



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/LTE CPE
BRAND NAME : ZTE
MODEL NAME : MF279
FCC ID : SRQ-MF279
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jun. 21, 2017 and testing was completed on Jul. 12, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5

1.1 Applicant 5

1.2 Manufacturer 5

1.3 Product Feature of Equipment Under Test 5

1.4 Product Specification of Equipment Under Test 6

1.5 Modification of EUT 6

1.6 Testing Location 7

1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

2.1 Carrier Frequency and Channel 8

2.2 Test Mode 9

2.3 Connection Diagram of Test System 10

2.4 Support Unit used in test configuration and system 11

2.5 EUT Operation Test Setup 11

2.6 Measurement Results Explanation Example 11

3 TEST RESULT 12

3.1 6dB Bandwidth Measurement 12

3.2 Peak Output Power Measurement 14

3.3 Power Spectral Density Measurement 16

3.4 Conducted Band Edges and Spurious Emission Measurement 18

3.5 Radiated Band Edges and Spurious Emission Measurement 43

3.6 AC Conducted Emission Measurement 47

3.7 Antenna Requirements 51

4 LIST OF MEASURING EQUIPMENT 52

5 UNCERTAINTY OF EVALUATION 53

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.53 dB at 4926.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.45 dB at 0.499 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/LTE CPE
Brand Name	ZTE
Model Name	MF279
FCC ID	SRQ-MF279
EUT supports Radios application	WCDMA/HSPA/ HSPA+ (16QAM uplink is not supported)/LTE/ WLAN2.4GHz 802.11b/g/n HT20/HT40/ WLAN5GHz 802.11a/n HT20/HT40/ WLAN5GHz 802.11ac VHT20/VHT40/VHT80/
IMEI Code	Conducted: 990008890000966 Conduction: N/A Radiation: 990008890001071/990008890000644
HW Version	dqfA
SW Version	EN_ZTE_MF279V0.0.0B02
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification										
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz									
Maximum (Peak) Output Power to antenna	<p><Ant. 1> 802.11b : 19.35 dBm (0.0861 W) 802.11g : 23.32 dBm (0.2148 W) 802.11n HT20 : 22.79 dBm (0.1901 W) 802.11n HT40 : 22.27 dBm (0.1687 W)</p> <p><Ant. 2> 802.11b : 19.19 dBm (0.0830 W) 802.11g : 23.97 dBm (0.2495 W) 802.11n HT20 : 22.86 dBm (0.1932 W) 802.11n HT40 : 22.07 dBm (0.1611 W)</p> <p>MIMO <Ant. 1 + 2> 802.11n HT20 : 25.42 dBm (0.3483 W) 802.11n HT40 : 24.58 dBm (0.2871 W)</p>									
99% Occupied Bandwidth	802.11b : 13.89MHz 802.11g : 16.88MHz 802.11n HT20 : 18.03MHz 802.11n HT40 : 36.06MHz									
Antenna Type / Gain	<p>Ant. 1: PIFA Antenna with gain 2.0 dBi Ant. 2: PIFA Antenna with gain 2.1 dBi</p>									
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)									
Antenna Function for Transmitter	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 b/g/n SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 n MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11 b/g/n SISO	V	V	802.11 n MIMO	V	V
	Ant. 1	Ant. 2								
802.11 b/g/n SISO	V	V								
802.11 n MIMO	V	V								

Note: MIMO Ant. 1+2 is a calculated result from sum of the power MIMO Ant. 1 and MIMO Ant. 2.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Test Site	Sporton International (KunShan) INC.			
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


MIMO Antenna

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WCDMA Band V Idle + WLAN Link(2.4G) + Adapter + Phone Link + Lan Link
Remark: For Radiated Test Cases, The tests were performed with Adapter	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

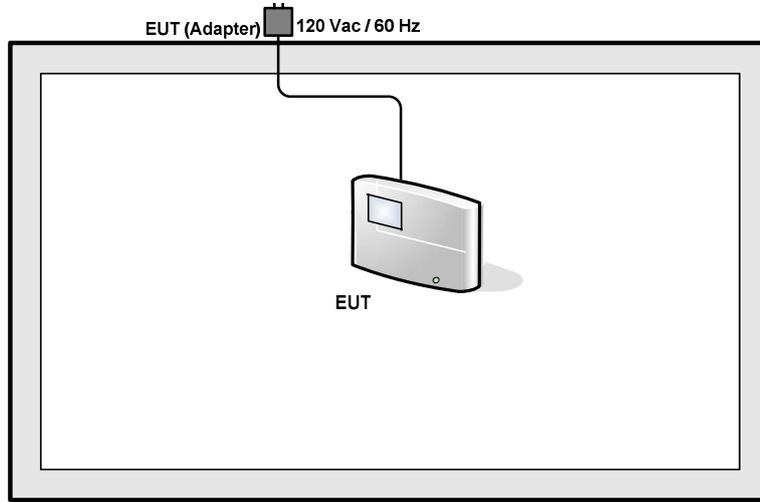

<AC Conducted Emission Mode>

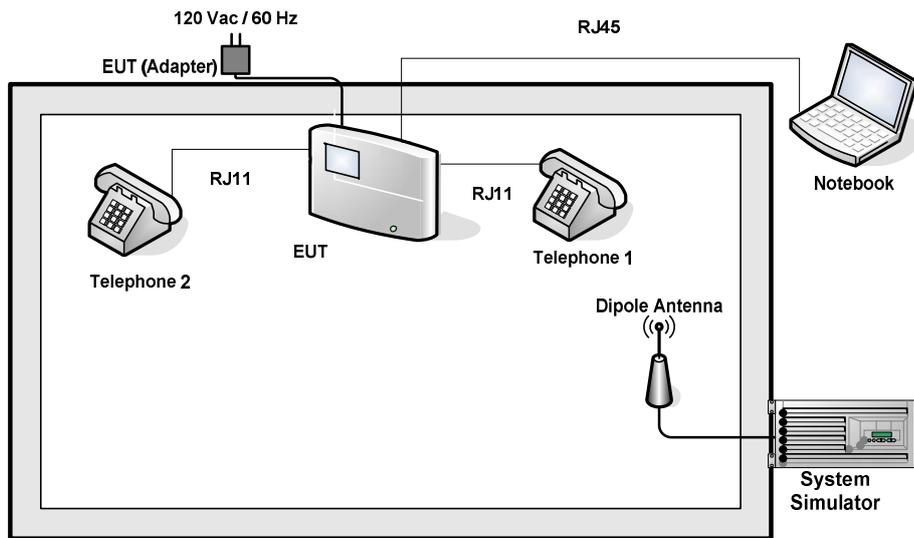

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Telephone	BBK	HCD007(6082)TSD	N/A	N/A	N/A
4.	Telephone	bubugao	HCD007(6082)TSD	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.7 dB.

Offset(dB) = RF cable loss(dB).

= 5.7 (dB)

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

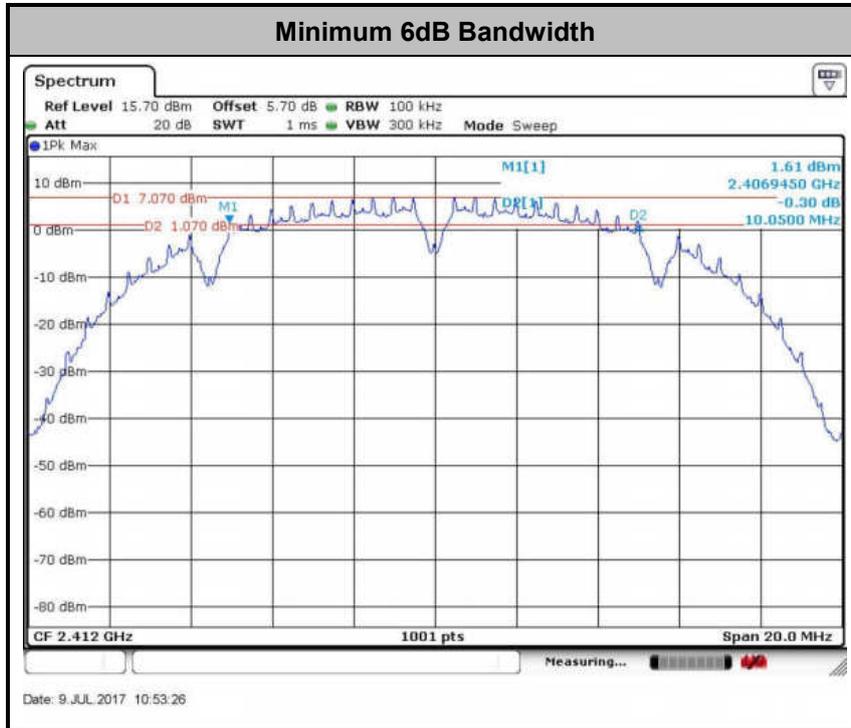

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

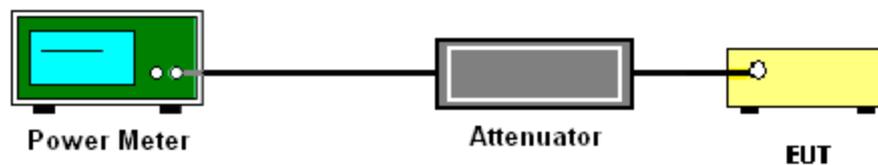



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

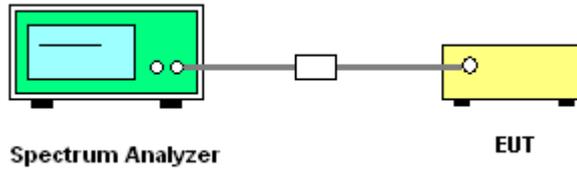

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

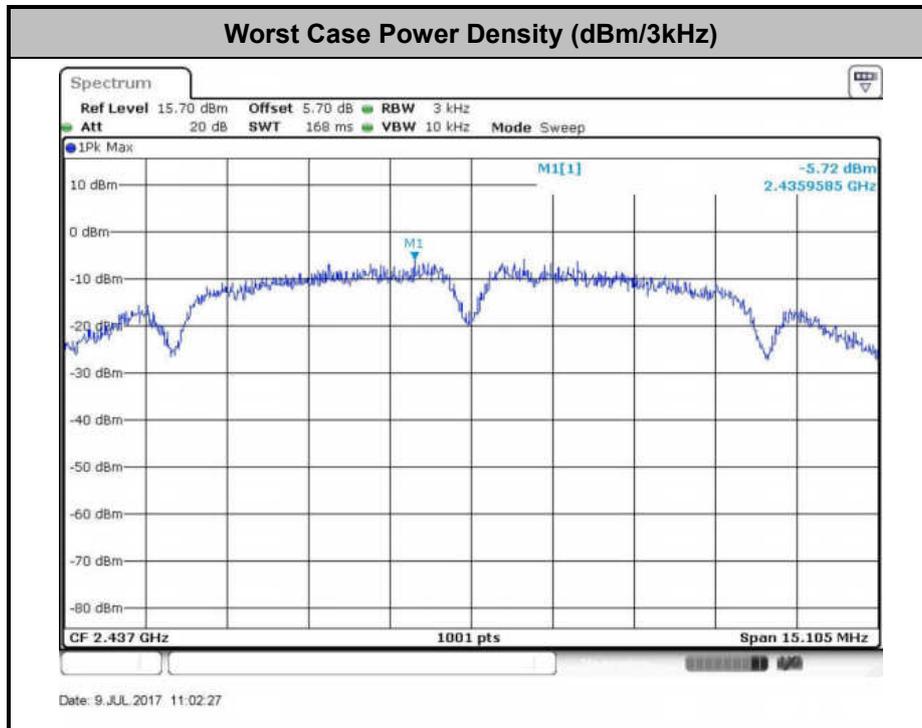

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

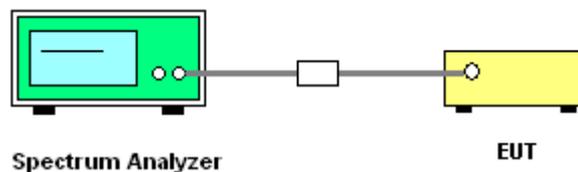




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Ant. 1 (Measured)

Number of TX	1	Ant. :	1
Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

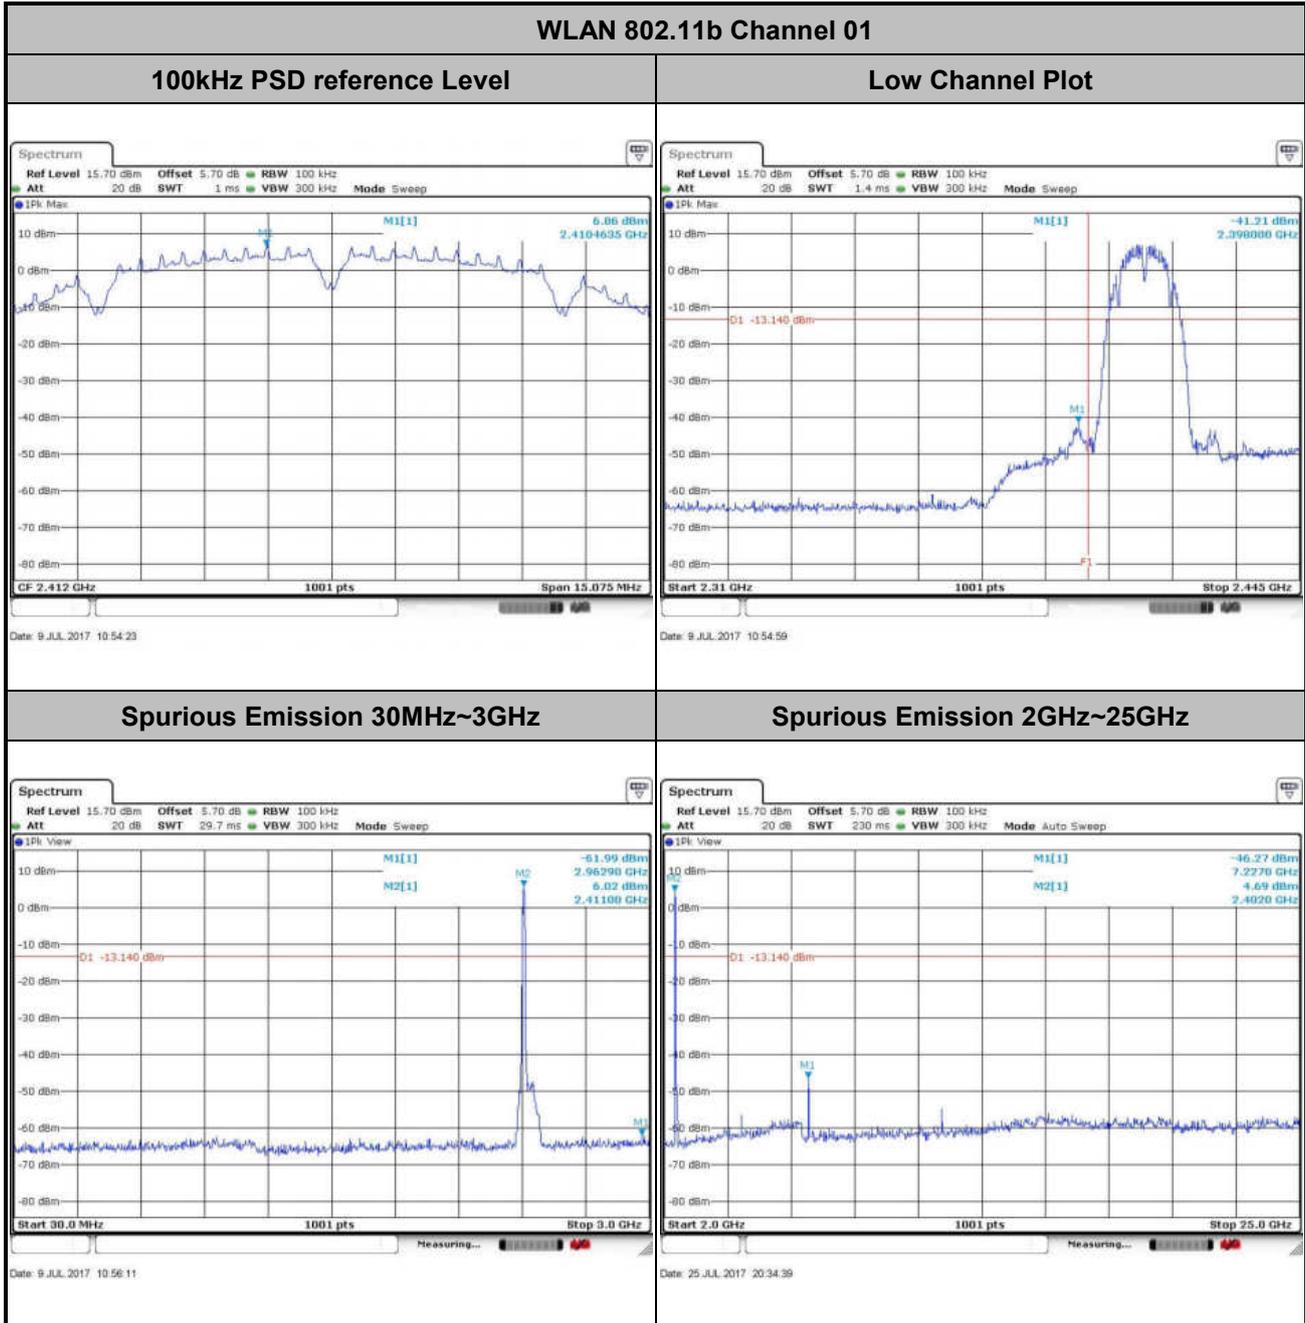





Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11b Channel 06


100kHz PSD reference Level

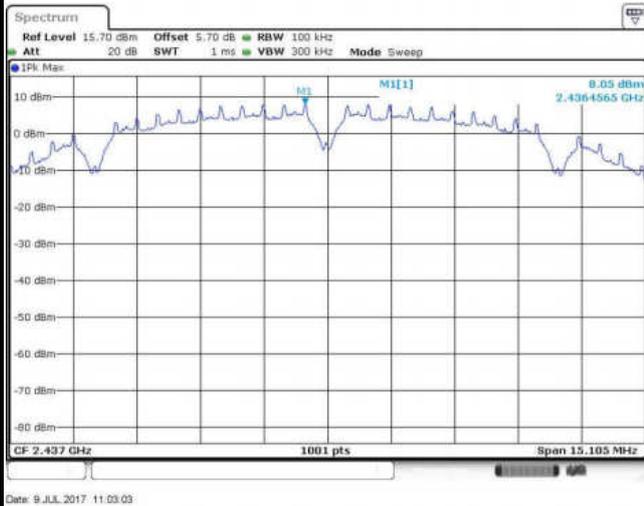

Spurious Emission 30MHz~3GHz

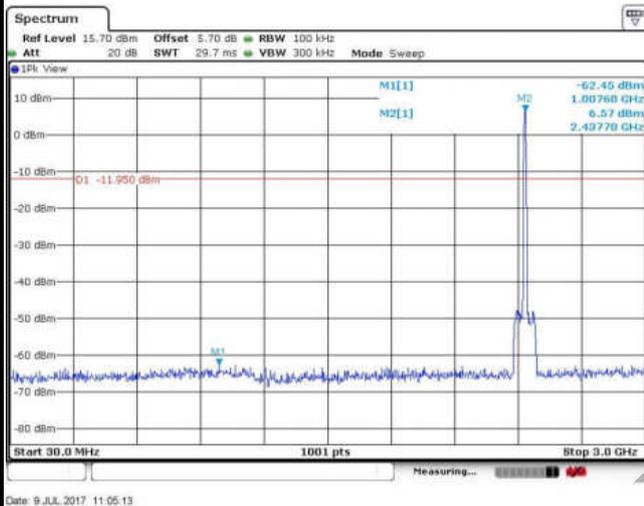

Spurious Emission 2GHz~25GHz

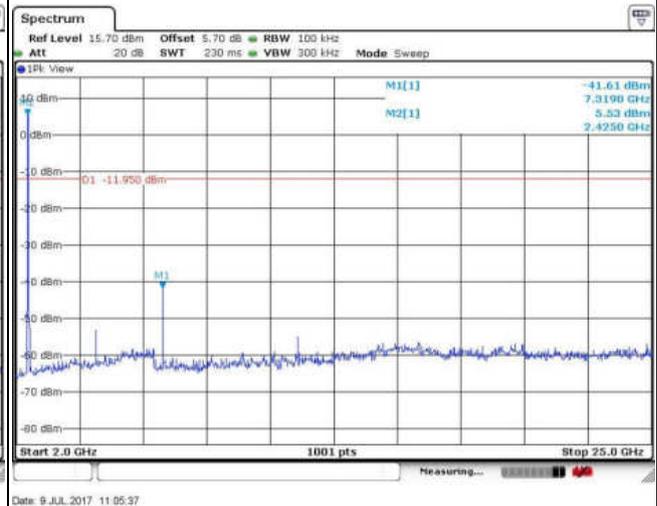




Number of TX :	1	Ant. :	1
Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11b Channel 11

100kHz PSD reference Level

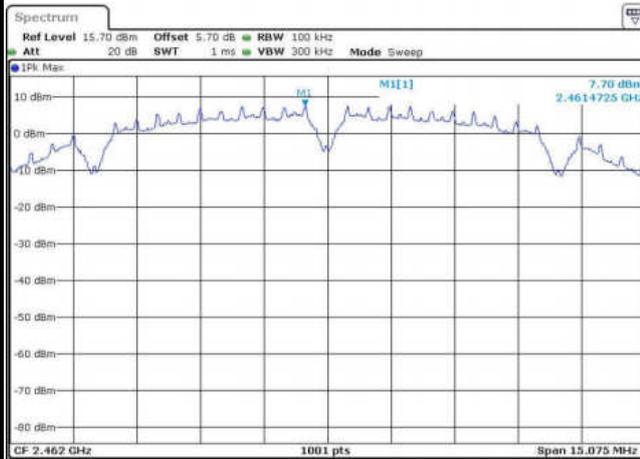


Date: 9 JUL 2017 11:10:05

High Channel Plot

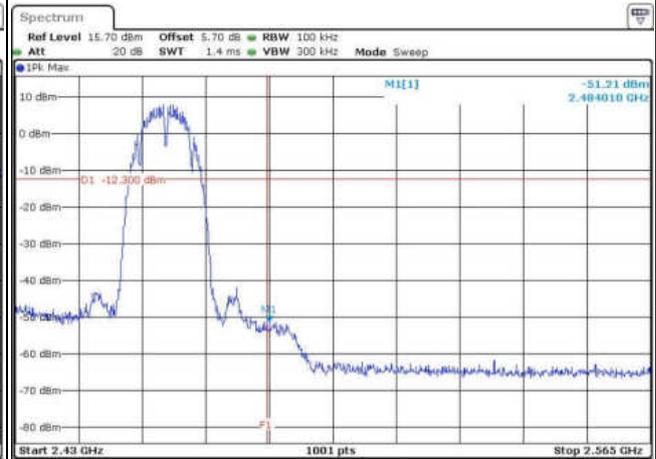


Date: 9 JUL 2017 11:10:30

Spurious Emission 30MHz~3GHz

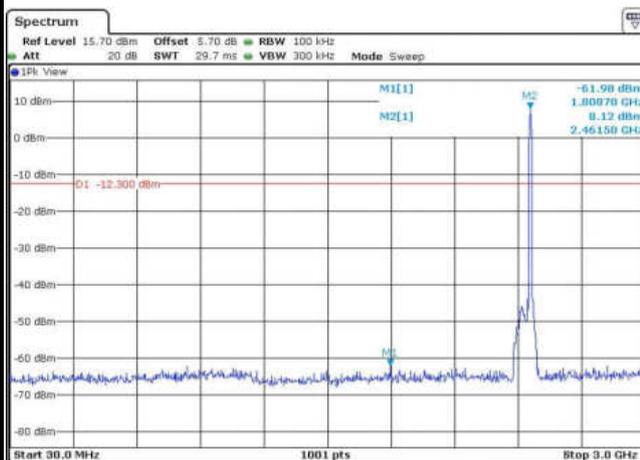

Date: 9 JUL 2017 11:11:24


Spurious Emission 2GHz~25GHz

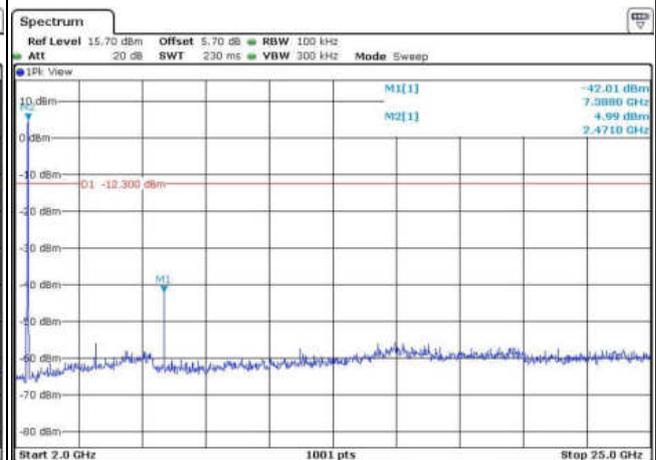

Date: 9 JUL 2017 11:11:47



Number of TX :	1	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	03	Test Engineer :	Silent Hai

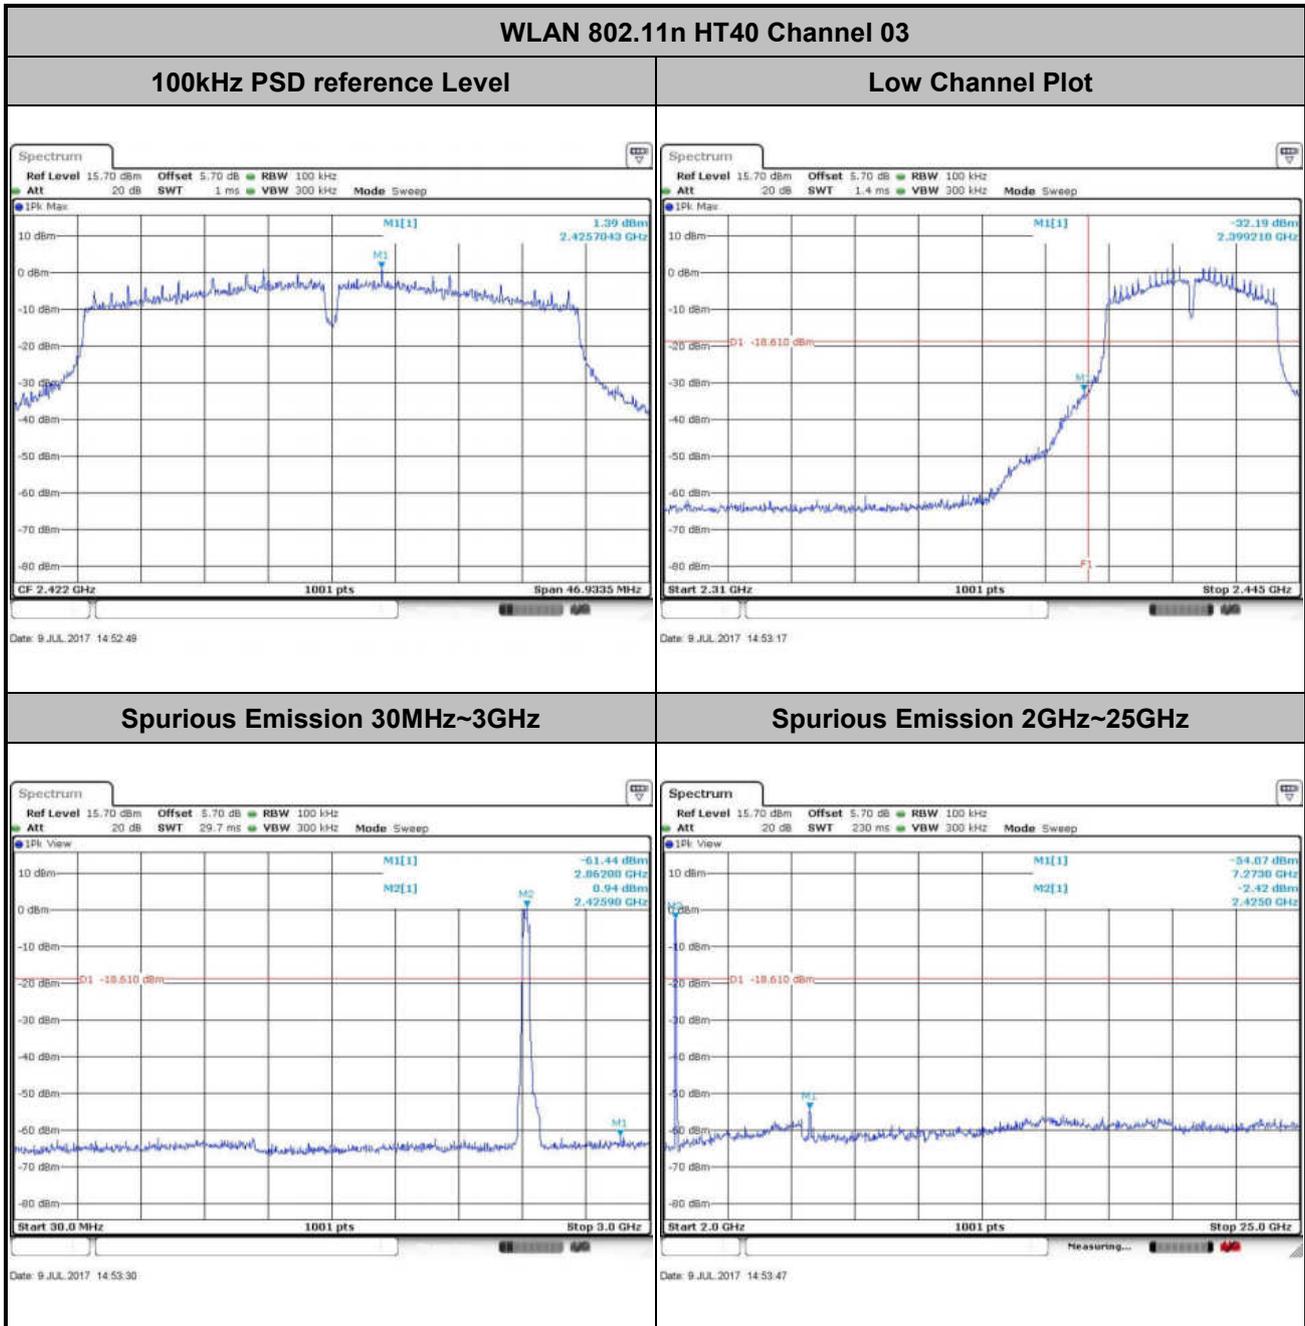





Number of TX :	1	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

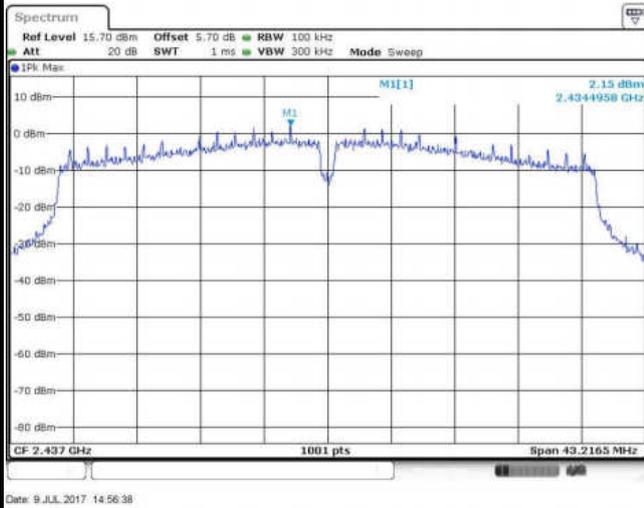

Spurious Emission 30MHz~3GHz

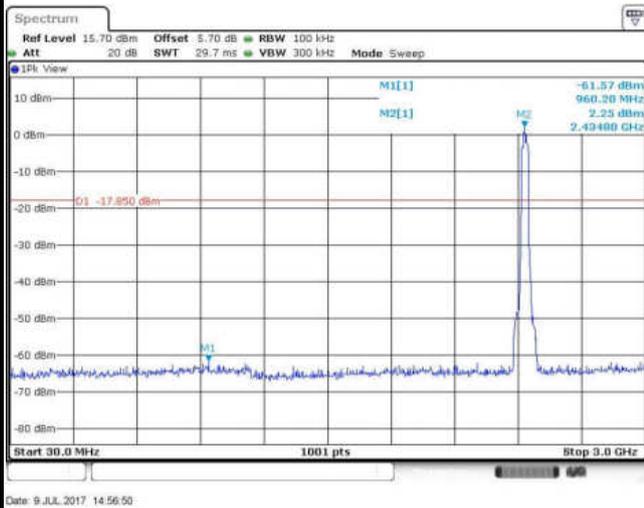


Spurious Emission 2GHz~25GHz

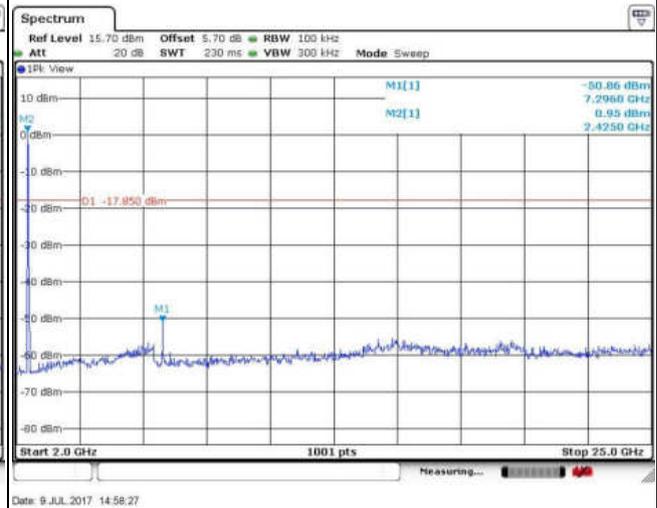



Number of TX :	1	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	09	Test Engineer :	Silent Hai

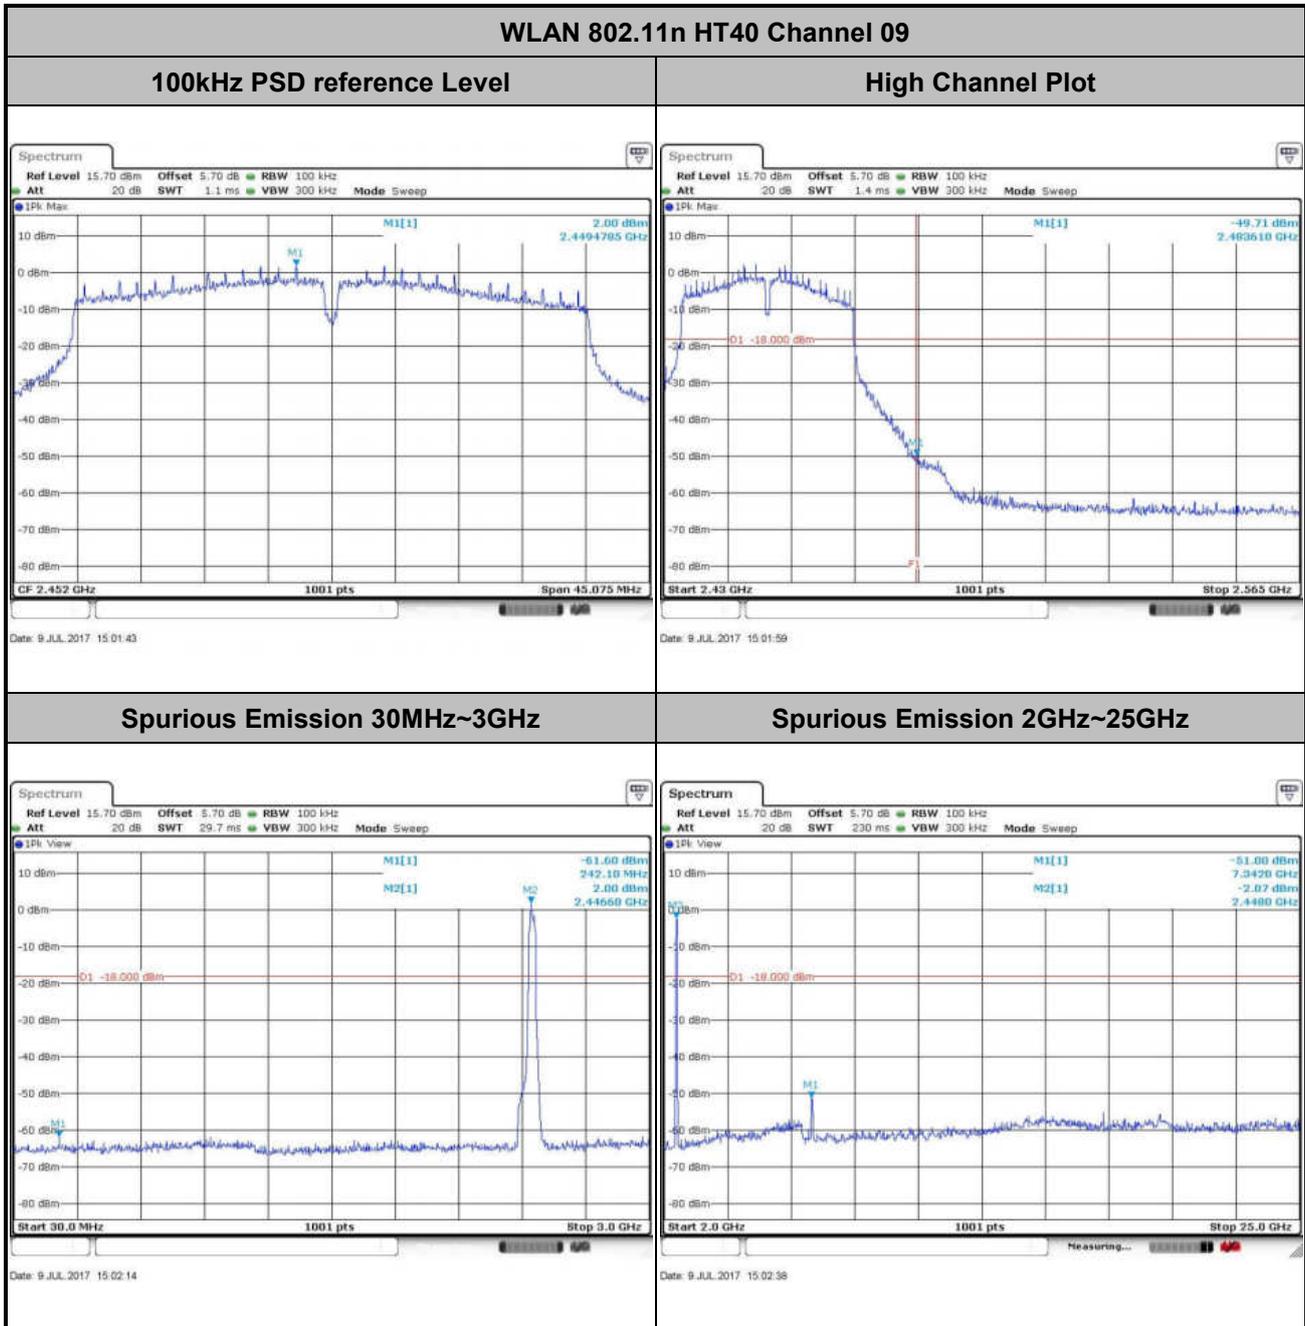




Number of TX = 1, Ant. 2 (Measured)

Number of TX :	1	Ant. :	2
Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11g Channel 01

100kHz PSD reference Level

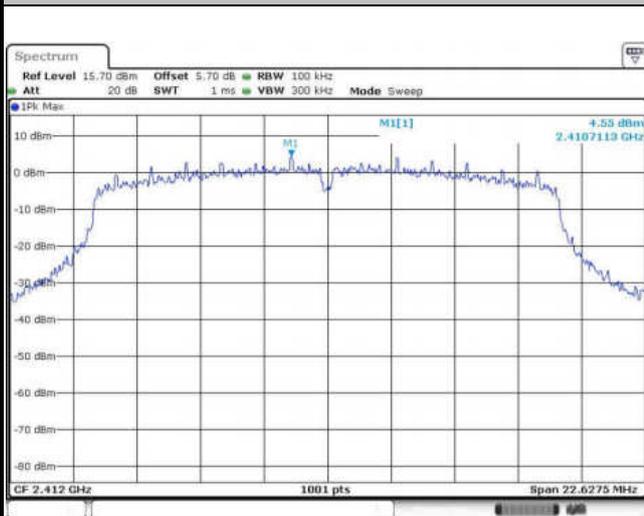


Date: 9 JUL 2017 11:41:38

Low Channel Plot

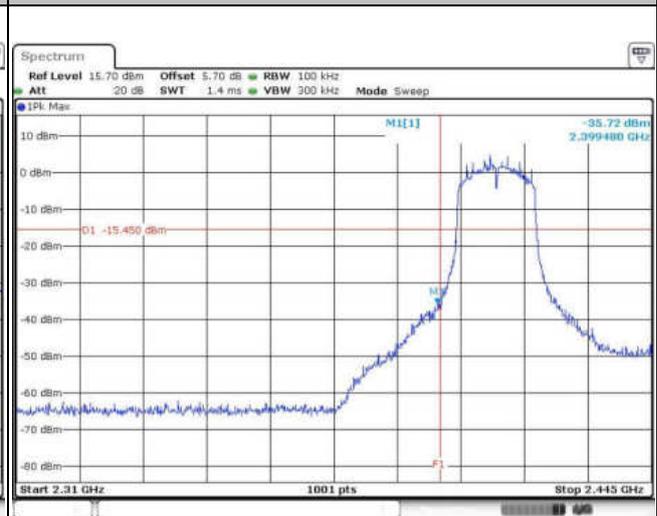


Date: 9 JUL 2017 11:41:56

Spurious Emission 30MHz~3GHz

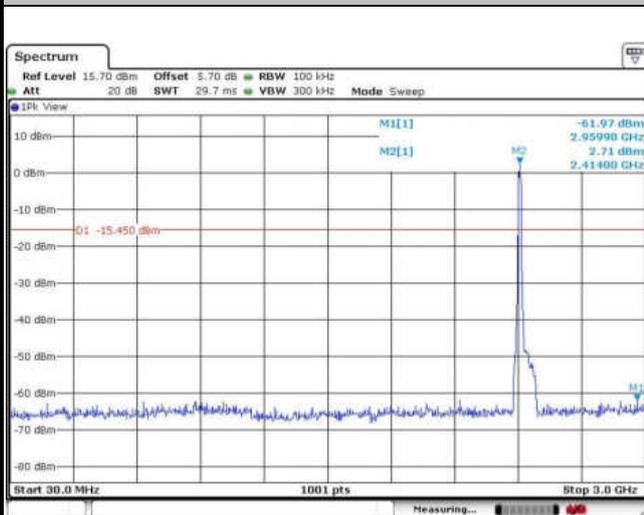

Date: 9 JUL 2017 11:43:36

Spurious Emission 2GHz~25GHz

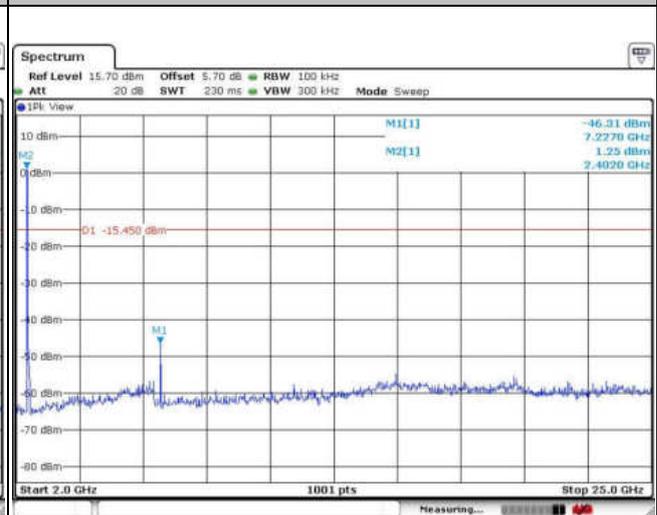


Date: 9 JUL 2017 11:44:02




Number of TX :	1	Ant. :	2
Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11g Channel 06


100kHz PSD reference Level

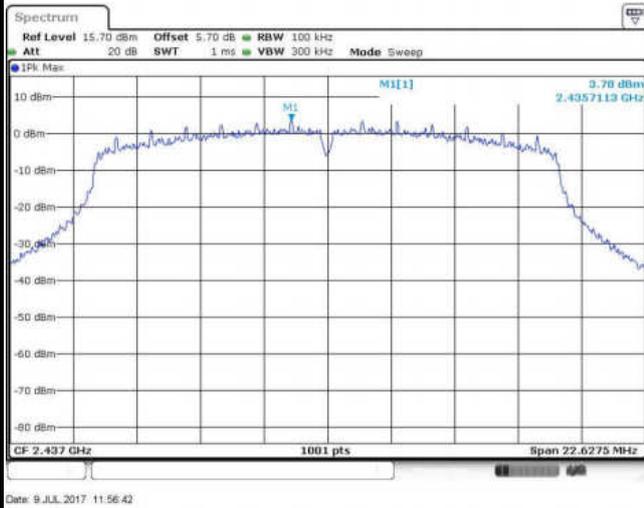

Spurious Emission 30MHz~3GHz

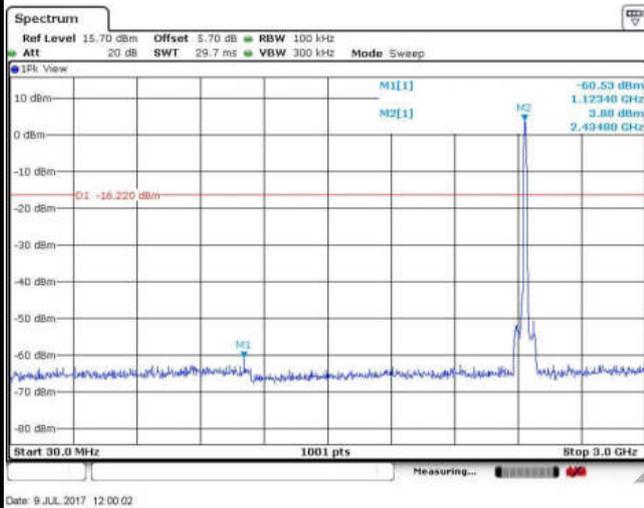

Spurious Emission 2GHz~25GHz

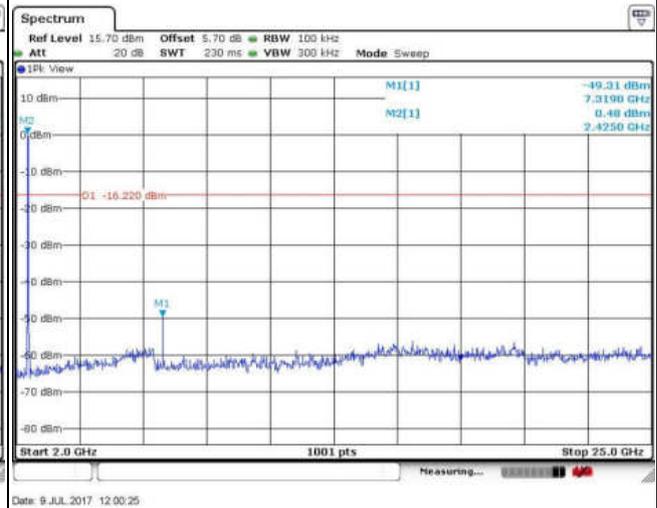




Number of TX :	1	Ant. :	2
Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11g Channel 11

100kHz PSD reference Level

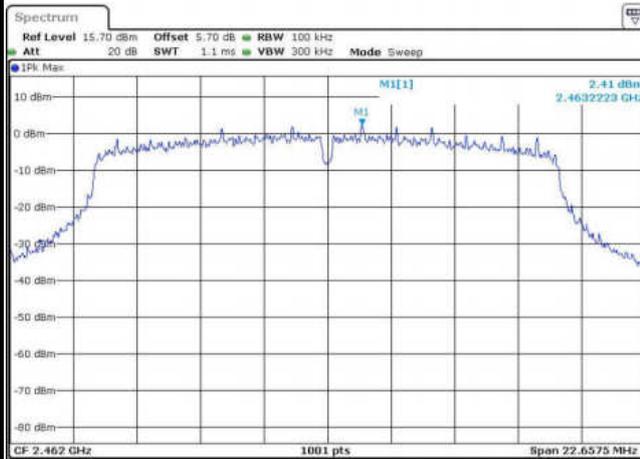


Date: 9 JUL 2017 12:05:40

High Channel Plot

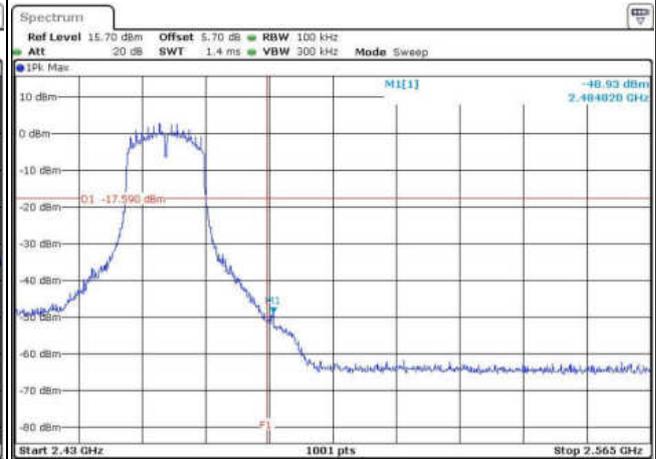


Date: 9 JUL 2017 12:06:04

Spurious Emission 30MHz~3GHz

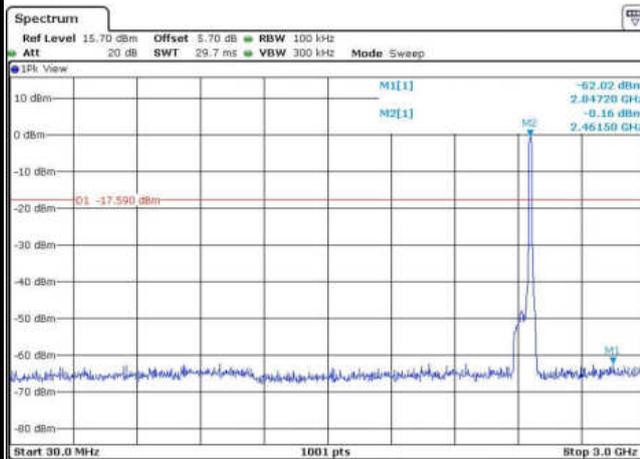

Date: 9 JUL 2017 12:06:48


Spurious Emission 2GHz~25GHz

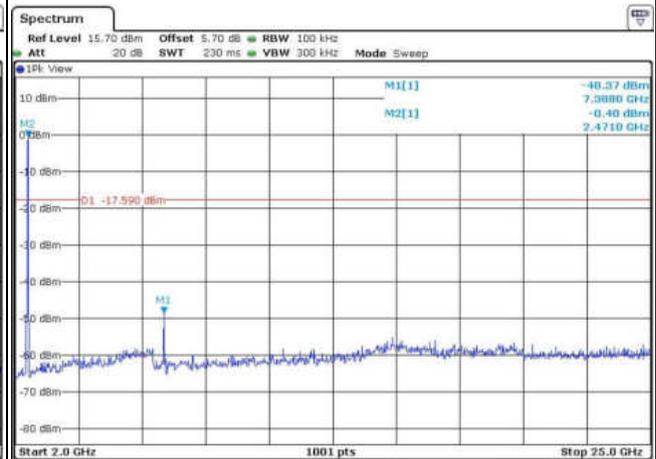

Date: 9 JUL 2017 12:07:11



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

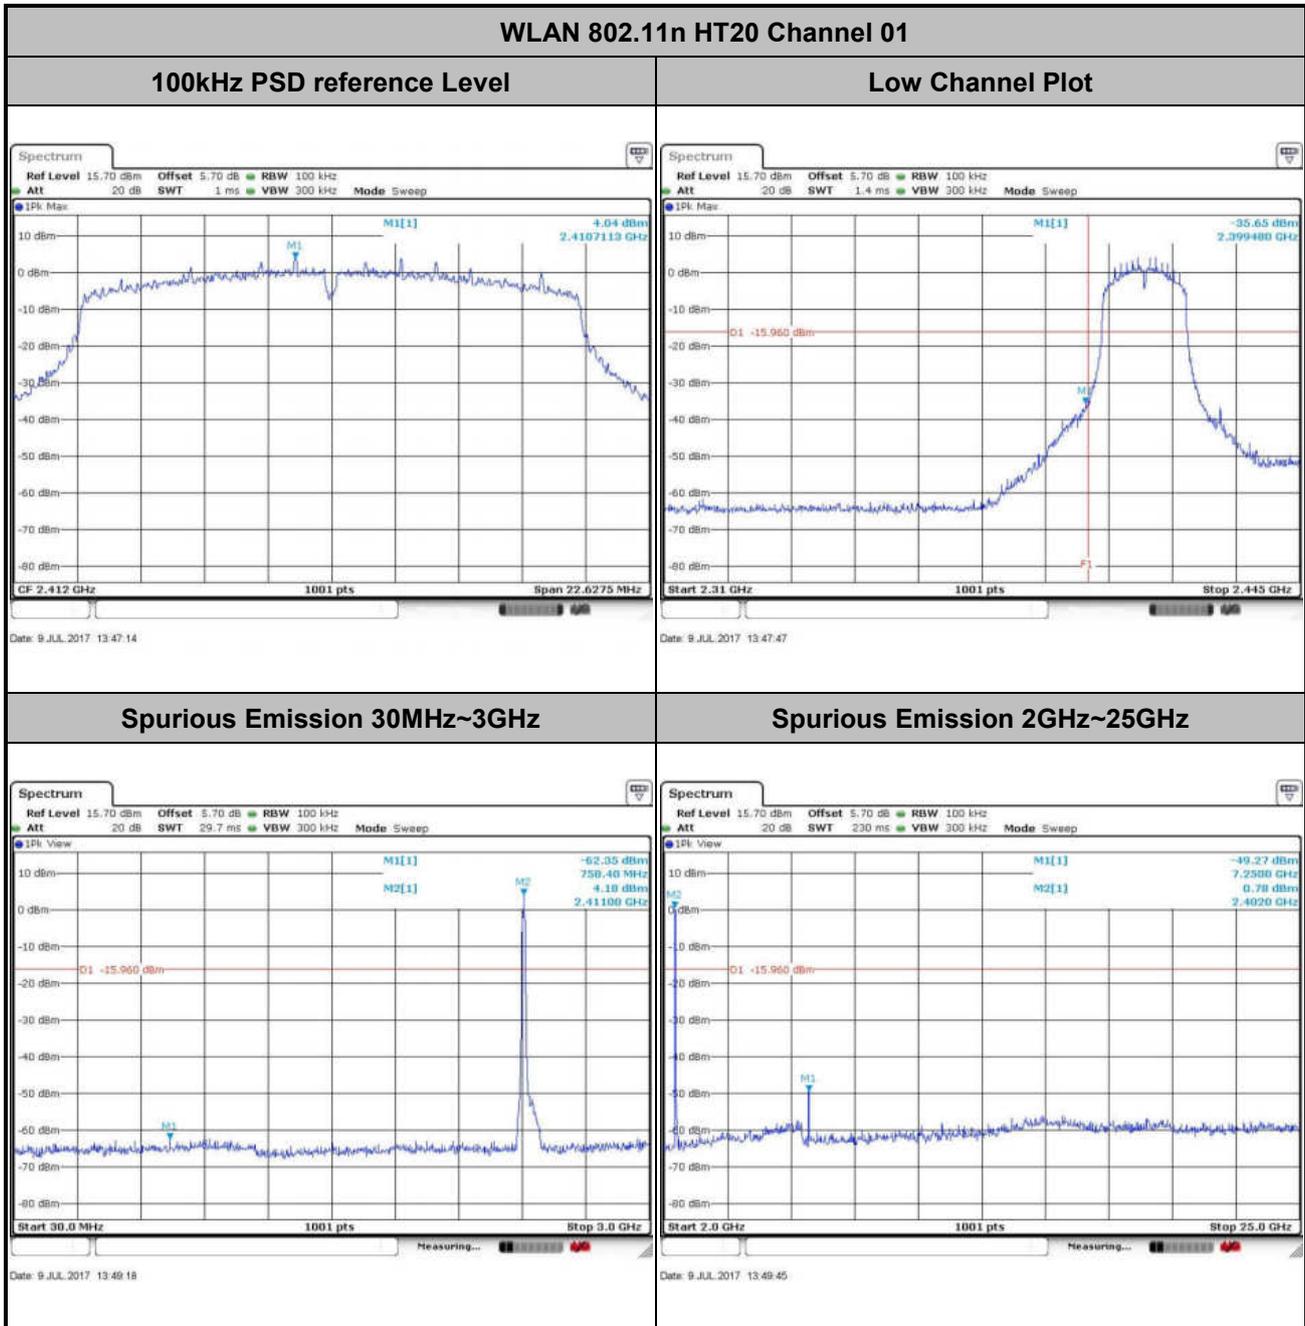




Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

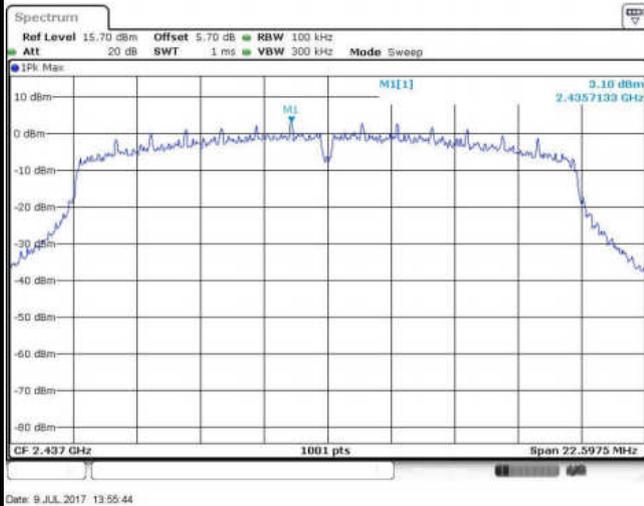


Date: 9 JUL 2017 13:55:44

Spurious Emission 30MHz~3GHz

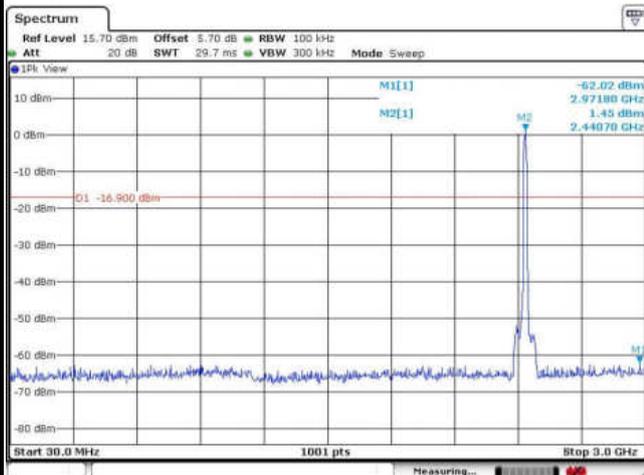

Date: 9 JUL 2017 13:57:07


Spurious Emission 2GHz~25GHz

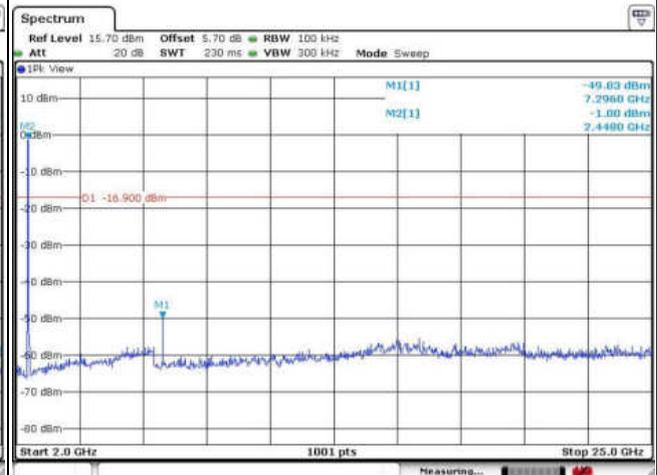

Date: 9 JUL 2017 13:57:30



Number of TX :	1	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

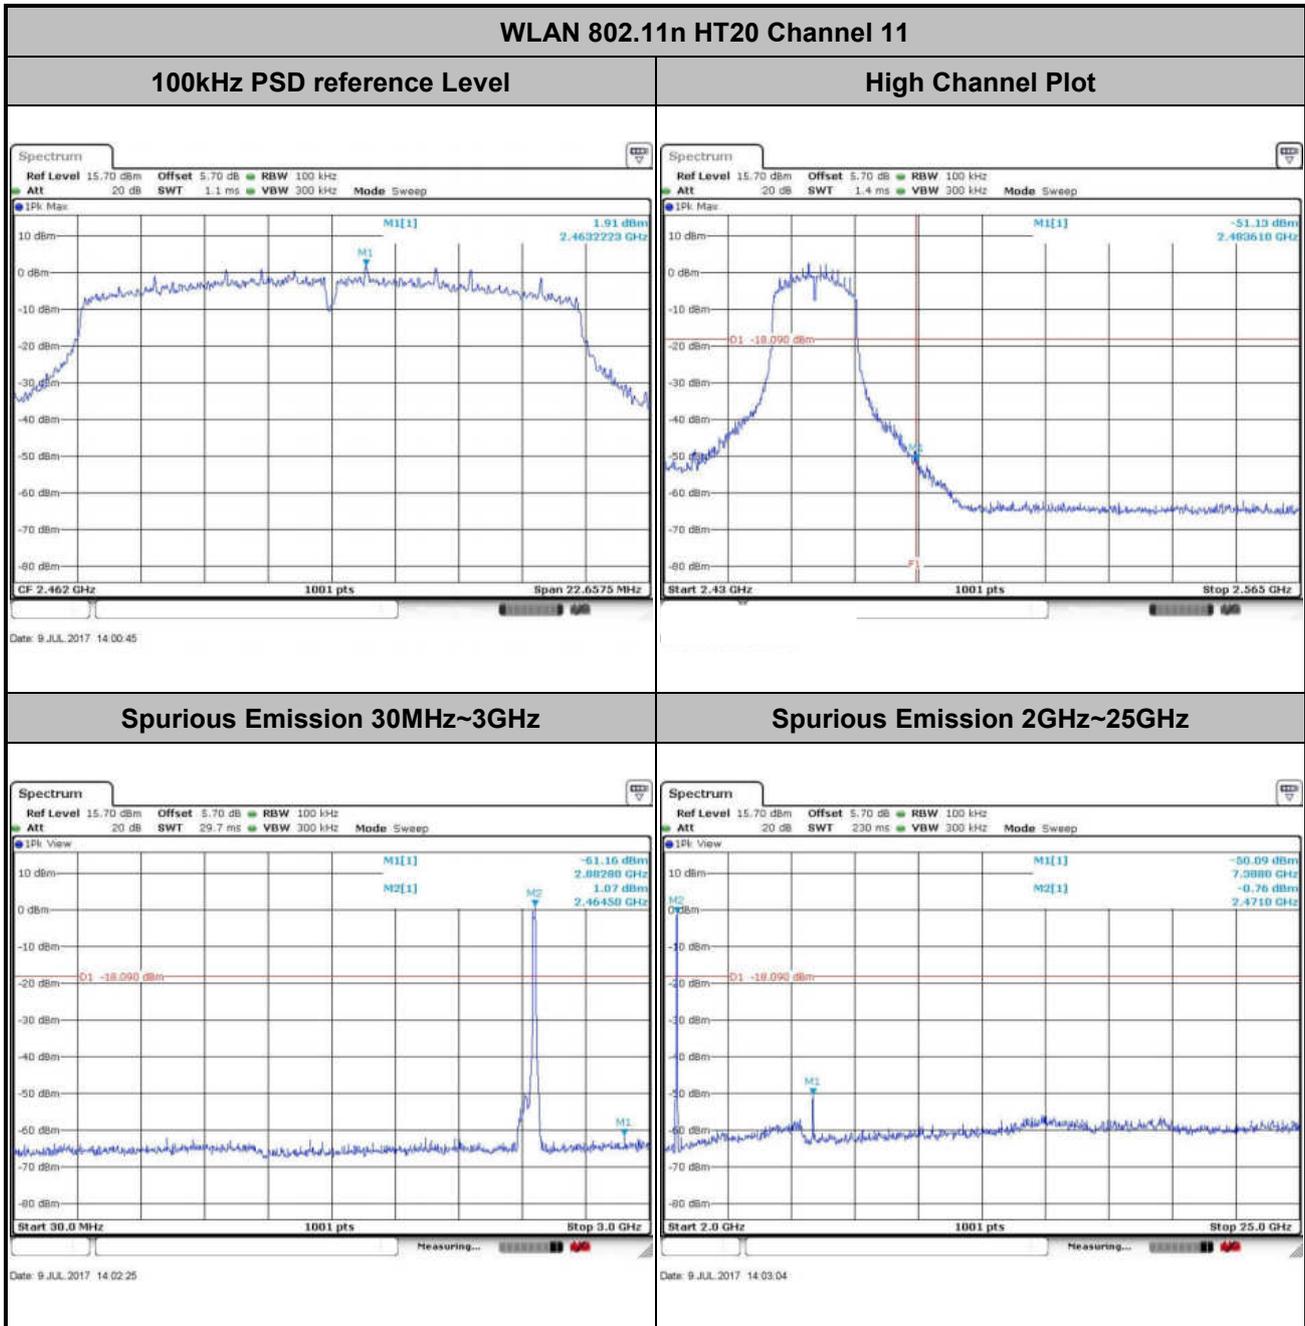




Number of TX = 2, Ant. 1 (Measured)

Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

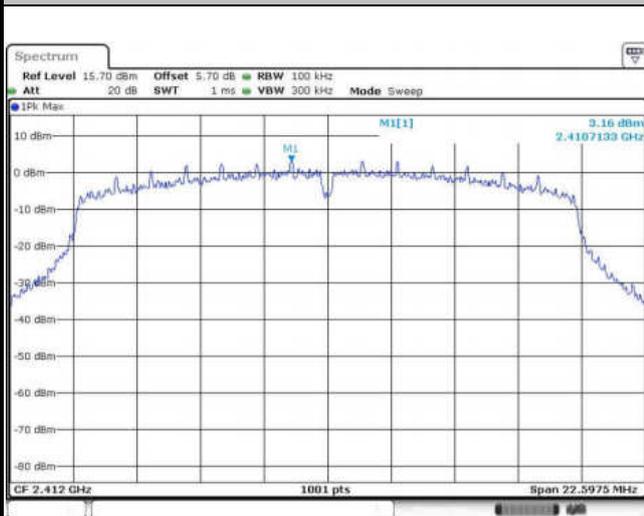


Date: 9 JUL 2017 14:29:04

Low Channel Plot

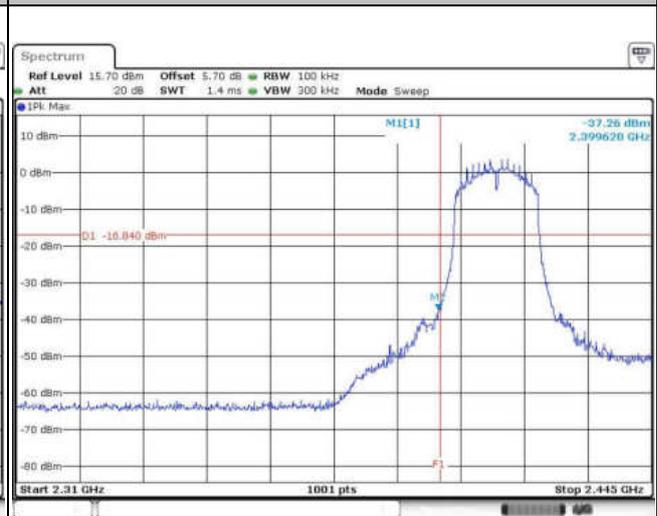


Date: 9 JUL 2017 14:29:40

Spurious Emission 30MHz~3GHz

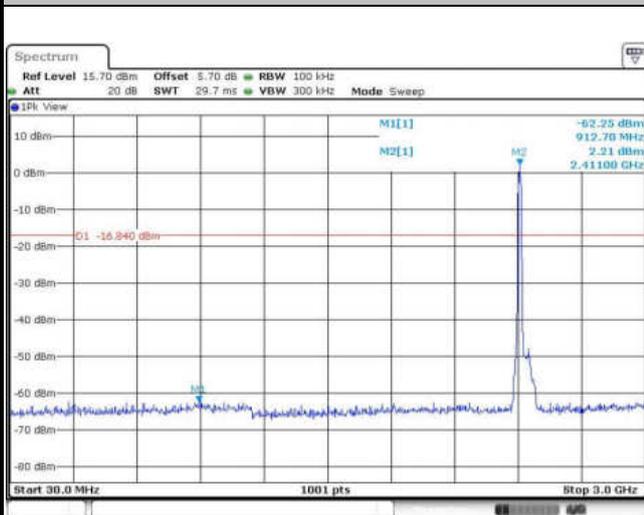

Date: 9 JUL 2017 14:29:57

Spurious Emission 2GHz~25GHz

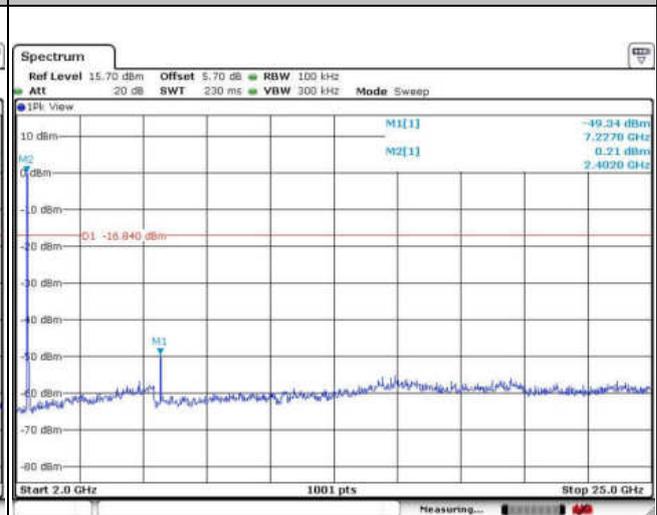


Date: 9 JUL 2017 14:30:18




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

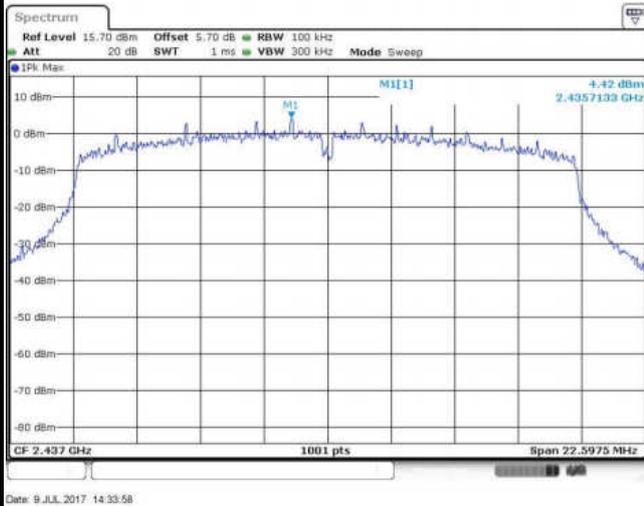

Spurious Emission 30MHz~3GHz

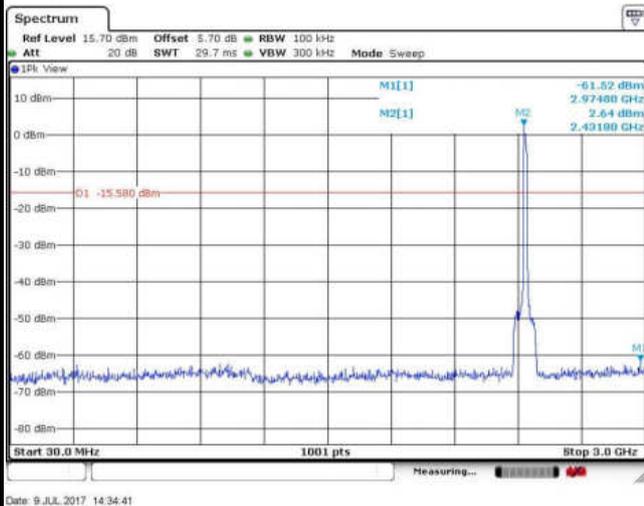

Spurious Emission 2GHz~25GHz

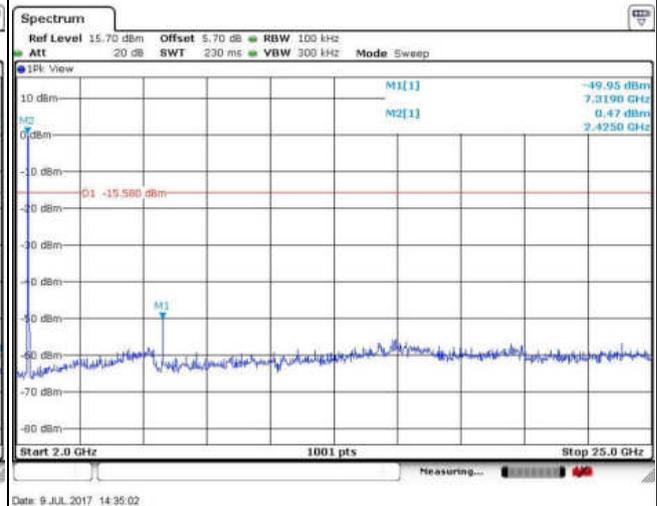




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

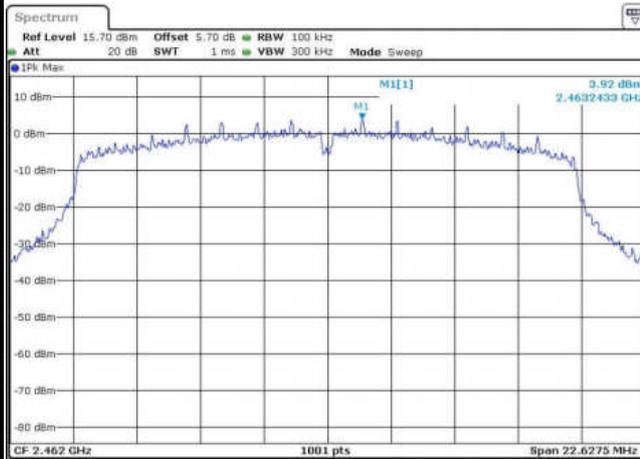


Date: 9 JUL 2017 14:38:21

High Channel Plot

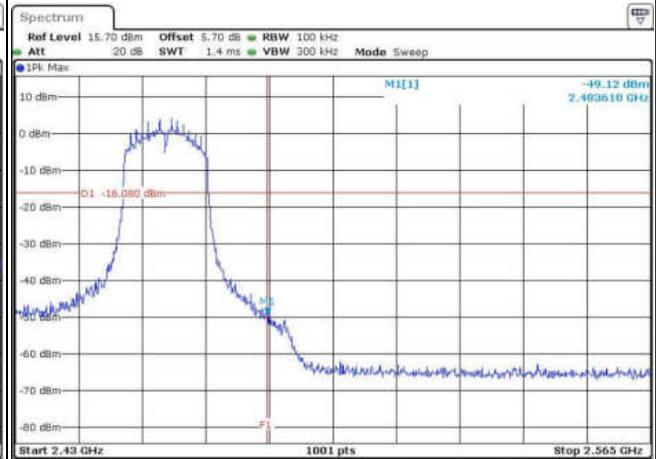


Date: 9 JUL 2017 14:38:40

Spurious Emission 30MHz~3GHz

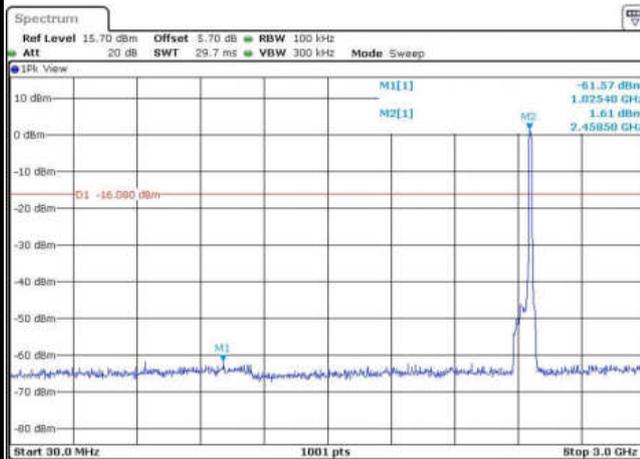

Date: 9 JUL 2017 14:39:03

Spurious Emission 2GHz~25GHz

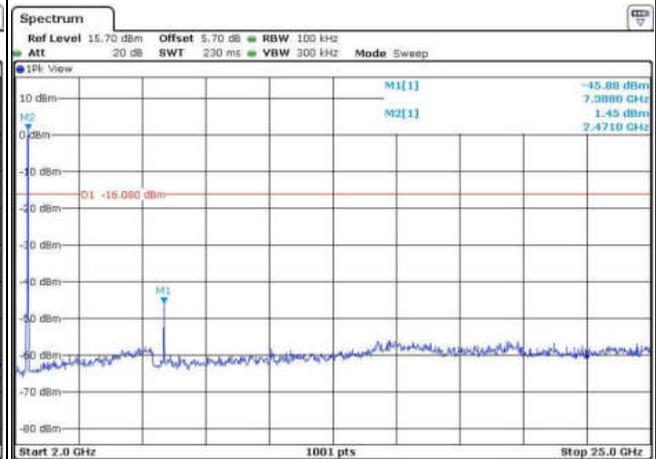


Date: 9 JUL 2017 14:39:40



Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	03	Test Engineer :	Silent Hai


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

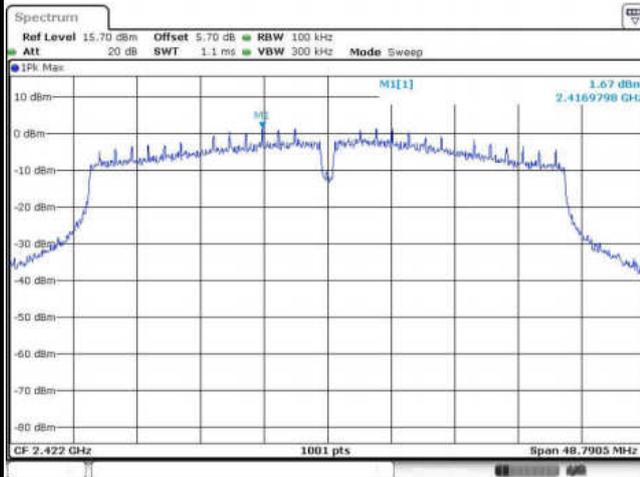


Date: 9 JUL 2017 15:06:24

Low Channel Plot

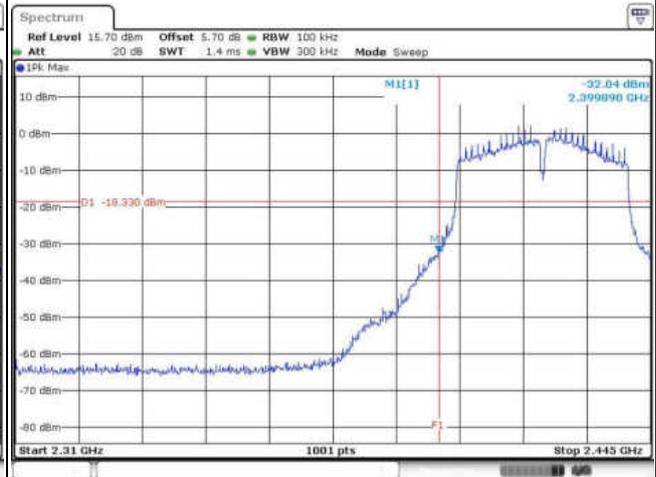


Date: 9 JUL 2017 15:06:42

Spurious Emission 30MHz~3GHz

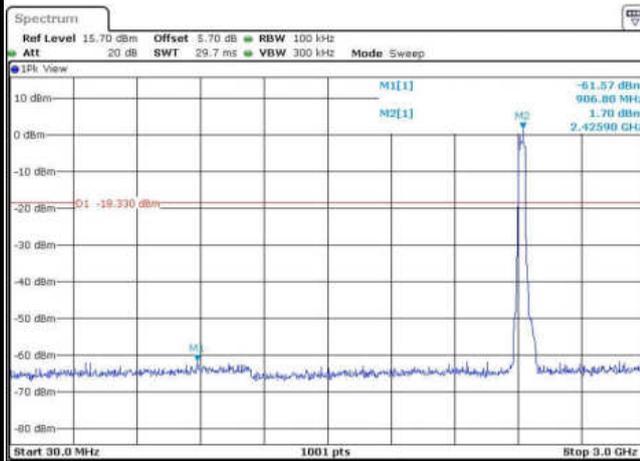

Date: 9 JUL 2017 15:06:58

Spurious Emission 2GHz~25GHz

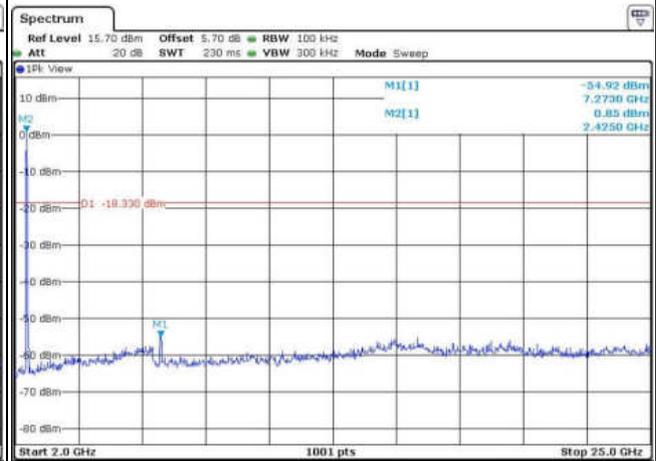


Date: 9 JUL 2017 15:07:23




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

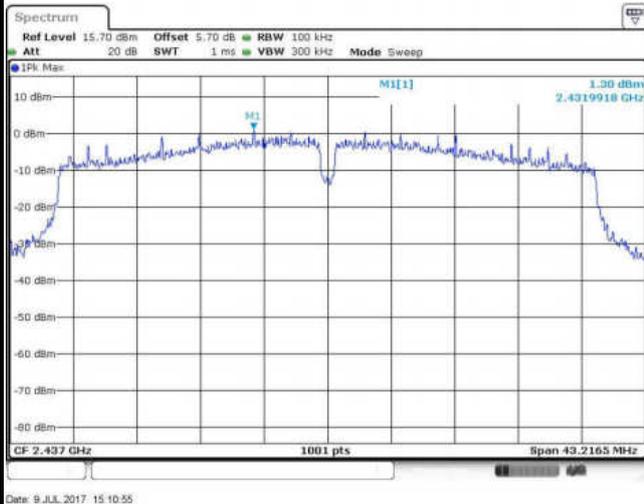

Spurious Emission 30MHz~3GHz

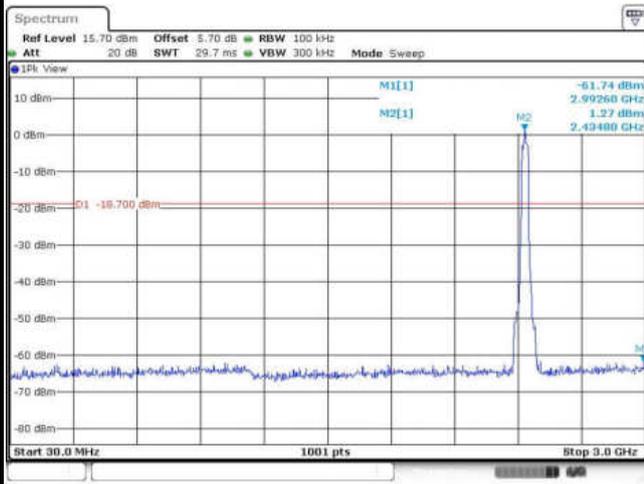


Spurious Emission 2GHz~25GHz

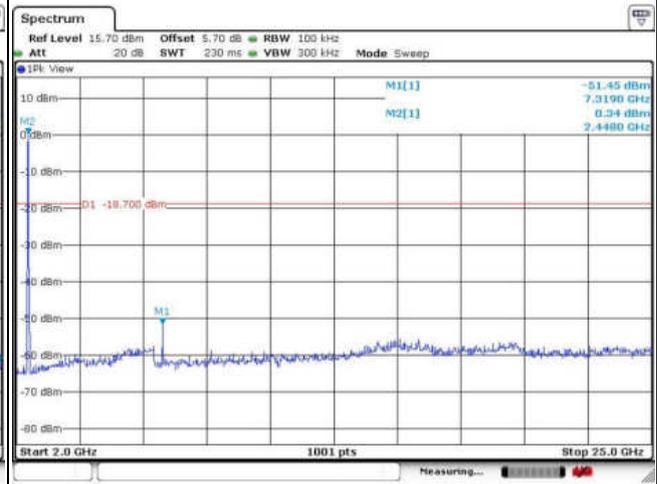




Number of TX :	2	Ant. :	1
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	09	Test Engineer :	Silent Hai

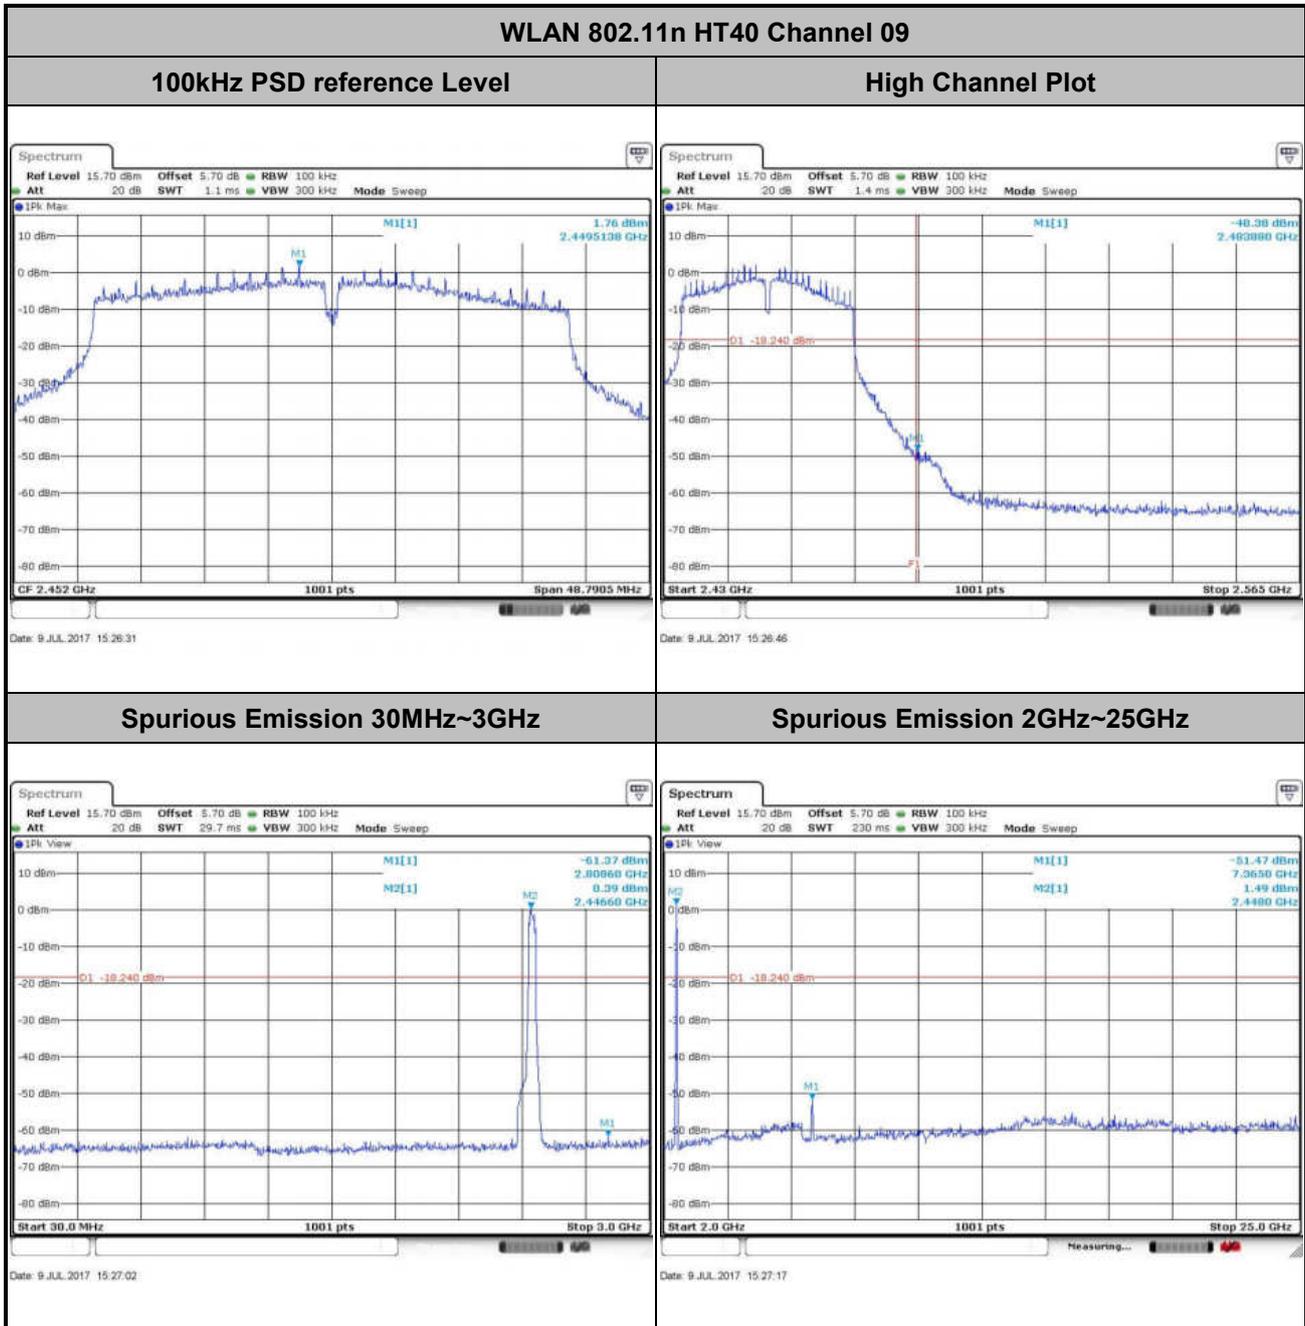



Number of TX = 2, Ant. 2 (Measured)

Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

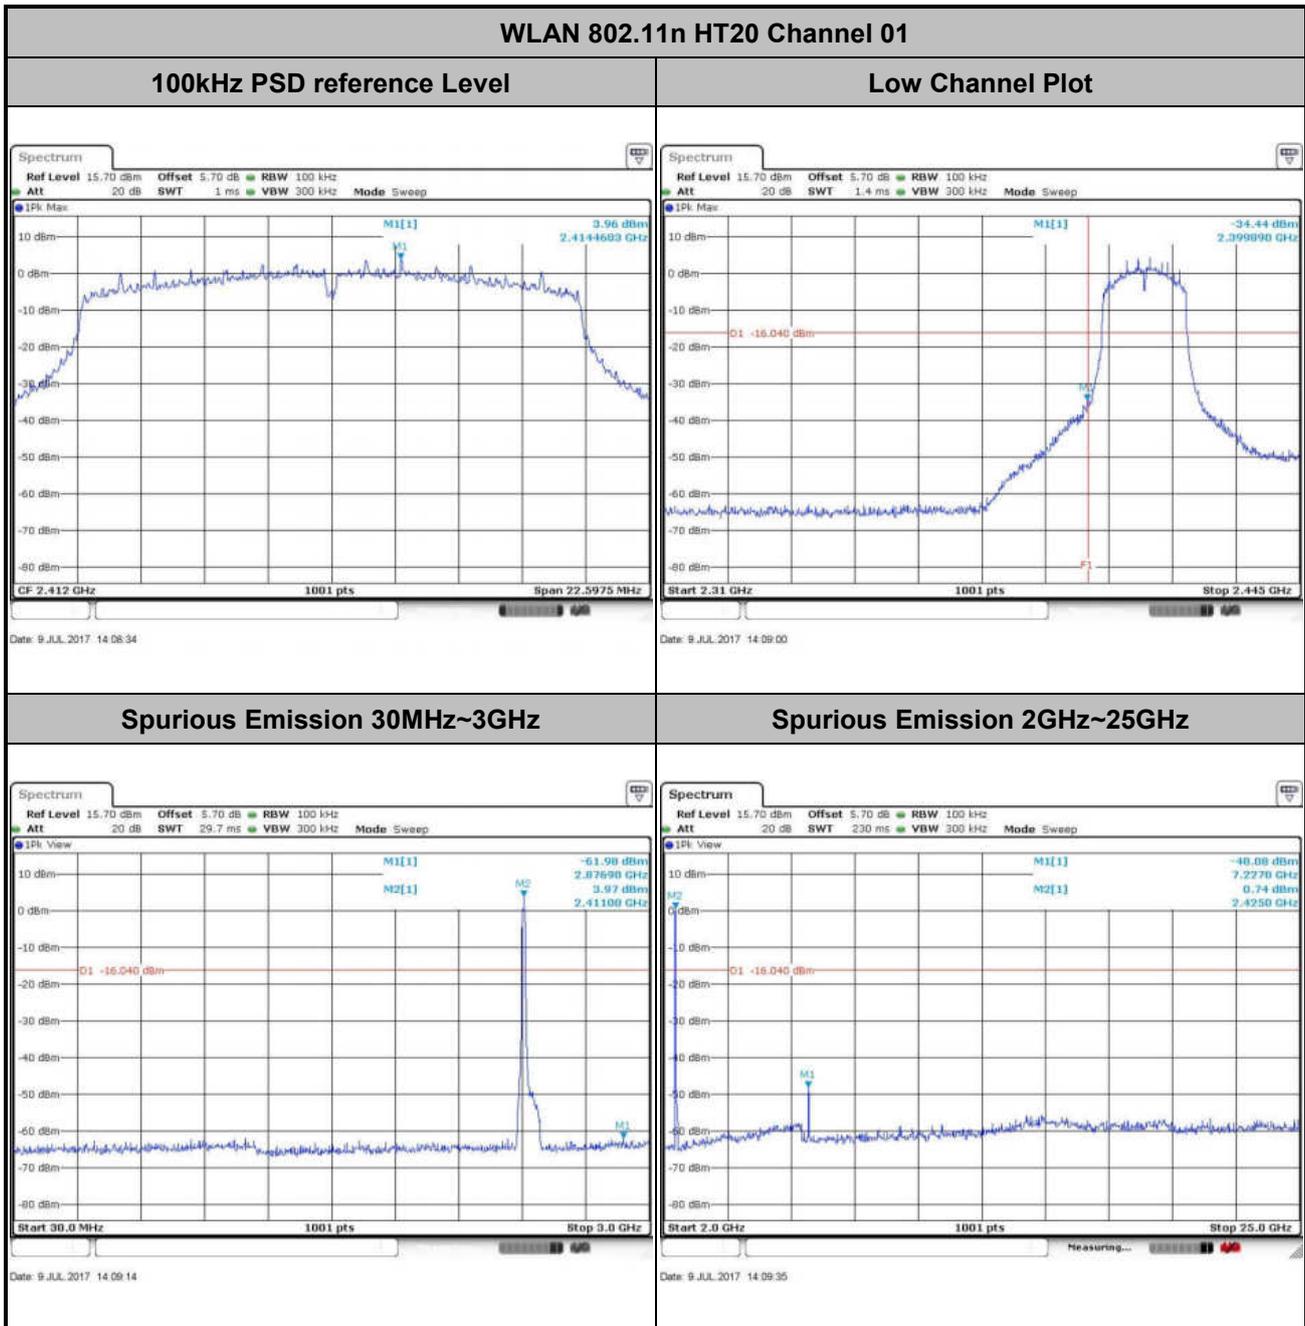





Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

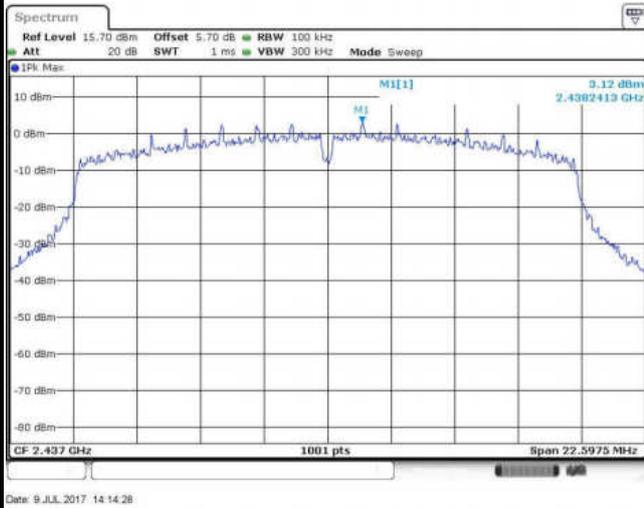

Spurious Emission 30MHz~3GHz

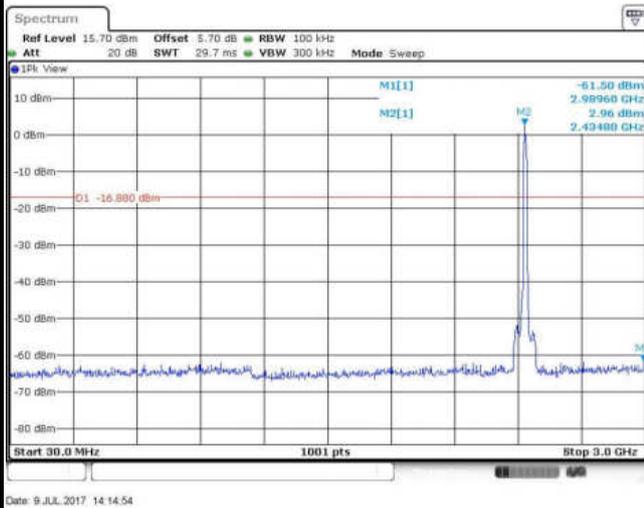


Spurious Emission 2GHz~25GHz

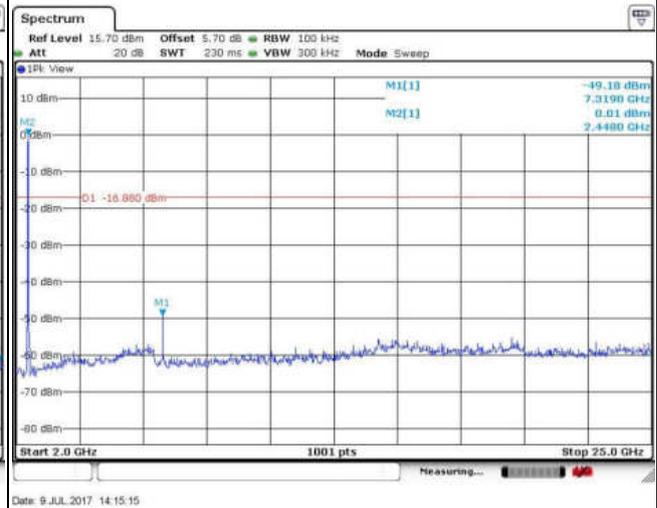




Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

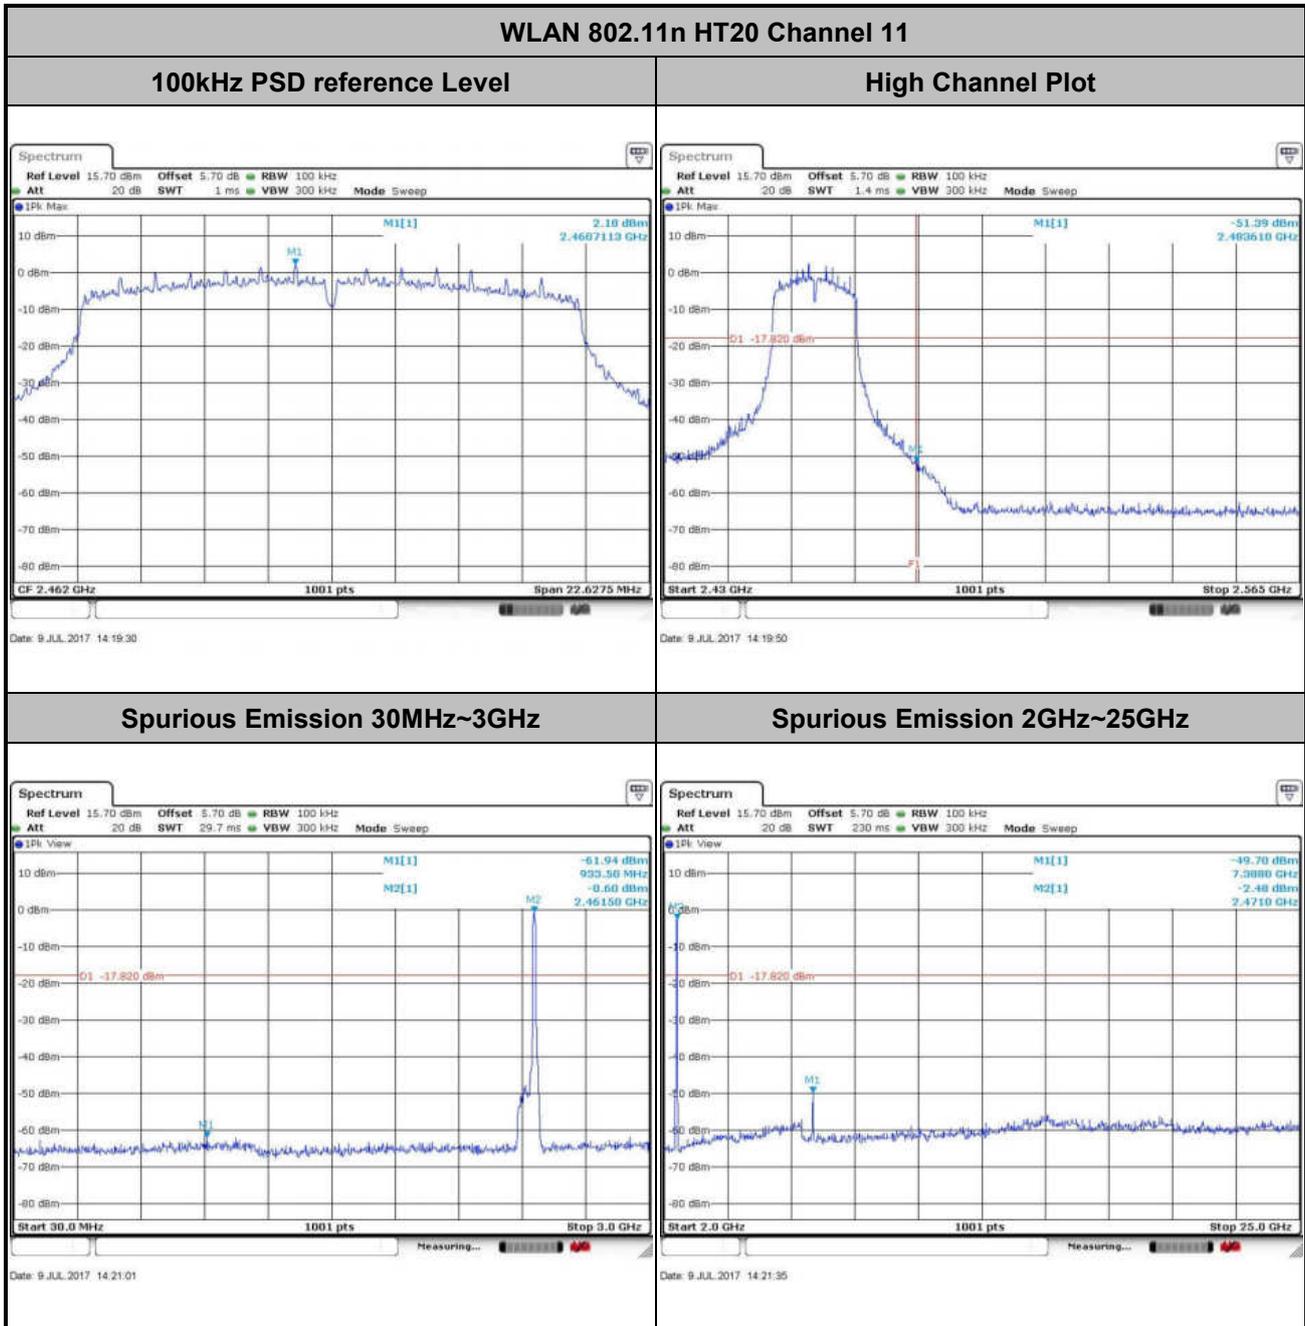



Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	03	Test Engineer :	Silent Hai

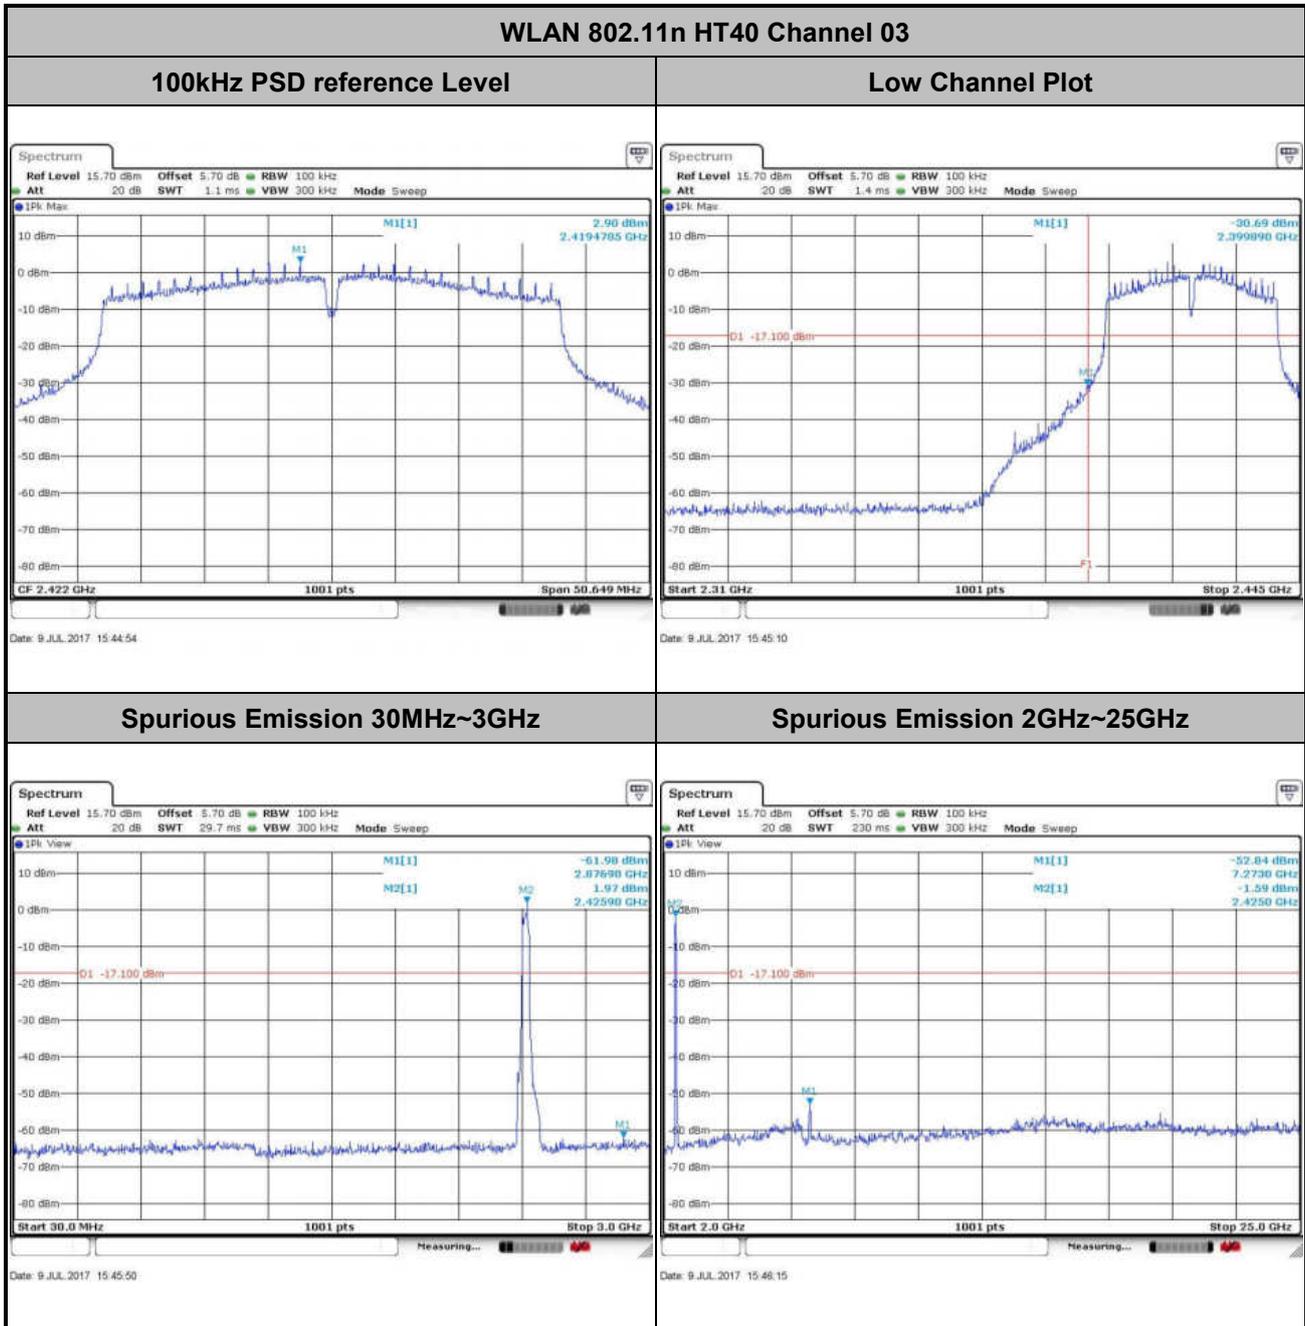





Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

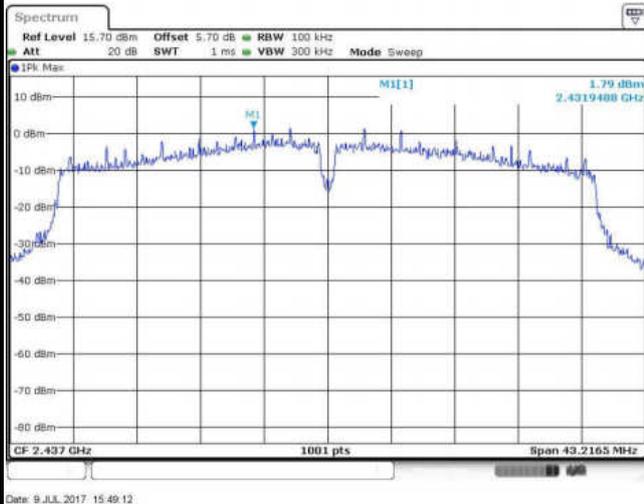

Spurious Emission 30MHz~3GHz

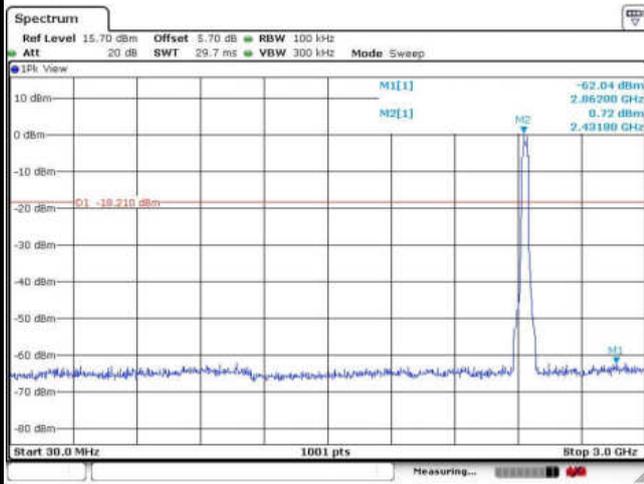


Spurious Emission 2GHz~25GHz

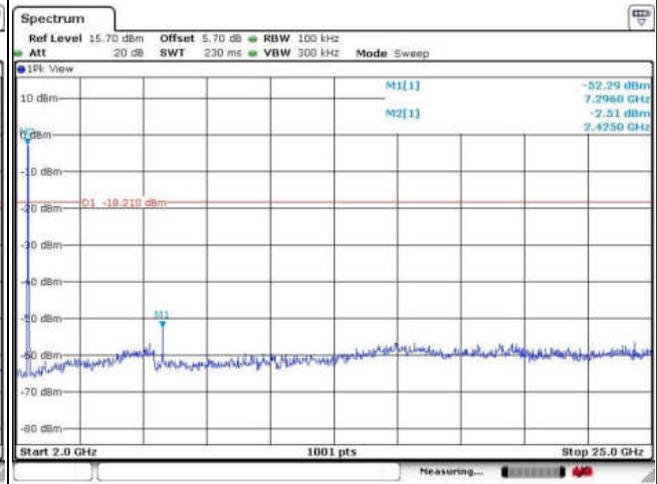



Number of TX :	2	Ant. :	2
Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	09	Test Engineer :	Silent Hai

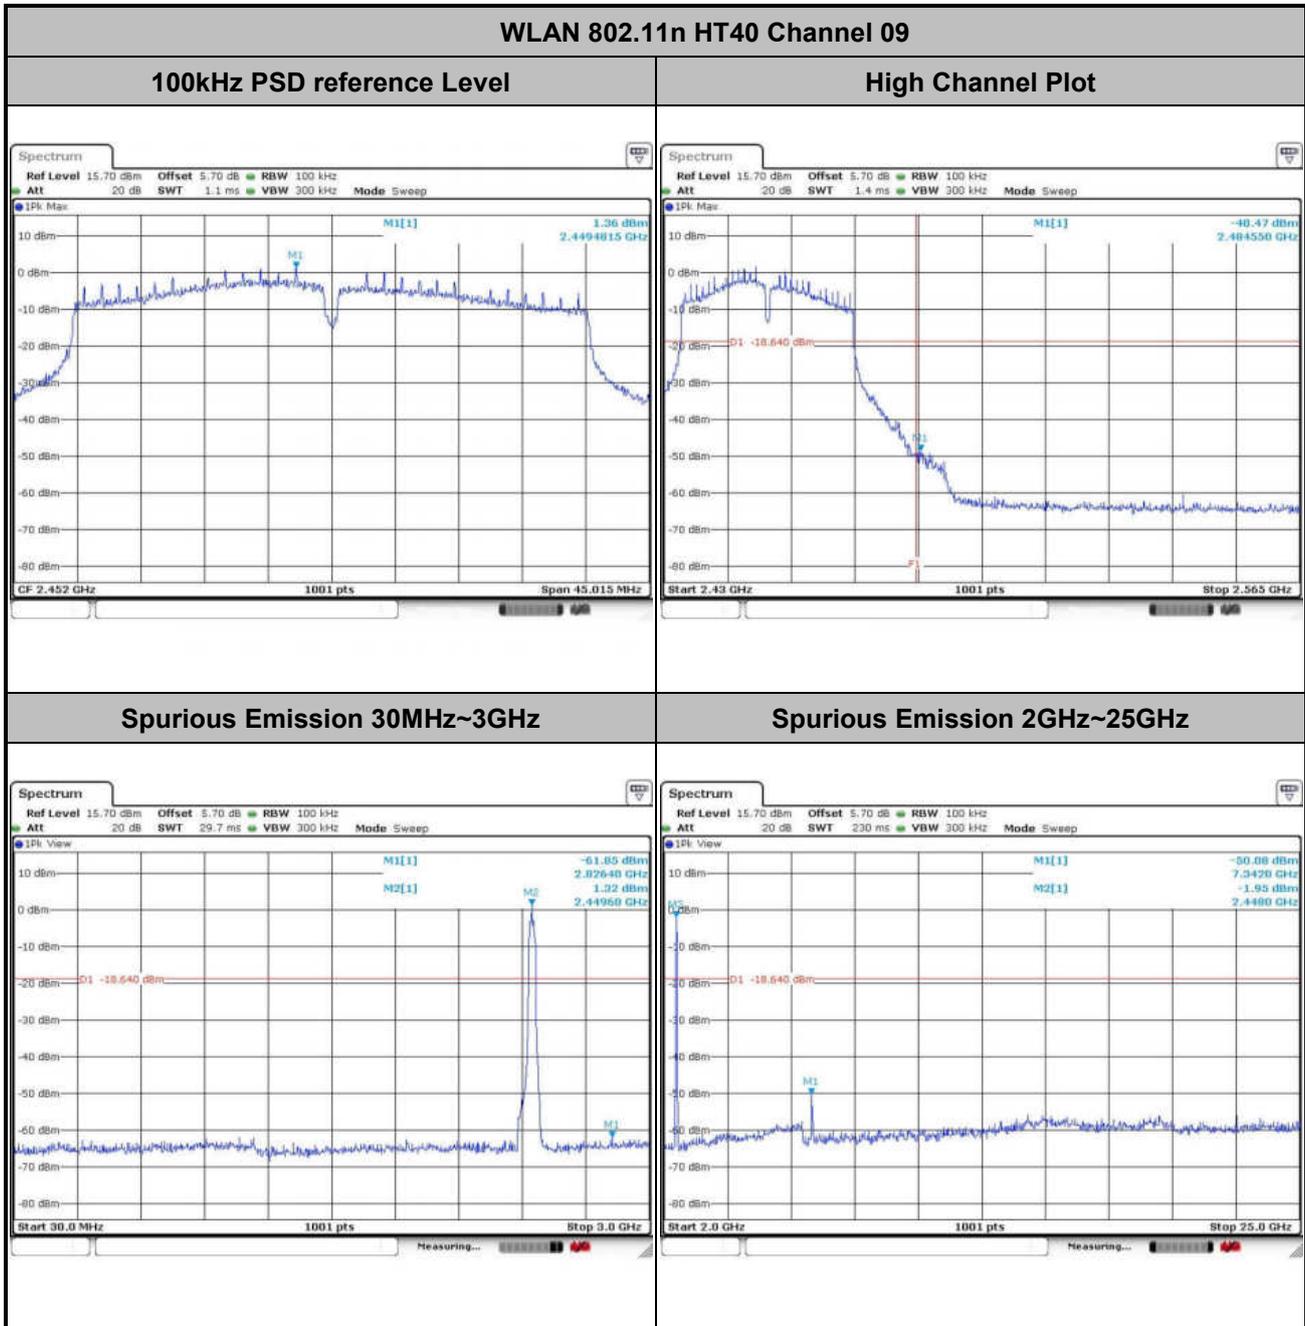



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

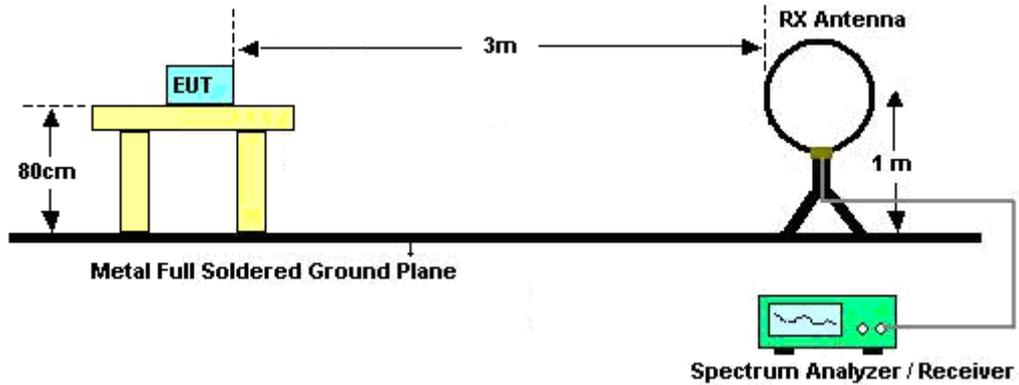

For radiated emissions from 30MHz to 1GHz

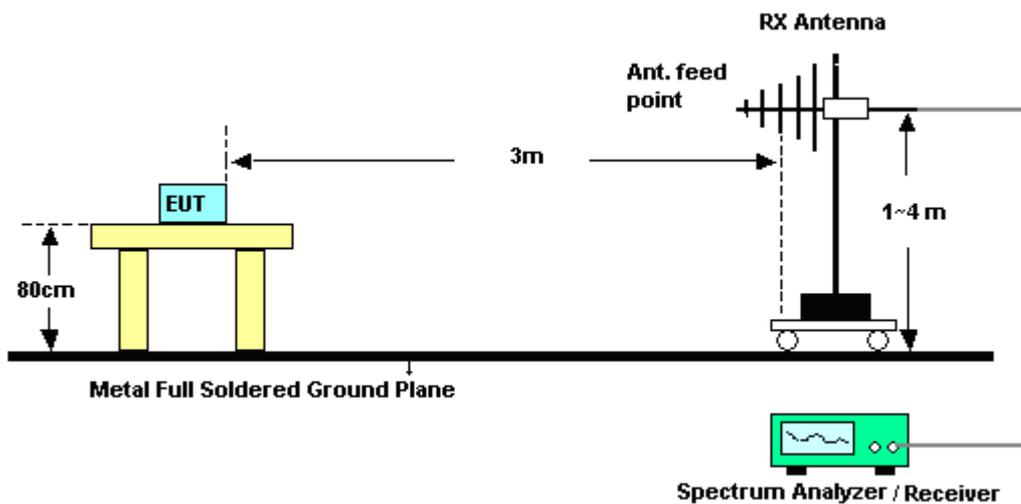

For radiated emissions above 1GHz

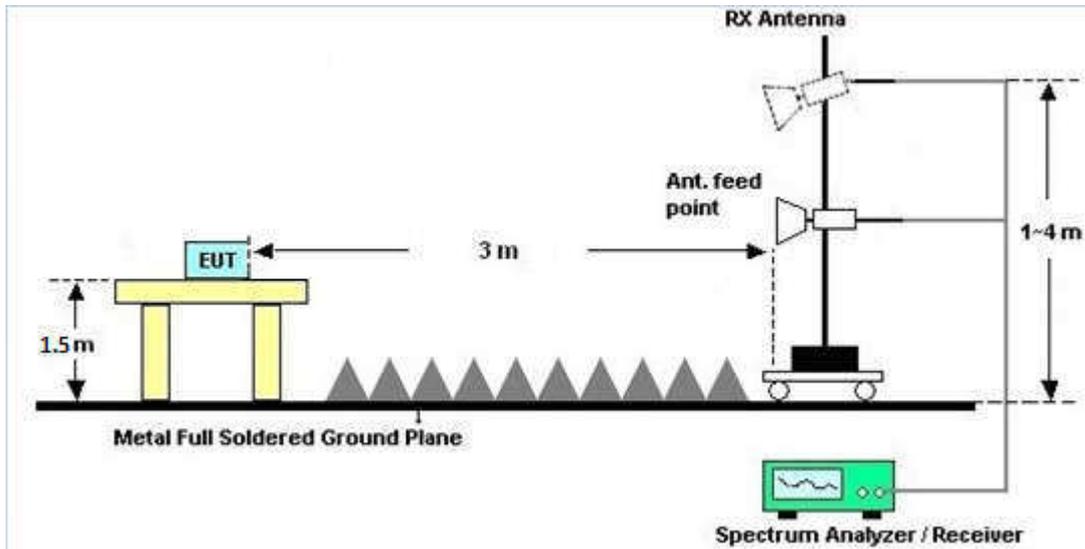

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

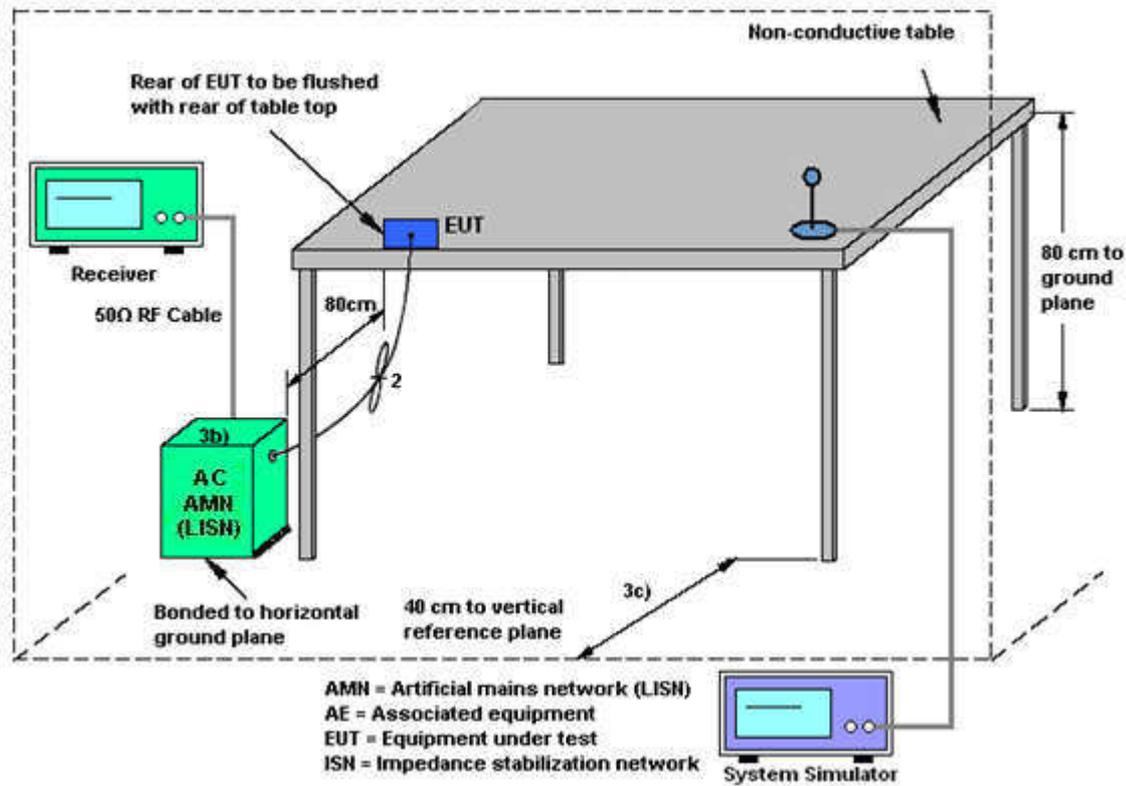



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + WLAN Link(2.4G) + Adapter + Phone Link + Lan Link		

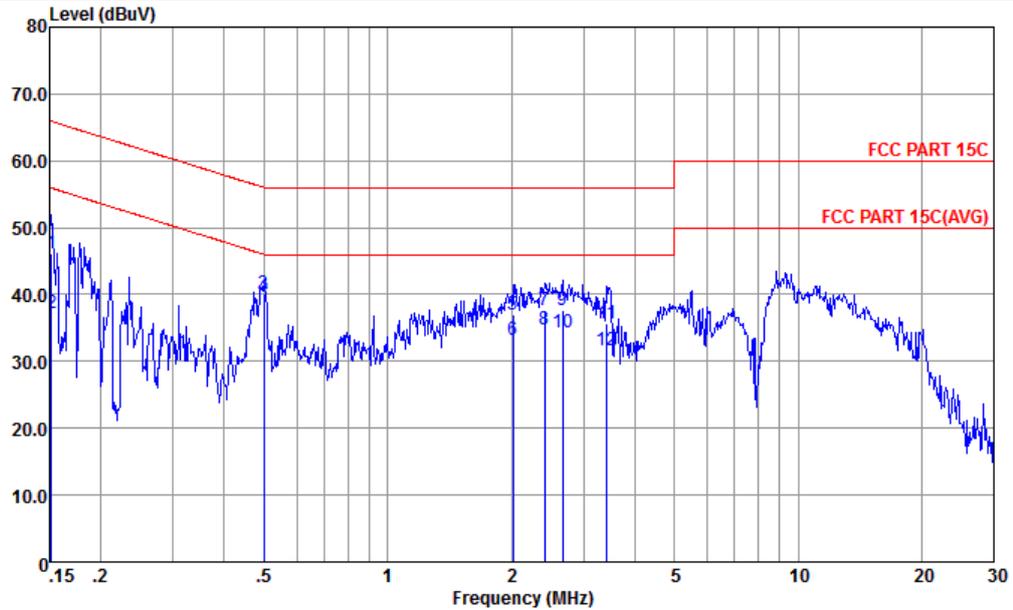


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-161017-060103 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	46.13	-19.78	65.91	35.20	0.54	10.39	QP
2	0.152	37.23	-18.68	55.91	26.30	0.54	10.39	Average
3	0.499	40.06	-15.95	56.01	29.60	0.27	10.19	QP
4 *	0.499	39.56	-6.45	46.01	29.10	0.27	10.19	Average
5	2.023	37.00	-19.00	56.00	26.60	0.21	10.19	QP
6	2.023	33.20	-12.80	46.00	22.80	0.21	10.19	Average
7	2.409	37.71	-18.29	56.00	27.30	0.21	10.20	QP
8	2.409	34.81	-11.19	46.00	24.40	0.21	10.20	Average
9	2.664	37.72	-18.28	56.00	27.30	0.21	10.21	QP
10	2.664	34.32	-11.68	46.00	23.90	0.21	10.21	Average
11	3.417	35.64	-20.36	56.00	25.20	0.21	10.23	QP
12	3.417	31.54	-14.46	46.00	21.10	0.21	10.23	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + WLAN Link(2.4G) + Adapter + Phone Link + Lan Link		

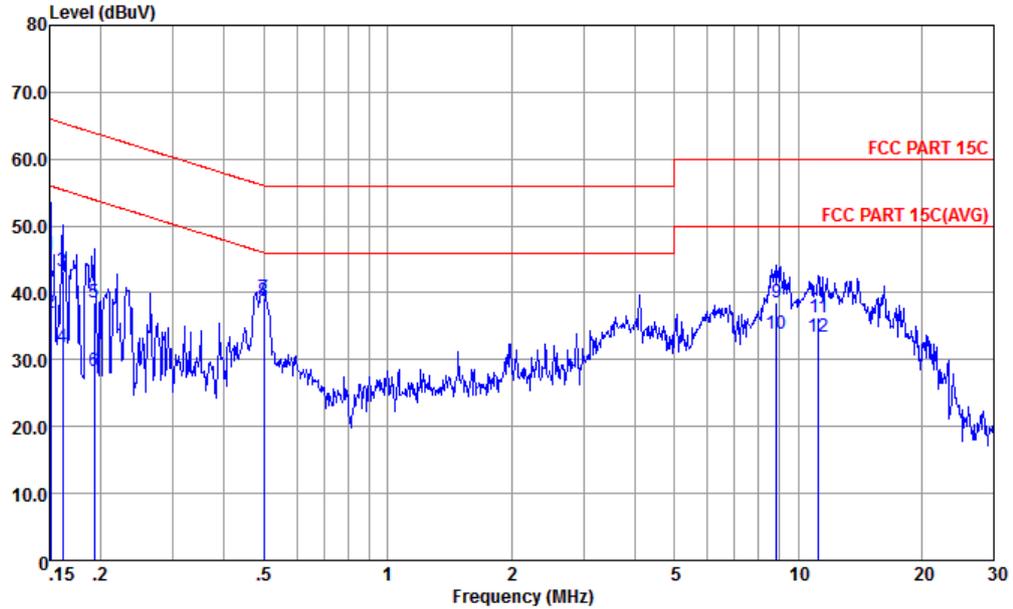

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-161017-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	45.63	-20.33	65.96	34.90	0.34	10.39	QP
2	0.151	36.93	-19.03	55.96	26.20	0.34	10.39	Average
3	0.162	43.22	-22.16	65.38	32.50	0.34	10.38	QP
4	0.162	31.92	-23.46	55.38	21.20	0.34	10.38	Average
5	0.192	38.57	-25.36	63.93	27.90	0.33	10.34	QP
6	0.192	28.27	-25.66	53.93	17.60	0.33	10.34	Average
7	0.499	39.17	-16.84	56.01	28.60	0.38	10.19	QP
8 *	0.499	38.67	-7.34	46.01	28.10	0.38	10.19	Average
9	8.869	38.52	-21.48	60.00	27.90	0.30	10.32	QP
10	8.869	33.92	-16.08	50.00	23.30	0.30	10.32	Average
11	11.198	36.25	-23.75	60.00	25.60	0.28	10.37	QP
12	11.198	33.45	-16.55	50.00	22.80	0.28	10.37	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
2.4 GHz	2.00	2.10	2.10	5.06	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jul. 09, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Jul. 09, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Jul. 09, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 22, 2016	Jul. 12, 2017	Oct. 21, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Jul. 12, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Jul. 12, 2017	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Jul. 12, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Jul. 12, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Oct. 19, 2016	Jul. 12, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	Jul. 12, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 13, 2016	Jul. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Jul. 12, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 12, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 12, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 12, 2017	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	Jul. 10, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Jul. 10, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Jul. 10, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jul. 10, 2017	Oct. 12, 2017	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR762107A

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/7/9	Relative Humidity:	51~55	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2		
11b	1Mbps	1	1	2412	13.89	-	10.05	-	0.50	Pass
11b	1Mbps	1	6	2437	13.84	-	10.07	-	0.50	Pass
11b	1Mbps	1	11	2462	13.89	-	10.05	-	0.50	Pass
11g	6Mbps	1	1	2412	-	16.83	-	15.09	0.50	Pass
11g	6Mbps	1	6	2437	-	16.68	-	15.09	0.50	Pass
11g	6Mbps	1	11	2462	-	16.88	-	15.11	0.50	Pass
HT20	MCS0	1	1	2412	-	17.78	-	15.09	0.50	Pass
HT20	MCS0	1	6	2437	-	17.63	-	15.07	0.50	Pass
HT20	MCS0	1	11	2462	-	17.83	-	15.11	0.50	Pass
HT40	MCS0	1	3	2422	35.96	-	31.29	-	0.50	Pass
HT40	MCS0	1	6	2437	35.86	-	28.81	-	0.50	Pass
HT40	MCS0	1	9	2452	36.06	-	30.05	-	0.50	Pass
HT20	MCS0	2	1	2412	17.78	17.83	15.07	15.07	0.50	Pass
HT20	MCS0	2	6	2437	17.73	17.68	15.07	15.07	0.50	Pass
HT20	MCS0	2	11	2462	17.63	18.03	15.09	15.09	0.50	Pass
HT40	MCS0	2	3	2422	36.06	35.96	32.53	33.77	0.50	Pass
HT40	MCS0	2	6	2437	35.86	35.66	28.81	28.81	0.50	Pass
HT40	MCS0	2	9	2452	36.06	35.96	32.53	30.01	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	18.57	19.19		30.00	30.00	2.00	2.10	20.57	21.29	36.00	36.00	Pass
11b	1Mbps	1	6	2437	19.35	18.14		30.00	30.00	2.00	2.10	21.35	20.24	36.00	36.00	Pass
11b	1Mbps	1	11	2462	19.28	17.63		30.00	30.00	2.00	2.10	21.28	19.73	36.00	36.00	Pass
11g	6Mbps	1	1	2412	23.01	23.97		30.00	30.00	2.00	2.10	25.01	26.07	36.00	36.00	Pass
11g	6Mbps	1	6	2437	23.32	23.21		30.00	30.00	2.00	2.10	25.32	25.31	36.00	36.00	Pass
11g	6Mbps	1	11	2462	23.23	22.99		30.00	30.00	2.00	2.10	25.23	25.09	36.00	36.00	Pass
HT20	MCS0	1	1	2412	21.01	22.86		30.00	30.00	2.00	2.10	23.01	24.96	36.00	36.00	Pass
HT20	MCS0	1	6	2437	22.62	22.05		30.00	30.00	2.00	2.10	24.62	24.15	36.00	36.00	Pass
HT20	MCS0	1	11	2462	22.79	21.92		30.00	30.00	2.00	2.10	24.79	24.02	36.00	36.00	Pass
HT40	MCS0	1	3	2422	21.46	22.07		30.00	30.00	2.00	2.10	23.46	24.17	36.00	36.00	Pass
HT40	MCS0	1	6	2437	22.06	21.38		30.00	30.00	2.00	2.10	24.06	23.48	36.00	36.00	Pass
HT40	MCS0	1	9	2452	22.27	20.92		30.00	30.00	2.00	2.10	24.27	23.02	36.00	36.00	Pass
HT20	MCS0	2	1	2412	21.88	22.56	25.24	30.00		2.10		27.34		36.00		Pass
HT20	MCS0	2	6	2437	22.45	22.37	25.42	30.00		2.10		27.52		36.00		Pass
HT20	MCS0	2	11	2462	22.16	21.39	24.80	30.00		2.10		26.90		36.00		Pass
HT40	MCS0	2	3	2422	21.15	21.89	24.55	30.00		2.10		26.65		36.00		Pass
HT40	MCS0	2	6	2437	21.57	21.57	24.58	30.00		2.10		26.68		36.00		Pass
HT40	MCS0	2	9	2452	21.83	20.82	24.36	30.00		2.10		26.46		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	1	1	2412	0.00	0.00	16.21	16.93	
11b	1Mbps	1	6	2437	0.00	0.00	17.07	15.89	
11b	1Mbps	1	11	2462	0.00	0.00	17.02	15.48	
11g	6Mbps	1	1	2412	0.11	0.11	14.30	15.07	
11g	6Mbps	1	6	2437	0.11	0.11	15.17	14.09	
11g	6Mbps	1	11	2462	0.11	0.11	14.99	13.49	
HT20	MCS0	1	1	2412	0.11	0.11	13.02	13.96	
HT20	MCS0	1	6	2437	0.11	0.11	14.00	12.93	
HT20	MCS0	1	11	2462	0.11	0.11	14.06	12.68	
HT40	MCS0	1	3	2422	0.17	0.17	13.48	14.06	
HT40	MCS0	1	6	2437	0.17	0.17	13.84	13.43	
HT40	MCS0	1	9	2452	0.17	0.17	14.10	12.58	
HT20	MCS0	2	1	2412	0.11	0.12	13.09	13.74	16.44
HT20	MCS0	2	6	2437	0.11	0.12	14.03	12.80	16.47
HT20	MCS0	2	11	2462	0.11	0.12	13.88	12.13	16.10
HT40	MCS0	2	3	2422	0.20	0.17	13.31	14.08	16.72
HT40	MCS0	2	6	2437	0.20	0.17	13.76	13.10	16.45
HT40	MCS0	2	9	2452	0.20	0.17	14.04	12.28	16.26

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant 1	Ant 2	Worse + 3.01	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	-7.86	-	-	2.00	2.10	8.00	8.00	Pass
11b	1Mbps	1	6	2437	-5.72	-	-	2.00	2.10	8.00	8.00	Pass
11b	1Mbps	1	11	2462	-6.08	-	-	2.00	2.10	8.00	8.00	Pass
11g	6Mbps	1	1	2412	-	-9.32	-	2.00	2.10	8.00	8.00	Pass
11g	6Mbps	1	6	2437	-	-8.92	-	2.00	2.10	8.00	8.00	Pass
11g	6Mbps	1	11	2462	-	-10.95	-	2.00	2.10	8.00	8.00	Pass
HT20	MCS0	1	1	2412	-	-10.20	-	2.00	2.10	8.00	8.00	Pass
HT20	MCS0	1	6	2437	-	-10.70	-	2.00	2.10	8.00	8.00	Pass
HT20	MCS0	1	11	2462	-	-12.80	-	2.00	2.10	8.00	8.00	Pass
HT40	MCS0	1	3	2422	-13.70	-	-	2.00	2.10	8.00	8.00	Pass
HT40	MCS0	1	6	2437	-12.98	-	-	2.00	2.10	8.00	8.00	Pass
HT40	MCS0	1	9	2452	-13.59	-	-	2.00	2.10	8.00	8.00	Pass
HT20	MCS0	2	1	2412	-10.67	-9.70	-6.69	5.06		8.00		Pass
HT20	MCS0	2	6	2437	-10.26	-11.55	-7.25	5.06		8.00		Pass
HT20	MCS0	2	11	2462	-10.97	-11.56	-7.96	5.06		8.00		Pass
HT40	MCS0	2	3	2422	-13.00	-12.16	-9.15	5.06		8.00		Pass
HT40	MCS0	2	6	2437	-12.08	-13.38	-9.07	5.06		8.00		Pass
HT40	MCS0	2	9	2452	-13.38	-13.13	-10.12	5.06		8.00		Pass

Measured power density (dBm) has offset with cable loss.



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2386.31	53.31	-20.69	74	58.46	25.8	5.47	36.42	381	360	P	H
		2389.95	41.9	-12.1	54	47.05	25.8	5.47	36.42	381	360	A	H
	*	2412	104.2	-	-	109.33	25.83	5.47	36.43	381	360	P	H
	*	2410	100.21	-	-	105.34	25.83	5.47	36.43	381	360	A	H
		2388.78	53.48	-20.52	74	58.63	25.8	5.47	36.42	315	112	P	V
		2389.43	41.91	-12.09	54	47.06	25.8	5.47	36.42	315	112	A	V
	*	2412	103.8	-	-	108.93	25.83	5.47	36.43	315	112	P	V
	*	2410	100.67	-	-	105.8	25.83	5.47	36.43	315	112	A	V
802.11b CH 06 2437MHz		2388.78	54.95	-19.05	74	60.1	25.8	5.47	36.42	341	359	P	H
		2389.95	44.36	-9.64	54	49.51	25.8	5.47	36.42	341	359	A	H
	*	2438	101.82	-	-	106.89	25.89	5.49	36.45	341	359	P	H
	*	2438	98.78	-	-	103.85	25.89	5.49	36.45	341	359	A	H
		2483.92	54.09	-19.91	74	59.11	25.94	5.51	36.47	341	359	P	H
		2483.68	43.24	-10.76	54	48.26	25.94	5.51	36.47	341	359	A	H
		2389.17	51.98	-22.02	74	57.13	25.8	5.47	36.42	304	132	P	V
		2389.95	41.86	-12.14	54	47.01	25.8	5.47	36.42	304	132	A	V
	*	2438	100.09	-	-	105.16	25.89	5.49	36.45	304	132	P	V
	*	2438	97.07	-	-	102.14	25.89	5.49	36.45	304	132	A	V
		2484.16	52.88	-21.12	74	57.9	25.94	5.51	36.47	304	132	P	V
	2483.51	43	-11	54	48.02	25.94	5.51	36.47	304	132	A	V	



802.11b CH 11 2462MHz	*	2460	103.72	-	-	108.77	25.91	5.5	36.46	312	360	P	H
	*	2460	100.51	-	-	105.56	25.91	5.5	36.46	312	360	A	H
		2484.16	53.4	-20.6	74	58.42	25.94	5.51	36.47	312	360	P	H
		2483.68	42.59	-11.41	54	47.61	25.94	5.51	36.47	312	360	A	H
	*	2460	103.27	-	-	108.32	25.91	5.5	36.46	301	101	P	V
	*	2460	99.51	-	-	104.56	25.91	5.5	36.46	301	101	A	V
		2484.52	53.22	-20.78	74	58.24	25.94	5.51	36.47	301	101	P	V
		2483.51	41.59	-12.41	54	46.61	25.94	5.51	36.47	301	101	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for channels 01, 06, and 11 at various frequencies.



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 06 2437MHz		2389.43	51	-23	74	56.15	25.8	5.47	36.42	346	237	P	H
		2389.95	41.04	-12.96	54	46.19	25.8	5.47	36.42	346	237	A	H
	*	2436	100.39	-	-	105.49	25.86	5.48	36.44	346	237	P	H
	*	2436	97.25	-	-	102.35	25.86	5.48	36.44	346	237	A	H
		2483.51	51.37	-22.63	74	56.39	25.94	5.51	36.47	346	237	P	H
		2483.74	41.09	-12.91	54	46.11	25.94	5.51	36.47	346	237	A	H
		2389.69	50.15	-23.85	74	55.3	25.8	5.47	36.42	299	91	P	V
		2389.95	40.33	-13.67	54	45.48	25.8	5.47	36.42	299	91	A	V
	*	2436	99.25	-	-	104.35	25.86	5.48	36.44	299	91	P	V
	*	2436	96.12	-	-	101.22	25.86	5.48	36.44	299	91	A	V
		2484.88	49.81	-24.19	74	54.83	25.94	5.51	36.47	299	91	P	V
		2483.51	39.23	-14.77	54	44.25	25.94	5.51	36.47	299	91	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11b CH 06 at 2437MHz and a Remark section.



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2388.26	60.87	-13.13	74	66.02	25.8	5.47	36.42	304	118	P	H
		2389.82	46.89	-7.11	54	52.04	25.8	5.47	36.42	304	118	A	H
	*	2410	105.54	-	-	110.67	25.83	5.47	36.43	304	118	P	H
	*	2410	97.64	-	-	102.77	25.83	5.47	36.43	304	118	A	H
		2387.48	54.79	-19.21	74	59.94	25.8	5.47	36.42	318	223	P	V
		2389.82	42.53	-11.47	54	47.68	25.8	5.47	36.42	318	223	A	V
	*	2410	103.42	-	-	108.55	25.83	5.47	36.43	318	223	P	V
	*	2414	94.51	-	-	99.64	25.83	5.47	36.43	318	223	A	V
802.11g CH 06 2437MHz		2386.31	53.4	-20.6	74	58.55	25.8	5.47	36.42	363	121	P	H
		2389.95	43.91	-10.09	54	49.06	25.8	5.47	36.42	363	121	A	H
	*	2436	103.88	-	-	108.98	25.86	5.48	36.44	363	121	P	H
	*	2436	96.26	-	-	101.36	25.86	5.48	36.44	363	121	A	H
		2484.16	51.27	-22.73	74	56.29	25.94	5.51	36.47	363	121	P	H
		2485.9	40.15	-13.85	54	45.17	25.94	5.51	36.47	363	121	A	H
		2389.04	51.32	-22.68	74	56.47	25.8	5.47	36.42	324	220	P	V
		2389.82	41.1	-12.9	54	46.25	25.8	5.47	36.42	324	220	A	V
	*	2436	101.94	-	-	107.04	25.86	5.48	36.44	324	220	P	V
	*	2434	94.07	-	-	99.17	25.86	5.48	36.44	324	220	A	V
		2483.62	50.93	-23.07	74	55.95	25.94	5.51	36.47	324	220	P	V
		2483.86	40.93	-13.07	54	45.95	25.94	5.51	36.47	324	220	A	V



802.11g CH 11 2462MHz	*	2464	105.65	-	-	110.7	25.91	5.5	36.46	320	47	P	H
	*	2462	97.22	-	-	102.27	25.91	5.5	36.46	320	47	A	H
		2483.8	58.39	-15.61	74	63.41	25.94	5.51	36.47	320	47	P	H
		2483.74	42.76	-11.24	54	47.78	25.94	5.51	36.47	320	47	A	H
	*	2464	103.51	-	-	108.56	25.91	5.5	36.46	330	221	P	V
	*	2464	95.84	-	-	100.89	25.91	5.5	36.46	330	221	A	V
		2483.8	57.24	-16.76	74	62.26	25.94	5.51	36.47	330	221	P	V
		2483.51	42.82	-11.18	54	47.84	25.94	5.51	36.47	330	221	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.

2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Includes a Remark section with two points.



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		2389.56	61.29	-12.71	74	66.44	25.8	5.47	36.42	295	81	P	H
		2389.95	47.19	-6.81	54	52.34	25.8	5.47	36.42	295	81	A	H
	*	2410	109.02	-	-	114.15	25.83	5.47	36.43	295	81	P	H
	*	2412	101.49	-	-	106.62	25.83	5.47	36.43	295	81	A	H
		2389.69	60.99	-13.01	74	66.14	25.8	5.47	36.42	394	55	P	V
		2389.95	45.9	-8.1	54	51.05	25.8	5.47	36.42	394	55	A	V
	*	2414	107.4	-	-	112.53	25.83	5.47	36.43	394	55	P	V
	*	2410	99.47	-	-	104.6	25.83	5.47	36.43	394	55	A	V
802.11n HT20 CH 06 2437MHz		2389.82	55.32	-18.68	74	60.47	25.8	5.47	36.42	375	78	P	H
		2389.95	45.51	-8.49	54	50.66	25.8	5.47	36.42	375	78	A	H
	*	2438	108.03	-	-	113.1	25.89	5.49	36.45	375	78	P	H
	*	2438	100.3	-	-	105.37	25.89	5.49	36.45	375	78	A	H
		2483.51	52.01	-21.99	74	57.03	25.94	5.51	36.47	375	78	P	H
		2483.51	42.63	-11.37	54	47.65	25.94	5.51	36.47	375	78	A	H
		2389.3	53.77	-20.23	74	58.92	25.8	5.47	36.42	329	339	P	V
		2389.95	44.31	-9.69	54	49.46	25.8	5.47	36.42	329	339	A	V
	*	2436	106.01	-	-	111.11	25.86	5.48	36.44	329	339	P	V
	*	2436	97.79	-	-	102.89	25.86	5.48	36.44	329	339	A	V
	2483.98	51.89	-22.11	74	56.91	25.94	5.51	36.47	329	339	P	V	
	2483.51	42.52	-11.48	54	47.54	25.94	5.51	36.47	329	339	A	V	



802.11n HT20 CH 11 2462MHz	*	2460	111.24	-	-	116.29	25.91	5.5	36.46	358	83	P	H
	*	2460	103.42	-	-	108.47	25.91	5.5	36.46	358	83	A	H
		2484.22	67.84	-6.16	74	72.86	25.94	5.51	36.47	358	83	P	H
		2483.8	48.99	-5.01	54	54.01	25.94	5.51	36.47	358	83	A	H
	*	2464	106.67	-	-	111.72	25.91	5.5	36.46	373	336	P	V
	*	2464	98.92	-	-	103.97	25.91	5.5	36.46	373	336	A	V
		2484.04	59.12	-14.88	74	64.14	25.94	5.51	36.47	373	336	P	V
	2483.51	43.28	-10.72	54	48.3	25.94	5.51	36.47	373	336	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	63.39	-10.61	74	61.5	30.68	7.72	36.51	300	267	P	H
		4824	50.95	-3.05	54	49.06	30.68	7.72	36.51	300	267	A	H
		4824	58.58	-15.42	74	56.69	30.68	7.72	36.51	332	20	P	V
		4824	47.61	-6.39	54	45.72	30.68	7.72	36.51	332	20	A	V
802.11n HT20 CH 06 2437MHz		4878	63.27	-10.73	74	61.19	30.85	7.76	36.53	307	271	P	H
		4878	49.85	-4.15	54	47.77	30.85	7.76	36.53	307	271	A	H
		7308	46.78	-27.22	74	38.46	34.81	9.76	36.25	100	0	P	H
		4878	55.08	-18.92	74	53	30.85	7.76	36.53	311	18	P	V
		4878	44.51	-9.49	54	42.43	30.85	7.76	36.53	311	18	A	V
		7308	46.51	-27.49	74	38.19	34.81	9.76	36.25	300	360	P	V
802.11n HT20 CH 11 2462MHz		4926	62.73	-11.27	74	60.47	31.02	7.8	36.56	345	186	P	H
		4926	50.55	-3.45	54	48.29	31.02	7.8	36.56	345	190	A	H
		7386	47.54	-26.46	74	38.93	35.03	9.86	36.28	100	360	P	H
		4926	48.32	-25.68	74	46.06	31.02	7.8	36.56	100	360	P	V
			7386	47.58	-26.42	74	38.97	35.03	9.86	36.28	100	360	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT40 CH 03 (2422MHz) and 802.11n HT40 CH 06 (2437MHz).



802.11n HT40 CH 09 2452MHz		2386.83	50.48	-23.52	74	55.63	25.8	5.47	36.42	300	183	P	H
		2388.91	41.24	-12.76	54	46.39	25.8	5.47	36.42	300	183	A	H
	*	2450	102.9	-	-	107.97	25.89	5.49	36.45	300	183	P	H
	*	2450	95.47	-	-	100.54	25.89	5.49	36.45	300	183	A	H
		2483.68	60.43	-13.57	74	65.45	25.94	5.51	36.47	300	183	P	H
		2483.51	48.54	-5.46	54	53.56	25.94	5.51	36.47	300	183	A	H
		2389.43	54.01	-19.99	74	59.16	25.8	5.47	36.42	337	110	P	V
		2389.95	44.36	-9.64	54	49.51	25.8	5.47	36.42	337	110	A	V
	*	2448	106.61	-	-	111.68	25.89	5.49	36.45	337	110	P	V
	*	2450	99.01	-	-	104.08	25.89	5.49	36.45	337	110	A	V
		2483.62	62	-12	74	67.02	25.94	5.51	36.47	337	110	P	V
		2484.04	48.48	-5.52	54	53.5	25.94	5.51	36.47	337	110	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4842	46.01	-27.99	74	44.06	30.73	7.74	36.52	100	360	P	H
		7266	47.08	-26.92	74	38.88	34.72	9.72	36.24	100	360	P	H
		4842	59.55	-14.45	74	57.6	30.73	7.74	36.52	100	256	P	V
		4842	48.34	-5.66	54	46.39	30.73	7.74	36.52	203	246	A	V
		7266	46.61	-27.39	74	38.41	34.72	9.72	36.24	100	360	P	V
802.11n HT40 CH 06 2437MHz		4872	44.29	-29.71	74	42.21	30.85	7.76	36.53	100	360	P	H
		7308	47.35	-26.65	74	39.03	34.81	9.76	36.25	100	360	P	H
		4872	57.67	-16.33	74	55.59	30.85	7.76	36.53	100	255	P	V
		4872	47.33	-6.67	54	45.25	30.85	7.76	36.53	190	251	A	V
		7308	45.94	-28.06	74	37.62	34.81	9.76	36.25	100	360	P	V
802.11n HT40 CH 09 2452MHz		4902	45.57	-28.43	74	43.38	30.96	7.78	36.55	100	360	P	H
		7356	48.05	-25.95	74	39.56	34.94	9.82	36.27	100	360	P	H
		4902	57.3	-16.7	74	55.11	30.96	7.78	36.55	100	243	P	V
		4902	46.43	-7.57	54	44.24	30.96	7.78	36.55	207	253	A	V
		7356	46.31	-27.69	74	37.82	34.94	9.82	36.27	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		30	32.54	-7.46	40	35.96	27.2	0.65	31.27	100	57	P	H
		39.7	26.22	-13.78	40	34.64	22.2	0.75	31.37	-	-	P	H
		77.53	27.56	-12.44	40	42.78	15.2	1.07	31.49	-	-	P	H
		451.95	29.52	-16.48	46	32.7	25.41	2.65	31.24	-	-	P	H
		479.11	28.22	-17.78	46	32.52	24.21	2.74	31.25	-	-	P	H
		974.78	32.63	-21.37	54	29.78	29.5	4.04	30.69	-	-	P	H
		30.97	30.86	-9.14	40	34.63	26.86	0.66	31.29	100	25	P	V
		94.99	23.78	-19.72	43.5	35.56	18.5	1.17	31.45	-	-	P	V
		256.01	26.84	-19.16	46	39.19	17.32	1.77	31.44	-	-	P	V
		434.49	29.57	-16.43	46	33.45	24.78	2.59	31.25	-	-	P	V
		703.18	33.01	-12.99	46	34.06	26.65	3.35	31.05	-	-	P	V
		924.34	32.94	-13.06	46	30.84	28.98	3.91	30.79	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



2.4GHz 2400~2483.5MHz

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	802.11 b	100	-	-	10Hz
2	802.11 b	100	-	-	10Hz
1	802.11 g	97.56	2.029	0.493	1kHz
2	802.11 g	97.55	2.022	0.495	1kHz
1+2	802.11n HT20	97.38	1.884	0.531	1kHz
1+2	802.11n HT40	96.27	0.935	1.070	3kHz

802.11b Ant.1

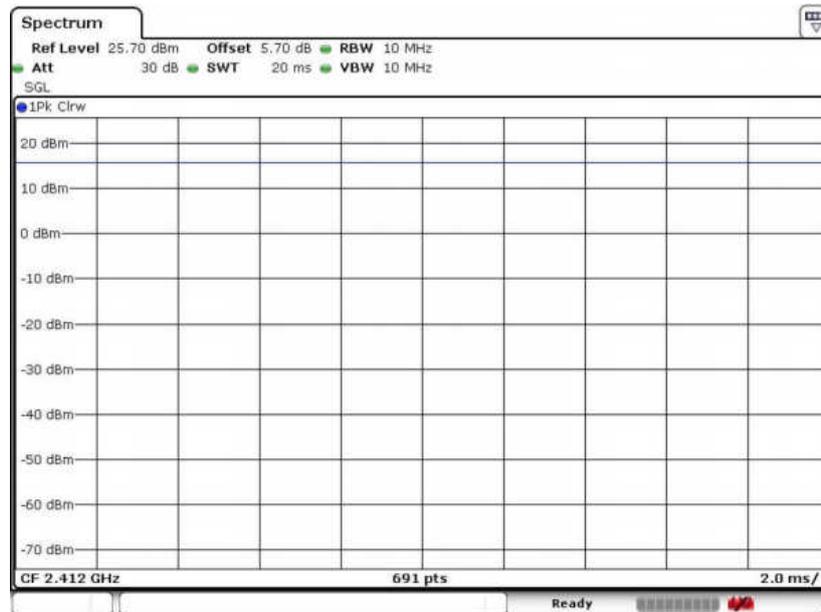




802.11b Ant.2

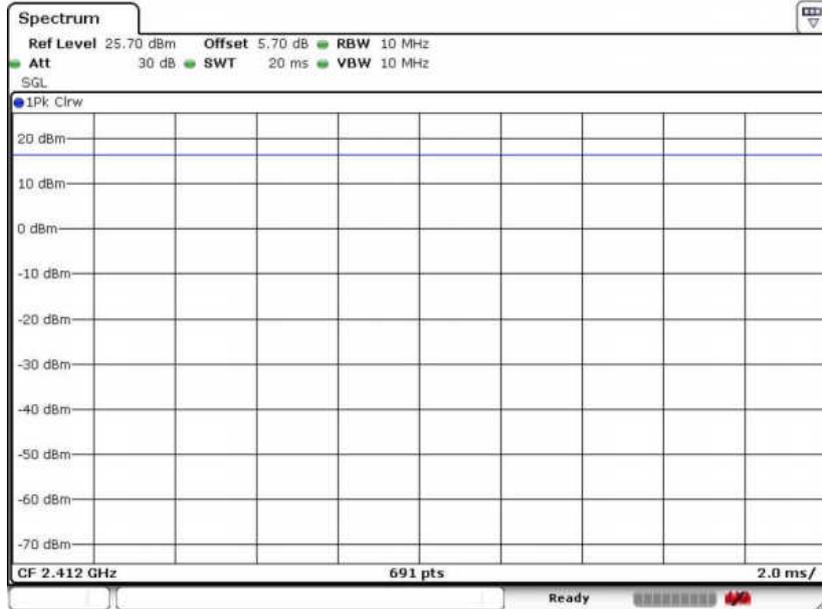


802.11g Ant. 1

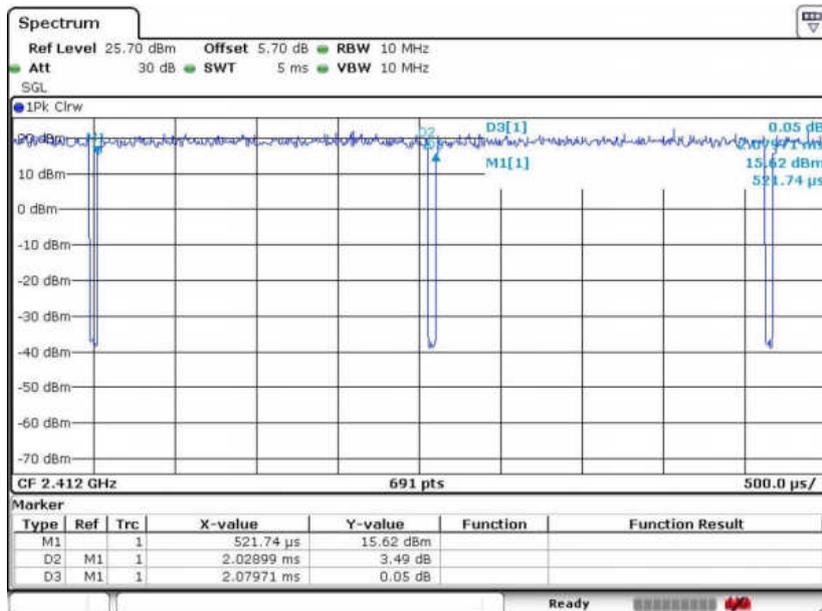




802.11g Ant. 2

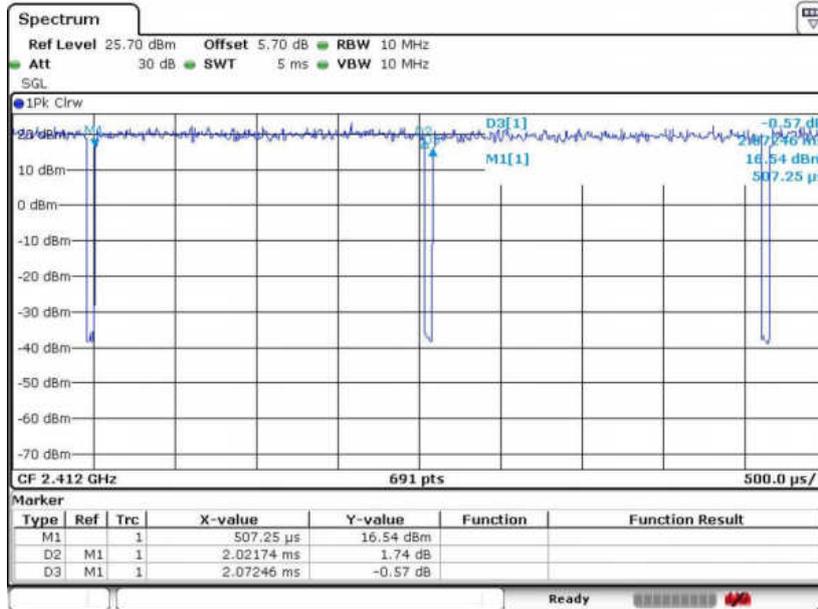

802.11n20 Ant.1+2

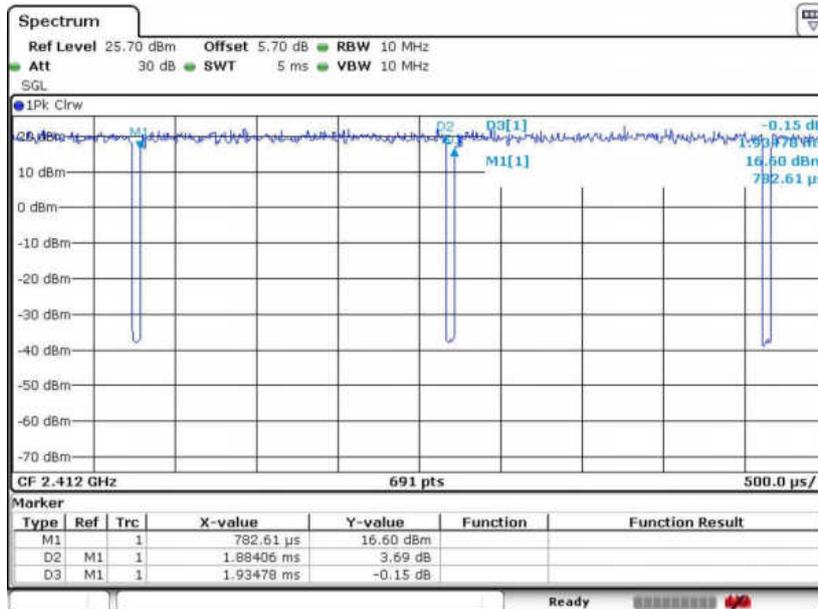



802.11n40 Ant.1+2

