



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/LTE CPE
BRAND NAME : ZTE
MODEL NAME : MF288
FCC ID : SRQ-MF288
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Aug. 09, 2017 and testing was completed on Sep. 25, 2017. We, Sporton International (KunShan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335
China



TABLE OF CONTENTS

- 1 GENERAL DESCRIPTION 5**
 - 1.1 Applicant 5
 - 1.2 Manufacturer 5
 - 1.3 Product Feature of Equipment Under Test 5
 - 1.4 Product Specification of Equipment Under Test 6
 - 1.5 Modification of EUT 7
 - 1.6 Testing Location 7
 - 1.7 Applicable Standards 8
- 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9**
 - 2.1 Carrier Frequency and Channel 9
 - 2.2 Test Mode 10
 - 2.3 Connection Diagram of Test System 11
 - 2.4 Support Unit used in test configuration and system 12
 - 2.5 EUT Operation Test Setup 12
 - 2.6 Measurement Results Explanation Example 13
- 3 TEST RESULT 14**
 - 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14
 - 3.2 Maximum Conducted Output Power Measurement 17
 - 3.3 Power Spectral Density Measurement 18
 - 3.4 Unwanted Emissions Measurement 21
 - 3.5 AC Conducted Emission Measurement 28
 - 3.6 Frequency Stability Measurement 32
 - 3.7 Automatically Discontinue Transmission 33
 - 3.8 Antenna Requirements 34
- 4 LIST OF MEASURING EQUIPMENT 35**
- 5 UNCERTAINTY OF EVALUATION 36**
- APPENDIX A. CONDUCTED TEST RESULTS**
- APPENDIX B. RADIATED SPURIOUS EMISSION**
- APPENDIX C. DUTY CYCLE PLOTS**
- APPENDIX D. SETUP PHOTOGRAPHS**



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	RSS-247 Section 6	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	15.407(b)(4)(i) ≤ -17, -27 dBm/MHz & 15.209(a)	Pass	Under limit 2.31 dB at 36.79 MHz for Quasi-Peak
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 5.48 dB at 0.426 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-247 6.4(2)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/LTE CPE
Brand Name	ZTE
Model Name	MF288
FCC ID	SRQ-MF288
EUT supports Radios application	WCDMA/HSPA/ HSPA+ (16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
IMEI Code	Conducted: 866339030000579 Conduction: 866339030000017 Radiation: 866339030000017
HW Version	MF288HW1.0
SW Version	MF288UIV1.0.3
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification				
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz			
Maximum Output Power	<5745 MHz ~ 5825 MHz> <Ant. 1> 802.11a : 15.48 dBm / 0.0353 W <Ant. 2> 802.11a : 14.93 dBm / 0.0311 W <Ant. 3> 802.11a : 15.34 dBm / 0.0342 W MIMO <Ant. 1 + 2 + 3> 802.11n HT20 : 18.51 dBm / 0.0710 W 802.11n HT40 : 18.39 dBm / 0.0690 W 802.11ac VHT80: 16.32 dBm / 0.0429 W			
99% Occupied Bandwidth	802.11a : 17.23 MHz 802.11n HT20 : 18.23 MHz 802.11n HT40 : 36.26 MHz 802.11ac VHT80 : 75.88 MHz			
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)			
Antenna Type / Gain	<5745 MHz ~ 5825 MHz> Ant. 1 : PIFA Antenna with gain 2.67 dBi Ant. 2 : PIFA Antenna with gain 2.95 dBi Ant. 3 : PIFA Antenna with gain 2.01 dBi			
Antenna Function Description		Ant.1	Ant.2	Ant.3
	802.11a/n SISO	V	V	V
	802.11n/ac MIMO	V	V	V

Note:

1. MIMO Ant. 1+2+3 is a calculated result from sum of the power MIMO Ant. 1, MIMO Ant. 2 and MIMO Ant. 3.
2. For 802.11n/ac mode, the MIMO conducted power is higher than SISO mode, so we only test MIMO mode.
3. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, we assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.
4. Only 802.11n/ac support TX Beamforming.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

Test Site	Sporton International (Kunshan) Inc.			
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958			
Test Site No.	Sporton Site No.			FCC Test Firm Registration No.
	TH01-KS	03CH03-KS	CO01-KS	630927

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Single Antenna

Modulation	Data Rate
802.11a	6 Mbps

MIMO Antenna

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


AC Conducted Emission	Mode 1 : WCDMA Band V Idle + Phone Link + WLAN Link(5G) + Adapter + Lan Link + Lan Load + U Disk + GNSS Rx + WWAN Internal Antenna
--------------------------------------	---

Ch. #		Band IV : 5745-5825 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5745-5825 MHz
		802.11ac VHT80
L	Low	-
M	Middle	155
H	High	-

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

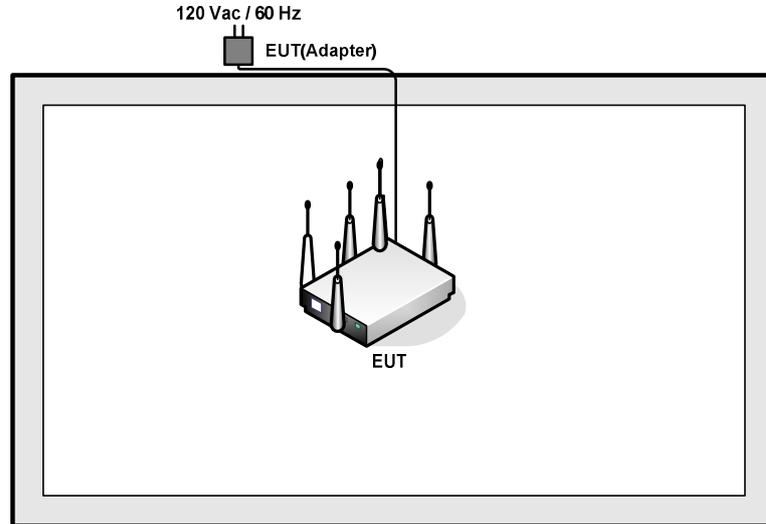

<AC Conducted Emission Mode>

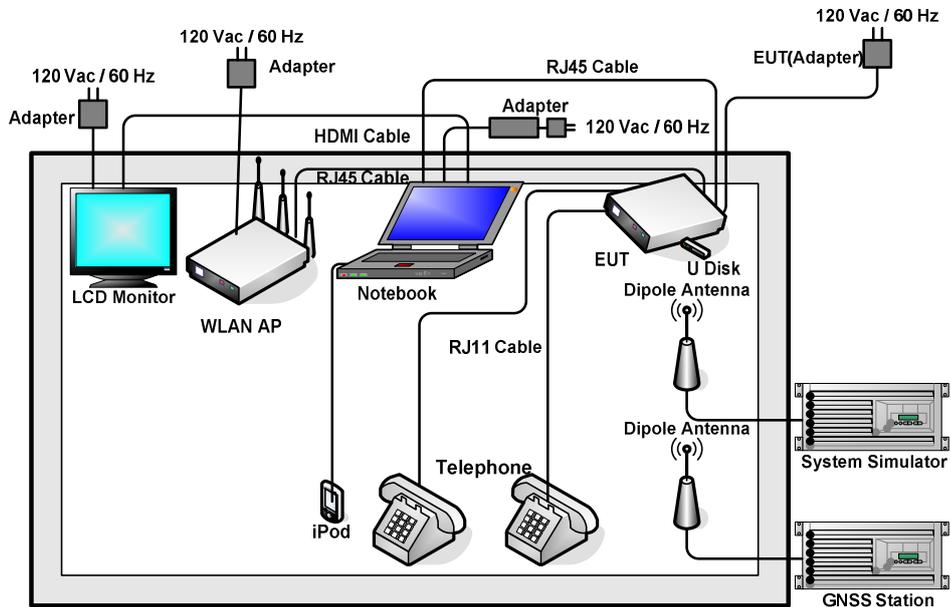



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8m
3.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8m
4.	Glonass Station	RACELOGIC	RLLS03-2RP	N/A	N/A	Unshielded, 1.8m
5.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Shielded, 1.8 m
6.	Monitor	Dell	IN1930MwC	Fcc DoC	N/A	Unshielded, 1.8m
7.	Telephone*2	BBK	HCD007(6082)TSD	N/A	N/A	N/A
8.	U Disk	SanDisk	SDCZ51-004G	N/A	N/A	N/A
9.	iPod	Apple	A1199	Fcc DoC	Shielded, 1.2m	N/A
10.	RJ45 Cable	N/A	N/A	N/A	Unshielded,1.8m	N/A
11.	RJ11 Cable	N/A	N/A	N/A	Unshielded,1.8m	N/A
12.	HDMI Cable	N/A	N/A	N/A	Unshielded,1.2m	N/A

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.8dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

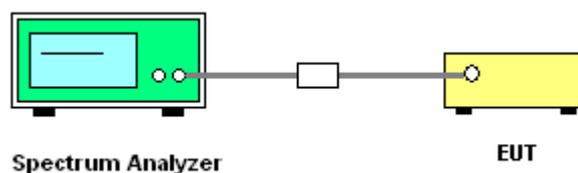




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

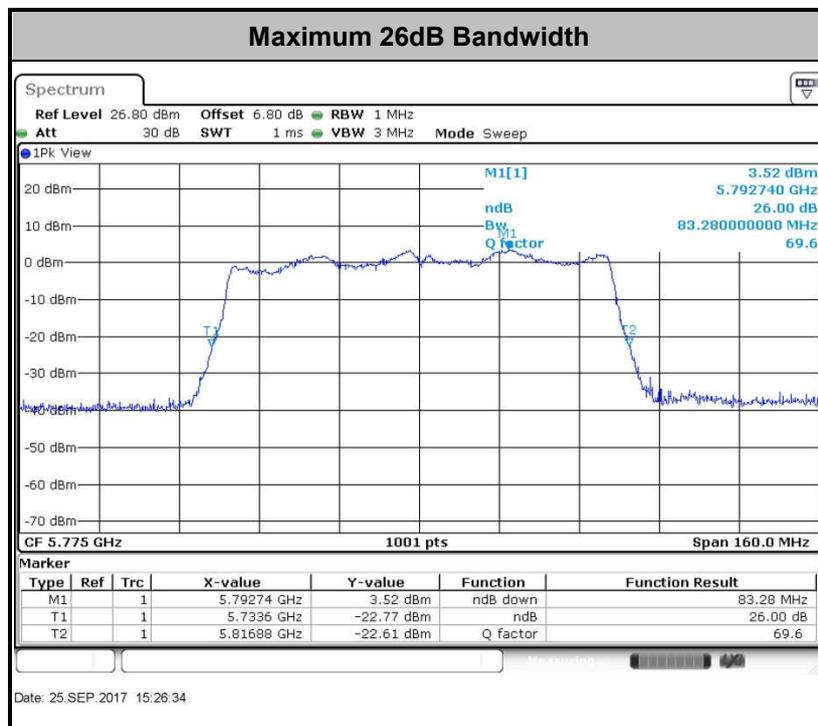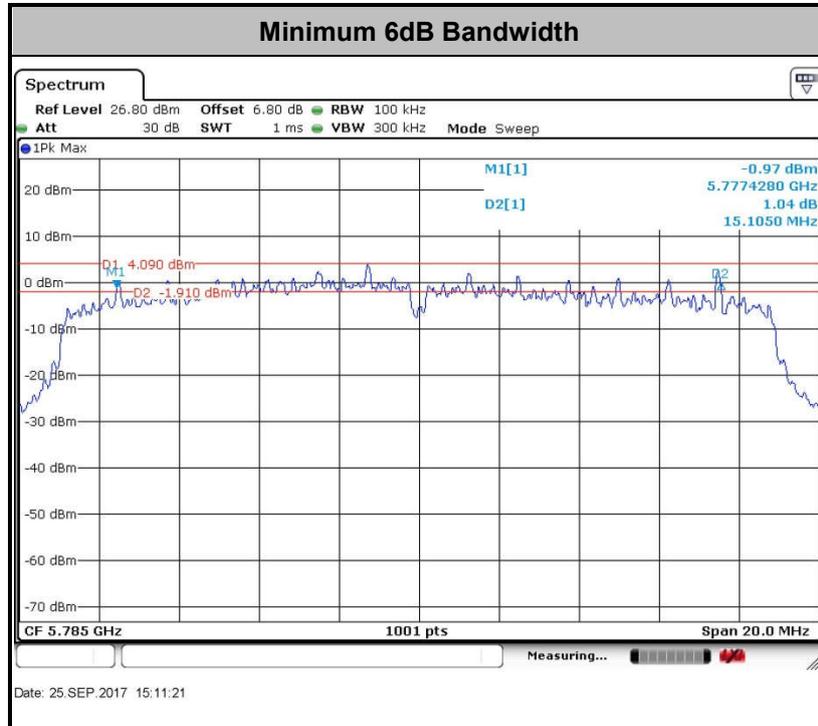

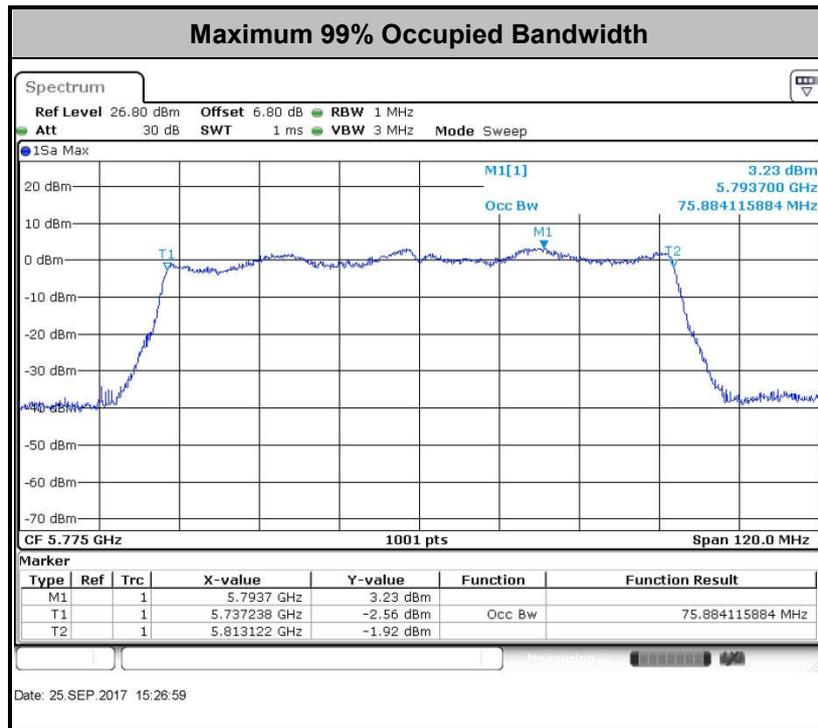

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

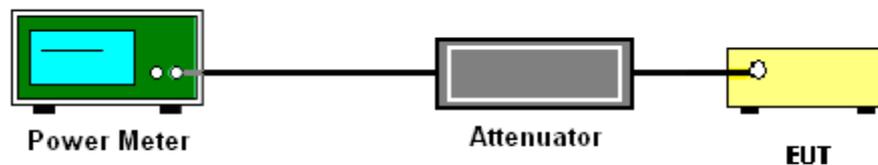

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit.


3.3.4 Test Setup

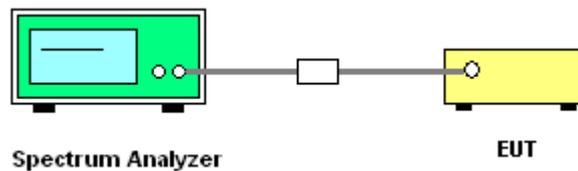



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

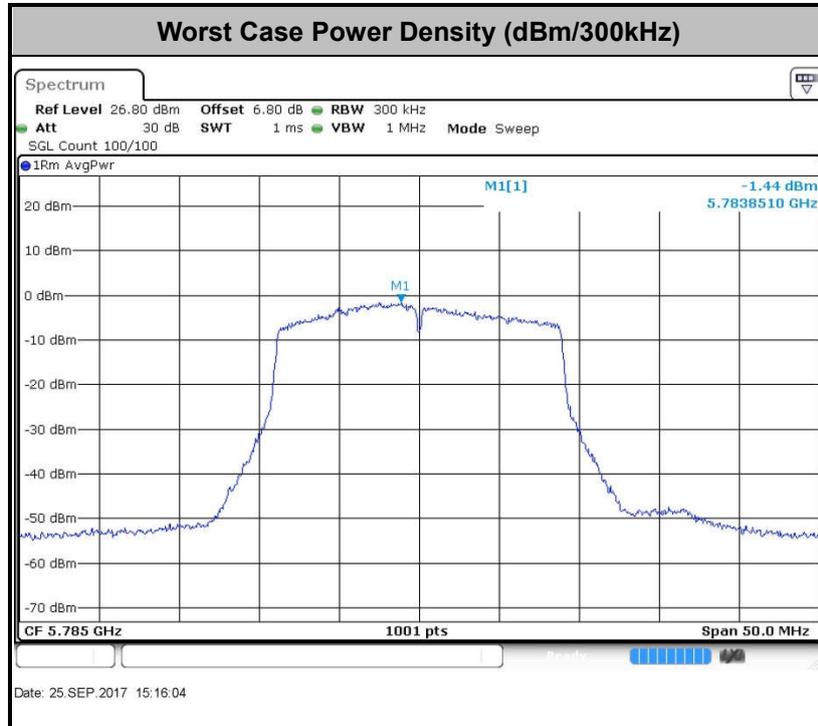



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



(3) KDB789033 D02 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).



3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


(4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 3 MHz
- Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
- Averaging type = power averaging(RMS)
- The correction factor shall be offset is $10 \log (1/x)$, where x is the duty cycle.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup

For radiated emissions below 30MHz

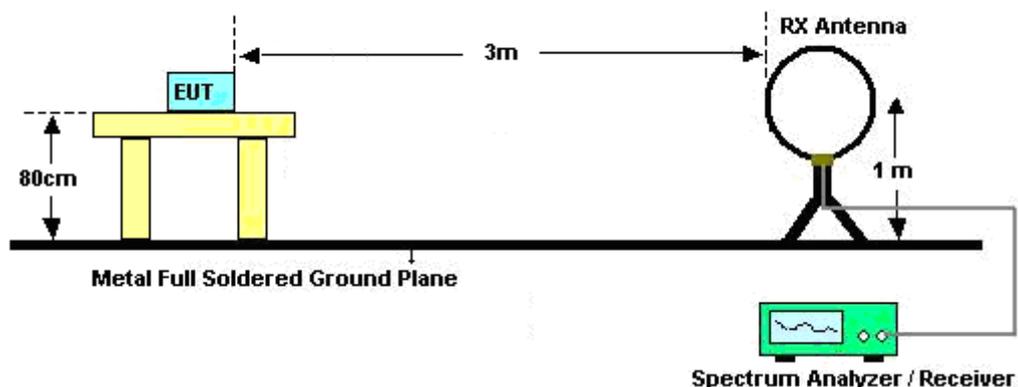


For radiated emissions from 30MHz to 1GHz

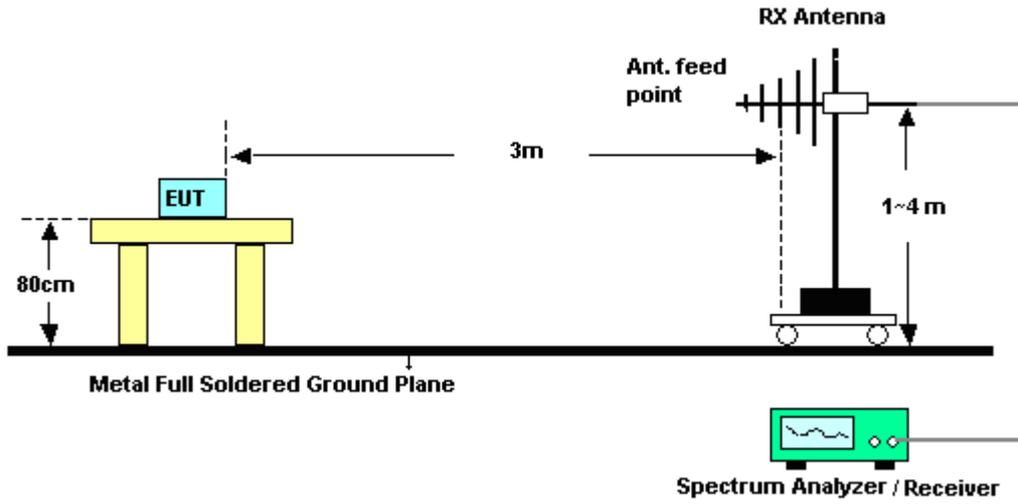


For radiated emissions above 1GHz

Non-TXBF Mode

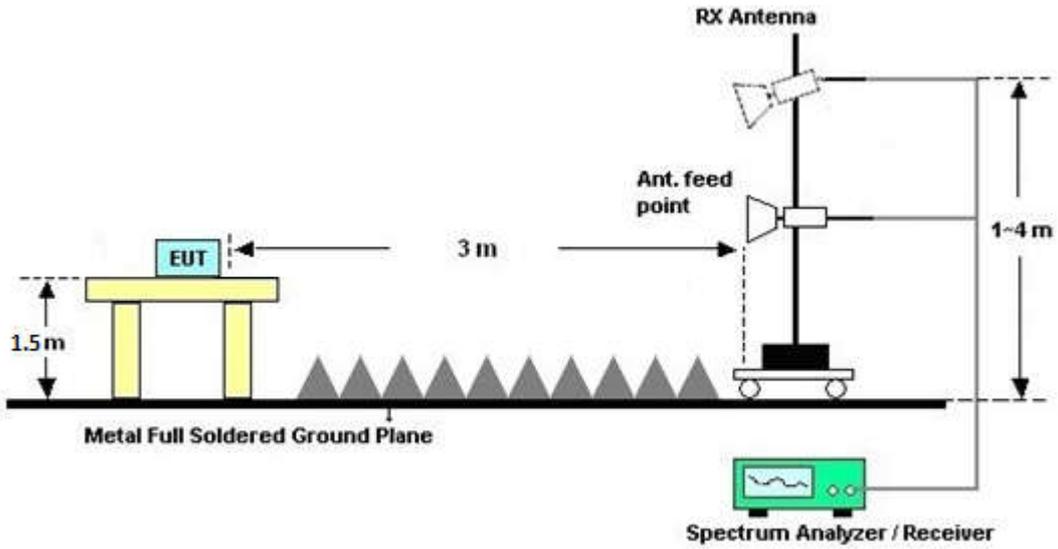

TXBF Mode

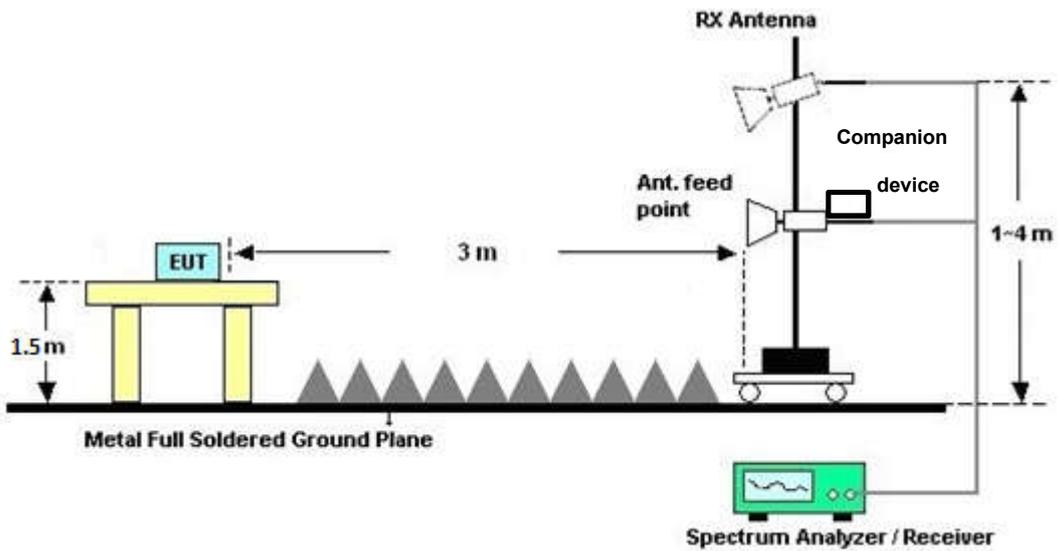



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

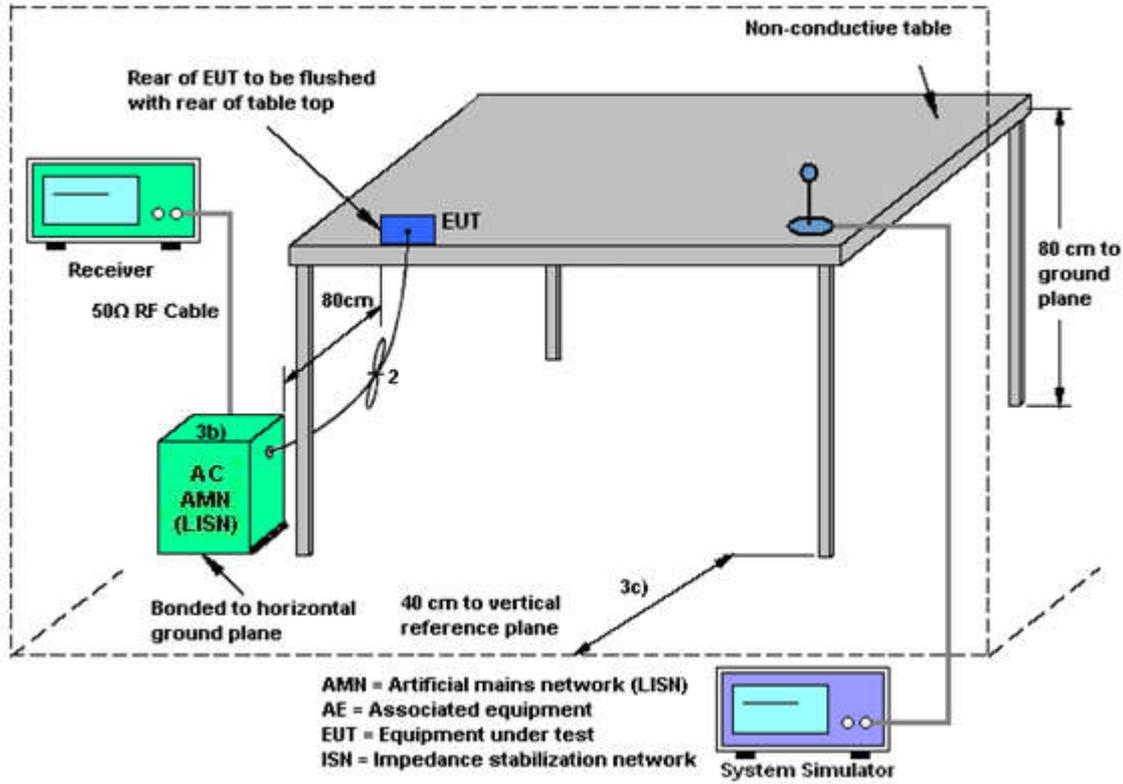



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Phone Link + WLAN Link(5G) + Adapter + Lan Link + Lan Load + U Disk + GNSS Rx + WWAN Internal Antenna		

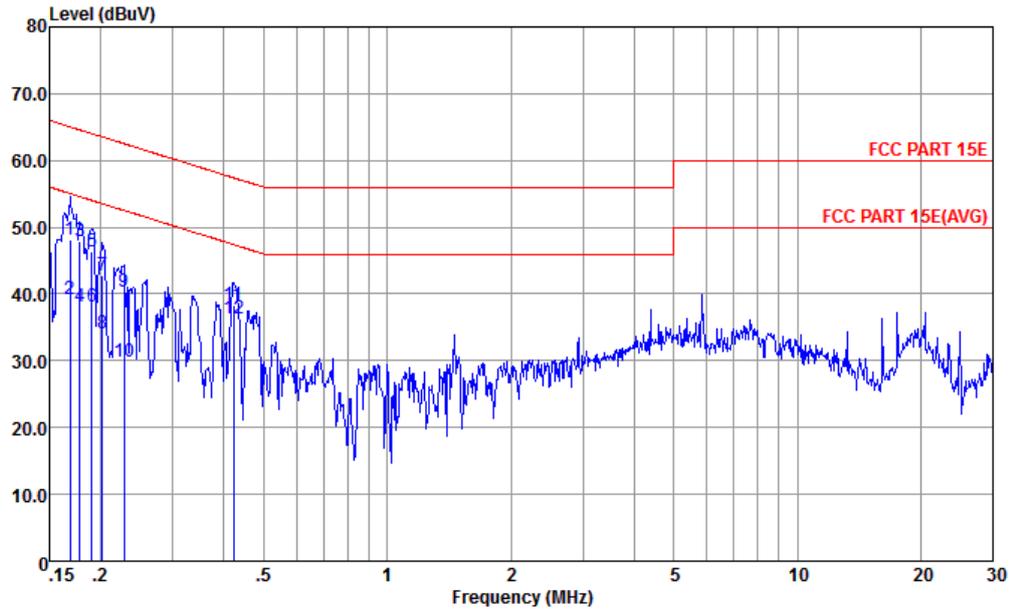


Site : CO01-KS
 Condition : FCC PART 15E LISN-L-161017-060103 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.169	48.19	-16.84	65.03	37.20	0.44	10.55	QP
2	0.169	39.29	-15.74	55.03	28.30	0.44	10.55	Average
3	0.178	47.80	-16.79	64.59	36.90	0.38	10.52	QP
4	0.178	38.20	-16.39	54.59	27.30	0.38	10.52	Average
5	0.190	46.40	-17.62	64.02	35.60	0.32	10.48	QP
6	0.190	38.00	-16.02	54.02	27.20	0.32	10.48	Average
7	0.202	42.82	-20.72	63.54	32.10	0.27	10.45	QP
8	0.202	34.02	-19.52	53.54	23.30	0.27	10.45	Average
9	0.228	40.32	-22.20	62.52	29.60	0.27	10.45	QP
10	0.228	29.92	-22.60	52.52	19.20	0.27	10.45	Average
11	0.421	38.25	-19.17	57.42	27.60	0.27	10.38	QP
12 *	0.421	36.25	-11.17	47.42	25.60	0.27	10.38	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + Phone Link + WLAN Link(5G) + Adapter + Lan Link + Lan Load + U Disk + GNSS Rx + WWAN Internal Antenna		

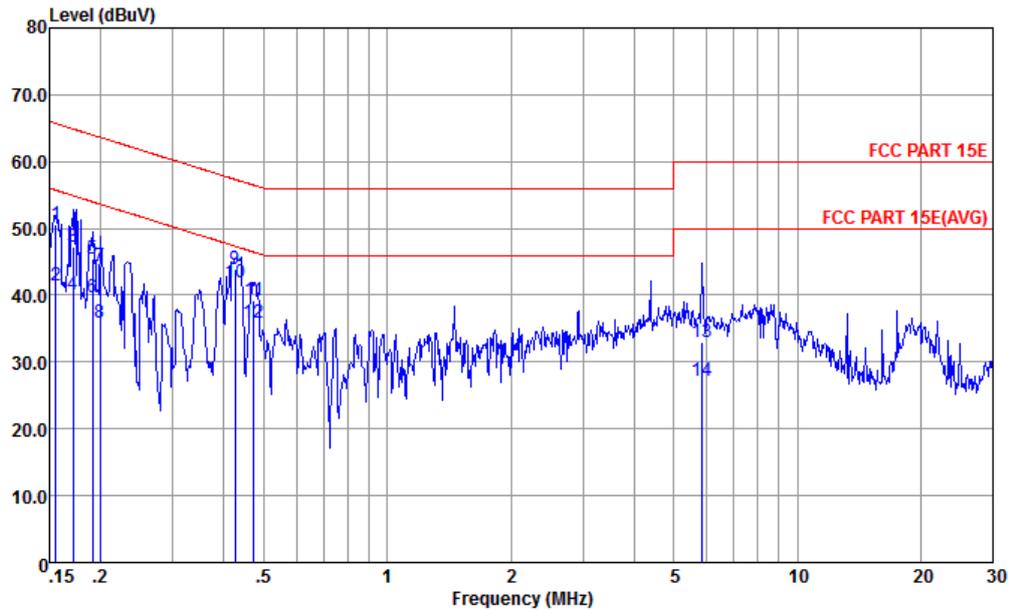

Site : CO01-KS
 Condition : FCC PART 15E LISN-N-161017-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	50.54	-15.15	65.69	39.60	0.34	10.60	QP
2	0.156	41.54	-14.15	55.69	30.60	0.34	10.60	Average
3	0.171	47.18	-17.72	64.90	36.29	0.34	10.55	QP
4	0.171	40.18	-14.72	54.90	29.29	0.34	10.55	Average
5	0.191	45.41	-18.57	63.98	34.60	0.33	10.48	QP
6	0.191	39.61	-14.37	53.98	28.80	0.33	10.48	Average
7	0.200	44.39	-19.23	63.62	33.60	0.33	10.46	QP
8	0.200	35.99	-17.63	53.62	25.20	0.33	10.46	Average
9	0.426	43.95	-13.38	57.33	33.20	0.37	10.38	QP
10 *	0.426	41.85	-5.48	47.33	31.10	0.37	10.38	Average
11	0.474	39.31	-17.14	56.45	28.60	0.38	10.33	QP
12	0.474	35.91	-10.54	46.45	25.20	0.38	10.33	Average
13	5.867	32.98	-27.02	60.00	22.30	0.36	10.32	QP
14	5.867	27.28	-22.72	50.00	16.60	0.36	10.32	Average

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

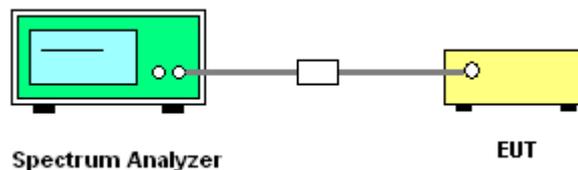

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

$$Directional\ Gain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for 802.11n/ac modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

5.2G Band Antenna	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
1+2+3	7.33	7.33	1.33	1.33



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Sep. 25, 2017	Aug. 07, 2018	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Sep. 25, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Sep. 25, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	HZ014011440	-40~+150°C 20%~95%RH	Apr.18, 2017	Sep. 25, 2017	Apr. 17, 2018	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 22, 2016	Sep. 19, 2017	Oct. 21, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Sep. 19, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Sep. 19, 2017	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Sep. 19, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Sep. 19, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Oct. 19, 2016	Sep. 19, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr. 18, 2017	Sep. 19, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Oct. 13, 2016	Sep. 19, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1GHz~18GHz	Apr. 18, 2017	Sep. 19, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Sep. 19, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 19, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 19, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 19, 2017	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	Sep. 11, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Sep. 11, 2017	Oct. 13, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Sep. 11, 2017	Oct. 13, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Sep. 11, 2017	Oct. 13, 2017	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/9/25	Relative Humidity:	51~55	%

TEST RESULTS DATA
6dB and 99% OBW

Band IV																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)			26 dB Bandwidth (MHz)			6 dB Bandwidth (MHz)			6 dB Bandwidth Min. Limit (MHz)			Pass/Fail
					Ant 1	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	
11a	6Mbps	1	149	5745	17.13	17.18	17.18	20.83	21.03	21.13	16.28	16.28	16.28	0.5	0.5	0.5	Pass
11a	6Mbps	1	157	5785	17.18	17.13	17.18	21.03	20.88	20.93	16.28	16.28	16.28	0.5	0.5	0.5	Pass
11a	6Mbps	1	165	5825	17.23	17.13	17.13	20.88	20.93	21.03	16.28	16.30	16.28	0.5	0.5	0.5	Pass
HT20	MCS0	3	149	5745	18.13	18.08	17.83	21.58	21.63	21.03	16.78	16.52	15.13	0.5			Pass
HT20	MCS0	3	157	5785	18.13	18.23	17.73	21.78	21.78	21.08	16.78	16.52	15.11	0.5			Pass
HT20	MCS0	3	165	5825	18.18	18.23	17.78	21.83	21.68	20.98	16.82	16.54	15.13	0.5			Pass
HT40	MCS0	3	151	5755	35.86	35.96	36.26	40.37	40.55	40.46	35.09	33.85	33.81	0.5			Pass
HT40	MCS0	3	159	5795	35.86	35.76	36.16	40.46	40.37	40.10	35.09	33.85	33.85	0.5			Pass
VHT80	MCS0	3	155	5775	75.64	75.64	75.88	83.12	82.96	83.28	75.37	75.13	75.68	0.5			Pass

TEST RESULTS DATA
Average Power Table

Band IV															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)				FCC Conducted Power Limit (dBm)			DG (dBi)			Pass/Fail
					Ant 1	Ant 2	Ant 3	SUM	Ant 1	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	
11a	6Mbps	1	149	5745	15.19	14.81	14.70	-	30.00	30.00	30.00	2.67	2.95	2.01	Pass
11a	6Mbps	1	157	5785	15.48	14.93	15.34	-	30.00	30.00	30.00	2.67	2.95	2.01	Pass
11a	6Mbps	1	165	5825	15.05	14.88	14.95	-	30.00	30.00	30.00	2.67	2.95	2.01	Pass
HT20	MCS0	3	149	5745	14.30	12.93	13.05	18.24	28.67			7.33			Pass
HT20	MCS0	3	157	5785	14.21	13.17	13.77	18.51	28.67			7.33			Pass
HT20	MCS0	3	165	5825	13.92	13.04	13.18	18.17	28.67			7.33			Pass
HT40	MCS0	3	151	5755	13.96	12.96	12.81	18.05	28.67			7.33			Pass
HT40	MCS0	3	159	5795	14.21	13.36	13.21	18.39	28.67			7.33			Pass
VHT80	MCS0	3	155	5775	12.05	11.20	11.35	16.32	28.67			7.33			Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band IV															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Power Density with RBW and duty factor (dBm/500kHz)				Average PSD Limit (dBm/500kHz)			DG (dBi)			Pass /Fail
					Ant 1	Ant 2	Ant 3	SUM	Ant 1	Ant 2	Ant 3	Ant 1	Ant 2	Ant 3	
11a	6Mbps	1	149	5745	1.53	0.57	0.33		30.00	30.00	30.00	2.67	2.95	2.01	Pass
11a	6Mbps	1	157	5785	1.43	1.33	1.24		30.00	30.00	30.00	2.67	2.95	2.01	Pass
11a	6Mbps	1	165	5825	0.89	1.05	0.78		30.00	30.00	30.00	2.67	2.95	2.01	Pass
HT20	MCS0	3	149	5745	0.09	-0.72	-0.23	4.86	28.67			7.33			Pass
HT20	MCS0	3	157	5785	0.23	-0.29	0.83	5.60	28.67			7.33			Pass
HT20	MCS0	3	165	5825	-0.10	-0.83	0.17	4.94	28.67			7.33			Pass
HT40	MCS0	3	151	5755	-2.51	-3.22	-3.47	2.26	28.67			7.33			Pass
HT40	MCS0	3	159	5795	-2.80	-3.05	-2.40	2.37	28.67			7.33			Pass
VHT80	MCS0	3	155	5775	-7.90	-7.90	-7.34	-2.57	28.67			7.33			Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	20	3.4	
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	20	4.35	
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	20	3.8	
11a	6Mbps	1	149	5745	5745.025	0.025	4.35	-30	3.8	
11a	6Mbps	1	149	5745	5744.975	-0.025	-4.35	50	3.8	



Appendix B. Radiated Spurious Emission

Non-TX Beamforming Mode

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		5640	50.45	68.3	-17.85	43.56	30.7	12.48	36.29	100	164	P	H
		5676.4	51.37	87.88	-36.51	44.19	30.95	12.52	36.29	100	164	P	H
		5718.8	53.19	110.56	-57.37	45.58	31.32	12.57	36.28	100	164	P	H
		5724.4	59.16	120.93	-61.77	51.55	31.32	12.57	36.28	100	164	P	H
		5744	107.51	-	-	99.76	31.44	12.59	36.28	100	164	P	H
		5744	100.73	-	-	92.98	31.44	12.59	36.28	100	164	A	H
		5649.6	50.26	68.3	-18.04	43.23	30.82	12.5	36.29	366	193	P	V
		5678	50.19	89.06	-38.87	43.01	30.95	12.52	36.29	366	193	P	V
		5716.4	52.12	109.89	-57.77	44.66	31.19	12.55	36.28	366	193	P	V
		5724.8	57.91	121.84	-63.93	50.3	31.32	12.57	36.28	366	193	P	V
		5752	107.87	-	-	99.99	31.56	12.6	36.28	366	193	P	V
		5752	100.87	-	-	92.99	31.56	12.6	36.28	366	193	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5607.6	49.36	68.3	-18.94	42.5	30.73	12.44	36.31	100	163	P	H
		5693.2	49.42	100.29	-50.87	42.11	31.07	12.53	36.29	100	163	P	H
		5708.8	49.64	107.77	-58.13	42.18	31.19	12.55	36.28	100	163	P	H
		5724.4	48.61	120.93	-72.32	41	31.32	12.57	36.28	100	163	P	H
		5784	108.96	-	-	100.94	31.68	12.62	36.28	100	163	P	H
		5784	100.55	-	-	92.53	31.68	12.62	36.28	100	163	A	H
		5852.4	50.96	116.83	-65.87	42.36	32.18	12.69	36.27	100	163	P	H
		5866.8	50.84	107.59	-56.75	42.1	32.3	12.71	36.27	100	163	P	H
		5880.8	51.6	100.99	-49.39	42.8	32.35	12.73	36.28	100	163	P	H
		5938	52.31	68.3	-15.99	43.33	32.51	12.78	36.31	100	163	P	H
		5643.6	48.99	68.3	-19.31	42.1	30.7	12.48	36.29	368	217	P	V
		5658.4	50.26	74.54	-24.28	43.23	30.82	12.5	36.29	368	217	P	V
		5715.2	48.65	109.56	-60.91	41.19	31.19	12.55	36.28	368	217	P	V
		5722.8	48.15	117.28	-69.13	40.54	31.32	12.57	36.28	368	217	P	V
		5786	107.99	-	-	99.82	31.81	12.64	36.28	368	217	P	V
		5786	100.19	-	-	92.02	31.81	12.64	36.28	368	217	A	V
		5850.01	51.45	122.28	-70.83	42.85	32.18	12.69	36.27	368	217	P	V
		5866.4	51.27	107.71	-56.44	42.53	32.3	12.71	36.27	368	217	P	V
		5890	51.59	94.17	-42.58	42.72	32.41	12.75	36.29	368	217	P	V
		5955.6	50.71	68.3	-17.59	41.6	32.62	12.82	36.33	368	217	P	V



WiFi Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5828	109.26	-	-	100.81	32.05	12.67	36.27	100	164	P	H
		5828	100.8	-	-	92.35	32.05	12.67	36.27	100	164	A	H
		5850.01	53.01	122.28	-69.27	44.41	32.18	12.69	36.27	100	164	P	H
		5858.8	54.95	109.83	-54.88	46.21	32.3	12.71	36.27	100	164	P	H
		5897.2	53.03	88.83	-35.8	44.16	32.41	12.75	36.29	100	164	P	H
		5962	52.3	68.3	-16	43.19	32.62	12.82	36.33	100	164	P	H
		5830	108.38	-	-	99.93	32.05	12.67	36.27	398	195	P	V
		5830	100.89	-	-	92.44	32.05	12.67	36.27	398	195	A	V
		5850.4	55.18	121.39	-66.21	46.58	32.18	12.69	36.27	398	195	P	V
		5855.01	53.73	110.9	-57.17	44.99	32.3	12.71	36.27	398	195	P	V
		5924	53.45	69.04	-15.59	44.47	32.51	12.78	36.31	398	195	P	V
		5944.8	52.81	68.3	-15.49	43.76	32.57	12.8	36.32	398	195	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	40.96	74	-33.04	51.6	38.58	16.13	65.35	100	360	P	H
		11490	40.51	74	-33.49	51.15	38.58	16.13	65.35	100	360	P	V
802.11a CH 157 5785MHz		11570	40.08	74	-33.92	50.87	38.43	16.22	65.44	100	360	P	H
		11570	41.33	74	-32.67	52.12	38.43	16.22	65.44	100	360	P	V
802.11a CH 165 5825MHz		11650	39.6	74	-34.4	50.58	38.27	16.29	65.54	100	360	P	H
		11650	40.38	74	-33.62	51.36	38.27	16.29	65.54	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Limit	Over	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Line	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5828	108.76	-	-	100.31	32.05	12.67	36.27	265	160	P	H
		5828	101.23	-	-	92.78	32.05	12.67	36.27	265	160	A	H
		5851.2	57.67	119.56	-61.89	49.07	32.18	12.69	36.27	265	160	P	H
		5855.2	54.43	110.84	-56.41	45.69	32.3	12.71	36.27	265	160	P	H
		5877.2	51.8	103.67	-51.87	43	32.35	12.73	36.28	265	160	P	H
		5950.8	51.74	68.3	-16.56	42.69	32.57	12.8	36.32	265	160	P	H
		5824	109.04	-	-	100.59	32.05	12.67	36.27	298	135	P	V
		5824	101.24	-	-	92.79	32.05	12.67	36.27	298	135	A	V
		5850.01	58.41	122.28	-63.87	49.81	32.18	12.69	36.27	298	135	P	V
		5870.8	53.72	106.47	-52.75	44.92	32.35	12.73	36.28	298	135	P	V
		5919.6	53.51	72.28	-18.77	44.59	32.46	12.76	36.3	298	135	P	V
		5934.8	51.97	68.3	-16.33	42.99	32.51	12.78	36.31	298	135	P	V
Remark	<p>3. No other spurious found.</p> <p>4. All results are PASS against Peak and Average limit line.</p>												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		11650	45.54	74	-28.46	56.52	38.27	16.29	65.54	100	360	P	H
CH 165 5825MHz		11650	44.92	74	-29.08	55.9	38.27	16.29	65.54	100	360	P	V



Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Limit	Over	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Line	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
3		(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5832	108.93	-	-	100.48	32.05	12.67	36.27	100	228	P	H
		5832	101.12	-	-	92.67	32.05	12.67	36.27	100	228	A	H
		5850.01	61.53	122.28	-60.75	52.93	32.18	12.69	36.27	100	228	P	H
		5855.2	58.7	110.84	-52.14	49.96	32.3	12.71	36.27	100	228	P	H
		5897.6	53.98	88.54	-34.56	45.11	32.41	12.75	36.29	100	228	P	H
		5928.4	52.25	68.3	-16.05	43.27	32.51	12.78	36.31	100	228	P	H
		5826	109.3	-	-	100.85	32.05	12.67	36.27	373	283	P	V
		5826	102.18	-	-	93.73	32.05	12.67	36.27	373	283	A	V
		5851.6	68.95	118.65	-49.7	60.35	32.18	12.69	36.27	373	283	P	V
		5855.6	57.74	110.73	-52.99	49	32.3	12.71	36.27	373	283	P	V
		5905.2	53.31	82.91	-29.6	44.39	32.46	12.76	36.3	373	283	P	V
		5925.6	53.08	68.3	-15.22	44.1	32.51	12.78	36.31	373	283	P	V
Remark	5. No other spurious found. 6. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		11650	45.02	74	-28.98	56	38.27	16.29	65.54	100	360	P	H
CH 165 5825MHz		11650	46.77	74	-27.23	57.75	38.27	16.29	65.54	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Limit	Over	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Line	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
3		(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11a LF		35.82	27.45	40	-12.55	34.02	24.84	0.87	32.28	100	212	P	H
		119.24	23.43	43.5	-20.07	35.62	18.51	1.57	32.27	-	-	P	H
		216.24	21.97	46	-24.03	35.79	16.23	2.16	32.21	-	-	P	H
		459.71	27.27	46	-18.73	30.92	25.07	3.22	31.94	-	-	P	H
		725.49	29.38	46	-16.62	30.03	26.95	4.1	31.7	-	-	P	H
		963.14	32.22	54	-21.78	29.37	29.5	4.73	31.38	-	-	P	H
	*	36.79	37.69	40	-2.31	44.88	24.18	0.89	32.26	100	53	QP	V
		76.56	21.69	40	-18.31	37.54	15.1	1.28	32.23	-	-	P	V
		216.24	21.71	46	-24.29	35.53	16.23	2.16	32.21	-	-	P	V
		323.91	27.25	46	-18.75	36.32	20.13	2.88	32.08	-	-	P	V
		556.71	27.77	46	-18.23	31.22	24.76	3.54	31.75	-	-	P	V
	745.86	29.8	46	-16.2	30.13	27.23	4.17	31.73	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Limit	Over	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Line	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 149 5745MHz		5602.8	50.62	68.3	-17.68	43.76	30.73	12.44	36.31	100	185	P	H
		5676	51.22	87.58	-36.36	44.04	30.95	12.52	36.29	100	185	P	H
		5700.4	52.85	105.41	-52.56	45.54	31.07	12.53	36.29	100	185	P	H
		5724.8	58.48	121.84	-63.36	50.87	31.32	12.57	36.28	100	185	P	H
		5746	111.39	-	-	103.64	31.44	12.59	36.28	100	185	P	H
		5746	105.24	-	-	97.49	31.44	12.59	36.28	100	185	A	H
		5644.8	51.29	68.3	-17.01	44.4	30.7	12.48	36.29	302	280	P	V
		5689.6	51.29	97.63	-46.34	43.98	31.07	12.53	36.29	302	280	P	V
		5718	51.75	110.34	-58.59	44.14	31.32	12.57	36.28	302	280	P	V
		5724.4	57.42	120.93	-63.51	49.81	31.32	12.57	36.28	302	280	P	V
		5746	110.22	-	-	102.47	31.44	12.59	36.28	302	280	P	V
		5746	103.8	-	-	96.05	31.44	12.59	36.28	302	280	A	V



WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5618.8	49.18	68.3	-19.12	42.3	30.72	12.46	36.3	100	191	P	H
		5689.6	50.99	97.63	-46.64	43.68	31.07	12.53	36.29	100	191	P	H
		5703.6	51.2	106.31	-55.11	43.74	31.19	12.55	36.28	100	191	P	H
		5722.8	49.61	117.28	-67.67	42	31.32	12.57	36.28	100	191	P	H
		5784	114.05	-	-	106.03	31.68	12.62	36.28	100	191	P	H
		5784	105.63	-	-	97.61	31.68	12.62	36.28	100	191	A	H
		5852.4	51.48	116.83	-65.35	42.88	32.18	12.69	36.27	100	191	P	H
		5872.8	52.99	105.92	-52.93	44.19	32.35	12.73	36.28	100	191	P	H
		5886.4	52.94	96.84	-43.9	44.14	32.35	12.73	36.28	100	191	P	H
		5954.4	51.7	68.3	-16.6	42.65	32.57	12.8	36.32	100	191	P	H
		5628	49.07	68.3	-19.23	42.19	30.72	12.46	36.3	305	280	P	V
		5698.4	49.93	104.12	-54.19	42.62	31.07	12.53	36.29	305	280	P	V
		5711.6	50.43	108.55	-58.12	42.97	31.19	12.55	36.28	305	280	P	V
		5724	49.02	120.02	-71	41.41	31.32	12.57	36.28	305	280	P	V
		5788	109.42	-	-	101.25	31.81	12.64	36.28	305	280	P	V
		5788	102.75	-	-	94.58	31.81	12.64	36.28	305	280	A	V
		5850.4	51.22	121.39	-70.17	42.62	32.18	12.69	36.27	305	280	P	V
		5871.2	53.3	106.36	-53.06	44.5	32.35	12.73	36.28	305	280	P	V
	5878.8	52.33	102.48	-50.15	43.53	32.35	12.73	36.28	305	280	P	V	
	5930.8	50.63	68.3	-17.67	41.65	32.51	12.78	36.31	305	280	P	V	



WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5822	113.12	-	-	104.67	32.05	12.67	36.27	100	197	P	H
		5822	105.73	-	-	97.28	32.05	12.67	36.27	100	197	A	H
		5850.01	54.27	122.28	-68.01	45.67	32.18	12.69	36.27	100	197	P	H
		5858.8	53.04	109.83	-56.79	44.3	32.3	12.71	36.27	100	197	P	H
		5919.6	53.04	72.28	-19.24	44.12	32.46	12.76	36.3	100	197	P	H
		5991.2	52.43	68.3	-15.87	43.21	32.72	12.85	36.35	100	197	P	H
		5824	110.68	-	-	102.23	32.05	12.67	36.27	302	279	P	V
		5824	104.46	-	-	96.01	32.05	12.67	36.27	302	279	A	V
		5850.8	55.48	120.48	-65	46.88	32.18	12.69	36.27	302	279	P	V
		5856	53.32	110.62	-57.3	44.58	32.3	12.71	36.27	302	279	P	V
		5903.6	54.21	84.1	-29.89	45.34	32.41	12.75	36.29	302	279	P	V
	5942.8	51.73	68.3	-16.57	42.68	32.57	12.8	36.32	302	279	P	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2+3, Note, Frequency (MHz), Level (dBµV/m), Limit Line (dBµV/m), Over Limit (dB), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for channels 149, 157, and 165 at various frequencies.



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2+3, Note, Frequency (MHz), Level (dBµV/m), Limit Line (dBµV/m), Over Limit (dB), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5649.2 to 5925.2 MHz.



WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5608	49.23	68.3	-19.07	42.37	30.73	12.44	36.31	100	170	P	H
		5692	50.89	99.4	-48.51	43.58	31.07	12.53	36.29	100	170	P	H
		5714	51.53	109.22	-57.69	44.07	31.19	12.55	36.28	100	170	P	H
		5724	51.01	120.02	-69.01	43.4	31.32	12.57	36.28	100	170	P	H
		5804	110.53	-	-	102.21	31.93	12.66	36.27	100	170	P	H
		5804	103.59	-	-	95.27	31.93	12.66	36.27	100	170	A	H
		5850.4	53.38	121.39	-68.01	44.78	32.18	12.69	36.27	100	170	P	H
		5866.4	53.3	107.71	-54.41	44.56	32.3	12.71	36.27	100	170	P	H
		5884.4	53.97	98.32	-44.35	45.17	32.35	12.73	36.28	100	170	P	H
		5943.2	52.56	68.3	-15.74	43.51	32.57	12.8	36.32	100	170	P	H
		5648	49.25	68.3	-19.05	42.36	30.7	12.48	36.29	302	302	P	V
		5685.6	50.36	94.68	-44.32	43.05	31.07	12.53	36.29	302	302	P	V
		5714.4	51.44	109.33	-57.89	43.98	31.19	12.55	36.28	302	302	P	V
		5722	50.05	115.46	-65.41	42.44	31.32	12.57	36.28	302	302	P	V
		5804	107.48	-	-	99.16	31.93	12.66	36.27	302	302	P	V
		5804	99.93	-	-	91.61	31.93	12.66	36.27	302	302	A	V
		5851.6	52.3	118.65	-66.35	43.7	32.18	12.69	36.27	302	302	P	V
		5856.4	51.99	110.51	-58.52	43.25	32.3	12.71	36.27	302	302	P	V
	5883.6	52.44	98.91	-46.47	43.64	32.35	12.73	36.28	302	302	P	V	
	5934	52.64	68.3	-15.66	43.66	32.51	12.78	36.31	302	302	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	44.58	74	-29.42	55.18	38.6	16.14	65.34	100	360	P	H
		11510	44.26	74	-29.74	54.86	38.6	16.14	65.34	100	360	P	V
802.11n HT40 CH 159 5795MHz		11590	43.67	74	-30.33	54.51	38.39	16.24	65.47	100	360	P	H
		11590	44.49	74	-29.51	55.33	38.39	16.24	65.47	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5646.4	51.24	68.3	-17.06	44.35	30.7	12.48	36.29	100	160	P	H
		5688.4	55.57	96.74	-41.17	48.26	31.07	12.53	36.29	100	160	P	H
		5708	56.81	107.54	-50.73	49.35	31.19	12.55	36.28	100	160	P	H
		5721.6	59.07	114.55	-55.48	51.46	31.32	12.57	36.28	100	160	P	H
		5788	105.65	-	-	97.48	31.81	12.64	36.28	100	160	P	H
		5788	98.25	-	-	90.08	31.81	12.64	36.28	100	160	A	H
		5851.2	60.51	119.56	-59.05	51.91	32.18	12.69	36.27	100	160	P	H
		5868.4	61.16	107.15	-45.99	52.42	32.3	12.71	36.27	100	160	P	H
		5875.2	54.98	105.15	-50.17	46.18	32.35	12.73	36.28	100	160	P	H
		5996.8	52.23	68.3	-16.07	43.01	32.72	12.85	36.35	100	160	P	H
		5627.6	50.91	68.3	-17.39	44.03	30.72	12.46	36.3	294	275	P	V
		5694	54.73	100.88	-46.15	47.42	31.07	12.53	36.29	294	275	P	V
		5716.8	58.82	110.01	-51.19	51.36	31.19	12.55	36.28	294	275	P	V
		5724	57.32	120.02	-62.7	49.71	31.32	12.57	36.28	294	275	P	V
		5776	102.64	-	-	94.62	31.68	12.62	36.28	294	275	P	V
		5776	95.16	-	-	87.14	31.68	12.62	36.28	294	275	A	V
		5854.8	57.47	111.36	-53.89	48.73	32.3	12.71	36.27	294	275	P	V
		5855.6	58.12	110.73	-52.61	49.38	32.3	12.71	36.27	294	275	P	V
	5877.2	55.04	103.67	-48.63	46.24	32.35	12.73	36.28	294	275	P	V	
	5941.2	52.06	68.3	-16.24	43.01	32.57	12.8	36.32	294	275	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	43.9	74	-30.1	54.64	38.48	16.2	65.42	100	360	P	H
		11550	43.91	74	-30.09	54.65	38.48	16.2	65.42	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



TX Beamforming Mode

Band 4 - 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 149 5745MHz		5647.2	51.99	-16.31	68.3	45.1	30.7	12.48	36.29	100	186	P	H
		5652.4	52.75	-17.33	70.08	45.72	30.82	12.5	36.29	100	186	P	H
		5718.4	54.39	-56.06	110.45	46.78	31.32	12.57	36.28	100	186	P	H
		5722.8	60.87	-56.41	117.28	53.26	31.32	12.57	36.28	100	186	P	H
		5746	113.86	-	-	106.11	31.44	12.59	36.28	100	186	P	H
		5746	107.3	-	-	99.55	31.44	12.59	36.28	100	186	A	H
		5624	50.79	-17.51	68.3	43.91	30.72	12.46	36.3	315	282	P	V
		5667.2	51.07	-29.99	81.06	43.89	30.95	12.52	36.29	315	282	P	V
		5708.8	50.17	-57.6	107.77	42.71	31.19	12.55	36.28	315	282	P	V
		5724.8	57.16	-64.68	121.84	49.55	31.32	12.57	36.28	315	282	P	V
	5748	111.38	-	-	103.63	31.44	12.59	36.28	315	282	P	V	
	5748	103.74	-	-	95.99	31.44	12.59	36.28	315	282	A	V	



WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5620.8	49.68	-18.62	68.3	42.8	30.72	12.46	36.3	329	197	P	H
		5650.4	49.01	-19.59	68.6	41.98	30.82	12.5	36.29	329	197	P	H
		5705.2	49.78	-56.98	106.76	42.32	31.19	12.55	36.28	329	197	P	H
		5724.8	48.81	-73.03	121.84	41.2	31.32	12.57	36.28	329	197	P	H
		5782	112.57	-	-	104.55	31.68	12.62	36.28	329	197	P	H
		5782	105.24	-	-	97.22	31.68	12.62	36.28	329	197	A	H
		5852.4	51.86	-64.97	116.83	43.26	32.18	12.69	36.27	329	197	P	H
		5860.4	53.64	-55.75	109.39	44.9	32.3	12.71	36.27	329	197	P	H
		5918.4	52.5	-20.67	73.17	43.58	32.46	12.76	36.3	329	197	P	H
		5974.4	52.11	-16.19	68.3	42.94	32.67	12.84	36.34	329	197	P	H
		5643.2	48.72	-19.58	68.3	41.83	30.7	12.48	36.29	309	282	P	V
		5673.2	49.91	-35.6	85.51	42.73	30.95	12.52	36.29	309	282	P	V
		5716	50.25	-59.53	109.78	42.79	31.19	12.55	36.28	309	282	P	V
		5723.6	49.76	-69.35	119.11	42.15	31.32	12.57	36.28	309	282	P	V
		5788	109.22	-	-	101.05	31.81	12.64	36.28	309	282	P	V
		5788	102.37	-	-	94.2	31.81	12.64	36.28	309	282	A	V
		5852.8	51.22	-64.7	115.92	42.62	32.18	12.69	36.27	309	282	P	V
		5872.8	51.82	-54.1	105.92	43.02	32.35	12.73	36.28	309	282	P	V
	5877.6	52.12	-51.25	103.37	43.32	32.35	12.73	36.28	309	282	P	V	
	5983.2	50.84	-17.46	68.3	41.67	32.67	12.84	36.34	309	282	P	V	



WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5826	112.65	-	-	104.2	32.05	12.67	36.27	100	186	P	H
		5826	104.81	-	-	96.36	32.05	12.67	36.27	100	186	A	H
		5850.01	55.25	-67.03	122.28	46.65	32.18	12.69	36.27	100	186	P	H
		5864.8	53.64	-54.51	108.15	44.9	32.3	12.71	36.27	100	186	P	H
		5904.4	53.38	-30.13	83.51	44.51	32.41	12.75	36.29	100	186	P	H
		5928	51.85	-16.45	68.3	42.87	32.51	12.78	36.31	100	186	P	H
		5826	109.07	-	-	100.62	32.05	12.67	36.27	304	280	P	V
		5826	102.69	-	-	94.24	32.05	12.67	36.27	304	280	A	V
		5852	55.01	-62.73	117.74	46.41	32.18	12.69	36.27	304	280	P	V
		5866.8	53.39	-54.2	107.59	44.65	32.3	12.71	36.27	304	280	P	V
		5912	52.66	-25.23	77.89	43.74	32.46	12.76	36.3	304	280	P	V
	5984	51.72	-16.58	68.3	42.55	32.67	12.84	36.34	304	280	P	V	
Remark	<p>3. No other spurious found.</p> <p>4. All results are PASS against Peak and Average limit line.</p>												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	44.27	-29.73	74	54.91	38.58	16.13	65.35	100	360	P	H
		11490	44.49	-29.51	74	55.13	38.58	16.13	65.35	100	360	P	V
802.11n HT20 CH 157 5785MHz		11570	44.21	-29.79	74	55	38.43	16.22	65.44	100	360	P	H
		11570	44.89	-29.11	74	55.68	38.43	16.22	65.44	100	360	P	V
802.11n HT20 CH 165 5825MHz		11650	43.63	-30.37	74	54.61	38.27	16.29	65.54	100	360	P	H
		11650	44.09	-29.91	74	55.07	38.27	16.29	65.54	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2+3, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5649.6 to 5946.4 MHz.



WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5649.9	49.11	-19.19	68.3	42.08	30.82	12.5	36.29	100	166	P	H
		5690.4	49.86	-48.36	98.22	42.55	31.07	12.53	36.29	100	166	P	H
		5714	50.49	-58.73	109.22	43.03	31.19	12.55	36.28	100	166	P	H
		5723.2	49.84	-68.36	118.2	42.23	31.32	12.57	36.28	100	166	P	H
		5786	110.05	-	-	101.88	31.81	12.64	36.28	100	166	P	H
		5786	102.56	-	-	94.39	31.81	12.64	36.28	100	166	A	H
		5850.4	53.02	-68.37	121.39	44.42	32.18	12.69	36.27	100	166	P	H
		5857.2	53.13	-57.15	110.28	44.39	32.3	12.71	36.27	100	166	P	H
		5885.2	52.98	-44.75	97.73	44.18	32.35	12.73	36.28	100	166	P	H
		5930.8	52.4	-15.9	68.3	43.42	32.51	12.78	36.31	100	166	P	H
		5613.2	49.46	-18.84	68.3	42.6	30.73	12.44	36.31	306	282	P	V
		5693.6	50.27	-50.31	100.58	42.96	31.07	12.53	36.29	306	282	P	V
		5714.8	50.48	-58.97	109.45	43.02	31.19	12.55	36.28	306	282	P	V
		5723.2	49.73	-68.47	118.2	42.12	31.32	12.57	36.28	306	282	P	V
		5798	106.39	-	-	98.22	31.81	12.64	36.28	306	282	P	V
		5798	98.94	-	-	90.77	31.81	12.64	36.28	306	282	A	V
		5853.2	51.72	-63.28	115	43.12	32.18	12.69	36.27	306	282	P	V
		5858.8	52.22	-57.61	109.83	43.48	32.3	12.71	36.27	306	282	P	V
	5881.2	52.76	-47.93	100.69	43.96	32.35	12.73	36.28	306	282	P	V	
	5979.2	50.49	-17.81	68.3	41.32	32.67	12.84	36.34	306	282	P	V	
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		11510	44.57	-29.43	74	55.17	38.6	16.14	65.34	100	360	P	H
		11510	44.78	-29.22	74	55.38	38.6	16.14	65.34	100	360	P	V
802.11n HT40 CH 159 5795MHz		11590	44	-30	74	54.84	38.39	16.24	65.47	100	360	P	H
		11590	43.81	-30.19	74	54.65	38.39	16.24	65.47	100	360	P	V
Remark	3. No other spurious found.												
	4. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5619.6	49.57	-18.73	68.3	42.69	30.72	12.46	36.3	100	165	P	H
		5686	53.55	-41.42	94.97	46.24	31.07	12.53	36.29	100	165	P	H
		5707.6	57.68	-49.75	107.43	50.22	31.19	12.55	36.28	100	165	P	H
		5724	58.43	-61.59	120.02	50.82	31.32	12.57	36.28	100	165	P	H
		5800	104.85	-	-	96.68	31.81	12.64	36.28	100	165	P	H
		5800	97.5	-	-	89.33	31.81	12.64	36.28	100	165	A	H
		5850.01	61.63	-60.65	122.28	53.03	32.18	12.69	36.27	100	165	P	H
		5866.8	61.91	-45.68	107.59	53.17	32.3	12.71	36.27	100	165	P	H
		5875.2	53.72	-51.43	105.15	44.92	32.35	12.73	36.28	100	165	P	H
		5929.6	52.69	-15.61	68.3	43.71	32.51	12.78	36.31	100	165	P	H
		5647.6	51	-17.3	68.3	44.11	30.7	12.48	36.29	315	283	P	V
		5692.4	55.71	-43.99	99.7	48.4	31.07	12.53	36.29	315	283	P	V
		5717.2	58.49	-51.63	110.12	51.03	31.19	12.55	36.28	315	283	P	V
		5720.01	55.75	-55.17	110.92	48.14	31.32	12.57	36.28	315	283	P	V
		5776	102.29	-	-	94.27	31.68	12.62	36.28	315	283	P	V
		5776	95.2	-	-	87.18	31.68	12.62	36.28	315	283	A	V
		5854.8	56.95	-54.41	111.36	48.21	32.3	12.71	36.27	315	283	P	V
		5856.8	58.63	-51.77	110.4	49.89	32.3	12.71	36.27	315	283	P	V
	5884.8	55.05	-42.97	98.02	46.25	32.35	12.73	36.28	315	283	P	V	
	5926	52.47	-15.83	68.3	43.49	32.51	12.78	36.31	315	283	P	V	

Remark 3. No other spurious found.
4. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1+2+3	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	44	-30	74	54.74	38.48	16.2	65.42	100	360	P	H
		11550	43.62	-30.38	74	54.36	38.48	16.2	65.42	100	360	P	V

Remark	3. No other spurious found.
	4. All results are PASS against Peak and Average limit line.



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2+3		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		35.82	32.45	-7.55	40	39.02	24.84	0.87	32.28	100	20	P	H
		119.24	27.43	-16.07	43.5	39.62	18.51	1.57	32.27	-	-	P	H
		216.24	28.97	-17.03	46	42.79	16.23	2.16	32.21	-	-	P	H
		459.71	28.27	-17.73	46	31.92	25.07	3.22	31.94	-	-	P	H
		552.83	28.81	-17.19	46	32.26	24.78	3.53	31.76	-	-	P	H
		825.4	32.03	-13.97	46	30.79	28.46	4.34	31.56	-	-	P	H
		36.79	36.92	-3.08	40	44.11	24.18	0.89	32.26	100	53	P	V
		76.56	23.69	-16.31	40	39.54	15.1	1.28	32.23	-	-	P	V
		323.91	30.25	-15.75	46	39.32	20.13	2.88	32.08	-	-	P	V
		556.71	28.77	-17.23	46	32.22	24.76	3.54	31.75	-	-	P	V
		709	29.8	-16.2	46	30.72	26.73	4.04	31.69	-	-	P	V
	936.95	32.61	-13.39	46	30.12	29.23	4.64	31.38	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Band 4 5725~5850MHz

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	802.11 a	96.94	2.065	0.484	1kHz
2	802.11 a	96.94	2.065	0.484	1kHz
3	802.11 a	96.94	2.065	0.484	1kHz
1+2+3	802.11n HT20	98.71	-	-	10Hz
1+2+3	802.11n HT40	97.67	2.428	0.412	1kHz
1+2+3	802.11ac VHT80	94.61	1.145	0.873	1kHz

802.11a Ant.1

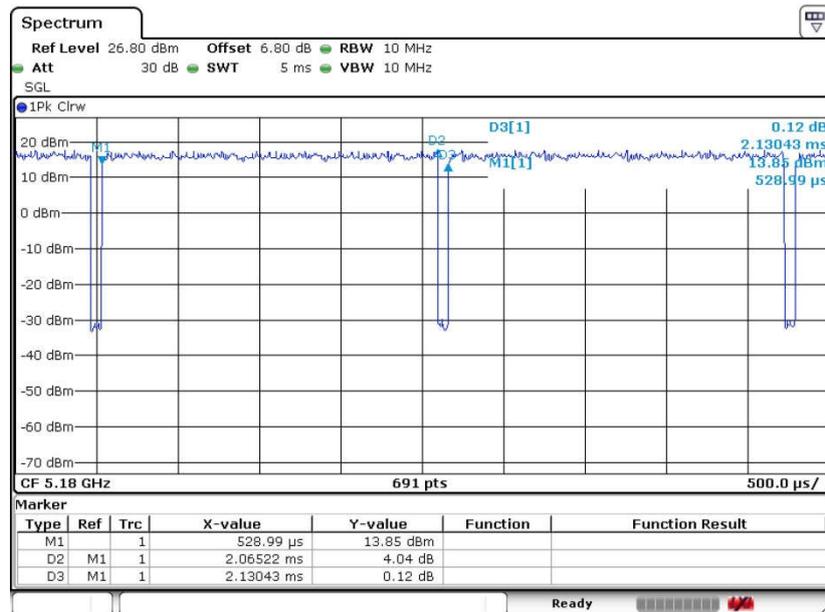




802.11a Ant.2

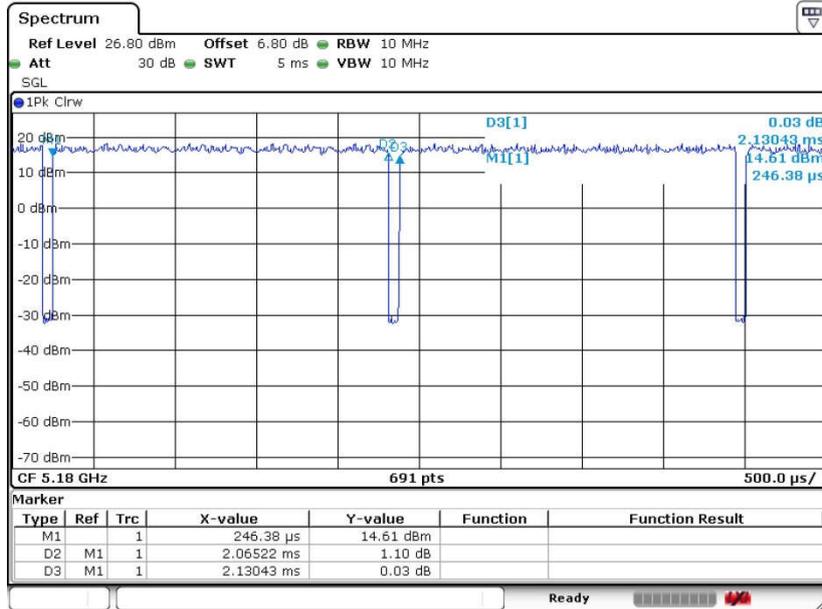


802.11a Ant.3

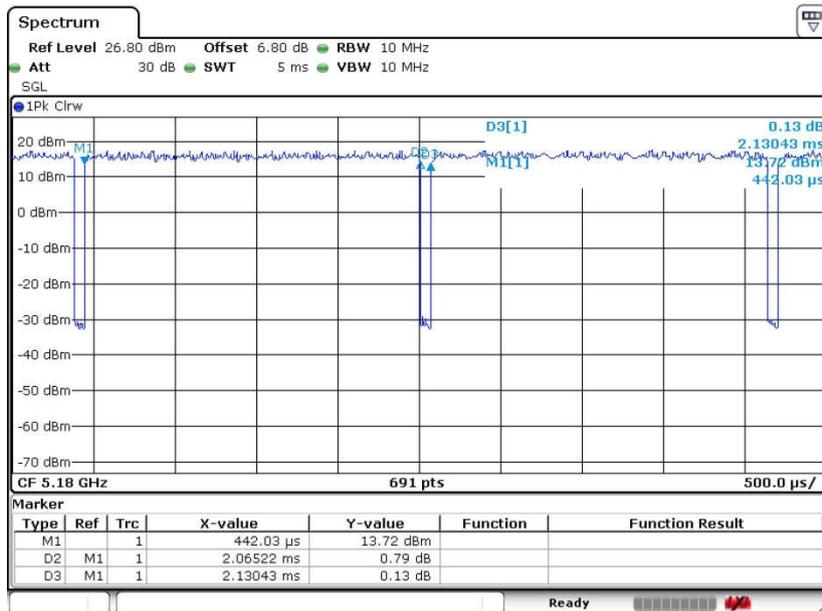




802.11n20 Ant.1+2+3

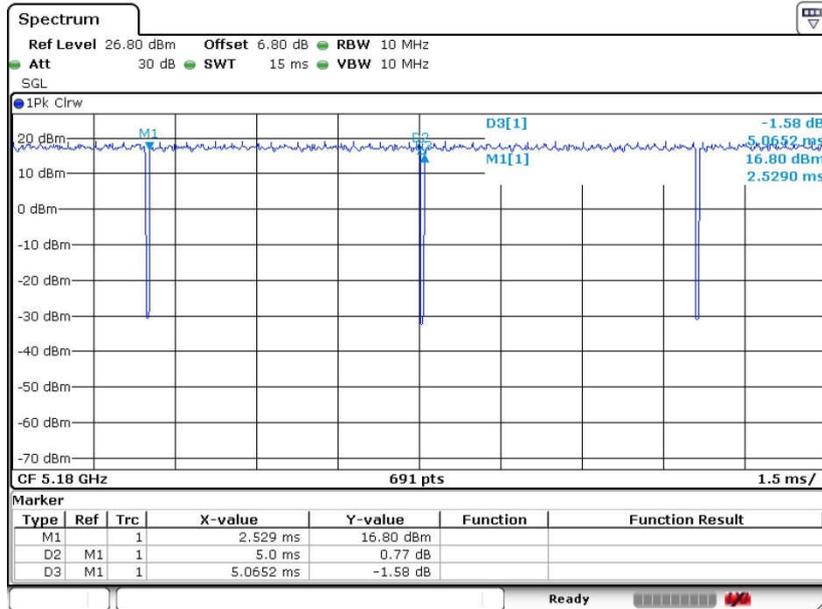

802.11n40 Ant.1+2+3

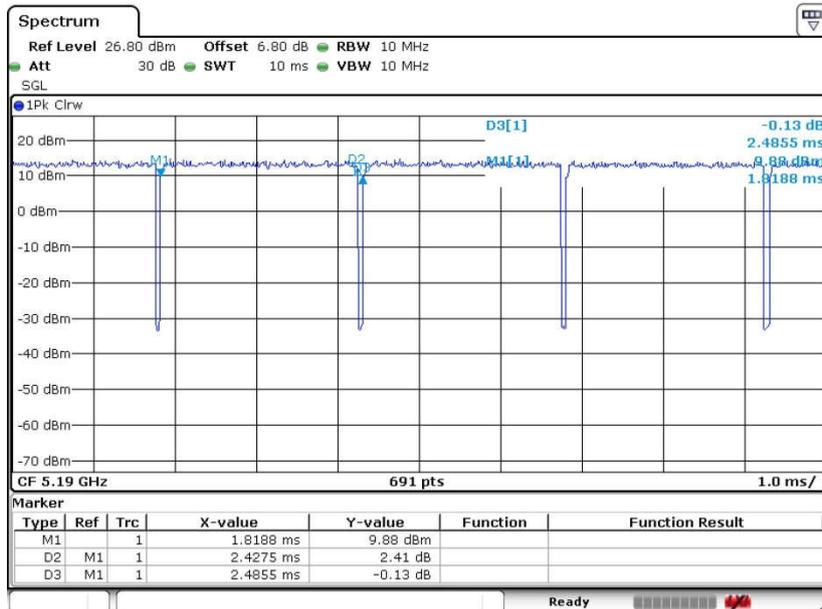



802.11acVHT80 Ant.1+2+3

