



RF TEST REPORT

Report No.: SET2016-17974

Product: LTE/WCDMA/GSM (GPRS) Multi-Mode Ufi

FCC ID: SRQ-MF910L

Model No.: MF910L

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Dates of Testing: 09/01/2016 — 09/12/2016

Issued by: CCIC-SET

Lab Location: Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road,
Nanshan District, Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 196 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Shenzhen Huatongwei International Inspection Co., Ltd. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Shenzhen Huatongwei International Inspection Co., Ltd within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: LTE/WCDMA/GSM (GPRS) Multi-Mode Ufi

Brand Name.....: ZTE

Trade Name: ZTE

Applicant: ZTE Corporation


Applicant Address: ZTE Plaza, Keji Road South, Shenzhen, China

Manufacturer: ZTE Corporation

Manufacturer Address: ZTE Plaza, Keji Road South, Shenzhen, China

Test Standards: 47 CFR Part 2: Frequency Allocations and Radio Treaty
Matters; General Rules and Regulations
47 CFR FCC Part 22(H): Cellular Radiotelephone Service
47 CFR Part 24(E): Personal Communications Services
47 CFR Part 27(L) 27(H) 27(M): Miscellaneous wireless
communications services

Test Result.....: PASS

Tested by:  2016.09.12

Lu Lei, Test Engineer

Reviewed by.....:  2016.09.12

Zhu Qi, Senior Engineer

Approved by.....:  2016.09.12

Wu Li'an, Manager



Table of Contents

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator5**
- 1.3 Test Standards and Results7**
- 1.4 Test Configuration of Equipment Under Test9**
- 1.5 Measurement Results Explanation Example10**
- 1.6 Facilities and Accreditations 11**
- 2. 47 CFR PART 2, PART 27H REQUIREMENTS12**
- 2.1 Conducted RF Output Power12**
- 2.2 Peak to Average Ratio.....21**
- 2.3 99% Occupied Bandwidth and 26dB Bandwidth.....36**
- 2.4 Frequency Stability55**
- 2.5 Conducted Out of Band Emissions61**
- 2.6 Conducted Band Edge 111**
- 2.7 Transmitter Radiated Power (EIRP/ERP)177**
- 2.8 Radiated Out of Band Emissions186**
- 3. LIST OF MEASURING EQUIPMENT195**
- 4. UNCERTAINTY OF EVALUATION196**

Change History		
Issue	Date	Reason for change
1.0	2016.09.12	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type	LTE/WCDMA/GSM (GPRS) Multi-Mode Ufi
Hardware Version	xw9B_P1
Software Version	PCW_GENZTEV1.0.0B01
EUT supports Radios application	GSM/GPRS/EDGE/WCDMA/HSPA/LTE WLAN2.4GHz 802.11b/g/n (HT20)
Frequency Range	LTE Band 2 Tx: 1850.7MHz~1909.3MHz Rx: 1930.7MHz~1989.3MHz LTE Band 5 Tx: 824.7MHz~848.3MHz Rx: 869.7MHz~893.3MHz LTE Band 17 Tx: 706.5MHz~713.5MHz Rx: 736.5MHz~743.5MHz LTE Band 41 Tx: 2498.5MHz~2687.5MHz Rx: 2498.5MHz~2687.5MHz
Maximum Output Power to Antenna	LTE Band 2: 23.45dBm LTE Band 5: 23.39dBm LTE Band 17: 23.24dBm LTE Band 41: 22.28dBm
Bandwidth	LTE Band 2: 1.4MHz/3MHz/5MHz/10MHz/15MHz/20MHz LTE Band 5: 1.4MHz/3MHz/5MHz/10MHz LTE Band 17: 5MHz/10MHz LTE Band 41: 5MHz/10MHz/15MHz/20MHz
Modulation Type	QPSK/16QAM
Antenna Type	Internal Antenna



1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	BW (MHz)	Emission Designator	Frequency Tolerance (ppm)	Maximum ERP/EIRP(W)
Part 24	LTE Band 2	QPSK	1.4	1M10G7D	—	0.183
Part 24	LTE Band 2	16QAM	1.4	1M10W7D	—	0.142
Part 24	LTE Band 2	QPSK	3	2M75G7D	—	0.185
Part 24	LTE Band 2	16QAM	3	2M75W7D	—	0.143
Part 24	LTE Band 2	QPSK	5	4M52G7D	—	0.186
Part 24	LTE Band 2	16QAM	5	4M50W7D	—	0.144
Part 24	LTE Band 2	QPSK	10	8M96G7D	0.03	0.187
Part 24	LTE Band 2	16QAM	10	8M94W7D	0.03	0.145
Part 24	LTE Band 2	QPSK	15	13M5G7D	—	0.188
Part 24	LTE Band 2	16QAM	15	13M5W7D	—	0.146
Part 24	LTE Band 2	QPSK	20	18M4G7D	—	0.190
Part 24	LTE Band 2	16QAM	20	18M4W7D	—	0.147
Part 22	LTE Band 5	QPSK	1.4	1M10G7D	—	0.191
Part 22	LTE Band 5	16QAM	1.4	1M10W7D	—	0.152
Part 22	LTE Band 5	QPSK	3	2M75G7D	—	0.194
Part 22	LTE Band 5	16QAM	3	2M76W7D	—	0.154
Part 22	LTE Band 5	QPSK	5	4M51G7D	—	0.196
Part 22	LTE Band 5	16QAM	5	4M49W7D	—	0.155
Part 22	LTE Band 5	QPSK	10	8M95G7D	0.04	0.198
Part 22	LTE Band 5	16QAM	10	8M94W7D	0.04	0.157
Part 27	LTE Band 17	QPSK	5	4M54G7D	—	0.192
Part 27	LTE Band 17	16QAM	5	4M52W7D	—	0.150
Part 27	LTE Band 17	QPSK	10	8M99G7D	0.05	0.194
Part 27	LTE Band 17	16QAM	10	8M97W7D	0.05	0.152



Part 27	LTE Band 41	QPSK	5	4M51G7D	—	0.151
Part 27	LTE Band 41	16QAM	5	4M51W7D	—	0.122
Part 27	LTE Band 41	QPSK	10	8M94G7D	0.02	0.152
Part 27	LTE Band 41	16QAM	10	8M94W7D	0.02	0.123
Part 27	LTE Band 41	QPSK	15	13M5G7D	—	0.153
Part 27	LTE Band 41	16QAM	15	13M5W7D	—	0.124
Part 27	LTE Band 41	QPSK	20	18M4G7D	—	0.155
Part 27	LTE Band 41	16QAM	20	18M3W7D	—	0.125



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24, and Part27 for the EUT FCC ID Certification:

1.47 CFR Part 2, 22(H), 24(E), 27(L), 27(H), 27(M)

2. ANSI/TIA/EIA-603-D-2010

3. FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Limit	Result
1	2.1046	Conducted RF Output Power	Reporting Only	PASS
2	24.232(d) 27.50(d)(5)	Peak to Average Ratio	<13dB	PASS
3	27.50(h)(2) 24.232(c)	Effective Radiated Power(Band 2/41)	EIRP<2Watt	PASS PASS
	22.913(a)(2)	Effective Radiated Power(Band 5)	EIRP<7Watt	PASS
	27.50(c)(10)	Effective Radiated Power(Band 17)	EIRP<3Watt	PASS
4	2.1049 22.917(b) 24.238(b) 27.53(h)(3) 27.53(m)(6)	Occupied Bandwidth	Reporting Only	PASS
5	2.1051 22.917(a) 24.238(b) 27.53(g) 27.53(h)	Conducted Band Edge(Band 2/5/17)	< 43+10log10(P[watt])	PASS



	2.1051 27.53(m)(4)	Conducted Band Edge(Band 41)	<5.5MHz: -13dBm ≥5.5MHz: -25dBm	PASS
6	2.1051 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Conducted Spurious Emission (Band 2/5/17)	< 43+10log10(P[watt])	PASS
	2.1051 27.53(m)(4)	Conducted Spurious Emission (Band 41)	< 55+10log10(P[watt])	PASS
7	2.1053 22.917(a) 24.238(a) 27.53(g) 27.53(h)	Radiated Spurious Emission (Band 2/5/17)	< 43+10log10(P[watt])	PASS
	2.1053 27.53(m)(4)	Radiated Spurious Emission (Band 41)	< 55+10log10(P[watt])	PASS
8	2.1055 22.355 24.235 27.54	Frequency Stability	<2.5ppm	PASS

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.4 Test Configuration of Equipment Under Test

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth(MHz)						Modulation		RB#			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	17			✓	✓			✓	✓	✓	✓	✓	✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2						✓	✓	✓	✓		✓	✓	✓	✓
	5				✓			✓	✓	✓		✓	✓	✓	✓
	17				✓			✓	✓	✓		✓	✓	✓	✓
	41						✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓		✓	
	5	✓	✓	✓	✓			✓	✓			✓		✓	
	17			✓	✓			✓	✓			✓		✓	
	41			✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓			✓	✓	✓		✓	✓		✓
	17			✓	✓			✓	✓	✓		✓	✓		✓
	41			✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	17			✓	✓			✓	✓	✓			✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Frequency Stability	2	✓			✓			✓				✓		✓	
	5	✓			✓			✓				✓		✓	
	17			✓	✓			✓				✓		✓	
	41				✓			✓				✓		✓	
ERP/EIRP	2	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
	5	✓	✓	✓	✓			✓	✓	✓			✓	✓	✓
	17			✓	✓			✓	✓	✓			✓	✓	✓
	41			✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
Radiated Spurious	2	✓	✓	✓	✓	✓	✓	✓		✓			✓	✓	✓



Emission	5	✓	✓	✓	✓			✓		✓			✓	✓	✓
	17			✓	✓			✓		✓			✓	✓	✓
	41			✓	✓	✓	✓	✓		✓			✓	✓	✓
Note	<p>1. The mark “ ✓ ” means that this configuration is chosen for testing.</p> <p>2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p> <p>3. For E.R.P/E.I.R.P. measurement, the widest bandwidth and the bandwidth with the highest conducted power of each band is chosen for testing. Besides, the lowest bandwidth of each band is also measured for reporting only.</p>														

1.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.5dB and 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 7 + 10 = 17 \text{ (dB)} \end{aligned}$$



1.6 Facilities and Accreditations

1.6.1 Test Facilities

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories

(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% - 60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR PART 2, PART 27H REQUIREMENTS

2.1 Conducted RF Output Power


2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.1.3 Test Setup

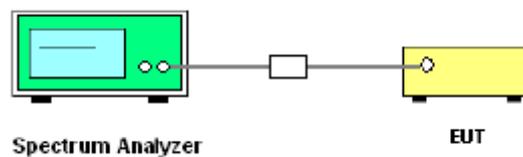

2.1.4 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



2.1.5 Test Results

1. LTE Band 2 Maximum Average Power:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				18700	18900	19100
Frequency(MHz)				1860	1880	1900
20	QPSK	1	0	23.42	23.40	23.45
20		1	49	23.41	23.37	23.42
20		1	99	23.35	23.38	23.35
20		50	0	22.64	22.60	22.62
20		50	24	22.56	22.58	22.60
20		50	49	22.51	22.53	22.47
20		100	0	22.45	22.44	22.50
20	16QAM	1	0	22.12	22.15	22.14
20		1	49	22.07	22.12	22.13
20		1	99	22.12	22.14	22.09
20		50	0	21.65	21.78	21.74
20		50	24	21.51	21.59	21.65
20		50	49	21.55	21.52	21.54
20		100	0	21.51	21.52	21.52
Channel				18675	18900	19125
Frequency(MHz)				1857.5	1880	1902.5
15	QPSK	1	0	23.42	23.38	23.39
15		1	37	23.36	23.40	23.37
15		1	74	23.40	23.35	23.36
15		36	0	22.62	22.65	22.63
15		36	18	22.58	22.63	22.59
15		36	37	22.53	22.57	22.61
15		75	0	22.56	22.59	22.63
15	16QAM	1	0	22.19	22.15	22.14
15		1	37	22.13	22.10	22.12
15		1	74	22.05	22.12	22.11
15		36	0	21.63	21.71	21.62
15		36	18	21.65	21.62	21.59
15		36	37	21.61	21.64	21.71
15		75	0	21.57	21.52	21.58



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				18650	18900	19150
Frequency(MHz)				1855	1880	1905
10	QPSK	1	0	23.37	23.39	23.38
10		1	24	23.35	23.32	23.34
10		1	49	23.34	23.37	23.36
10		25	0	22.71	22.61	22.63
10		25	12	22.62	22.68	22.65
10		25	24	22.69	22.60	22.64
10		50	0	22.51	22.55	22.56
10	16QAM	1	0	22.18	22.21	22.20
10		1	24	22.16	22.15	22.11
10		1	49	22.15	22.12	22.08
10		25	0	21.72	21.75	21.74
10		25	12	21.65	21.68	21.72
10		25	24	21.59	21.56	21.62
10		50	0	21.51	21.52	21.52
Channel				18625	18900	19175
Frequency(MHz)				1852.5	1880	1907.5
5	QPSK	1	0	23.34	23.30	23.36
5		1	12	23.35	23.31	23.33
5		1	24	23.32	23.35	23.31
5		12	0	22.71	22.69	22.62
5		12	6	22.62	22.64	22.59
5		12	11	22.61	22.58	22.57
5		25	0	22.54	22.51	22.52
5	16QAM	1	0	22.20	22.12	22.21
5		1	12	22.12	22.11	22.08
5		1	24	22.15	22.10	22.09
5		12	0	21.66	21.64	21.61
5		12	6	21.57	21.55	21.53
5		12	11	21.54	21.51	21.55
5		25	0	21.50	21.55	21.47



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				18615	18900	19185
Frequency(MHz)				1851.5	1880	1908.5
3	QPSK	1	0	23.34	23.29	23.27
3		1	7	23.27	23.25	23.32
3		1	14	23.29	23.27	23.30
3		8	0	22.69	22.72	22.70
3		8	4	22.68	22.71	22.73
3		8	7	22.64	22.68	22.65
3		15	0	22.71	22.69	22.63
3	16QAM	1	0	22.21	22.19	22.12
3		1	7	22.12	22.07	22.10
3		1	14	22.04	22.08	22.11
3		8	0	21.52	21.51	21.55
3		8	4	21.55	21.57	21.52
3		8	7	21.44	21.39	21.44
3		15	0	21.47	21.42	21.40
Channel				18607	18900	19193
Frequency(MHz)				1850.7	1732.5	1909.3
1.4	QPSK	1	0	23.30	23.32	23.27
1.4		1	2	23.23	23.31	23.26
1.4		1	5	23.24	23.26	23.29
1.4		3	0	22.70	22.69	22.72
1.4		3	1	22.74	22.68	22.73
1.4		3	2	22.64	22.57	22.61
1.4		6	0	22.58	22.56	22.53
1.4	16QAM	1	0	22.20	22.17	22.15
1.4		1	2	22.15	22.10	22.14
1.4		1	5	22.07	22.12	22.04
1.4		3	0	21.55	21.51	21.47
1.4		3	1	21.54	21.48	21.55
1.4		3	2	21.50	21.47	21.43
1.4		6	0	21.48	21.41	21.44



2. LTE Band 5 Maximum Average Power:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				20450	20525	20600
Frequency(MHz)				829	836.5	844
10	QPSK	1	0	23.32	23.39	23.35
10		1	24	23.35	23.34	23.33
10		1	49	23.32	23.29	23.30
10		25	0	22.71	22.69	22.64
10		25	12	22.62	22.66	22.70
10		25	24	22.67	22.70	22.65
10		50	0	22.65	22.62	22.68
10	16QAM	1	0	22.23	22.25	22.24
10		1	24	22.11	22.18	22.15
10		1	49	22.08	22.09	22.16
10		25	0	21.55	21.53	21.50
10		25	12	21.48	21.40	21.42
10		25	24	21.42	21.48	21.44
10		50	0	21.40	21.44	21.43
Channel				20425	20525	20625
Frequency(MHz)				826.5	836.5	846.5
5	QPSK	1	0	23.28	23.34	23.30
5		1	12	23.32	23.28	23.26
5		1	24	23.26	23.29	23.24
5		12	0	22.64	22.66	22.62
5		12	6	22.60	22.63	22.61
5		12	11	22.59	22.61	22.55
5		25	0	22.61	22.58	22.62
5	16QAM	1	0	22.29	22.21	22.22
5		1	12	22.22	22.25	22.20
5		1	24	22.16	22.17	22.18
5		12	0	21.55	21.53	21.54
5		12	6	21.48	21.40	21.42
5		12	11	21.45	21.46	21.41
5		25	0	21.47	21.44	21.43



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				20415	20525	20635
Frequency(MHz)				825.5	836.5	847.5
3	QPSK	1	0	23.25	23.30	23.27
3		1	7	23.24	23.22	23.21
3		1	14	23.23	23.24	23.17
3		8	0	22.57	22.61	22.56
3		8	4	22.60	22.55	22.58
3		8	7	22.58	22.52	22.55
3		15	0	22.57	22.54	22.57
3	16QAM	1	0	22.21	22.22	22.25
3		1	7	22.17	22.18	22.13
3		1	14	22.15	22.20	22.16
3		8	0	21.53	21.45	21.50
3		8	4	21.44	21.48	21.45
3		8	7	21.43	21.44	21.40
3		15	0	21.42	21.46	21.41
Channel				20407	20525	20643
Frequency(MHz)				824.7	836.5	848.3
1.4	QPSK	1	0	23.21	23.28	23.26
1.4		1	2	23.26	23.27	23.21
1.4		1	5	23.19	23.26	23.23
1.4		3	0	22.61	22.58	22.57
1.4		3	1	22.54	22.53	22.48
1.4		3	2	22.56	22.47	22.51
1.4		6	0	22.47	22.50	22.53
1.4	16QAM	1	0	22.22	22.27	22.19
1.4		1	2	22.18	22.24	22.21
1.4		1	5	22.14	22.17	22.16
1.4		3	0	21.45	21.54	21.47
1.4		3	1	21.49	21.47	21.45
1.4		3	2	21.40	21.43	21.47
1.4		6	0	21.38	21.42	21.43



3. LTE Band 17 Maximum Average Power:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				23780	23790	23800
Frequency(MHz)				709	710	711
10	QPSK	1	0	23.18	23.24	23.23
10		1	24	23.19	23.16	23.09
10		1	49	23.12	23.10	23.14
10		25	0	22.72	22.71	22.76
10		25	12	22.67	22.36	22.64
10		25	24	22.61	22.65	22.71
10		50	0	22.69	22.66	22.67
10	16QAM	1	0	22.24	22.19	22.17
10		1	24	22.16	22.18	22.13
10		1	49	22.20	22.25	22.22
10		25	0	21.71	21.66	21.65
10		25	12	21.67	21.65	21.71
10		25	24	21.61	21.64	21.66
10		50	0	21.63	21.56	21.59
Channel				23755	23790	23825
Frequency(MHz)				706.5	710	713.5
5	QPSK	1	0	23.22	23.14	23.20
5		1	12	23.09	23.13	23.16
5		1	24	23.14	23.10	23.15
5		12	0	22.60	22.63	22.67
5		12	6	22.56	22.52	22.57
5		12	11	22.50	22.54	22.59
5		25	0	22.54	22.49	22.52
5	16QAM	1	0	22.21	22.23	22.18
5		1	12	22.23	22.17	22.22
5		1	24	22.19	22.15	22.15
5		12	0	21.60	21.65	21.67
5		12	6	21.62	21.55	21.59
5		12	11	21.61	21.54	21.58
5		25	0	21.57	21.51	21.52



4. LTE Band 41 Maximum Average Power:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				39750	40620	41490
Frequency(MHz)				2506	2593	2680
20	QPSK	1	0	22.22	22.25	22.28
20		1	49	22.21	22.24	22.22
20		1	99	22.15	22.18	22.25
20		50	0	21.54	21.50	21.52
20		50	24	21.46	21.48	21.50
20		50	49	21.41	21.43	21.47
20		100	0	21.35	21.44	21.40
20	16QAM	1	0	21.12	21.15	21.14
20		1	49	21.07	21.12	21.13
20		1	99	21.12	21.14	21.09
20		50	0	20.65	20.78	20.74
20		50	24	20.51	20.59	20.65
20		50	49	20.55	20.52	20.54
20		100	0	20.51	20.52	20.52
Channel				39725	40620	41515
Frequency(MHz)				2503.5	2593	2682.5
15	QPSK	1	0	22.25	22.22	22.19
15		1	37	22.21	22.20	22.17
15		1	74	22.20	22.15	22.16
15		36	0	21.52	21.55	21.53
15		36	18	21.48	21.43	21.49
15		36	37	21.53	21.47	21.51
15		75	0	21.46	21.49	21.43
15	16QAM	1	0	21.19	21.15	21.14
15		1	37	21.13	21.10	21.12
15		1	74	21.05	21.12	21.11
15		36	0	20.63	20.71	20.62
15		36	18	20.65	20.62	20.59
15		36	37	20.61	20.64	20.71
15		75	0	20.57	20.52	20.58



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				39700	40620	41540
Frequency(MHz)				2501	2593	2685
10	QPSK	1	0	22.21	22.24	22.20
10		1	24	22.20	22.19	22.21
10		1	49	22.22	22.17	22.18
10		25	0	21.51	21.52	21.48
10		25	12	21.42	21.48	21.45
10		25	24	21.49	21.50	21.44
10		50	0	21.41	21.45	21.40
10	16QAM	1	0	21.17	21.16	21.15
10		1	24	21.12	21.09	21.11
10		1	49	21.14	21.12	21.08
10		25	0	20.62	20.65	20.64
10		25	12	20.65	20.64	20.62
10		25	24	20.59	20.56	20.57
10		50	0	20.51	20.52	20.52
Channel				39675	40620	41565
Frequency(MHz)				2498.5	2593	2687.5
5	QPSK	1	0	22.18	22.20	22.21
5		1	12	22.15	22.17	22.15
5		1	24	22.12	22.15	22.17
5		12	0	21.51	21.49	21.42
5		12	6	21.42	21.44	21.49
5		12	11	21.41	21.48	21.47
5		25	0	21.44	21.41	21.42
5	16QAM	1	0	21.12	21.15	21.14
5		1	12	21.12	21.11	21.08
5		1	24	21.05	21.10	21.09
5		12	0	20.56	20.54	20.51
5		12	6	20.47	20.45	20.43
5		12	11	20.44	20.41	20.48
5		25	0	20.50	20.45	20.47

2.2 Peak to Average Ratio


2.2.1 Definition

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.2.3 Test Description

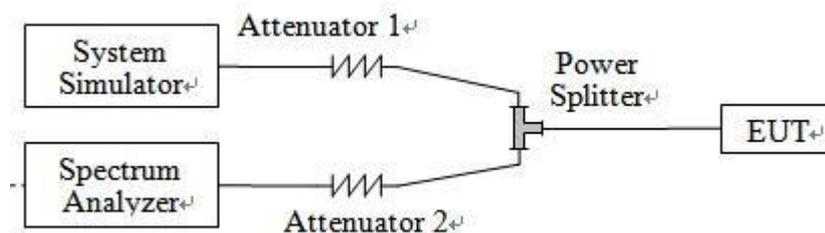

2.2.4 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

2.2.5 Test Results of Peak-to-Average Ratio

1. Test Result of LTE Band 2 Peak-to-Average Ratio:

BW (MHz)	Modulation	Channel	Frequency (MHz)	RB Size	RB Offset	Peak to Average ratio		Limit	Verdict
						dB	Refer to Plot	dB	
20	16QAM	18700	1860	1	0	5.99	Plot A1 to A6	13	PASS
				100	0	6.56			
	16QAM	18900	1880	1	0	6.07			PASS
				100	0	6.28			
	16QAM	19100	1900	1	0	5.20			PASS
				100	0	6.10			

2. Test Result of LTE Band 5 Peak-to-Average Ratio:

BW (MHz)	Modulation	Channel	Frequency (MHz)	RB Size	RB Offset	Peak to Average ratio		Limit	Verdict
						dB	Refer to Plot	dB	
10	16QAM	20450	829	1	0	5.75	Plot B1 to B6	13	PASS
				50	0	6.37			
	16QAM	20525	836.5	1	0	5.80			PASS
				50	0	6.37			
	16QAM	20600	844	1	0	5.83			PASS
				50	0	6.50			

3. Test Result of LTE Band 17 Peak-to-Average Ratio:

BW (MHz)	Modulation	Channel	Frequency (MHz)	RB Size	RB Offset	Peak to Average ratio		Limit	Verdict
						dB	Refer to Plot	dB	
10	16QAM	23780	709	1	0	5.62	Plot C1 to C6	13	PASS
				50	0	6.53			
	16QAM	23790	710	1	0	5.65			PASS
				50	0	6.45			
	16QAM	23800	711	1	0	5.88			PASS
				50	0	6.33			




4. Test Result of LTE Band 41 Peak-to-Average Ratio:


BW (MHz)	Modulation	Channel	Frequency (MHz)	RB Size	RB Offset	Peak to Average ratio		Limit	Verdict
						dB	Refer to Plot	dB	
10	16QAM	39700	2501	1	0	8.56	Plot D1 to D6	13	PASS
				50	0	9.34			
	16QAM	40620	2593	1	0	8.74			PASS
				50	0	9.36			
	16QAM	41540	2685	1	0	8.91			PASS
				50	0	9.44			

Note: both QPSK/16QAM modulation modes were tested, only provide worst-case mode (16QAM) test plots here.


2.2.6 Test Results (Plots) of Peak-to-Average Ratio

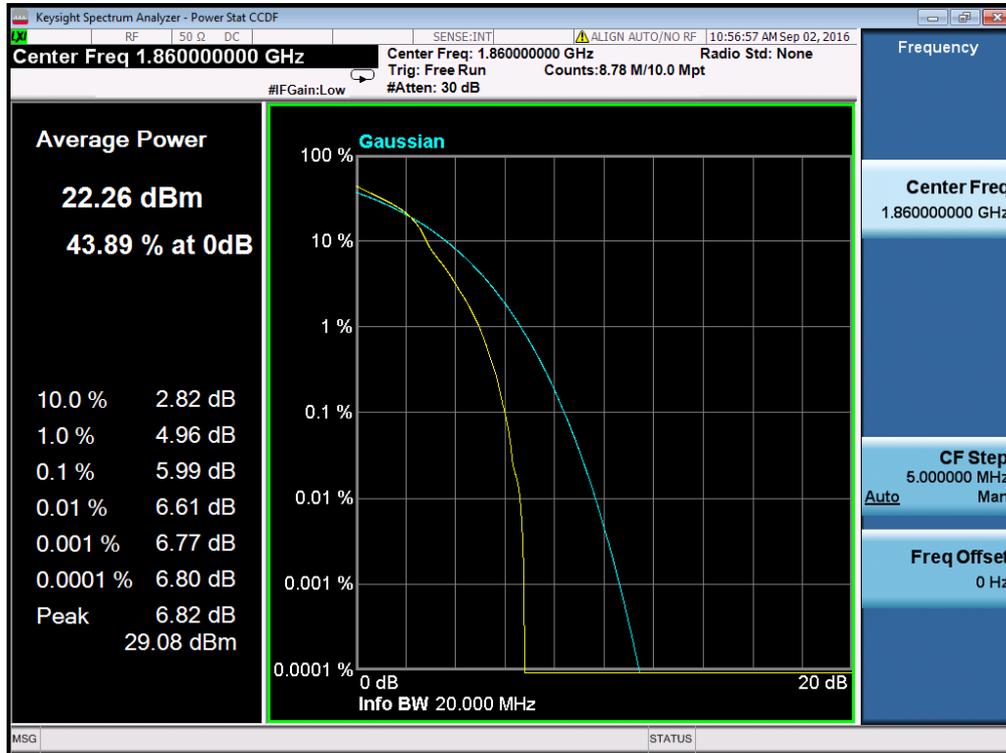


(Plot A1: Band 2/20MHz/16QAM in L Ch 1RB Size)

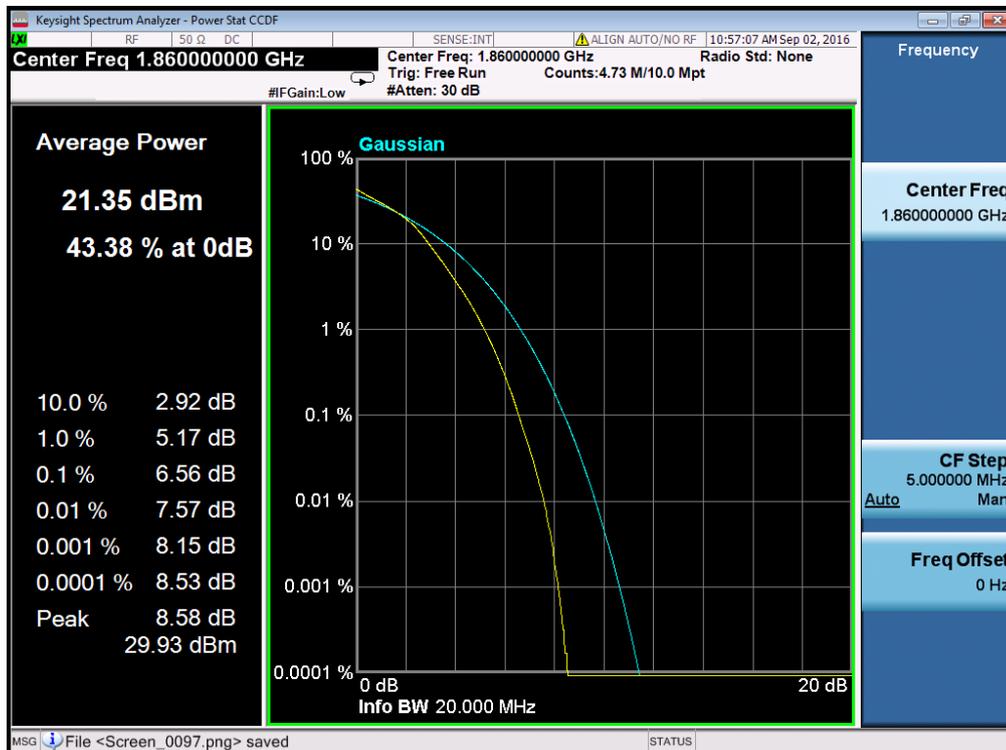


(Plot A2: Band 2/20MHz/16QAM in L Ch 100RB Size)

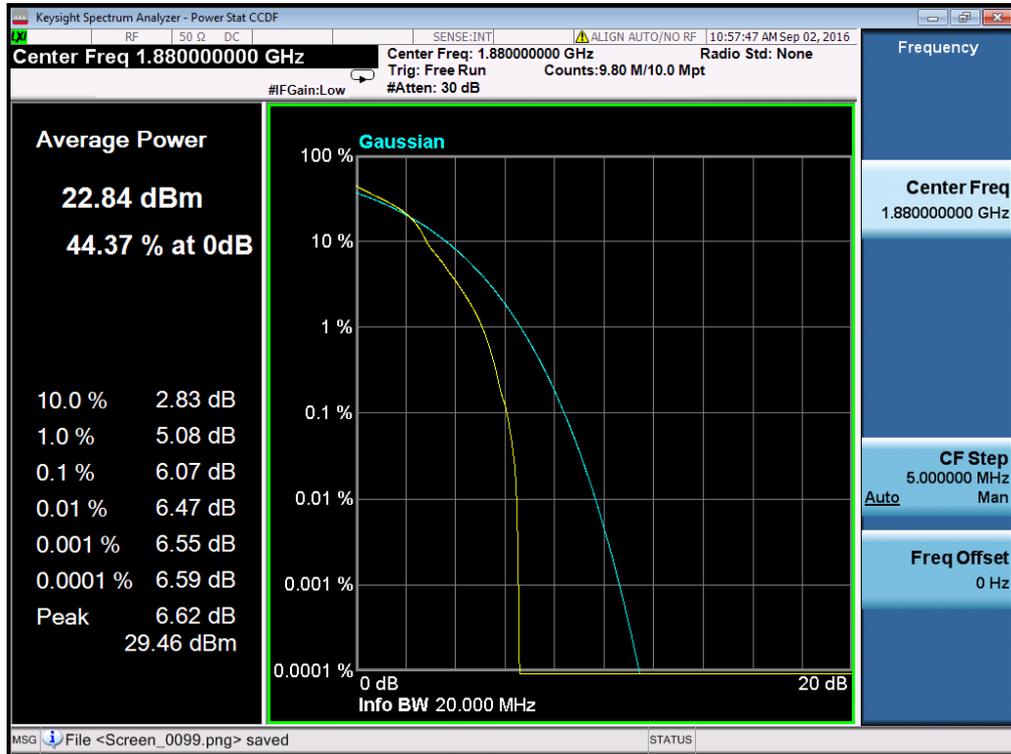


(Plot A3: Band 2/20MHz/16QAM in M Ch 1RB Size)

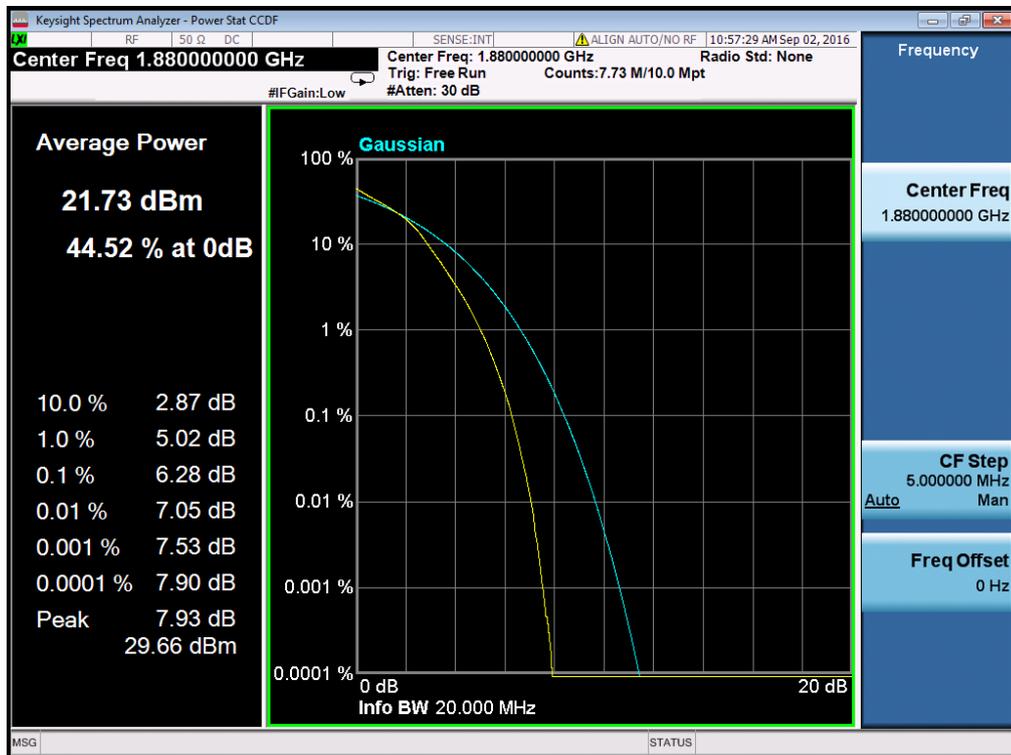


(Plot A4: Band 2/20MHz/16QAM in M Ch 100RB Size)

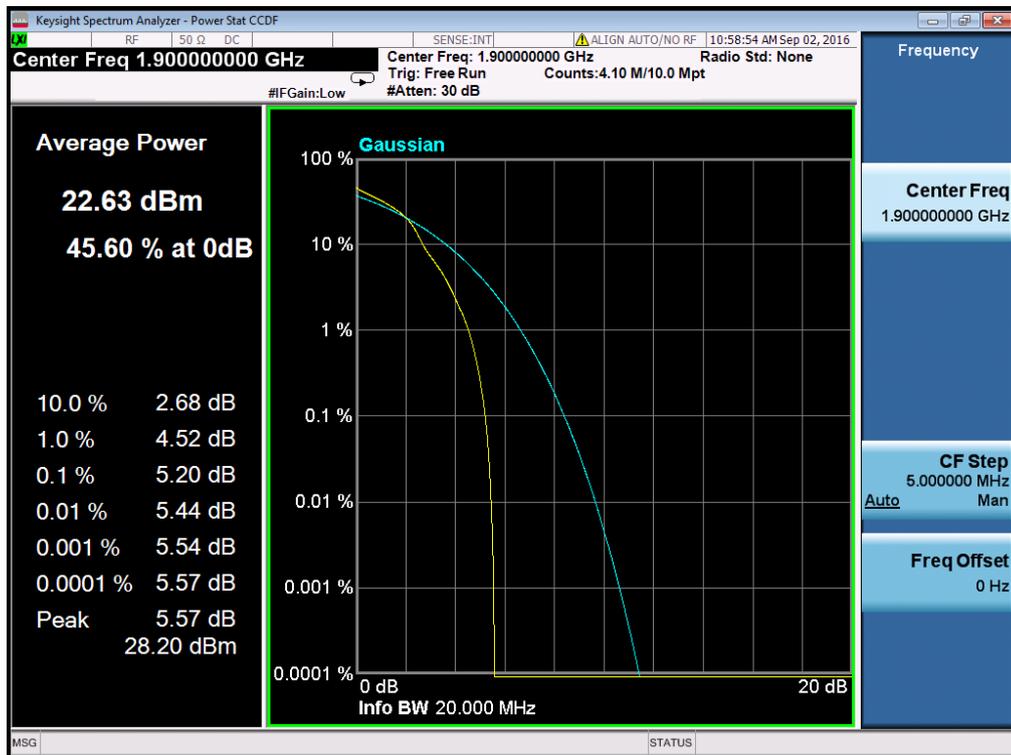


(Plot A5: Band 2/20MHz/16QAM in H Ch 1RB Size)

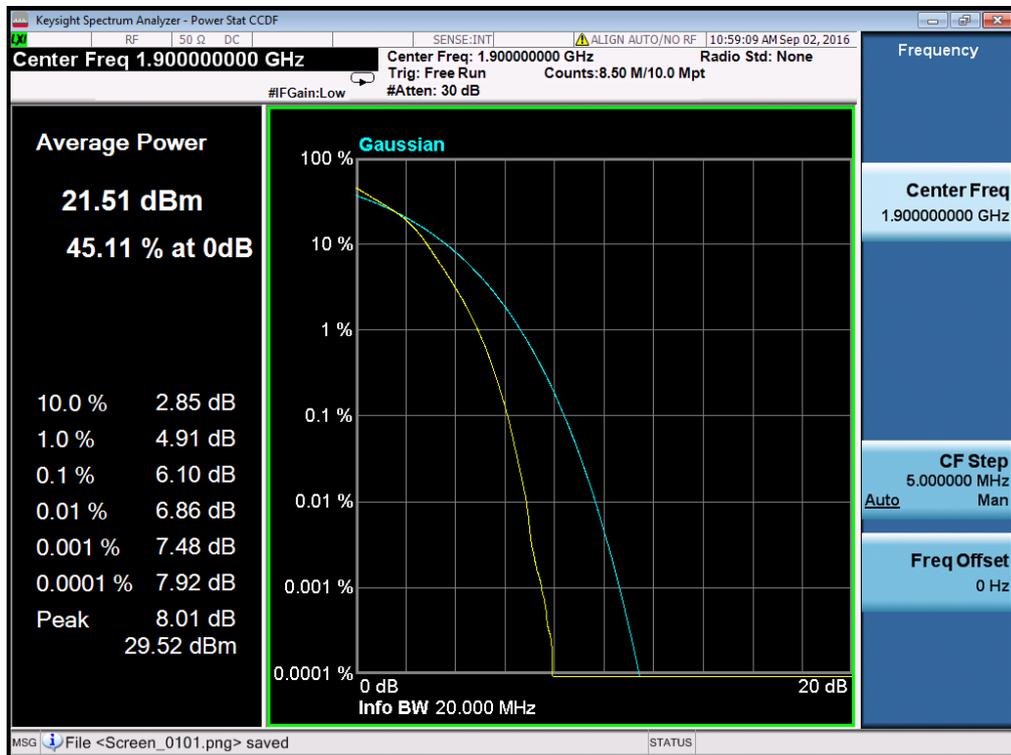


(Plot A6: Band 2/20MHz/16QAM in H Ch 100RB Size)

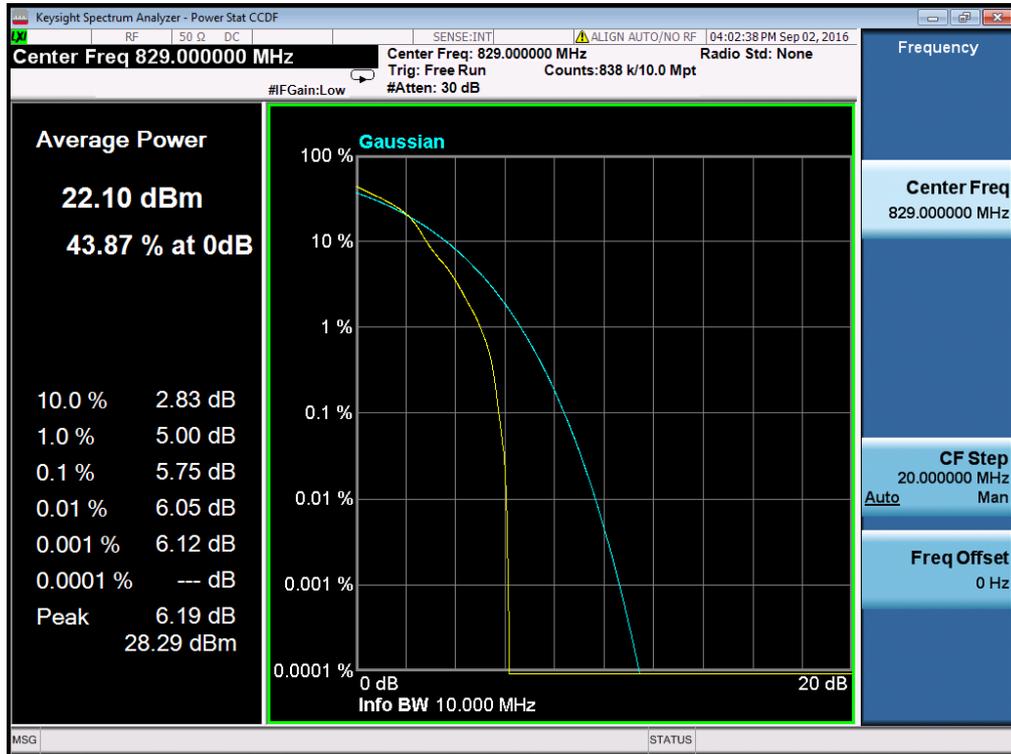


(Plot B1: Band 5/10MHz/16QAM in L Ch 1RB Size)

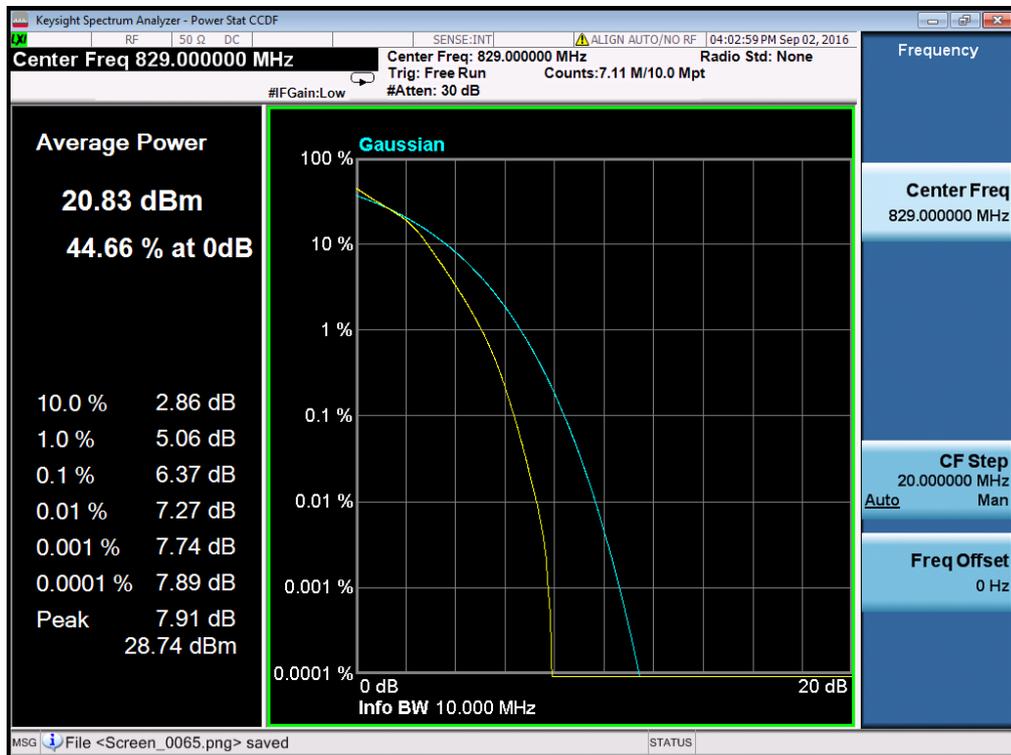


(Plot B2: Band 5/10MHz/16QAM in L Ch 50RB Size)

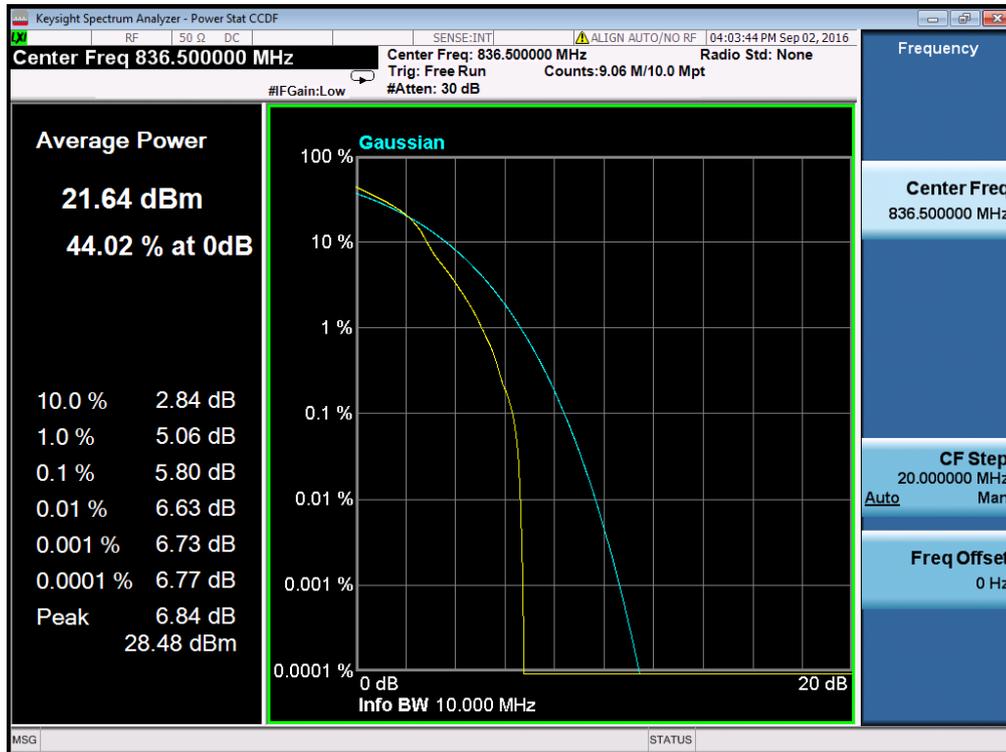


(Plot B3: Band 5/10MHz/16QAM in M Ch 1RB Size)

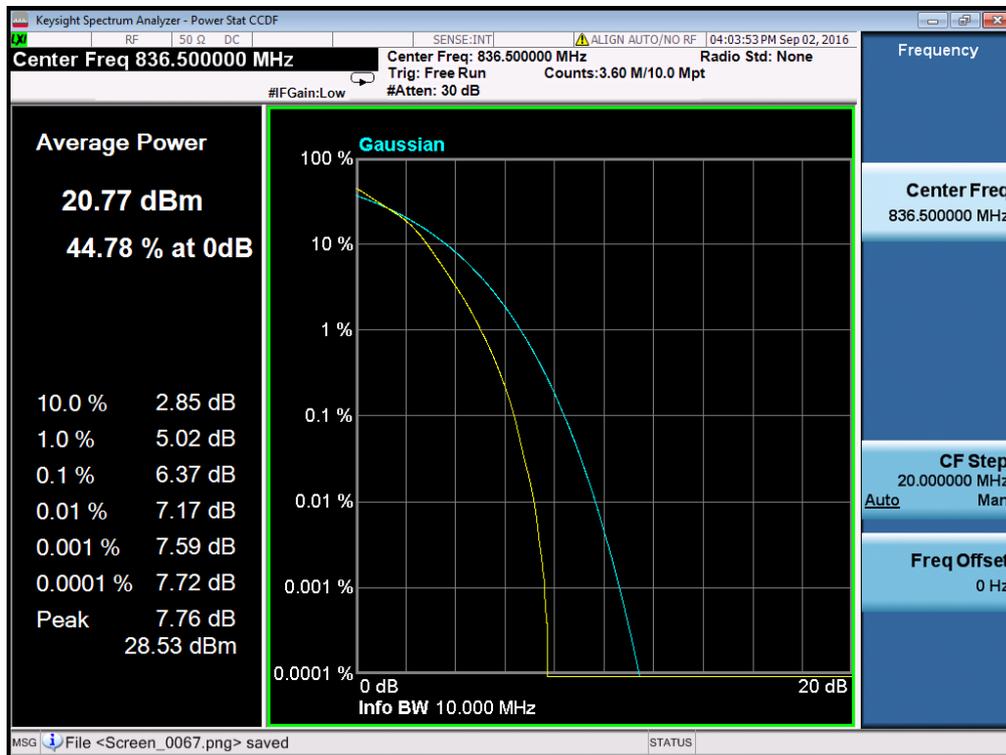


(Plot B4: Band 5/10MHz/16QAM in M Ch 50RB Size)

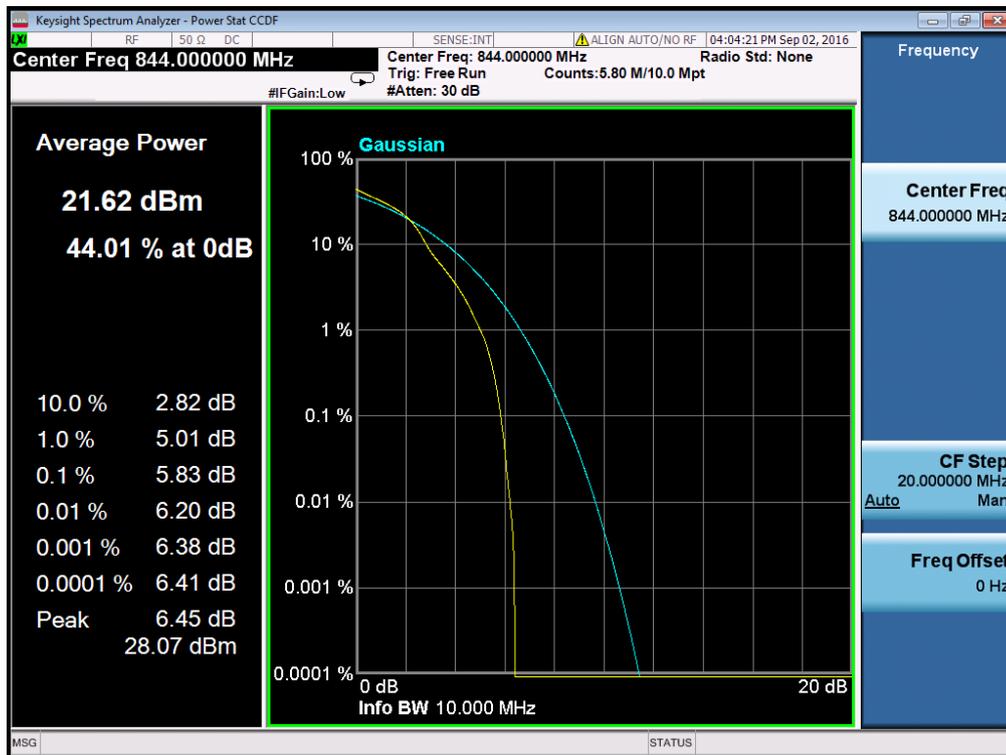


(Plot B5: Band 5/10MHz/16QAM in H Ch 1RB Size)

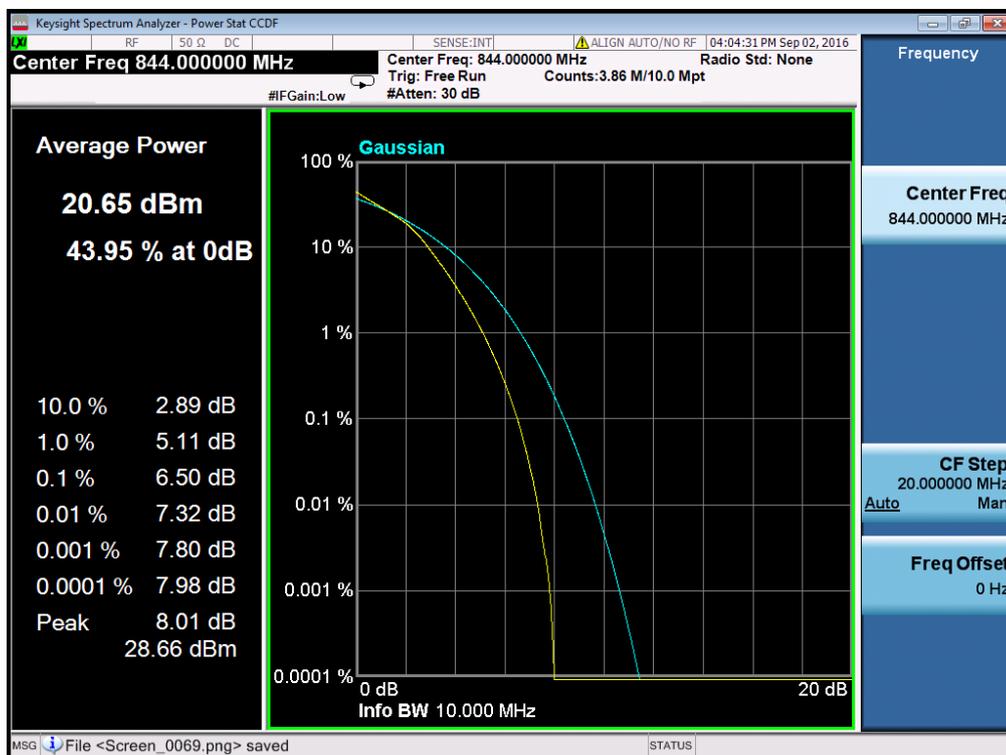


(Plot B6: Band 5/10MHz/16QAM in H Ch 50RB Size)

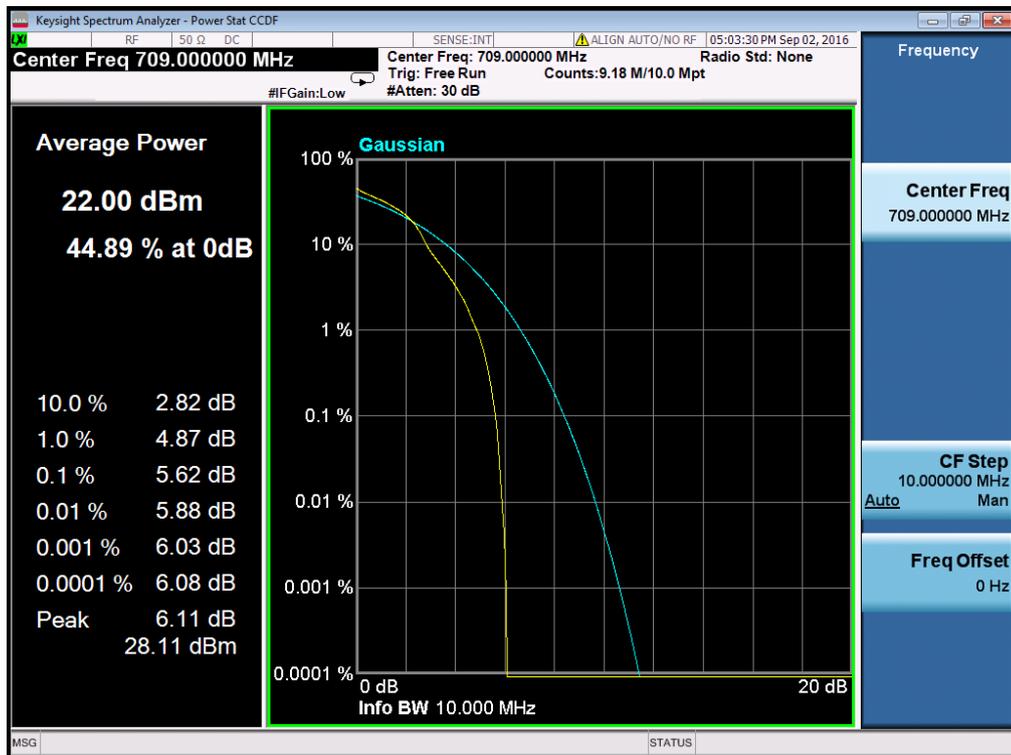


(Plot C1: Band 17/10MHz/16QAM in L Ch 1RB Size)

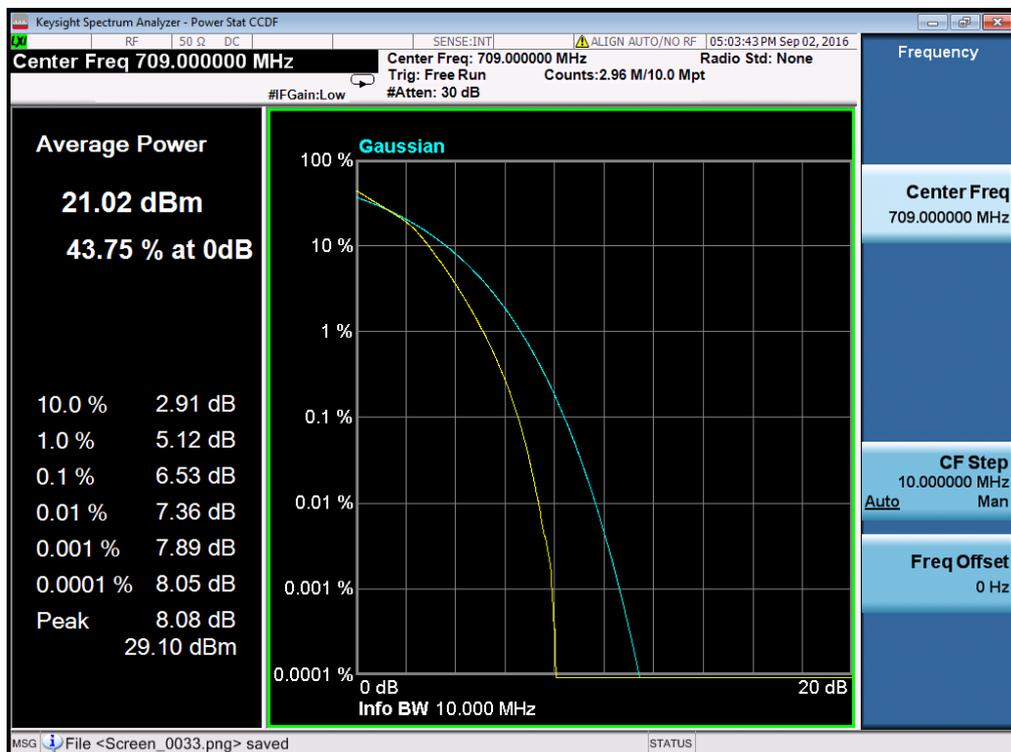


(Plot C2: Band 17/10MHz/16QAM in L Ch 50RB Size)

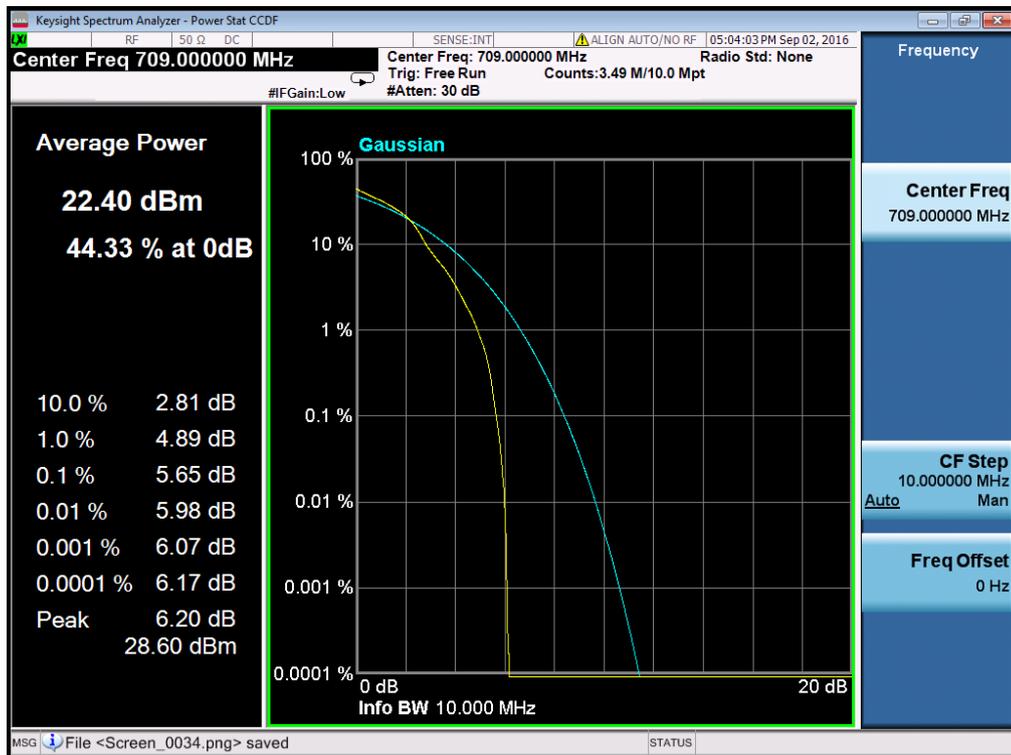


(Plot C3: Band 17/10MHz/16QAM in M Ch 1RB Size)

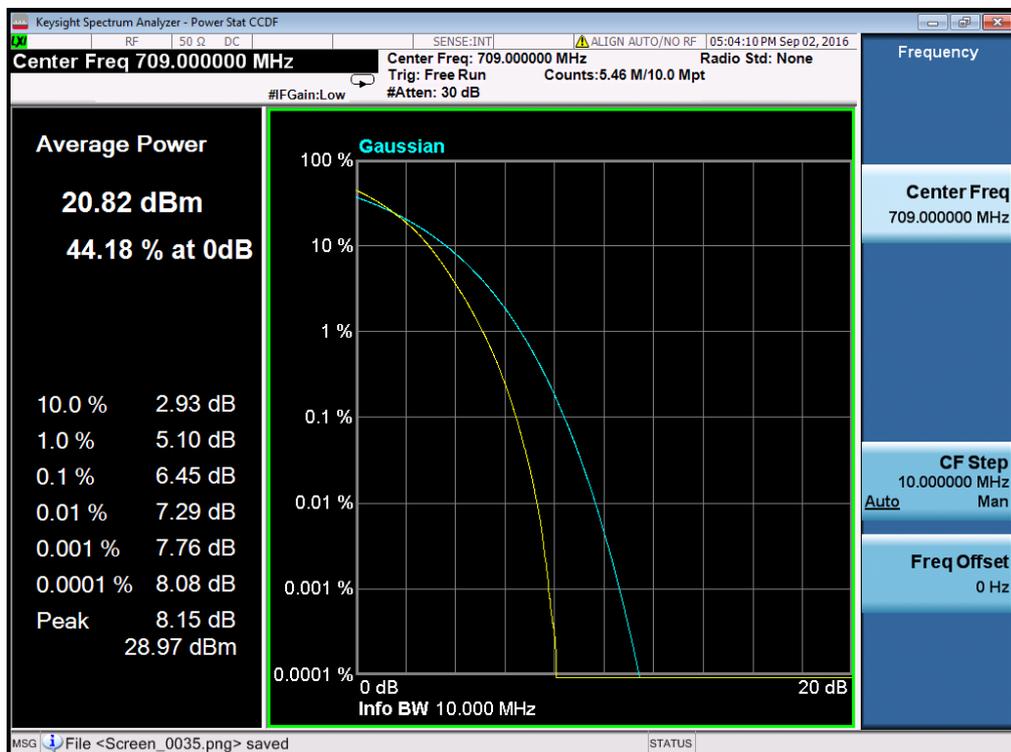


(Plot C4: Band 17/10MHz/16QAM in M Ch 50RB Size)

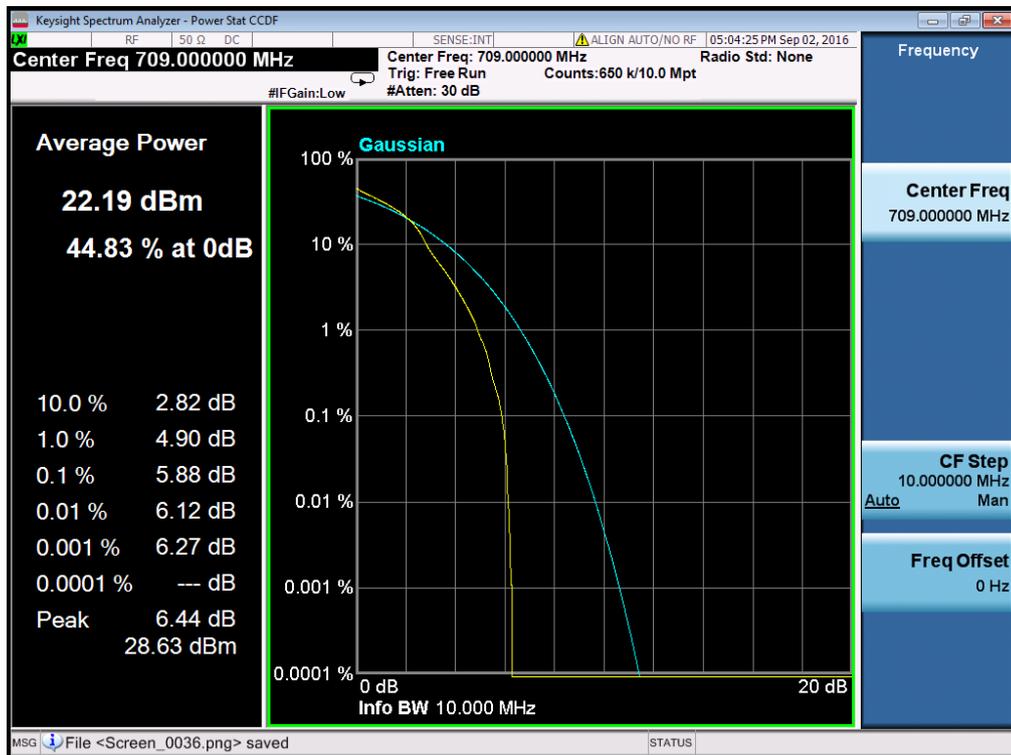


(Plot C5: Band 17/10MHz/16QAM in H Ch 1RB Size)

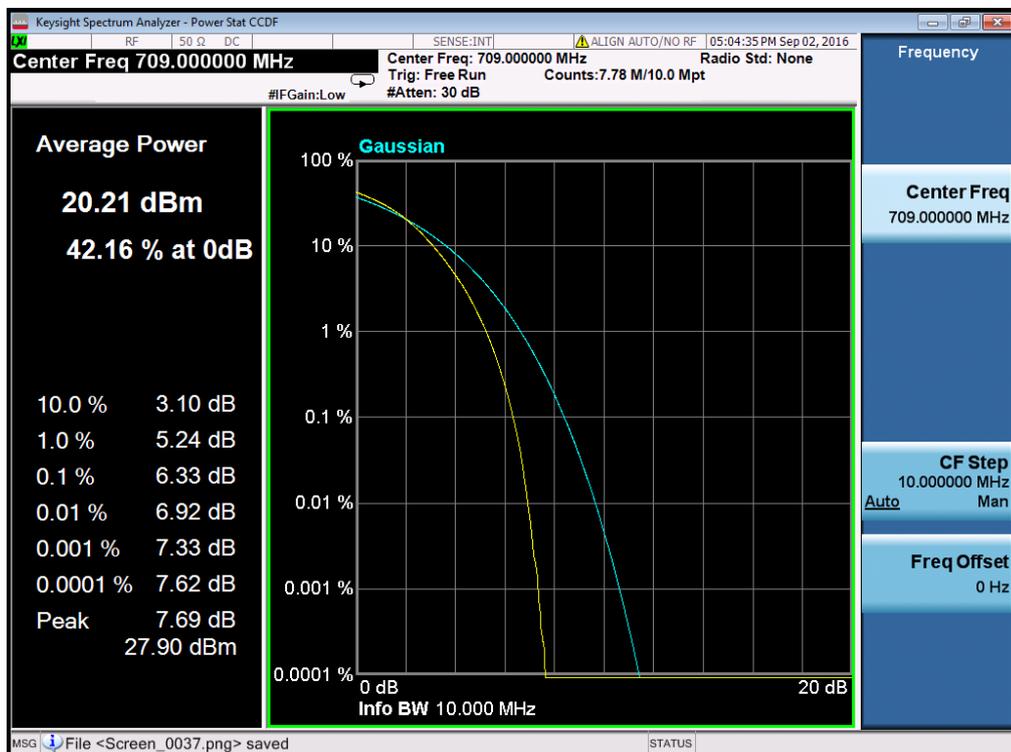


(Plot C6: Band 17/10MHz/16QAM in H Ch 50RB Size)

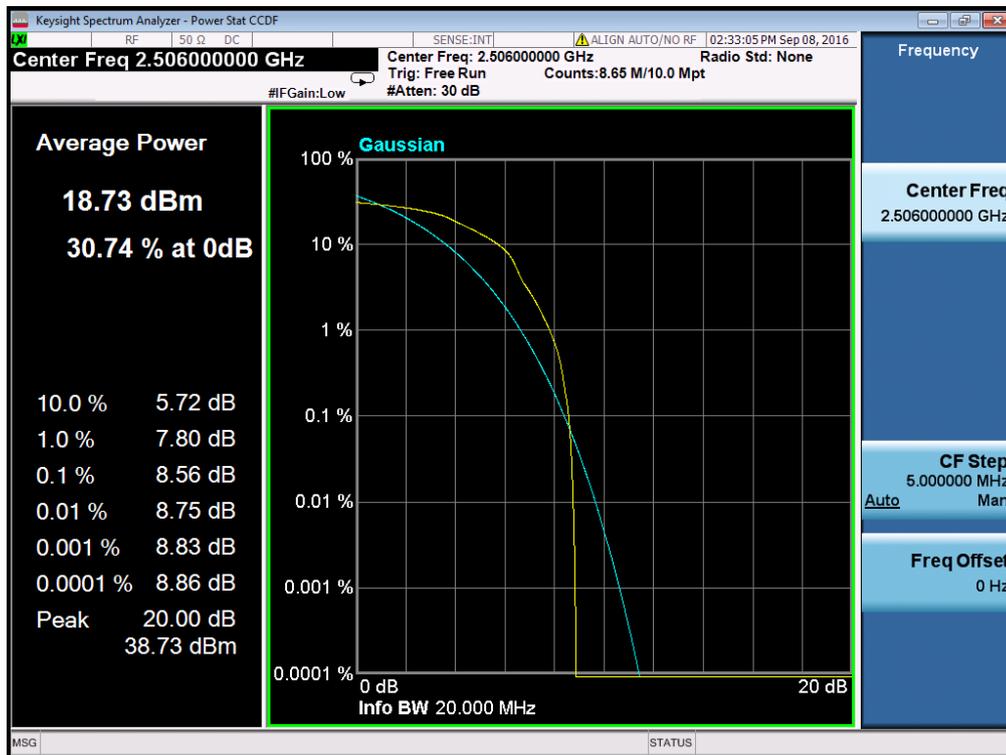


(Plot D1: Band 41/10MHz/16QAM in L Ch 1RB Size)

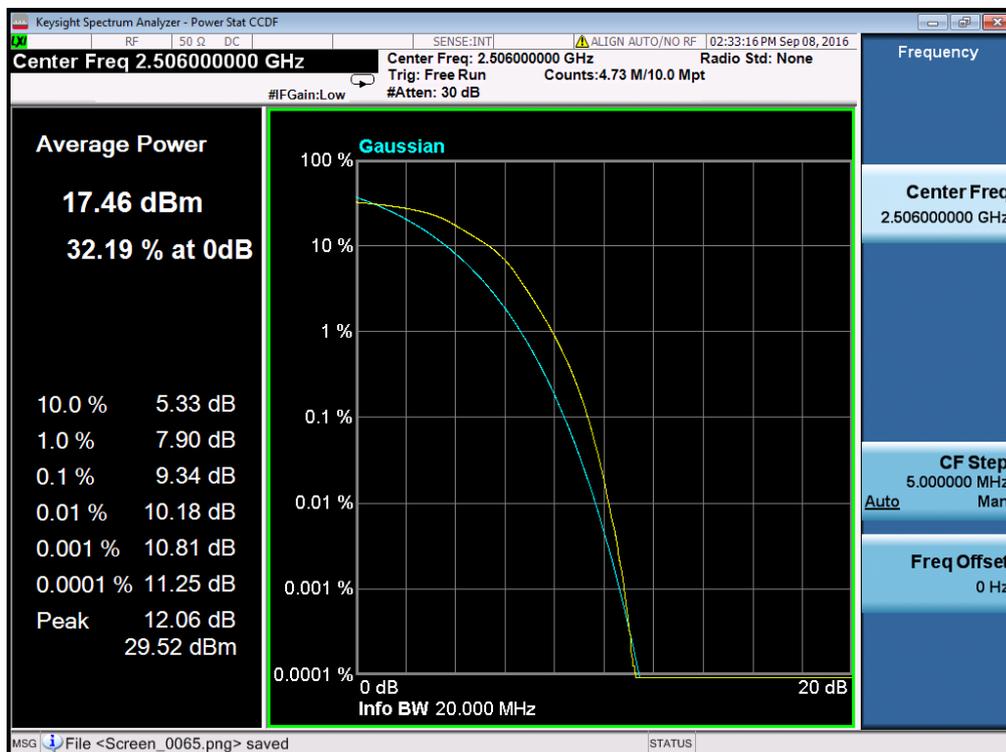


(Plot D2: Band 41/10MHz/16QAM in L Ch 50RB Size)

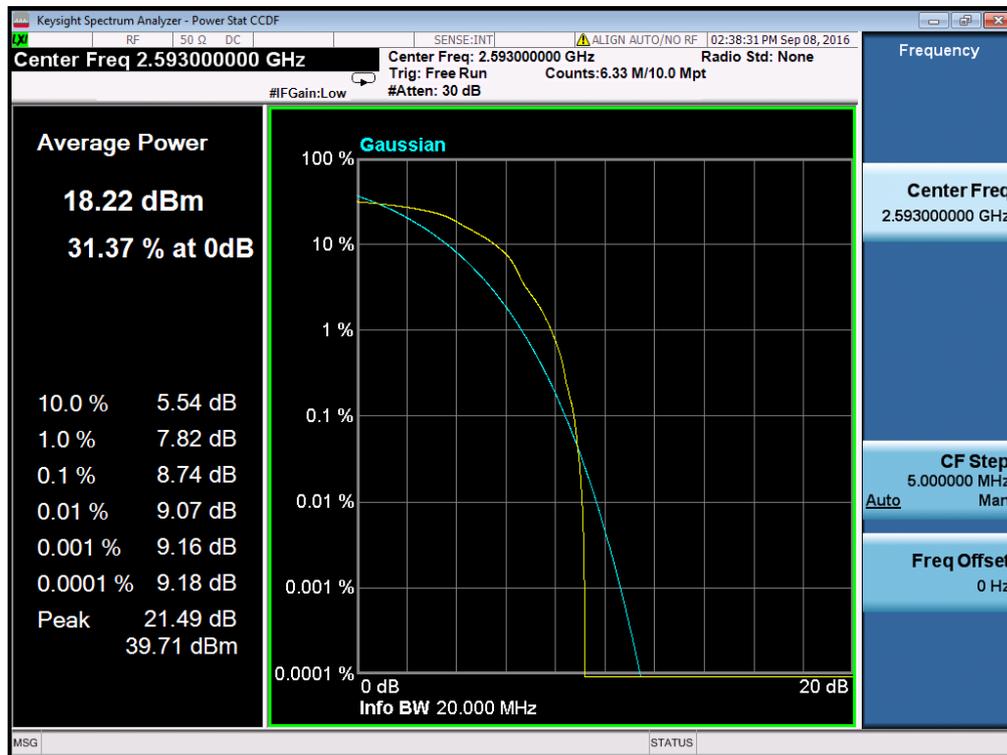


(Plot D3: Band 41/10MHz/16QAM in M Ch 1RB Size)

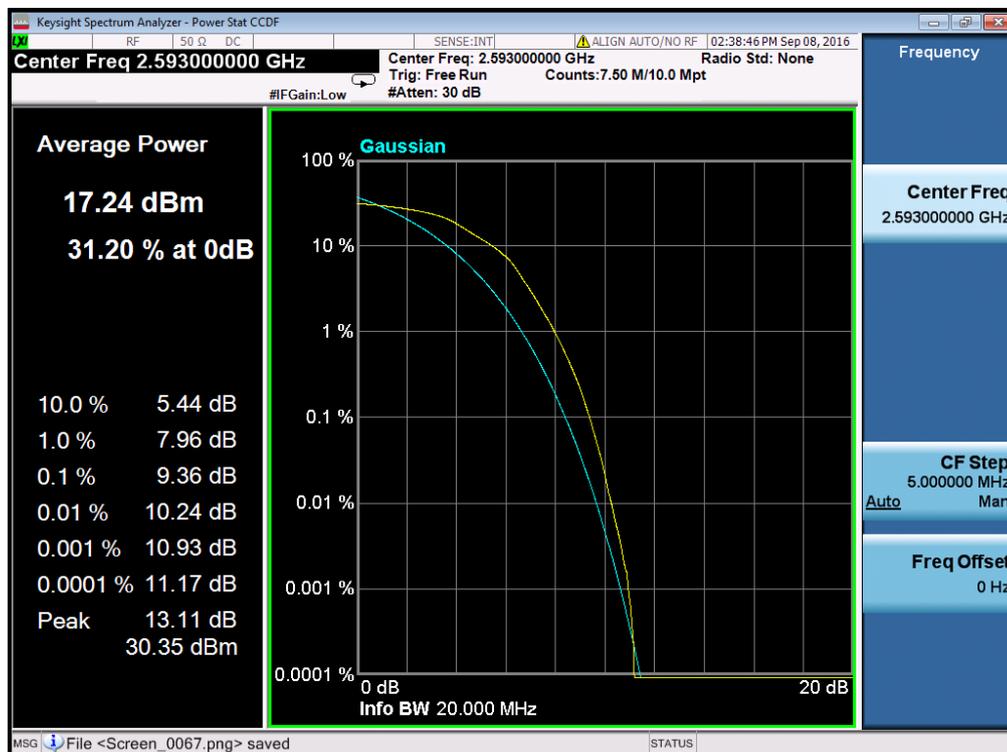

(Plot D4: Band 41/10MHz/16QAM in M Ch 50RB Size)

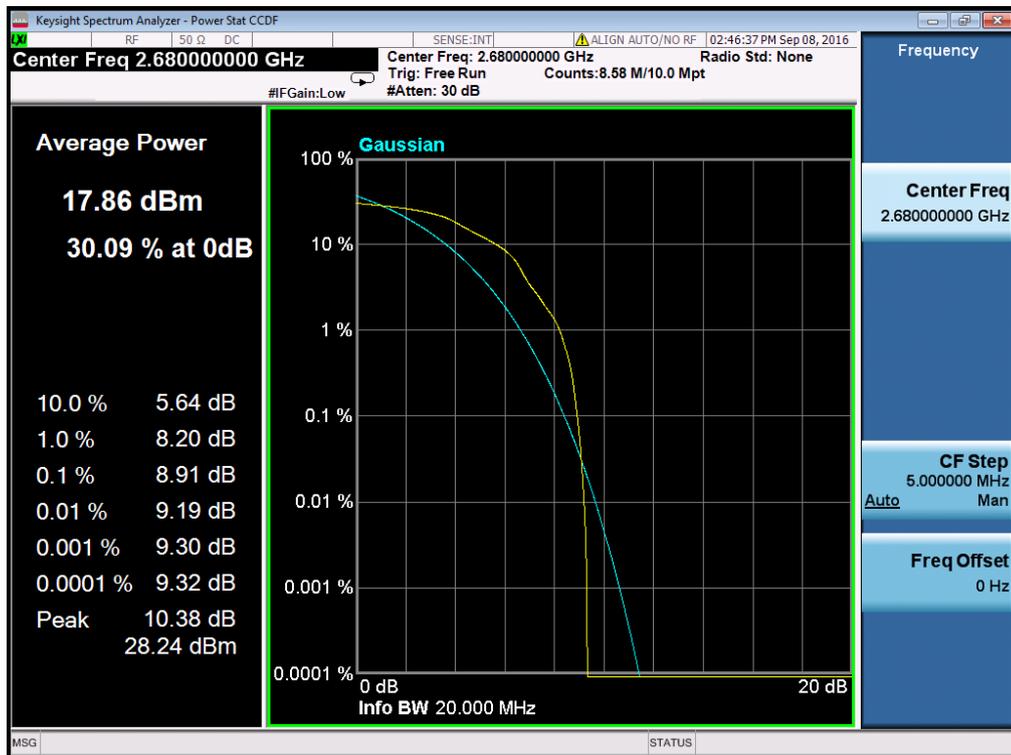

(Plot D5: Band 41/10MHz/16QAM in H Ch 1RB Size)

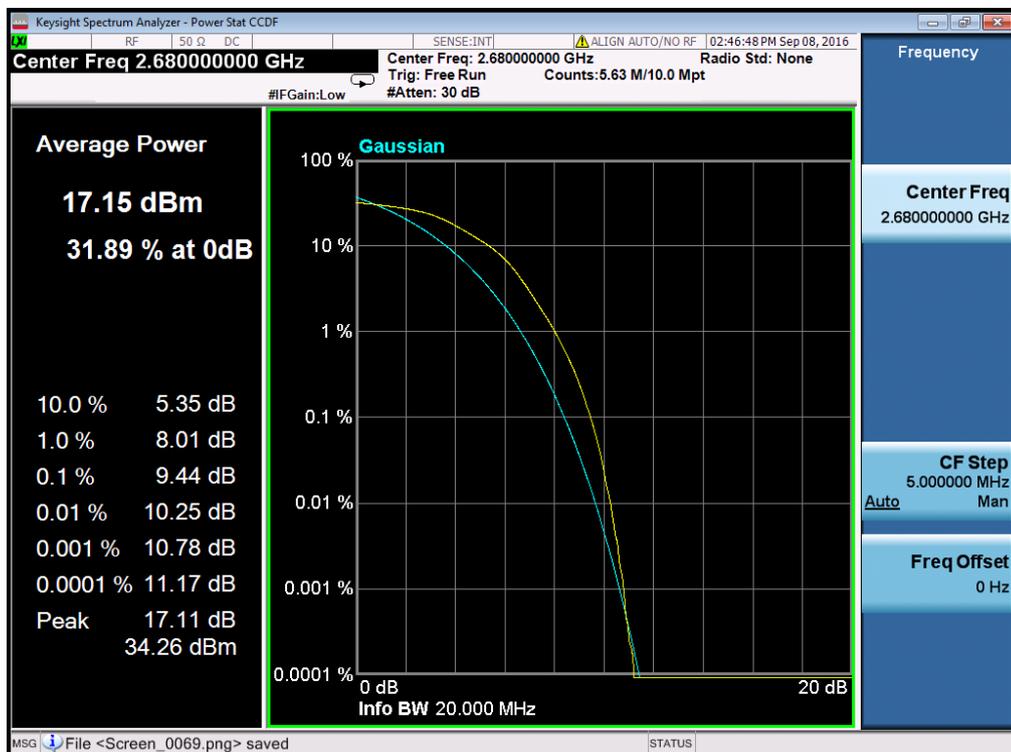

(Plot D6: Band 41/10MHz/16QAM in H Ch 50RB Size)

2.3 99% Occupied Bandwidth and 26dB Bandwidth

2.3.1 Definition


According to FCC section 2.1049, the occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

2.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.3.3 Test Setup

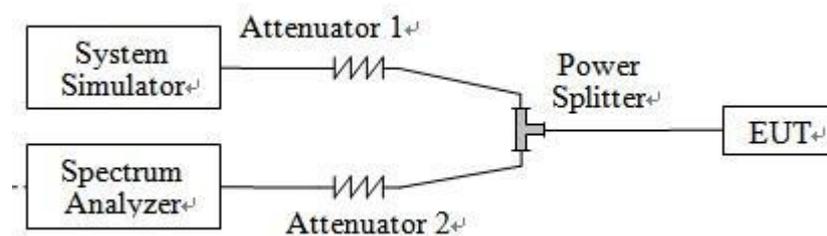

2.3.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

2.3.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

LTE Band 2					
BW (MHz)	Channel	Frequency (MHz)	Mode	99% Occupied Bandwidth(MHz)	26dBBandwidth (MHz)
1.4	18900	1880	QPSK	1.10	1.33
			16QAM	1.10	1.37
3	18900	1880	QPSK	2.75	3.15
			16QAM	2.75	3.14
5	18900	1880	QPSK	4.52	5.11
			16QAM	4.50	5.04
10	18900	1880	QPSK	8.96	9.84
			16QAM	8.94	9.66
15	18900	1880	QPSK	13.48	15.04
			16QAM	13.47	14.92
20	18900	1880	QPSK	18.39	20.60
			16QAM	18.41	20.72

LTE Band 5					
BW (MHz)	Channel	Frequency (MHz)	Mode	99% Occupied Bandwidth(MHz)	26dBBandwidth (MHz)
1.4	20525	836.5	QPSK	1.10	1.32
			16QAM	1.10	1.33
3	20525	836.5	QPSK	2.75	3.13
			16QAM	2.76	3.11
5	20525	836.5	QPSK	4.51	5.11
			16QAM	4.49	5.03
10	20525	836.5	QPSK	8.95	9.79
			16QAM	8.94	9.72



LTE Band 17					
BW (MHz)	Channel	Frequency (MHz)	Mode	99% Occupied Bandwidth(MHz)	26dB Bandwidth (MHz)
5	23790	710	QPSK	4.54	5.18
			16QAM	4.52	5.15
10	23790	710	QPSK	8.99	9.81
			16QAM	8.97	9.70

LTE Band 41					
BW (MHz)	Channel	Frequency (MHz)	Mode	99% Occupied Bandwidth(MHz)	26dB Bandwidth (MHz)
5	40620	2593	QPSK	4.51	5.10
			16QAM	4.51	5.09
10	40620	2593	QPSK	8.94	9.75
			16QAM	8.94	9.60
15	40620	2593	QPSK	13.45	14.91
			16QAM	13.46	14.87
20	40620	2593	QPSK	18.38	20.62
			16QAM	18.31	20.74

Note: The maximum RB configurations of the 99% Occupied Bandwidth and 26dB Bandwidth summary as below:

BW1.4MHz RB setting: RB Size 6,RB Offset 0

BW3MHz RB setting: RB Size 15,RB Offset 0


BW5MHz RB setting: RB Size 25,RB Offset 0

BW10MHz RB setting: RB Size 50,RB Offset 0


BW15MHz RB setting: RB Size 75,RB Offset 0

BW20MHz RB setting: RB Size 100,RB Offset 0


2.3.6 Test Result (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth

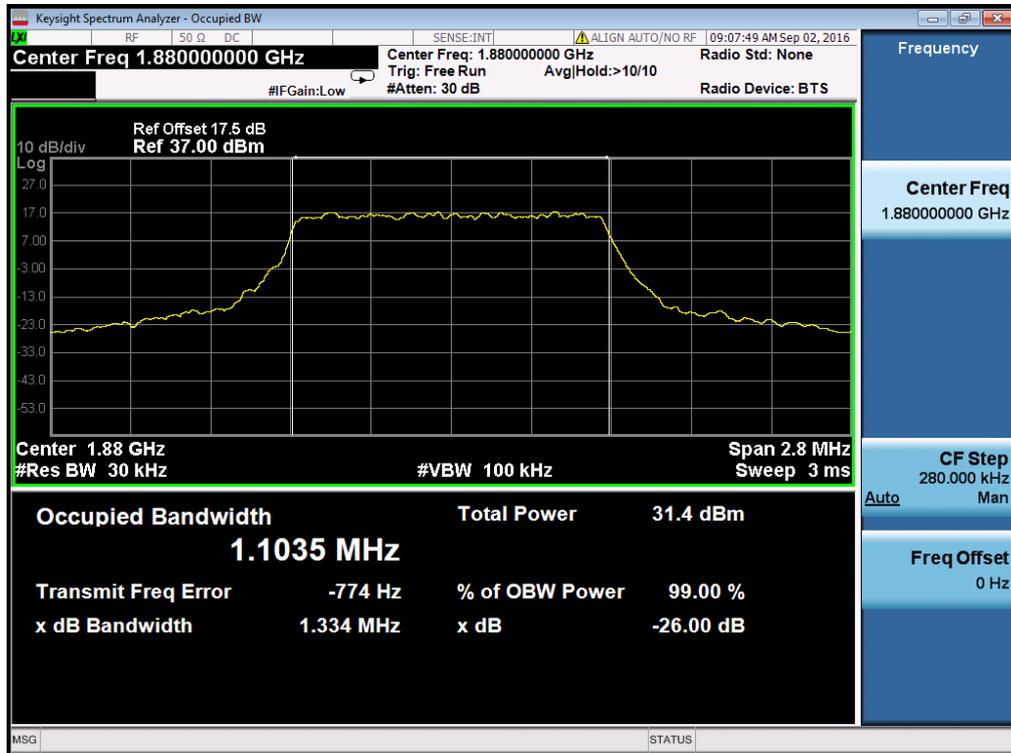


Occupied Bandwidth LTE Band 2 1.4MHz/QPSK

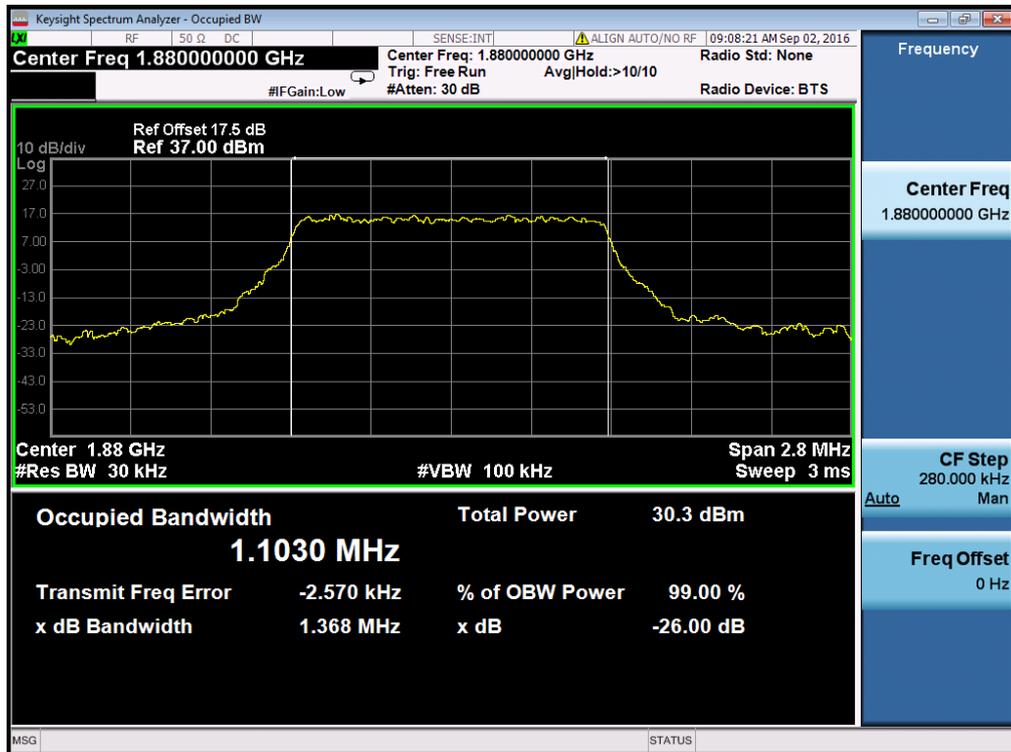


Occupied Bandwidth LTE Band 2 1.4MHz/16QAM

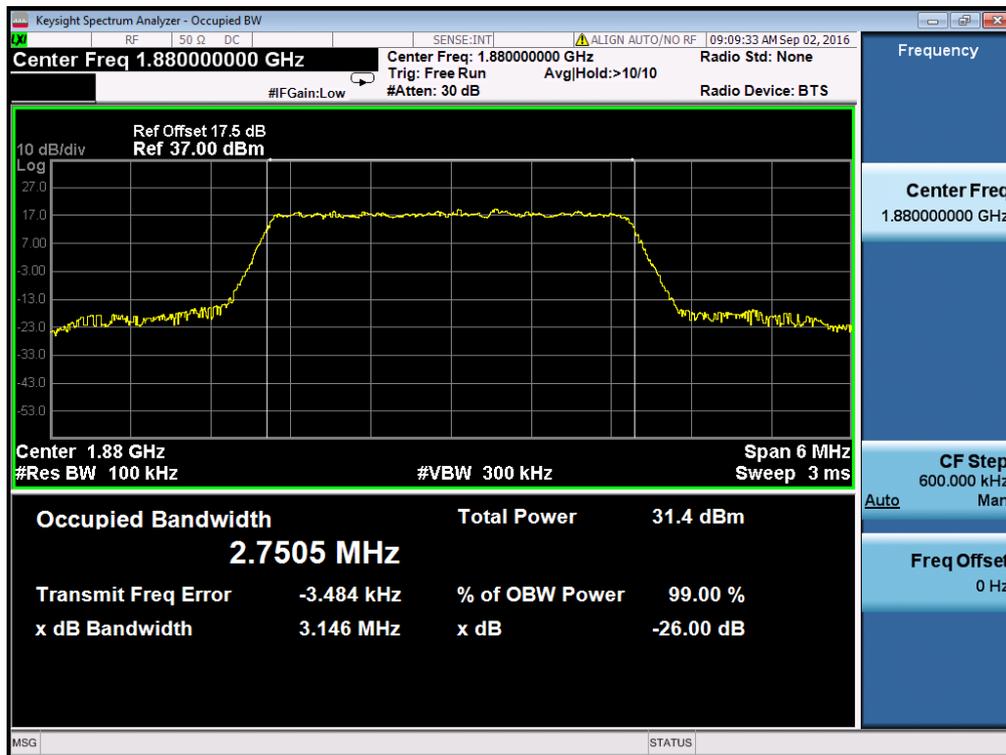


Occupied Bandwidth LTE Band 2/3MHz/QPSK

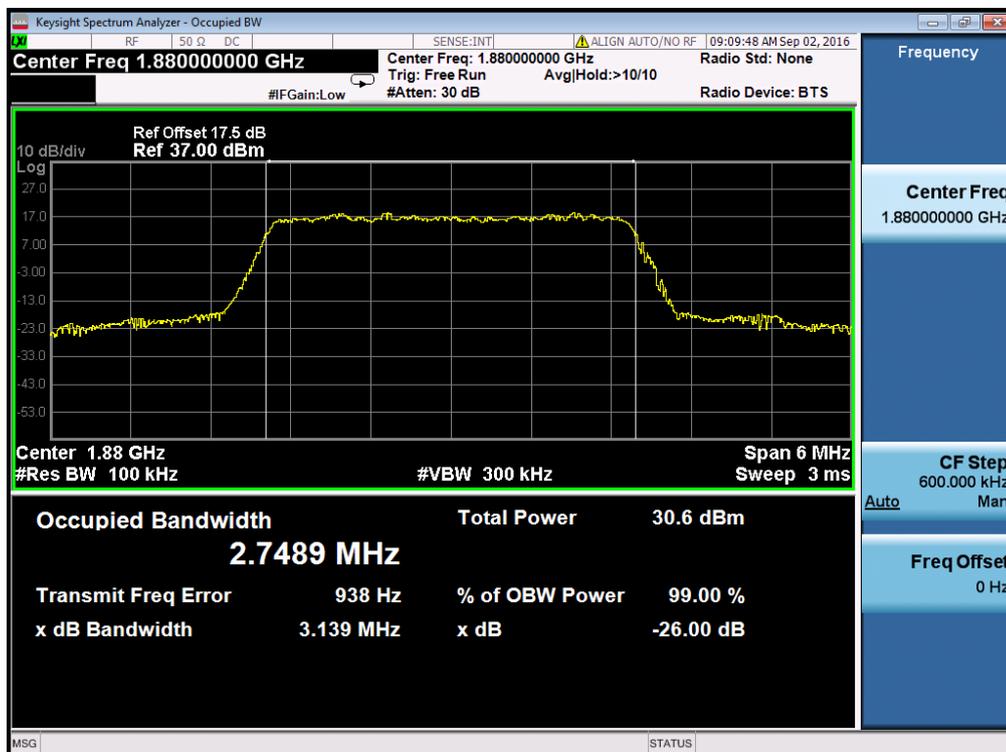


Occupied Bandwidth LTE Band 2/3MHz/16QAM

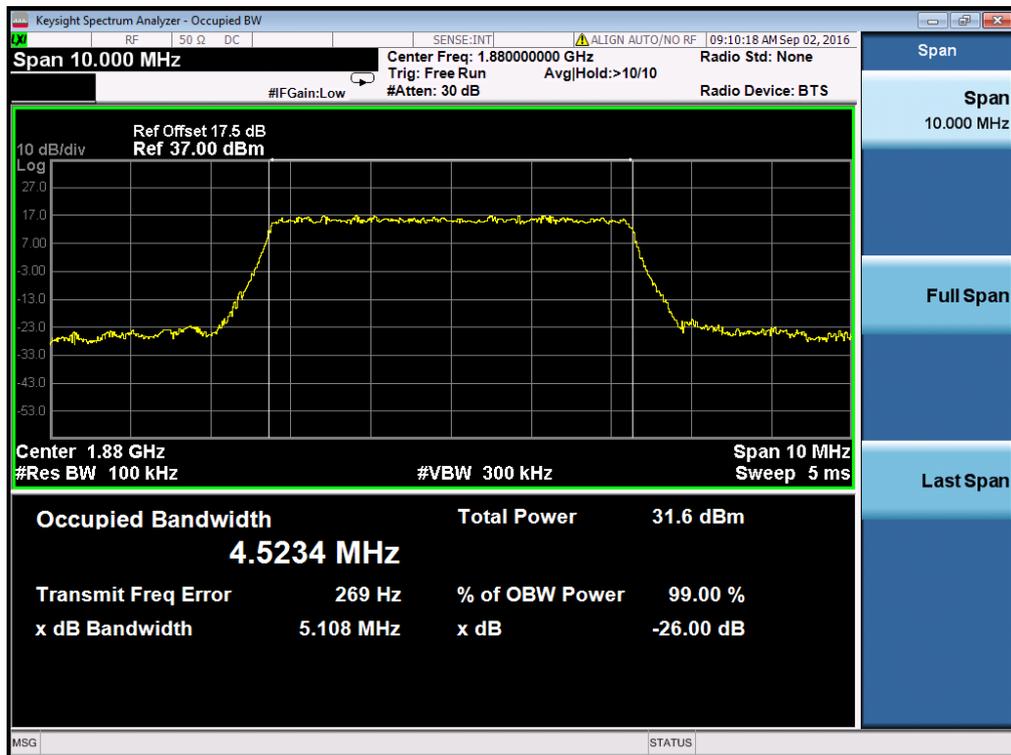


Occupied Bandwidth LTE Band 2/5MHz/QPSK

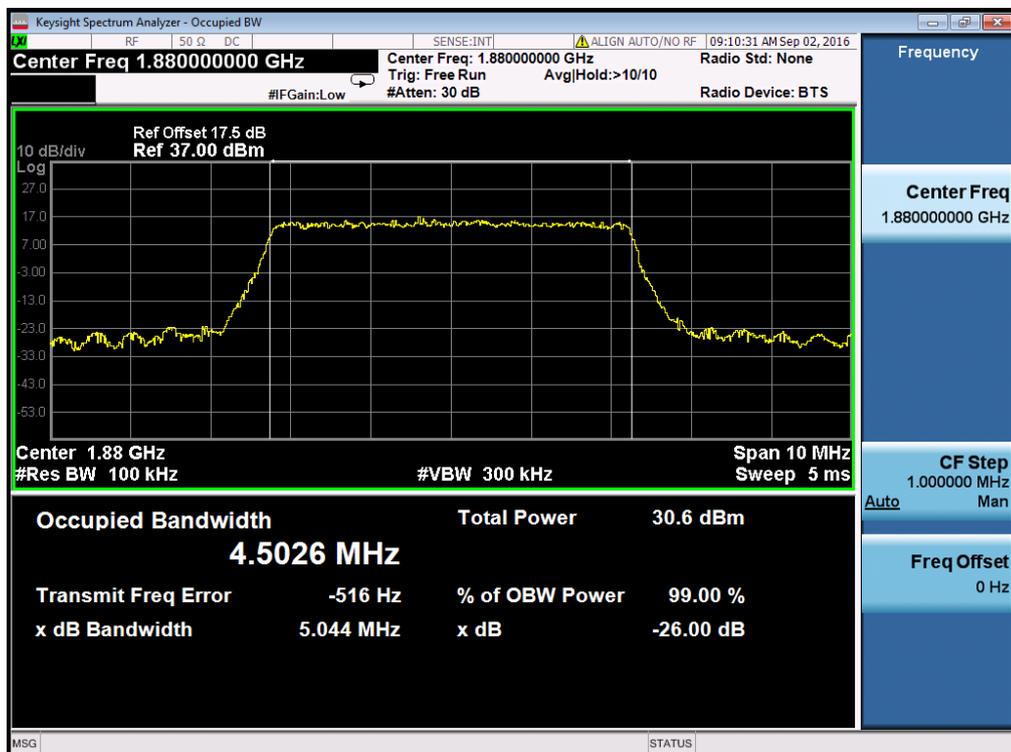


Occupied Bandwidth LTE Band 2/5MHz/16QAM

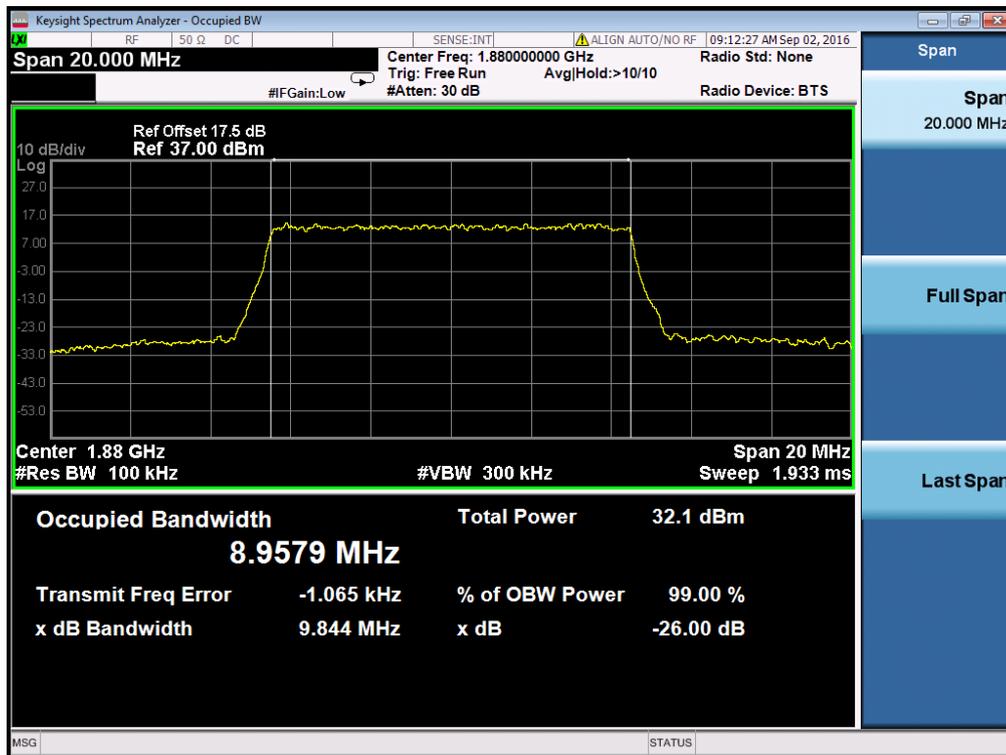


Occupied Bandwidth LTE Band 2/10MHz/QPSK

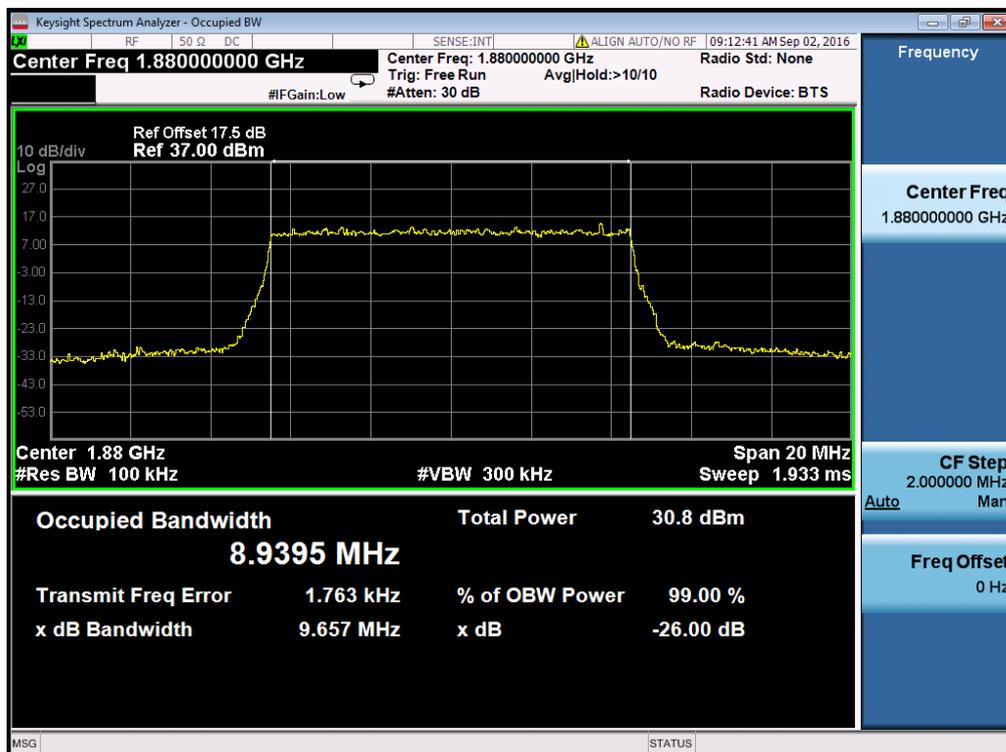


Occupied Bandwidth LTE Band 2/10MHz/16QAM

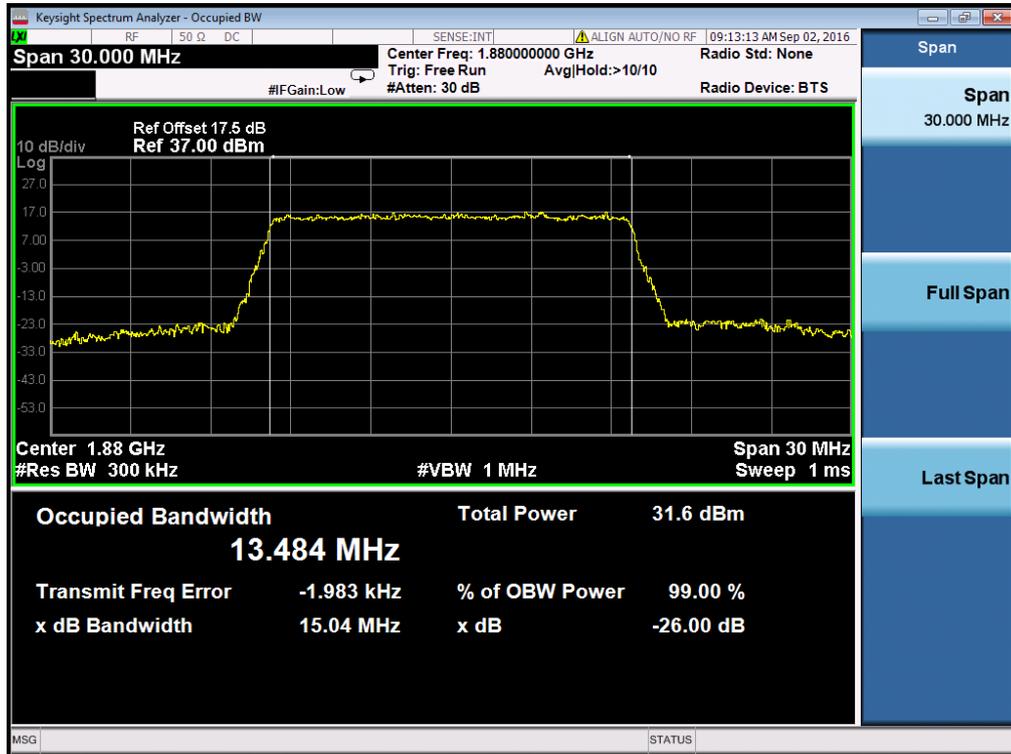


Occupied Bandwidth LTE Band 2/15MHz/QPSK

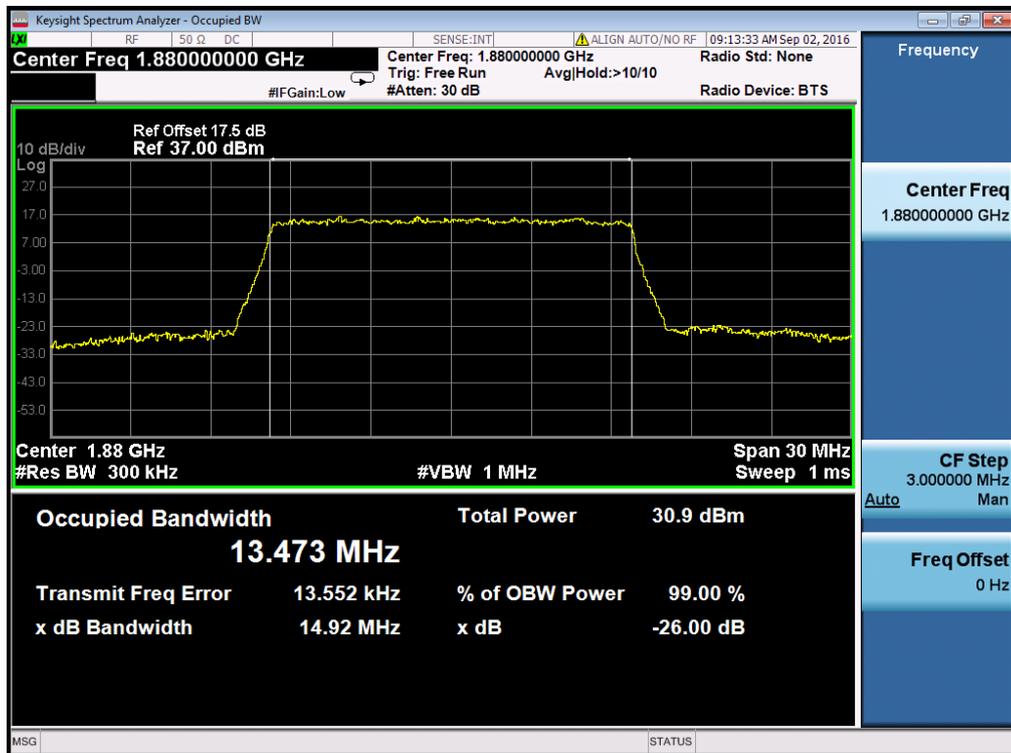


Occupied Bandwidth LTE Band 2/15MHz/16QAM

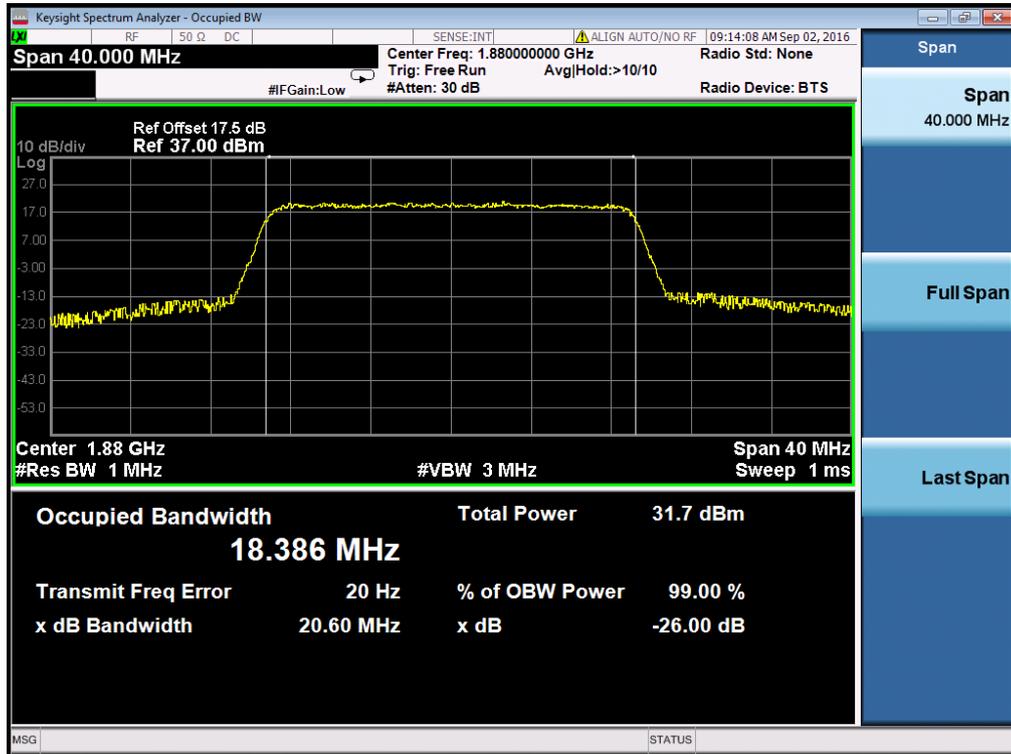


Occupied Bandwidth LTE Band 2/20MHz/QPSK

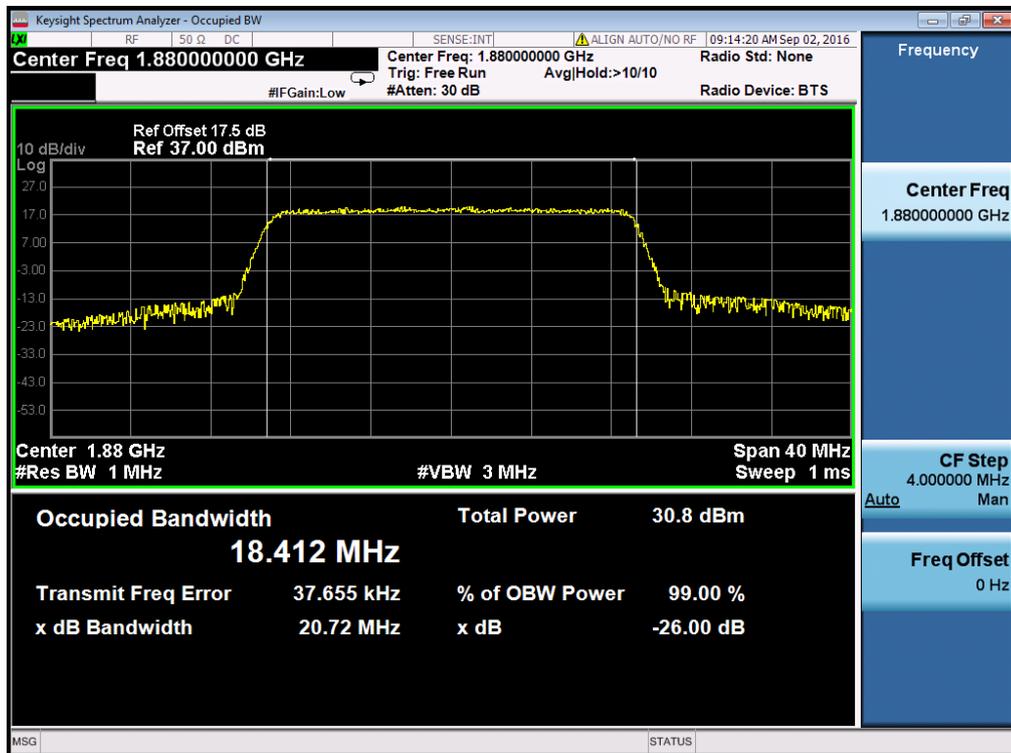


Occupied Bandwidth LTE Band 2/20MHz/16QAM

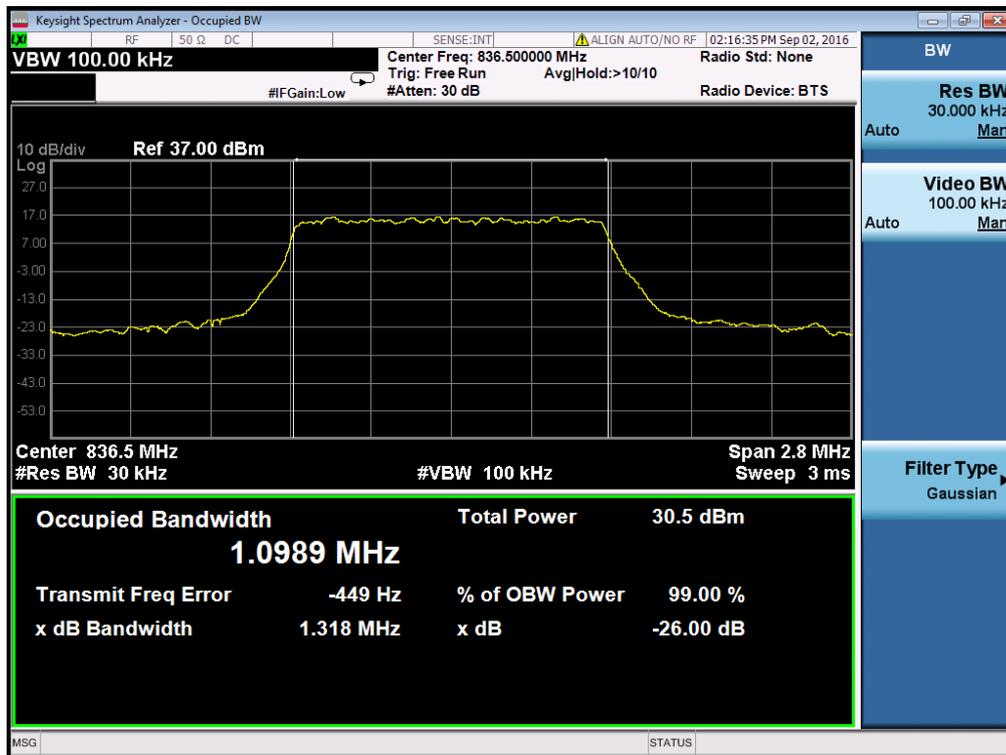


Occupied Bandwidth LTE Band 5/1.4MHz/QPSK

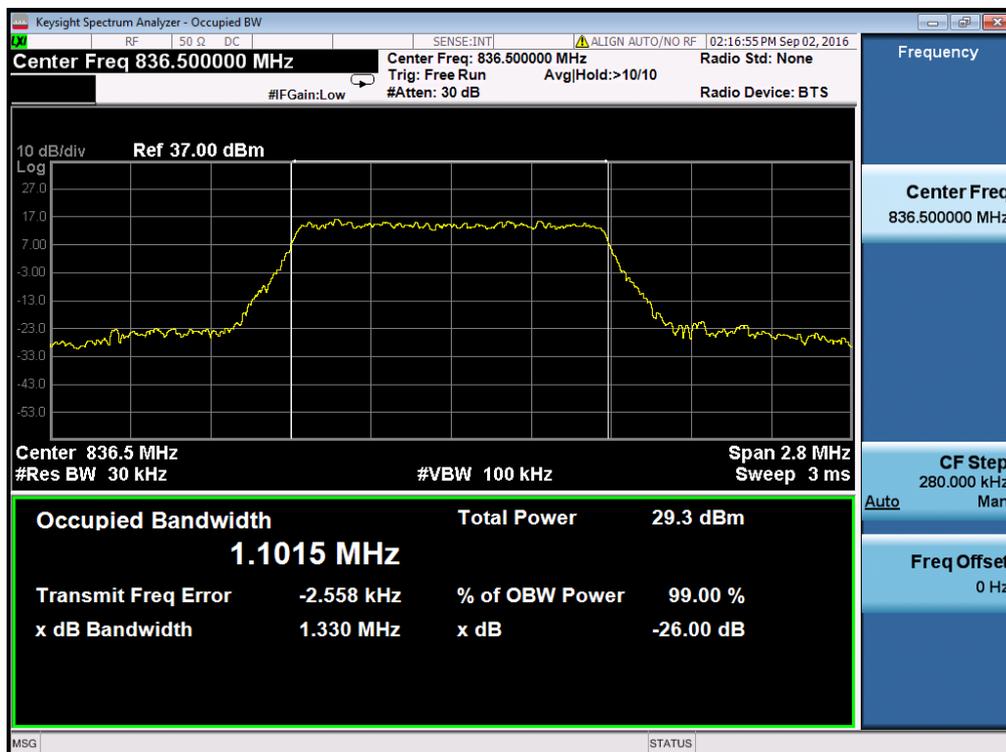


Occupied Bandwidth LTE Band 5/1.4MHz/16QAM

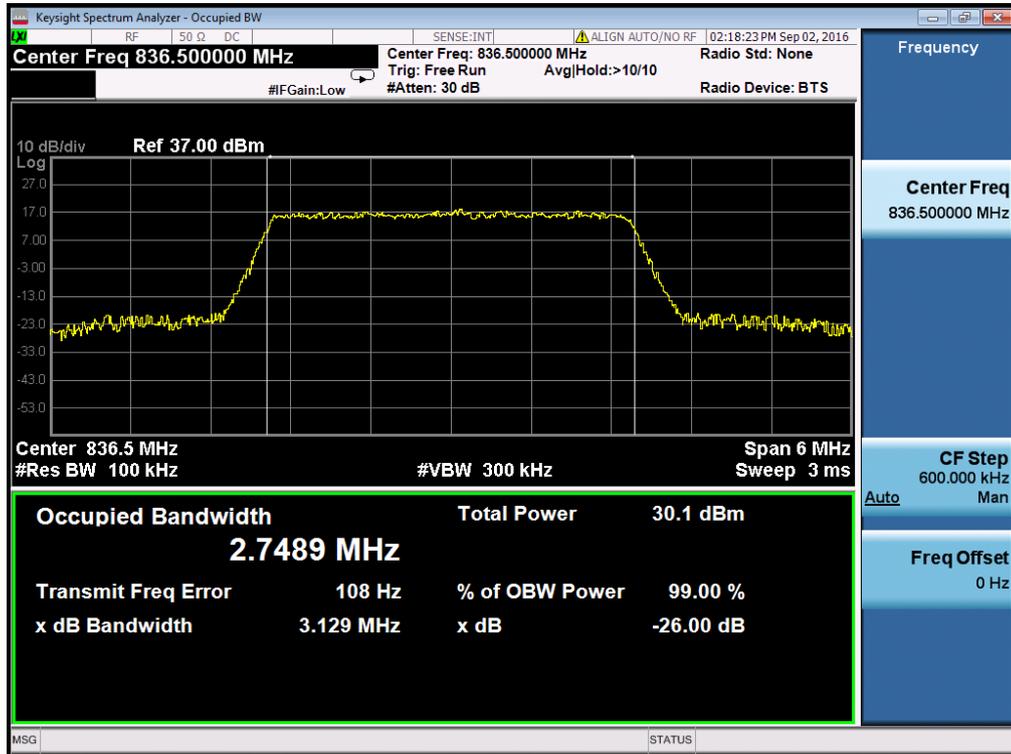


Occupied Bandwidth LTE Band 5/3MHz/QPSK

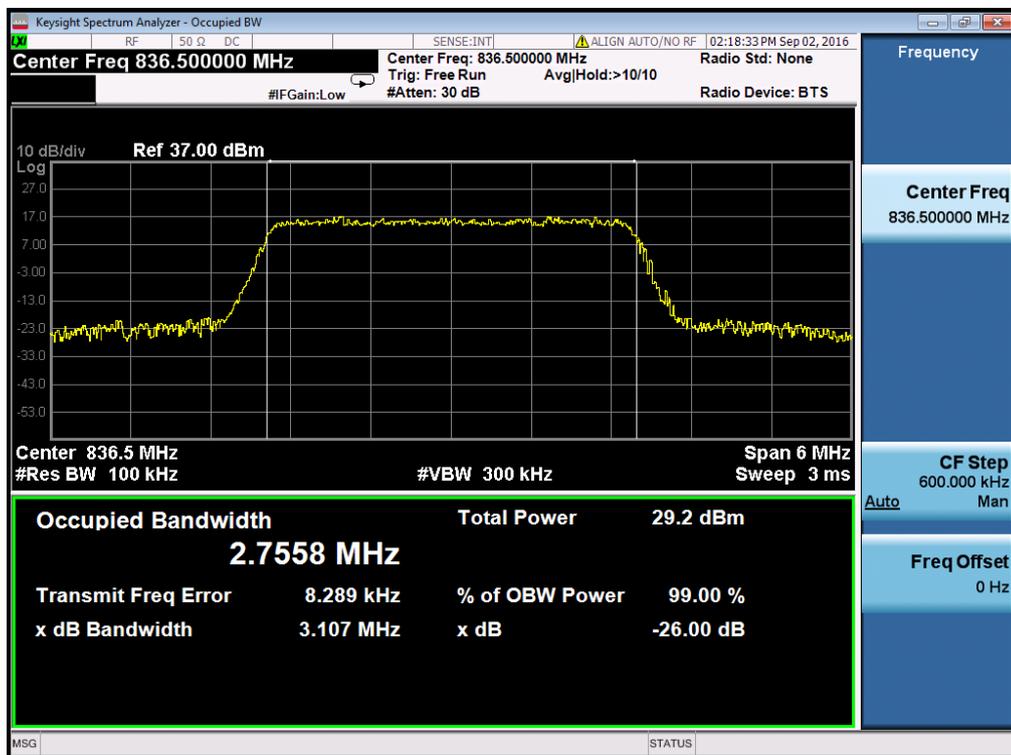


Occupied Bandwidth LTE Band 5/3MHz/16QAM

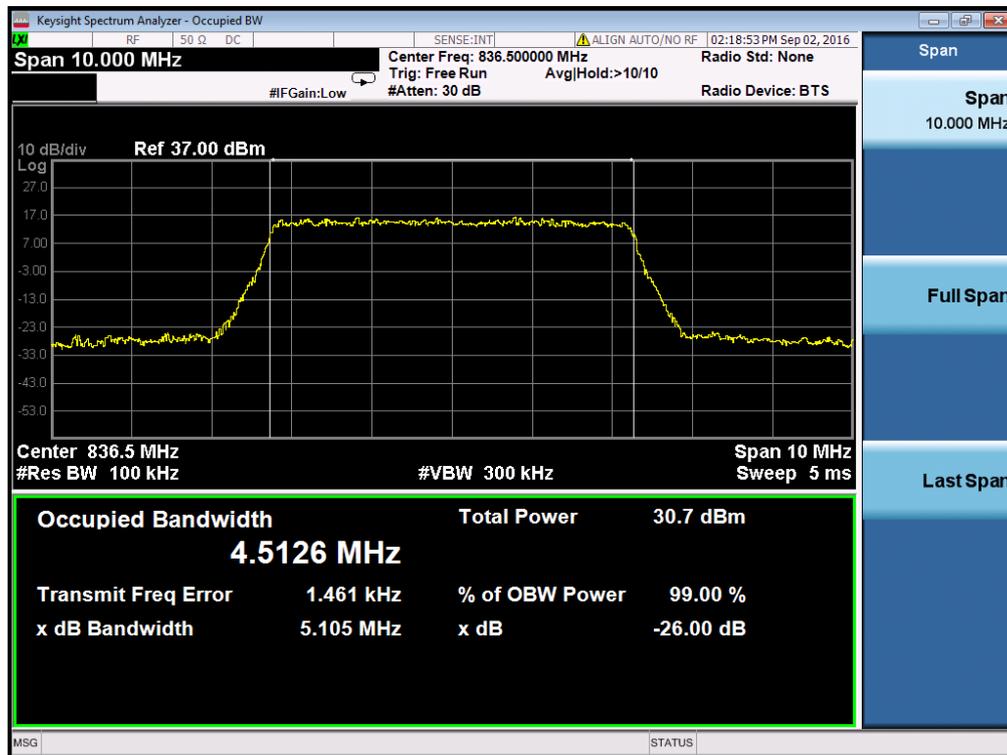


Occupied Bandwidth LTE Band 5/5MHz/QPSK

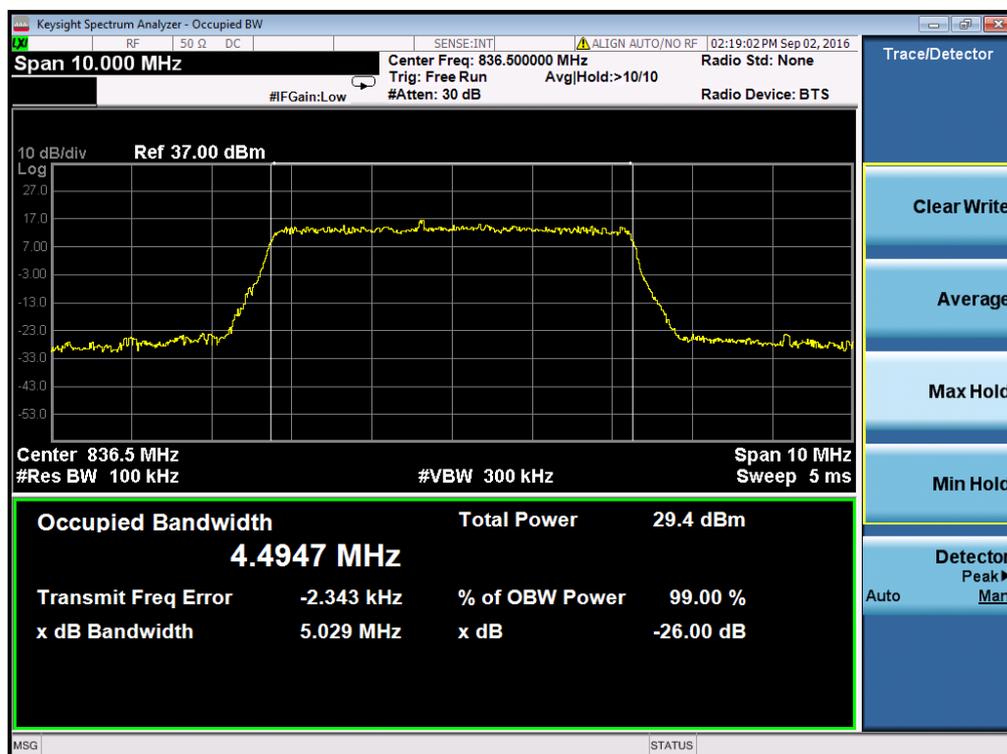


Occupied Bandwidth LTE Band 5/5MHz/16QAM

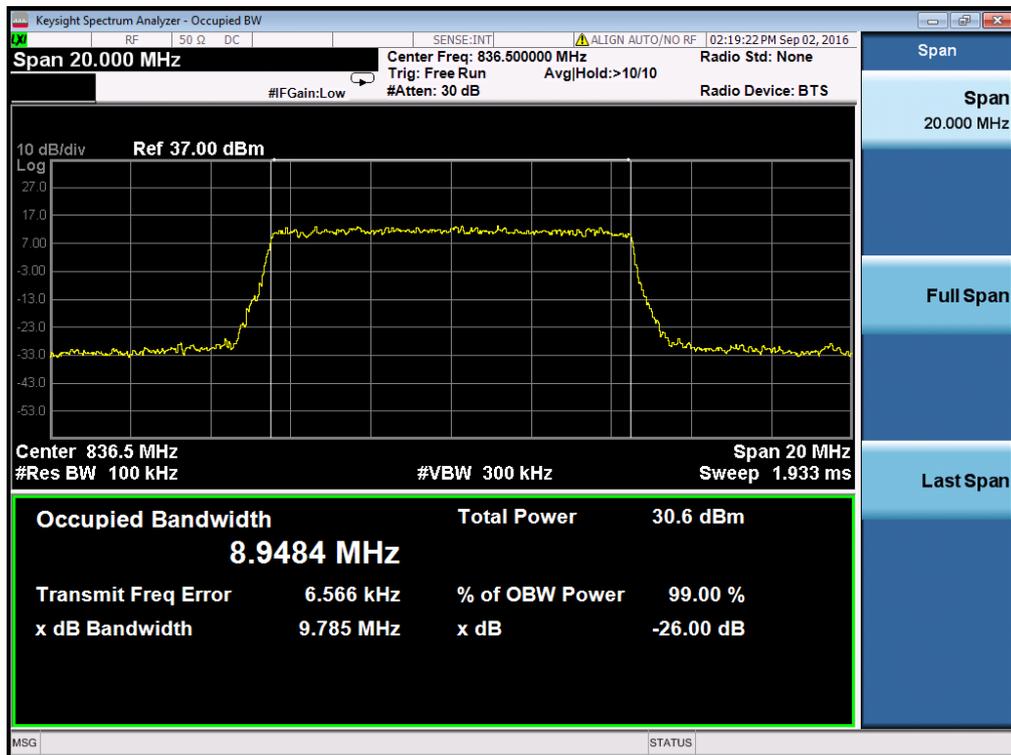


Occupied Bandwidth LTE Band 5/10MHz/QPSK

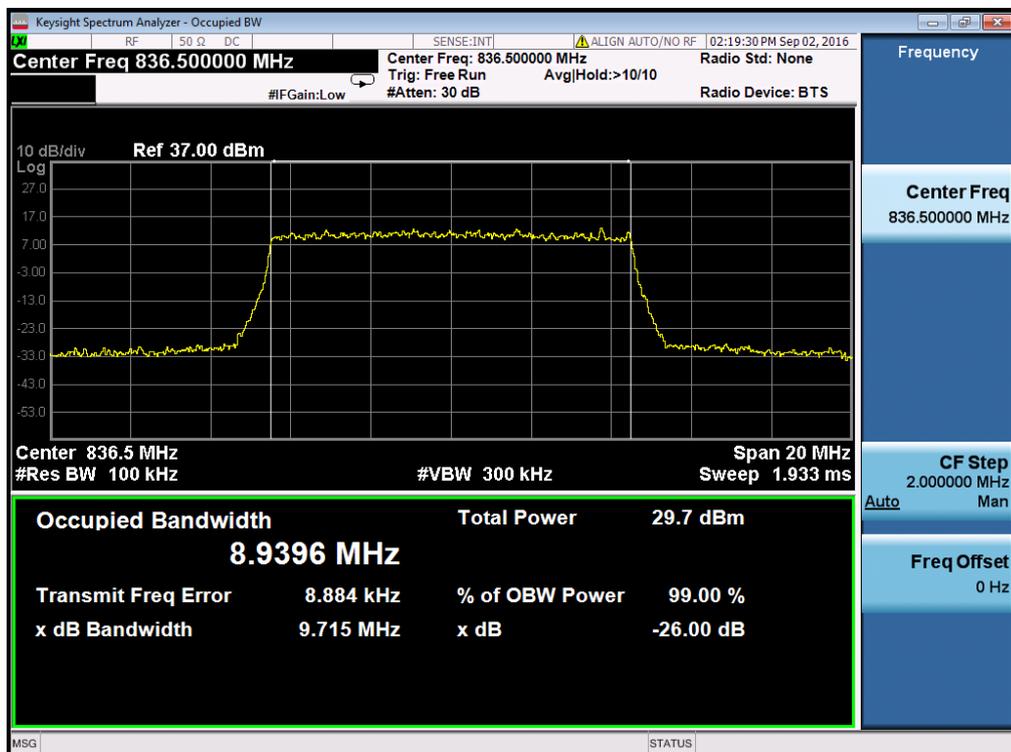


Occupied Bandwidth LTE Band 5/10MHz/16QAM

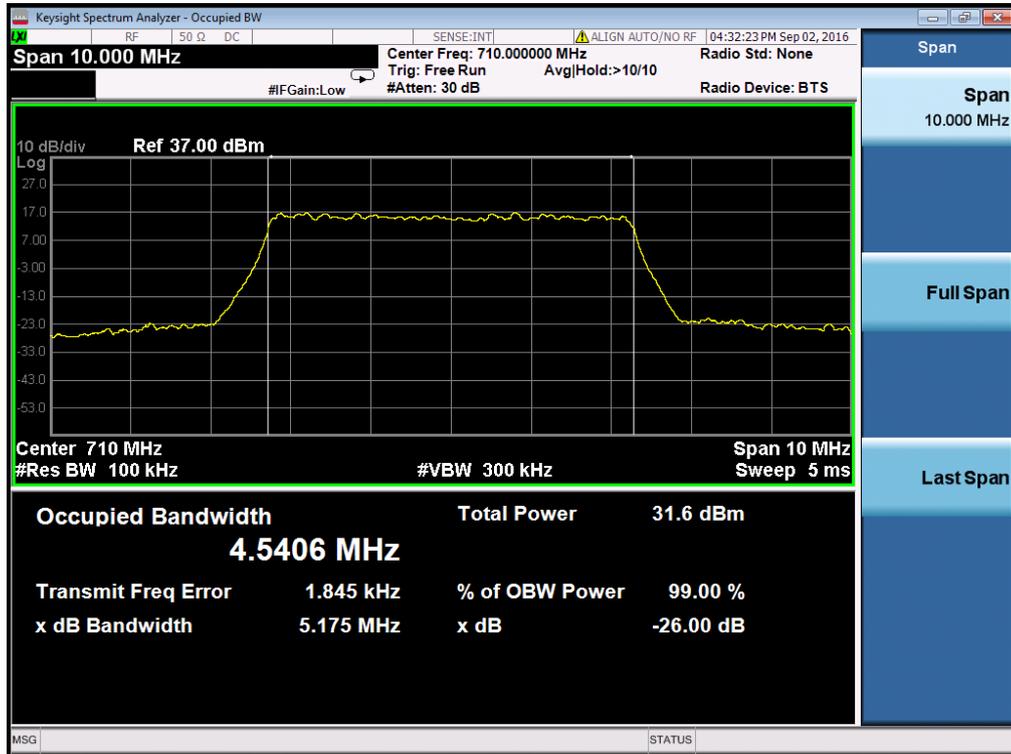


Occupied Bandwidth LTE Band 17/5MHz/QPSK

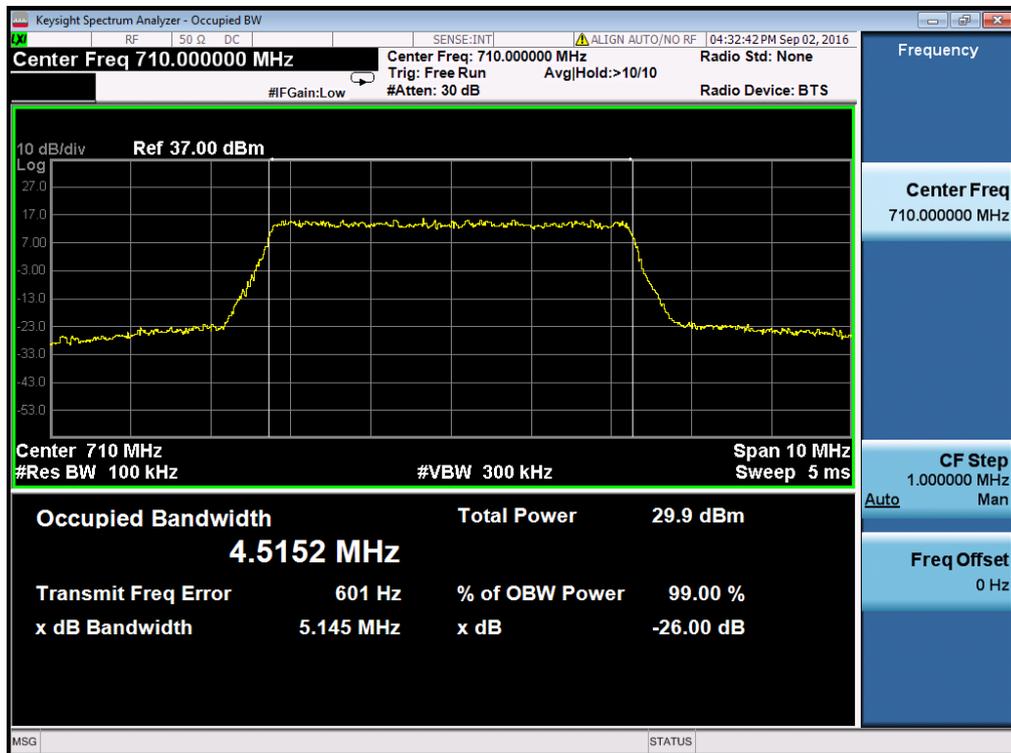


Occupied Bandwidth LTE Band 17/5MHz/16QAM

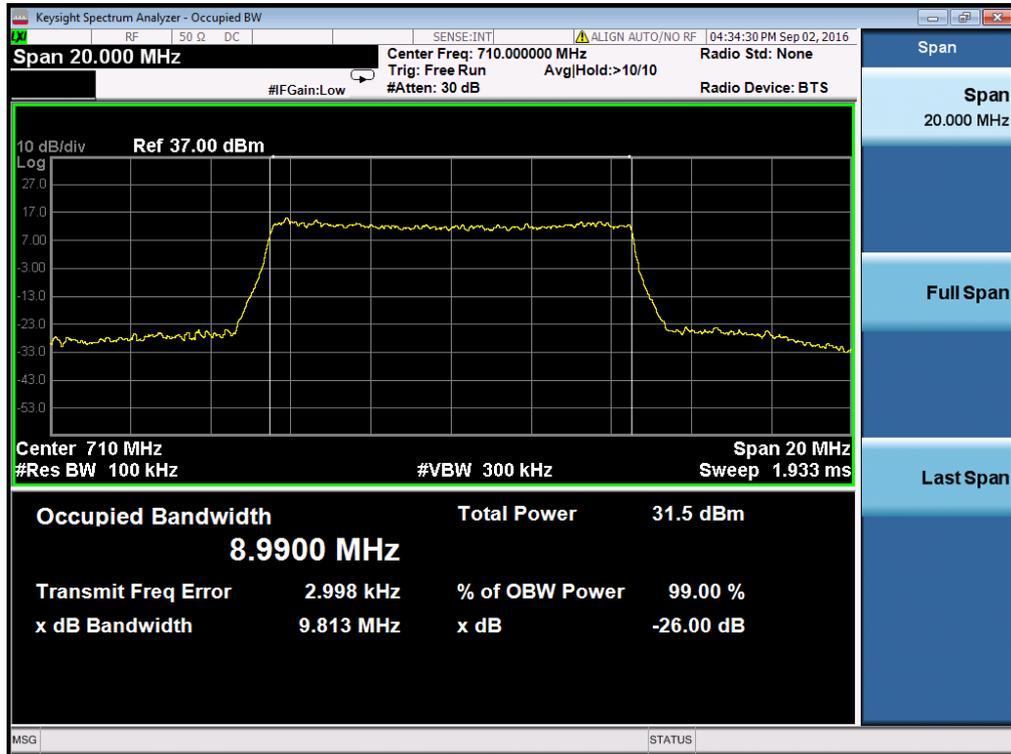


Occupied Bandwidth LTE Band 17/10MHz/QPSK

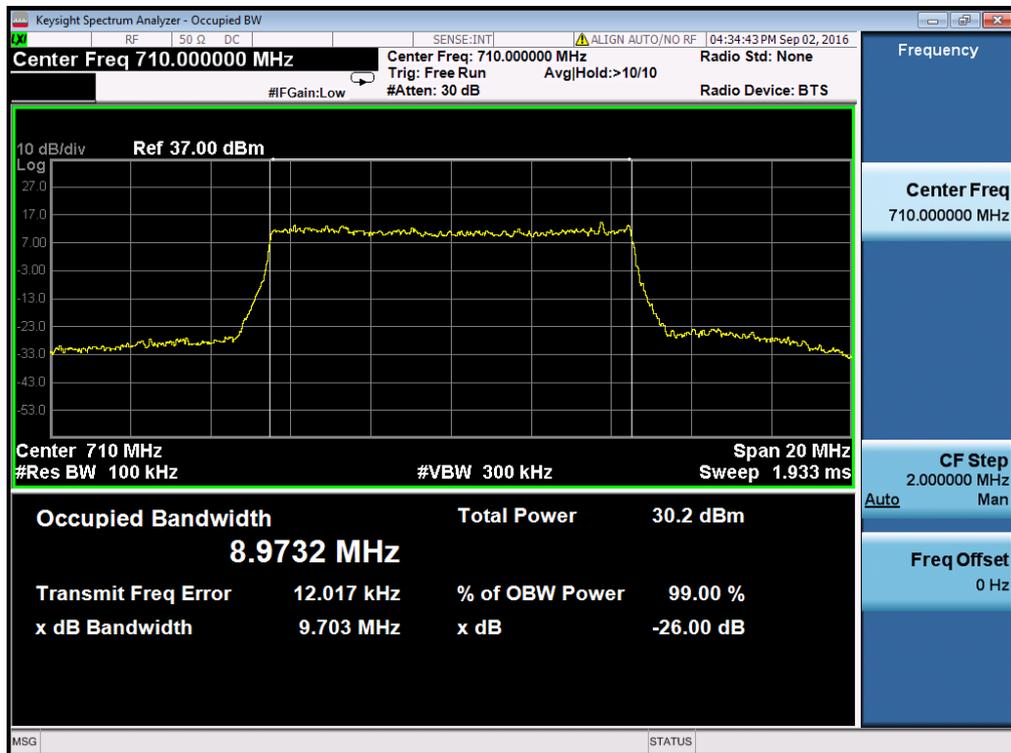


Occupied Bandwidth LTE Band 17/10MHz/16QAM

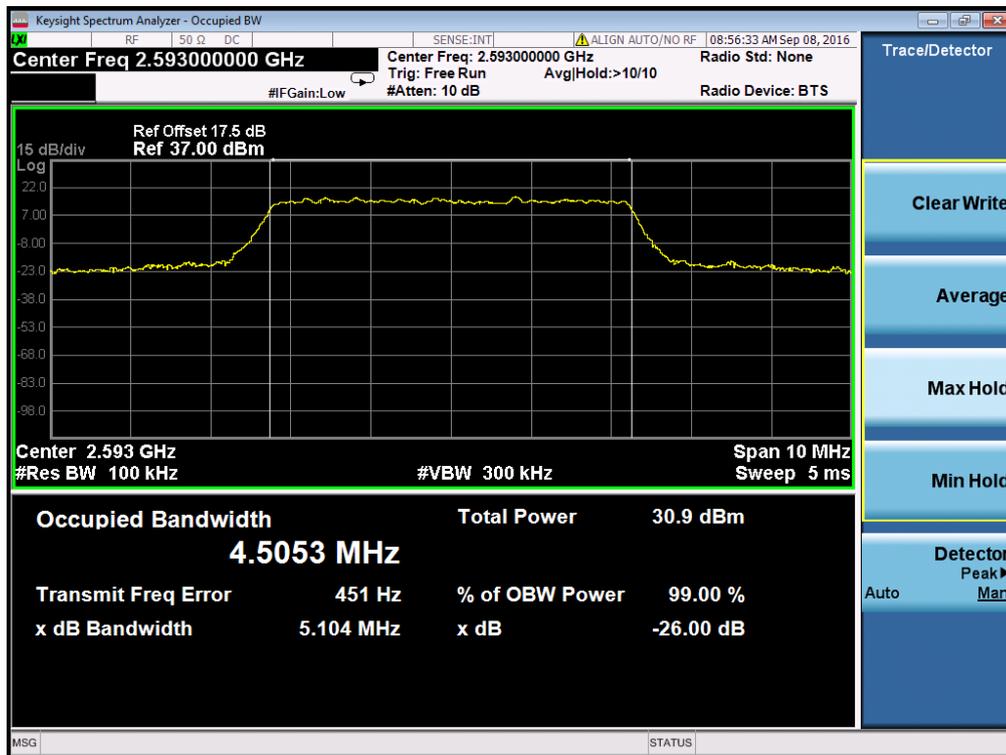

Occupied Bandwidth LTE Band 41/5MHz/QPSK

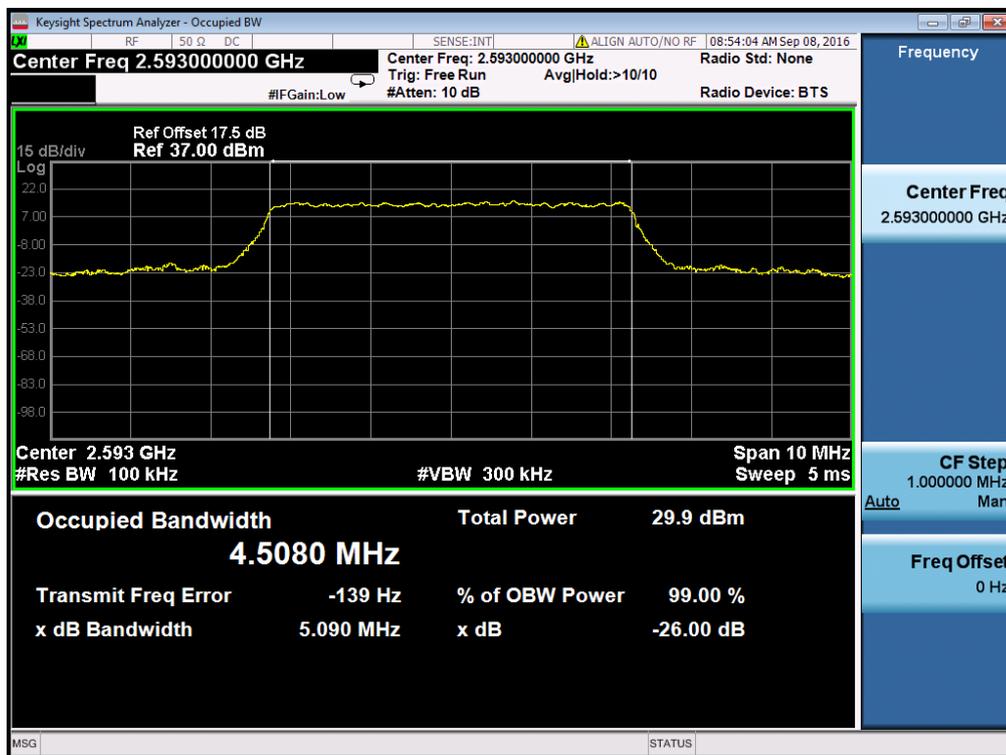


Occupied Bandwidth LTE Band 41/5MHz/16QAM

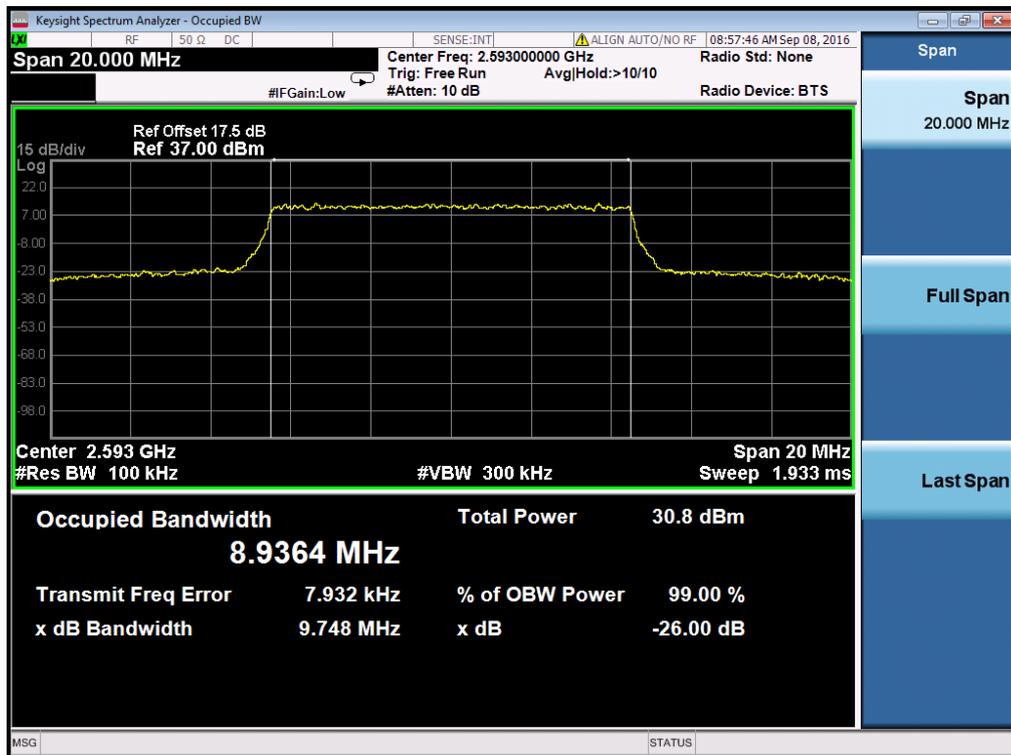

Occupied Bandwidth LTE Band 41/10MHz/QPSK




Occupied Bandwidth LTE Band 41/10MHz/16QAM

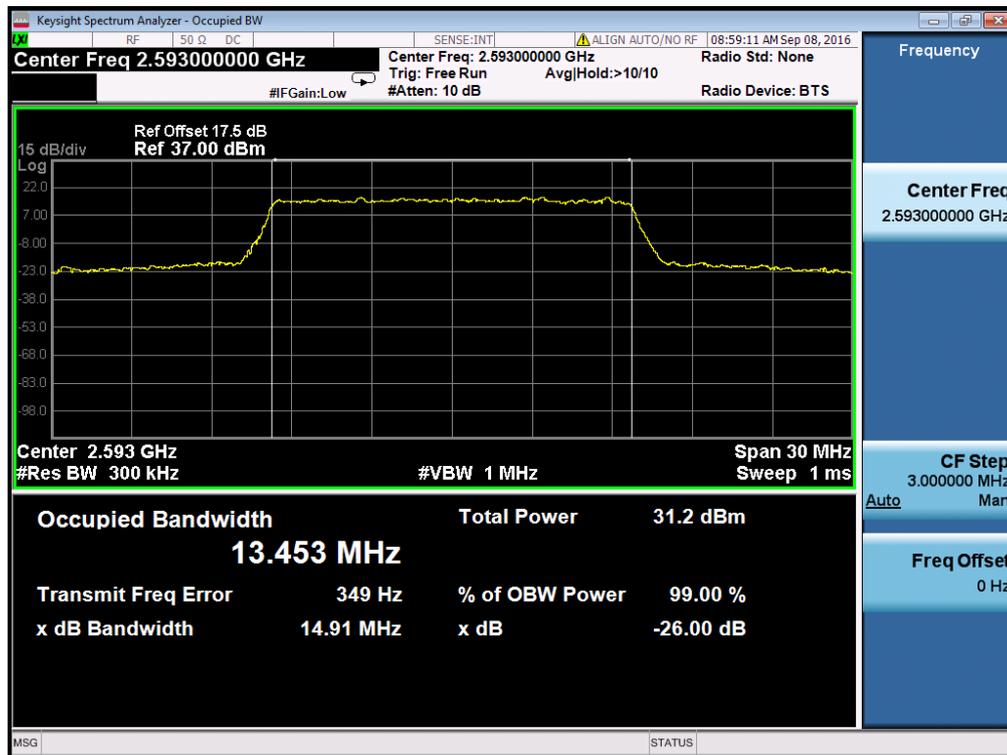


Occupied Bandwidth LTE Band 41/15MHz/QPSK



Occupied Bandwidth LTE Band 41/15MHz/16QAM

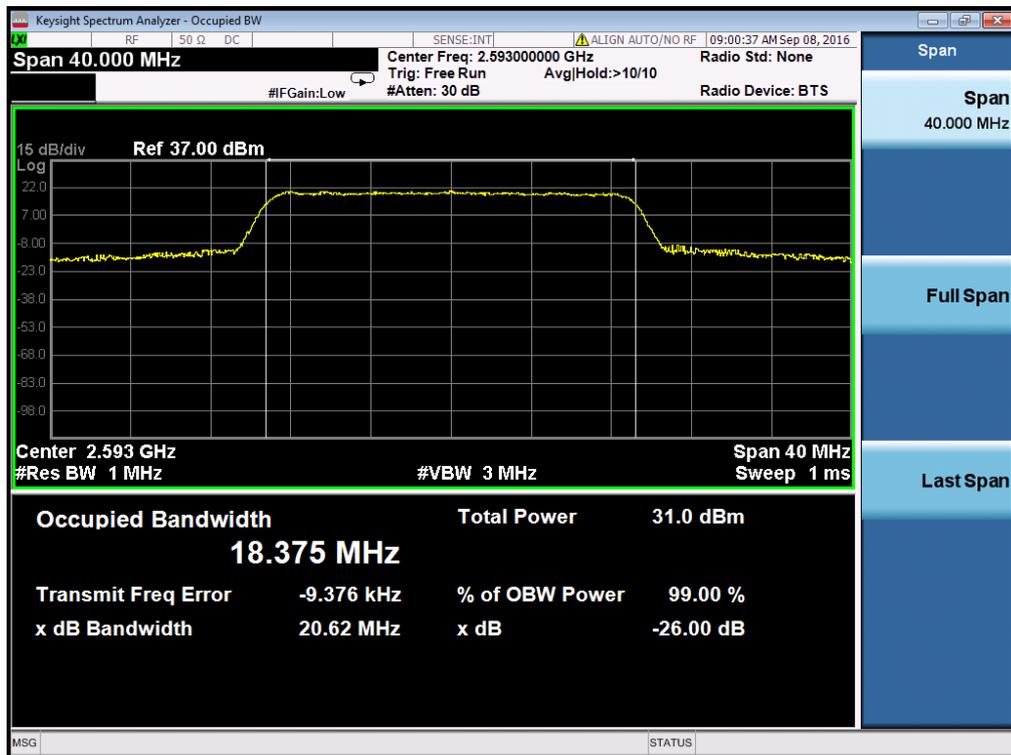

Occupied Bandwidth LTE Band 41/20MHz/QPSK

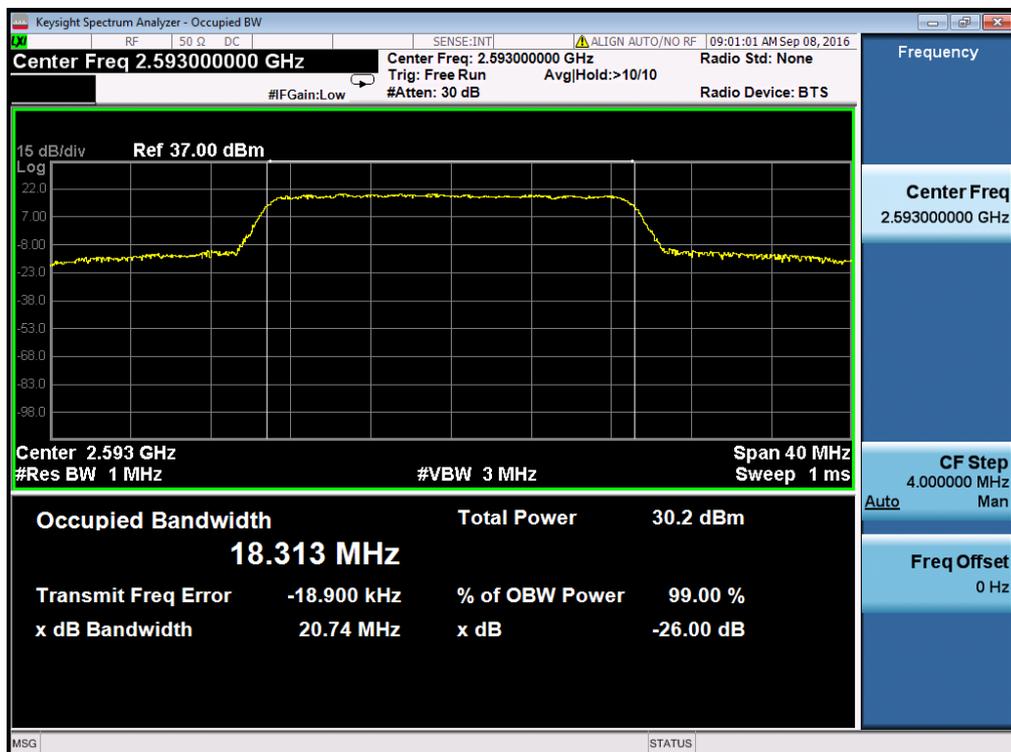

Occupied Bandwidth LTE Band 41/20MHz/16QAM

2.4 Frequency Stability

2.4.1 Requirement


According to FCC section 27.54, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3 Test Setup

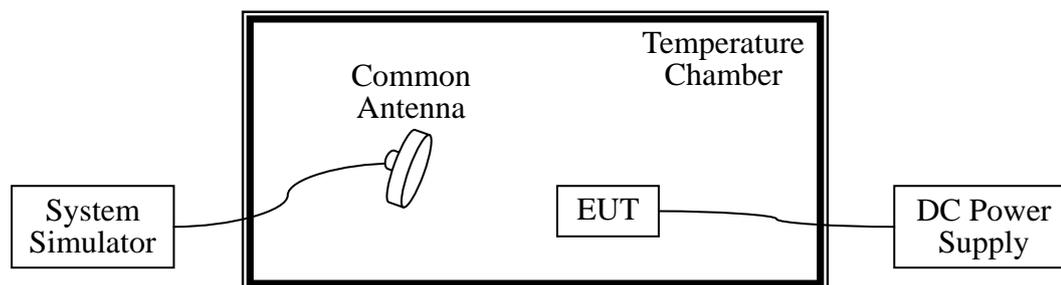

2.4.4 Test Procedures

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized



before testing. Power was applied and the maximum change in frequency was recorded within one minute.

3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. The nominal, highest and lowest extreme voltages were tested, which are specified by the applicant; the normal temperature here used is 25°C.
5. The variation in frequency was measured for the worst case.

2.4.5 Test Result of Frequency Stability

1. LTE Band 2, QPSK, BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 1880MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	34	0.02	2.5
	-20	20	0.01	
	-10	54	0.03	
	0	38	0.02	
	+10	16	0.01	
	+20	58	0.03	
	+30	24	0.01	
	+40	18	0.01	
	+55	49	0.03	
4.2	+25	35	0.02	
3.5	+25	22	0.01	

2. LTE Band 2, 16QAM, BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 1880MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	21	0.01	2.5
	-20	29	0.02	
	-10	52	0.03	
	0	32	0.02	
	+10	22	0.01	
	+20	23	0.01	
	+30	52	0.03	
	+40	17	0.01	
	+55	32	0.02	
4.2	+25	41	0.02	
3.5	+25	49	0.03	

3. LTE Band 5, QPSK ,BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 836.5MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	26	0.03	2.5
	-20	18	0.02	
	-10	19	0.02	
	0	36	0.04	
	+10	18	0.02	
	+20	9	0.01	
	+30	21	0.02	
	+40	38	0.04	
+55	27	0.03		
4.2	+25	24	0.03	
3.5	+25	33	0.04	

4. LTE Band 5, 16QAM ,BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 836.5MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	18	0.02	2.5
	-20	32	0.04	
	-10	24	0.03	
	0	21	0.02	
	+10	11	0.01	
	+20	16	0.02	
	+30	10	0.01	
	+40	23	0.03	
	+55	17	0.02	
4.2	+25	31	0.04	
3.5	+25	23	0.03	

5. LTE Band 17, QPSK ,BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 710MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	14	0.02	2.5
	-20	23	0.03	
	-10	36	0.05	
	0	24	0.03	
	+10	23	0.03	
	+20	35	0.05	
	+30	15	0.02	
	+40	16	0.02	
+55	22	0.03		
4.2	+25	29	0.04	
3.5	+25	31	0.04	

6. LTE Band 17,16QAM ,BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 710MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	26	0.04	2.5
	-20	18	0.03	
	-10	34	0.05	
	0	15	0.02	
	+10	23	0.03	
	+20	17	0.02	
	+30	27	0.04	
	+40	23	0.03	
	+55	24	0.03	
4.2	+25	30	0.04	
3.5	+25	36	0.05	

7. LTE Band 41, QPSK ,BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 2593MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	53	0.02	2.5
	-20	23	0.01	
	-10	36	0.01	
	0	61	0.02	
	+10	23	0.01	
	+20	35	0.01	
	+30	48	0.02	
	+40	27	0.01	
+55	55	0.02		
4.2	+25	44	0.02	
3.5	+25	35	0.01	

8. LTE Band 41,16QAM ,BW 10MHz

Test Conditions		Frequency Deviation BW 10MHz Middle Channel 2593MHz		
Power (VDC)	Temperature (°C)	Frequency Error	Frequency Error	Limit
		Hz	ppm	ppm
3.7	-30	49	0.02	2.5
	-20	58	0.02	
	-10	34	0.01	
	0	23	0.01	
	+10	30	0.01	
	+20	27	0.01	
	+30	55	0.02	
	+40	31	0.01	
	+55	45	0.02	
4.2	+25	31	0.01	
3.5	+25	47	0.02	

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

For Band 41:


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power(P) by a factor of at least $55+10 \log(P)$ dB. This calculated to be -25dBm.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

2.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

2.5.3 Test Setup

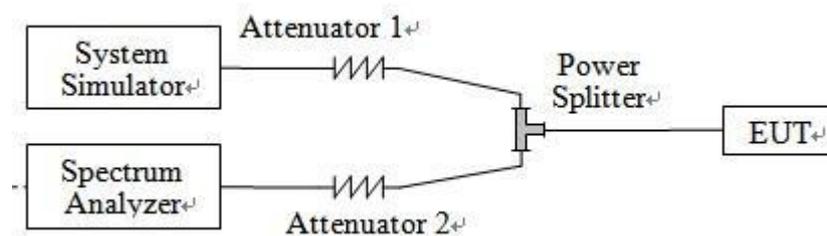

2.5.4 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was



measured.


4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.
8. For Band 41

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25$ dBm.


2.5.5 Test Result of Conducted Spurious Emission

Note: For 9 KHz to 30MHz: the amplitude of spurious emissions is attenuated by more than 20dB below the permissible value, so we not provide the test result here

Band	LTE Band 2	Channel	Low
Bandwidth	1.4MHz	Modulation	QPSK

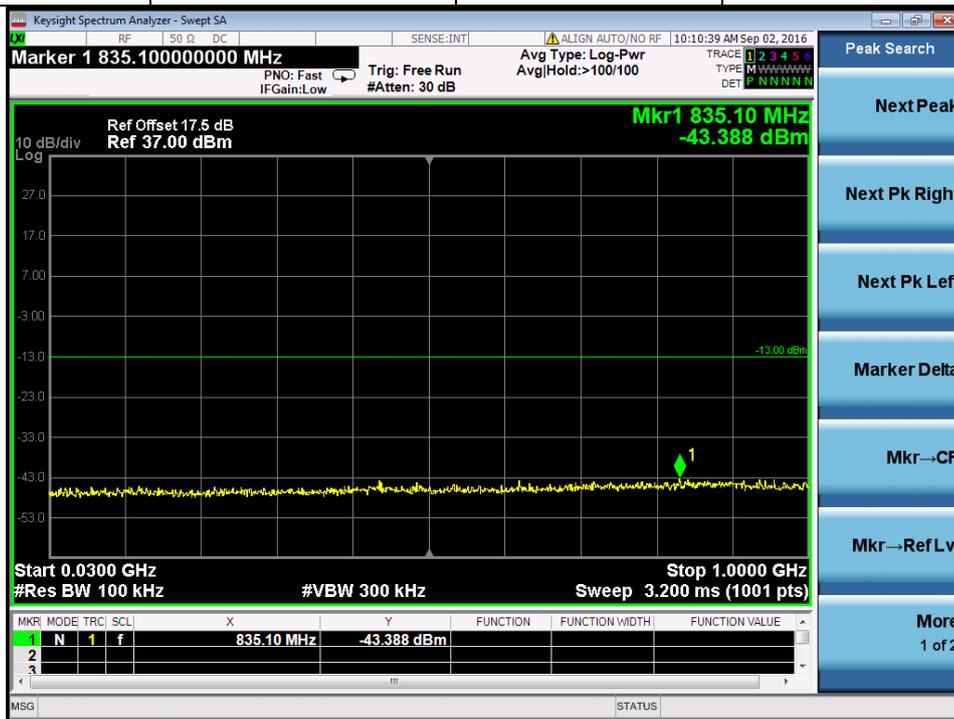


RB Size 1, RB Offset 0 30MHz to 1GHz

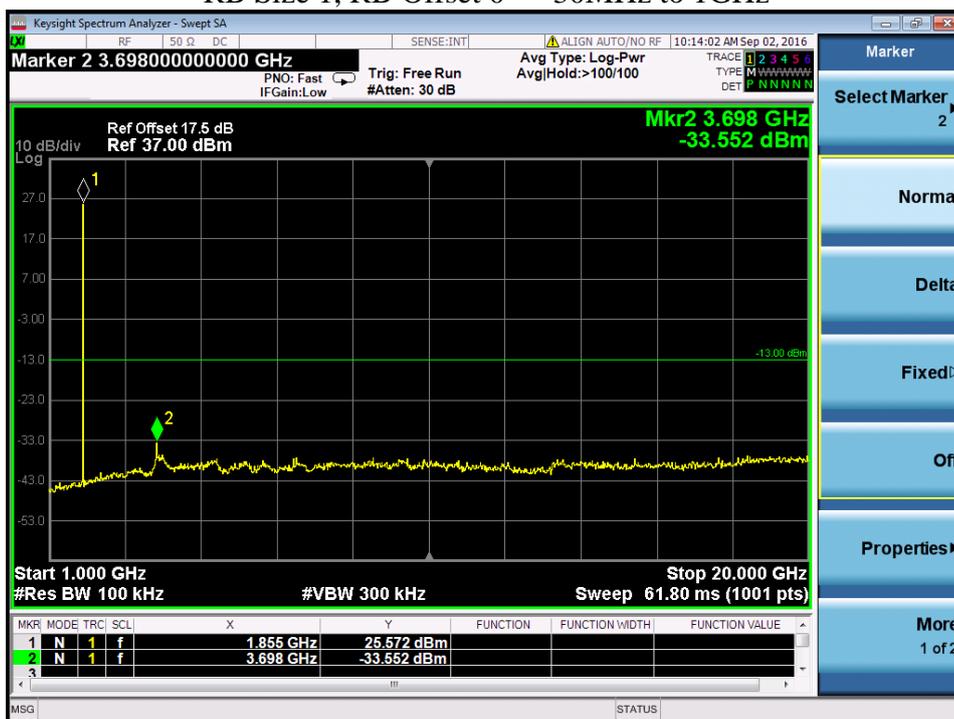


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Middle
Bandwidth	1.4MHz	Modulation	QPSK

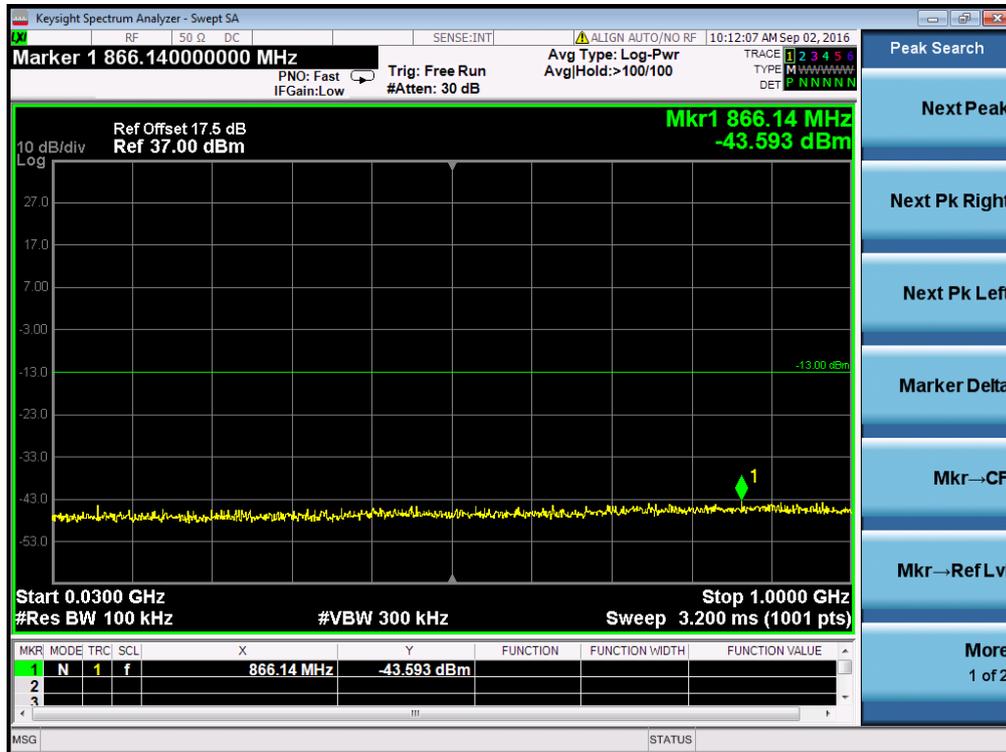


RB Size 1, RB Offset 0 30MHz to 1GHz

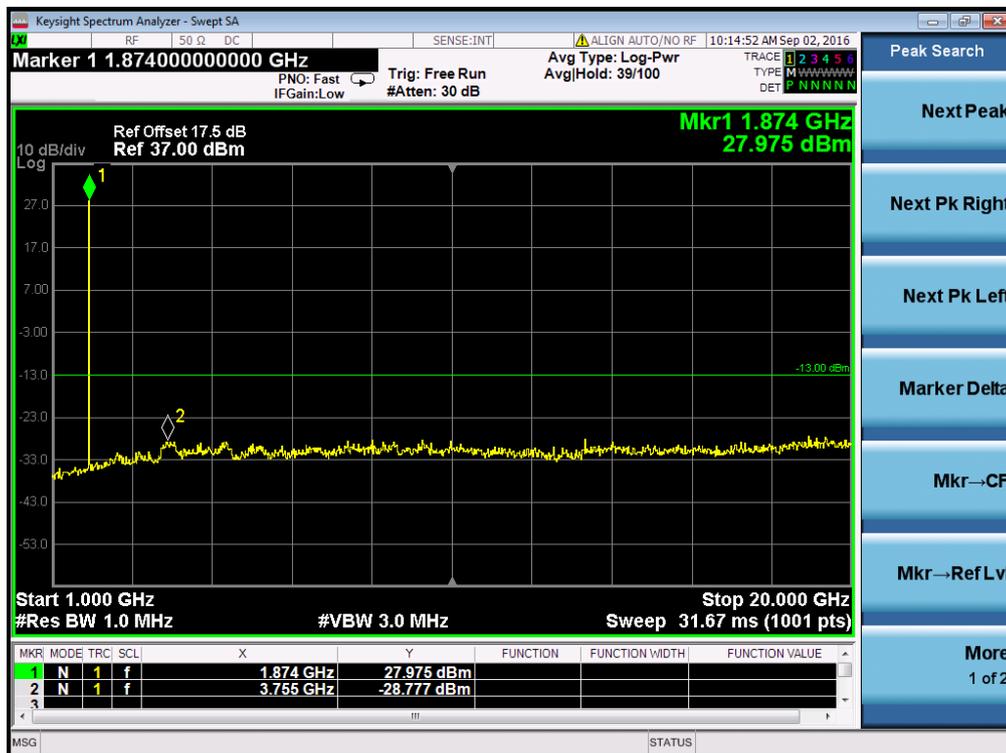


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	High
Bandwidth	1.4MHz	Modulation	QPSK

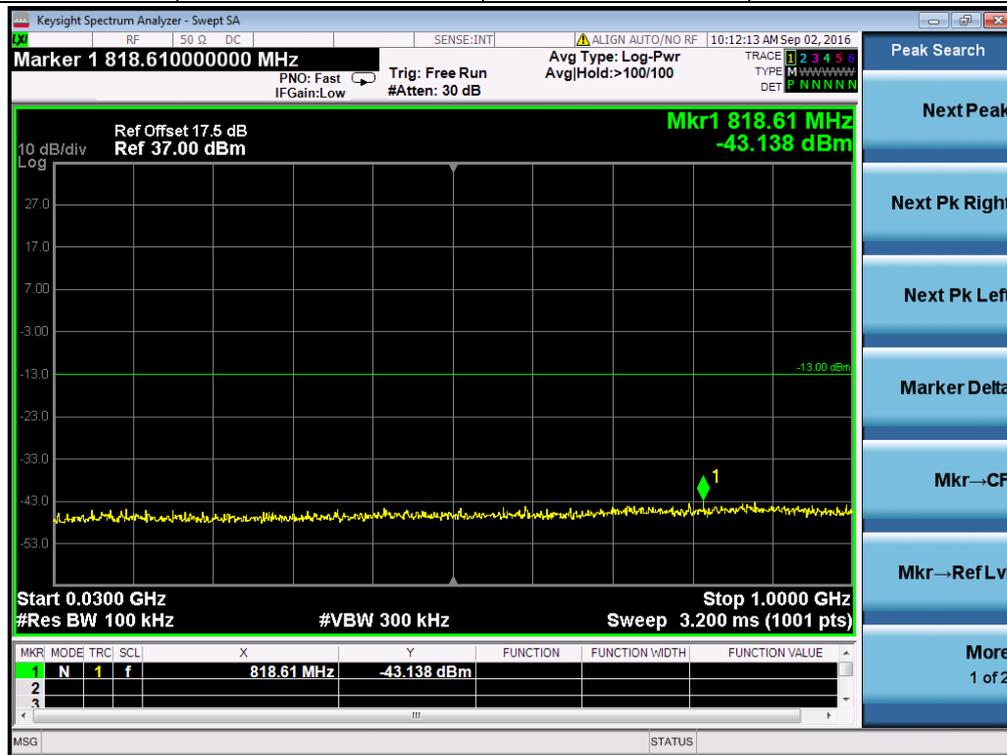


RB Size 1, RB Offset 0 30MHz to 1GHz

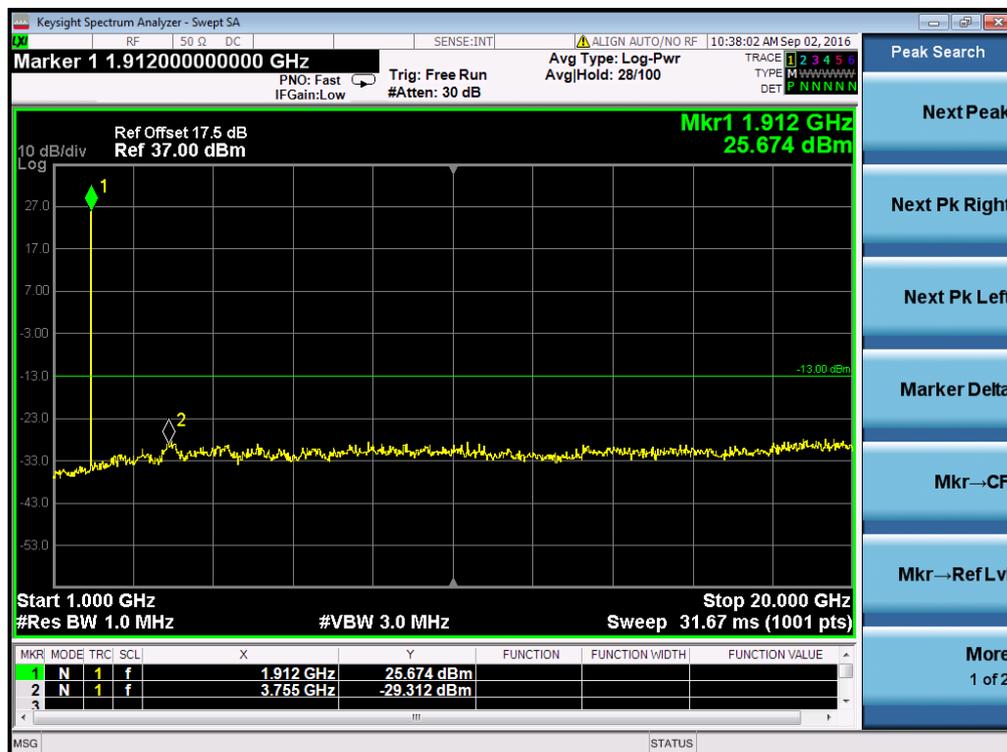


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Low
Bandwidth	3MHz	Modulation	QPSK

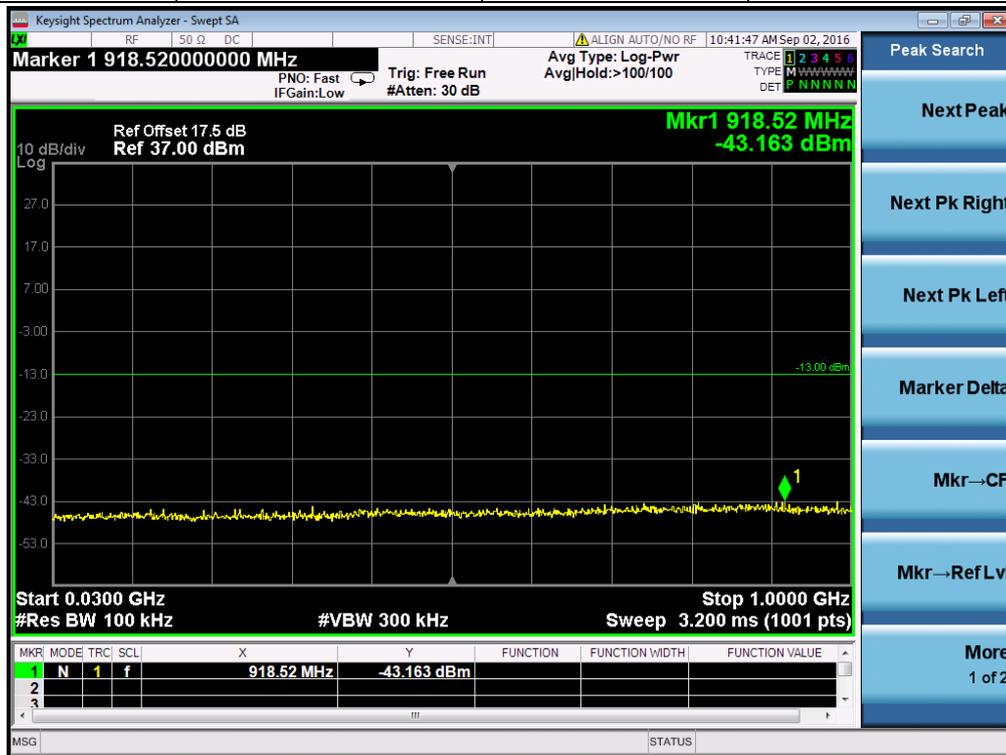


RB Size 1, RB Offset 0 30MHz to 1GHz

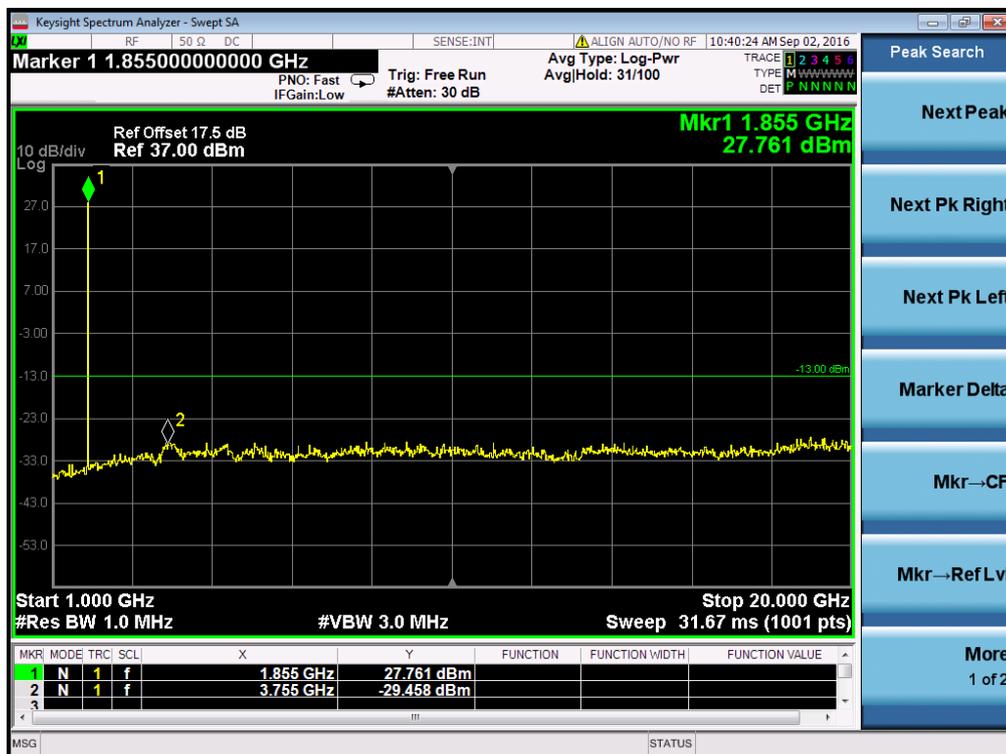


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Middle
Bandwidth	3MHz	Modulation	QPSK

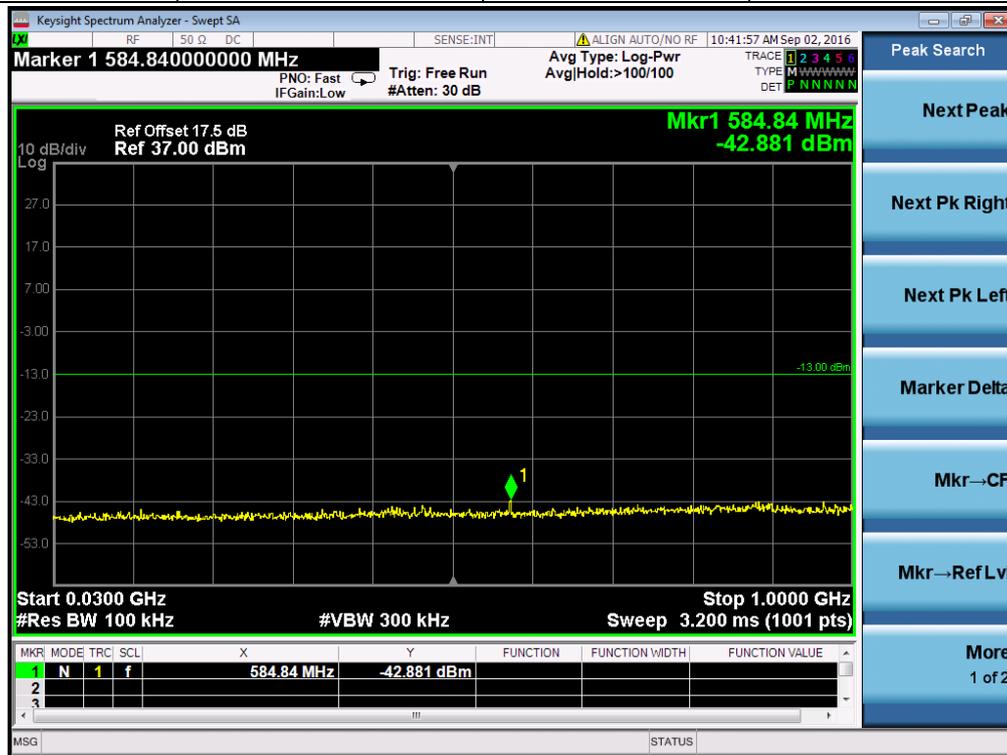


RB Size 1, RB Offset 0 30MHz to 1GHz

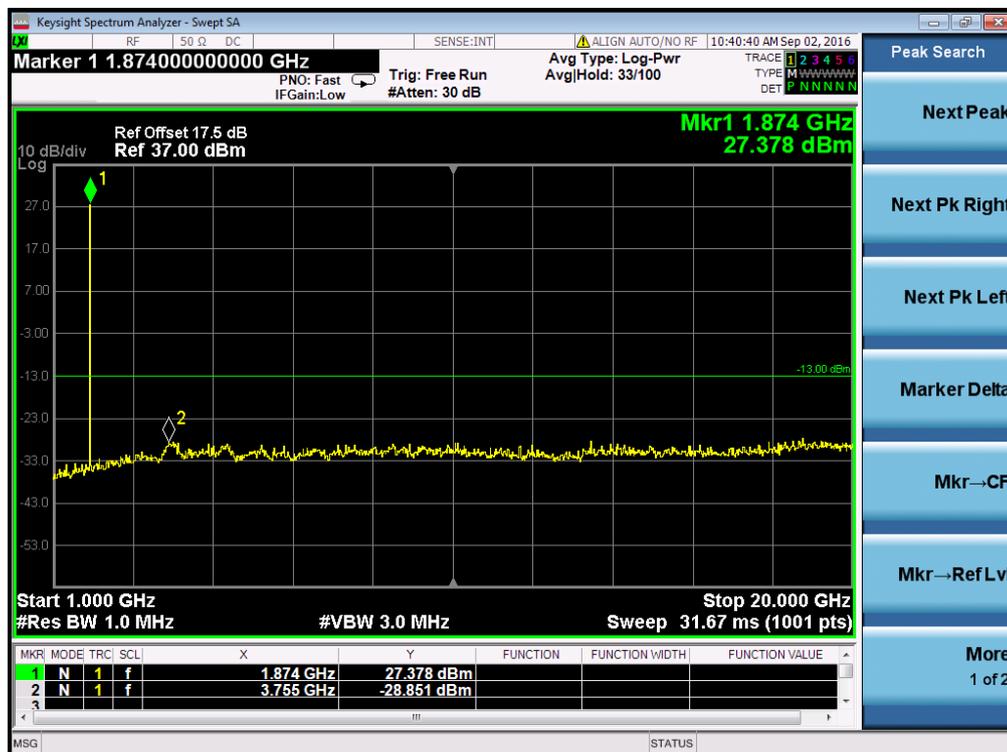


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	High
Bandwidth	3MHz	Modulation	QPSK

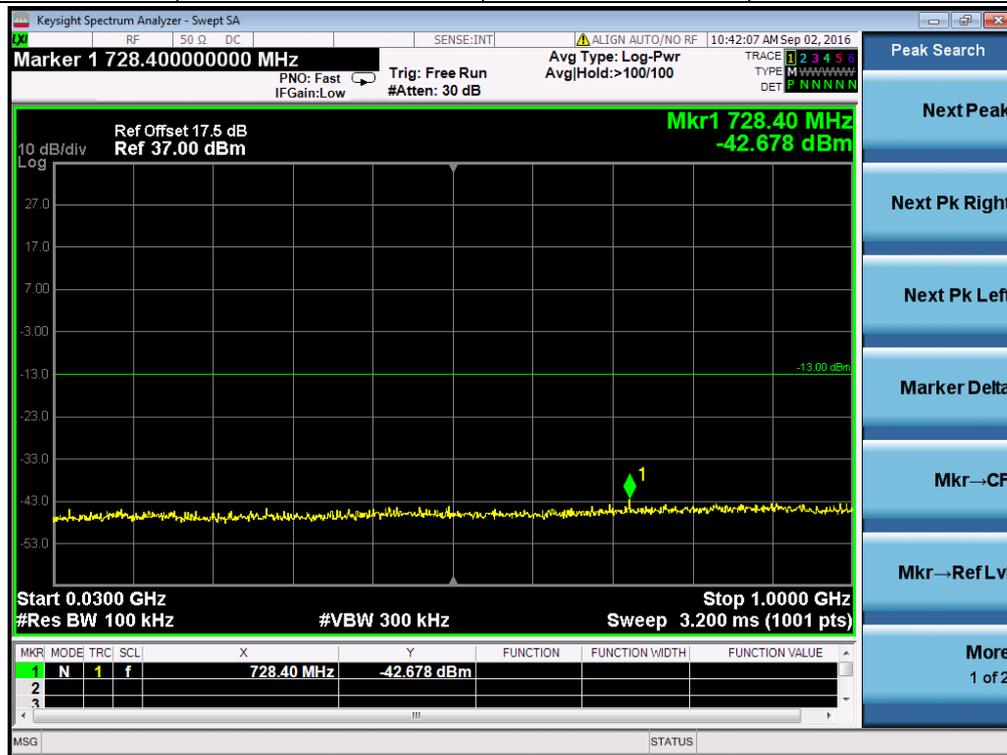


RB Size 1, RB Offset 0 30MHz to 1GHz

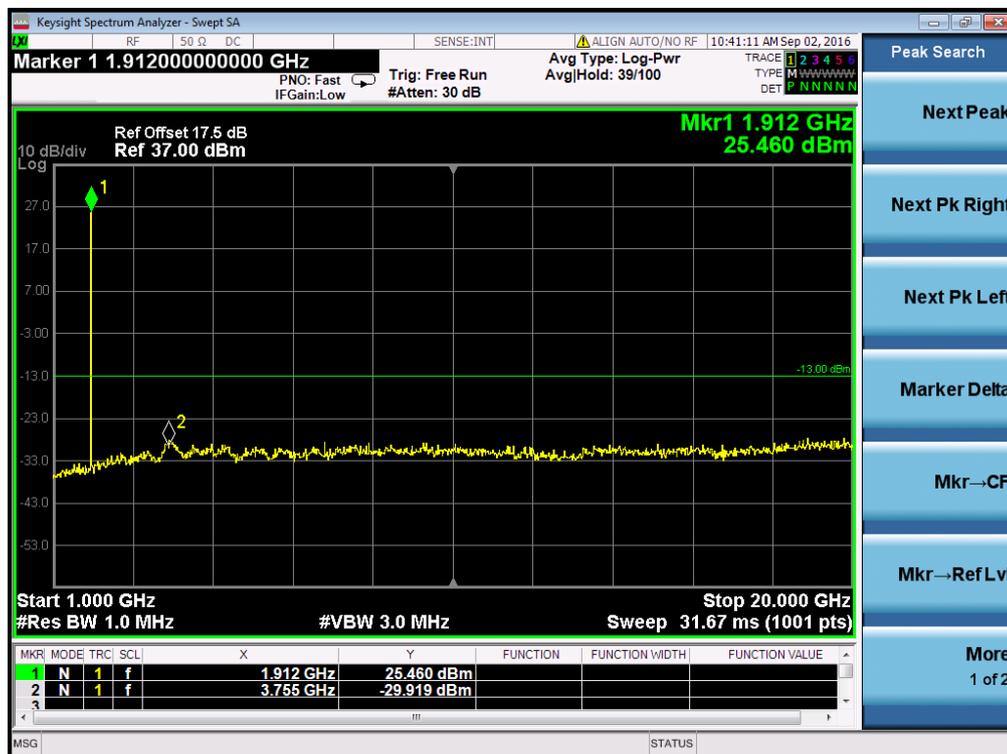


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Low
Bandwidth	5MHz	Modulation	QPSK

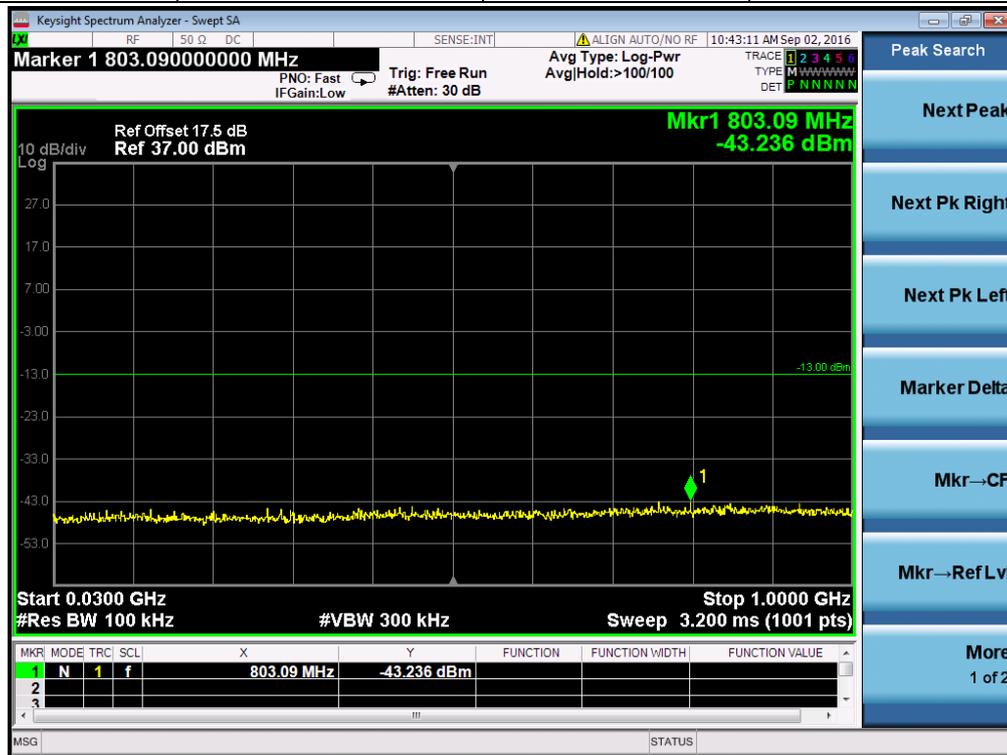


RB Size 1, RB Offset 0 30MHz to 1GHz

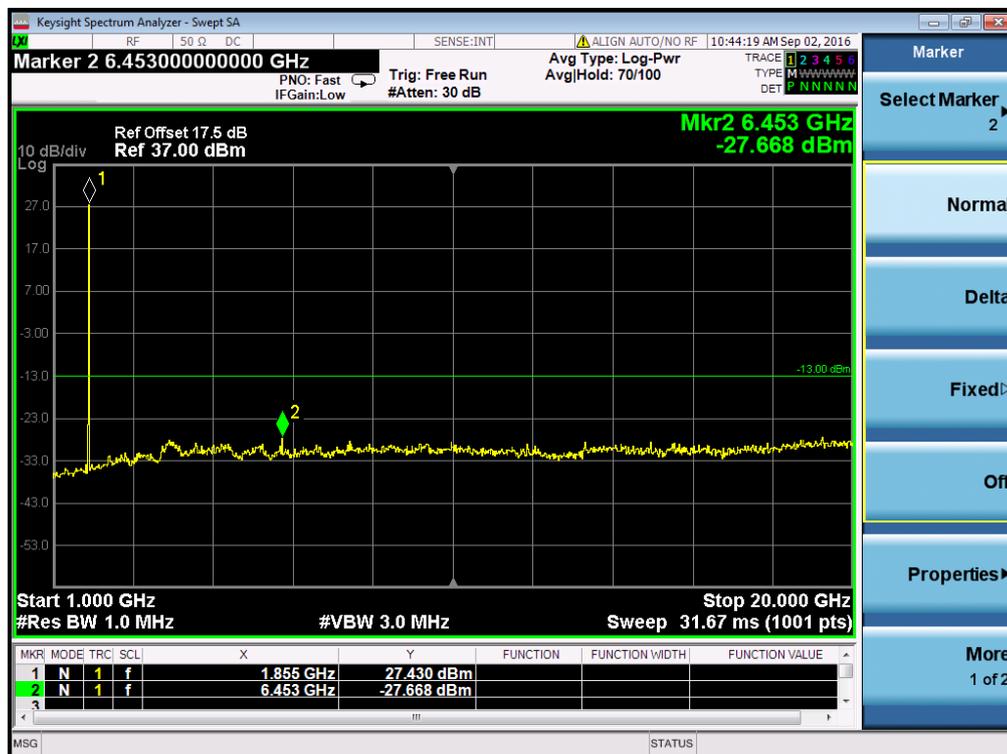


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Middle
Bandwidth	5MHz	Modulation	QPSK

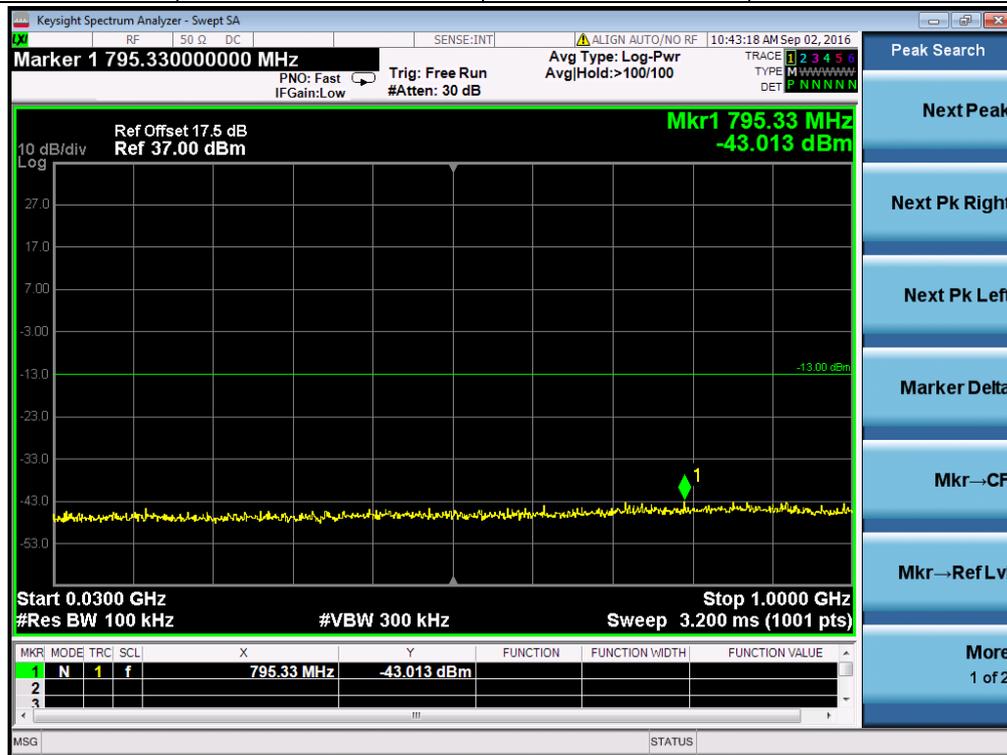


RB Size 1, RB Offset 0 30MHz to 1GHz

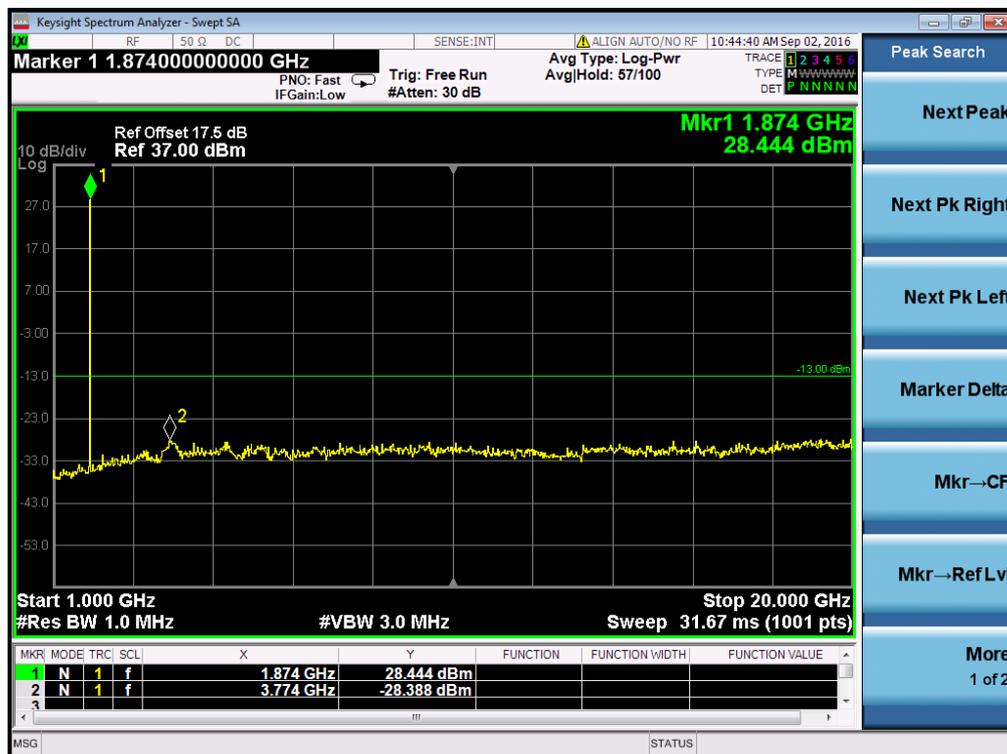


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	High
Bandwidth	5MHz	Modulation	QPSK

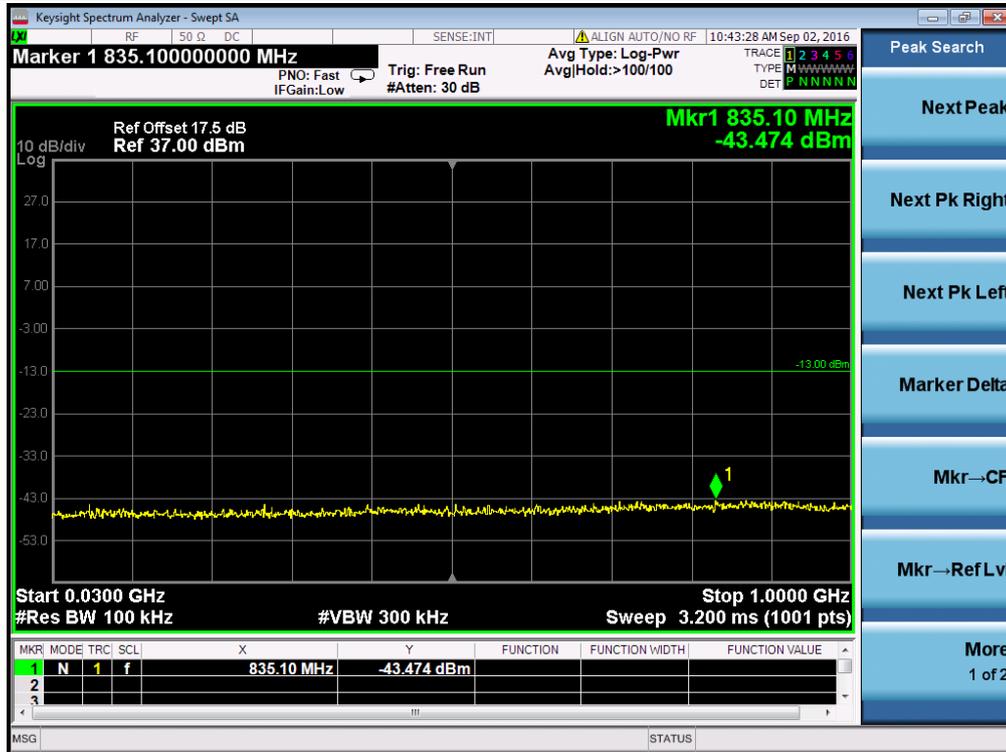


RB Size 1, RB Offset 0 30MHz to 1GHz

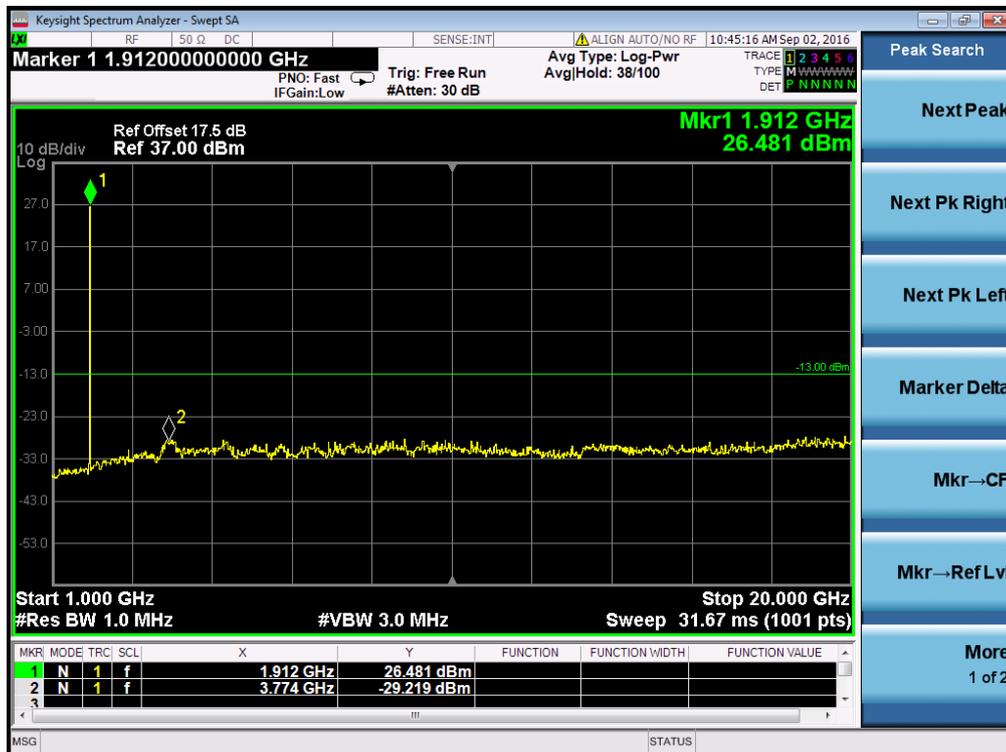


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Low
Bandwidth	10MHz	Modulation	QPSK

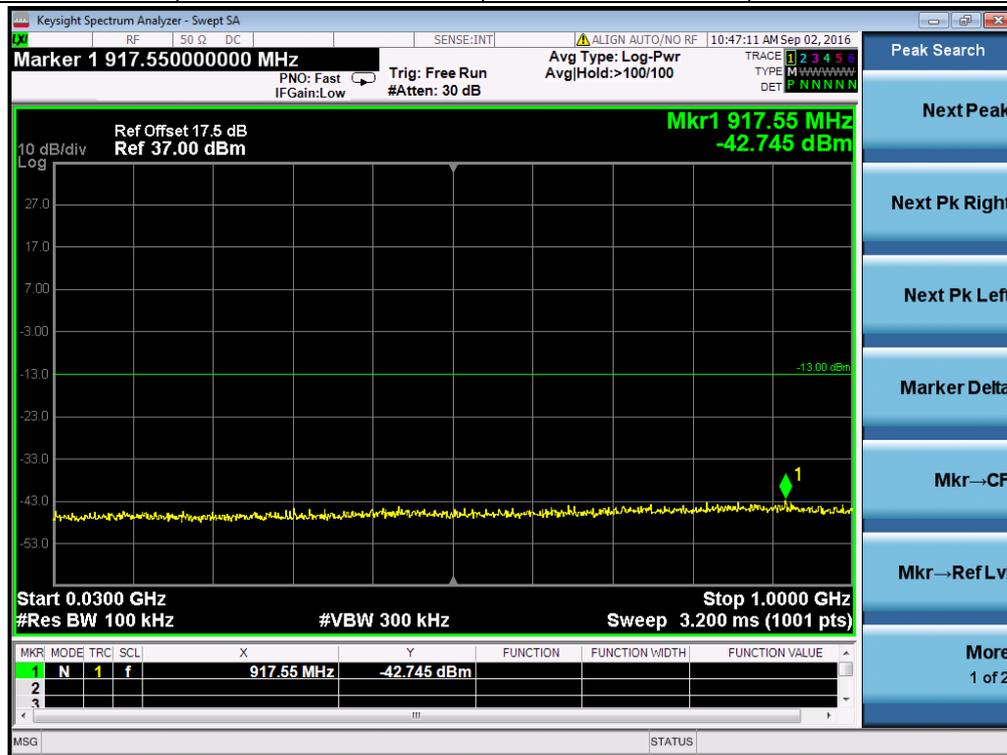


RB Size 1, RB Offset 0 30MHz to 1GHz

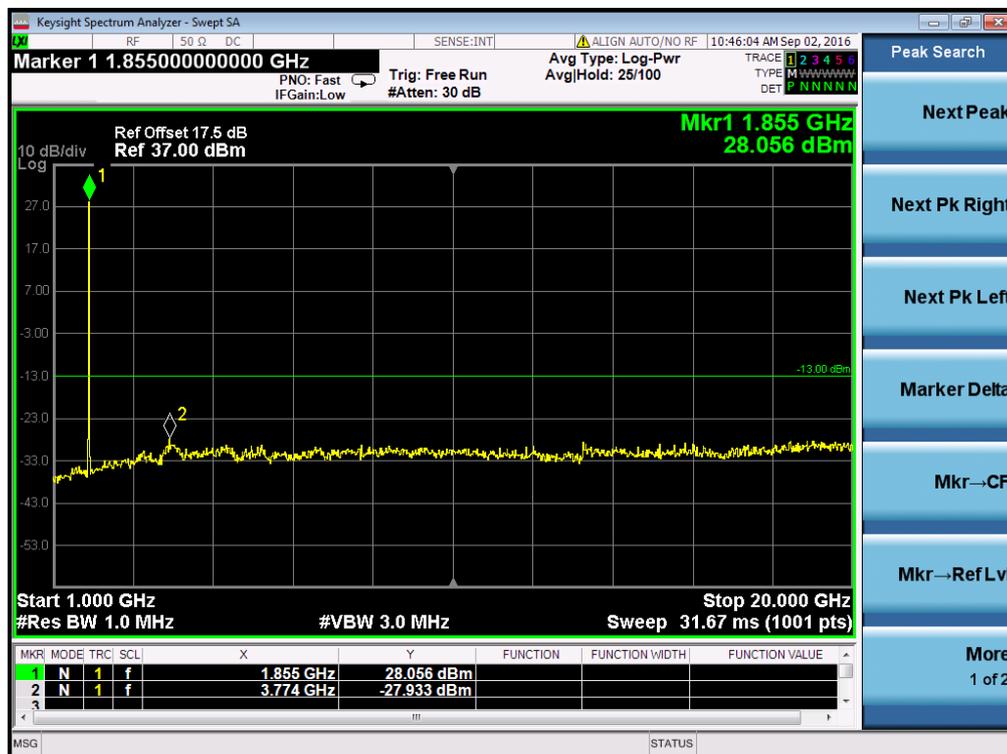


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Middle
Bandwidth	10MHz	Modulation	QPSK

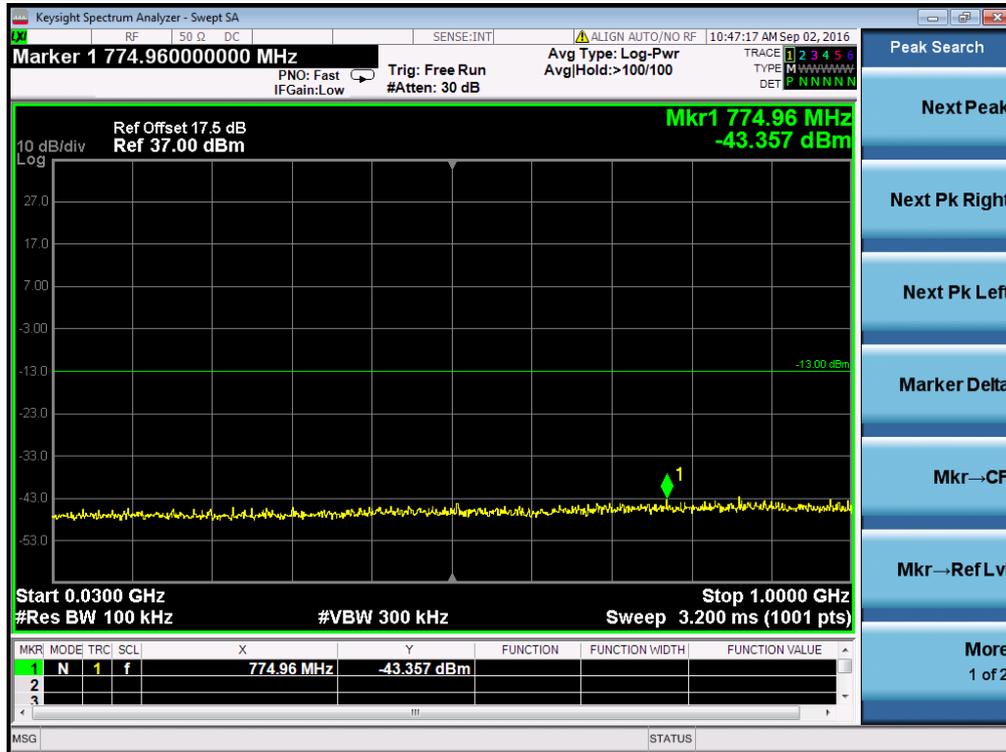


RB Size 1, RB Offset 0 30MHz to 1GHz

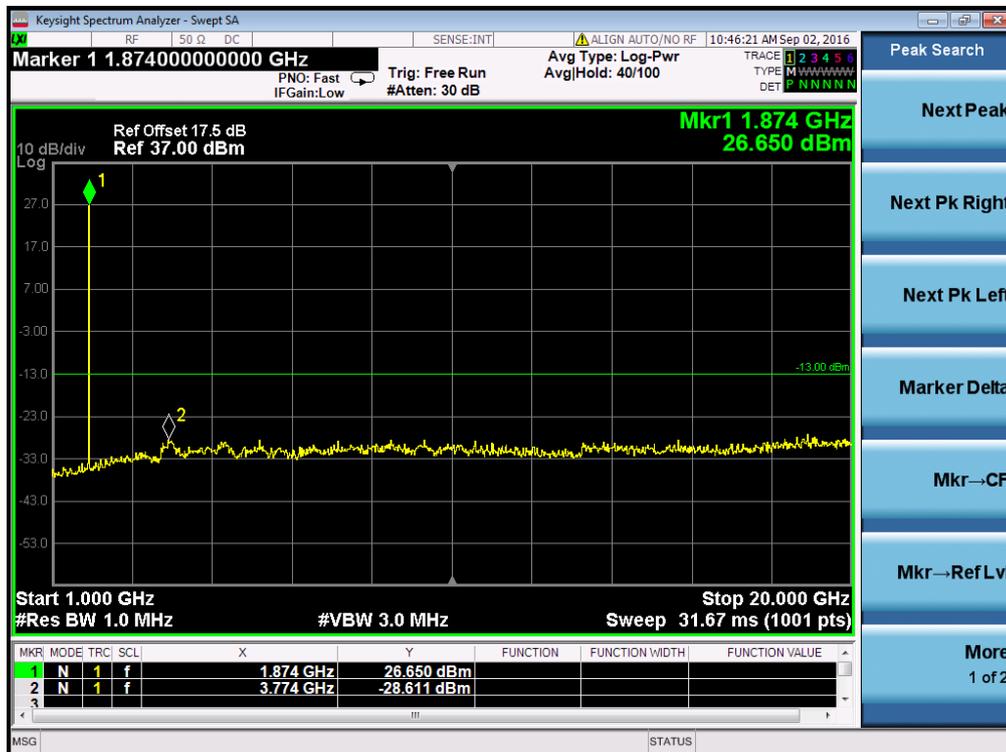


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	High
Bandwidth	10MHz	Modulation	QPSK

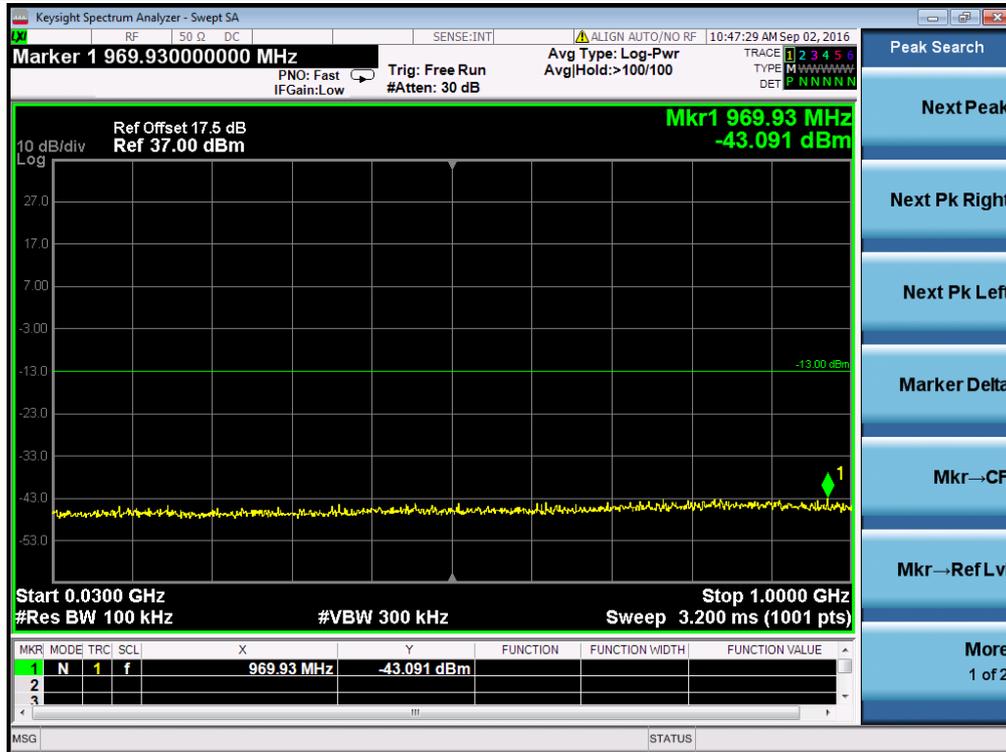


RB Size 1, RB Offset 0 30MHz to 1GHz

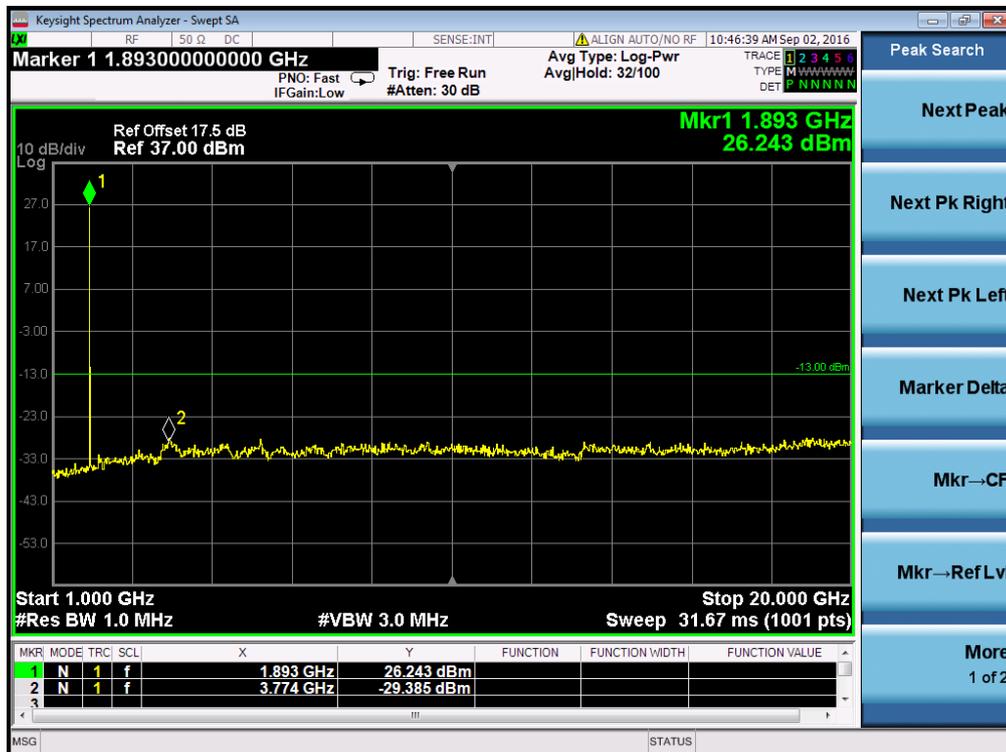


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Low
Bandwidth	15MHz	Modulation	QPSK

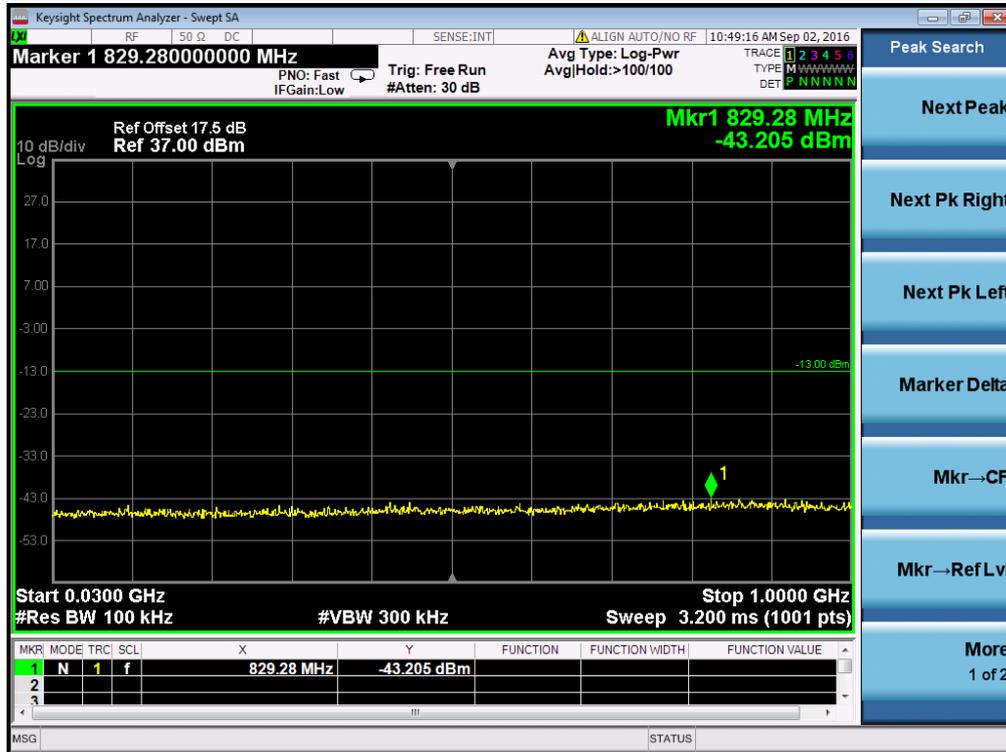


RB Size 1, RB Offset 0 30MHz to 1GHz

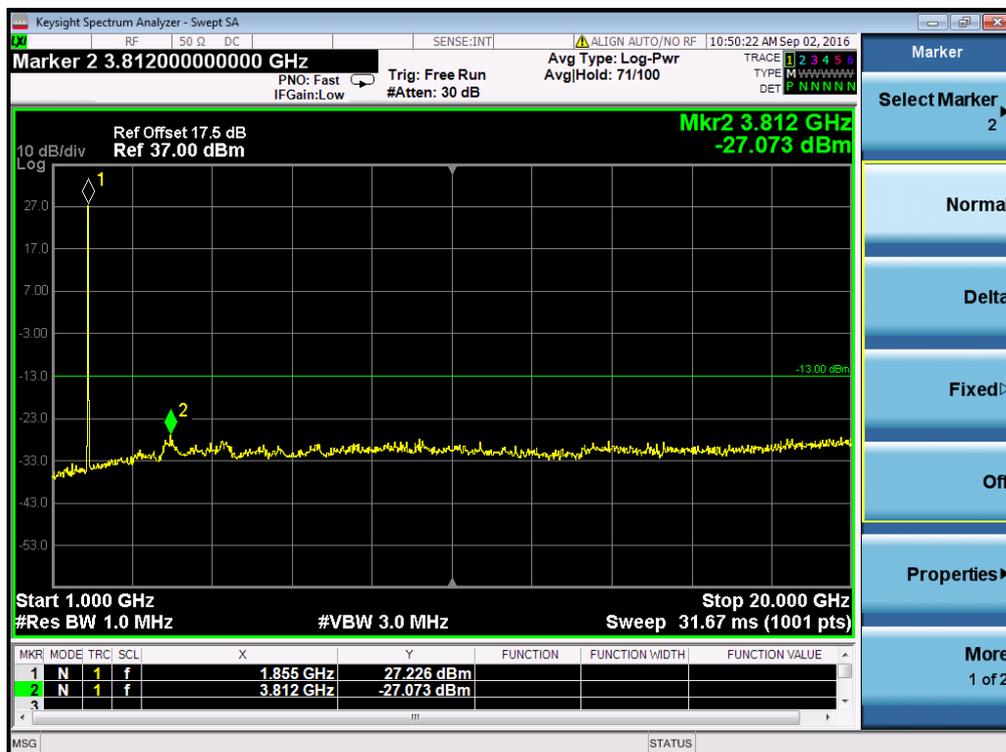


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Middle
Bandwidth	15MHz	Modulation	QPSK

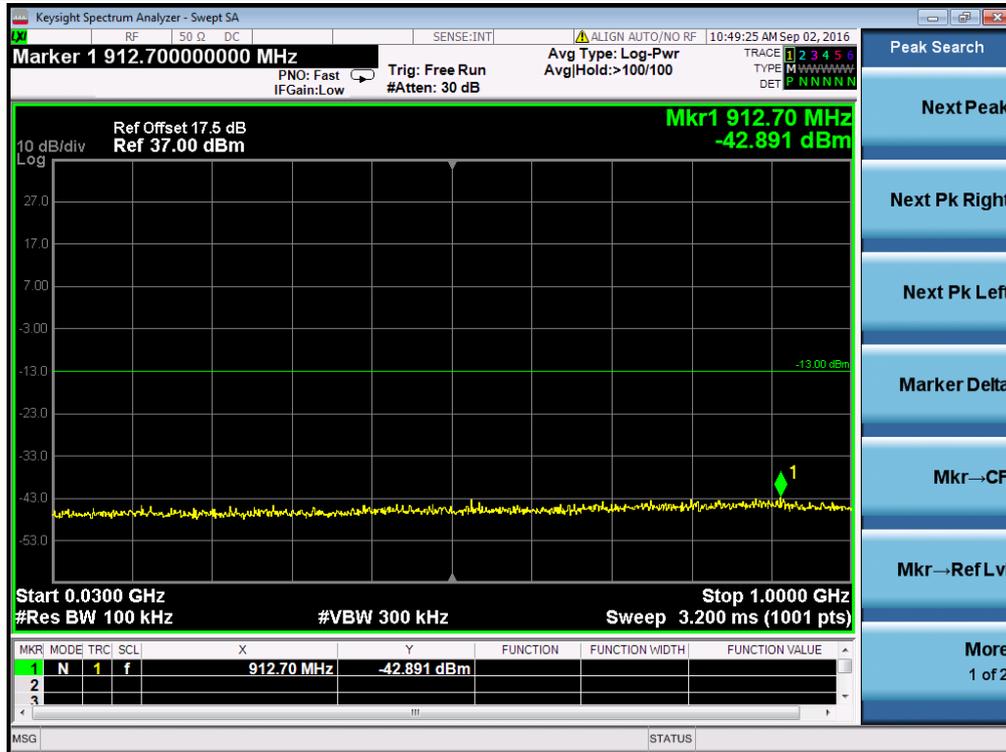


RB Size 1, RB Offset 0 30MHz to 1GHz

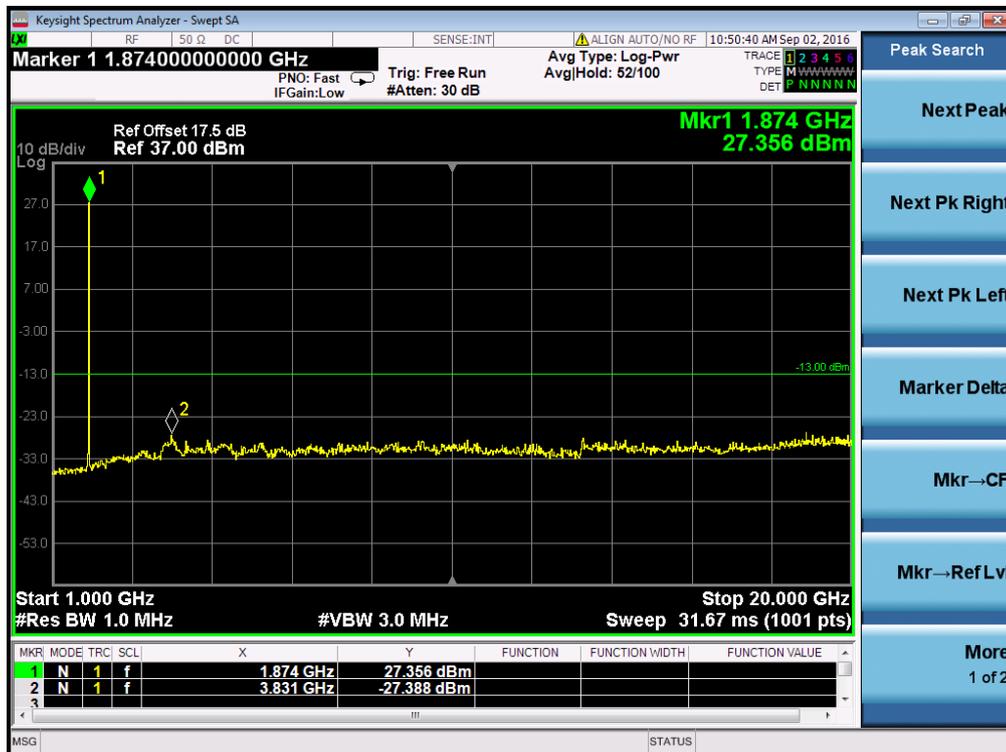


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	High
Bandwidth	15MHz	Modulation	QPSK

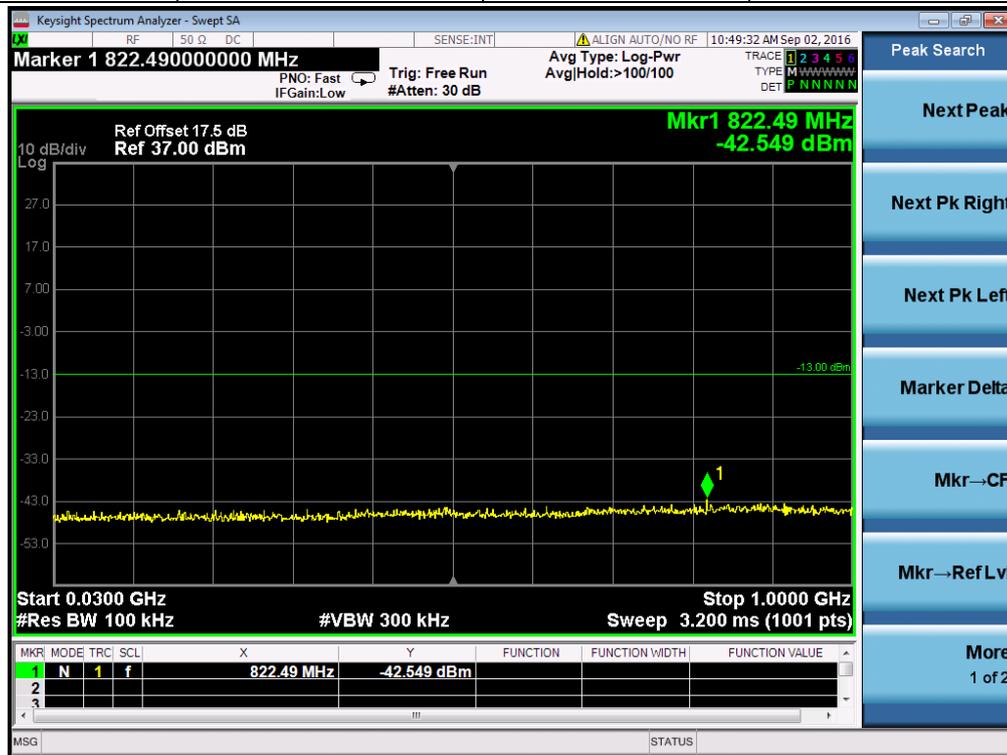


RB Size 1, RB Offset 0 30MHz to 1GHz

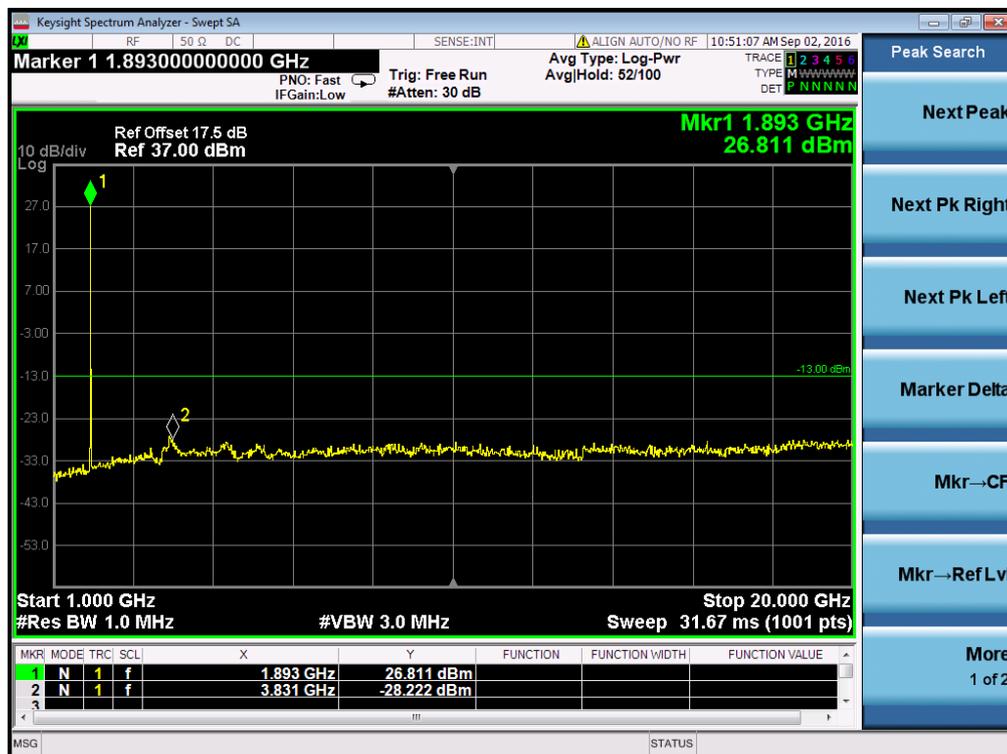


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Low
Bandwidth	20MHz	Modulation	QPSK

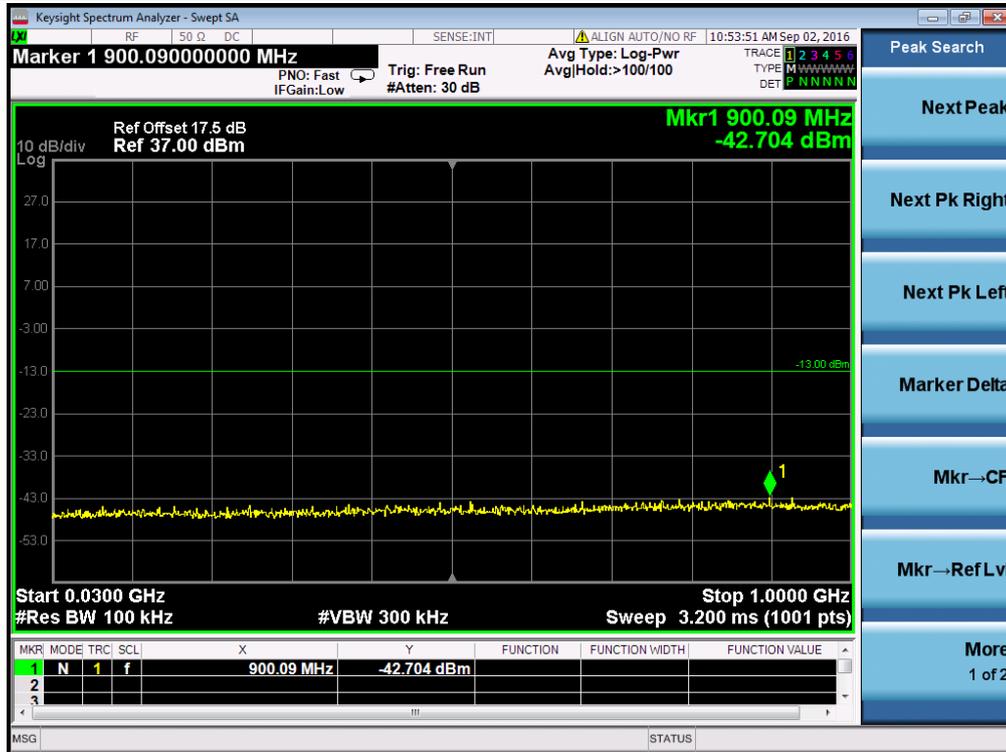


RB Size 1, RB Offset 0 30MHz to 1GHz

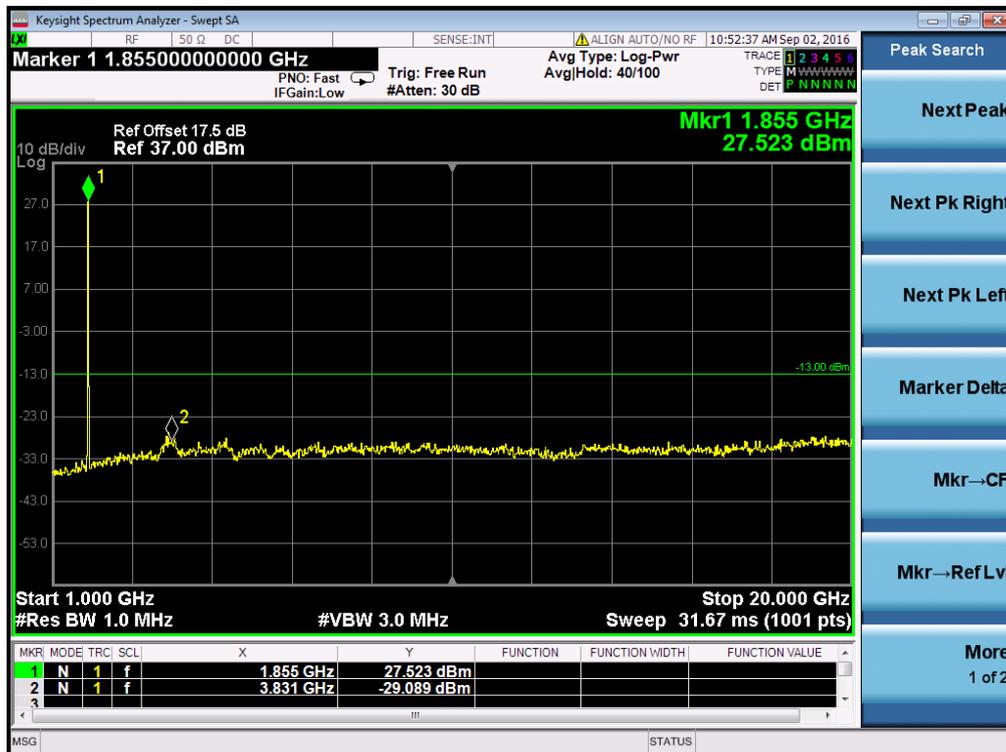


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	Middle
Bandwidth	20MHz	Modulation	QPSK

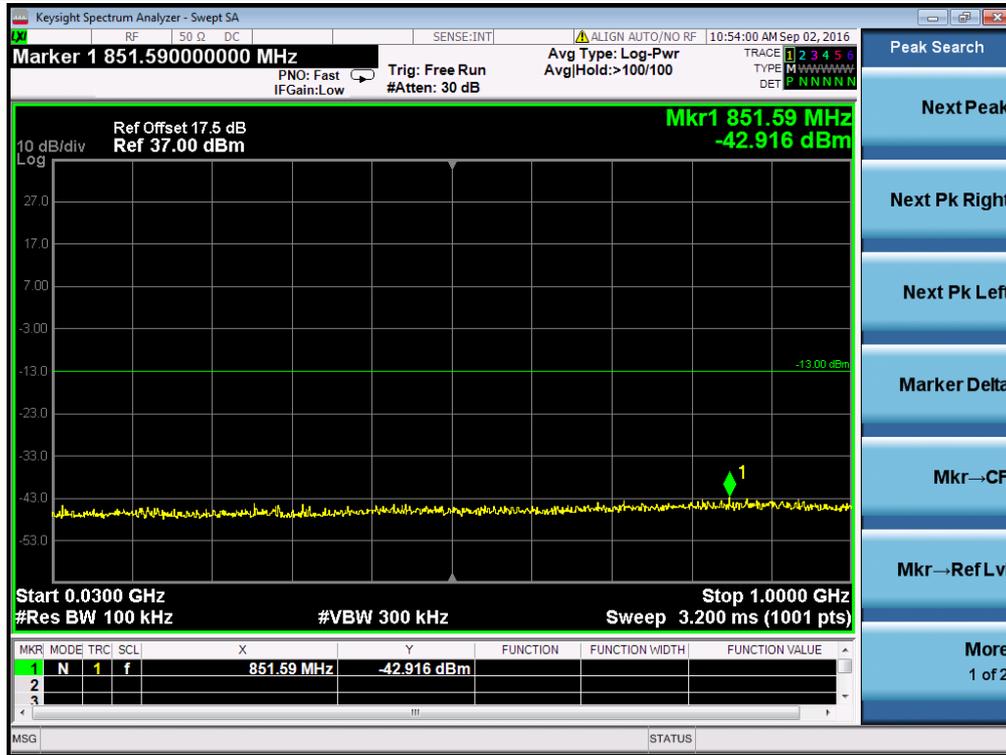


RB Size 1, RB Offset 0 30MHz to 1GHz

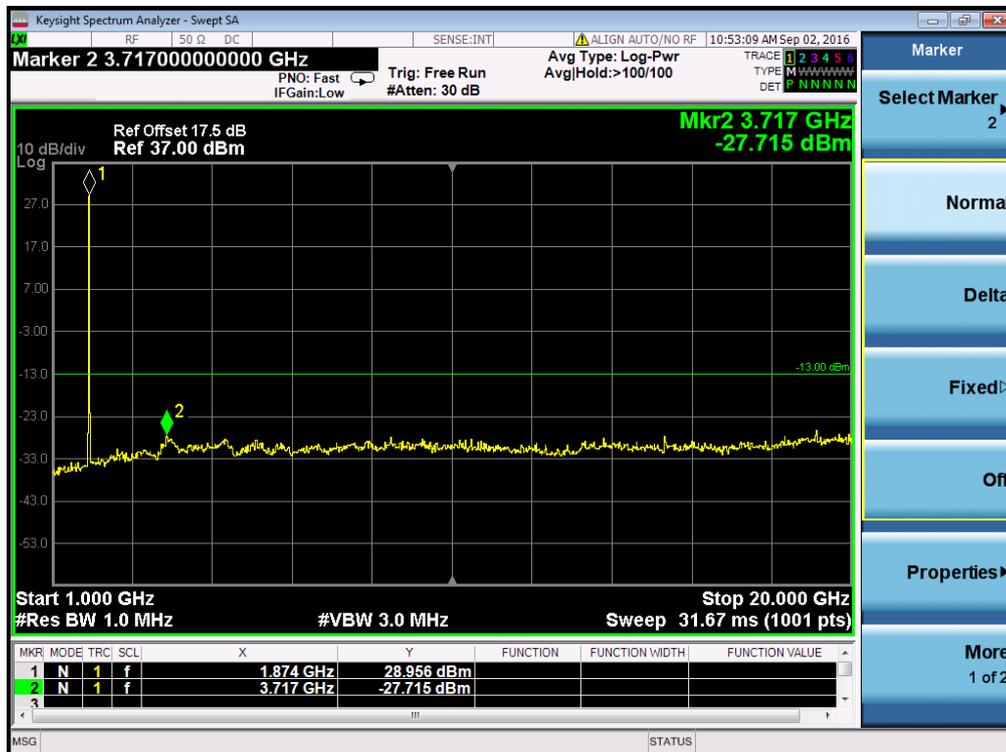


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 2	Channel	High
Bandwidth	20MHz	Modulation	QPSK

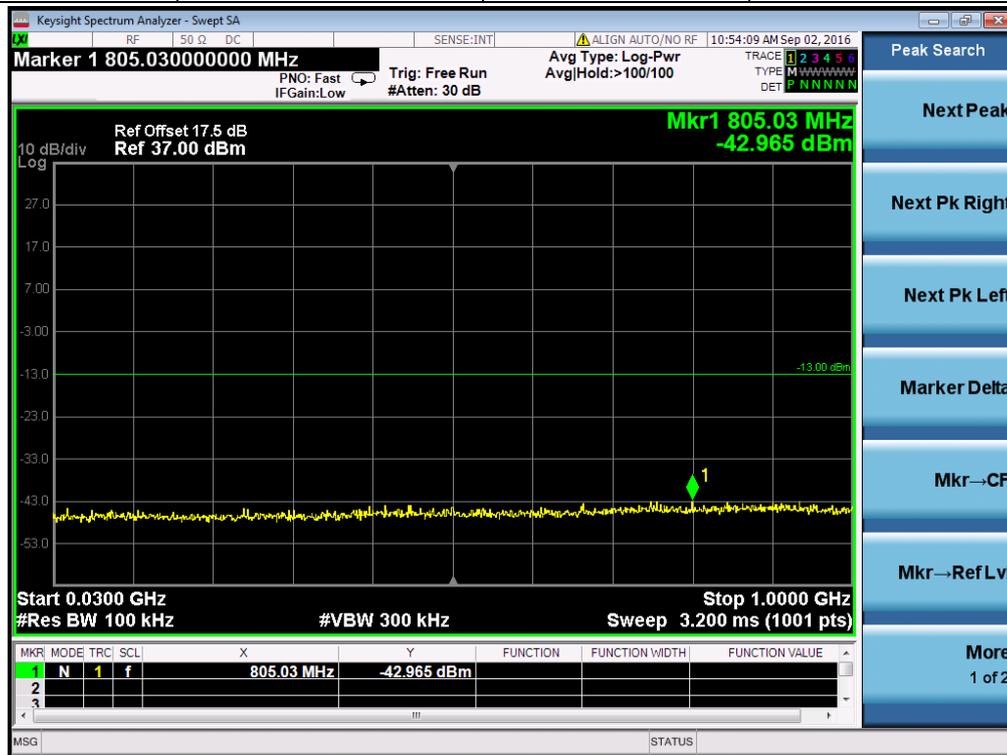


RB Size 1, RB Offset 0 30MHz to 1GHz

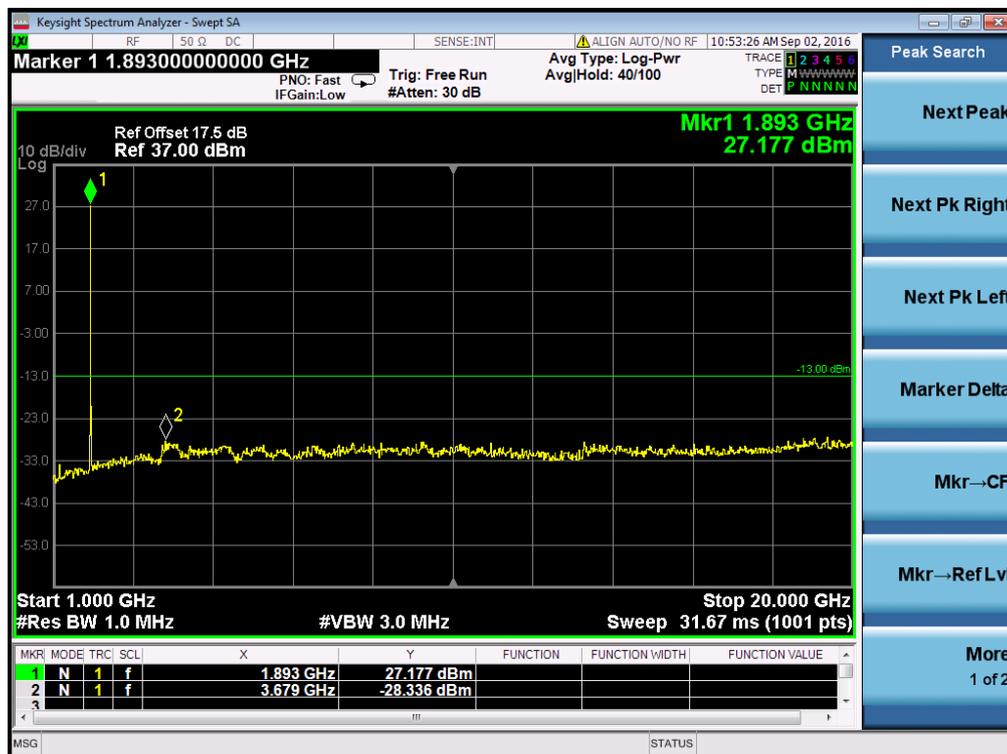


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 5	Channel	Low
Bandwidth	1.4MHz	Modulation	QPSK

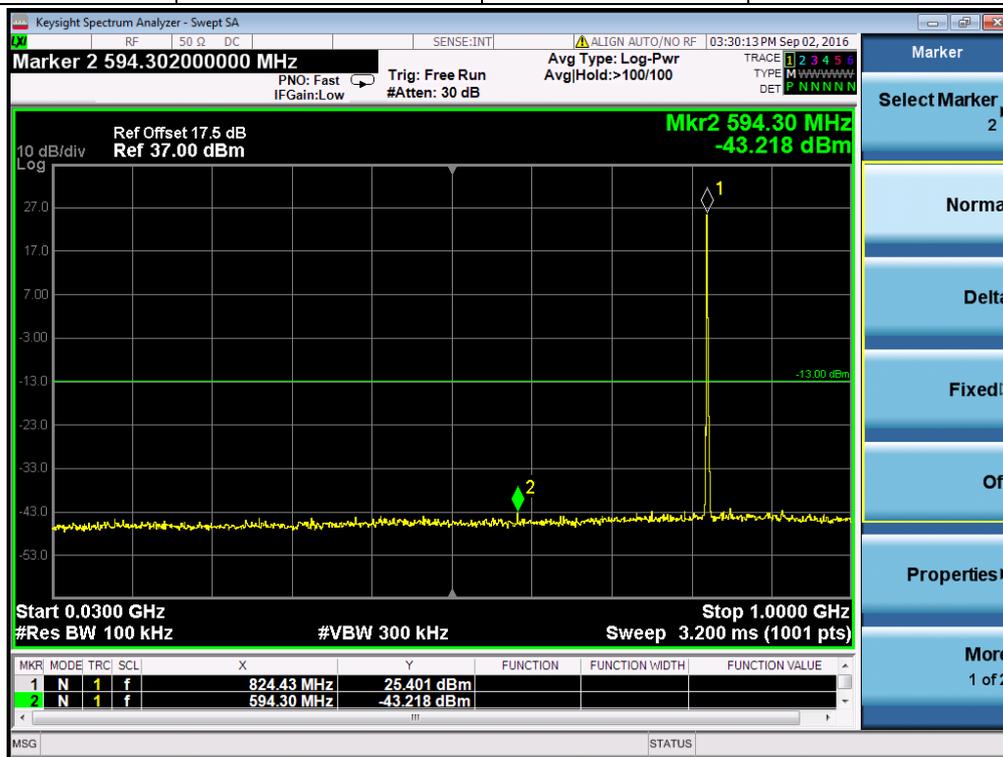


RB Size 1, RB Offset 0 30MHz to 1GHz

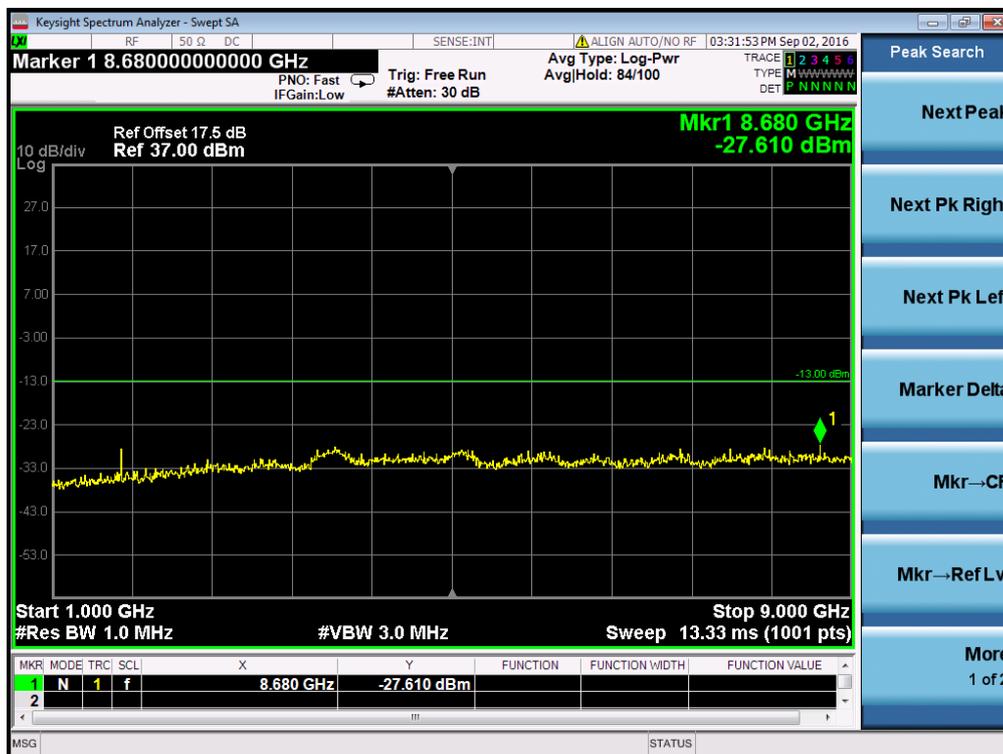


RB Size 1, RB Offset 0 1GHz to 9GHz



Band	LTE Band 5	Channel	Middle
Bandwidth	1.4MHz	Modulation	QPSK

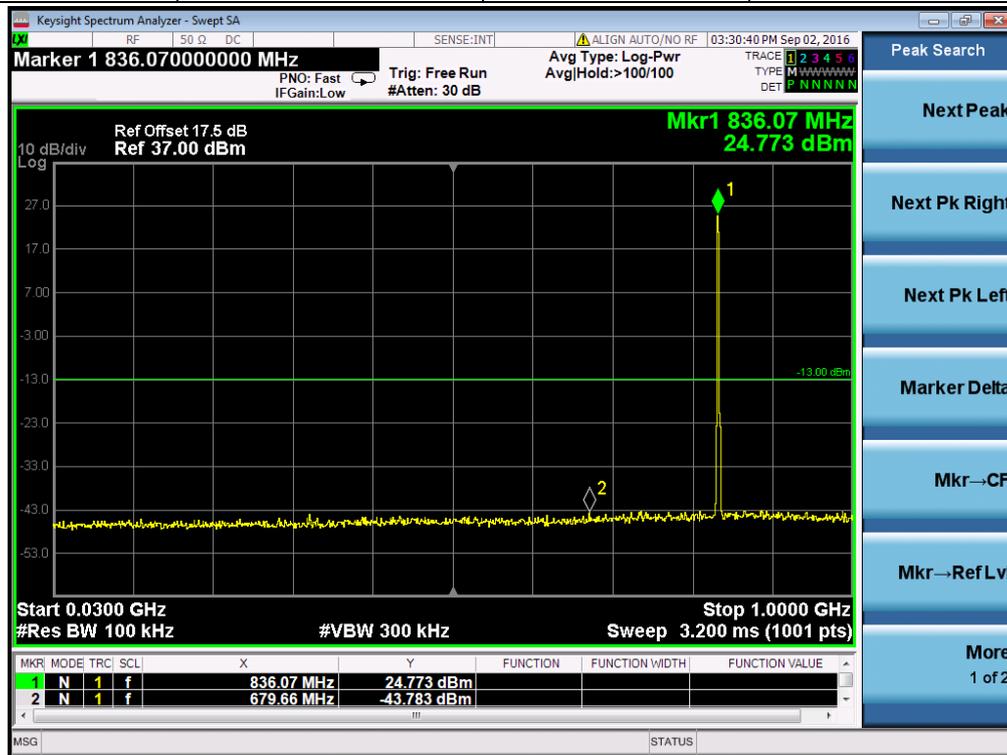


RB Size 1, RB Offset 0 30MHz to 1GHz

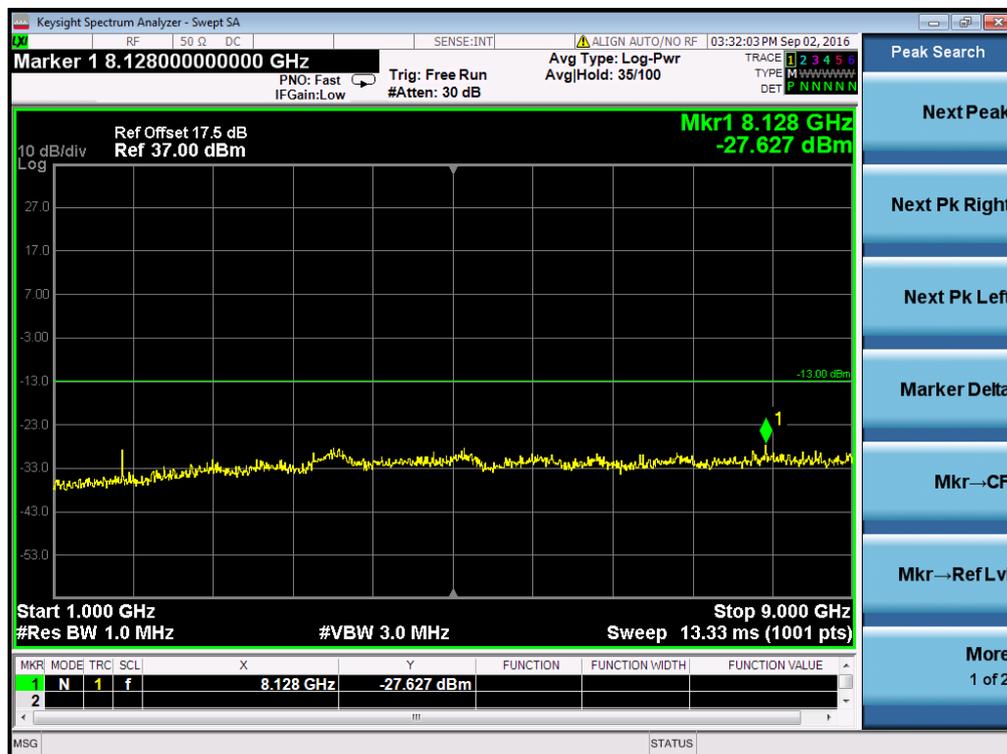


RB Size 1, RB Offset 0 1GHz to 20GHz



Band	LTE Band 5	Channel	High
Bandwidth	1.4MHz	Modulation	QPSK

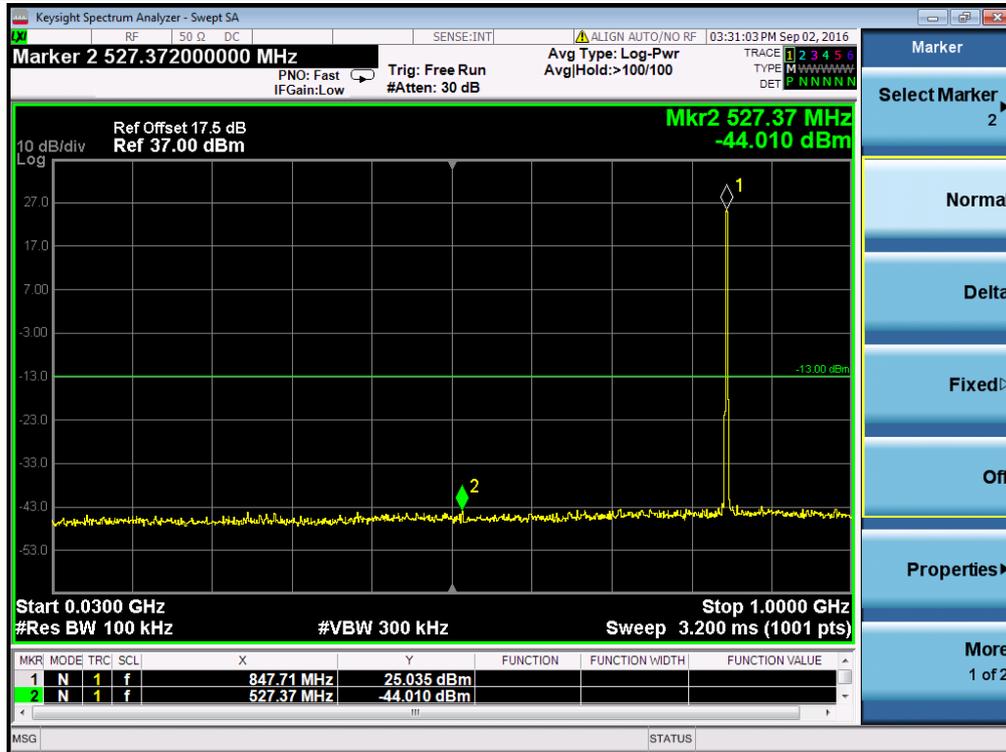


RB Size 1, RB Offset 0 30MHz to 1GHz

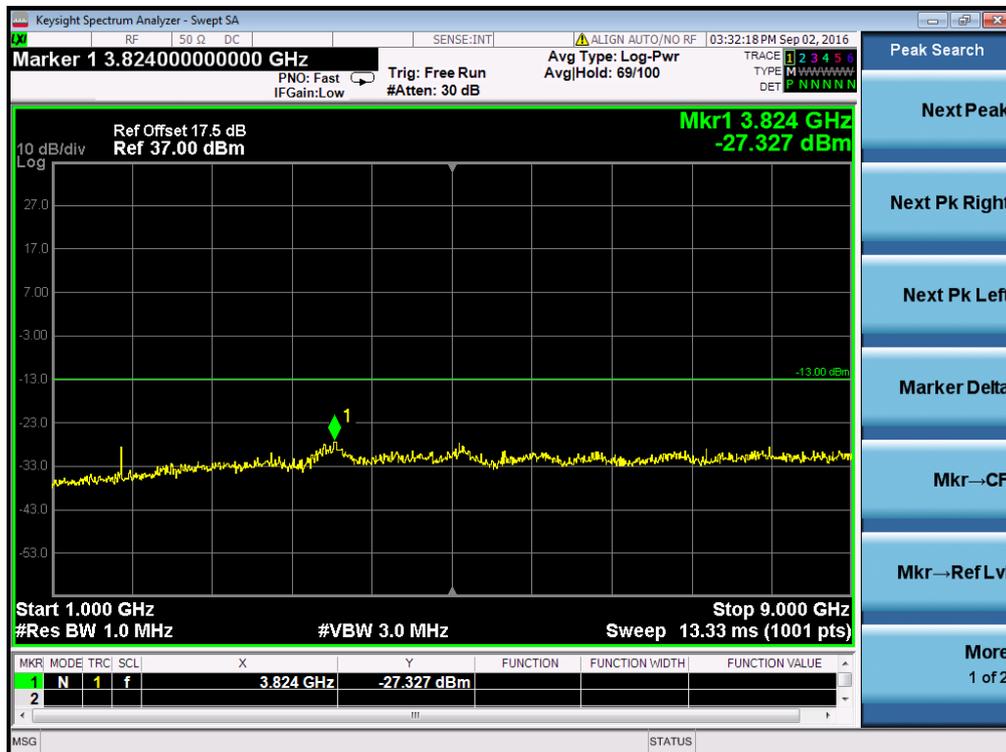


RB Size 1, RB Offset 0 1GHz to 9GHz



Band	LTE Band 5	Channel	Low
Bandwidth	3MHz	Modulation	QPSK

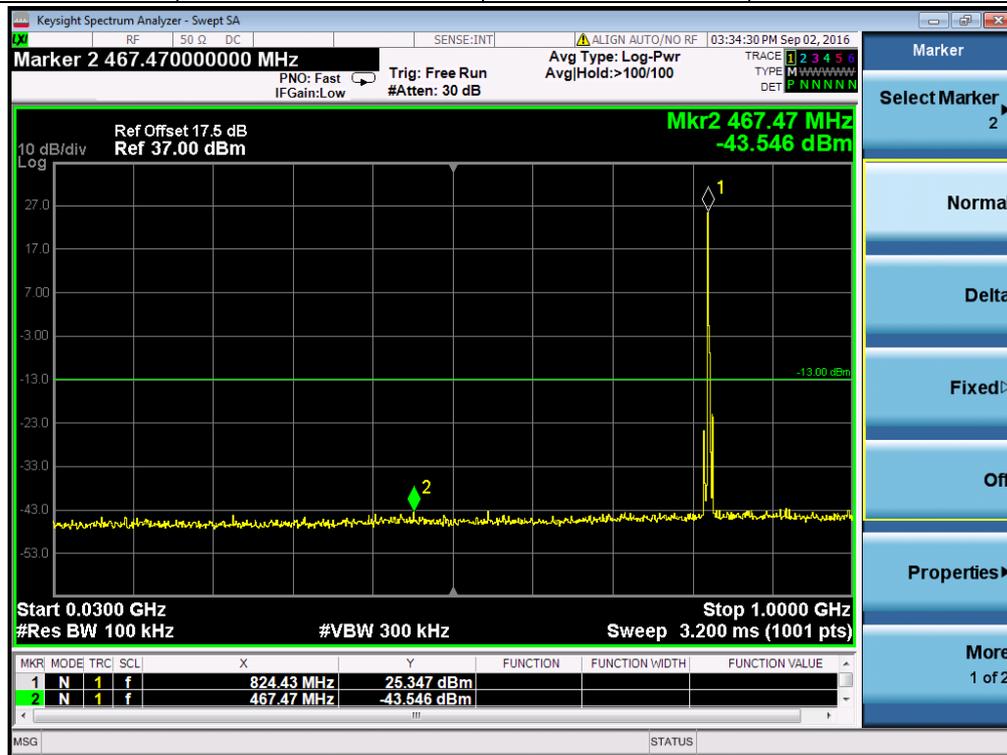


RB Size 1, RB Offset 0 30MHz to 1GHz

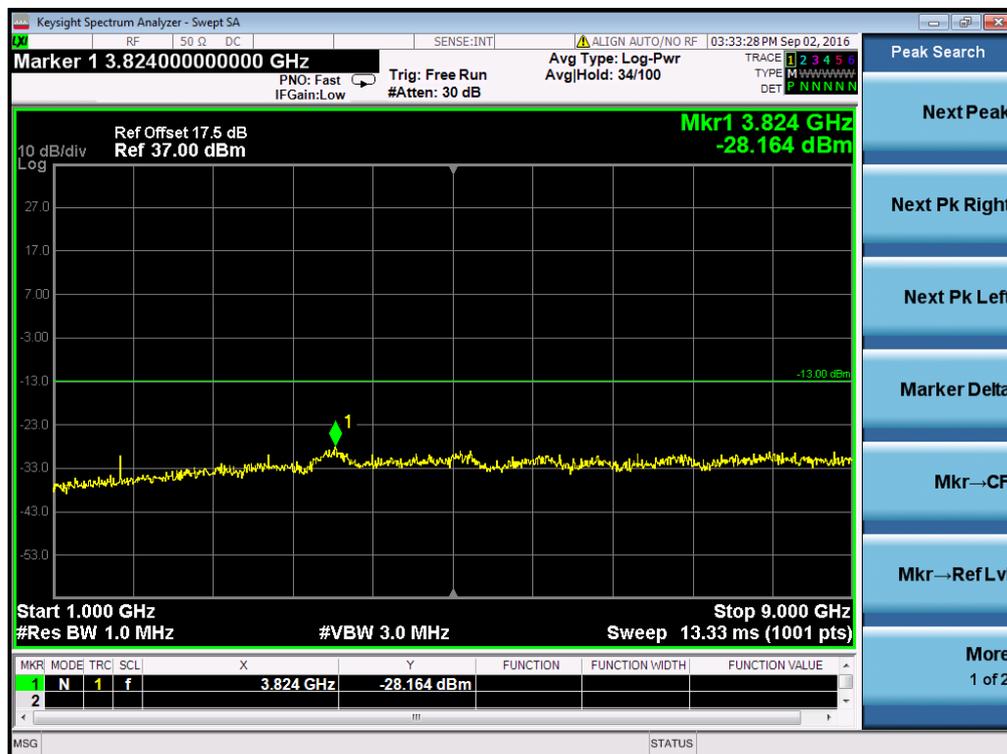


RB Size 1, RB Offset 0 1GHz to 9GHz



Band	LTE Band 5	Channel	Middle
Bandwidth	3MHz	Modulation	QPSK

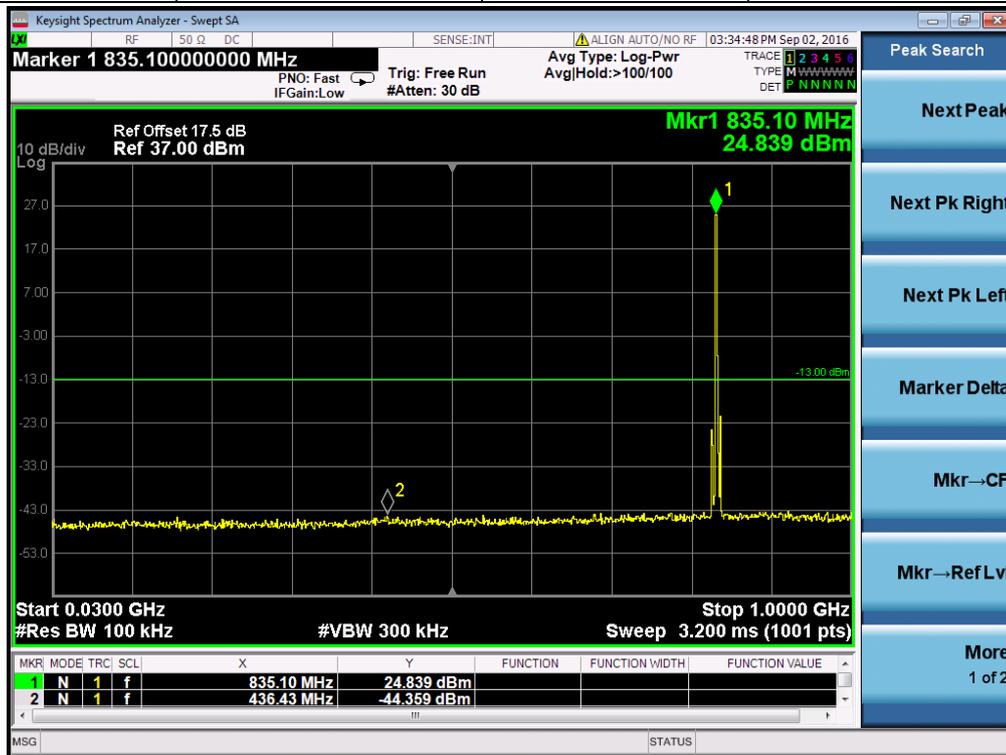


RB Size 1, RB Offset 0 30MHz to 1GHz

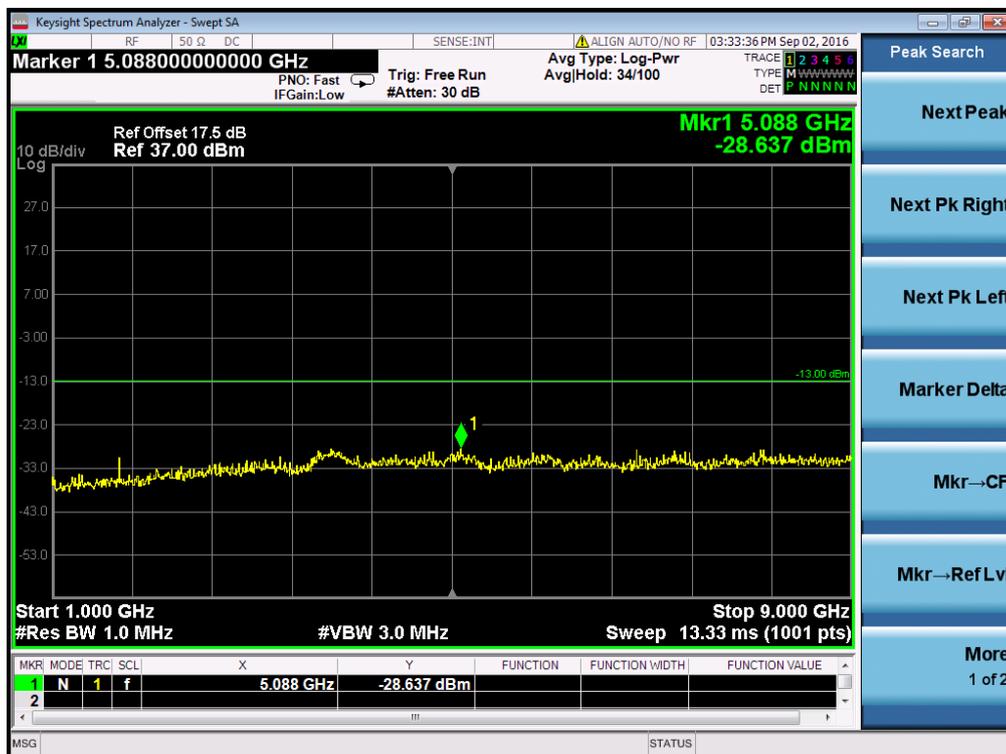


RB Size 1, RB Offset 0 1GHz to 9GHz



Band	LTE Band 5	Channel	High
Bandwidth	3MHz	Modulation	QPSK

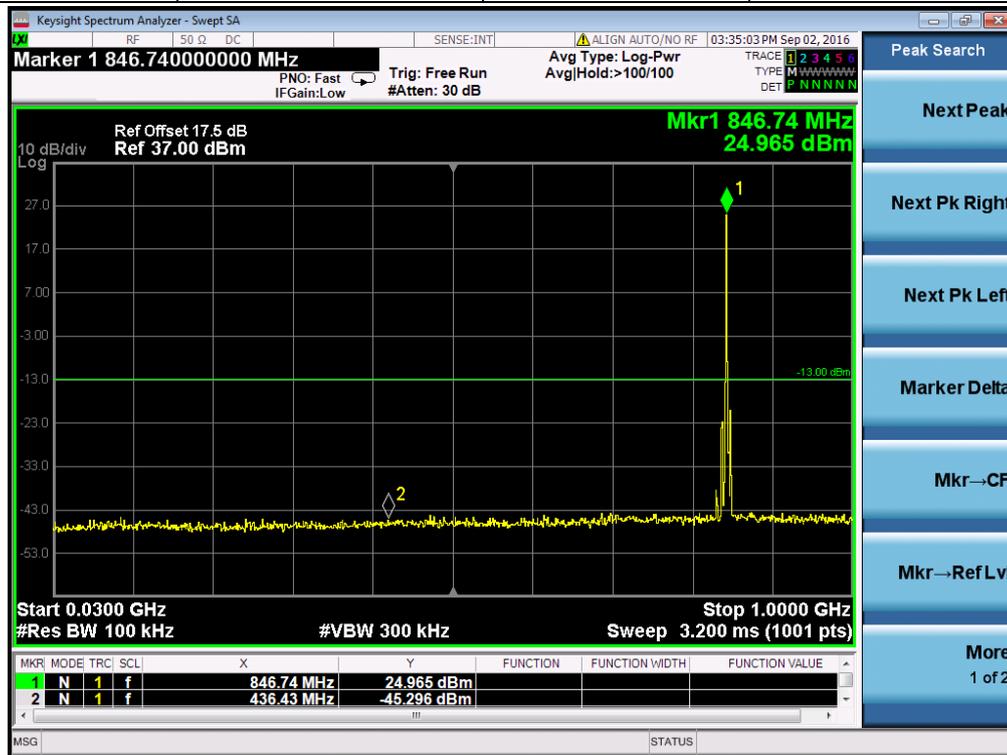

RB Size 1, RB Offset 0 30MHz to 1GHz

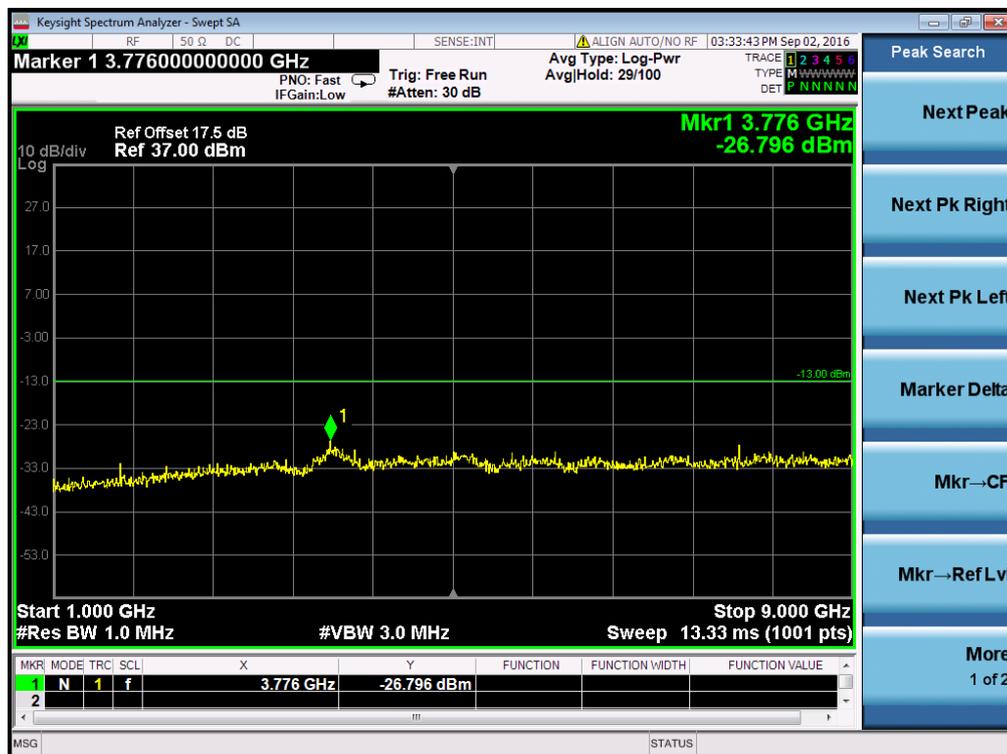

RB Size 1, RB Offset 0 1GHz to 9GHz