


FCC SAR Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : Ufi
BRAND NAME : ZTE
MODEL NAME : MF915
FCC ID : SRQ-MF915
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL (XI'AN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (XI'AN) INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (XI'AN) INC.

1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P.R.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 Maximum Tune-up Limit.....	7
4.3 General LTE SAR Test and Reporting Considerations.....	11
5. RF Exposure Limits	12
5.1 Uncontrolled Environment.....	12
5.2 Controlled Environment.....	12
6. Specific Absorption Rate (SAR).....	13
6.1 Introduction	13
6.2 SAR Definition.....	13
7. System Description and Setup	14
8. Measurement Procedures	15
8.1 Spatial Peak SAR Evaluation.....	15
8.2 Power Reference Measurement.....	16
8.3 Area Scan	16
8.4 Zoom Scan.....	17
8.5 Volume Scan Procedures.....	17
8.6 Power Drift Monitoring.....	17
9. Test Equipment List	18
10. System Verification	19
10.1 Tissue Verification	19
10.2 System Performance Check Results.....	20
11. RF Exposure Positions	21
11.1 Body Position	21
12. Conducted RF Output Power (Unit: dBm).....	22
13. Antenna Location	39
14. SAR Test Results	41
14.1 Body SAR	42
14.2 Repeated SAR Measurement	46
15. Simultaneous Transmission Analysis.....	47
15.1 Body Accessory Exposure Conditions.....	48
16. Uncertainty Assessment	54
17. References	56
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA460501	Rev. 01	Initial issue of report	Jul. 25, 2014

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION, Ufi, MF915**, are as follows.

Equipment Class	Frequency Band	Operating Mode	Highest SAR Summary	
			Body 1g SAR (W/kg) (Gap10mm)	Simultaneous Transmission SAR (W/kg)
PCB	GSM850	Data	0.70	1.51
	GSM1900	Data	0.50	
	WCDMA Band V	Data	1.07	
	WCDMA Band IV	Data	1.14	
	WCDMA Band II	Data	1.23	
	LTE Band 12	Data	1.16	
	LTE Band 17	Data	1.06	
	LTE Band 4	Data	1.43	
	LTE Band 2	Data	1.29	
DTS	WLAN 2.4GHz Band	Data	0.13	1.51
Date of Testing:		06/22/2014 ~ 07/23/2014		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL (XI'AN) INC.
Test Site Location	1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. C. TEL: +86-029-8860-8767 FAX: +86-029-8860-8791

Applicant	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

Manufacturer	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	Ufi
Brand Name	ZTE
Model Name	MF915
FCC ID	SRQ-MF915
IMEI Code	004401783042910
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz
Mode	• GPRS/EGPRS • RMC 12.2Kbps • HSDPA • HSUPA • DC-HSDPA • HSPA+ (Downlink Only) • LTE: QPSK, 16QAM • 802.11b/g/n HT20
HW Version	xw5A
SW Version	BD_TMOMF915V0.0.0B02
EUT Stage	Identical Prototype
Remark: 1. This device 2.4GHz WLAN supports Hotspot operation. 2. 802.11n-HT40 is not supported in 2.4GHz WLAN. 3. This device supports GRPS mode up to multi-slot class10 and EGPRS mode up to multi-slot class12. 4. This device has no voice function.	

4.2 Maximum Tune-up Limit

Mode	Burst average power(dBm)	
	GSM 850	GSM 1900
GPRS (GMSK, 1 Tx slot)	33.5	29
GPRS (GMSK, 2 Tx slots)	30	27
EDGE (8PSK, 1 Tx slot)	26	27
EDGE (8PSK, 2 Tx slots)	24	23.5
EDGE (8PSK, 3 Tx slots)	22	22
EDGE (8PSK, 4 Tx slots)	22	21

Mode	Average power(dBm)		
	WCDMA Band V	WCDMA Band II	WCDMA Band IV
RMC 12.2Kbps	23.5	24	23.5
HSDPA Subtest-1	22	22	22
HSDPA Subtest-2	22	22	22
HSDPA Subtest-3	22	22	22
HSDPA Subtest-4	22	22	22
DC-HSDPA Subtest-1	22	22	22
DC-HSDPA Subtest-2	22	22	22
DC-HSDPA Subtest-3	22	22	22
DC-HSDPA Subtest-4	22	22	22
HSUPA Subtest-1	22	21	22
HSUPA Subtest-2	21	21	21
HSUPA Subtest-3	21	21	21
HSUPA Subtest-4	22	22	22
HSUPA Subtest-5	21	21	21

LTE Band 2				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	20	≤ 18	0	24.5
QPSK	20	> 18	1	23.5
16QAM	20	≤ 18	1	23.5
16QAM	20	> 18	2	22.5
QPSK	15	≤ 16	0	24.5
QPSK	15	> 16	1	23.5
16QAM	15	≤ 16	1	23.5
16QAM	15	> 16	2	22.5
QPSK	10	≤ 12	0	24.5
QPSK	10	> 12	1	23.5
16QAM	10	≤ 12	1	23.5
16QAM	10	> 12	2	22.5
QPSK	5	≤ 8	0	24.5
QPSK	5	> 8	1	23.5
16QAM	5	≤ 8	1	23.5
16QAM	5	> 8	2	22.5
QPSK	3	≤ 4	0	24.5
QPSK	3	> 4	1	23.5
16QAM	3	≤ 4	1	23.5
16QAM	3	> 4	2	22.5
QPSK	1.4	≤ 5	0	24.5
QPSK	1.4	> 5	1	23.5
16QAM	1.4	≤ 5	1	23.5
16QAM	1.4	> 5	2	22.5

LTE Band 4				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	20	≤ 18	0	24
QPSK	20	> 18	1	23
16QAM	20	≤ 18	1	23
16QAM	20	> 18	2	22
QPSK	15	≤ 16	0	24
QPSK	15	> 16	1	23
16QAM	15	≤ 16	1	23
16QAM	15	> 16	2	22
QPSK	10	≤ 12	0	24
QPSK	10	> 12	1	23
16QAM	10	≤ 12	1	23
16QAM	10	> 12	2	22
QPSK	5	≤ 8	0	24
QPSK	5	> 8	1	23
16QAM	5	≤ 8	1	23
16QAM	5	> 8	2	22
QPSK	3	≤ 4	0	24
QPSK	3	> 4	1	23
16QAM	3	≤ 4	1	23
16QAM	3	> 4	2	22
QPSK	1.4	≤ 5	0	24
QPSK	1.4	> 5	1	23
16QAM	1.4	≤ 5	1	23
16QAM	1.4	> 5	2	22

LTE Band 12				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	10	≤ 12	0	24.5
QPSK	10	> 12	1	23.5
16QAM	10	≤ 12	1	23.5
16QAM	10	> 12	2	22.5
QPSK	5	≤ 8	0	24.5
QPSK	5	> 8	1	23.5
16QAM	5	≤ 8	1	23.5
16QAM	5	> 8	2	22.5
QPSK	3	≤ 4	0	24.5
QPSK	3	> 4	1	23.5
16QAM	3	≤ 4	1	23.5
16QAM	3	> 4	2	22.5
QPSK	1.4	≤ 5	0	24.5
QPSK	1.4	> 5	1	23.5
16QAM	1.4	≤ 5	1	23.5
16QAM	1.4	> 5	2	22.5

LTE Band 17				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	10	≤ 12	0	24
QPSK	10	> 12	1	23
16QAM	10	≤ 12	1	23
16QAM	10	> 12	2	22
QPSK	5	≤ 8	0	24
QPSK	5	> 8	1	23
16QAM	5	≤ 8	1	23
16QAM	5	> 8	2	22

Mode / Band	Maximum Average Power (dBm)		
	802.11b	802.11g	802.11n-HT20
WLAN 2.4 GHz Band Ant.0	14	13	12
WLAN 2.4 GHz Band Ant.1	13	13	12
WLAN 2.4 GHz Band Ant.0+1(0)			11
WLAN 2.4 GHz Band Ant.0+1(1)			8
WLAN 2.4 GHz Band Ant.0+1			13

4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03									
FCC ID	SRQ-MF915								
Equipment Name	Ufi								
Operating Frequency Range of each LTE transmission band	LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz								
Channel Bandwidth	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz (LTE Band 2/4) 1.4MHz, 3MHz, 5MHz, 10MHz (LTE Band 12) 5MHz, 10MHz (LTE Band 17)								
uplink modulations used	QPSK, and 16QAM								
LTE Voice / Data requirements	Data only								
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								
	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz		
		QPSK	> 5	> 4	> 8	> 12	> 16		> 18
		16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16		≤ 18
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18		
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)								
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.								

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq. (MHz)				
L	23755		706.5			23780		709				
M	23790		710			23790		710				
H	23825		713.5			23800		711				
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

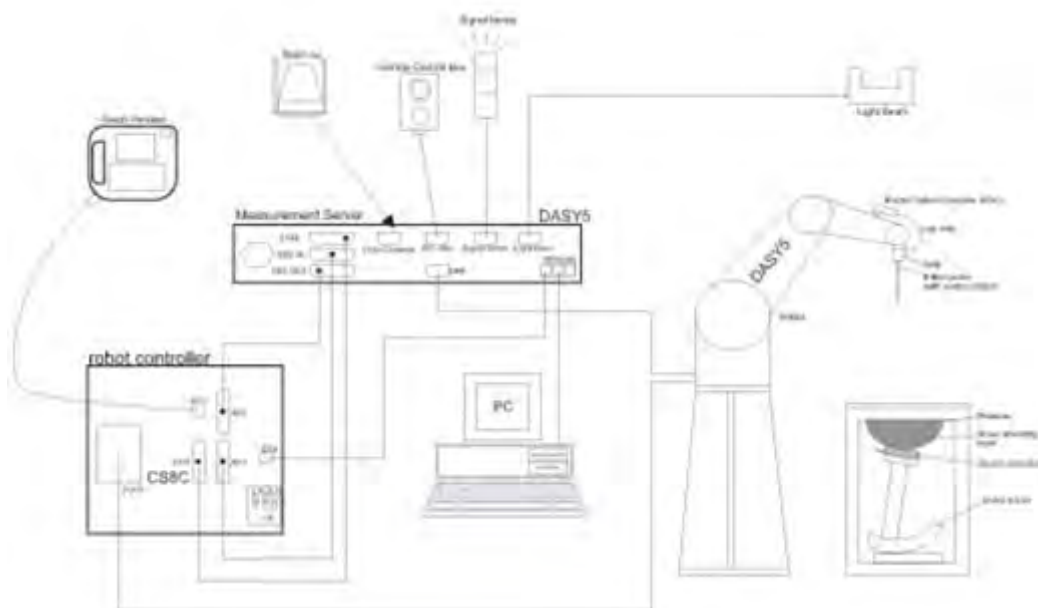

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN power measurement, use engineering software to configure EUT WLAN continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 11, 2013	Nov. 10, 2014
SPEAG	835MHz System Validation Kit	D835V2	4d151	Mar. 25, 2013	Mar. 23, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1090	Mar. 27, 2013	Mar. 25, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	Mar. 27, 2013	Mar. 25, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	908	Mar. 26, 2013	Mar. 24, 2015
SPEAG	Data Acquisition Electronics	DAE4	1358	Apr. 30, 2014	Apr. 29, 2015
SPEAG	Data Acquisition Electronics	DAE4	1353	Jan. 30, 2014	Jan. 29, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3911	Apr. 22, 2014	Apr. 21, 2015
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1754	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY52102600	Dec. 30, 2013	Dec. 29, 2014
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May 06, 2014	May 05, 2015
Anritsu	Radio communication analyzer	MT8820C	6201074235	Nov. 05, 2013	Nov. 04, 2014
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Dec. 30, 2013	Dec. 29, 2014
Agilent	Dielectric Probe Kit	85070E	MY44300751	NCR	NCR
Anritsu	Power Meter	ML2495A	1005002	Feb. 27, 2014	Feb. 26, 2015
Anritsu	Power Sensor	MA2411B	917070	Feb. 27, 2014	Feb. 26, 2015
R&S	Spectrum Analyzer	FSP7	101045	Dec. 30, 2013	Dec. 29, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator	WK0602-XX	N/A	Note 1	
PE	Attenuator	PE7005-10	N/A	Note 1	
PE	Attenuator	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 1	

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- Referring to KDB 865664 D01v01r03, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- The justification data of dipole D835V2, SN: 4d151, D1750V2, SN: 1090, D1900V2, SN: 5d170 and D2450V2, SN: 908 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1750	70.2	0	0	0.4	0	29.4	1.49	53.4
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Body	22.6	0.961	53.917	0.96	55.5	0.10	-2.85	±5	2014.06.27
835	Body	22.5	0.973	54.088	0.97	55.2	0.31	-2.01	±5	2014.06.23
1750	Body	22.7	1.539	54.578	1.49	53.4	3.29	2.21	±5	2014.06.22
1900	Body	22.5	1.501	53.849	1.52	53.3	-1.25	1.03	±5	2014.07.23
2450	Body	22.6	1.985	51.168	1.95	52.7	1.79	-2.91	±5	2014.07.08

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014.06.27	750	Body	250	1099	3911	1358	2.06	8.56	8.24	-3.74
2014.06.23	835	Body	250	4d151	3911	1353	2.22	9.43	8.88	-5.83
2014.06.22	1750	Body	250	1090	3911	1353	9.67	38.10	38.68	1.52
2014.07.23	1900	Body	250	5d170	3911	1353	10.20	41.20	40.8	-0.97
2014.07.08	2450	Body	250	908	3911	1358	13.60	50.40	54.4	7.94

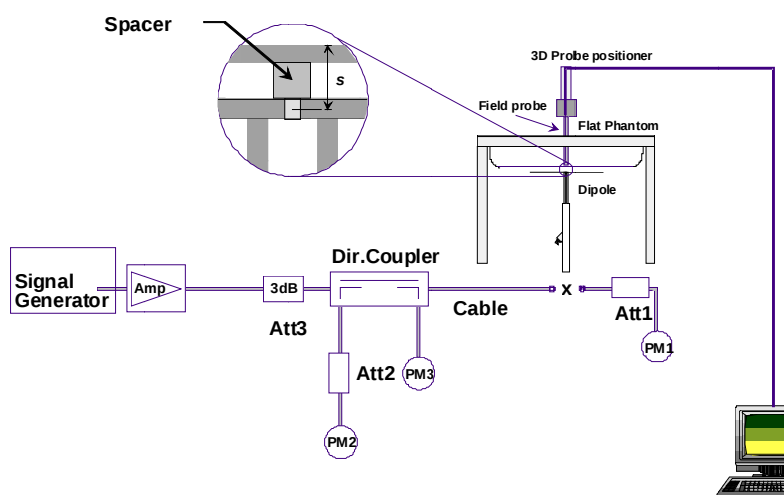


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo



11. RF Exposure Positions

11.1 Body Position

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1 cm.

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. For Body mode SAR testing, GPRS / EDGE should be evaluated, therefore the EUT was set in GPRS 1 Tx slot for GSM850 band and set in GPRS 2 Tx slots for GSM1900 band due to its highest frame-average power.

Band GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GPRS (GMSK, 1 Tx slot) – CS1	32.71	32.69	32.98	33.5	23.71	23.69	23.98	24.5
GPRS (GMSK, 2 Tx slots) – CS1	29.53	29.55	29.75	30	23.53	23.55	23.75	24
EDGE (8PSK, 1 Tx slot) – MCS5	25.87	25.78	25.93	26	16.87	16.78	16.93	17
EDGE (8PSK, 2 Tx slots) – MCS5	23.79	23.67	23.86	24	17.79	17.67	17.86	28
EDGE (8PSK, 3 Tx slots) – MCS5	21.90	21.78	21.98	22	17.64	17.52	17.72	17.74
EDGE (8PSK, 4 Tx slots) – MCS5	21.30	21.19	21.35	22	18.30	18.19	18.35	19
Band GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS (GMSK, 1 Tx slot) – CS1	28.55	28.59	28.74	29	19.55	19.59	19.74	20
GPRS (GMSK, 2 Tx slots) – CS1	26.54	26.55	26.69	27	20.54	20.55	20.69	21
EDGE (8PSK, 1 Tx slot) – MCS5	25.11	25.07	26.15	27	16.11	16.07	17.15	18
EDGE (8PSK, 2 Tx slots) – MCS5	23.03	22.95	23.04	23.5	17.03	16.95	17.04	17.5
EDGE (8PSK, 3 Tx slots) – MCS5	21.18	21.10	21.20	22	16.92	16.84	16.94	17.74
EDGE (8PSK, 4 Tx slots) – MCS5	20.52	20.50	20.60	21	17.52	17.50	17.60	18

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

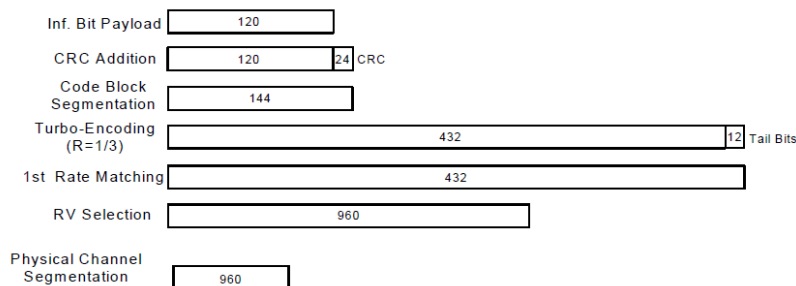
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>

General Note: Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..

Band			WCDMA V			Tune-up Limit (dBm)	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel			4132	4182	4233		9262	9400	9538		1312	1413	1513	
Rx Channel			4357	4407	4458		9662	9800	9938		1537	1638	1738	
Frequency (MHz)			826.4	836.4	846.6		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
MPR (dB)	3GPP Rel 99	RMC 12.2Kbps	22.55	22.61	22.57	23.5	22.50	22.53	22.80	24	22.65	22.62	22.45	23.5
0	3GPP Rel 6	HSDPA Subtest-1	21.46	21.50	21.49	22	21.45	21.46	21.59	22	21.61	21.55	21.39	22
0	3GPP Rel 6	HSDPA Subtest-2	21.51	21.58	21.55	22	21.38	21.40	21.65	22	21.62	21.56	21.41	22
0.5	3GPP Rel 6	HSDPA Subtest-3	21.05	21.10	21.08	22	20.99	21.01	21.21	22	21.07	21.03	20.98	22
0.5	3GPP Rel 6	HSDPA Subtest-4	21.06	21.12	21.09	22	21.03	21.05	21.25	22	21.15	21.11	21.06	22
0	3GPP Rel 8	DC-HSDPA Subtest-1	21.44	21.45	21.43	22	21.40	21.40	21.53	22	21.63	21.59	21.45	22
0	3GPP Rel 8	DC-HSDPA Subtest-2	21.49	21.55	21.50	22	21.35	21.40	21.60	22	21.65	21.53	21.49	22
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	21.00	21.02	21.03	22	21.00	21.08	21.18	22	21.09	21.00	20.99	22
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	21.01	21.00	21.05	22	21.00	21.03	21.22	22	21.15	21.05	21.03	22
0	3GPP Rel 6	HSUPA Subtest-1	20.98	21.04	21.01	22	20.73	20.76	20.88	21	21.45	21.33	21.31	22
2	3GPP Rel 6	HSUPA Subtest-2	20.55	20.61	20.57	21	20.03	20.05	20.19	21	20.70	20.65	20.61	21
1	3GPP Rel 6	HSUPA Subtest-3	20.27	20.35	20.29	21	19.99	20.01	20.14	21	20.46	20.39	20.36	21
2	3GPP Rel 6	HSUPA Subtest-4	21.07	21.15	21.08	22	21.19	21.21	21.30	22	21.17	21.05	21.03	22
0	3GPP Rel 6	HSUPA Subtest-5	20.49	20.58	20.52	21	20.65	20.68	20.68	21	20.64	20.59	20.55	21

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.02	23.02	23.07	24.5	0
10	QPSK	1	24	23.12	23.03	23.10		
10	QPSK	1	49	23.25	23.05	23.12		
10	QPSK	25	0	22.06	22.02	22.11	23.5	0-1
10	QPSK	25	12	22.10	22.05	22.17		
10	QPSK	25	24	22.15	22.14	22.21		
10	QPSK	50	0	22.15	22.22	22.14	23.5	0-1
10	16QAM	1	0	21.64	22.32	22.19		
10	16QAM	1	24	22.13	22.33	22.20		
10	16QAM	1	49	22.21	22.43	22.23	22.5	0-2
10	16QAM	25	0	21.09	22.05	22.14		
10	16QAM	25	12	21.21	22.13	22.15		
10	16QAM	25	24	21.23	22.15	22.19	22.5	0-2
10	16QAM	50	0	21.15	21.22	21.11		
Channel				23035	23095	23155	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.98	22.89	23.05	24.5	0
5	QPSK	1	12	23.01	23.01	23.10		
5	QPSK	1	24	23.06	23.07	23.14		
5	QPSK	12	0	22.06	22.07	22.13	23.5	0-1
5	QPSK	12	6	22.07	22.09	22.16		
5	QPSK	12	11	22.17	22.11	22.20		
5	QPSK	25	0	22.02	22.21	22.12	23.5	0-1
5	16QAM	1	0	22.03	21.90	21.67		
5	16QAM	1	12	22.05	21.93	21.87		
5	16QAM	1	24	22.12	22.27	22.14	22.5	0-2
5	16QAM	12	0	21.09	22.04	21.99		
5	16QAM	12	6	21.11	22.11	22.03		
5	16QAM	12	11	21.12	22.16	22.09	22.5	0-2
5	16QAM	25	0	21.05	21.25	21.19		
Channel				23025	23095	23165	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.92	22.95	22.90	24.5	0
3	QPSK	1	7	22.99	22.99	22.94		
3	QPSK	1	14	23.03	23.13	23.05		
3	QPSK	8	0	22.03	22.13	22.03	23.5	0-1
3	QPSK	8	4	22.10	22.16	22.09		
3	QPSK	8	7	22.14	22.22	22.13		
3	QPSK	15	0	22.08	22.11	22.15	23.5	0-1
3	16QAM	1	0	21.80	22.17	21.89		
3	16QAM	1	7	22.22	22.19	22.13		
3	16QAM	1	14	22.28	22.28	22.20	22.5	0-2
3	16QAM	8	0	21.07	22.03	22.06		
3	16QAM	8	4	21.11	22.04	22.09		
3	16QAM	8	7	21.12	22.19	22.11	22.5	0-2
3	16QAM	15	0	21.07	21.24	21.09		



Channel				23017	23095	23173	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.05	23.06	23.05	24.5	0
1.4	QPSK	1	2	23.06	23.11	23.10		
1.4	QPSK	1	5	23.11	23.13	23.16		
1.4	QPSK	3	0	23.07	23.07	22.90		
1.4	QPSK	3	1	23.09	23.09	22.92		
1.4	QPSK	3	2	23.10	23.10	22.96		
1.4	QPSK	6	0	22.09	22.18	22.09	23.5	0-1
1.4	16QAM	1	0	21.73	22.05	22.06	23.5	0-1
1.4	16QAM	1	2	22.21	22.12	22.10		
1.4	16QAM	1	5	22.26	22.41	22.20		
1.4	16QAM	3	0	22.07	21.91	21.87		
1.4	16QAM	3	1	22.11	22.06	22.01		
1.4	16QAM	3	2	22.14	22.12	22.06		
1.4	16QAM	6	0	21.01	21.14	21.03	22.5	0-2

<LTE Band 17 Conducted Power>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.00	23.10	23.04		
10	QPSK	1	24	23.01	23.20	23.12	23	0-1
10	QPSK	1	49	23.13	23.22	23.13		
10	QPSK	25	0	21.98	22.08	22.03		
10	QPSK	25	12	22.10	22.12	22.06	23	0-1
10	QPSK	25	24	22.15	22.17	22.22		
10	QPSK	50	0	22.17	22.14	22.16		
10	16QAM	1	0	21.85	21.79	21.80	23	0-1
10	16QAM	1	24	22.13	21.89	21.84		
10	16QAM	1	49	22.30	22.04	22.15		
10	16QAM	25	0	21.12	21.04	21.07	22	0-2
10	16QAM	25	12	21.15	21.09	21.19		
10	16QAM	25	24	21.18	21.22	21.23		
10	16QAM	50	0	21.11	21.16	21.03	24	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.02	23.02	22.92	24	0
5	QPSK	1	12	23.07	23.10	23.14		
5	QPSK	1	24	23.09	23.19	23.18		
5	QPSK	12	0	22.30	22.04	22.04	23	0-1
5	QPSK	12	6	22.34	22.06	22.09		
5	QPSK	12	11	22.39	22.12	22.12		
5	QPSK	25	0	22.22	22.03	22.17	23	0-1
5	16QAM	1	0	22.10	22.17	22.03		
5	16QAM	1	12	22.13	22.20	22.22		
5	16QAM	1	24	22.21	22.26	22.24	22	0-2
5	16QAM	12	0	20.92	21.10	20.98		
5	16QAM	12	6	21.17	21.14	21.05		
5	16QAM	12	11	21.19	21.18	21.07	22	0-2
5	16QAM	25	0	21.19	21.13	21.08		

<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.39	23.41	23.16	24	0
20	QPSK	1	49	23.30	23.11	23.12		
20	QPSK	1	99	23.28	23.10	23.10		
20	QPSK	50	0	22.38	22.43	22.33	23	0-1
20	QPSK	50	24	22.30	22.34	22.30		
20	QPSK	50	49	22.26	22.30	22.13		
20	QPSK	100	0	22.29	22.42	22.26		
20	16QAM	1	0	22.46	22.60	22.46	23	0-1
20	16QAM	1	49	22.41	22.45	22.43		
20	16QAM	1	99	22.14	22.39	22.20		
20	16QAM	50	0	21.38	21.39	21.30	22	0-2
20	16QAM	50	24	21.29	21.28	21.29		
20	16QAM	50	49	21.25	21.26	21.14		
20	16QAM	100	0	21.27	21.38	21.35		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.35	23.39	23.29	24	0
15	QPSK	1	37	23.34	23.38	23.10		
15	QPSK	1	74	23.32	23.25	23.01		
15	QPSK	36	0	22.37	22.35	22.30	23	0-1
15	QPSK	36	18	22.32	22.32	22.22		
15	QPSK	36	37	22.31	22.30	22.18		
15	QPSK	75	0	22.44	22.37	22.19		
15	16QAM	1	0	22.25	22.35	22.24	23	0-1
15	16QAM	1	37	22.17	22.33	22.22		
15	16QAM	1	74	22.10	22.28	21.83		
15	16QAM	36	0	21.35	21.29	21.24	22	0-2
15	16QAM	36	18	21.31	21.26	21.17		
15	16QAM	36	37	21.21	21.24	21.15		
15	16QAM	75	0	21.30	21.35	21.19		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.38	23.41	23.22	24	0
10	QPSK	1	24	23.35	23.22	23.12		
10	QPSK	1	49	23.33	23.20	23.10		
10	QPSK	25	0	22.39	22.34	22.18	23	0-1
10	QPSK	25	12	22.33	22.30	22.15		
10	QPSK	25	24	22.32	22.22	22.07		
10	QPSK	50	0	22.38	22.43	22.16		
10	16QAM	1	0	22.41	22.34	22.40	23	0-1
10	16QAM	1	24	22.36	22.30	22.32		
10	16QAM	1	49	22.32	22.05	22.24		
10	16QAM	25	0	21.42	21.49	21.23	22	0-2
10	16QAM	25	12	21.35	21.30	21.16		
10	16QAM	25	24	21.33	21.25	21.15		
10	16QAM	50	0	21.39	21.20	21.17		



FCC SAR Test Report

Report No. : FA460501

Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.38	23.24	23.17	24	0
5	QPSK	1	12	23.37	23.19	23.12		
5	QPSK	1	24	23.34	23.10	23.10		
5	QPSK	12	0	22.39	22.29	22.16	23	0-1
5	QPSK	12	6	22.34	22.27	22.11		
5	QPSK	12	11	22.30	22.26	22.07		
5	QPSK	25	0	22.31	22.44	22.11		
5	16QAM	1	0	22.34	22.13	22.23	23	0-1
5	16QAM	1	12	22.31	22.09	22.19		
5	16QAM	1	24	22.27	22.05	22.09		
5	16QAM	12	0	21.44	21.51	21.25	22	0-2
5	16QAM	12	6	21.38	21.41	21.14		
5	16QAM	12	11	21.35	21.33	21.09		
5	16QAM	25	0	21.26	21.42	21.17		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.37	23.40	23.06	24	0
3	QPSK	1	7	23.29	23.28	23.04		
3	QPSK	1	14	23.25	23.24	23.01		
3	QPSK	8	0	22.41	22.35	22.17	23	0-1
3	QPSK	8	4	22.29	22.34	22.12		
3	QPSK	8	7	22.27	22.30	22.10		
3	QPSK	15	0	22.33	22.33	22.20		
3	16QAM	1	0	22.37	22.56	21.86	23	0-1
3	16QAM	1	7	22.28	22.39	21.69		
3	16QAM	1	14	22.23	21.93	21.67		
3	16QAM	8	0	21.41	21.37	21.22	22	0-2
3	16QAM	8	4	21.34	21.36	21.20		
3	16QAM	8	7	21.30	21.35	21.02		
3	16QAM	15	0	21.28	21.23	21.02		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.39	23.28	23.17	24	0
1.4	QPSK	1	2	23.38	23.16	23.13		
1.4	QPSK	1	5	23.36	23.13	23.12		
1.4	QPSK	3	0	23.36	23.25	23.10		
1.4	QPSK	3	1	23.34	23.16	23.09		
1.4	QPSK	3	2	23.32	23.15	23.06		
1.4	QPSK	6	0	22.42	22.30	22.24	23	0-1
1.4	16QAM	1	0	22.54	22.63	22.28	23	0-1
1.4	16QAM	1	2	22.50	22.42	22.13		
1.4	16QAM	1	5	22.43	22.36	21.96		
1.4	16QAM	3	0	22.44	22.20	22.18		
1.4	16QAM	3	1	22.40	22.18	22.15		
1.4	16QAM	3	2	22.30	22.11	22.10		
1.4	16QAM	6	0	21.38	21.16	21.22	22	0-2



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.35	23.51	23.79		
20	QPSK	1	49	23.36	23.71	23.85	24.5	0
20	QPSK	1	99	23.44	23.85	24.05	23.5	0-1
20	QPSK	50	0	22.45	22.80	23.15		
20	QPSK	50	24	22.50	22.84	23.20		
20	QPSK	50	49	22.55	22.86	23.24		
20	QPSK	100	0	22.45	22.85	23.17		
20	16QAM	1	0	22.20	22.47	23.06	23.5	0-1
20	16QAM	1	49	22.32	22.77	23.08		
20	16QAM	1	99	22.69	22.96	23.14		
20	16QAM	50	0	21.37	21.75	22.06	22.5	0-2
20	16QAM	50	24	21.40	21.78	22.22		
20	16QAM	50	49	21.55	21.85	22.26		
20	16QAM	100	0	21.43	21.78	22.11		
Channel				18675	18900	19125	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.37	23.72	23.90	24.5	0
15	QPSK	1	37	23.39	23.76	23.91		
15	QPSK	1	74	23.45	23.90	24.01		
15	QPSK	36	0	22.35	22.73	23.13	23.5	0-1
15	QPSK	36	18	22.38	22.75	23.14		
15	QPSK	36	37	22.45	22.83	23.16		
15	QPSK	75	0	22.46	22.83	23.17		
15	16QAM	1	0	22.23	22.34	22.99	23.5	0-1
15	16QAM	1	37	22.27	22.44	23.04		
15	16QAM	1	74	22.57	22.66	23.31		
15	16QAM	36	0	21.40	21.67	22.09	22.5	0-2
15	16QAM	36	18	21.41	21.68	22.11		
15	16QAM	36	37	21.45	21.85	22.12		
15	16QAM	75	0	21.55	21.80	22.13		
Channel				18650	18900	19150	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.34	23.55	23.96	24.5	0
10	QPSK	1	24	23.39	23.66	24.01		
10	QPSK	1	49	23.42	23.87	24.03		
10	QPSK	25	0	22.39	22.79	23.11	23.5	0-1
10	QPSK	25	12	22.45	22.80	23.14		
10	QPSK	25	24	22.49	22.83	23.18		
10	QPSK	50	0	22.45	22.80	23.16		
10	16QAM	1	0	22.16	22.25	22.80	23.5	0-1
10	16QAM	1	24	22.27	22.26	23.05		
10	16QAM	1	49	22.45	22.49	23.09		
10	16QAM	25	0	21.43	21.72	22.11	22.5	0-2
10	16QAM	25	12	21.49	21.75	22.25		
10	16QAM	25	24	21.54	21.82	22.34		
10	16QAM	50	0	21.43	21.80	22.25		



FCC SAR Test Report

Report No. : FA460501

Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.30	23.71	23.79	24.5	0
5	QPSK	1	12	23.32	23.74	23.88		
5	QPSK	1	24	23.39	23.77	24.03		
5	QPSK	12	0	22.40	22.76	23.07	23.5	0-1
5	QPSK	12	6	22.42	22.78	23.08		
5	QPSK	12	11	22.49	22.86	23.09		
5	QPSK	25	0	22.40	22.82	23.06		
5	16QAM	1	0	22.30	22.45	22.92	23.5	0-1
5	16QAM	1	12	22.47	22.51	23.15		
5	16QAM	1	24	22.52	22.68	23.19		
5	16QAM	12	0	21.37	21.71	22.05	22.5	0-2
5	16QAM	12	6	21.52	21.78	22.07		
5	16QAM	12	11	21.58	21.79	22.19		
5	16QAM	25	0	21.40	21.83	22.07		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.33	23.62	23.88	24.5	0
3	QPSK	1	7	23.35	23.64	23.95		
3	QPSK	1	14	23.38	23.82	23.98		
3	QPSK	8	0	22.39	22.69	23.06	23.5	0-1
3	QPSK	8	4	22.41	22.70	23.12		
3	QPSK	8	7	22.47	22.79	23.24		
3	QPSK	15	0	22.42	22.73	23.06		
3	16QAM	1	0	22.11	22.49	22.86	23.5	0-1
3	16QAM	1	7	22.12	22.55	22.98		
3	16QAM	1	14	22.26	22.91	23.21		
3	16QAM	8	0	21.39	21.66	22.10	22.5	0-2
3	16QAM	8	4	21.50	21.83	22.11		
3	16QAM	8	7	21.57	21.85	22.13		
3	16QAM	15	0	21.27	21.70	22.10		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.34	23.71	23.92	24.5	0
1.4	QPSK	1	2	23.30	23.77	23.95		
1.4	QPSK	1	5	23.49	23.79	24.03		
1.4	QPSK	3	0	23.30	23.59	23.93		
1.4	QPSK	3	1	23.32	23.66	23.96		
1.4	QPSK	3	2	23.42	23.78	23.97		
1.4	QPSK	6	0	22.48	22.88	23.11	23.5	0-1
1.4	16QAM	1	0	22.35	22.56	22.88	23.5	0-1
1.4	16QAM	1	2	22.39	22.75	23.01		
1.4	16QAM	1	5	22.57	23.01	23.18		
1.4	16QAM	3	0	22.26	22.85	22.94		
1.4	16QAM	3	1	22.46	22.86	23.06		
1.4	16QAM	3	2	22.49	22.94	23.08		
1.4	16QAM	6	0	21.36	21.80	22.13	22.5	0-2

<WLAN Conducted Power>**General Note:**

1. Per KDB 248227, SAR for MIMO was measured with both transmitting simultaneously and was evaluated in dependently of SISO operation.
2. For 2.4GHz WLAN SISO mode SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g/n HT20 were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.
3. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
4. For 2.4GHz WLAN MIMO mode SAR testing, highest average RF output power channel for the lowest data rate for 802.11n HT20 were selected for SAR evaluation.

<2.4GHz WLAN Antenna 0>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	12.55	13.31	13.30	13.29
CH 6	2437	13.02			
CH 11	2462	13.35			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	12.06	12.68	12.66	12.61	12.65	12.68	12.74	12.58
CH 6	2437	12.77							
CH 11	2462	12.58							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	11.12	11.82	11.81	11.76	11.82	11.83	11.82	11.72
CH 6	2437	11.79							
CH 11	2462	11.84							

<2.4GHz WLAN Antenna 1>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	11.91	12.90	12.93	12.83
CH 6	2437	12.94			
CH 11	2462	12.52			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	11.75	12.08	11.97	12.06	12.22	12.20	12.19	12.07
CH 6	2437	12.27							
CH 11	2462	11.91							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	10.53	10.94	10.92	10.90	10.96	10.99	10.96	11.00
CH 6	2437	11.01							
CH 11	2462	10.80							

<2.4GHz WLAN Antenna 0+1(0)>

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH 1	2412	9.33	10.14	10.10	10.03	10.03	10.15	10.13	10.01
CH 6	2437	9.79							
CH 11	2462	10.16							


<2.4GHz WLAN Antenna 0+1(1)>

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH 1	2412	7.24	7.22	6.99	6.98	7.20	7.38	7.34	7.24
CH 6	2437	7.33							
CH 11	2462	7.39							

<2.4GHz WLAN Antenna 0+1>

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH 1	2412	11.42	11.93	11.83	11.77	11.85	12.00	11.96	11.85
CH 6	2437	11.74							
CH 11	2462	12.00							

13. Antenna Location

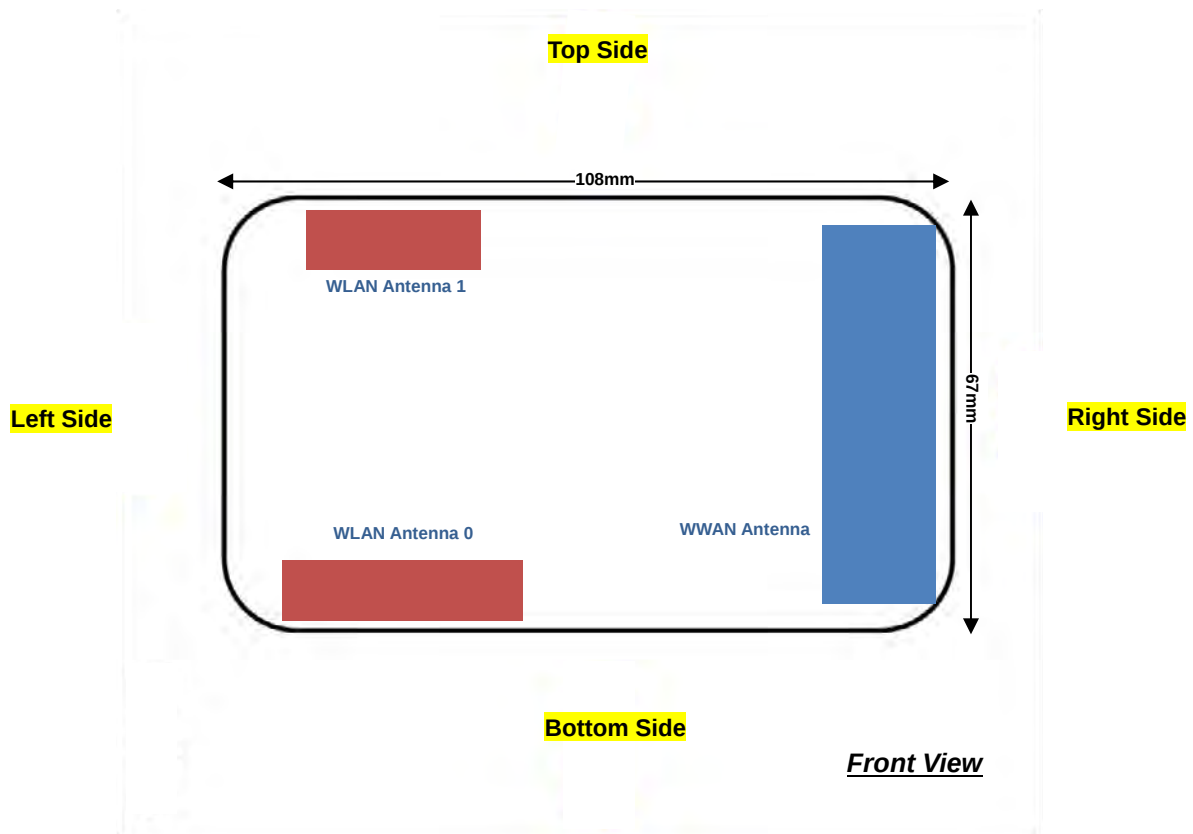

<Transmission configuration>

Wireless Interface	SISO Mode		MIMO Mode
	Antenna 0 <Tx/Rx>	Antenna 1 <Tx/Rx>	Antenna 0+1 <Tx/Rx>
WLAN 2.4GHz 802.11b/g	yes	yes	
WLAN 2.4GHz 802.11n HT20	yes	yes	yes

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	90mm
WLAN Antenna 0	≤ 25mm	≤ 25mm	58mm	≤ 25mm	71mm	≤ 25mm
WLAN Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	55mm	75mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	Yes	Yes	Yes	No
WLAN Antenna 0	Yes	Yes	No	Yes	No	Yes
WLAN Antenna 1	Yes	Yes	Yes	No	No	Yes

General Note: Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. For Body mode SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS 1 Tx slot for GSM850 band and set in GPRS 2 Tx slots for GSMGSM1900 band due to its highest frame-average power.
4. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded..
5. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
6. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
7. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
8. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
9. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
10. This device 2.4GHz WLAN supports Hotspot operation.

14.1 Body SAR

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	90mm
WLAN Antenna 0	≤ 25mm	≤ 25mm	58mm	≤ 25mm	71mm	≤ 25mm
WLAN Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	55mm	75mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	Yes	Yes	Yes	No
WLAN Antenna 0	Yes	Yes	No	Yes	No	Yes
WLAN Antenna 1	Yes	Yes	Yes	No	No	Yes

General Note: Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (GMSK 1 Tx slots)	Front	1	251	848.8	32.98	33.5	1.127	0.09	0.433	0.488
01	GSM850	GPRS (GMSK 1 Tx slots)	Back	1	251	848.8	32.98	33.5	1.127	-0.05	0.625	0.704
	GSM850	GPRS (GMSK 1 Tx slots)	Right side	1	251	848.8	32.98	33.5	1.127	-0.06	0.290	0.327
	GSM850	GPRS (GMSK 1 Tx slots)	Top side	1	251	848.8	32.98	33.5	1.127	-0.05	0.295	0.333
	GSM850	GPRS (GMSK 1 Tx slots)	Bottom side	1	251	848.8	32.98	33.5	1.127	-0.08	0.119	0.134
02	GSM1900	GPRS (GMSK 2 Tx slots)	Front	1	810	1909.8	26.69	27	1.074	0.02	0.465	0.499
	GSM1900	GPRS (GMSK 2 Tx slots)	Back	1	810	1909.8	26.69	27	1.074	-0.04	0.44	0.473
	GSM1900	GPRS (GMSK 2 Tx slots)	Right side	1	810	1909.8	26.69	27	1.074	-0.01	0.465	0.499
	GSM1900	GPRS (GMSK 2 Tx slots)	Top side	1	810	1909.8	26.69	27	1.074	-0.09	0.151	0.162
	GSM1900	GPRS (GMSK 2 Tx slots)	Bottom side	1	810	1909.8	26.69	27	1.074	-0.01	0.104	0.112

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2K	Front	1	4182	836.4	22.61	23.5	1.227	0.07	0.742	0.911
	WCDMA Band V	RMC 12.2K	Back	1	4182	836.4	22.61	23.5	1.227	-0.09	0.696	0.854
	WCDMA Band V	RMC 12.2K	Right side	1	4182	836.4	22.61	23.5	1.227	-0.04	0.211	0.259
	WCDMA Band V	RMC 12.2K	Top side	1	4182	836.4	22.61	23.5	1.227	0.04	0.588	0.722
	WCDMA Band V	RMC 12.2K	Bottom side	1	4182	836.4	22.61	23.5	1.227	0.02	0.306	0.376
	WCDMA Band V	RMC 12.2K	Front	1	4132	826.4	22.55	23.5	1.245	0.01	0.724	0.901
	WCDMA Band V	RMC 12.2K	Front	1	4233	846.6	22.57	23.5	1.239	0.05	0.625	0.774
03	WCDMA Band V	RMC 12.2K	Back	1	4132	826.4	22.55	23.5	1.245	-0.11	0.857	1.067
	WCDMA Band V	RMC 12.2K	Back	1	4233	846.6	22.57	23.5	1.239	-0.01	0.460	0.570
	WCDMA Band IV	RMC 12.2K	Front	1	1312	1712.4	22.65	23.5	1.216	0.05	0.867	1.054
	WCDMA Band IV	RMC 12.2K	Back	1	1312	1712.4	22.65	23.5	1.216	0.05	0.767	0.933
	WCDMA Band IV	RMC 12.2K	Right side	1	1312	1712.4	22.65	23.5	1.216	-0.04	0.753	0.916
	WCDMA Band IV	RMC 12.2K	Top side	1	1312	1712.4	22.65	23.5	1.216	-0.05	0.366	0.445
	WCDMA Band IV	RMC 12.2K	Bottom side	1	1312	1712.4	22.65	23.5	1.216	-0.08	0.183	0.223
	WCDMA Band IV	RMC 12.2K	Front	1	1413	1732.6	22.62	23.5	1.225	0.11	0.882	1.080
04	WCDMA Band IV	RMC 12.2K	Front	1	1513	1752.6	22.45	23.5	1.274	0.14	0.892	1.136
	WCDMA Band IV	RMC 12.2K	Back	1	1413	1732.6	22.62	23.5	1.225	-0.06	0.785	0.961
	WCDMA Band IV	RMC 12.2K	Back	1	1513	1752.6	22.45	23.5	1.274	-0.04	0.776	0.988
	WCDMA Band IV	RMC 12.2K	Right side	1	1413	1732.6	22.62	23.5	1.225	-0.06	0.727	0.890
	WCDMA Band IV	RMC 12.2K	Right side	1	1513	1752.6	22.45	23.5	1.274	-0.05	0.689	0.877
	WCDMA Band II	RMC 12.2K	Front	1	9538	1907.6	22.8	24	1.318	0.04	0.874	1.152
	WCDMA Band II	RMC 12.2K	Back	1	9538	1907.6	22.8	24	1.318	-0.03	0.803	1.059
	WCDMA Band II	RMC 12.2K	Right side	1	9538	1907.6	22.8	24	1.318	-0.08	0.825	1.088
	WCDMA Band II	RMC 12.2K	Top side	1	9538	1907.6	22.8	24	1.318	-0.06	0.267	0.352
	WCDMA Band II	RMC 12.2K	Bottom side	1	9538	1907.6	22.8	24	1.318	-0.01	0.192	0.253
05	WCDMA Band II	RMC 12.2K	Front	1	9262	1852.4	22.5	24	1.413	-0.06	0.871	1.230
	WCDMA Band II	RMC 12.2K	Front	1	9400	1880	22.53	24	1.403	0.13	0.873	1.225
	WCDMA Band II	RMC 12.2K	Back	1	9262	1852.4	22.5	24	1.413	-0.04	0.824	1.164
	WCDMA Band II	RMC 12.2K	Back	1	9400	1880	22.53	24	1.403	-0.01	0.831	1.166
	WCDMA Band II	RMC 12.2K	Right side	1	9262	1852.4	22.5	24	1.413	-0.07	0.692	0.977
	WCDMA Band II	RMC 12.2K	Right side	1	9400	1880	22.53	24	1.403	-0.06	0.737	1.034



<LTE SAR>

Plot No.	Band	BW (MHz)	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	1	49	QPSK	Front	1	23060	704	23.25	24.5	1.334	0.01	0.792	1.056
	LTE Band 12	10M	1	49	QPSK	Back	1	23060	704	23.25	24.5	1.334	0.03	0.813	1.084
	LTE Band 12	10M	1	49	QPSK	Right side	1	23060	704	23.25	24.5	1.334	-0.14	0.091	0.121
	LTE Band 12	10M	1	49	QPSK	Top side	1	23060	704	23.25	24.5	1.334	0.03	0.304	0.405
	LTE Band 12	10M	1	49	QPSK	Bottom side	1	23060	704	23.25	24.5	1.334	-0.02	0.238	0.317
	LTE Band 12	10M	1	49	QPSK	Front	1	23095	707.5	23.05	24.5	1.396	-0.01	0.809	1.130
	LTE Band 12	10M	1	49	QPSK	Front	1	23130	711	23.12	24.5	1.374	-0.05	0.825	1.134
	LTE Band 12	10M	1	49	QPSK	Back	1	23095	707.5	23.05	24.5	1.396	-0.01	0.830	1.159
06	LTE Band 12	10M	1	49	QPSK	Back	1	23130	711	23.12	24.5	1.374	-0.05	0.847	1.164
	LTE Band 12	10M	25	24	QPSK	Front	1	23130	711	22.21	23.5	1.346	0.01	0.668	0.899
	LTE Band 12	10M	25	24	QPSK	Back	1	23130	711	22.21	23.5	1.346	0.01	0.684	0.921
	LTE Band 12	10M	25	24	QPSK	Right side	1	23130	711	22.21	23.5	1.346	-0.11	0.071	0.096
	LTE Band 12	10M	25	24	QPSK	Top side	1	23130	711	22.21	23.5	1.346	0.01	0.259	0.349
	LTE Band 12	10M	25	24	QPSK	Bottom side	1	23130	711	22.21	23.5	1.346	0.03	0.205	0.276
	LTE Band 12	10M	25	24	QPSK	Front	1	23060	704	22.15	23.5	1.365	0.04	0.622	0.849
	LTE Band 12	10M	25	24	QPSK	Front	1	23095	707.5	22.14	23.5	1.368	0.04	0.643	0.879
	LTE Band 12	10M	25	24	QPSK	Back	1	23060	704	22.15	23.5	1.365	-0.01	0.647	0.883
	LTE Band 12	10M	25	24	QPSK	Back	1	23095	707.5	22.14	23.5	1.368	0.01	0.667	0.912
	LTE Band 12	10M	50	0	QPSK	Front	1	23095	707.5	22.22	23.5	1.343	0.03	0.638	0.857
	LTE Band 12	10M	50	0	QPSK	Back	1	23095	707.5	22.22	23.5	1.343	-0.01	0.660	0.886
	LTE Band 12	10M	50	0	QPSK	Right side	1	23095	707.5	22.22	23.5	1.343	0.05	0.074	0.099
	LTE Band 12	10M	50	0	QPSK	Top side	1	23095	707.5	22.22	23.5	1.343	-0.07	0.243	0.326
	LTE Band 12	10M	50	0	QPSK	Bottom side	1	23095	707.5	22.22	23.5	1.343	-0.02	0.190	0.255
	LTE Band 17	10M	1	49	QPSK	Front	1	23790	710	23.22	24	1.197	0.01	0.764	0.914
	LTE Band 17	10M	1	49	QPSK	Back	1	23790	710	23.22	24	1.197	0.01	0.860	1.029
	LTE Band 17	10M	1	49	QPSK	Right side	1	23790	710	23.22	24	1.197	-0.07	0.092	0.110
	LTE Band 17	10M	1	49	QPSK	Top side	1	23790	710	23.22	24	1.197	-0.02	0.403	0.482
	LTE Band 17	10M	1	49	QPSK	Bottom side	1	23790	710	23.22	24	1.197	-0.04	0.338	0.404
	LTE Band 17	10M	1	49	QPSK	Front	1	23780	709	23.13	24	1.222	0.03	0.751	0.918
	LTE Band 17	10M	1	49	QPSK	Front	1	23800	711	23.13	24	1.222	0.11	0.776	0.948
	LTE Band 17	10M	1	49	QPSK	Back	1	23780	709	23.13	24	1.222	-0.01	0.849	1.037
07	LTE Band 17	10M	1	49	QPSK	Back	1	23800	711	23.13	24	1.222	0.02	0.871	1.064
	LTE Band 17	10M	25	24	QPSK	Front	1	23800	711	22.22	23	1.197	-0.01	0.611	0.731
	LTE Band 17	10M	25	24	QPSK	Back	1	23800	711	22.22	23	1.197	0.06	0.650	0.778
	LTE Band 17	10M	25	24	QPSK	Right side	1	23800	711	22.22	23	1.197	-0.15	0.074	0.089
	LTE Band 17	10M	25	24	QPSK	Top side	1	23800	711	22.22	23	1.197	-0.04	0.313	0.375
	LTE Band 17	10M	25	24	QPSK	Bottom side	1	23800	711	22.22	23	1.197	-0.04	0.266	0.318
	LTE Band 17	10M	50	0	QPSK	Front	1	23780	709	22.17	23	1.211	0.04	0.596	0.722
	LTE Band 17	10M	50	0	QPSK	Back	1	23780	709	22.17	23	1.211	0.02	0.599	0.725
	LTE Band 17	10M	50	0	QPSK	Right side	1	23780	709	22.17	23	1.211	-0.07	0.074	0.090
	LTE Band 17	10M	50	0	QPSK	Top side	1	23780	709	22.17	23	1.211	-0.03	0.294	0.356
	LTE Band 17	10M	50	0	QPSK	Bottom side	1	23780	709	22.17	23	1.211	-0.04	0.253	0.306



Plot No.	Band	BW (MHz)	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	1	0	QPSK	Front	1	20175	1732.5	23.41	24	1.146	0.1	1.180	1.352
	LTE Band 4	20M	1	0	QPSK	Back	1	20175	1732.5	23.41	24	1.146	-0.06	1.050	1.203
	LTE Band 4	20M	1	0	QPSK	Right side	1	20175	1732.5	23.41	24	1.146	-0.03	0.821	0.940
	LTE Band 4	20M	1	0	QPSK	Top side	1	20175	1732.5	23.41	24	1.146	-0.03	0.467	0.535
	LTE Band 4	20M	1	0	QPSK	Bottom side	1	20175	1732.5	23.41	24	1.146	0.05	0.257	0.294
	LTE Band 4	20M	1	0	QPSK	Front	1	20050	1720	23.39	24	1.151	0.05	1.220	1.404
08	LTE Band 4	20M	1	0	QPSK	Front	1	20300	1745	23.16	24	1.213	0.14	1.180	1.432
	LTE Band 4	20M	1	0	QPSK	Back	1	20050	1720	23.39	24	1.151	-0.06	1.100	1.266
	LTE Band 4	20M	1	0	QPSK	Back	1	20300	1745	23.16	24	1.213	-0.07	0.992	1.204
	LTE Band 4	20M	1	0	QPSK	Right side	1	20050	1720	23.39	24	1.151	-0.16	0.873	1.005
	LTE Band 4	20M	1	0	QPSK	Right side	1	20300	1745	23.16	24	1.213	-0.07	0.813	0.986
	LTE Band 4	20M	50	0	QPSK	Front	1	20175	1732.5	22.43	23	1.140	0.06	0.958	1.092
	LTE Band 4	20M	50	0	QPSK	Back	1	20175	1732.5	22.43	23	1.140	-0.11	0.874	0.997
	LTE Band 4	20M	50	0	QPSK	Right side	1	20175	1732.5	22.43	23	1.140	-0.04	0.662	0.755
	LTE Band 4	20M	50	0	QPSK	Top side	1	20175	1732.5	22.43	23	1.140	-0.02	0.377	0.430
	LTE Band 4	20M	50	0	QPSK	Bottom side	1	20175	1732.5	22.43	23	1.140	0.01	0.201	0.229
	LTE Band 4	20M	50	0	QPSK	Front	1	20050	1720	22.38	23	1.153	0.05	0.884	1.020
	LTE Band 4	20M	50	0	QPSK	Front	1	20300	1745	22.33	23	1.167	0.15	0.875	1.021
	LTE Band 4	20M	50	0	QPSK	Back	1	20050	1720	22.38	23	1.153	-0.09	0.889	1.025
	LTE Band 4	20M	50	0	QPSK	Back	1	20300	1745	22.33	23	1.167	-0.13	0.862	1.006
	LTE Band 4	20M	100	0	QPSK	Front	1	20175	1732.5	22.42	23	1.143	0.12	0.878	1.003
	LTE Band 4	20M	100	0	QPSK	Back	1	20175	1732.5	22.42	23	1.143	-0.03	0.878	1.003
	LTE Band 4	20M	100	0	QPSK	Right side	1	20175	1732.5	22.42	23	1.143	-0.04	0.661	0.755
	LTE Band 4	20M	100	0	QPSK	Top side	1	20175	1732.5	22.42	23	1.143	-0.06	0.369	0.422
	LTE Band 4	20M	100	0	QPSK	Bottom side	1	20175	1732.5	22.42	23	1.143	0.04	0.188	0.215
09	LTE Band 2	20M	1	99	QPSK	Front	1	19100	1900	24.05	24.5	1.109	0.09	1.160	1.287
	LTE Band 2	20M	1	99	QPSK	Back	1	19100	1900	24.05	24.5	1.109	0.05	1.030	1.142
	LTE Band 2	20M	1	99	QPSK	Right side	1	19100	1900	24.05	24.5	1.109	0.07	1.040	1.154
	LTE Band 2	20M	1	99	QPSK	Top side	1	19100	1900	24.05	24.5	1.109	0.01	0.333	0.369
	LTE Band 2	20M	1	99	QPSK	Bottom side	1	19100	1900	24.05	24.5	1.109	-0.09	0.225	0.250
	LTE Band 2	20M	1	99	QPSK	Front	1	18700	1860	23.44	24.5	1.276	0.11	0.957	1.222
	LTE Band 2	20M	1	99	QPSK	Front	1	18900	1880	23.85	24.5	1.161	0.1	0.977	1.135
	LTE Band 2	20M	1	99	QPSK	Back	1	18700	1860	23.44	24.5	1.276	0.08	0.906	1.156
	LTE Band 2	20M	1	99	QPSK	Back	1	18900	1880	23.85	24.5	1.161	0.01	0.878	1.020
	LTE Band 2	20M	1	99	QPSK	Right side	1	18700	1860	23.44	24.5	1.276	-0.13	0.929	1.186
	LTE Band 2	20M	1	99	QPSK	Right side	1	18900	1880	23.85	24.5	1.161	-0.04	0.956	1.110
	LTE Band 2	20M	50	49	QPSK	Front	1	19100	1900	23.24	23.5	1.062	0.13	0.930	0.987
	LTE Band 2	20M	50	49	QPSK	Back	1	19100	1900	23.24	23.5	1.062	0.07	0.820	0.871
	LTE Band 2	20M	50	49	QPSK	Right side	1	19100	1900	23.24	23.5	1.062	-0.13	0.862	0.915
	LTE Band 2	20M	50	49	QPSK	Top side	1	19100	1900	23.24	23.5	1.062	0.02	0.269	0.286
	LTE Band 2	20M	50	49	QPSK	Bottom side	1	19100	1900	23.24	23.5	1.062	-0.06	0.177	0.188
	LTE Band 2	20M	50	49	QPSK	Front	1	18700	1860	22.55	23.5	1.245	0.08	0.795	0.989
	LTE Band 2	20M	50	49	QPSK	Front	1	18900	1880	22.86	23.5	1.159	-0.05	0.785	0.910
	LTE Band 2	20M	50	49	QPSK	Back	1	18700	1860	22.55	23.5	1.245	0.12	0.727	0.905
	LTE Band 2	20M	50	49	QPSK	Back	1	18900	1880	22.86	23.5	1.159	-0.08	0.708	0.820
	LTE Band 2	20M	50	49	QPSK	Right side	1	18700	1860	22.55	23.5	1.245	-0.05	0.743	0.925
	LTE Band 2	20M	50	49	QPSK	Right side	1	18900	1880	22.86	23.5	1.159	-0.02	0.777	0.900
	LTE Band 2	20M	100	0	QPSK	Front	1	19100	1900	23.17	23.5	1.079	0.11	0.908	0.980
	LTE Band 2	20M	100	0	QPSK	Back	1	19100	1900	23.17	23.5	1.079	0.03	0.805	0.869
	LTE Band 2	20M	100	0	QPSK	Right side	1	19100	1900	23.17	23.5	1.079	0.01	0.839	0.905
	LTE Band 2	20M	100	0	QPSK	Top side	1	19100	1900	23.17	23.5	1.079	-0.01	0.258	0.278
	LTE Band 2	20M	100	0	QPSK	Bottom side	1	19100	1900	23.17	23.5	1.079	-0.05	0.176	0.190

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	1	Ant. 0	11	2462	13.35	14	1.161	100	1.000	0.14	0.067	0.078
10	WLAN 2.4GHz	802.11b 1Mbps	Back	1	Ant. 0	11	2462	13.35	14	1.161	100	1.000	-0.09	0.077	0.089
	WLAN 2.4GHz	802.11b 1Mbps	Left side	1	Ant. 0	11	2462	13.35	14	1.161	100	1.000	0.09	0.011	0.013
	WLAN 2.4GHz	802.11b 1Mbps	Bottom side	1	Ant. 0	11	2462	13.35	14	1.161	100	1.000	-0.07	0.059	0.069
	WLAN 2.4GHz	802.11b 1Mbps	Front	1	Ant. 1	6	2437	12.94	13	1.014	100	1.000	-0.05	0.044	0.045
	WLAN 2.4GHz	802.11b 1Mbps	Back	1	Ant. 1	6	2437	12.94	13	1.014	100	1.000	0.01	0.054	0.055
	WLAN 2.4GHz	802.11b 1Mbps	Left side	1	Ant. 1	6	2437	12.94	13	1.014	100	1.000	-0.07	0.047	0.048
11	WLAN 2.4GHz	802.11b 1Mbps	Top side	1	Ant. 1	6	2437	12.94	13	1.014	100	1.000	-0.13	0.058	0.059
	WLAN 2.4GHz	802.11n-HT20 MCS8	Front	1	Ant 0+1	11	2462	12	13	1.259	90.83	1.101	0.01	0.053	0.073
12	WLAN 2.4GHz	802.11n-HT20 MCS8	Back	1	Ant 0+1	11	2462	12	13	1.259	90.83	1.101	-0.09	0.092	0.128
	WLAN 2.4GHz	802.11n-HT20 MCS8	Left side	1	Ant 0+1	11	2462	12	13	1.259	90.83	1.101	-0.03	0.058	0.080
	WLAN 2.4GHz	802.11n-HT20 MCS8	Top side	1	Ant 0+1	11	2462	12	13	1.259	90.83	1.101	-0.01	0.056	0.078
	WLAN 2.4GHz	802.11n-HT20 MCS8	Bottom side	1	Ant 0+1	11	2462	12	13	1.259	90.83	1.101	-0.07	0.032	0.044

14.2 Repeated SAR Measurement

No.	Band	BW (MHz)	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band V	-	-	-	RMC 12.2K	Back	1	4132	826.4	22.55	23.5	1.245	-0.11	0.857	1	1.067
2nd	WCDMA Band V	-	-	-	RMC 12.2K	Back	1	4132	826.4	22.55	23.5	1.245	-0.06	0.854	1.004	1.063
1st	LTE Band 17	10M	1	49	QPSK	Back	1	23800	711	23.13	24	1.222	0.02	0.871	1	1.064
2nd	LTE Band 17	10M	1	49	QPSK	Back	1	23800	711	23.13	24	1.222	-0.03	0.825	1.053	1.008
1st	LTE Band 4	20M	1	0	QPSK	Front	1	20050	1720	23.39	24	1.151	0.05	1.220	1	1.404
2nd	LTE Band 4	20M	1	0	QPSK	Front	1	20050	1720	23.39	24	1.151	0.08	1.160	1.049	1.335
1st	LTE Band 2	20M	1	99	QPSK	Front	1	19100	1900	24.05	24.5	1.109	0.09	1.160	1	1.287
2nd	LTE Band 2	20M	1	99	QPSK	Front	1	19100	1900	24.05	24.5	1.109	0.13	1.150	1.009	1.276

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Ufi	Note
		Body	
1.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
2.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot
3.	LTE(Data) + WLAN2.4GHz(data)	Yes	2.4GHz Hotspot

General Note:

1. This device 2.4GHz WLAN supports Hotspot operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The Reported SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

15.1 Body Accessory Exposure Conditions
<WWAN PCB + WLAN DTS>

WWAN Band		Exposure Position	WWAN PCB Max. WWAN SAR (W/kg)	WLAN(Chain 0) DTS Max. WLAN SAR (W/kg)	Summed SAR (W/kg)
GSM	GSM850	Front	0.488	0.078	0.57
		Back	0.704	0.089	0.79
		Left side		0.013	0.01
		Right side	0.327		0.33
		Top side	0.333		0.33
		Bottom side	0.134	0.069	0.20
	GSM1900	Front	0.499	0.078	0.58
		Back	0.473	0.089	0.56
		Left side		0.013	0.01
		Right side	0.499		0.50
		Top side	0.162		0.16
		Bottom side	0.112	0.069	0.18
WCMDA	Band V	Front	0.911	0.078	0.99
		Back	1.067	0.089	1.16
		Left side		0.013	0.01
		Right side	0.259		0.26
		Top side	0.722		0.72
		Bottom side	0.376	0.069	0.45
	Band IV	Front	1.136	0.078	1.21
		Back	0.988	0.089	1.08
		Left side		0.013	0.01
		Right side	0.916		0.92
		Top side	0.445		0.45
		Bottom side	0.223	0.069	0.29
	Band II	Front	1.230	0.078	1.31
		Back	1.166	0.089	1.26
		Left side		0.013	0.01
		Right side	1.088		1.09
		Top side	0.352		0.35
		Bottom side	0.253	0.069	0.32

WWAN Band		Exposure Position	WWAN PCB	WLAN(Chain 0) DTS	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
LTE	Band 17	Front	0.948	0.078	1.03
		Back	1.064	0.089	1.15
		Left side		0.013	0.01
		Right side	0.110		0.11
		Top side	0.482		0.48
		Bottom side	0.404	0.069	0.47
	Band 12	Front	1.134	0.078	1.21
		Back	1.164	0.089	1.25
		Left side		0.013	0.01
		Right side	0.121		0.12
		Top side	0.405		0.41
		Bottom side	0.317	0.069	0.39
	Band 4	Front	1.432	0.078	1.51
		Back	1.266	0.089	1.36
		Left side		0.013	0.01
		Right side	1.005		1.01
		Top side	0.535		0.54
		Bottom side	0.294	0.069	0.36
	Band 2	Front	1.287	0.078	1.37
		Back	1.156	0.089	1.25
		Left side		0.013	0.01
		Right side	1.186		1.19
		Top side	0.369		0.37
		Bottom side	0.250	0.069	0.32

WWAN Band		Exposure Position	WWAN PCB	WLAN(Chain 1) DTS	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
GSM	GSM850	Front	0.488	0.045	0.53
		Back	0.704	0.055	0.76
		Left side		0.048	0.05
		Right side	0.327		0.33
		Top side	0.333	0.059	0.39
		Bottom side	0.134		0.13
	GSM1900	Front	0.499	0.045	0.54
		Back	0.473	0.055	0.53
		Left side		0.048	0.05
		Right side	0.499		0.50
		Top side	0.162	0.059	0.22
		Bottom side	0.112		0.11
WCMDA	Band V	Front	0.911	0.045	0.96
		Back	1.067	0.055	1.12
		Left side		0.048	0.05
		Right side	0.259		0.26
		Top side	0.722	0.059	0.78
		Bottom side	0.376		0.38
	Band IV	Front	1.136	0.045	1.18
		Back	0.988	0.055	1.04
		Left side		0.048	0.05
		Right side	0.916		0.92
		Top side	0.445	0.059	0.50
		Bottom side	0.223		0.22
	Band II	Front	1.230	0.045	1.28
		Back	1.166	0.055	1.22
		Left side		0.048	0.05
		Right side	1.088		1.09
		Top side	0.352	0.059	0.41
		Bottom side	0.253		0.25

WWAN Band		Exposure Position	WWAN PCB Max. WWAN SAR (W/kg)	WLAN(Chain 1) DTS Max. WLAN SAR (W/kg)	Summed SAR (W/kg)
LTE	Band 17	Front	0.948	0.045	0.99
		Back	1.064	0.055	1.12
		Left side		0.048	0.05
		Right side	0.110		0.11
		Top side	0.482	0.059	0.54
		Bottom side	0.404		0.40
	Band 12	Front	1.134	0.045	1.18
		Back	1.164	0.055	1.22
		Left side		0.048	0.05
		Right side	0.121		0.12
		Top side	0.405	0.059	0.46
		Bottom side	0.317		0.32
	Band 4	Front	1.432	0.045	1.48
		Back	1.266	0.055	1.32
		Left side		0.048	0.05
		Right side	1.005		1.01
		Top side	0.535	0.059	0.59
		Bottom side	0.294		0.29
	Band 2	Front	1.287	0.045	1.33
		Back	1.156	0.055	1.21
		Left side		0.048	0.05
		Right side	1.186		1.19
		Top side	0.369	0.059	0.43
		Bottom side	0.250		0.25

WWAN Band		Exposure Position	WWAN PCB	WLAN(Chain 0+1) DTS	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
GSM	GSM850	Front	0.488	0.073	0.56
		Back	0.704	0.128	0.83
		Left side		0.080	0.08
		Right side	0.327		0.33
		Top side	0.333	0.078	0.41
		Bottom side	0.134	0.044	0.18
	GSM1900	Front	0.499	0.073	0.57
		Back	0.473	0.128	0.60
		Left side		0.080	0.08
		Right side	0.499		0.50
		Top side	0.162	0.078	0.24
		Bottom side	0.112	0.044	0.16
WCMDA	Band V	Front	0.911	0.073	0.98
		Back	1.067	0.128	1.20
		Left side		0.080	0.08
		Right side	0.259		0.26
		Top side	0.722	0.078	0.80
		Bottom side	0.376	0.044	0.42
	Band IV	Front	1.136	0.073	1.21
		Back	0.988	0.128	1.12
		Left side		0.080	0.08
		Right side	0.916		0.92
		Top side	0.445	0.078	0.52
		Bottom side	0.223	0.044	0.27
	Band II	Front	1.230	0.073	1.30
		Back	1.166	0.128	1.29
		Left side		0.080	0.08
		Right side	1.088		1.09
		Top side	0.352	0.078	0.43
		Bottom side	0.253	0.044	0.30

WWAN Band		Exposure Position	WWAN PCB	WLAN(Chain 0+1) DTS	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
LTE	Band 17	Front	0.948	0.073	1.02
		Back	1.064	0.128	1.19
		Left side		0.080	0.08
		Right side	0.110		0.11
		Top side	0.482	0.078	0.56
		Bottom side	0.404	0.044	0.45
	Band 12	Front	1.134	0.073	1.21
		Back	1.164	0.128	1.29
		Left side		0.080	0.08
		Right side	0.121		0.12
		Top side	0.405	0.078	0.48
		Bottom side	0.317	0.044	0.36
	Band 4	Front	1.432	0.073	1.51
		Back	1.266	0.128	1.39
		Left side		0.080	0.08
		Right side	1.005		1.01
		Top side	0.535	0.078	0.61
		Bottom side	0.294	0.044	0.34
	Band 2	Front	1.287	0.073	1.36
		Back	1.156	0.128	1.28
		Left side		0.080	0.08
		Right side	1.186		1.19
		Top side	0.369	0.078	0.45
		Bottom side	0.250	0.044	0.29

Test Engineer : David Gu and Nice Wang

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 14.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [8] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [10] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [11] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Body_750MHz_140627

DUT: D750V3 -SN: 1099

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL_750_140627 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.961 \text{ S/m}$; $\epsilon_r = 53.917$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.06, 10.06, 10.06); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.57 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.972 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 2.06 W/kg ; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

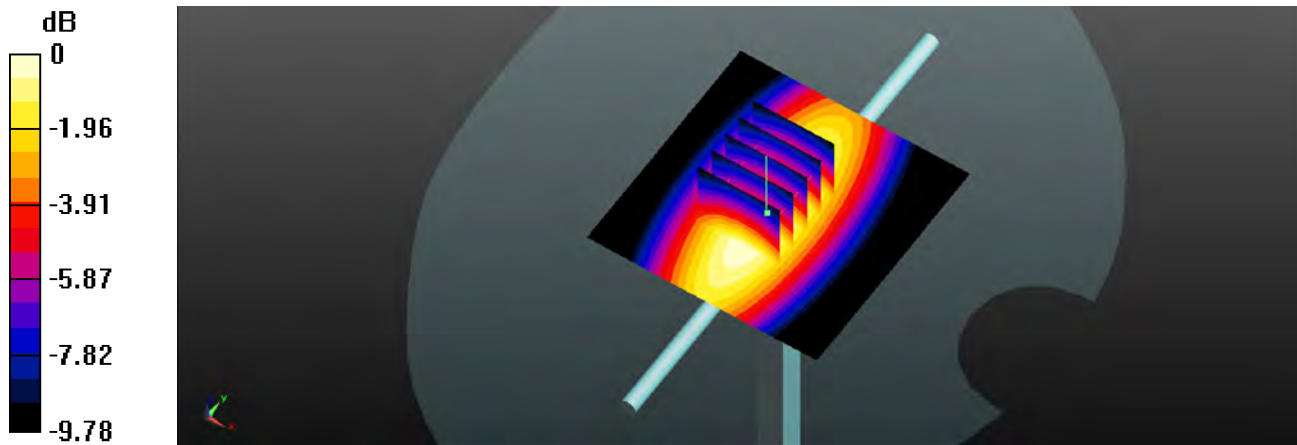

0 dB = 2.55 W/kg

System Check_Body_835MHz_140623

DUT: D835V2 -SN: 4d151

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_140623 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 54.088$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^{\circ}\text{C}$; Liquid Temperature : $22.5 \text{ }^{\circ}\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.40 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 49.515 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.26 W/kg

SAR(1 g) = 2.22 W/kg ; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 2.39 W/kg

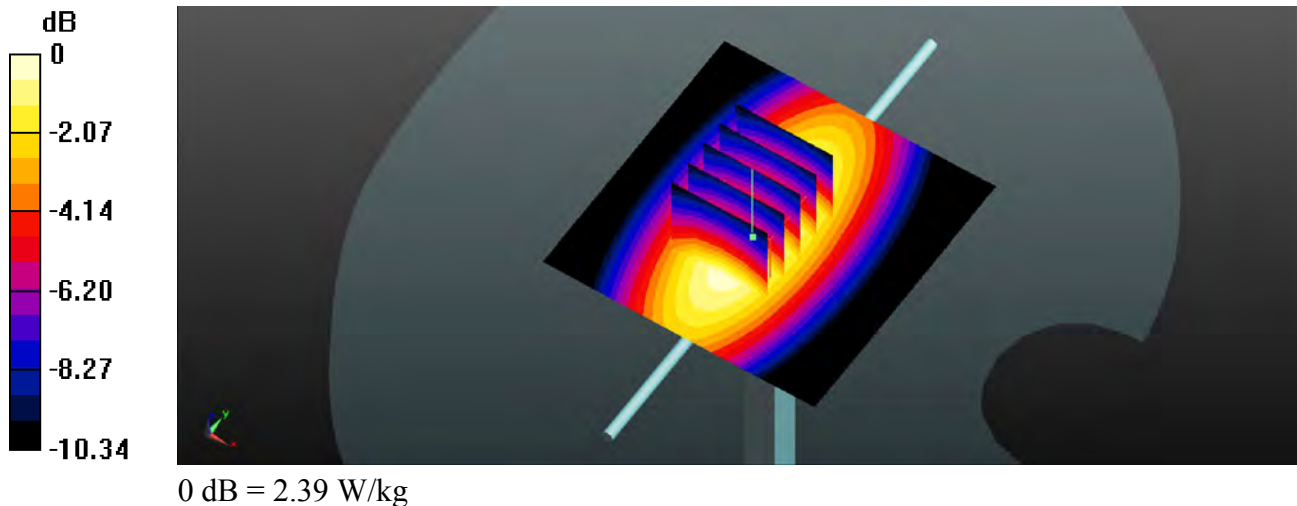

System Check_Body_1750MHz_140622

DUT: D1750V2 -SN: 1090

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1750_140622 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 54.578$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.6 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 95.311 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.67 W/kg; SAR(10 g) = 5.16 W/kg

Maximum value of SAR (measured) = 13.5 W/kg

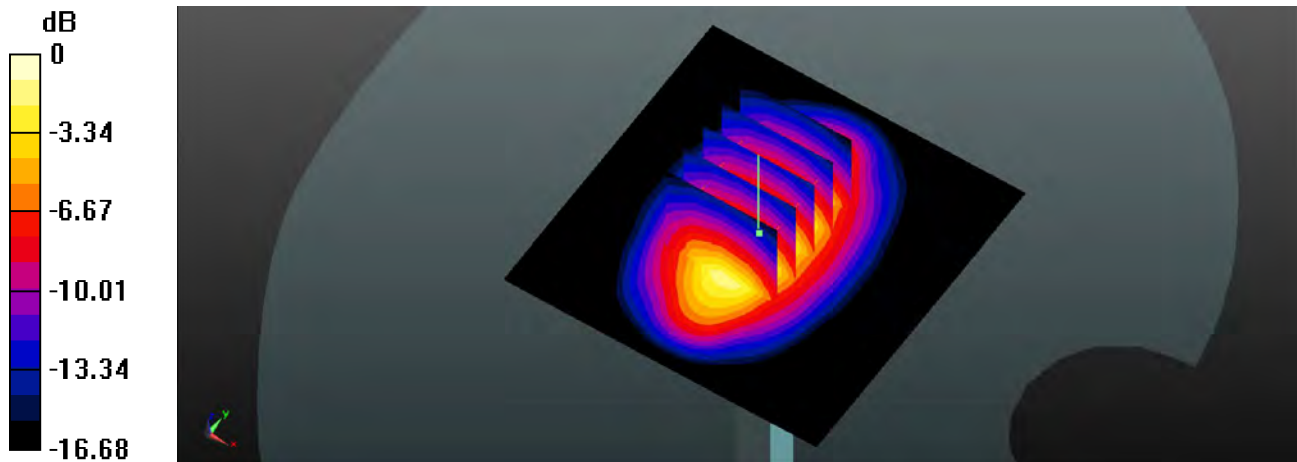

0 dB = 13.5 W/kg

System Check_Body_1900MHz_140723

DUT: Dipole 1900 MHz D1900V2

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140723 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 53.849$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.855 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.25 W/kg

Maximum value of SAR (measured) = 14.6 W/kg

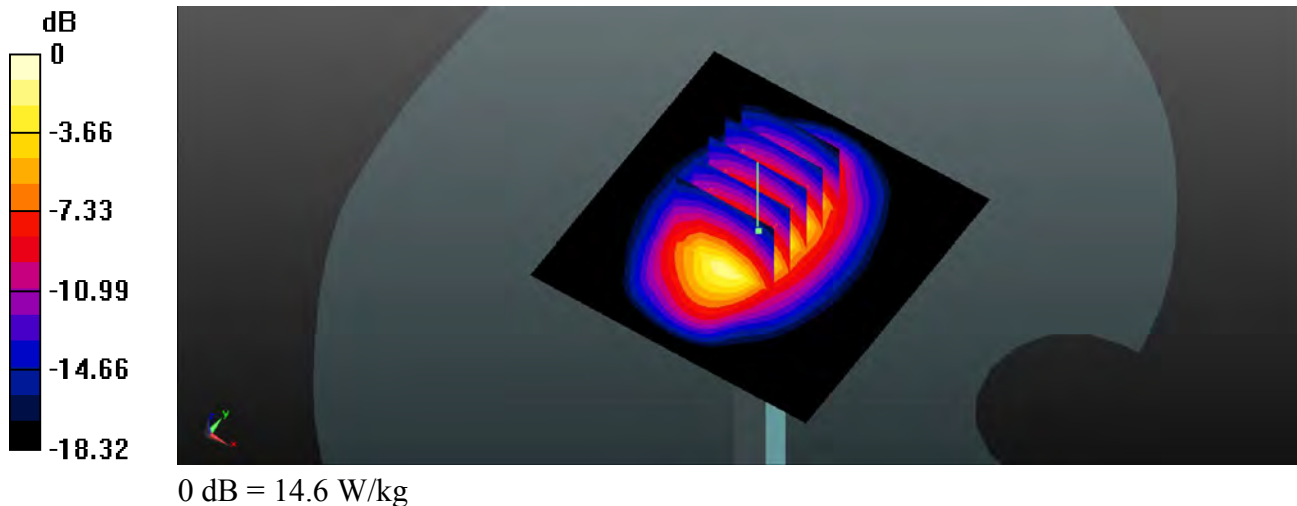

System Check_Body_2450MHz_140708

DUT: D2450V2 -SN: 908

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140708 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 51.168$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.4 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.996 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.41 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

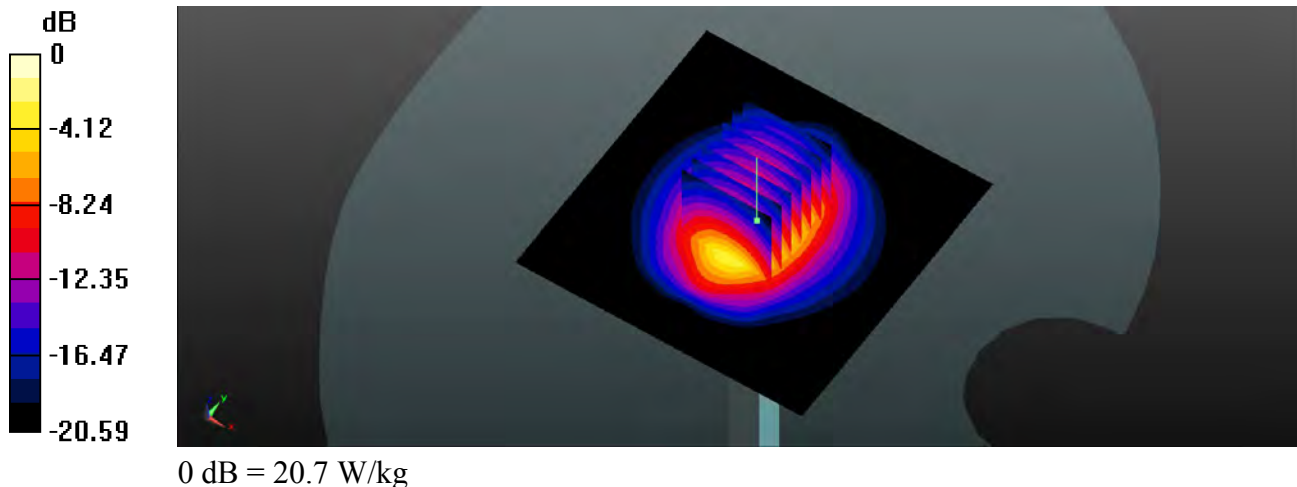



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

01GSM850_GPRS (GMSK 1 Tx slots)_Back_1.0cm_Ch251

Communication System: GPRS (GMSK 1 Tx slot); Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_140623 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 53.969$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch251/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.821 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.051 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.756 W/kg

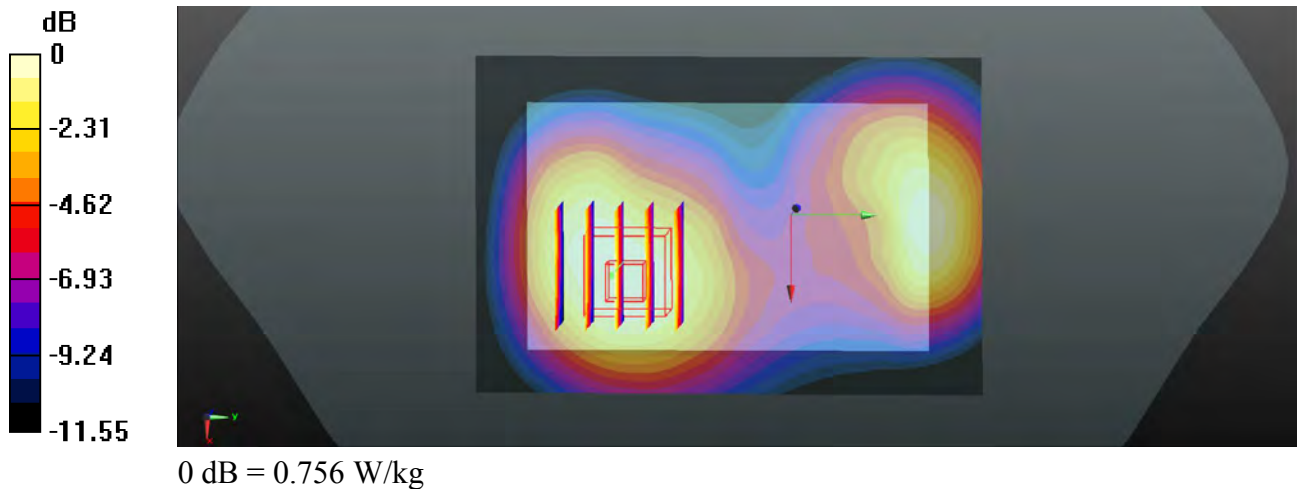

02 GSM1900_GPRS (GMSK 2 Tx slots)_Front_1.0cm_Ch810

Communication System: GPRS (GMSK 2 Tx slot); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium: MSL_1900_140723 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.511$ S/m; $\epsilon_r = 53.819$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch810/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.665 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.314 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 0.586 W/kg

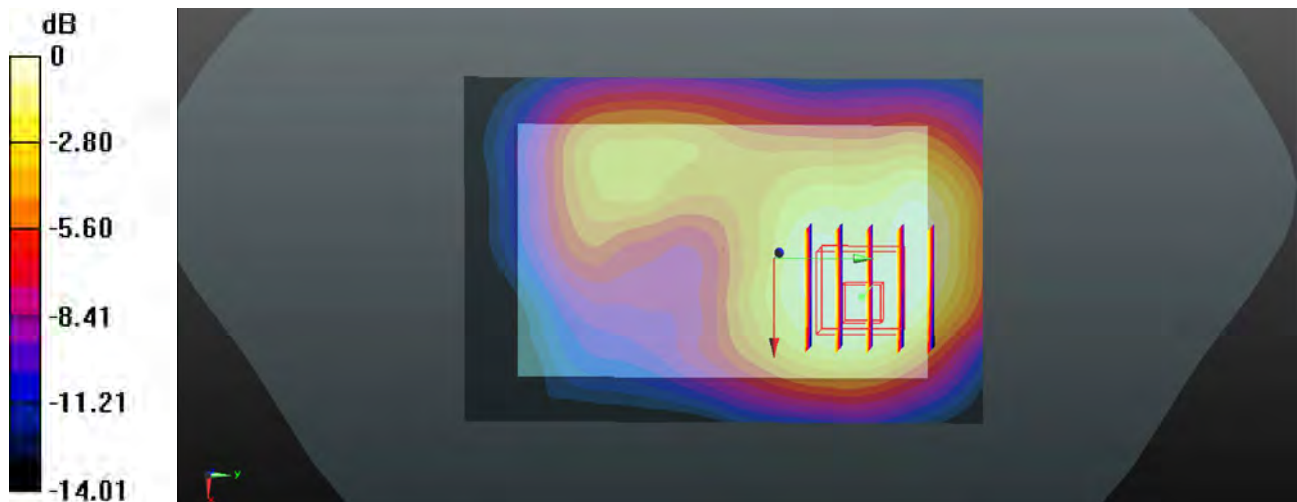

0 dB = 0.586 W/kg

03WCDMA Band V_RMC 12.2K_Back_1.0cm_Ch4132

Communication System: WCDMA ; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_140623 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.965$ S/m; $\epsilon_r = 54.15$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch4132/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.498 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.608 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

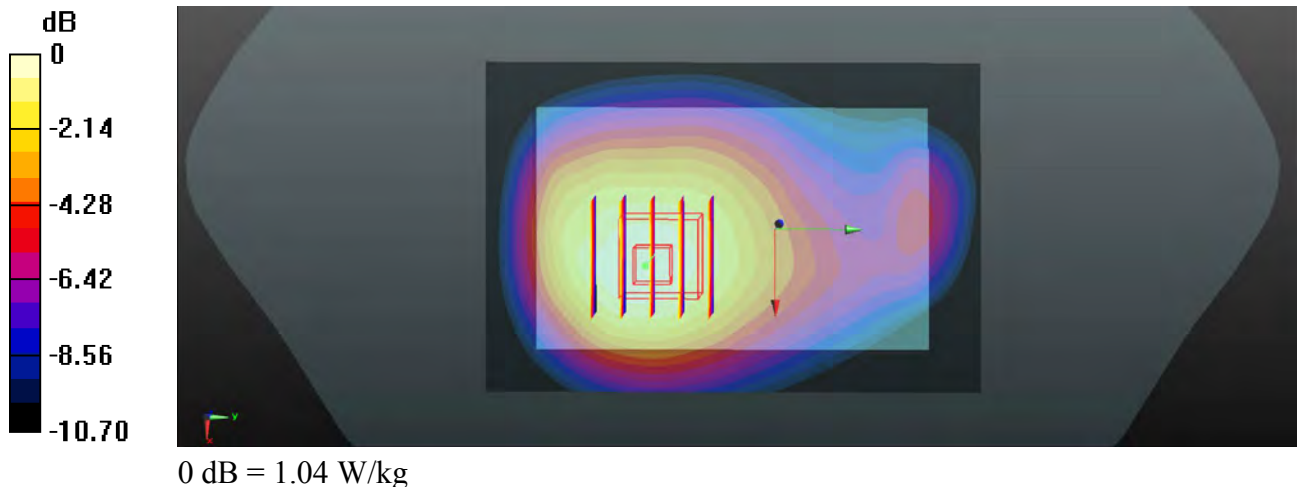

04 WCDMA Band IV_RMC 12.2K_Front_1.0cm_Ch1513

Communication System: WCDMA ; Frequency: 1752.6 MHz;Duty Cycle: 1:1

Medium: MSL_1750_140622 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.543$ S/m; $\epsilon_r = 54.577$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch1513/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.857 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 1.20 W/kg

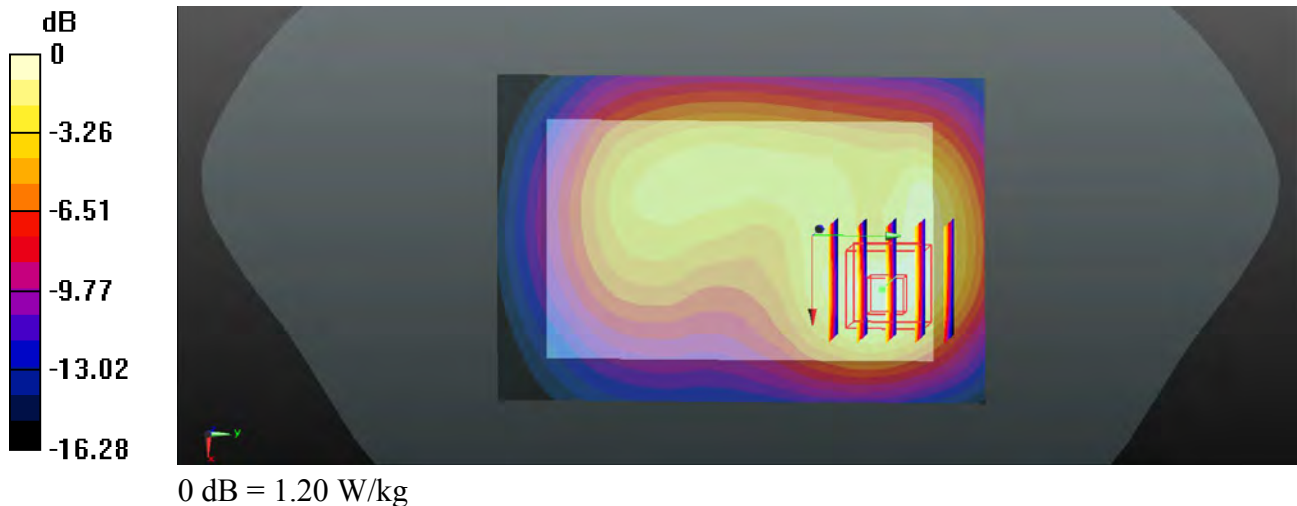

05 WCDMA Band II_RMC 12.2K_Front_1.0cm_Ch9262

Communication System: WCDMA ; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140620 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.444$ S/m; $\epsilon_r = 53.844$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch9262/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.21 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.926 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

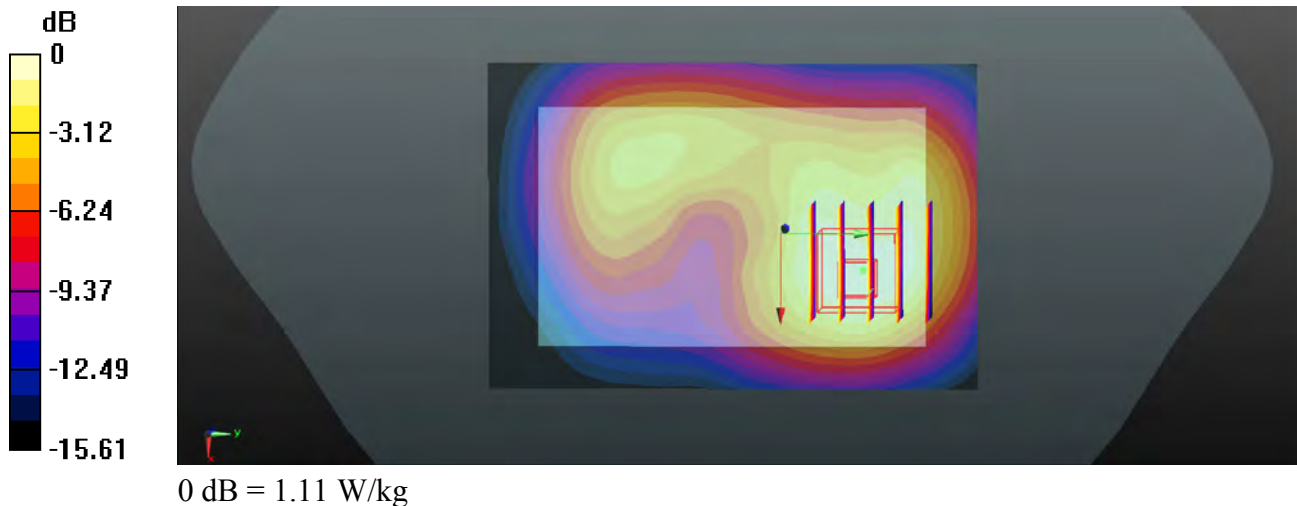

06 LTE Band 12_QPSK_10M(1,49)_Back_1.0cm_Ch23130

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: MSL_750_140627 Medium parameters used: $f = 711$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 54.837$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.06, 10.06, 10.06); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch23130/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.975 W/kg


Ch23130/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.960 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.628 W/kg

Maximum value of SAR (measured) = 0.985 W/kg

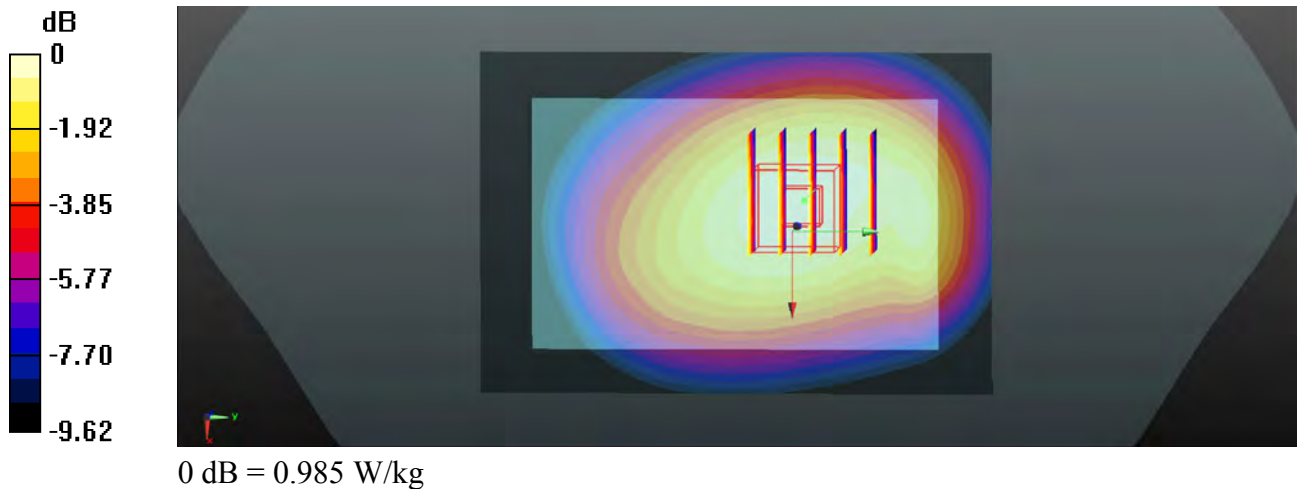

07 LTE Band 17_QPSK_10M(1,49)_Back_1.0cm_Ch23800

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium: MSL_750_140627 Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.935 \text{ S/m}$; $\epsilon_r = 54.837$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.06, 10.06, 10.06); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch23800/Area Scan (61x91x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.02 W/kg


Ch23800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.547 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.871 W/kg ; SAR(10 g) = 0.646 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

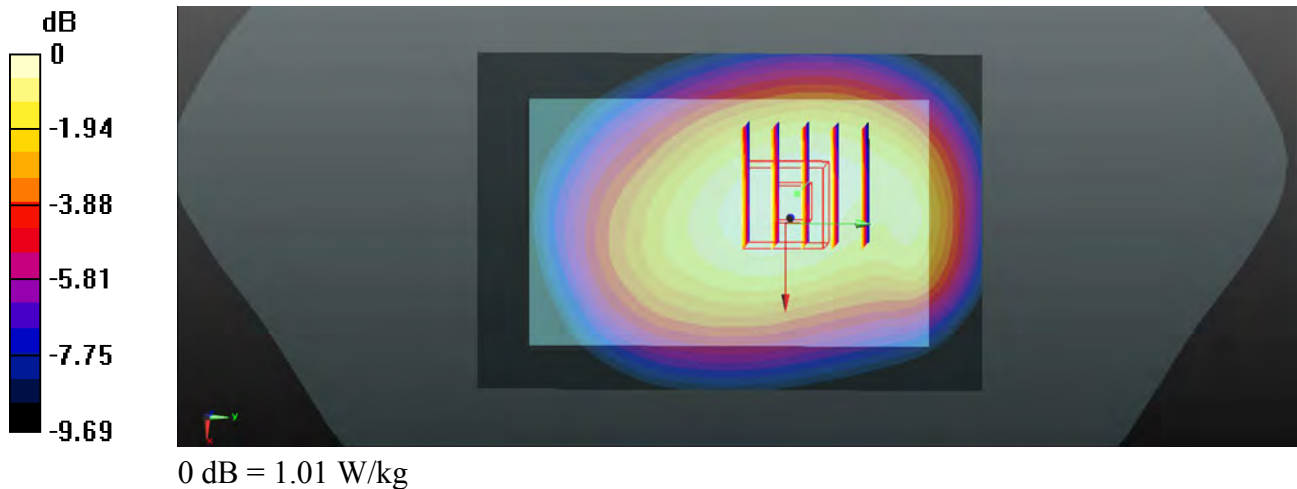

08 LTE Band 4_QPSK_20M(1,0)_Front_1.0cm_Ch20300

Communication System: LTE; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: MSL_1750_140622 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 54.584$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.11, 8.11, 8.11); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch20300/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.63 W/kg


Ch20300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.222 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.180 W/kg; SAR(10 g) = 0.673 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

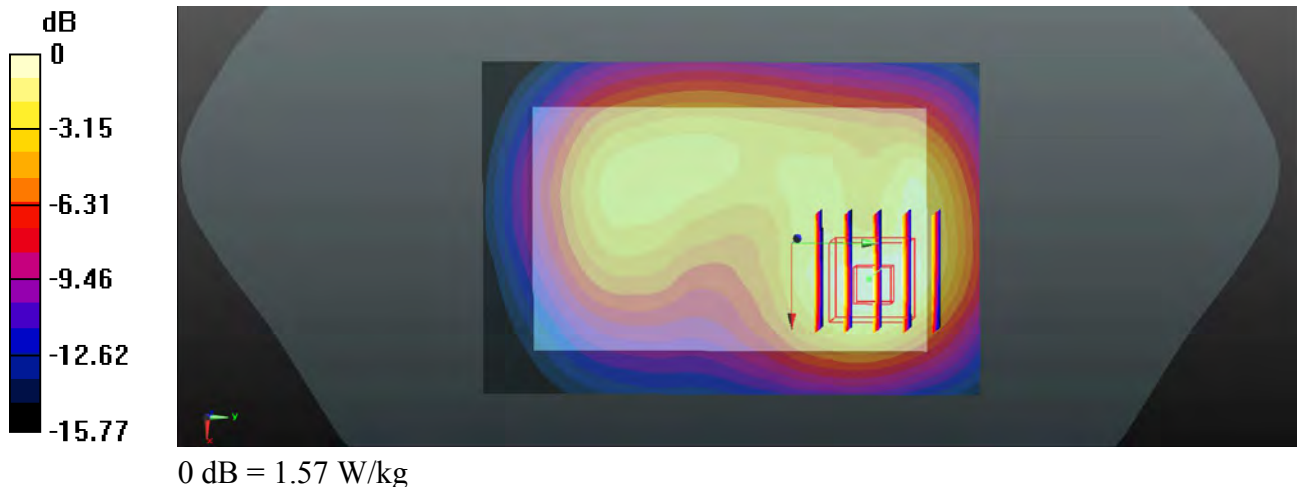

09 LTE Band 2_QPSK_20M(1,99)_Front_1.0cm_Ch19100

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_140620 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.501$ S/m; $\epsilon_r = 53.849$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1353; Calibrated: 2014/1/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch19100/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.61 W/kg


Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.120 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.160 W/kg; SAR(10 g) = 0.691 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

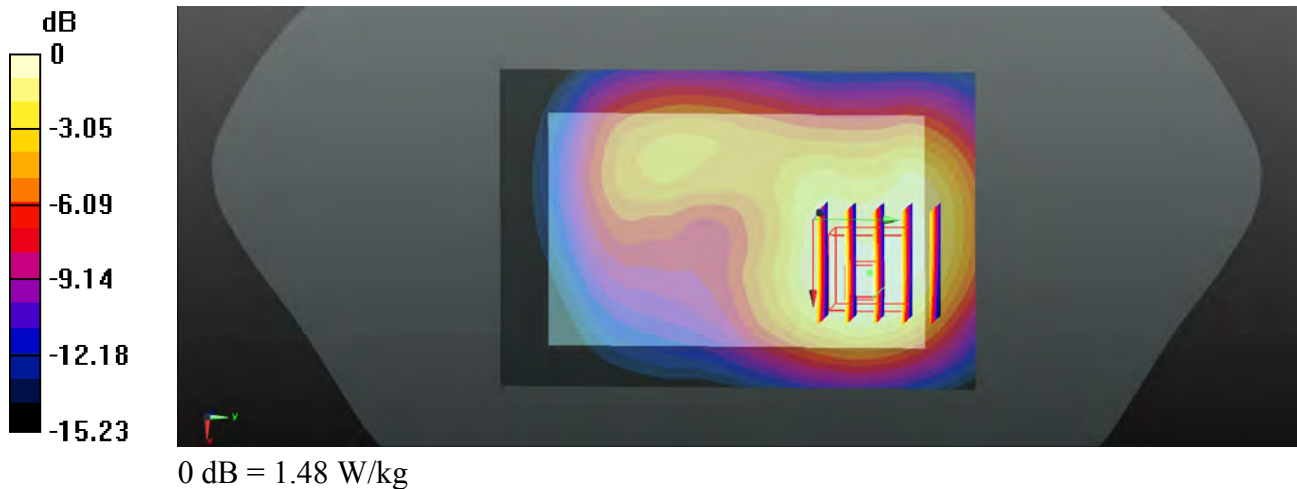

10 WLAN 2.4GHz_802.11b_Back_1.0cm_Ch11_Ant 0

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140708 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.002$ S/m; $\epsilon_r = 51.124$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch11/Area Scan (71x111x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.109 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.815 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

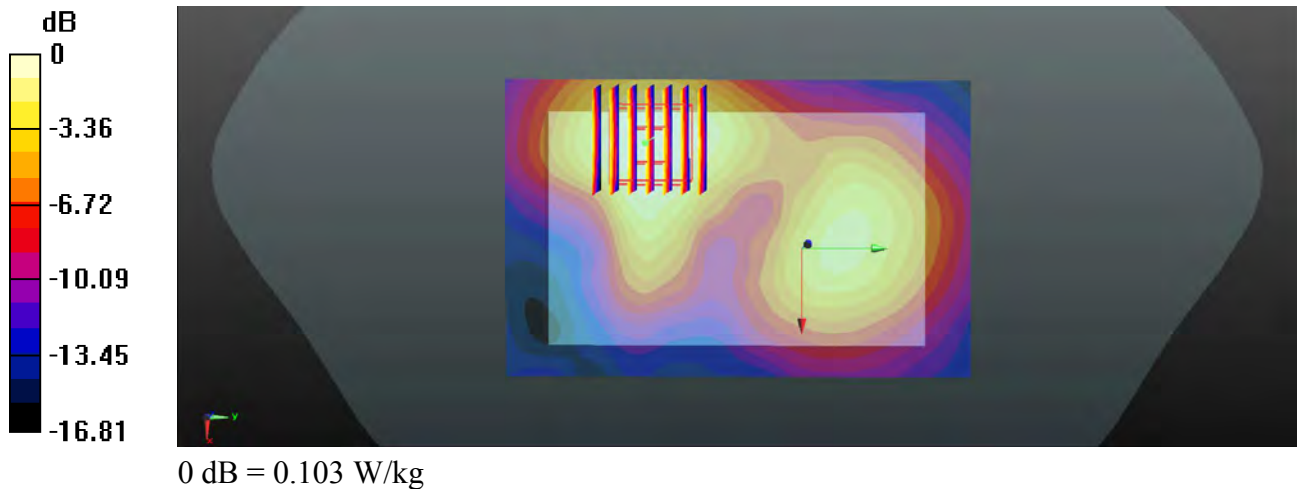

11 WLAN 2.4GHz_802.11b_Top side_1.0cm_Ch6_Ant 1

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: MSL_2450_140708 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 51.218$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch6/Area Scan (31x111x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0831 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.851 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0775 W/kg

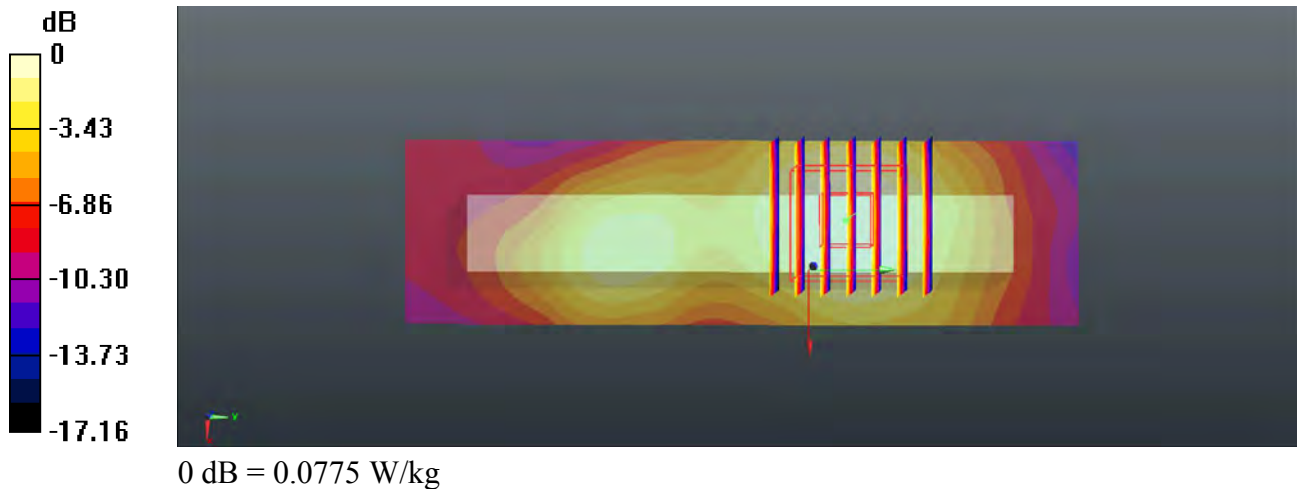

12 WLAN 2.4GHz_802.11n-HT20_Back_1.0cm_Ch11_Ant 0+1

Communication System: 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1.1

Medium: MSL_2450_140708 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.002$ S/m; $\epsilon_r = 51.124$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch11/Area Scan (71x111x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.124 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.873 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

