



EMC TEST REPORT

Report No.: SET2016-18969

Product Name: LTE Ufi

FCC ID: SRQ-MF920T

Model No. : MF920T

Applicant: ZTE CORPORATION

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Received Date: 2016-09-13

Tested Date: 2016-09-13—2016-11-09

Issued by: Shenzhen Huatongwei International Inspection Co., Ltd.

Lab Location: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **18** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : LTE Ufi

Model No. : MF920T

Applicant..... : ZTE CORPORATION

Applicant Address..... : ZTE Plaza, Keji Road South, Shenzhen, China

Manufacturer..... : ZTE CORPORATION

Manufacturer Address : ZTE Plaza, Keji Road South, Shenzhen, China

Test Standards..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result : PASS

Tested by : Ling Min Xie
LingMin Xie Test Engineer 2016.11.10

Reviewed by..... : Zhu Qi
Zhu Qi Senior Engineer 2016.11.10

Approved by : Wu Lian
Wu Li'an, Manager 2016.09.30

**TABLE OF CONTENTS**

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions	6
1.3.3	Measurement Uncertainty	6
2.	TEST CONDITIONS SETTING.....	7
2.1	Test Peripherals	7
2.2	Test Mode	7
2.3	Test Setup and Equipments List.....	7
2.3.1	Conducted Emission.....	7
2.3.2	Radiated Emission.....	9
3.	47 CFR PART 15B REQUIREMENTS	11
3.1	Conducted Emission	11
3.1.1	Requirement	11
3.1.2	Test Description	11
3.1.3	Test Result	11
3.2	Radiated Emission	14
3.2.1	Requirement	14
3.2.2	Test Description	15
3.2.3	Test Result	15

Change History		
Issue	Date	Reason for change
1.0	2016.11.10	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : LTE Ufi
FCC ID : SRQ-MF920T
Trade Name..... : ZTE
Brand Name..... : ZTE
Hardware Version..... : dkeB
Software Version : BD_LAMF920TV1.0.0B04

*Note1:*The EUT is a LTE Ufi, it supports the following operating frequency band:GPRS850/1900;WCDMA850//1700/1900;
LTE BAND 4,7;WIFI 2.4G(b/g/n20);

*Note 2:*The highest operation frequency or processor operate frequency is 1.3 GHz.

*Note 3:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2016	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories

(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

Support Cable:

Description	Shield Type	Ferrite Core	Length
USB Cable	shielding	Yes	1.2m
RJ45 Cable	shielding	No	2m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT configuration of the emission tests is EUT + PC+Mouse.

The EUT have the following typical setups during the test:

Setup1: EUT+ Mouse + Notebook PC + GPRS850 Traffic;

Setup2: EUT+ Mouse + Notebook PC + GPRS1900 Traffic;

Setup3: EUT+ Mouse + Notebook PC + WCDMA850 Traffic;

Setup4: EUT+ Mouse + Notebook PC + WCDMA1900 Traffic;

Setup5: EUT+ Mouse + Notebook PC + LTE BAND 4 Traffic;

Setup6: EUT+ Mouse + Notebook PC + LTE BAND 7 Traffic;


Setup7: EUT+ Mouse + Notebook PC + WIFI Traffic;

Setup8: EUT+ Mouse + Notebook PC + Traffic Idle;

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

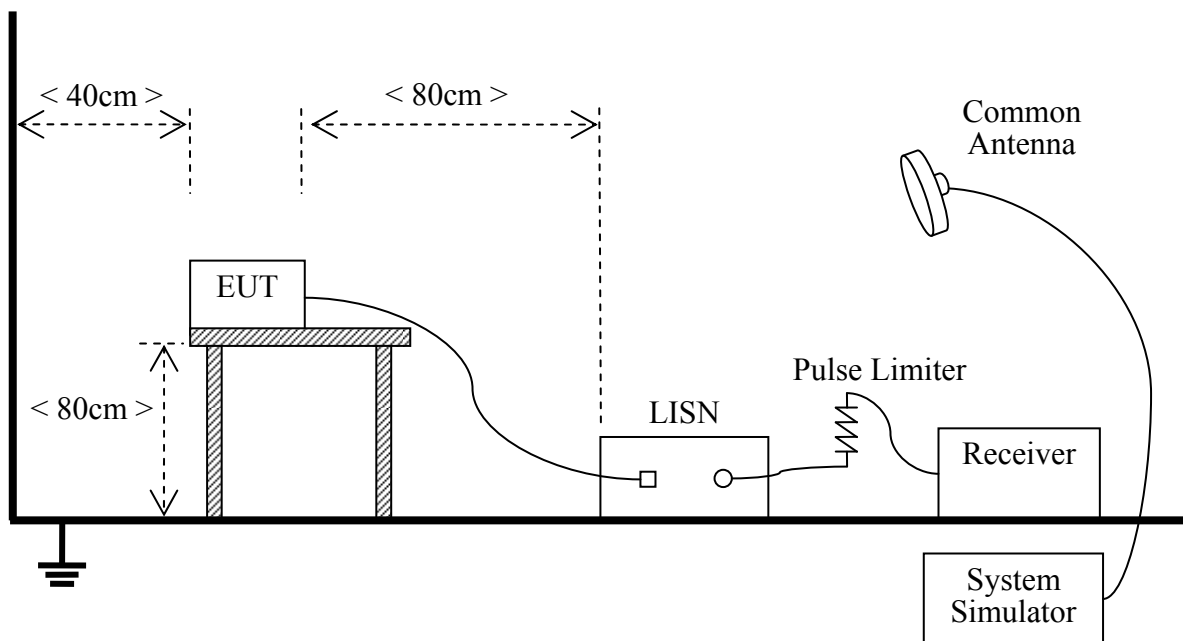

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100106	2015/11/2
2	Artificial Mains	Rohde & Schwarz	ESH2-Z5	100028	2015/11/2
3	Pulse Limiter	Rohde & Schwarz	ESHSZ2	100044	2015/11/2
4	EMI Test Software	Rohde & Schwarz	ES-K1	N/A	N/A


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

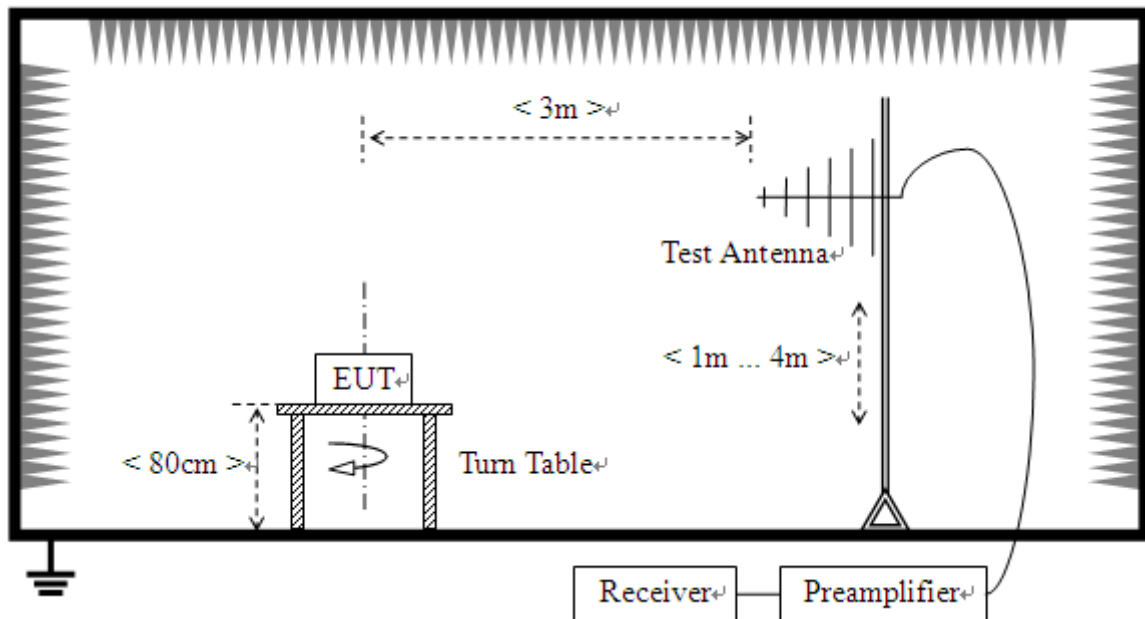

- 2) For radiated emissions above 1GHz

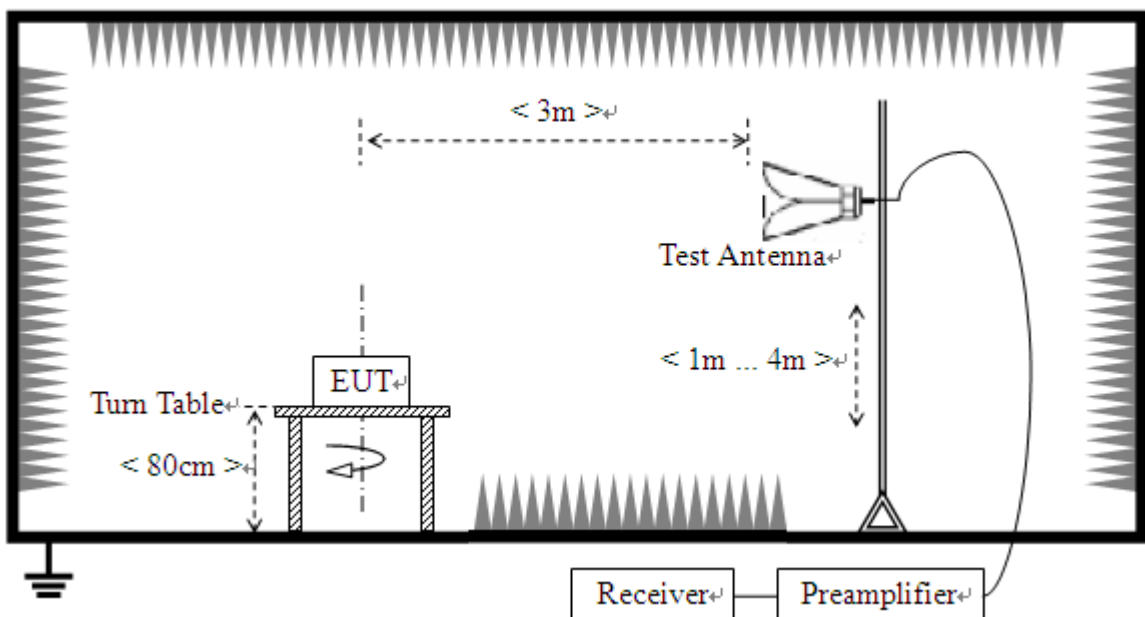

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ShwarzBeck	VULB9163	538	2015/11/2
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2015/11/2
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	MATURO	TT2.0	N/A	N/A
5	ANTENNA MAST	MATURO	TAM-4.0-P	N/A	N/A
6	EMI TEST Software	Rohde & Schwarz	ESK1	N/A	N/A
7	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/2
8	Amplifer	Sonoma	310N	E009-13	2015/11/2
9	JS amplifer	Rohde & Schwarz	JS4-00101800-28-5A	F201504	2015/11/2
10	TURNTABLE	ETS	2088	2149	N/A
11	ANTENNA MAST	ETS	2075	2346	N/A
12	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2015/11/2

3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

- Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.
- All test modes have been tested, only the worst cases are recorded in this report.


Test voltage and frequency (120V AC,60Hz)

A. Test Plot and Suspicious Points: Mains terminal disturbance voltage, Setup 8

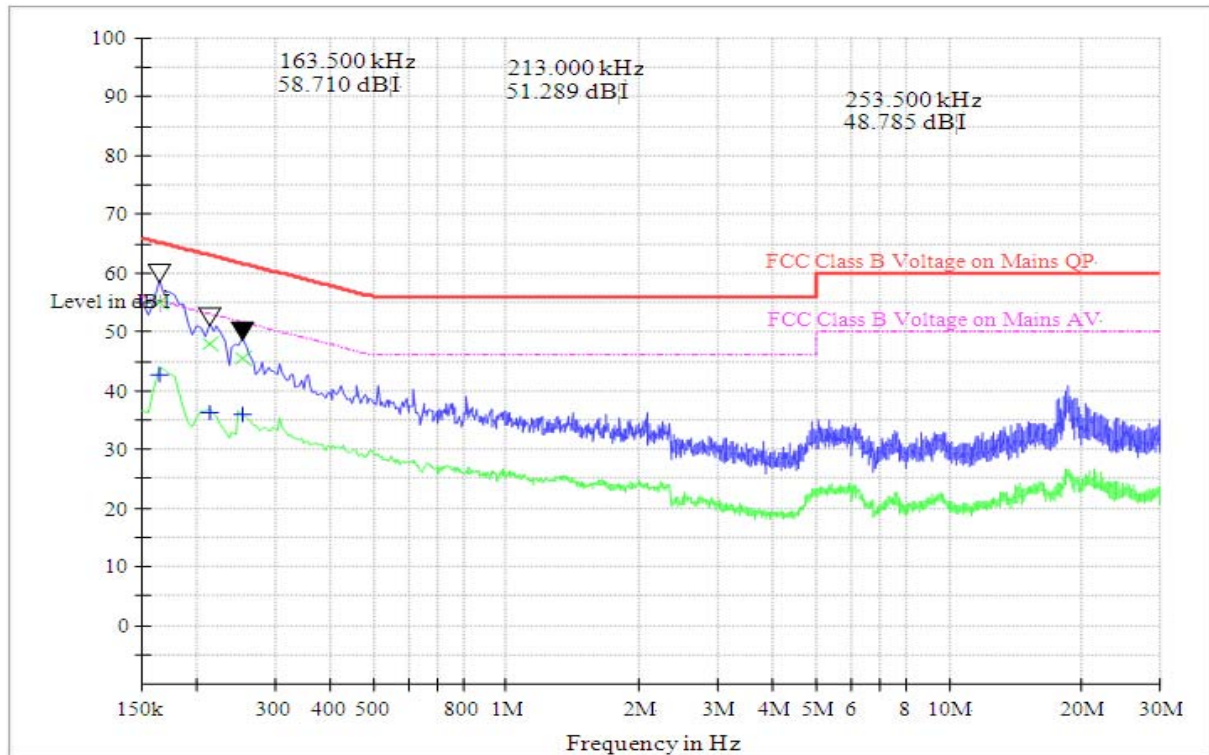

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)
0.1635	65.30	54.94	10.36	0.1635	55.30	42.62	12.68
0.2130	63.10	48.03	15.07	0.2130	53.10	36.26	16.84
0.2535	61.60	45.48	16.12	0.2535	51.60	36.02	15.58

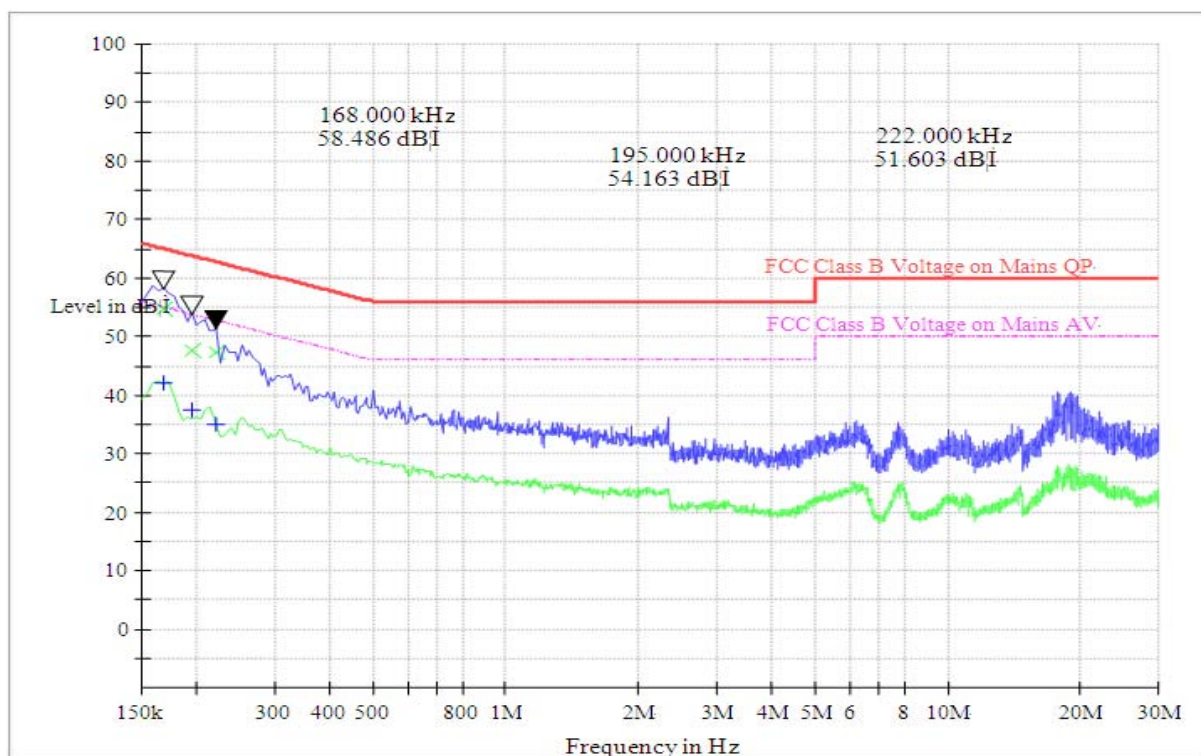

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals							
N Test Data							
QP				AV			
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)
0.1680	65.10	54.73	10.37	0.1680	55.20	42.22	12.98
0.1950	63.80	47.68	16.12	0.1950	53.80	37.36	16.44
0.2220	62.70	47.28	15.42	0.2220	52.70	34.97	17.73

Test Result: PASS

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW=1MHz, VBW=3MHz for PK value; PK detector, RBW =1MHz, VBW=10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

Note:


1. All test modes have been tested, only the worst cases are recorded in this report.

B. Test Plots and Suspicious Points: Radiation disturbances, antenna polarization: Setup 1

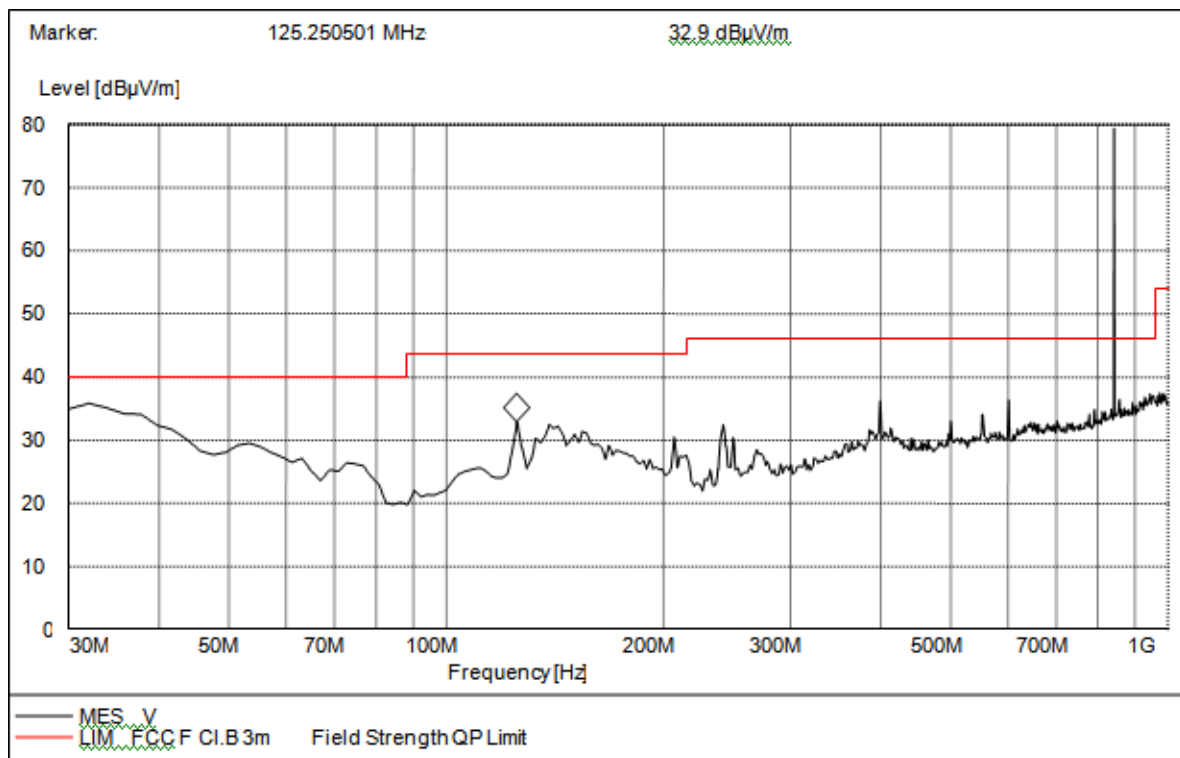


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBμV/m)	Margin (dB)	Antenna	Verdict
32.26000	32.84	120.000	131.4	40.00	11.69	Vertical	Pass
125.16000	31.56	120.000	145.6	43.50	14.96	Vertical	Pass
239.42000	31.57	120.000	215.4	46.00	20.31	Vertical	Pass

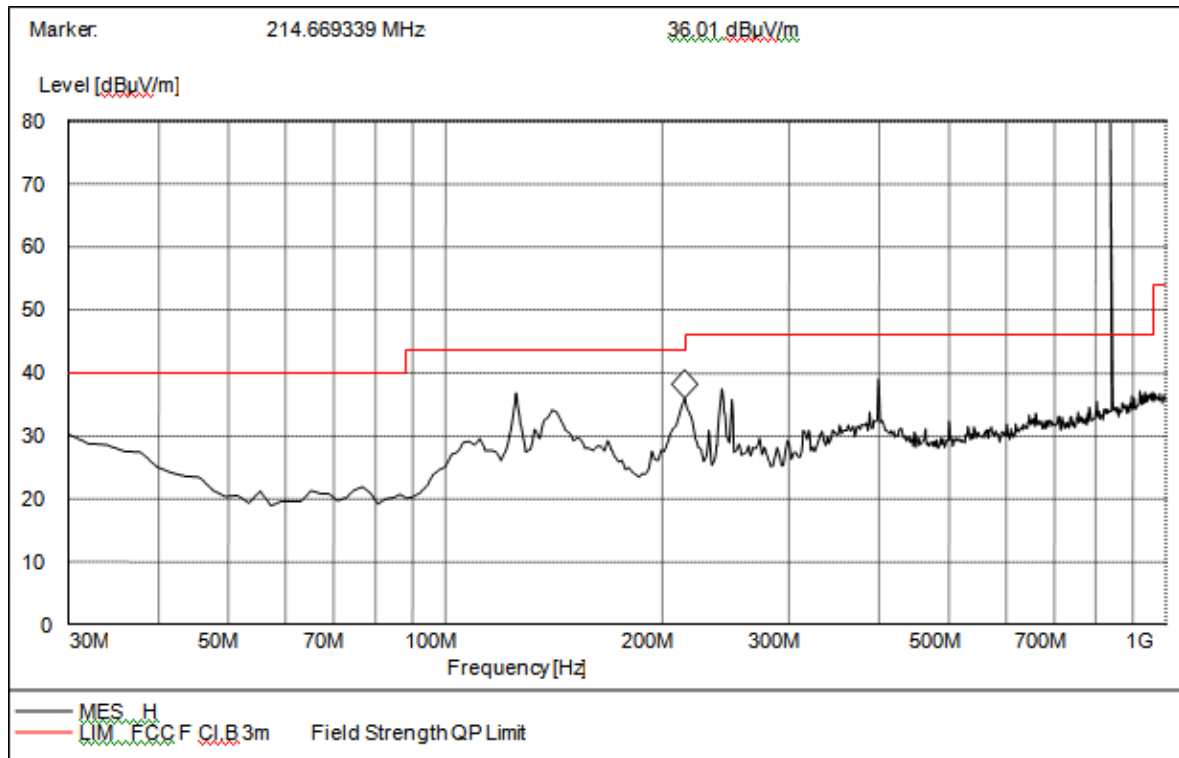


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
125.16000	35.96	120.000	134.5	40.00	12.15	Horizontal	Pass
215.97000	33.49	120.000	223.7	43.50	14.96	Horizontal	Pass
400.01000	38.69	120.000	169.0	46.00	10.45	Horizontal	Pass

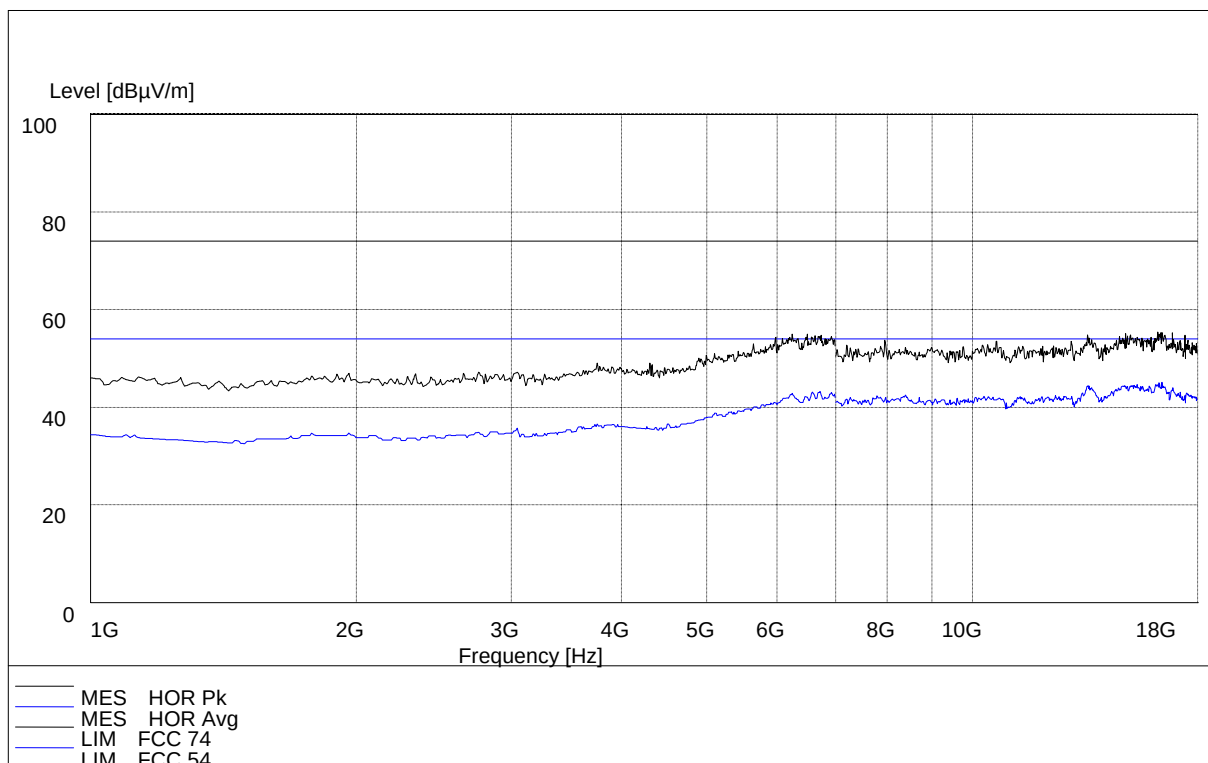

(Plot E: Test Antenna Horizontal 1G – 18G)

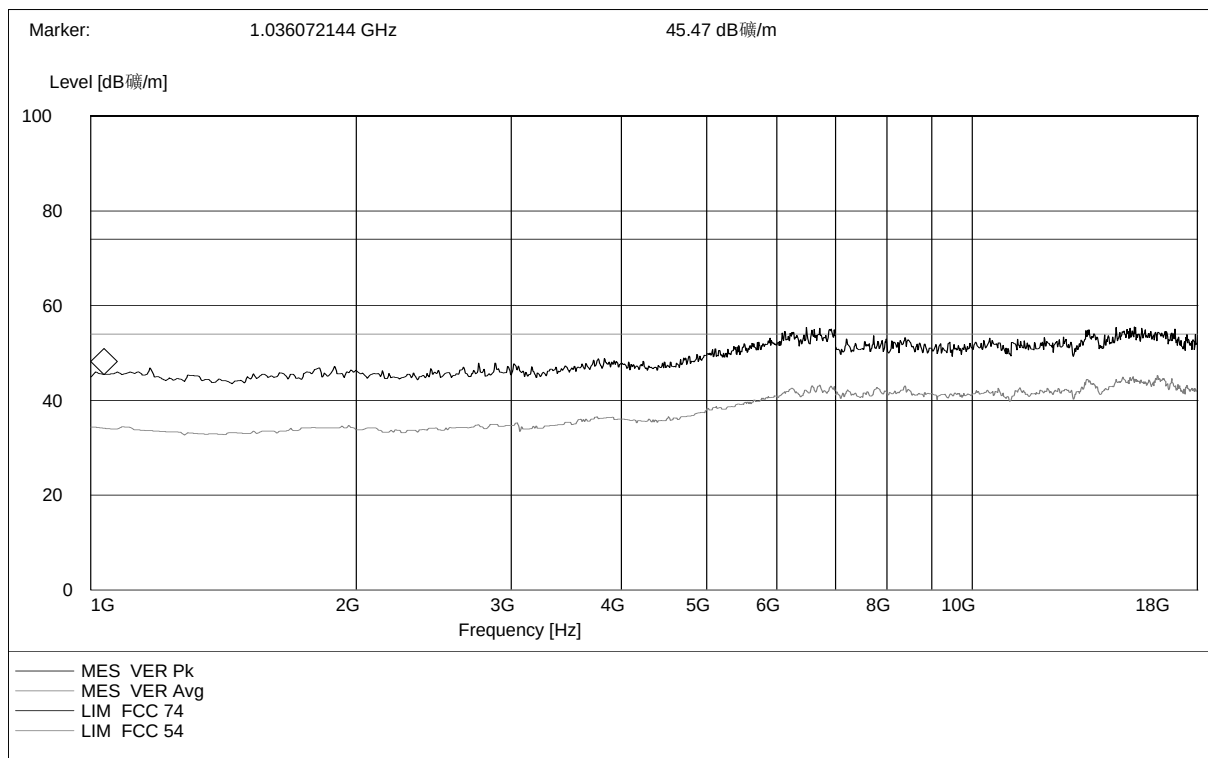

(Plot F: Test Antenna Vertical 1G – 18G)

Test Result: PASS