


# FCC SAR Test Report


APPLICANT : ZTE CORPORATION  
EQUIPMENT : CDMA/LTE Ufi  
BRAND NAME : ZTE  
MODEL NAME : MF975U  
FCC ID : SRQ-MF975U  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL (XI'AN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (XI'AN) INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (XI'AN) INC.**

**1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. China**



**Table of Contents**

**1. Statement of Compliance .....4**

**2. Administration Data .....5**

**3. Guidance Standard .....5**

**4. Equipment Under Test (EUT) .....6**

    4.1 General Information .....6

    4.2 Maximum Tune-up Limit.....7

    4.3 General LTE SAR Test and Reporting Considerations .....12

**5. RF Exposure Limits .....14**

    5.1 Uncontrolled Environment.....14

    5.2 Controlled Environment.....14

**6. Specific Absorption Rate (SAR).....15**

    6.1 Introduction .....15

    6.2 SAR Definition.....15

**7. System Description and Setup .....16**

**8. Measurement Procedures .....17**

    8.1 Spatial Peak SAR Evaluation.....17

    8.2 Power Reference Measurement.....18

    8.3 Area Scan .....18

    8.4 Zoom Scan.....19

    8.5 Volume Scan Procedures.....19

    8.6 Power Drift Monitoring.....19

**9. Test Equipment List .....20**

**10. System Verification .....21**

    10.1 Tissue Verification .....21

    10.2 System Performance Check Results.....22

**11. RF Exposure Positions .....23**

    11.1 Body Position .....23

**12. Conducted RF Output Power (Unit: dBm).....24**

**13. Antenna Location .....42**

**14. SAR Test Results .....43**

    14.1 Body SAR .....44

    14.2 Repeated SAR Measurement .....49

**15. Simultaneous Transmission Analysis.....50**

    15.1 Body Exposure Conditions .....51

**16. Uncertainty Assessment .....57**

**17. References .....60**

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of High SAR Measurement**

**Appendix C. DASy Calibration Certificate**

**Appendix D. Test Setup Photos**





1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ZTE CORPORATION, CDMA/LTE Ufi, MF975U are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg) Gap(1cm)	Simultaneous Transmission SAR (W/kg)
PCB	CDMA2000 BC0	1.18	1.58
	CDMA2000 BC1	1.45	
	LTE Band 12	0.95	
	LTE Band 13	1.30	
	LTE Band 5	0.77	
	LTE Band 4	1.44	
	LTE Band 2	1.38	
DTS	WLAN 2.4GHz Band	0.16	1.50
NII	WLAN 5.2GHz Band	0.24	1.58
	WLAN 5.8GHz Band	0.39	
Date of Testing:		Jul. 10, 2015 ~ Aug. 07, 2015	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



## 2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL (XI'AN) INC.
Test Site Location	1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. China TEL: +86-029-8860-8767 FAX: +86-029-8860-8791

Applicant	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

Manufacturer	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

## 3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r01
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r01
- FCC KDB 941225 D06 Hotspot Mode SAR v02

## 4. Equipment Under Test (EUT)

### 4.1 General Information

Product Feature & Specification	
Equipment Name	CDMA/LTE Ufi
Brand Name	ZTE
Model Name	MF975U
FCC ID	SRQ-MF975U
IMEI Code	99000513900050
Wireless Technology and Frequency Range	CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz
Mode	<ul style="list-style-type: none"> <li>· CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A)</li> <li>· LTE: QPSK, 16QAM</li> <li>· 802.11a/b/g/n HT20/HT40</li> <li>· 802.11ac VHT20/VHT40/VHT80</li> </ul>
HW Version	xz3A
SW Version	USCC_MF975U_V1.0.0B04
EUT Stage	Identical Prototype
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.</li> <li>2. This device 2.4GHz WLAN supports Hotspot operation, and 5.2GHz/5.8GHz WLAN supports WiFi Direct (GC/GO),</li> <li>3. This device has no voice function.</li> </ol>	



**4.2 Maximum Tune-up Limit**

Mode	Average power (dBm)	
	CDMA2000 BC0	CDMA2000 BC1
1xRTT RC1 SO55	24.50	24.00
1xRTT RC3 SO55	24.50	24.00
1xRTT RC3 SO32 (+ F-SCH)	24.50	24.00
1xRTT RC3 SO32 (+SCH)	24.50	24.00
1xEV-DO Rev 0 (RTAP 153.6kbps)	24.50	24.00
1xEV-DO Rev A (RETAP 4096bits)	24.50	24.00

LTE Band 12				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	10	≤ 12	0	24.00
QPSK	10	> 12	1	23.00
16QAM	10	≤ 12	1	23.00
16QAM	10	> 12	2	22.00
QPSK	5	≤ 8	0	24.00
QPSK	5	> 8	1	23.00
16QAM	5	≤ 8	1	23.00
16QAM	5	> 8	2	22.00
QPSK	3	≤ 4	0	24.00
QPSK	3	> 4	1	23.00
16QAM	3	≤ 4	1	23.00
16QAM	3	> 4	2	22.00
QPSK	1.4	≤ 5	0	24.00
QPSK	1.4	> 5	1	23.00
16QAM	1.4	≤ 5	1	23.00
16QAM	1.4	> 5	2	22.00

LTE Band 13				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	10	≤ 12	0	23.50
QPSK	10	> 12	1	22.50
16QAM	10	≤ 12	1	22.50
16QAM	10	> 12	2	21.50
QPSK	5	≤ 8	0	23.50
QPSK	5	> 8	1	22.50
16QAM	5	≤ 8	1	22.50
16QAM	5	> 8	2	21.50

LTE Band 5				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	10	≤ 12	0	23.50
QPSK	10	> 12	1	22.50
16QAM	10	≤ 12	1	22.50
16QAM	10	> 12	2	21.50
QPSK	5	≤ 8	0	23.50
QPSK	5	> 8	1	22.50
16QAM	5	≤ 8	1	22.50
16QAM	5	> 8	2	21.50
QPSK	3	≤ 4	0	23.50
QPSK	3	> 4	1	22.50
16QAM	3	≤ 4	1	22.50
16QAM	3	> 4	2	21.50
QPSK	1.4	≤ 5	0	23.50
QPSK	1.4	> 5	1	22.50
16QAM	1.4	≤ 5	1	22.50
16QAM	1.4	> 5	2	21.50

LTE Band 4				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	20	≤ 18	0	22.30
QPSK	20	> 18	1	21.30
16QAM	20	≤ 18	1	21.30
16QAM	20	> 18	2	20.30
QPSK	15	≤ 16	0	22.30
QPSK	15	> 16	1	21.30
16QAM	15	≤ 16	1	21.30
16QAM	15	> 16	2	20.30
QPSK	10	≤ 12	0	22.30
QPSK	10	> 12	1	21.30
16QAM	10	≤ 12	1	21.30
16QAM	10	> 12	2	20.30
QPSK	5	≤ 8	0	22.30
QPSK	5	> 8	1	21.30
16QAM	5	≤ 8	1	21.30
16QAM	5	> 8	2	20.30
QPSK	3	≤ 4	0	22.30
QPSK	3	> 4	1	21.30
16QAM	3	≤ 4	1	21.30
16QAM	3	> 4	2	20.30
QPSK	1.4	≤ 5	0	22.30
QPSK	1.4	> 5	1	21.30
16QAM	1.4	≤ 5	1	21.30
16QAM	1.4	> 5	2	20.30

LTE Band 2				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	MPR	Target Power
QPSK	20	≤ 18	0	23.50
QPSK	20	> 18	1	22.50
16QAM	20	≤ 18	1	22.50
16QAM	20	> 18	2	21.50
QPSK	15	≤ 16	0	23.50
QPSK	15	> 16	1	22.50
16QAM	15	≤ 16	1	22.50
16QAM	15	> 16	2	21.50
QPSK	10	≤ 12	0	23.50
QPSK	10	> 12	1	22.50
16QAM	10	≤ 12	1	22.50
16QAM	10	> 12	2	21.50
QPSK	5	≤ 8	0	23.50
QPSK	5	> 8	1	22.50
16QAM	5	≤ 8	1	22.50
16QAM	5	> 8	2	21.50
QPSK	3	≤ 4	0	23.50
QPSK	3	> 4	1	22.50
16QAM	3	≤ 4	1	22.50
16QAM	3	> 4	2	21.50
QPSK	1.4	≤ 5	0	23.50
QPSK	1.4	> 5	1	22.50
16QAM	1.4	≤ 5	1	22.50
16QAM	1.4	> 5	2	21.50



Mode		Maximum Average Power (dBm)		
2.4GHz	802.11b	Chain Port 0	15.50	
		Chain Port 1	15.50	
	802.11g	Chain Port 0	13.50	
		Chain Port 1	13.50	
	802.11n HT20	Chain Port 0	12.00	
		Chain Port 1	12.00	
		Chain Port 0+1	12.00	
	802.11n HT40	Chain Port 0	11.50	
		Chain Port 1	12.00	
		Chain Port 0+1	12.00	
5.2GHz	802.11a	Chain Port 0	10.00	
		Chain Port 1	10.00	
	802.11n HT20	Chain Port 0	10.00	
		Chain Port 1	10.00	
		Chain Port 0+1	10.50	
	802.11n HT40	Chain Port 0	10.00	
		Chain Port 1	10.00	
		Chain Port 0+1	10.00	
	802.11ac-VHT20	Chain Port 0	10.00	
		Chain Port 1	10.00	
	802.11ac-VHT40	Chain Port 0	10.00	
		Chain Port 1	9.00	
		Chain Port 0+1	10.00	
	802.11ac-VHT80	Chain Port 0	9.00	
		Chain Port 1	9.00	
		Chain Port 0+1	9.00	
5.8GHz	802.11a	Chain Port 0	10.00	
		Chain Port 1	10.50	
	802.11n HT20	Chain Port 0	10.00	
		Chain Port 1	10.00	
		Chain Port 0+1	CH 149	11.00
			CH 157	11.00
	CH 165		10.50	
	802.11n HT40	Chain Port 0	10.00	
		Chain Port 1	10.00	
		Chain Port 0+1	10.00	
	802.11ac-VHT20	Chain Port 0	10.50	
		Chain Port 1	10.00	
		Chain Port 0+1	10.50	
	802.11ac-VHT40	Chain Port 0	10.00	
		Chain Port 1	10.00	
		Chain Port 0+1	10.00	
802.11ac-VHT80	Chain Port 0	9.00		
	Chain Port 1	9.00		
	Chain Port 0+1	9.00		



**4.3 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r03																																							
FCC ID	SRQ-MF975U																																						
Equipment Name	CDMA/LTE Ufi																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz																																						
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Data only																																						
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt;5</td> <td>&gt;4</td> <td>&gt;8</td> <td>&gt;12</td> <td>&gt;16</td> <td>&gt;18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤5</td> <td>≤4</td> <td>≤8</td> <td>≤12</td> <td>≤16</td> <td>≤18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt;5</td> <td>&gt;4</td> <td>&gt;8</td> <td>&gt;12</td> <td>&gt;16</td> <td>&gt;18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	>5	>4	>8	>12	>16	>18	≤ 1	16 QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤ 1	16 QAM	>5	>4	>8	>12	>16	>18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	>5	>4	>8	>12	>16	>18	≤ 1																																
16 QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤ 1																																
16 QAM	>5	>4	>8	>12	>16	>18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
LTE Carrier Aggregation Combinations	Inter-Band possible combinations as below page and the detail power verification please referred to page35.																																						
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 10. Is supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																						

LTE Carrier Aggregation Combinations					
Inter-Band Combinations					
(PCC) B4	(SCC) B12	(PCC) B2	(SCC) B12	(PCC) B12	(SCC) B2
20M+10M		20M+10M		10M+20M	
20M+5M		20M+5M		10M+15M	
15M+10M		15M+10M		10M+10M	
15M+5M		15M+5M		10M+5M	
10M+10M		10M+10M		5M+20M	
10M+5M		10M+5M		5M+15M	
5M+10M		5M+10M		5M+10M	
5M+5M		5M+5M		5M+5M	



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz					Bandwidth 10 MHz						
	Channel #		Freq.(MHz)			Channel #		Freq.(MHz)				
L	23205		779.5			23230		782				
M	23230		782									
H	23255		784.5									
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900

**5. RF Exposure Limits**

**5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

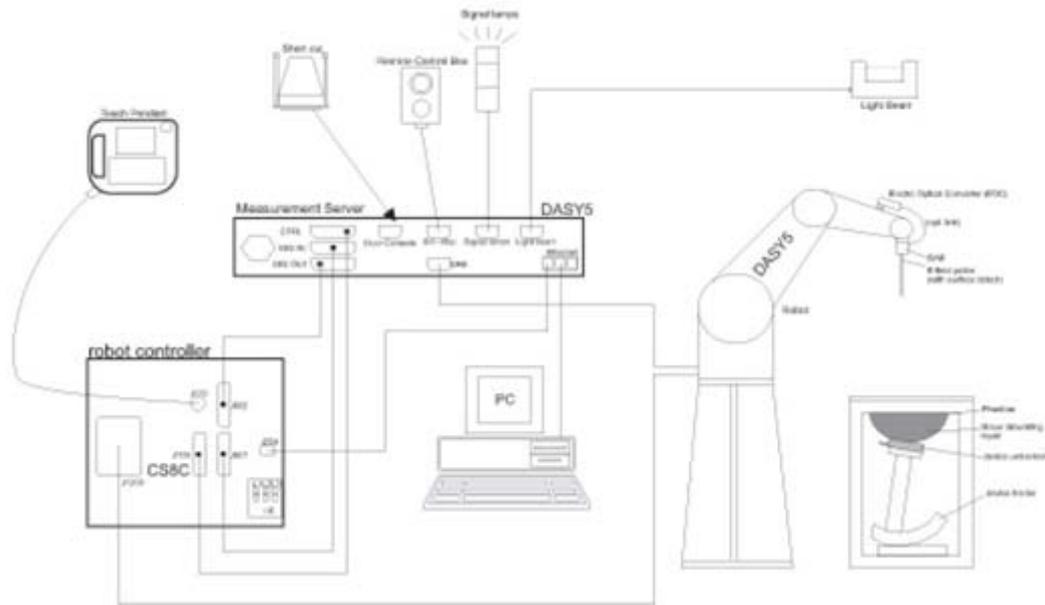

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN power measurement, use engineering software to configure EUT WLAN continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### 8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



**9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	Nov. 19, 2014	Nov. 18, 2015
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 21, 2014	Nov. 20, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1069	Nov. 21, 2014	Nov. 20, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2014	Nov. 20, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	840	Nov. 19, 2014	Nov. 18, 2015
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Nov. 24, 2014	Nov. 23, 2015
SPEAG	Data Acquisition Electronics	DAE4	1358	Apr. 28, 2015	Apr. 27, 2016
SPEAG	Data Acquisition Electronics	DAE4	1210	May 21, 2015	May 20, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3911	Oct. 02, 2014	Oct. 01, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	May 28, 2015	May 27, 2016
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY52102600	Dec. 09, 2014	Dec. 08, 2015
Anritsu	Radio communication analyzer	MT8820C	6201091028	Dec. 09, 2014	Dec. 08, 2015
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Dec. 09, 2014	Dec. 08, 2015
Agilent	Dielectric Probe Kit	85070E	MY44300751	NCR	NCR
Anritsu	Power Sensor	MA2411B	0917070	Jan. 23, 2015	Jan. 22, 2016
Anritsu	Power Meter	ML2495A	1005002	Jan. 23, 2015	Jan. 22, 2016
Anritsu	Power Sensor	MA2411B	1207253	Jan. 28, 2015	Jan. 27, 2016
Anritsu	Power Meter	ML2495A	1218010	Jan. 28, 2015	Jan. 27, 2016
R&S	Signal Generator	SMBV100A	258305	Jan. 23, 2015	Jan. 22, 2016
mini-circuits	Amplifier	ZVE-3W-83+	162601250	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	Note1	
Woken	Attenuator 1	WK0602-XX	N/A	Note1	
PE	Attenuator 2	PE7005-10	N/A	Note1	
PE	Attenuator 3	PE7005- 3	N/A	Note1	
AR	Power Amplifier	5S1G4M2	0328767	Note1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## **10. System Verification**

### **10.1 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1750	70.2	0	0	0.4	0	29.4	1.49	53.40
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


### **<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Body	22.5	0.963	54.228	0.96	55.50	0.31	-2.29	±5	2015.07.16
835	Body	22.4	0.994	54.578	0.97	55.20	2.47	-1.13	±5	2015.07.15
1750	Body	22.5	1.498	53.247	1.49	53.40	0.54	-0.29	±5	2015.07.10
1900	Body	22.5	1.527	55.253	1.52	53.30	0.46	3.66	±5	2015.07.10
2450	Body	22.6	1.949	53.894	1.95	52.70	-0.05	2.27	±5	2015.08.04
5200	Body	22.7	5.162	48.492	5.30	49.00	-2.60	-1.04	±5	2015.08.07
5800	Body	22.7	5.976	47.158	6.00	48.20	-0.40	-2.16	±5	2015.08.07

**10.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2015.07.16	750	Body	250	1065	3911	1358	2.17	8.64	8.68	0.46
2015.07.15	835	Body	250	4d091	3911	1358	2.51	9.60	10.04	4.58
2015.07.10	1750	Body	250	1069	3911	1358	9.51	38.10	38.04	-0.16
2015.07.10	1900	Body	250	5d118	3911	1358	10.10	40.00	40.4	1.00
2015.08.04	2450	Body	250	840	3911	1358	12.80	51.00	51.2	0.39
2015.08.07	5200	Body	100	1113	3857	1210	7.01	74.90	70.1	-6.41
2015.08.07	5800	Body	100	1113	3857	1210	7.03	75.40	70.3	-6.76

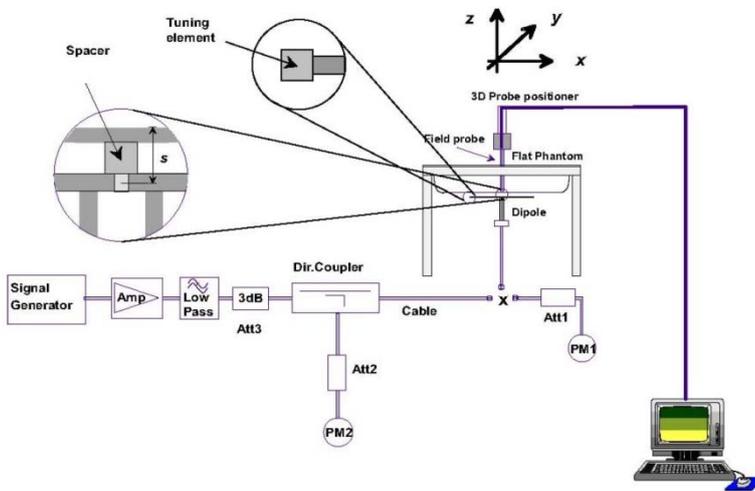

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**



## **11. RF Exposure Positions**

### **11.1 Body Position**

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1 cm.

#### **<EUT Setup Photos>**

Please refer to Appendix D for the test setup photos.



**12. Conducted RF Output Power (Unit: dBm)**

**<CDMA2000 Conducted Power>**

**General Note:**

- 1. Per KDB 941225 D01v03, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.

Band	CDMA2000 BC0			CDMA2000 BC1		
	TX Channel	1013	384	777	25	600
Frequency (MHz)	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	24.06	24.18	24.15	23.63	23.17	23.27
1xRTT RC3 SO55	24.07	24.19	24.16	23.89	23.36	23.33
1xRTT RC3 SO32 (+ F-SCH)	24.06	24.16	24.15	23.77	23.25	23.27
1xRTT RC3 SO32 (+SCH)	24.12	24.18	24.17	23.79	23.23	23.25
1xEV-DO Rev 0 (RTAP 153.6kbps)	24.09	24.15	24.13	23.84	23.31	23.29
1xEV-DO Rev A (RETAP 4096bits)	24.03	24.14	24.12	23.75	23.19	23.17



**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.48	22.67	22.50	24.00	0
10	QPSK	1	24	22.34	22.68	22.92		
10	QPSK	1	49	22.64	22.78	22.93		
10	QPSK	25	0	21.34	21.62	21.59	23.00	0-1
10	QPSK	25	12	21.33	21.55	21.65		
10	QPSK	25	24	21.42	21.77	21.65		
10	QPSK	50	0	21.53	21.68	21.62	23.00	0-1
10	16QAM	1	0	21.12	22.23	22.07		
10	16QAM	1	24	21.55	21.97	21.86		
10	16QAM	1	49	21.91	21.79	22.31	23.00	0-1
10	16QAM	25	0	20.36	20.41	20.63		
10	16QAM	25	12	20.42	20.55	20.66		
10	16QAM	25	24	20.41	20.72	20.63	22.00	0-2
10	16QAM	50	0	20.37	20.55	20.72		
Channel				23035	23095	23155	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.47	22.69	22.52	24.00	0
5	QPSK	1	12	22.11	22.46	22.97		
5	QPSK	1	24	22.61	22.66	22.77		
5	QPSK	12	0	21.31	21.58	21.61	23.00	0-1
5	QPSK	12	6	21.36	21.70	21.69		
5	QPSK	12	11	21.39	21.74	21.75		
5	QPSK	25	0	21.48	21.62	21.84	23.00	0-1
5	16QAM	1	0	22.00	21.85	21.68		
5	16QAM	1	12	21.59	21.93	21.83		
5	16QAM	1	24	21.51	21.89	22.36	23.00	0-1
5	16QAM	12	0	20.25	20.50	20.66		
5	16QAM	12	6	20.37	20.55	20.79		
5	16QAM	12	11	20.43	20.76	20.80	22.00	0-2
5	16QAM	25	0	20.47	20.69	20.53		
Channel				23025	23095	23165	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.36	22.60	22.50	24.00	0
3	QPSK	1	7	22.41	23.21	22.96		
3	QPSK	1	14	22.61	22.64	22.95		
3	QPSK	8	0	21.32	21.58	21.72	23.00	0-1
3	QPSK	8	4	21.34	21.67	21.90		
3	QPSK	8	7	21.29	21.62	21.81		
3	QPSK	15	0	21.29	21.60	21.85	23.00	0-1
3	16QAM	1	0	21.35	21.59	21.76		
3	16QAM	1	7	21.60	21.95	22.44		
3	16QAM	1	14	21.39	21.68	22.60	23.00	0-1
3	16QAM	8	0	20.28	20.60	20.77		
3	16QAM	8	4	20.38	20.76	20.83		
3	16QAM	8	7	20.10	20.79	21.03	22.00	0-2
3	16QAM	15	0	20.41	20.64	20.84		



Channel				23017	23095	23173	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.47	22.63	22.68	24.00	0
1.4	QPSK	1	2	22.22	22.71	23.03		
1.4	QPSK	1	5	22.27	22.71	22.93		
1.4	QPSK	3	0	22.40	22.56	22.95		
1.4	QPSK	3	1	22.30	22.65	23.21		
1.4	QPSK	3	2	22.43	22.77	22.96		
1.4	QPSK	6	0	21.36	21.69	21.81	23.00	0-1
1.4	16QAM	1	0	21.81	22.10	22.08	23.00	0-1
1.4	16QAM	1	2	21.33	21.92	22.55		
1.4	16QAM	1	5	21.47	22.05	22.76		
1.4	16QAM	3	0	21.32	21.70	22.01		
1.4	16QAM	3	1	21.41	21.75	22.08		
1.4	16QAM	3	2	21.36	21.84	21.71		
1.4	16QAM	6	0	20.41	20.55	20.81	22.00	0-2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel					23230		23.50	0
Frequency (MHz)					782			
10	QPSK	1	0		22.72		23.50	0
10	QPSK	1	24		22.54			
10	QPSK	1	49		22.43			
10	QPSK	25	0		21.67		22.50	0-1
10	QPSK	25	12		21.52			
10	QPSK	25	24		21.51			
10	QPSK	50	0		21.73		22.50	0-1
10	16QAM	1	0		22.14			
10	16QAM	1	24		22.05			
10	16QAM	1	49		21.65		21.50	0-2
10	16QAM	25	0		20.61			
10	16QAM	25	12		20.58			
10	16QAM	25	24		20.48		21.50	0-2
10	16QAM	25	24		20.48			
10	16QAM	50	0		20.72			
Channel				23205	23230	23255	23.50	0
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.75	22.55	22.52	23.50	0
5	QPSK	1	12	22.70	22.62	22.46		
5	QPSK	1	24	22.39	22.50	22.57		
5	QPSK	12	0	21.66	21.55	21.58	22.50	0-1
5	QPSK	12	6	21.68	21.57	21.63		
5	QPSK	12	11	21.62	21.61	21.62		
5	QPSK	25	0	21.56	21.49	21.54	22.50	0-1
5	16QAM	1	0	22.21	21.75	22.05		
5	16QAM	1	12	21.85	21.79	21.93		
5	16QAM	1	24	21.89	22.07	22.01	21.50	0-2
5	16QAM	12	0	20.79	20.58	20.72		
5	16QAM	12	6	20.67	20.62	20.60		
5	16QAM	12	11	20.54	20.51	20.55	21.50	0-2
5	16QAM	12	11	20.54	20.51	20.55		
5	16QAM	25	0	20.62	20.66	20.65		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.60	22.85	22.88	23.50	0
10	QPSK	1	24	22.94	22.79	22.55		
10	QPSK	1	49	22.67	22.67	22.67		
10	QPSK	25	0	21.68	21.82	21.72	22.50	0-1
10	QPSK	25	12	21.68	21.63	21.67		
10	QPSK	25	24	21.56	21.70	21.64		
10	QPSK	50	0	21.63	21.60	21.68		
10	16QAM	1	0	22.41	22.29	22.12	22.50	0-1
10	16QAM	1	24	21.76	21.61	21.81		
10	16QAM	1	49	21.54	22.13	21.86		
10	16QAM	25	0	20.77	20.74	20.65	21.50	0-2
10	16QAM	25	12	20.75	20.56	20.64		
10	16QAM	25	24	20.57	20.74	20.50		
10	16QAM	50	0	20.68	20.65	20.60		
Channel				20425	20525	20625	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.78	22.74	22.79	23.50	0
5	QPSK	1	12	22.73	22.45	22.63		
5	QPSK	1	24	22.72	22.75	22.62		
5	QPSK	12	0	21.71	21.60	21.57	22.50	0-1
5	QPSK	12	6	21.77	21.68	21.67		
5	QPSK	12	11	21.70	21.75	21.62		
5	QPSK	25	0	21.82	21.65	21.63		
5	16QAM	1	0	21.78	21.84	22.14	22.50	0-1
5	16QAM	1	12	22.33	22.20	22.18		
5	16QAM	1	24	21.84	21.88	21.75		
5	16QAM	12	0	20.77	20.68	20.68	21.50	0-2
5	16QAM	12	6	20.57	20.50	20.60		
5	16QAM	12	11	20.58	20.62	20.65		
5	16QAM	25	0	20.80	20.67	20.78		
Channel				20415	20525	20635	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.64	22.80	22.78	23.50	0
3	QPSK	1	7	22.75	22.57	23.09		
3	QPSK	1	14	22.62	22.54	22.89		
3	QPSK	8	0	21.63	21.66	21.76	22.50	0-1
3	QPSK	8	4	21.56	21.65	21.71		
3	QPSK	8	7	21.66	21.62	21.65		
3	QPSK	15	0	21.70	21.65	21.90		
3	16QAM	1	0	21.75	22.06	21.86	22.50	0-1
3	16QAM	1	7	22.45	21.79	22.41		
3	16QAM	1	14	21.77	21.79	21.76		
3	16QAM	8	0	21.05	20.84	20.74	21.50	0-2
3	16QAM	8	4	20.55	20.75	20.59		
3	16QAM	8	7	21.07	20.91	20.72		
3	16QAM	15	0	20.85	20.84	20.85		



Channel				20407	20525	20643	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.03	22.52	23.09	23.50	0
1.4	QPSK	1	2	22.63	22.91	22.82		
1.4	QPSK	1	5	23.00	22.88	23.05		
1.4	QPSK	3	0	22.69	22.52	22.73		
1.4	QPSK	3	1	22.84	22.69	22.82		
1.4	QPSK	3	2	22.85	22.74	23.00		
1.4	QPSK	6	0	21.76	21.81	21.70	22.50	0-1
1.4	16QAM	1	0	21.74	22.17	21.74	22.50	0-1
1.4	16QAM	1	2	21.94	21.41	22.45		
1.4	16QAM	1	5	22.46	21.90	21.92		
1.4	16QAM	3	0	21.92	21.71	21.81		
1.4	16QAM	3	1	21.56	21.78	21.76		
1.4	16QAM	3	2	21.80	21.50	21.83		
1.4	16QAM	6	0	20.78	20.51	21.13	21.50	0-2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.97	22.02	21.83	22.30	0
20	QPSK	1	49	21.27	21.33	21.25		
20	QPSK	1	99	21.30	21.36	21.28		
20	QPSK	50	0	20.38	20.39	20.37	21.30	0-1
20	QPSK	50	24	20.28	20.33	20.33		
20	QPSK	50	49	20.30	20.38	20.25		
20	QPSK	100	0	20.31	20.34	20.32	21.30	0-1
20	16QAM	1	0	21.22	21.25	21.08		
20	16QAM	1	49	20.41	20.37	20.33		
20	16QAM	1	99	20.40	20.55	20.53	20.30	0-2
20	16QAM	50	0	19.33	19.39	19.41		
20	16QAM	50	24	19.36	19.37	19.19		
20	16QAM	50	49	19.37	19.36	19.15	20.30	0-2
20	16QAM	100	0	19.38	19.35	19.42		
Channel				20025	20175	20325	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	21.72	21.69	21.63	22.30	0
15	QPSK	1	37	21.09	21.09	20.95		
15	QPSK	1	74	21.17	21.11	21.17		
15	QPSK	36	0	20.27	20.26	20.35	21.30	0-1
15	QPSK	36	18	20.10	20.08	20.21		
15	QPSK	36	37	20.04	20.03	20.09		
15	QPSK	75	0	20.16	20.22	20.18	21.30	0-1
15	16QAM	1	0	20.88	20.93	20.87		
15	16QAM	1	37	20.21	20.28	20.43		
15	16QAM	1	74	20.47	20.29	20.40	20.30	0-2
15	16QAM	36	0	19.31	19.22	19.41		
15	16QAM	36	18	19.08	19.05	19.19		
15	16QAM	36	37	19.30	19.01	19.07	20.30	0-2
15	16QAM	75	0	19.27	19.22	19.26		
Channel				20000	20175	20350	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	21.51	21.23	21.24	22.30	0
10	QPSK	1	24	21.22	20.91	20.92		
10	QPSK	1	49	21.14	21.02	20.86		
10	QPSK	25	0	20.33	20.10	20.02	21.30	0-1
10	QPSK	25	12	20.12	19.94	19.87		
10	QPSK	25	24	20.13	19.91	19.84		
10	QPSK	50	0	20.30	20.01	19.94	21.30	0-1
10	16QAM	1	0	20.75	20.66	20.54		
10	16QAM	1	24	20.53	20.25	20.14		
10	16QAM	1	49	20.45	20.27	20.12	20.30	0-2
10	16QAM	25	0	19.31	19.09	19.01		
10	16QAM	25	12	19.13	18.93	18.91		
10	16QAM	25	24	19.10	18.88	18.84	20.30	0-2
10	16QAM	50	0	19.22	18.99	18.93		



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.46	21.07	21.06	22.30	0
5	QPSK	1	12	21.34	20.91	20.69		
5	QPSK	1	24	21.23	20.79	20.68		
5	QPSK	12	0	20.30	19.93	19.80	21.30	0-1
5	QPSK	12	6	20.36	19.86	19.73		
5	QPSK	12	11	20.27	19.87	19.72		
5	QPSK	25	0	20.33	19.92	19.69		
5	16QAM	1	0	20.65	20.21	20.12	21.30	0-1
5	16QAM	1	12	20.71	20.30	20.05		
5	16QAM	1	24	20.48	20.11	19.93		
5	16QAM	12	0	19.23	18.93	18.80	20.30	0-2
5	16QAM	12	6	19.27	18.85	18.70		
5	16QAM	12	11	19.18	18.85	18.80		
5	16QAM	25	0	19.35	18.94	18.70		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	21.33	20.90	20.79	22.30	0
3	QPSK	1	7	21.31	21.37	21.09		
3	QPSK	1	14	21.17	20.98	20.72		
3	QPSK	8	0	20.29	19.90	19.75	21.30	0-1
3	QPSK	8	4	20.19	20.02	19.71		
3	QPSK	8	7	20.20	19.97	19.63		
3	QPSK	15	0	20.27	20.03	19.71		
3	16QAM	1	0	20.53	20.20	19.90	21.30	0-1
3	16QAM	1	7	20.74	20.38	20.14		
3	16QAM	1	14	20.45	20.20	19.86		
3	16QAM	8	0	19.34	19.01	18.84	20.30	0-2
3	16QAM	8	4	19.23	19.08	18.73		
3	16QAM	8	7	19.28	19.07	18.64		
3	16QAM	15	0	19.28	19.03	18.75		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.42	21.15	20.84	22.30	0
1.4	QPSK	1	2	21.37	21.06	20.87		
1.4	QPSK	1	5	21.32	21.06	20.78		
1.4	QPSK	3	0	21.17	20.91	20.66		
1.4	QPSK	3	1	21.29	20.94	20.82		
1.4	QPSK	3	2	21.29	21.05	20.81		
1.4	QPSK	6	0	20.20	19.90	19.71	21.30	0-1
1.4	16QAM	1	0	20.69	20.39	20.09	21.30	0-1
1.4	16QAM	1	2	20.60	20.28	20.10		
1.4	16QAM	1	5	20.56	20.27	20.06		
1.4	16QAM	3	0	20.18	19.98	19.72		
1.4	16QAM	3	1	20.23	19.89	19.74		
1.4	16QAM	3	2	20.28	20.04	19.80		
1.4	16QAM	6	0	19.26	18.97	18.81	20.30	0-2



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.98	23.11	23.10	23.50	0
20	QPSK	1	49	22.32	22.43	22.45		
20	QPSK	1	99	22.36	22.44	22.49		
20	QPSK	50	0	21.54	21.55	21.52	22.50	0-1
20	QPSK	50	24	21.30	21.42	21.43		
20	QPSK	50	49	21.28	21.42	21.48		
20	QPSK	100	0	21.38	21.47	21.41	22.50	0-1
20	16QAM	1	0	22.28	22.23	22.42		
20	16QAM	1	49	21.42	21.42	21.49		
20	16QAM	1	99	21.60	21.61	21.74	21.50	0-2
20	16QAM	50	0	20.61	20.54	20.52		
20	16QAM	50	24	20.34	20.50	20.43		
20	16QAM	50	49	20.33	20.49	20.46	21.50	0-2
20	16QAM	100	0	20.41	20.48	20.41		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.74	22.82	22.81	23.50	0
15	QPSK	1	37	22.17	22.19	22.13		
15	QPSK	1	74	22.19	22.21	22.43		
15	QPSK	36	0	21.42	21.36	21.48	22.50	0-1
15	QPSK	36	18	21.27	21.38	21.31		
15	QPSK	36	37	21.16	21.41	21.26		
15	QPSK	75	0	21.25	21.18	21.37	22.50	0-1
15	16QAM	1	0	22.08	22.05	22.09		
15	16QAM	1	37	21.58	21.27	21.41		
15	16QAM	1	74	21.48	21.50	21.65	21.50	0-2
15	16QAM	36	0	20.43	20.34	20.51		
15	16QAM	36	18	20.26	20.39	20.28		
15	16QAM	36	37	20.14	20.39	20.24	21.50	0-2
15	16QAM	75	0	20.32	20.22	20.39		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.61	22.21	22.10	23.50	0
10	QPSK	1	24	22.25	21.98	21.82		
10	QPSK	1	49	22.25	21.82	22.00		
10	QPSK	25	0	21.42	20.96	20.85	22.50	0-1
10	QPSK	25	12	21.24	20.92	20.75		
10	QPSK	25	24	21.21	20.89	20.80		
10	QPSK	50	0	21.28	20.93	20.79	22.50	0-1
10	16QAM	1	0	21.93	21.59	21.39		
10	16QAM	1	24	21.54	21.28	21.07		
10	16QAM	1	49	21.55	21.10	21.17	21.50	0-2
10	16QAM	25	0	20.42	19.99	19.84		
10	16QAM	25	12	20.23	19.91	19.75		
10	16QAM	25	24	20.25	19.87	19.82	21.50	0-2
10	16QAM	50	0	20.29	19.94	19.79		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.39	21.98	21.75	23.50	0
5	QPSK	1	12	22.27	21.91	21.72		
5	QPSK	1	24	22.33	21.88	21.70		
5	QPSK	12	0	21.25	20.94	20.75	22.50	0-1
5	QPSK	12	6	21.32	20.96	20.75		
5	QPSK	12	11	21.23	20.85	20.73		
5	QPSK	25	0	21.30	20.91	20.73		
5	16QAM	1	0	21.63	21.34	21.02	22.50	0-1
5	16QAM	1	12	21.66	21.27	21.16		
5	16QAM	1	24	21.58	21.11	21.03		
5	16QAM	12	0	20.25	19.93	19.74	21.50	0-2
5	16QAM	12	6	20.28	19.92	19.73		
5	16QAM	12	11	20.16	19.82	19.69		
5	16QAM	25	0	20.32	19.93	19.72		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.25	22.04	21.82	23.50	0
3	QPSK	1	7	22.49	22.07	22.26		
3	QPSK	1	14	22.35	22.01	21.77		
3	QPSK	8	0	21.27	20.98	20.77	22.50	0-1
3	QPSK	8	4	21.28	20.96	20.79		
3	QPSK	8	7	21.25	20.89	20.76		
3	QPSK	15	0	21.27	20.92	20.74		
3	16QAM	1	0	21.49	21.23	20.98	22.50	0-1
3	16QAM	1	7	21.75	21.45	21.19		
3	16QAM	1	14	21.52	21.18	20.97		
3	16QAM	8	0	20.37	20.00	19.82	21.50	0-2
3	16QAM	8	4	20.35	19.98	19.81		
3	16QAM	8	7	20.31	20.00	19.82		
3	16QAM	15	0	20.28	19.95	19.75		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.32	21.98	21.83	23.50	0
1.4	QPSK	1	2	22.29	22.01	21.82		
1.4	QPSK	1	5	22.25	21.95	21.74		
1.4	QPSK	3	0	22.22	21.90	21.77		
1.4	QPSK	3	1	22.29	21.98	21.88		
1.4	QPSK	3	2	22.30	22.02	21.81		
1.4	QPSK	6	0	21.20	20.93	20.71	22.50	0-1
1.4	16QAM	1	0	21.64	21.34	21.14	22.50	0-1
1.4	16QAM	1	2	21.56	21.35	21.11		
1.4	16QAM	1	5	21.68	21.25	21.15		
1.4	16QAM	3	0	21.33	21.01	20.78		
1.4	16QAM	3	1	21.33	20.96	20.78		
1.4	16QAM	3	2	21.34	20.99	20.89		
1.4	16QAM	6	0	20.35	20.02	19.79	21.50	0-2

**LTE Carrier Aggregation Conducted Power**

**General Note:**

- i. According to KDB941225 D05A v01, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device only supports downlink carrier aggregation. Uplink carrier aggregation is not supported. Power measurements were performed with two DL carriers for the Release 8 configuration that had the highest output power across all bandwidths, channels and RB configuration for each band.
- iv. During the carrier aggregation conducted power measurements we have attention to throughput traffic to make sure all the power measurement is corrected.

Configure	PCC						SCC				Measured Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx. Power (dBm)	LTE Rel 8 Tx. Power (dBm)
	LTE Band 4	20M	1720	20050	1	0	LTE Band 12	10M	711	23130	21.95	21.97
	LTE Band 4	20M	1732.5	20175	1	0	LTE Band 12	10M	711	23130	22.01	22.02
	LTE Band 4	20M	1745	20300	1	0	LTE Band 12	10M	711	23130	21.86	21.83
	LTE Band 2	20M	1860	18700	1	0	LTE Band 12	10M	711	23130	22.95	22.98
	LTE Band 2	20M	1880	18900	1	0	LTE Band 12	10M	711	23130	23.12	23.11
	LTE Band 2	20M	1900	19100	1	0	LTE Band 12	10M	711	23130	23.08	23.1
	LTE Band 12	10M	704	23060	1	49	LTE Band 2	20M	1880	18900	22.54	22.64
	LTE Band 12	10M	707.5	23095	1	49	LTE Band 2	20M	1880	18900	22.82	22.78
	LTE Band 12	10M	711	23130	1	49	LTE Band 2	20M	1880	18900	22.75	22.93

**<WLAN Conducted Power>****General Note:**

1. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
2. Per KDB 248227 D01v02r01, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6\text{W/kg}$  and SAR peak to location ratio  $< 0.04$ , no additional SAR measurements for MIMO.
3. Per KDB 248227 D01v02r01, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
4. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
5. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
6. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4\text{ W/kg}$ , further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4\text{ W/kg}$ , SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8\text{ W/kg}$  or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.

**<2.4GHz WLAN Antenna 0>**

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Duty Cycle %
2.4GHz WLAN Antenna 0	802.11b	CH 1	2412	1Mbps	14.18	100
		CH 6	2437		14.96	
		CH 11	2462		14.26	
	802.11g	CH 1	2412	6Mbps	11.83	95.22
		CH 6	2437		13.26	
		CH 11	2462		12.69	
	802.11n-HT20	CH 1	2412	MCS0	10.36	95.07
		CH 6	2437		11.60	
		CH 11	2462		11.77	
	802.11n-HT40	CH 3	2422	MCS0	9.78	90.80
		CH 6	2437		11.18	
		CH 9	2452		11.15	

**<2.4GHz WLAN Antenna 1>**

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Duty Cycle %
2.4GHz WLAN Antenna 1	802.11b	CH 1	2412	1Mbps	14.86	100
		CH 6	2437		14.16	
		CH 11	2462		14.24	
	802.11g	CH 1	2412	6Mbps	12.28	95.39
		CH 6	2437		11.99	
		CH 11	2462		12.55	
	802.11n-HT20	CH 1	2412	MCS0	11.52	94.98
		CH 6	2437		11.06	
		CH 11	2462		11.48	
	802.11n-HT40	CH 3	2422	MCS0	11.92	89.94
		CH 6	2437		11.55	
		CH 9	2452		11.87	

**<2.4GHz WLAN Antenna 0+1>**

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Duty Cycle %
2.4GHz WLAN Antenna 0+1	802.11n-HT20	CH 1	2412	MCS0	10.76	95.26
		CH 6	2437		10.89	
		CH 11	2462		11.26	
	802.11n-HT40	CH 3	2422	MCS0	11.19	89.62
		CH 6	2437		11.87	
		CH 9	2452		11.82	



<5GHz WLAN Antenna 0>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Duty Cycle %
5.2GHz WLAN Antenna 0	802.11a	CH 36	5180	6Mbps	9.53	95.39
		CH 40	5200		9.26	
		CH 44	5220		9.14	
		CH 48	5240		9.21	
	802.11n-HT20	CH 36	5180	MCS0	9.51	94.92
		CH 40	5200		9.30	
		CH 44	5220		9.22	
		CH 48	5240		9.17	
	802.11n-HT40	CH 38	5190	MCS0	9.75	91.35
		CH 46	5230		9.52	
	802.11ac-VHT20	CH 36	5180	MCS0	9.52	94.61
		CH 40	5200		9.35	
		CH 44	5220		9.27	
		CH 48	5240		9.22	
	802.11ac-VHT40	CH 38	5190	MCS0	8.90	90.07
		CH 46	5230		8.76	
802.11ac-VHT80	CH 42	5210	MCS0	7.93	83.61	
5.8GHz WLAN Antenna 0	802.11a	CH 149	5745	MCS0	9.43	95.39
		CH 157	5785		9.89	
		CH 165	5825		9.59	
	802.11n-HT20	CH 149	5745	MCS0	9.44	94.92
		CH 157	5785		9.88	
		CH 165	5825		9.39	
	802.11n-HT40	CH 151	5755	MCS0	9.70	91.35
		CH 159	5795		9.57	
	802.11ac-VHT20	CH 149	5745	MCS0	9.50	94.61
		CH 157	5785		9.98	
		CH 165	5825		9.55	
	802.11ac-VHT40	CH 151	5755	MCS0	8.89	90.07
		CH 159	5795		8.71	
	802.11ac-VHT80	CH 155	5775	MCS0	8.09	83.51




<5GHz WLAN Antenna 1>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Duty Cycle %
5.2GHz WLAN Antenna 1	802.11a	CH 36	5180	6Mbps	9.54	95.39
		CH 40	5200		9.43	
		CH 44	5220		9.47	
		CH 48	5240		9.76	
	802.11n-HT20	CH 36	5180	MCS0	9.44	95.19
		CH 40	5200		9.34	
		CH 44	5220		9.33	
		CH 48	5240		9.66	
	802.11n-HT40	CH 38	5190	MCS0	9.76	90.33
		CH 46	5230		9.92	
	802.11ac-VHT20	CH 36	5180	MCS0	9.61	94.94
		CH 40	5200		9.27	
CH 44		5220	9.47			
CH 48		5240	9.44			
802.11ac-VHT40	CH 38	5190	MCS0	8.69	92.03	
	CH 46	5230		8.92		
802.11ac-VHT80	CH 42	5210	MCS0	8.08	84.03	
5.8GHz WLAN Antenna 1	802.11a	CH 149	5745	MCS0	9.58	95.39
		CH 157	5785		9.98	
		CH 165	5825		9.36	
	802.11n-HT20	CH 149	5745	MCS0	9.45	95.19
		CH 157	5785		9.89	
		CH 165	5825		9.08	
	802.11n-HT40	CH 151	5755	MCS0	9.95	90.33
		CH 159	5795		9.74	
	802.11ac-VHT20	CH 149	5745	MCS0	9.50	94.94
		CH 157	5785		9.87	
		CH 165	5825		9.20	
	802.11ac-VHT40	CH 151	5755	MCS0	8.95	92.03
CH 159		5795	8.71			
802.11ac-VHT80	CH 155	5775	MCS0	8.25	84.03	

**<5GHz WLAN Antenna 0+1>**

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Duty Cycle %
5.2GHz WLAN Antenna 0+1	802.11n-HT20	CH 36	5180	MCS0	10.00	94.92
		CH 40	5200		9.93	
		CH 44	5220		10.03	
		CH 48	5240		9.88	
	802.11n-HT40	CH 38	5190	MCS0	9.47	91.25
		CH 46	5230		9.74	
	802.11ac-VHT20	CH 36	5180	MCS0	9.16	95.00
		CH 40	5200		9.17	
		CH 44	5220		9.35	
		CH 48	5240		9.62	
	802.11ac-VHT40	CH 38	5190	MCS0	8.95	90.86
		CH 46	5230		8.70	
802.11ac-VHT80	CH 42	5210	MCS0	7.91	84.29	
5.8GHz WLAN Antenna 0+1	802.11n-HT20	CH 149	5745	MCS0	10.13	94.92
		CH 157	5785		10.64	
		CH 165	5825		9.99	
	802.11n-HT40	CH 151	5755	MCS0	9.93	91.25
		CH 159	5795		9.78	
	802.11ac-VHT20	CH 149	5745	MCS0	9.67	95.00
		CH 157	5785		10.27	
		CH 165	5825		9.59	
	802.11ac-VHT40	CH 151	5755	MCS0	9.21	90.86
		CH 159	5795		8.92	
	802.11ac-VHT80	CH 155	5775	MCS0	8.44	84.29

### 13. Antenna Location

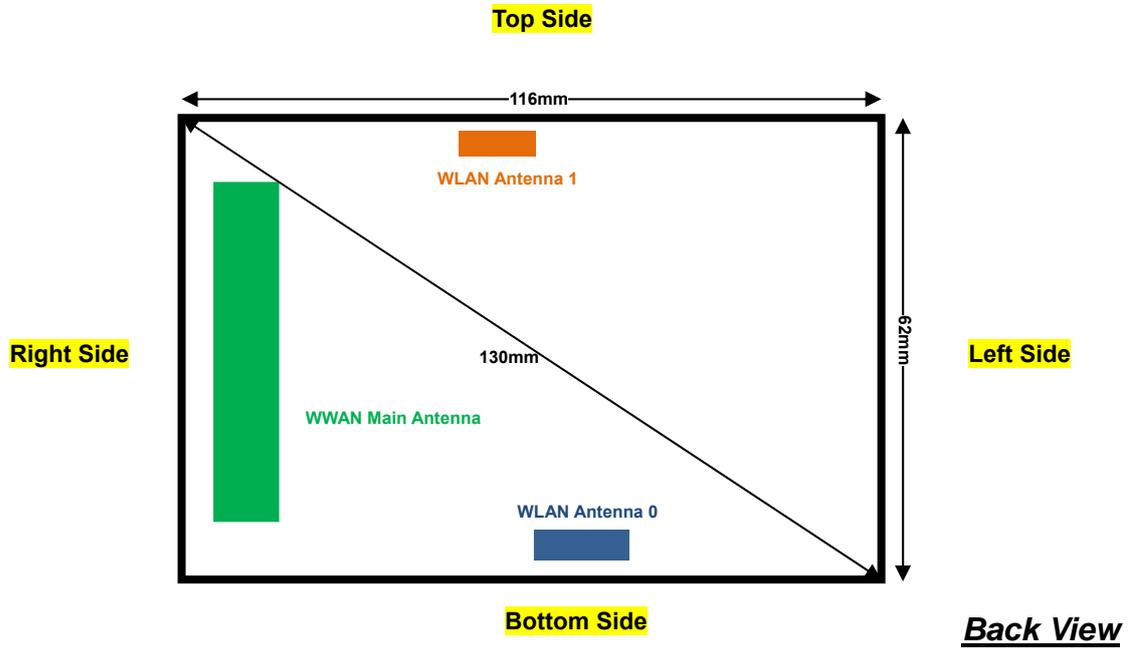

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	103mm
WLAN Antenna 0	≤ 25mm	≤ 25mm	56mm	≤ 25mm	61mm	36mm
WLAN Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	56mm	53mm	46mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	Yes	Yes	Yes	No
WLAN Antenna 0	Yes	Yes	No	Yes	No	No
WLAN Antenna 1	Yes	Yes	Yes	No	No	No

**General Note:**

Referring to KDB 941225 D06 v02, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - b. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - c. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - e. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 941225 D01v03, in hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
4. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
5. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
6. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
7. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
8. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
9. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
10. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
11. For WLAN SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
12. Per KDB 248227 D01v02r01, the simultaneous SAR provisions in KDB publication 447498 should be applied to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1g single transmission chain SAR measurements is  $< 1.6$ W/kg and SAR peak to location ratio  $< 0.04$ , no additional SAR measurements for MIMO.
13. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Body SAR

<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC0	RTAP 153.6kbps	Front	1	384	836.52	24.15	24.50	1.084	0.02	0.997	1.081
	CDMA2000 BC0	RTAP 153.6kbps	Back	1	384	836.52	24.15	24.50	1.084	0.01	1.050	1.138
	CDMA2000 BC0	RTAP 153.6kbps	Right side	1	384	836.52	24.15	24.50	1.084	-0.05	0.224	0.243
	CDMA2000 BC0	RTAP 153.6kbps	Top side	1	384	836.52	24.15	24.50	1.084	0.01	0.454	0.492
	CDMA2000 BC0	RTAP 153.6kbps	Bottom side	1	384	836.52	24.15	24.50	1.084	-0.1	0.358	0.388
	CDMA2000 BC0	RTAP 153.6kbps	Front	1	1013	824.7	24.09	24.50	1.099	-0.01	1.030	1.132
	CDMA2000 BC0	RTAP 153.6kbps	Front	1	777	848.31	24.13	24.50	1.089	-0.03	0.908	0.989
<b>01</b>	<b>CDMA2000 BC0</b>	<b>RTAP 153.6kbps</b>	<b>Back</b>	<b>1</b>	<b>1013</b>	<b>824.7</b>	<b>24.09</b>	<b>24.50</b>	<b>1.099</b>	<b>0.04</b>	<b>1.070</b>	<b>1.176</b>
	CDMA2000 BC0	RTAP 153.6kbps	Back	1	777	848.31	24.13	24.50	1.089	0.01	0.939	1.023
	CDMA2000 BC1	RTAP 153.6kbps	Front	1	25	1851.3	23.84	24.00	1.038	0.19	1.120	1.162
	CDMA2000 BC1	RTAP 153.6kbps	Back	1	25	1851.3	23.84	24.00	1.038	0.15	1.090	1.131
<b>02</b>	<b>CDMA2000 BC1</b>	<b>RTAP 153.6kbps</b>	<b>Right side</b>	<b>1</b>	<b>25</b>	<b>1851.3</b>	<b>23.84</b>	<b>24.00</b>	<b>1.038</b>	<b>-0.05</b>	<b>1.400</b>	<b>1.453</b>
	CDMA2000 BC1	RTAP 153.6kbps	Top side	1	25	1851.3	23.84	24.00	1.038	0.01	1.100	1.141
	CDMA2000 BC1	RTAP 153.6kbps	Bottom side	1	25	1851.3	23.84	24.00	1.038	-0.05	0.071	0.074
	CDMA2000 BC1	RTAP 153.6kbps	Front	1	600	1880	23.31	24.00	1.172	-0.07	0.907	1.063
	CDMA2000 BC1	RTAP 153.6kbps	Front	1	1175	1908.8	23.29	24.00	1.178	-0.01	0.934	1.100
	CDMA2000 BC1	RTAP 153.6kbps	Back	1	600	1880	23.31	24.00	1.172	0.13	0.910	1.067
	CDMA2000 BC1	RTAP 153.6kbps	Back	1	1175	1908.8	23.29	24.00	1.178	0.08	0.927	1.092
	CDMA2000 BC1	RTAP 153.6kbps	Right side	1	600	1880	23.31	24.00	1.172	-0.18	1.170	1.371
	CDMA2000 BC1	RTAP 153.6kbps	Right side	1	1175	1908.8	23.29	24.00	1.178	0.18	1.100	1.295
	CDMA2000 BC1	RTAP 153.6kbps	Top side	1	600	1880	23.31	24.00	1.172	0.03	1.060	1.243
	CDMA2000 BC1	RTAP 153.6kbps	Top side	1	1175	1908.8	23.29	24.00	1.178	0.02	1.140	1.342

<LTE SAR>

Plot No.	Band	BW (MHz)	RB Size	RB Offset	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	1	49	QPSK	Front	1	23130	711	22.93	24.00	1.279	-0.01	0.676	0.865
<b>03</b>	<b>LTE Band 12</b>	<b>10M</b>	<b>1</b>	<b>49</b>	<b>QPSK</b>	<b>Back</b>	<b>1</b>	<b>23130</b>	<b>711</b>	<b>22.93</b>	<b>24.00</b>	<b>1.279</b>	<b>0.03</b>	<b>0.741</b>	<b>0.948</b>
	LTE Band 12	10M	1	49	QPSK	Right side	1	23130	711	22.93	24.00	1.279	-0.02	0.132	0.169
	LTE Band 12	10M	1	49	QPSK	Top side	1	23130	711	22.93	24.00	1.279	-0.06	0.275	0.352
	LTE Band 12	10M	1	49	QPSK	Bottom side	1	23130	711	22.93	24.00	1.279	-0.08	0.241	0.308
	LTE Band 12	10M	1	49	QPSK	Front	1	23060	704	22.64	24.00	1.368	0.03	0.512	0.700
	LTE Band 12	10M	1	49	QPSK	Front	1	23095	707.5	22.78	24.00	1.324	0.01	0.555	0.735
	LTE Band 12	10M	1	49	QPSK	Back	1	23060	704	22.64	24.00	1.368	-0.05	0.590	0.807
	LTE Band 12	10M	1	49	QPSK	Back	1	23095	707.5	22.78	24.00	1.324	-0.01	0.616	0.816
	LTE Band 12	10M	25	24	QPSK	Front	1	23095	707.5	21.77	23.00	1.327	-0.02	0.419	0.556
	LTE Band 12	10M	25	24	QPSK	Back	1	23095	707.5	21.77	23.00	1.327	0.01	0.487	0.646
	LTE Band 12	10M	25	24	QPSK	Right side	1	23095	707.5	21.77	23.00	1.327	-0.16	0.094	0.125
	LTE Band 12	10M	25	24	QPSK	Top side	1	23095	707.5	21.77	23.00	1.327	-0.05	0.216	0.287
	LTE Band 12	10M	25	24	QPSK	Bottom side	1	23095	707.5	21.77	23.00	1.327	-0.08	0.175	0.232
	LTE Band 12	10M	50	0	QPSK	Front	1	23095	707.5	21.68	23.00	1.355	-0.02	0.430	0.583
	LTE Band 12	10M	50	0	QPSK	Back	1	23095	707.5	21.68	23.00	1.355	-0.02	0.502	0.680
	LTE Band 13	10M	1	0	QPSK	Front	1	23230	782	22.72	23.50	1.197	0.02	0.971	1.162
<b>04</b>	<b>LTE Band 13</b>	<b>10M</b>	<b>1</b>	<b>0</b>	<b>QPSK</b>	<b>Back</b>	<b>1</b>	<b>23230</b>	<b>782</b>	<b>22.72</b>	<b>23.50</b>	<b>1.197</b>	<b>0.04</b>	<b>1.090</b>	<b>1.304</b>
	LTE Band 13	10M	1	0	QPSK	Right side	1	23230	782	22.72	23.50	1.197	-0.14	0.149	0.178
	LTE Band 13	10M	1	0	QPSK	Top side	1	23230	782	22.72	23.50	1.197	-0.02	0.484	0.579
	LTE Band 13	10M	1	0	QPSK	Bottom side	1	23230	782	22.72	23.50	1.197	0.05	0.337	0.403
	LTE Band 13	10M	25	0	QPSK	Front	1	23230	782	21.67	22.50	1.211	-0.04	0.806	0.976
	LTE Band 13	10M	25	0	QPSK	Back	1	23230	782	21.67	22.50	1.211	-0.01	0.860	1.041
	LTE Band 13	10M	25	0	QPSK	Right side	1	23230	782	21.67	22.50	1.211	-0.12	0.118	0.143
	LTE Band 13	10M	25	0	QPSK	Top side	1	23230	782	21.67	22.50	1.211	0.01	0.396	0.479
	LTE Band 13	10M	25	0	QPSK	Bottom side	1	23230	782	21.67	22.50	1.211	-0.12	0.272	0.329
	LTE Band 13	10M	50	0	QPSK	Front	1	23230	782	21.73	22.50	1.194	-0.03	0.771	0.921
	LTE Band 13	10M	50	0	QPSK	Back	1	23230	782	21.73	22.50	1.194	0.01	0.824	0.984



Plot No.	Band	BW (MHz)	RB Size	RB Offset	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	1	24	QPSK	Front	1	20450	829	22.94	23.50	1.138	0.01	0.660	0.751
<b>05</b>	<b>LTE Band 5</b>	<b>10M</b>	<b>1</b>	<b>24</b>	<b>QPSK</b>	<b>Back</b>	<b>1</b>	<b>20450</b>	<b>829</b>	<b>22.94</b>	<b>23.50</b>	<b>1.138</b>	<b>0.01</b>	<b>0.674</b>	<b>0.767</b>
	LTE Band 5	10M	1	24	QPSK	Right side	1	20450	829	22.94	23.50	1.138	-0.09	0.127	0.144
	LTE Band 5	10M	1	24	QPSK	Top side	1	20450	829	22.94	23.50	1.138	-0.03	0.323	0.367
	LTE Band 5	10M	1	24	QPSK	Bottom side	1	20450	829	22.94	23.50	1.138	-0.03	0.246	0.280
	LTE Band 5	10M	25	0	QPSK	Front	1	20525	836.5	21.82	22.50	1.169	-0.01	0.514	0.601
	LTE Band 5	10M	25	0	QPSK	Back	1	20525	836.5	21.82	22.50	1.169	-0.09	0.518	0.606
	LTE Band 5	10M	25	0	QPSK	Right side	1	20525	836.5	21.82	22.50	1.169	-0.07	0.104	0.122
	LTE Band 5	10M	25	0	QPSK	Top side	1	20525	836.5	21.82	22.50	1.169	-0.04	0.250	0.292
	LTE Band 5	10M	25	0	QPSK	Bottom side	1	20525	836.5	21.82	22.50	1.169	-0.02	0.196	0.229
	LTE Band 4	20M	1	0	QPSK	Front	1	20175	1732.5	22.02	22.30	1.067	0.02	1.140	1.216
	LTE Band 4	20M	1	0	QPSK	Back	1	20175	1732.5	22.02	22.30	1.067	0.07	1.040	1.109
	LTE Band 4	20M	1	0	QPSK	Right side	1	20175	1732.5	22.02	22.30	1.067	-0.09	1.300	1.387
	LTE Band 4	20M	1	0	QPSK	Top side	1	20175	1732.5	22.02	22.30	1.067	-0.06	0.550	0.587
	LTE Band 4	20M	1	0	QPSK	Bottom side	1	20175	1732.5	22.02	22.30	1.067	-0.09	0.039	0.042
	LTE Band 4	20M	1	0	QPSK	Front	1	20050	1720	21.97	22.30	1.079	0.02	1.150	1.241
	LTE Band 4	20M	1	0	QPSK	Front	1	20300	1745	21.83	22.30	1.114	0.04	1.110	1.237
	LTE Band 4	20M	1	0	QPSK	Back	1	20050	1720	21.97	22.30	1.079	0.03	1.060	1.144
	LTE Band 4	20M	1	0	QPSK	Back	1	20300	1745	21.83	22.30	1.114	0.05	0.982	1.094
	LTE Band 4	20M	1	0	QPSK	Right side	1	20050	1720	21.97	22.30	1.079	-0.1	1.290	1.392
<b>06</b>	<b>LTE Band 4</b>	<b>20M</b>	<b>1</b>	<b>0</b>	<b>QPSK</b>	<b>Right side</b>	<b>1</b>	<b>20300</b>	<b>1745</b>	<b>21.83</b>	<b>22.30</b>	<b>1.114</b>	<b>-0.1</b>	<b>1.290</b>	<b>1.437</b>
	LTE Band 4	20M	50	0	QPSK	Front	1	20175	1732.5	20.39	21.30	1.233	0.18	0.819	1.010
	LTE Band 4	20M	50	0	QPSK	Back	1	20175	1732.5	20.39	21.30	1.233	0.05	0.724	0.893
	LTE Band 4	20M	50	0	QPSK	Right side	1	20175	1732.5	20.39	21.30	1.233	-0.1	0.928	1.144
	LTE Band 4	20M	50	0	QPSK	Top side	1	20175	1732.5	20.39	21.30	1.233	-0.04	0.392	0.483
	LTE Band 4	20M	50	0	QPSK	Bottom side	1	20175	1732.5	20.39	21.30	1.233	-0.06	0.029	0.036
	LTE Band 4	20M	50	0	QPSK	Front	1	20050	1720	20.38	21.30	1.236	0.02	0.836	1.033
	LTE Band 4	20M	50	0	QPSK	Front	1	20300	1745	20.37	21.30	1.239	0.17	0.822	1.018
	LTE Band 4	20M	50	0	QPSK	Back	1	20050	1720	20.38	21.30	1.236	-0.02	0.738	0.912
	LTE Band 4	20M	50	0	QPSK	Back	1	20300	1745	20.37	21.30	1.239	0.03	0.733	0.908
	LTE Band 4	20M	50	0	QPSK	Right side	1	20050	1720	20.38	21.30	1.236	-0.11	0.938	1.159
	LTE Band 4	20M	50	0	QPSK	Right side	1	20300	1745	20.37	21.30	1.239	-0.09	0.959	1.188
	LTE Band 4	20M	100	0	QPSK	Front	1	20175	1732.5	20.34	21.30	1.247	0.17	0.807	1.007
	LTE Band 4	20M	100	0	QPSK	Back	1	20175	1732.5	20.34	21.30	1.247	0.07	0.705	0.879
	LTE Band 4	20M	100	0	QPSK	Right side	1	20175	1732.5	20.34	21.30	1.247	-0.08	0.926	1.155



Plot No.	Band	BW (MHz)	RB Size	RB Offset	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	1	0	QPSK	Front	1	18900	1880	23.11	23.50	1.094	0.1	0.858	0.939
	LTE Band 2	20M	1	0	QPSK	Back	1	18900	1880	23.11	23.50	1.094	0.14	0.924	1.011
	LTE Band 2	20M	1	0	QPSK	Right side	1	18900	1880	23.11	23.50	1.094	-0.13	1.150	1.258
	LTE Band 2	20M	1	0	QPSK	Top side	1	18900	1880	23.11	23.50	1.094	0.1	0.905	0.990
	LTE Band 2	20M	1	0	QPSK	Bottom side	1	18900	1880	23.11	23.50	1.094	-0.09	0.058	0.063
	LTE Band 2	20M	1	0	QPSK	Front	1	18700	1860	22.98	23.50	1.127	0.02	0.918	1.035
	LTE Band 2	20M	1	0	QPSK	Front	1	19100	1900	23.10	23.50	1.096	-0.01	0.831	0.911
	LTE Band 2	20M	1	0	QPSK	Back	1	18700	1860	22.98	23.50	1.127	0.18	0.943	1.063
	LTE Band 2	20M	1	0	QPSK	Back	1	19100	1900	23.10	23.50	1.096	0.14	0.890	0.976
<b>07</b>	<b>LTE Band 2</b>	<b>20M</b>	<b>1</b>	<b>0</b>	<b>QPSK</b>	<b>Right side</b>	<b>1</b>	<b>18700</b>	<b>1860</b>	<b>22.98</b>	<b>23.50</b>	<b>1.127</b>	<b>-0.13</b>	<b>1.220</b>	<b>1.375</b>
	LTE Band 2	20M	1	0	QPSK	Right side	1	19100	1900	23.10	23.50	1.096	-0.01	1.120	1.228
	LTE Band 2	20M	1	0	QPSK	Top side	1	18700	1860	22.98	23.50	1.127	0.13	0.834	0.940
	LTE Band 2	20M	1	0	QPSK	Top side	1	19100	1900	23.10	23.50	1.096	0.06	0.999	1.095
	LTE Band 2	20M	50	0	QPSK	Front	1	18900	1880	21.55	22.50	1.245	0.06	0.632	0.787
	LTE Band 2	20M	50	0	QPSK	Back	1	18900	1880	21.55	22.50	1.245	0.09	0.659	0.820
	LTE Band 2	20M	50	0	QPSK	Right side	1	18900	1880	21.55	22.50	1.245	-0.07	0.845	1.052
	LTE Band 2	20M	50	0	QPSK	Top side	1	18900	1880	21.55	22.50	1.245	0.04	0.662	0.824
	LTE Band 2	20M	50	0	QPSK	Bottom side	1	18900	1880	21.55	22.50	1.245	-0.09	0.041	0.051
	LTE Band 2	20M	50	0	QPSK	Back	1	18700	1860	21.54	22.50	1.247	0.11	0.705	0.879
	LTE Band 2	20M	50	0	QPSK	Back	1	19100	1900	21.52	22.50	1.253	0.08	0.598	0.749
	LTE Band 2	20M	50	0	QPSK	Right side	1	18700	1860	21.54	22.50	1.247	-0.02	0.898	1.120
	LTE Band 2	20M	50	0	QPSK	Right side	1	19100	1900	21.52	22.50	1.253	-0.13	0.791	0.991
	LTE Band 2	20M	50	0	QPSK	Top side	1	18700	1860	21.54	22.50	1.247	0.08	0.618	0.771
	LTE Band 2	20M	50	0	QPSK	Top side	1	19100	1900	21.52	22.50	1.253	0.02	0.713	0.893
	LTE Band 2	20M	100	0	QPSK	Front	1	18900	1880	21.47	22.50	1.268	-0.01	0.593	0.752
	LTE Band 2	20M	100	0	QPSK	Back	1	18900	1880	21.47	22.50	1.268	0.08	0.614	0.778
	LTE Band 2	20M	100	0	QPSK	Right side	1	18900	1880	21.47	22.50	1.268	-0.02	0.794	1.007
	LTE Band 2	20M	100	0	QPSK	Top side	1	18900	1880	21.47	22.50	1.268	0.05	0.634	0.804

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ant.	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Area Scan Max SAR(W/kg)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	1	Ant 0	6	2437	14.96	15.50	1.132	100	1.000		0.128		
	WLAN 2.4GHz	802.11b 1Mbps	Back	1	Ant 0	6	2437	14.96	15.50	1.132	100	1.000		0.142		
	WLAN 2.4GHz	802.11b 1Mbps	Bottom side	1	Ant 0	6	2437	14.96	15.50	1.132	100	1.000	-0.07	0.161	0.117	0.132
	WLAN 2.4GHz	802.11b 1Mbps	Front	1	Ant 1	1	2412	14.86	15.50	1.159	100	1.000		0.124		
	WLAN 2.4GHz	802.11b 1Mbps	Back	1	Ant 1	1	2412	14.86	15.50	1.159	100	1.000		0.122		
<b>08</b>	<b>WLAN 2.4GHz</b>	<b>802.11b 1Mbps</b>	<b>Top side</b>	<b>1</b>	<b>Ant 1</b>	<b>1</b>	<b>2412</b>	<b>14.86</b>	<b>15.50</b>	<b>1.159</b>	<b>100</b>	<b>1.000</b>	<b>-0.03</b>	<b>0.195</b>	<b>0.134</b>	<b>0.155</b>
	WLAN 2.4GHz	802.11n HT40 MCS0	Front	1	Ant 0+1	6	2437	11.87	12.00	1.030	89.62	1.116		0.0393		
	WLAN 2.4GHz	802.11n HT40 MCS0	Back	1	Ant 0+1	6	2437	11.87	12.00	1.030	89.62	1.116		0.0562		
	WLAN 2.4GHz	802.11n HT40 MCS0	Top side	1	Ant 0+1	6	2437	11.87	12.00	1.030	89.62	1.116		0.0587		
	WLAN 2.4GHz	802.11n HT40 MCS0	Bottom side	1	Ant 0+1	6	2437	11.87	12.00	1.030	89.62	1.116	-0.07	0.0589	0.036	0.041



<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ant.	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Area Scan Max SAR(W/kg)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11n HT40 MCS0	Front	1	Ant 0	38	5190	9.75	10.00	1.059	91.35	1.095	-0.11		0.057	0.066
	WLAN 5.2GHz	802.11n HT40 MCS0	Back	1	Ant 0	38	5190	9.75	10.00	1.059	91.35	1.095	-0.09		0.092	0.107
	WLAN 5.2GHz	802.11n HT40 MCS0	Bottom side	1	Ant 0	38	5190	9.75	10.00	1.059	91.35	1.095	-0.04		0.122	0.142
	WLAN 5.2GHz	802.11n HT40 MCS0	Front	1	Ant 1	46	5230	9.92	10.00	1.019	90.33	1.107		0.105		
	WLAN 5.2GHz	802.11n HT40 MCS0	Back	1	Ant 1	46	5230	9.92	10.00	1.019	90.33	1.107		0.207		
<b>09</b>	<b>WLAN 5.2GHz</b>	<b>802.11n HT40 MCS0</b>	<b>Top side</b>	<b>1</b>	<b>Ant 1</b>	<b>46</b>	<b>5230</b>	<b>9.92</b>	<b>10.00</b>	<b>1.019</b>	<b>90.33</b>	<b>1.107</b>	<b>-0.05</b>	<b>0.532</b>	<b>0.212</b>	<b>0.239</b>
	WLAN 5.2GHz	802.11n HT20 MCS0	Front	1	Ant 0+1	44	5220	10.03	10.50	1.114	94.92	1.054	-0.15	0.036	0.00858	0.010
	WLAN 5.2GHz	802.11n HT20 MCS0	Back	1	Ant 0+1	44	5220	10.03	10.50	1.114	94.92	1.054	-0.12	0.145	0.015	0.018
	WLAN 5.2GHz	802.11n HT20 MCS0	Top side	1	Ant 0+1	44	5220	10.03	10.50	1.114	94.92	1.054	-0.14	0.356	0.123	0.144
	WLAN 5.2GHz	802.11n HT20 MCS0	Bottom side	1	Ant 0+1	44	5220	10.03	10.50	1.114	94.92	1.054		0.174		
	WLAN 5.8GHz	802.11ac VHT20 MCS0	Front	1	Ant 0	157	5785	9.98	10.50	1.127	94.61	1.057	0.01		0.186	0.222
	WLAN 5.8GHz	802.11ac VHT20 MCS0	Back	1	Ant 0	157	5785	9.98	10.50	1.127	94.61	1.057	-0.15		0.09	0.107
	WLAN 5.8GHz	802.11ac VHT20 MCS0	Bottom side	1	Ant 0	157	5785	9.98	10.50	1.127	94.61	1.057	-0.023		0.326	0.388
	WLAN 5.8GHz	802.11a 6Mbps	Front	1	Ant 1	157	5785	9.98	10.50	1.127	95.39	1.048		0.206		
	WLAN 5.8GHz	802.11a 6Mbps	Back	1	Ant 1	157	5785	9.98	10.50	1.127	95.39	1.048		0.203		
	WLAN 5.8GHz	802.11a 6Mbps	Top side	1	Ant 1	157	5785	9.98	10.50	1.127	95.39	1.048	-0.09	0.477	0.175	0.207
	WLAN 5.8GHz	802.11n HT20 MCS0	Front	1	Ant 0+1	157	5785	10.64	11.00	1.086	94.92	1.054	0.15		0.02	0.023
	WLAN 5.8GHz	802.11n HT20 MCS0	Back	1	Ant 0+1	157	5785	10.64	11.00	1.086	94.92	1.054	-0.03		0.033	0.038
	WLAN 5.8GHz	802.11n HT20 MCS0	Top side	1	Ant 0+1	157	5785	10.64	11.00	1.086	94.92	1.054	-0.15		0.152	0.174
<b>10</b>	<b>WLAN 5.8GHz</b>	<b>802.11n HT20 MCS0</b>	<b>Bottom side</b>	<b>1</b>	<b>Ant 0+1</b>	<b>157</b>	<b>5785</b>	<b>10.64</b>	<b>11.00</b>	<b>1.086</b>	<b>94.92</b>	<b>1.054</b>	<b>-0.07</b>		<b>0.343</b>	<b>0.393</b>



**14.2 Repeated SAR Measurement**

No.	Band	BW (MHz)	RB Size	RB Offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	CDMA2000 BC0	-	-	-	RTAP 153.6k bps	Back	1	1013	824.7	24.09	24.50	1.099	0.04	1.070	1	1.176
2nd	CDMA2000 BC0	-	-	-	RTAP 153.6k bps	Back	1	1013	824.7	24.09	24.50	1.099	-0.03	1.040	1.028	1.143
1st	CDMA2000 BC1	-	-	-	RTAP 153.6k bps	Right side	1	25	1851.3	23.84	24.00	1.038	-0.05	1.400	1	1.453
2nd	CDMA2000 BC1	-	-	-	RTAP 153.6k bps	Right side	1	25	1851.3	23.84	24.00	1.038	-0.04	1.390	1.007	1.442
1st	LTE Band 13	10M	1	0	QPSK	Back	1	23230	782	22.72	23.50	1.197	0.04	1.090	1	1.304
2nd	LTE Band 13	10M	1	0	QPSK	Back	1	23230	782	22.72	23.50	1.197	-0.01	1.080	1.009	1.292
1st	LTE Band 4	20M	1	0	QPSK	Right side	1	20175	1732.5	22.02	22.30	1.067	-0.09	1.300	1	1.387
2nd	LTE Band 4	20M	1	0	QPSK	Right side	1	20175	1732.5	22.02	22.30	1.067	-0.12	1.290	1.008	1.376

**General Note:**

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**15. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Body	Note
1.	CDMA(Data) + WLAN2.4GHz SISO(data)	Yes	2.4GHz Hotspot
2.	CDMA(Data) + WLAN2.4GHz MIMO(data)	Yes	2.4GHz Hotspot
3.	CDMA(Data) + WLAN5GHz SISO(data)	Yes	WiFi Direct
4.	CDMA(Data) + WLAN5GHz MIMO(data)	Yes	WiFi Direct
5.	LTE (Data) + WLAN2.4GHz SISO(data)	Yes	2.4GHz Hotspot
6.	LTE (Data) + WLAN2.4GHz MIMO(data)	Yes	2.4GHz Hotspot
7.	LTE (Data) + WLAN5 GHz SISO(data)	Yes	WiFi Direct
8.	LTE (Data) + WLAN5 GHz MIMO(data)	Yes	WiFi Direct

**General Note:**

1. This device has no voice function.
2. This device 2.4GHz WLAN supports hotspot operation and 5.2GHz/5.8GHz supports WiFi Direct (GC/GO).
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, they will not transmit simultaneously.
4. EUT will choose either CDMA or LTE according to the network signal condition; therefore, they will not transmit simultaneously.
5. The Reported SAR summation is calculated based on the same configuration and test position.
6. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

15.1 Body Exposure Conditions

<WWAN + WLAN 2.4GHz (Antenna 0)>

WWAN Band		Exposure Position	WWAN	WLAN 2.4GHz	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
CDMA2000	BC0	Front	1.132	0.132	1.26
		Back	1.176	0.132	1.31
		Right side	0.243		0.24
		Top side	0.492		0.49
		Bottom side	0.388	0.132	0.52
	BC1	Front	1.162	0.132	1.29
		Back	1.131	0.132	1.26
		Right side	1.453		1.45
		Top side	1.342		1.34
		Bottom side	0.074	0.132	0.21
LTE	Band 12	Front	0.865	0.132	1.00
		Back	0.948	0.132	1.08
		Right side	0.169		0.17
		Top side	0.352		0.35
		Bottom side	0.308	0.132	0.44
	Band 13	Front	1.162	0.132	1.29
		Back	1.304	0.132	1.44
		Right side	0.178		0.18
		Top side	0.579		0.58
		Bottom side	0.403	0.132	0.54
	Band 5	Front	0.751	0.132	0.88
		Back	0.767	0.132	0.90
		Right side	0.144		0.14
		Top side	0.367		0.37
		Bottom side	0.280	0.132	0.41
	Band 4	Front	1.241	0.132	1.37
		Back	1.144	0.132	1.28
		Right side	1.437		1.44
		Top side	0.587		0.59
		Bottom side	0.042	0.132	0.17
Band 2	Front	1.035	0.132	1.17	
	Back	1.063	0.132	1.20	
	Right side	1.375		1.38	
	Top side	1.095		1.10	
	Bottom side	0.063	0.132	0.20	

<WWAN + WLAN 2.4GHz (Antenna 1)>

WWAN Band		Exposure Position	WWAN	WLAN 2.4GHz	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
CDMA2000	BC0	Front	1.132	0.155	1.29
		Back	1.176	0.155	1.33
		Right side	0.243		0.24
		Top side	0.492	0.155	0.65
		Bottom side	0.388		0.39
	BC1	Front	1.162	0.155	1.32
		Back	1.131	0.155	1.29
		Right side	1.453		1.45
		Top side	1.342	0.155	1.50
		Bottom side	0.074		0.07
LTE	Band 12	Front	0.865	0.155	1.02
		Back	0.948	0.155	1.10
		Right side	0.169		0.17
		Top side	0.352	0.155	0.51
		Bottom side	0.308		0.31
	Band 13	Front	1.162	0.155	1.32
		Back	1.304	0.155	1.46
		Right side	0.178		0.18
		Top side	0.579	0.155	0.73
		Bottom side	0.403		0.40
	Band 5	Front	0.751	0.155	0.91
		Back	0.767	0.155	0.92
		Right side	0.144		0.14
		Top side	0.367	0.155	0.52
		Bottom side	0.280		0.28
	Band 4	Front	1.241	0.155	1.40
		Back	1.144	0.155	1.30
		Right side	1.437		1.44
		Top side	0.587	0.155	0.74
		Bottom side	0.042		0.04
	Band 2	Front	1.035	0.155	1.19
		Back	1.063	0.155	1.22
		Right side	1.375		1.38
		Top side	1.095	0.155	1.25
		Bottom side	0.063		0.06

**<WWAN + WLAN 2.4GHz (Antenna 0+1)>**

WWAN Band		Exposure Position	WWAN	WLAN 2.4GHz	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
CDMA2000	BC0	Front	1.132	0.041	1.17
		Back	1.176	0.041	1.22
		Right side	0.243		0.24
		Top side	0.492	0.041	0.53
		Bottom side	0.388	0.041	0.43
	BC1	Front	1.162	0.041	1.20
		Back	1.131	0.041	1.17
		Right side	1.453		1.45
		Top side	1.342	0.041	1.38
		Bottom side	0.074	0.041	0.12
LTE	Band 12	Front	0.865	0.041	0.91
		Back	0.948	0.041	0.99
		Right side	0.169		0.17
		Top side	0.352	0.041	0.39
		Bottom side	0.308	0.041	0.35
	Band 13	Front	1.162	0.041	1.20
		Back	1.304	0.041	1.35
		Right side	0.178		0.18
		Top side	0.579	0.041	0.62
		Bottom side	0.403	0.041	0.44
	Band 5	Front	0.751	0.041	0.79
		Back	0.767	0.041	0.81
		Right side	0.144		0.14
		Top side	0.367	0.041	0.41
		Bottom side	0.280	0.041	0.32
	Band 4	Front	1.241	0.041	1.28
		Back	1.144	0.041	1.19
		Right side	1.437		1.44
		Top side	0.587	0.041	0.63
		Bottom side	0.042	0.041	0.08
Band 2	Front	1.035	0.041	1.08	
	Back	1.063	0.041	1.10	
	Right side	1.375		1.38	
	Top side	1.095	0.041	1.14	
	Bottom side	0.063	0.041	0.10	



<WWAN + WLAN 5GHz (Antenna 0)>

WWAN Band		Exposure Position	WWAN	WLAN 5GHz	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
CDMA2000	BC0	Front	1.132	0.222	1.35
		Back	1.176	0.107	1.28
		Right side	0.243		0.24
		Top side	0.492		0.49
		Bottom side	0.388	0.388	0.78
	BC1	Front	1.162	0.222	1.38
		Back	1.131	0.107	1.24
		Right side	1.453		1.45
		Top side	1.342		1.34
		Bottom side	0.074	0.388	0.46
LTE	Band 12	Front	0.865	0.222	1.09
		Back	0.948	0.107	1.06
		Right side	0.169		0.17
		Top side	0.352		0.35
		Bottom side	0.308	0.388	0.70
	Band 13	Front	1.162	0.222	1.38
		Back	1.304	0.107	1.41
		Right side	0.178		0.18
		Top side	0.579		0.58
		Bottom side	0.403	0.388	0.79
	Band 5	Front	0.751	0.222	0.97
		Back	0.767	0.107	0.87
		Right side	0.144		0.14
		Top side	0.367		0.37
		Bottom side	0.28	0.388	0.67
	Band 4	Front	1.241	0.222	1.46
		Back	1.144	0.107	1.25
		Right side	1.437		1.44
		Top side	0.587		0.59
		Bottom side	0.042	0.388	0.43
	Band 2	Front	1.035	0.222	1.26
		Back	1.063	0.107	1.17
		Right side	1.375		1.38
		Top side	1.095		1.10
		Bottom side	0.063	0.388	0.45

<WWAN + WLAN 5GHz (Antenna 1)>

WWAN Band		Exposure Position	WWAN	WLAN 5GHz	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
CDMA2000	BC0	Front	1.132	0.239	1.37
		Back	1.176	0.239	1.42
		Right side	0.243		0.24
		Top side	0.492	0.239	0.73
		Bottom side	0.388		0.39
	BC1	Front	1.162	0.239	1.40
		Back	1.131	0.239	1.37
		Right side	1.453		1.45
		Top side	1.342	0.239	1.58
		Bottom side	0.074		0.07
LTE	Band 12	Front	0.865	0.239	1.10
		Back	0.948	0.239	1.19
		Right side	0.169		0.17
		Top side	0.352	0.239	0.59
		Bottom side	0.308		0.31
	Band 13	Front	1.162	0.239	1.40
		Back	1.304	0.239	1.54
		Right side	0.178		0.18
		Top side	0.579	0.239	0.82
		Bottom side	0.403		0.40
	Band 5	Front	0.751	0.239	0.99
		Back	0.767	0.239	1.01
		Right side	0.144		0.14
		Top side	0.367	0.239	0.61
		Bottom side	0.28		0.28
	Band 4	Front	1.241	0.239	1.48
		Back	1.144	0.239	1.38
		Right side	1.437		1.44
		Top side	0.587	0.239	0.83
		Bottom side	0.042		0.04
	Band 2	Front	1.035	0.239	1.27
		Back	1.063	0.239	1.30
		Right side	1.375		1.38
		Top side	1.095	0.239	1.33
		Bottom side	0.063		0.06

**<WWAN + WLAN 5GHz (Antenna 0+1)>**

WWAN Band		Exposure Position	WWAN	WLAN 5GHz	Summed SAR (W/kg)
			Max. WWAN SAR (W/kg)	Max. WLAN SAR (W/kg)	
CDMA2000	BC0	Front	1.132	0.023	1.16
		Back	1.176	0.038	1.21
		Right side	0.243		0.24
		Top side	0.492	0.174	0.67
		Bottom side	0.388	0.393	0.78
	BC1	Front	1.162	0.023	1.19
		Back	1.131	0.038	1.17
		Right side	1.453		1.45
		Top side	1.342	0.174	1.52
		Bottom side	0.074	0.393	0.47
LTE	Band 12	Front	0.865	0.023	0.89
		Back	0.948	0.038	0.99
		Right side	0.169		0.17
		Top side	0.352	0.174	0.53
		Bottom side	0.308	0.393	0.70
	Band 13	Front	1.162	0.023	1.19
		Back	1.304	0.038	1.34
		Right side	0.178		0.18
		Top side	0.579	0.174	0.75
		Bottom side	0.403	0.393	0.80
	Band 5	Front	0.751	0.023	0.77
		Back	0.767	0.038	0.81
		Right side	0.144		0.14
		Top side	0.367	0.174	0.54
		Bottom side	0.28	0.393	0.67
	Band 4	Front	1.241	0.023	1.26
		Back	1.144	0.038	1.18
		Right side	1.437		1.44
		Top side	0.587	0.174	0.76
		Bottom side	0.042	0.393	0.44
	Band 2	Front	1.035	0.023	1.06
		Back	1.063	0.038	1.10
		Right side	1.375		1.38
		Top side	1.095	0.174	1.27
Bottom side		0.063	0.393	0.46	

**Test Engineer : Ken Li and Ken Li**

## **16. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 16.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	√3	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	√3	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Rectangular	√3	0.64	0.43	± 0.9 %	± 0.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Rectangular	√3	0.6	0.49	± 0.9 %	± 0.7 %
<b>Combined Standard Uncertainty</b>						± 10.9 %	± 10.7 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 21.7 %	± 21.4 %

**Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	6.7	Rectangular	√3	1	1	± 3.9 %	± 3.9 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Rectangular	√3	0.64	0.43	± 0.9 %	± 0.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Rectangular	√3	0.6	0.49	± 0.9 %	± 0.6 %
<b>Combined Standard Uncertainty</b>						± 12.0 %	± 11.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 24.0 %	± 23.7 %

**Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz**

## **17. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r01, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Jun 2015.
- [6] FCC KDB 447498 D01 v05r02, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Feb 2014
- [7] FCC KDB 941225 D01 v03, “3G SAR MEAUREMENT PROCEDURES”, Oct 2014
- [8] FCC KDB 941225 D05 v02r03, “SAR Evaluation Considerations for LTE Devices”, Dec 2013
- [9] FCC KDB 941225 D05A v01r01, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Aug 2014
- [10] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r01, “RF Exposure Compliance Reporting and Documentation Considerations” May 2013.



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

### System Check\_Body\_750MHz\_150716

#### DUT: D750V3-SN:1065

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_150716 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.963$  S/m;  $\epsilon_r = 54.228$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.61, 9.61, 9.61); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 2.72 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 49.31 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.14 W/kg  
**SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.44 W/kg**  
Maximum value of SAR (measured) = 2.72 W/kg

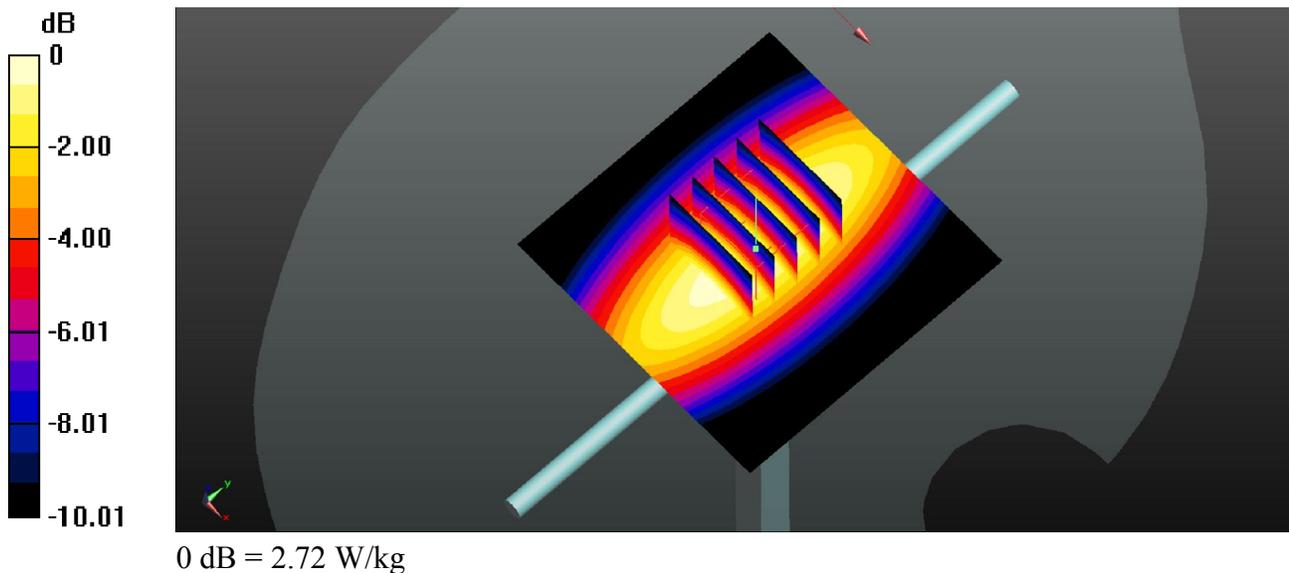

### System Check\_Body\_835MHz\_150715

**DUT: D835V2-SN:4d091**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_150715 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.578$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.66, 9.66, 9.66); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 3.16 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 48.80 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 3.65 W/kg  
**SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.68 W/kg**  
Maximum value of SAR (measured) = 3.14 W/kg

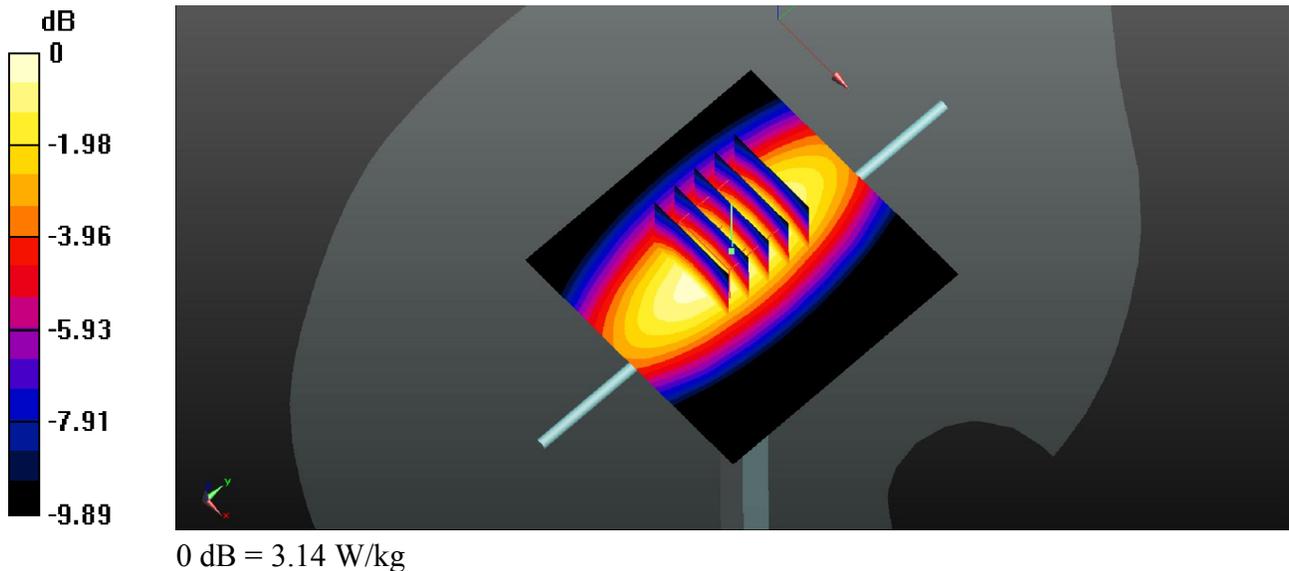

### System Check\_Body\_1750MHz\_150710

**DUT: D1750V2-SN:1069**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_150710 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.498$  S/m;  $\epsilon_r = 53.247$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.93, 7.93, 7.93); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 13.4 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 94.62 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 17.0 W/kg  
**SAR(1 g) = 9.51 W/kg; SAR(10 g) = 5.03 W/kg**  
Maximum value of SAR (measured) = 13.2 W/kg

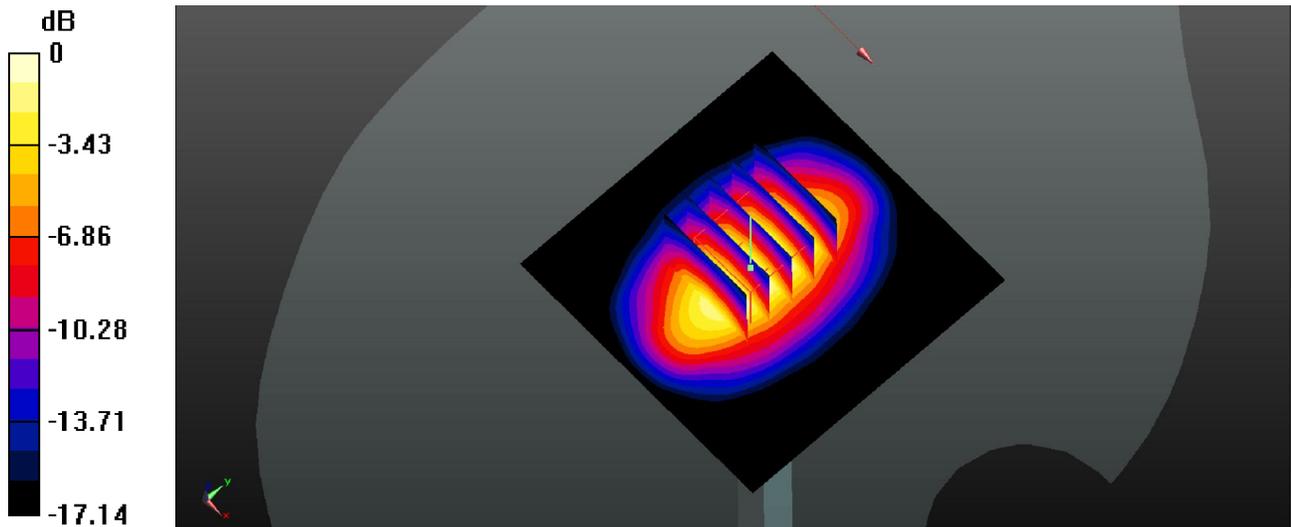

0 dB = 13.2 W/kg

### System Check\_Body\_1900MHz\_150710

#### DUT: D1900V2-SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_150710 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.527$  S/m;  $\epsilon_r = 55.253$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.57, 7.57, 7.57); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 14.2 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.98 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.24 W/kg**

Maximum value of SAR (measured) = 14.2 W/kg

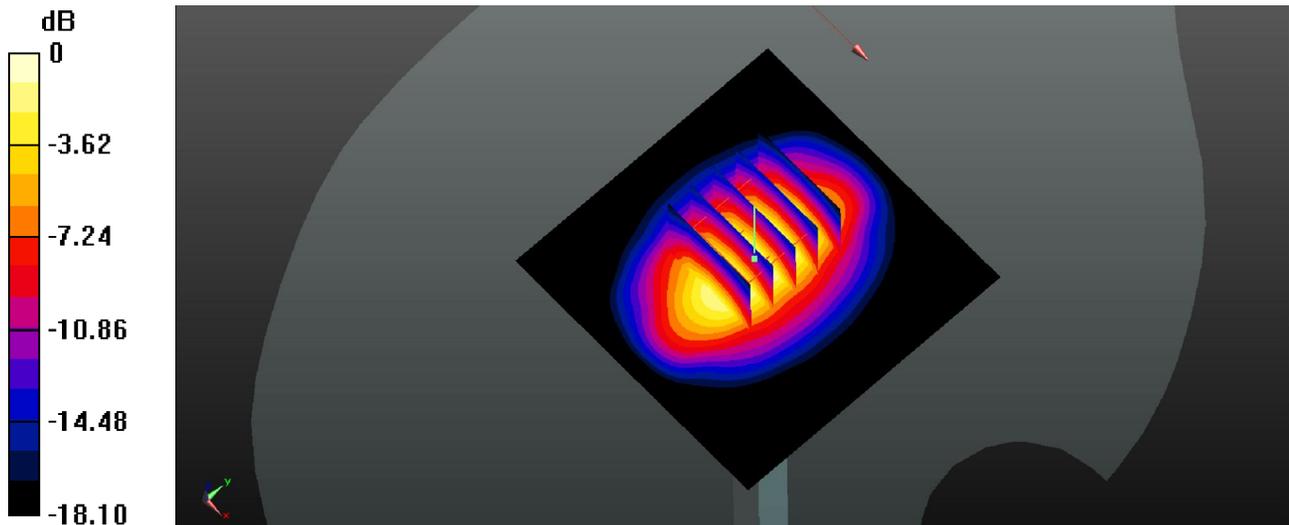

0 dB = 14.2 W/kg

### System Check\_Body\_2450MHz\_150804

**DUT: D2450V2-SN:840**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_150804 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.949$  S/m;  $\epsilon_r = 53.894$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.18, 7.18, 7.18); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 19.5 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 85.32 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 26.3 W/kg  
**SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.89 W/kg**  
Maximum value of SAR (measured) = 19.6 W/kg

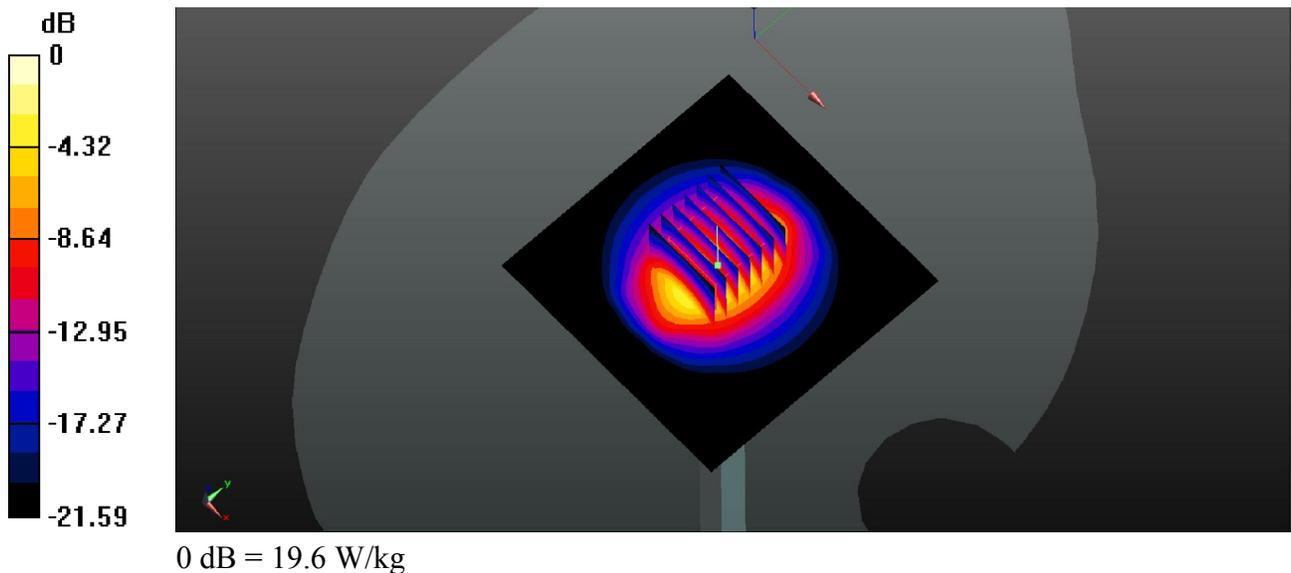

### System Check\_Body\_5200MHz\_150807

#### DUT: D5GHzV2-SN:1113

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL\_5000\_150807 Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.162$  mho/m;  $\epsilon_r =$

$48.492$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.45, 4.45, 4.45); Calibrated: 2015.05.28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.05.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

**Pin=100mW/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 16.392 mW/g


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.630 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 28.050 W/kg

**SAR(1 g) = 7.01 mW/g; SAR(10 g) = 1.96 mW/g**

Maximum value of SAR (measured) = 16.251 mW/g

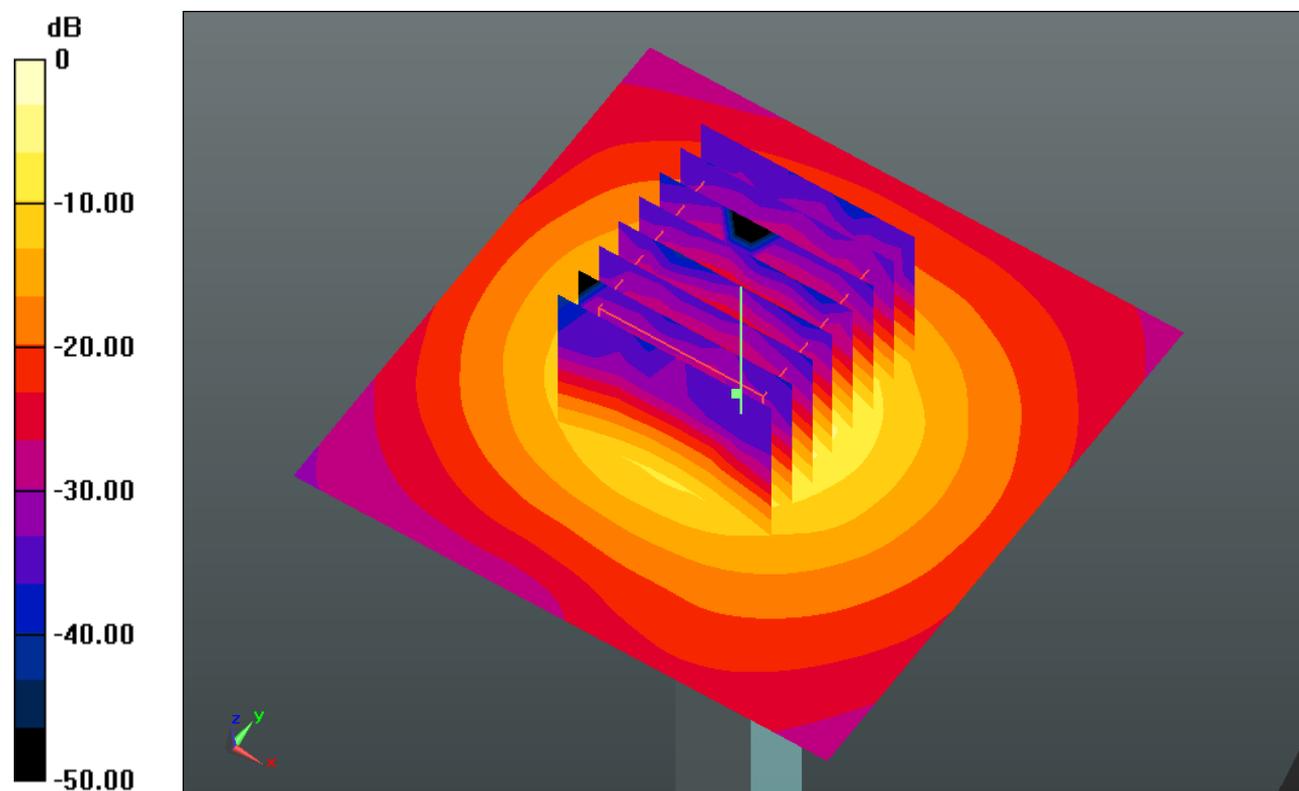

0 dB = 16.250mW/g

**System Check\_Body\_5800MHz\_150807**

**DUT: D5GHzV2-SN:1113**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL\_5000\_150807 Medium parameters used:  $f = 5800$  MHz;  $\sigma = 5.976$  mho/m;  $\epsilon_r = 47.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(4.16, 4.16, 4.16); Calibrated: 2015.05.28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.05.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

**Pin=100mW/Area Scan (71x71x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 17.632 mW/g


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 36.887 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.874 W/kg

**SAR(1 g) = 7.03 mW/g; SAR(10 g) = 1.95 mW/g**

Maximum value of SAR (measured) = 17.166 mW/g

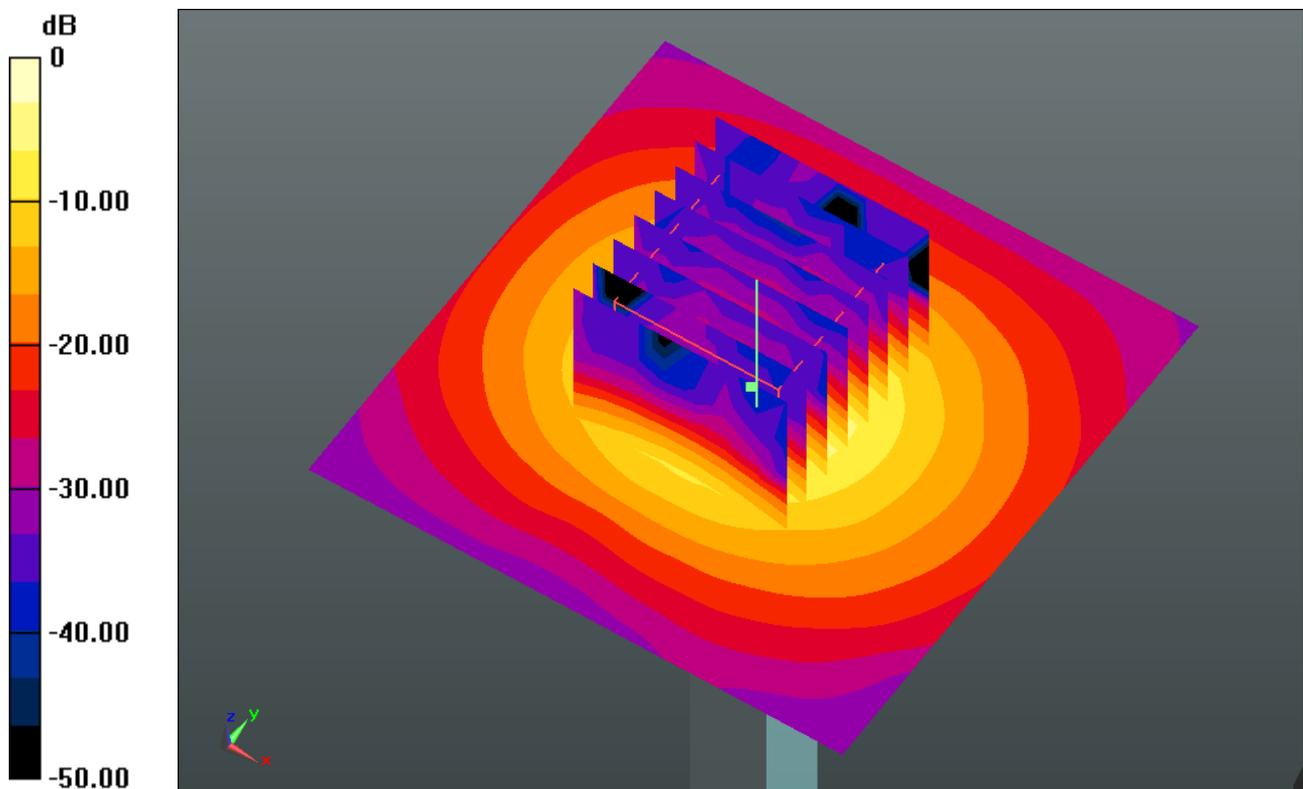

0 dB = 17.170mW/g



**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

### 01 CDMA2000\_BC0\_RTAP 153.6K\_Back\_1.0cm\_Ch1013


Communication System: UID 0, CDMA2000 (0); Frequency: 824.7 MHz; Duty Cycle: 1:1  
Medium: MSL\_835\_150715 Medium parameters used:  $f = 826.9$  MHz;  $\sigma = 0.983$  S/m;  $\epsilon_r = 54.696$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.66, 9.66, 9.66); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1013/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.34 W/kg

**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 25.02 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.52 W/kg  
**SAR(1 g) = 1.070 W/kg; SAR(10 g) = 0.736 W/kg**  
Maximum value of SAR (measured) = 1.29 W/kg

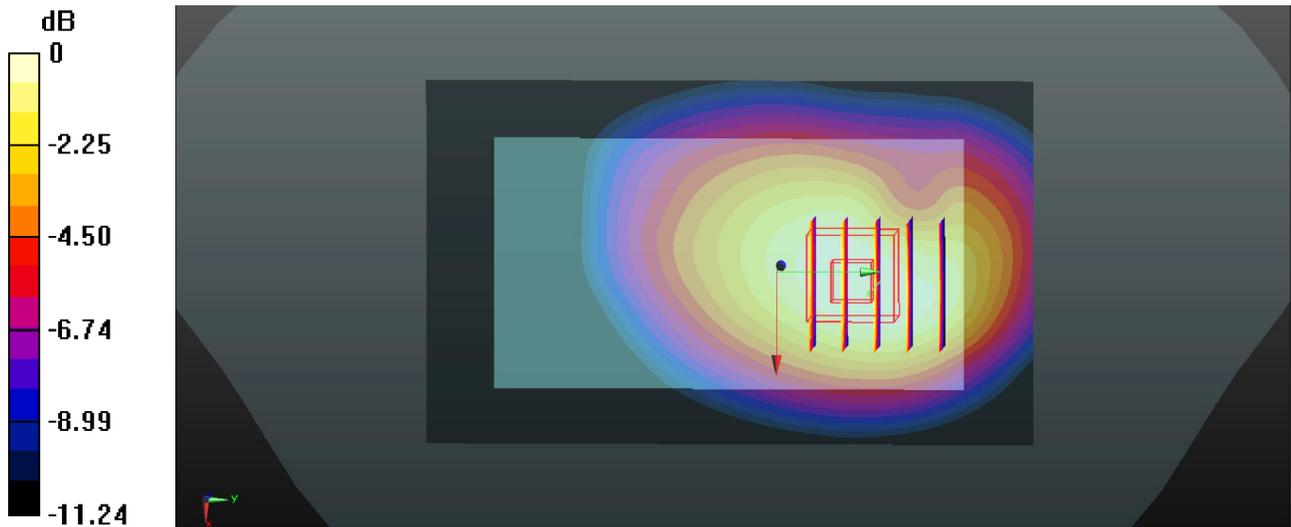

0 dB = 1.29 W/kg

## 02 CDMA2000 BC1\_RTAP 153.6K\_Right side\_1.0cm\_Ch25


Communication System: UID 0, CDMA2000 (0); Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_150710 Medium parameters used:  $f = 1851.25$  MHz;  $\sigma = 1.48$  S/m;  $\epsilon_r = 55.388$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.57, 7.57, 7.57); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch25/Area Scan (31x61x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.96 W/kg

**Ch25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.734 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 2.30 W/kg  
**SAR(1 g) = 1.400 W/kg; SAR(10 g) = 0.767 W/kg**  
Maximum value of SAR (measured) = 1.88 W/kg

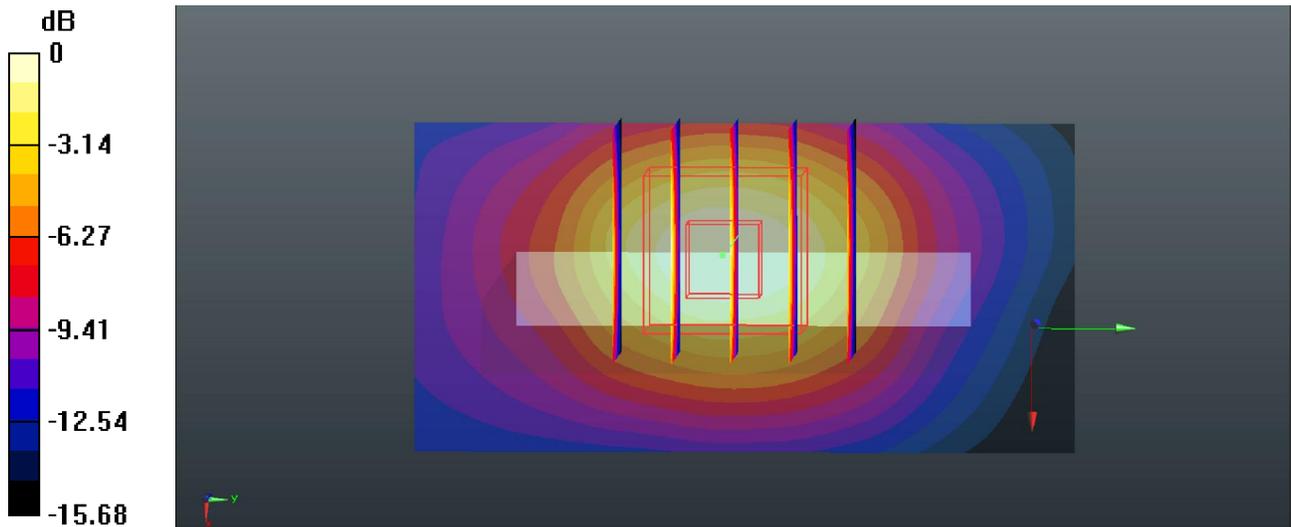

0 dB = 1.88 W/kg

### 03 LTE Band 12\_QPSK\_10M(1,49)\_Back\_1.0cm\_Ch23130

Communication System: UID 0, FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_150716 Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.937 \text{ S/m}$ ;  $\epsilon_r = 55.142$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.61, 9.61, 9.61); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23130/Area Scan (61x101x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.910 \text{ W/kg}$


**Ch23130/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $20.63 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$

Peak SAR (extrapolated) =  $1.05 \text{ W/kg}$

**SAR(1 g) =  $0.741 \text{ W/kg}$ ; SAR(10 g) =  $0.509 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.912 \text{ W/kg}$

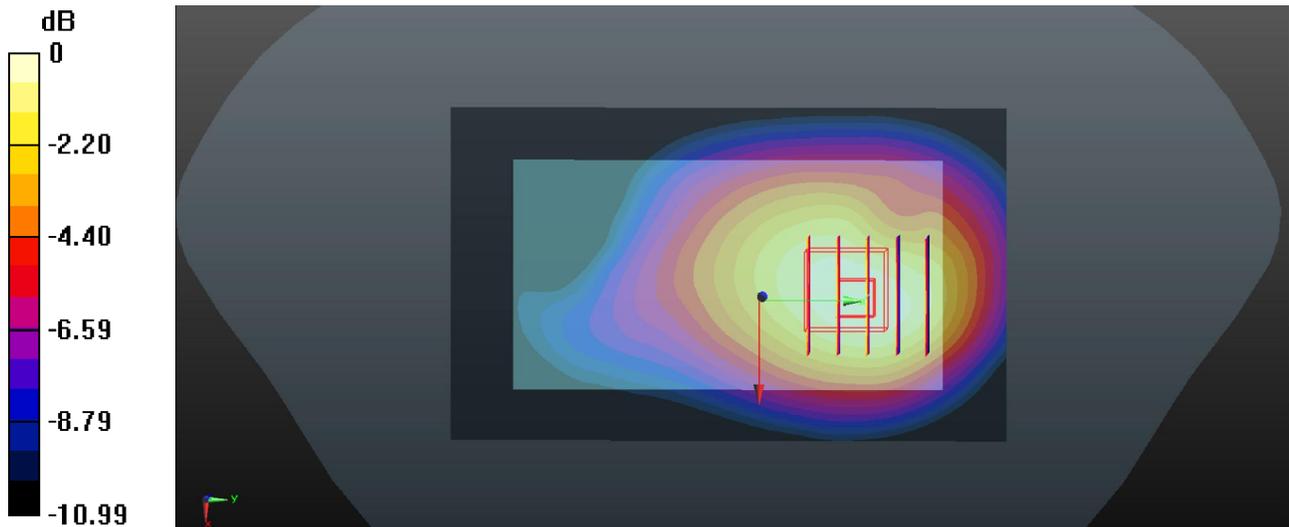

0 dB =  $0.912 \text{ W/kg}$

### 04 LTE Band 13\_QPSK\_10M(1,0)\_Back\_1.0cm\_Ch23230

Communication System: UID 0, FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_150716 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.988 \text{ S/m}$ ;  $\epsilon_r = 53.555$ ;  $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.61, 9.61, 9.61); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23230/Area Scan (61x101x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (interpolated) =  $1.34 \text{ W/kg}$

**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $24.65 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$   
Peak SAR (extrapolated) =  $1.53 \text{ W/kg}$   
**SAR(1 g) =  $1.090 \text{ W/kg}$ ; SAR(10 g) =  $0.748 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.35 \text{ W/kg}$

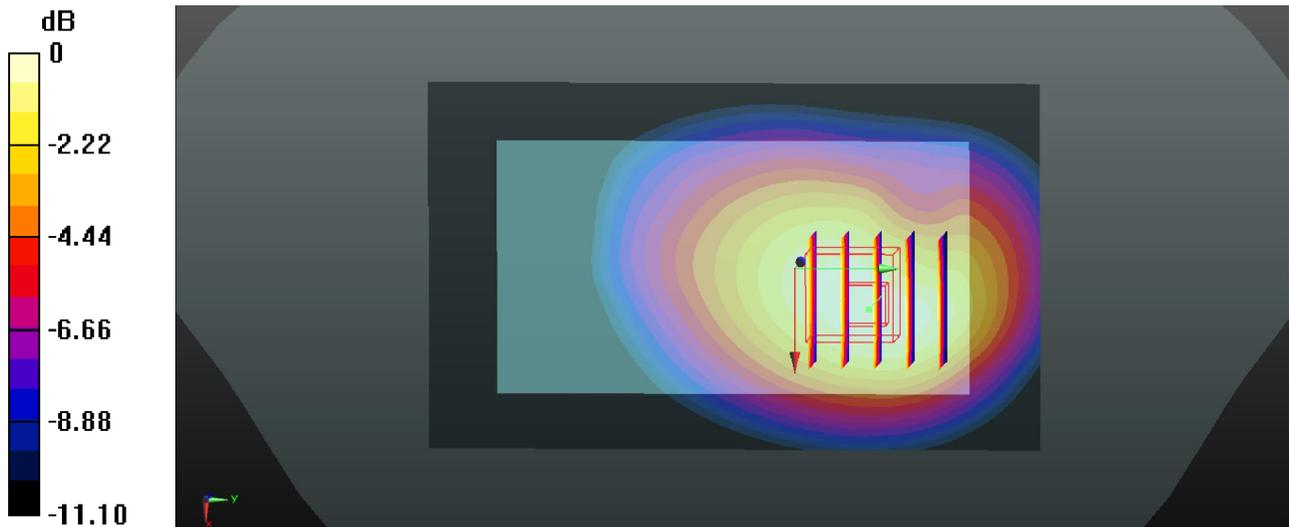

0 dB =  $1.35 \text{ W/kg}$

### 05 LTE Band 5\_QPSK\_10M(1,24)\_Back\_1.0cm\_Ch20450

Communication System: UID 0, FDD-LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_150715 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.987$  S/m;  $\epsilon_r = 54.649$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.66, 9.66, 9.66); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20450/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.828 W/kg


**Ch20450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.42 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.956 W/kg

**SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.471 W/kg**

Maximum value of SAR (measured) = 0.826 W/kg

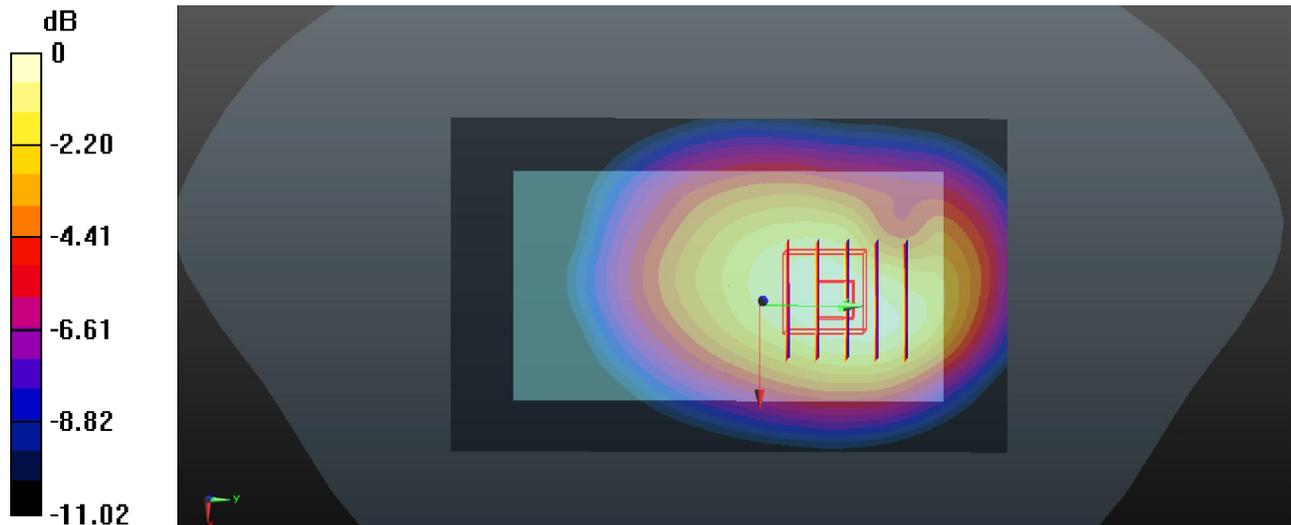

0 dB = 0.826 W/kg

### 06 LTE Band 4\_QPSK\_20M(1,0)\_Right side\_1.0cm\_Ch20300

Communication System: UID 0, FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_150710 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.492$  S/m;  $\epsilon_r = 53.228$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.93, 7.93, 7.93); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20300/Area Scan (31x61x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.87 W/kg


**Ch20300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.57 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.12 W/kg

**SAR(1 g) = 1.290 W/kg; SAR(10 g) = 0.705 W/kg**

Maximum value of SAR (measured) = 1.73 W/kg

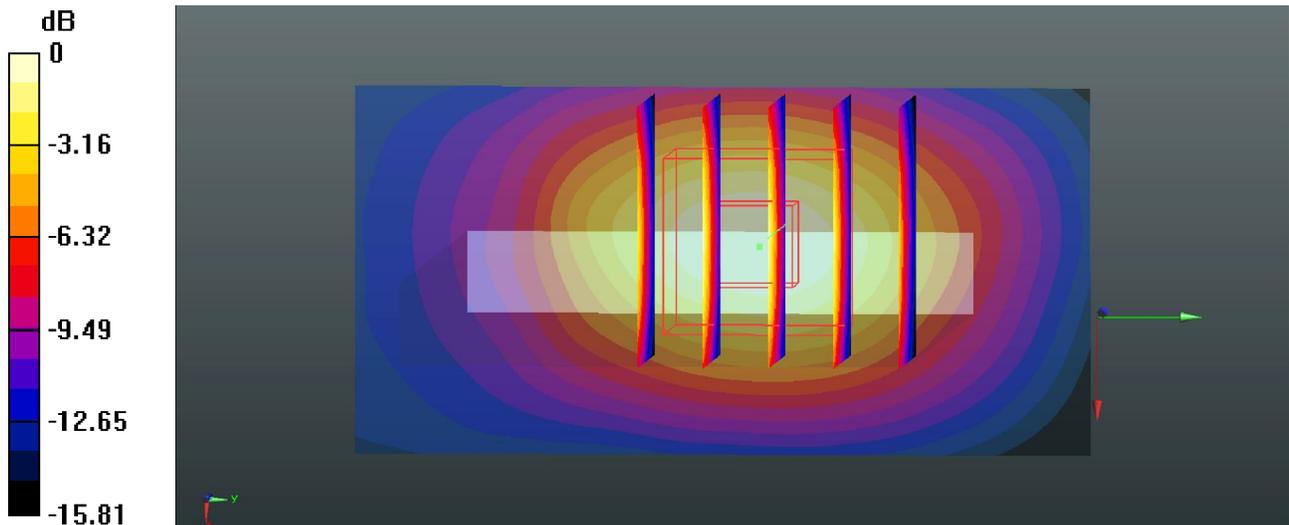

0 dB = 1.73 W/kg

### 07 LTE Band 2\_QPSK\_20M(1,0)\_Right side\_1.0cm\_Ch18700

Communication System: UID 0, FDD-LTE (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: MSL\_1900\_150710 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.49$  S/m;  $\epsilon_r = 55.39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.57, 7.57, 7.57); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18700/Area Scan (31x61x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.80 W/kg


**Ch18700/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.220 W/kg; SAR(10 g) = 0.676 W/kg**

Maximum value of SAR (measured) = 1.63 W/kg

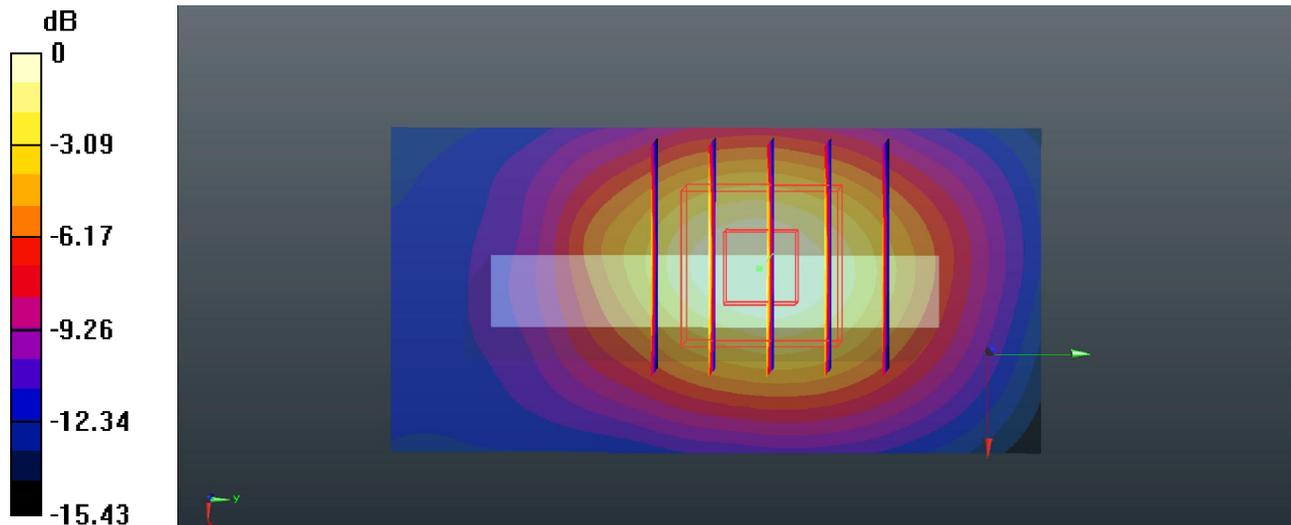

0 dB = 1.63 W/kg

### 08 WLAN 2.4G\_802.11b\_Top side\_1.0cm\_Ch1\_ANT 1

Communication System: UID 0, 802.11b (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: MSL\_2450\_150804 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.877$  S/m;  $\epsilon_r = 54.002$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.18, 7.18, 7.18); Calibrated: 2014/10/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/4/28
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1/Area Scan (71x121x1):** Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.195 W/kg


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.967 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.181 W/kg

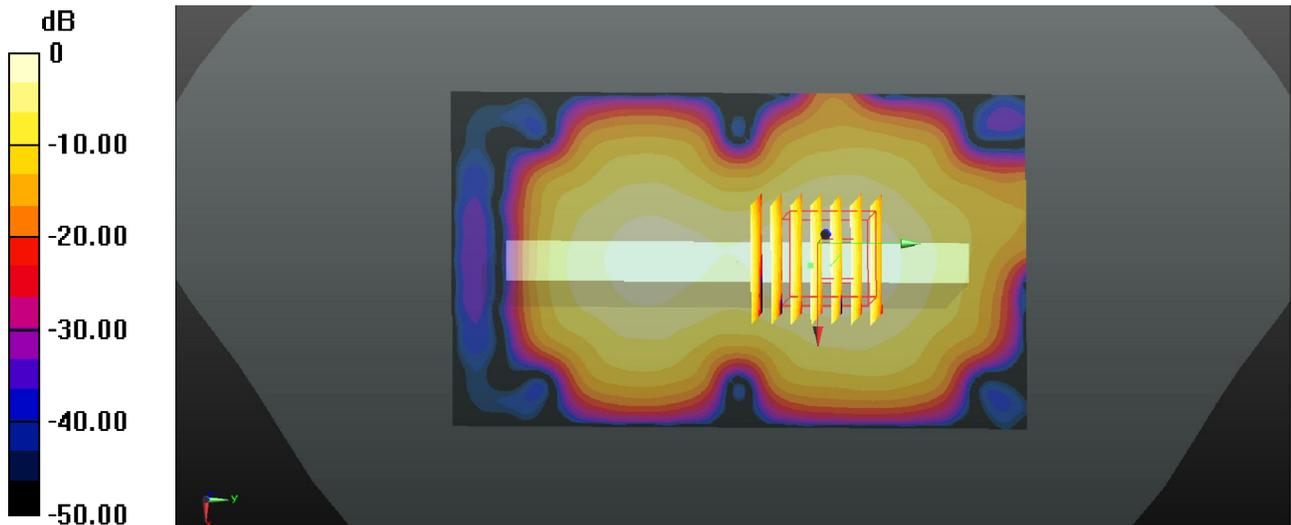

0 dB = 0.181 W/kg

### 09 WLAN 5GHz Band1\_802.11n-HT40\_MCS0\_Top Side\_1cm\_Ch46\_Ant.1


Communication System: WIFI (0); Frequency: 5230 MHz; Duty Cycle: 1:1.107  
Medium: MSL\_5000\_150807 Medium parameters used:  $f = 5230$  MHz;  $\sigma = 5.206$  mho/m;  $\epsilon_r = 48.439$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.45, 4.45, 4.45); Calibrated: 2015.05.28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.05.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

**Ch46/Area Scan (51x141x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.532 mW/g

**Ch46/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 7.057 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.857 W/kg  
**SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.061 mW/g**  
Maximum value of SAR (measured) = 0.535 mW/g

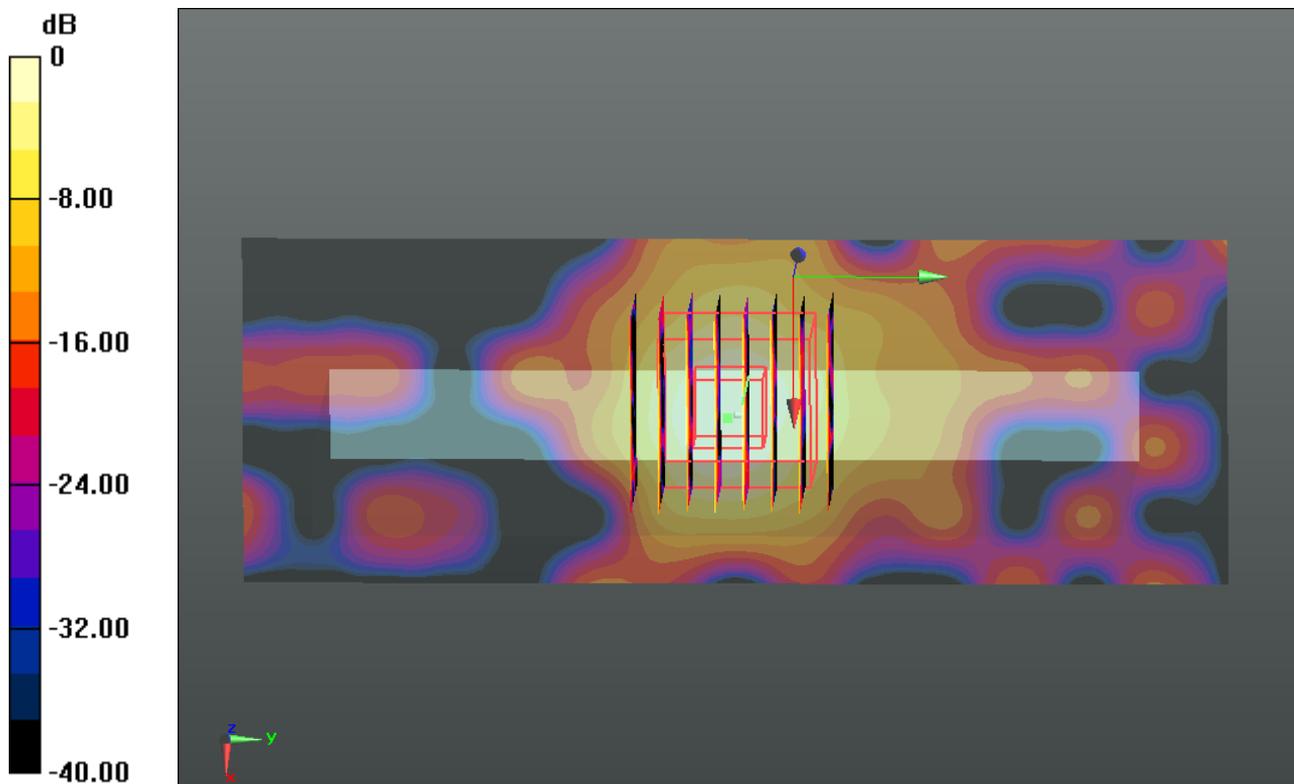

0 dB = 0.540mW/g

### 10 WLAN 5GHz Band4\_802.11ac-VHT20\_MCS0\_Bottom Side\_1cm\_Ch157\_Ant.0+1


Communication System: WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1.054  
Medium: MSL\_5000\_150807 Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.961$  mho/m;  $\epsilon_r = 47.221$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.16, 4.16, 4.16); Calibrated: 2015.05.28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.05.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

**Ch157/Area Scan (51x141x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.863 mW/g

**Ch157/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 4.058 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.589 W/kg  
**SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.101 mW/g**  
Maximum value of SAR (measured) = 0.833 mW/g

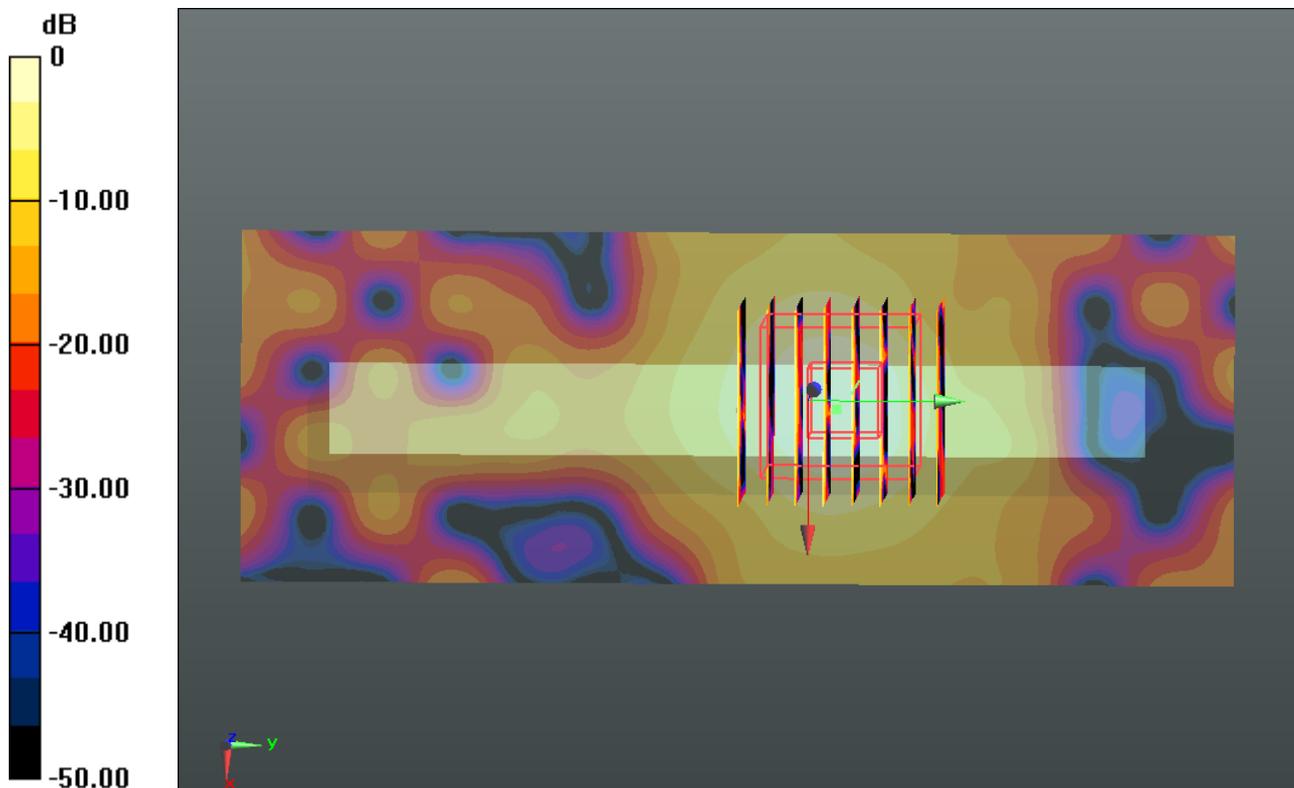

0 dB = 0.830mW/g