



RF TEST REPORT

Applicant ZTE Corporation
FCC ID SRQ-MO-01K
Product LTE/WCDMA Dual-Mode
Digital Mobile Phone
Model MO-01K
Report No. RXC1706-0185RF01R1
Issue Date September 30, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	10
5.1. Average Power Output –Conducted.....	10
5.2. 6dB Bandwidth	16
5.3. Band Edge	22
5.4. Power Spectral Density	26
5.5. Spurious RF Conducted Emissions.....	32
5.6. Radiated Emissions in the Restricted Band	43
5.7. Radiates Emission	52
5.8. Conducted Emission	102
6. Main Test Instruments.....	104
ANNEX A: EUT Appearance and Test Setup.....	105
A.1 EUT Appearance	105
A.2 Test Setup	106



Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d), 15.205, 15.209	PASS
7	Radiated Emissions	15.247(d), 15.205, 15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: June 14, 2017~ July 5, 2017 and September 29, 2017			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description	
Product Name:	LTE/WCDMA Dual-Mode Digital Mobile Phone
Model:	MO-01K
IMEI:	865202030008870
Hardware Version:	P840D01HW1.0
Software Version:	DCM_JP_P840D01V0.0.0B02
Power Supply:	Battery/AC adapter
Antenna Type:	Internal Antenna (Type-IFA antenna)
Antenna Connector:	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain:	1.1 dBi
additional beamforming gain:	0 dB
Test Mode:	Bluetooth(Low Energy) 802.11b 802.11g, 802.11n(HT20/HT40);
Modulation Type:	BLE :GFSK 802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G :14.30dBm BLE : 0.35 dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2472 MHz 802.11n(HT40): 2422 ~ 2462 MHz BLE: 2402 ~2480 MHz
EUT Accessory	
Battery	Manufacturer: Harbin Coslight Power Co., Ltd. Model: Li3928T44P8h475371 Ratings: 3.85Vdc,2800mAh,10.8Wh
Note: The information of the EUT is declared by the manufacturer.	



Difference Configuration Statement		
Test Configuration	TC 1	TC 2
LCD Model	98-03050-6423B	BV050HDM-L00-3K13
LCD Manufacturer	Shenzhen DJN Optronics Technology Co., Ltd	BOE HYUNDAI LCD Inc.
Others	The same	The same
The difference between the two EUT is only the LCD, however, only the LCD of 98-03050-6423B (TC 1) is refer to this report.		



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**

4. Test Configuration

Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate
Bluetooth(Low Energy)	1Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

5. Test Case Results

5.1. Average Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method in KDB 558074 D01 for this test.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.



Test Results


Power Index					
Packet Type	CH1	CH6	CH11	CH12	CH13
802.11b	14	16	14	14	14
802.11g	12	14	12	12	10
802.11n HT20	11	13	11	11	7
Packet Type	CH3	CH6	CH9	CH10	CH11
802.11n HT40	11	14	11	11	10

Network Standards	Carrier frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	14.14	30	PASS
	2437	14.30	30	PASS
	2462	13.34	30	PASS
	2467	11.31	30	PASS
	2472	12.21	30	PASS
802.11g	2412	12.59	30	PASS
	2437	11.30	30	PASS
	2462	11.28	30	PASS
	2467	11.48	30	PASS
	2472	10.33	30	PASS
802.11n HT20	2412	11.68	30	PASS
	2437	10.26	30	PASS
	2462	10.45	30	PASS
	2467	10.62	30	PASS
	2472	7.59	30	PASS
802.11n HT40	2422	11.82	30	PASS
	2437	12.61	30	PASS
	2462	11.46	30	PASS
	2457	12.41	30	PASS
	2462	12.11	30	PASS




Bluetooth (Low Energy)	2402	-1.20	30	PASS
	2440	0.35	30	PASS
	2480	-1.46	30	PASS

802.11b, Carrier frequency (MHz): 2412

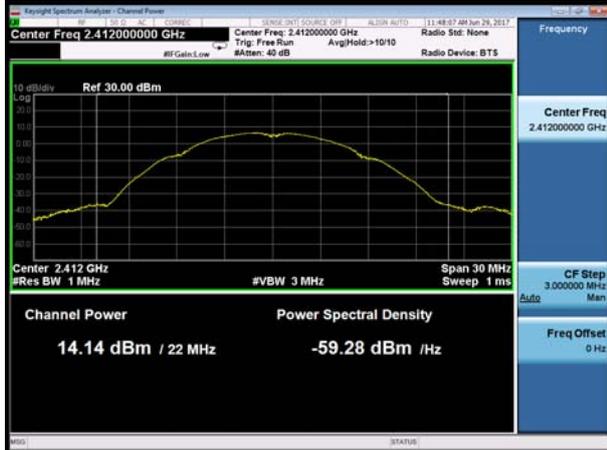


802.11g, Carrier frequency (MHz): 2412

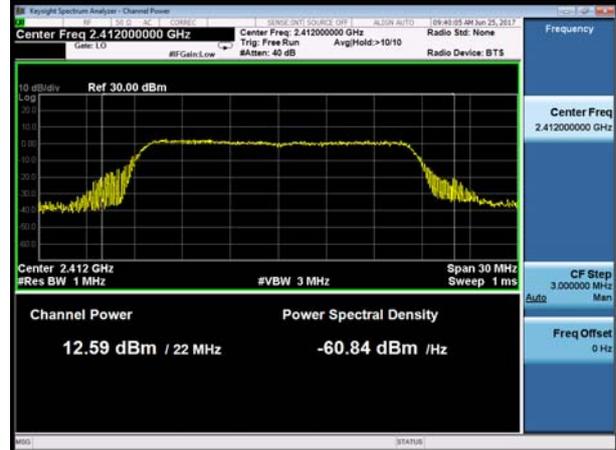

802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437

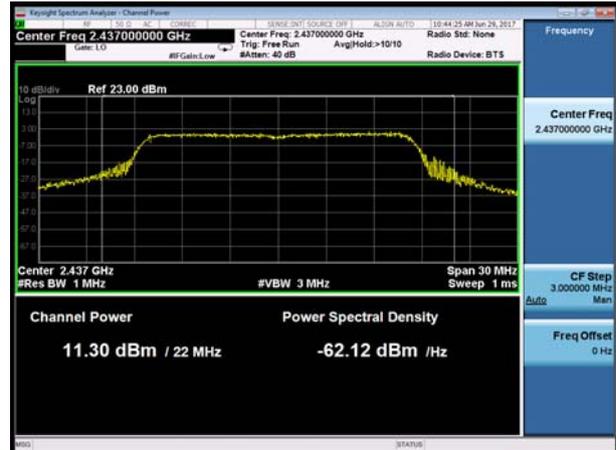

802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462

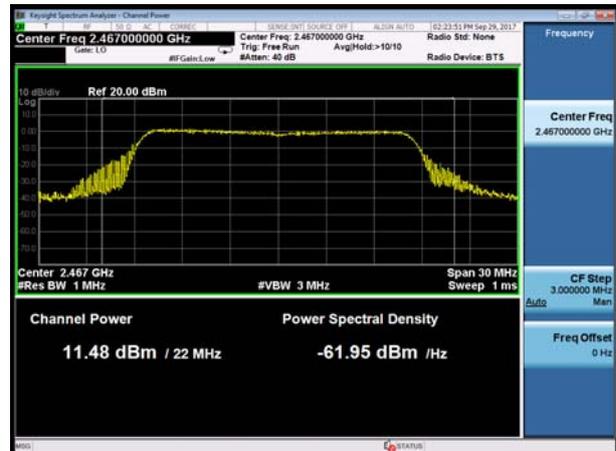





802.11b, Carrier frequency (MHz):2467

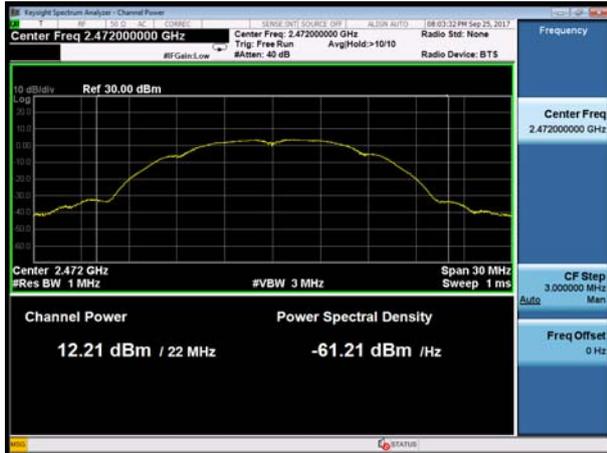


802.11g, Carrier frequency (MHz):2467

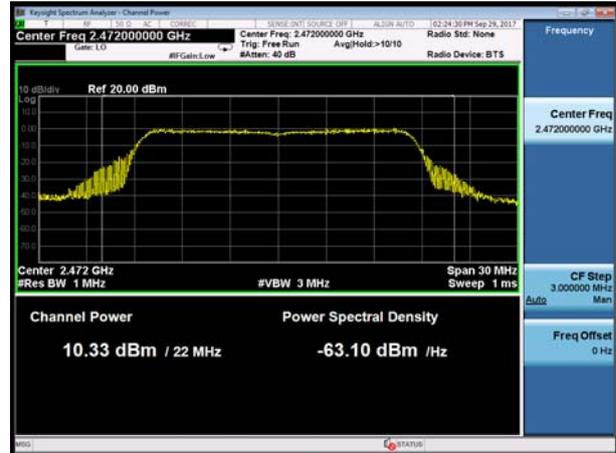


802.11b, Carrier frequency (MHz):2472

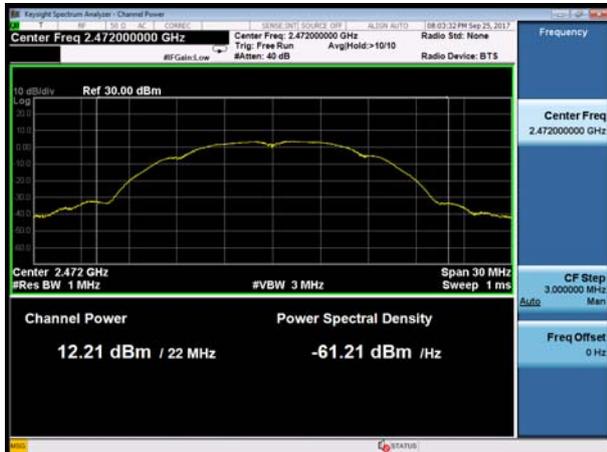


802.11g, Carrier frequency (MHz):2472

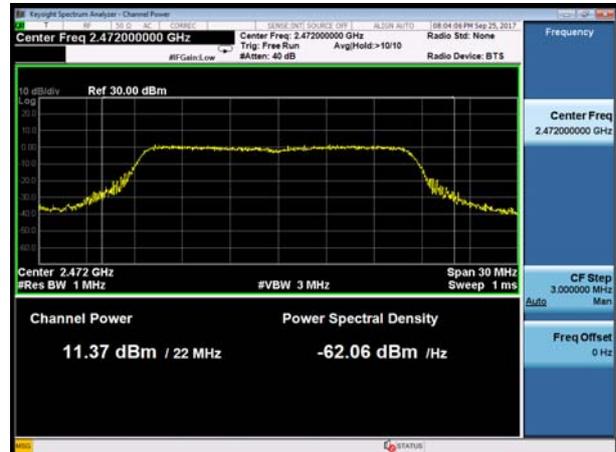


802.11n(HT20), Carrier frequency (MHz): 2412

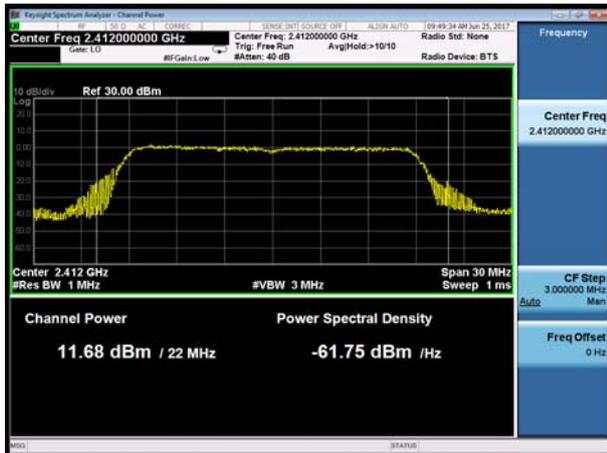


802.11n(HT40), Carrier frequency (MHz): 2422

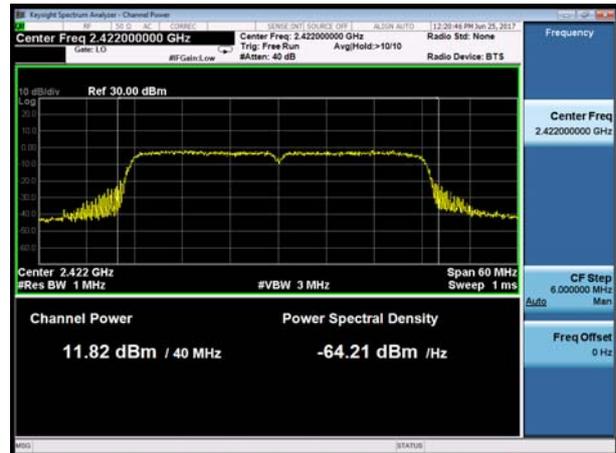


802.11n(HT20), Carrier frequency (MHz): 2437

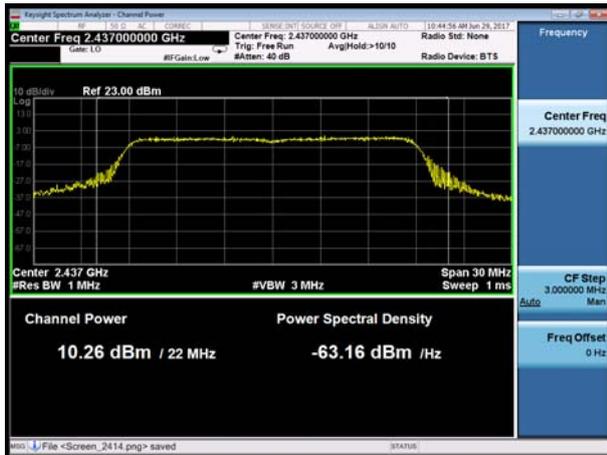


802.11n(HT40), Carrier frequency (MHz): 2437

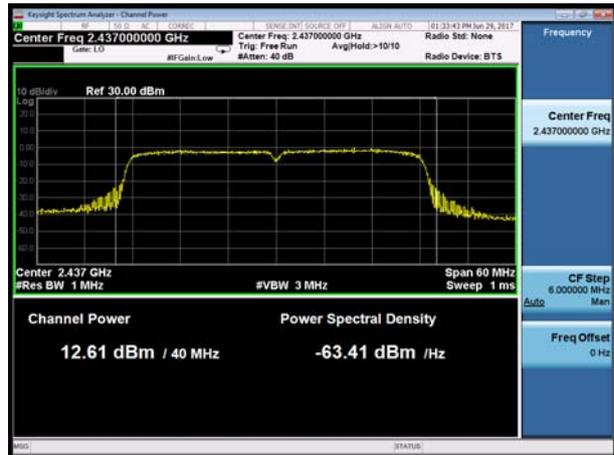

802.11n(HT20), Carrier frequency (MHz):2462

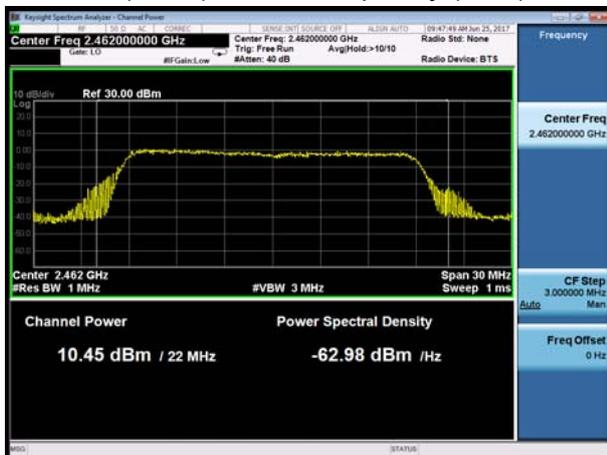


802.11n(HT40), Carrier frequency (MHz):2452

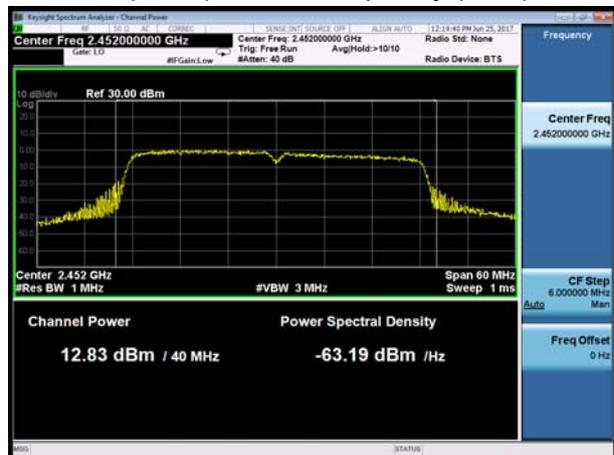

802.11n(HT20), Carrier frequency (MHz):2467




802.11n(HT40), Carrier frequency (MHz):2457

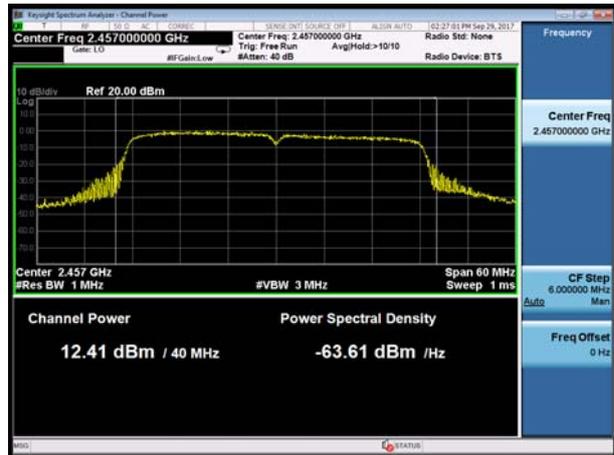

802.11n(HT20), Carrier frequency (MHz):2472




802.11n(HT40), Carrier frequency (MHz):2462

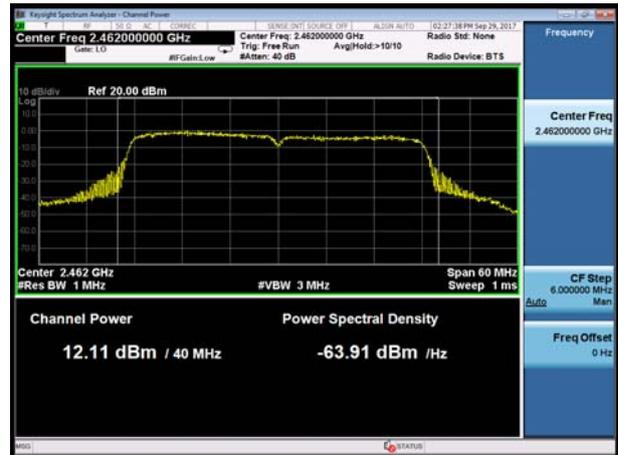

BLE Carrier frequency (MHz): 2402



BLE Carrier frequency (MHz): 2440

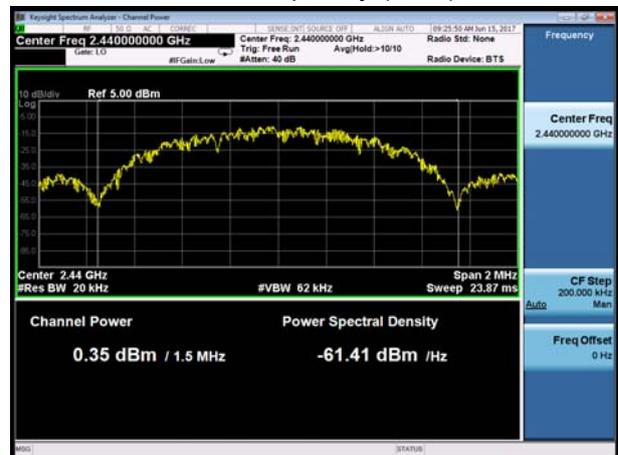

BLE Carrier frequency (MHz): 2480



5.2. 6dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

Test Setup

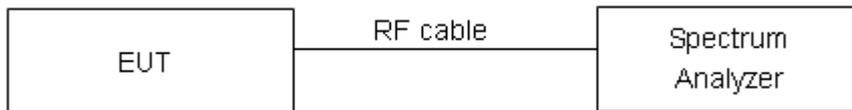

Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	12.064	7.542	500	PASS
	2437	11.767	7.824	500	PASS
	2462	12.101	7.769	500	PASS
	2467	14.351	10.070	500	PASS
	2472	14.159	10.070	500	PASS
802.11g	2412	16.547	16.590	500	PASS
	2437	16.518	16.610	500	PASS
	2462	16.547	16.560	500	PASS
	2467	16.686	16.580	500	PASS
	2472	16.600	16.570	500	PASS
802.11n HT20	2412	17.745	17.790	500	PASS
	2437	17.722	17.800	500	PASS
	2462	17.730	17.740	500	PASS
	2467	17.764	17.790	500	PASS
	2472	17.739	17.730	500	PASS
802.11n HT40	2422	36.541	36.770	500	PASS
	2437	36.499	35.900	500	PASS
	2452	35.930	34.450	500	PASS
	2457	36.938	35.100	500	PASS
	2462	36.023	35.350	500	PASS
Bluetooth (Low Energy)	2402	1.0871	0.6733	500	PASS
	2440	1.0868	0.6736	500	PASS
	2480	1.0865	0.6728	500	PASS

802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437

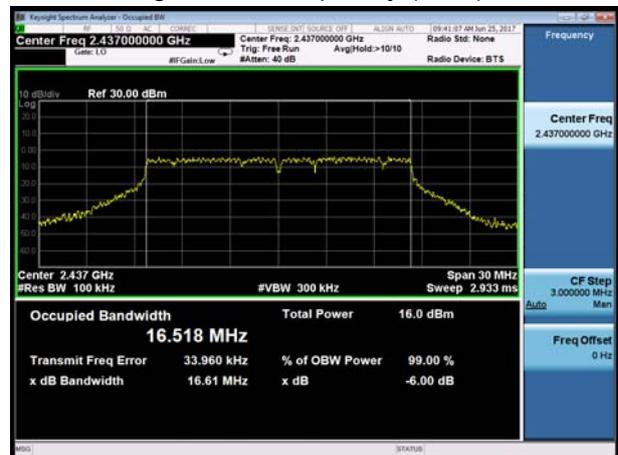

802.11b, Carrier frequency (MHz): 2462



802.11g, Carrier frequency (MHz): 2462



802.11b, Carrier frequency (MHz):2467



802.11g, Carrier frequency (MHz):2467



802.11b, Carrier frequency (MHz):2472



802.11g, Carrier frequency (MHz):2472



802.11n(HT20), Carrier frequency (MHz): 2412



802.11n(HT40), Carrier frequency (MHz): 2422



802.11n(HT20), Carrier frequency (MHz): 2437




802.11n(HT40), Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz):2462



802.11n(HT40), Carrier frequency (MHz):2452

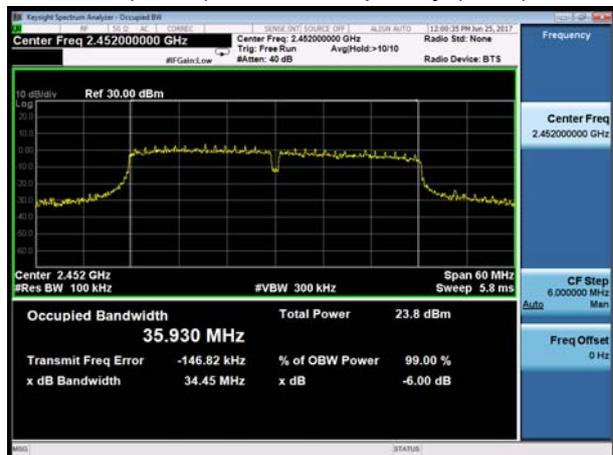

802.11n(HT20), Carrier frequency (MHz):2467



802.11n(HT40), Carrier frequency (MHz):2457



802.11n(HT20), Carrier frequency (MHz):2472



802.11n(HT40), Carrier frequency (MHz):2462



BLE Carrier frequency (MHz): 2402



BLE Carrier frequency (MHz): 2440



BLE Carrier frequency (MHz): 2480



5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results: PASS

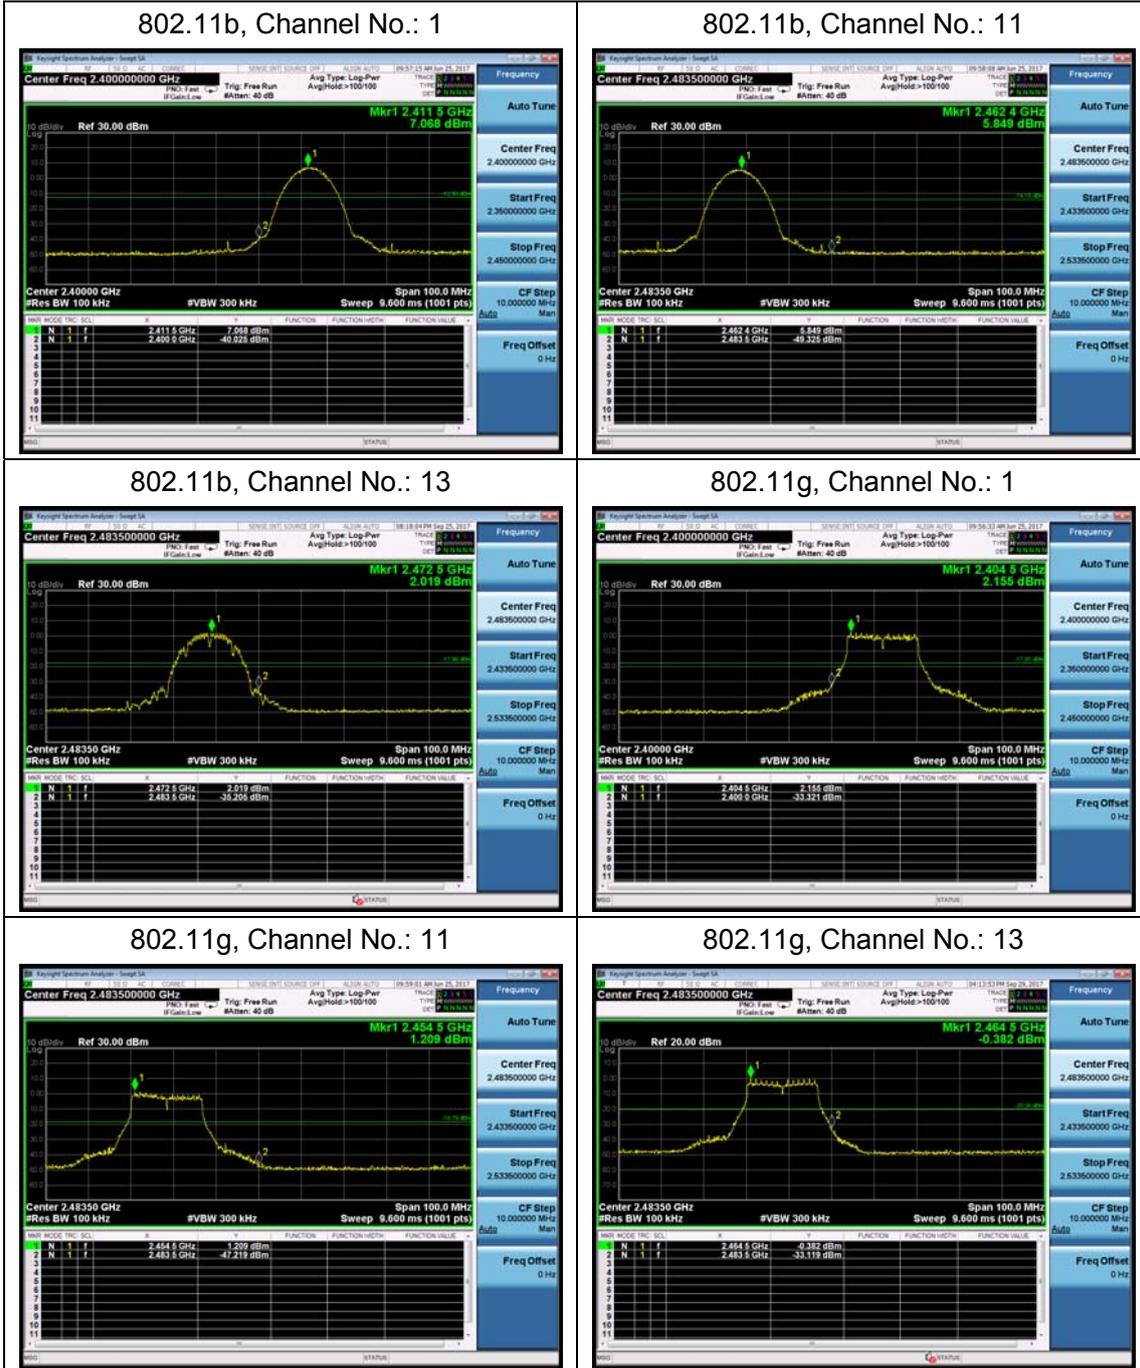


802.11n(HT20), Channel No.: 1

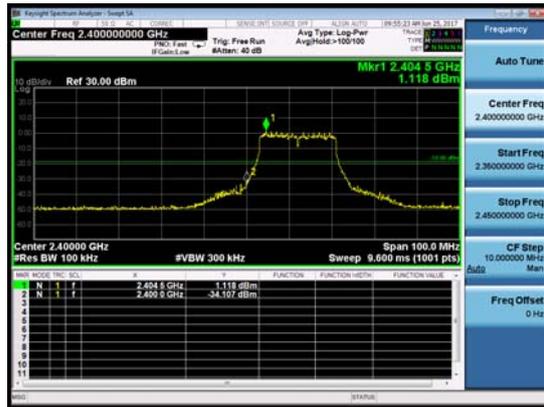


802.11n(HT20), Channel No.: 11

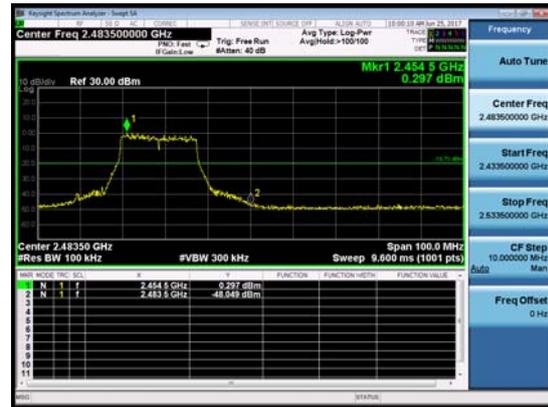

802.11n(HT20), Channel No.: 13

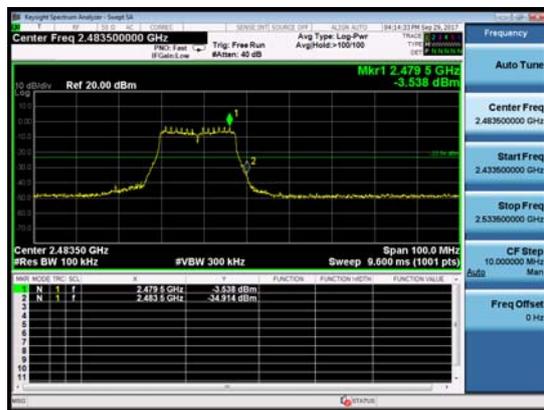

802.11n(HT40), Channel No.: 3

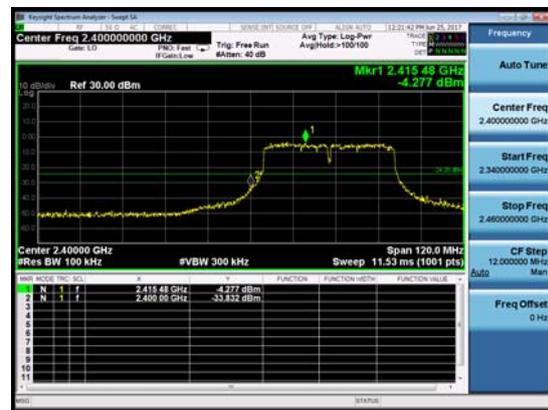

802.11n(HT40), Channel No.: 9




802.11n(HT40), Channel No.: 11






BLE, Channel No.: 0

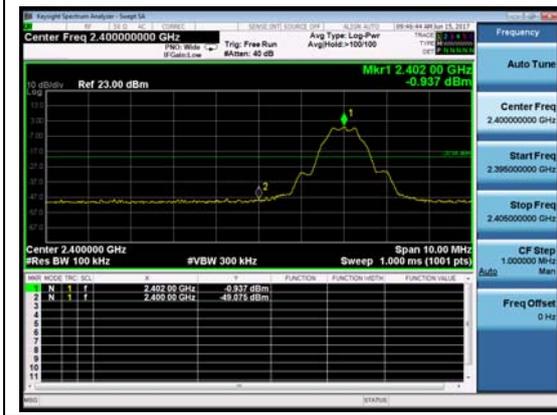

BLE, Channel No.: 39

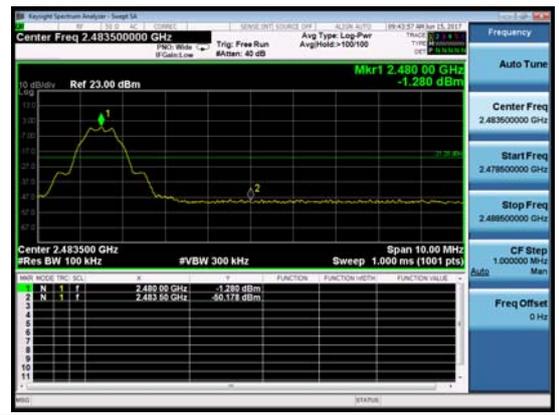

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

RBW is set to 3 kHz and VBW is set to 10 kHz for BLE/ Wi-Fi 2.4G on spectrum analyzer.

Set the span to 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The Average power spectral density is recorded.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	≤ 8 dBm / 3kHz
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

**Test Results:**


Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-17.670	8	PASS
	6	-17.042	8	PASS
	11	-18.399	8	PASS
	12	-19.373	8	PASS
	13	-20.517	8	PASS
802.11g	1	-23.536	8	PASS
	6	-24.344	8	PASS
	11	-24.306	8	PASS
	12	-23.260	8	PASS
	13	-25.125	8	PASS
802.11n HT20	1	-23.289	8	PASS
	6	-24.336	8	PASS
	11	-25.174	8	PASS
	12	-24.473	8	PASS
	13	-28.089	8	PASS
802.11n HT40	3	-26.625	8	PASS
	6	-27.214	8	PASS
	9	-27.872	8	PASS
	10	-25.242	8	PASS
	11	-25.431	8	PASS
Bluetooth (Low Energy)	0	-20.345	8	PASS
	19	-18.600	8	PASS
	39	-20.639	8	PASS



802.11b, Channel No.: 1




802.11g, Channel No.: 1

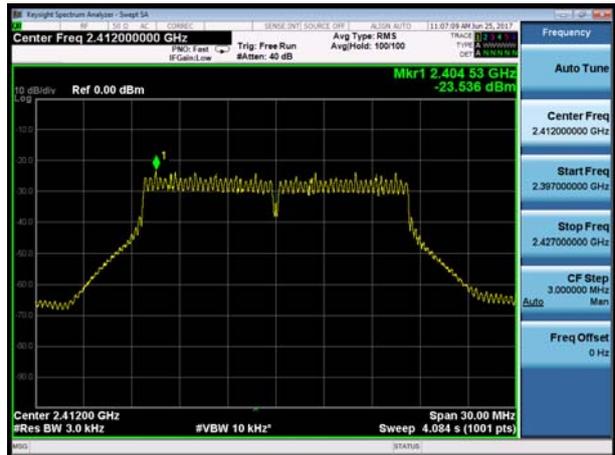

802.11b, Channel No.: 6



802.11g, Channel No.: 6

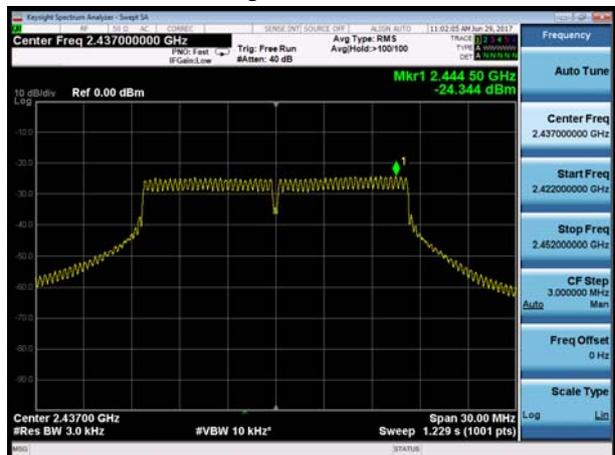

802.11b, Channel No.: 11



802.11g, Channel No.: 11






802.11b, Channel No.: 12




802.11g, Channel No.: 12

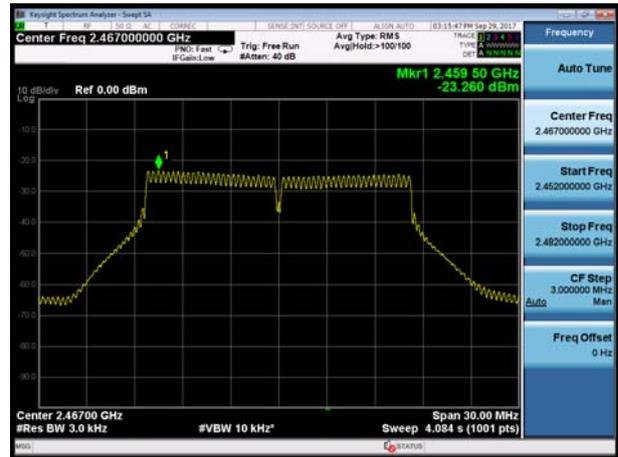


802.11b, Channel No.: 13




802.11g, Channel No.: 13

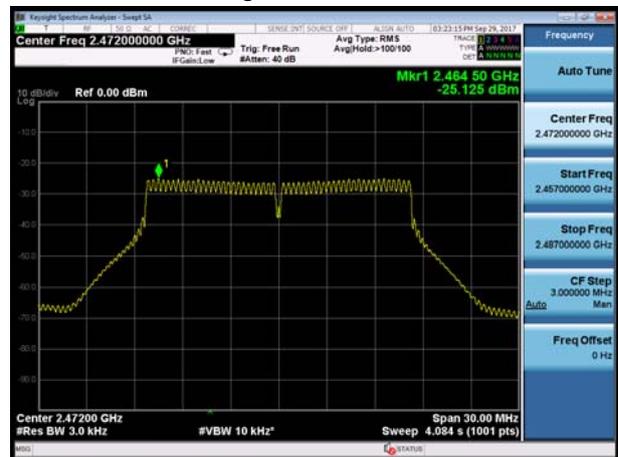

802.11n(HT20), Channel No. 1

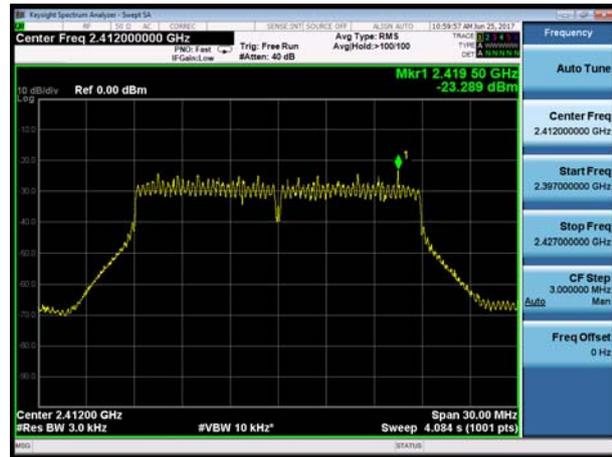


802.11n(HT40), Channel No. 3

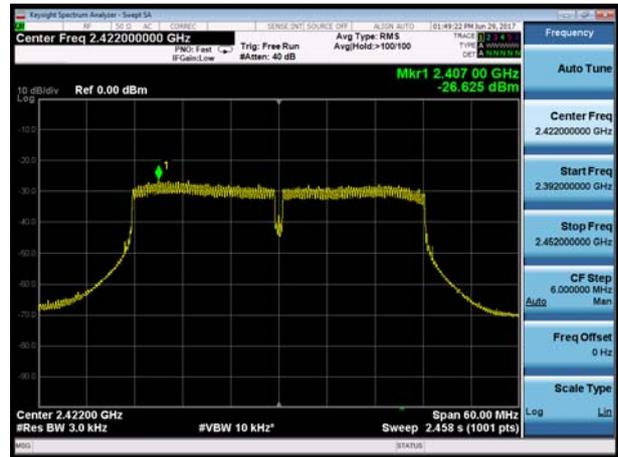





802.11n(HT20), Channel No. 6

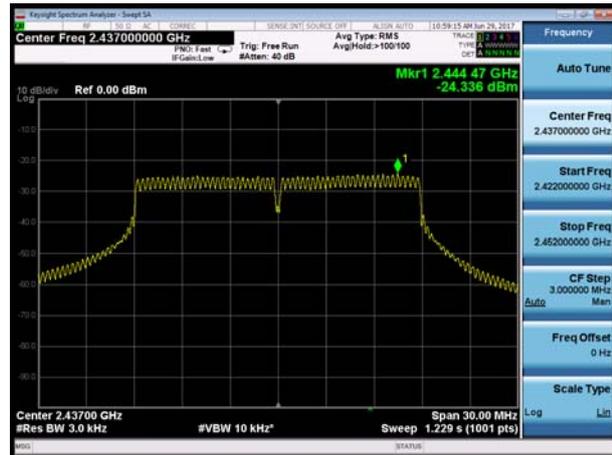


802.11n(HT40), Channel No. 6

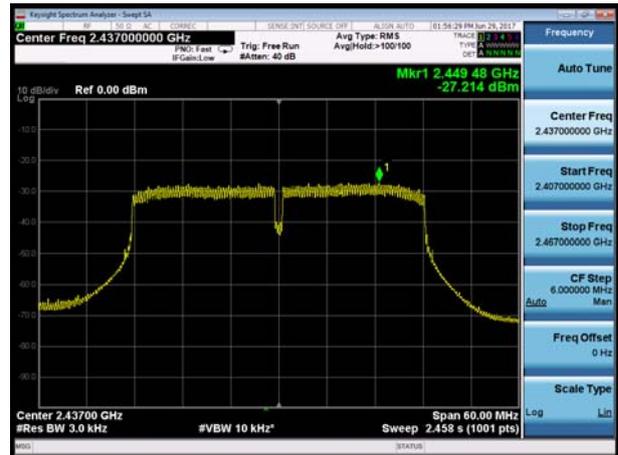


802.11n(HT20), Channel No. 11

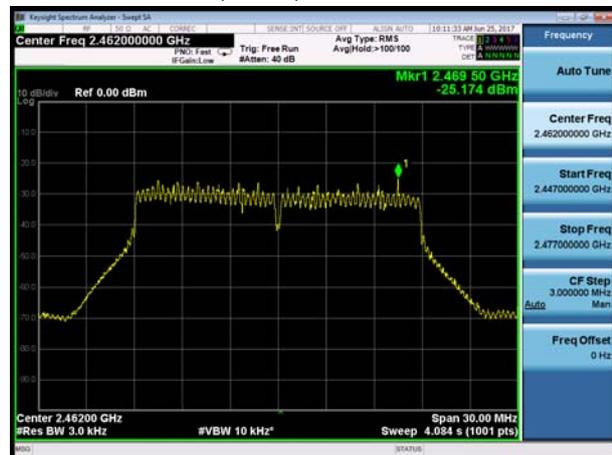

802.11n(HT40), Channel No. 9

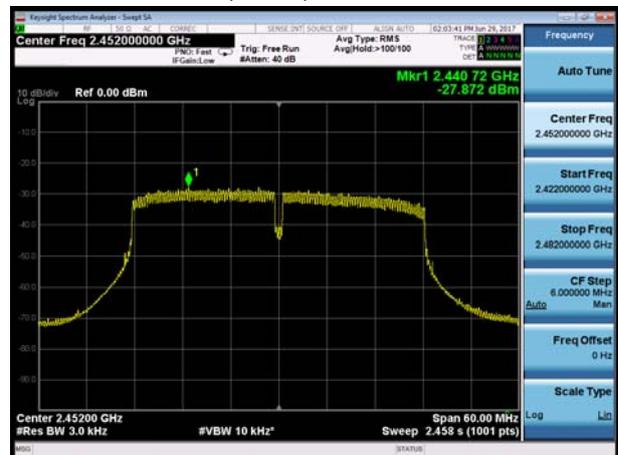

802.11n(HT20), Channel No. 12

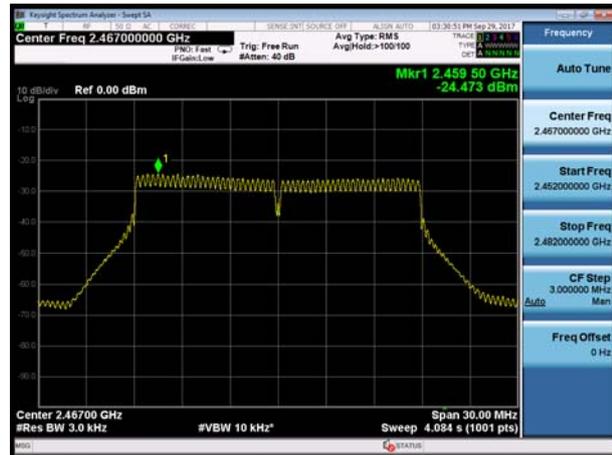


802.11n(HT40), Channel No. 10







802.11n(HT20), Channel No. 13

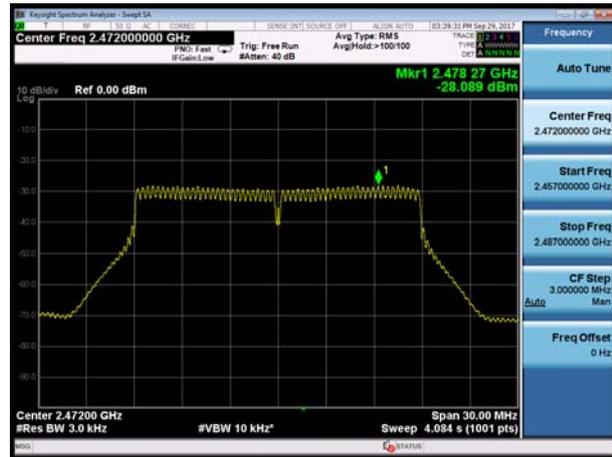

802.11n(HT40), Channel No. 11

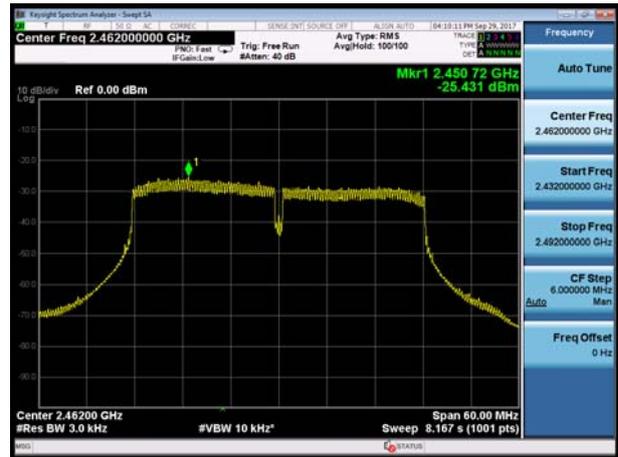

BLE, Channel No.: 0

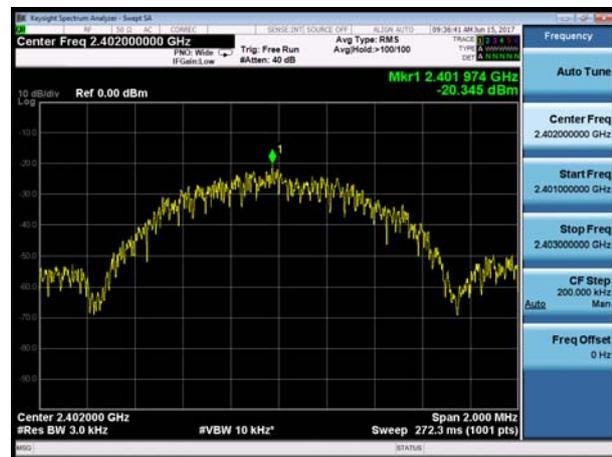

BLE, Channel No.: 19



BLE, Channel No.: 39



5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Antenna

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit (dBm)
802.11b	2412	-3.066	-23.066
	2437	-15.251	-35.251
	2462	-7.664	-27.664
	2467	4.185	-15.815
	2472	6.394	-13.606
802.11g	2412	-10.160	-30.160
	2437	-19.677	-39.677
	2462	-12.706	-32.706
	2467	1.369	-18.631
	2472	1.307	-18.693
802.11n HT20	2412	-11.081	-31.081
	2437	-20.697	-40.697
	2462	-13.527	-33.527
	2467	0.113	-19.887
	2472	-3.679	-23.679



802.11n HT40	2422	-10.628	-30.628
	2437	-17.320	-37.320
	2452	-16.100	-36.100
	2457	0.342	-19.658
	2462	0.474	-19.526
Bluetooth (Low Energy)	2402	-10.838	-30.838
	2440	-18.176	-38.176
	2480	-15.994	-35.994

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

**Test Results:**


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

The signal beyond the limit is carrier.


Test Data File Name	Frequency (MHz)	Peak (dBm)	Limit (dBm)	Margin (dB)
WIFI g CH06_0.03-18GHz	9748.0	-57.58	-39.68	17.90
WIFI n(20M) CH06_0.03-18GHz	9748.0	-56.39	-40.70	15.69
WIFI n(40M) CH06_0.03-18GHz	9748.0	-56.40	-37.32	19.08
BT LE CH19_0.03-18GHz	9760.0	-52.39	-38.18	14.22
BT LE CH39_0.03-18GHz	9920.0	-52.18	-35.99	16.19

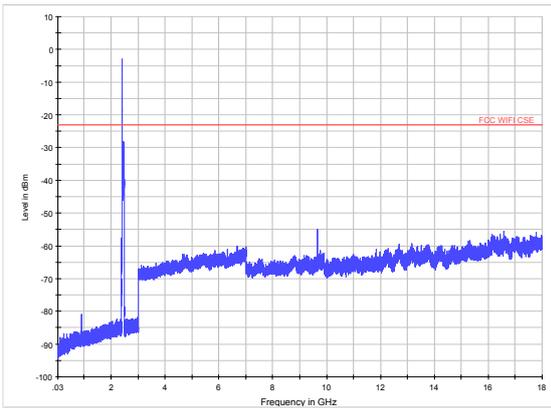


802.11b CH1 30MHz to 18GHz

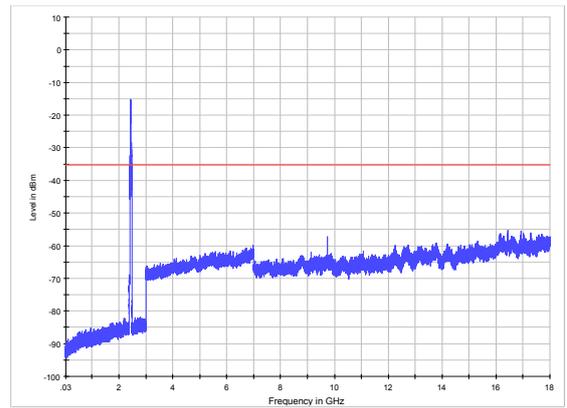


802.11b CH6 30MHz to 18GHz

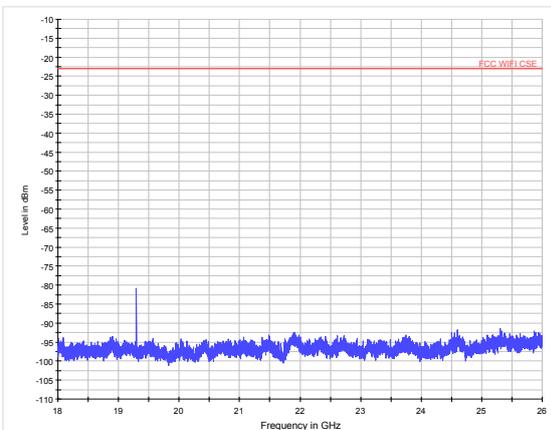


802.11b CH1 18GHz to 26.5GHz

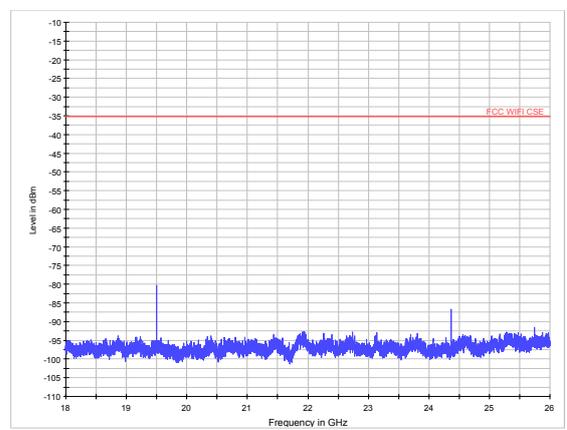


802.11b CH6 18GHz to 26.5GHz

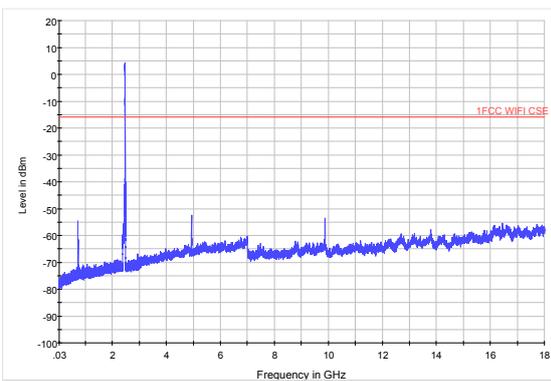


802.11b CH12 30MHz to 18GHz

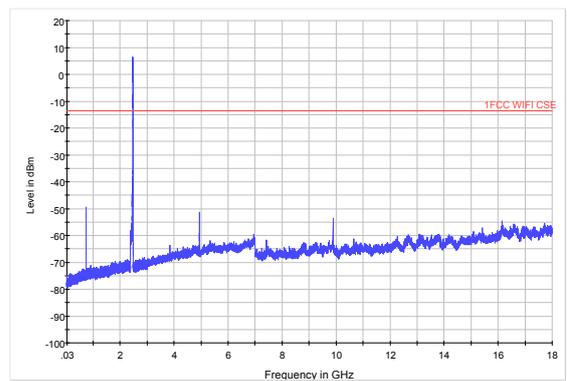


802.11b CH13 30MHz to 18GHz

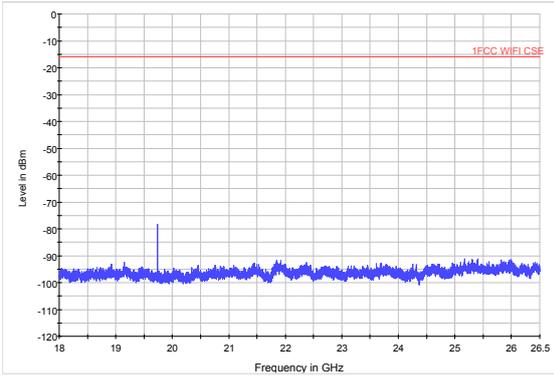


802.11b CH12 18GHz to 26.5GHz

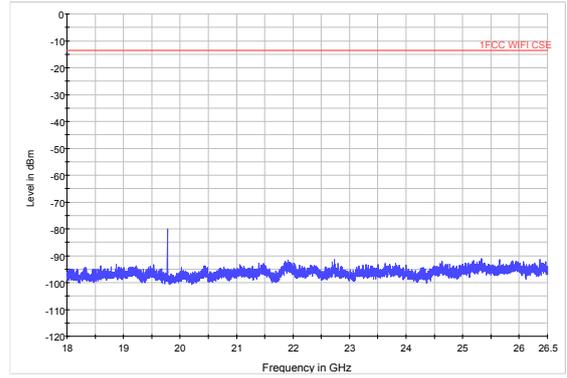


802.11b CH13 18GHz to 26.5GHz

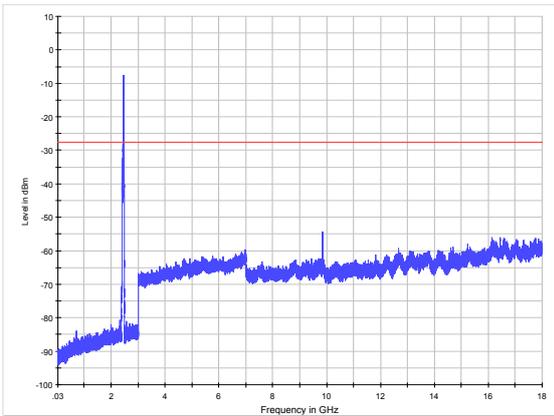


802.11b CH11 30MHz to 18GHz

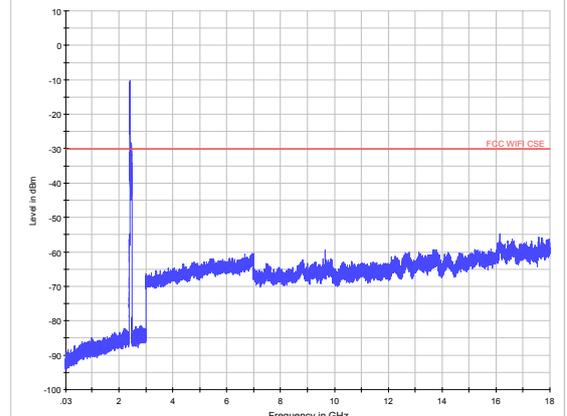


802.11g CH1 30MHz to 18GHz

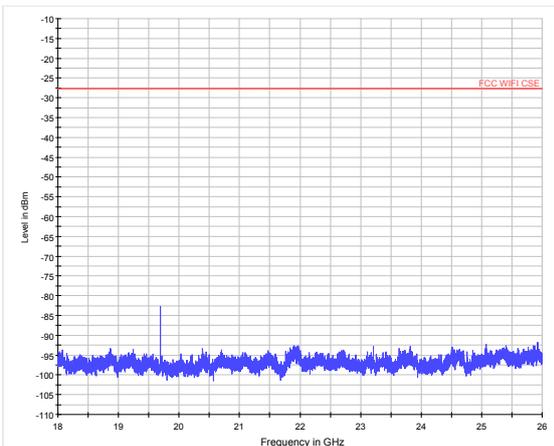


802.11b CH11 18GHz to 26.5GHz

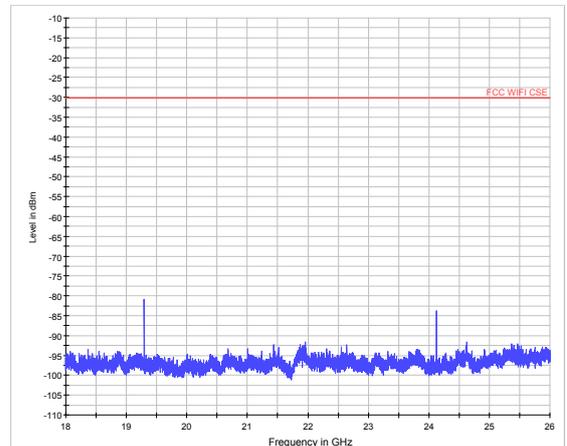


802.11g CH1 18GHz to 26.5GHz

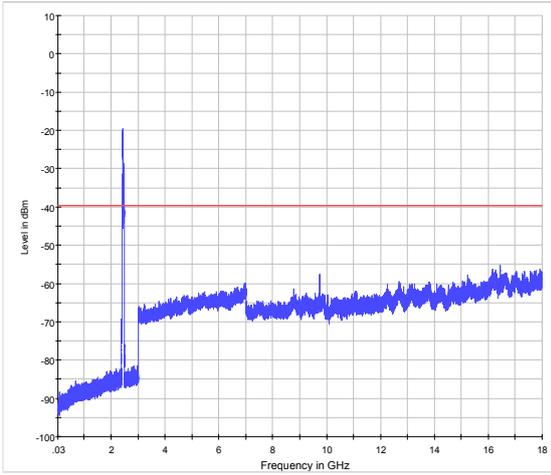


802.11g CH6 30MHz to 18GHz

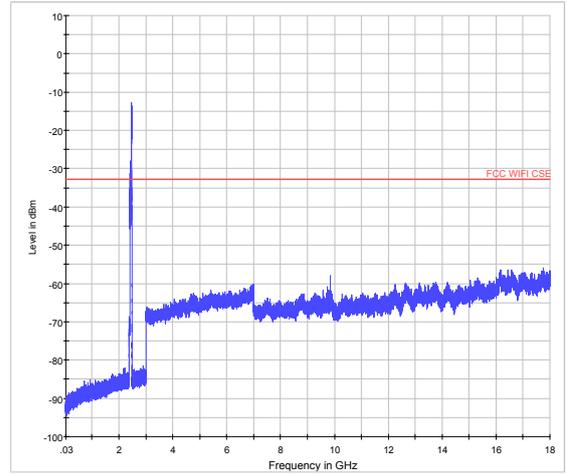


802.11g CH11 30MHz to 18GHz

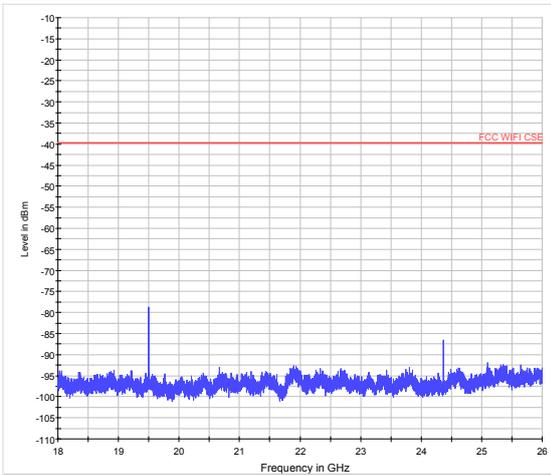


802.11g CH6 18GHz to 26.5GHz

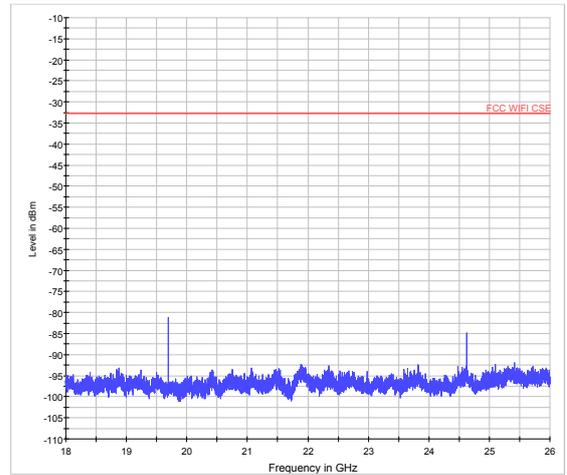


802.11g CH11 18GHz to 26.5GHz

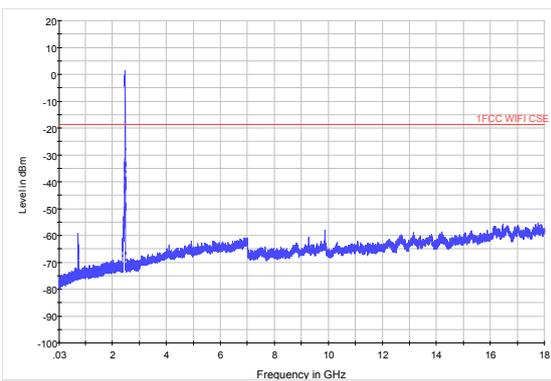


802.11g CH12 30MHz to 18GHz

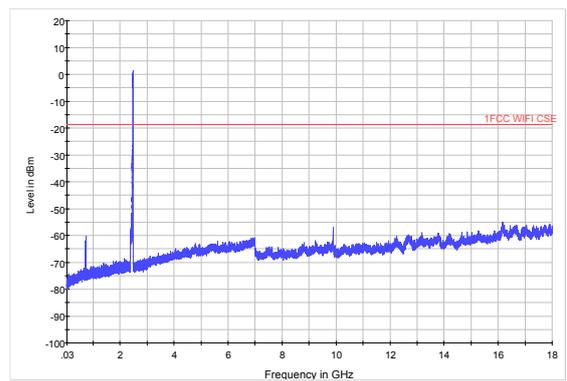


802.11g CH13 30MHz to 18GHz

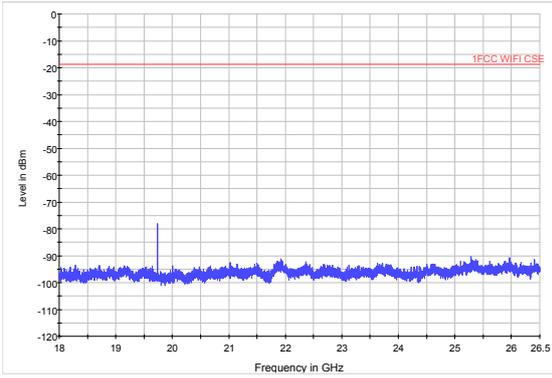


802.11g CH12 18GHz to 26.5GHz

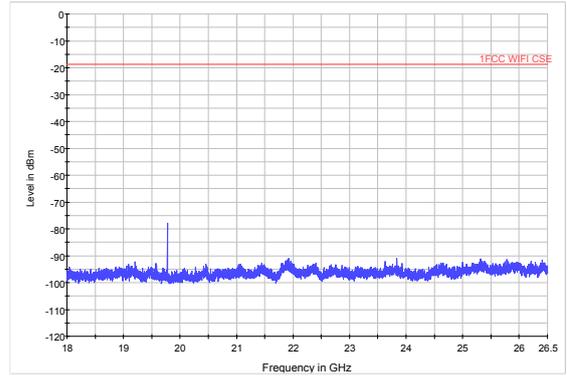


802.11g CH13 18GHz to 26.5GHz

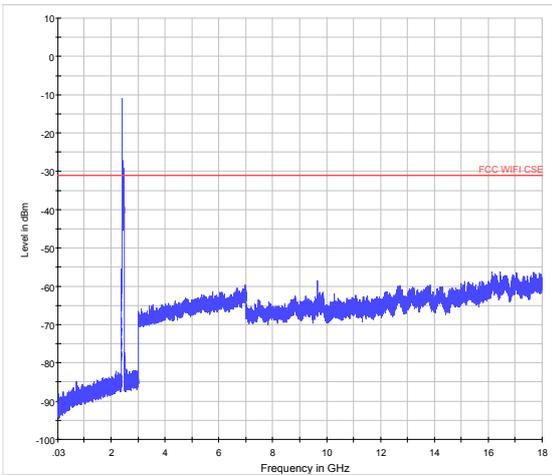


802.11n (HT20) CH1 30MHz to 18GHz

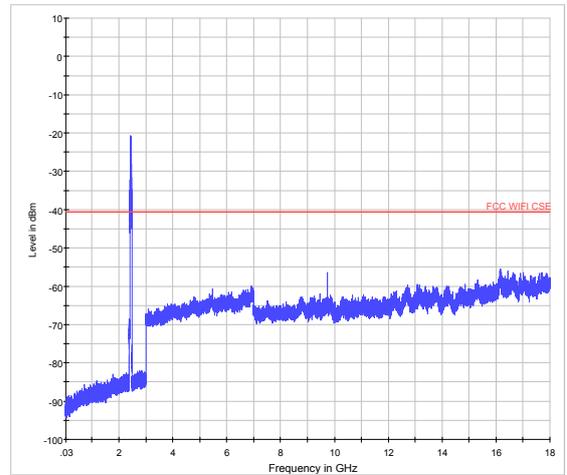


802.11n (HT20) CH6 30MHz to 18GHz

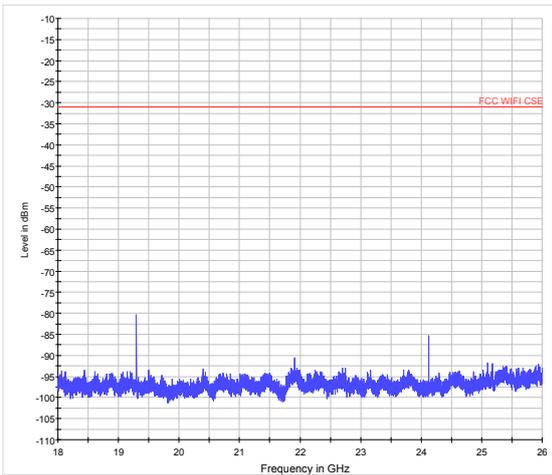


802.11n (HT20) CH1 18GHz to 26.5GHz

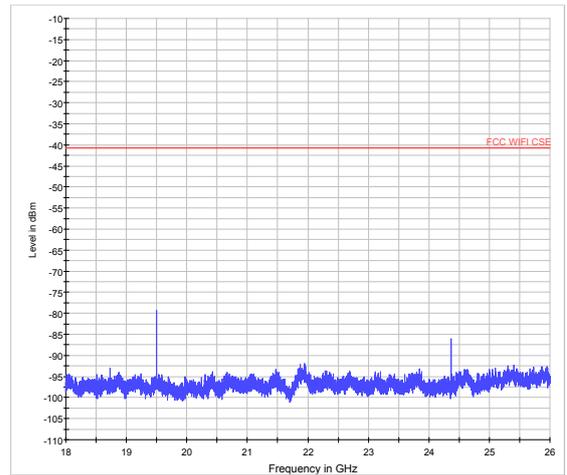


802.11n (HT20) CH6 18GHz to 26.5GHz

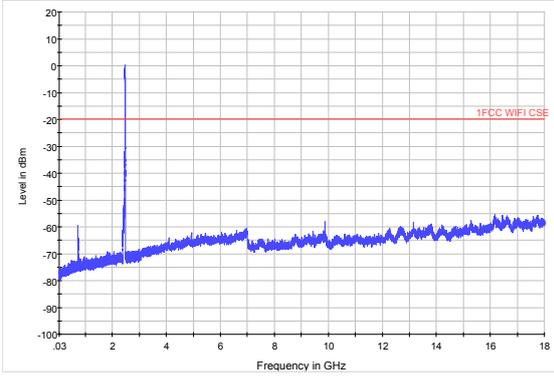


802.11n (HT20) CH12 30MHz to 18GHz

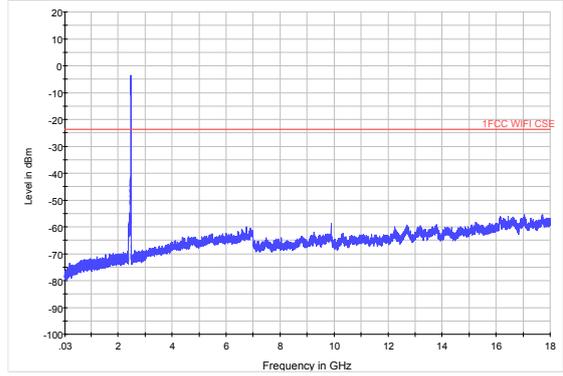


802.11n (HT20) CH13 30MHz to 18GHz

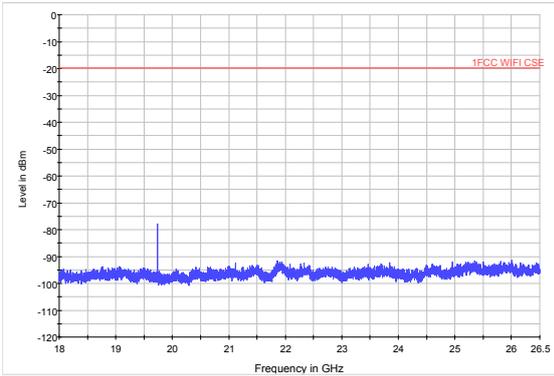


802.11n (HT20) CH12 18GHz to 26.5GHz

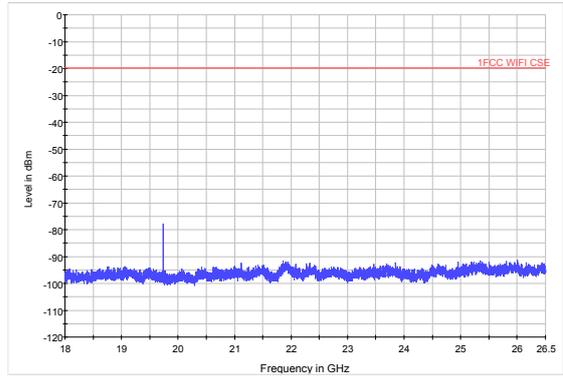


802.11n (HT20) CH13 18GHz to 26.5GHz

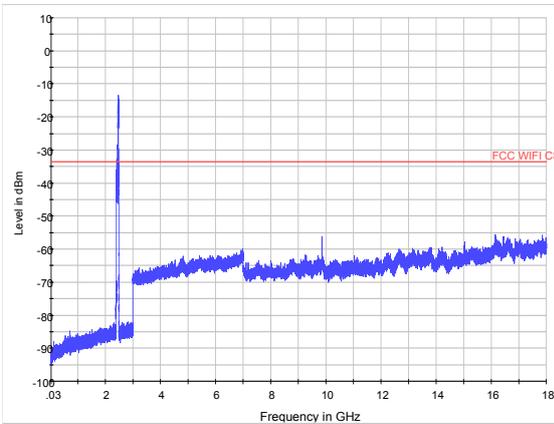


802.11n (HT20) CH11 30MHz to 18GHz

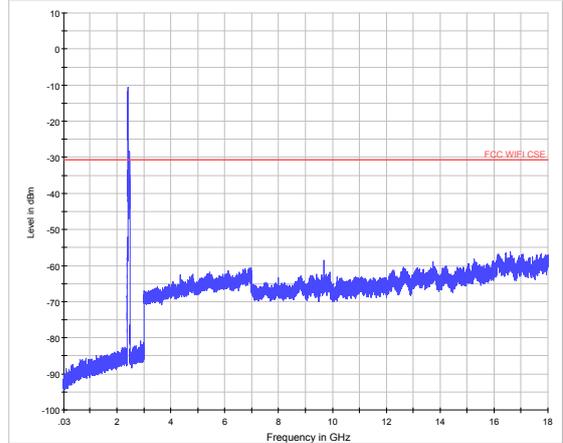


802.11n (HT40) CH3 30MHz to 18GHz

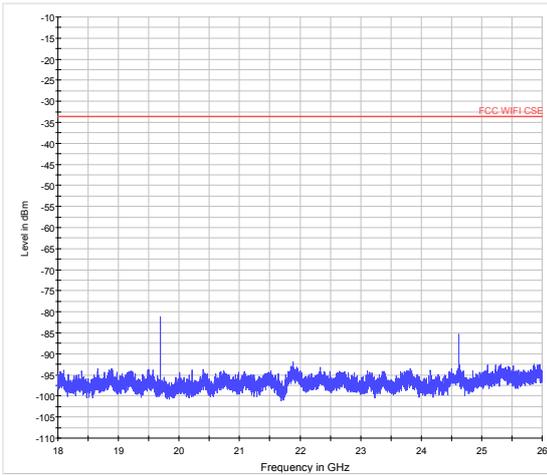


802.11n (HT20) CH11 18GHz to 26.5GHz

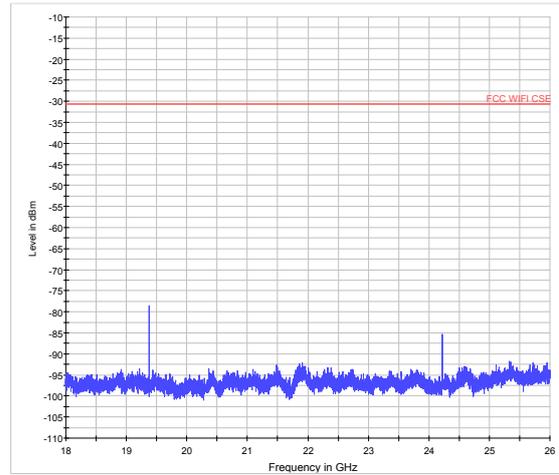


802.11n (HT40) CH3 18GHz to 26.5GHz

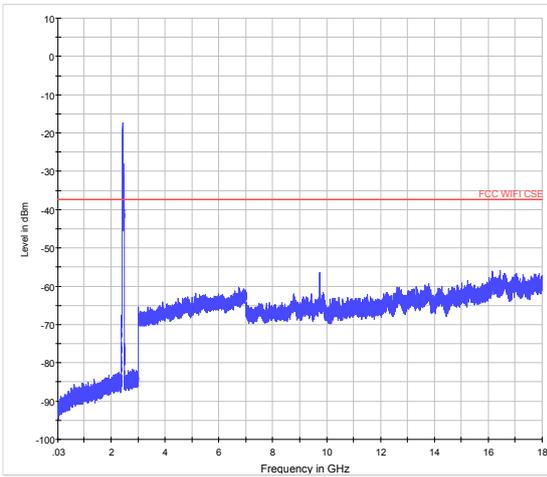


802.11n (HT40) CH6 30MHz to 18GHz

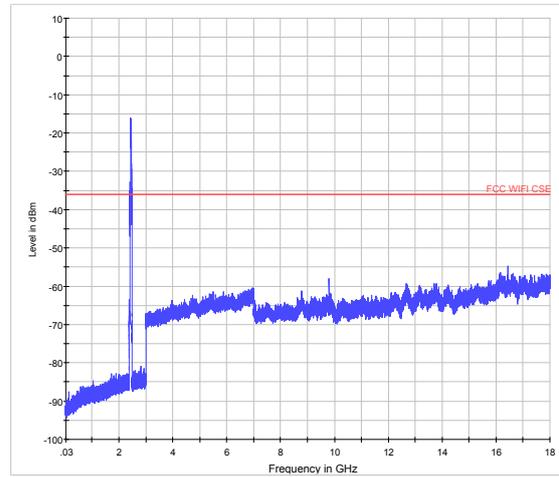


802.11n (HT40) CH9 30MHz to 18GHz

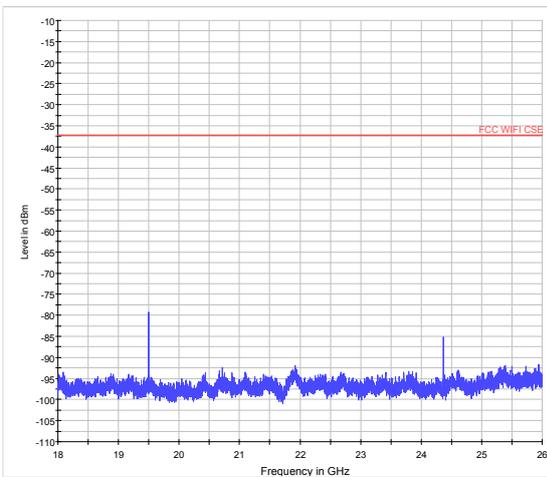


802.11n (HT40) CH6 18GHz to 26.5GHz

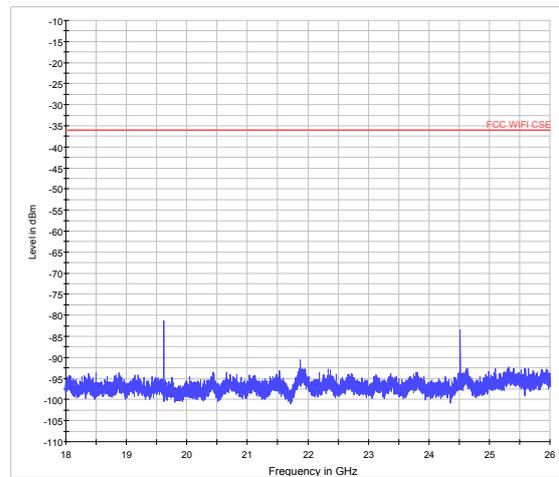


802.11n (HT40) CH9 18GHz to 26.5GHz

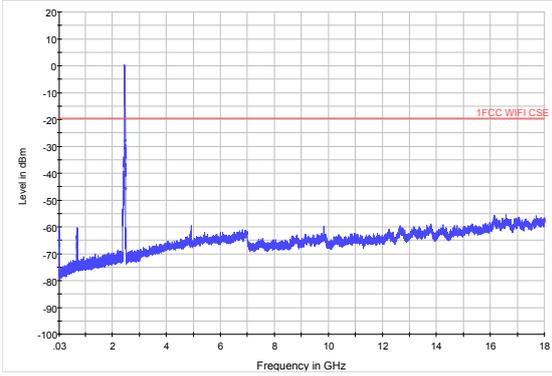


802.11n (HT40) CH10 30MHz to 18GHz

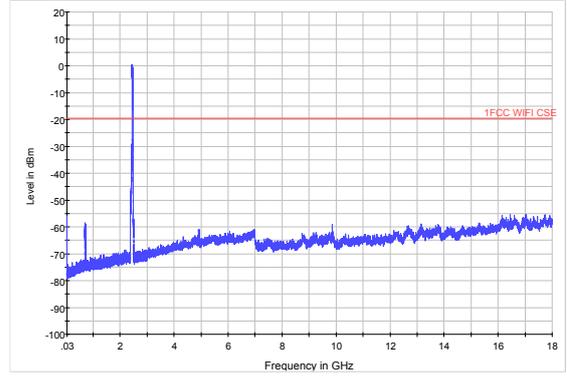


802.11n (HT40) CH11 30MHz to 18GHz

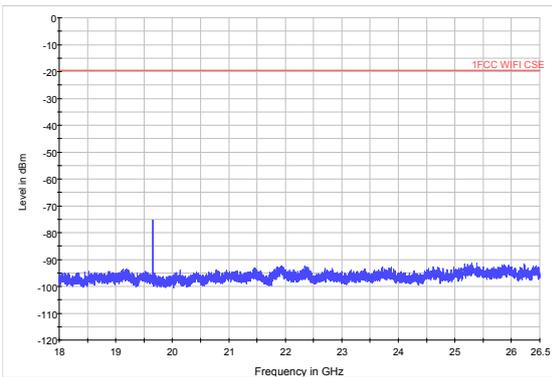


802.11n (HT40) CH10 18GHz to 26.5GHz

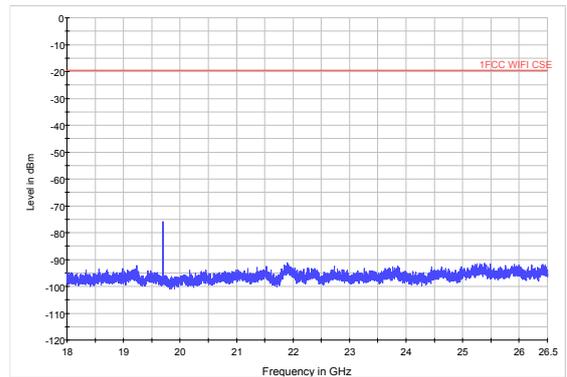


802.11n (HT40) CH11 18GHz to 26.5GHz

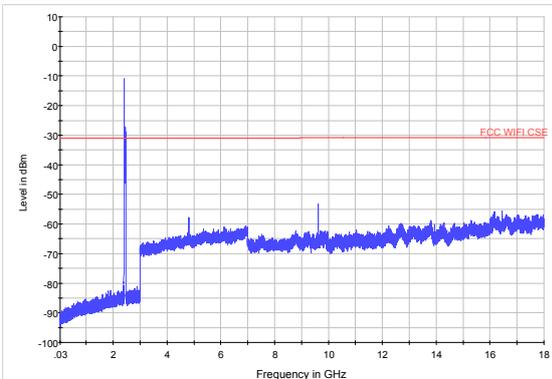


BLE CH0 30MHz to 18GHz

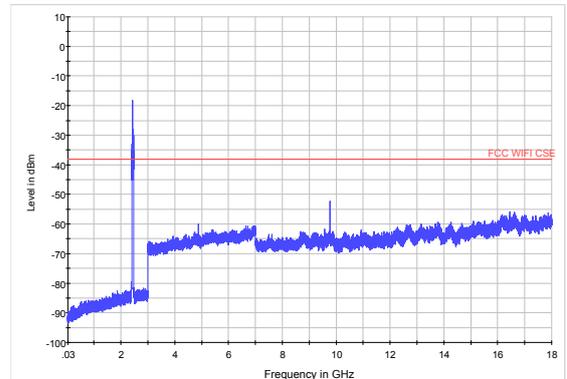


BLE CH19 30MHz to 18GHz

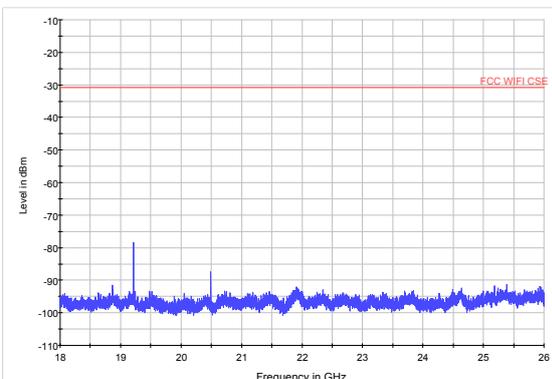


BLE CH0 18GHz to 26.5GHz

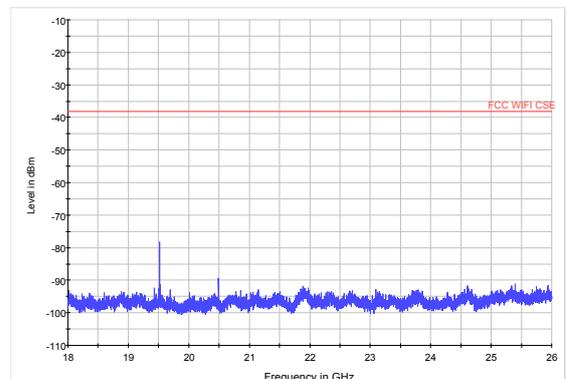

BLE CH19 18GHz to 26.5GHz

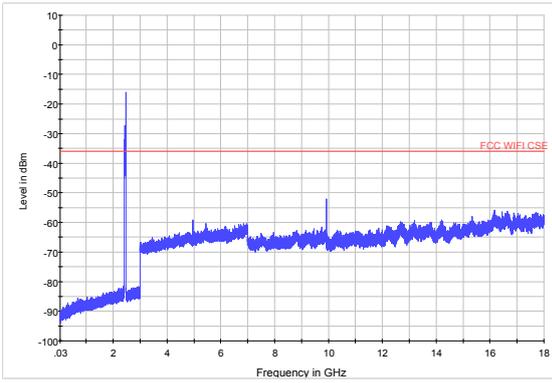

BLE CH39 30MHz to 18GHz

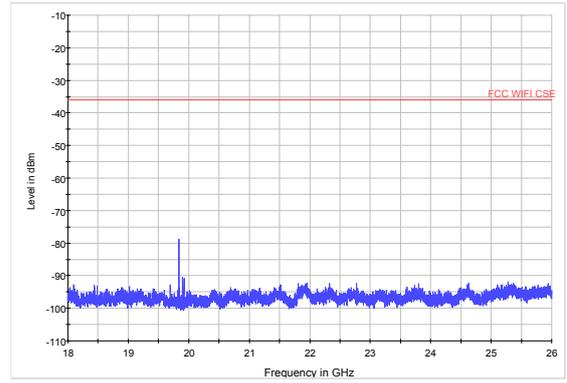

BLE CH39 18GHz to 26.5GHz

5.6. Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

Set the spectrum analyzer in the following:


- (a) PEAK: RBW=1MHz /VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz /VBW=3MHz / Sweep=AUTO

This setting method can refer to **KDB 558074**.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

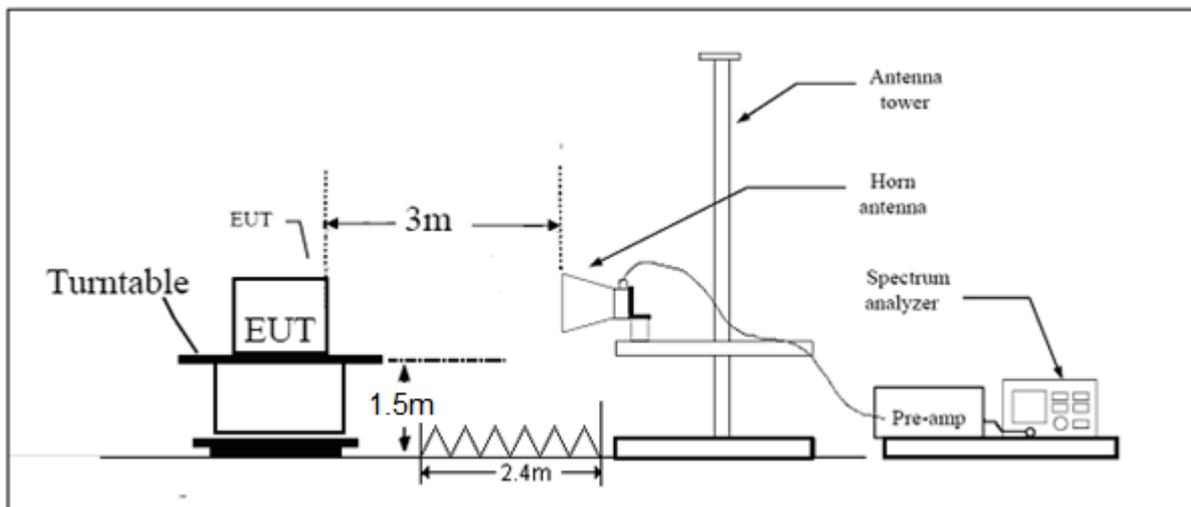

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.




Test Results:


PASS

The signal beyond the limit is carrier.


802.11b-Channel 1: Peak

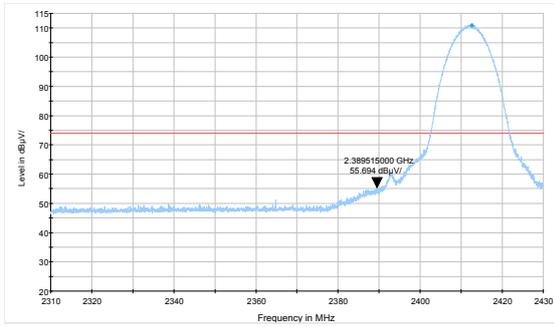


802.11b-Channel 11: Peak

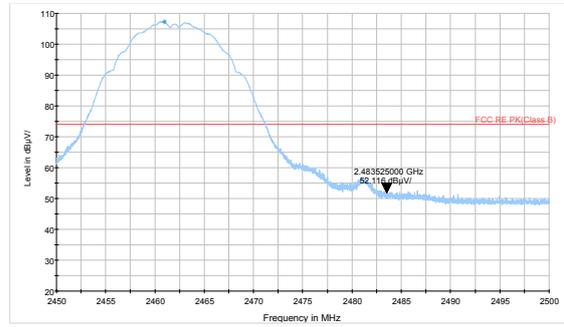


802.11b-Channel 1: Average

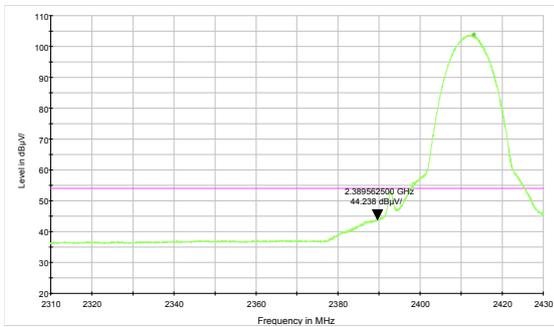


802.11b-Channel 11: Average

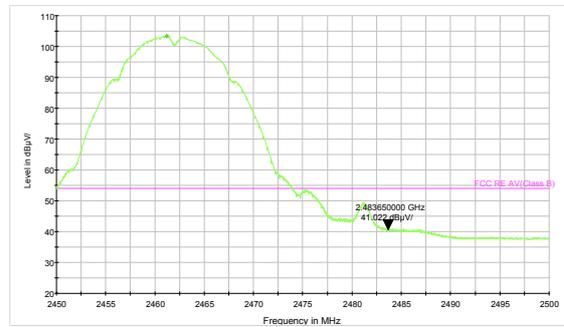

802.11b-Channel 12: Peak


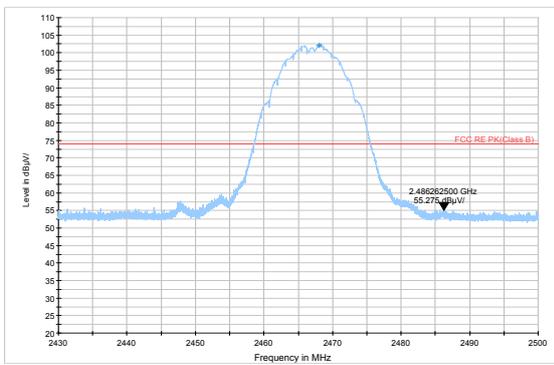


802.11b-Channel 13: Peak

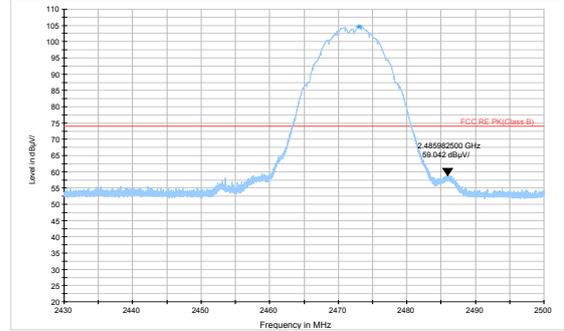


802.11b-Channel 12: Average


802.11b-Channel 13: Average

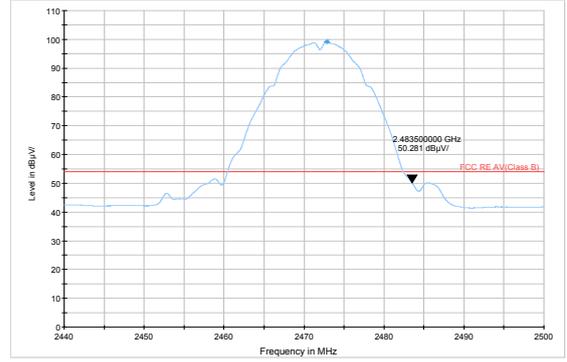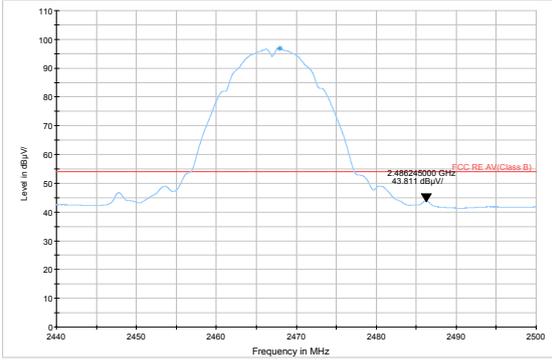


802.11g-Channel 1: Peak

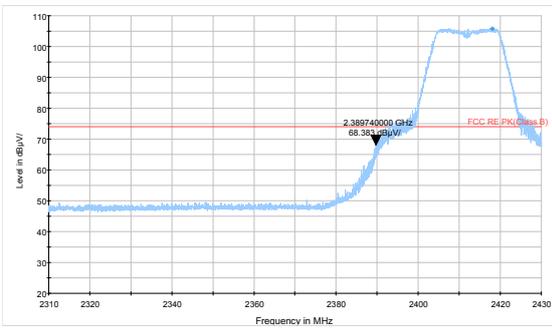


802.11g-Channel 11: Peak

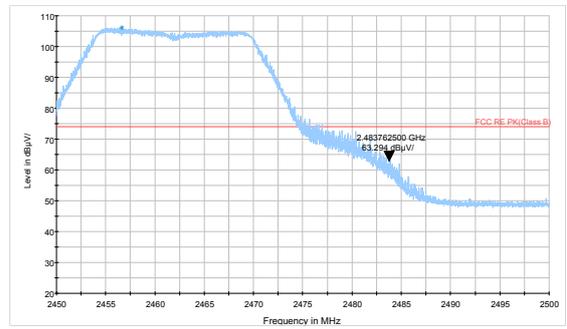


802.11g-Channel 1: Average

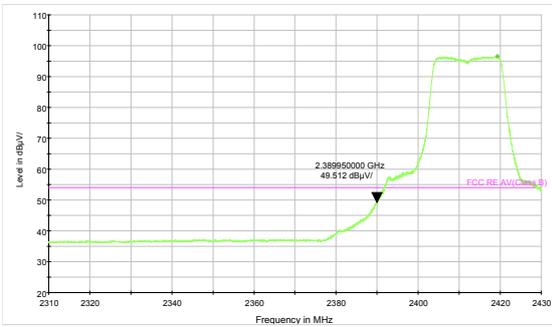


802.11g-Channel 11: Average

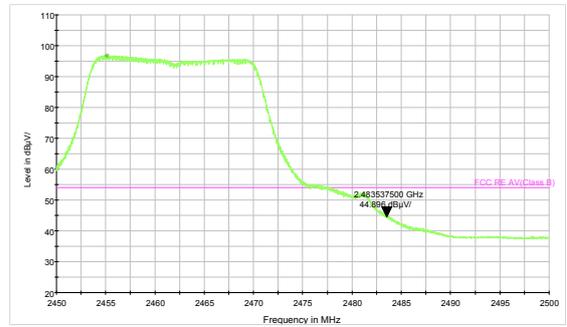

802.11g-Channel 12: Peak


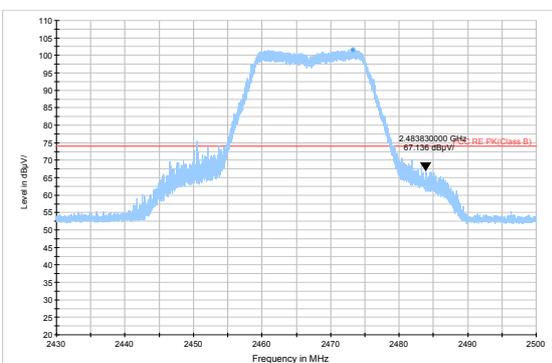


802.11g-Channel 13: Peak

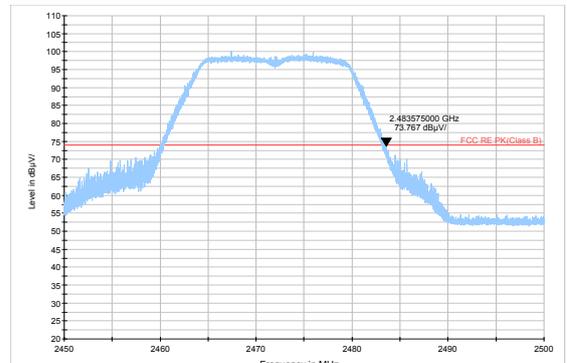


802.11g-Channel 12: Average

802.11g-Channel 13: Average

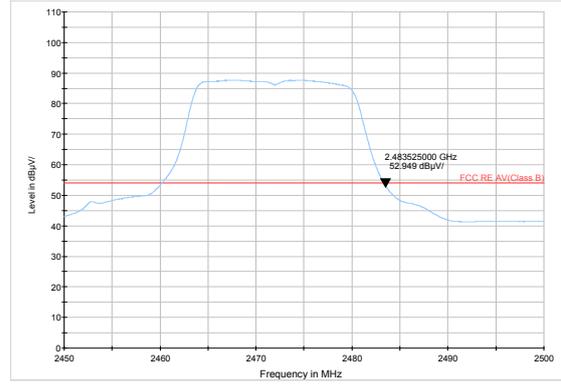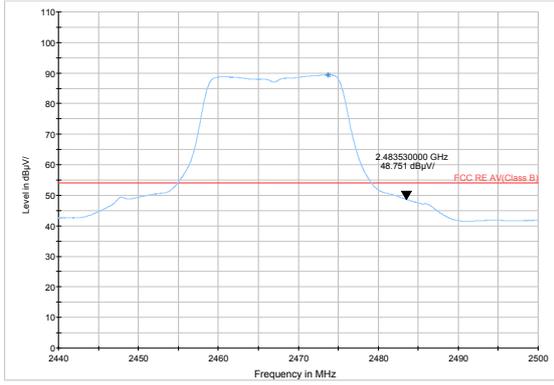





802.11n HT20 -Channel 1: Peak

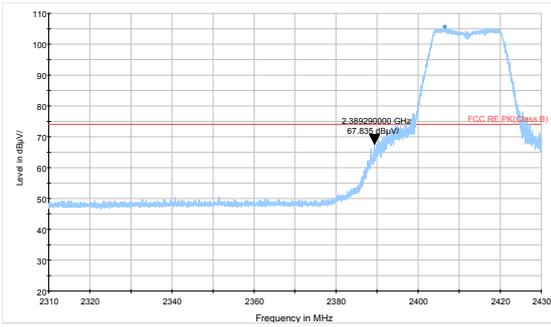


802.11n HT20-Channel 11: Peak

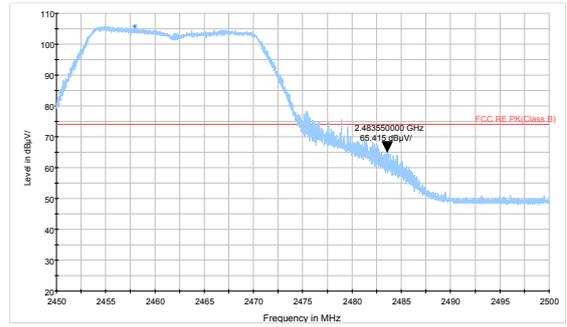


802.11n HT20-Channel 1: Average

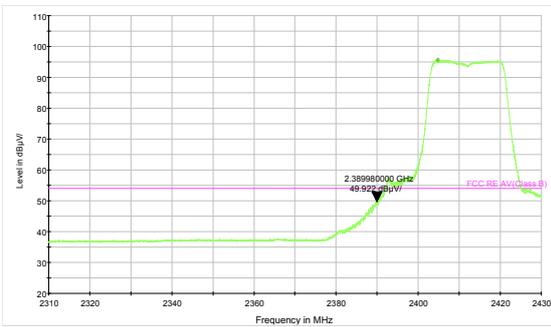


802.11n HT20-Channel 11: Average

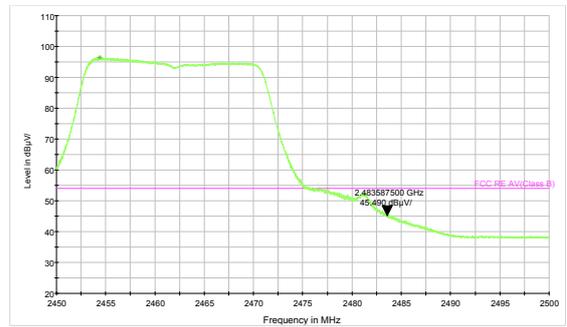


802.11n HT20 -Channel 12: Peak

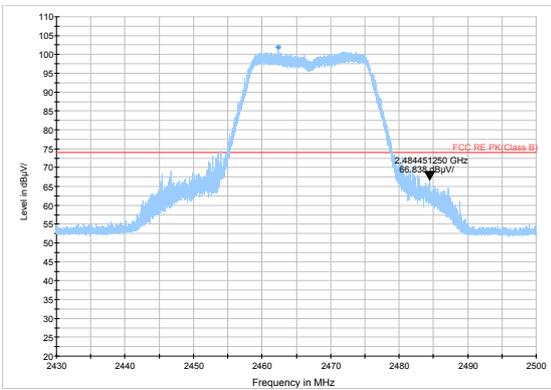


802.11n HT20 -Channel 13: Peak

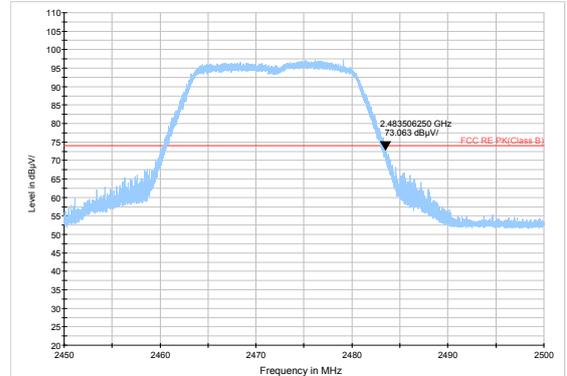


802.11n HT20-Channel 12: Average

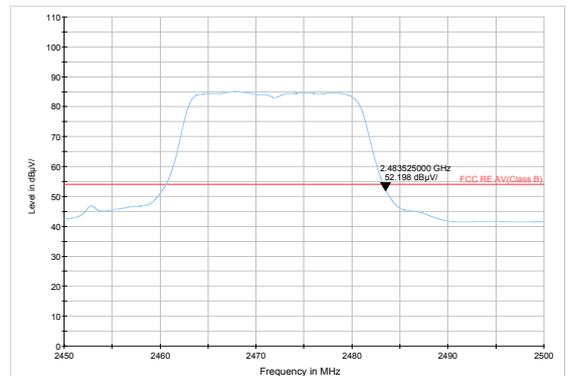


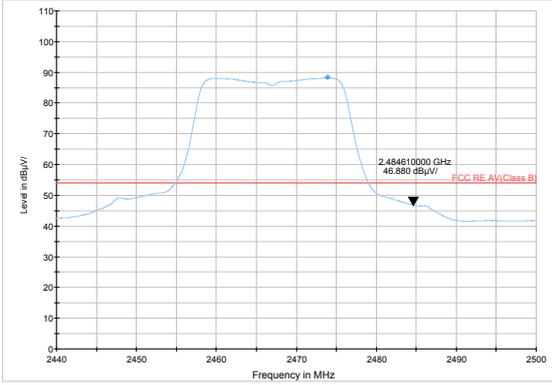


802.11n HT40 -Channel 3: Peak

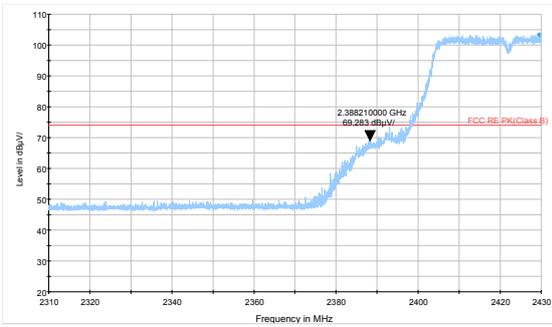


802.11n HT40-Channel 9: Peak

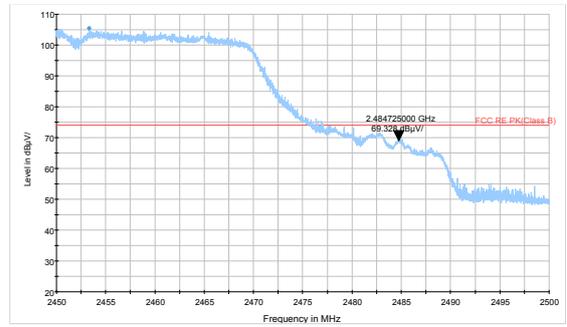


802.11n HT40-Channel 3: Average

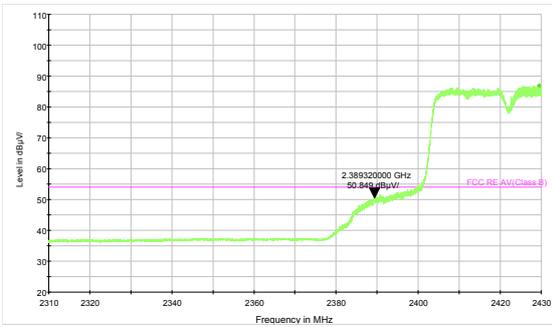


802.11n HT40-Channel 9: Average

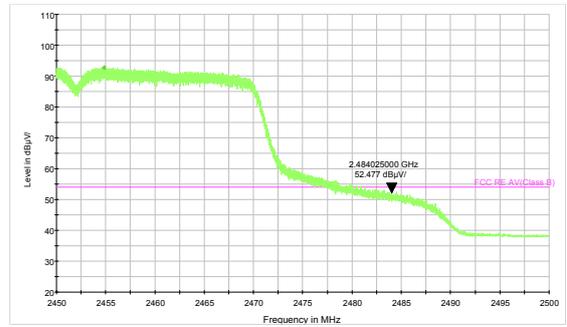

802.11n HT40 -Channel 10: Peak

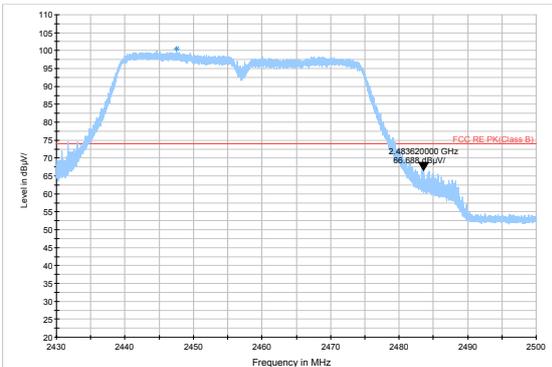


802.11n HT40 -Channel 11: Peak

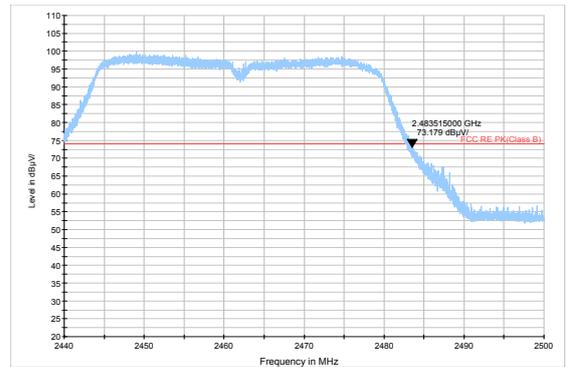





802.11n HT40-Channel 10: Average

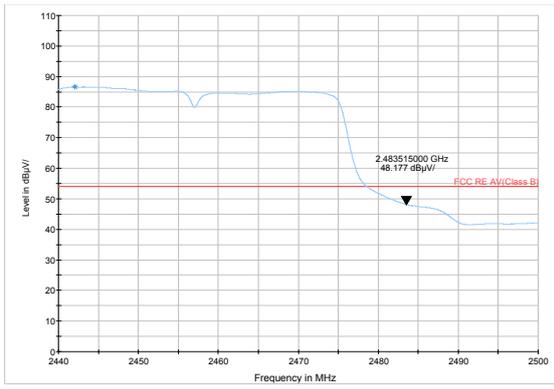


802.11n HT40-Channel 11: Average

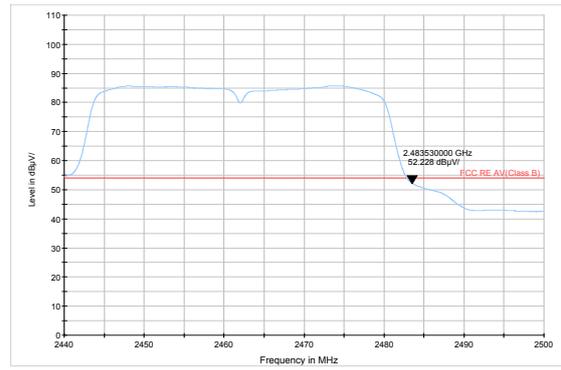


BLE -Channel 0: Peak

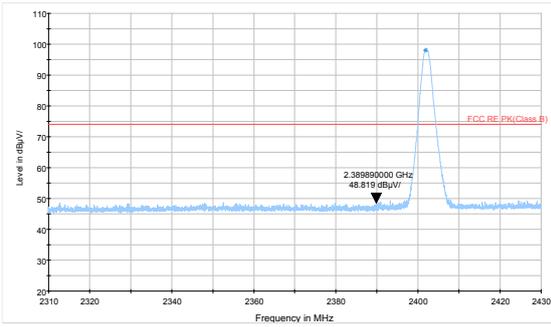


BLE -Channel 39: Peak

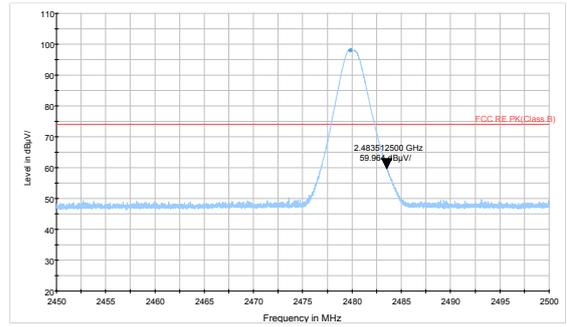

BLE -Channel 0: Average

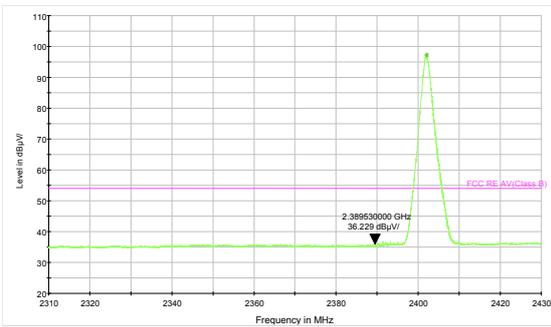

BLE -Channel 39: Average

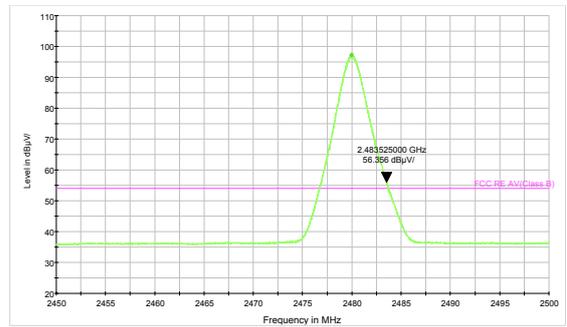

5.7. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO




Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

The test is in transmitting mode.

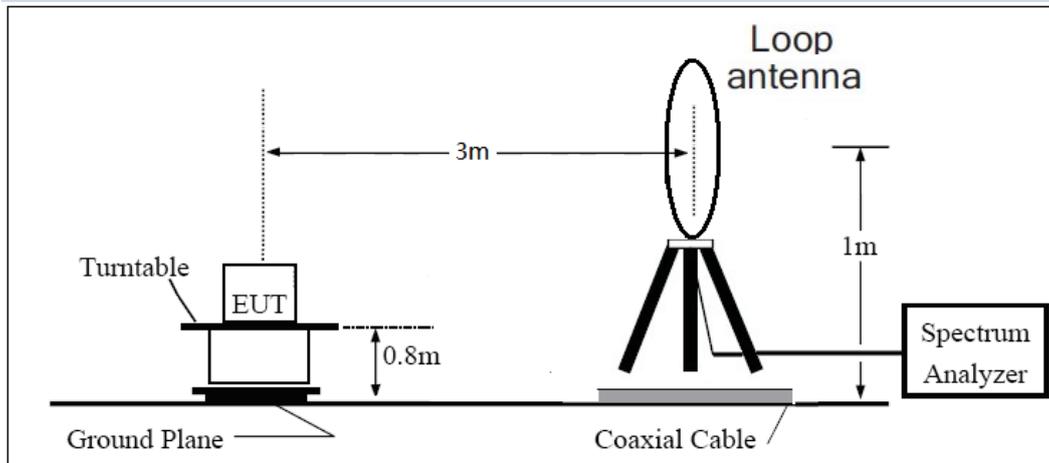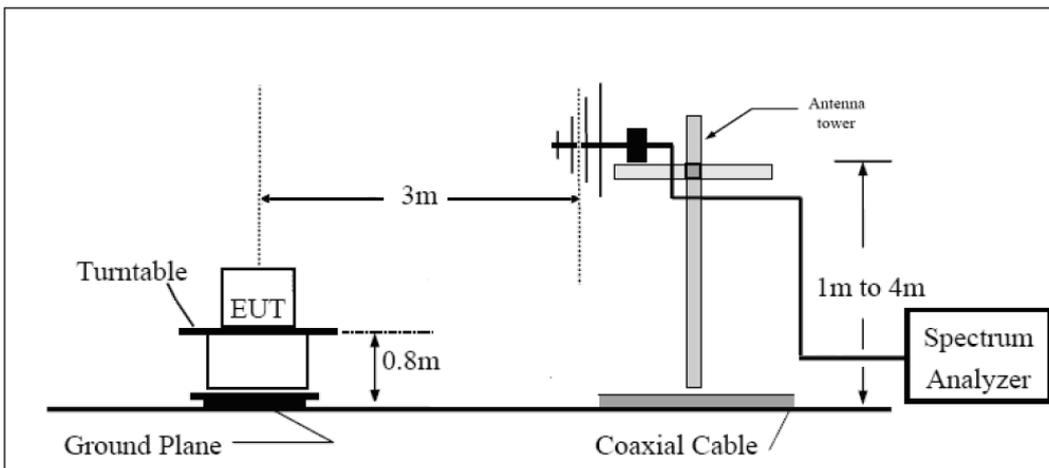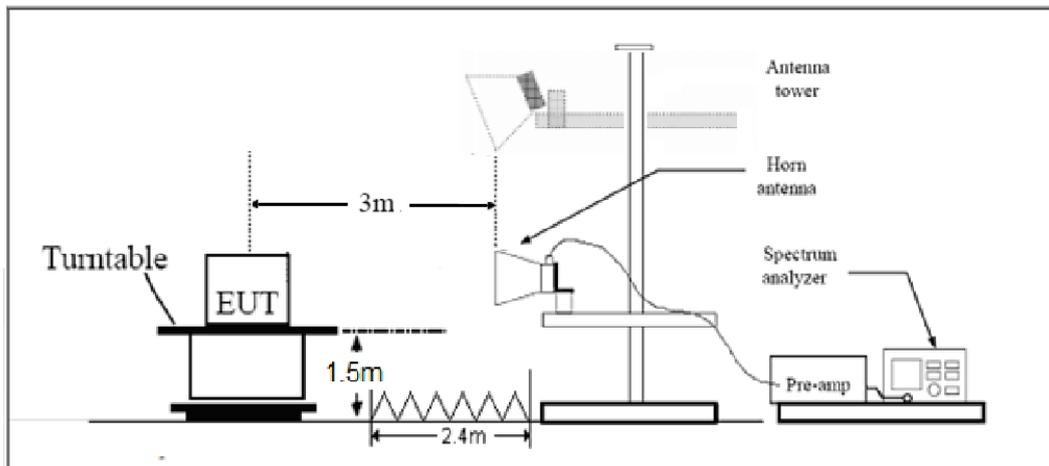Test setup**9KHz ~ 30MHz****30MHz ~ 1GHz****Above 1GHz**

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:

FCC RE 0.03-1GHz QP Class B

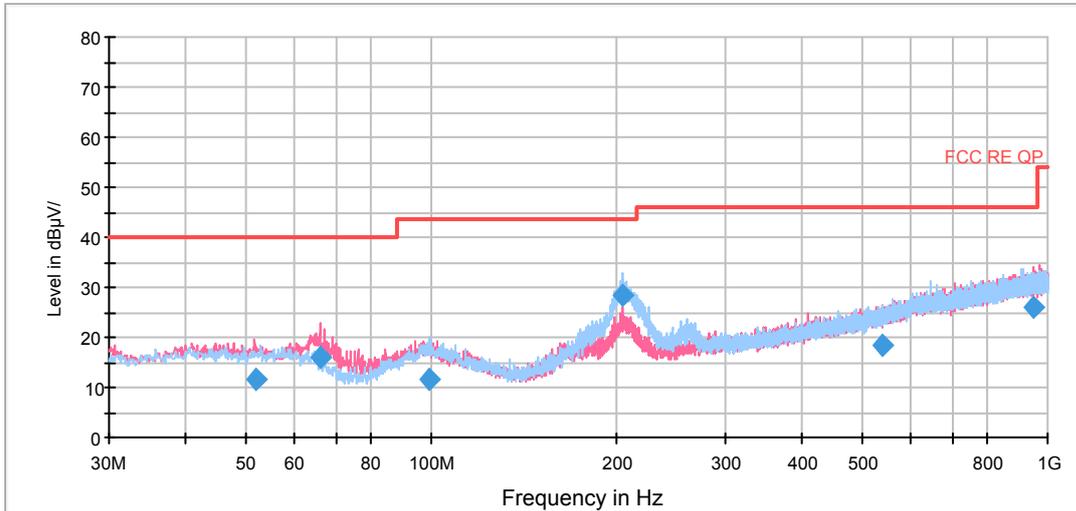

Radiates Emission from 30MHz to 1GHz

802.11b CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	50.5	205.0	V	290.0	55.7	-5.2	23.5	74
1439.000000	44.6	105.0	H	342.0	48.5	-3.9	29.4	74
1678.500000	45.9	105.0	H	0.0	48.0	-2.1	28.1	74
1995.500000	53.0	205.0	V	239.0	53.2	-0.2	21.0	74
2509.750000	51.3	105.0	H	284.0	48.5	2.8	22.7	74
2966.750000	53.6	205.0	H	0.0	48.4	5.2	20.4	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1193.500000	34.8	105.0	V	237.0	40.0	-5.2	19.2	54
1439.250000	32.9	105.0	H	335.0	36.8	-3.9	21.1	54
1731.500000	34.7	105.0	H	239.0	36.5	-1.8	19.3	54
1990.000000	38.7	205.0	V	225.0	39.0	-0.3	15.3	54
2487.500000	39.4	105.0	H	0.0	36.3	3.1	14.6	54
2997.500000	42.5	205.0	H	260.0	37.2	5.3	11.5	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

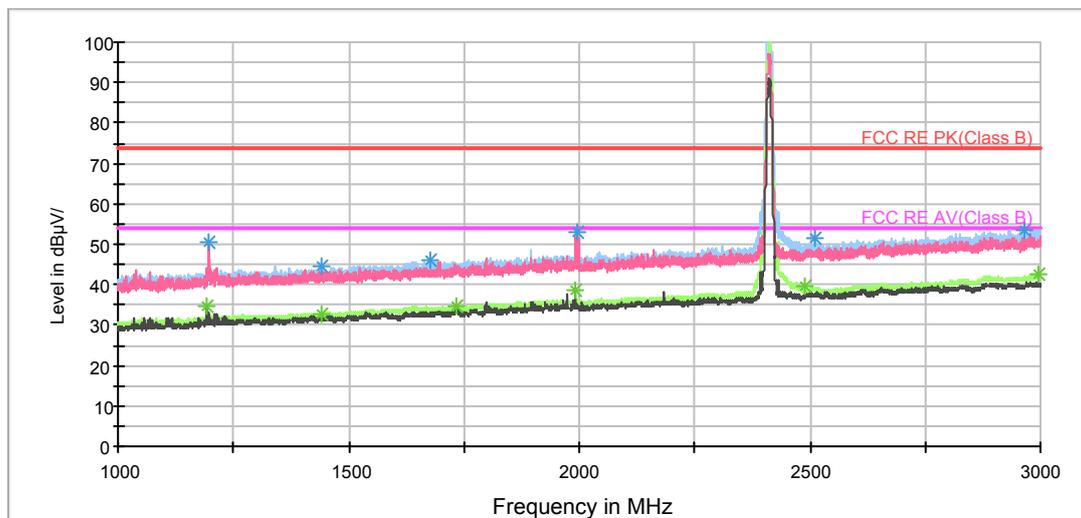


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

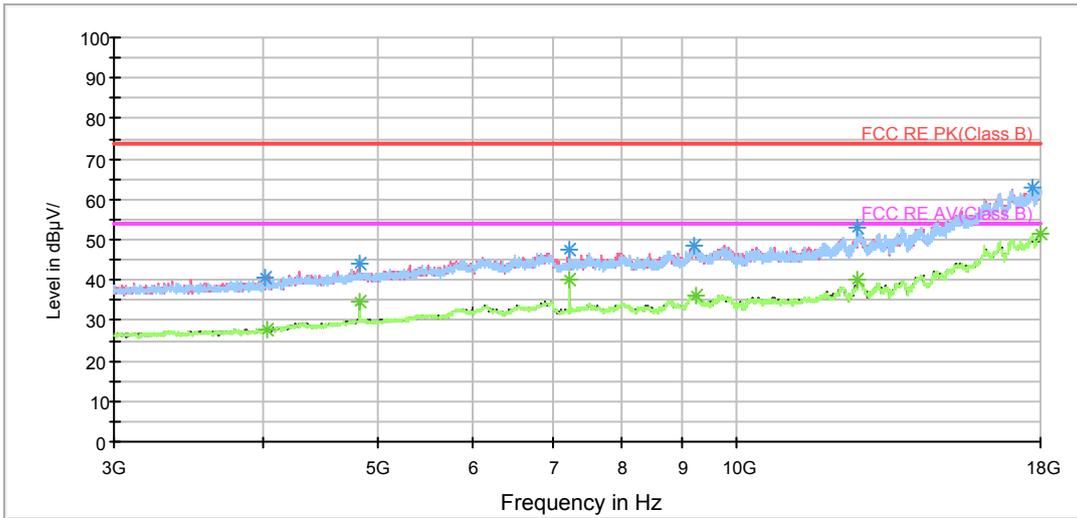

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

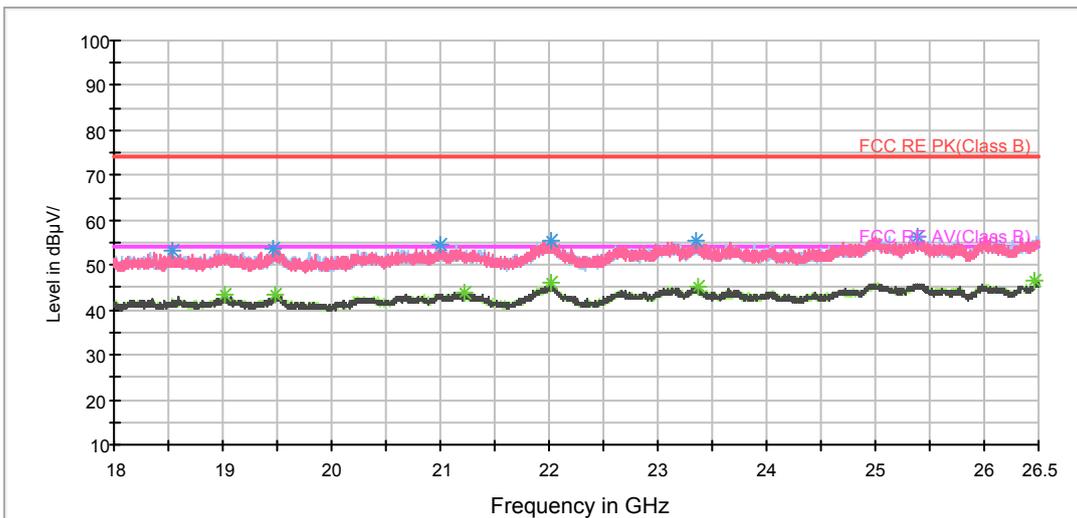

Radiates Emission from 18GHz to 26.5GHz



802.11b CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.000000	49.8	205.0	V	289.0	55.0	-5.2	24.2	74
1211.500000	45.0	205.0	V	260.0	50.0	-5.0	29.0	74
1568.250000	47.0	205.0	V	0.0	50.6	-3.6	27.0	74
1998.250000	54.0	205.0	V	245.0	54.4	-0.4	20.0	74
2552.750000	50.6	105.0	H	301.0	48.1	2.5	23.4	74
2997.500000	54.1	205.0	H	113.0	48.8	5.3	19.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	34.5	205.0	V	282.0	39.7	-5.2	19.5	54
1212.000000	33.2	205.0	V	289.0	38.2	-5.0	20.8	54
1731.500000	34.8	205.0	H	0.0	36.6	-1.8	19.2	54
1993.500000	37.7	205.0	V	304.0	38.0	-0.3	16.3	54
2587.250000	39.4	105.0	H	356.0	36.5	2.9	14.6	54
2998.000000	42.5	205.0	H	3.0	37.2	5.3	11.5	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

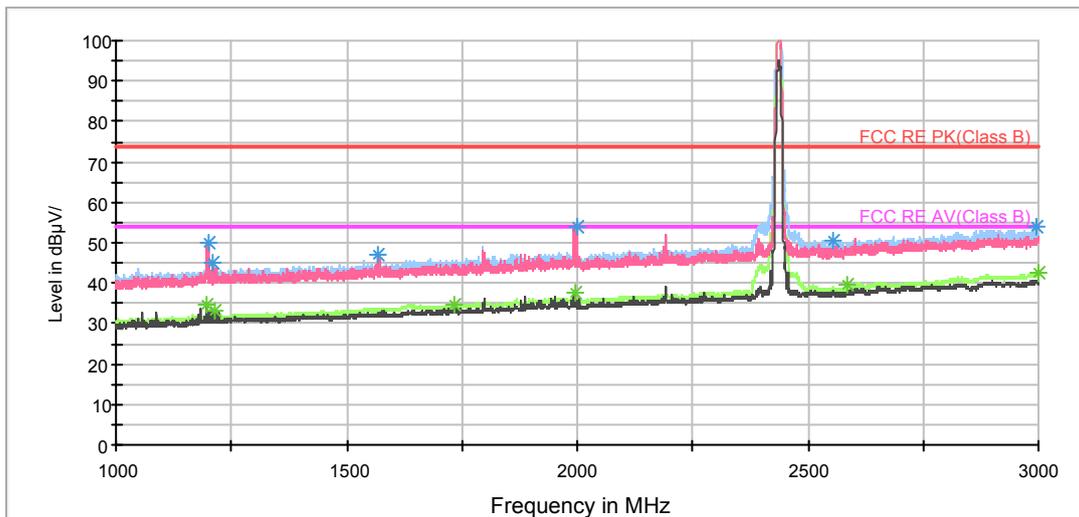


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

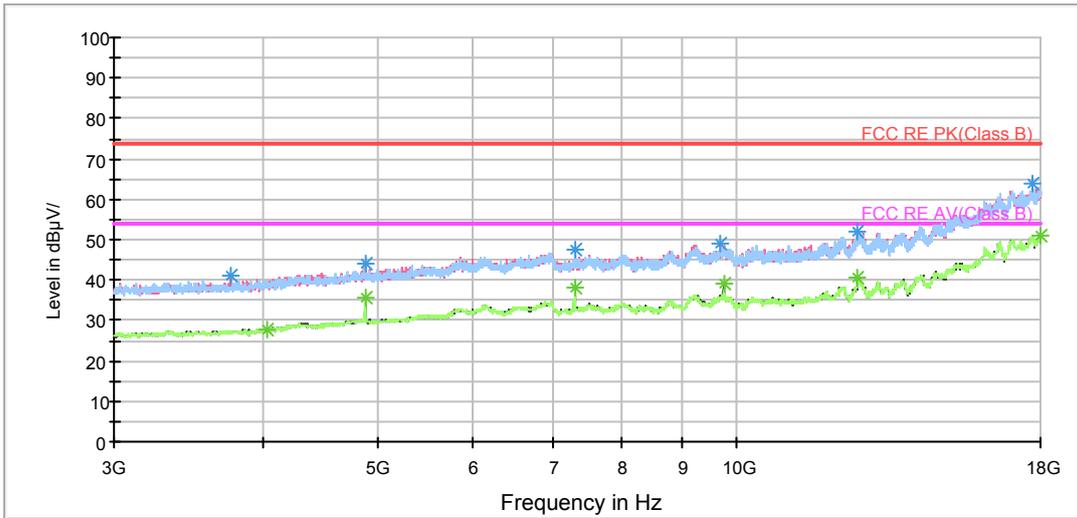

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

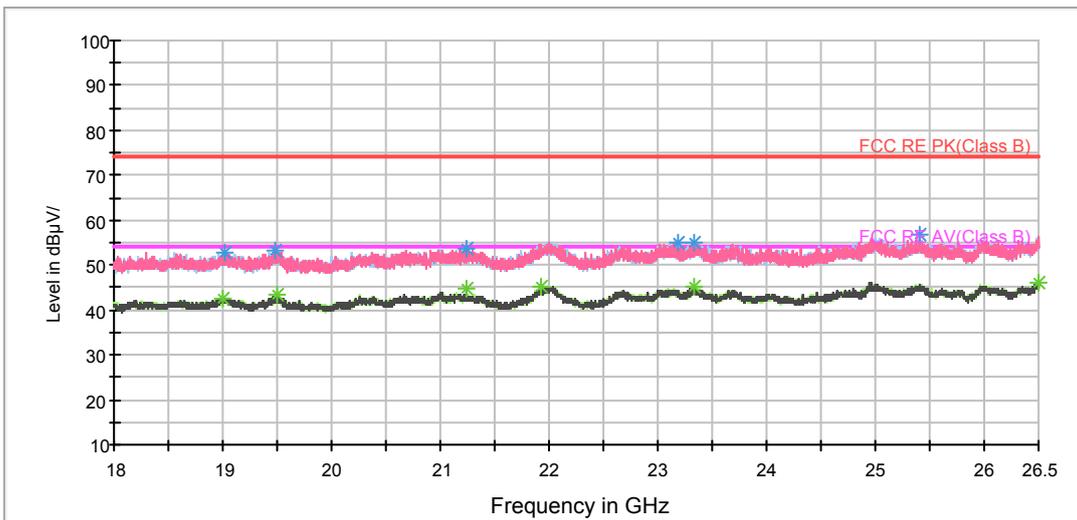

Radiates Emission from 18GHz to 26.5GHz



802.11b CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1194.500000	48.2	205.0	V	252.0	53.4	-5.2	25.8	74
1437.750000	44.6	205.0	H	14.0	48.5	-3.9	29.4	74
1564.750000	47.1	205.0	V	179.0	50.7	-3.6	26.9	74
1994.000000	54.9	105.0	V	229.0	55.1	-0.2	19.1	74
2583.000000	49.7	105.0	H	0.0	47.0	2.7	24.3	74
2939.250000	54.0	205.0	H	138.0	49.1	4.9	20.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.500000	32.8	105.0	V	323.0	38.0	-5.2	21.2	54
1212.500000	33.9	205.0	V	274.0	38.9	-5.0	20.1	54
1644.500000	34.7	205.0	H	138.0	36.6	-1.9	19.3	54
1955.750000	37.5	205.0	V	230.0	38.0	-0.5	16.5	54
2601.000000	37.8	205.0	V	288.0	34.4	3.4	16.2	54
2990.500000	42.5	205.0	H	21.0	37.3	5.2	11.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

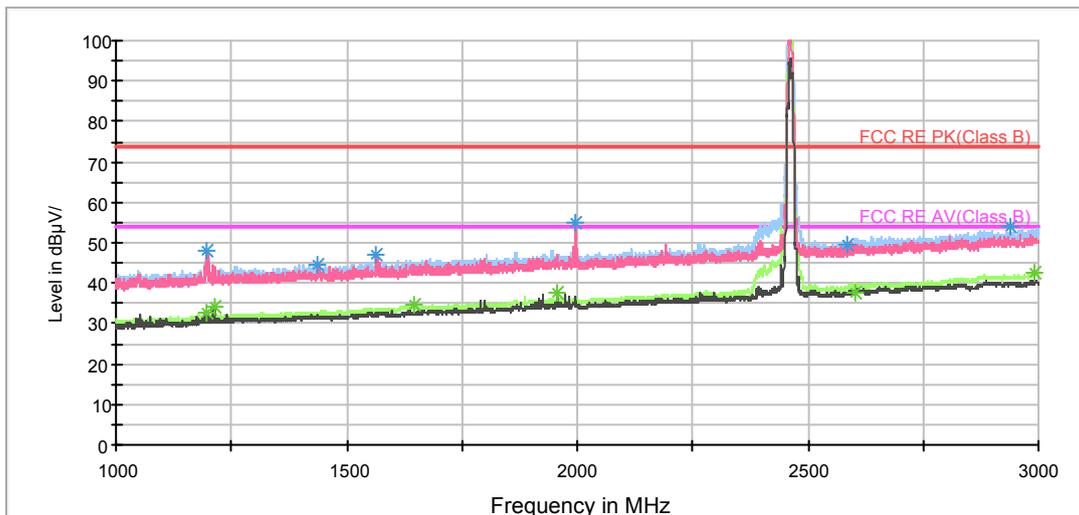

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

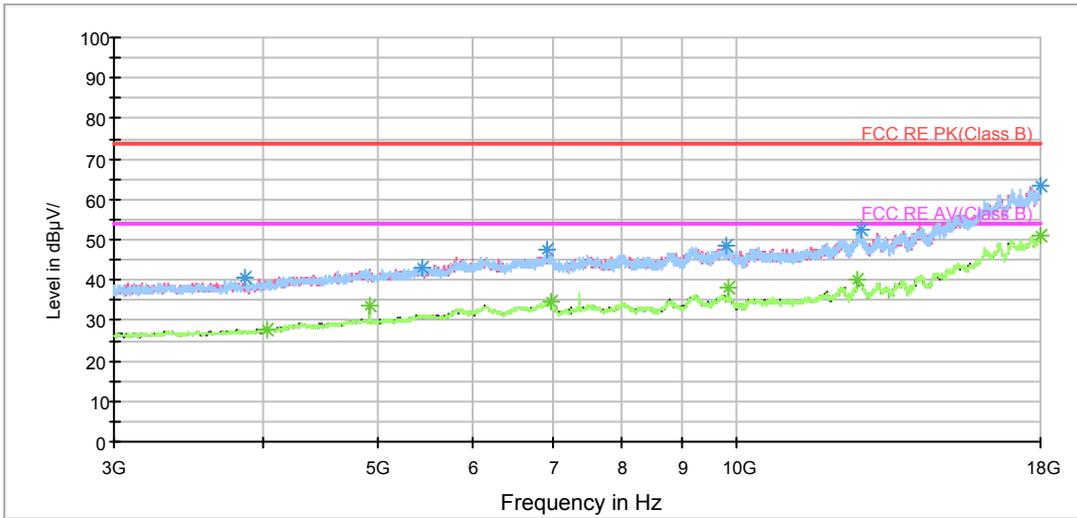

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV



Radiates Emission from 18GHz to 26.5GHz



802.11b CH12


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1181.750000	48.5	102.0	H	336.0	47.2	1.3	25.5	74
1408.500000	49.5	202.0	V	205.0	47.7	1.8	24.5	74
1694.750000	50.4	102.0	H	0.0	47.0	3.4	23.6	74
1960.750000	52.3	202.0	V	231.0	47.6	4.7	21.7	74
2342.750000	53.2	102.0	V	64.0	46.7	6.5	20.8	74
2897.000000	56.5	202.0	H	19.0	47.5	9.0	17.5	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.750000	37.6	202.0	V	193.0	36.5	1.1	16.4	54
1422.750000	39.1	102.0	H	226.0	37.1	2.0	14.9	54
1699.500000	39.5	202.0	V	342.0	36.1	3.4	14.5	54
1965.000000	40.6	102.0	H	303.0	36.1	4.5	13.4	54
2348.000000	42.3	202.0	H	8.0	35.8	6.5	11.7	54
2899.250000	45.0	202.0	V	242.0	36.0	9.0	9.0	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

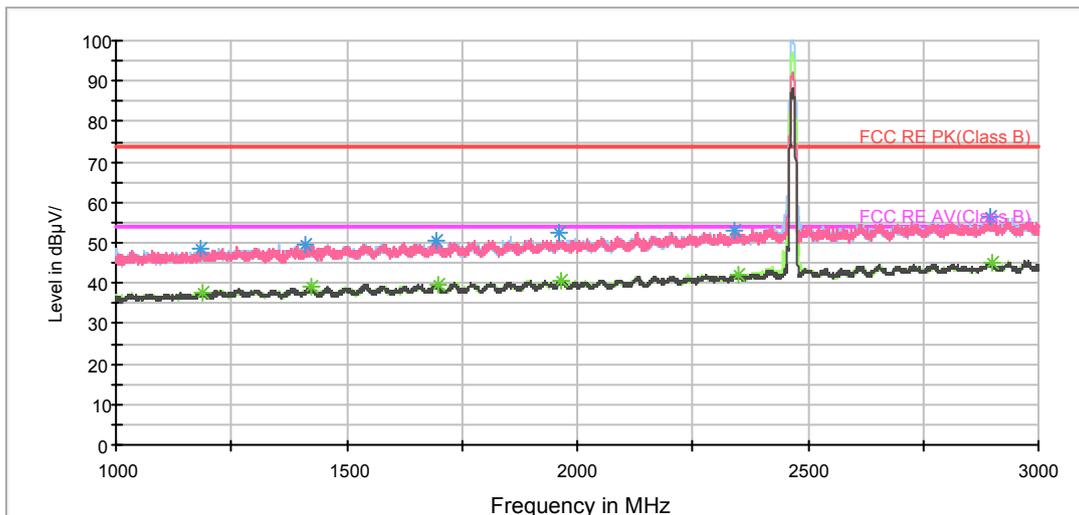


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

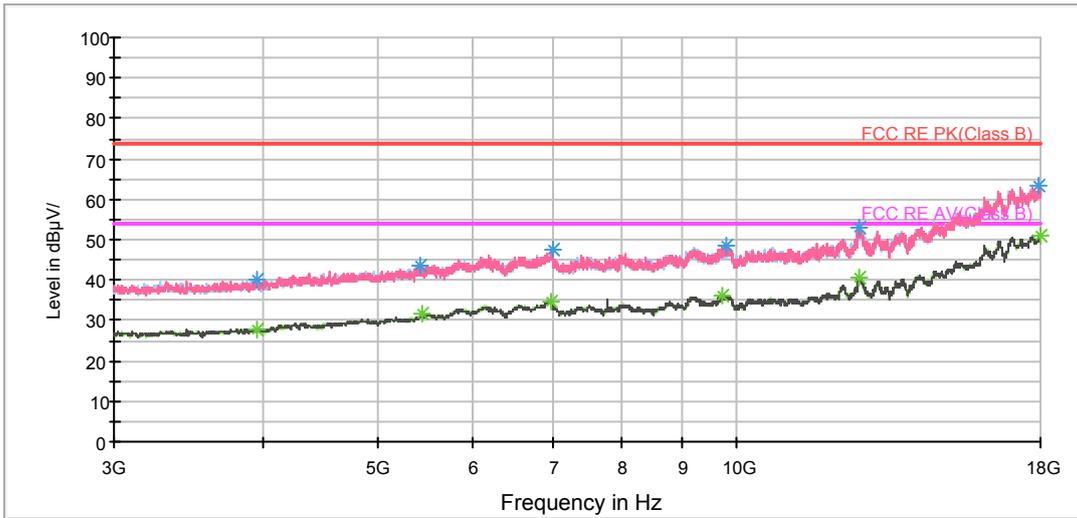

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

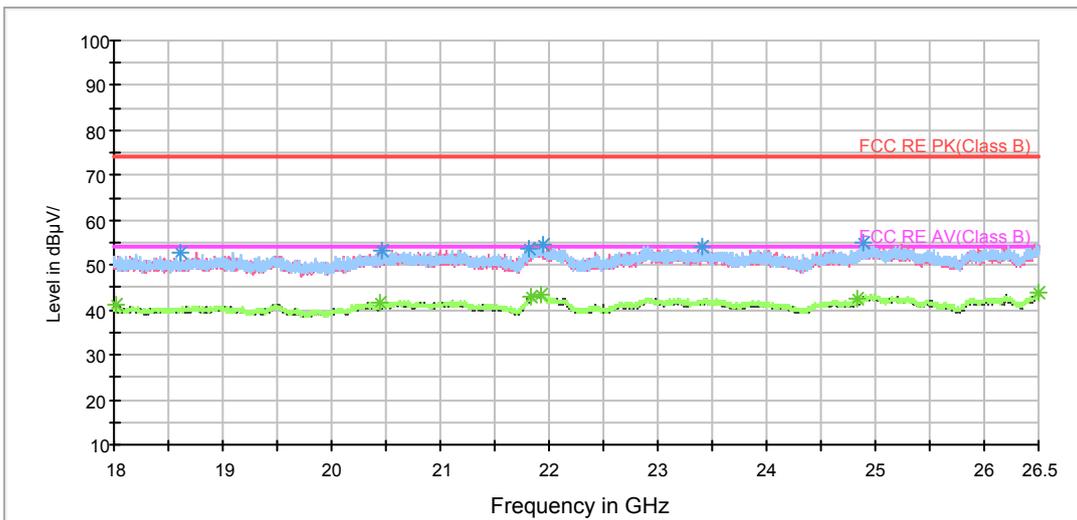

Radiates Emission from 18GHz to 26.5GHz



802.11b CH13


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1109.750000	48.9	202.0	H	233.0	48.2	0.7	25.1	74
1419.500000	49.7	102.0	H	239.0	47.7	2.0	24.3	74
1726.750000	50.3	102.0	V	158.0	47.0	3.3	23.7	74
2052.000000	51.2	202.0	V	237.0	46.6	4.6	22.8	74
2935.250000	56.3	102.0	V	147.0	47.6	8.7	17.7	74
1109.750000	48.9	202.0	H	233.0	48.2	0.7	25.1	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1105.750000	37.1	202.0	V	0.0	36.5	0.6	16.9	54
1420.500000	38.8	202.0	H	268.0	36.7	2.1	15.2	54
1725.000000	40.5	202.0	V	248.0	37.2	3.3	13.5	54
2051.500000	40.6	102.0	V	0.0	36.0	4.6	13.4	54
2931.250000	45.0	102.0	H	104.0	36.4	8.6	9.0	54
1105.750000	37.1	202.0	V	0.0	36.5	0.6	16.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier ga

RE 1G-3GHz PK+AV

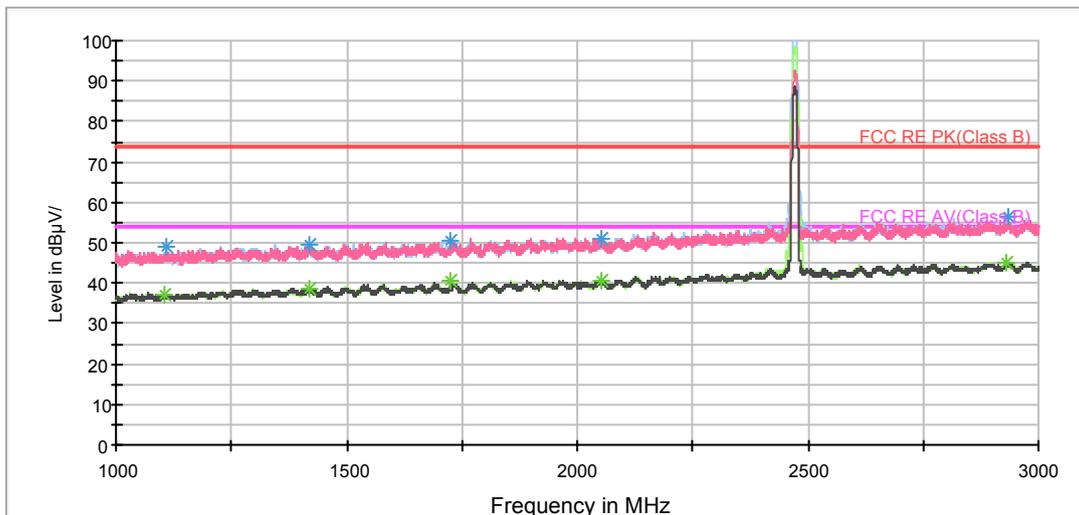


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

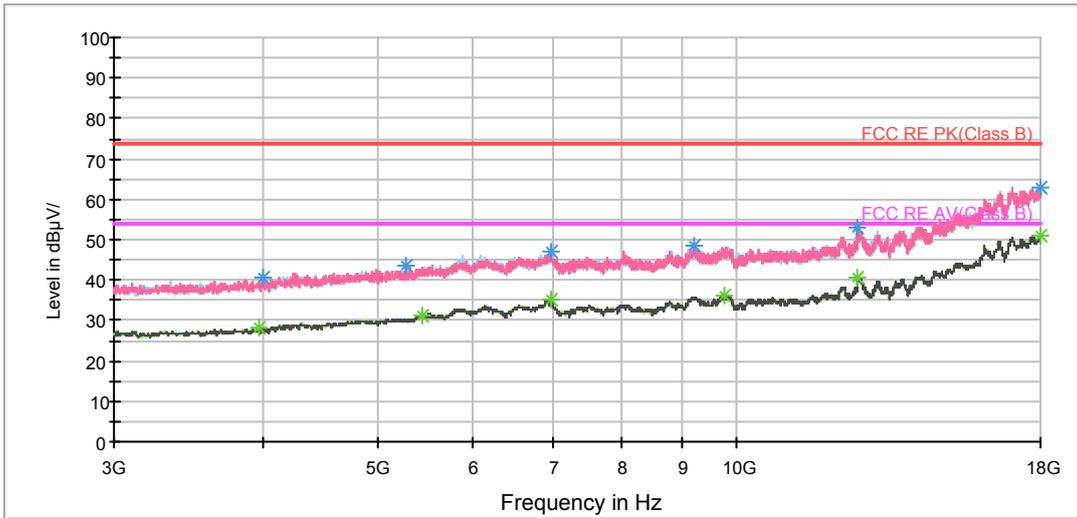

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

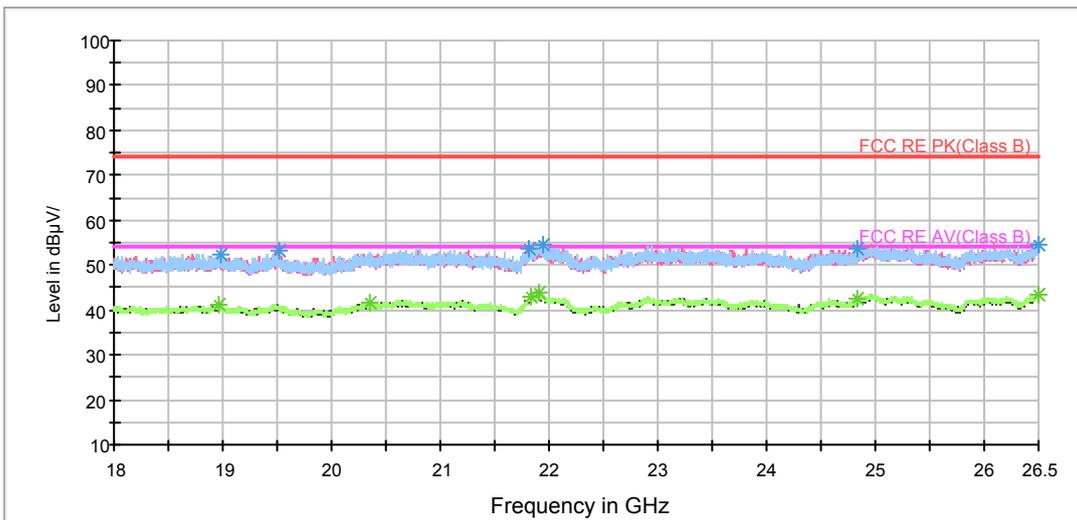

Radiates Emission from 18GHz to 26.5GHz



802.11g CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.250000	48.2	205.0	V	253.0	53.4	-5.2	25.8	74
1259.000000	45.2	205.0	H	0.0	50.0	-4.8	28.8	74
1689.000000	46.3	205.0	H	111.0	48.3	-2.0	27.7	74
1996.250000	52.5	205.0	V	231.0	52.8	-0.3	21.5	74
2464.250000	52.8	205.0	H	2.0	50.4	2.4	21.2	74
2949.750000	54.0	205.0	H	0.0	49.0	5.0	20.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.250000	33.3	205.0	V	231.0	38.5	-5.2	20.7	54
1234.750000	33.4	205.0	H	232.0	38.3	-4.9	20.6	54
1643.000000	34.9	205.0	H	38.0	36.7	-1.8	19.1	54
1998.250000	36.4	205.0	H	103.0	36.8	-0.4	17.6	54
2464.250000	43.7	205.0	H	2.0	41.3	2.4	10.3	54
2997.750000	42.5	205.0	H	0.0	37.2	5.3	11.5	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

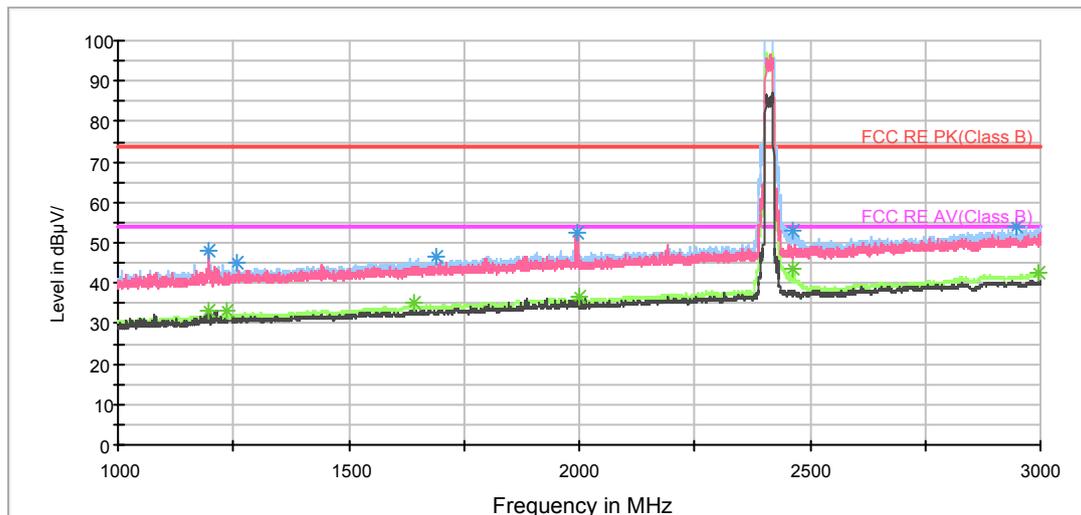


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

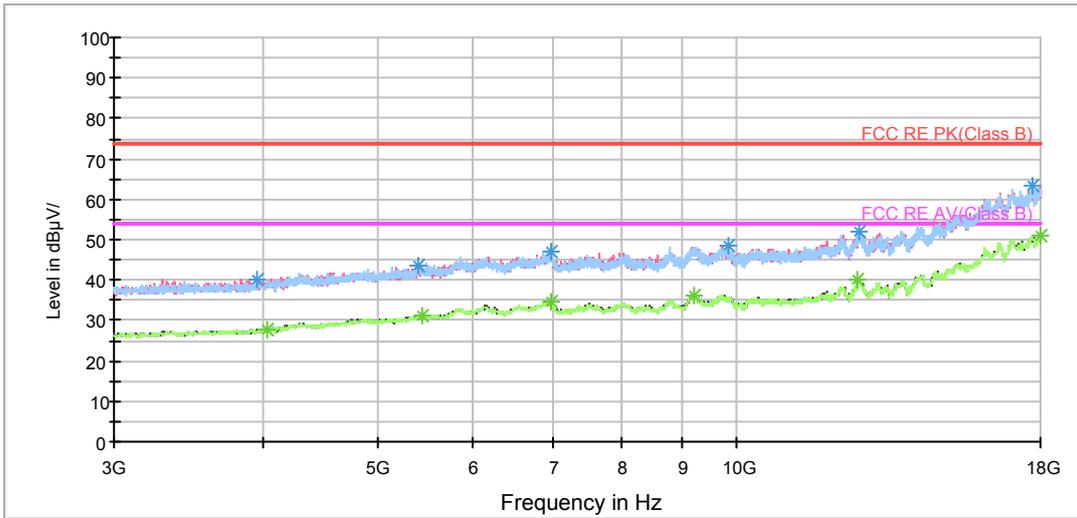

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

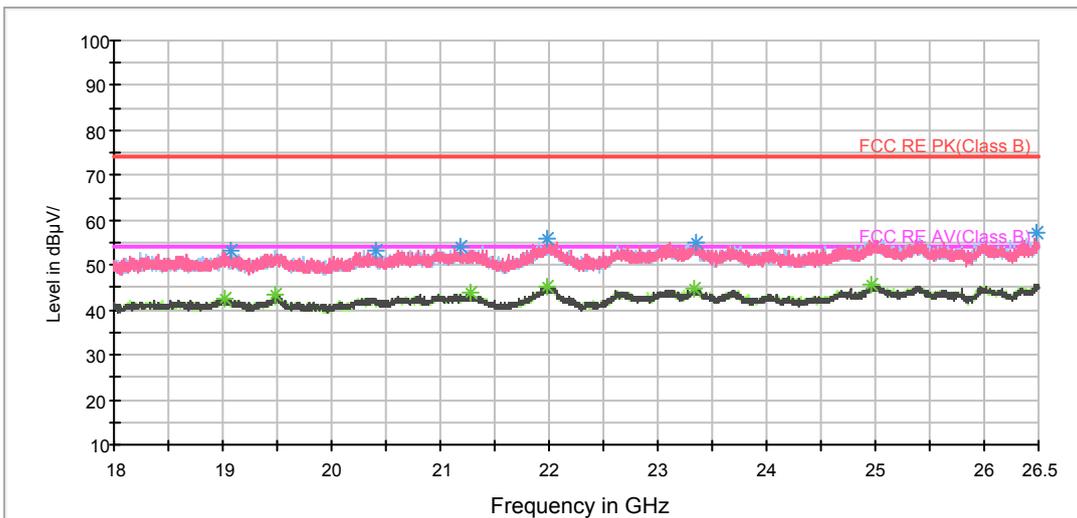

Radiates Emission from 18GHz to 26.5GHz



802.11g CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	47.4	205.0	V	262.0	52.6	-5.2	26.6	74
1424.000000	44.3	105.0	H	141.0	48.2	-3.9	29.7	74
1727.000000	46.2	105.0	H	337.0	48.3	-2.1	27.8	74
1991.500000	52.2	105.0	V	211.0	52.5	-0.3	21.8	74
2488.000000	51.3	205.0	H	166.0	48.1	3.2	22.7	74
2999.000000	53.3	205.0	H	0.0	48.0	5.3	20.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1181.250000	32.6	205.0	H	228.0	37.6	-5.0	21.4	54
1408.000000	33.1	105.0	H	352.0	37.2	-4.1	20.9	54
1632.000000	34.7	205.0	H	203.0	36.4	-1.7	19.3	54
1992.500000	42.3	205.0	V	247.0	42.6	-0.3	11.7	54
2472.000000	42.3	205.0	H	166.0	39.7	2.6	11.7	54
2986.750000	42.6	105.0	H	257.0	37.4	5.2	11.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

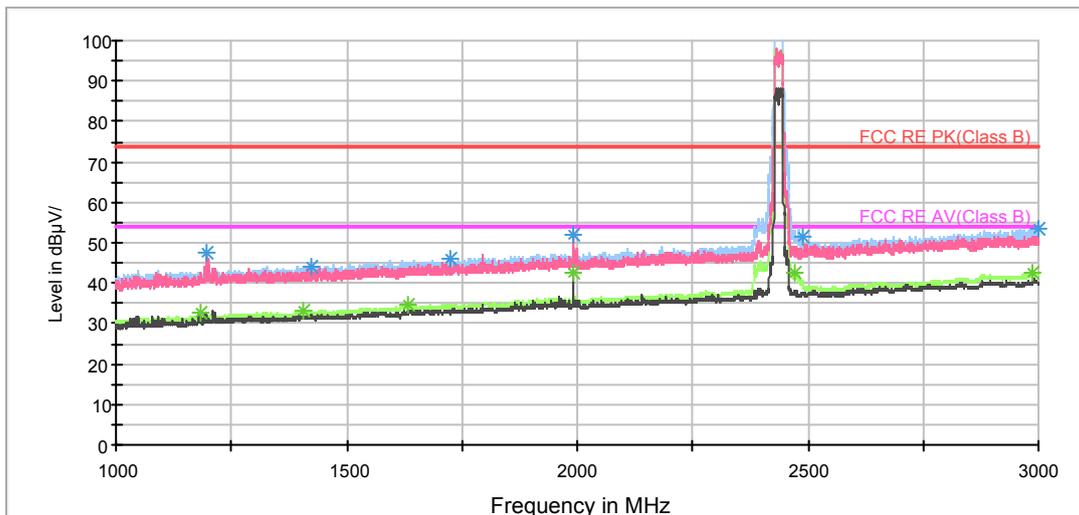

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

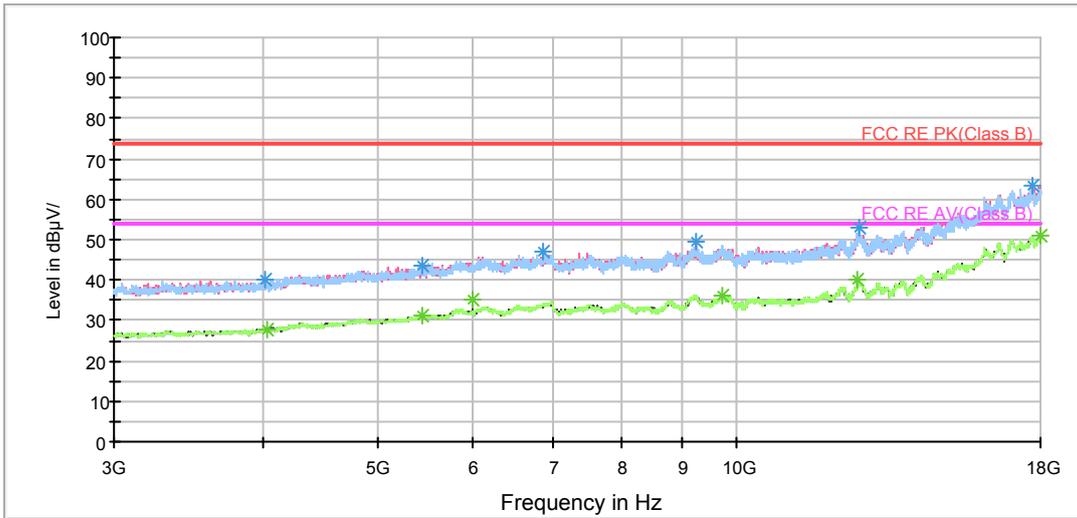

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

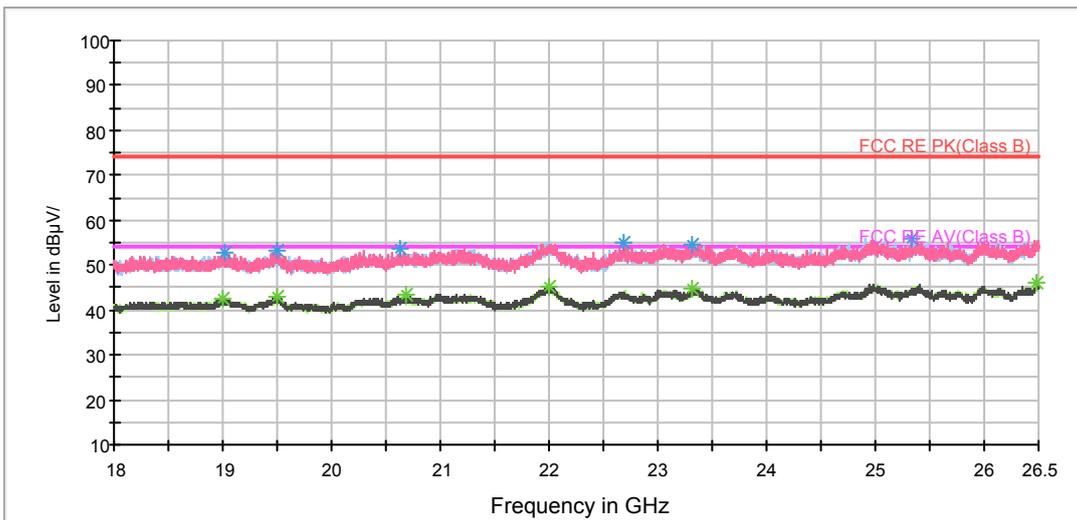

Radiates Emission from 18GHz to 26.5GHz



802.11g CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	50.6	105.0	V	243.0	55.8	-5.2	23.4	74
1303.000000	44.6	205.0	H	180.0	49.4	-4.8	29.4	74
1690.500000	45.6	105.0	H	0.0	47.6	-2.0	28.4	74
1992.250000	52.5	105.0	V	220.0	52.8	-0.3	21.5	74
2408.500000	55.2	205.0	H	1.0	52.7	2.5	18.8	74
2995.250000	53.1	205.0	H	249.0	47.8	5.3	20.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.750000	32.9	105.0	H	270.0	38.1	-5.2	21.1	54
1213.250000	33.7	205.0	V	276.0	38.7	-5.0	20.3	54
1727.250000	34.8	205.0	H	48.0	36.9	-2.1	19.2	54
2025.500000	36.8	205.0	V	226.0	37.3	-0.5	17.2	54
2393.500000	42.8	205.0	H	173.0	41.1	1.7	11.2	54
2997.250000	42.7	105.0	H	285.0	37.4	5.3	11.3	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

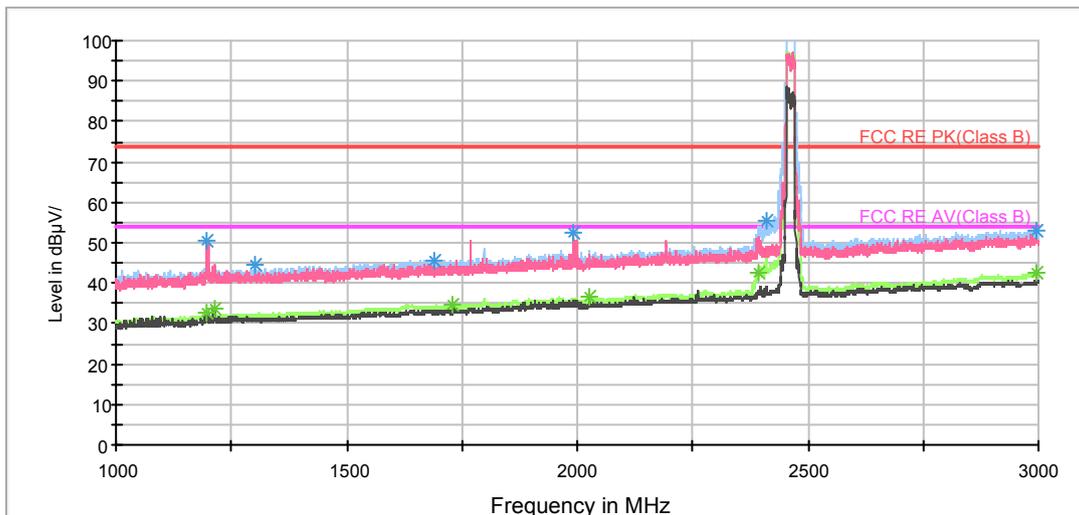


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

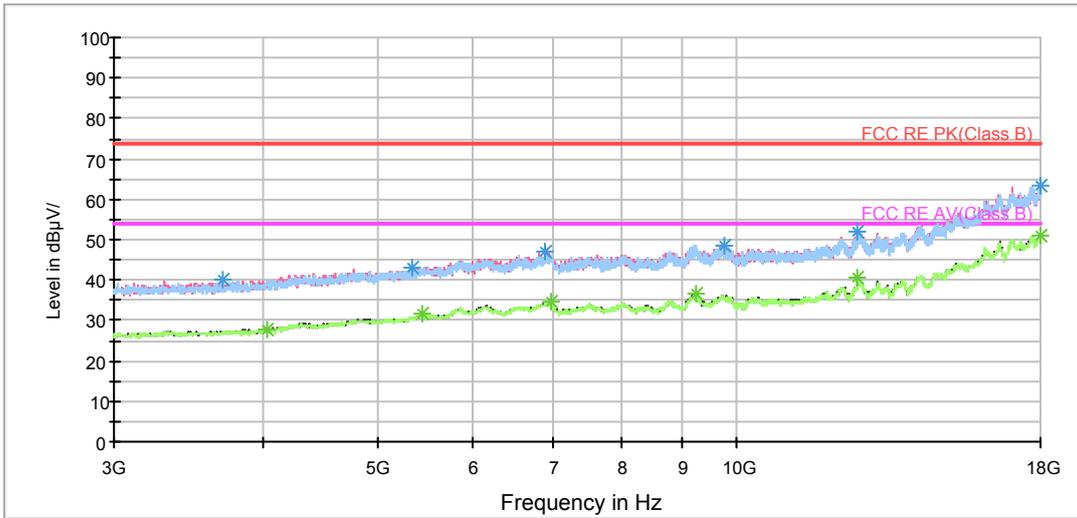

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

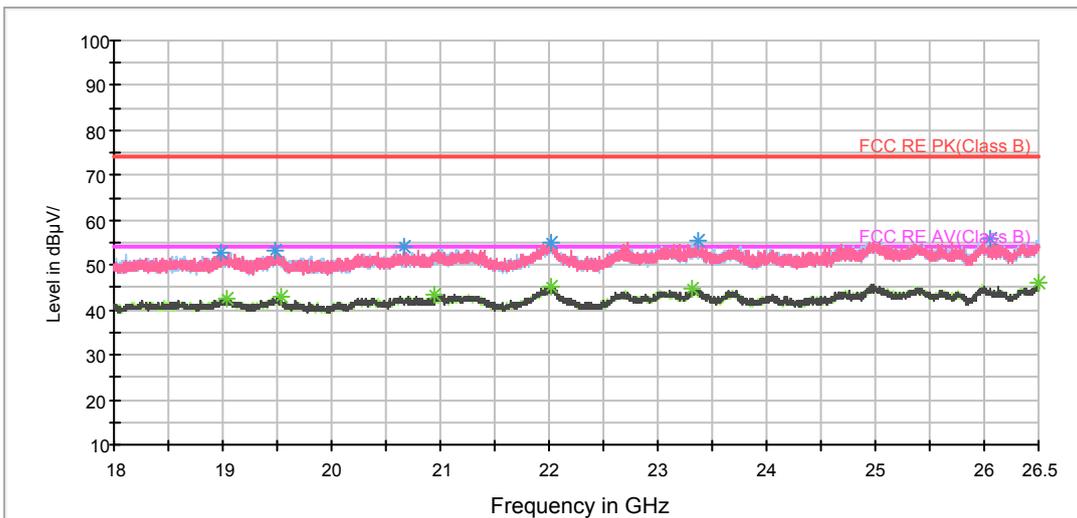

Radiates Emission from 18GHz to 26.5GHz



802.11g CH12


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.750000	48.4	102.0	V	44.0	47.2	1.2	25.6	74
1418.250000	49.9	102.0	V	132.0	47.9	2.0	24.1	74
1620.000000	50.7	102.0	H	164.0	47.0	3.7	23.3	74
2049.000000	51.7	102.0	H	299.0	47.1	4.6	22.3	74
2978.500000	56.6	202.0	H	250.0	47.6	9.0	17.4	74
2276.750000	53.4	202.0	V	0.0	47.0	6.4	20.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1191.000000	38.2	202.0	H	169.0	37.1	1.1	15.8	54
1425.250000	38.9	202.0	V	327.0	36.9	2.0	15.1	54
1621.500000	39.1	202.0	H	22.0	35.3	3.8	14.9	54
2050.500000	41.0	202.0	H	216.0	36.4	4.6	13.0	54
2276.500000	42.3	102.0	H	255.0	35.9	6.4	11.7	54
2971.500000	45.2	202.0	V	301.0	36.2	9.0	8.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

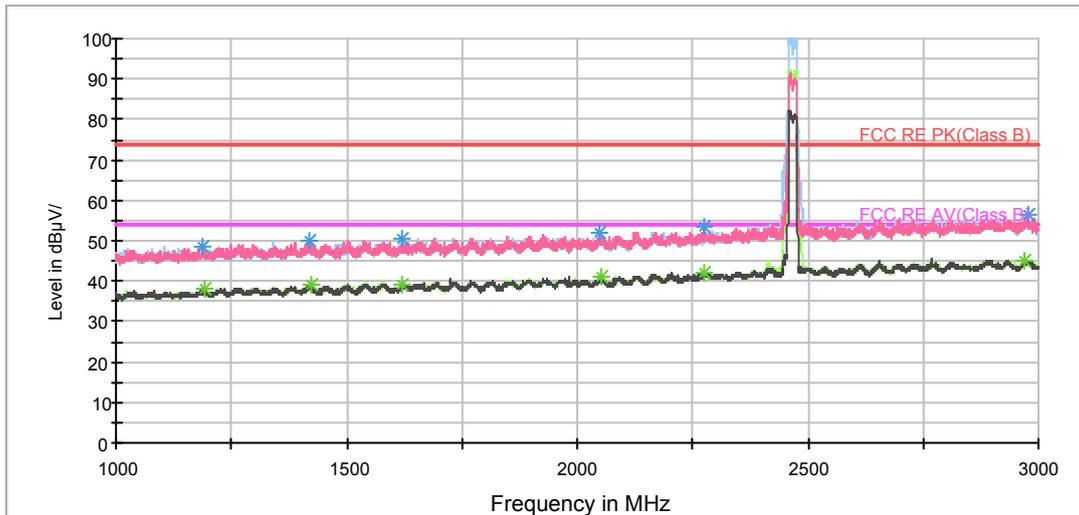

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

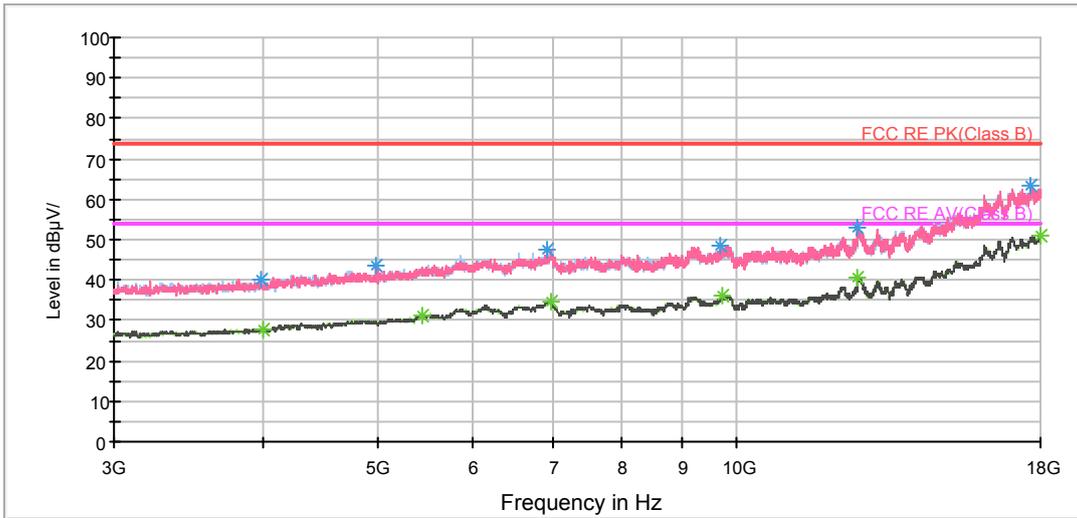

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

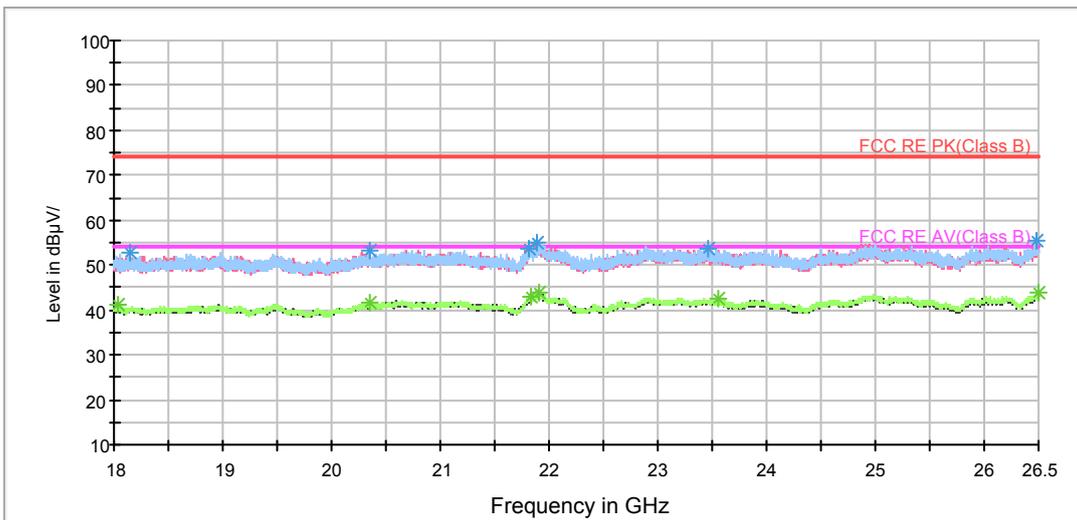

Radiates Emission from 18GHz to 26.5GHz



802.11g CH13


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1176.250000	48.2	202.0	V	328.0	46.9	1.3	25.8	74
1422.000000	49.3	202.0	H	271.0	47.3	2.0	24.7	74
1730.000000	50.7	102.0	V	134.0	47.4	3.3	23.3	74
2023.500000	51.4	202.0	H	0.0	47.1	4.3	22.6	74
2623.250000	54.1	102.0	H	193.0	46.7	7.4	19.9	74
2932.000000	56.0	102.0	V	190.0	47.4	8.6	18.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1191.500000	37.7	202.0	V	0.0	36.6	1.1	16.3	54
1420.750000	39.1	202.0	V	339.0	37.0	2.1	14.9	54
1733.750000	40.1	102.0	V	56.0	36.4	3.7	13.9	54
2052.000000	40.8	102.0	V	67.0	36.2	4.6	13.2	54
2620.750000	44.5	102.0	H	54.0	37.1	7.4	9.5	54
2931.000000	45.0	102.0	V	318.0	36.4	8.6	9.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

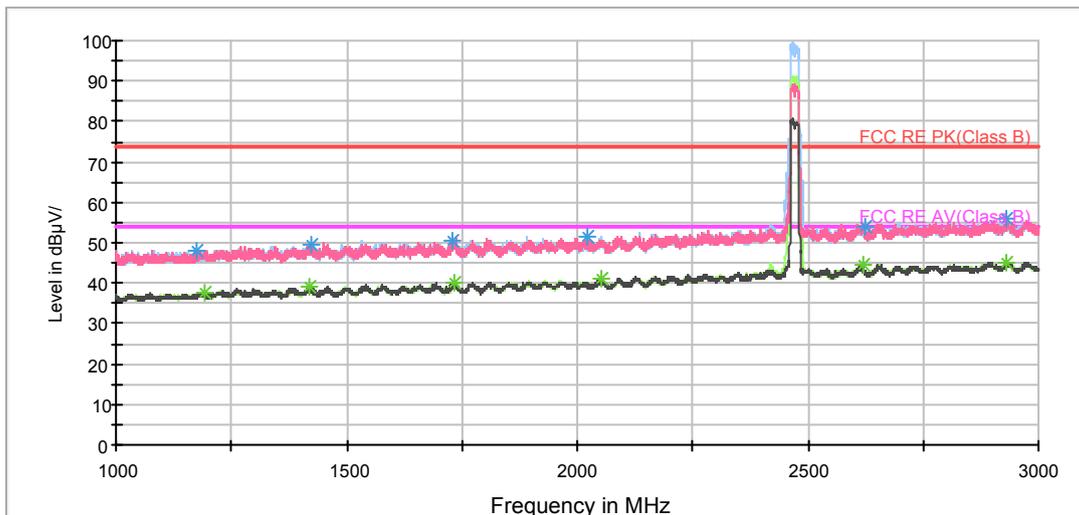

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

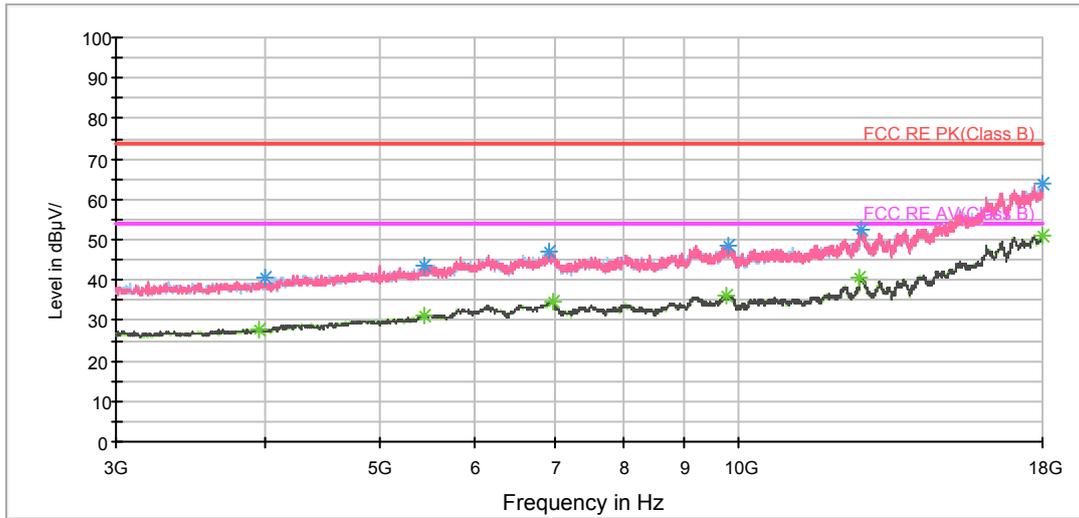

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV



Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.750000	48.1	205.0	V	276.0	53.3	-5.2	25.9	74
1211.750000	44.4	205.0	V	276.0	49.4	-5.0	29.6	74
1730.750000	44.9	205.0	H	85.0	46.8	-1.9	29.1	74
1997.000000	52.4	105.0	V	255.0	52.7	-0.3	21.6	74
2464.750000	52.0	205.0	H	4.0	49.5	2.5	22.0	74
2979.500000	52.3	205.0	V	0.0	47.1	5.2	21.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	33.3	205.0	V	298.0	38.5	-5.2	20.7	54
1211.500000	32.7	205.0	V	258.0	37.7	-5.0	21.3	54
1730.250000	33.7	105.0	V	175.0	35.7	-2.0	20.3	54
1999.750000	39.4	205.0	V	237.0	39.8	-0.4	14.6	54
2464.500000	42.2	205.0	H	100.0	39.7	2.5	11.8	54
2991.500000	40.7	105.0	H	0.0	35.5	5.2	13.3	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

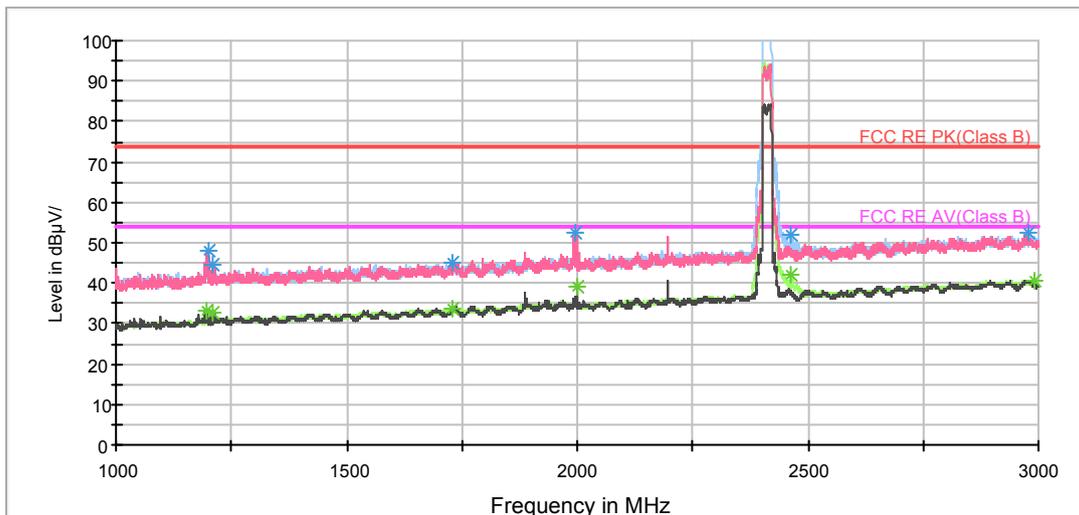


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

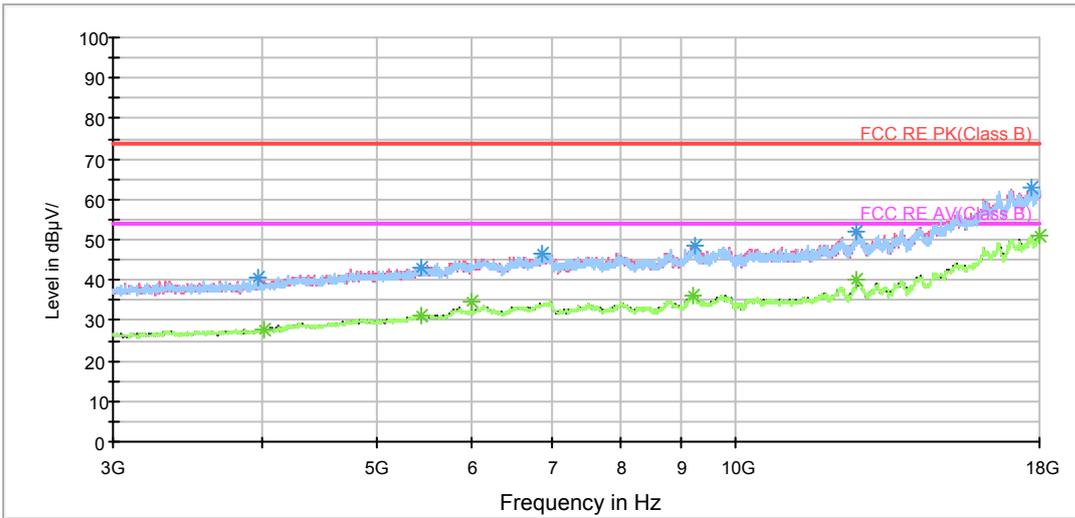

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

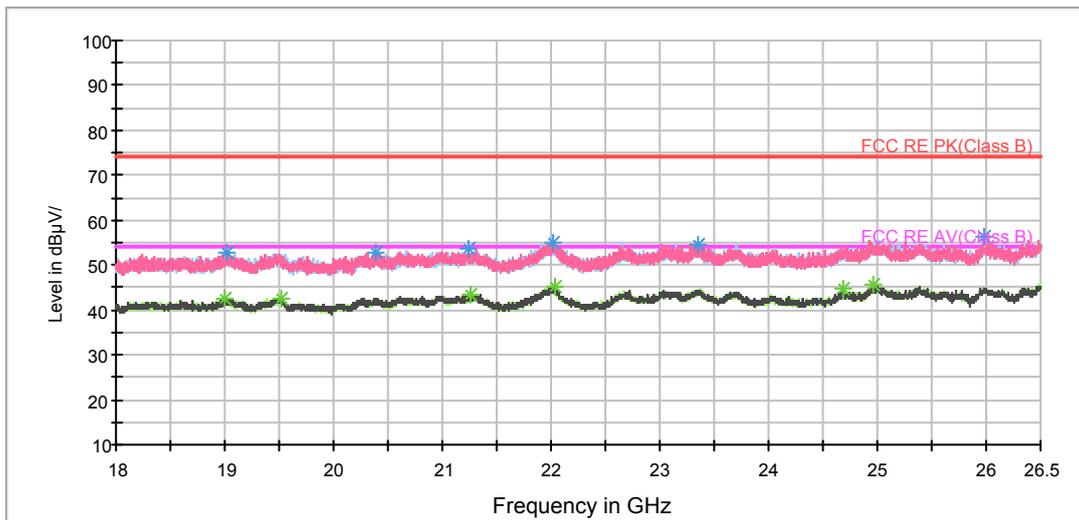

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.750000	49.7	205.0	V	275.0	54.9	-5.2	24.3	74
1417.500000	43.8	205.0	H	6.0	47.7	-3.9	30.2	74
1671.750000	45.6	205.0	H	0.0	47.7	-2.1	28.4	74
1999.000000	52.8	205.0	V	223.0	53.2	-0.4	21.2	74
2476.000000	52.5	205.0	H	6.0	49.9	2.6	21.5	74
2997.000000	52.8	205.0	H	89.0	47.5	5.3	21.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1193.000000	35.9	105.0	H	261.0	41.1	-5.2	18.1	54
1391.250000	33.2	205.0	H	148.0	37.2	-4.0	20.8	54
1637.000000	34.7	205.0	H	6.0	36.4	-1.7	19.3	54
1952.500000	37.7	205.0	V	245.0	38.3	-0.6	16.3	54
2476.000000	41.6	205.0	H	6.0	39.0	2.6	12.4	54
2992.000000	42.5	205.0	H	50.0	37.3	5.2	11.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

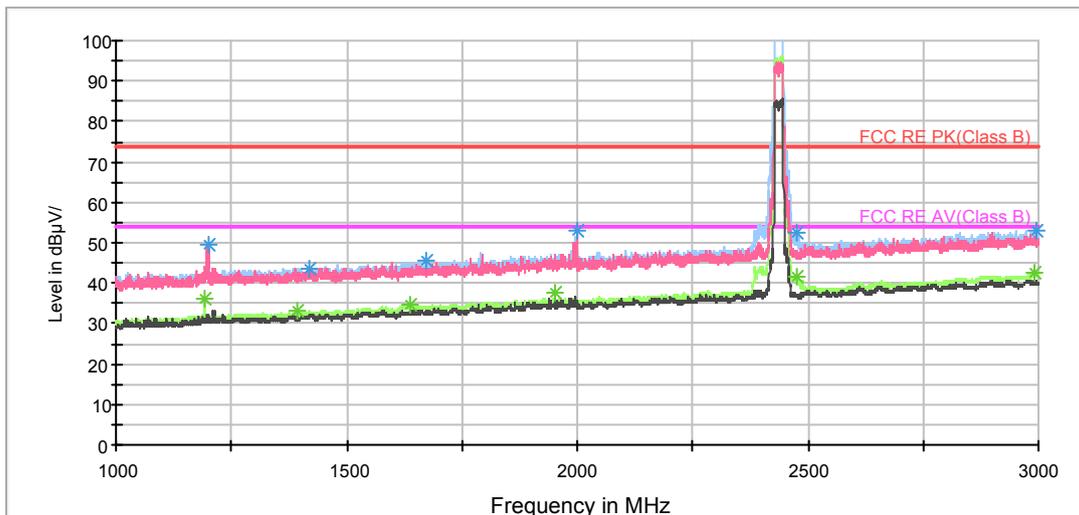

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

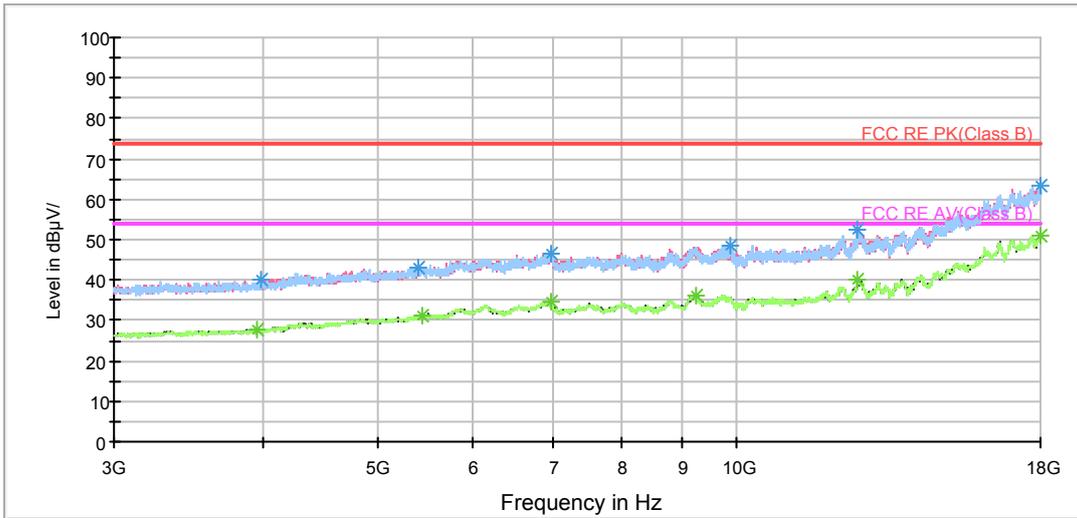

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

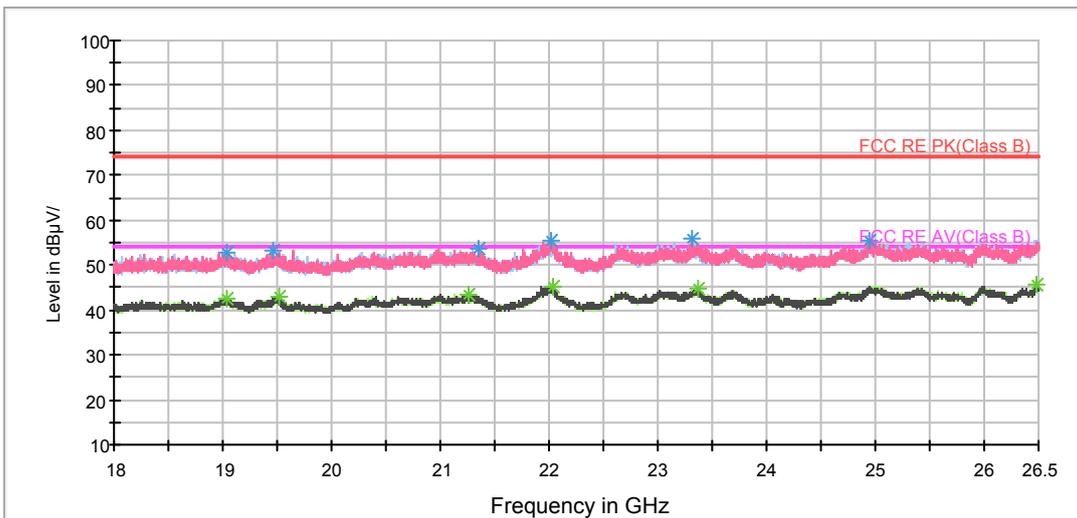

Radiates Emission from 18GHz to 26.5GHz

802.11n (HT20) CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.500000	49.2	205.0	V	245.0	54.4	-5.2	24.8	74
1201.250000	44.7	205.0	V	252.0	49.9	-5.2	29.3	74
1657.500000	45.1	205.0	V	0.0	47.3	-2.2	28.9	74
1992.000000	54.7	205.0	V	237.0	55.0	-0.3	19.3	74
2393.000000	53.4	105.0	H	0.0	51.7	1.7	20.6	74
2986.500000	52.4	205.0	H	0.0	47.2	5.2	21.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1179.250000	33.1	205.0	V	268.0	38.1	-5.0	20.9	54
1201.250000	34.0	205.0	V	252.0	39.2	-5.2	20.0	54
1730.500000	33.6	205.0	V	26.0	35.5	-1.9	20.4	54
1988.250000	38.1	205.0	V	222.0	38.6	-0.5	15.9	54
2393.000000	42.4	105.0	H	0.0	40.7	1.7	11.6	54
2999.250000	41.0	105.0	H	342.0	35.7	5.3	13.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

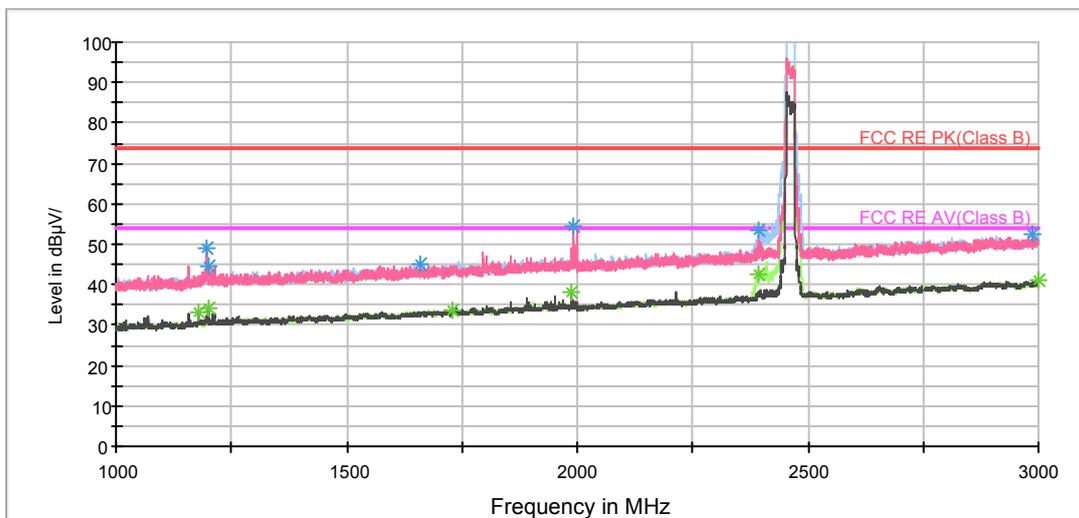

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz