



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE/CDMA/WCDMA/GSM(GPRS)
Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : N9136
FCC ID : SRQ-N9136
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 01, 2016 and testing was completed on Dec. 29, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 11

3 TEST RESULT 12

 3.1 6dB Bandwidth Measurement 12

 3.2 Output Power Measurement..... 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 27

 3.6 AC Conducted Emission Measurement..... 31

 3.7 Antenna Requirements 37

4 LIST OF MEASURING EQUIPMENT 38

5 UNCERTAINTY OF EVALUATION 39

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.42 dB at 2389.950 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 4.32 dB at 2.692 MHz
0	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE/CDMA/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	N9136
FCC ID	SRQ-N9136
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE/WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.1 LE
IMEI Code	Conducted: 99000881000834 Radiation: 990008810007968 Conduction: 990008810008057
HW Version	N9136HW1.0
SW Version	N9136V1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 18.08 dBm (0.0643 W) 802.11g : 22.36 dBm (0.1722 W) 802.11n HT20 : 21.19 dBm (0.1315 W)
Antenna Type / Gain	PIFA Antenna with gain 0.75 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	CO01-KS	03CH02-KS
			418269

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 1) + Earphone
	Mode 2 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 2) + Earphone

2.3 Connection Diagram of Test System

<WLAN Tx Mode>



<AC Conducted Emission Mode>

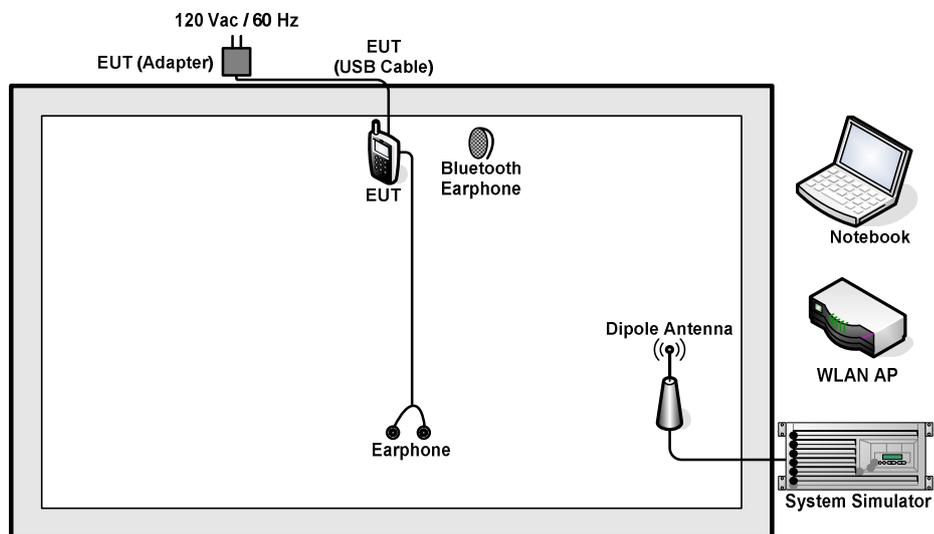



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the BT earphone and WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

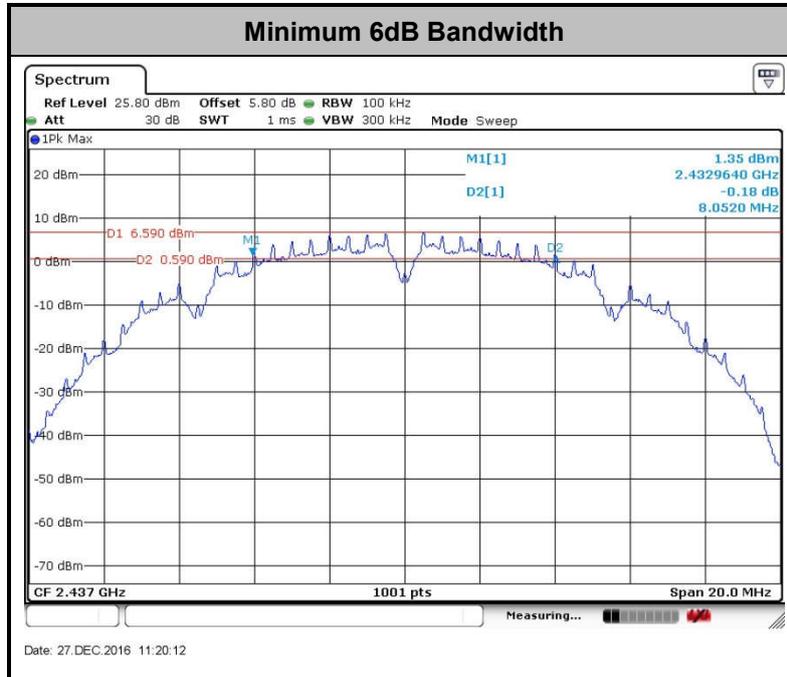

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

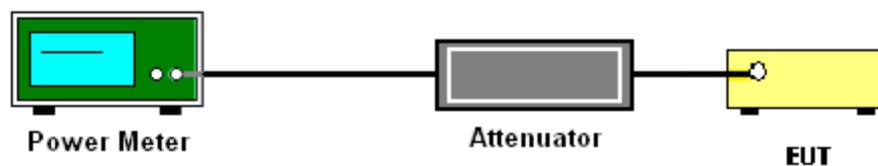

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

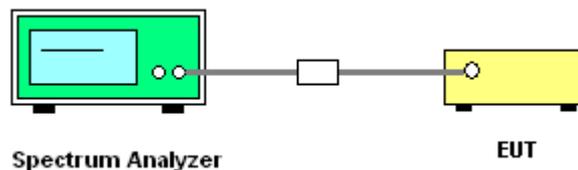



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

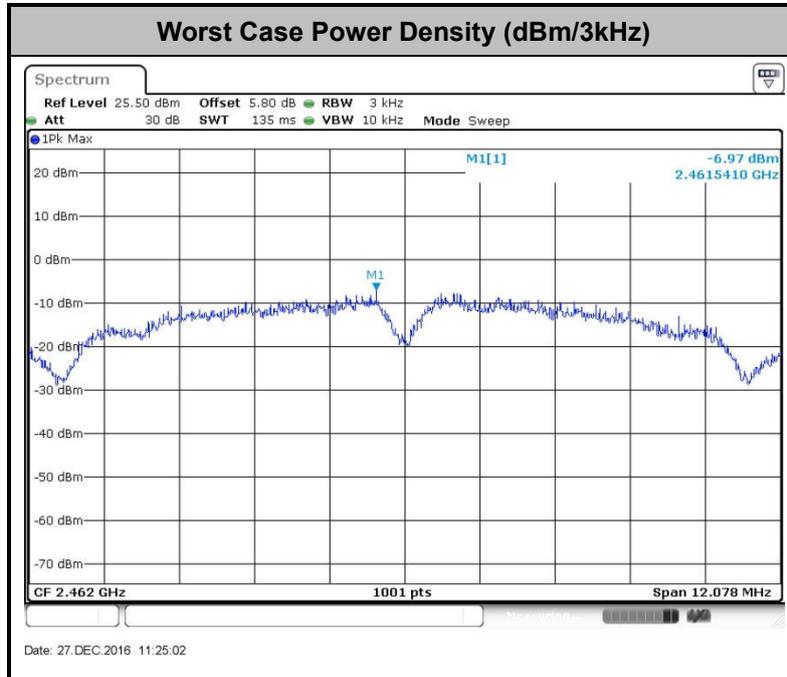

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

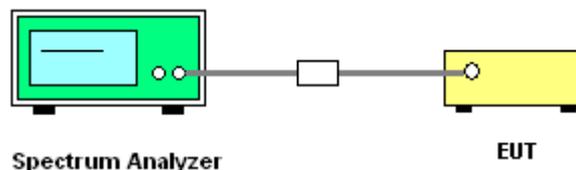



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

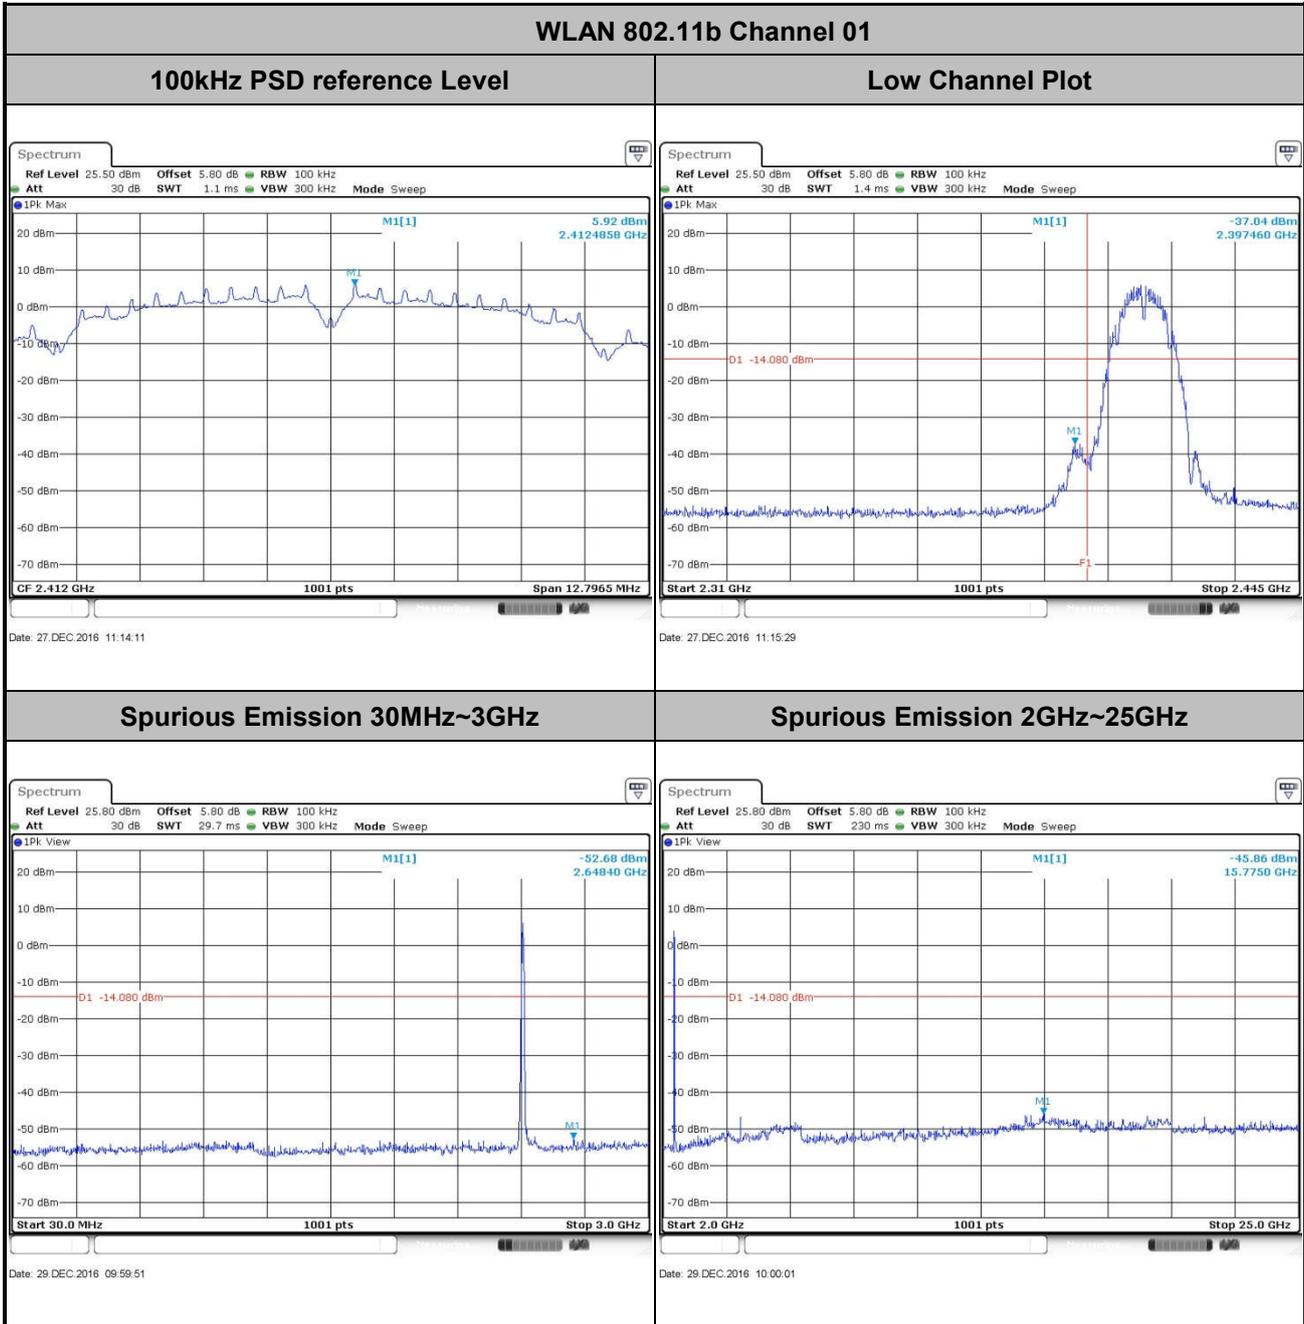





Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11b Channel 06


100kHz PSD reference Level

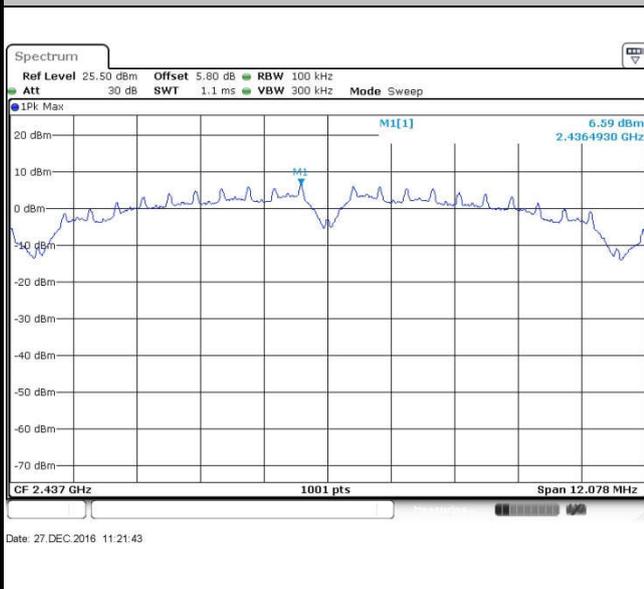

Spurious Emission 30MHz~3GHz

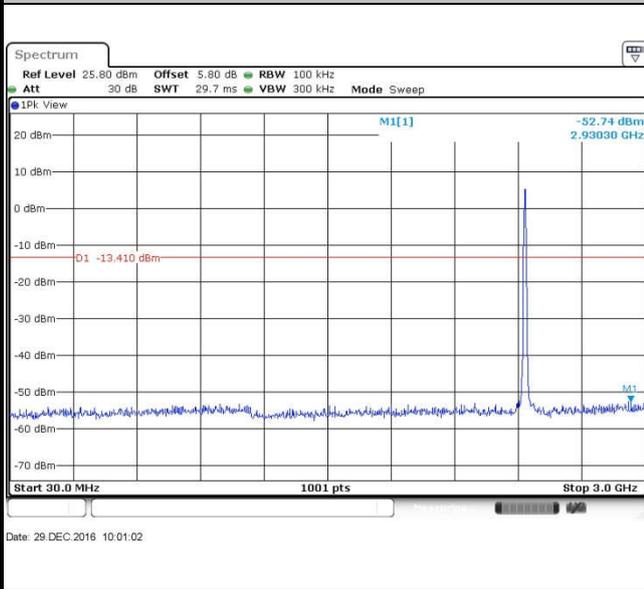

Spurious Emission 2GHz~25GHz

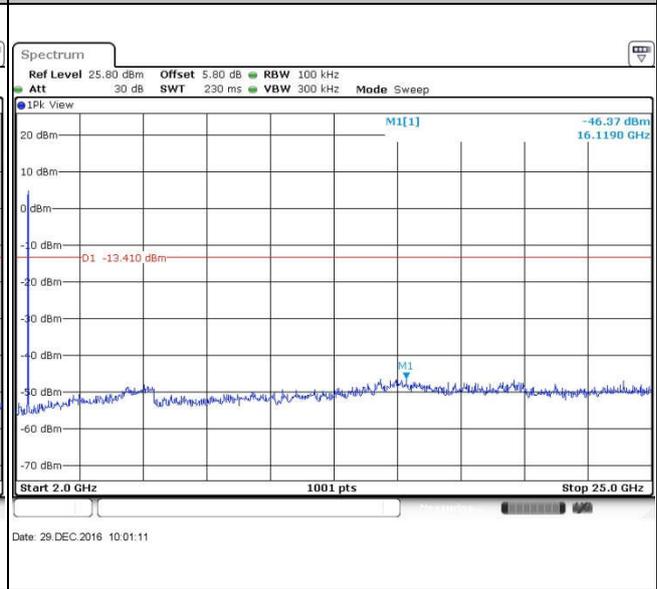




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11b Channel 11

100kHz PSD reference Level

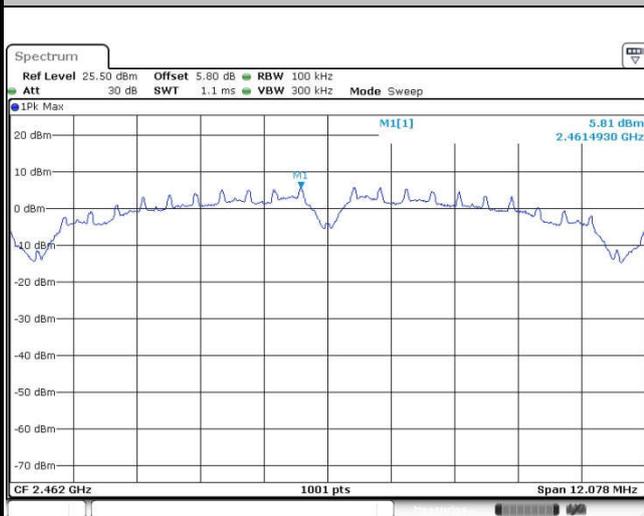


Date: 27.DEC.2016 11:25:20

High Channel Plot

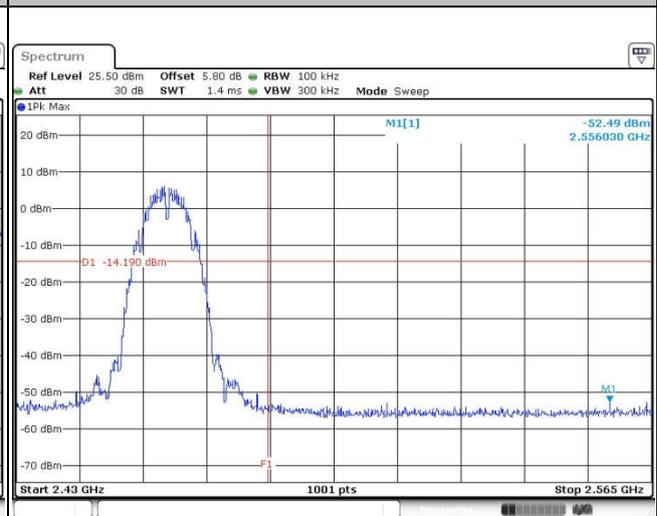


Date: 27.DEC.2016 11:25:29

Spurious Emission 30MHz~3GHz

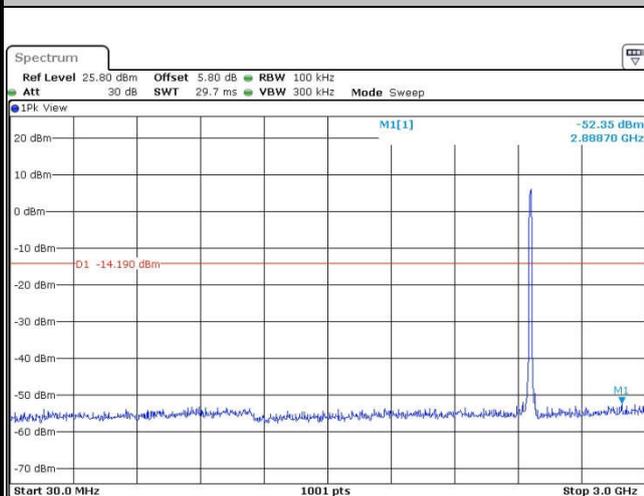

Date: 29.DEC.2016 10:02:29

Spurious Emission 2GHz~25GHz

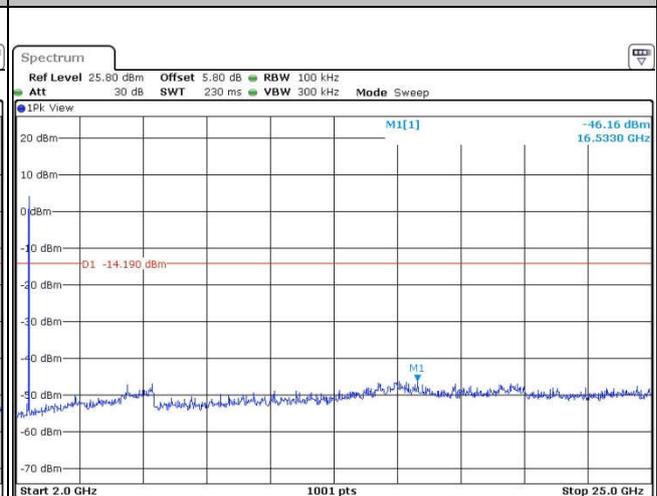


Date: 29.DEC.2016 10:02:38



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11g Channel 01

100kHz PSD reference Level

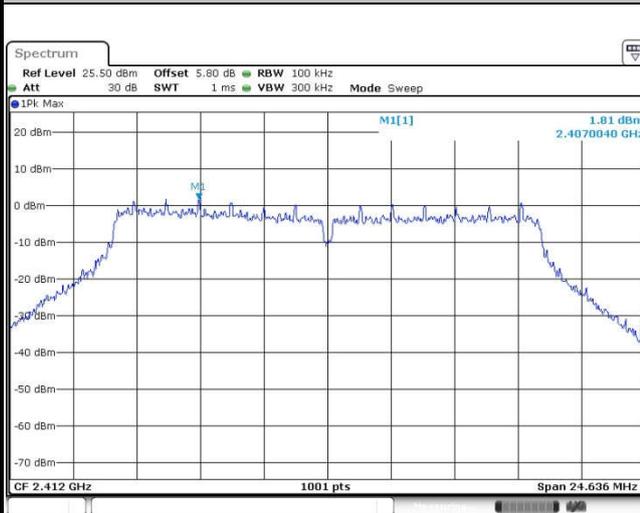


Date: 27 DEC.2016 11:31:27

Low Channel Plot

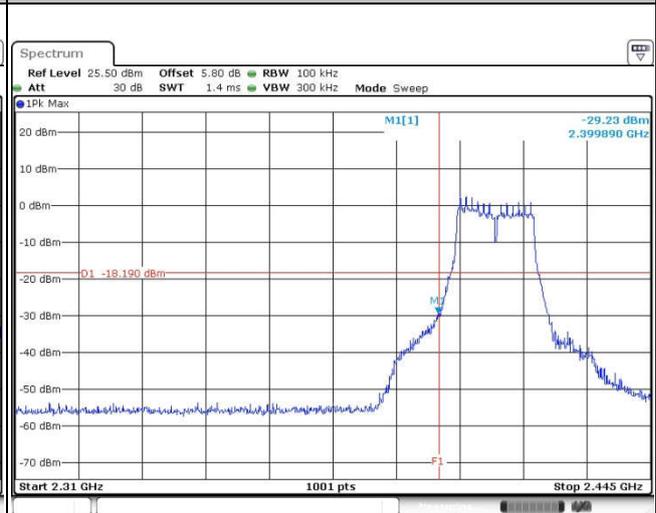


Date: 27 DEC.2016 11:31:39

Spurious Emission 30MHz~3GHz

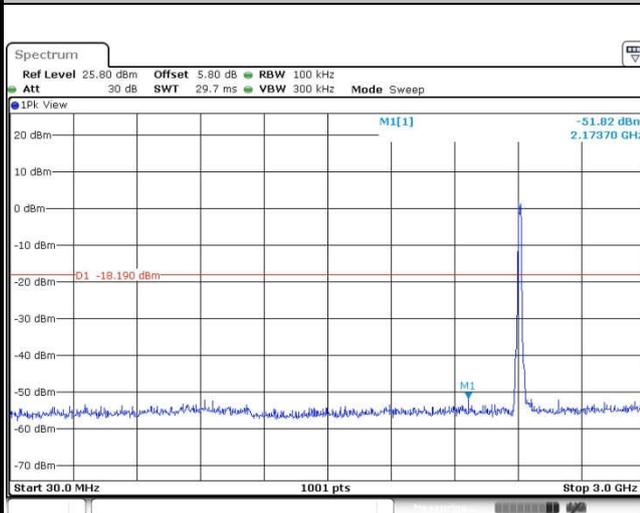

Date: 29 DEC.2016 10:04:55

Spurious Emission 2GHz~25GHz

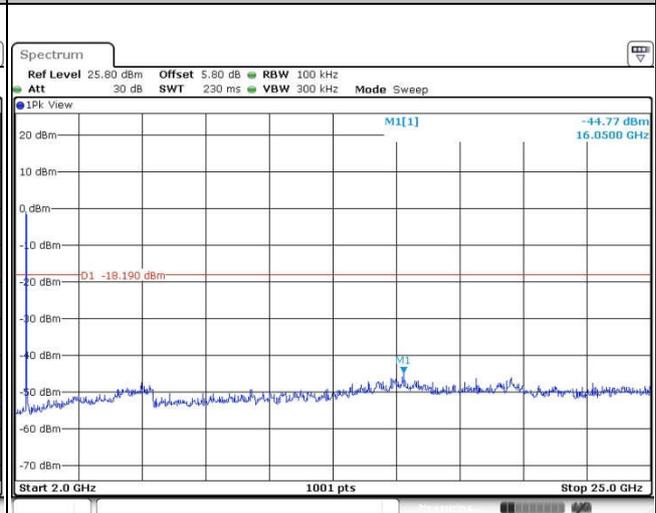


Date: 29 DEC.2016 10:05:03




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11g Channel 06


100kHz PSD reference Level

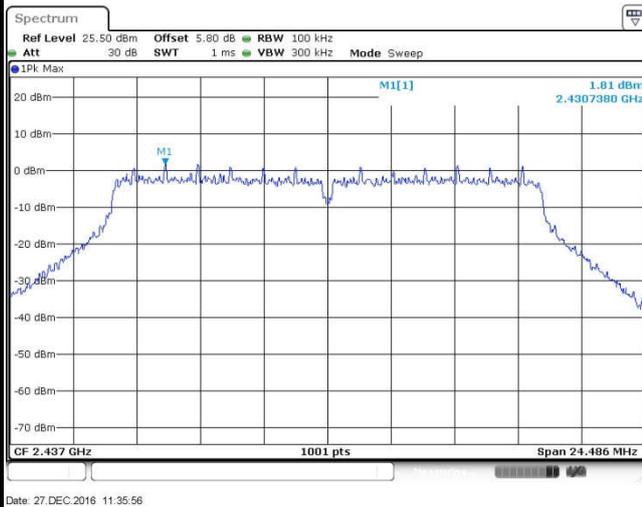

Spurious Emission 30MHz~3GHz

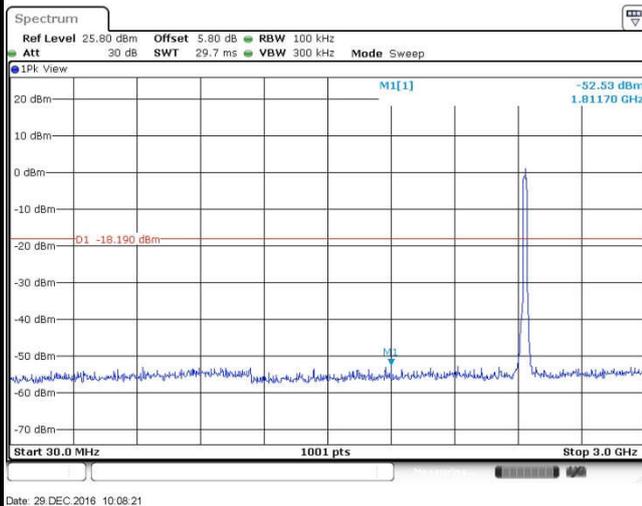

Spurious Emission 2GHz~25GHz

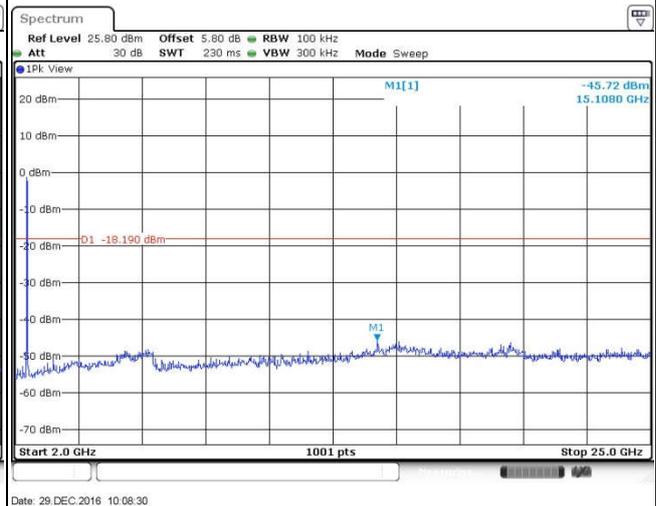




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11g Channel 11

100kHz PSD reference Level

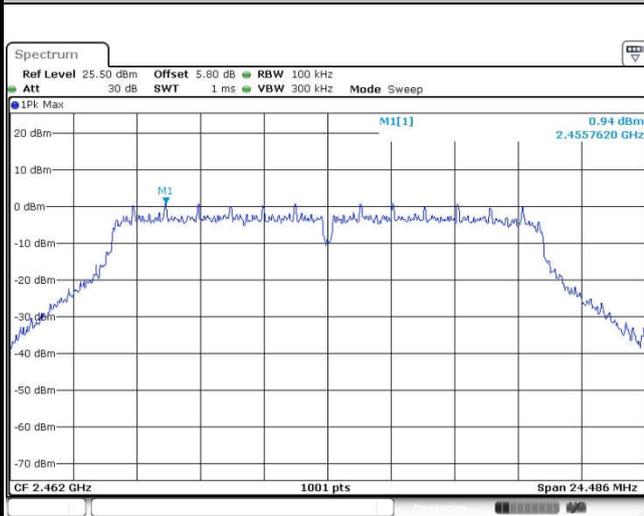


Date: 27.DEC.2016 11:39:48

High Channel Plot

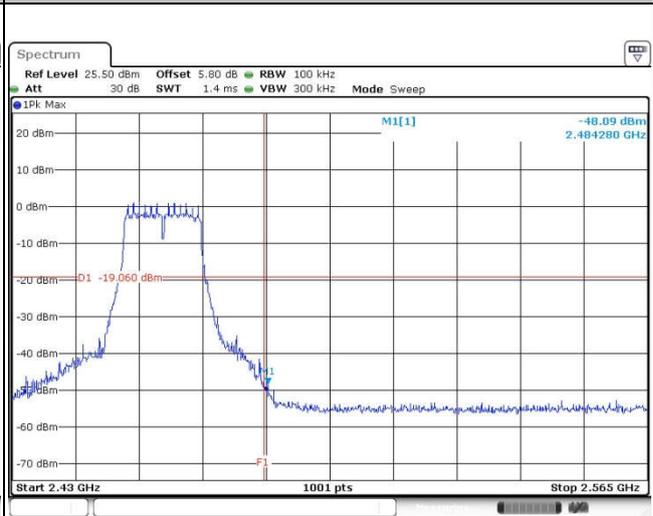


Date: 27.DEC.2016 11:40:18

Spurious Emission 30MHz~3GHz

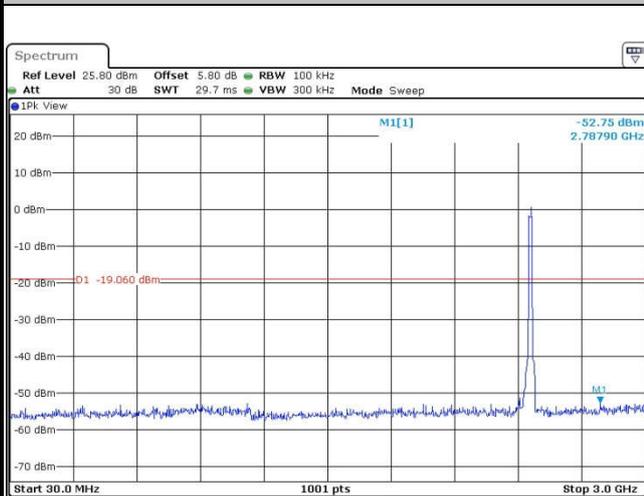

Date: 29.DEC.2016 10:13:37


Spurious Emission 2GHz~25GHz

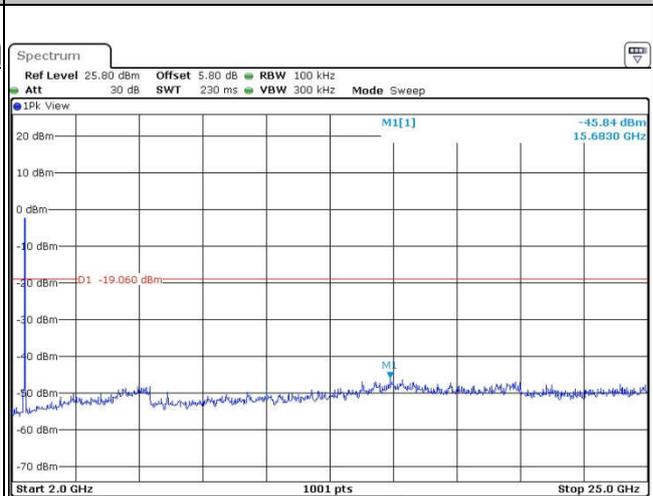

Date: 29.DEC.2016 10:13:45



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

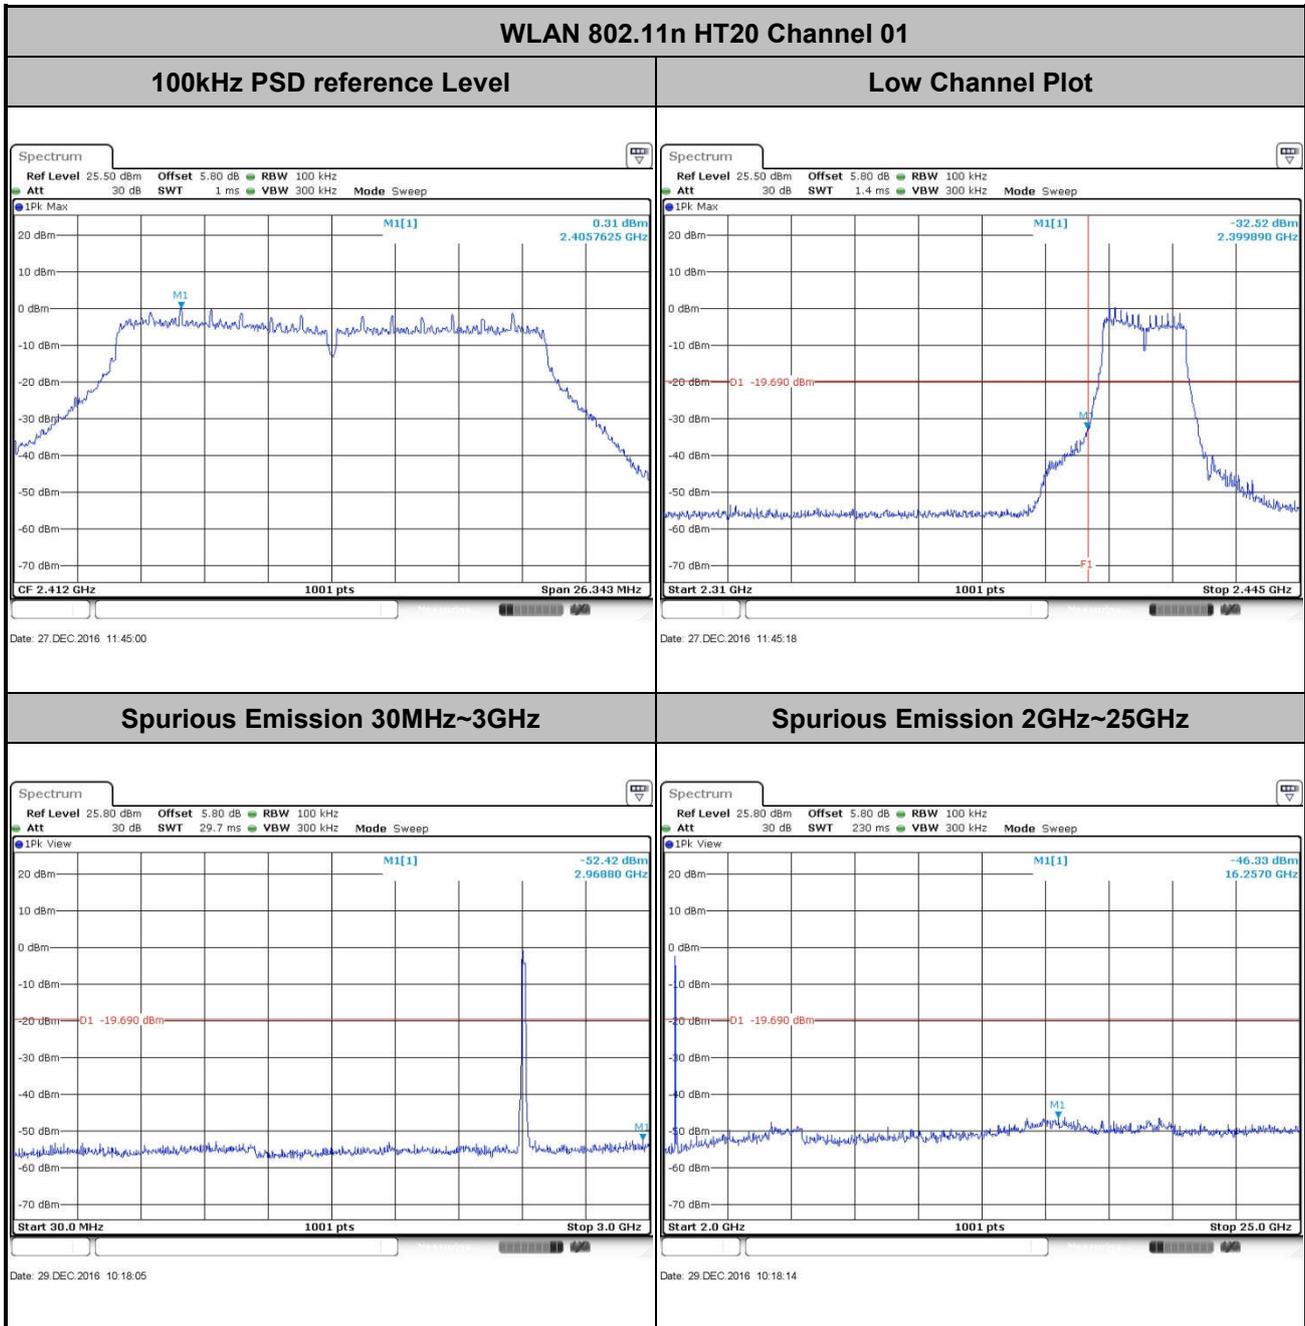





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

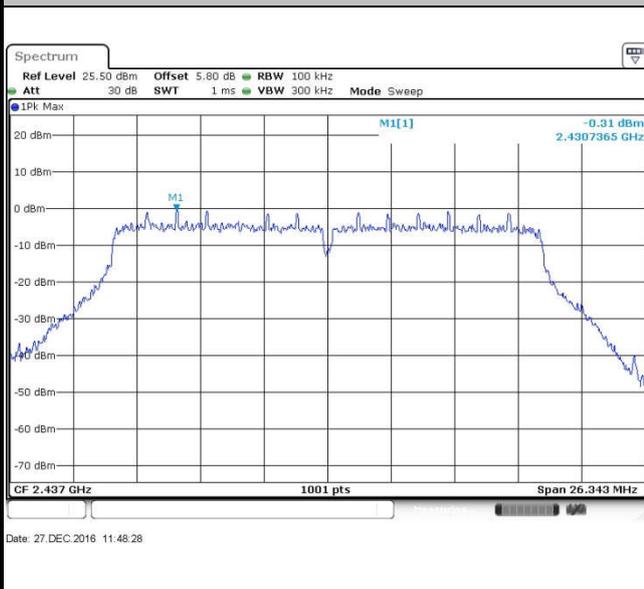

Spurious Emission 30MHz~3GHz

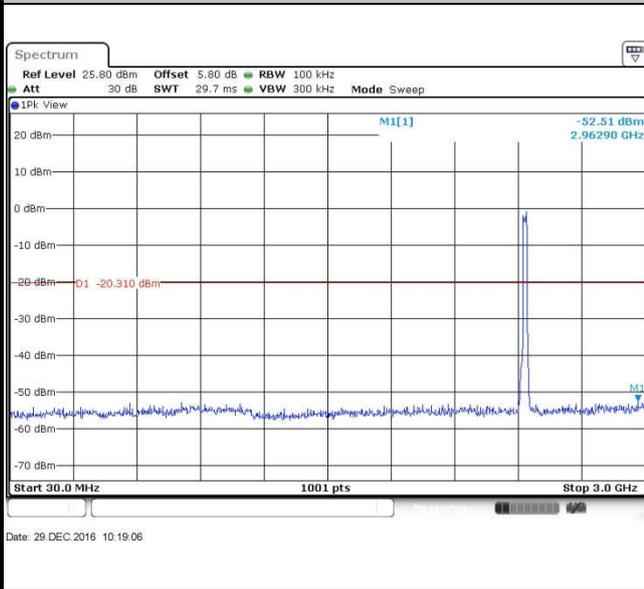

Spurious Emission 2GHz~25GHz

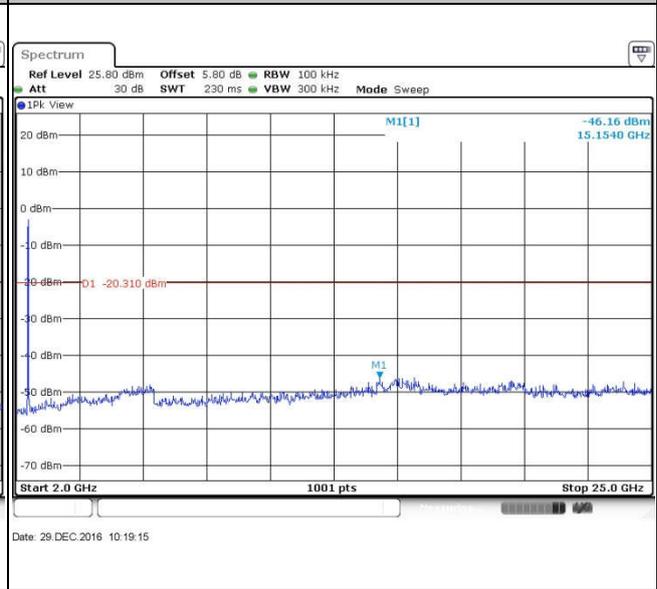





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

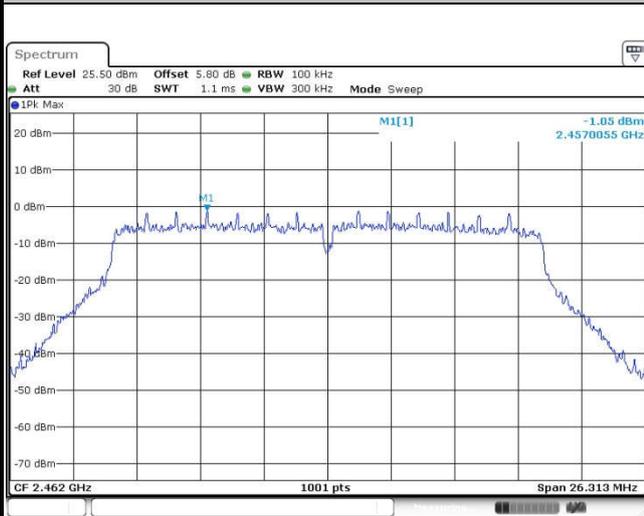


High Channel Plot

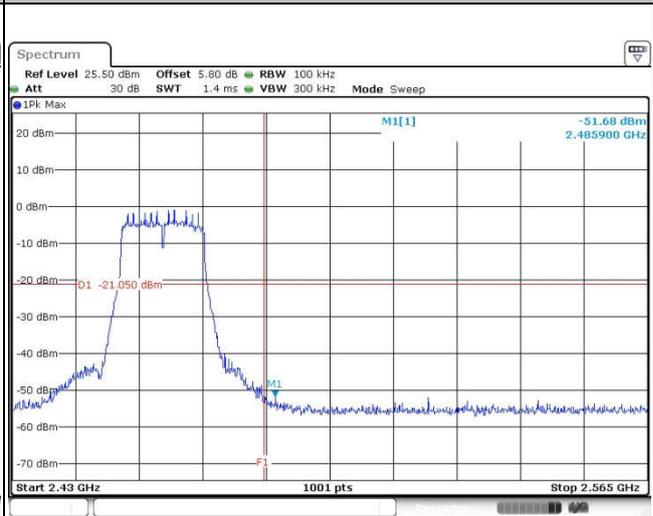

Spurious Emission 30MHz~3GHz

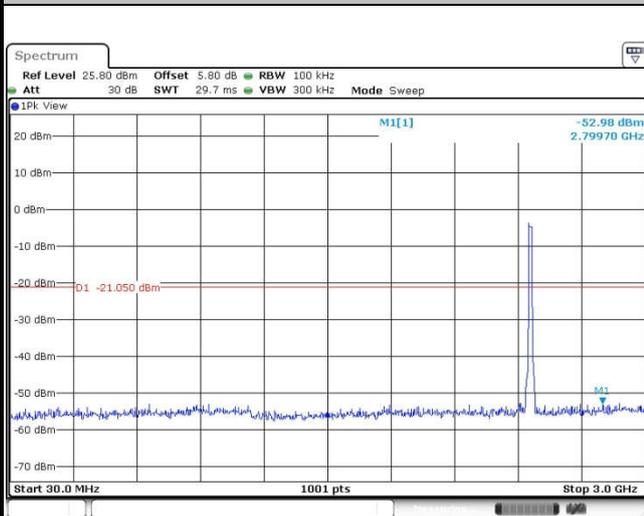

Spurious Emission 2GHz~25GHz

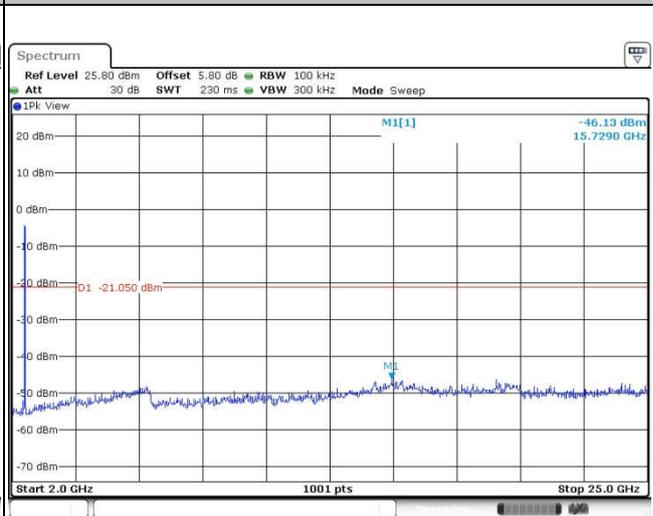



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

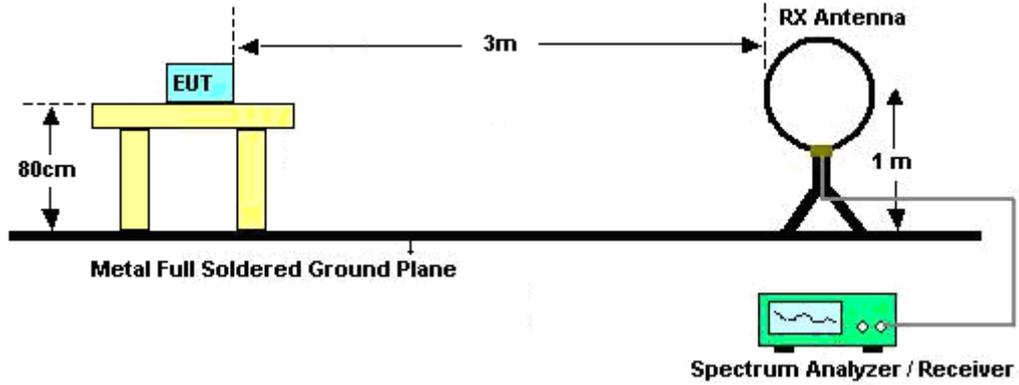

For radiated emissions from 30MHz to 1GHz

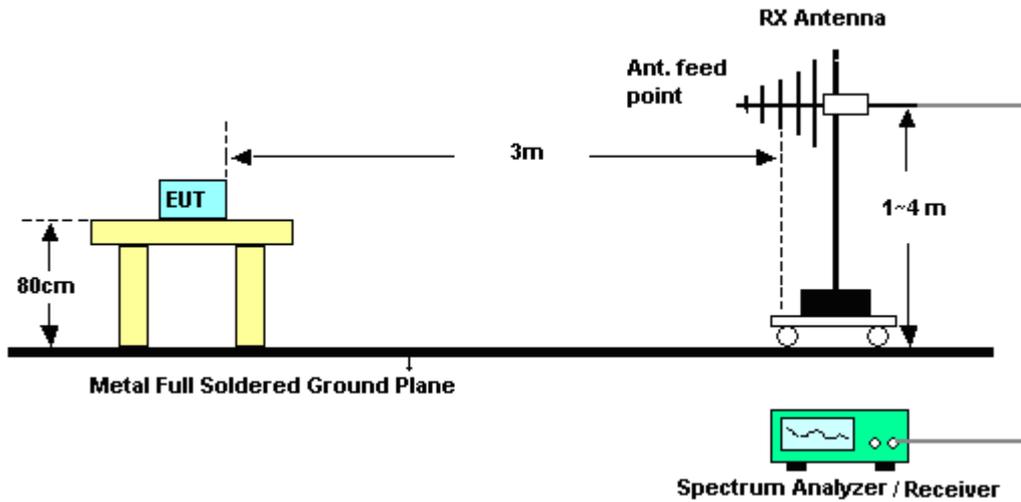

For radiated emissions above 1GHz

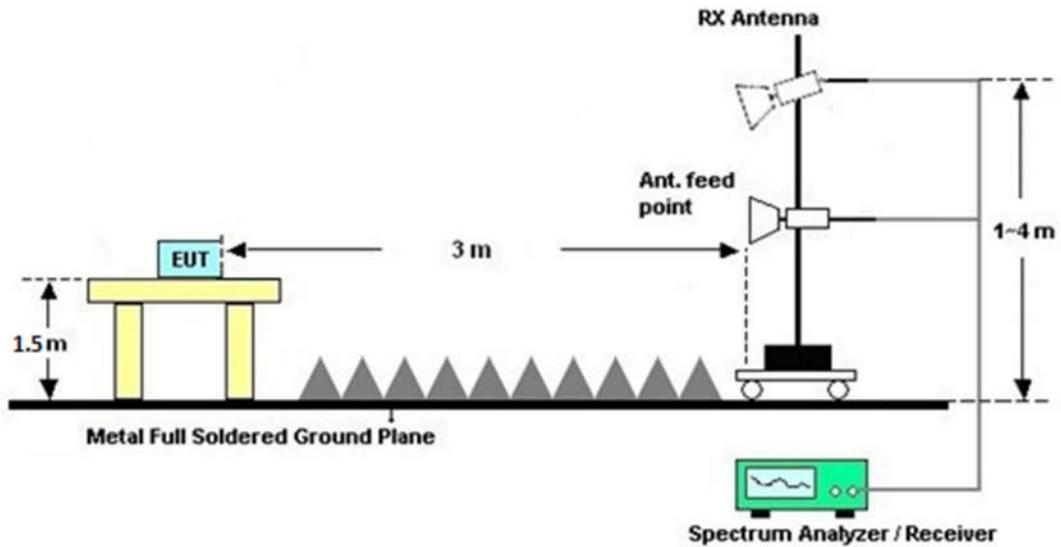

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

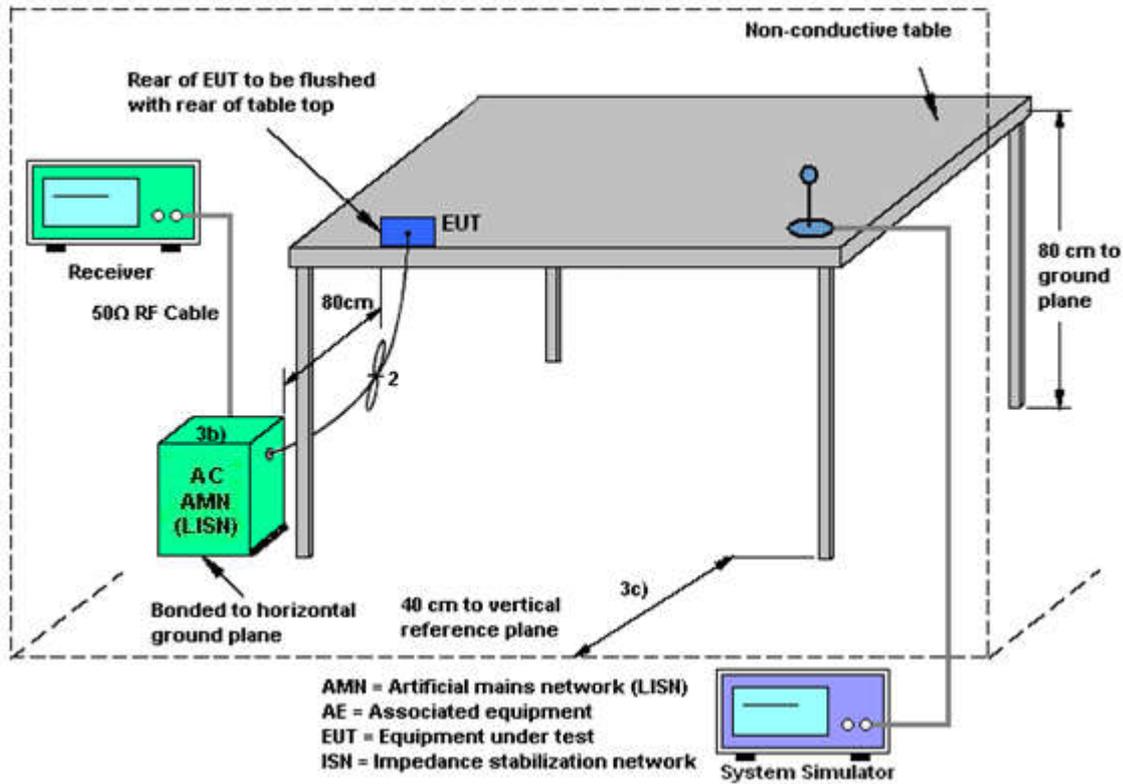



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 1) + Earphone		

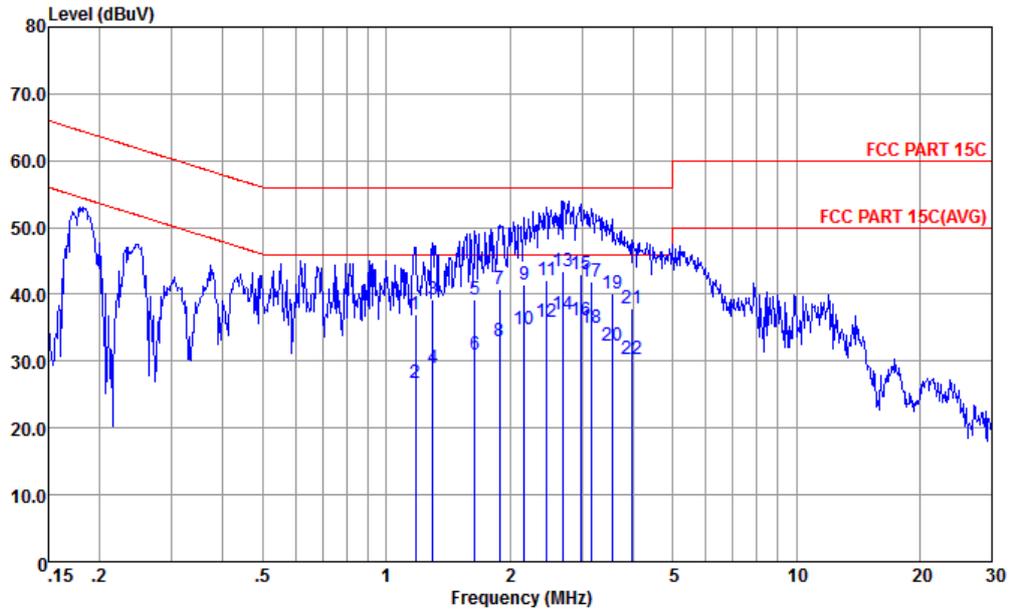


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-20151024 LINE
 mode : Mode 1
 IMEI : 990008810008057
 : #1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.178	36.92	-19.08	56.00	26.50	0.23	10.19	QP
2	1.178	26.82	-19.18	46.00	16.40	0.23	10.19	Average
3	1.296	39.31	-16.69	56.00	28.90	0.22	10.19	QP
4	1.296	29.01	-16.99	46.00	18.60	0.22	10.19	Average
5	1.645	39.29	-16.71	56.00	28.90	0.20	10.19	QP
6	1.645	30.99	-15.01	46.00	20.60	0.20	10.19	Average
7	1.888	40.67	-15.33	56.00	30.29	0.19	10.19	QP
8	1.888	32.87	-13.13	46.00	22.49	0.19	10.19	Average
9	2.167	41.37	-14.63	56.00	31.00	0.18	10.19	QP
10	2.167	34.77	-11.23	46.00	24.40	0.18	10.19	Average
11	2.461	42.09	-13.91	56.00	31.71	0.18	10.20	QP
12	2.461	35.89	-10.11	46.00	25.51	0.18	10.20	Average
13	2.707	43.49	-12.51	56.00	33.10	0.18	10.21	QP
14 *	2.707	36.89	-9.11	46.00	26.50	0.18	10.21	Average
15	2.978	42.90	-13.10	56.00	32.50	0.18	10.22	QP
16	2.978	36.00	-10.00	46.00	25.60	0.18	10.22	Average



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 1) + Earphone		

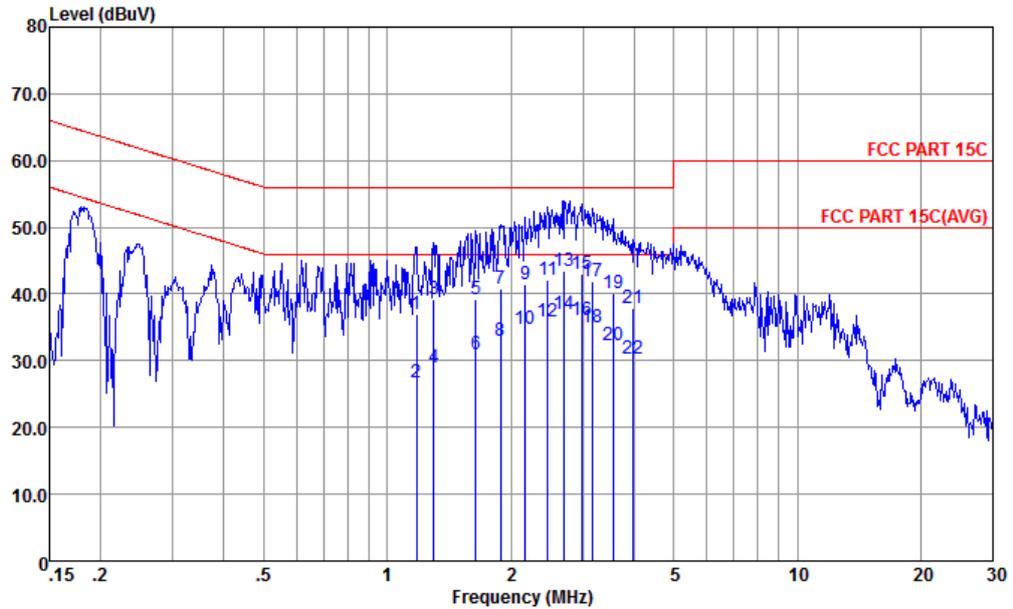


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-20151024 LINE
 mode : Mode 1
 IMEI : 990008810008057
 : #1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
17	3.156	41.91	-14.09	56.00	31.51	0.18	10.22	QP
18	3.156	35.01	-10.99	46.00	24.61	0.18	10.22	Average
19	3.547	40.22	-15.78	56.00	29.80	0.19	10.23	QP
20	3.547	32.42	-13.58	46.00	22.00	0.19	10.23	Average
21	3.985	37.83	-18.17	56.00	27.40	0.19	10.24	QP
22	3.985	30.23	-15.77	46.00	19.80	0.19	10.24	Average



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 1) + Earphone		

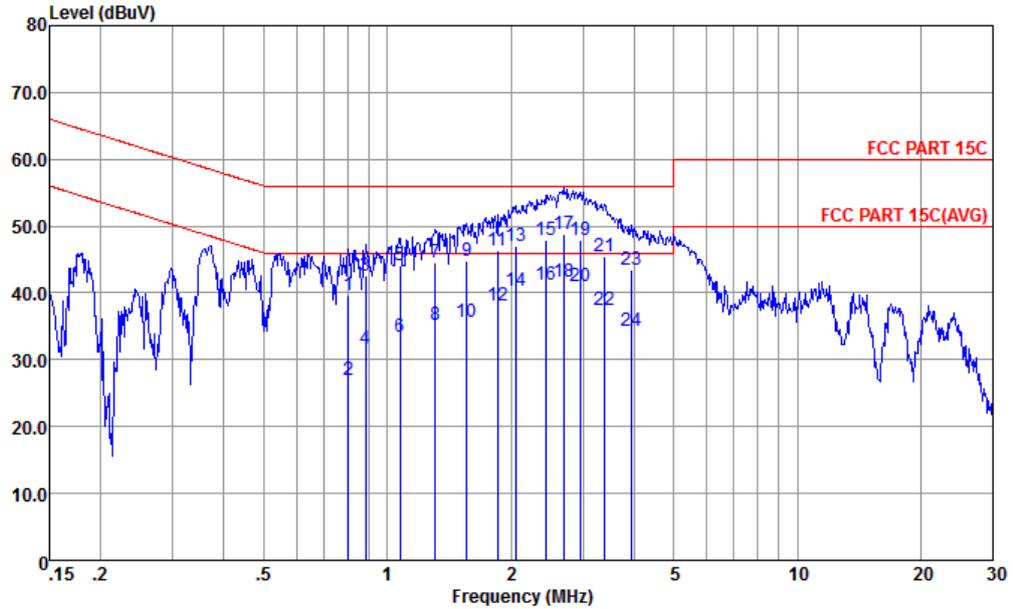


Site : CO01-KS
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL
 mode : Mode 1
 IMEI : 990008810008057
 : #1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.804	39.72	-16.28	56.00	29.20	0.35	10.17	QP
2	0.804	26.92	-19.08	46.00	16.40	0.35	10.17	Average
3	0.885	42.54	-13.46	56.00	32.00	0.36	10.18	QP
4	0.885	31.54	-14.46	46.00	21.00	0.36	10.18	Average
5	1.077	44.16	-11.84	56.00	33.60	0.37	10.19	QP
6	1.077	33.46	-12.54	46.00	22.90	0.37	10.19	Average
7	1.310	44.66	-11.34	56.00	34.10	0.37	10.19	QP
8	1.310	35.16	-10.84	46.00	24.60	0.37	10.19	Average
9	1.560	44.86	-11.14	56.00	34.29	0.38	10.19	QP
10	1.560	35.76	-10.24	46.00	25.19	0.38	10.19	Average
11	1.858	46.37	-9.63	56.00	35.80	0.38	10.19	QP
12	1.858	38.17	-7.83	46.00	27.60	0.38	10.19	Average
13	2.055	47.07	-8.93	56.00	36.50	0.38	10.19	QP
14	2.055	40.27	-5.73	46.00	29.70	0.38	10.19	Average
15	2.435	47.98	-8.02	56.00	37.40	0.38	10.20	QP
16	2.435	41.28	-4.72	46.00	30.70	0.38	10.20	Average



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter 1) + Earphone		

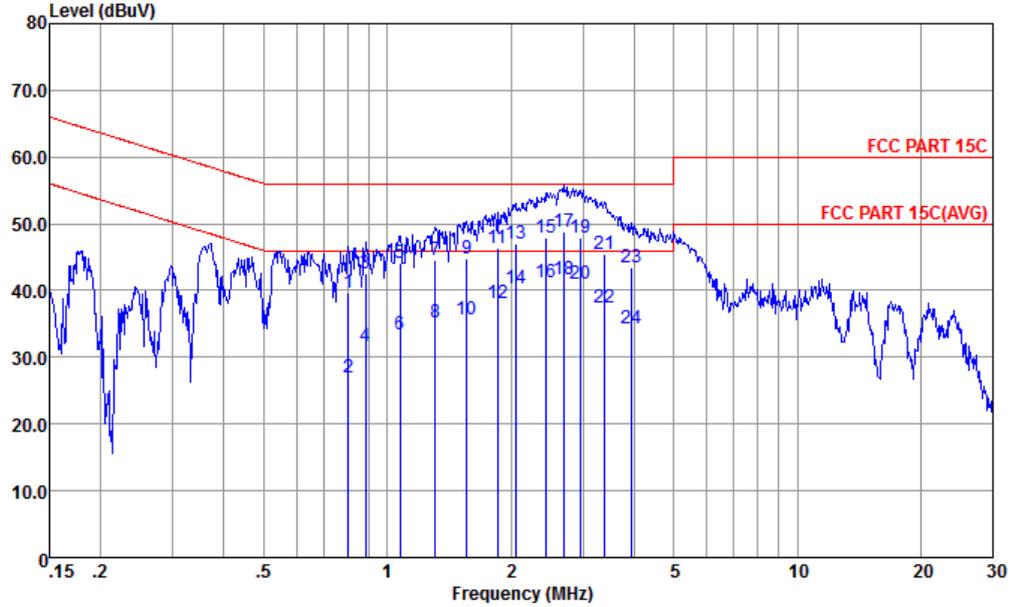

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL
 mode : Mode 1
 IMEI : 990008810008057
 : #1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
17	2.692	48.88	-7.12	56.00	38.30	0.37	10.21	QP
18 *	2.692	41.68	-4.32	46.00	31.10	0.37	10.21	Average
19	2.962	47.89	-8.11	56.00	37.30	0.37	10.22	QP
20	2.962	40.99	-5.01	46.00	30.40	0.37	10.22	Average
21	3.399	45.40	-10.60	56.00	34.80	0.37	10.23	QP
22	3.399	37.40	-8.60	46.00	26.80	0.37	10.23	Average
23	3.943	43.40	-12.60	56.00	32.79	0.37	10.24	QP
24	3.943	34.30	-11.70	46.00	23.69	0.37	10.24	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Dec. 23, 2016~ Dec. 29, 2016	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Dec. 23, 2016~ Dec. 29, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Dec. 23, 2016~ Dec. 29, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Dec. 23, 2016~ Dec. 29, 2016	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 22, 2016	Dec. 23, 2016~ Dec. 29, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Dec. 23, 2016~ Dec. 29, 2016	Nov. 22, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Dec. 23, 2016~ Dec. 29, 2016	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Dec. 23, 2016~ Dec. 29, 2016	Oct. 21, 2017	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1943529	1GHz~18GHz	Jan. 20, 2016	Dec. 23, 2016~ Dec. 29, 2016	Jan. 19, 2017	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Dec. 23, 2016~ Dec. 29, 2016	Mar. 02, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Dec. 23, 2016~ Dec. 29, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz	Oct. 13, 2016	Dec. 23, 2016~ Dec. 29, 2016	Oct. 12, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 23, 2016~ Dec. 29, 2016	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 23, 2016~ Dec. 29, 2016	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 23, 2016~ Dec. 29, 2016	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Apr. 29, 2016	Dec. 29, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Dec. 29, 2016	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Dec. 29, 2016	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Dec. 29, 2016	Oct. 12, 2017	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 26, 2016	Dec. 29, 2016	Aug. 25, 2017	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2016/12/23~2016/12/29	Relative Humidity:	51~55	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.44	8.53	0.50	Pass
11b	1Mbps	1	6	2437	13.24	8.05	0.50	Pass
11b	1Mbps	1	11	2462	13.09	8.05	0.50	Pass
11g	6Mbps	1	1	2412	18.73	16.42	0.50	Pass
11g	6Mbps	1	6	2437	18.38	16.32	0.50	Pass
11g	6Mbps	1	11	2462	18.38	16.32	0.50	Pass
HT20	MCS0	1	1	2412	19.38	17.56	0.50	Pass
HT20	MCS0	1	6	2437	19.08	17.56	0.50	Pass
HT20	MCS0	1	11	2462	18.88	17.54	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.46	30.00	0.75	18.21	36.00	Pass
11b	1Mbps	1	6	2437	18.08	30.00	0.75	18.83	36.00	Pass
11b	1Mbps	1	11	2462	17.58	30.00	0.75	18.33	36.00	Pass
11g	6Mbps	1	1	2412	22.28	30.00	0.75	23.03	36.00	Pass
11g	6Mbps	1	6	2437	22.36	30.00	0.75	23.11	36.00	Pass
11g	6Mbps	1	11	2462	21.65	30.00	0.75	22.40	36.00	Pass
HT20	MCS0	1	1	2412	21.02	30.00	0.75	21.77	36.00	Pass
HT20	MCS0	1	6	2437	21.19	30.00	0.75	21.94	36.00	Pass
HT20	MCS0	1	11	2462	20.49	30.00	0.75	21.24	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.09	14.61
11b	1Mbps	1	6	2437	0.09	14.97
11b	1Mbps	1	11	2462	0.09	14.54
11g	6Mbps	1	1	2412	0.60	13.05
11g	6Mbps	1	6	2437	0.60	13.14
11g	6Mbps	1	11	2462	0.60	12.58
HT20	MCS0	1	1	2412	0.62	10.90
HT20	MCS0	1	6	2437	0.62	10.97
HT20	MCS0	1	11	2462	0.62	10.44

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.86	0.75	8.00	Pass
11b	1Mbps	1	6	2437	-7.35	0.75	8.00	Pass
11b	1Mbps	1	11	2462	-6.97	0.75	8.00	Pass
11g	6Mbps	1	1	2412	-11.29	0.75	8.00	Pass
11g	6Mbps	1	6	2437	-12.19	0.75	8.00	Pass
11g	6Mbps	1	11	2462	-12.18	0.75	8.00	Pass
HT20	MCS0	1	1	2412	-13.25	0.75	8.00	Pass
HT20	MCS0	1	6	2437	-14.01	0.75	8.00	Pass
HT20	MCS0	1	11	2462	-15.37	0.75	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2389.17	47.46	-26.54	74	46.6	27.62	4.76	31.52	340	62	P	H
		2389.95	37.89	-16.11	54	37.03	27.62	4.76	31.52	340	62	A	H
	*	2412	105.26	-	-	104.37	27.61	4.78	31.5	340	62	P	H
	*	2410	102.01	-	-	101.12	27.61	4.78	31.5	340	62	A	H
		2389.95	43.54	-30.46	74	42.68	27.62	4.76	31.52	102	118	P	V
		2389.95	34.03	-19.97	54	33.17	27.62	4.76	31.52	102	118	A	V
	*	2414	98.75	-	-	97.86	27.61	4.78	31.5	102	118	P	V
	*	2414	95.58	-	-	94.69	27.61	4.78	31.5	102	118	A	V
802.11b CH 06 2437MHz		2389.82	45.73	-28.27	74	44.87	27.62	4.76	31.52	195	0	P	H
		2389.95	36.38	-17.62	54	35.52	27.62	4.76	31.52	195	0	A	H
		2491.78	44.89	-29.11	74	43.88	27.58	4.88	31.45	195	0	P	H
		2483.51	34.32	-19.68	54	33.33	27.59	4.86	31.46	195	0	A	H
	*	2436	105.17	-	-	104.25	27.61	4.8	31.49	195	0	P	H
	*	2436	101.91	-	-	100.99	27.61	4.8	31.49	195	0	A	H
		2318.71	43.02	-30.98	74	42.15	27.74	4.69	31.56	102	116	P	V
		2389.95	32.8	-21.20	54	31.94	27.62	4.76	31.52	102	116	A	V
		2491.84	43.99	-30.01	74	42.98	27.58	4.88	31.45	102	116	P	V
		2490.34	32.88	-21.12	54	31.87	27.58	4.88	31.45	102	116	A	V
	*	2436	99.91	-	-	98.99	27.61	4.8	31.49	102	116	P	V
	*	2436	96.71	-	-	95.79	27.61	4.8	31.49	102	116	A	V



802.11b CH 11 2462MHz		2484.7	46.38	-27.62	74	45.39	27.59	4.86	31.46	128	319	P	H
		2483.51	36.31	-17.69	54	35.32	27.59	4.86	31.46	128	319	A	H
	*	2462	105.02	-	-	104.06	27.59	4.84	31.47	128	319	P	H
	*	2460	101.78	-	-	100.82	27.59	4.84	31.47	128	319	A	H
		2490.52	43.87	-30.13	74	42.86	27.58	4.88	31.45	100	297	P	V
		2483.51	33.69	-20.31	54	32.7	27.59	4.86	31.46	100	297	A	V
	*	2462	99.22	-	-	98.26	27.59	4.84	31.47	100	297	P	V
	*	2460	95.98	-	-	95.02	27.59	4.84	31.47	100	297	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	43.85	-30.15	74	65.07	31.29	6.87	59.38	160	0	P	H
		4824	40.03	-33.97	74	61.25	31.29	6.87	59.38	150	0	P	V
802.11b CH 06 2437MHz		4872	39.81	-34.19	74	61.08	31.01	6.86	59.14	100	360	P	H
		7311	42.09	-31.91	74	56.83	35.34	8.47	58.55	100	360	P	H
		4872	39.18	-34.82	74	60.45	31.01	6.86	59.14	100	360	P	V
		7311	42.67	-31.33	74	57.41	35.34	8.47	58.55	100	360	P	V
802.11b CH 11 2462MHz		4926	38.9	-35.10	74	59.5	31.46	6.84	58.9	150	360	P	H
		7386	41.96	-32.04	74	55.86	36.59	8.49	58.98	150	360	P	H
		4926	37.71	-36.29	74	58.31	31.46	6.84	58.9	150	360	P	V
		7386	41.64	-32.36	74	55.54	36.59	8.49	58.98	150	360	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.82	63.43	-10.57	74	62.57	27.62	4.76	31.52	188	49	P	H
		2389.95	50.58	-3.42	54	49.72	27.62	4.76	31.52	188	49	A	H
	*	2418	104.42	-	-	103.53	27.61	4.78	31.5	188	49	P	H
	*	2418	96.68	-	-	95.79	27.61	4.78	31.5	188	49	A	H
		2389.82	58.1	-15.90	74	57.24	27.62	4.76	31.52	100	78	P	V
		2389.95	44.34	-9.66	54	43.48	27.62	4.76	31.52	100	78	A	V
	*	2418	99.13	-	-	98.24	27.61	4.78	31.5	100	78	P	V
	*	2418	91.18	-	-	90.29	27.61	4.78	31.5	100	78	A	V
802.11g CH 06 2437MHz		2389.17	44.37	-29.63	74	43.51	27.62	4.76	31.52	180	87	P	H
		2389.95	35.25	-18.75	54	34.39	27.62	4.76	31.52	180	87	A	H
		2489.38	48.48	-25.52	74	47.47	27.58	4.88	31.45	180	87	P	H
		2489.26	39.29	-14.71	54	38.28	27.58	4.88	31.45	180	87	A	H
	*	2432	104.39	-	-	103.47	27.61	4.8	31.49	180	87	P	H
	*	2430	96.39	-	-	95.47	27.61	4.8	31.49	180	87	A	H
		2389.56	42.99	-31.01	74	42.13	27.62	4.76	31.52	113	95	P	V
		2389.95	32.96	-21.04	54	32.1	27.62	4.76	31.52	113	95	A	V
		2489.02	44.73	-29.27	74	43.72	27.58	4.88	31.45	113	95	P	V
		2489.26	35.42	-18.58	54	34.41	27.58	4.88	31.45	113	95	A	V
	*	2434	98.4	-	-	97.48	27.61	4.8	31.49	113	95	P	V
	*	2430	90.46	-	-	89.54	27.61	4.8	31.49	113	95	A	V



802.11g CH 11 2462MHz		2483.62	63.61	-10.39	74	62.62	27.59	4.86	31.46	167	50	P	H
		2483.51	46.95	-7.05	54	45.96	27.59	4.86	31.46	167	50	A	H
	*	2456	104.32	-	-	103.36	27.59	4.84	31.47	167	50	P	H
	*	2458	96.78	-	-	95.82	27.59	4.84	31.47	167	50	A	H
		2483.98	59.67	-14.33	74	58.68	27.59	4.86	31.46	105	100	P	V
		2483.51	42.96	-11.04	54	41.97	27.59	4.86	31.46	105	100	A	V
	*	2458	99.23	-	-	98.27	27.59	4.84	31.47	105	100	P	V
	*	2458	91.52	-	-	90.56	27.59	4.84	31.47	105	100	A	V
Remark	<ol style="list-style-type: none"> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	38.5	-35.50	74	59.72	31.29	6.87	59.38	150	360	P	H
		4824	37.98	-36.02	74	59.2	31.29	6.87	59.38	150	360	P	V
802.11g CH 06 2437MHz		4872	40.31	-33.69	74	57.66	34.93	6.86	59.14	150	360	P	H
		7308	42.44	-31.56	74	56.7	35.82	8.47	58.55	150	360	P	H
		4872	39.72	-34.28	74	57.07	34.93	6.86	59.14	150	360	P	V
		7308	43.19	-30.81	74	57.45	35.82	8.47	58.55	150	360	P	V
802.11g CH 11 2462MHz		4926	37.09	-36.91	74	57.69	31.46	6.84	58.9	150	360	P	H
		7386	41.56	-32.44	74	55.46	36.59	8.49	58.98	150	360	P	H
		4926	35.83	-38.17	74	56.43	31.46	6.84	58.9	150	360	P	V
		7386	40.86	-33.14	74	54.76	36.59	8.49	58.98	150	360	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.95	61.92	-12.08	74	61.06	27.62	4.76	31.52	130	56	P	H
		2389.95	47.94	-6.06	54	47.08	27.62	4.76	31.52	130	56	A	H
	*	2418	102.85	-	-	101.96	27.61	4.78	31.5	130	56	P	H
	*	2418	94.85	-	-	93.96	27.61	4.78	31.5	130	56	A	H
		2389.95	56.21	-17.79	74	55.35	27.62	4.76	31.52	104	56	P	V
		2389.95	43.31	-10.69	54	42.45	27.62	4.76	31.52	104	56	A	V
	*	2418	98.41	-	-	97.52	27.61	4.78	31.5	104	56	P	V
	*	2420	90.37	-	-	89.45	27.61	4.8	31.49	104	56	A	V
802.11n HT20 CH 06 2437MHz		2389.3	44.56	-29.44	74	43.7	27.62	4.76	31.52	113	59	P	H
		2389.95	34.83	-19.17	54	33.97	27.62	4.76	31.52	113	59	A	H
		2488.78	48.6	-25.40	74	47.59	27.58	4.88	31.45	113	59	P	H
		2488.72	39.4	-14.60	54	38.39	27.58	4.88	31.45	113	59	A	H
	*	2430	103.27	-	-	102.35	27.61	4.8	31.49	113	59	P	H
	*	2430	95.54	-	-	94.62	27.61	4.8	31.49	113	59	A	H
		2385.4	42.83	-31.17	74	41.96	27.65	4.75	31.53	384	98	P	V
		2389.95	33.39	-20.61	54	32.53	27.62	4.76	31.52	384	98	A	V
		2489.2	46.77	-27.23	74	45.76	27.58	4.88	31.45	384	98	P	V
		2488.66	36.6	-17.40	54	35.59	27.58	4.88	31.45	384	98	A	V
	*	2430	98.77	-	-	97.85	27.61	4.8	31.49	384	98	P	V
*	2430	91.03	-	-	90.11	27.61	4.8	31.49	384	98	A	V	



802.11n HT20 CH 11 2462MHz		2483.62	64.03	-9.97	74	63.04	27.59	4.86	31.46	112	44	P	H
		2483.62	46.49	-7.51	54	45.5	27.59	4.86	31.46	112	44	A	H
	*	2456	103.66	-	-	102.7	27.59	4.84	31.47	112	44	P	H
	*	2456	95.53	-	-	94.57	27.59	4.84	31.47	112	44	A	H
		2483.92	58.66	-15.34	74	57.67	27.59	4.86	31.46	100	56	P	V
		2483.5	40.67	-13.33	54	39.68	27.59	4.86	31.46	100	56	A	V
	*	2458	98.8	-	-	97.84	27.59	4.84	31.47	100	56	P	V
	*	2458	91.14	-	-	90.18	27.59	4.84	31.47	100	56	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 CH 01 (2412MHz) and CH 06 (2437MHz), and 802.11n HT20 CH 11 (2462MHz). A Remark section at the bottom states: '1. No other spurious found. 2. All results are PASS against Peak and Average limit line.'



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		32.91	22.07	-17.93	40	25.69	26.22	0.65	30.49	100	280	P	H
		100.81	15.52	-27.98	43.5	23.93	19.97	1.09	29.47	-	-	P	H
		153.19	15.63	-27.87	43.5	24.68	18.51	1.32	28.88	-	-	P	H
		408.3	22.91	-23.09	46	23.52	24.39	2.13	27.13	-	-	P	H
		486.87	22.76	-23.24	46	23.14	24.13	2.32	26.83	-	-	P	H
		886.51	27.31	-18.69	46	20.95	28.5	3.15	25.29	-	-	P	H
		35.82	28.85	-11.15	40	33.4	25.26	0.66	30.47	122	351	P	V
		39.7	25.8	-14.20	40	32.85	22.7	0.68	30.43	-	-	P	V
		98.87	16.96	-26.54	43.5	25.68	19.7	1.08	29.5	-	-	P	V
		412.18	22.63	-23.37	46	23.13	24.48	2.14	27.12	-	-	P	V
		705.12	25.67	-20.33	46	21.49	27.31	2.8	25.93	-	-	P	V
		920.46	27.97	-18.03	46	20.89	29.04	3.2	25.16	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.94	8.26	0.12	300Hz
802.11g	87.04	1.36	0.73	1kHz
2.4GHz 802.11n HT20	86.76	1.28	0.78	1kHz


802.11b

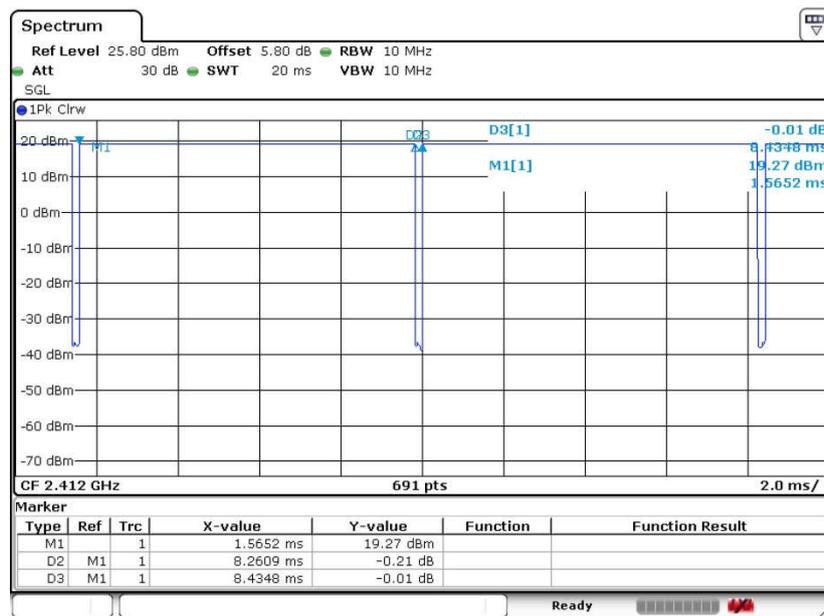

Date: 23.DEC.2016 05:45:17




802.11g

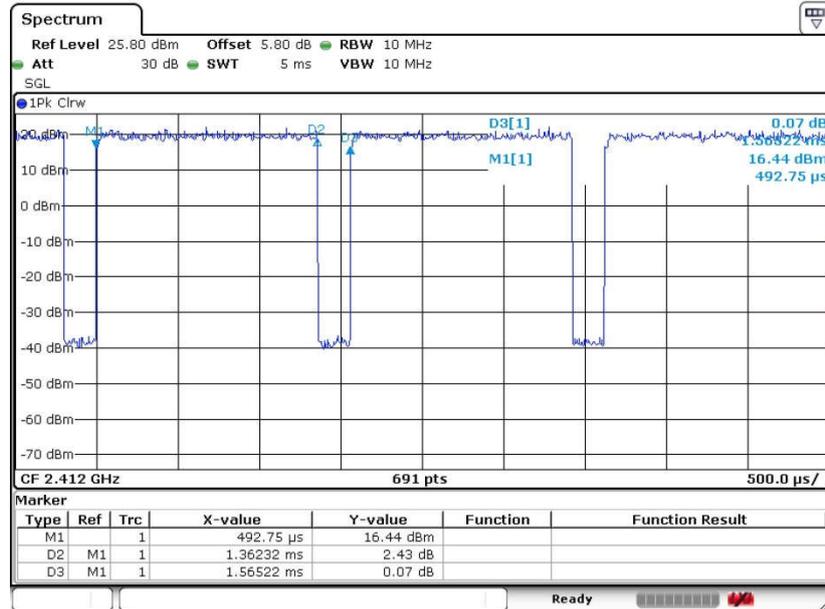

Date: 23.DEC.2016 05:46:04

802.11n HT20

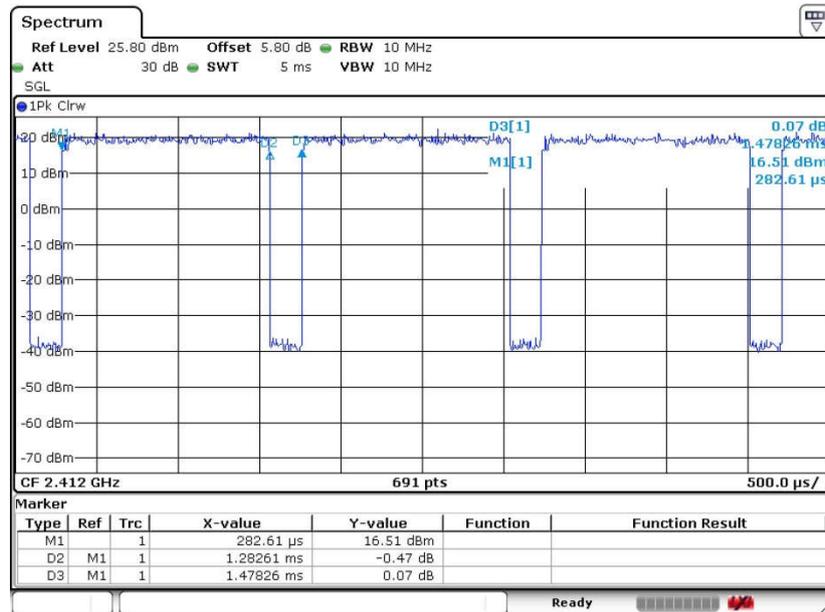

Date: 23.DEC.2016 05:46:38