

FCC SAR TEST REPORT



Issued to

ZTE Corporation

For

WCDMA Digital Mobile Phone

Model Name : NX402
Trade Name : nubia
Brand Name : nubia
FCC ID : SRQ-NX402
Standard : 47CFR 2.1093
ANSI C95.1-1999
IEEE 1528-2003
MAX SAR : Head: 0.529W/kg
Body: 1.165W/kg
Test date : 2013-10-31 to 2013-11-5
Issue date : 2013-11-13

by

Shenzhen Morlab Communications Technology Co., Ltd.

FL.3, Building A, FeiYang Science Park, No.8 LongChang Road,Block 67, BaoAn District,
ShenZhen, GuangDong Province, P. R. China 518101

Tested by Zou Jian
Zou Jian
(Test Engineer)

Date 2013.11.13

Approved by Zeng Dexin
Zeng Dexin
(Chief Engineer)

Date 2013.11.13

Reviewed by Zhu Zhan
Zhu Zhan
(SAR Specialist)

Date 2013.11.13



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate



DIRECTORY

1. TESTING LABORATORY	4
1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	4
1.2 ACCREDITATION CERTIFICATE	4
1.3 LIST OF TEST EQUIPMENTS	4
2. TECHNICAL INFORMATION	5
2.1 IDENTIFICATION OF APPLICANT	5
2.2 IDENTIFICATION OF MANUFACTURER	5
2.3 EQUIPMENT UNDER TEST (EUT)	5
2.3.1 PHOTOGRAPHS OF THE EUT	6
2.3.2 IDENTIFICATION OF ALL USED EUT	6
2.4 APPLIED REFERENCE DOCUMENTS	6
2.5 DEVICE CATEGORY AND SAR LIMITS	6
2.6 TEST ENVIRONMENT/CONDITIONS	7
3. SPECIFIC ABSORPTION RATE (SAR)	8
3.1 INTRODUCTION	8
3.2 SAR DEFINITION	8
4. SAR MEASUREMENT SETUP	9
4.1 THE MEASUREMENT SYSTEM	9
4.2 PROBE	9
4.3 PROBE CALIBRATION PROCESS	11
4.3.1 DOSIMETRIC ASSESSMENT PROCEDURE	11
4.3.2 FREE SPACE ASSESSMENT PROCEDURE	11
4.3.3 TEMPERATURE ASSESSMENT PROCEDURE	11
4.4 PHANTOM	12
4.5 DEVICE HOLDER	12
5. TISSUE SIMULATING LIQUIDS	13
6. UNCERTAINTY ASSESSMENT	15



6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST 15

6.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK 16

7. SAR MEASUREMENT EVALUATION..... 18

7.1 SYSTEM SETUP..... 18

7.2 VALIDATION RESULTS 19

8. OPERATIONAL CONDITIONS DURING TEST 20

8.1 INFORMATION ON THE TESTING 20

8.2 BODY-WORN CONFIGURATIONS 21

8.3 MEASUREMENT PROCEDURE 21

8.4 DESCRIPTION OF INTERPOLATION/EXTRAPOLATION SCHEME 21

9. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER..... 23

10. TEST RESULTS LIST..... 27

11. HOTSPOT MODE EVALUATION PROCEDURE 32

12. MULTIPLE TRANSMITTERS EVALUATION 33

ANNEX A GRAPH TEST RESULTS 36

Change History		
Issue	Date	Reason for change
1.0	Nov. 11, 2013	First edition
2.0	Nov. 13,2013	Second edition



1. TESTING LABORATORY

1.1 Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.
Morlab Laboratory
Address: FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China 518101

1.2 Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.3 List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2013-9-26	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762)	2013-9-26	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2013-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02)	2013-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2013-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2013-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2013-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2013-9-24	1year
10	Probe	Satimo (SN:SN 37/08 EP80)	2013-9-25	1year
11	Dielectric Probe Kit	Agilent (85033E)	2013-9-24	1year
12	Phantom	Satimo (SN:SN_36_08_SAM62)	2013-9-24	1year
13	Liquid	Satimo(Last Calibration: 2013-10-30 to 2013-11-1)	N/A	N/A
14	Dipole 835MHz	Satimo (SN 20/08 DIPC 99)	2013-9-25	1year
15	Dipole 1750MHz	Satimo (SN 30/13 DIP1G750-260)	2013-9-25	1year
16	Dipole 1900MHz	Satimo (SN 30/13 DIP1G900-261)	2013-9-25	1year
17	Dipole 2450MHz	Satimo (SN 30/13 DIP2G450-263)	2013-9-25	1year

2. TECHNICAL INFORMATION

Note: the Following data is based on the information by the applicant.

2.1 Identification of Applicant

Company Name:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China.

2.2 Identification of Manufacturer

Company Name:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China.

2.3 Equipment Under Test (EUT)

Model Name:	NX402
Trade Name:	nubia
Brand Name:	nubia
Hardware Version:	QB8064-02A
Software Version:	X402_Z35_EN_XSRPK1DDN1F100
Frequency Bands:	GSM 850MHz/PCS1900MHz; WCDMA 850MHZ/1700MHz/1900MHz; (Band II, IV, V) Bluetooth; Wifi802.11B/G/N (2.4GHz)
Modulation Mode:	GSM/GPRS: GMSK; EDGE:8PSK; WCDMA/HSDPA/HSUPA: QPSK; WIFI802.11B: DSSS; WIFI802.11G: OFDM WIFI 802.11N: OFDM; BT: GFSK/π/4-DQPSK /8-DPSK
Multislot Class:	GPRS:Class 33; EDGE:Class 33
GPRS Class:	Class B
DTM:	Not support
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype
Battery Model:	Li3822T42P3h844941
Battery specification:	2300mAh3.8V
3GPP Version:	Release 7
Hotspot function:	Support

2.3.1 Photographs of the EUT

Please see for photographs of the EUT.

2.3.2 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the Following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	QB8064-02A	X402_Z35_EN_XSRPK1DDN1F100

2.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	ANSI C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
3	IEEE 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
4	KDB 447498 D01v05r01	General RF Exposure Guidance
5	KDB 248227 D01v01r02	SAR Measurement Procedures for 802.11 a/b/g Transmitters
6	KDB 941225 D01v02	SAR Measurement Procedures for 3G Devices
7	KDB 941225 D06v01r01	Hot Spot SAR
8	KDB 865664 D01v01r01	SAR Measurement 100 MHz to 6 GHz
9	KDB 865664 D02v01r01	SAR Reporting

2.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.6 Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz /PCS1900MHz; WCDMA 850MHz/1700MHz/WCDMA1900MHz; 802.11B(2.4GHz);
Operation mode:	Call established
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS1900 MHz Maximum output power(level 0) WCDMA 850MHz Maximum output power(All up bits) WCDMA 1700MHz Maximum output power(All up bits) WCDMA 1900MHz Maximum output power(All up bits) 802.11B Maximum output power(2.4GHz)

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz, or to 4175, 4175 and 4233 respectively in the case of WCDMA 850MHz, or to 1313, 1450 and 1512 respectively in the case of WCDMA 1700MHz, or to 9262, 9400 and 9538 respectively in the case of WCDMA 1900MHz, or to 1, 6, 11 respectively in the case of 802.11B (2.4GHz). The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be Middle than the output power level of the handset by at least 35 dB.

3. SPECIFIC ABSORPTION RATE (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are Middle than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR MEASUREMENT SETUP

4.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the Following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The Following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with Following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm

- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)
- Probe linearity: < 0.25 dB
- Axial Isotropy: < 0.25 dB
- Spherical Isotropy: < 0.25 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annex technique using reference guide at the five frequencies.

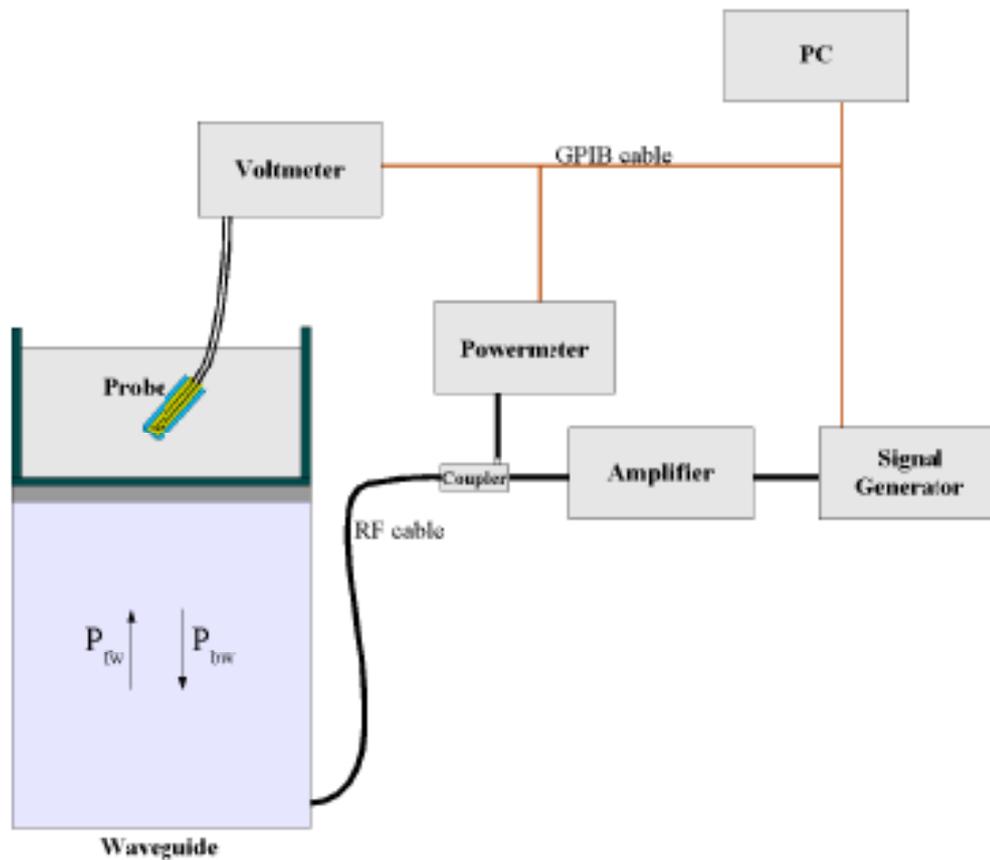

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where DCP is the diode compression point in mV.

4.3 Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

4.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulating head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

δt = exposure time (30 seconds),

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

C = heat capacity of tissue (brain or muscle),

δT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

Where:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is Middle than 1°.

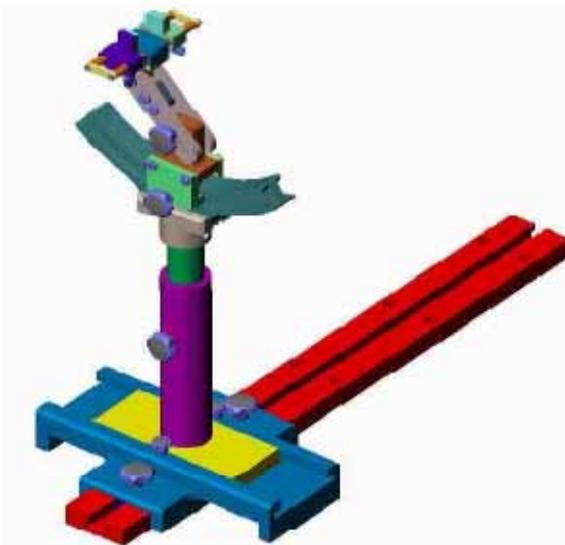

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. TISSUE SIMULATING LIQUIDS

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The following table gives the recipes for tissue simulating liquids

Ingredients (% by weight)	Frequency Band 835MHz		Frequency Band 1750MHz		Frequency Band 1900MHz		Frequency Band 2450MHz	
	Head	Body	Head	Body	Head	Body	Head	Body
Tissue Type								
Water	41.45	52.4	52.6	68.8	54.9	40.4	62.7	73.2
Salt(NaCl)	1.45	1.4	0.4	0.2	0.18	0.5	0.5	0.04
Sugar	56.0	45.0	0	45.0	0.0	58.0	0.0	0.0
HEC	1.0	1.0	0	1.0	0.0	1.0	0.0	0.0
Bactericide	0.1	0.1	0	0.1	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	31.0	44.92	0.0	36.8	0.0
Acticide SPX	0.0	0.0	0	0.0	0.0	0.0	0.0	26.7
Dielectric Constant	41.50	55.2	40.1	53.4	40.0	53.3	39.2	52.7
Conductivity (S/m)	0.90	0.97	1.37	1.49	1.40	1.52	1.80	1.97

The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2013/10/31	Head 835	Relative Permittivity(ϵ_r):	41.35	41.5	-0.36	5
		Conductivity(σ):	0.86	0.90	-4.44	5
	Body 835	Relative Permittivity(ϵ_r):	55.14	55.2	-0.11	5
		Conductivity(σ):	0.98	0.97	1.03	5
2013/11/1	Head 1750	Relative Permittivity(ϵ_r):	40.2	40.1	0.25	5
		Conductivity(σ):	1.35	1.37	-1.46	5
	Body 1750	Relative Permittivity(ϵ_r):	53.2	53.4	-0.37	5
		Conductivity(σ):	1.47	1.49	-1.34	5
2013/11/4	Head 1900	Relative Permittivity(ϵ_r):	40.03	40	0.08	5
		Conductivity(σ):	1.36	1.40	-2.86	5
	Body 1900	Relative Permittivity(ϵ_r):	53.27	53.3	-0.06	5
		Conductivity(σ):	1.54	1.52	1.32	5
2013/11/5	Head 2450	Relative Permittivity(ϵ_r):	39.18	39.2	-0.05	5
		Conductivity(σ):	1.78	1.80	-1.11	5
	Body 2450	Relative Permittivity(ϵ_r):	52.68	52.7	-0.04	5
		Conductivity(σ):	1.96	1.95	0.51	5

6. UNCERTAINTY ASSESSMENT

The Following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Test sample Related									
Test sample positioning	E.4.2. 1	0.03	N	1	1	1	0.03	0.0 3	N- 1
Device Holder Uncertainty	E.4.1. 1	5.00	N	1	1	1	5.00	5.0 0	N- 1
Output power Power drift -	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3	∞

SAR drift measurement								3	
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

6.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK


a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞

Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞
Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.69	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.85	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.28	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	3.46	M
Combined Standard Uncertainty			RSS				8.83	8.83	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	17.66	

7. SAR MEASUREMENT EVALUATION

7.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

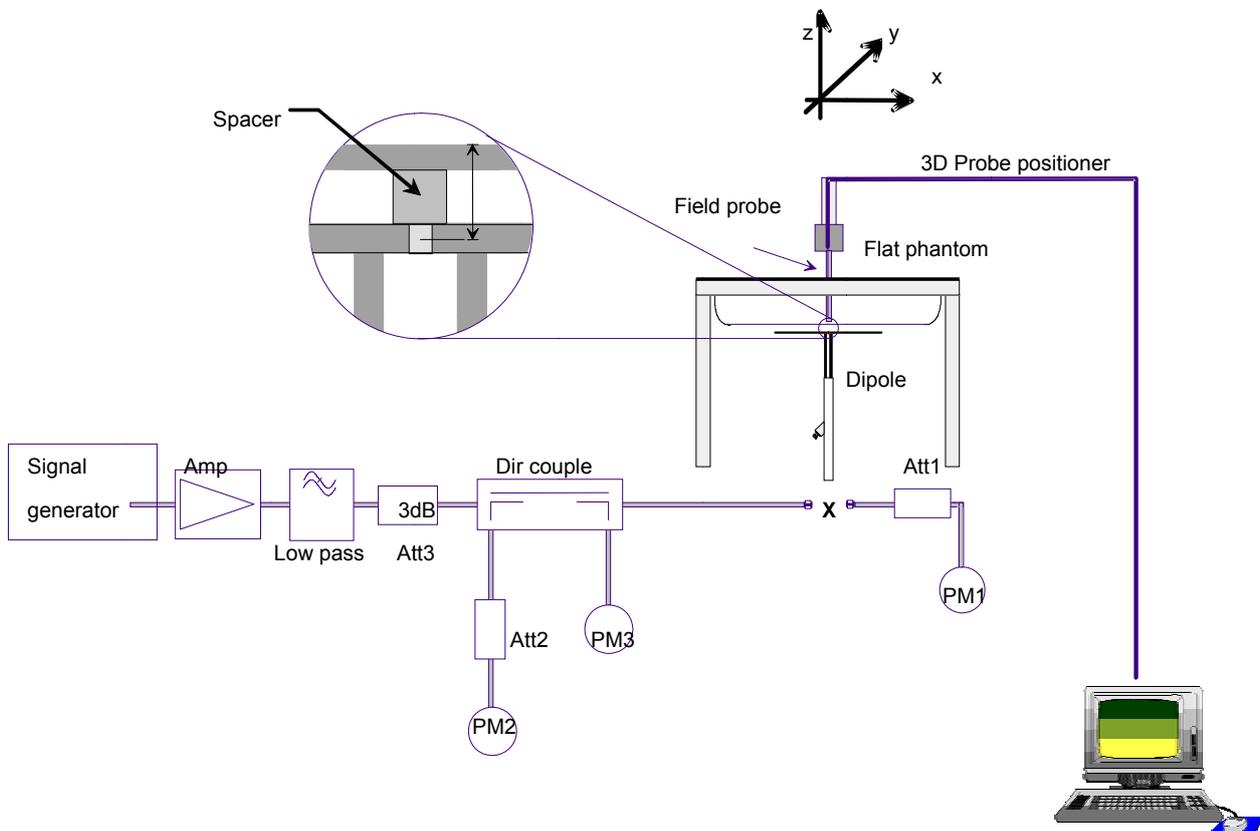

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

7.2 Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	835MHz(H)	835MHz(B)	1750MHz(H)	1750MHz(B)
Target value (1g)	9.710 W/Kg	10.020 W/Kg	38.29 W/Kg	40.12 W/Kg
Test value (1g 250 mW input)	2.423 W/Kg (10.31)	2.487 W/Kg (10.31)	9.531 W/Kg (11.1)	9.758 W/Kg (11.1)
Normalized value (1g)	9.692 W/Kg	9.948 W/Kg	38.124 W/Kg	39.032 W/Kg

Frequency	1900MHz(H)	1900MHz(B)	2450MHz(H)	2450MHz(B)
Target value (1g)	39.390 W/Kg	42.330 W/Kg	54.77 W/Kg	56.090 W/Kg
Test value (1g 250 mW input)	9.662 W/Kg (11.4)	9.898 W/Kg (11.4)	12.594 W/Kg (11.5)	12.915 W/Kg (11.5)
Normalized value (1g)	38.648 W/Kg	39.592 W/Kg	50.376 W/Kg	51.660 W/Kg

Note: System checks the specific test data please see page 162~177

8. OPERATIONAL CONDITIONS DURING TEST

8.1 Information on the testing

The mobile phone antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The mobile phone is set to transmit at its Highest output peak power level.

The mobile phone is test in the “cheek” and “tilted” positions on the left and right sides of the phantom. The mobile phone is placed with the vertical centre line of the body of the mobile phone and the horizontal line crossing the centre of the earpiece in a plane parallel to the sagittal plane of the phantom.

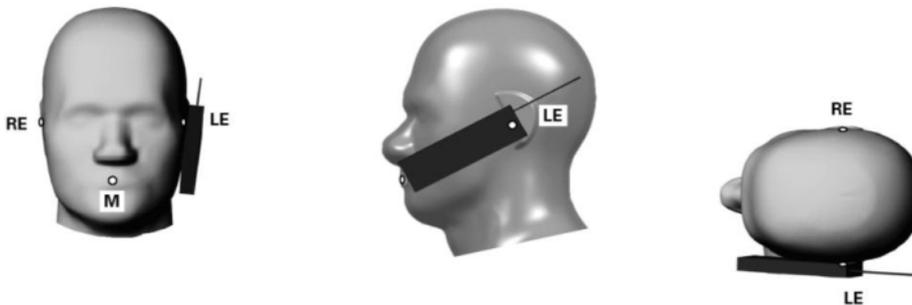


Illustration for Cheek Position

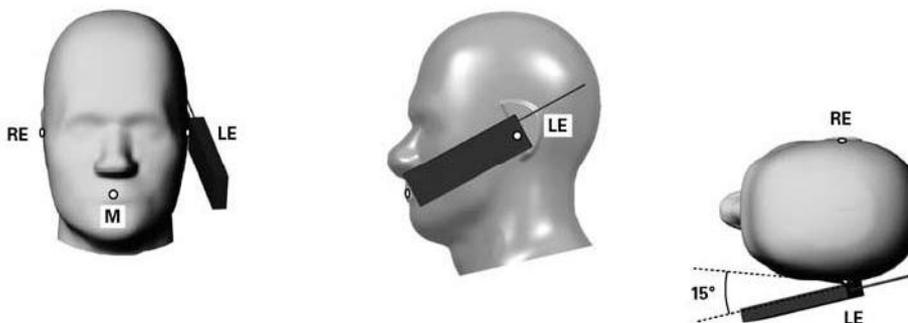


Illustration for Tilted Position

Description of the “cheek” position:

The mobile phone is well placed in the reference plane and the earpiece is in contact with the ear. Then the mobile phone is moved until any point on the front side get in contact with the cheek of the phantom or until contact with the ear is lost.

Description of the “tilted” position:

The mobile phone is well placed in the “cheek” position as described above. Then the mobile phone is moved outward away from the month by an angle of 15 degrees or until contact with the ear lost.

Remark: Please refer to Appendix B for the test setup photos.

8.2 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

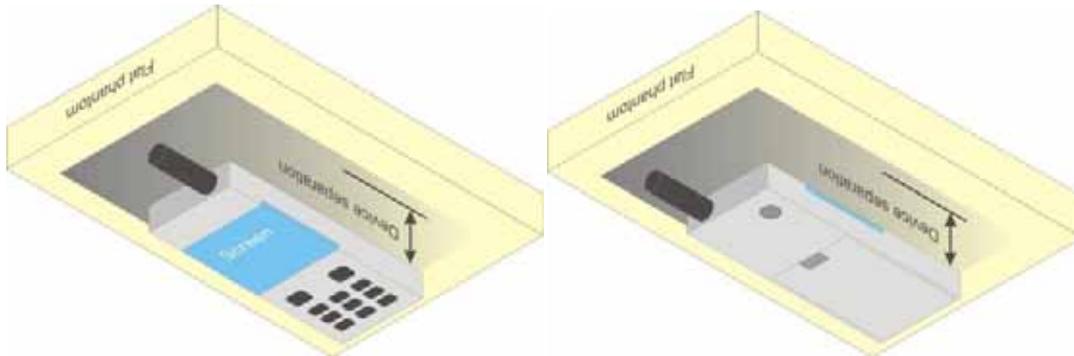


Illustration for Body Worn Position

8.3 Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.4 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.



An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. MEASUREMENT OF CONDUCTED PEAK OUTPUT POWER

1. WCDMA Conducted peak output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4175	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	24.95	24.57	24.59	23.54	24.07	24.71
HSDPA	1	24.77	24.56	24.57	23.21	23.70	23.33
	2	24.74	24.53	24.58	23.26	23.74	23.35
	3	24.26	24.04	24.06	22.78	23.24	22.84
	4	24.23	24.06	24.05	22.76	23.25	22.82
HSUPA	1	24.74	24.48	24.58	23.53	24.05	23.03
	2	22.75	22.48	22.57	21.56	22.02	21.05
	3	23.73	23.46	23.57	22.54	23.06	22.04
	4	22.74	22.47	22.54	21.58	22.02	21.06
	5	24.73	24.48	24.57	23.52	24.04	23.04
HSPA+	1	24.93	24.54	24.56	23.51	24.03	23.07
Note: The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA was tested by power meter.							

Item	band	WCDMA 1700		
	ARFCN	1312	1412	1513
	subtest	dBm		
5.2(WCDMA)	non	24.68	24.59	24.57
HSDPA	1	24.63	24.55	24.52
	2	24.62	24.54	24.51
	3	24.14	24.09	24.03
	4	24.13	24.07	24.02
HSUPA	1	24.62	24.51	24.49
	2	22.65	22.57	22.53
	3	23.63	23.53	23.47
	4	22.61	22.53	22.51
	5	24.59	24.50	24.48
HSPA+	1	24.61	24.50	24.47
Note	The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter.			

2. GSM Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power (dBm)
GSM 850	128	824.2	31.77
	190	836.6	31.82
	251	848.8	31.77
PCS 1900	512	1850.2	28.59
	661	1880.0	28.95
	810	1909.8	28.64

3. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.49	29.53	27.95	26.93
	190	836.6	31.58	29.62	28.04	27.02
	251	848.8	31.52	29.56	27.98	26.96
PCS 1900	512	1850.2	28.45	26.49	24.91	23.94
	661	1880.0	28.80	26.84	25.26	24.38
	810	1909.8	28.45	26.49	24.91	23.95

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	22.46	23.51	23.69	23.92
	190	836.6	22.55	23.60	23.78	24.01
	251	848.8	22.49	23.54	23.72	23.92
PCS 1900	512	1850.2	19.42	20.47	20.65	20.93
	661	1880.0	19.77	20.82	21.00	21.37
	810	1909.8	19.42	20.47	20.65	20.94

4. EGPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.67	29.69	28.05	26.95
	190	836.6	31.73	29.75	28.11	27.01
	251	848.8	31.67	29.69	28.05	26.95
PCS 1900	512	1850.2	28.28	26.30	24.66	23.65
	661	1880.0	28.76	26.78	25.14	24.21
	810	1909.8	28.51	26.53	24.89	23.82

EGPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	22.64	23.67	23.79	23.94
	190	836.6	22.70	23.73	23.85	24.00
	251	848.8	22.64	23.67	23.79	23.94
PCS 1900	512	1850.2	19.25	20.28	20.40	20.64
	661	1880.0	19.73	20.76	20.88	21.20
	810	1909.8	19.48	20.51	20.63	20.81

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:2	1:2.67	1:2
Correct Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

5. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11B (DSSS)	802.11G (OFDM)	802.11N20 (OFDM)
Wifi	1	2412	11.8	9.85	9.9
	6	2437	12.16	10.22	10.25
	11	2462	11.58	9.75	9.81

Band	Channel	Frequency (MHz)	Output Power(dBm)
			802.11N40 (OFDM)
Wifi	3	2422	10.07
	6	2437	10.4
	9	2452	10.06

6. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	π/4-DQPSK	8-DPSK
BT	0	2402	7.041	7.583	7.811
	39	2441	9.233	9.741	9.899
	78	2480	8.190	8.624	8.809

Band	Channel	Frequency (MHz)	Output Power(dBm)
			GFSK
BT	0	2402	-0.561
	19	2440	0.689
	39	2480	-0.545

10. TEST RESULTS LIST

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.								
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g			
Right Side Of Head	Cheek/Touch	190	0.475	1.042	0.495			
	Ear/Tilt		0.388		0.404			
Left Side Of Head	Cheek/Touch		0.440		0.458			
	Ear/Tilt		0.363		0.378			
Body (10mm Separation)	GSM		Back upward		0.655	1.140	0.683	
			Front upward		0.571		0.595	
	GPRS		Back upward		128		1.022	1.165
					190		0.896	1.001
		251		0.846	0.958			
		Front upward	190	0.715	1.117		0.799	
		Edge A		0.685			0.765	
		Edge B		0.198			0.221	
	Edge C	0.573		0.640				
	EDGE	Back upward	0.711	1.119			0.796	

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.						
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g	
Right Side Of Head	Cheek/Touch	661	0.276	1.012	0.279	
	Ear/Tilt		0.110		0.111	
Left Side Of Head	Cheek/Touch		0.218		0.221	
	Ear/Tilt		0.115		0.116	
Body (10mm Separation)	GSM		Back upward	0.380	1.028	0.385
			Front upward	0.262		0.265
	GPRS		Back upward	0.777		0.799
			Front upward	0.632		0.650
		Edge A	0.222	0.228		
		Edge B	0.624	0.641		
	EDGE	Edge C	0.294	0.302		
	EDGE	Back upward	0.721	1.069		0.771

Note:

1. GPRS/EDGE test Scenario(Based on the Max. Time-based Average Power)

Band	Channel	Slots	Power level	Duty Cycle
GPRS850	190	4	5	1:2
EDGE850	190	4	5	1:2
GPRS1900	661	4	0	1:2
EDGE1900	661	4	0	1:2

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	4132	0.297	1.012	0.301
	Ear/Tilt		0.269		0.272
Left Side Of Head	Cheek/Touch		0.372		0.376
	Ear/Tilt		0.251		0.254
Body (10mm Separation)	Back upward		0.614		0.621
	Front upward		0.516		0.522
	Edge A		0.385		0.390
	Edge B		0.117		0.118
	Edge C		0.269		0.272

Summary of Measurement Results (WCDMA 1700MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	1312	0.422	1.076	0.454
	Ear/Tilt		0.096		0.103
Left Side Of Head	Cheek/Touch		0.193		0.208
	Ear/Tilt		0.123		0.132
Body (10mm Separation)	Back upward		0.567		0.610
	Front upward		0.541		0.582
	Edge A		0.099		0.107
	Edge B		0.494		0.532
	Edge C		0.130		0.140

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	9538	0.495	1.069	0.529
	Ear/Tilt		0.111		0.119
Left Side Of Head	Cheek/Touch		0.369		0.394
	Ear/Tilt		0.162		0.173
Body (10mm Separation)	Back upward		0.747		0.799
	Front upward		0.602		0.644
	Edge A		0.134		0.143
	Edge B		0.729		0.779
	Edge C	0.227	0.243		

Summary of Measurement Results (WLAN 802.11B Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Right Side Of Head	Cheek/Touch	6	0.176	1.081	0.190
	Ear/Tilt		0.101		0.109
Left Side Of Head	Cheek/Touch		0.139		0.150
	Ear/Tilt		0.083		0.090
Body (10mm Separation)	Back upward		0.089		0.096
	Front upward		0.045		0.049
	Edge C		0.035		0.038
	Edge D		0.080		0.086

Note:

- When the 1-g SAR for the mid-band channel or the channel with the Highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v05r01)
 ≤ 0.8 W/kg and transmission band ≤ 100 MHz

≤ 0.6 W/kg and, 100 MHz < transmission bandwidth ≤ 200 MHz
 ≤ 0.4 W/kg and transmission band > 200 MHz

2. The WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB Middle than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.
3. BT&wifi SAR test is conducted according to section 12 stand-alone SAR evaluation of this report.
4. During 802.11b(2.4GHz) testing, engineering testing software installed on the EUT can provide continuous transmitting RF signal. The RF signal utilized in SAR measurement has almost 100% duty cycle, and its crest factor is 1.
5. Scaling Factor calculation


Band	Tune-up power tolerance (dBm)	SAR test channel Power (dBm)	Scaling Factor
GSM 850	PCL = 5, PWR = 31.5+-0.5	31.82	1.042
GPRS 850	PCL = 5, PWR =27+-0.5(4 slots)	26.93	1.140
		27.02	1.117
		26.96	1.132
EDGE 850	PCL = 5, PWR =27+-0.5(4 slots)	27.01	1.119
PCS 1900	PCL = 0, PWR = 28.5+-0.5	28.95	1.012
GPRS 1900	PCL=0, PWR= 24+-0.5(4 slots)	24.38	1.028
EDGE 1900	PCL=0, PWR= 24+-0.5(4 slots)	24.21	1.069
WCDMA 850	Max output power =24(+1/-2)	24.95	1.012
WCDMA 1750	Max output power =24(+1/-2)	24.68	1.076
WCDMA 1900	Max output power =24(+1/-2)	24.71	1.069
802.11(2.4GHz)	Max output power =12+-0.5	12.16	1.081

11. HOTSPOT MODE EVALUATION PROCEDURE

The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hot Spot SAR v01r01.

SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless modes that support wireless routing.


Edge configurations:

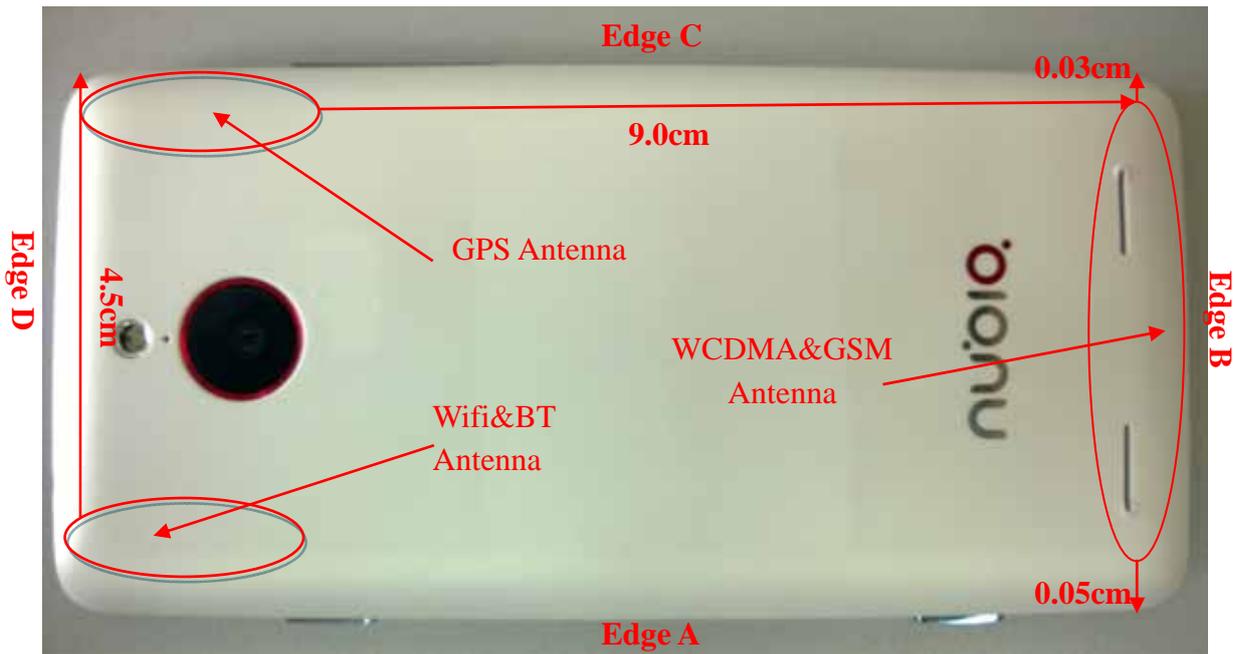

Assessment	Hotspot side for SAR					
	Test distance: 10mm					
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
WCDMA/GSM	Yes	Yes	Yes	Yes	Yes	No
WLAN&BT	Yes	Yes	No	No	Yes	Yes

12. MULTIPLE TRANSMITTERS EVALUATION

The are three transmitters build in EUT, as following:

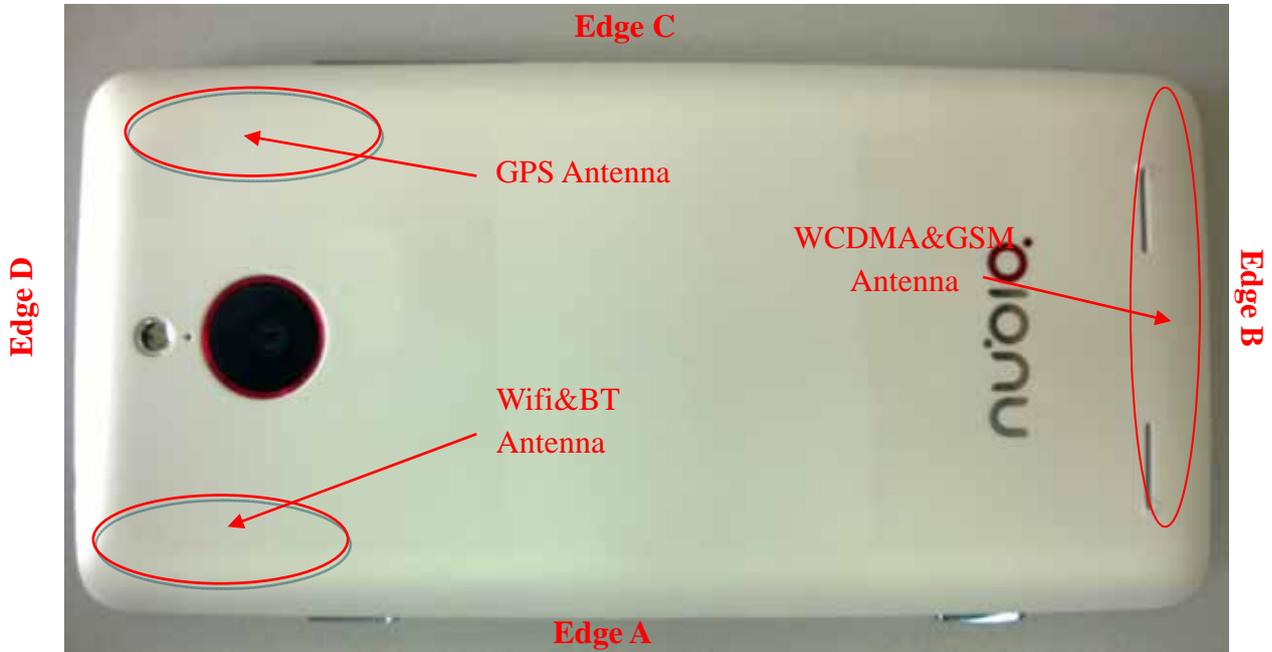

Stand-alone SAR

Test distance: 5mm		
Band	SAR Test Exclusion Threshold(mW) Per KDB 447498 D01v05r01	Highest power(mW)
WIFI(2.4G)	10	16.444
BT	10	9.770

According to the chart above, WIFI2.4G is required for Stand-alone SAR test, BT SAR is required for head, and BT body SAR is not required.

The SAR test for 802.11b(2.4GHz) is required, 802.11g/HT20/HT40 is not required, for the maximum average output power is less than 1/4 dB Higher than measured on the corresponding 802.11b channels. As per KDB 248227

The SAR test for BT is not required for highest power is not exceed the power threshold for 2450MHz at the test distance of 5mm.

The BT stand-alone body SAR is not required, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

(Max power= 9.770 mW ; min. test separation distance= 10mm for body; $f=2.4\text{GHz}$)

BT estimated Head SAR = 0.404 W/Kg (1g); BT estimated Body SAR = 0.202W/Kg (1g)

Simultaneous SAR

Description of Simultaneous Transmit Capabilities				
No.	Transmitter Combinations	Scenario Supported ?	Supported for Mobile Hotspot ?	Explanation
1	GSM(Voice)+GSM(Data)	No	No	Note 1
2	WCDMA(Voice)+WCDMA(Data)	Yes	Yes	
3	GSM(Voice)+WCDMA(Data)	No	No	
4	WCDMA(Voice)+GSM(Data)	No	No	
5	GSM(Data)+WCDMA(Voice)	No	No	
6	GSM(Voice)+WCDMA(Voice)	No	No	
7	GSM(Voice)+WiFi (/ BT)	Yes	No	Note 2
8	WCDMA(Voice)+WiFi (/BT)	Yes	No	
9	WCDMA(Voice)+WCDMA(Data)+WiFi	Yes	Yes	Note 3
10	GSM(Data)+WiFi	Yes	Yes	
11	WCDMA(Data)+WiFi	Yes	Yes	

Not applicable	Applicable	Head	Body-worn	Hotspot
1,3,4,5,6	2,7,8,9,10,11	2,7,8,9	2,7,8,9	2,9,10,11

Note:

- EUT system architecture does not support simultaneous voice and data (except on WCDMA), multiple voice channels, or multiple data channels during a single session on the cellular net work.
- Supported for voice plus background data.
- Support for mobile hotspot operation.
- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WiFi transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
- GSM supports voice and data transmission, though not simultaneously. WCDMA supports voice and

data transmission simultaneously.

7. Simultaneous Transmission SAR evaluation is not required for BT and WiFi, because the software mechanism have been incorporated to guarantee that the WLAN and Bluetooth transmitters would not simultaneously operate.
8. For Scenario **No.2,8,9,11**, WCDMA and WiFi is tested separately, the WCDMA mode is test with 12.2kbps RMC and TPC set to all "1", if maximum SAR for 12.2kbps RMC is $\leq 75\%$ of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSDPA/HSUPA active is less than 1/4 dB Middle than that measured without HSDPA/HSUPA using 12.2kbps RMC, according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.
9. For Scenario **No.7,10**, GSM and WiFi is tested separately, the GSM mode do not supports voice and data transmission simultaneously, voice (GSM) and data (GPRS/EDGE) is tested separately.

1. Applicable Multiple Scenario Evaluation

Test Position	WCDMA&GSM SARMax (W/Kg)	Bluetooth SAR(W/Kg)	WiFi SARMax(W/Kg)	Σ 1-g SARMax(W/Kg)	
				BT&Main Ant	WiFi&Main Ant
Head SAR	0.529	0.404	0.190	0.933	0.719
Body SAR	1.165	0.202	0.096	1.367	1.261

Simultaneous Transmission SAR evaluation is not required for Wifi and WCDMA&GSM, because the sum of 1g SARMax is **1.261W/Kg** < 1.6W/Kg for Wifi and WCDMA&GSM.

Simultaneous Transmission SAR evaluation is not required for BT and WCDMA&GSM, because the sum of 1g SARMax is **1.367W/Kg** < 1.6W/Kg for BT and WCDMA&GSM.

(According to KDB 447498D01v05, the sum of the Highest reported SAR of each antenna does not exceed the limit, simultaneous transmission SAR evaluation is not required.)

ANNEX A GRAPH TEST RESULTS

BAND	<u>PARAMETERS</u>
<u>GSM850</u>	<p><u>Measurement 1:</u> Right Head with Cheek device position on Middle Channel in GSM mode</p> <p><u>Measurement 2:</u> Right Head with Tilt device position on Middle Channel in GSM mode</p> <p><u>Measurement 3:</u> Left Head with Cheek device position on Middle Channel in GSM mode</p> <p><u>Measurement 4:</u> Left Head with Tilt device position on Middle Channel in GSM mode</p> <p><u>Measurement 5:</u> Flat Plane with Body device position on Middle Channel in GSM mode</p> <p><u>Measurement 6:</u> Flat Plane with Body device position on Middle Channel in GSM mode</p> <p><u>Measurement 7:</u> Flat Plane with Body device position on Low Channel in EDGE mode</p> <p><u>Measurement 8:</u> Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 9:</u> Flat Plane with Body device position on High Channel in EDGE mode</p> <p><u>Measurement 10:</u> Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 11:</u> Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 12:</u> Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 13:</u> Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 14:</u> Flat Plane with Body device position on Middle Channel in GPRS mode</p>
<u>GSM1900</u>	<p><u>Measurement 15:</u> Right Head with Cheek device position on Middle Channel in GSM mode</p> <p><u>Measurement 16:</u> Right Head with Tilt device position on Middle Channel in GSM mode</p> <p><u>Measurement 17:</u> Left Head with Cheek device position on Middle Channel in GSM mode</p> <p><u>Measurement 18:</u> Left Head with Tilt device position on Middle Channel in GSM mode</p>

	<p><u>Measurement 19</u>: Flat Plane with Body device position Middle Channel in GSM mode</p> <p><u>Measurement 20</u>: Flat Plane with Body device position on Middle Channel in GSM mode</p> <p><u>Measurement 21</u>: Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 22</u>: Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 23</u>: Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 24</u>: Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 25</u>: Flat Plane with Body device position on Middle Channel in EDGE mode</p> <p><u>Measurement 26</u>: Flat Plane with Body device position on Middle Channel in GPRS mode</p>
<p><u>WCDMA</u> <u>850</u></p>	<p><u>Measurement 27</u>: Right Head with Cheek device position on Low Channel in WCDMA mode</p> <p><u>Measurement 28</u>: Right Head with Tilt device position on Low Channel in WCDMA mode</p> <p><u>Measurement 29</u>: Left Head with Cheek device position on Low Channel in WCDMA mode</p> <p><u>Measurement 30</u>: Left Head with Tilt device position on Low Channel in WCDMA mode</p> <p><u>Measurement 31</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 32</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 33</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 34</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 35</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p>
<p><u>WCDMA</u> <u>1700</u></p>	<p><u>Measurement 36</u>: Right Head with Cheek device position on Low Channel in WCDMA mode</p> <p><u>Measurement 37</u>: Right Head with Tilt device position on Low Channel in WCDMA mode</p> <p><u>Measurement 38</u>: Left Head with Cheek device position on Low Channel in WCDMA mode</p>

	<p><u>Measurement 39</u>: Left Head with Tilt device position on Low Channel in WCDMA mode</p> <p><u>Measurement 40</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 41</u>: Flat Plane with Body device position on Low Channel in WMA mode</p> <p><u>Measurement 42</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 43</u>: Flat Plane with Body device position on Low Channel in WCDMA mode</p> <p><u>Measurement 44</u>: Flat Plane with Body device position on Low Channel in WCMA mode</p>
<p><u>WCDMA</u> <u>1900</u></p>	<p><u>Measurement 45</u>: Right Head with Cheek device position on High Channel in WCDMA mode</p> <p><u>Measurement 46</u>: Right Head with Tilt device position on High Channel in WCDMA mode</p> <p><u>Measurement 47</u>: Left Head with Cheek device position on High Channel in WCDMA mode</p> <p><u>Measurement 48</u>: Left Head with Tilt device position on High Channel in WCDMA mode</p> <p><u>Measurement 49</u>: Flat Plane with Body device position on High Channel in WCDMA mode</p> <p><u>Measurement 50</u>: Flat Plane with Body device position on High Channel in WMA mode</p> <p><u>Measurement 51</u>: Flat Plane with Body device position on High Channel in WCDMA mode</p> <p><u>Measurement 52</u>: Flat Plane with Body device position on High Channel in WCDMA mode</p> <p><u>Measurement 53</u>: Flat Plane with Body device position on High Channel in WCMA mode</p>
<p><u>802.11B</u> <u>(2450)</u></p>	<p><u>Measurement 54</u>: Right Head with Cheek device position on Middle Channel in DSSS mode</p> <p><u>Measurement 55</u>: Right Head with Tilt device position on Middle Channel in DSSS mode</p> <p><u>Measurement 56</u>: Left Head with Cheek device position on Middle Channel in DSSS mode</p> <p><u>Measurement 57</u>: Left Head with Tilt device position on Middle Channel in DSSS mode</p> <p><u>Measurement 58</u>: Flat Plane with Body device position on Middle Channel in DSSS mode</p>



	<p><u>Measurement 59</u>: Flat Plane with Body device position on Middle Channel in DSSS mode</p> <p><u>Measurement 60</u>: Flat Plane with Body device position on Middle Channel in DSSS mode</p> <p><u>Measurement 61</u>: Flat Plane with Body device position on Middle Channel in DSSS mode.</p>
--	--

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 8 minutes 49 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	-0.560000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

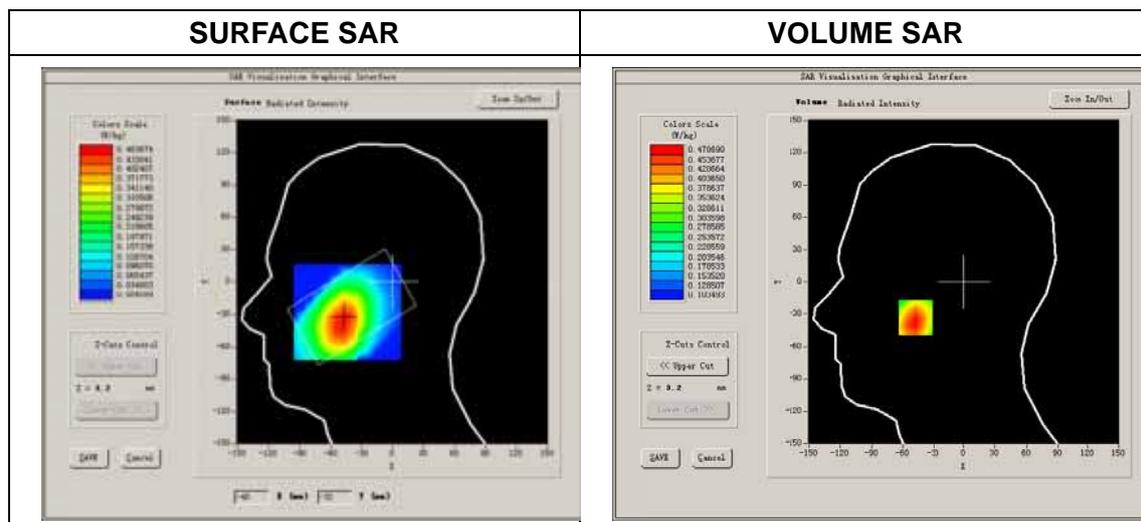

Maximum location: X=-48.00, Y=-33.00

SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.381209
SAR 1g (W/Kg)	0.475292

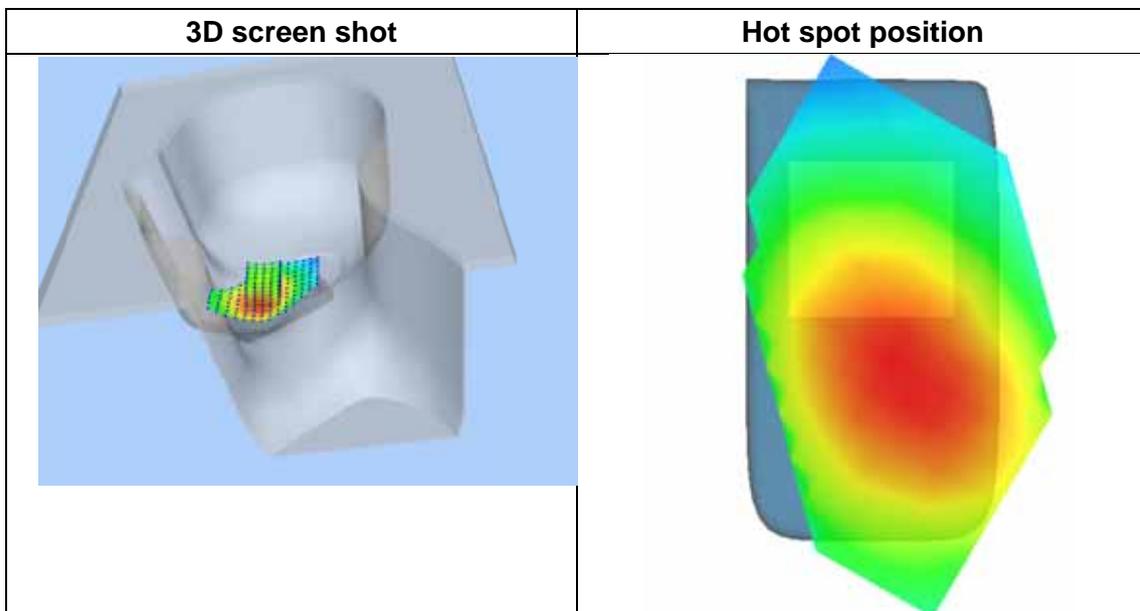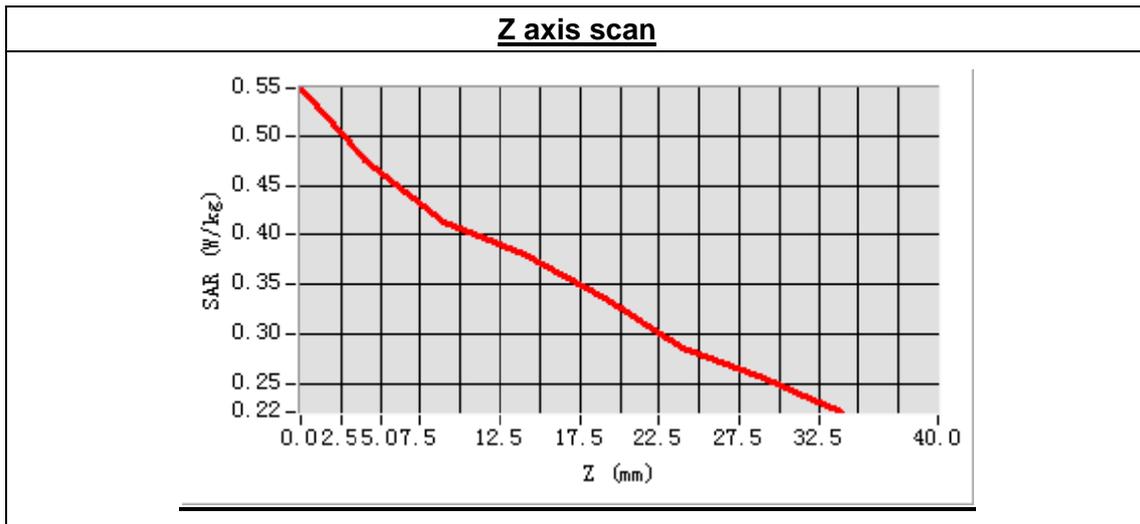

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 8 minutes 16 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift(%)	-0.560000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

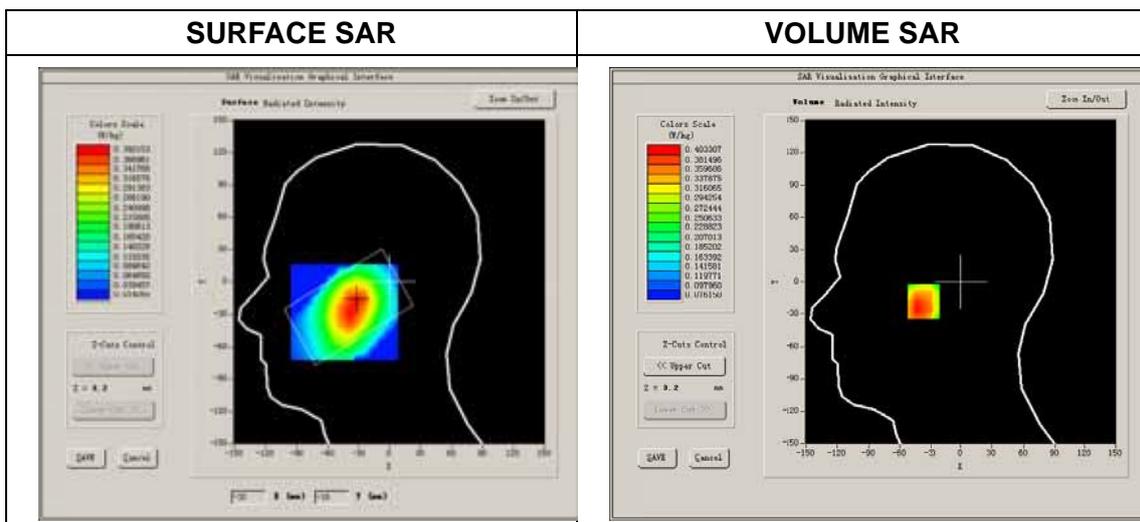

Maximum location: X=-32.00, Y=-18.00

SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.303721
SAR 1g (W/Kg)	0.388287

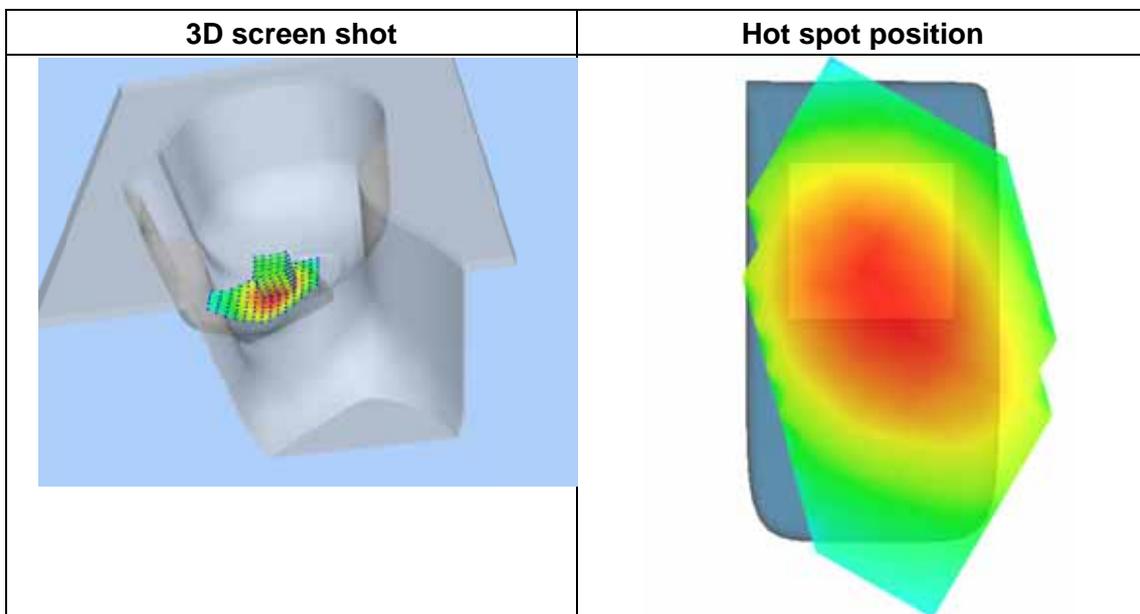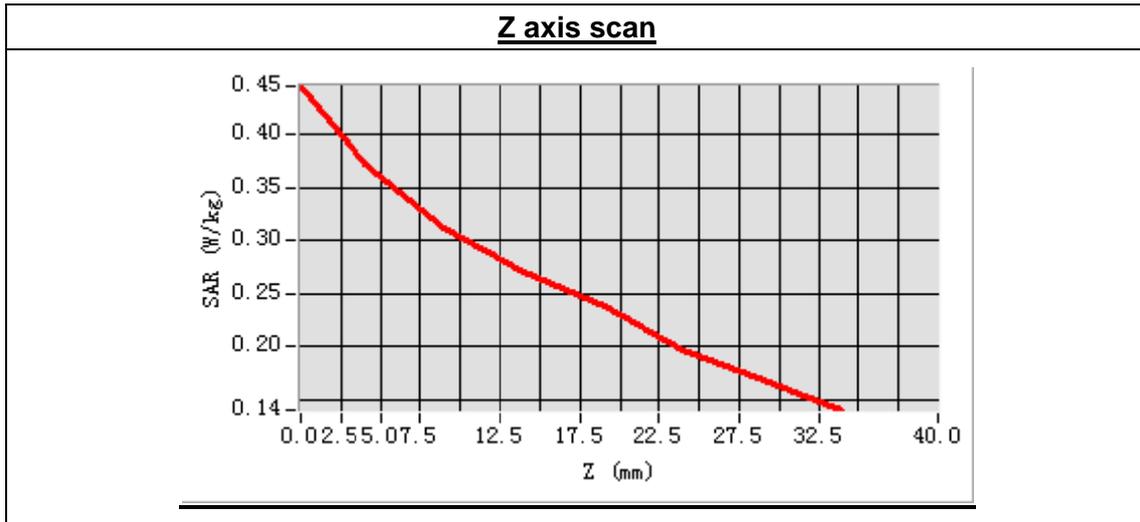

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration:8 minutes 28 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	-1.680000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

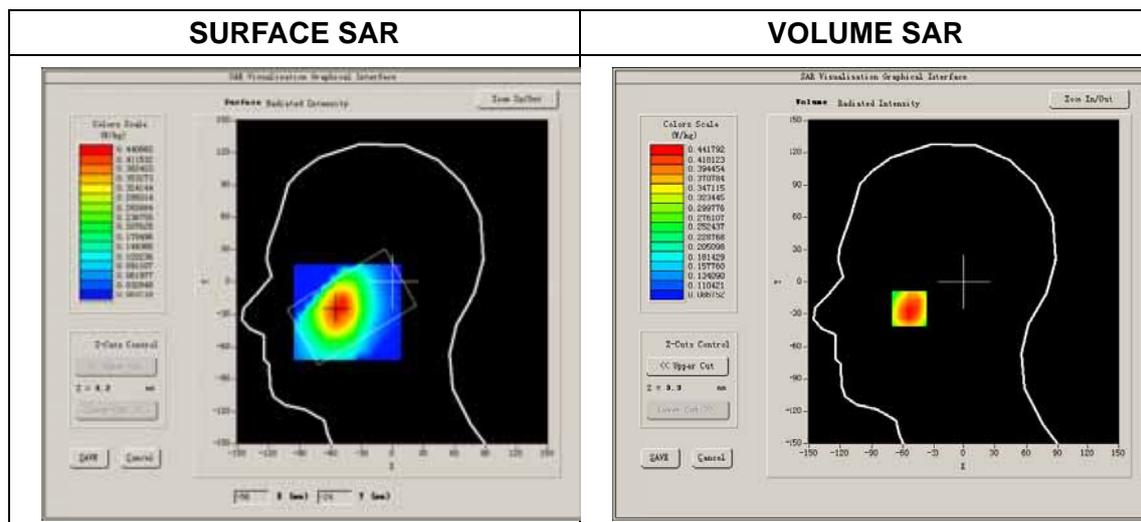

Maximum location: X=-54.00, Y=-25.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.349370
SAR 1g (W/Kg)	0.440302

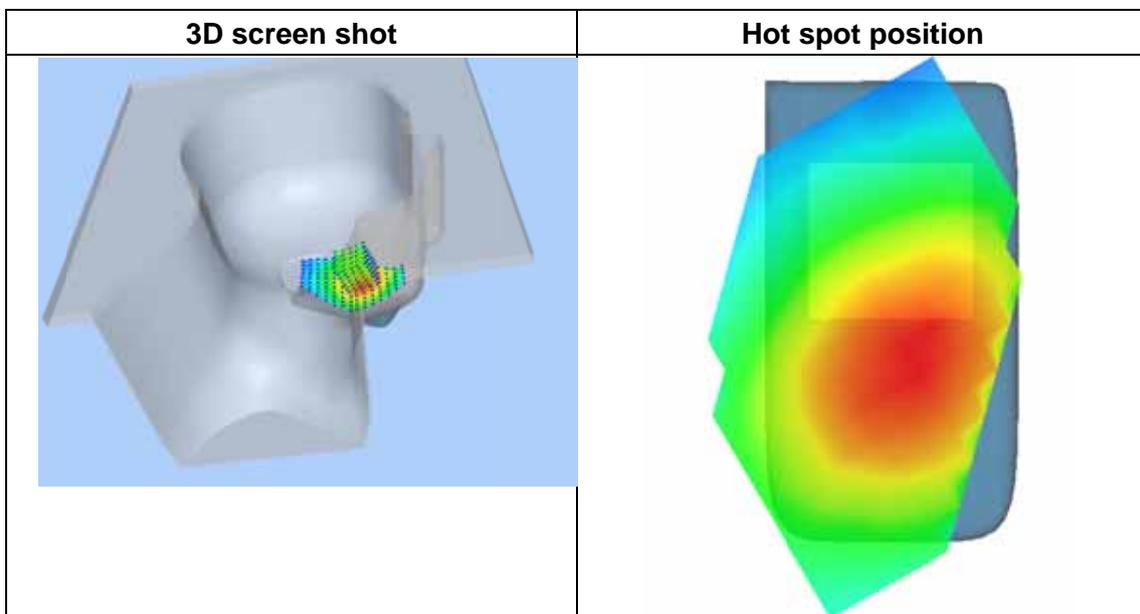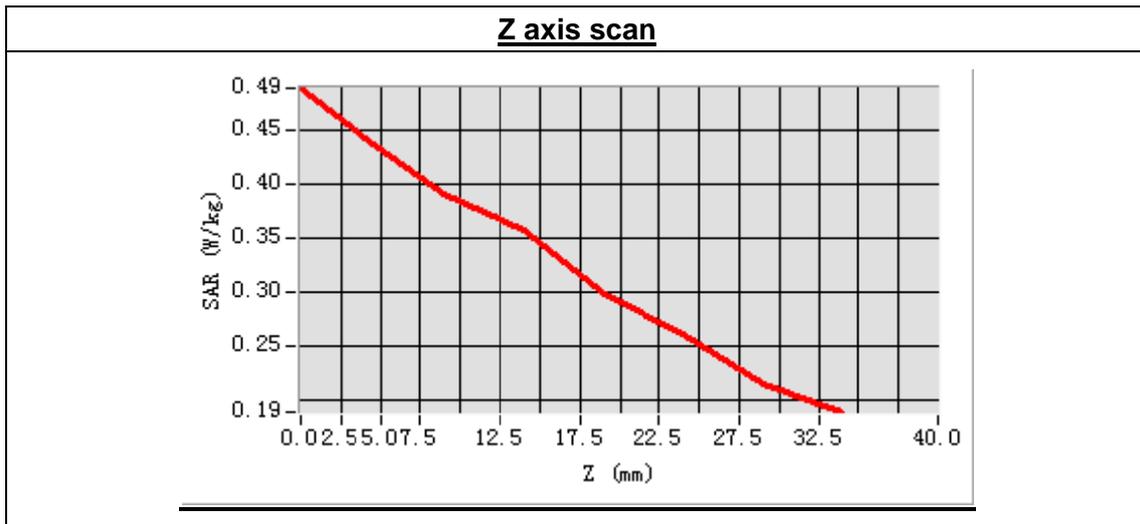

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 8 minutes 12 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift(%)	-0.360000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:8

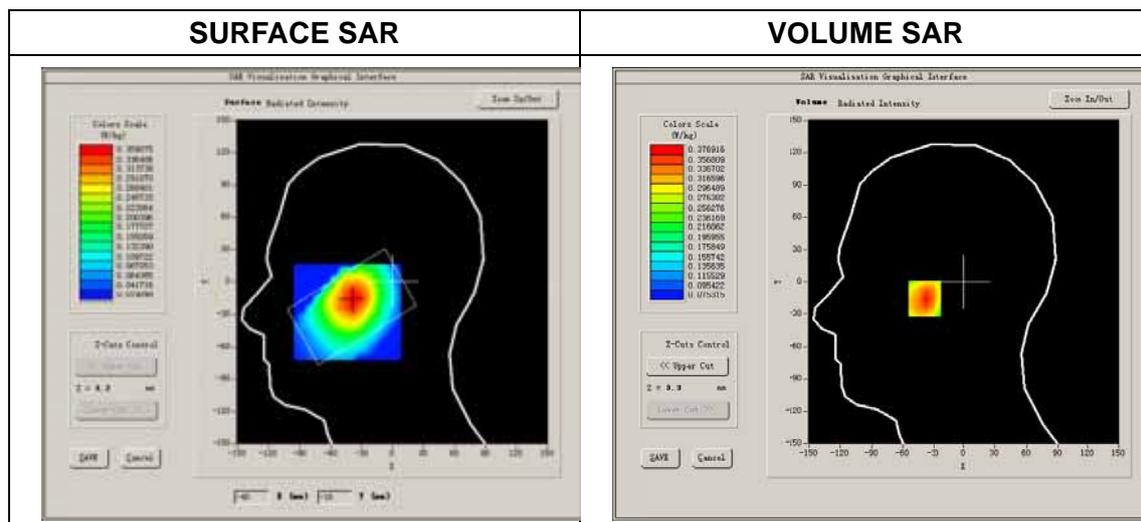

Maximum location: X=-38.00, Y=-15.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.281280
SAR 1g (W/Kg)	0.362937

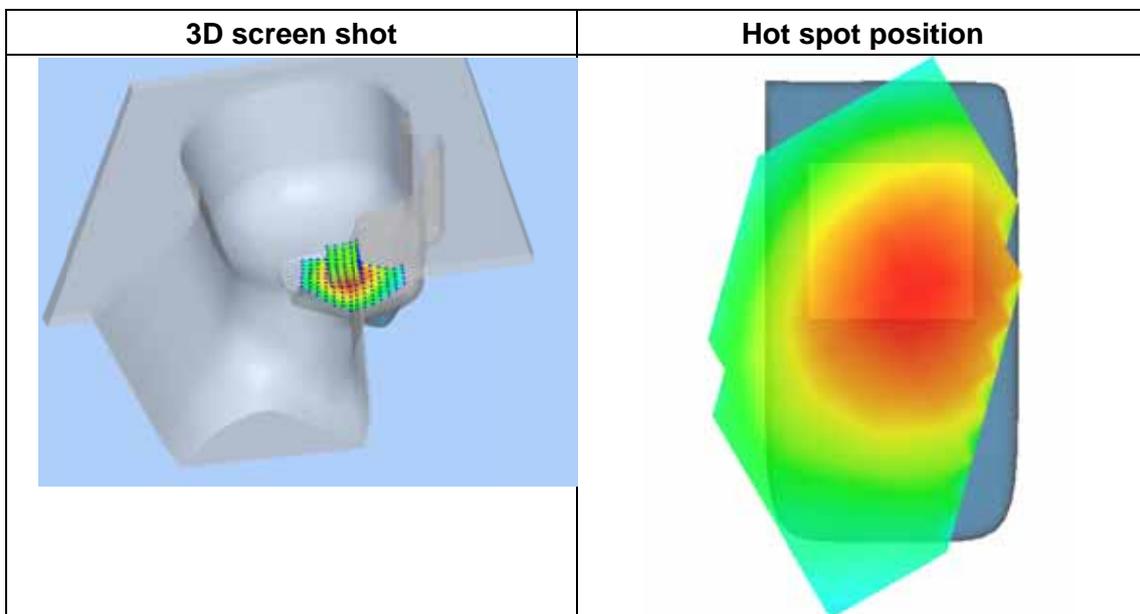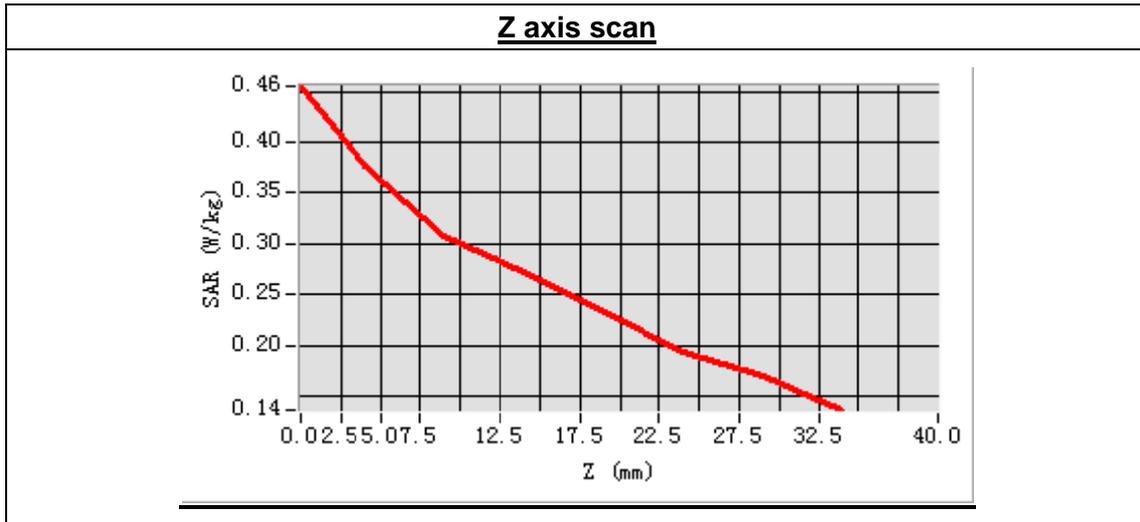

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 25 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-4.010000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:8

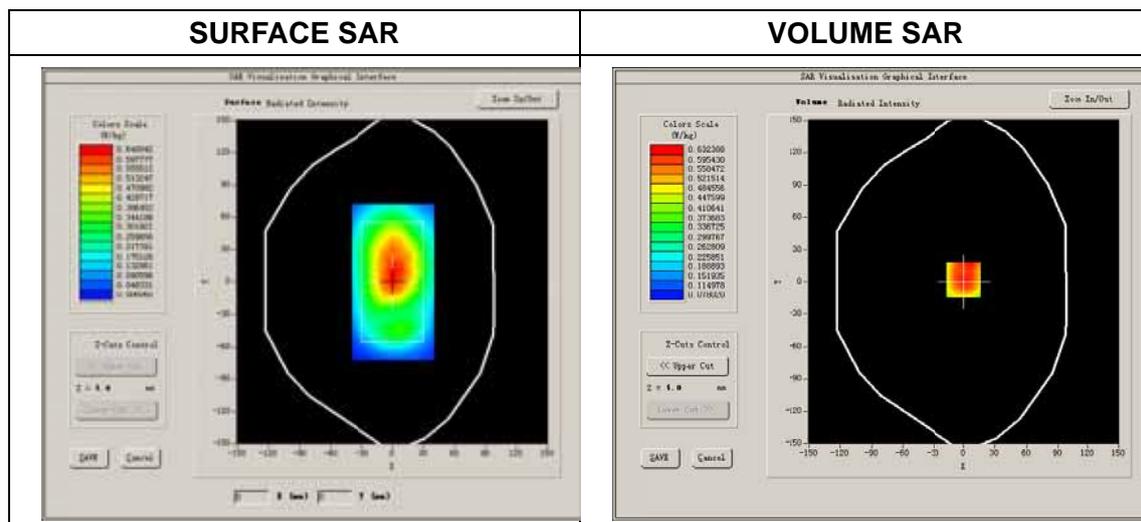

Maximum location: X=0.00, Y=2.00

SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.514965
SAR 1g (W/Kg)	0.655190

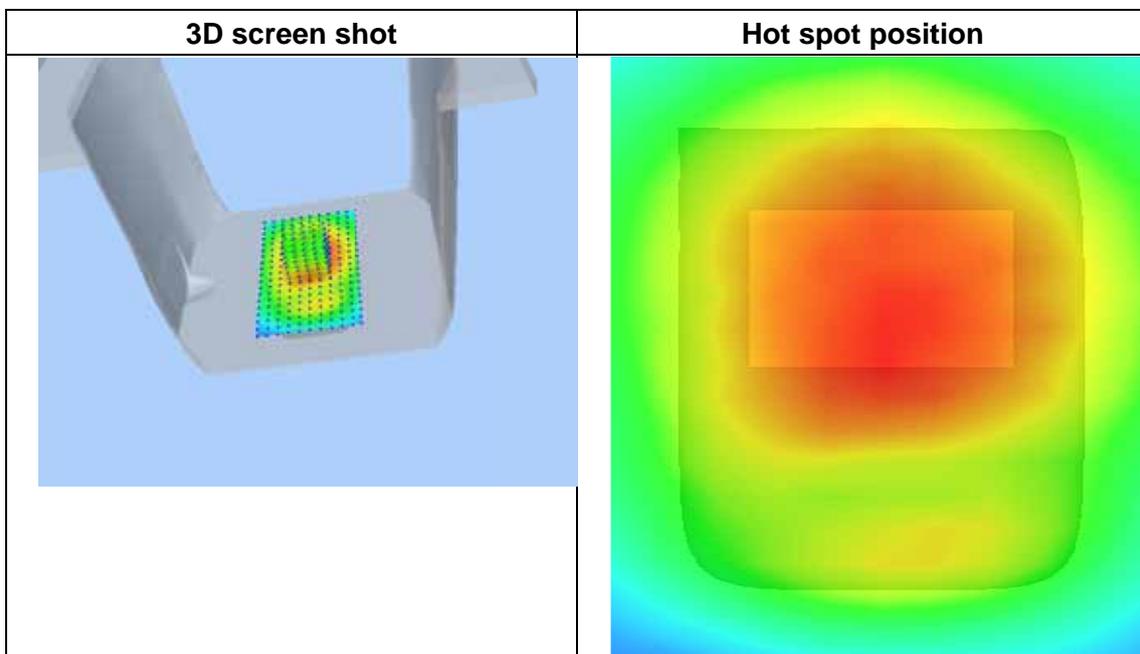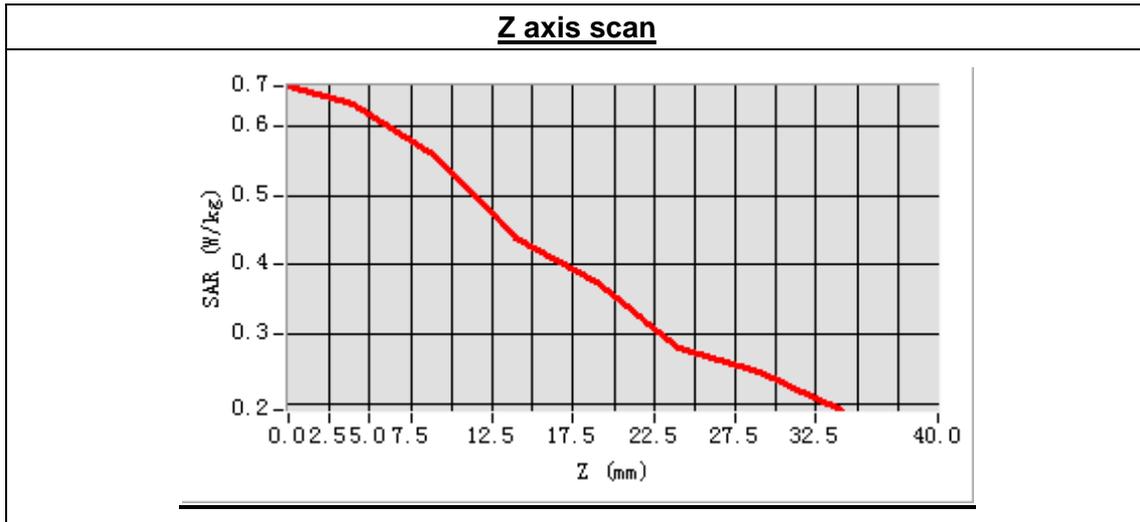

MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	1.120000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:8

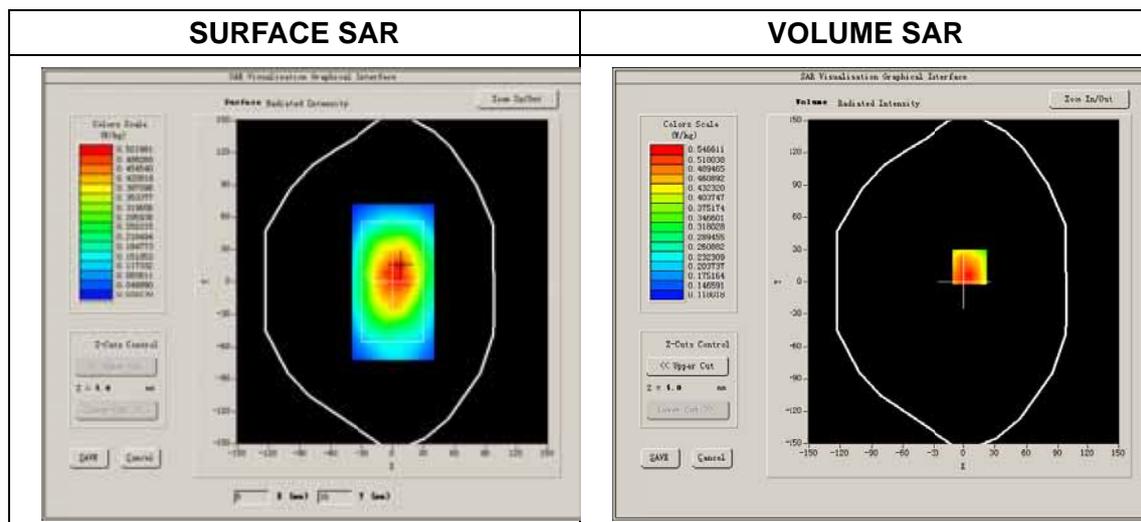

Maximum location: X=6.00, Y=14.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.446044
SAR 1g (W/Kg)	0.570549

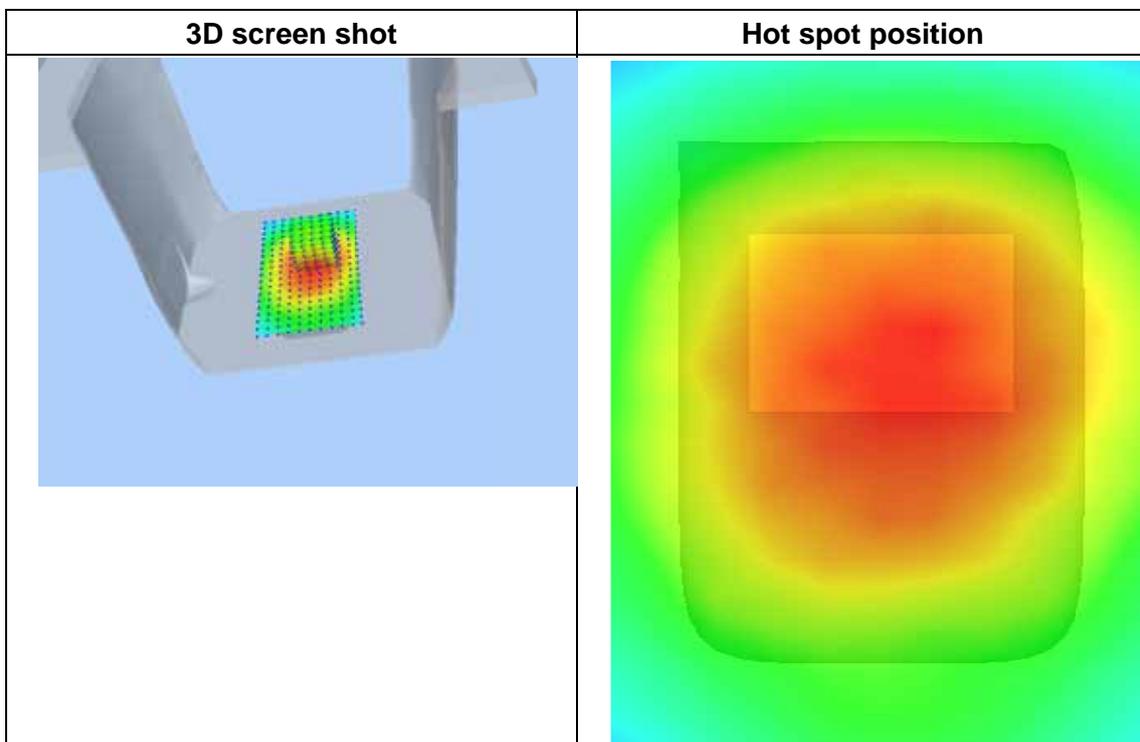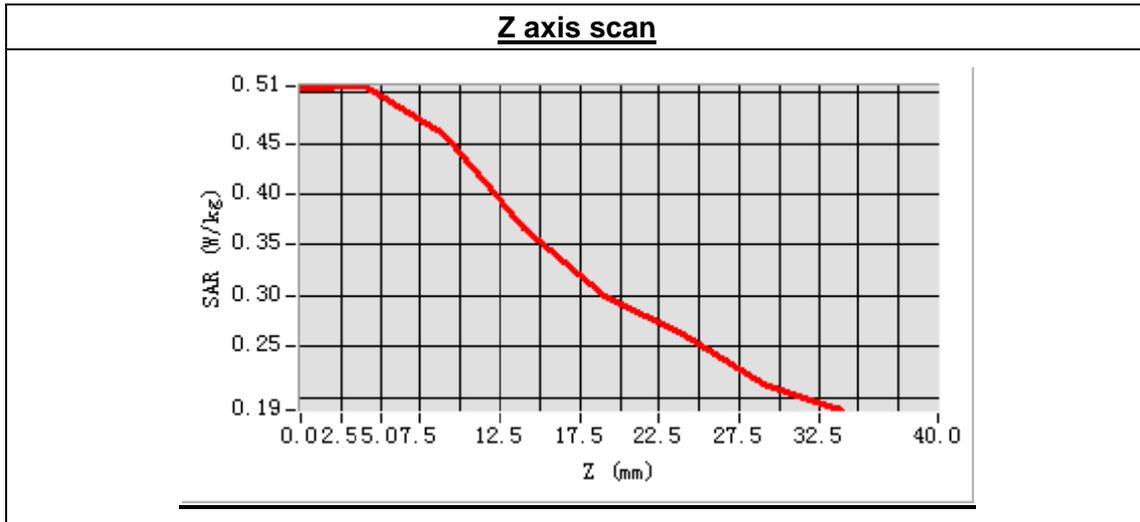

MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 26 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results



Low Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	-0.480000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

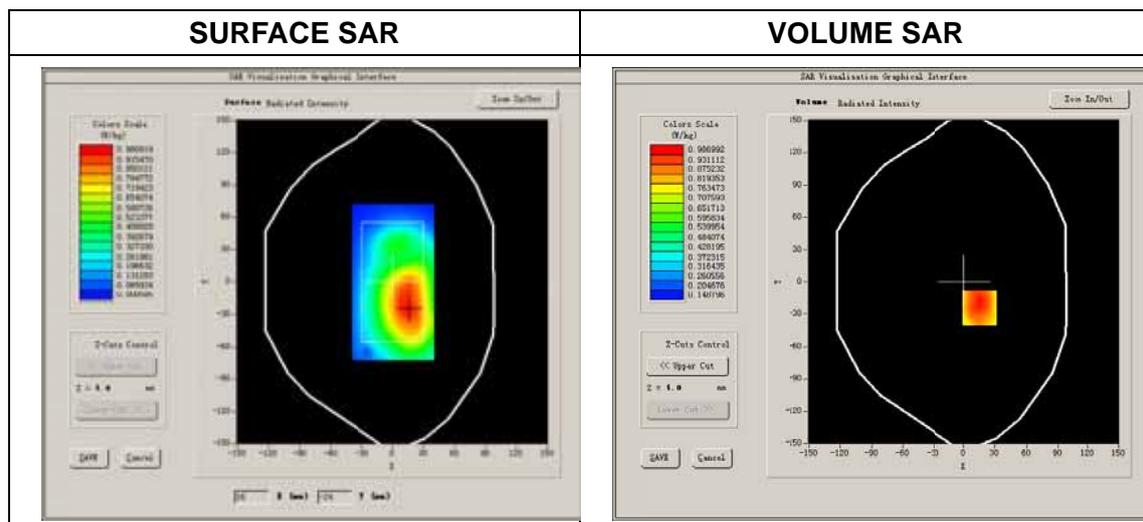

Maximum location: X=15.00, Y=-24.00
 SAR Peak: 1.43 W/kg

SAR 10g (W/Kg)	0.750970
SAR 1g (W/Kg)	1.021998

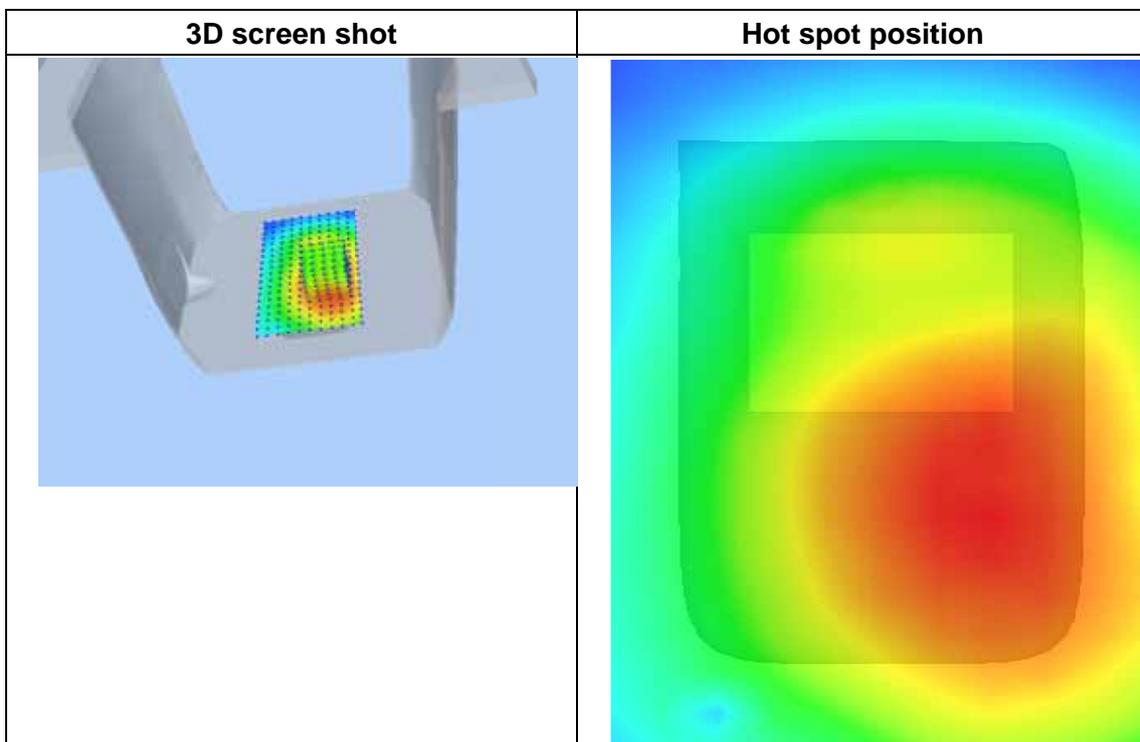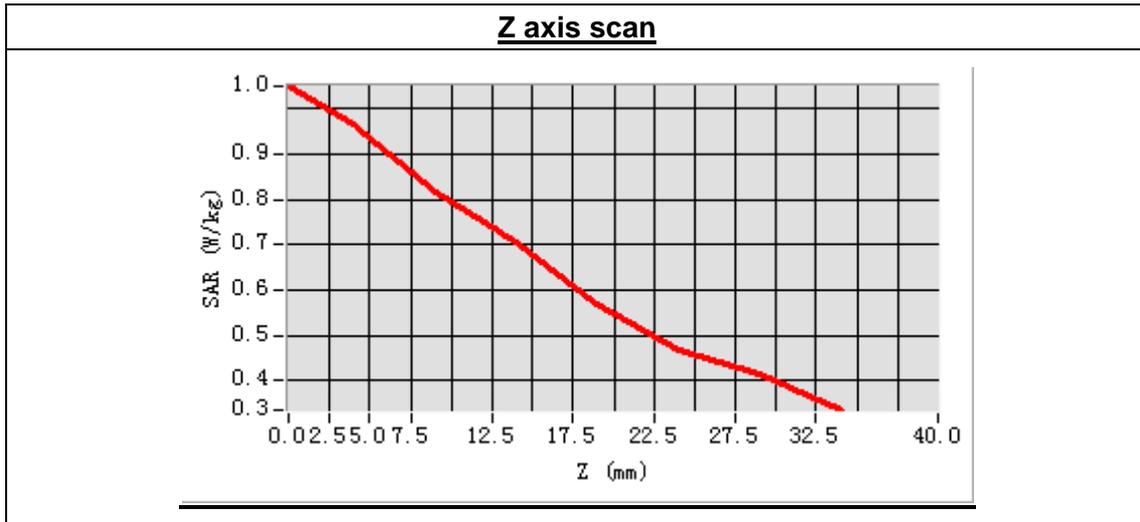

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 18 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results



Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	0.550000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

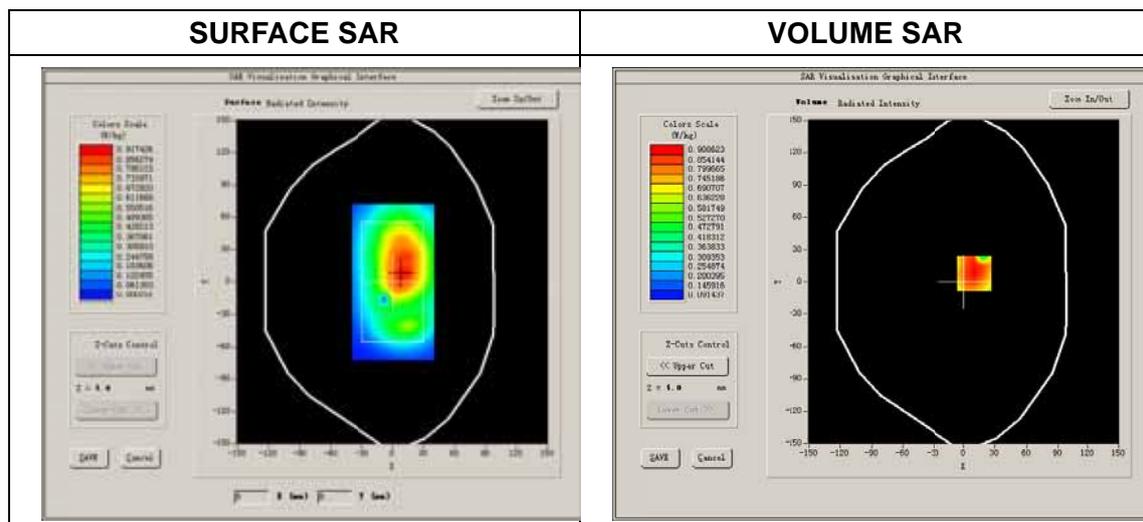

Maximum location: X=10.00, Y=8.00
 SAR Peak: 1.24 W/kg

SAR 10g (W/Kg)	0.675624
SAR 1g (W/Kg)	0.895535

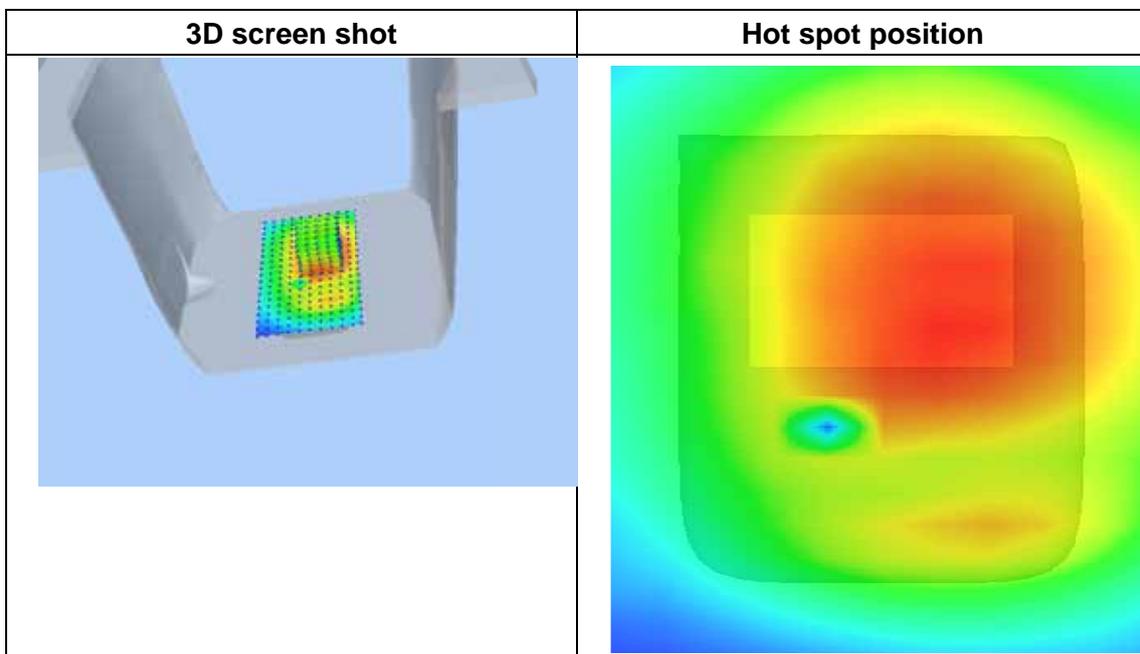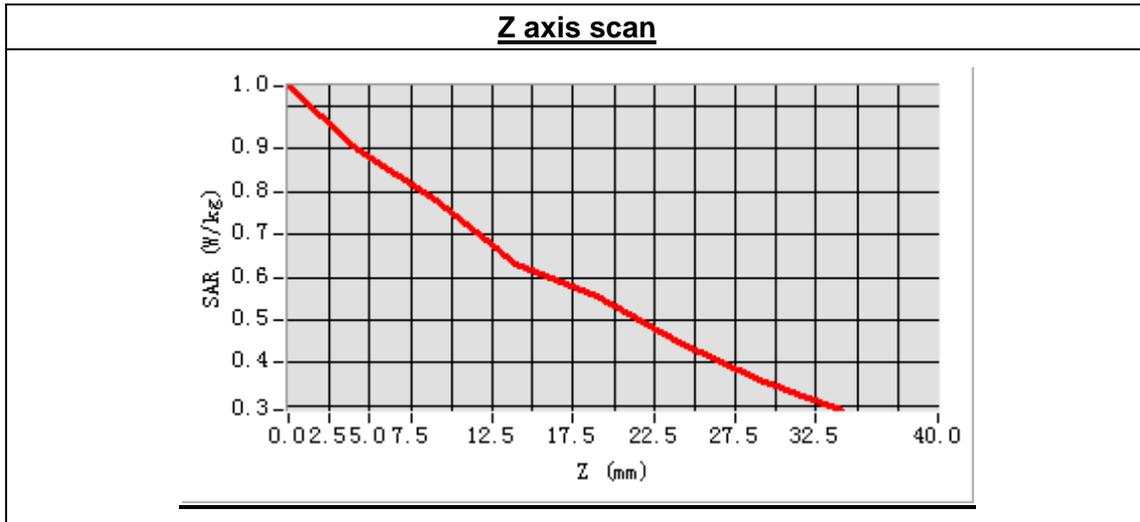

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 25 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

High Band SAR (Channel 251):



Frequency (MHz)	848.800000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	-0.040000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

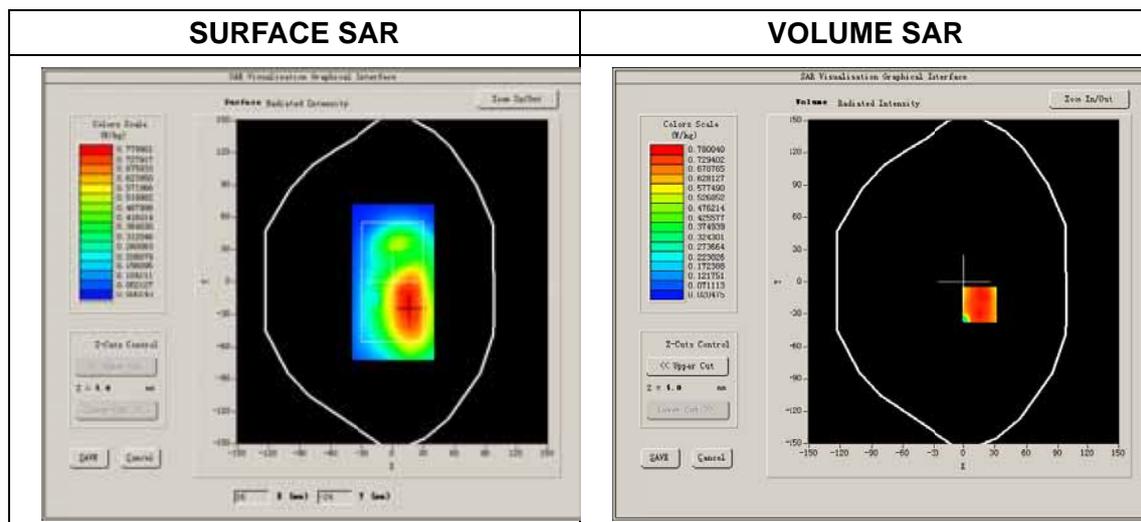

Maximum location: X=15.00, Y=-21.00

SAR Peak: 1.25 W/kg

SAR 10g (W/Kg)	0.611860
SAR 1g (W/Kg)	0.845841

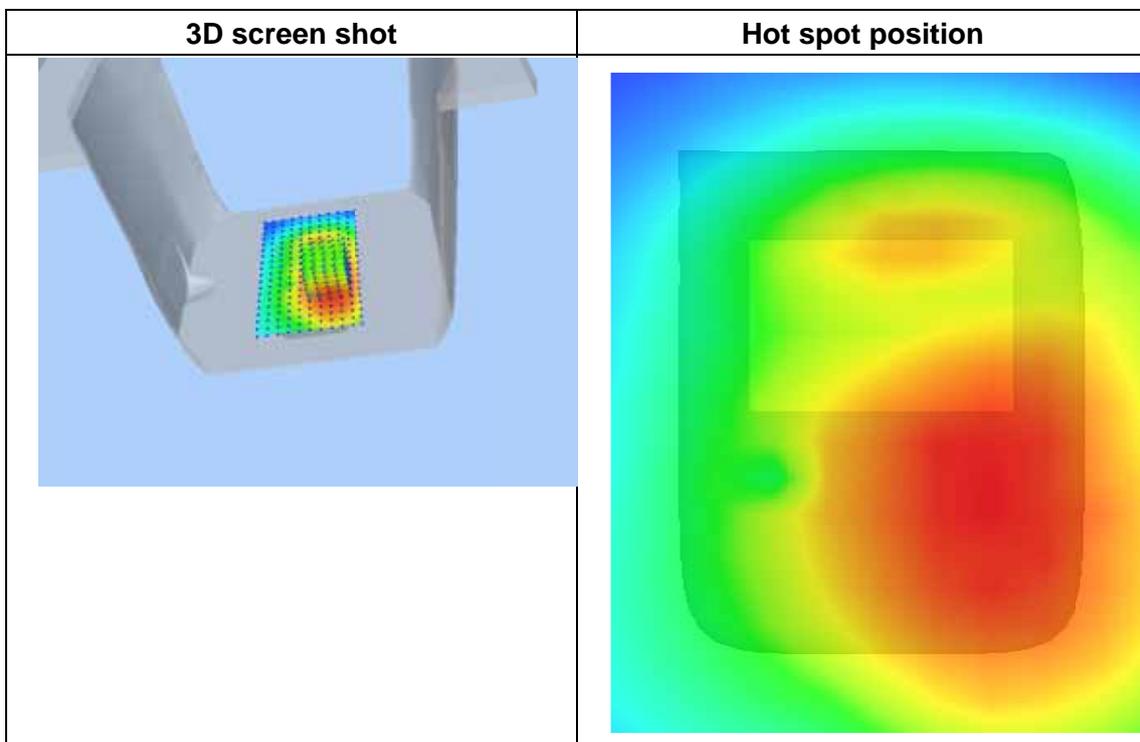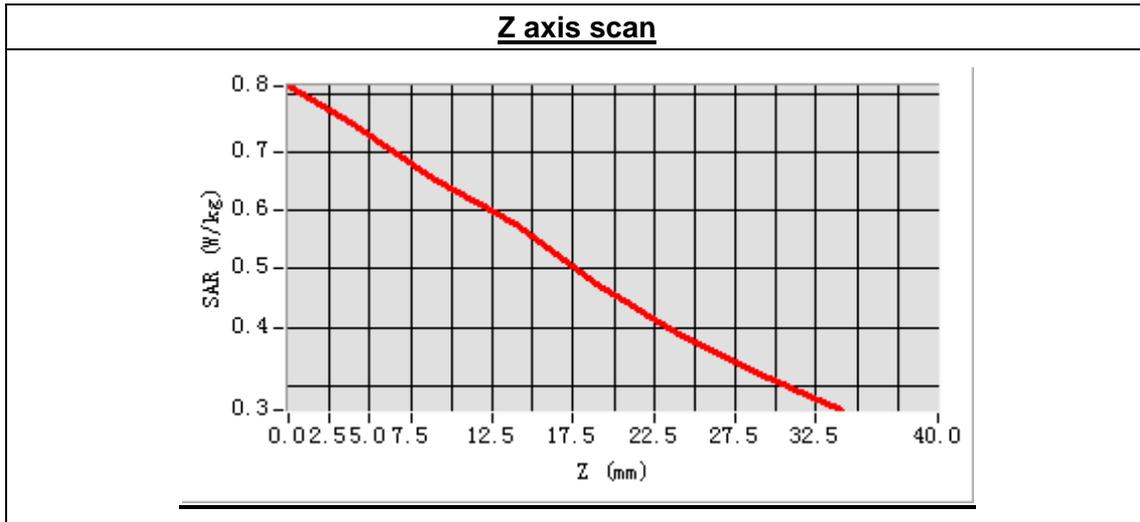

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 32 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	1.160000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

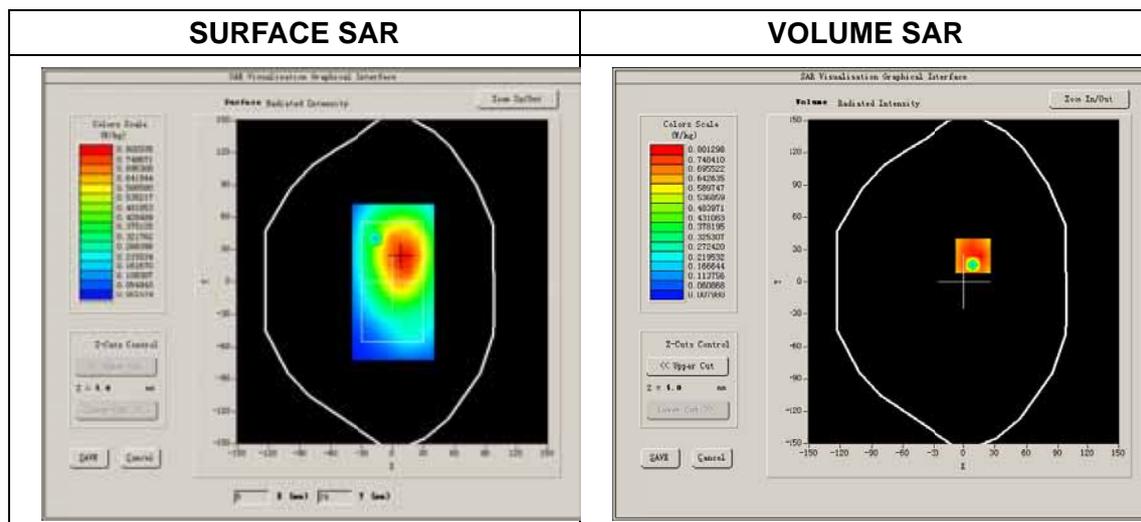

Maximum location: X=9.00, Y=24.00

SAR Peak: 0.97 W/kg

SAR 10g (W/Kg)	0.598357
SAR 1g (W/Kg)	0.714623

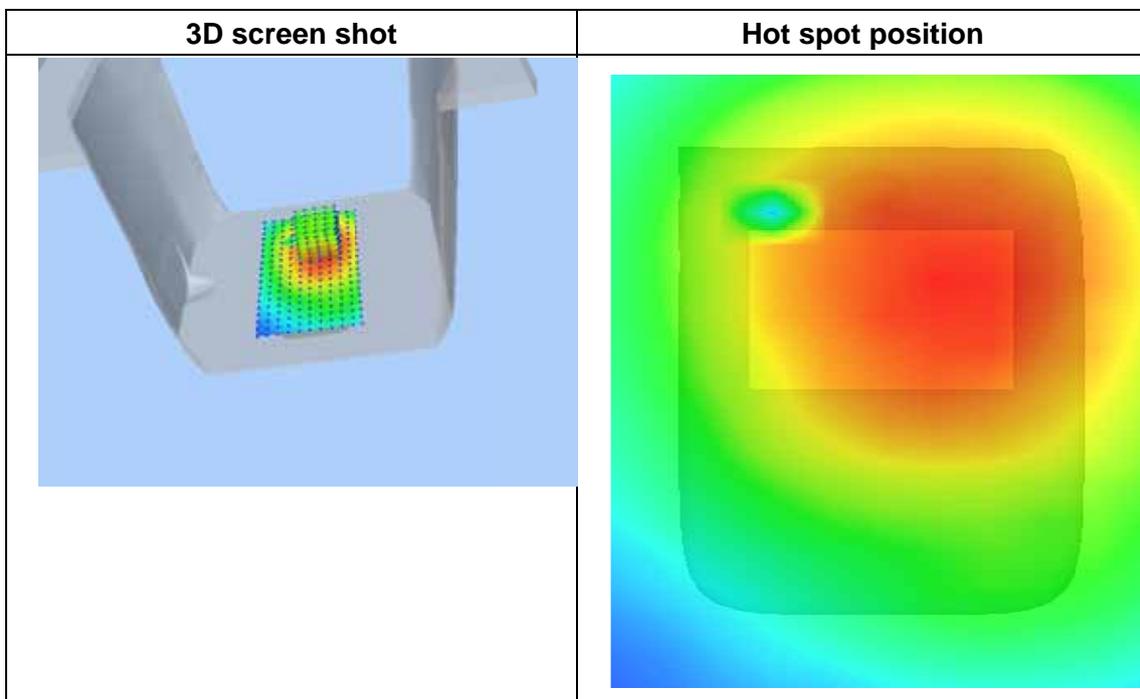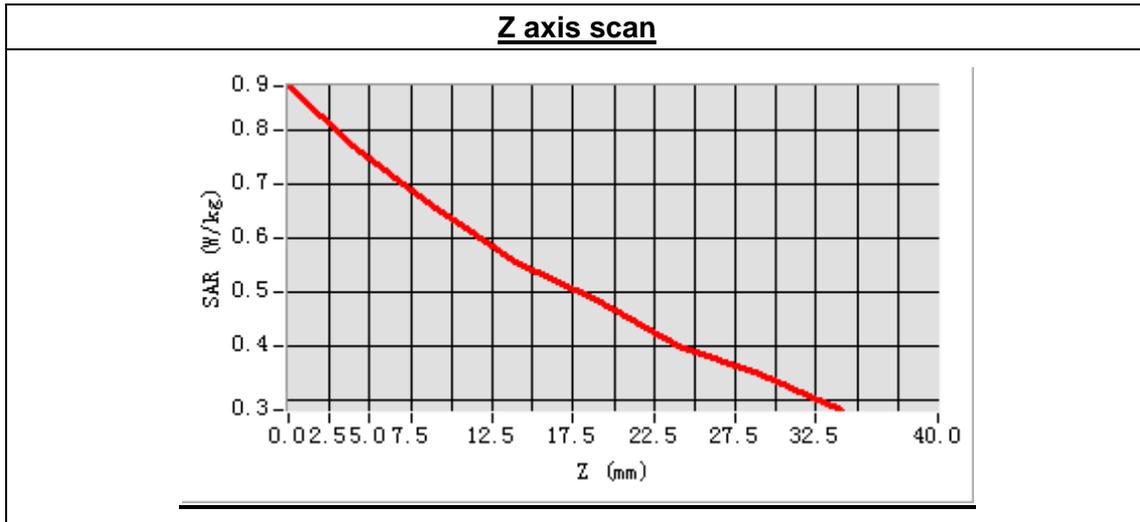

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	-0.780000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

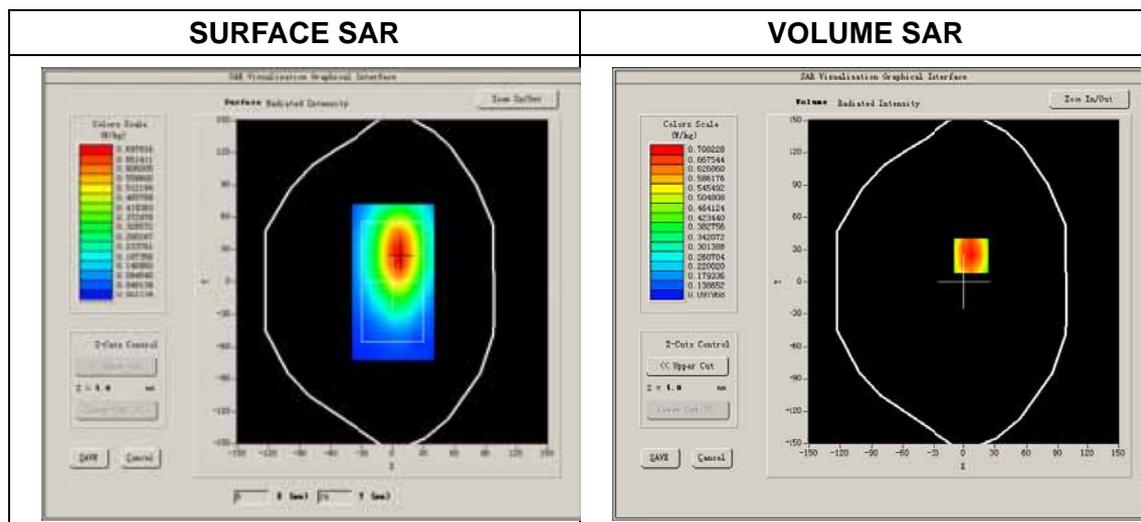

Maximum location: X=7.00, Y=24.00

SAR Peak: 0.88 W/kg

SAR 10g (W/Kg)	0.494205
SAR 1g (W/Kg)	0.685436

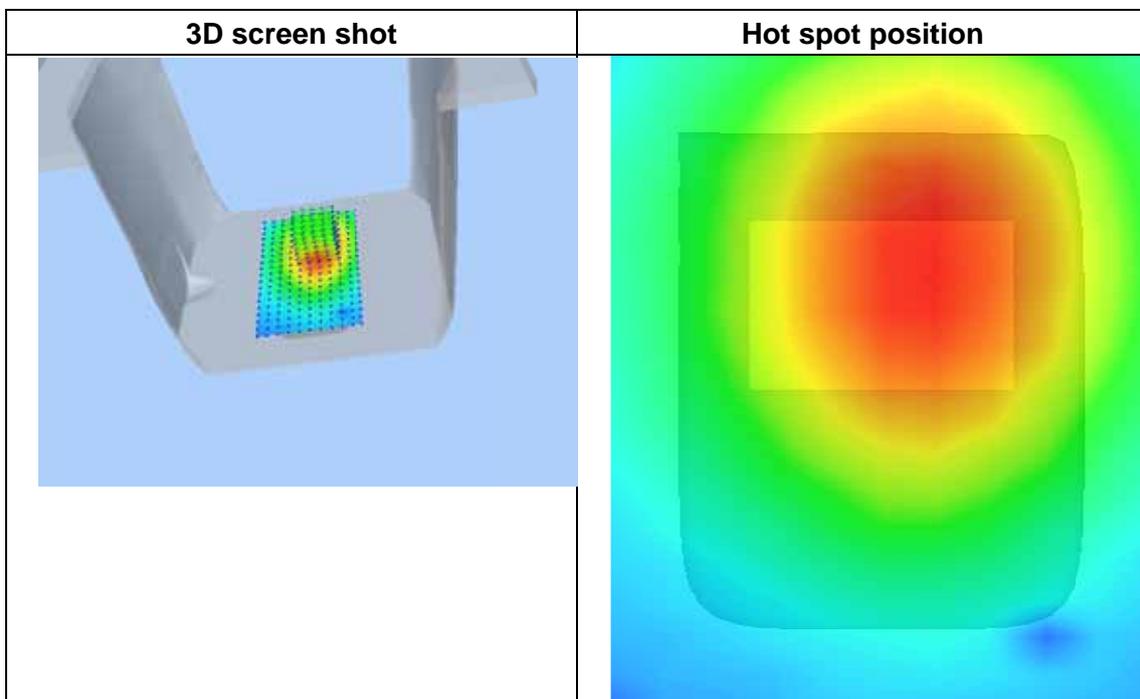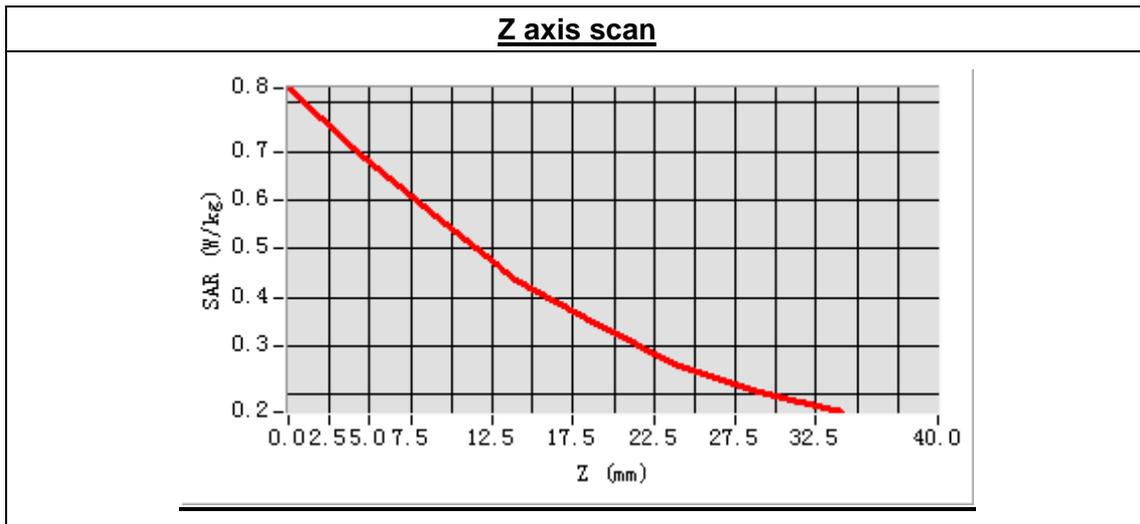

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 25 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	2.990000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

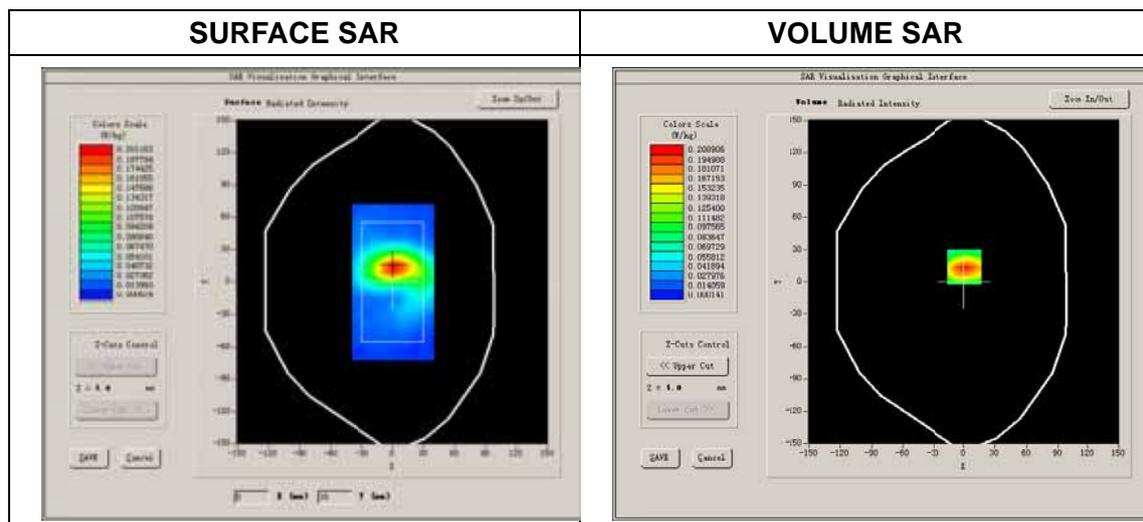

Maximum location: X=1.00, Y=14.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.122378
SAR 1g (W/Kg)	0.197865

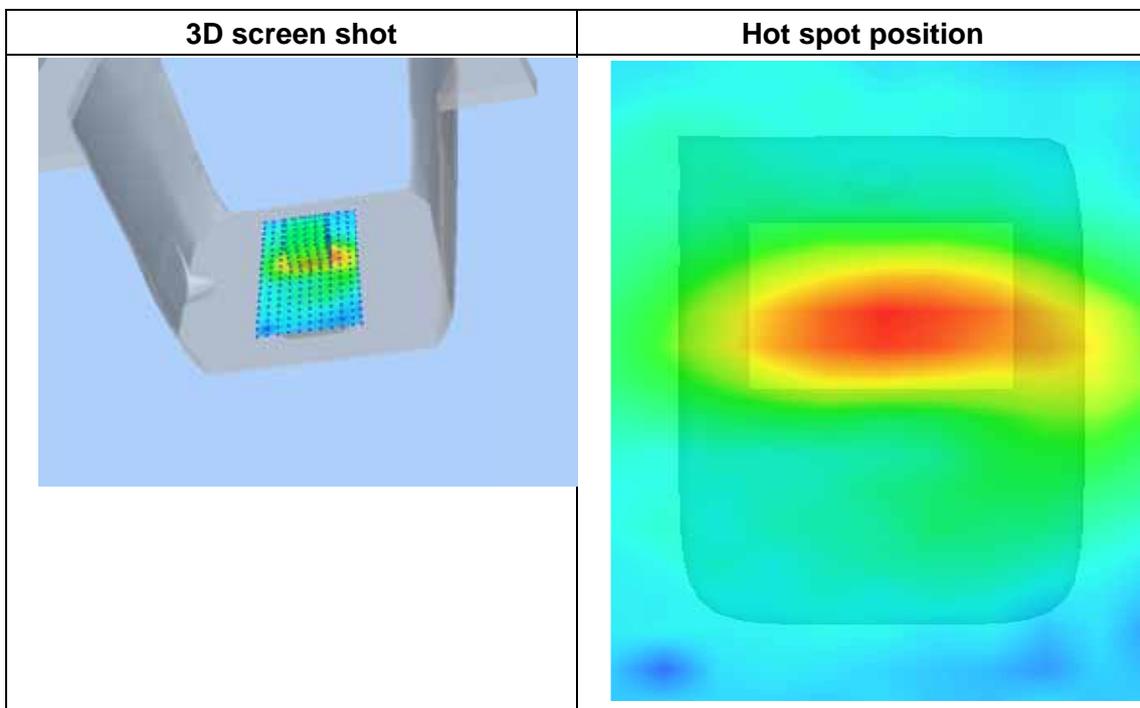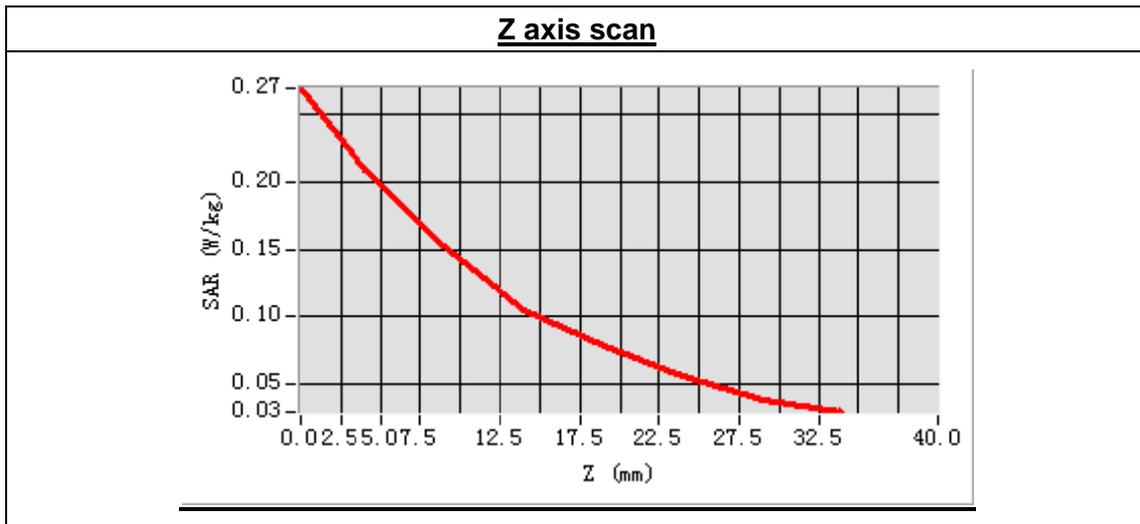

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 31 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	1.260000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

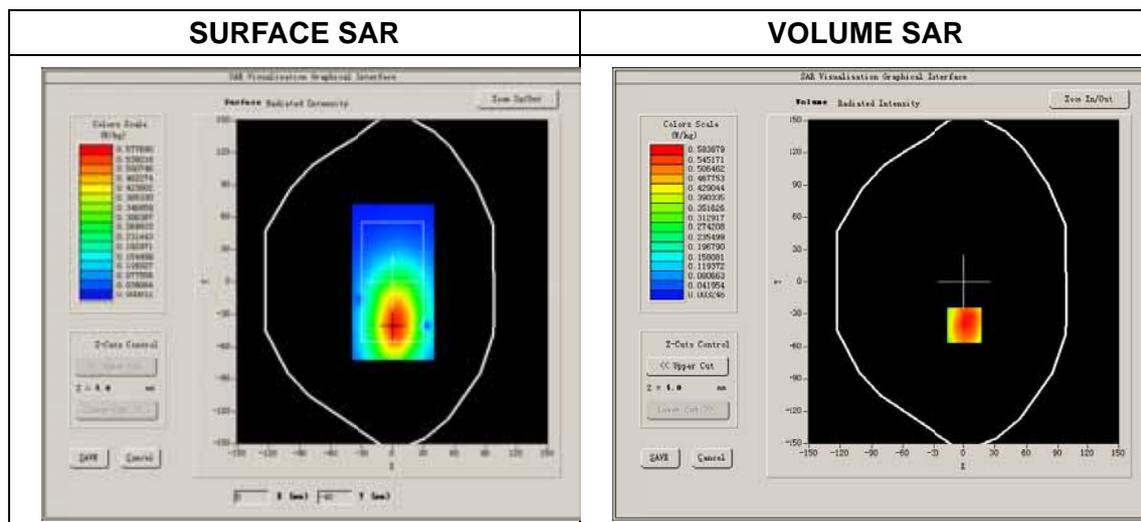

Maximum location: X=1.00, Y=-40.00

SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.411318
SAR 1g (W/Kg)	0.572787

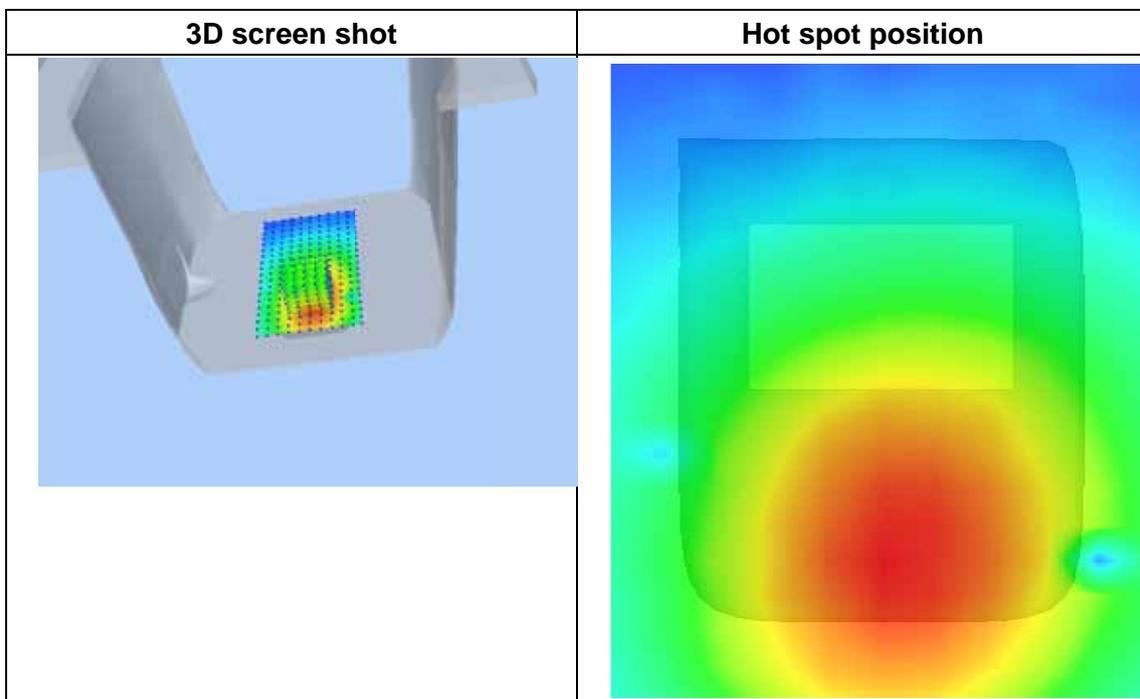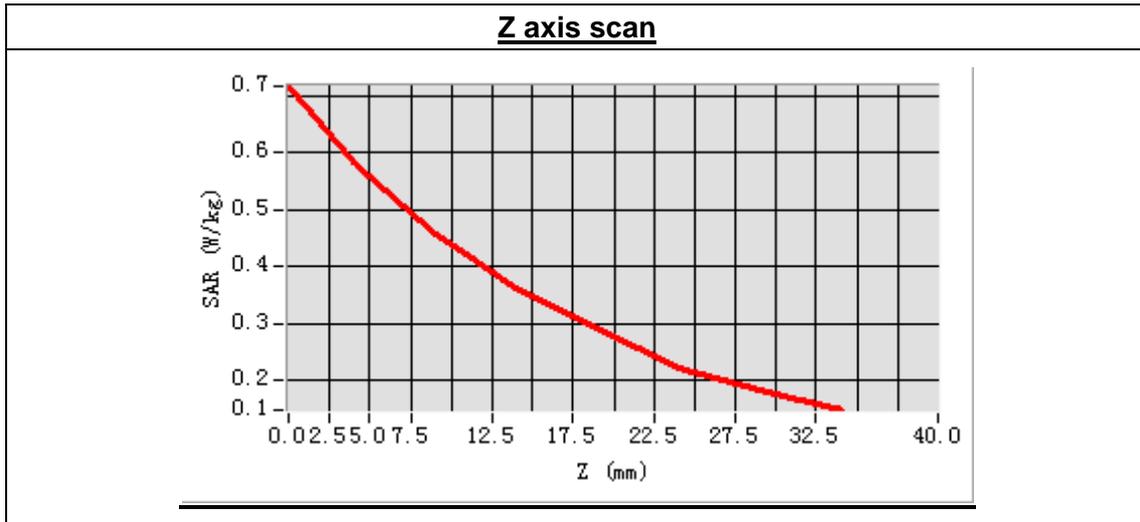

MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 28 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	EDGE

B. SAR Measurement Results

Middle Band SAR (Channel 190):



Frequency (MHz)	836.600000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift(%)	-3.040000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:2

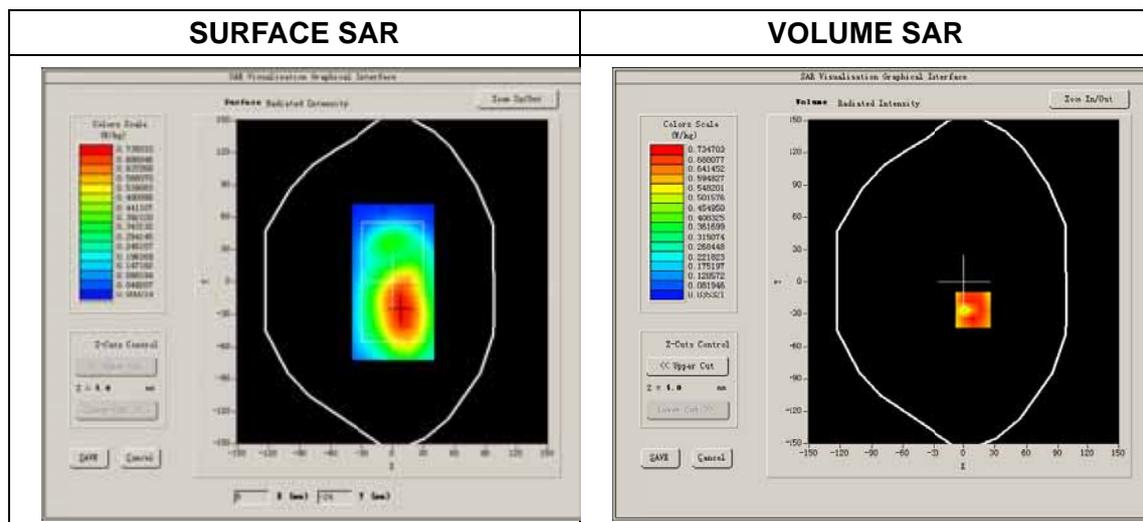

Maximum location: X=9.00, Y=-26.00

SAR Peak: 0.91 W/kg

SAR 10g (W/Kg)	0.551099
SAR 1g (W/Kg)	0.710926

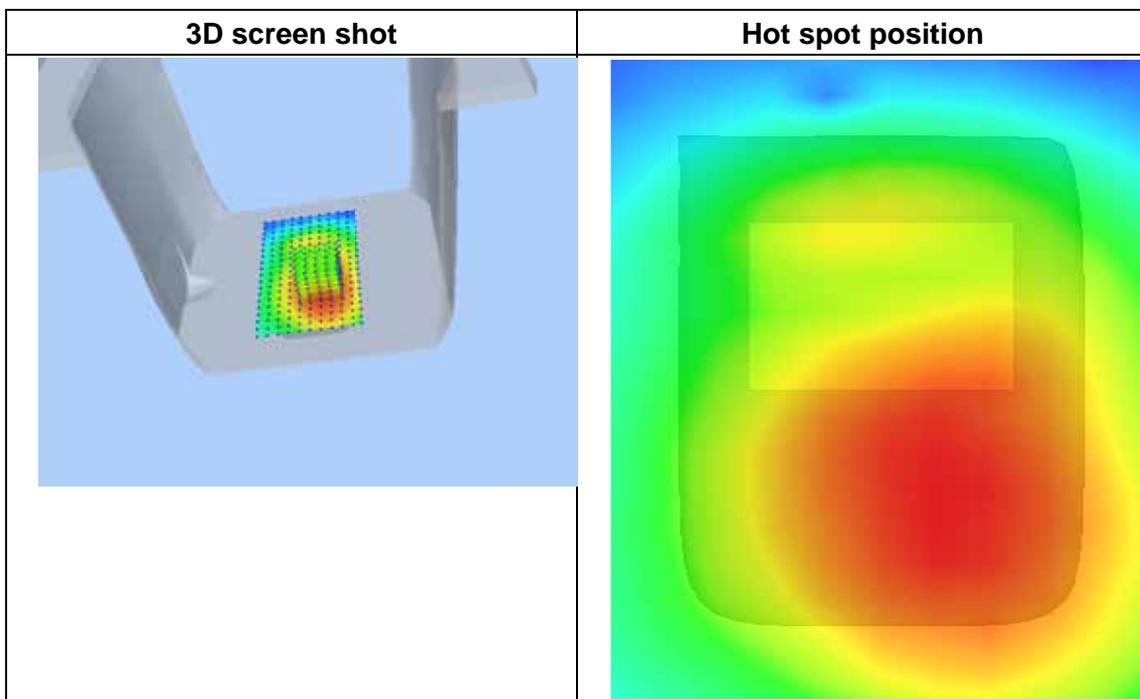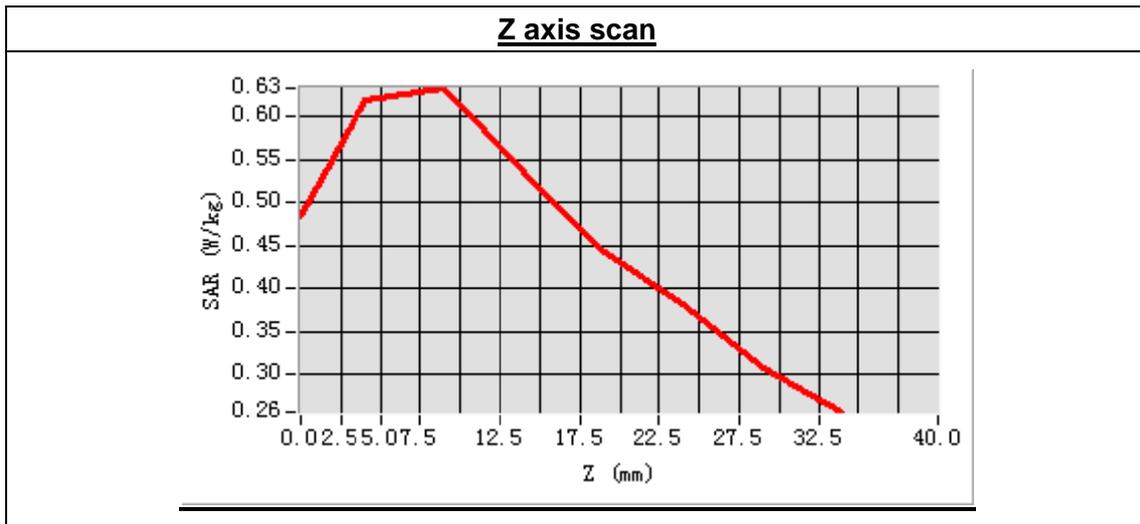

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 6 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):



Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.035496
Conductivity (S/m)	1.362495
Power drift(%)	0.740000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

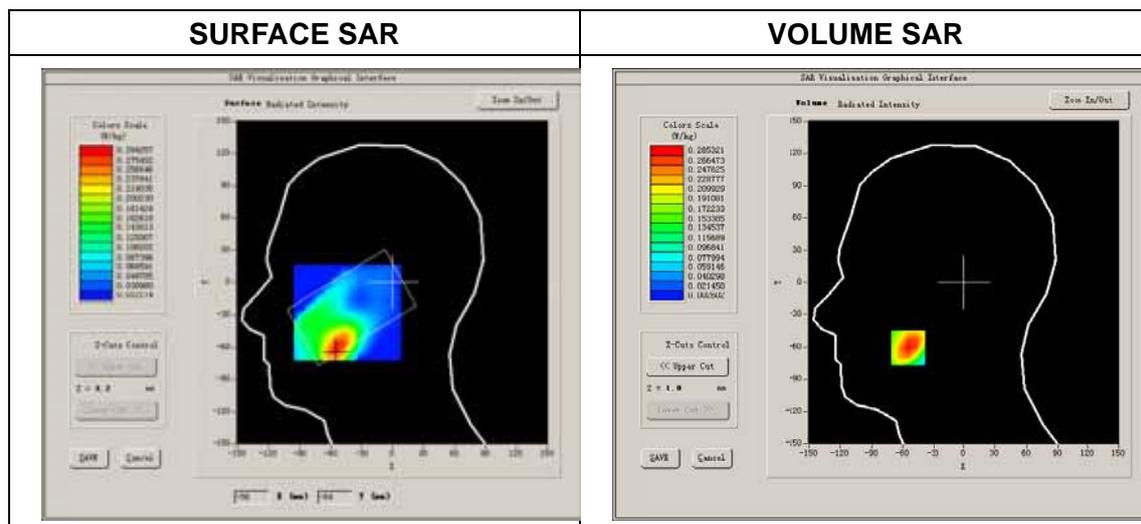

Maximum location: X=-55.00, Y=-61.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.155619
SAR 1g (W/Kg)	0.275934

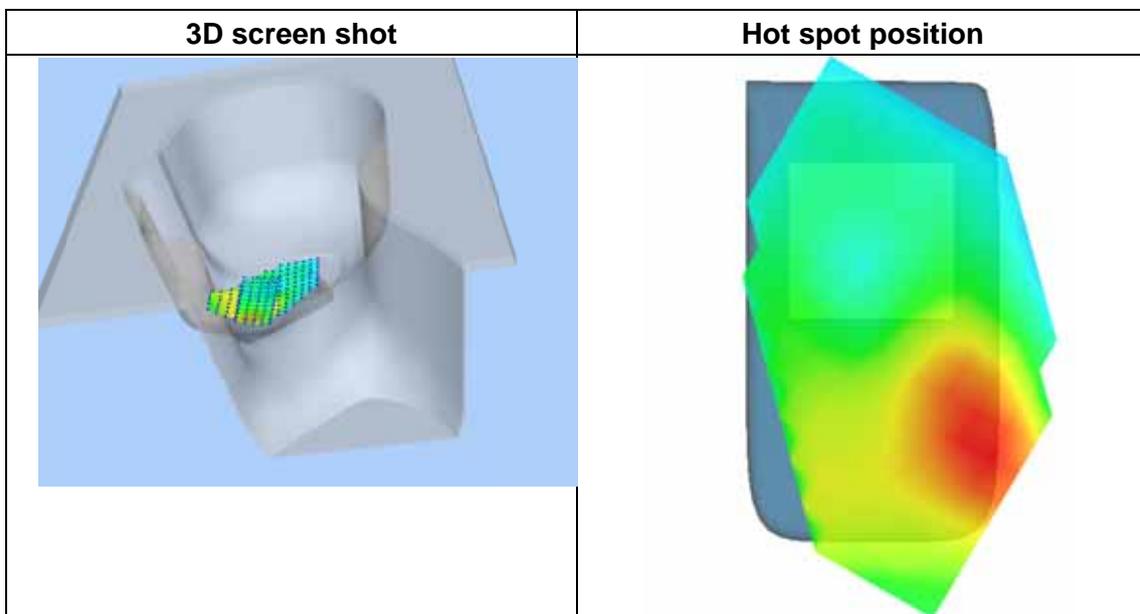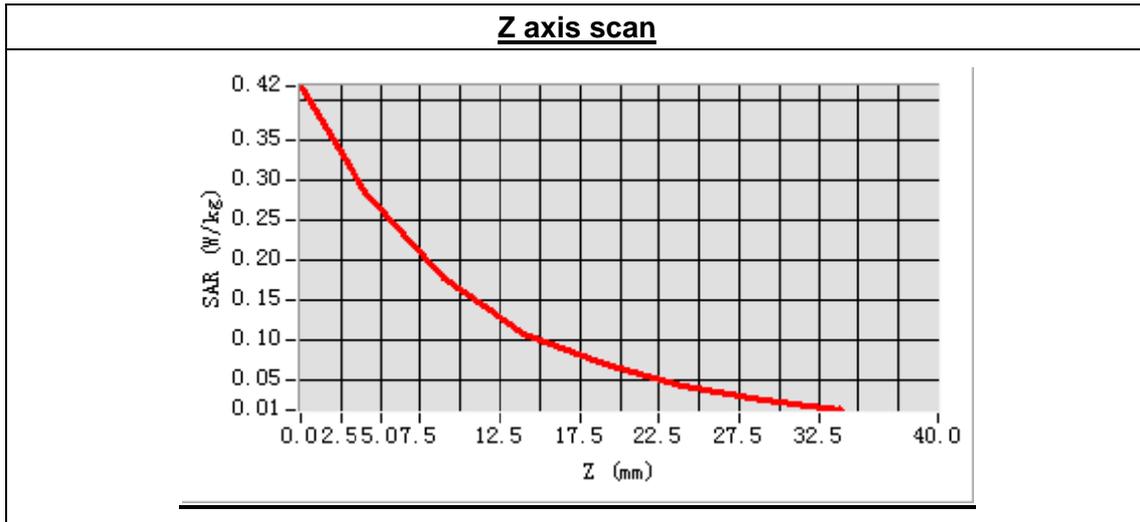

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 7 minutes 33 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.035496
Conductivity (S/m)	1.362495
Power drift(%)	-3.430000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

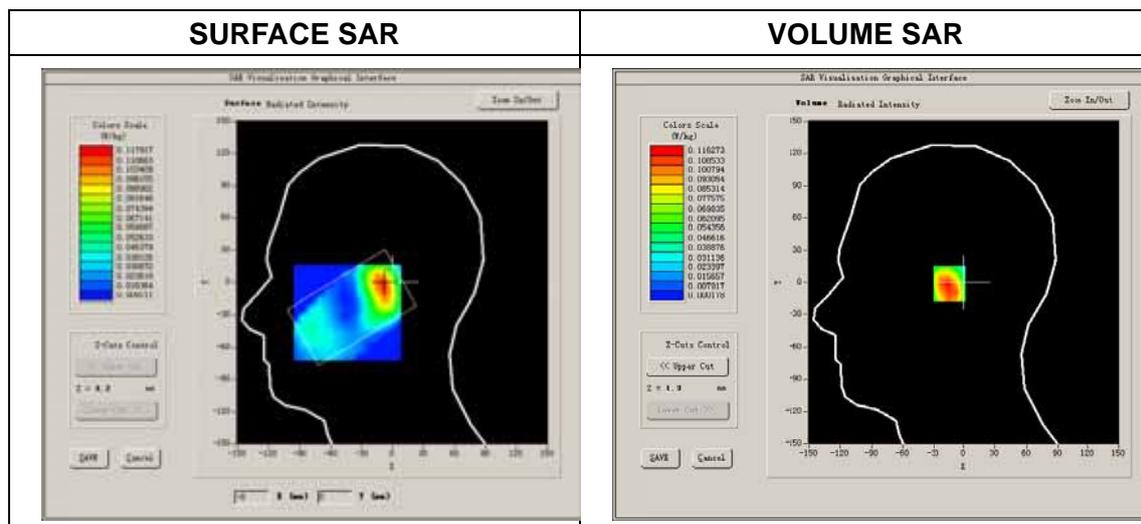

Maximum location: X=-9.00, Y=-1.00
 SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.061694
SAR 1g (W/Kg)	0.109801

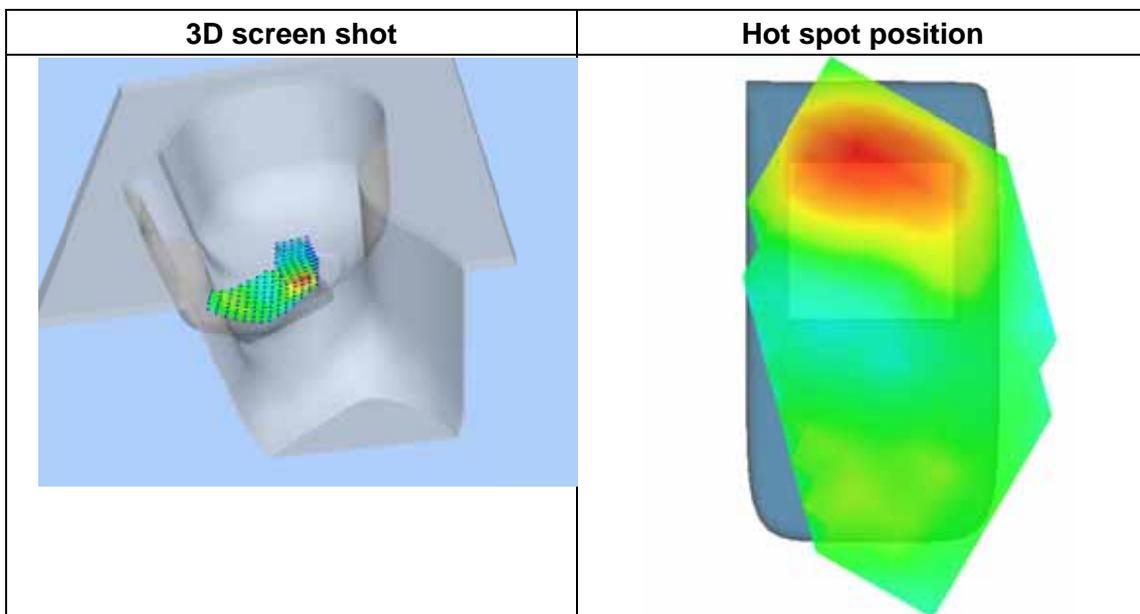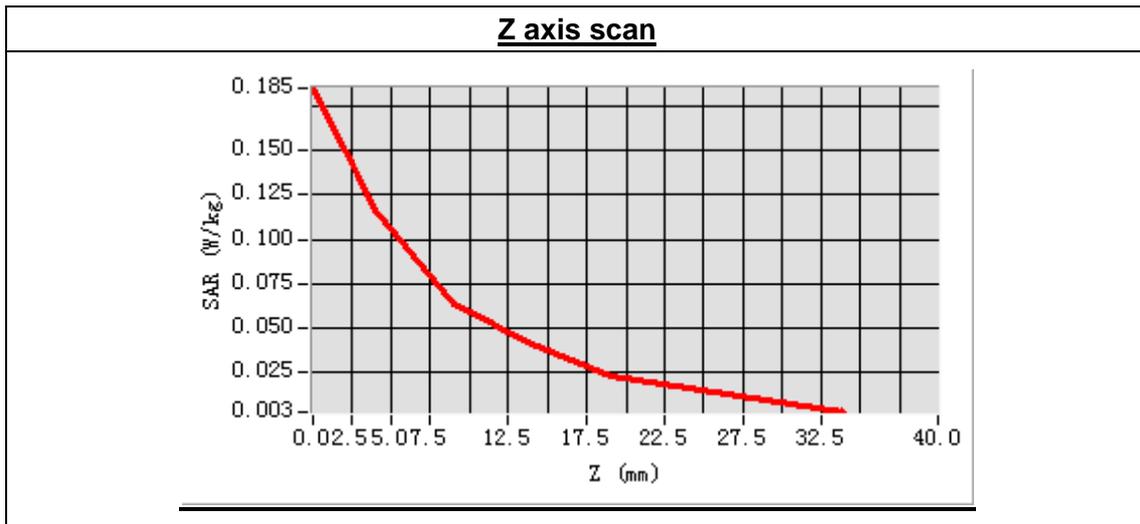

MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 14 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):



Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.035496
Conductivity (S/m)	1.362495
Power drift(%)	-0.600000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

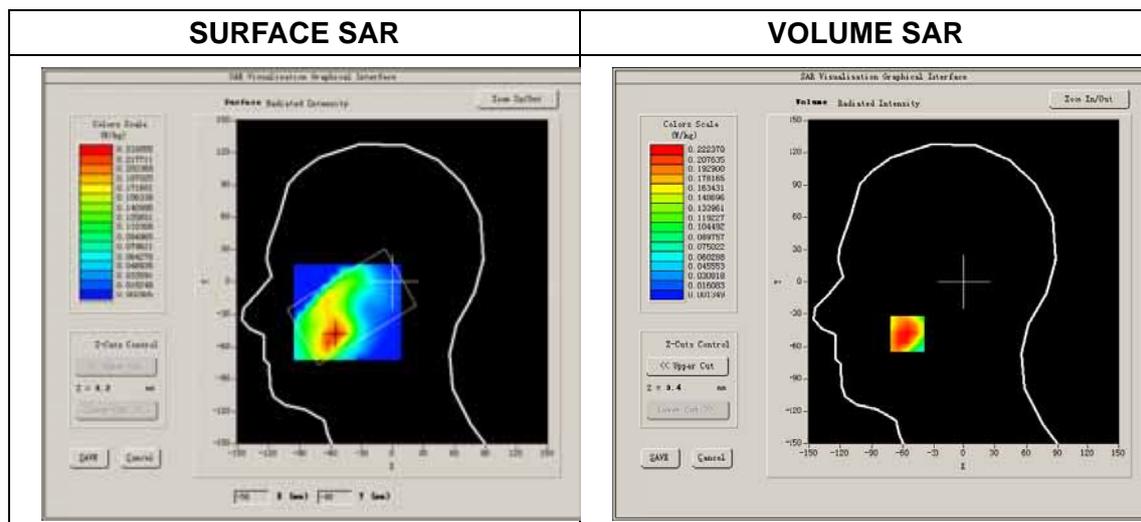

Maximum location: X=-56.00, Y=-48.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.123251
SAR 1g (W/Kg)	0.217990

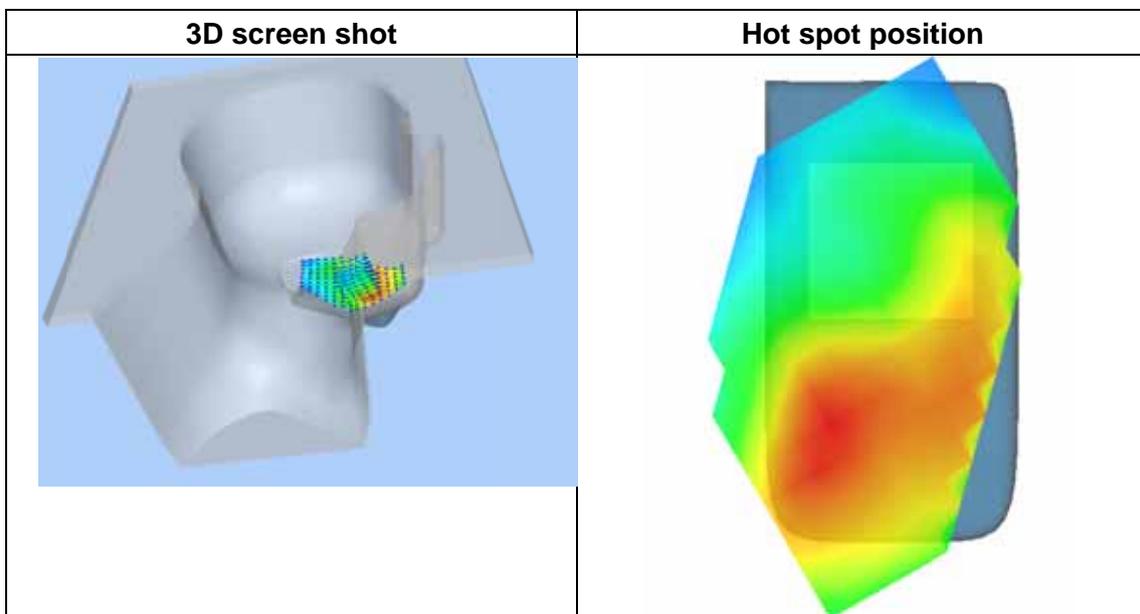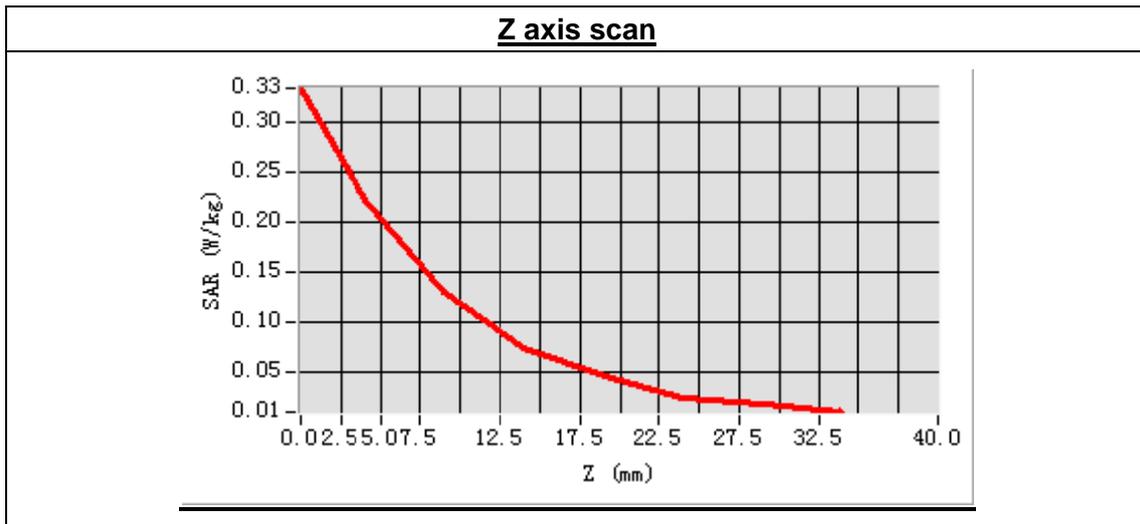

MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 7 minutes 58 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results

Middle Band SAR (Channel 661):



Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.035496
Conductivity (S/m)	1.362495
Power drift(%)	-3.290000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:8

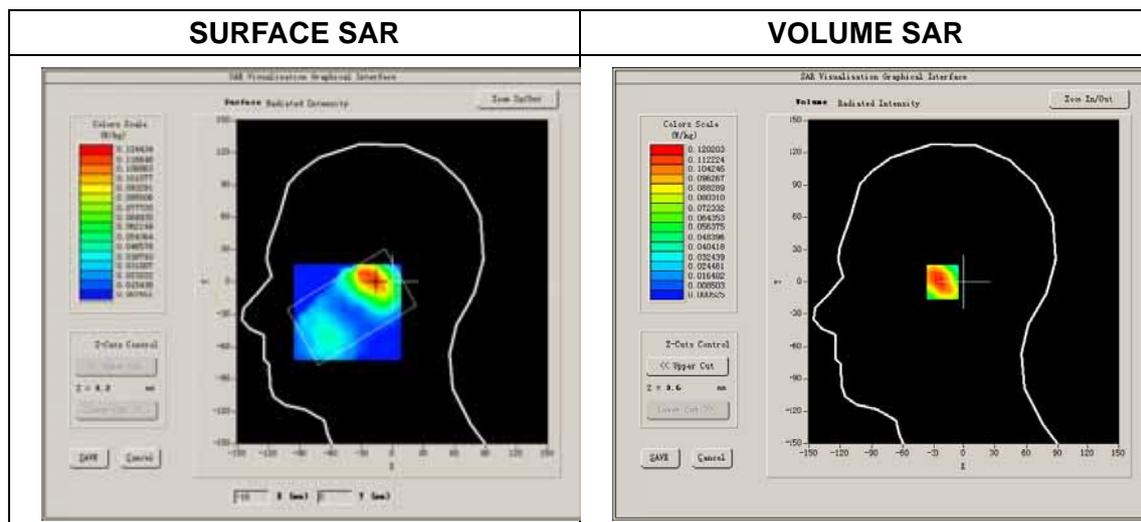

Maximum location: X=-16.00, Y=0.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.067173
SAR 1g (W/Kg)	0.114792

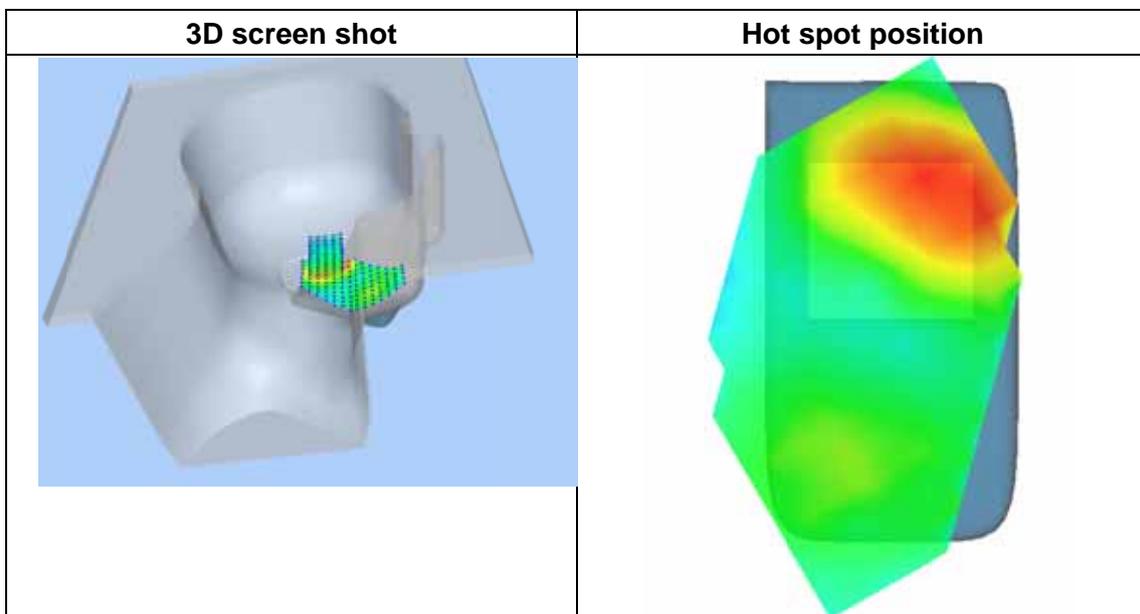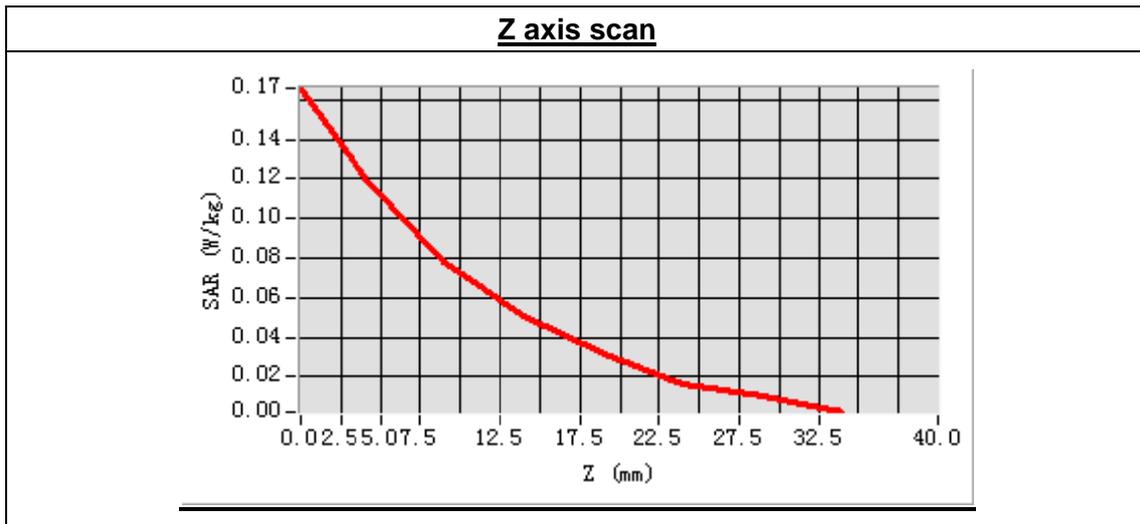

MEASUREMENT 19

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 25 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	2.020000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:8

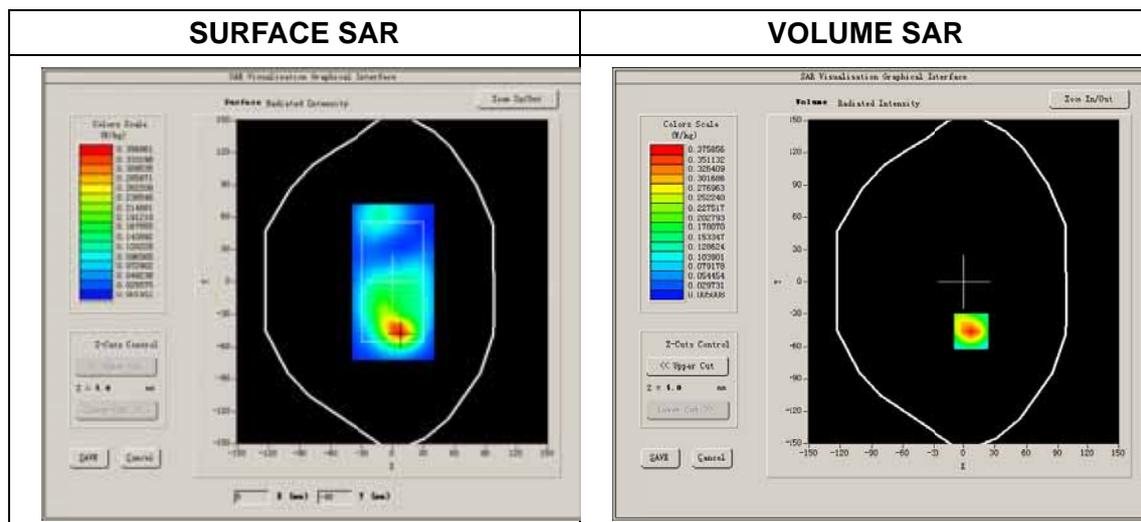

Maximum location: X=7.00, Y=-46.00
 SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.202618
SAR 1g (W/Kg)	0.379769

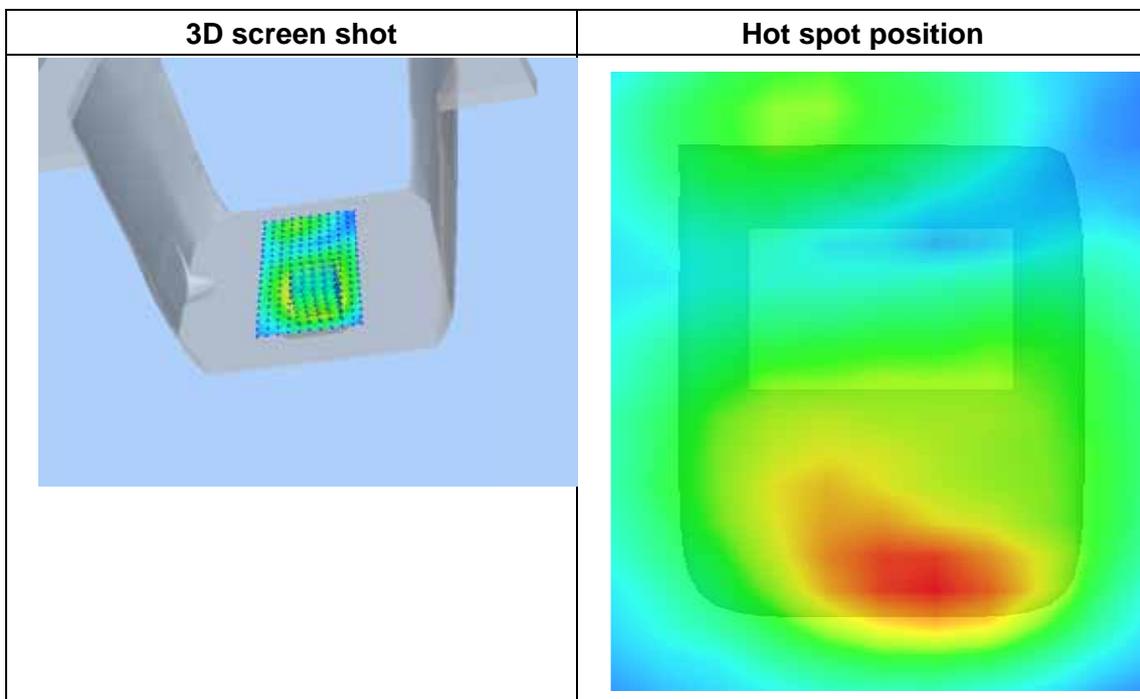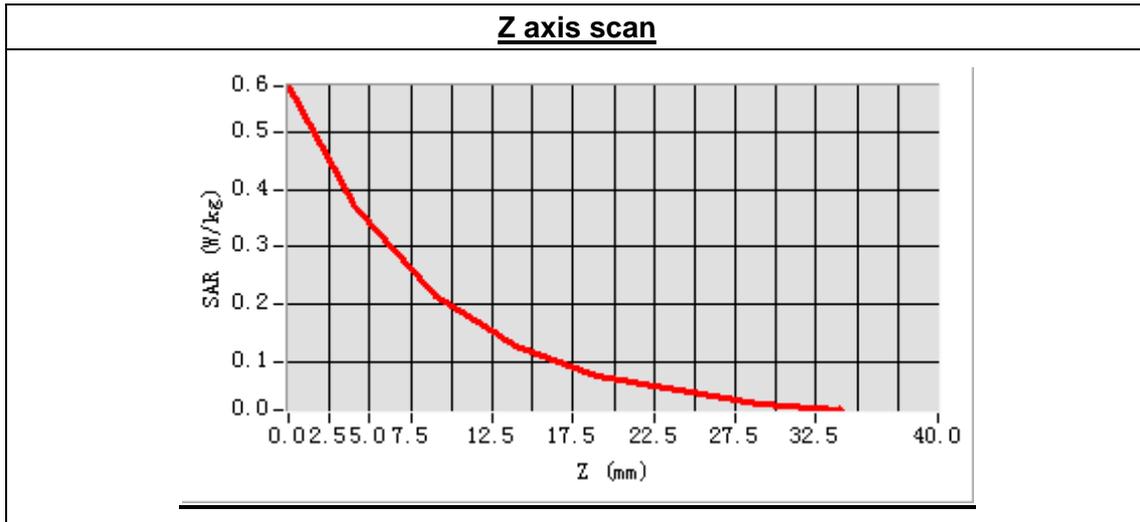

MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 27seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GSM

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	0.990000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:8

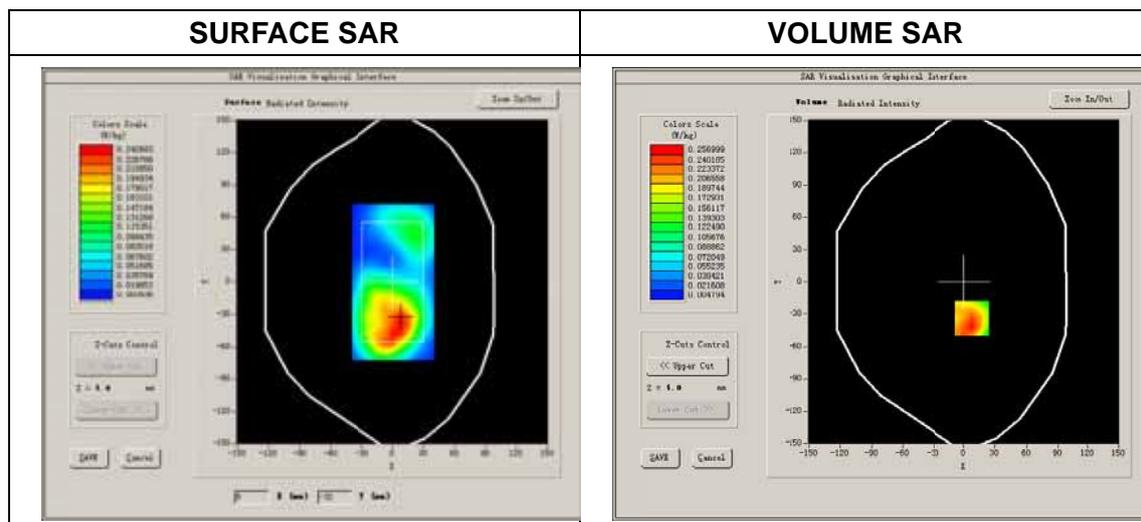

Maximum location: X=8.00, Y=-34.00
 SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.158976
SAR 1g (W/Kg)	0.261748

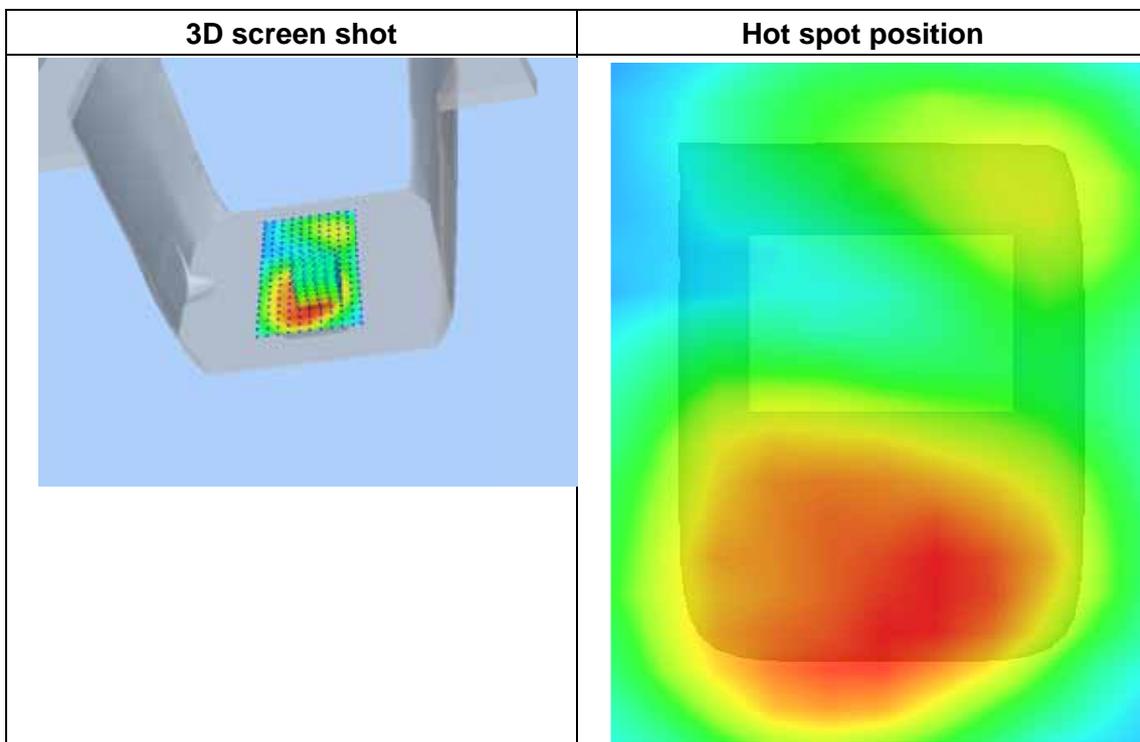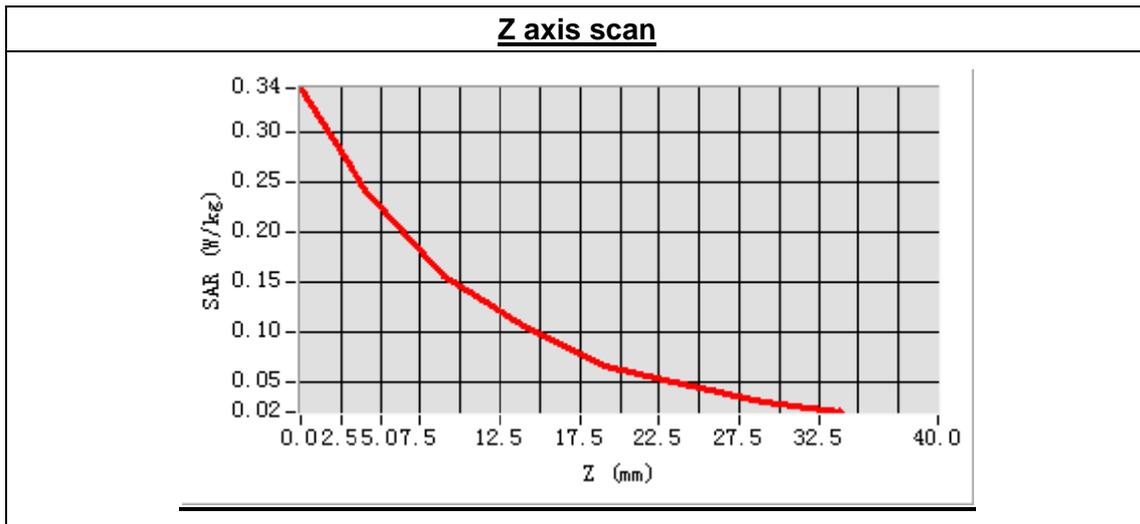

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 25 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	-1.950000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

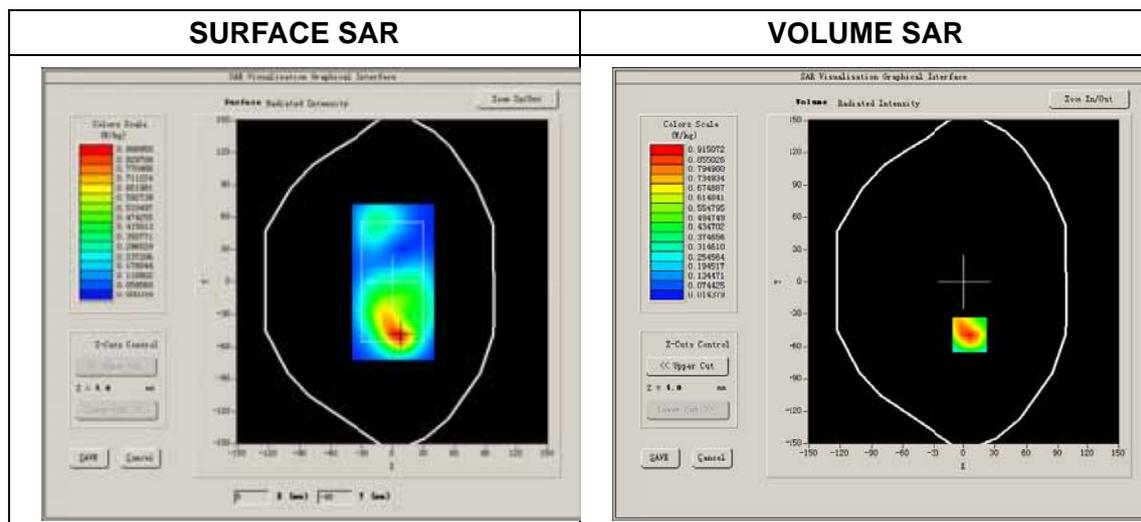

Maximum location: X=6.00, Y=-49.00
 SAR Peak: 1.35 W/kg

SAR 10g (W/Kg)	0.481663
SAR 1g (W/Kg)	0.777400

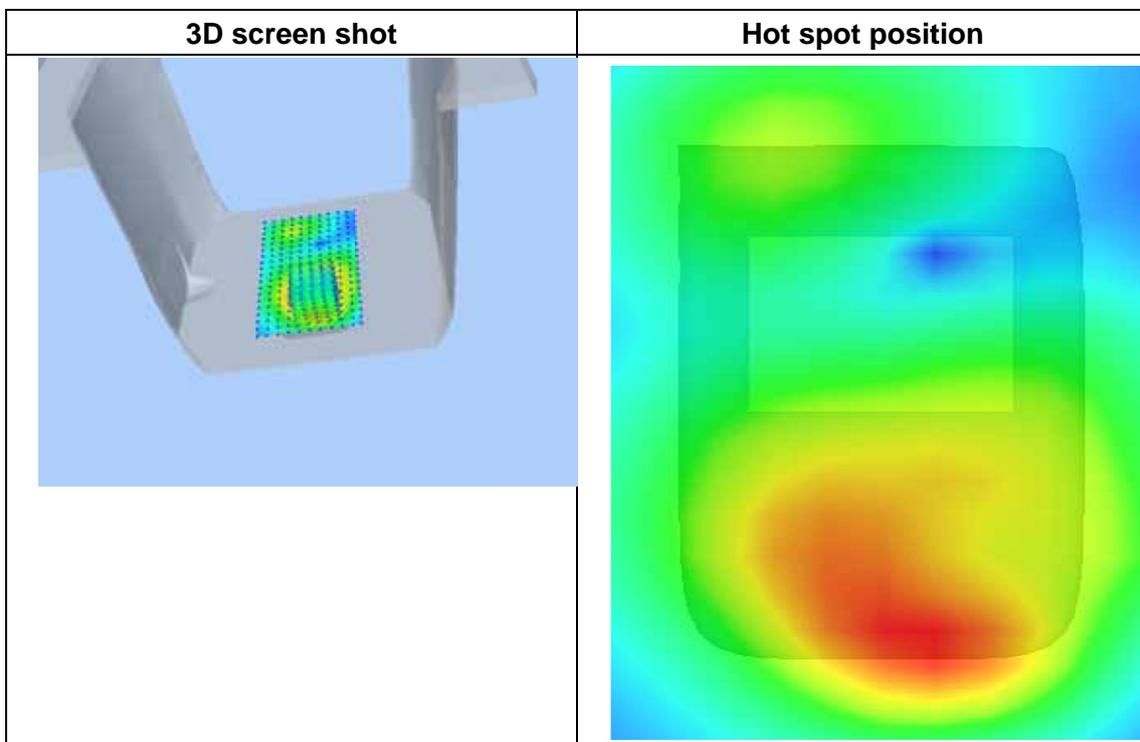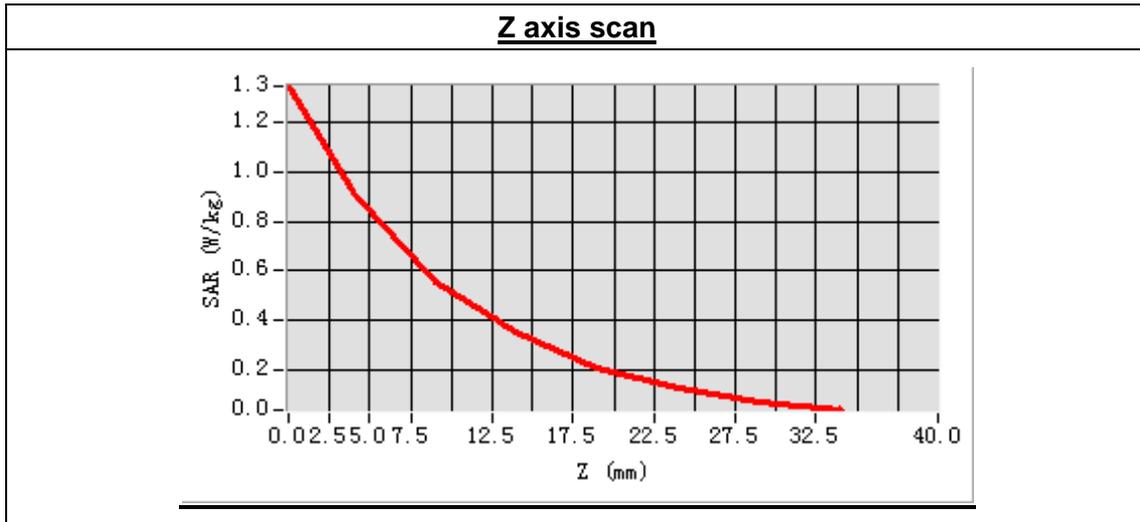

MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	-1.860000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

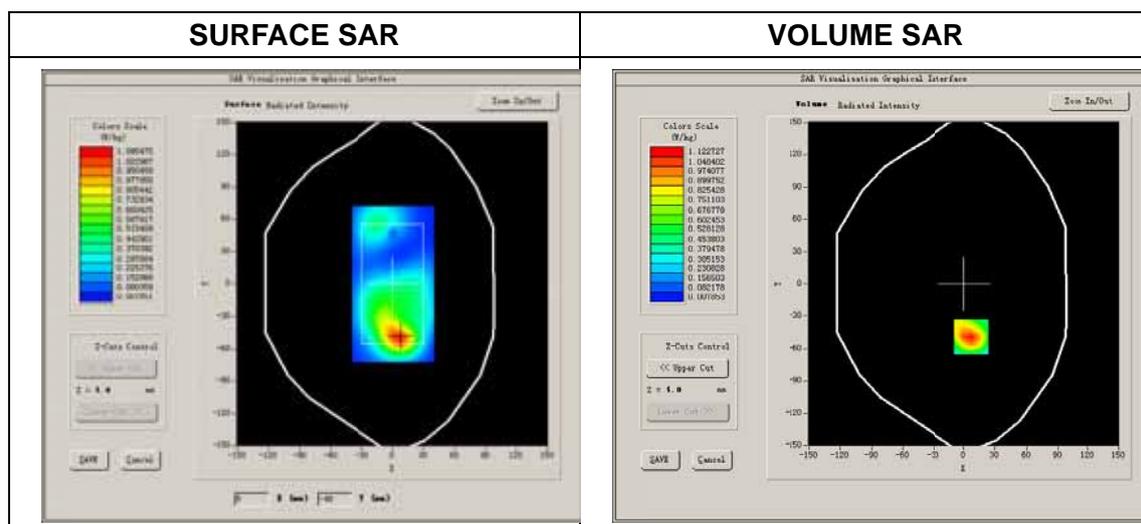

Maximum location: X=7.00, Y=-49.00
 SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.486475
SAR 1g (W/Kg)	0.632318

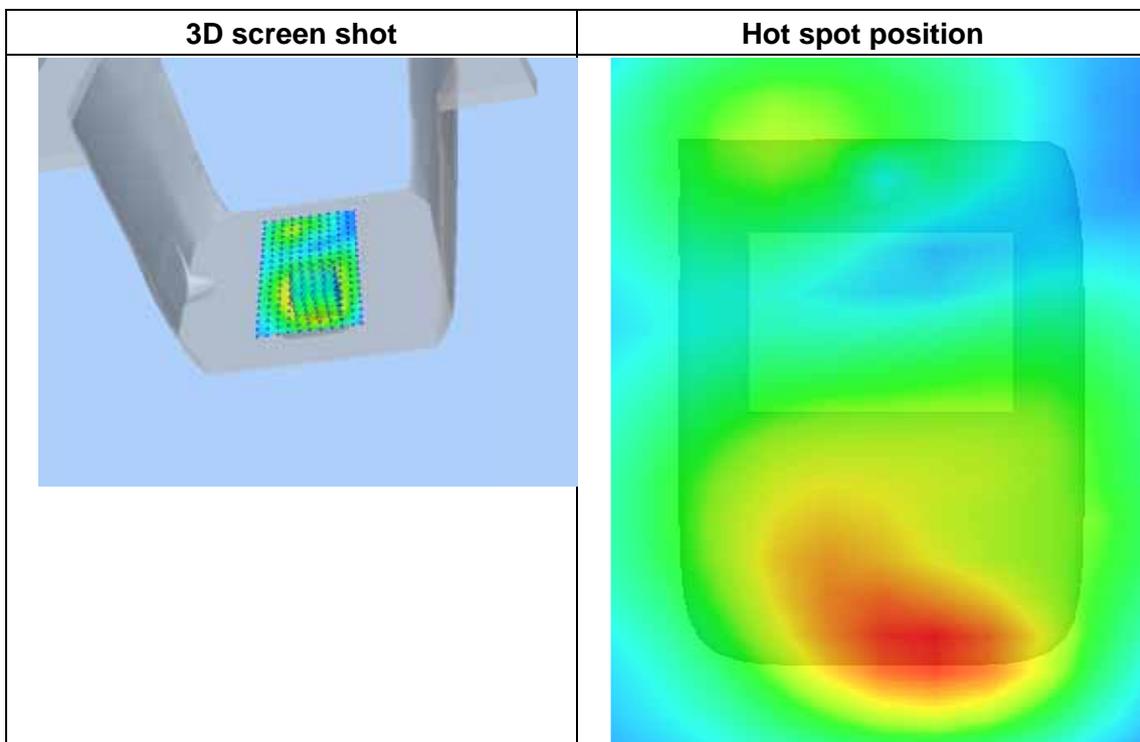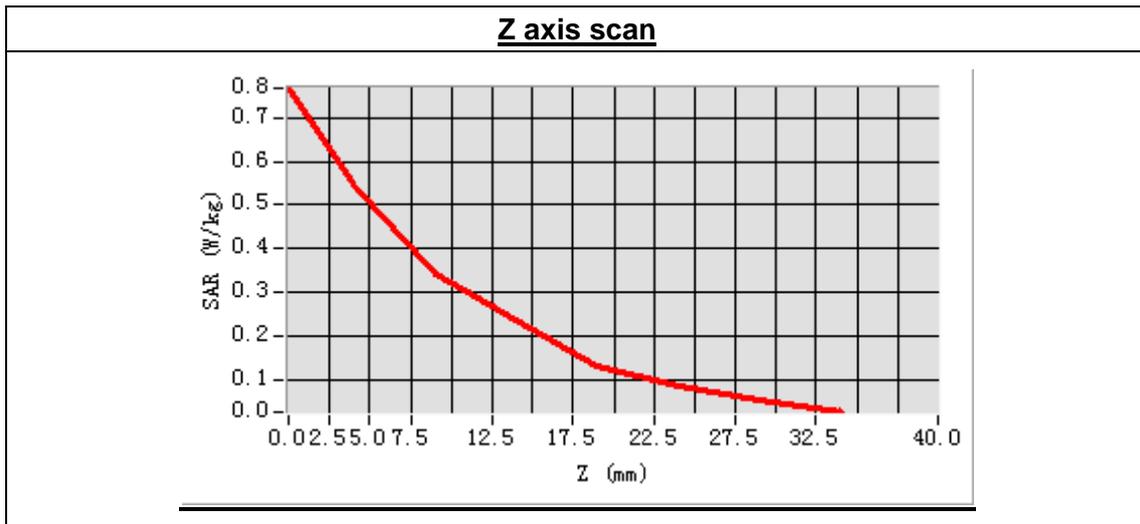

MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 29 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 661):



Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	-1.130000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

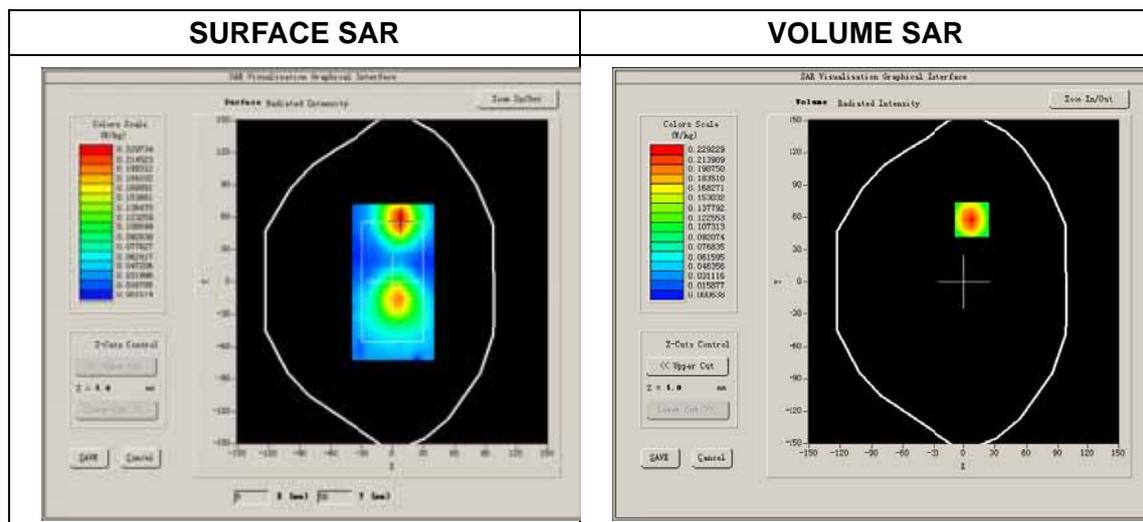

Maximum location: X=8.00, Y=58.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.121854
SAR 1g (W/Kg)	0.222166

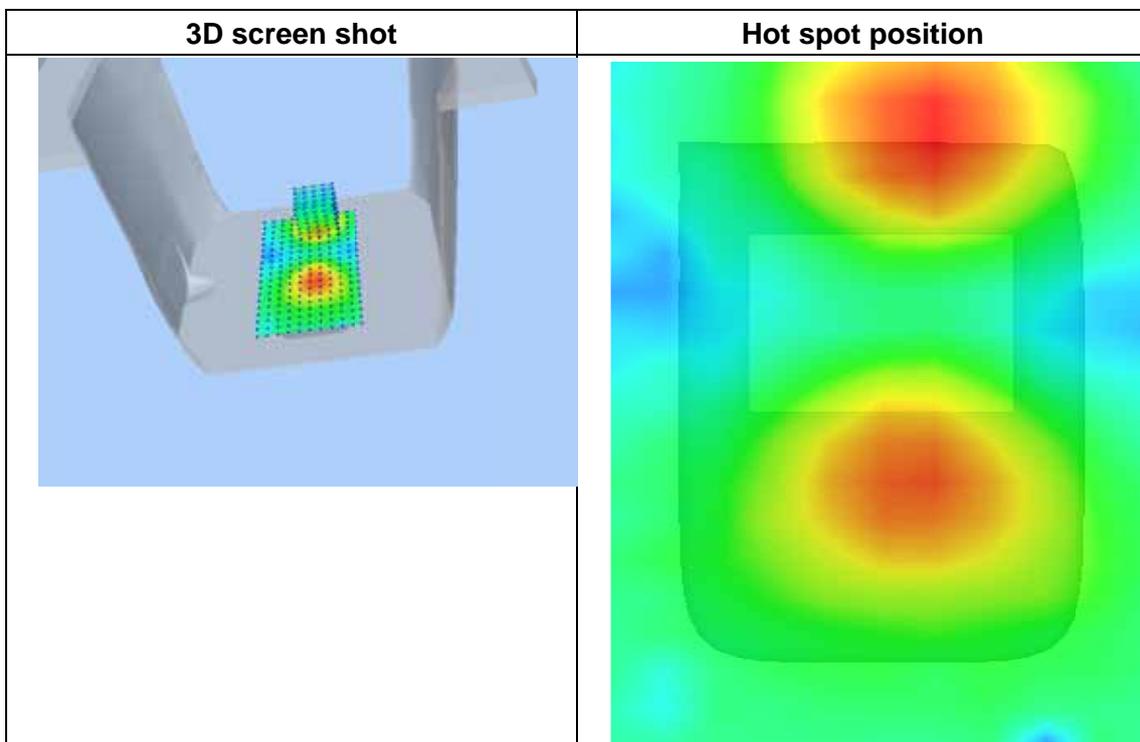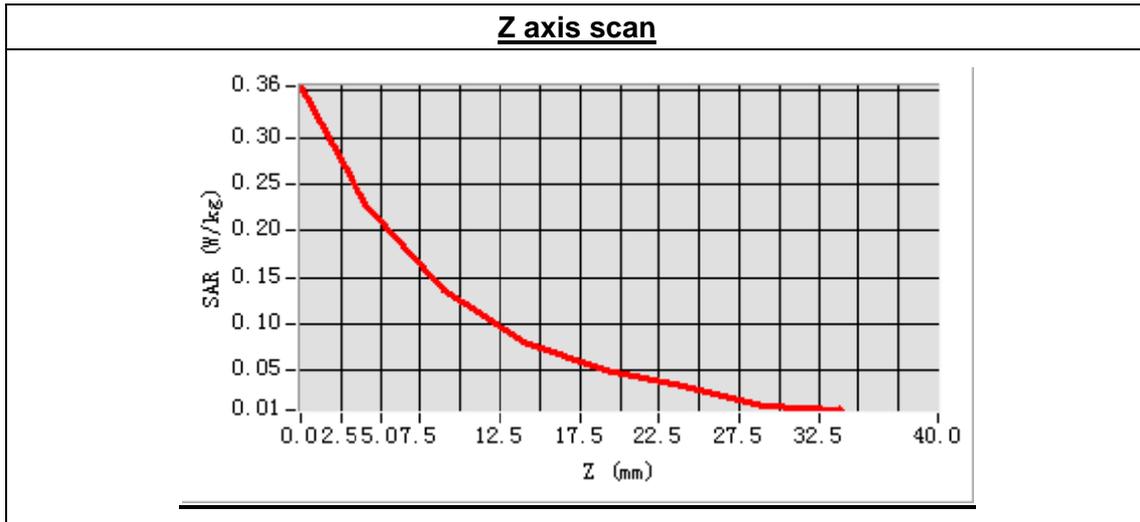

MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 26 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Result



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	1.150000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

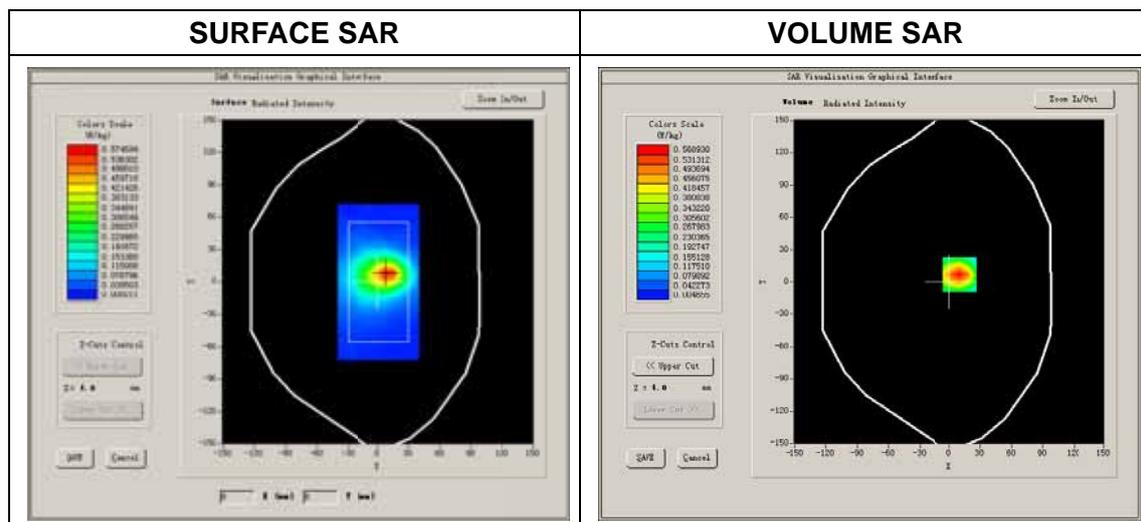

Maximum location: X=10.00, Y=5.00
 SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.394584
SAR 1g (W/Kg)	0.623745

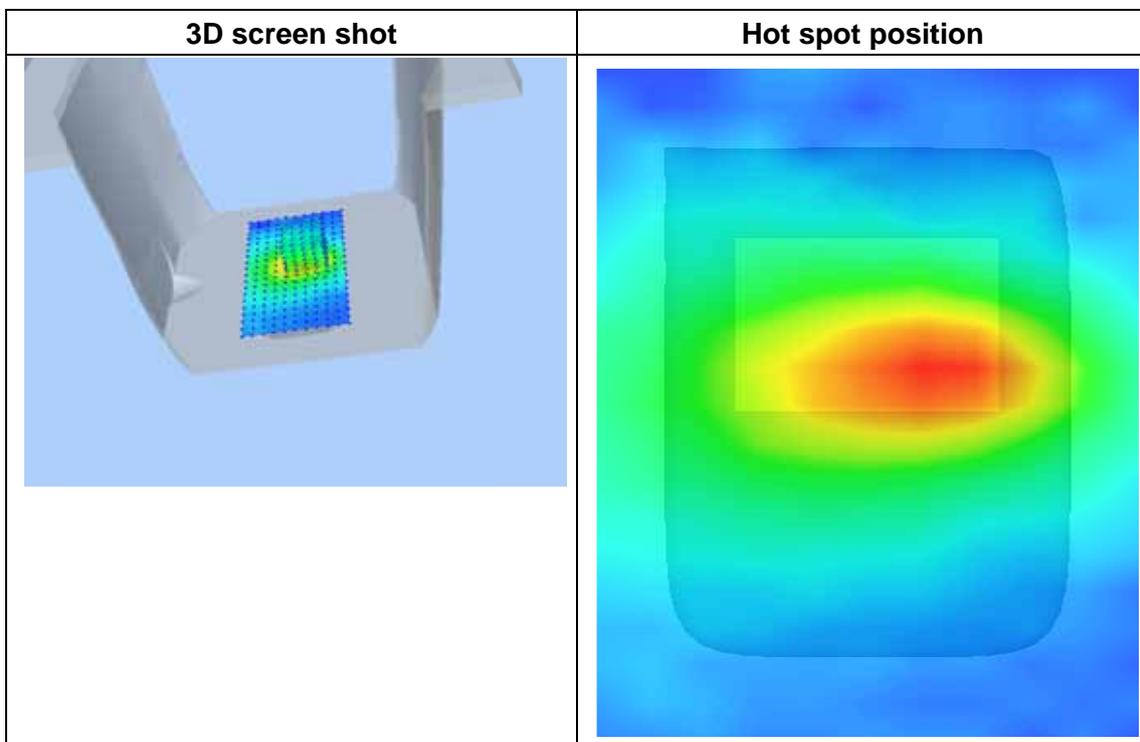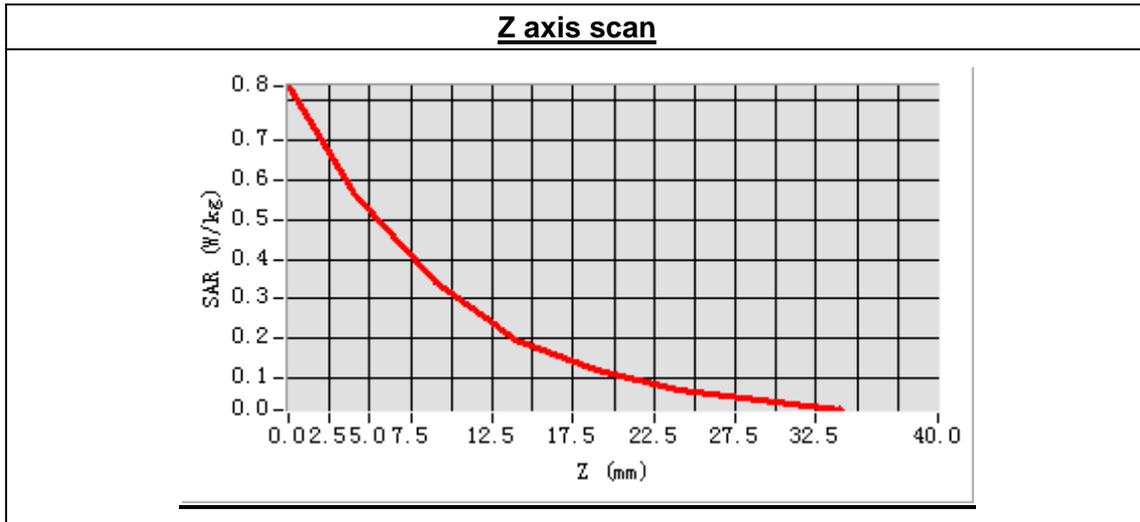

MEASUREMENT 25

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 30 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	-1.800000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

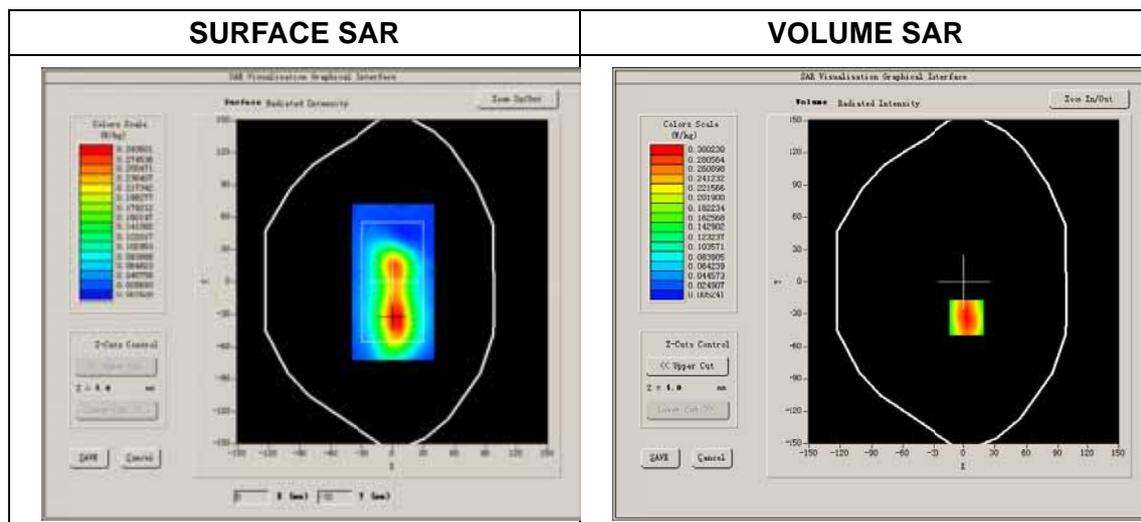

Maximum location: X=3.00, Y=-33.00
 SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.168239
SAR 1g (W/Kg)	0.293610

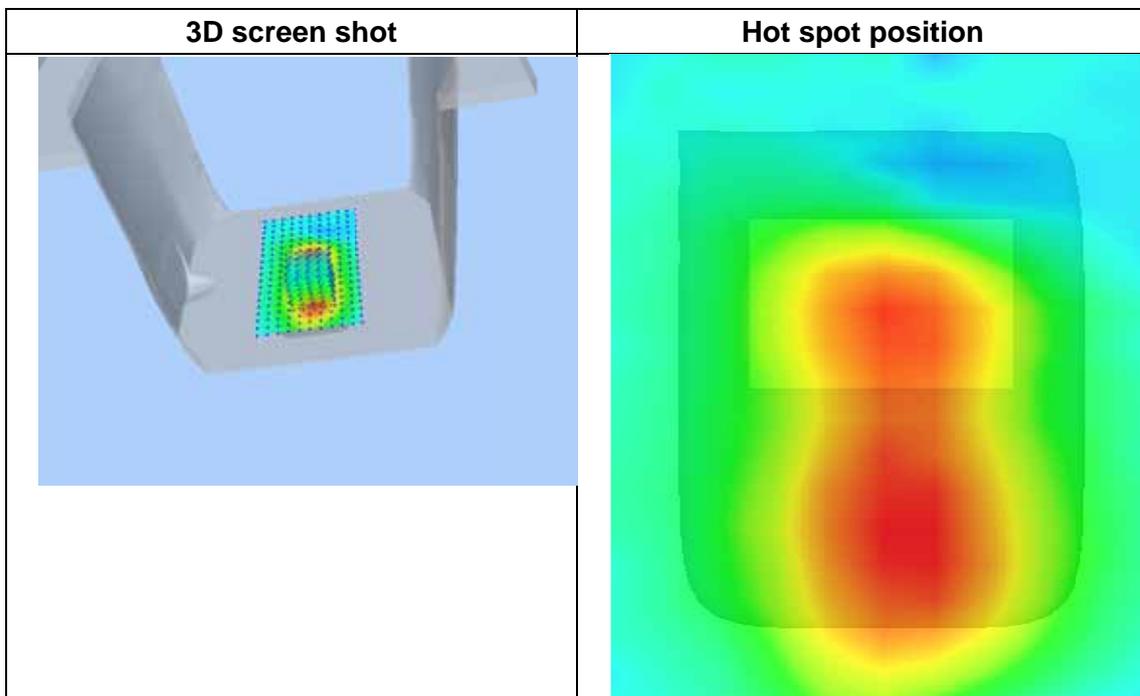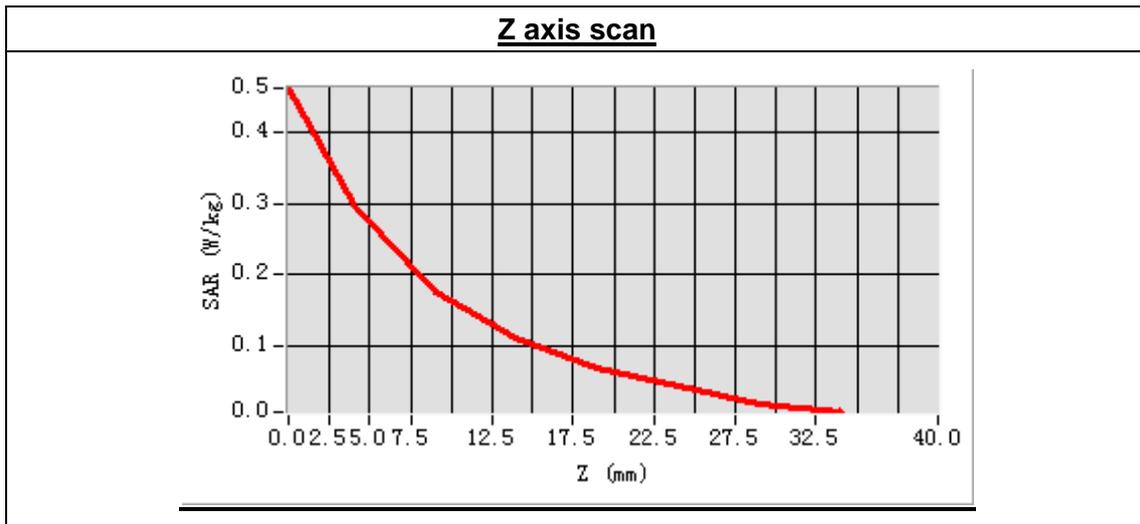

MEASUREMENT 26

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 33 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	EDGE

B. SAR Measurement Results



Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift(%)	0.750000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:2

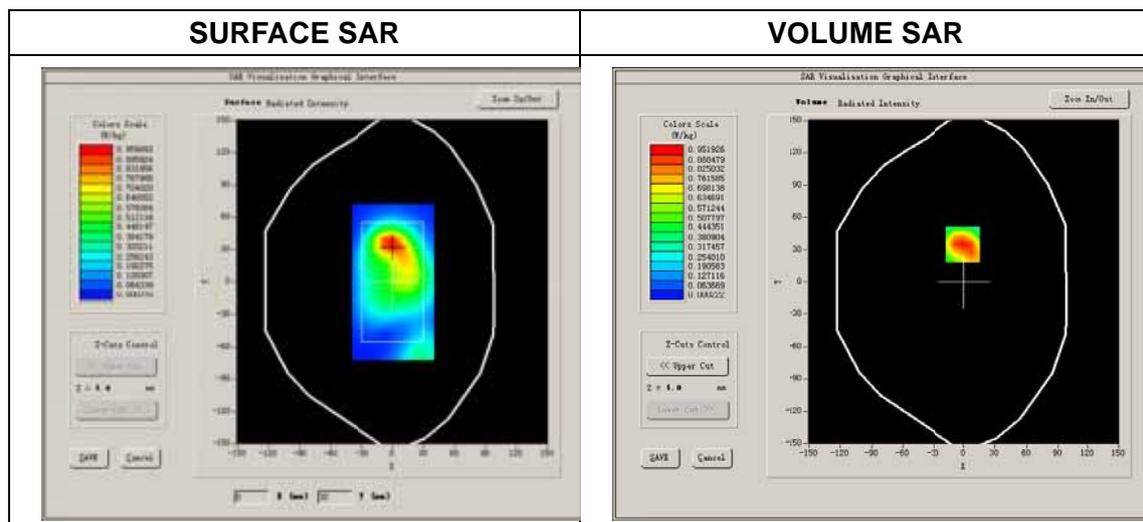

Maximum location: X=-1.00, Y=35.00
 SAR Peak: 1.35 W/kg

SAR 10g (W/Kg)	0.507536
SAR 1g (W/Kg)	0.720690

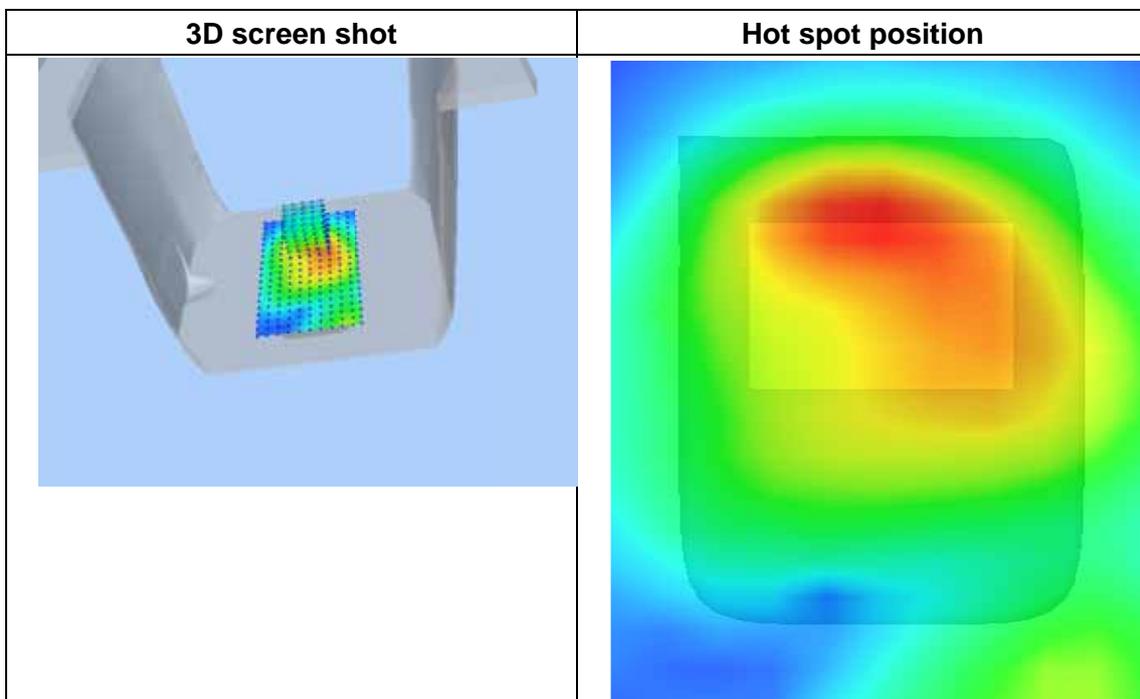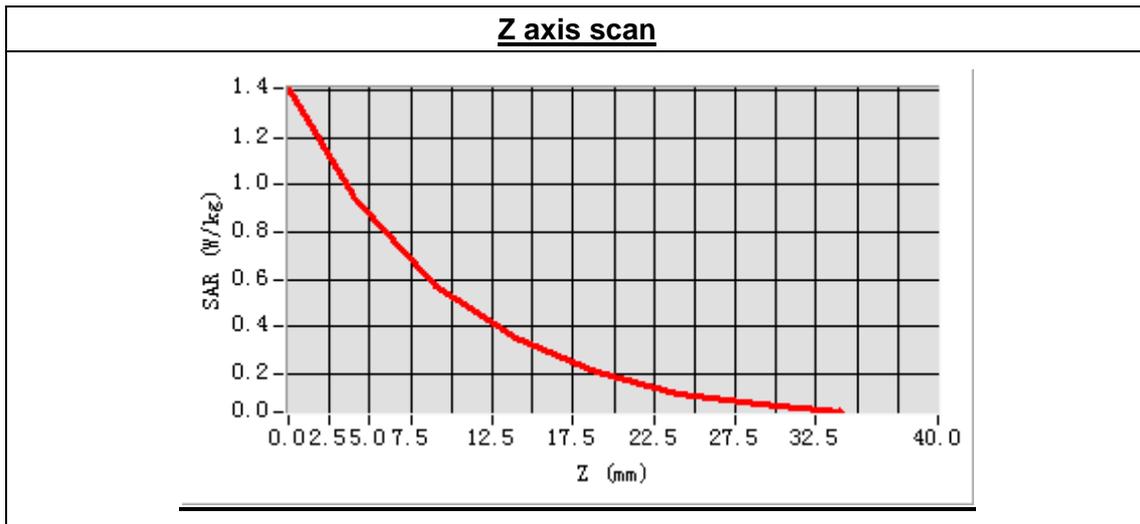

MEASUREMENT 27

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 7 minutes 59 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	1.580000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:1

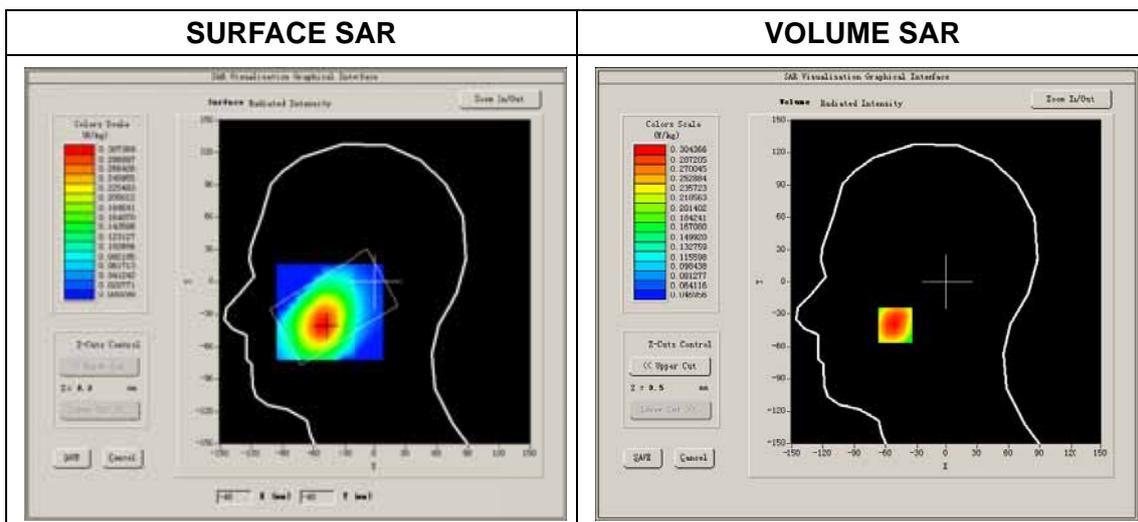

Maximum location: X=-51.00, Y=-40.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.239450
SAR 1g (W/Kg)	0.296715

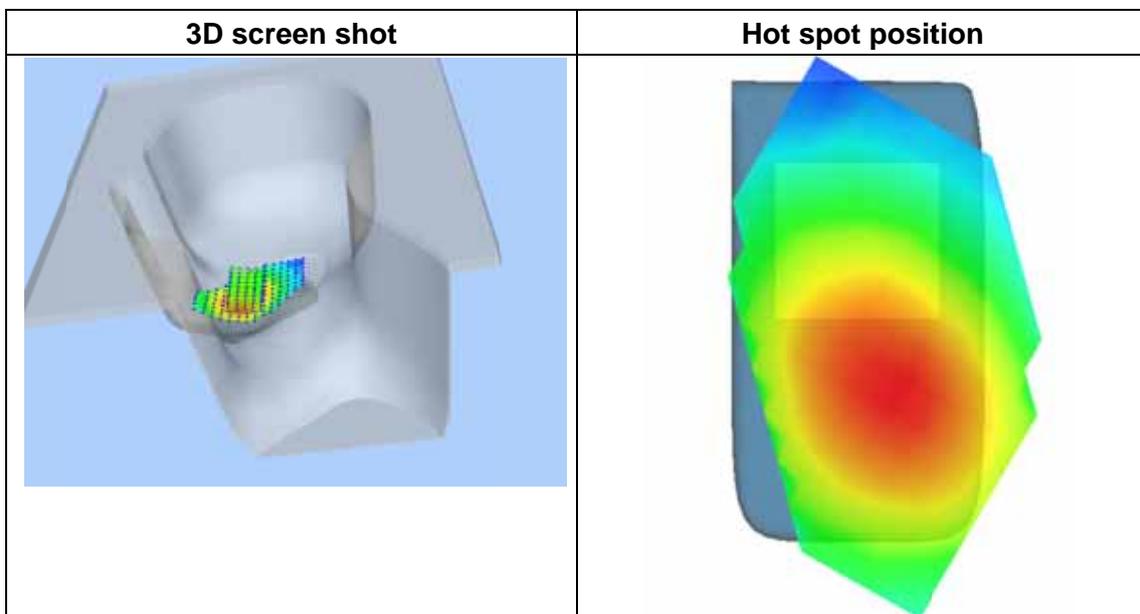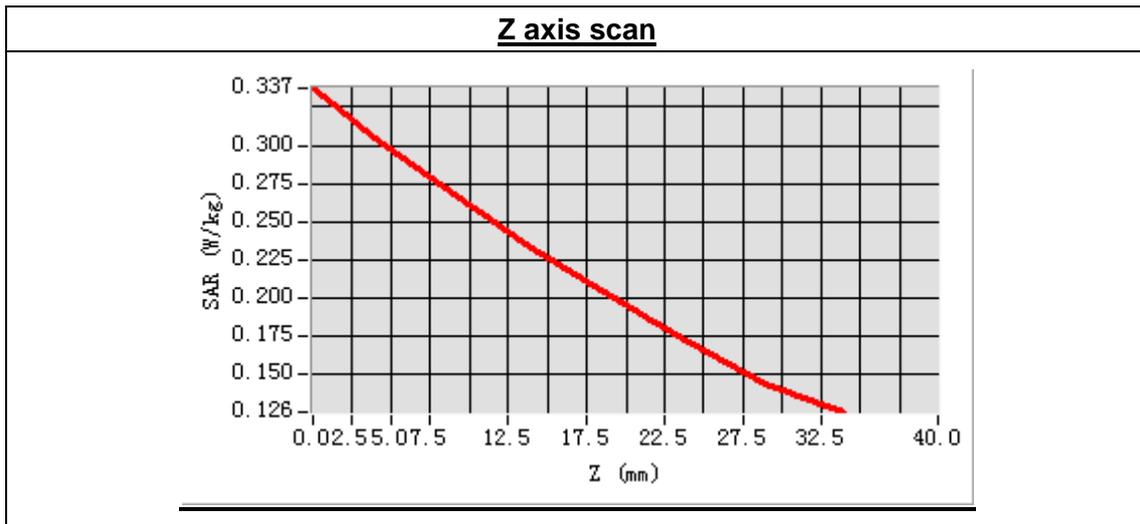

MEASUREMENT 28

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration:8 minutes 9 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	-0.600000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:1

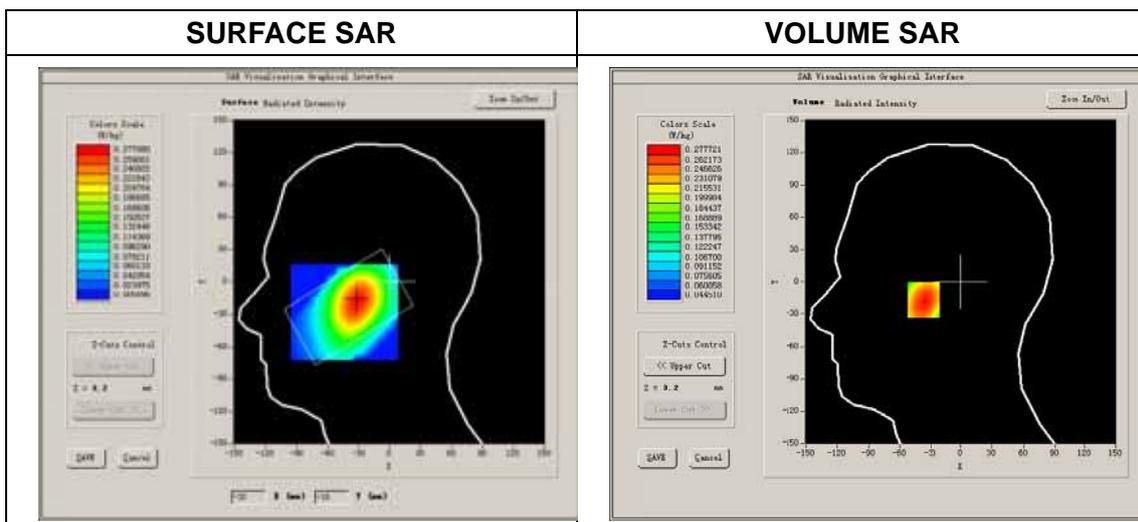

Maximum location: X=-32.00, Y=-17.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.212564
SAR 1g (W/Kg)	0.268519

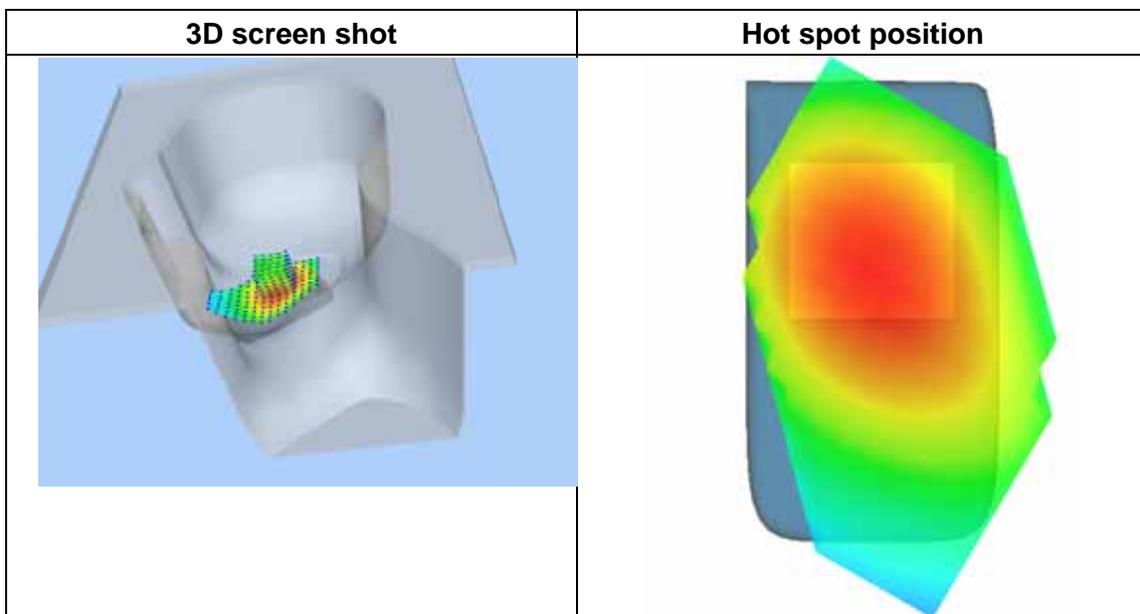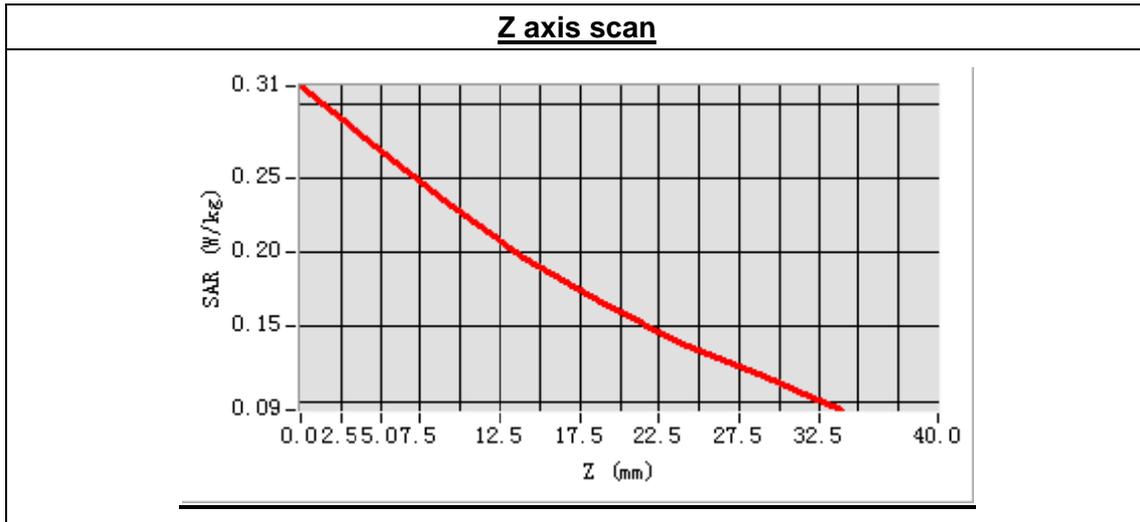

MEASUREMENT 29

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 8 minutes 53 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	0.180000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:1

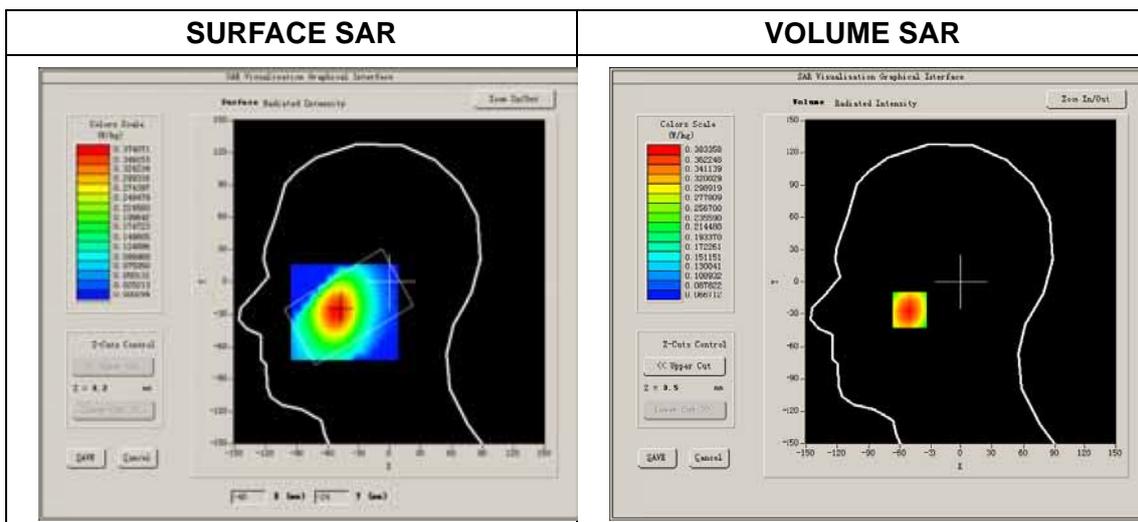

Maximum location: X=-51.00, Y=-26.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.286036
SAR 1g (W/Kg)	0.371914

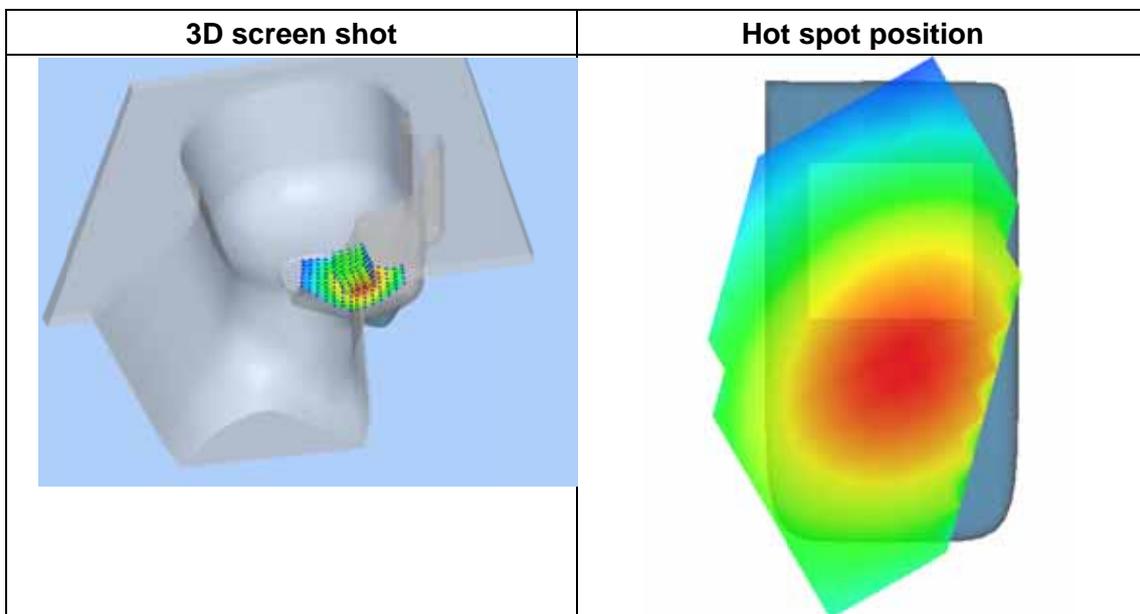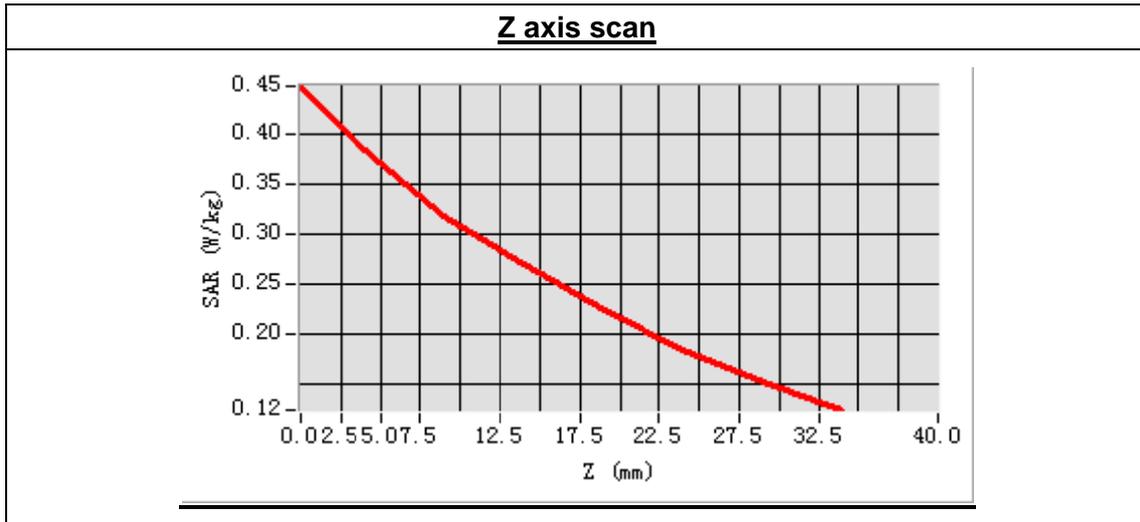

MEASUREMENT 30

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 7 minutes 40 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	-1.410000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:1

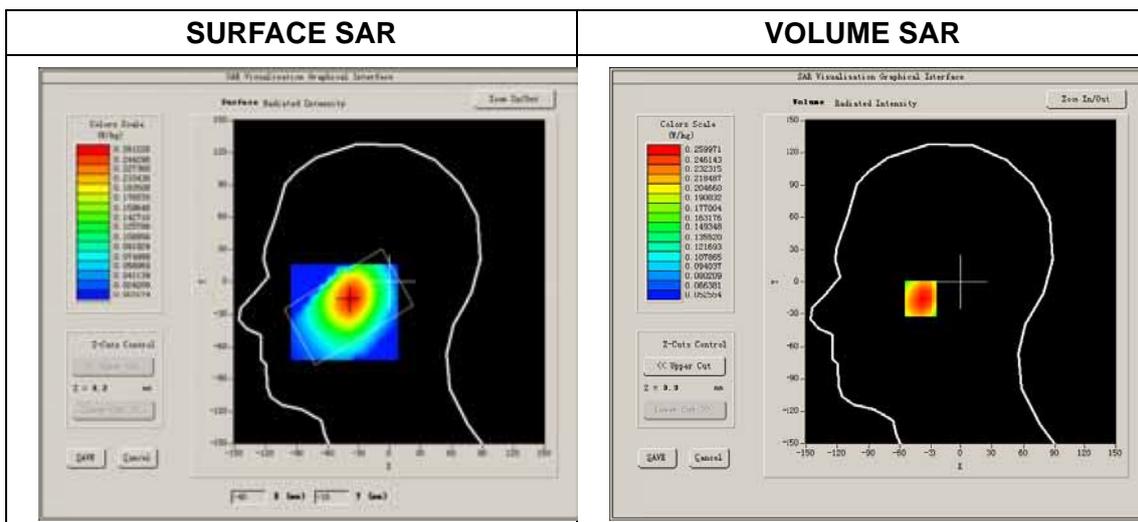

Maximum location: X=-39.00, Y=-15.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.198812
SAR 1g (W/Kg)	0.251362

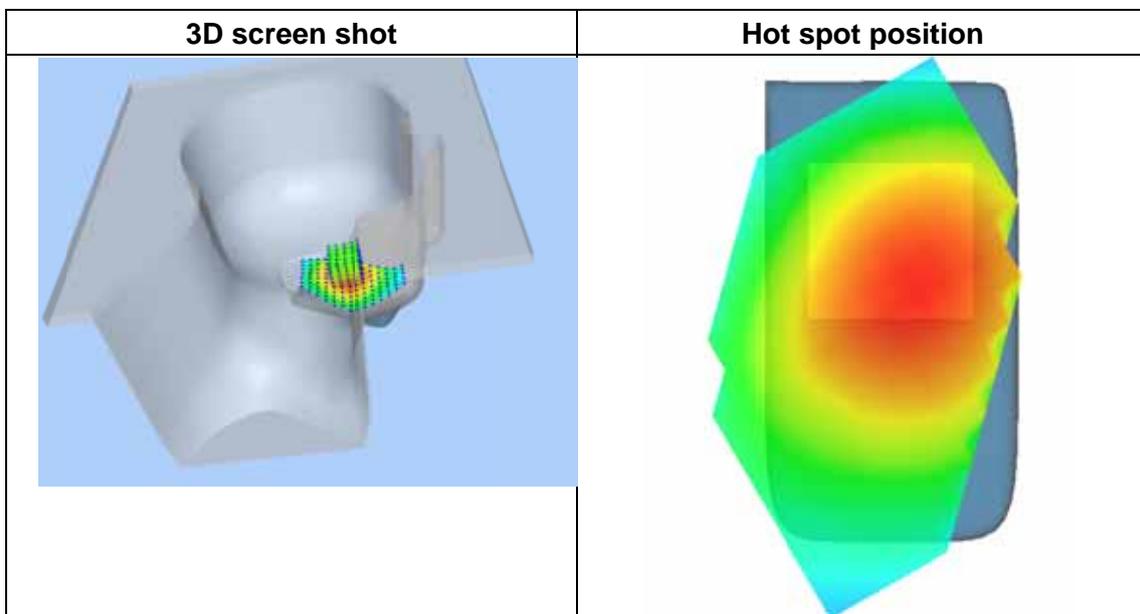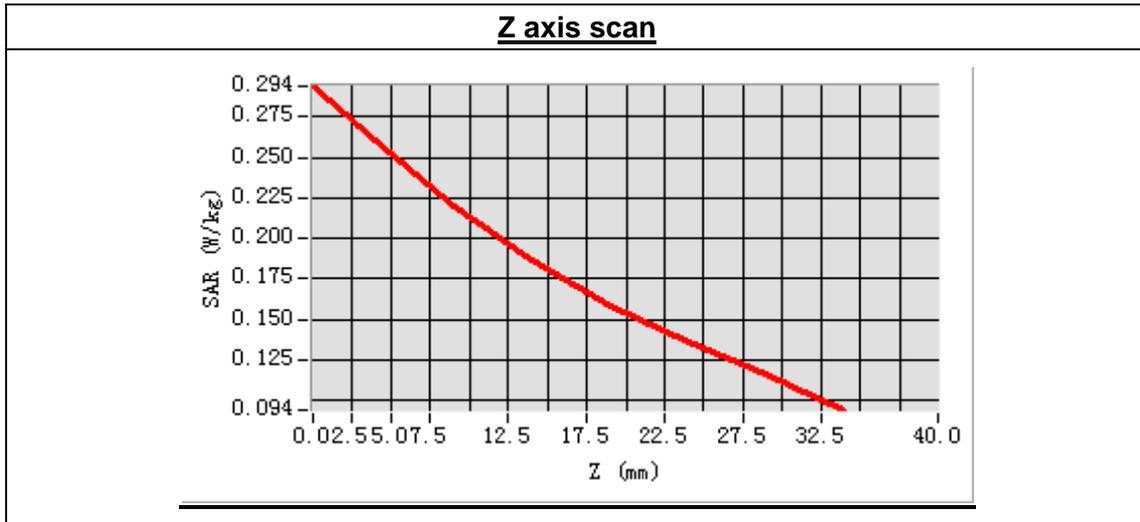

MEASUREMENT 31

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 30 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Low Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-1.460000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1

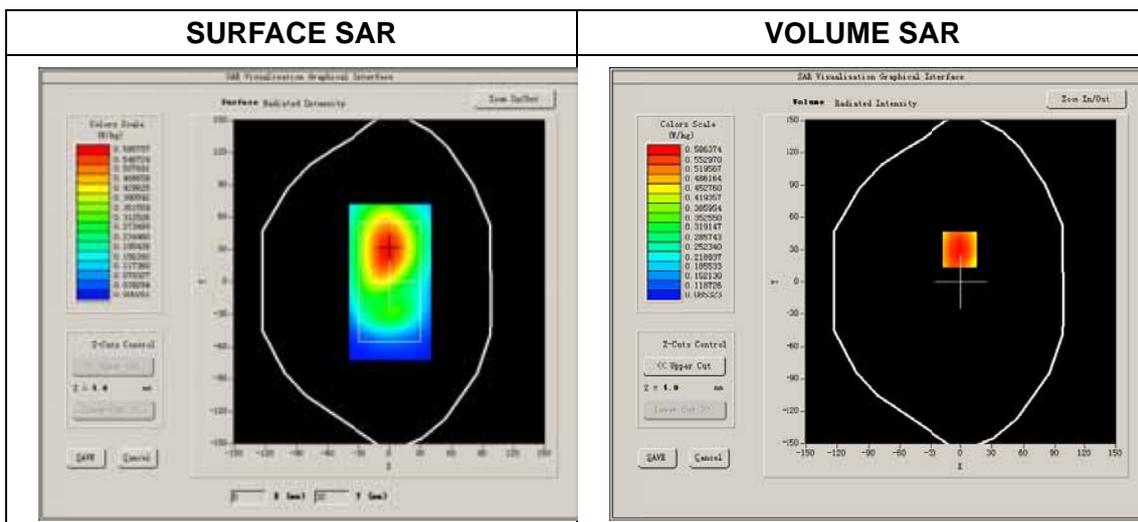

Maximum location: X=-1.00, Y=30.00
 SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.475825
SAR 1g (W/Kg)	0.614493

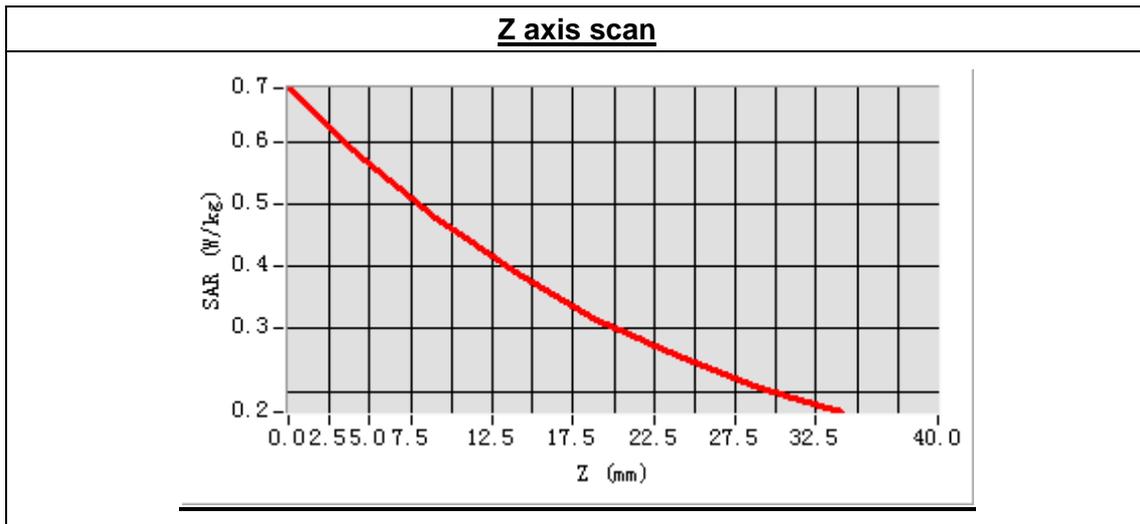

MEASUREMENT 32

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 32 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-2.200000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1

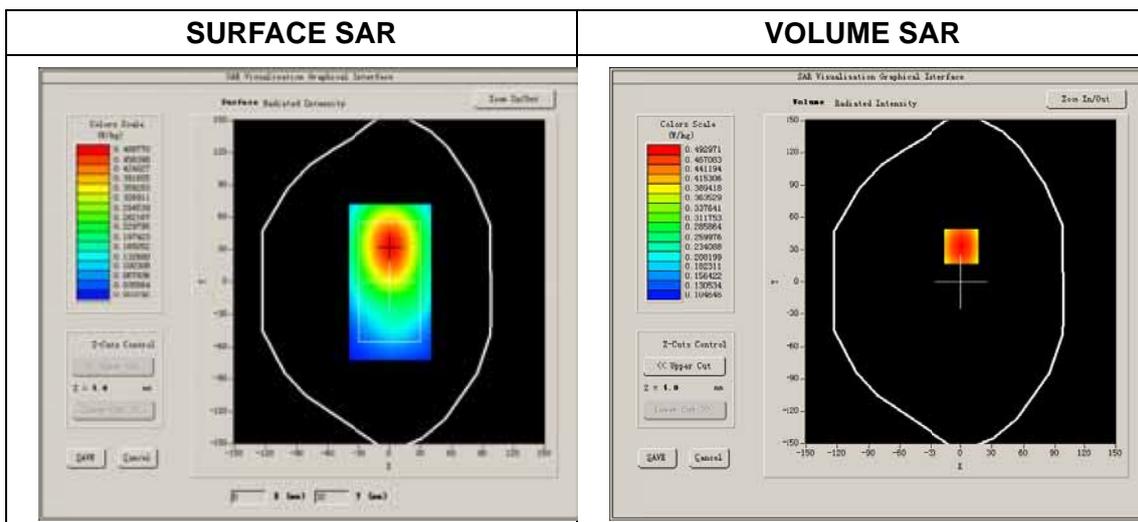

Maximum location: X=1.00, Y=33.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.403517
SAR 1g (W/Kg)	0.515822

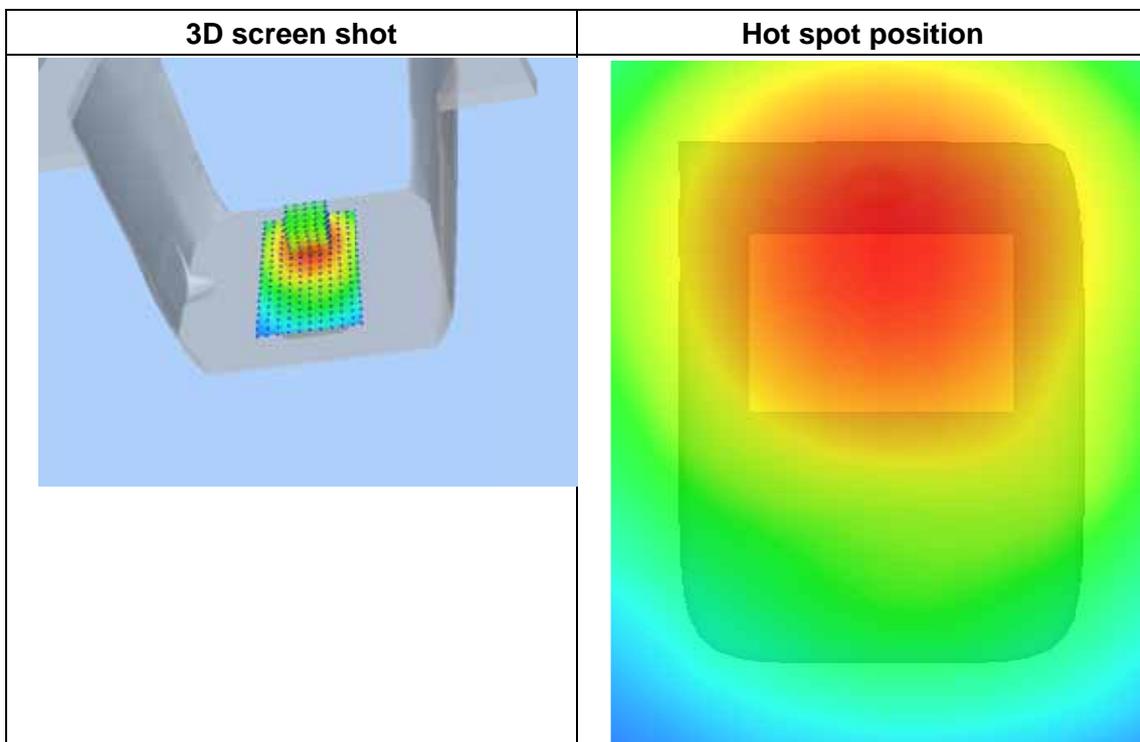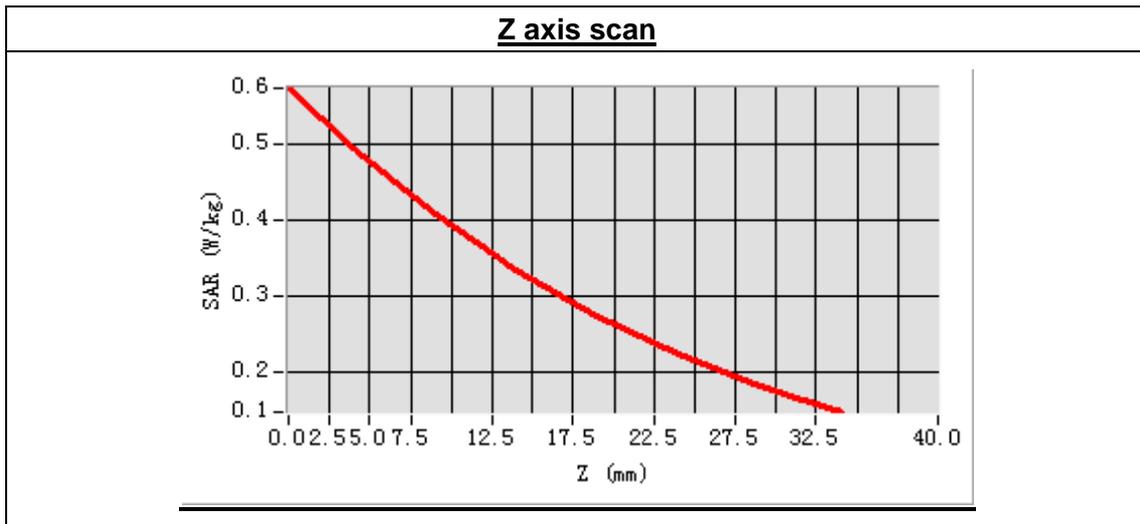

MEASUREMENT 33

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 31seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-0.980000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1

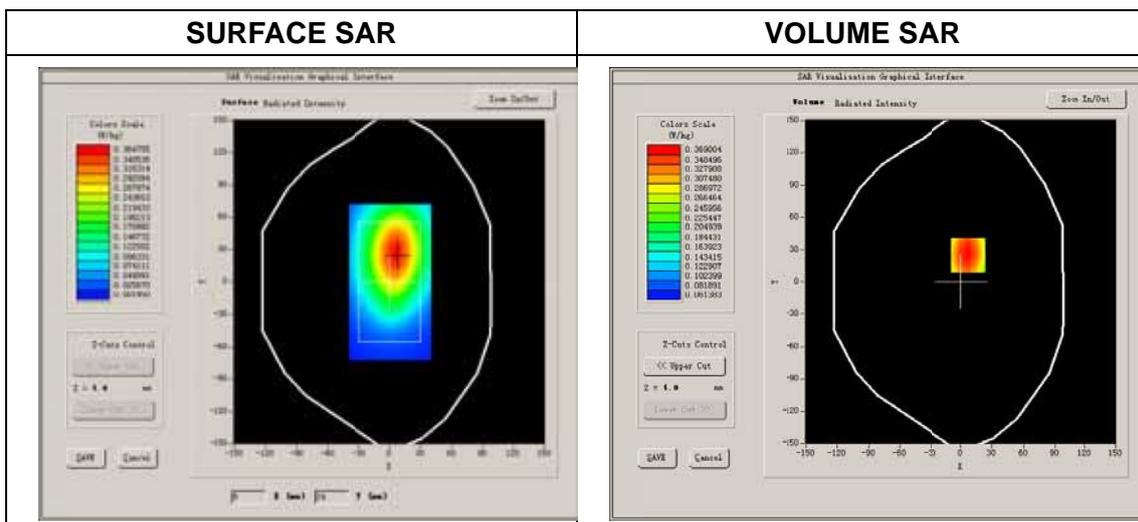

Maximum location: X=7.00, Y=25.00

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.279073
SAR 1g (W/Kg)	0.385425

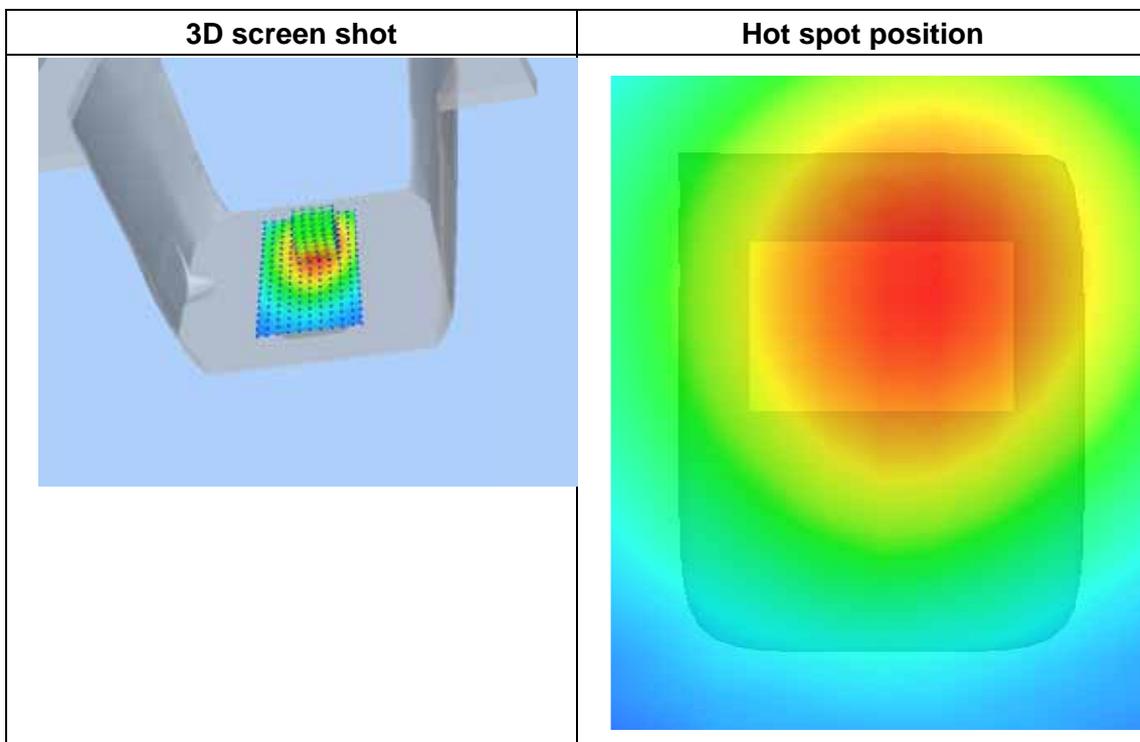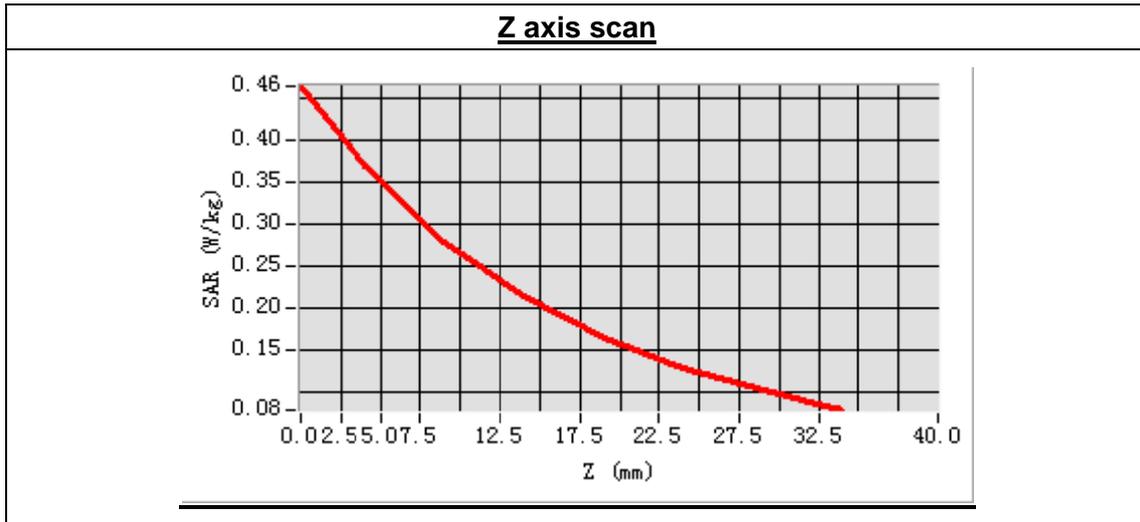

MEASUREMENT 34

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 30 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-0.750000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1

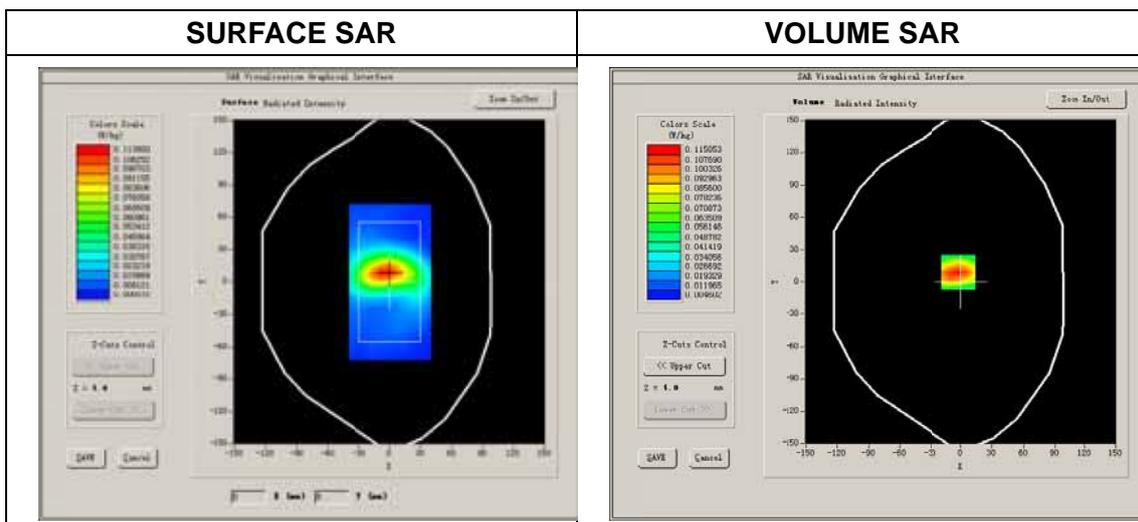

Maximum location: X=-2.00, Y=9.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.070622
SAR 1g (W/Kg)	0.117295

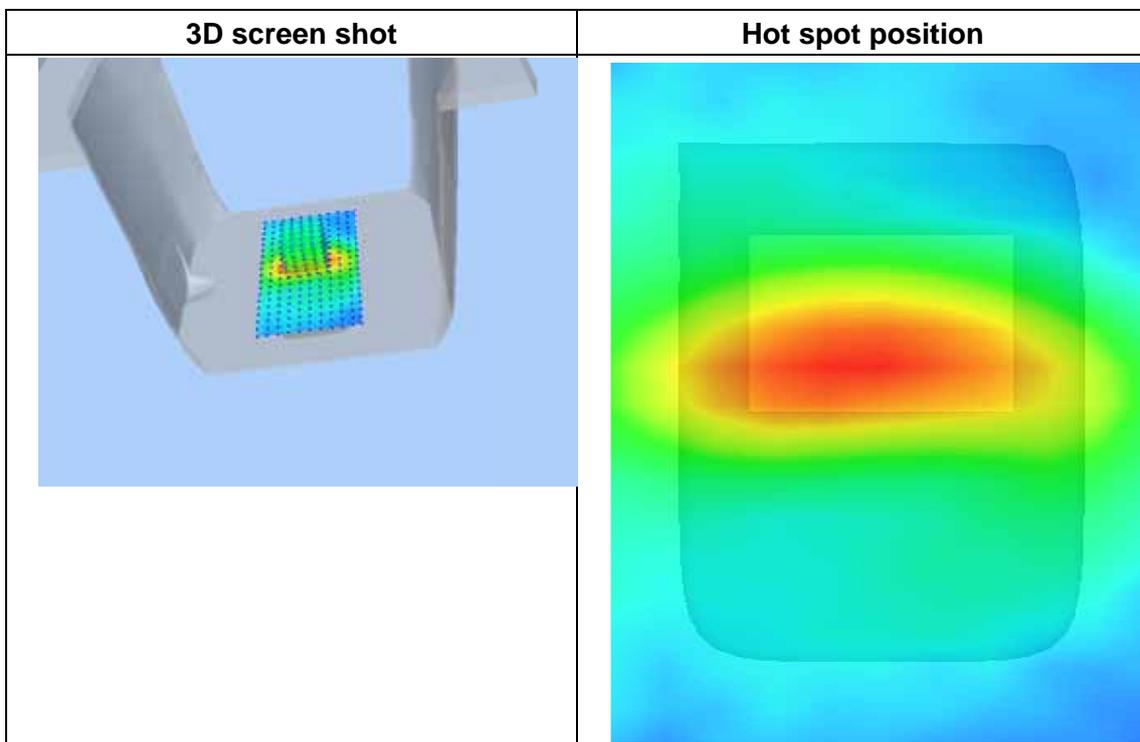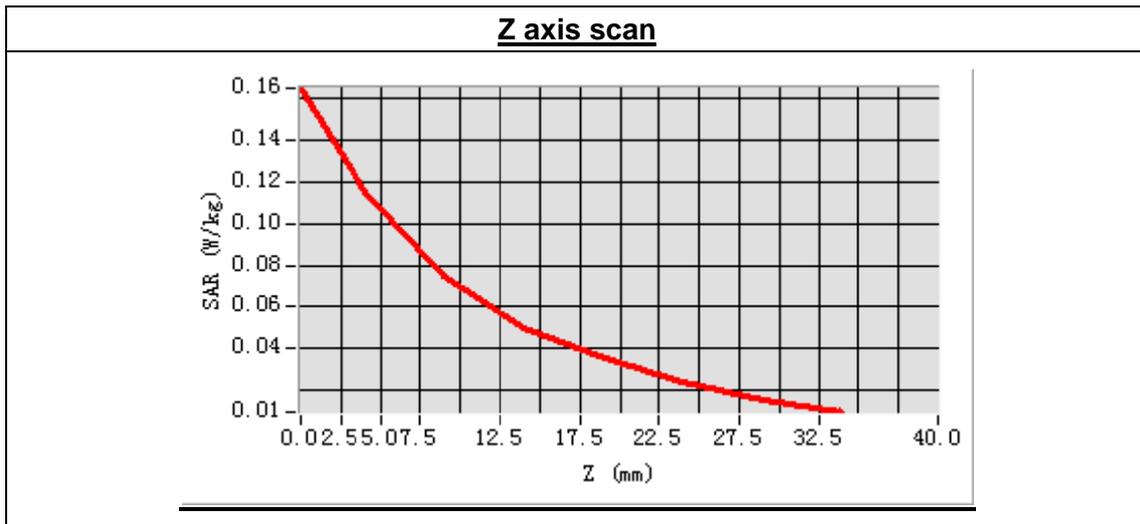

MEASUREMENT 35

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 9 minutes 16 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 4132):



Frequency (MHz)	826.400000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-2.430000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1

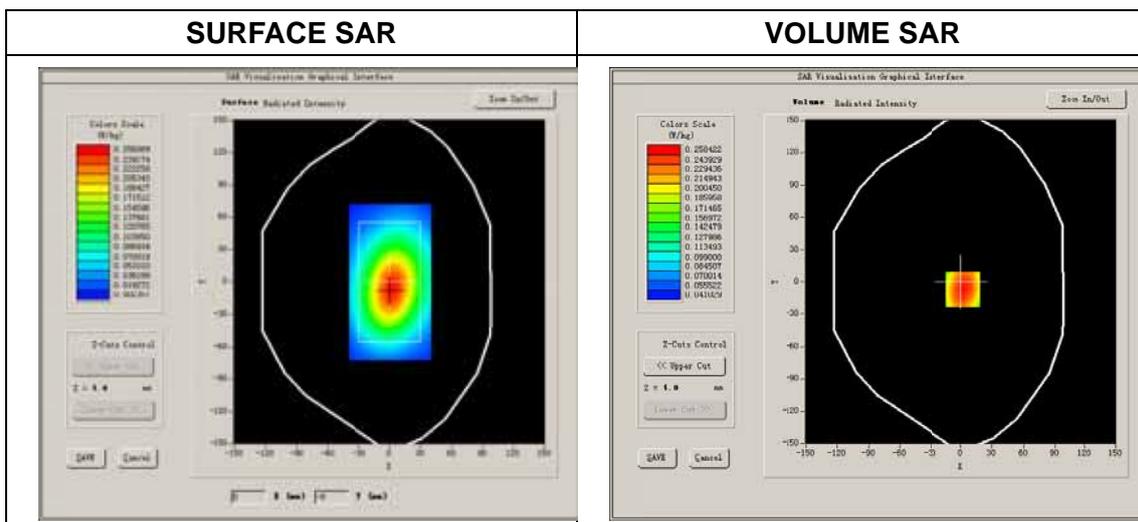

Maximum location: X=2.00, Y=-7.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.192889
SAR 1g (W/Kg)	0.269129

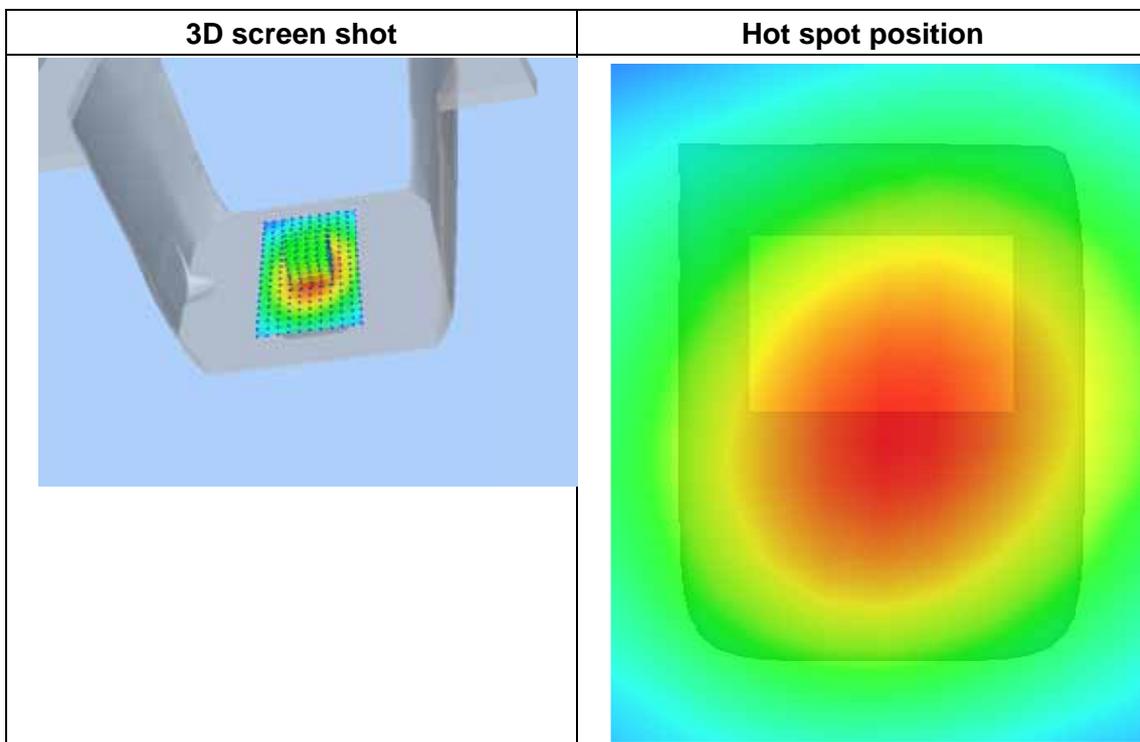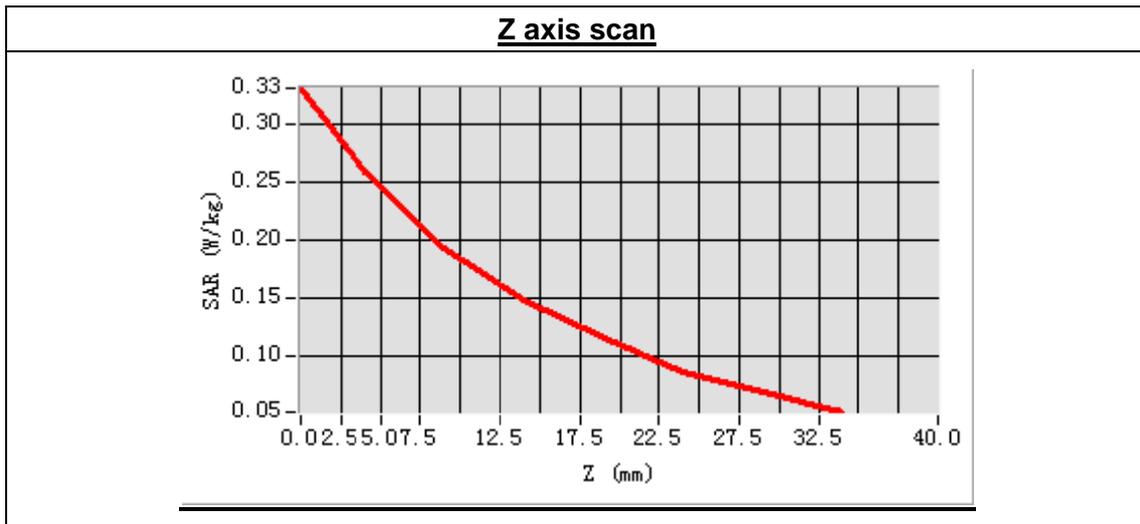

MEASUREMENT 36

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 9 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	40.243516
Conductivity (S/m)	1.354358
Power drift (%)	-2.350000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.42
Crest factor:	1:1

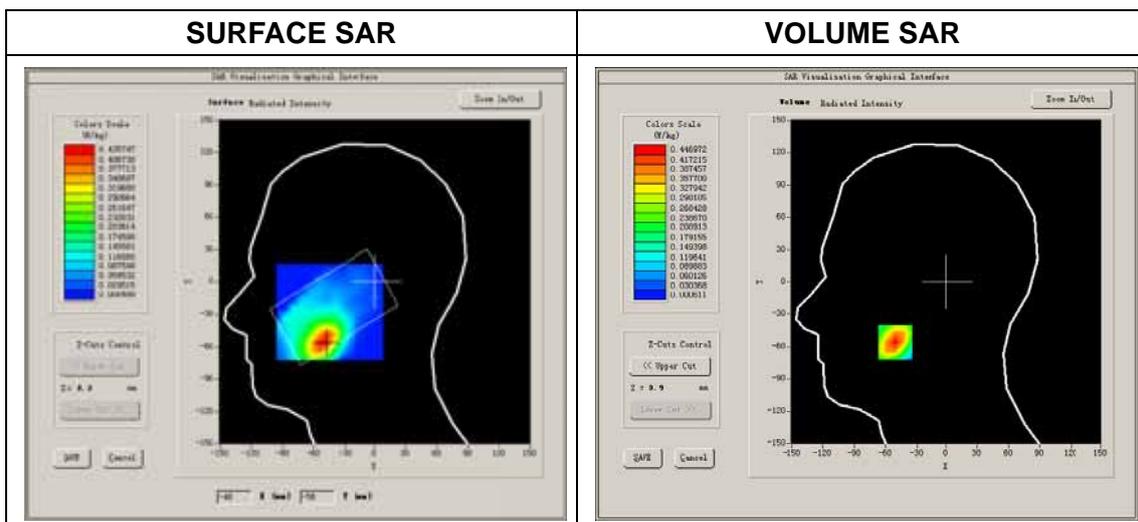

Maximum location: X=-51.00, Y=-56.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.245621
SAR 1g (W/Kg)	0.422305

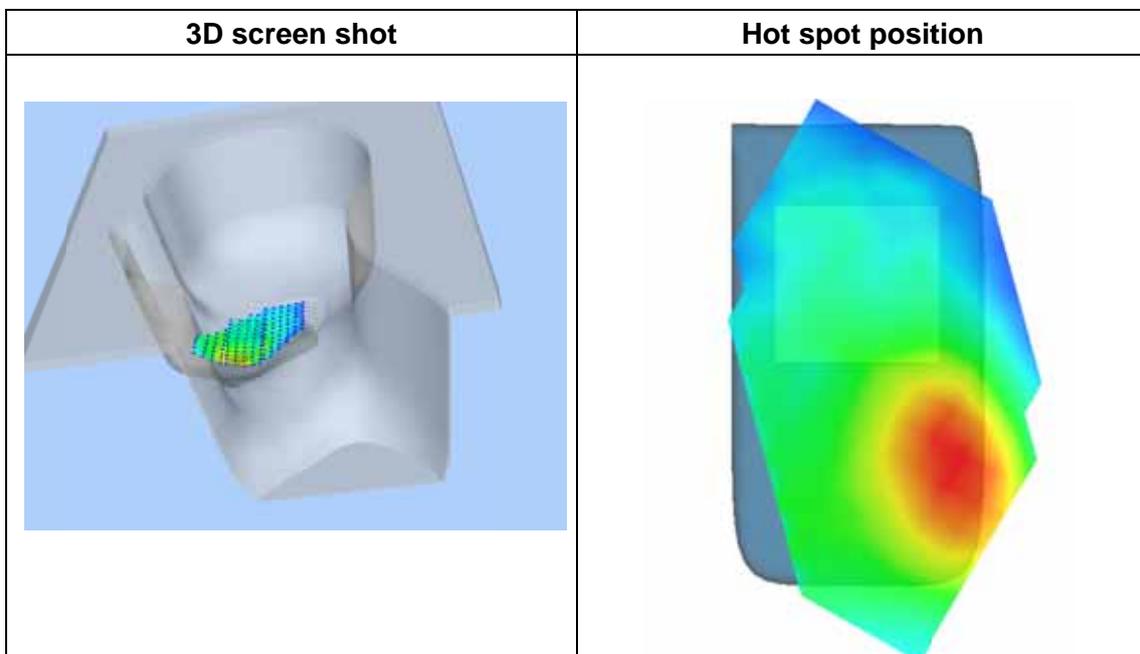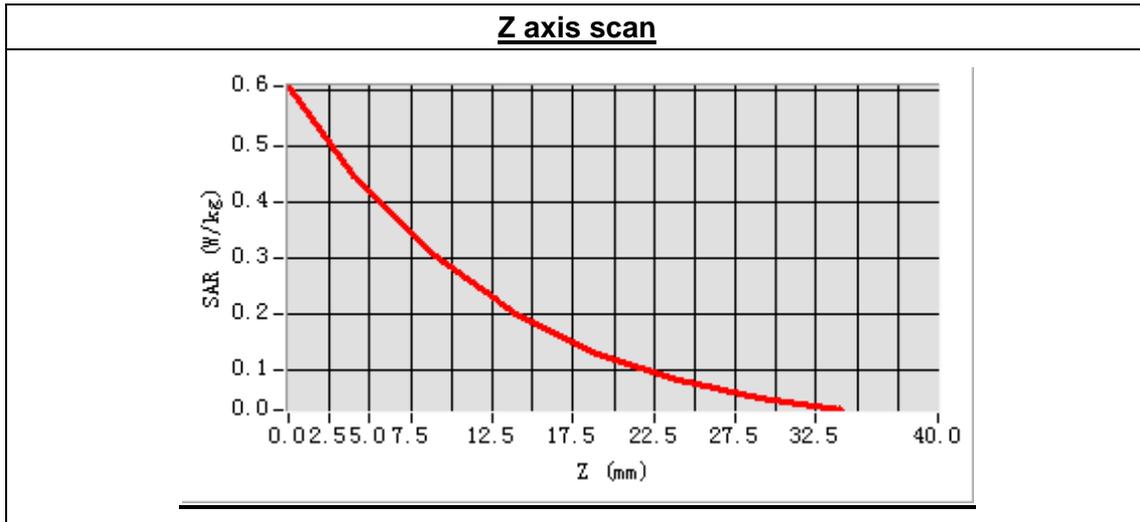

MEASUREMENT 37

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 7 minutes 59 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	40.243516
Conductivity (S/m)	1.354358
Power drift (%)	-1.340000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.42
Crest factor:	1:1

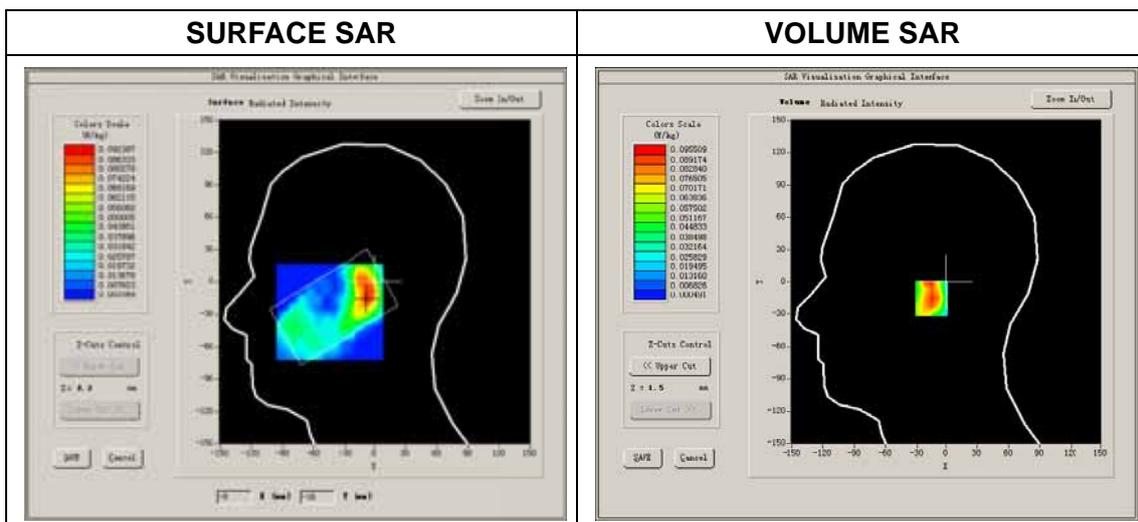

Maximum location: X=-7.00, Y=-15.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.051833
SAR 1g (W/Kg)	0.096222

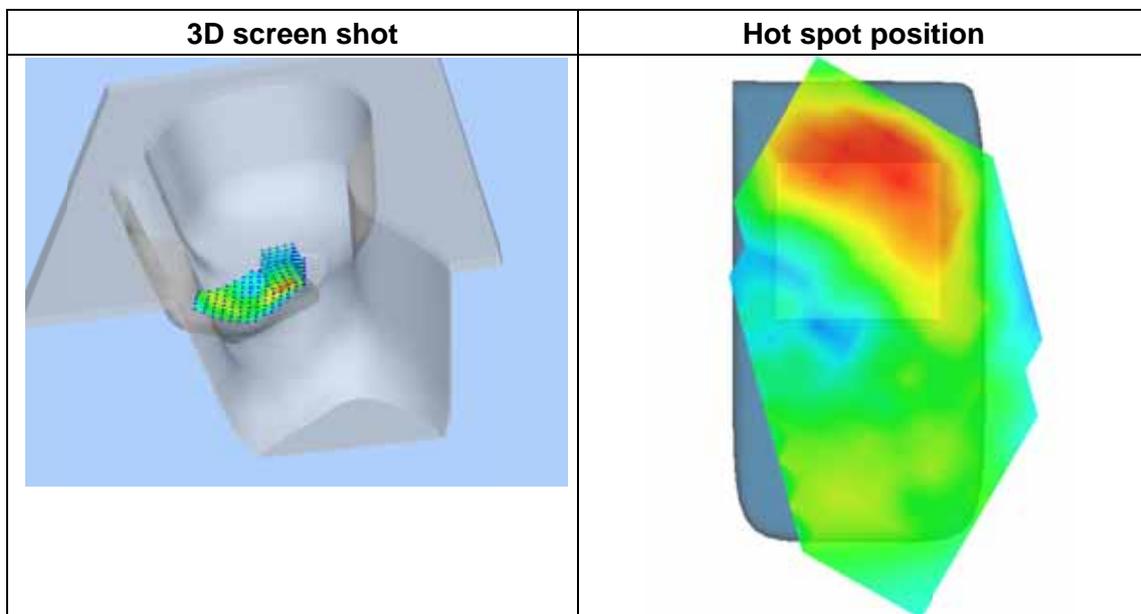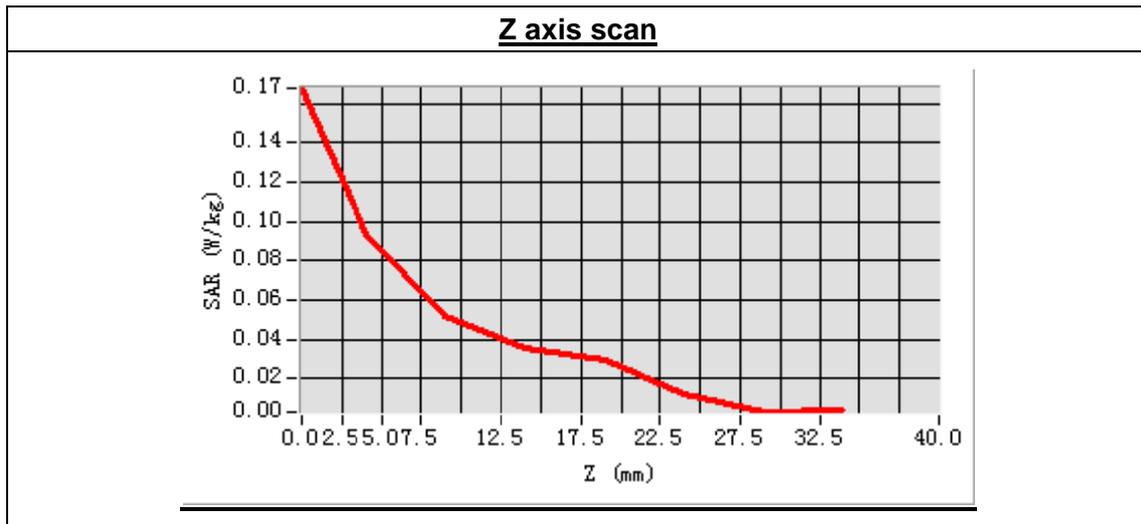

MEASUREMENT 38

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	40.243516
Conductivity (S/m)	1.354358
Power drift (%)	-3.140000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.42
Crest factor:	1:1

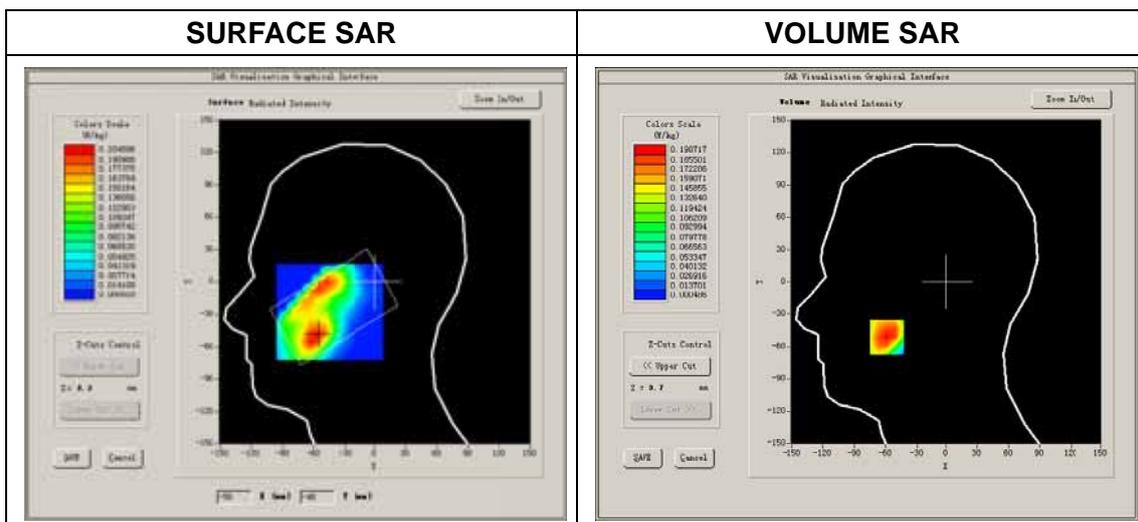

Maximum location: X=-59.00, Y=-51.00

SAR Peak: 0.32 W/kg

SAR 10g (W/Kg)	0.110959
SAR 1g (W/Kg)	0.193305

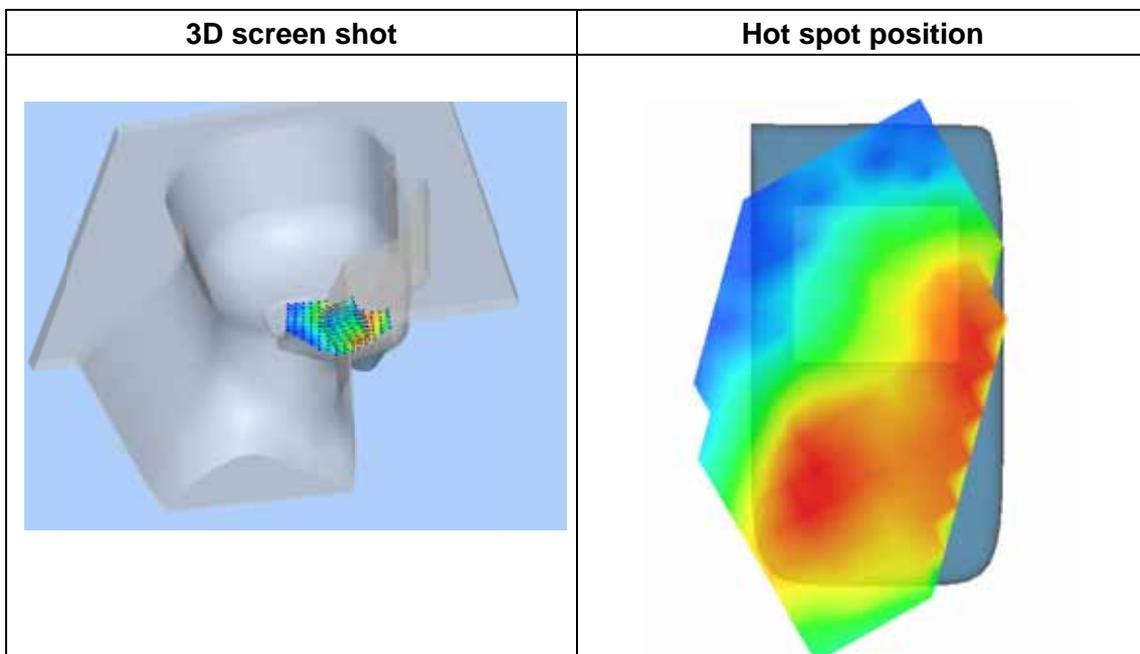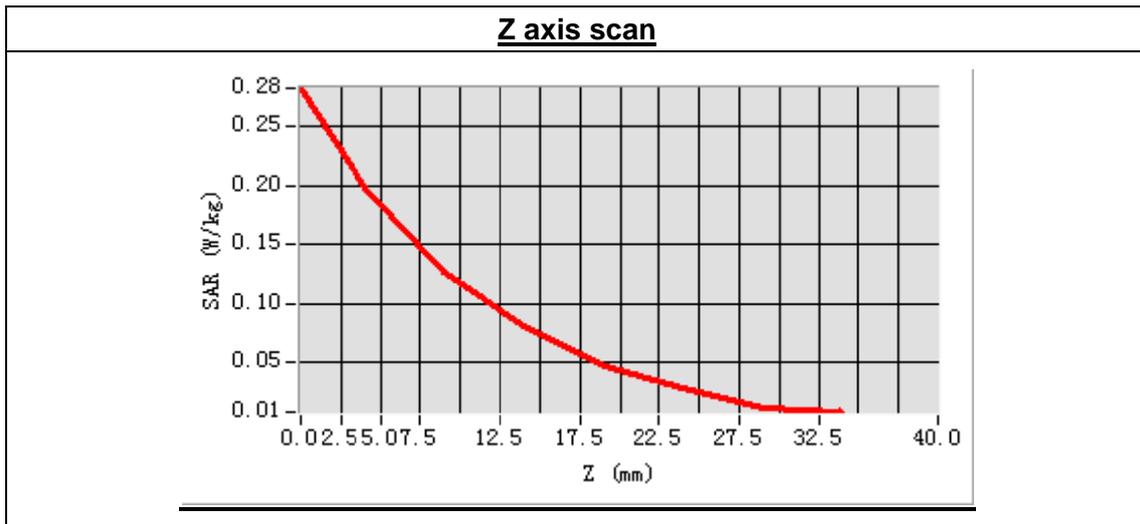

MEASUREMENT 39

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 8 minutes 30 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results



Low Band SAR (Channel 1312):

Frequency (MHz)	1712.400000
Relative permittivity (real part)	40.243516
Conductivity (S/m)	1.354358
Power drift (%)	1.450000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.42
Crest factor:	1:1

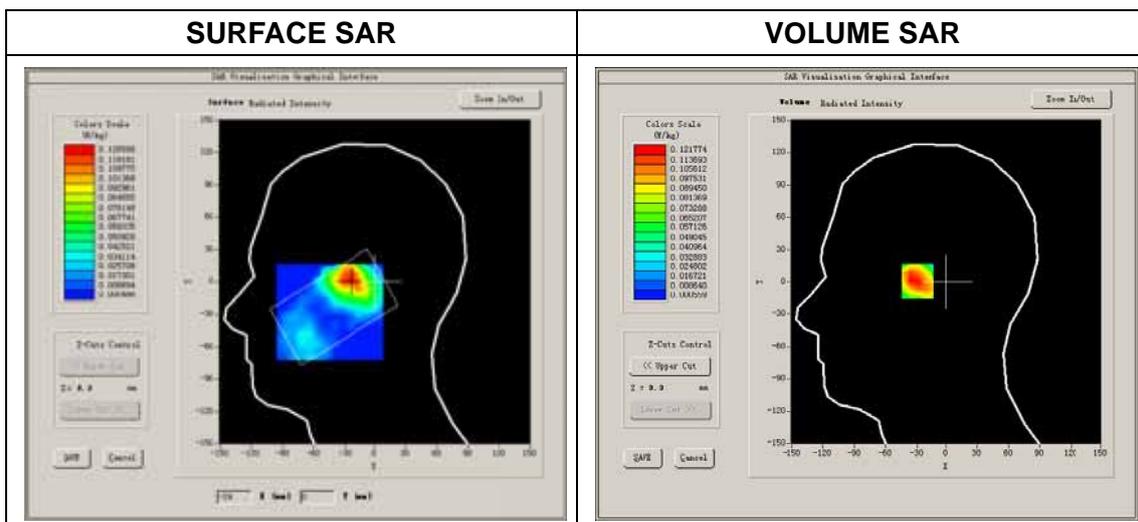

Maximum location: X=-25.00, Y=2.00
 SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.069322
SAR 1g (W/Kg)	0.123072

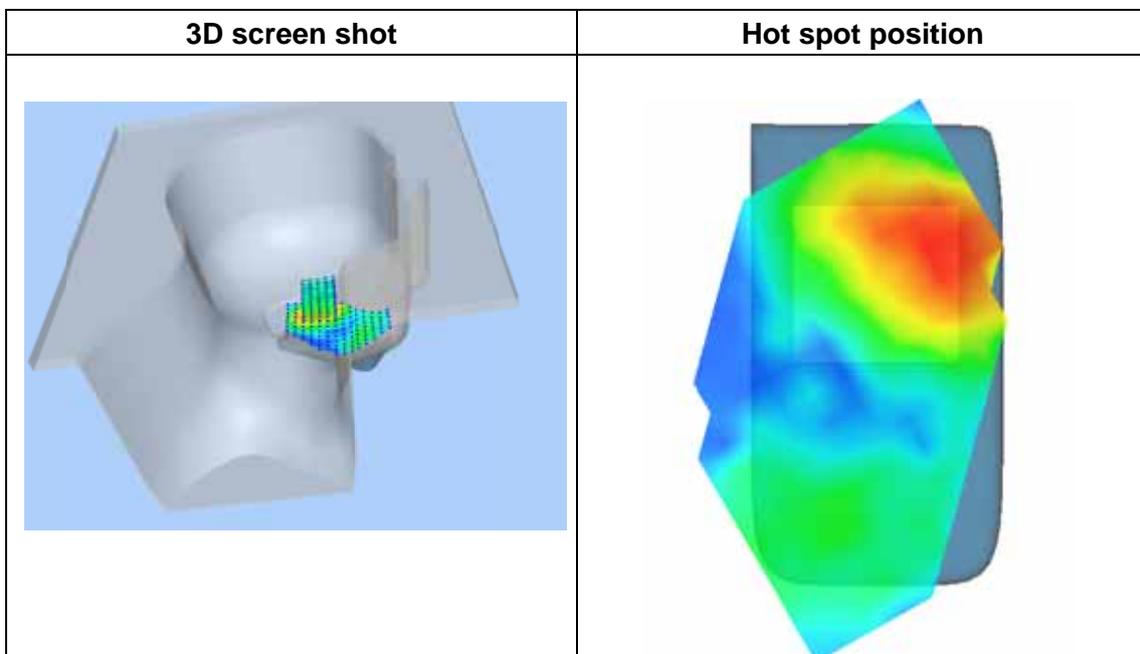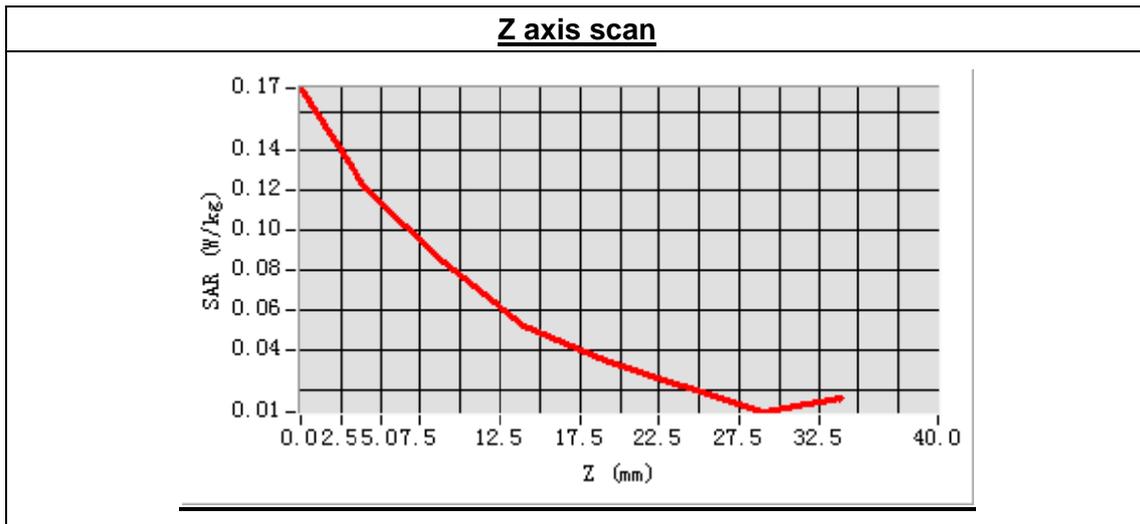

MEASUREMENT 40

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 37 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	53.196437
Conductivity (S/m)	1.472835
Power drift (%)	-2.220000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.51
Crest factor:	1:1

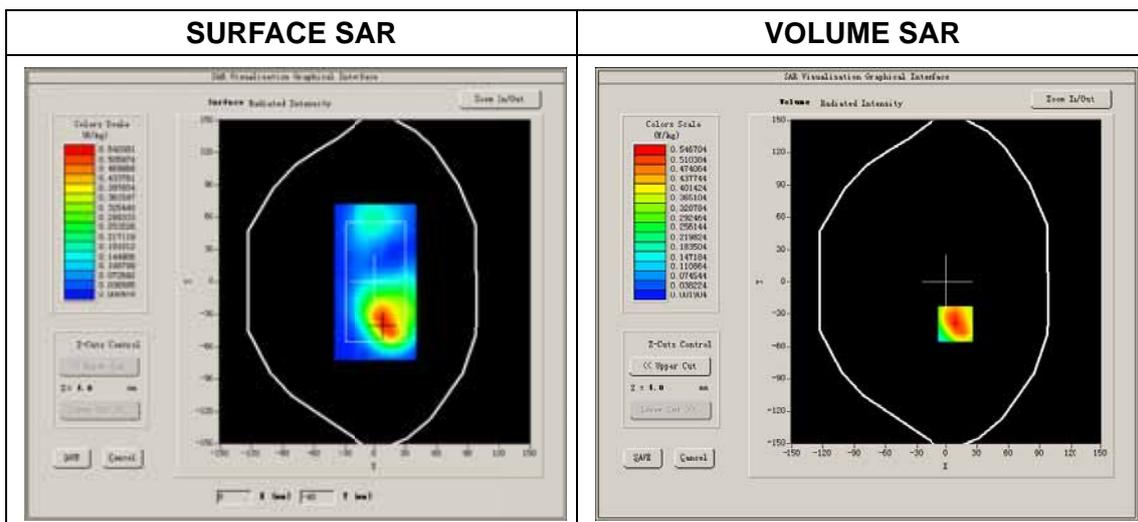

Maximum location: X=9.00, Y=-39.00

SAR Peak: 0.88 W/kg

SAR 10g (W/Kg)	0.328419
SAR 1g (W/Kg)	0.566939

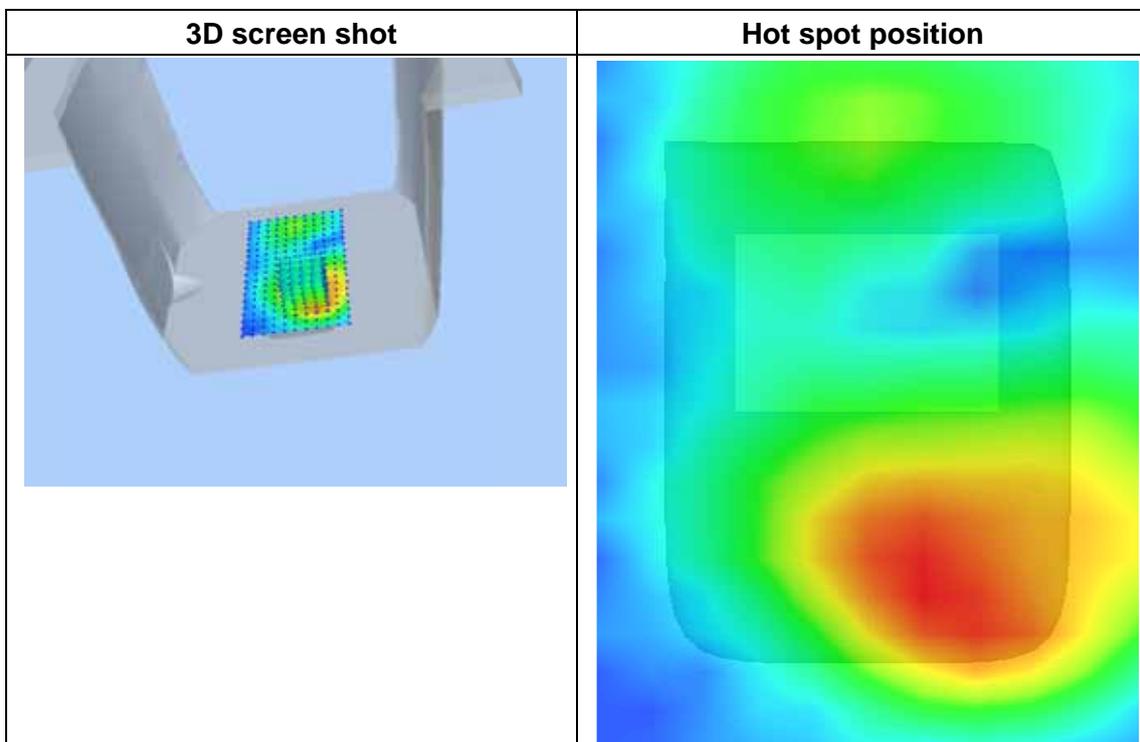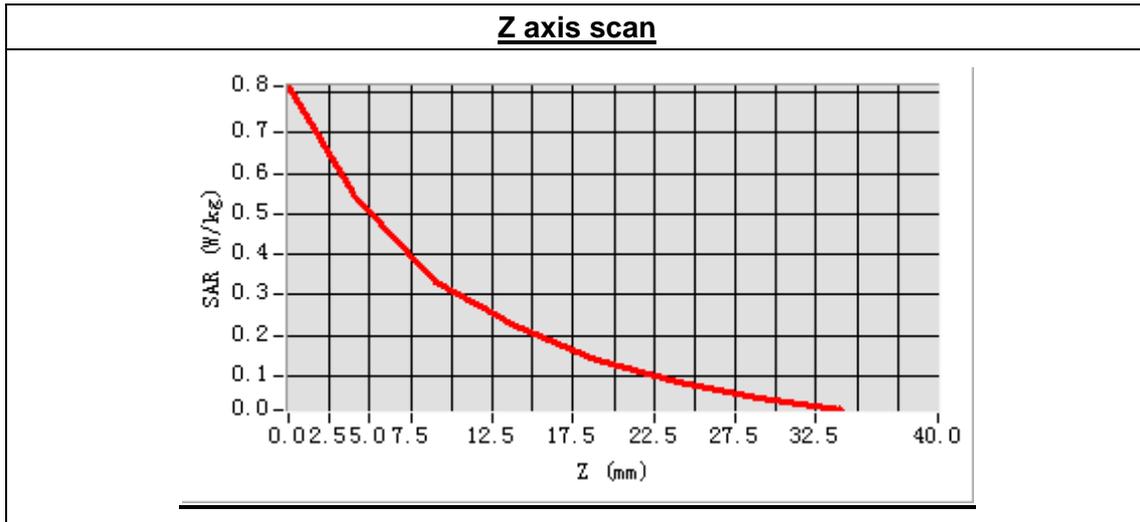

MEASUREMENT 41

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 33 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	53.196437
Conductivity (S/m)	1.472835
Power drift (%)	-0.210000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.51
Crest factor:	1:1

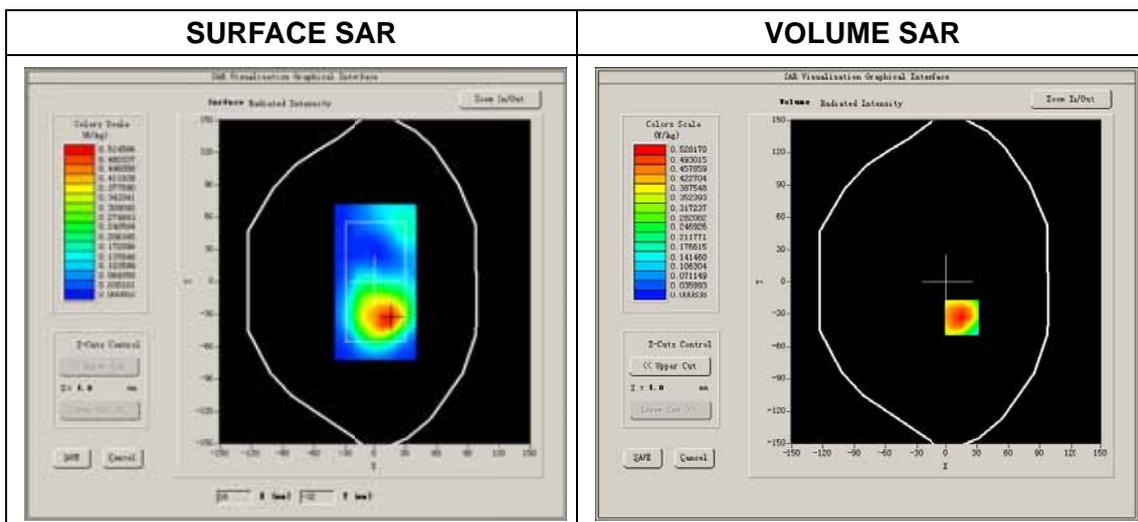

Maximum location: X=15.00, Y=-33.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.326933
SAR 1g (W/Kg)	0.541436

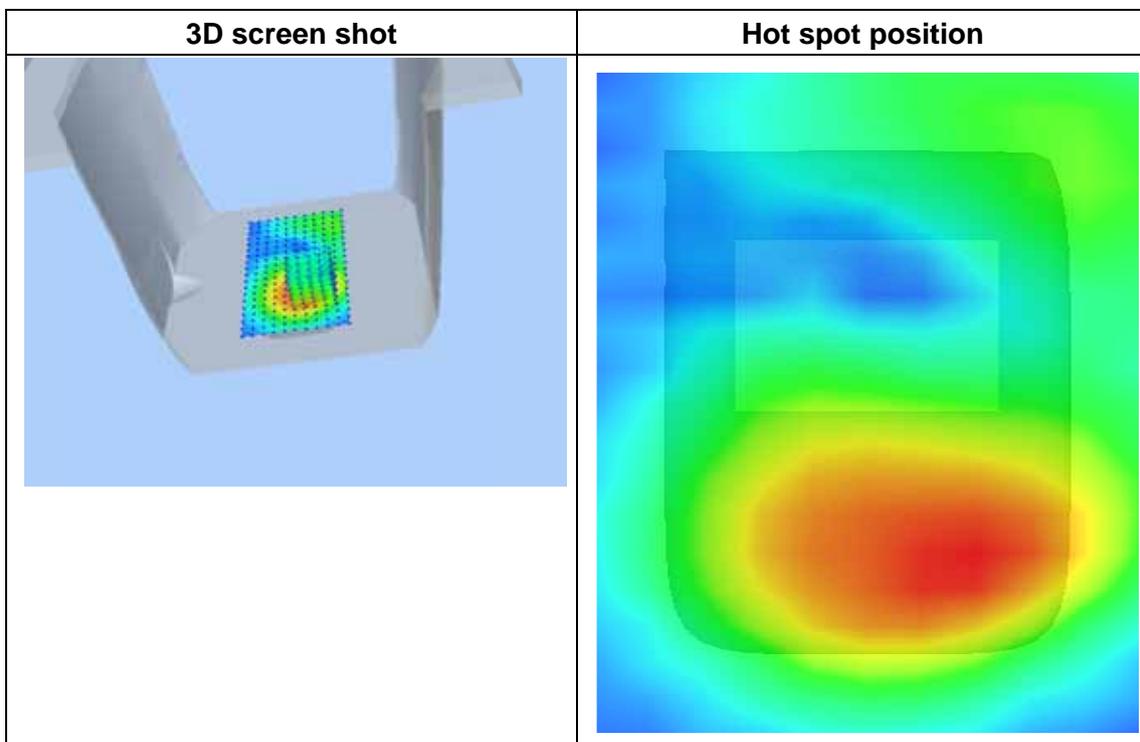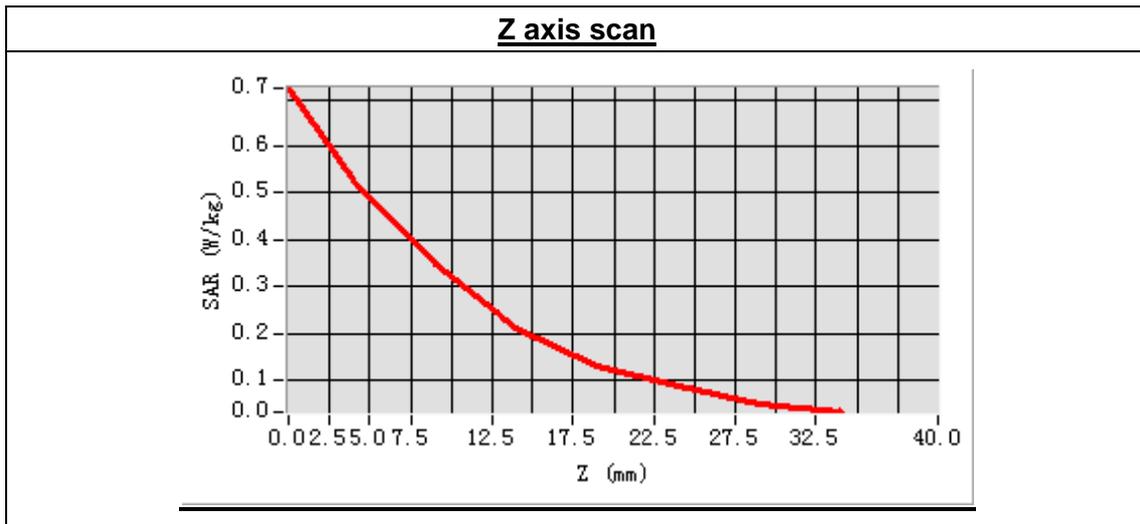

MEASUREMENT 42

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 29 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	53.196437
Conductivity (S/m)	1.472835
Power drift (%)	-2.480000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.51
Crest factor:	1:1

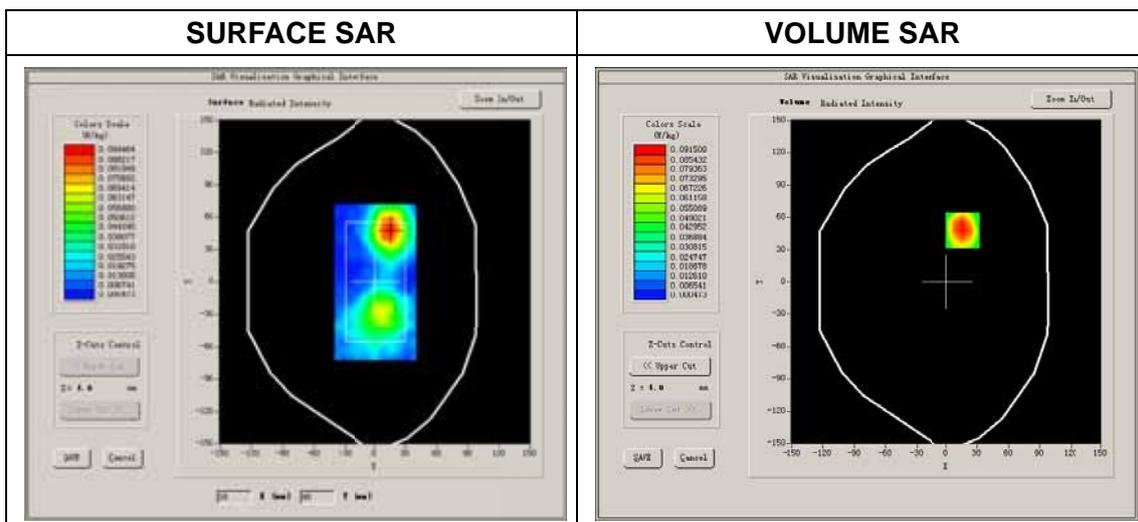

Maximum location: X=16.00, Y=48.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.050997
SAR 1g (W/Kg)	0.099210

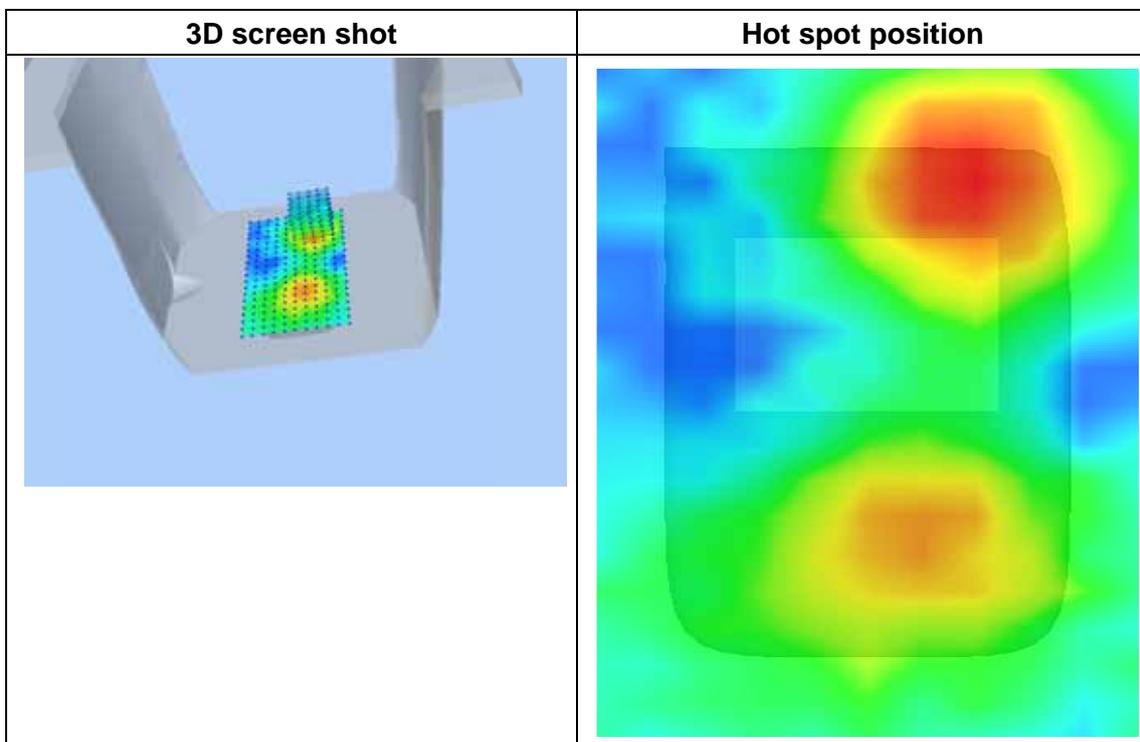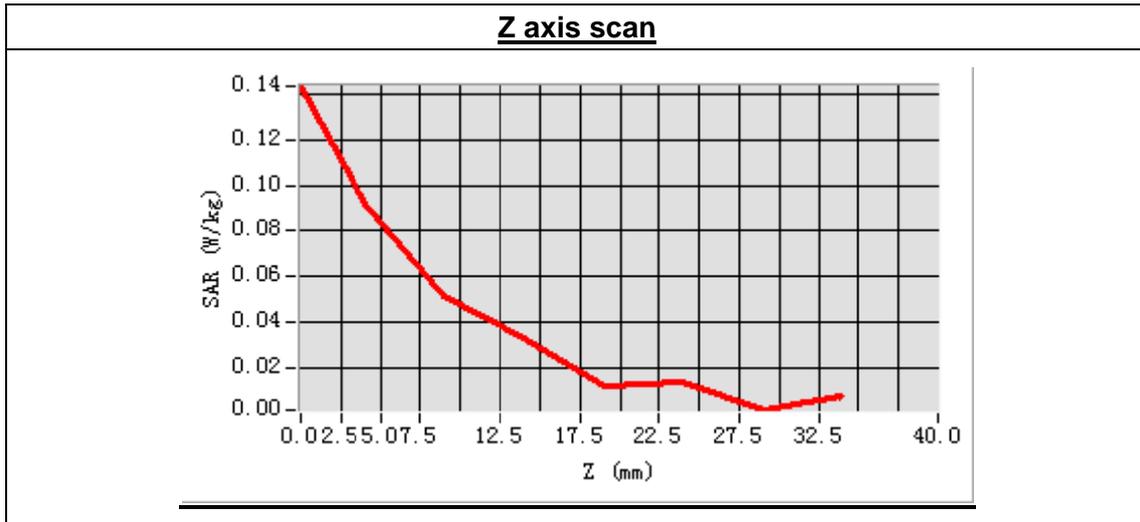

MEASUREMENT 43

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 28 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results



Low Band SAR (Channel 1312):

Frequency (MHz)	1712.400000
Relative permittivity (real part)	53.196437
Conductivity (S/m)	1.472835
Power drift (%)	0.450000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.51
Crest factor:	1:1

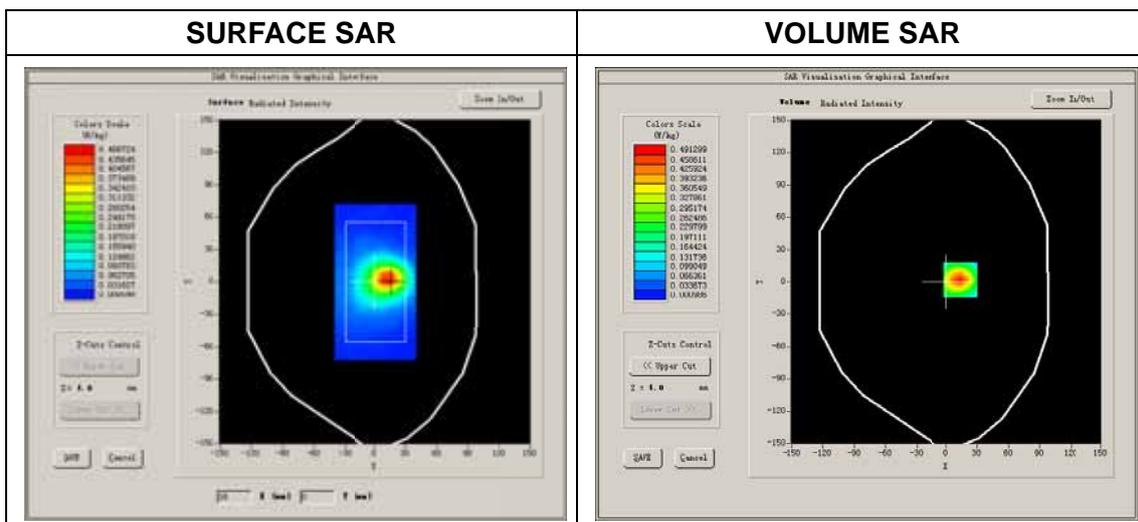

Maximum location: X=14.00, Y=2.00
 SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.266979
SAR 1g (W/Kg)	0.494175

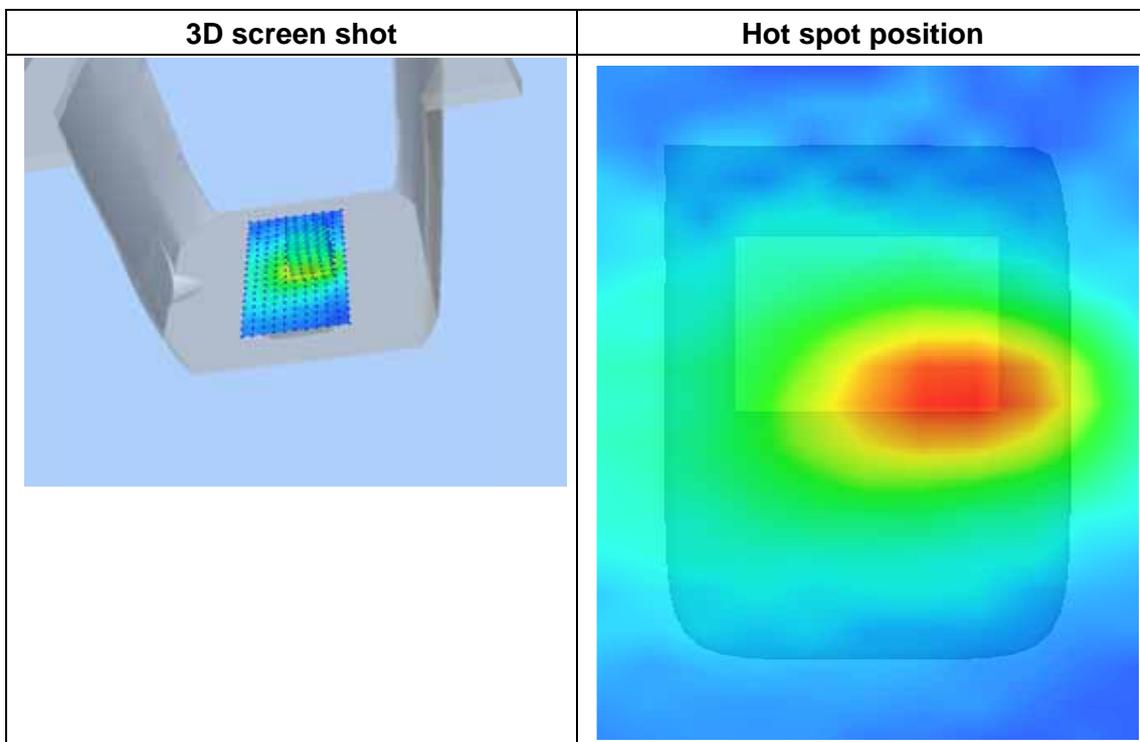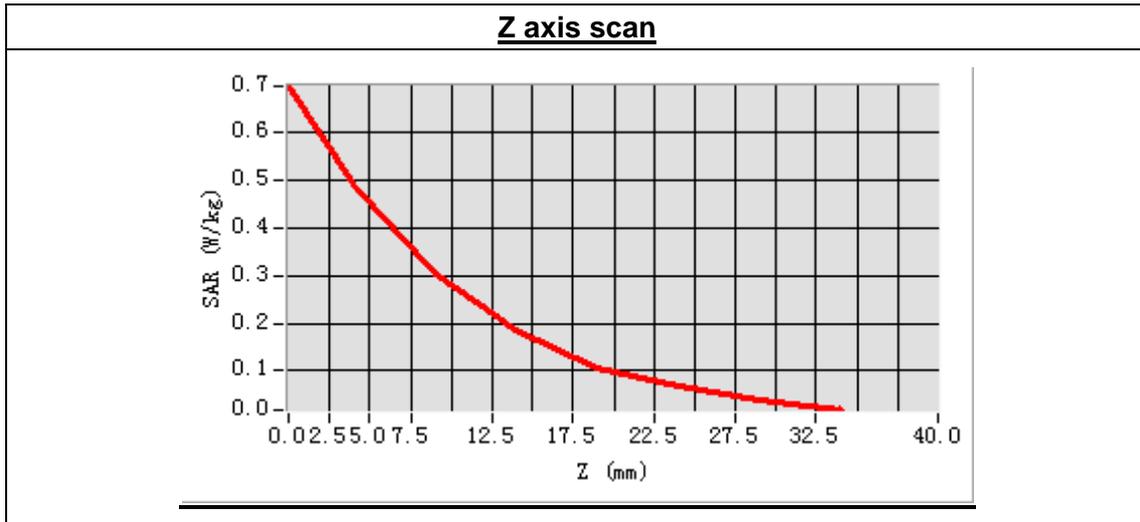

MEASUREMENT 44

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.1

Measurement duration: 9 minutes 32 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1700
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Low Band SAR (Channel 1312):



Frequency (MHz)	1712.400000
Relative permittivity (real part)	53.196437
Conductivity (S/m)	1.472835
Power drift (%)	-1.230000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	5.51
Crest factor:	1:1

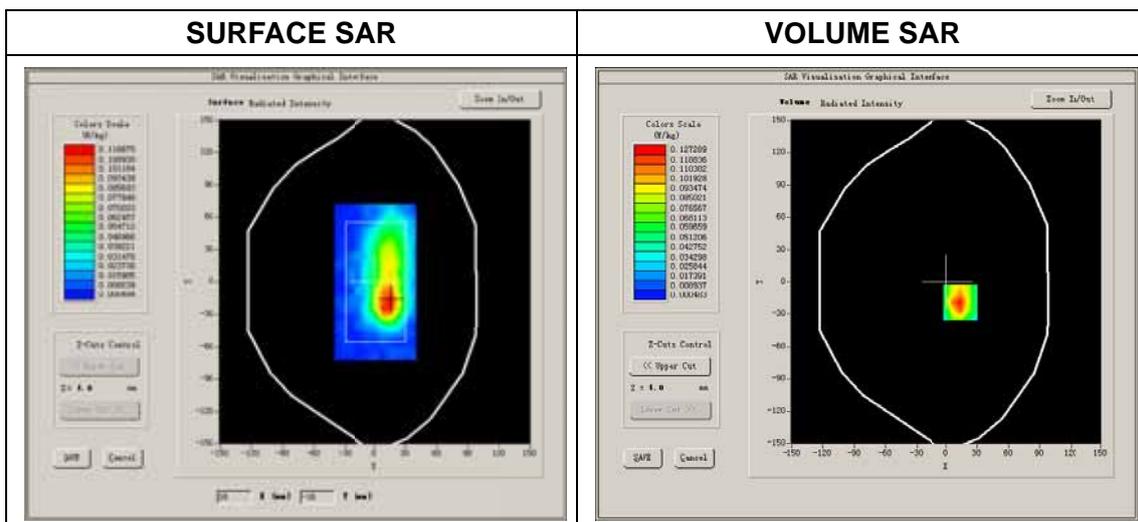

Maximum location: X=14.00, Y=-19.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.065217
SAR 1g (W/Kg)	0.130382

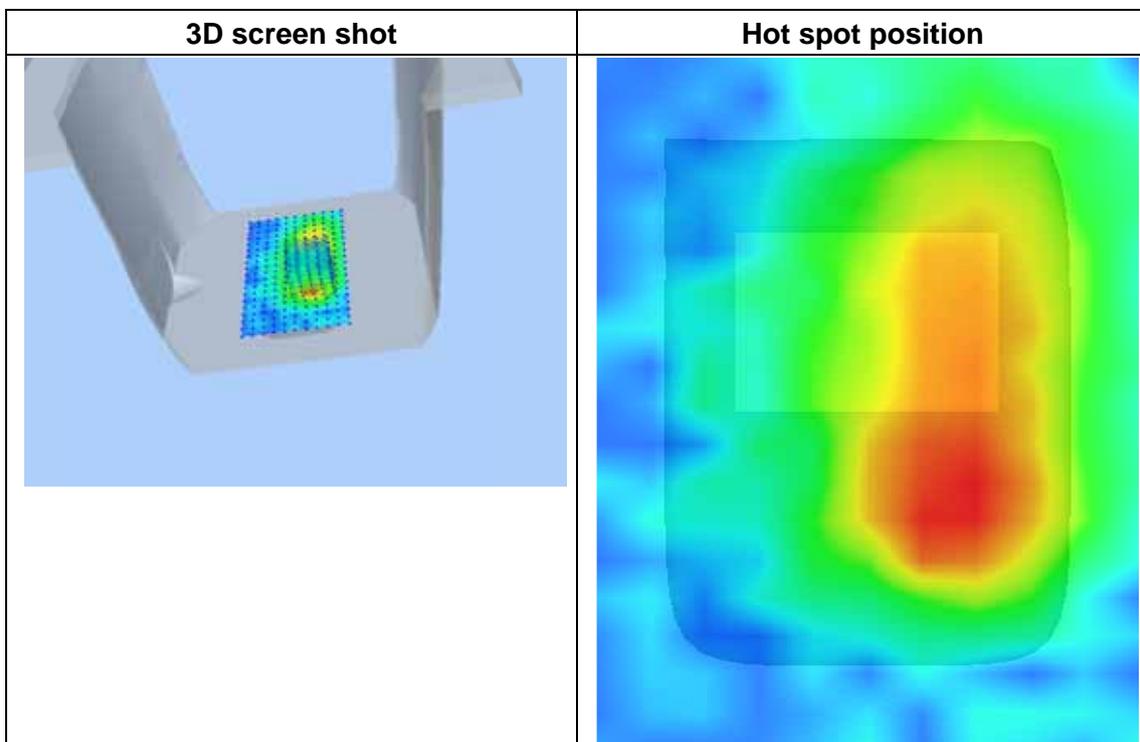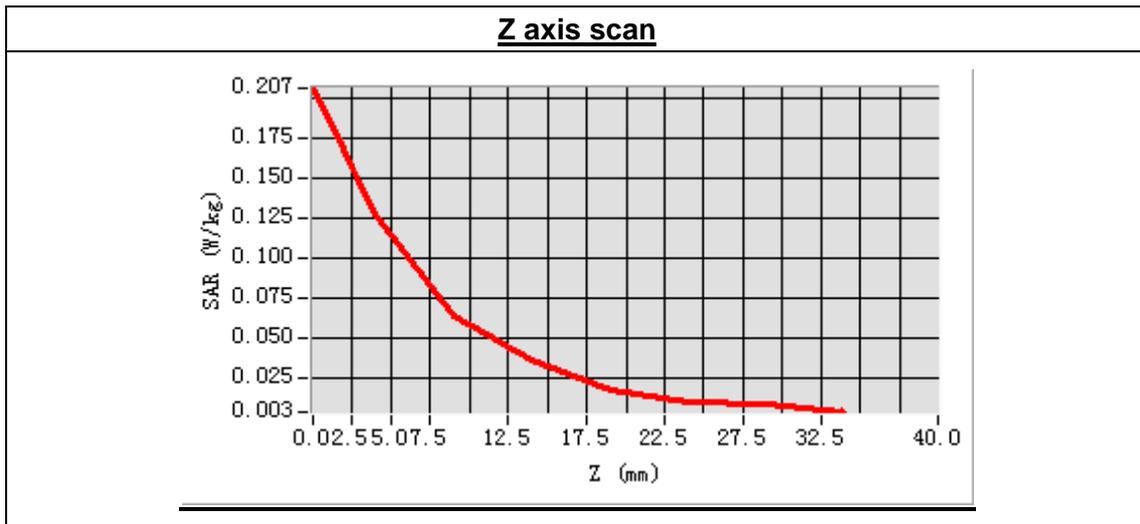

MEASUREMENT 45

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 9 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

High Band SAR (Channel 9538):



Frequency (MHz)	1907.600000
Relative permittivity (real part)	40.035469
Conductivity (S/m)	1.362495
Power drift (%)	-2.350000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:1

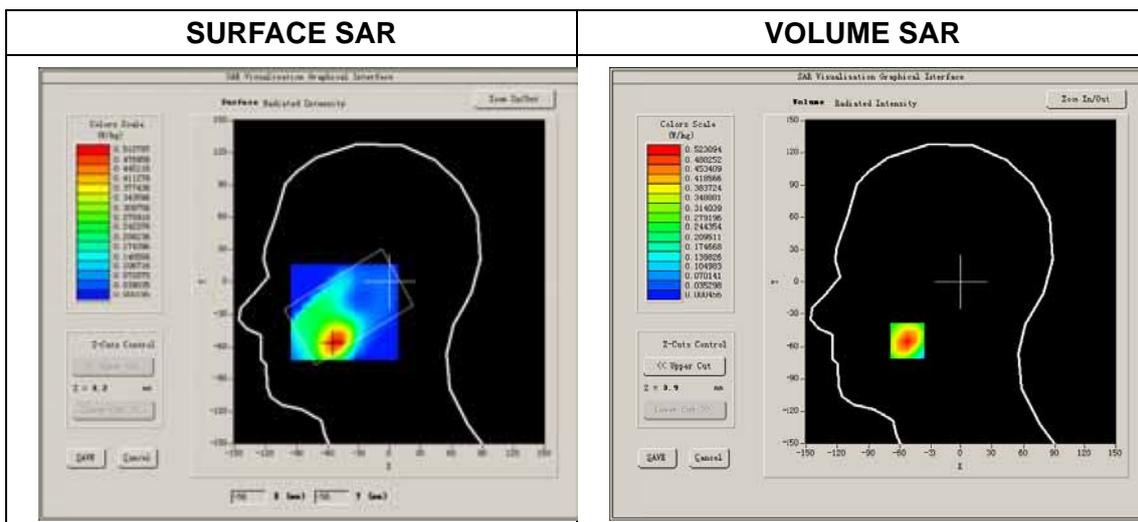

Maximum location: X=-53.00, Y=-55.00

SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.263700
SAR 1g (W/Kg)	0.494735

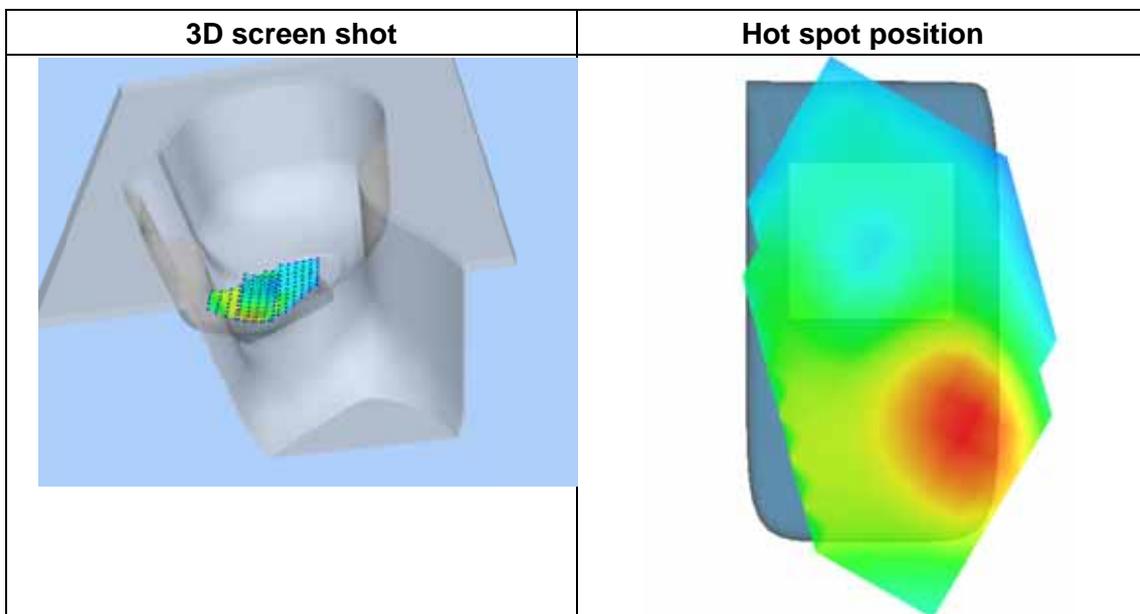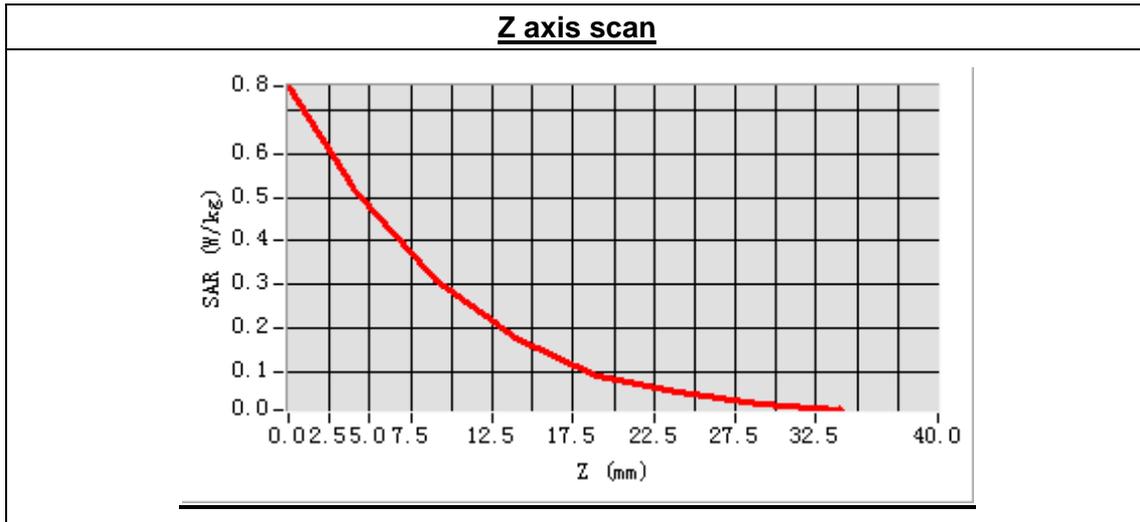

MEASUREMENT 46

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 7 minutes 59 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results



High Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	40.035469
Conductivity (S/m)	1.362495
Power drift (%)	-1.340000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:1

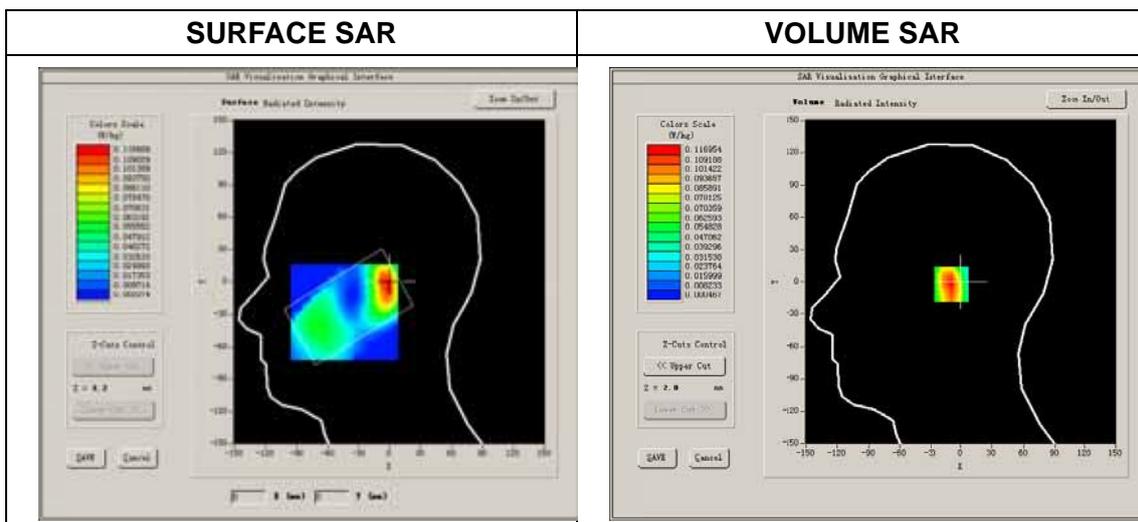

Maximum location: X=-2.00, Y=-2.00
 SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.057344
SAR 1g (W/Kg)	0.111294

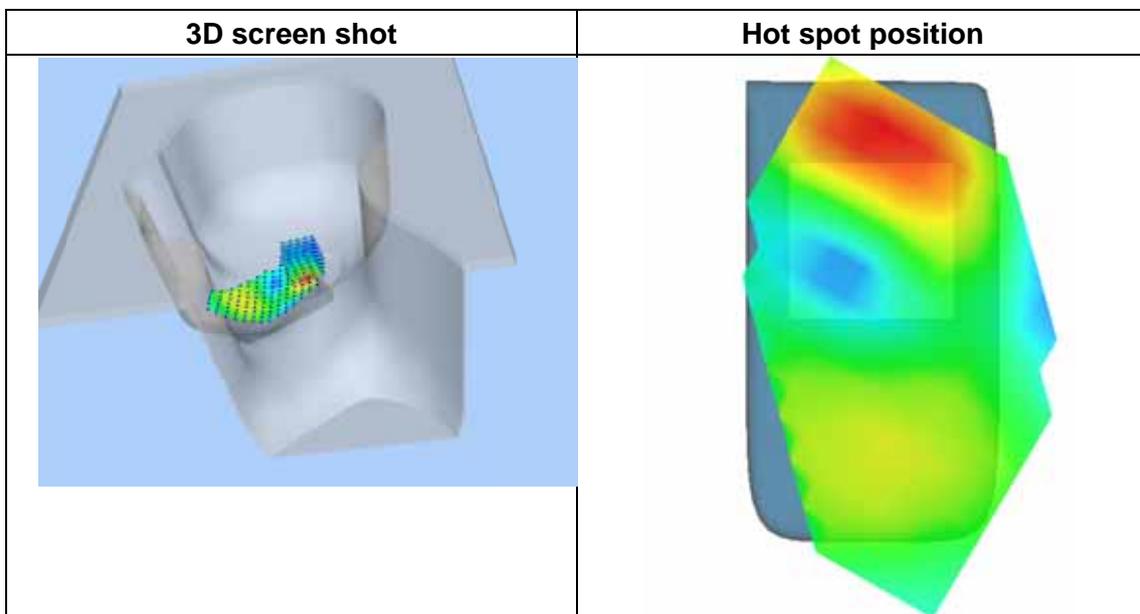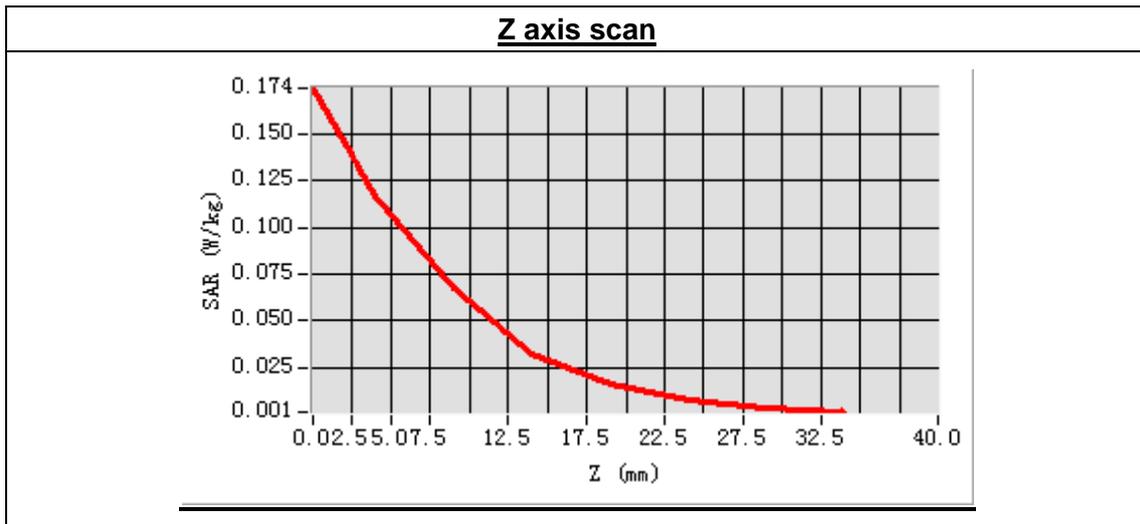

MEASUREMENT 47

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

High Band SAR (Channel 9538):



Frequency (MHz)	1907.600000
Relative permittivity (real part)	40.035469
Conductivity (S/m)	1.362495
Power drift (%)	-3.140000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:1

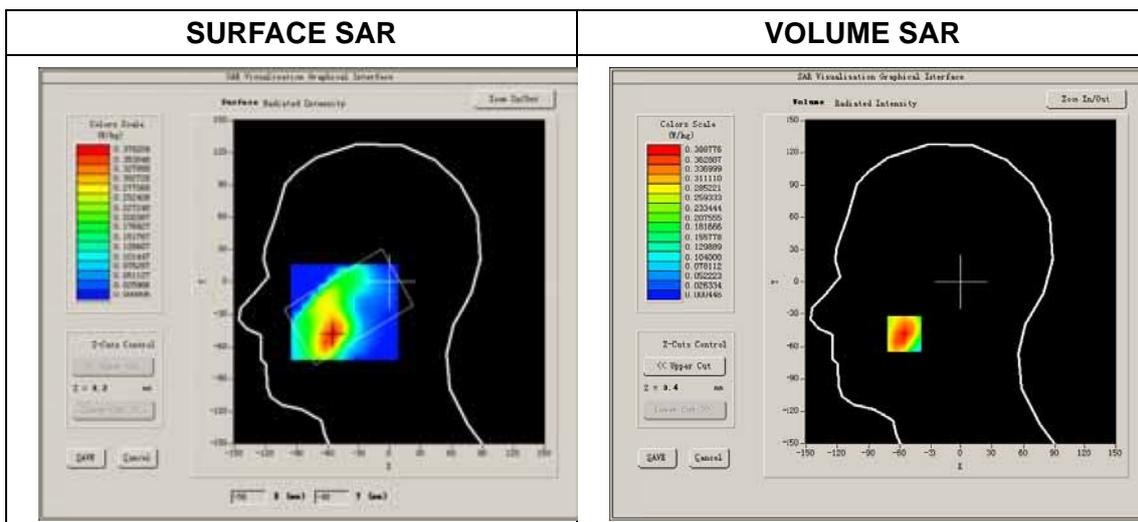

Maximum location: X=-56.00, Y=-48.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.204269
SAR 1g (W/Kg)	0.369112

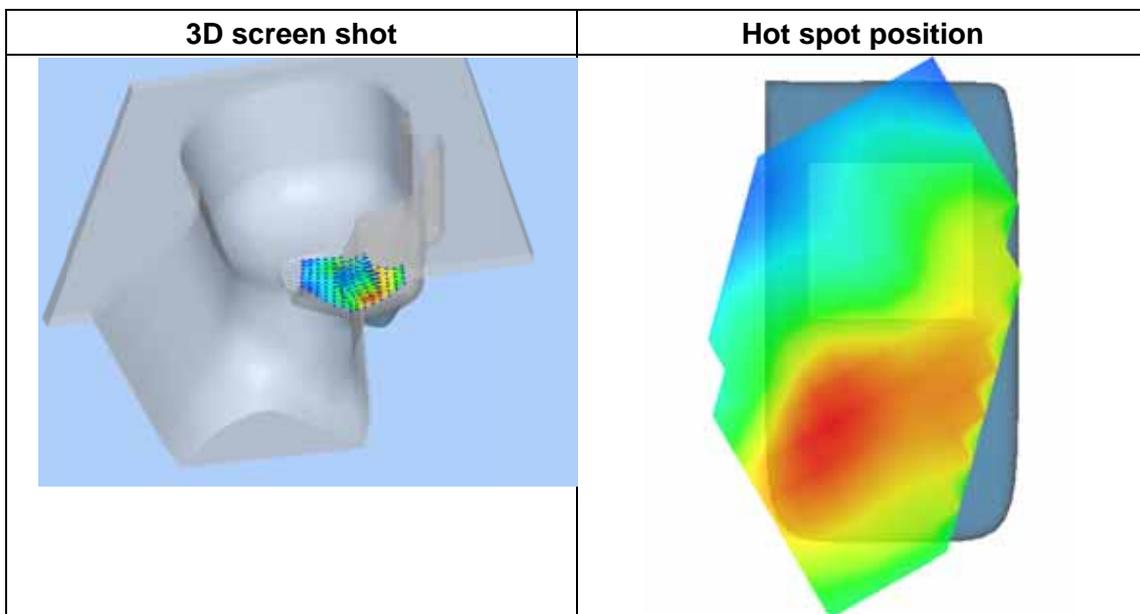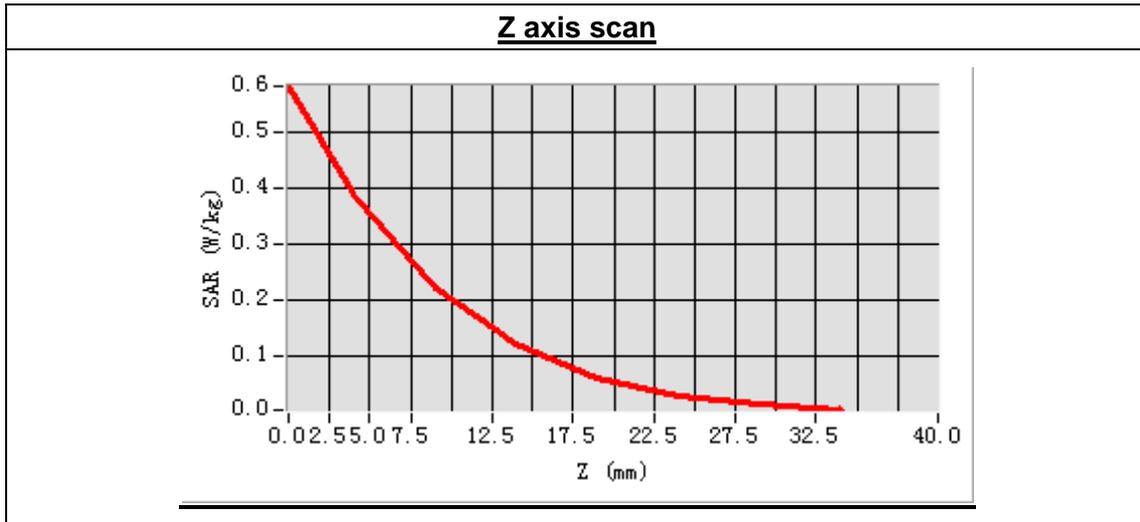

MEASUREMENT 48

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 8 minutes 30 seconds


A. Experimental conditions.

Phantom File	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results



High Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	40.035469
Conductivity (S/m)	1.362495
Power drift (%)	1.450000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:1

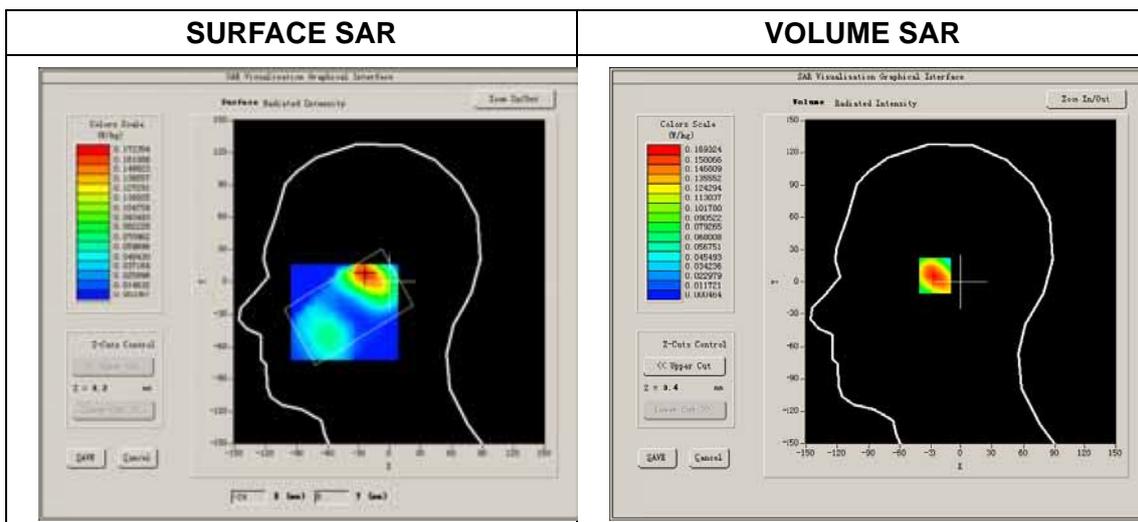

Maximum location: X=-23.00, Y=7.00
 SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.091854
SAR 1g (W/Kg)	0.162151

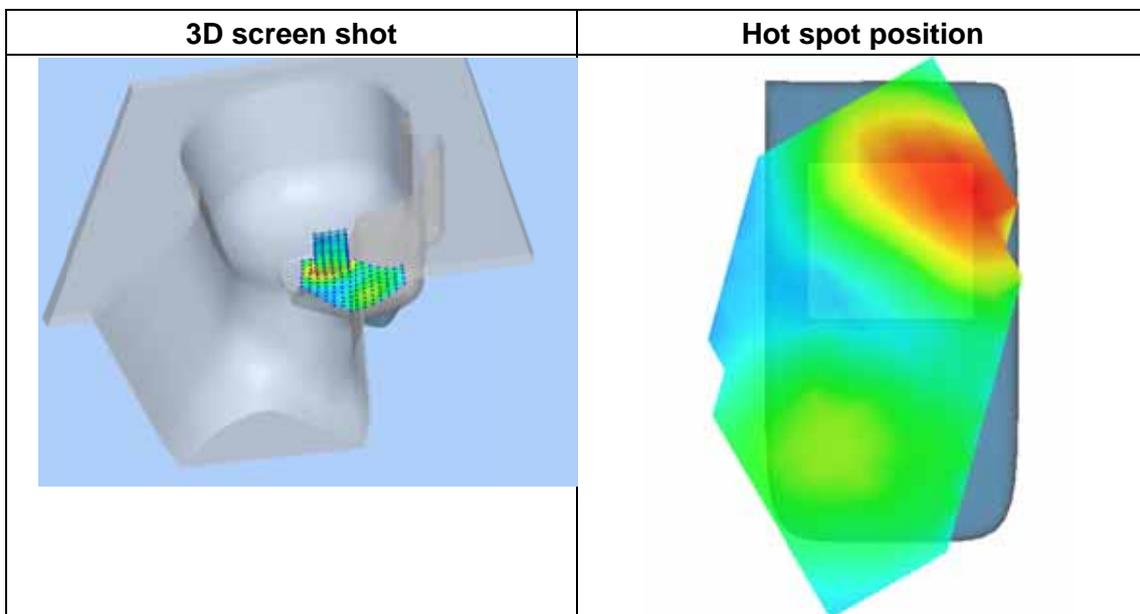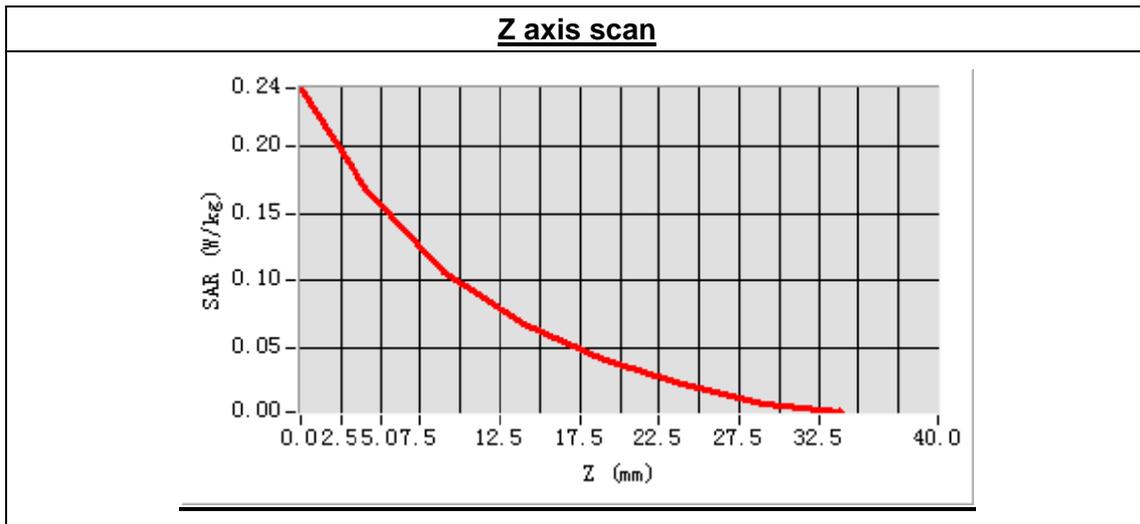

MEASUREMENT 49

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 37 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results



High Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift (%)	-2.220000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1

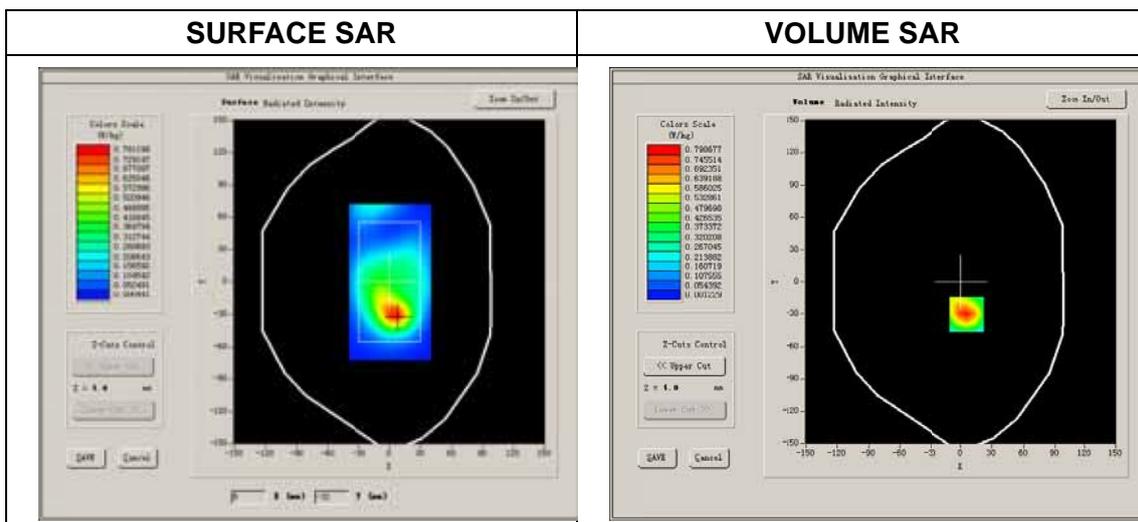

Maximum location: X=6.00, Y=-30.00
 SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.418801
SAR 1g (W/Kg)	0.747494

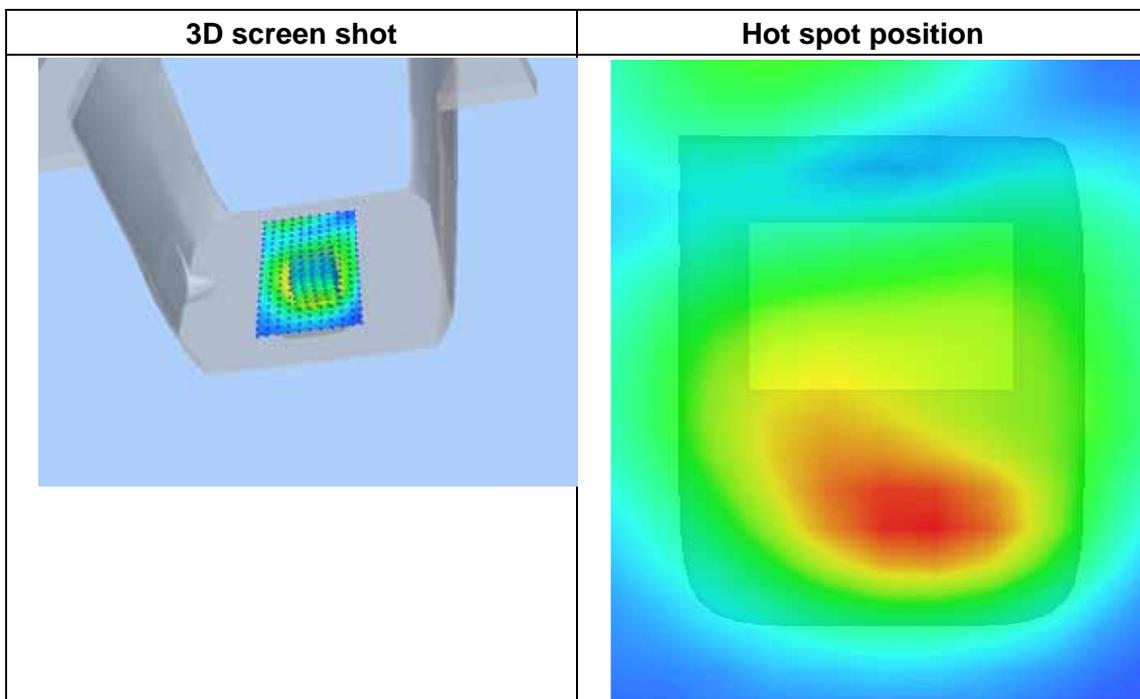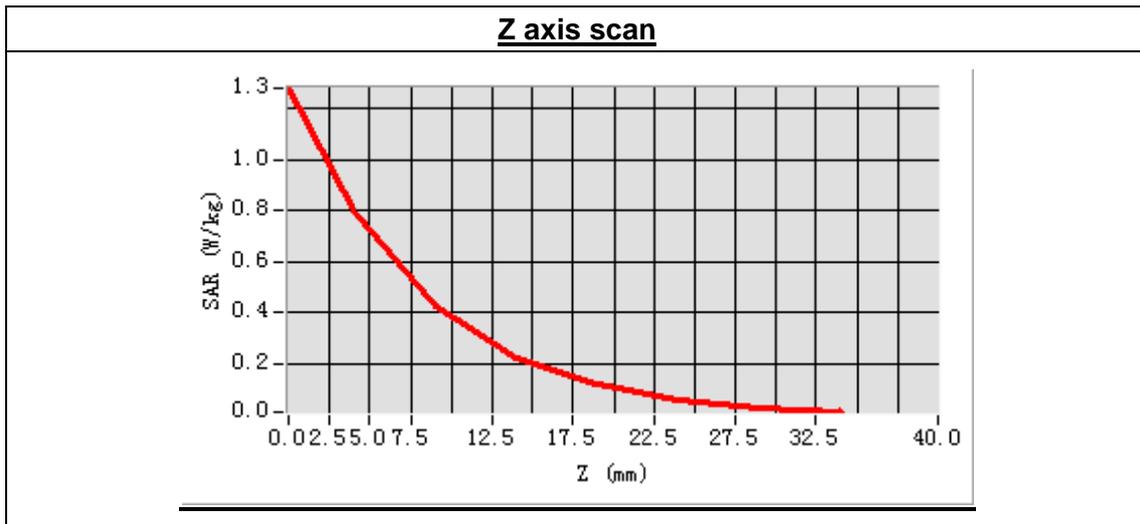

MEASUREMENT 50

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 33 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

High Band SAR (Channel 9538):



Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift (%)	-0.210000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1

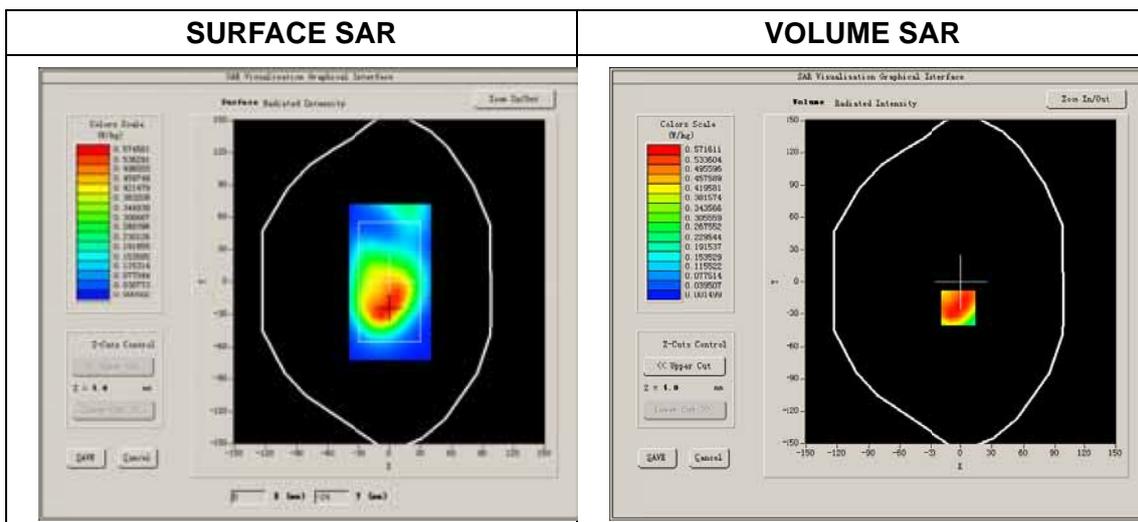

Maximum location: X=-2.00, Y=-24.00

SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.331761
SAR 1g (W/Kg)	0.602233

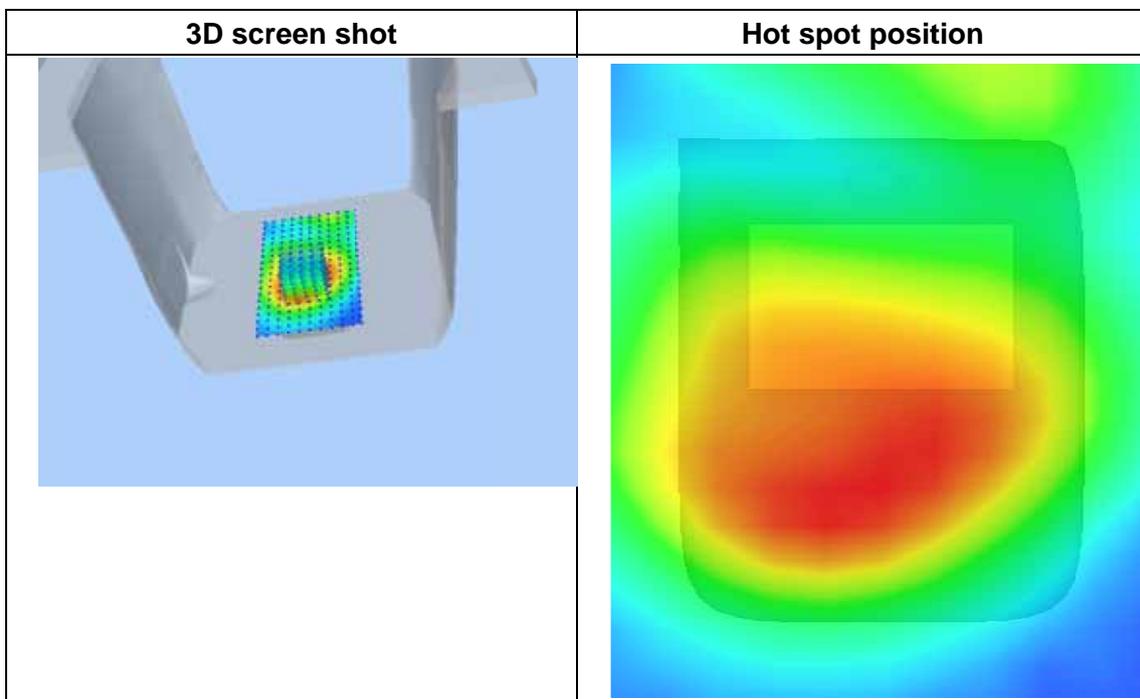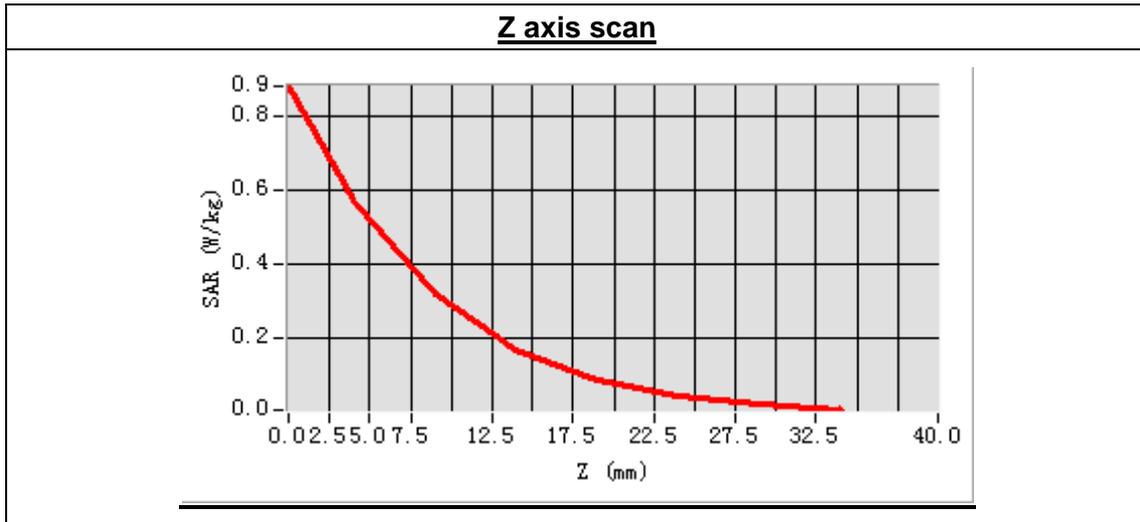

MEASUREMENT 51

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 29 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results



High Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift (%)	-2.480000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1

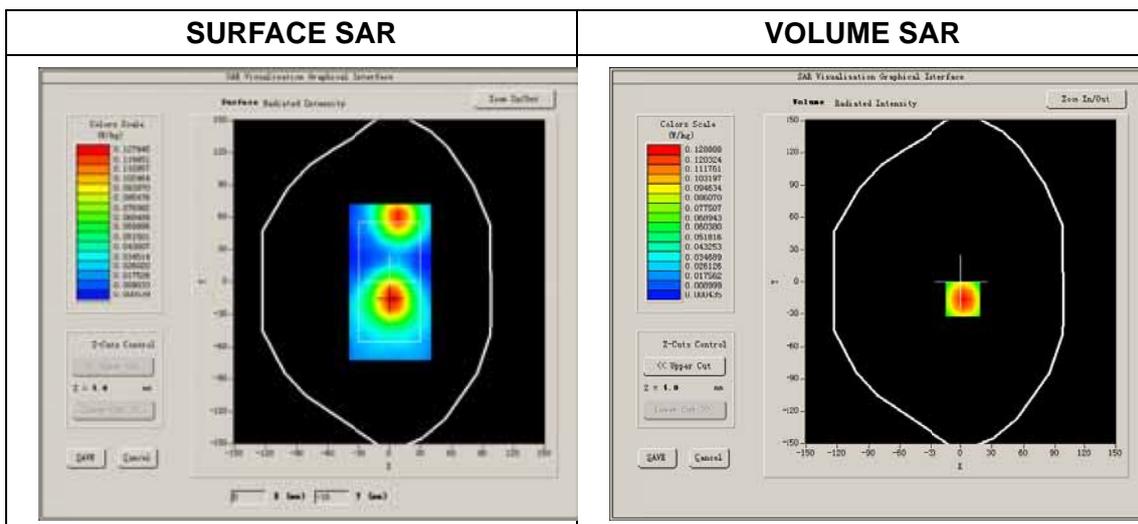

Maximum location: X=2.00, Y=-16.00
 SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.069637
SAR 1g (W/Kg)	0.134258

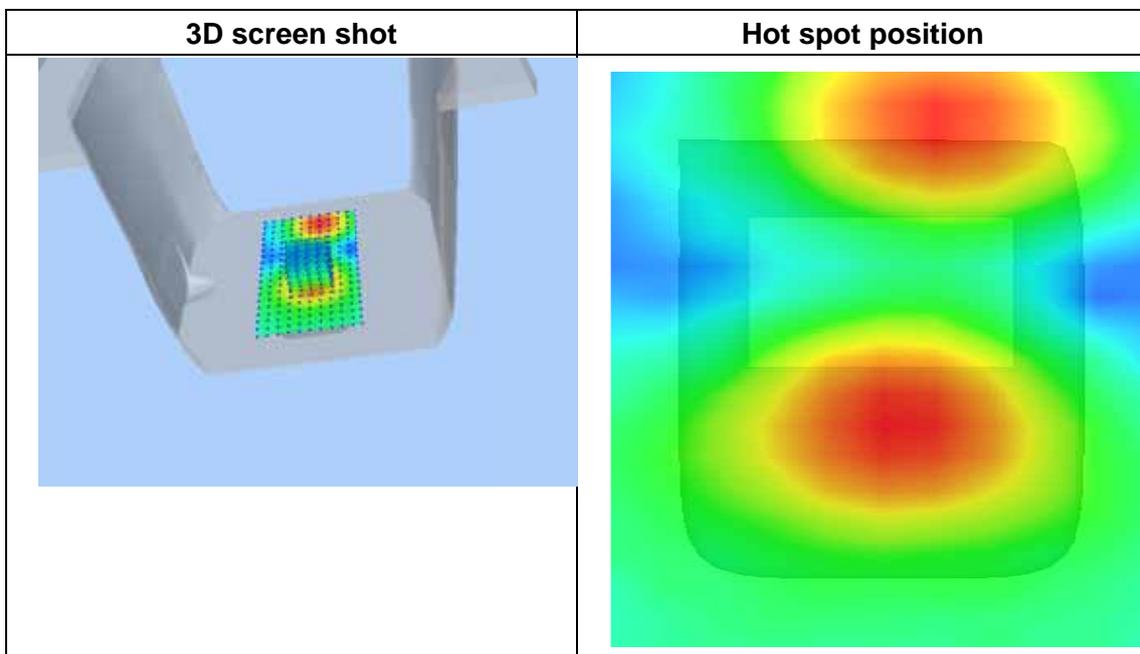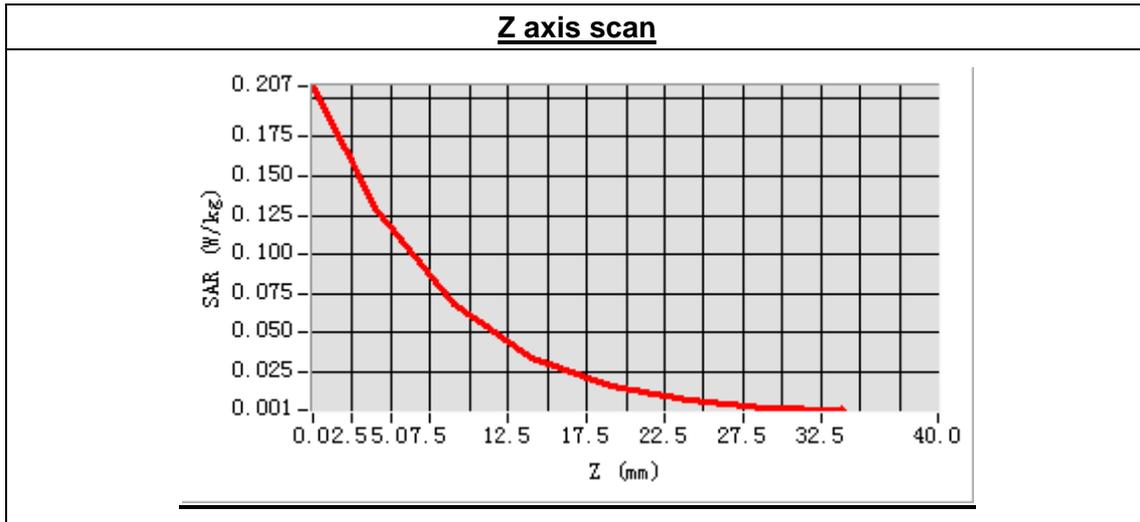

MEASUREMENT 52

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 28 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results



High Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift (%)	0.450000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1

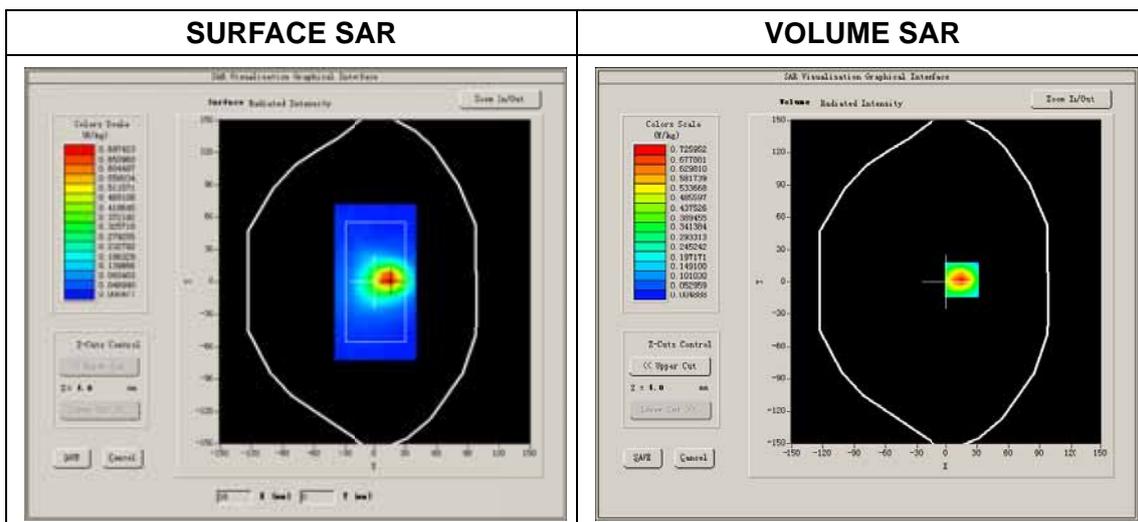

Maximum location: X=15.00, Y=2.00
 SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.385963
SAR 1g (W/Kg)	0.729473

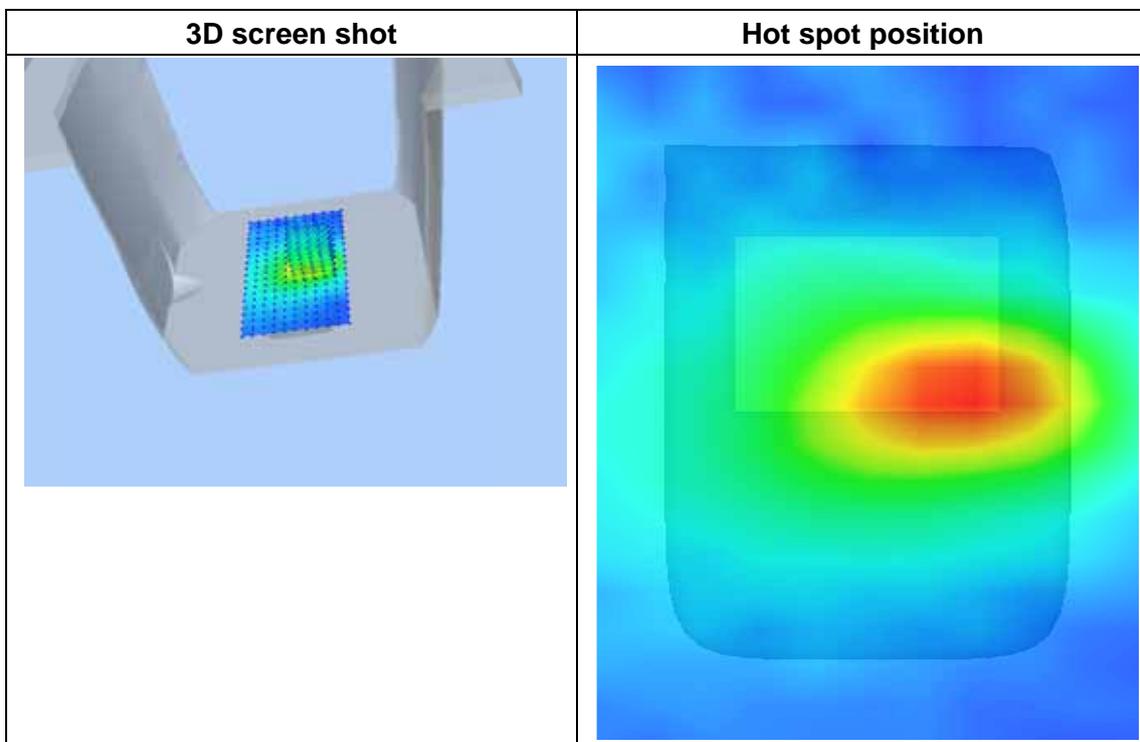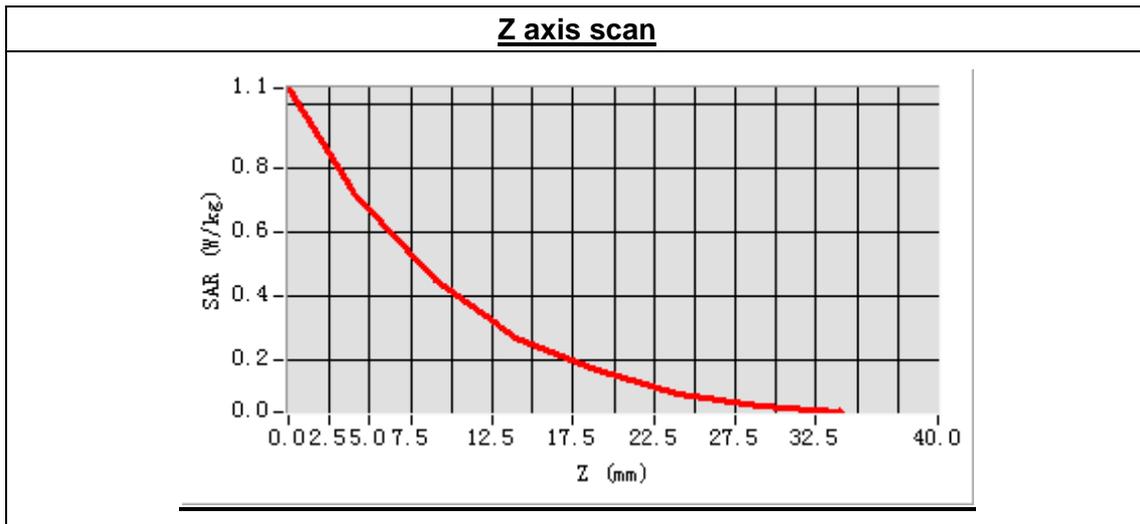

MEASUREMENT 53

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 9 minutes 32 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results

High Band SAR (Channel 9538):



Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift (%)	-1.230000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1

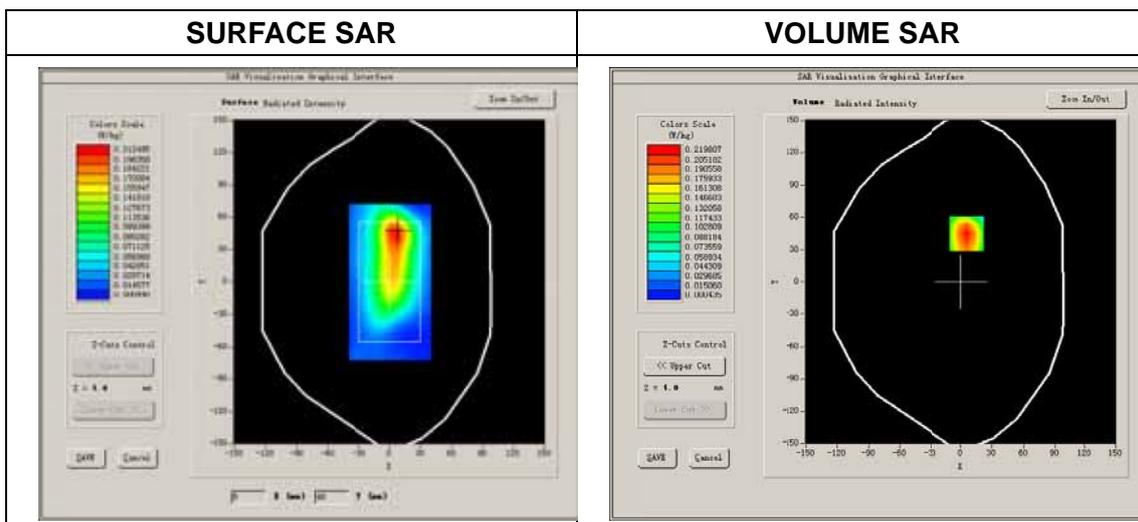

Maximum location: X=6.00, Y=45.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.117067
SAR 1g (W/Kg)	0.226902

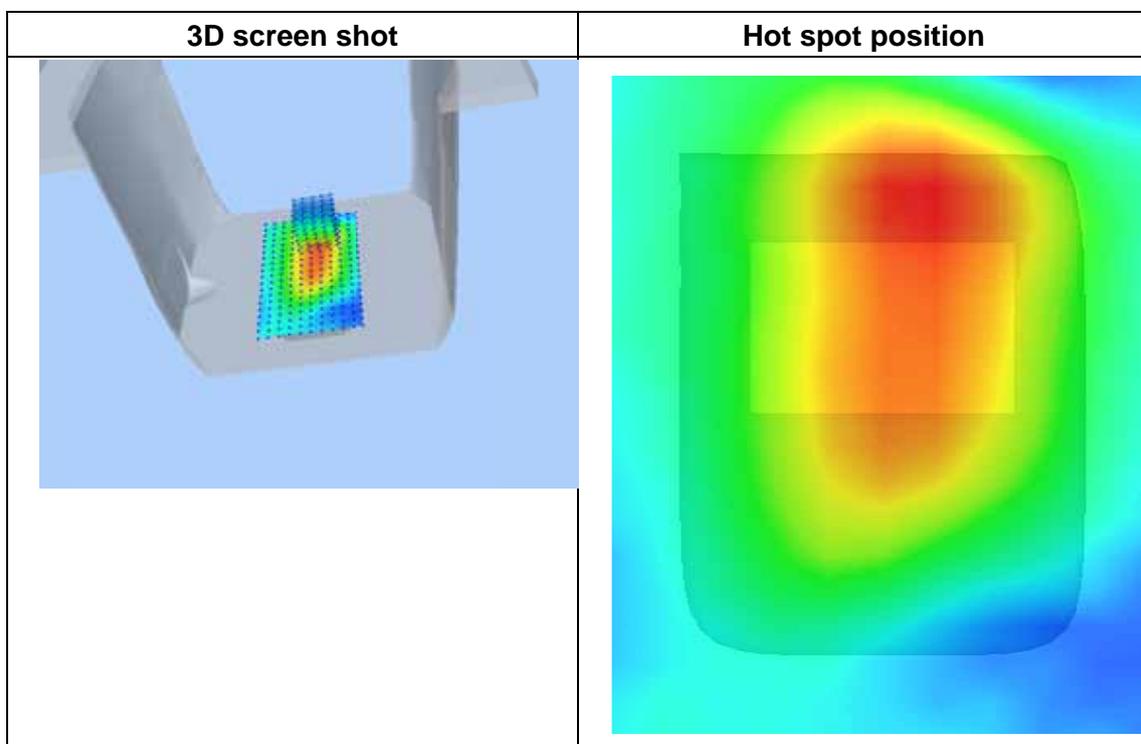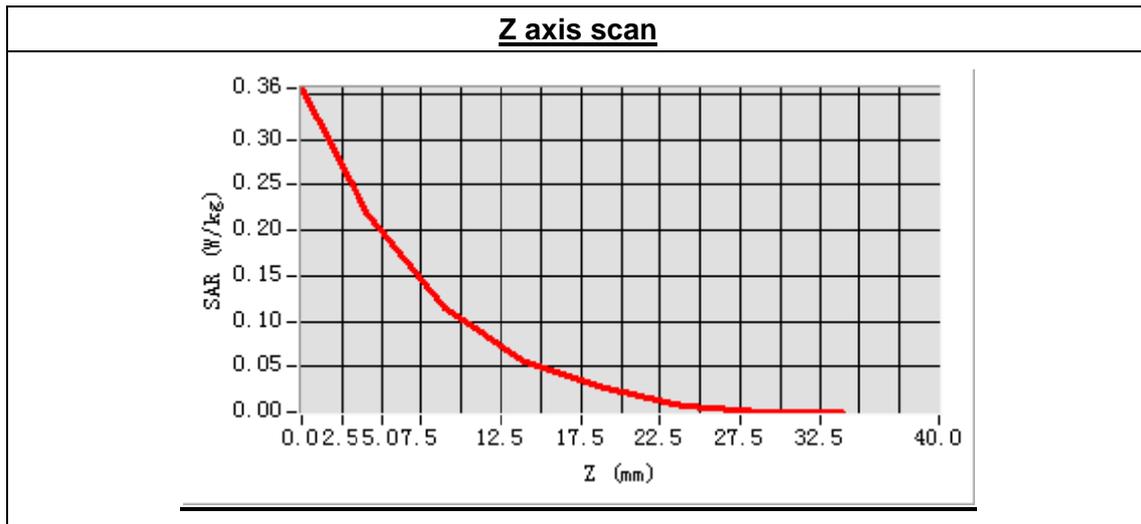

MEASUREMENT 54

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 8 minutes 0 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Cheek
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results



Middle Band SAR (Channel 6)

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.184386
Conductivity (S/m)	1.779534
Power drift (%)	3.480000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.80
Crest factor:	1:1

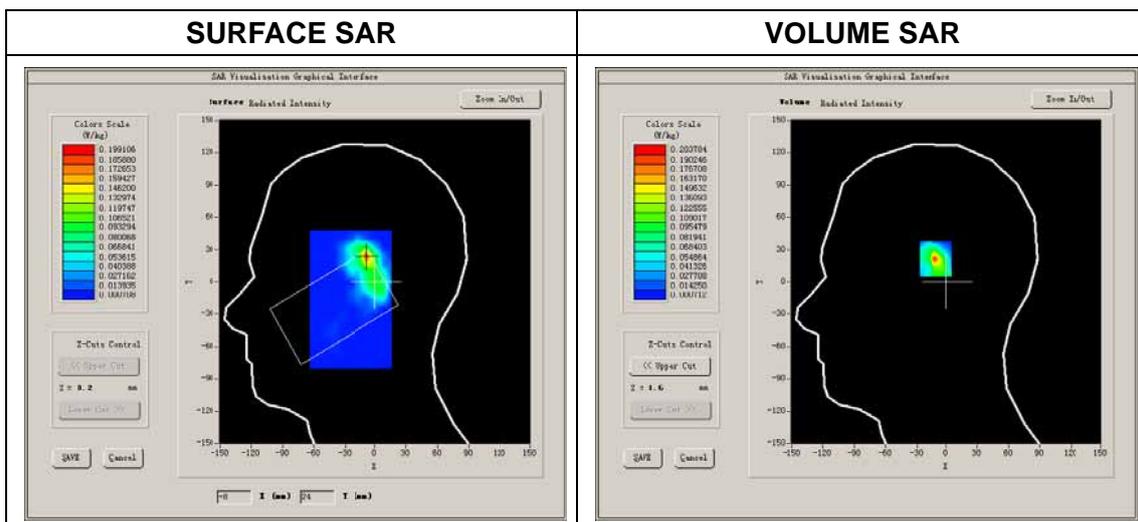

Maximum location: X=-8.00, Y=24.00
 SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.058761
SAR 1g (W/Kg)	0.175706

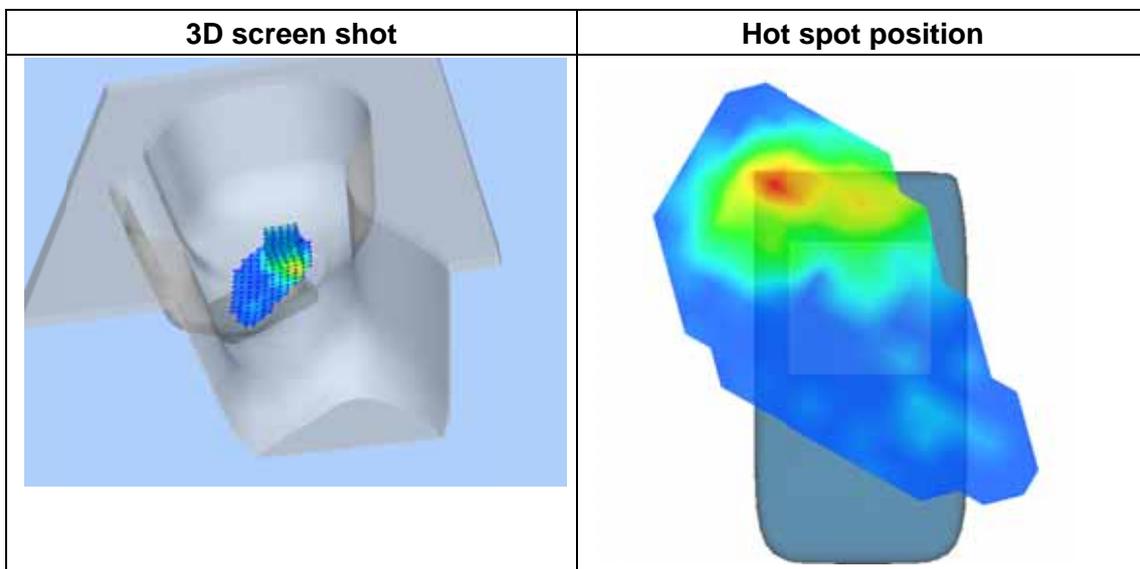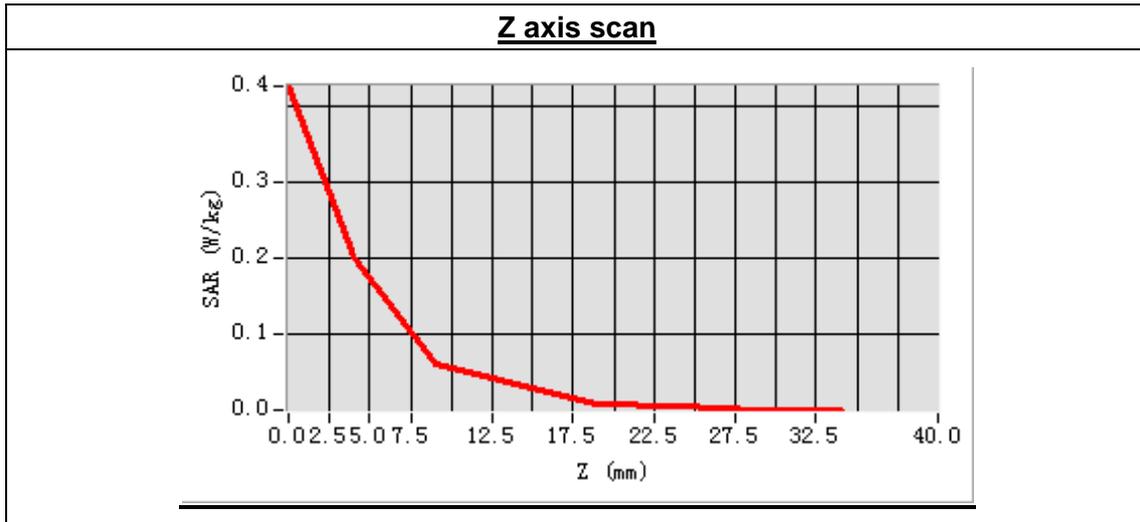

MEASUREMENT 55

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 8 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Right head
Device Position	Tilt
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results

Middle Band SAR (Channel 6)



Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.184386
Conductivity (S/m)	1.779534
Power drift (%)	-2.310000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.80
Crest factor:	1:1

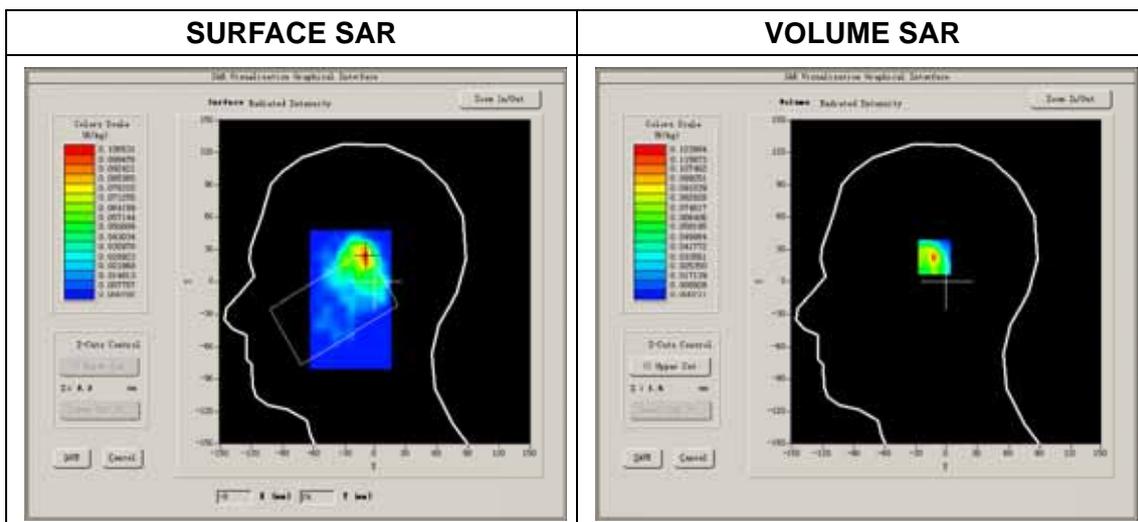

Maximum location: X=-9.00, Y=25.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.041774
SAR 1g (W/Kg)	0.101007

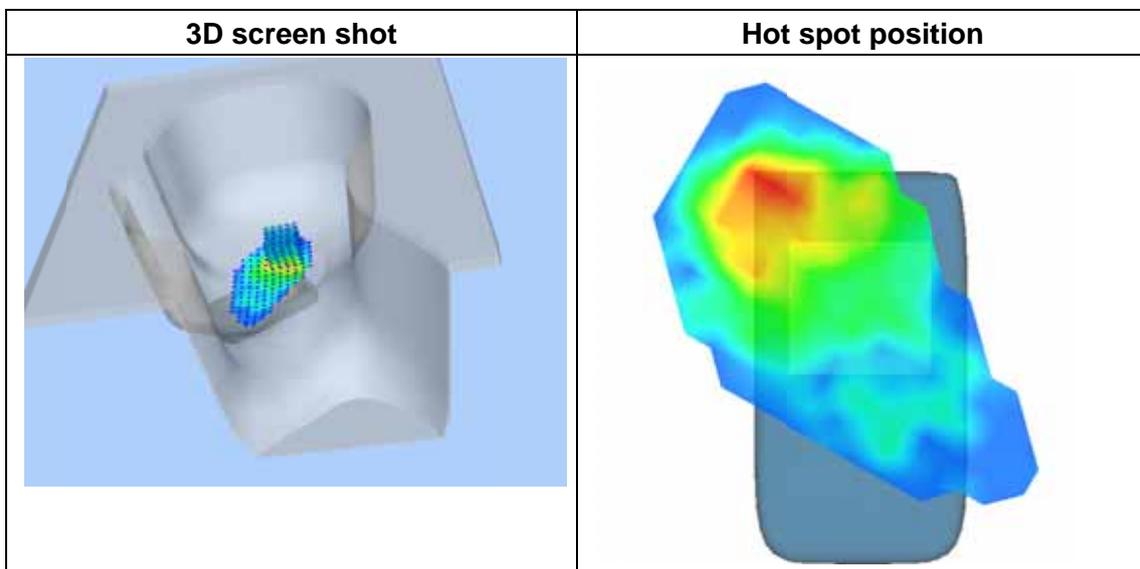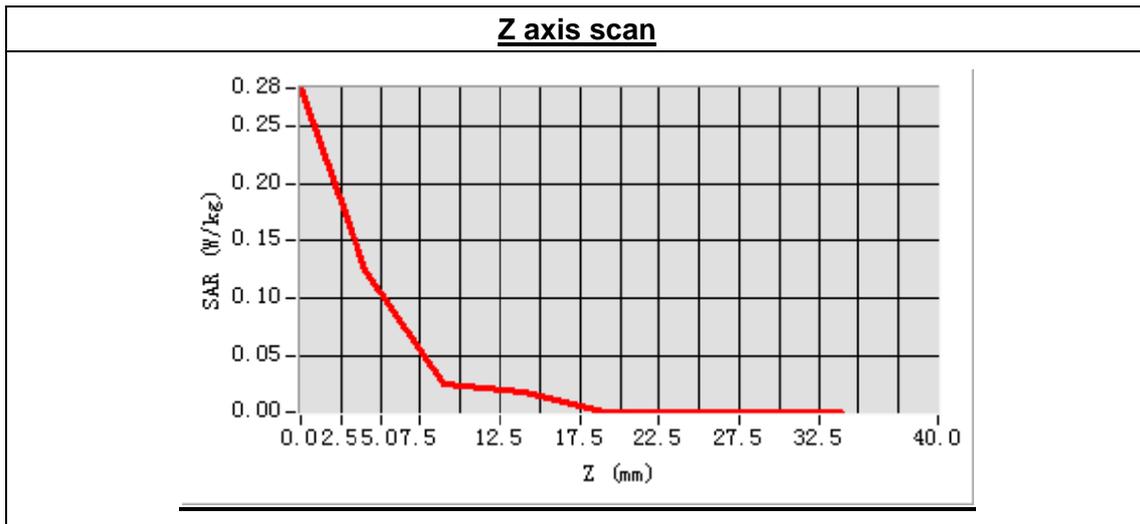

MEASUREMENT 56

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 7 minutes 53 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Cheek
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results



Middle Band SAR (Channel 6)

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.184386
Conductivity (S/m)	1.779534
Power drift (%)	-2.130000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.80
Crest factor:	1:1

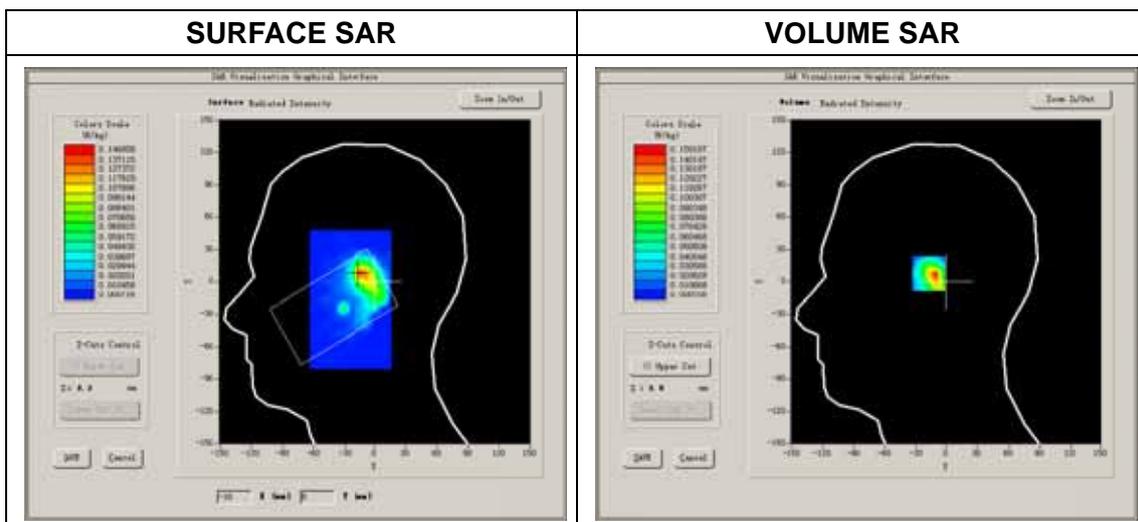

Maximum location: X=-14.00, Y=8.00
 SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.053045
SAR 1g (W/Kg)	0.139152

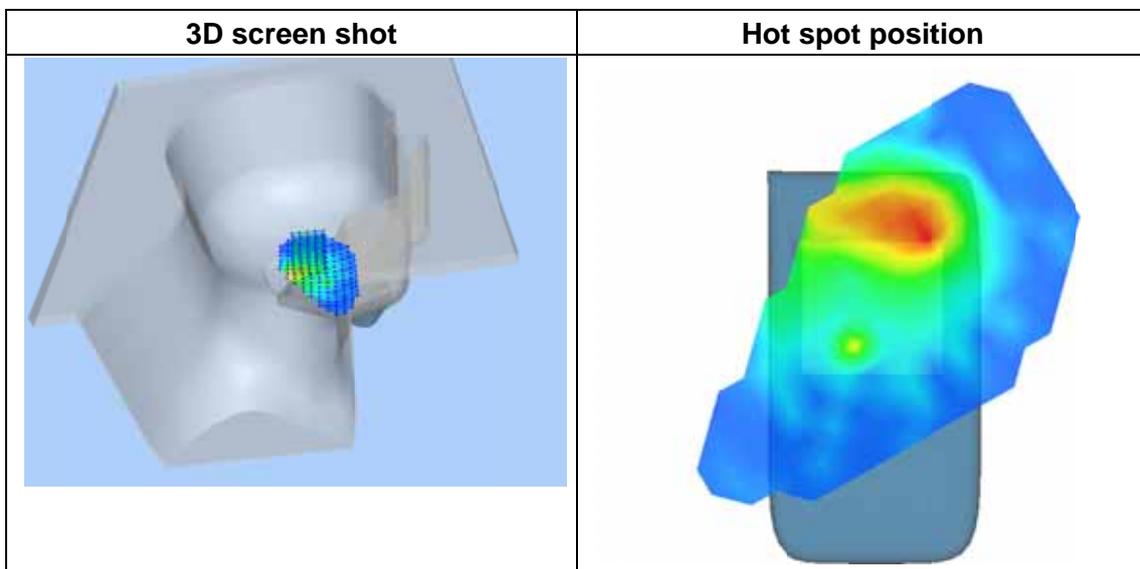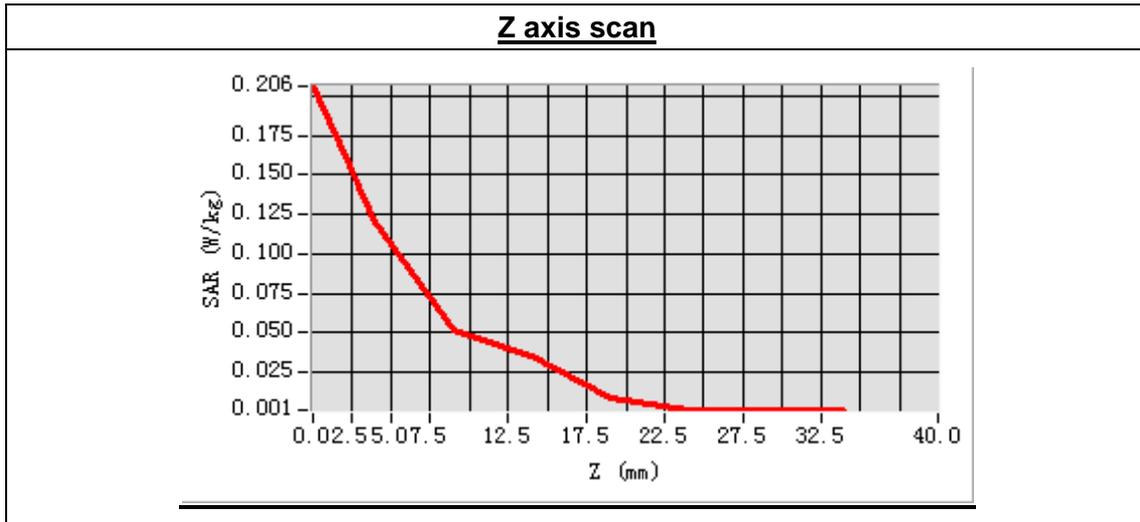

MEASUREMENT 57

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 7 minutes 50 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Left head
Device Position	Tilt
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results



Middle Band SAR (Channel 6)

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.184386
Conductivity (S/m)	1.779534
Power drift (%)	-3.910000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.80
Crest factor:	1:1

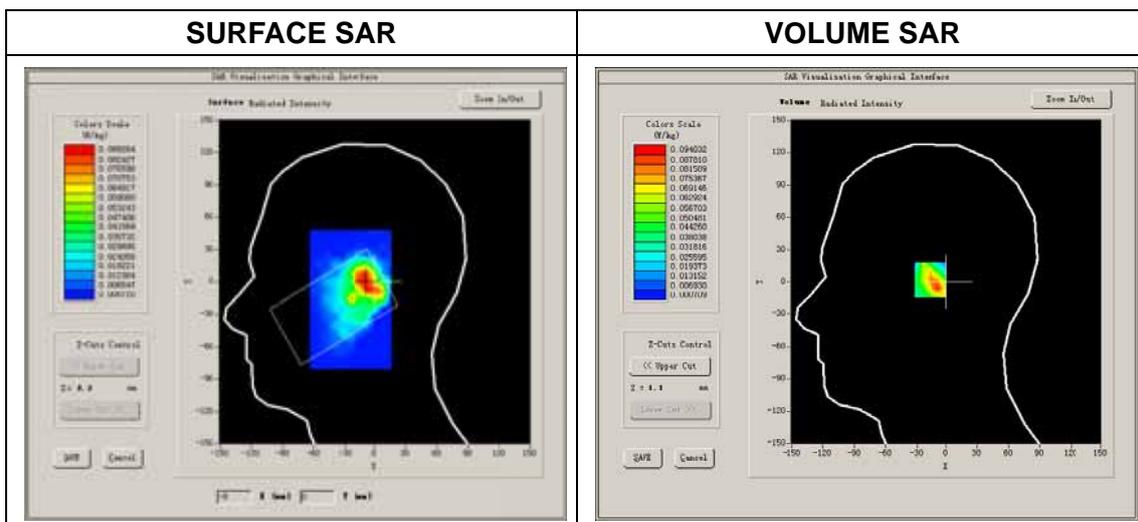

Maximum location: X=-11.00, Y=2.00
 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.038666
SAR 1g (W/Kg)	0.083301

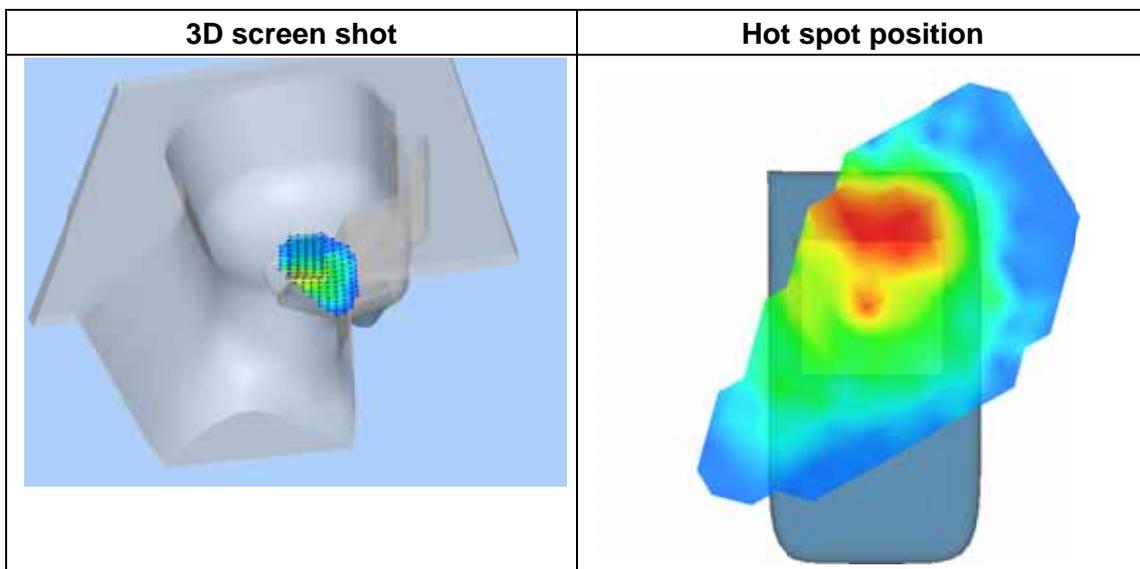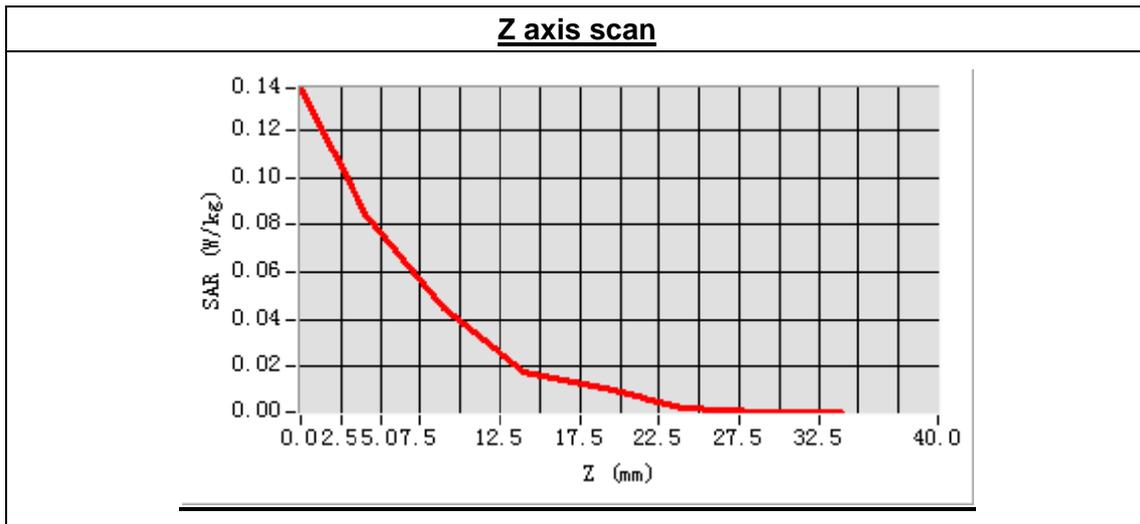

MEASUREMENT 58

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 9 minutes 35 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results

Middle Band SAR (Channel 6)



Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.684357
Conductivity (S/m)	1.956847
Power drift (%)	-3.330000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

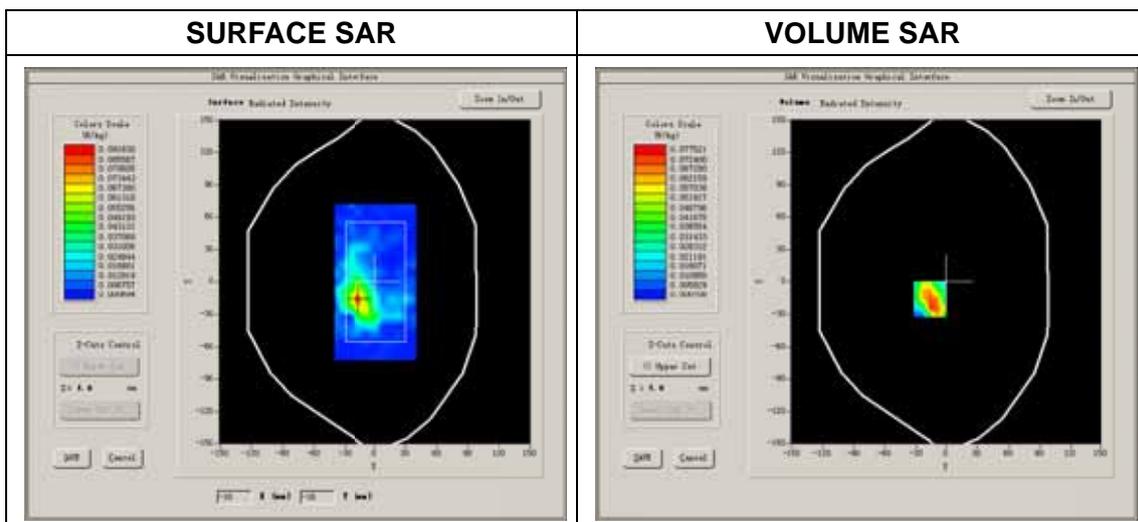

Maximum location: X=-16.00, Y=-16.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.031053
SAR 1g (W/Kg)	0.088686

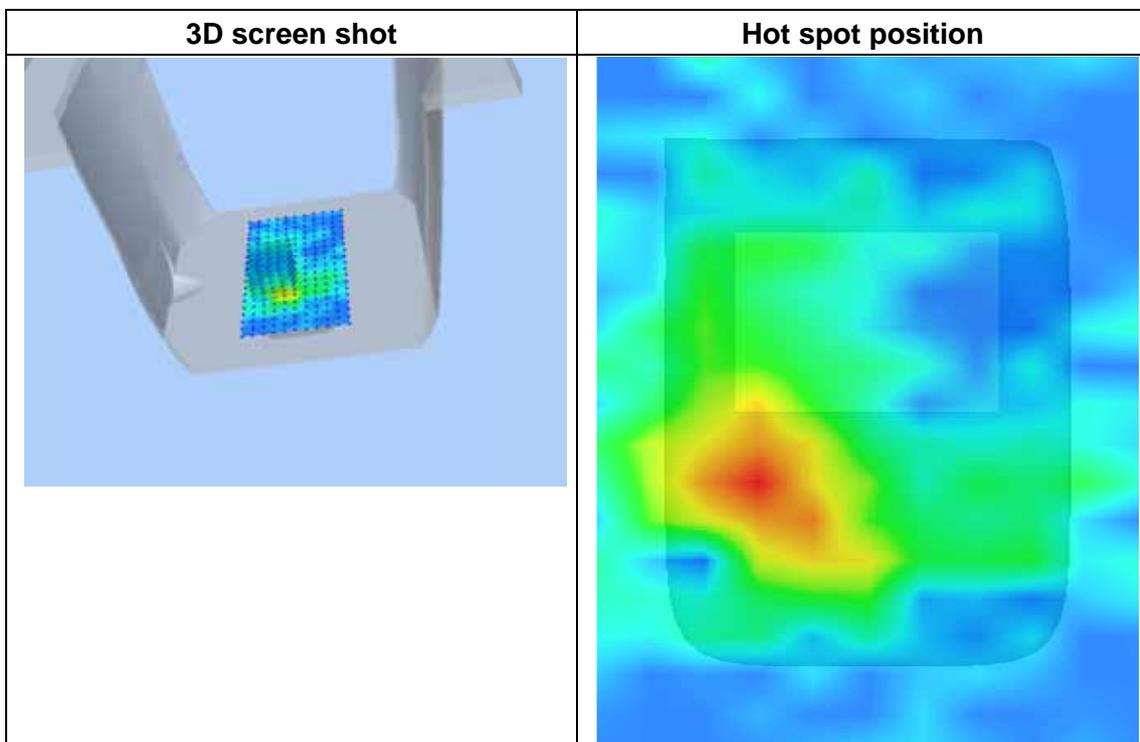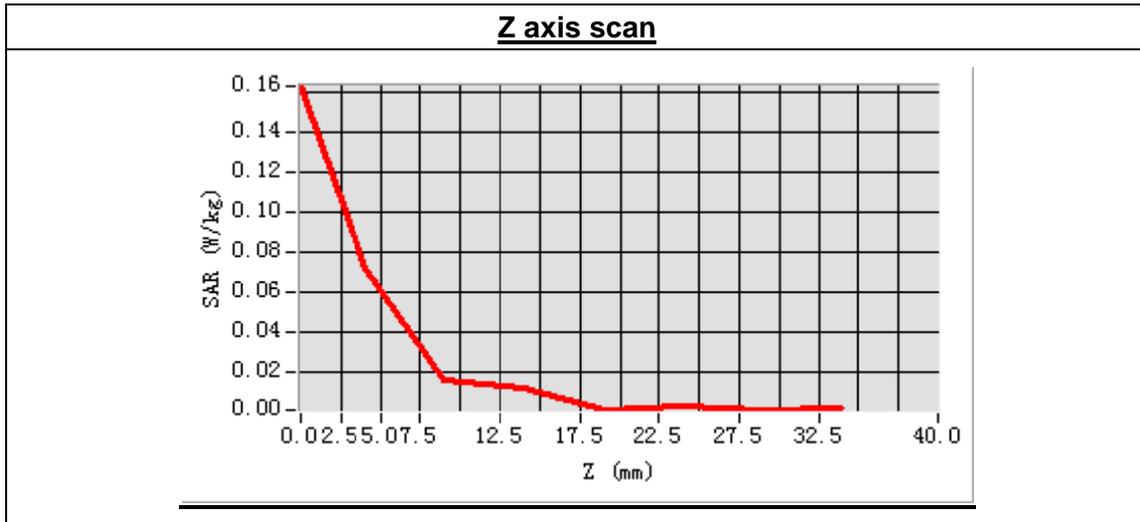

MEASUREMENT 59

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 9 minutes 36 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results



Middle Band SAR (Channel 6)

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.684357
Conductivity (S/m)	1.956847
Power drift (%)	-1.490000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

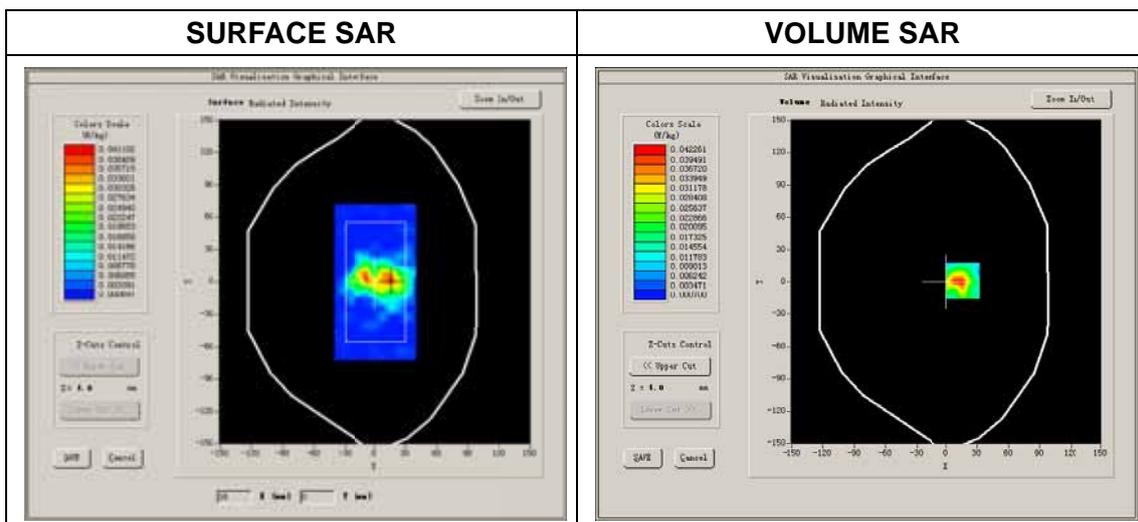

Maximum location: X=16.00, Y=1.00
 SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.017398
SAR 1g (W/Kg)	0.044652

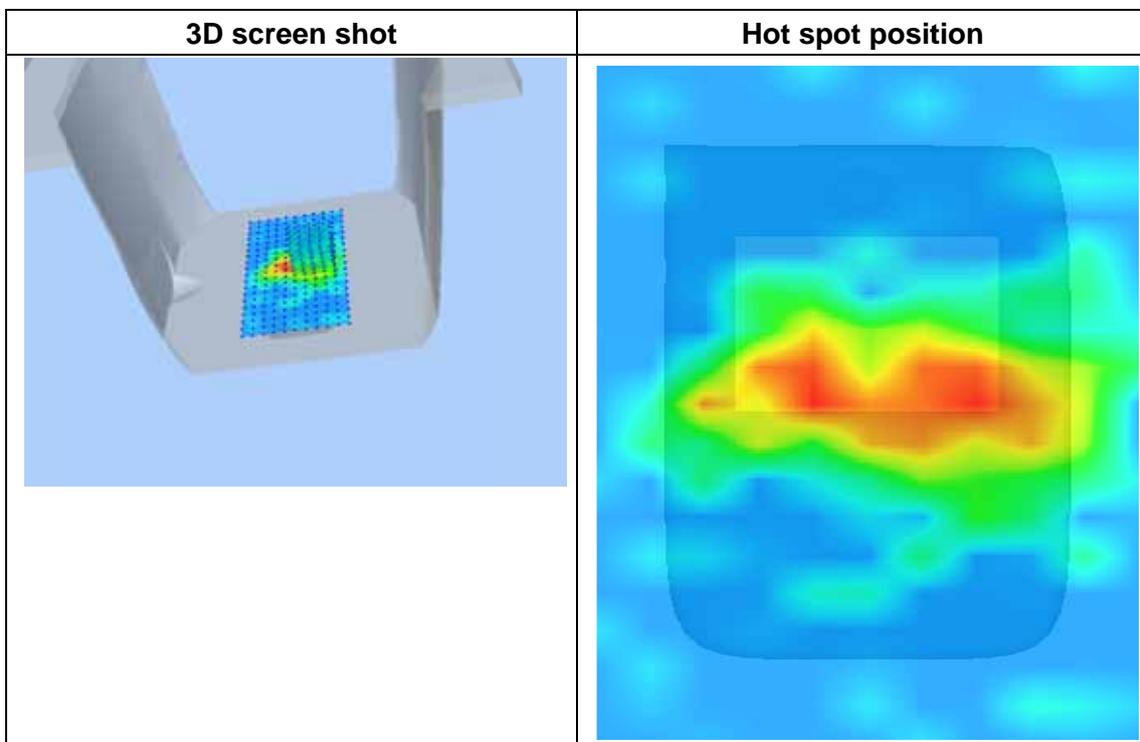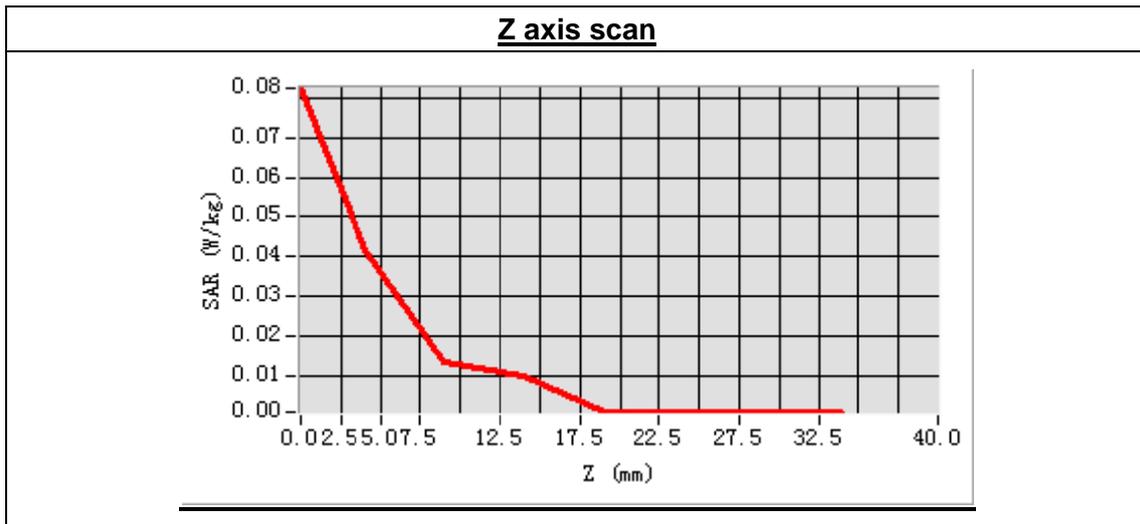

MEASUREMENT 60

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 9 minutes 34 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results

Middle Band SAR (Channel 6)



Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.684357
Conductivity (S/m)	1.956847
Power drift (%)	-2.110000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

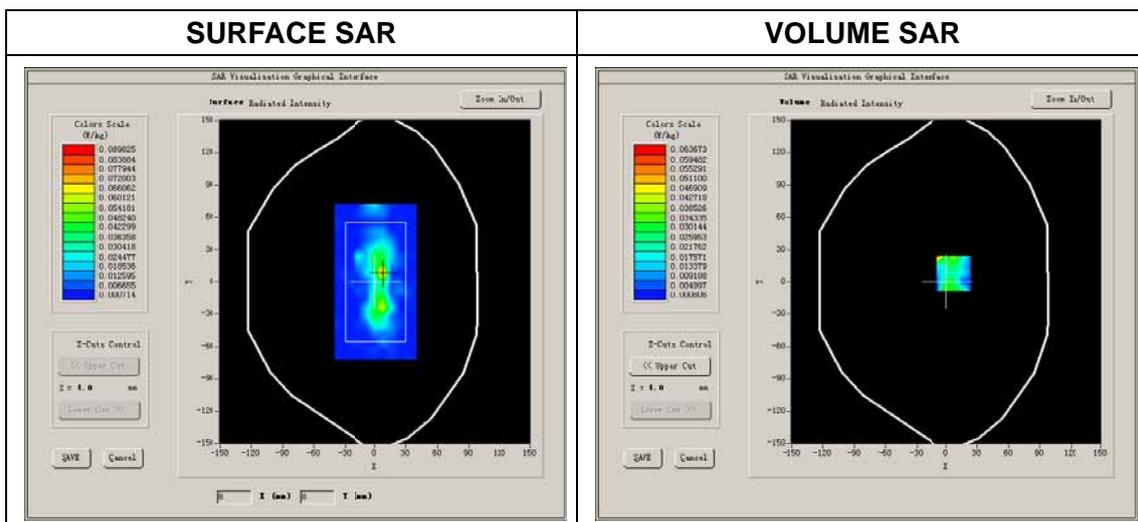

Maximum location: X=7.00, Y=8.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.014368
SAR 1g (W/Kg)	0.034782

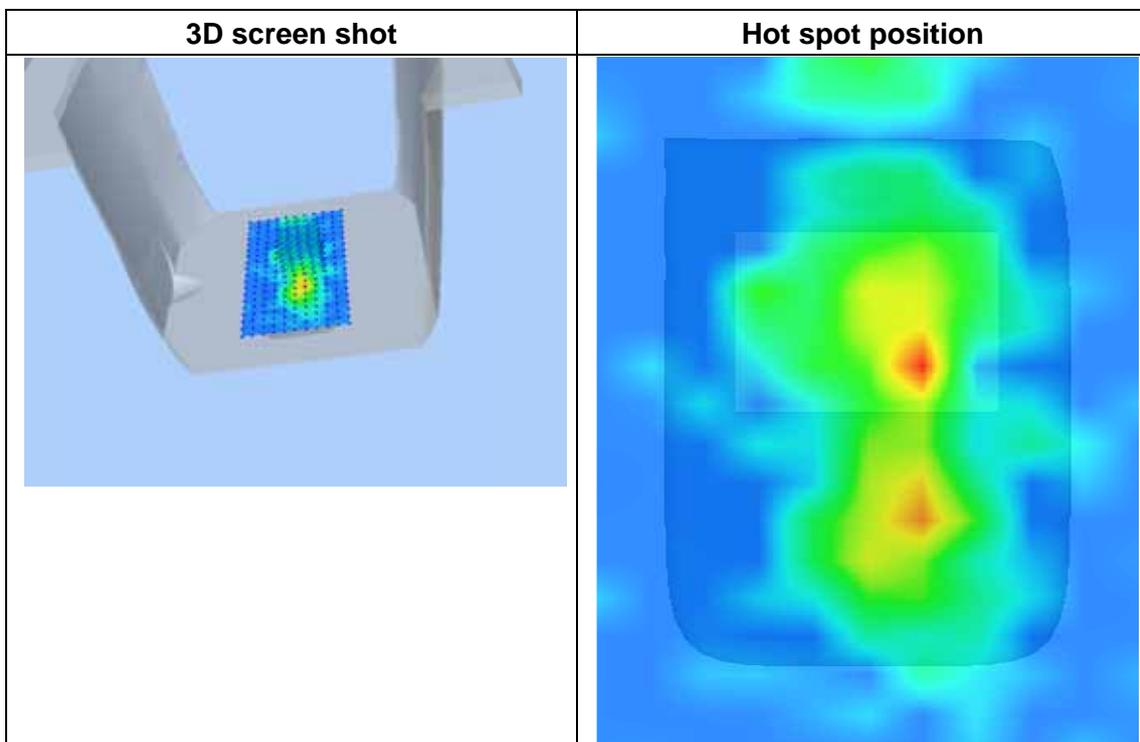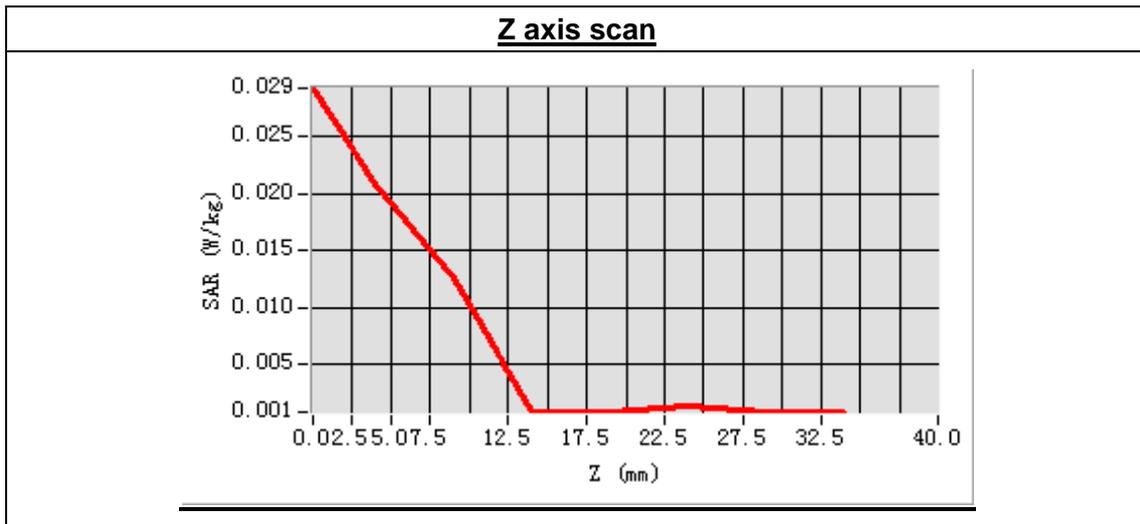

MEASUREMENT 61

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 9 minutes 34 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Middle
Signal	DSSS

B. SAR Measurement Results

Middle Band SAR (Channel 6)



Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.684357
Conductivity (S/m)	1.956847
Power drift (%)	-2.570000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

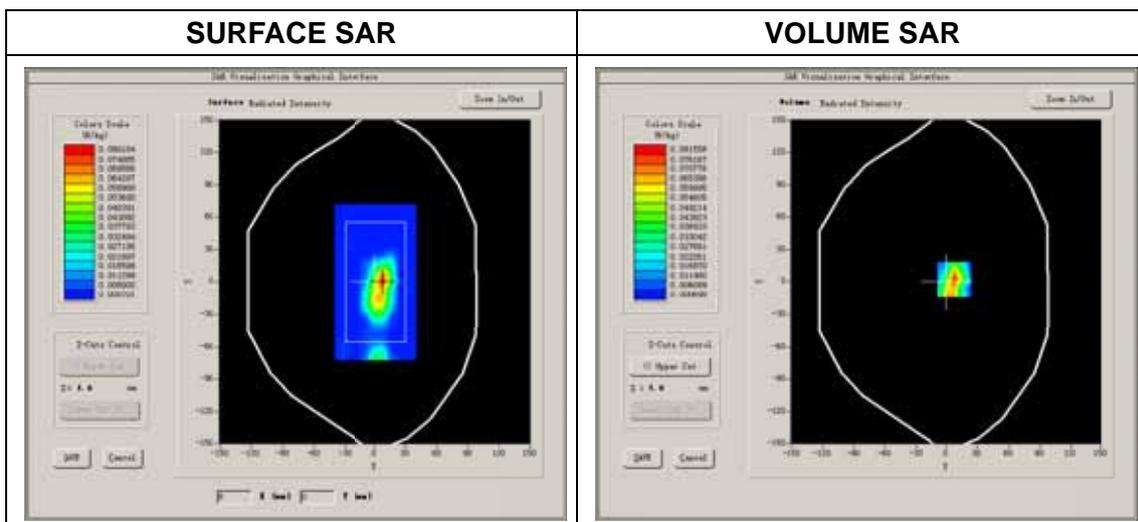

Maximum location: X=8.00, Y=2.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.028528
SAR 1g (W/Kg)	0.079908

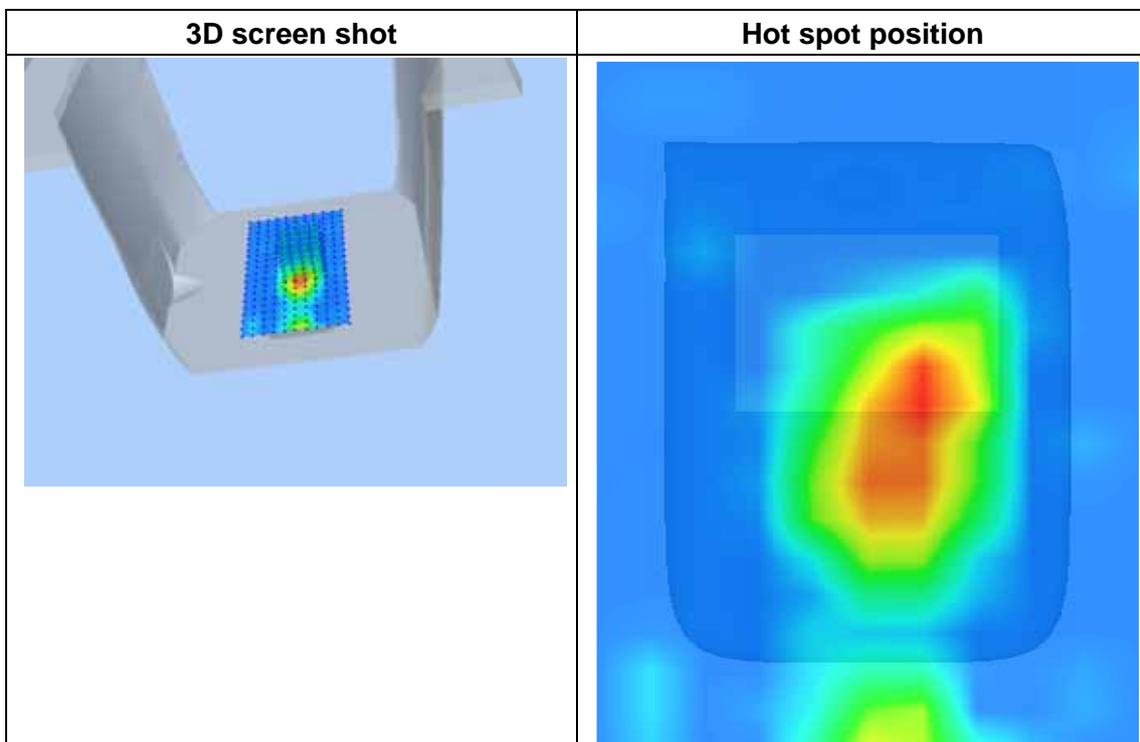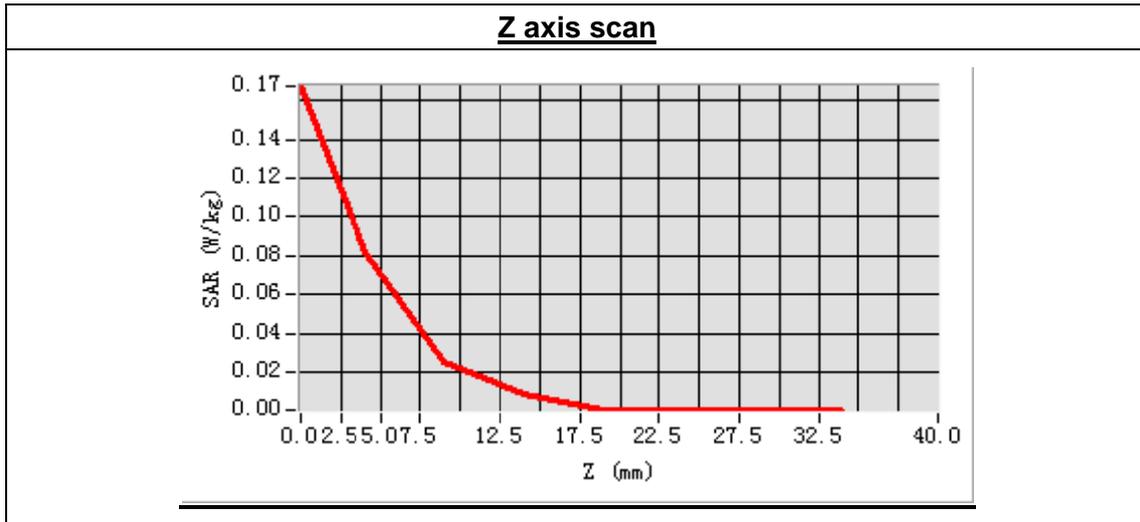

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	826.400000
Relative permittivity (real part)	41.351684
Conductivity (S/m)	0.857385
Power drift (%)	-0.310000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.73
Crest factor:	1:1


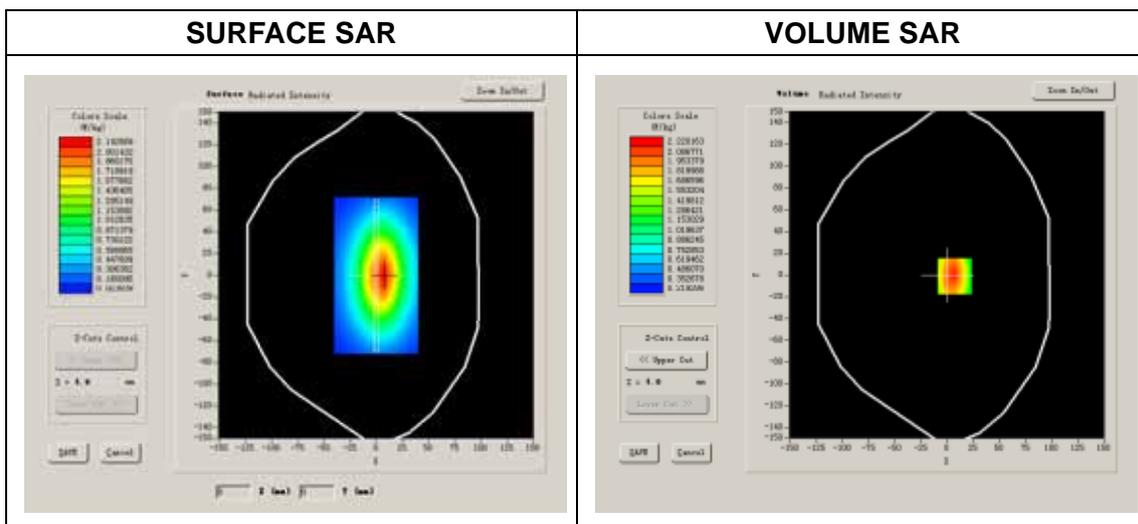


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.547564
SAR 1g (W/Kg)	2.423474

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143

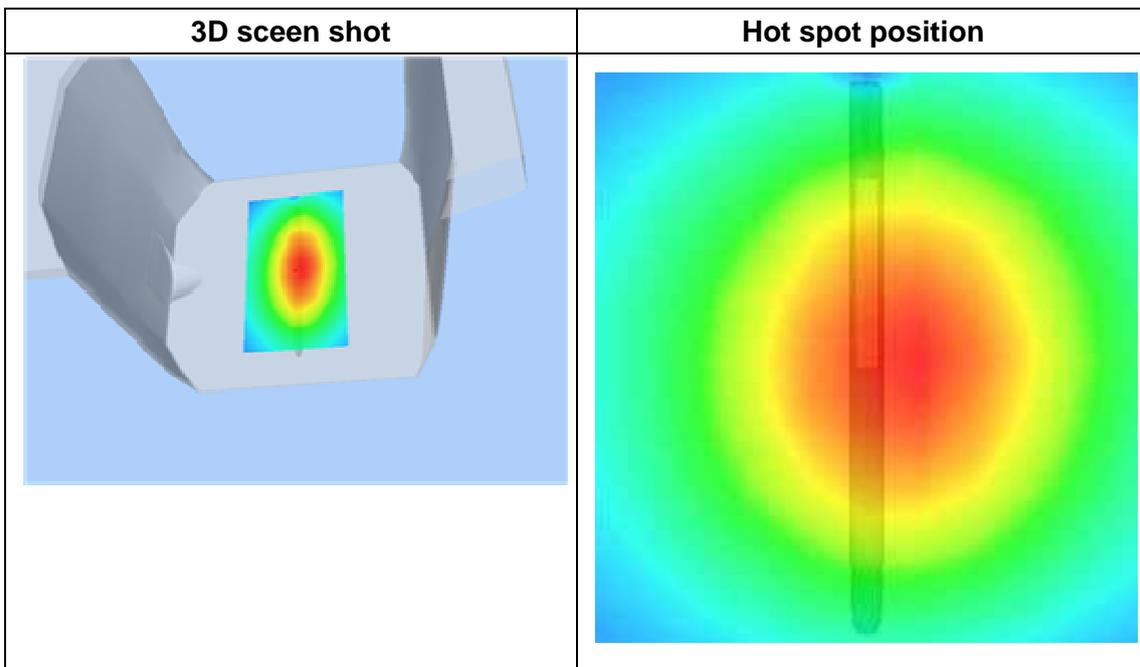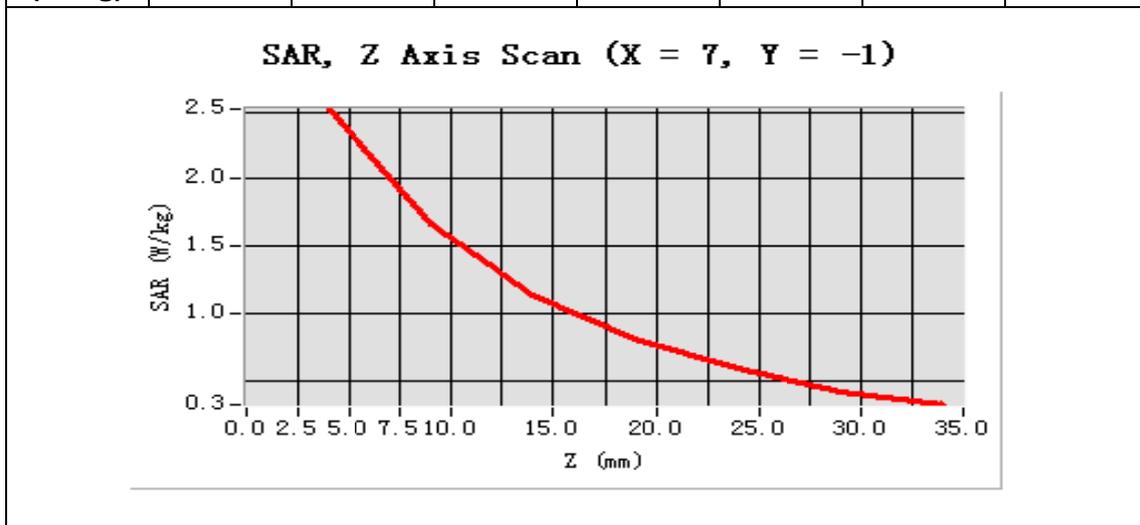

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.10.31

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.143528
Conductivity (S/m)	0.983168
Power drift (%)	-1.700000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.99
Crest factor:	1:1


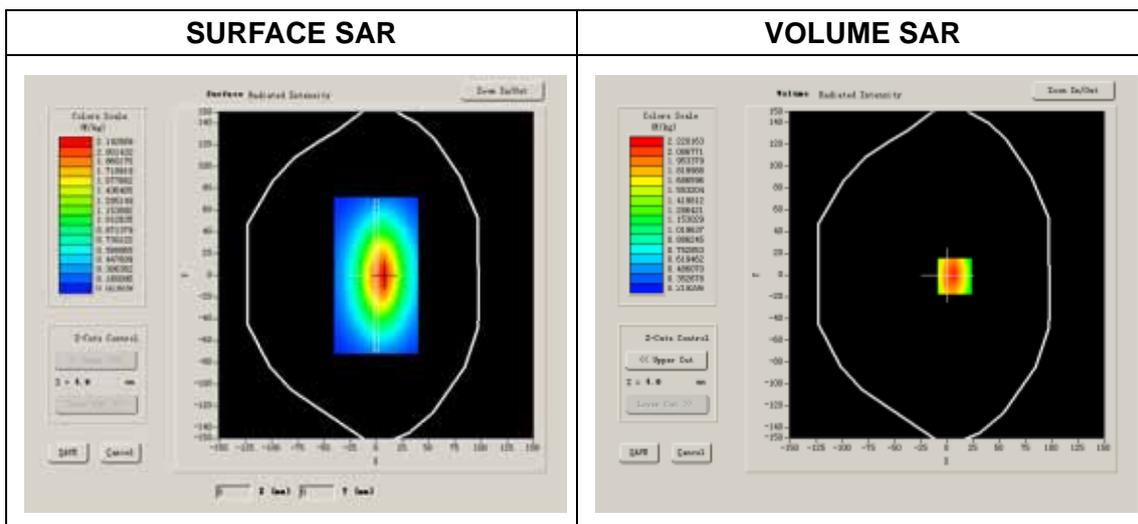


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.567146
SAR 1g (W/Kg)	2.486730

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143

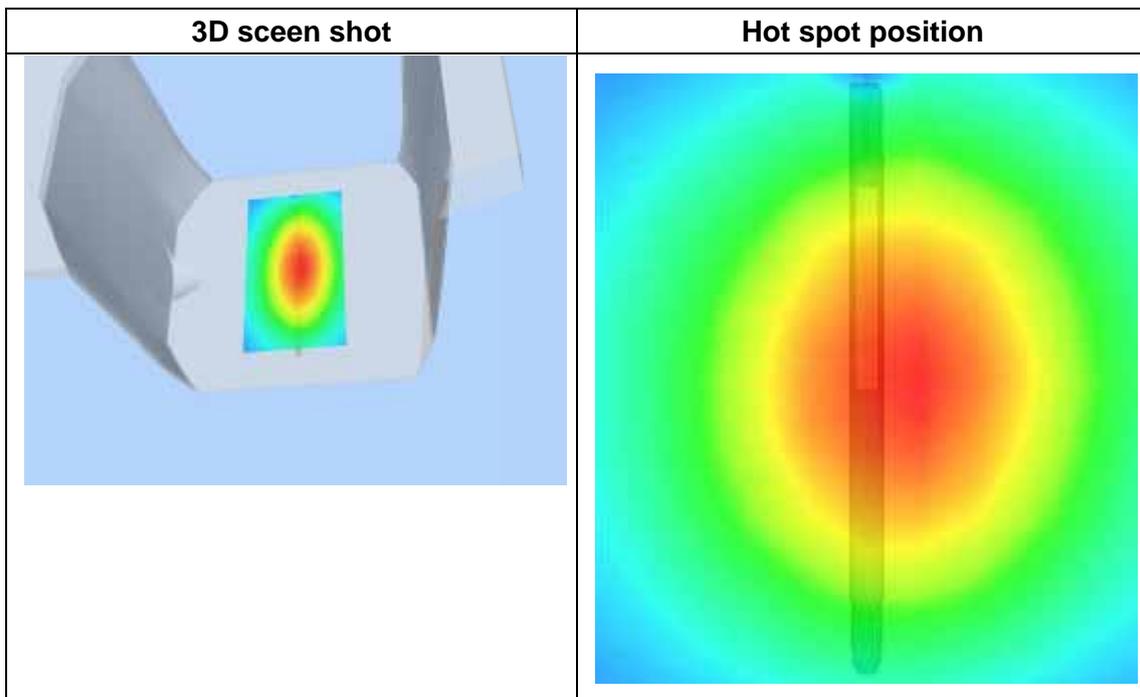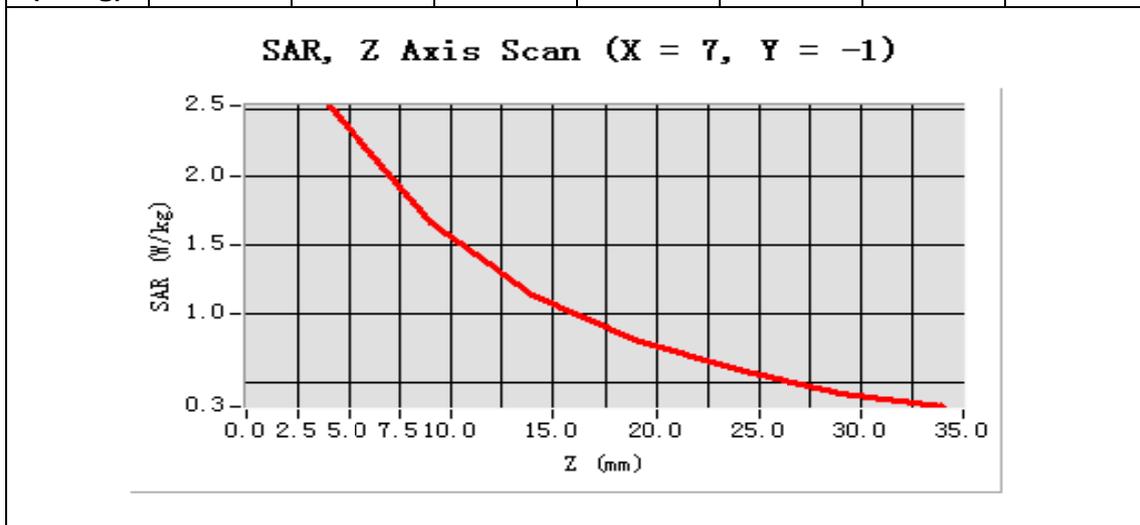

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1750.000000
Relative permittivity (real part)	40.243516
Conductivity (S/m)	1.354358
Power drift (%)	-0.820000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	5.42
Crest factor:	1:1


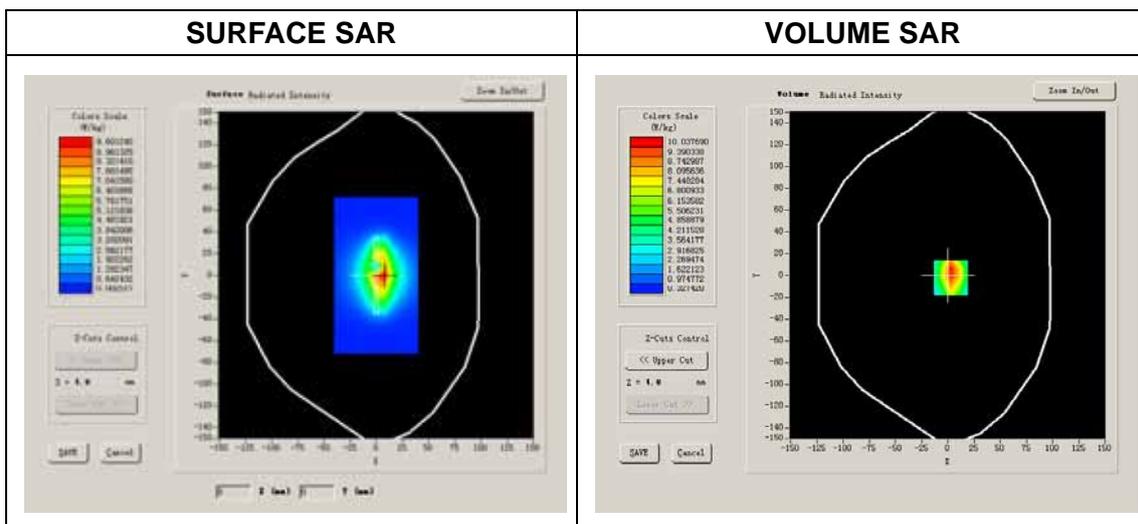


Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	5.226482
SAR 1g (W/Kg)	9.531454

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	9.8504	5.7592	3.5340	2.1937	1.3905	0.9106

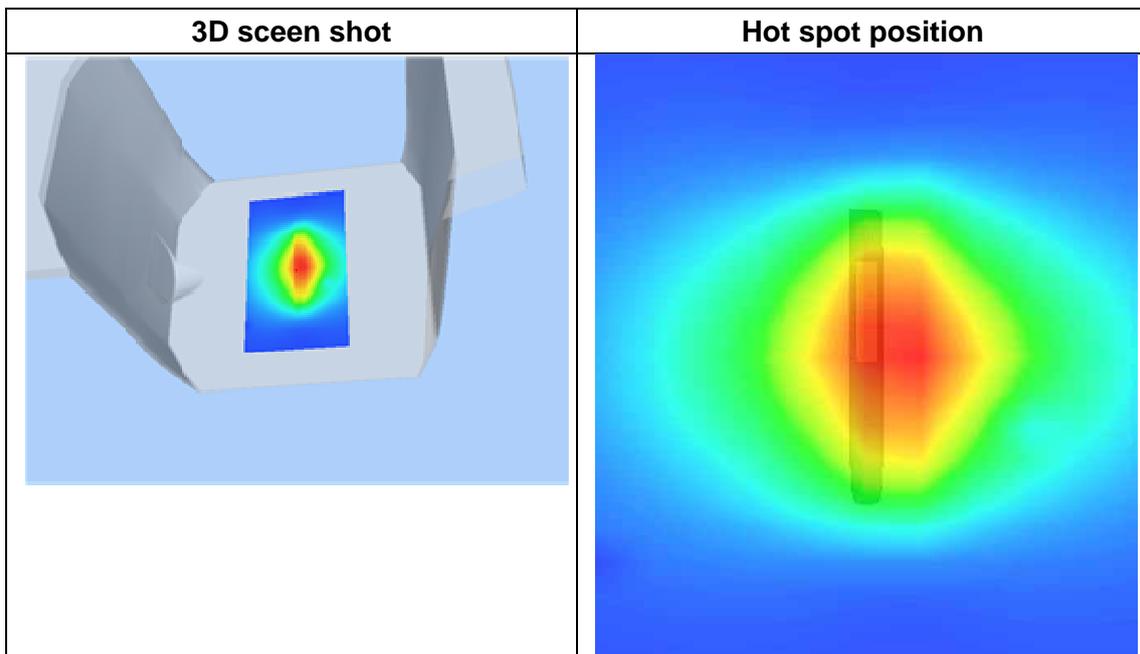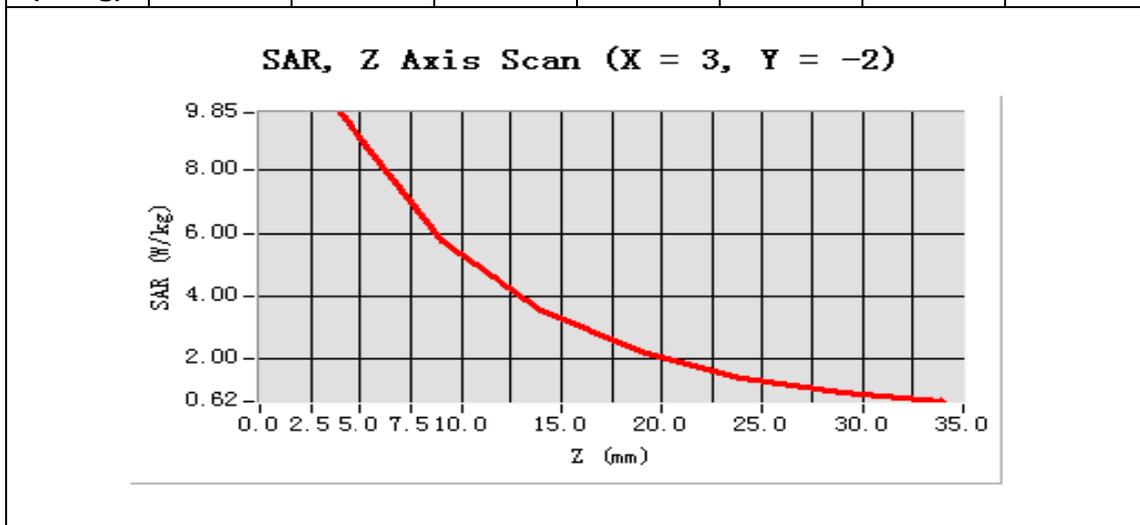

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 13 minutes 26 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1750.000000
Relative permittivity (real part)	53.196437
Conductivity (S/m)	1.472835
Power drift (%)	-0.710000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	5.51
Crest factor:	1:1


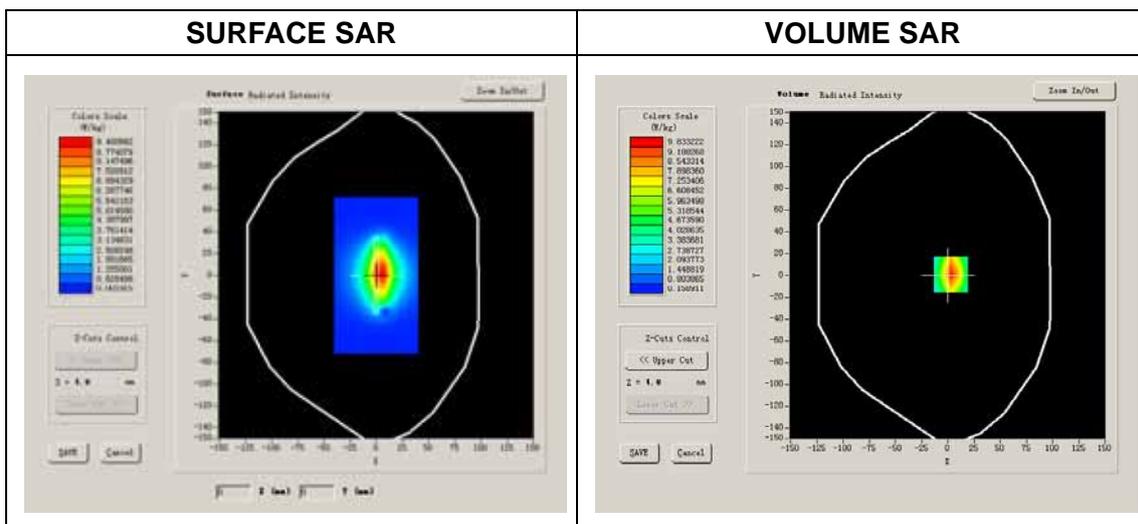


Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	4.981611
SAR 1g (W/Kg)	9.758142

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078

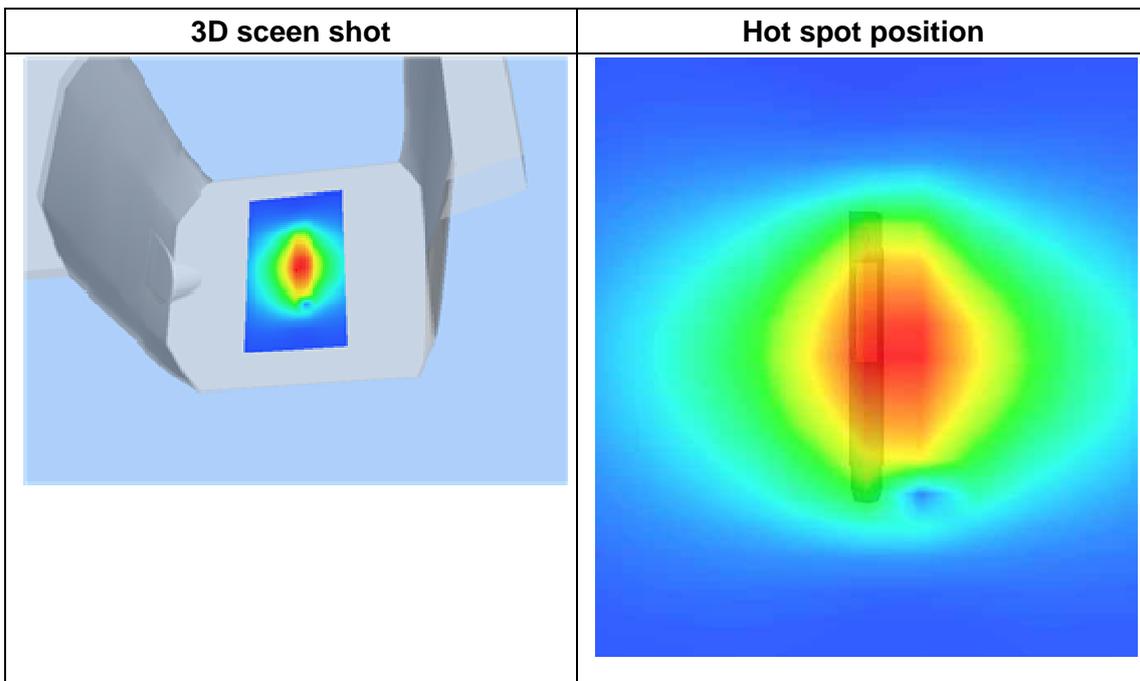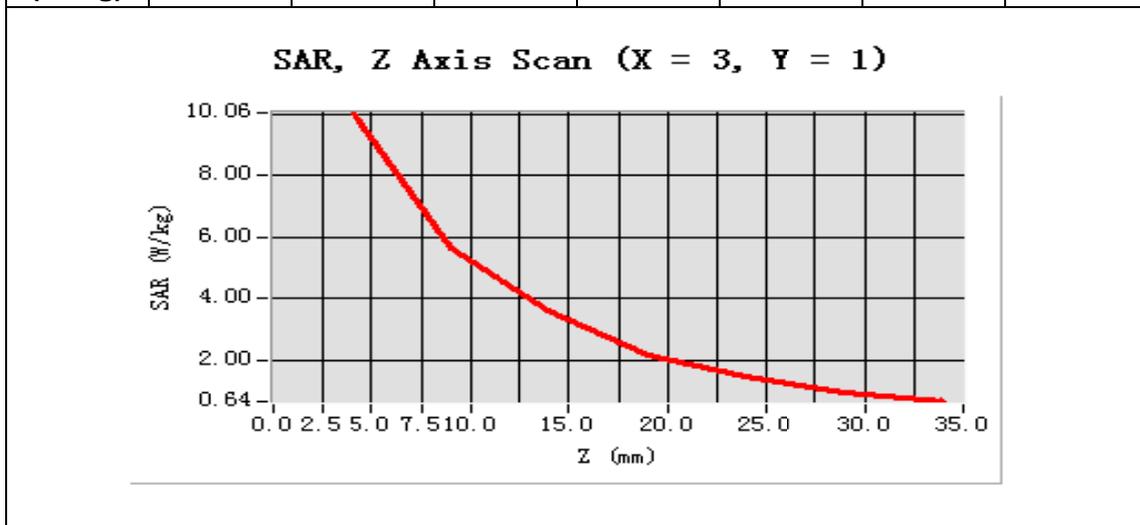

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.035469
Conductivity (S/m)	1.362495
Power drift (%)	-0.290000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.00
Crest factor:	1:1


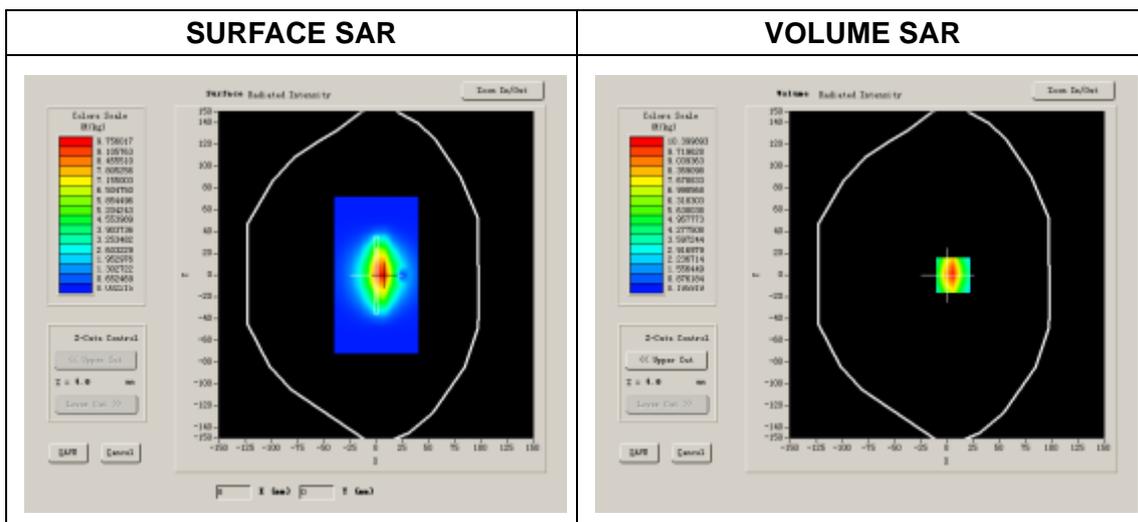


Maximum location: X=6.00, Y=0.00

SAR 10g (W/Kg)	6.326124
SAR 1g (W/Kg)	9.662043

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.6419	6.0043	3.7297	2.2606	1.5119	0.9792

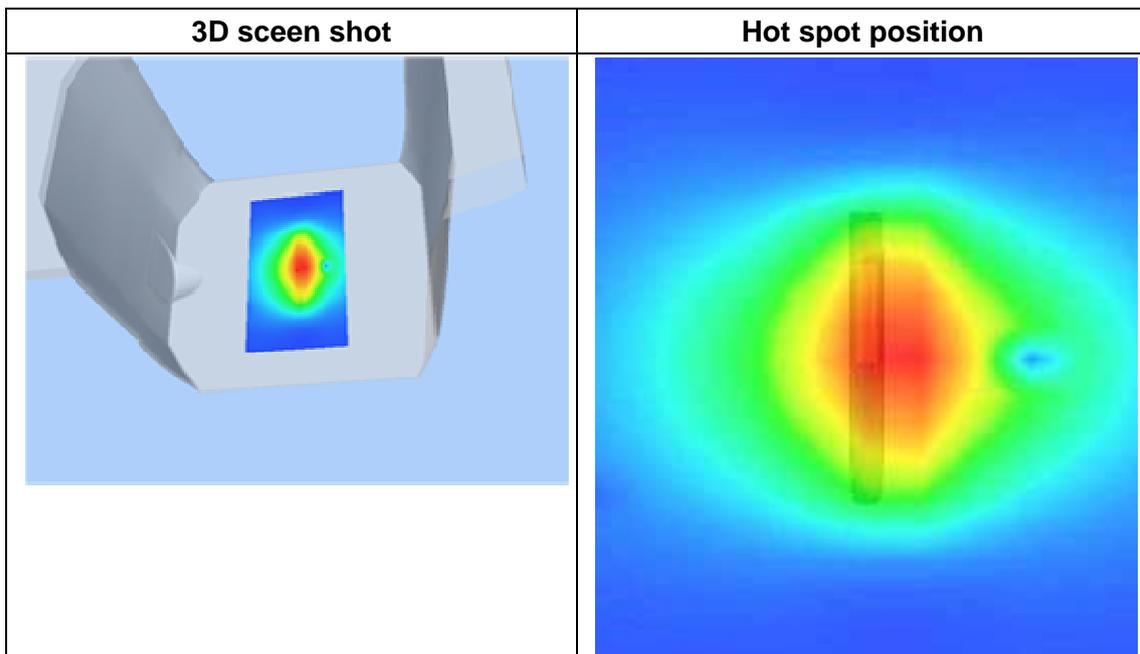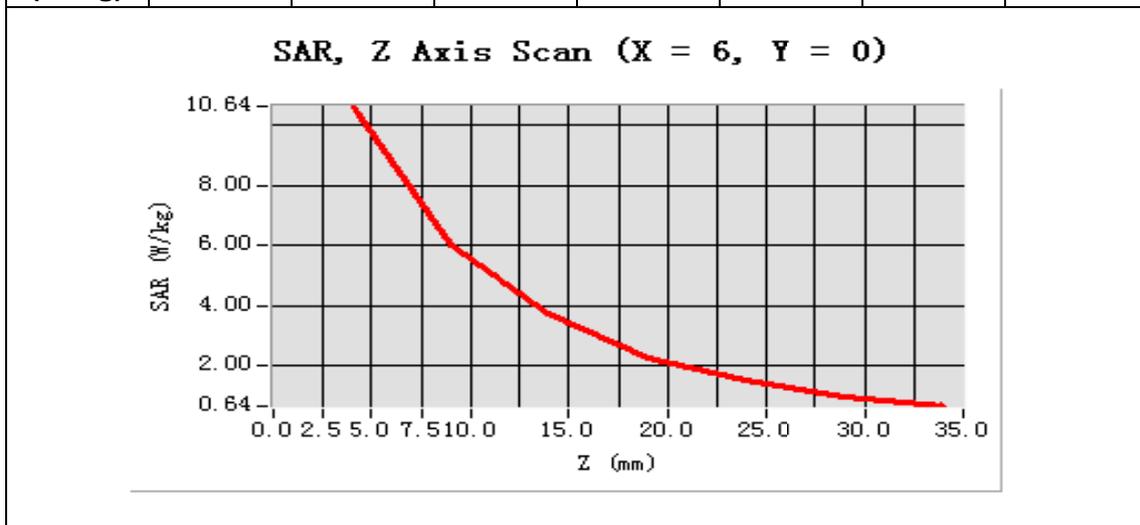

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2013.11.4

Measurement duration: 13 minutes 26 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Flat Plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.271496
Conductivity (S/m)	1.536849
Power drift (%)	-0.520000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	6.17
Crest factor:	1:1


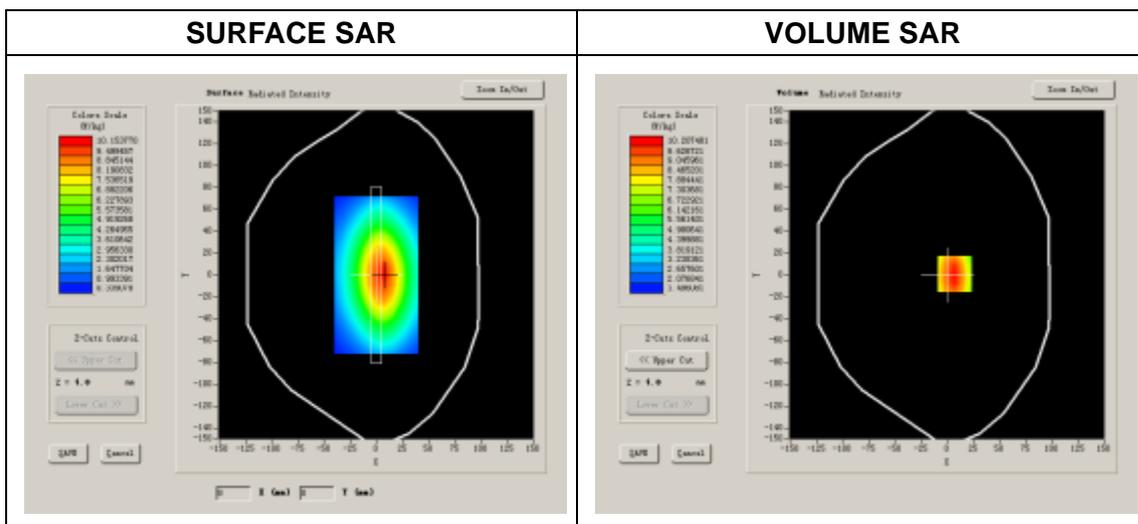


Maximum location: X=7.00, Y=1.00

SAR 10g (W/Kg)	6.473584
SAR 1g (W/Kg)	9.897623

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.2075	7.3996	5.4654	4.1101	3.1286	2.4128

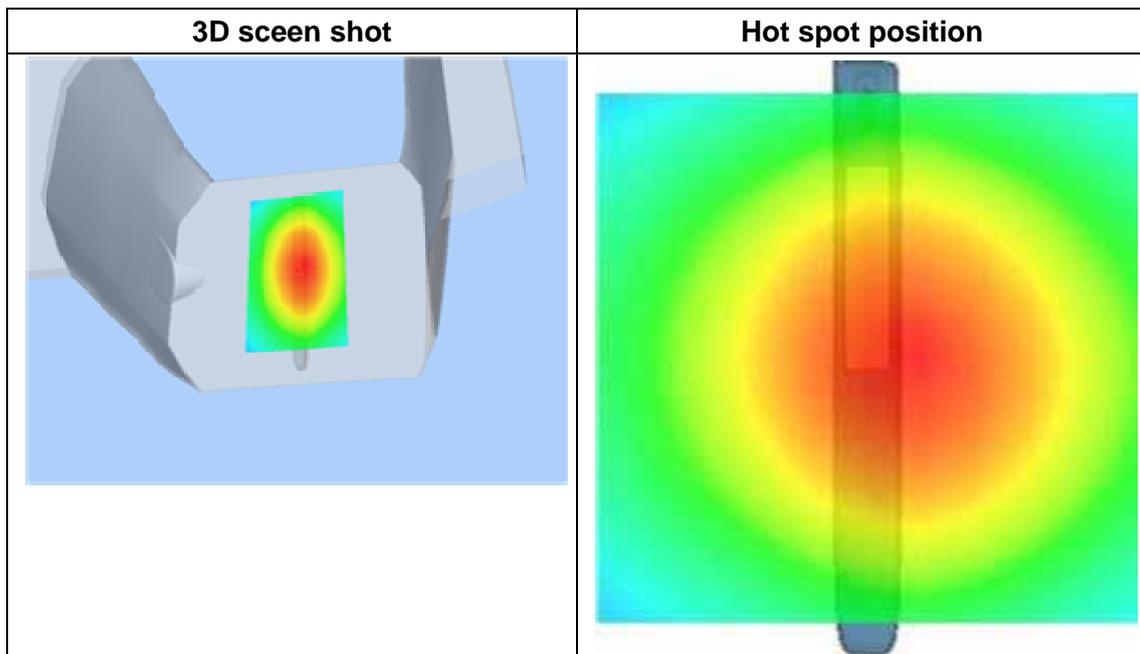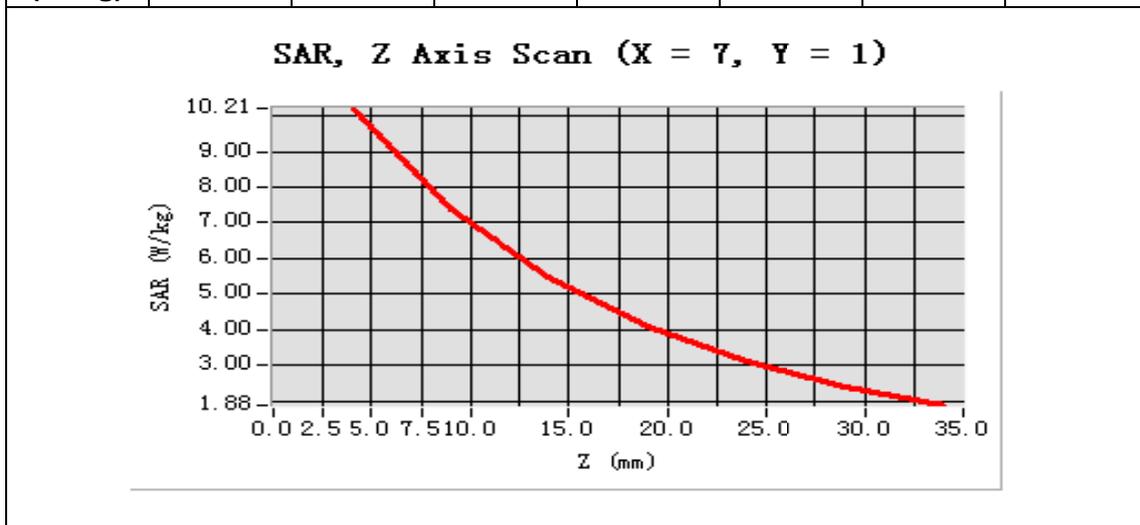

System Performance Check Data(Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.184386
Conductivity (S/m)	1.779534
Power Drift (%)	-0.720000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.80
Crest factor:	1:1


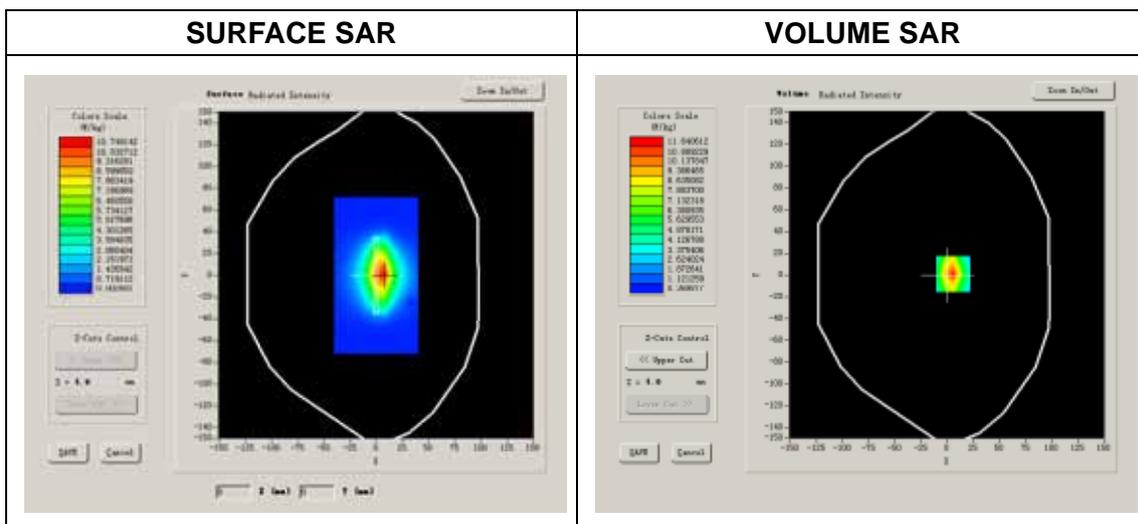


Maximum location: X=6.00, Y=1.00

SAR 10g (W/Kg)	7.628465
SAR 1g (W/Kg)	12.593548

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	11.9115	6.2096	3.8187	2.4504	1.5036	1.0219

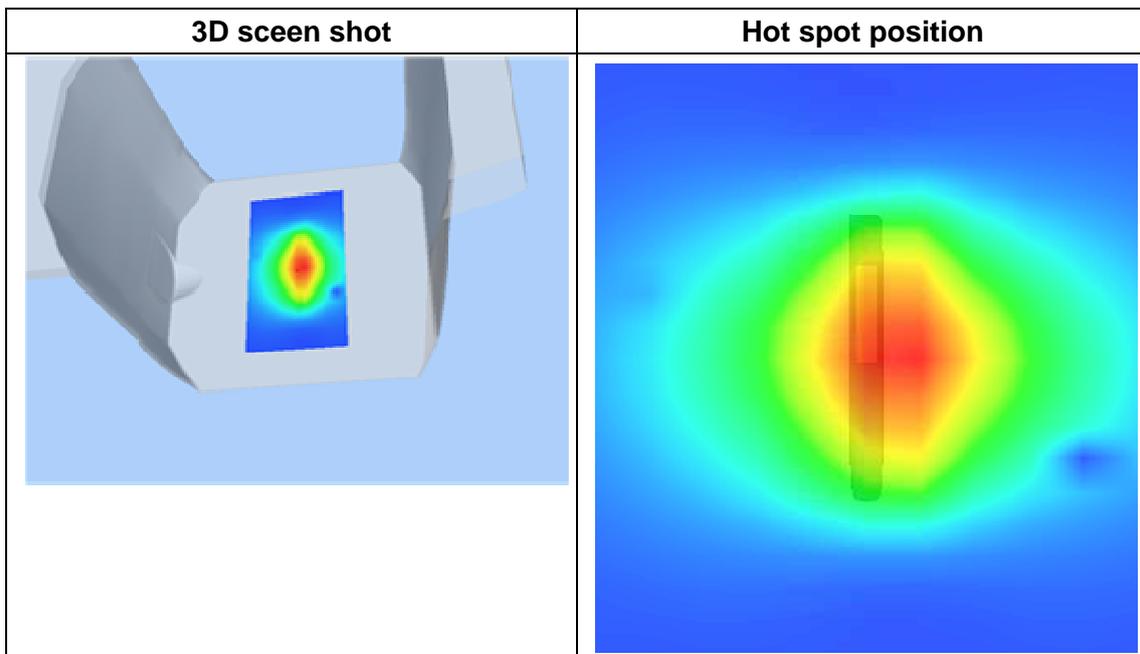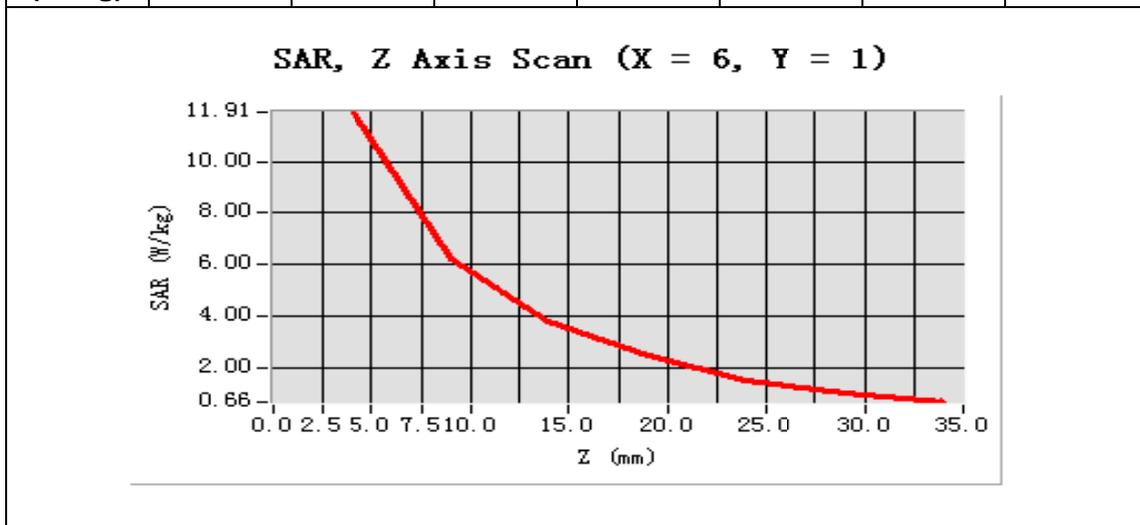

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2013.11.5

Measurement duration: 13 minutes 27 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.684357
Conductivity (S/m)	1.956847
Power Drift (%)	-1.170000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

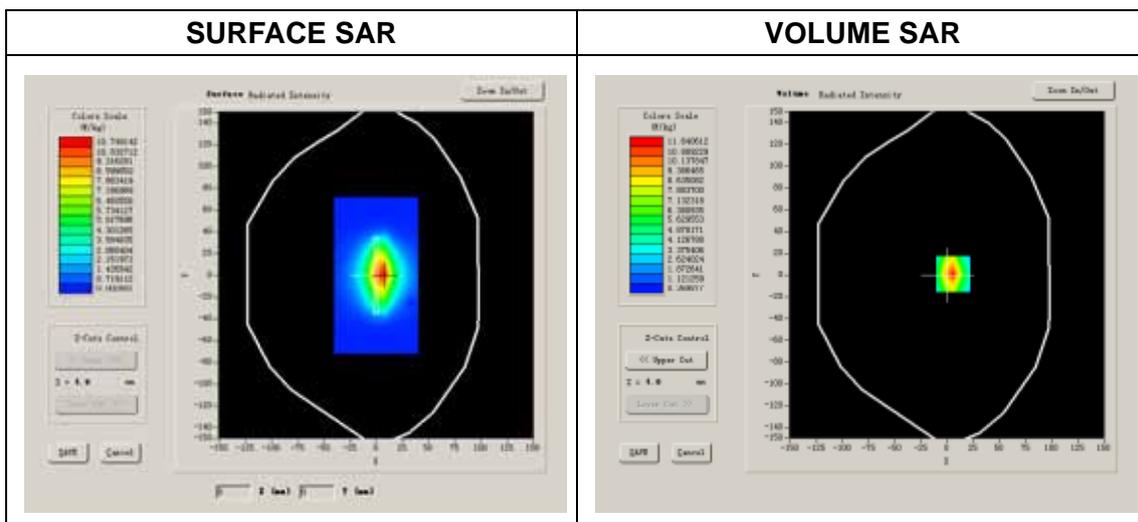

Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	7.172741
SAR 1g (W/Kg)	12.914682

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3.5991	1.3473

