

# FCC RF Test Report


APPLICANT : ZTE CORPORATION  
EQUIPMENT : FDD-LTE Digital Mobile Handset  
MODEL NAME : NX405H  
FCC ID : SRQ-NX405H  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 30, 2014 and testing was completed on Jul. 07, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

**No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.**



## TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT .....	4
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test .....	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT .....	7
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....	7
1.7 Testing Location .....	8
1.8 Applicable Standards .....	8
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>9</b>
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System .....	11
2.3 Support Unit used in test configuration .....	11
2.4 Measurement Results Explanation Example .....	11
<b>3 TEST RESULT.....</b>	<b>12</b>
3.1 Conducted Output Power Measurement.....	12
3.2 Peak-to-Average Ratio .....	14
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....	24
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	30
3.5 Band Edge Measurement.....	54
3.6 Conducted Spurious Emission Measurement.....	69
3.7 Field Strength of Spurious Radiation Measurement .....	88
3.8 Frequency Stability Measurement.....	97
<b>4 LIST OF MEASURING EQUIPMENT .....</b>	<b>103</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>104</b>
<b>APPENDIX A. SETUP PHOTOGRAPHS</b>	



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d) §27.50(d)(5)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(g)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 24.61 dB at 2510.000 MHz
3.8	§2.1055 §22.355 §24.235 §27.54	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	FDD-LTE Digital Mobile Handset
Model Name	NX405H
FCC ID	SRQ-NX405H
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+ (Downlink Only)/ DC-HSDPA/LTE/WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	NX405HMB_B
SW Version	NX405H_USCommon_V0.03
EUT Stage	Pre-Production

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.63 dBm GSM1900 : 29.06 dBm WCDMA Band V : 22.91 dBm WCDMA Band IV : 23.14 dBm WCDMA Band II : 23.23 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA / DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) DC-HSDPA: 64QAM HSPA+: 16QAM (Downlink Only)

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	0.6446	0.027 ppm	249KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2010	0.029 ppm	249KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.0713	0.011 ppm	4M18F9W
Part 24	GSM1900 GSM	GMSK	0.9821	0.037 ppm	245KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.4093	0.036 ppm	249KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.2436	0.006 ppm	4M18F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.1760	0.010 ppm	4M18F9W

### 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.		
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	TH01-SZ	03CH01-SZ	831040

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.		
<b>Test Site Location</b>	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL:+86-755-8637-9589 FAX: +86-755-8637-9595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	OTA01-SZ		

**Note:** The test site complies with ANSI C63.4 2003 requirement.

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes with accessories and standalone to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.
3. 30 MHz to 18000 MHz for WCDMA Band IV.

Test Modes		
Band	Radiated TCs	Conducted TCs
<b>GSM 850</b>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>
<b>GSM 1900</b>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>
<b>WCDMA Band V</b>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
<b>WCDMA Band II</b>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
<b>WCDMA Band IV</b>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:** The maximum power levels are chosen to test as the worst case configuration as follows:

GSM mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band II,

RMC 12.2Kbps mode for WCDMA band IV, only these modes were used for all tests.




Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.61	32.63	32.62	28.93	29.06	29.01
GPRS class 8	32.53	32.58	32.55	28.92	28.99	28.96
GPRS class 10	28.11	28.43	28.34	25.06	25.24	25.15
GPRS class 11	25.14	25.25	25.21	22.91	23.06	22.98
GPRS class 12	25.00	25.17	25.11	22.69	22.80	22.72
EGPRS class 8	26.37	26.35	26.26	25.19	25.12	25.21
EGPRS class 10	23.82	23.74	23.78	22.60	22.66	22.77
EGPRS class 11	22.71	22.66	22.71	21.54	21.61	21.72
EGPRS class 12	22.43	22.42	22.37	21.27	21.26	21.40

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	22.80	22.91	22.89	23.21	23.23	23.10	23.07	23.14	23.11
HSDPA Subtest-1	21.96	22.09	22.03	21.95	22.03	21.92	21.84	22.04	22.06
HSDPA Subtest-2	21.56	22.10	22.12	21.86	22.17	21.94	21.92	22.12	22.23
HSDPA Subtest-3	21.54	21.62	21.61	21.26	21.64	21.12	21.40	21.60	21.70
HSDPA Subtest-4	21.63	21.62	21.62	21.57	21.64	21.45	21.40	21.60	21.71
DC-HSDPA Subtest-1	22.03	22.07	22.07	22.12	22.33	22.28	22.22	22.23	22.28
DC-HSDPA Subtest-2	22.09	22.05	22.08	22.16	22.31	22.33	22.25	22.29	22.33
DC-HSDPA Subtest-3	21.61	21.55	21.57	21.58	21.72	21.75	21.65	21.68	21.71
DC-HSDPA Subtest-4	21.63	21.54	21.59	21.55	21.73	21.72	21.63	21.65	21.70
HSUPA Subtest-1	22.07	21.44	21.53	22.10	21.91	21.21	21.85	21.36	21.46
HSUPA Subtest-2	20.69	20.97	21.10	20.58	20.44	20.54	20.43	20.70	21.05
HSUPA Subtest-3	20.19	20.76	20.77	20.67	20.82	20.65	20.42	20.69	20.68
HSUPA Subtest-4	21.36	21.34	21.03	20.82	21.39	20.84	21.46	21.28	21.17
HSUPA Subtest-5	22.20	22.00	22.20	21.90	22.10	21.90	21.90	22.00	22.10

## 2.2 Connection Diagram of Test System

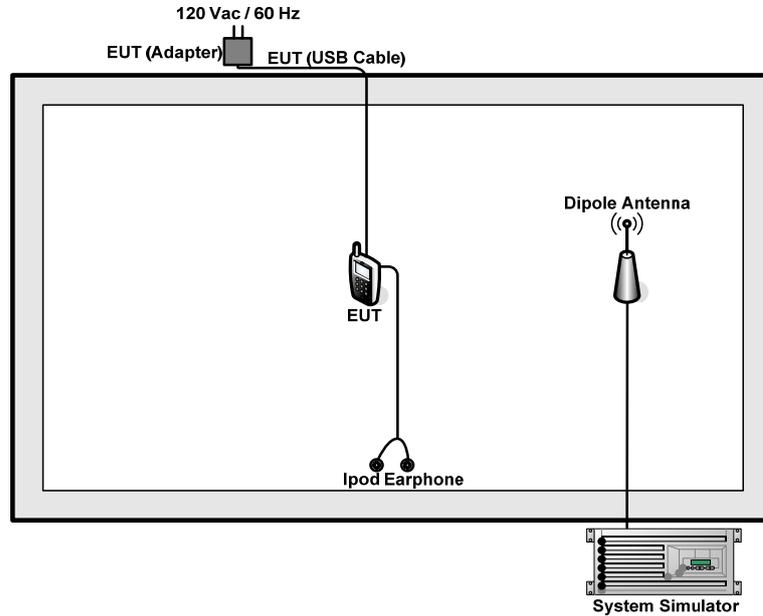

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m
3.	Ipod Earphone	Apple	MC690ZP/A	FCC DoC	Unshielded, 1.6 m	N/A

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 7 dB and a 10dB attenuator.

$$\begin{aligned} \text{Offset (dB)} &= \text{RF cable loss (dB)} + \text{attenuator factor (dB)}. \\ &= 7 + 10 = 17 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

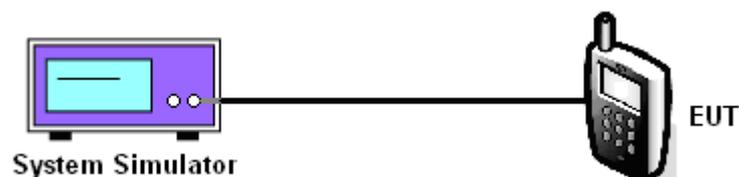

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.61	32.63	32.62	26.37	26.35	26.26	22.80	22.91	22.89
Conducted Power (Watts)	1.82	1.83	1.83	0.43	0.43	0.42	0.19	0.20	0.19

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	28.93	29.06	29.01	25.19	25.12	25.21	23.21	23.23	23.10
Conducted Power (Watts)	0.78	0.81	0.80	0.33	0.33	0.33	0.21	0.21	0.20

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	23.07	23.14	23.11
Conducted Power (Watts)	0.20	0.21	0.20

Note: Maximum burst average power for GSM, and maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
3. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

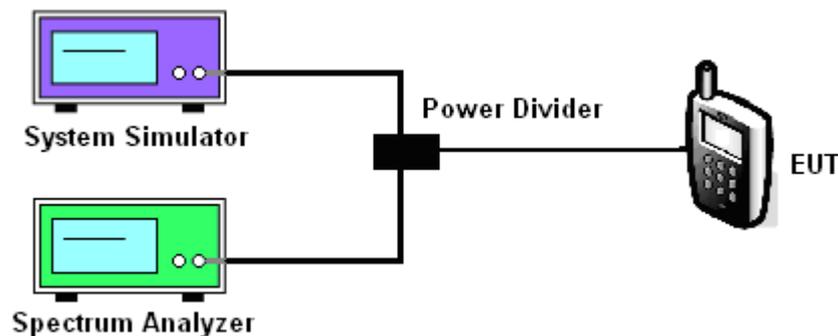

3.2.5 Test Result of Peak-to-Average Ratio

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.36	0.34	0.35	2.66	2.55	2.61	3.16	3.36	2.93


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	3.42	3.30	3.19



### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

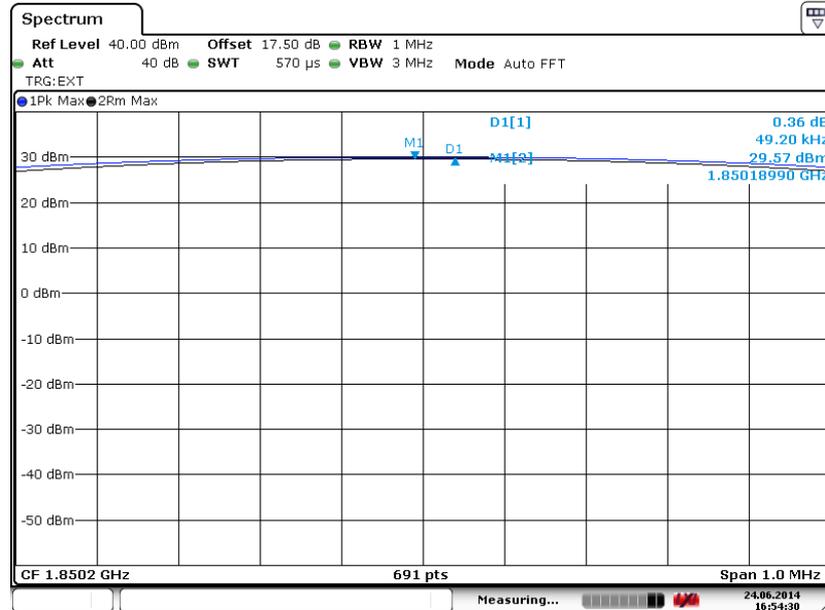

Date: 24.JUN.2014 16:54:29


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

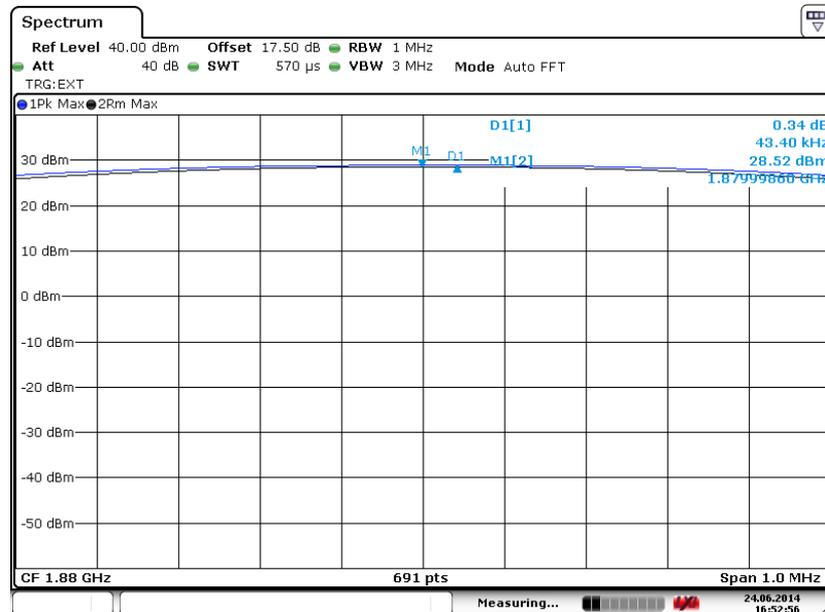

Date: 24.JUN.2014 16:52:56



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

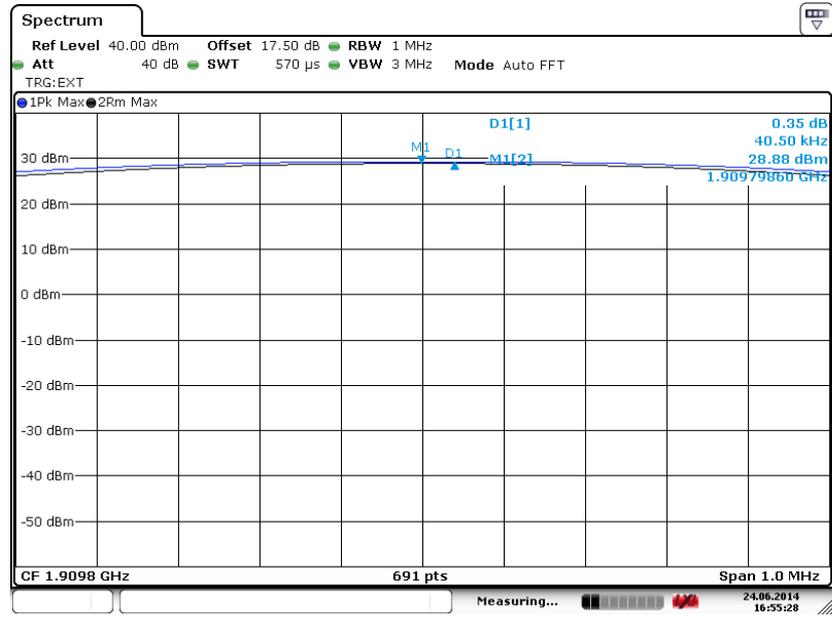


Date: 24.JUN.2014 16:55:28




<b>Band :</b>	GSM 1900	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

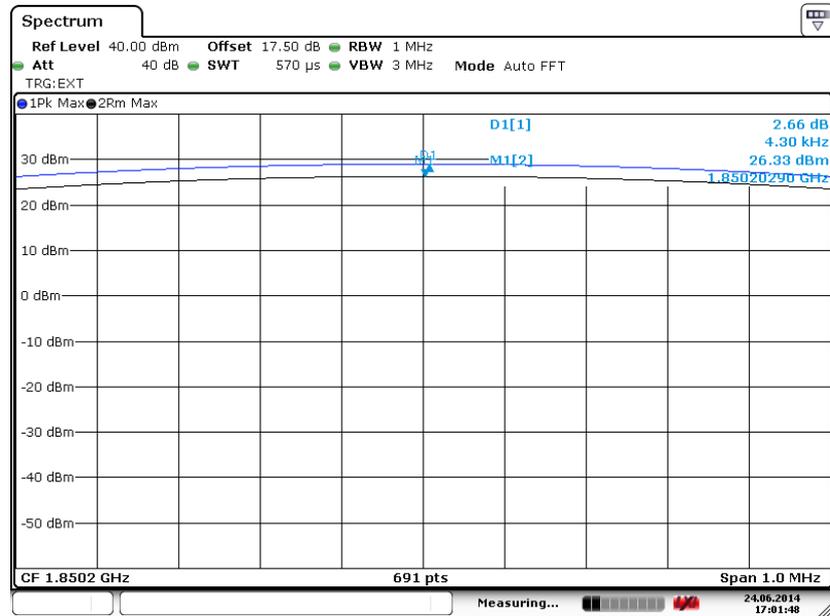

Date: 24.JUN.2014 17:01:47


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

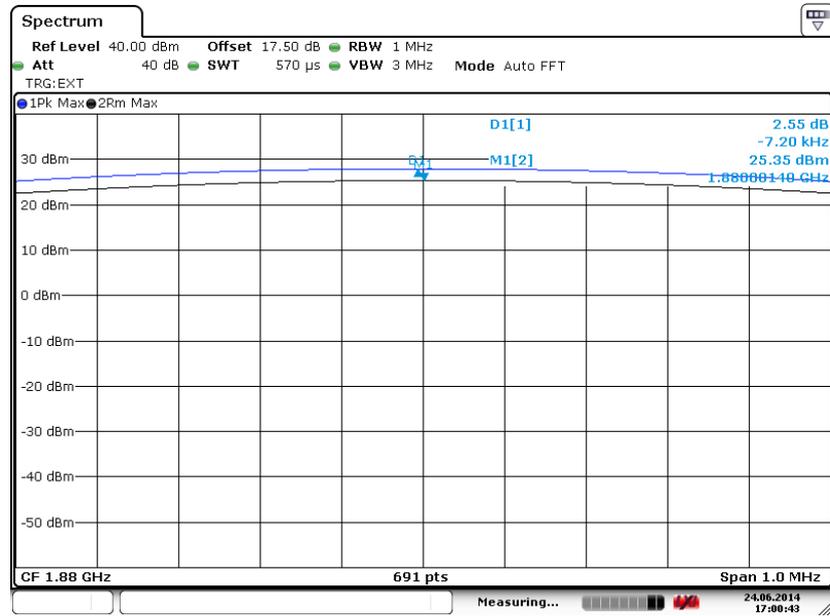

Date: 24.JUN.2014 17:00:43



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

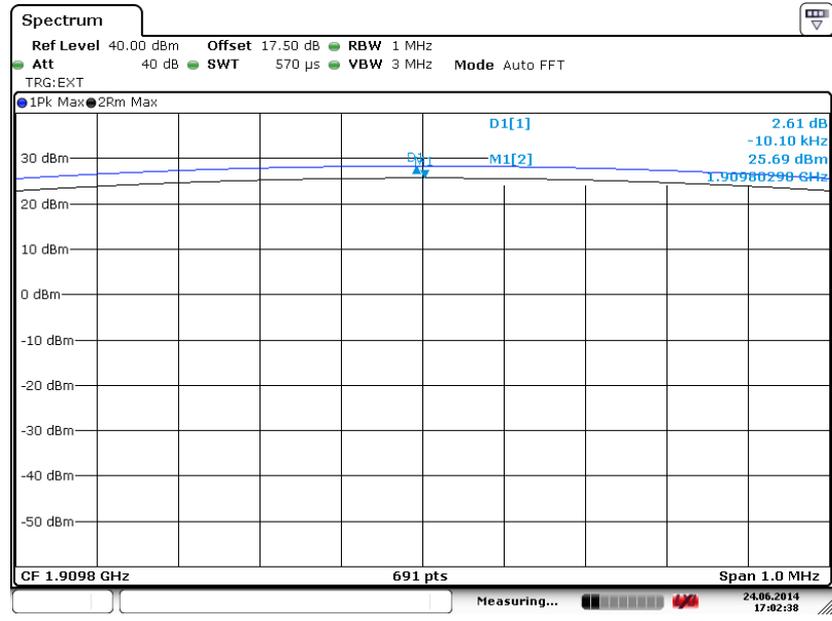


Date: 24.JUN.2014 17:02:37




<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

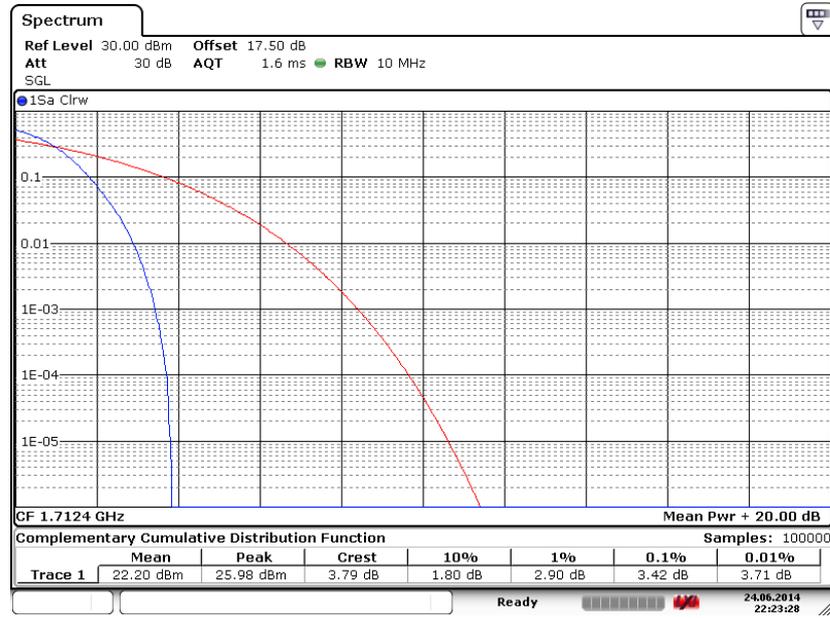

Date: 24.JUN.2014 22:23:27


Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

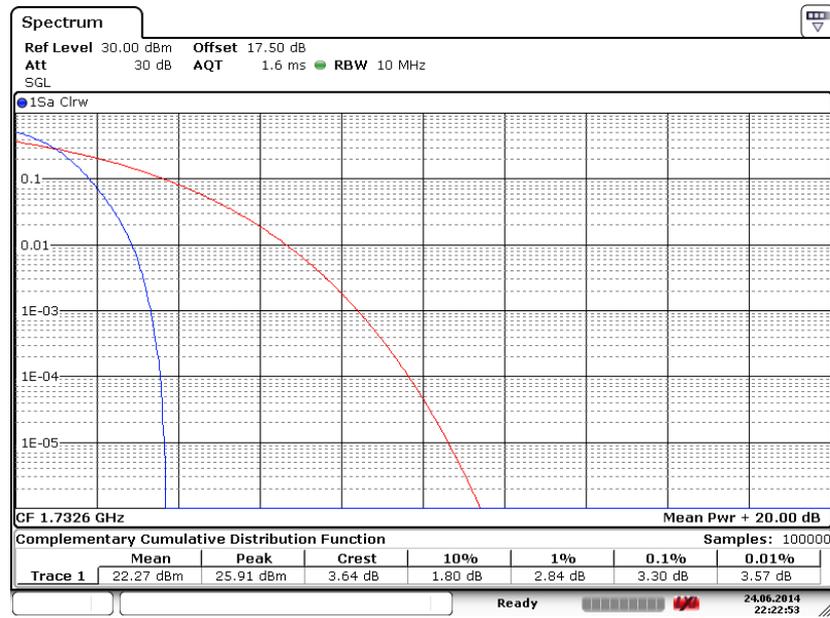

Date: 24.JUN.2014 22:22:53



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

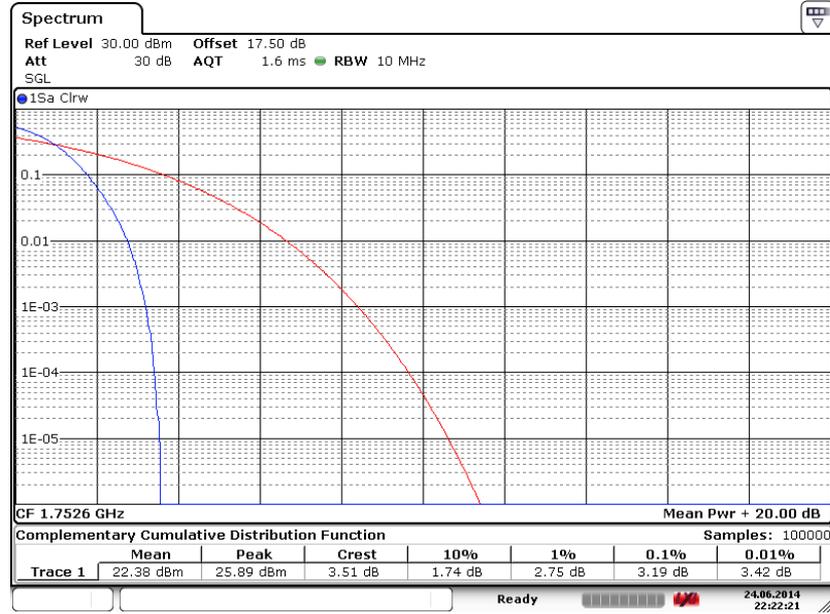


Date: 24.JUN.2014 22:22:21




<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

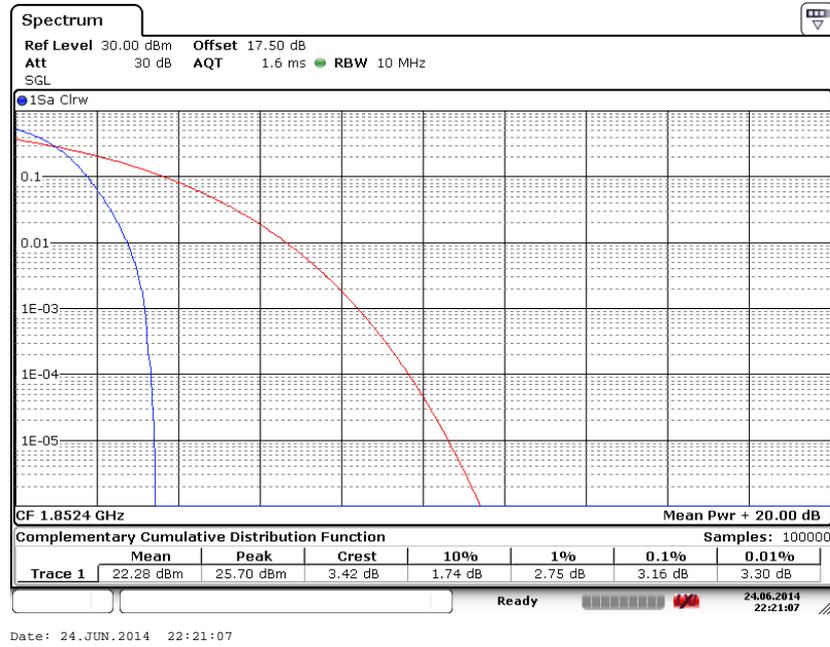


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

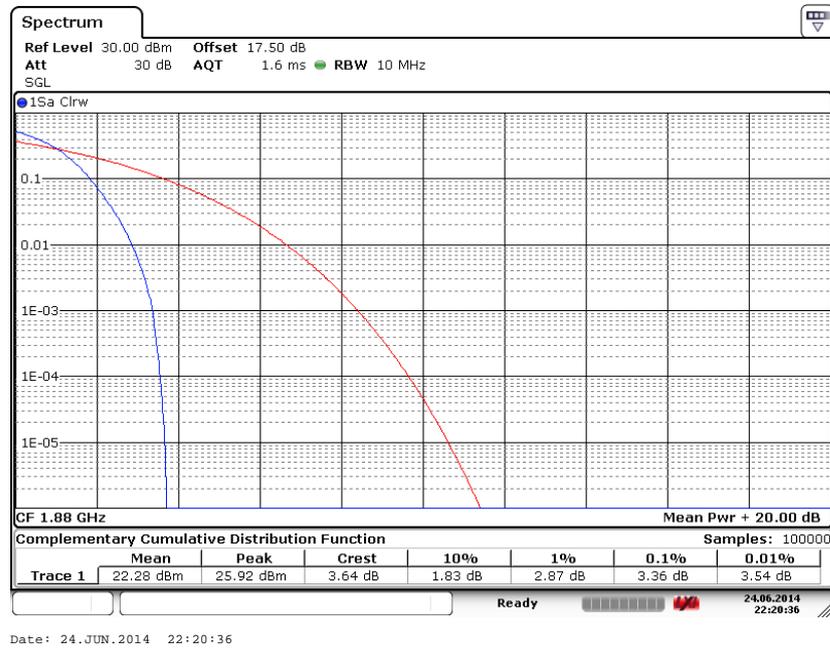



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

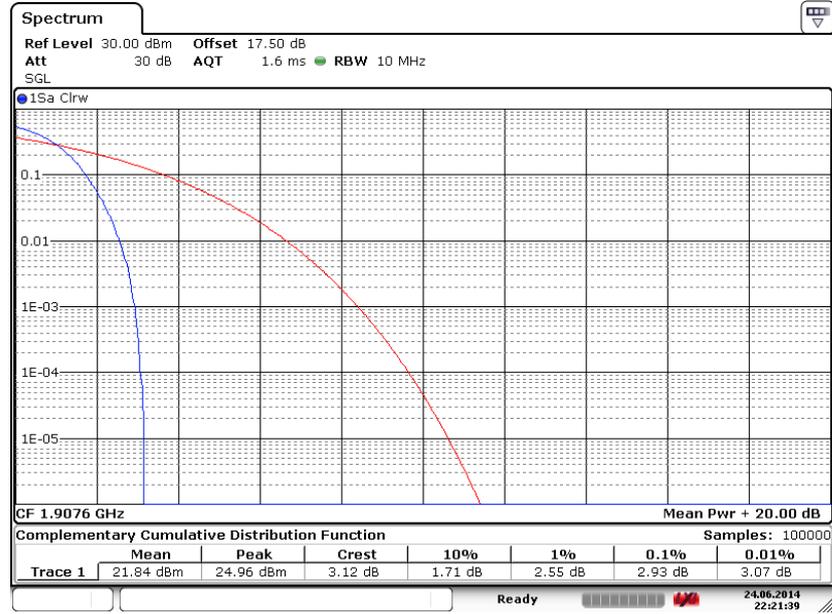

Date: 24.JUN.2014 22:21:38

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed on a turntable 1.5 meters high in a fully anechoic chamber.
2. The EUT was placed 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;  
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.3.4 Test Setup

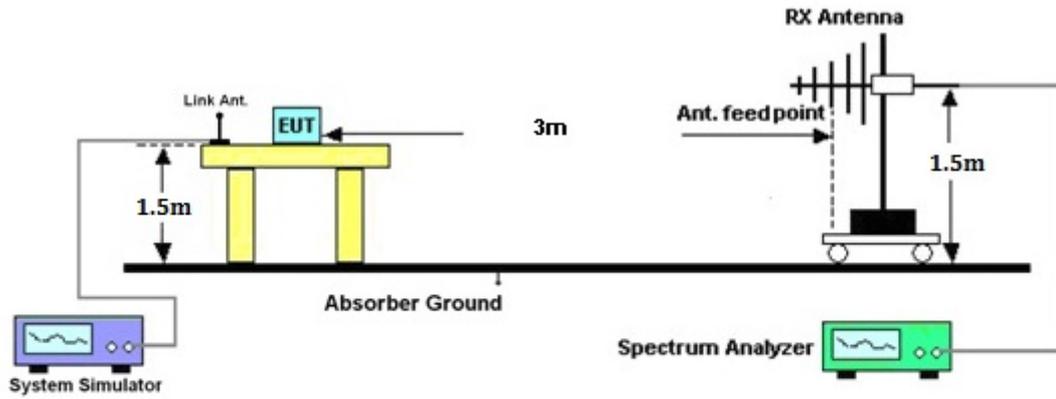

**3.3.5 Test Result of ERP**

<b>GSM850 (GSM) Radiated Power ERP</b>						
Horizontal Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-18.95	-48.12	0.00	-1.08	28.09	0.6446
836.40	-20.08	-48.28	0.00	-0.93	27.27	0.5332
848.80	-21.16	-48.35	0.00	-0.76	26.43	0.4396
Vertical Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-31.43	-47.97	0.00	-1.08	15.46	0.0352
836.40	-32.34	-48.01	0.00	-0.93	14.75	0.0298
848.80	-33.71	-48.05	0.00	-0.76	13.58	0.0228

<b>GSM850 (EDGE class 8) Radiated Power ERP</b>						
Horizontal Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-24.01	-48.12	0.00	-1.08	23.03	0.2010
836.40	-24.95	-48.28	0.00	-0.93	22.40	0.1739
848.80	-26.07	-48.35	0.00	-0.76	21.52	0.1419
Vertical Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-36.32	-47.97	0.00	-1.08	10.57	0.0114
836.40	-37.14	-48.01	0.00	-0.93	9.94	0.0099
848.80	-38.60	-48.05	0.00	-0.76	8.69	0.0074



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-28.51	-48.12	0.00	-1.08	18.53	0.0713
836.40	-29.44	-48.28	0.00	-0.93	17.91	0.0618
846.60	-30.14	-48.35	0.00	-0.76	17.45	0.0556
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-40.86	-47.97	0.00	-1.08	6.03	0.0040
836.40	-41.70	-48.01	0.00	-0.93	5.38	0.0035
846.60	-42.60	-48.05	0.00	-0.76	4.69	0.0029



3.3.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.30	-51.88	0.00	1.96	28.54	0.7152
1880.00	-25.88	-52.99	0.00	2.00	29.11	0.8149
1909.80	-26.57	-54.28	0.00	1.98	29.69	0.9318
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.20	-52.13	0.00	1.96	28.89	0.7753
1880.00	-26.14	-53.17	0.00	2.00	29.03	0.7997
1909.80	-26.19	-54.13	0.00	1.98	29.92	0.9821

GSM1900 (EDGE class 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-28.75	-51.88	0.00	1.96	25.09	0.3229
1880.00	-29.26	-52.99	0.00	2.00	25.73	0.3745
1909.80	-30.21	-54.28	0.00	1.98	26.05	0.4030
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-28.68	-52.13	0.00	1.96	25.41	0.3479
1880.00	-29.61	-53.17	0.00	2.00	25.56	0.3599
1909.80	-29.99	-54.13	0.00	1.98	26.12	0.4093



WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1712.40	-32.73	-51.88	0.00	1.96	21.11	0.1291
1732.60	-34.24	-52.99	0.00	2.00	20.75	0.1190
1752.60	-34.36	-54.28	0.00	1.98	21.90	0.1548
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1712.40	-32.63	-52.13	0.00	1.96	21.46	0.1401
1732.60	-33.98	-53.17	0.00	2.00	21.19	0.1315
1752.60	-33.65	-54.13	0.00	1.98	22.46	0.1760

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-30.68	-51.88	0.00	1.96	23.16	0.2070
1880.00	-31.38	-52.99	0.00	2.00	23.61	0.2298
1907.60	-32.62	-54.28	0.00	1.98	23.64	0.2314
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-30.62	-52.13	0.00	1.96	23.47	0.2224
1880.00	-31.79	-53.17	0.00	2.00	23.38	0.2180
1907.60	-32.24	-54.13	0.00	1.98	23.87	0.2436

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

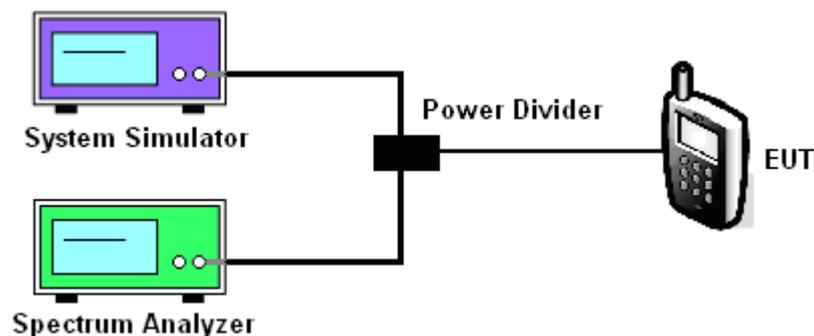

3.4.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	246.02	244.57	248.91	244.57	248.91	244.57
26dB BW (kHz)	312.60	312.60	311.10	302.50	312.60	303.90

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	244.57	243.13	244.57	246.02	244.57	248.91
26dB BW (kHz)	311.10	311.10	309.70	306.80	308.20	309.70



Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.182	4.182	4.168
26dB BW (MHz)	4.660	4.660	4.660


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.182	4.153	4.168
26dB BW (MHz)	4.660	4.660	4.660

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.168	4.182	4.182
26dB BW (MHz)	4.660	4.660	4.674

### 3.4.6 Test Result (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

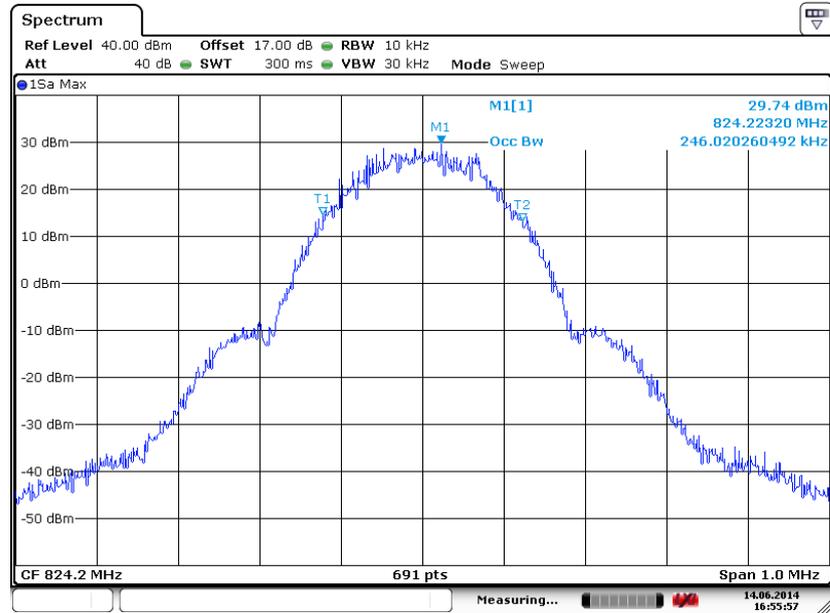

Date: 14.JUN.2014 16:55:57


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

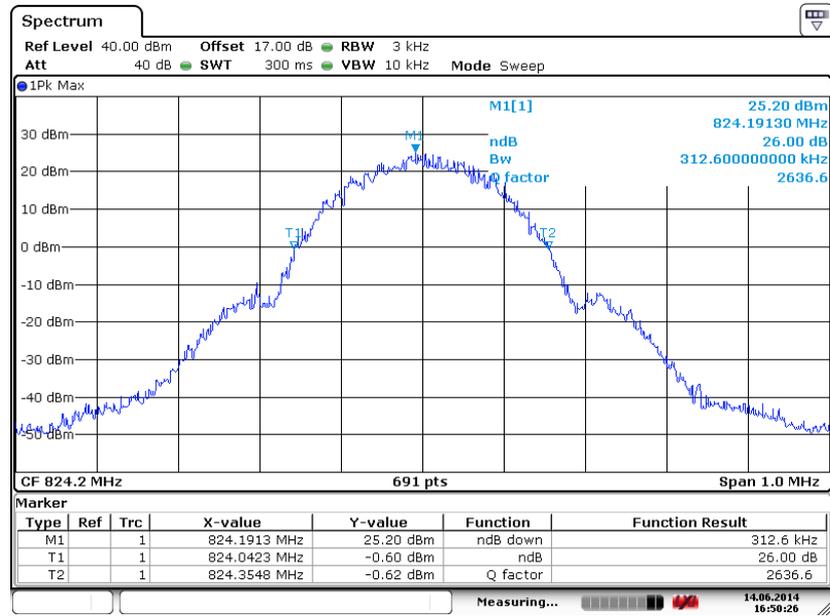

Date: 14.JUN.2014 16:50:26




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

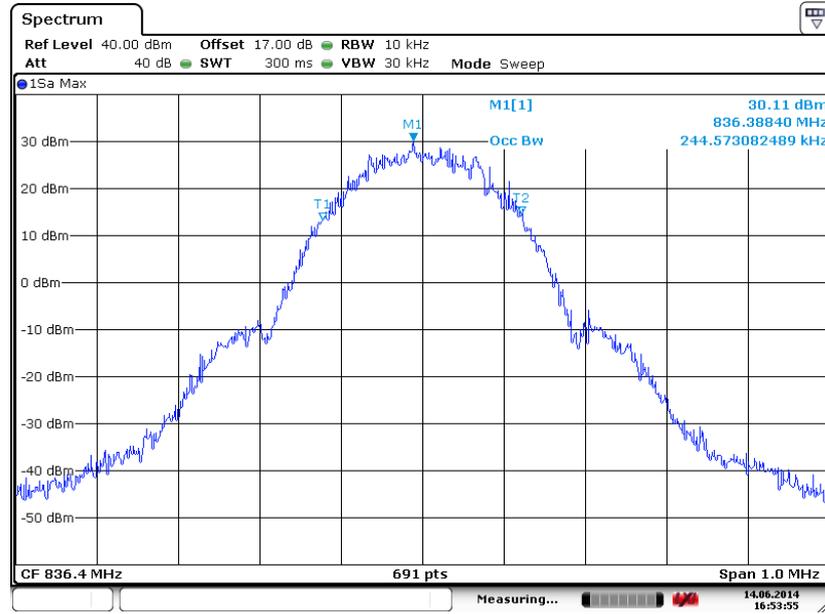

Date: 14.JUN.2014 16:53:55


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

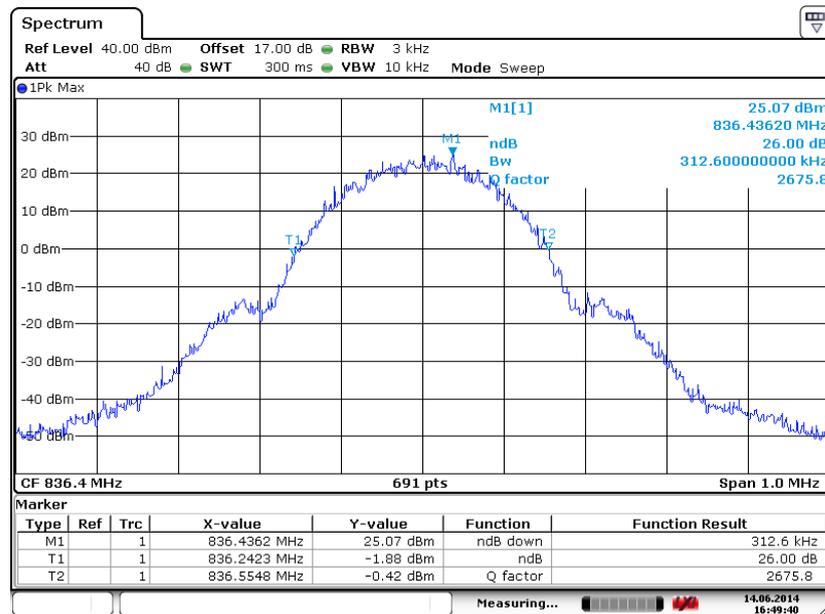

Date: 14.JUN.2014 16:49:40




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

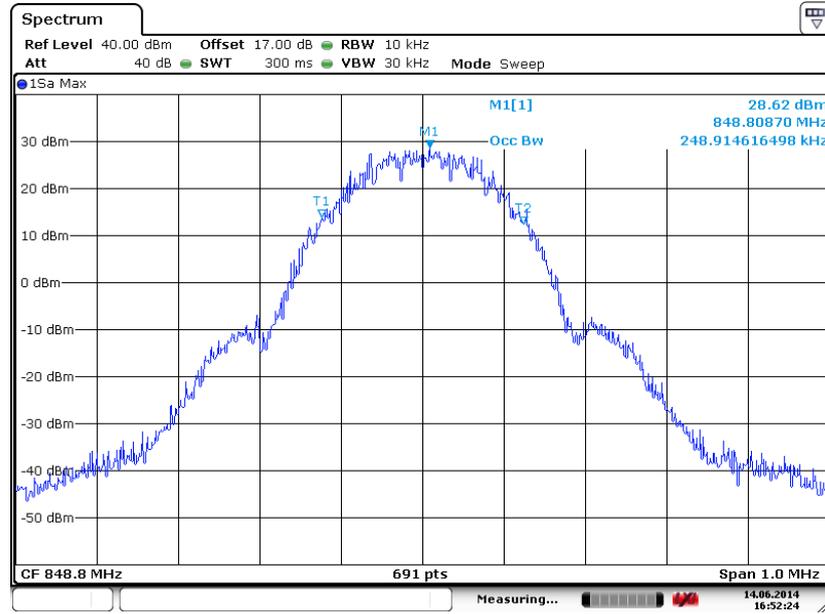

Date: 14.JUN.2014 16:52:24

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

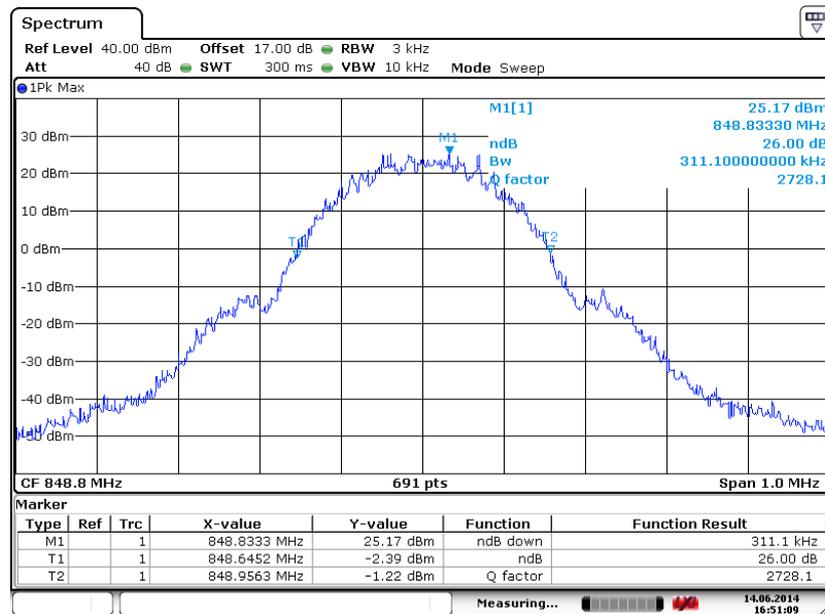


Date: 14.JUN.2014 16:51:09

Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		1	848.8333 MHz	25.17 dBm	ndB down	311.1 kHz
T1	1		1	848.6452 MHz	-2.39 dBm	ndB	26.00 dB
T2	1		1	848.9563 MHz	-1.22 dBm	Q factor	2728.1




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

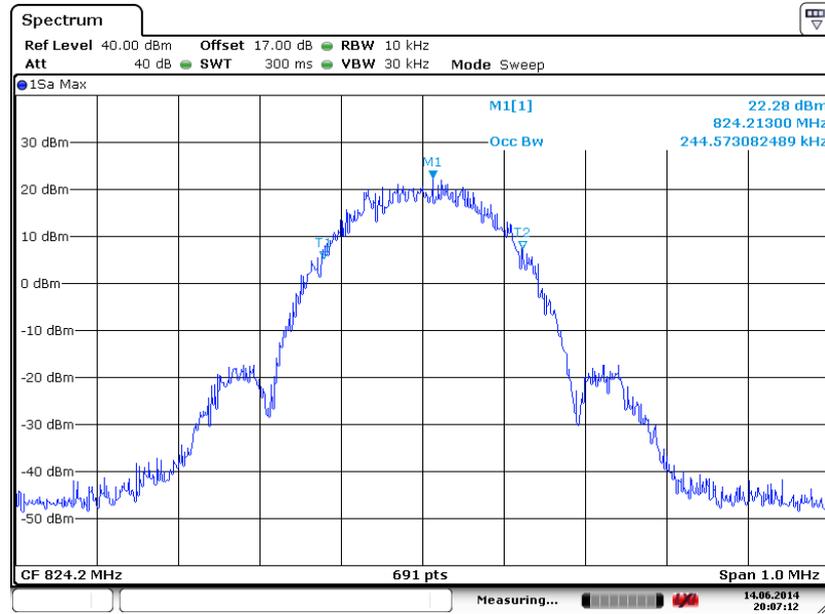

Date: 14.JUN.2014 20:07:12


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

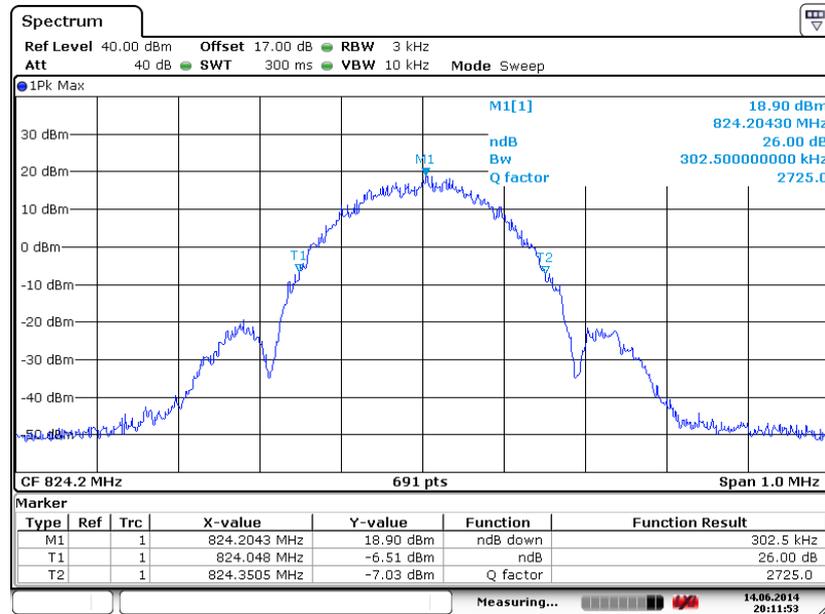

Date: 14.JUN.2014 20:11:53




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

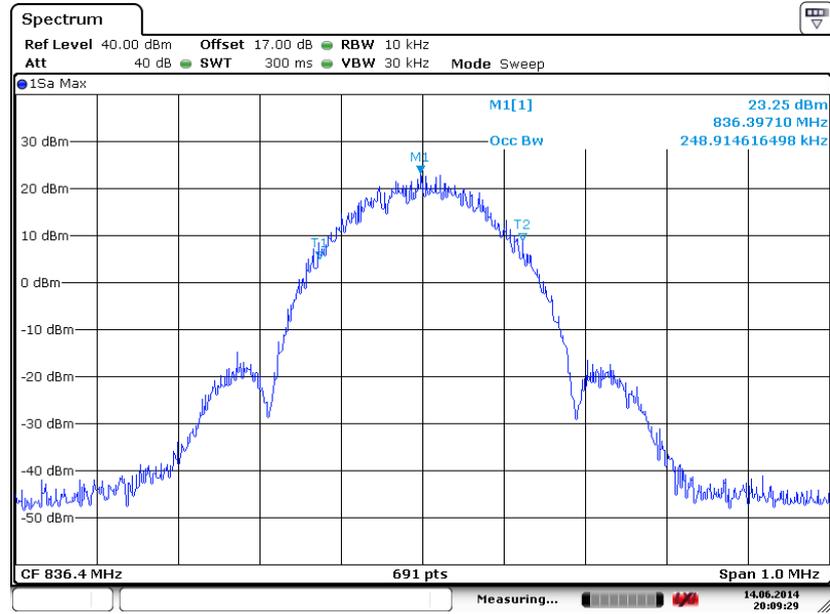

Date: 14.JUN.2014 20:09:29


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

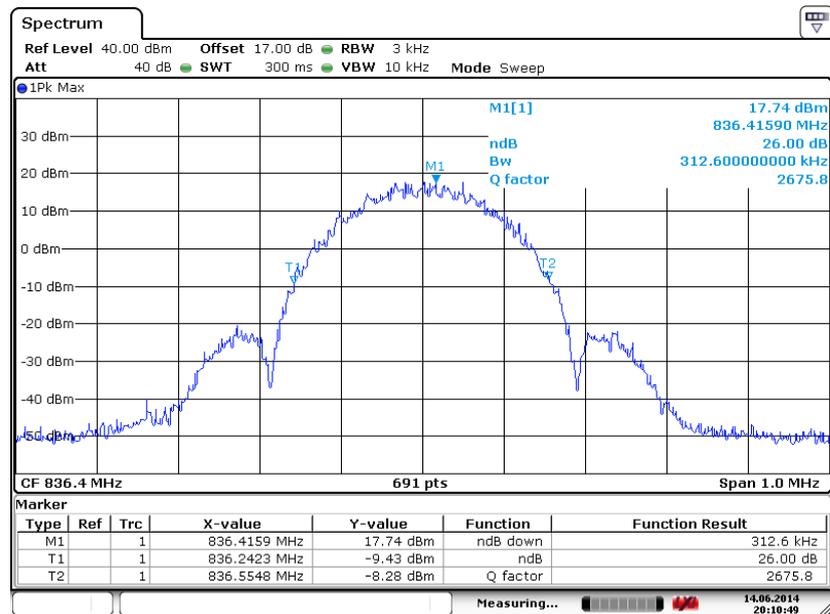

Date: 14.JUN.2014 20:10:49




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

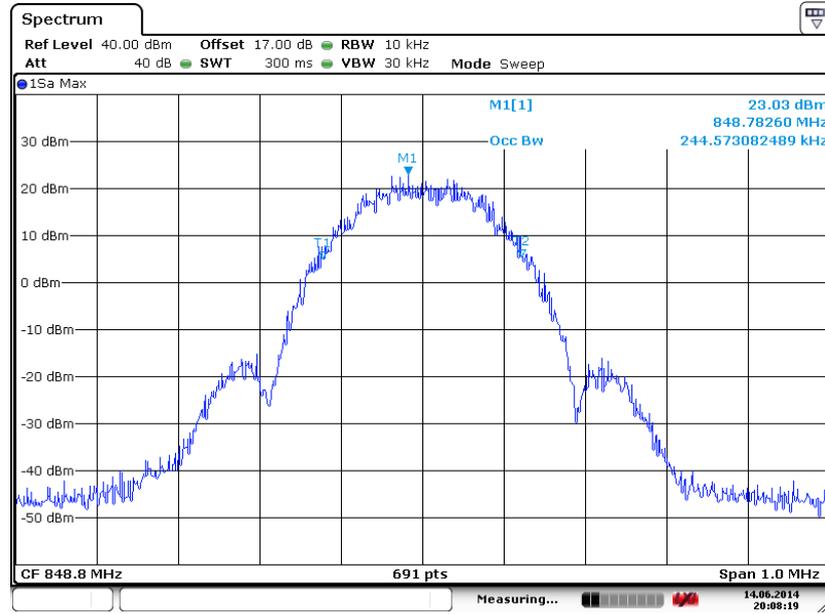

Date: 14.JUN.2014 20:08:19

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

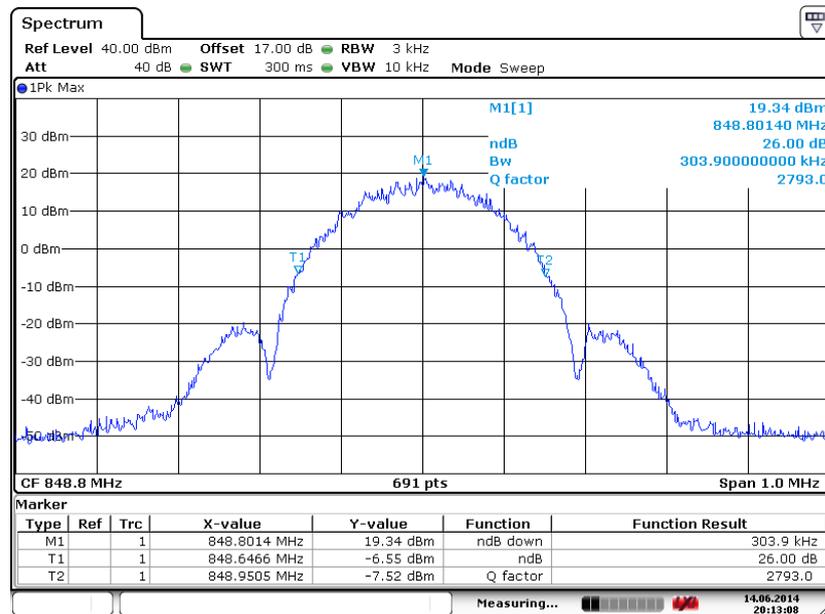


Date: 14.JUN.2014 20:13:08




Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

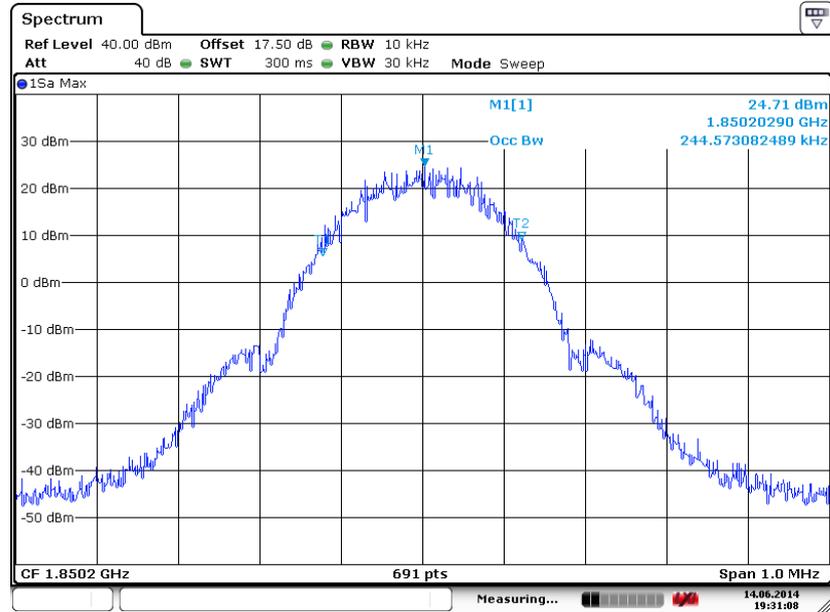

Date: 14.JUN.2014 19:31:08


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

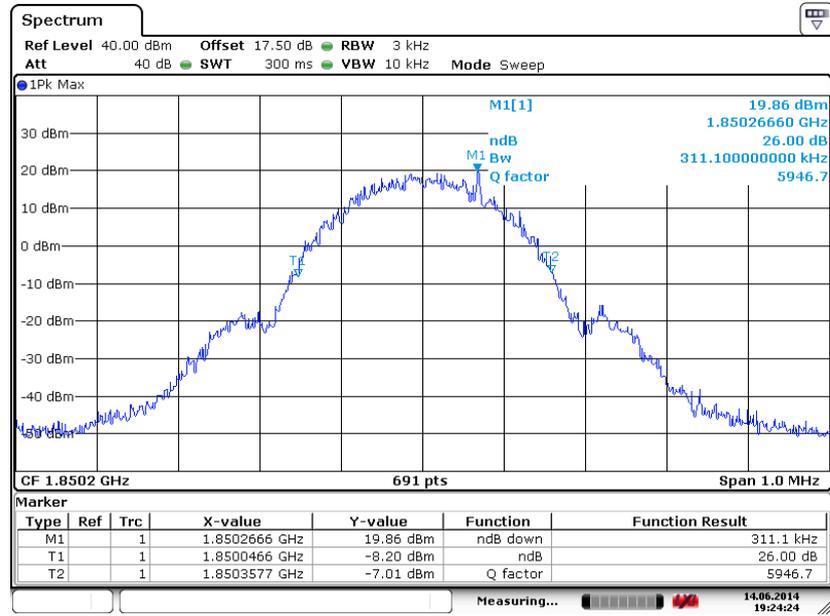

Date: 14.JUN.2014 19:24:24




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

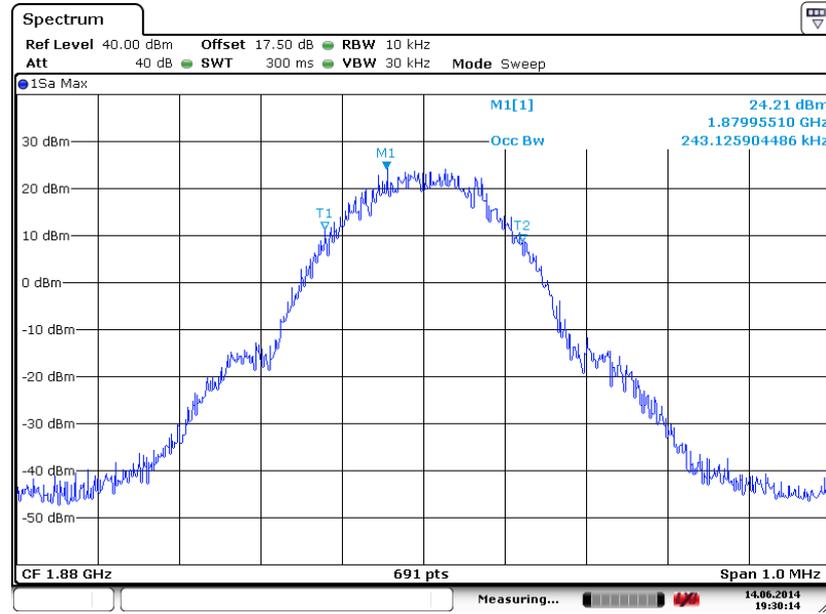

Date: 14. JUN. 2014 19:30:15


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

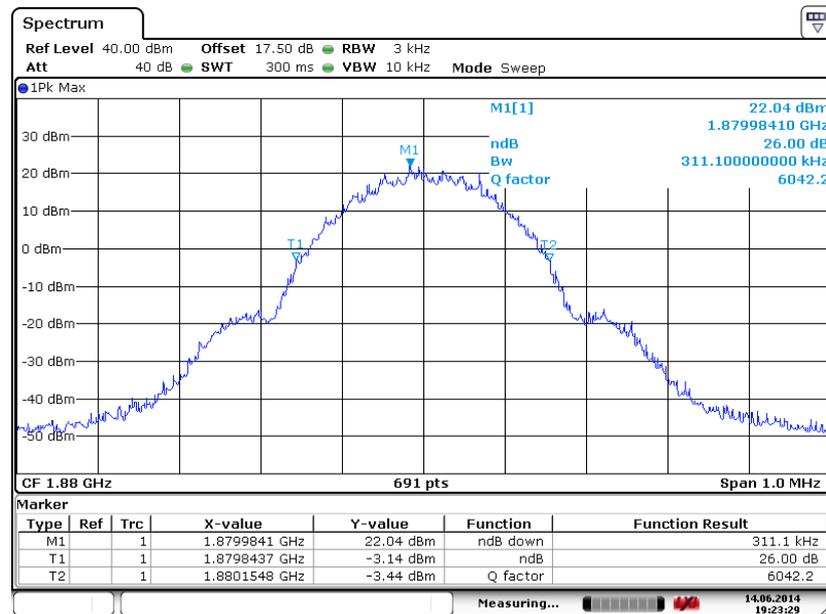

Date: 14. JUN. 2014 19:23:29




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

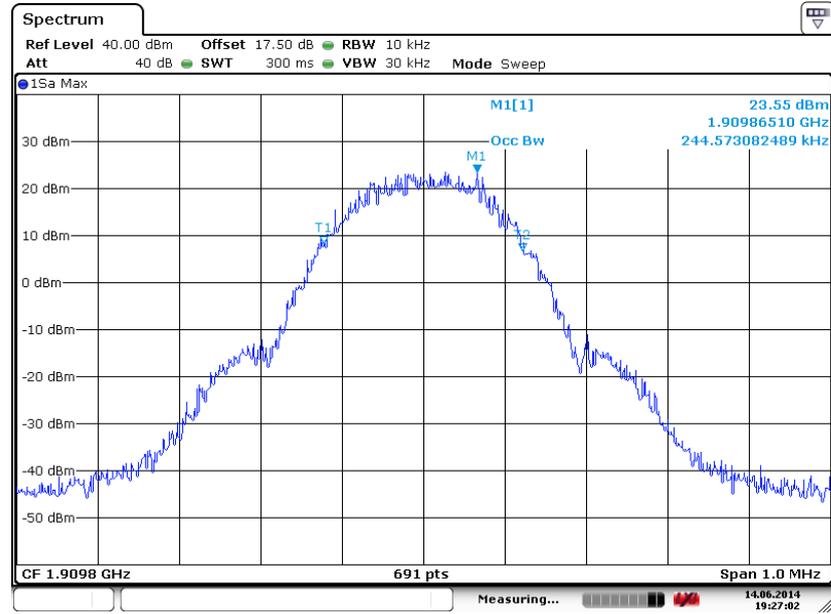

Date: 14.JUN.2014 19:27:02

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

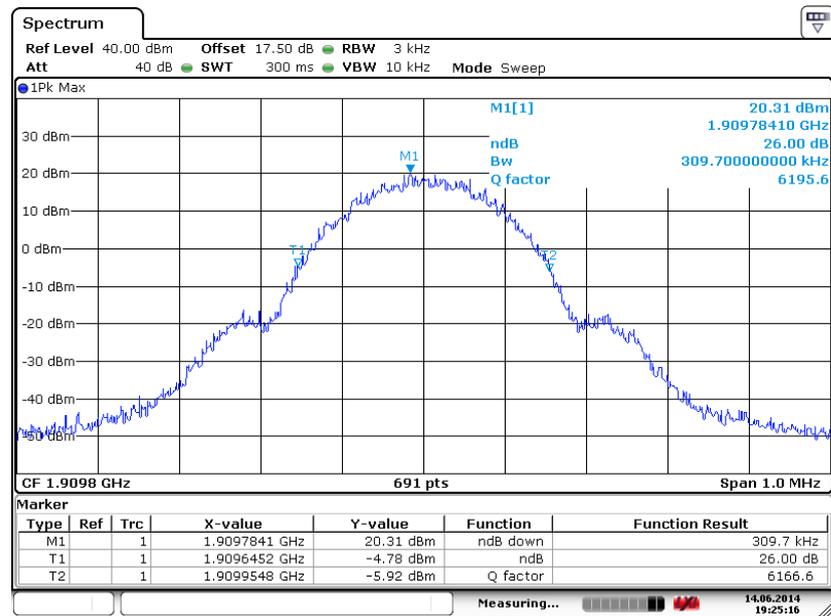


Date: 14.JUN.2014 19:25:16




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

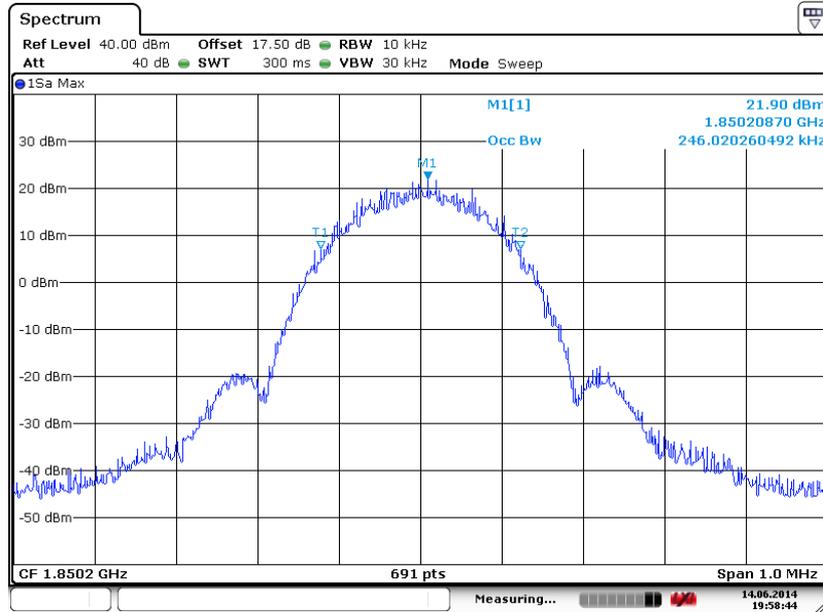

Date: 14.JUN.2014 19:58:44


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

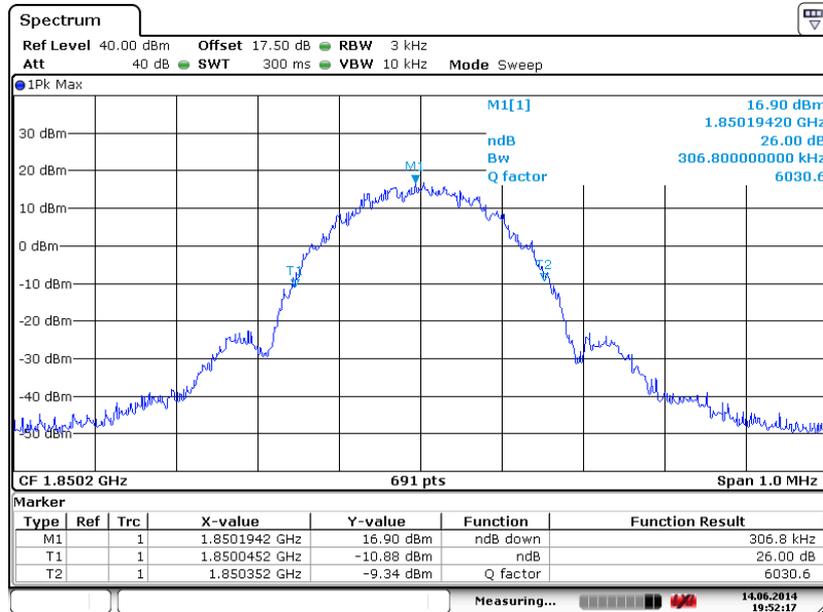

Date: 14.JUN.2014 19:52:17




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

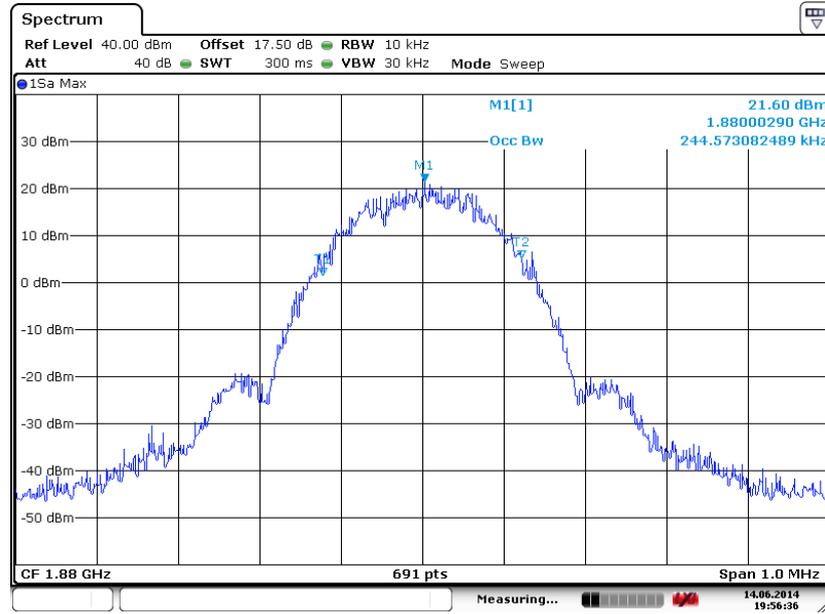

Date: 14.JUN.2014 19:56:36


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

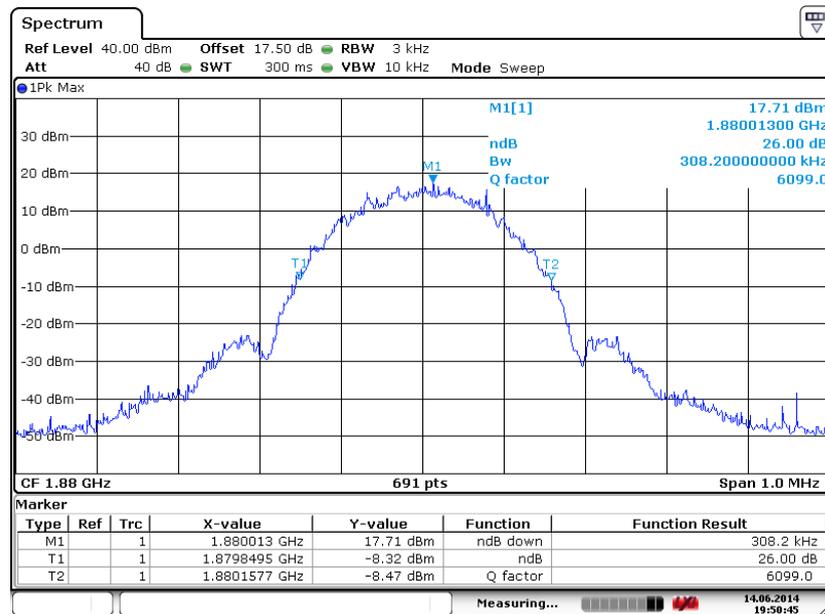

Date: 14.JUN.2014 19:58:45




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

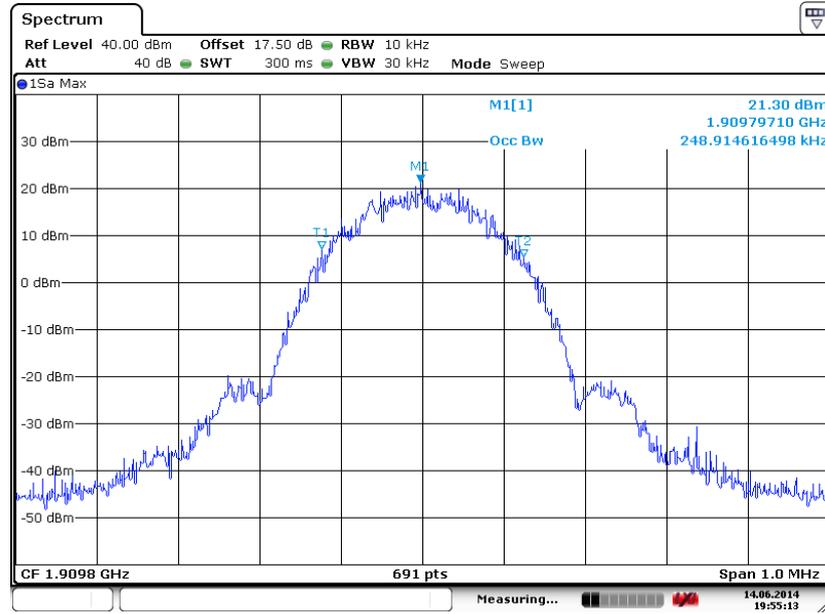

Date: 14.JUN.2014 19:55:13

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

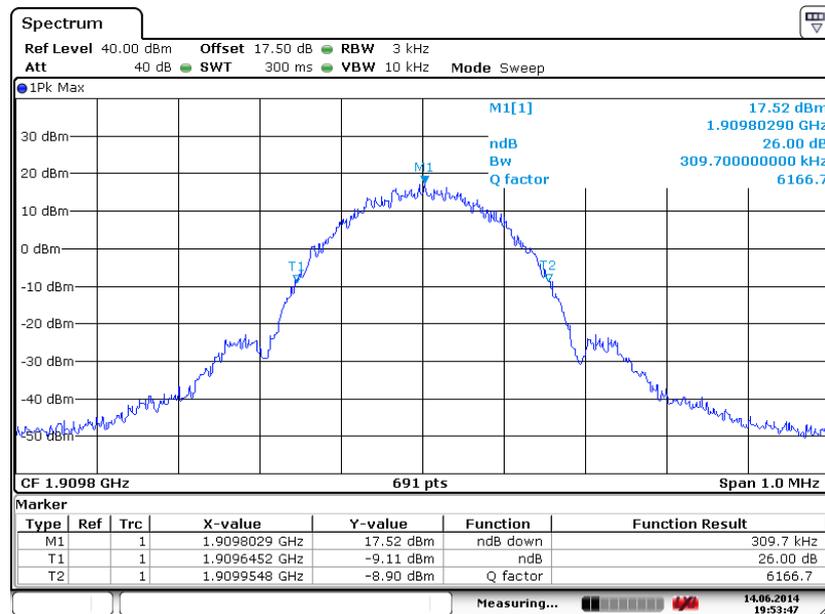


Date: 14.JUN.2014 19:53:47




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

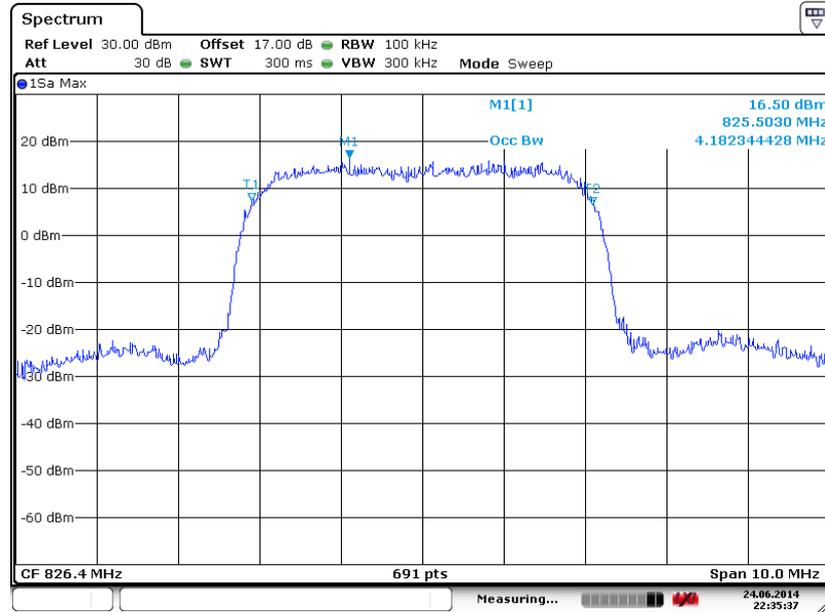

Date: 24.JUN.2014 22:35:36


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

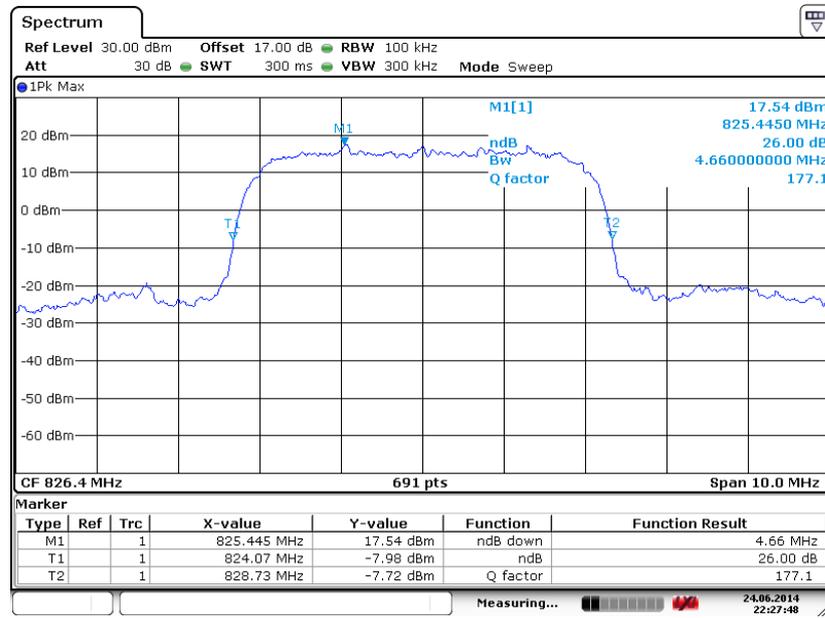

Date: 24.JUN.2014 22:27:48




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

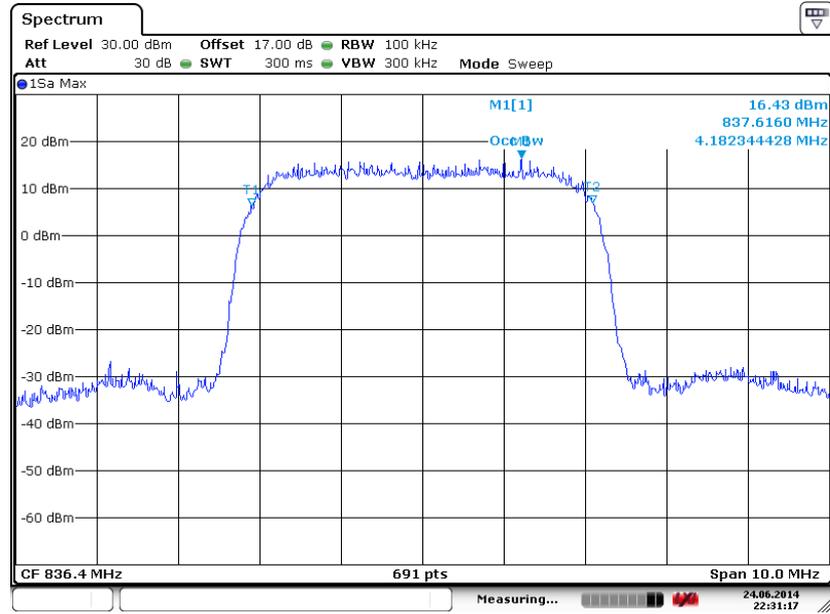

Date: 24.JUN.2014 22:31:17


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

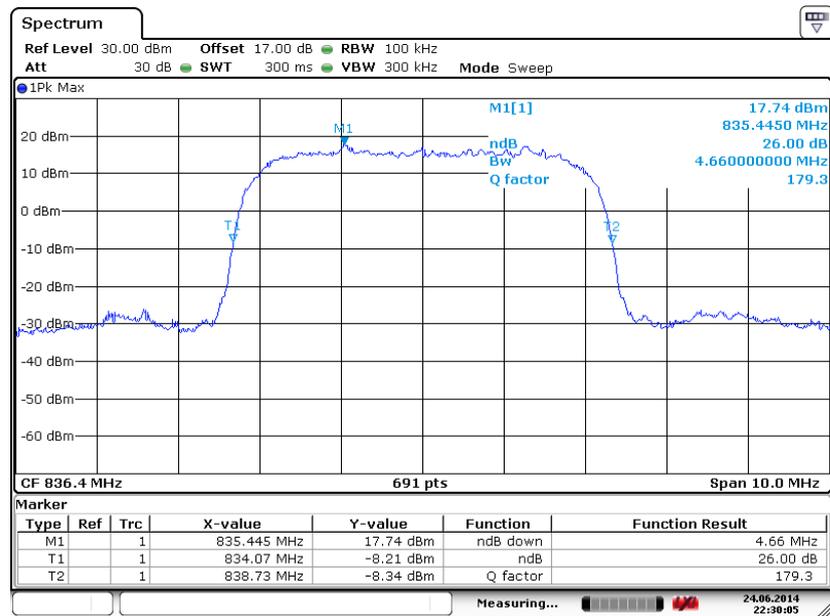

Date: 24.JUN.2014 22:30:05




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

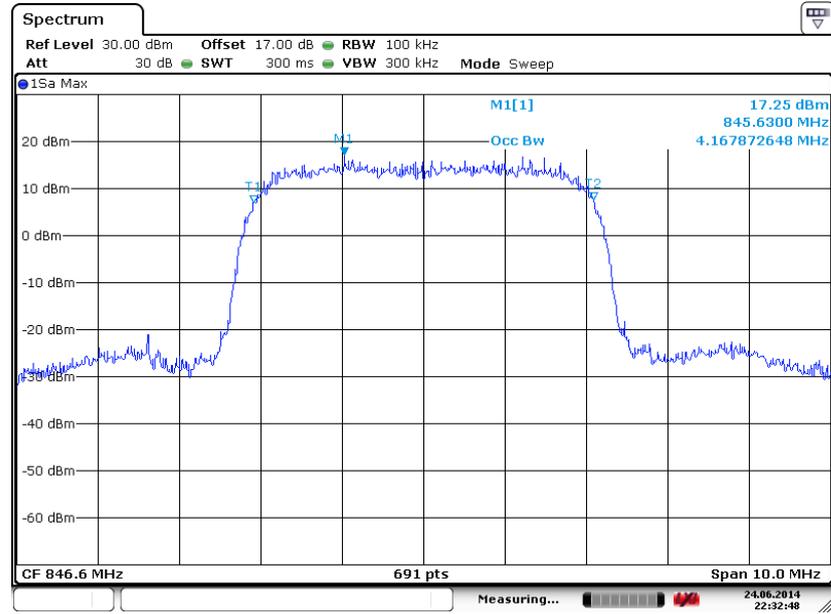

Date: 24.JUN.2014 22:32:48

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

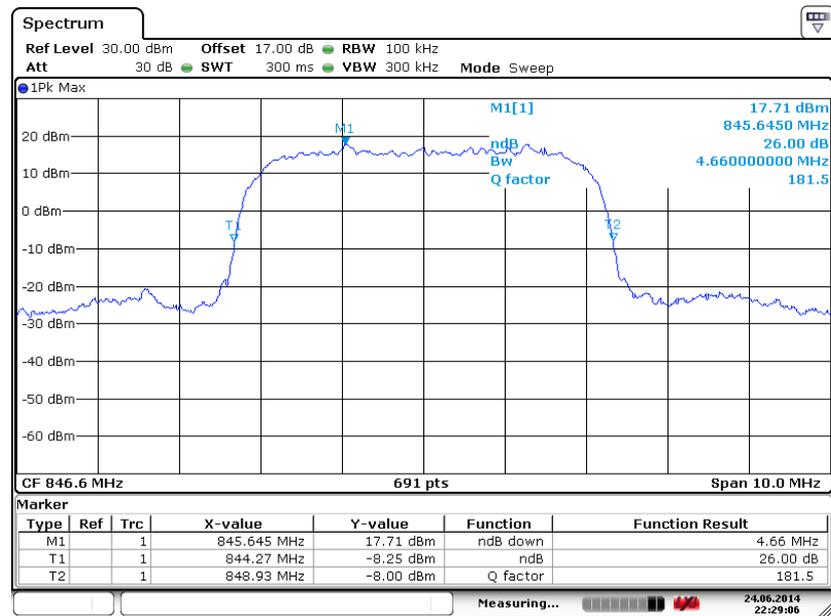


Date: 24.JUN.2014 22:29:06




<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

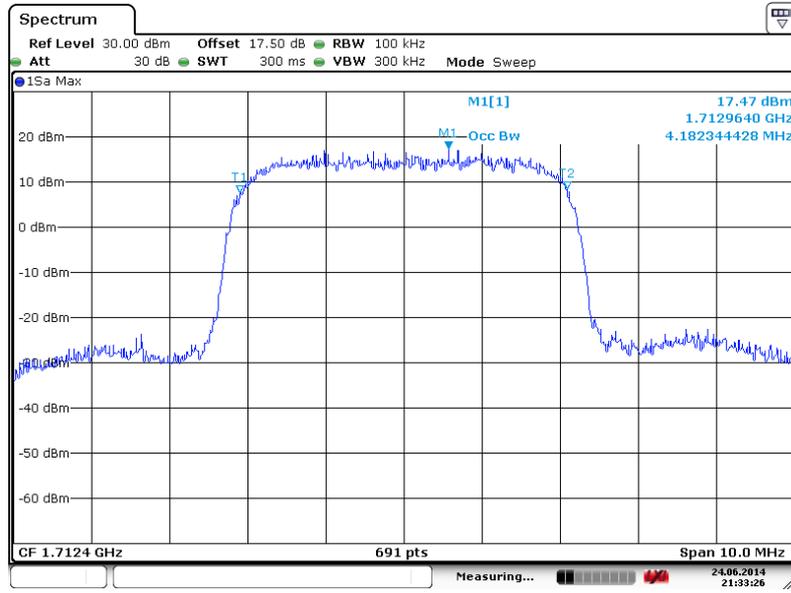

Date: 24.JUN.2014 21:33:26


26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

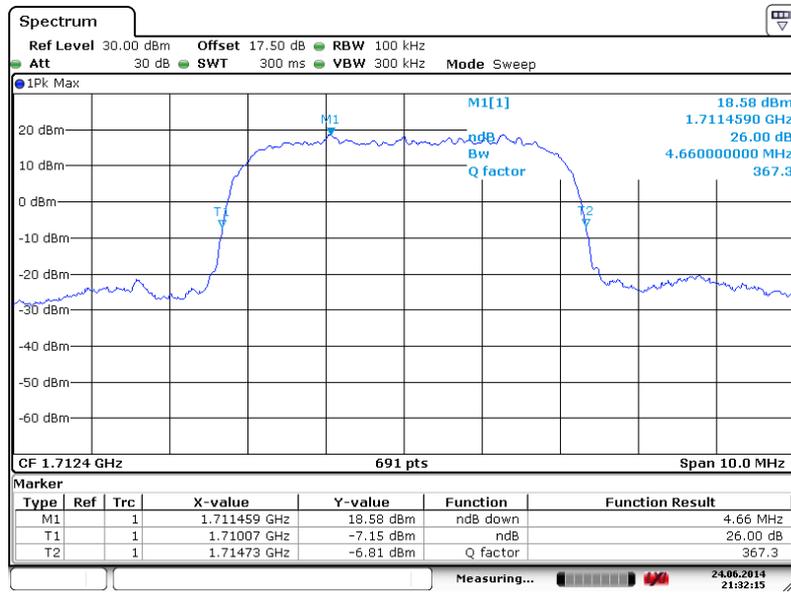

Date: 24.JUN.2014 21:32:15




99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

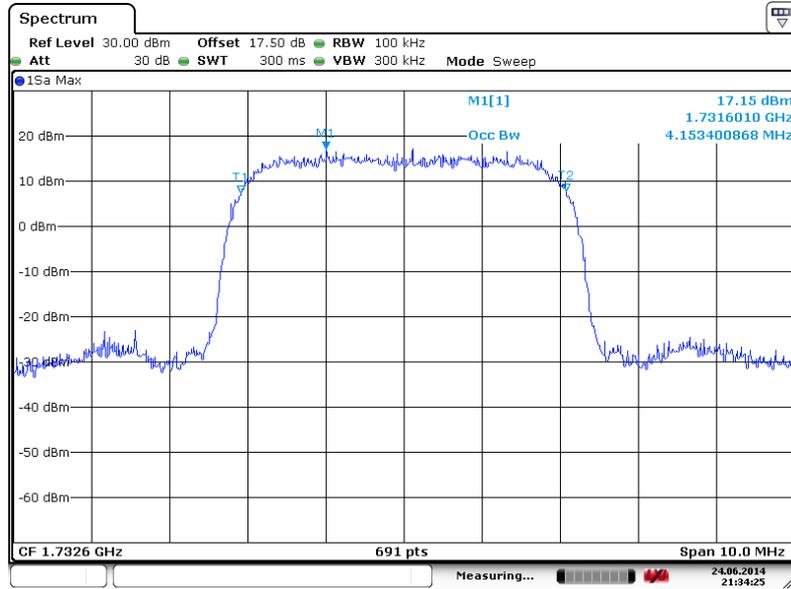

Date: 24.JUN.2014 21:34:25


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

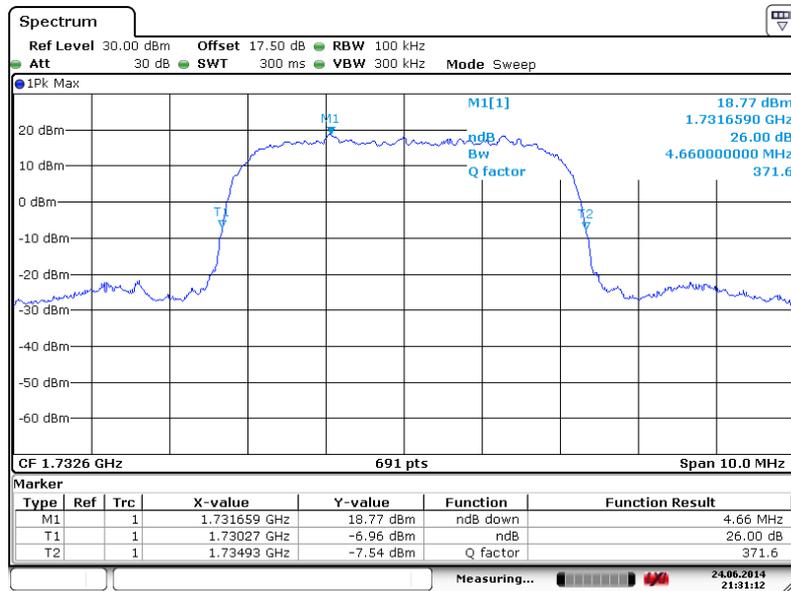

Date: 24.JUN.2014 21:31:12




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

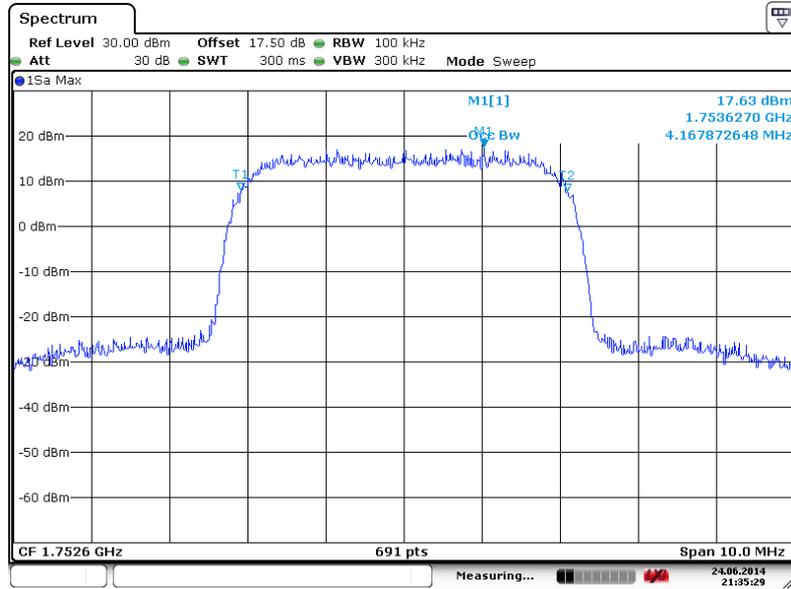

Date: 24.JUN.2014 21:35:29

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

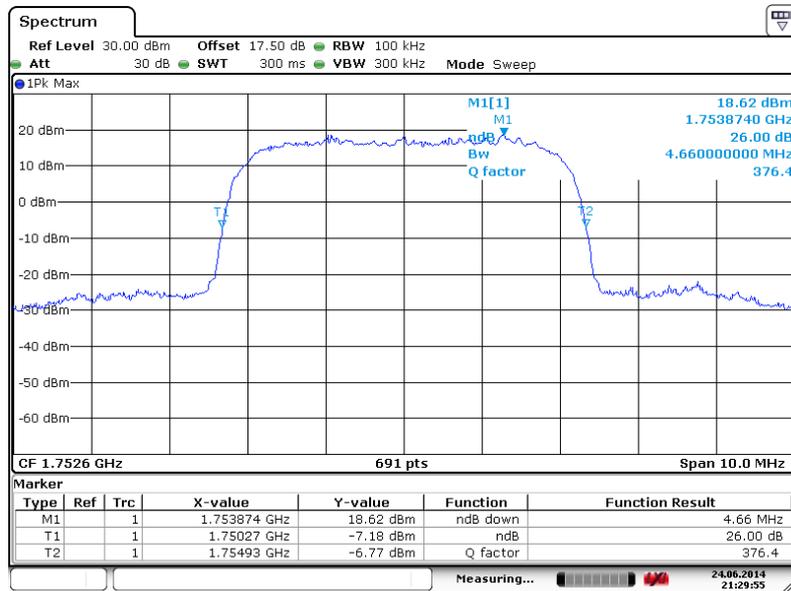


Date: 24.JUN.2014 21:29:55




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

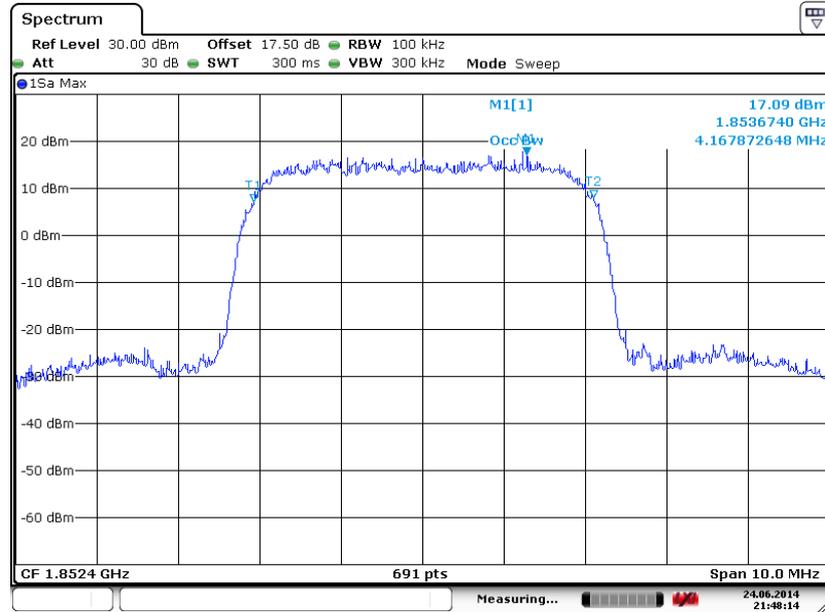

Date: 24.JUN.2014 21:48:14


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

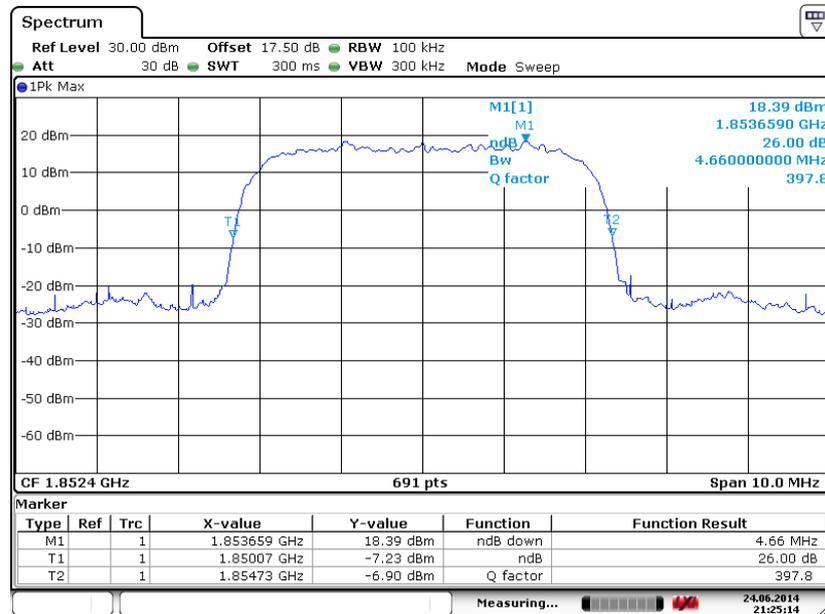

Date: 24.JUN.2014 21:25:14




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

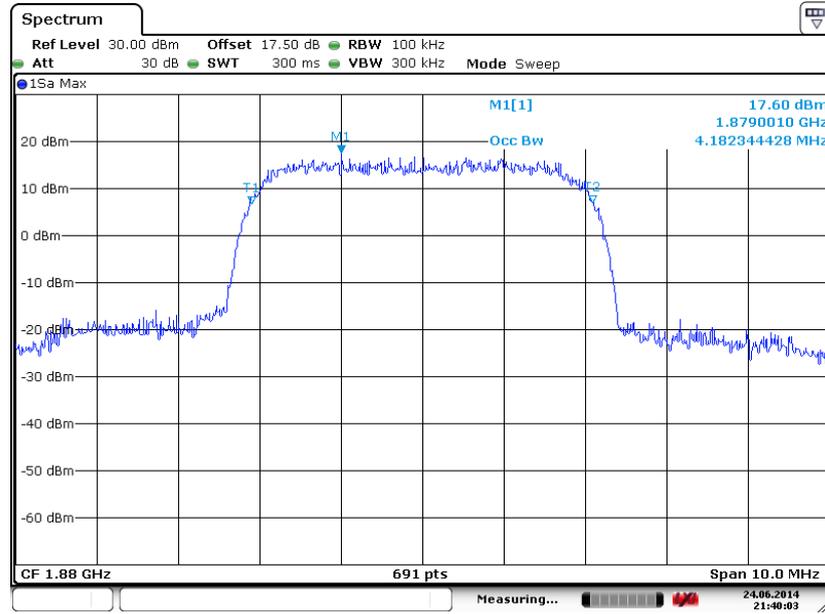

Date: 24.JUN.2014 21:40:03


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

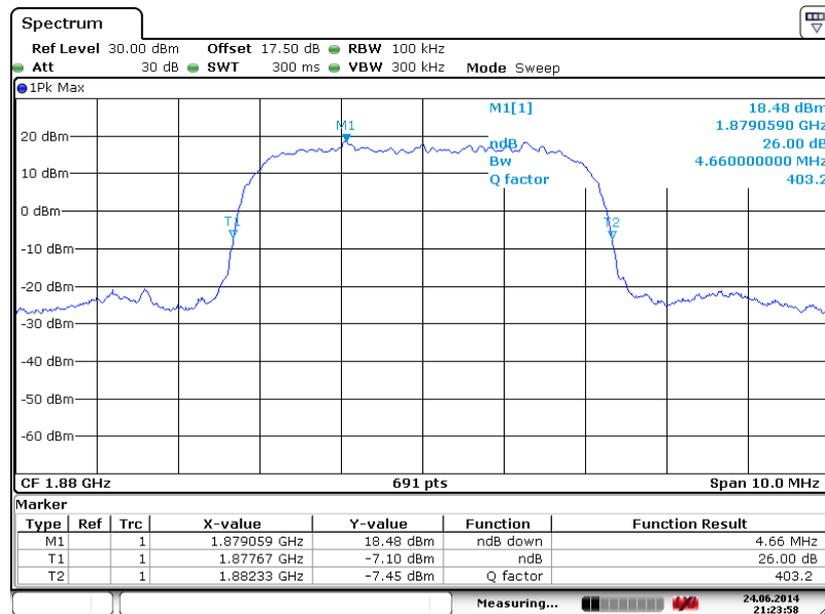

Date: 24.JUN.2014 21:23:58




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

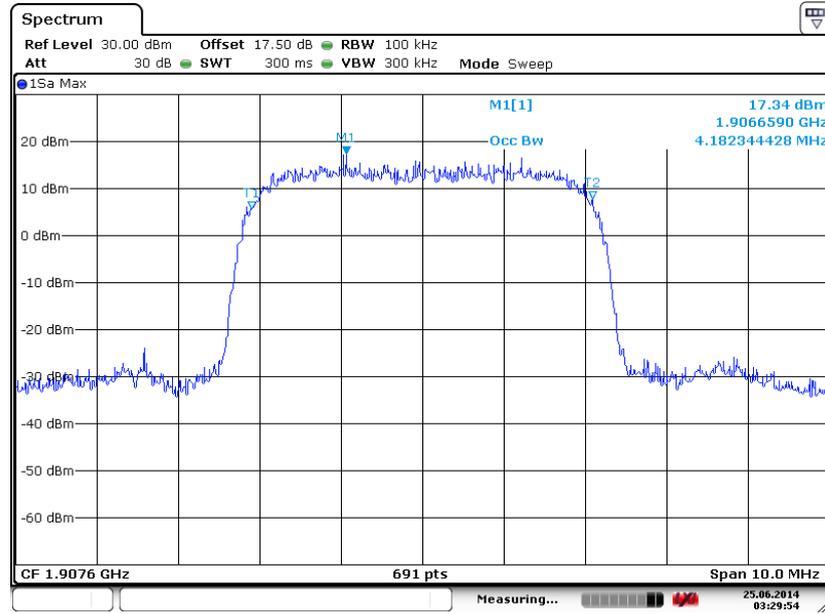

Date: 25.JUN.2014 03:29:54

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

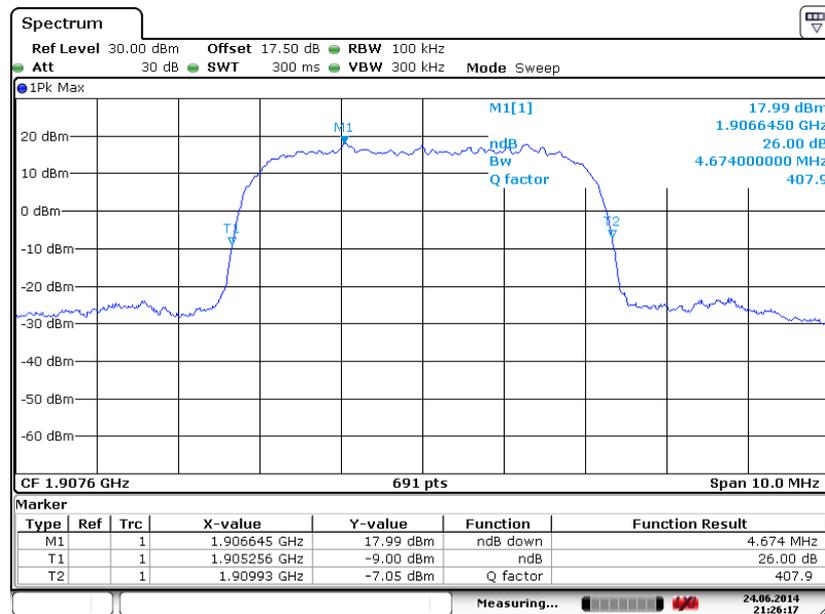

Date: 24.JUN.2014 21:26:17

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
 
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


#### 3.5.4 Test Setup

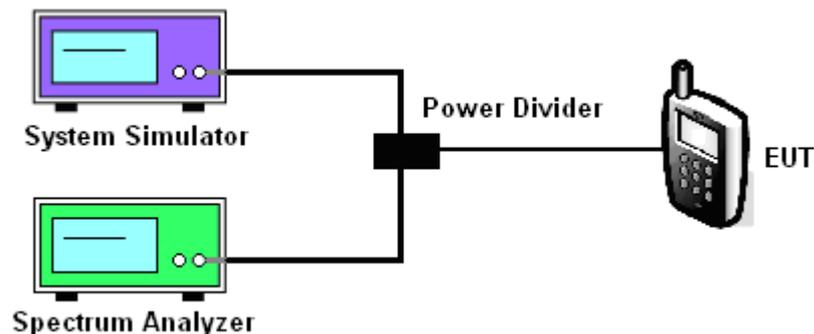

### 3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.18dB	Maximum 26dB Bandwidth :	0.313MHz
Band Edge :	-16.91dBm	Measurement Value :	-17.09dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

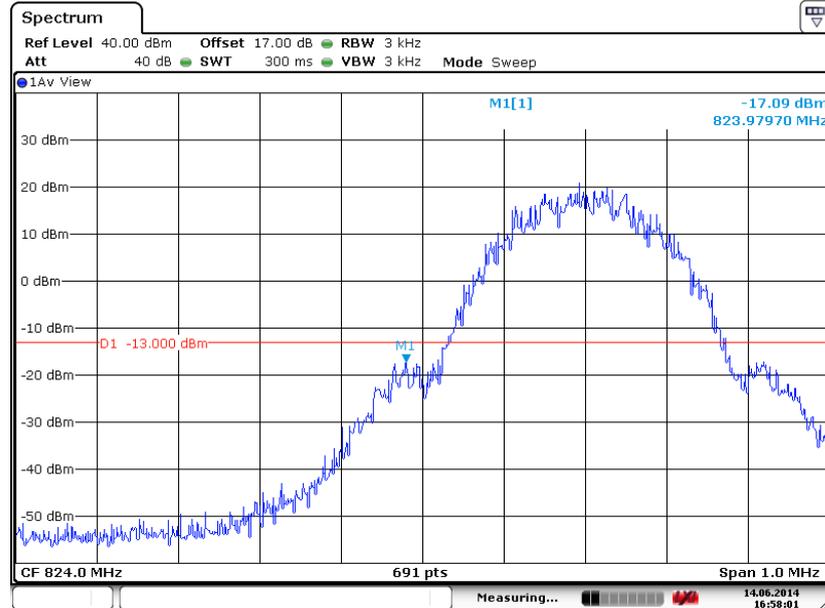


Date: 14.JUN.2014 16:58:01

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	GSM850	<b>Test Mode :</b>	GSM Link (GMSK)
<b>Correction Factor :</b>	0.18dB	<b>Maximum 26dB Bandwidth :</b>	0.313MHz
<b>Band Edge :</b>	-14.68dBm	<b>Measurement Value :</b>	-14.86dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

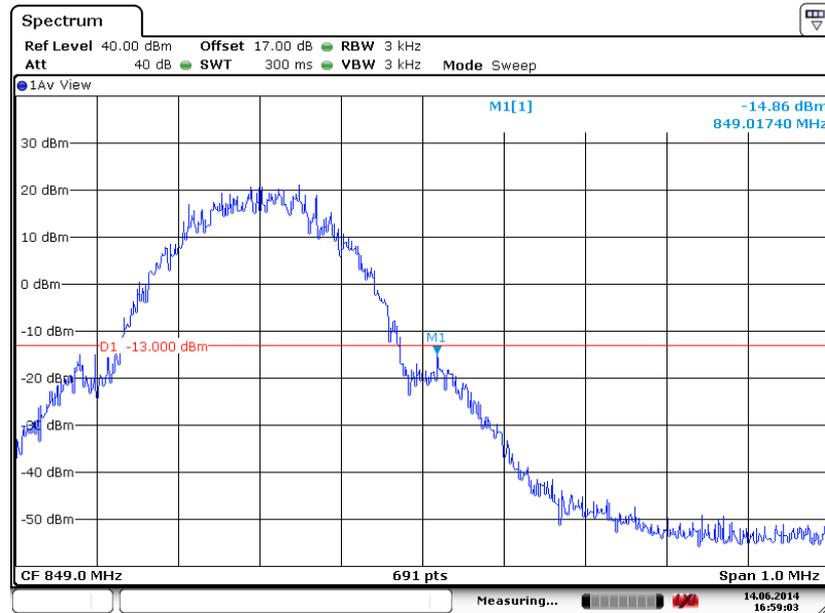


Date: 14.JUN.2014 16:59:04

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.18dB	Maximum 26dB Bandwidth :	0.313MHz
Band Edge :	-24.69dBm	Measurement Value :	-24.87dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

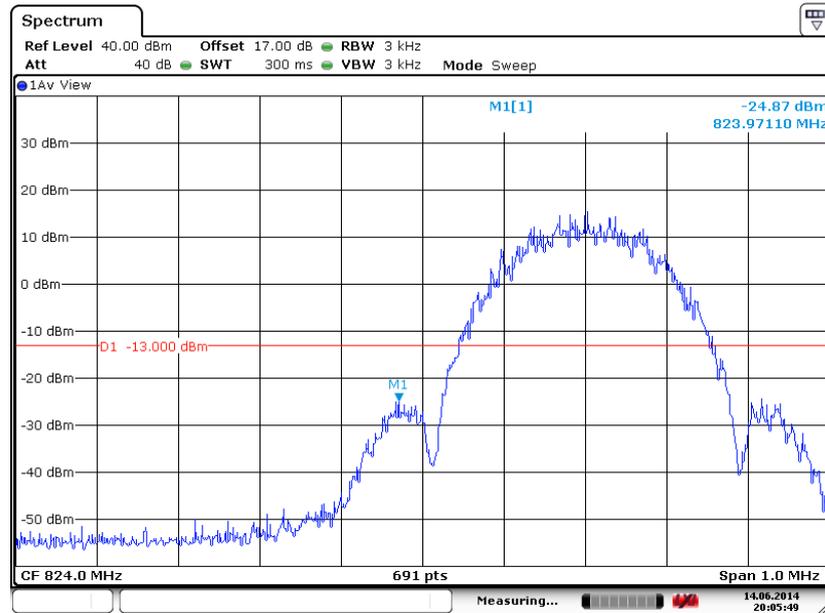


Date: 14.JUN.2014 20:05:49

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.18dB	Maximum 26dB Bandwidth :	0.313MHz
Band Edge :	-24.49dBm	Measurement Value :	-24.67dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

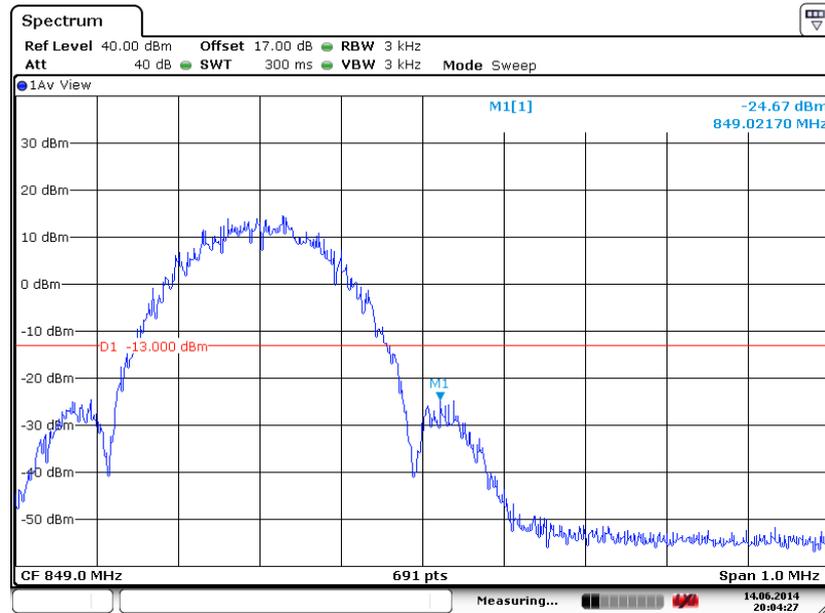


Date: 14.JUN.2014 20:04:27

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.16dB	Maximum 26dB Bandwidth :	0.311MHz
Band Edge :	-21.22dBm	Measurement Value :	-21.38dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

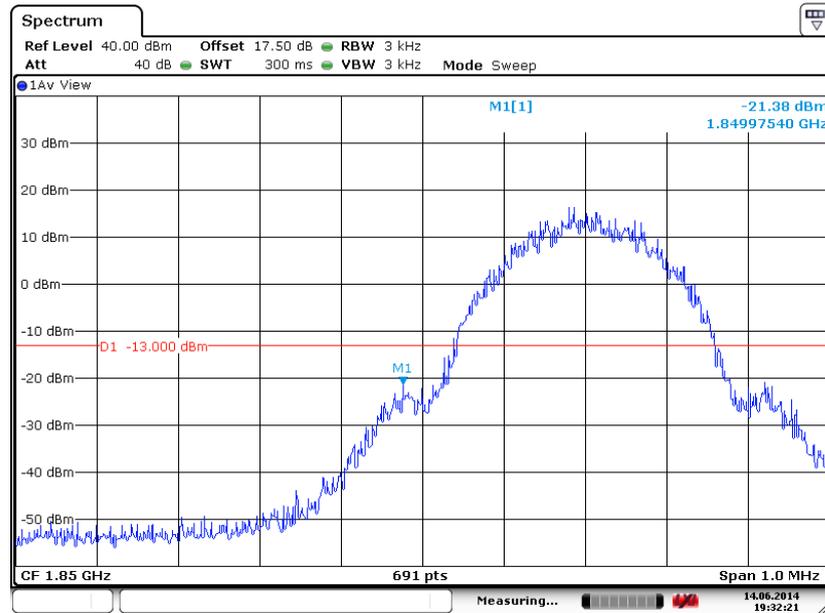


Date: 14.JUN.2014 19:32:21

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.16dB	Maximum 26dB Bandwidth :	0.311MHz
Band Edge :	-20.43dBm	Measurement Value :	-20.59dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

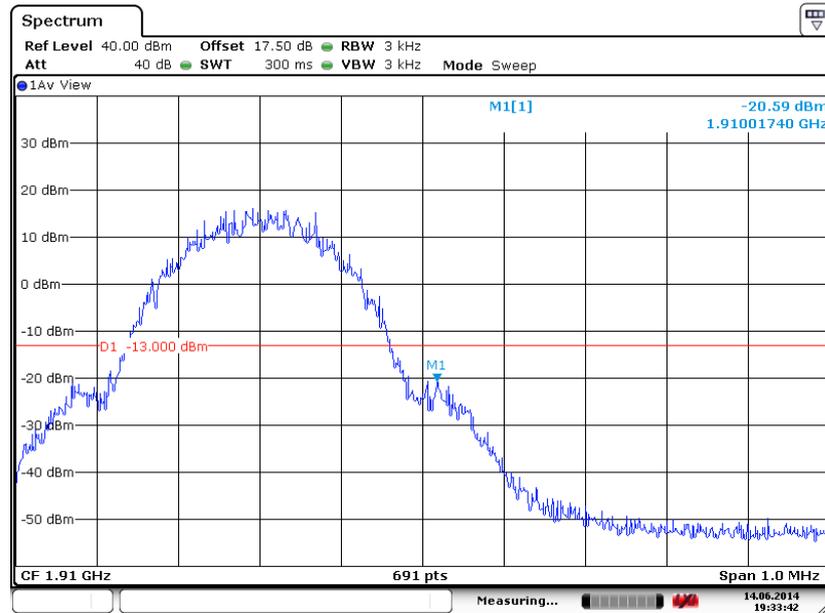


Date: 14.JUN.2014 19:33:42

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-26.45dBm	Measurement Value :	-26.59dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

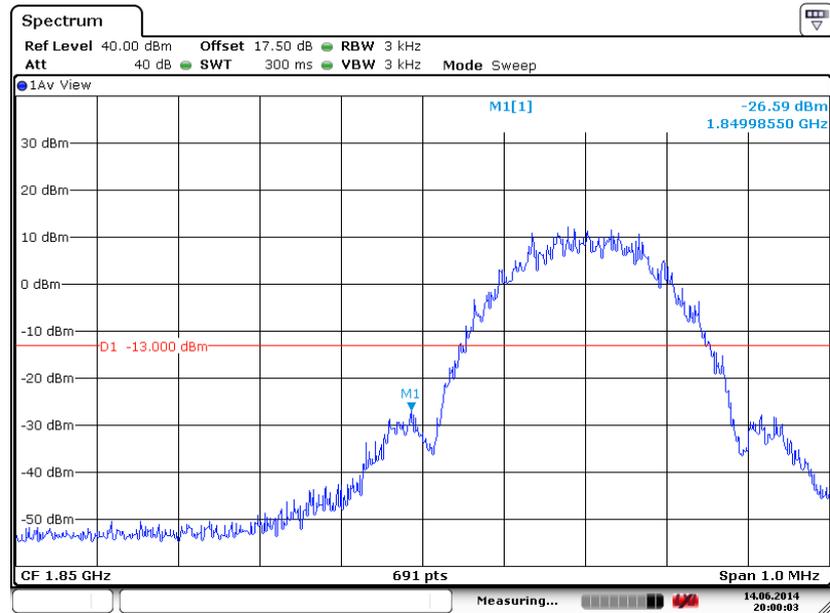


Date: 14.JUN.2014 20:00:03

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-27.86dBm	Measurement Value :	-28.00dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

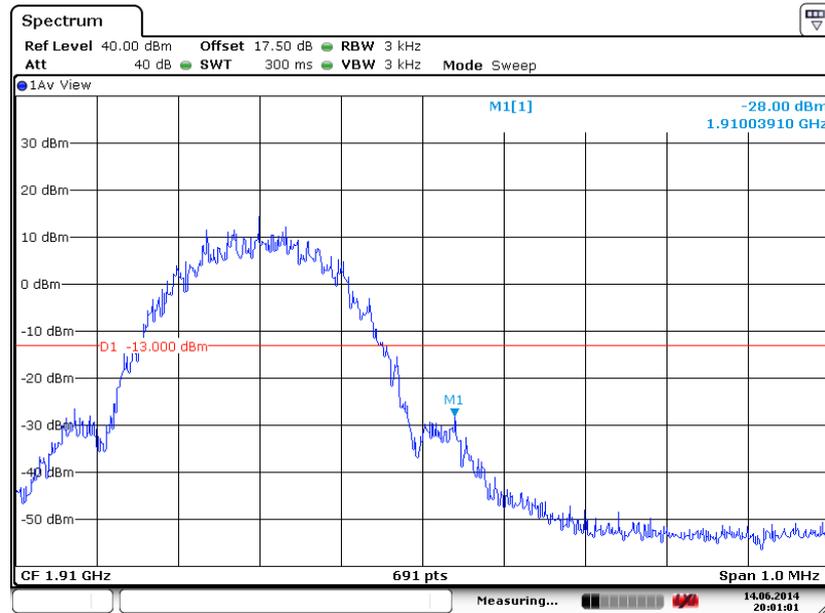


Date: 14.JUN.2014 20:01:01

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.32dB	Maximum 26dB Bandwidth :	4.660MHz
Band Edge :	-30.60dBm	Measurement Value :	-27.28dBm

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

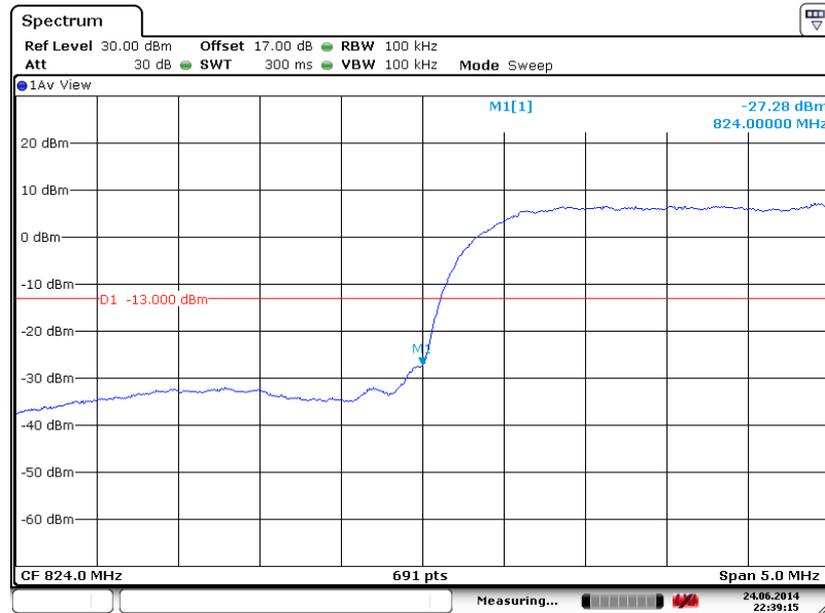


Date: 24.JUN.2014 22:39:14

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
<b>Correction Factor :</b>	-3.32dB	<b>Maximum 26dB Bandwidth :</b>	4.660MHz
<b>Band Edge :</b>	-30.14dBm	<b>Measurement Value :</b>	-26.82dBm

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

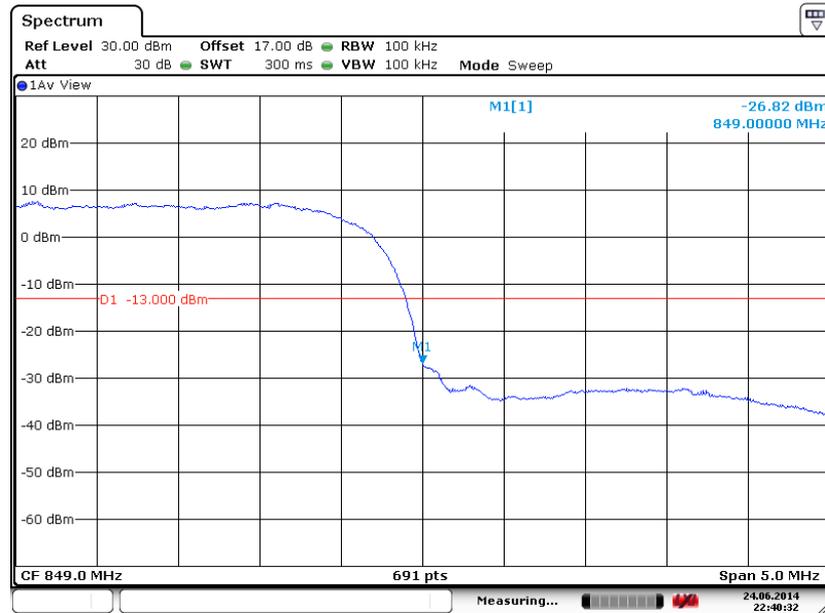

Date: 24.JUN.2014 22:40:31

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.32dB	Maximum 26dB Bandwidth :	4.660MHz
Band Edge :	-30.12dBm	Measurement Value :	-26.80dBm

Lower Band Edge Plot on Channel 1312 (1712.4 MHz)




Date: 24.JUN.2014 21:56:13

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.32dB	Maximum 26dB Bandwidth :	4.660MHz
Band Edge :	-30.34dBm	Measurement Value :	-27.02dBm

Higher Band Edge Plot on Channel 1513 (1752.6 MHz)

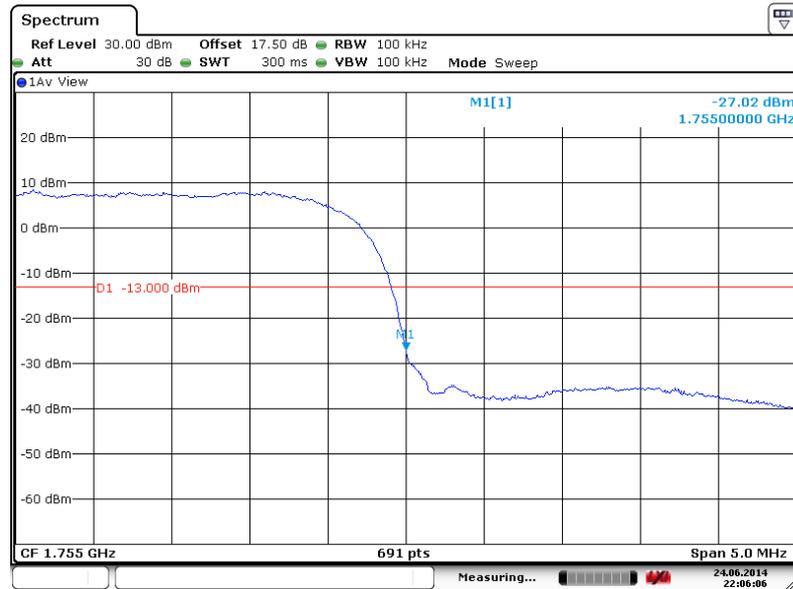


Date: 24 JUN. 2014 22:06:06

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
<b>Correction Factor :</b>	-3.30dB	<b>Maximum 26dB Bandwidth :</b>	4.674MHz
<b>Band Edge :</b>	-30.70dBm	<b>Measurement Value :</b>	-27.40dBm

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

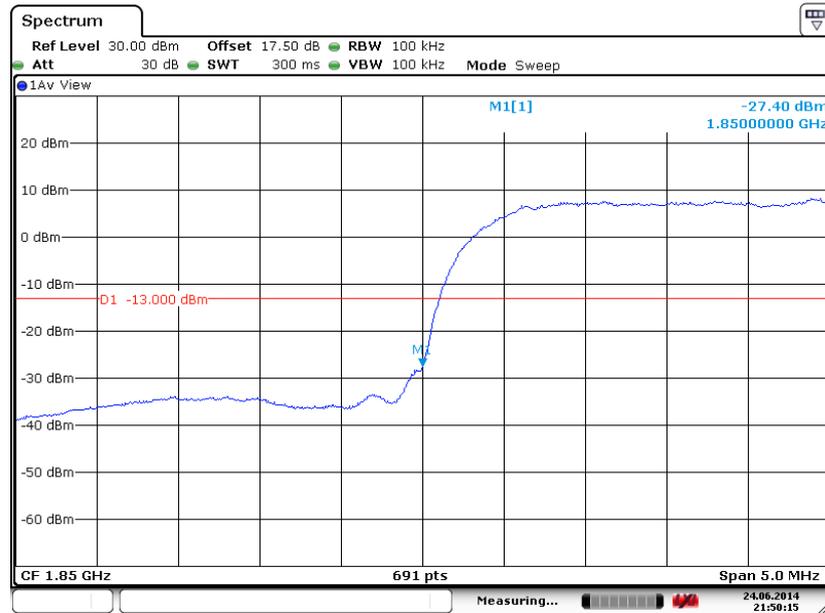


Date: 24.JUN.2014 21:50:15

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.674MHz
Band Edge :	-30.76dBm	Measurement Value :	-27.46dBm

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

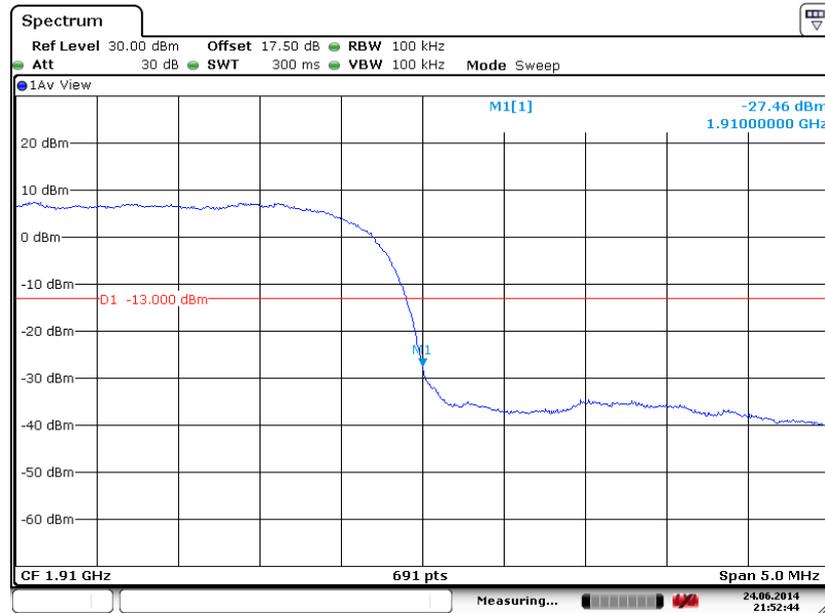

Date: 24.JUN.2014 21:52:44

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

### 3.6 Conducted Spurious Emission Measurement

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.6.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
 
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


#### 3.6.4 Test Setup

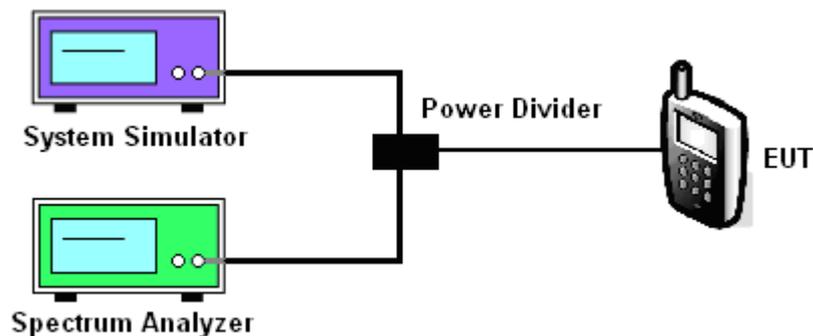

### 3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

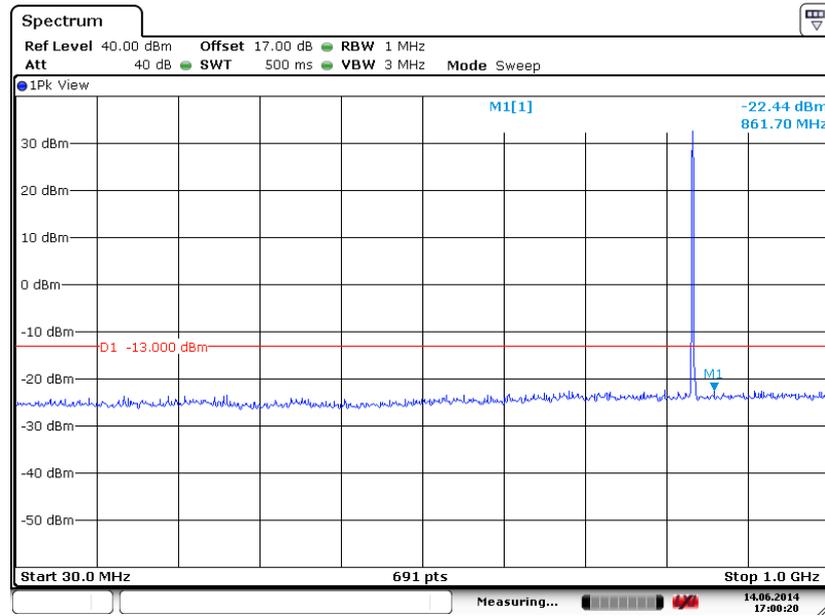

Date: 14.JUN.2014 17:00:20


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

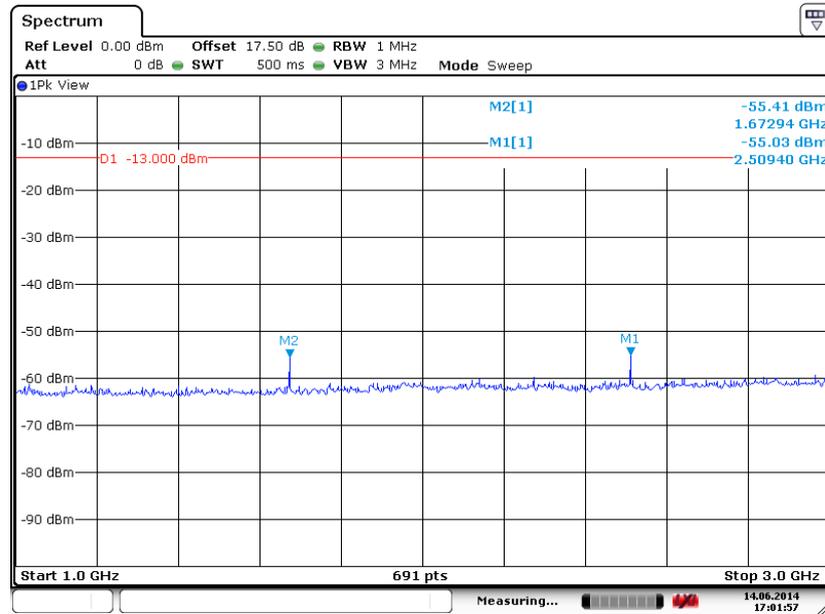

Date: 14.JUN.2014 17:01:57




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

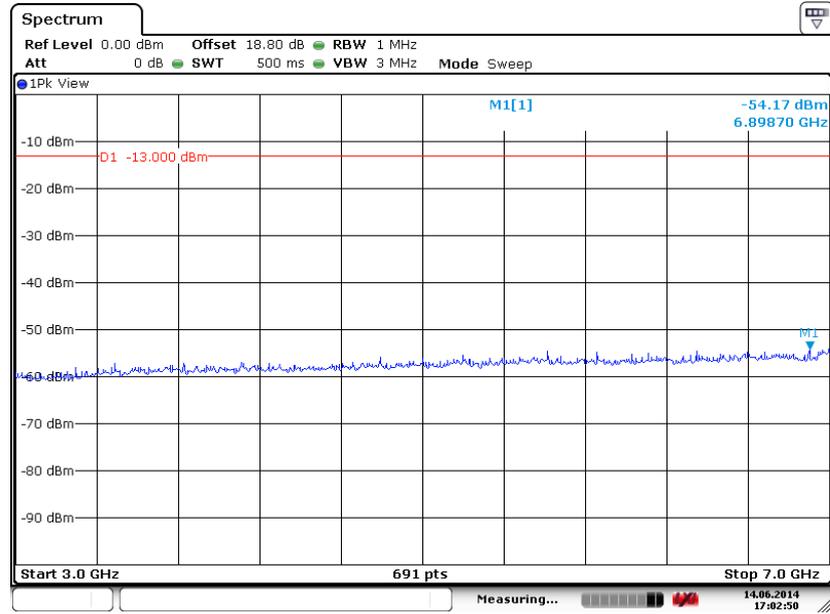

Date: 14.JUN.2014 17:02:50

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

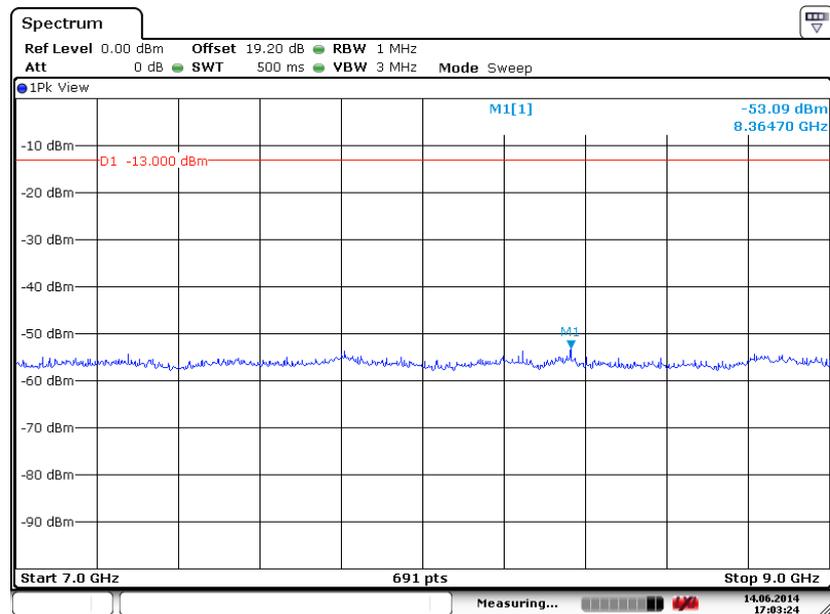


Date: 14.JUN.2014 17:03:24




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

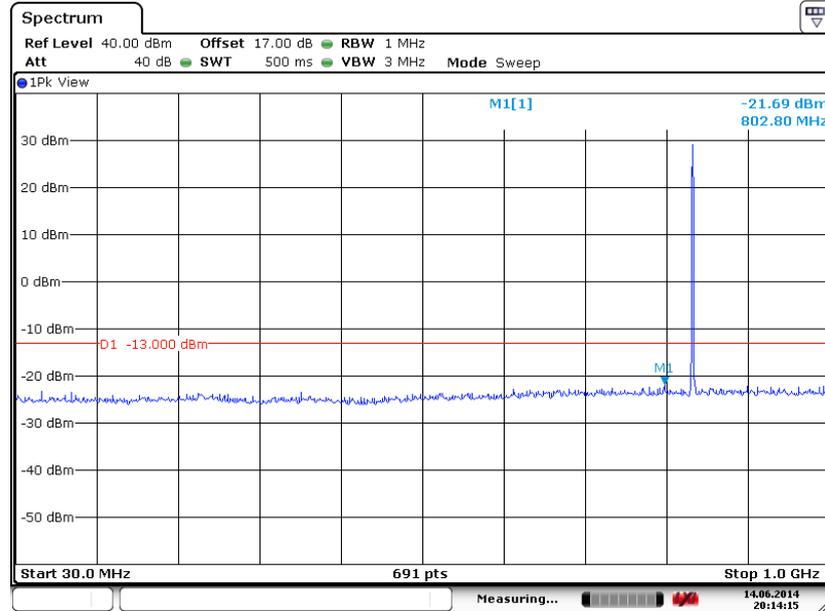

Date: 14.JUN.2014 20:14:15


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

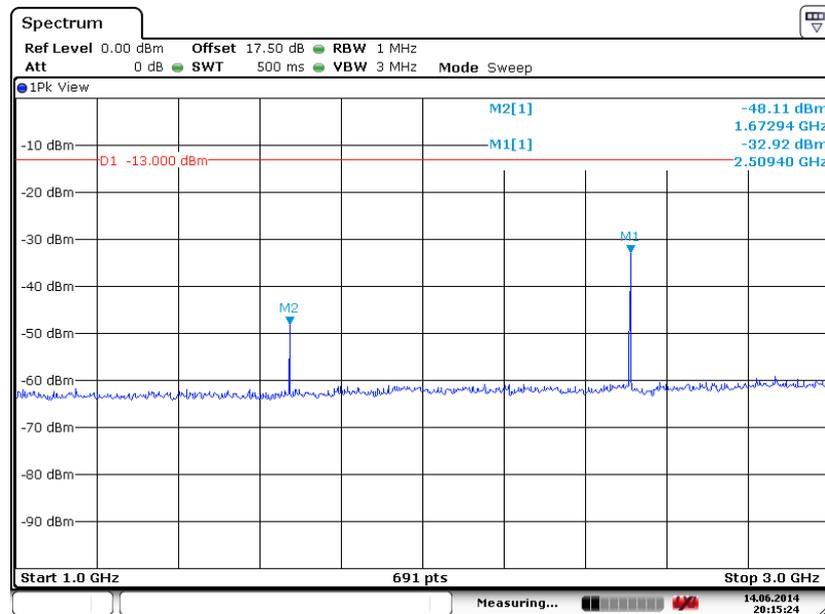

Date: 14.JUN.2014 20:15:24




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

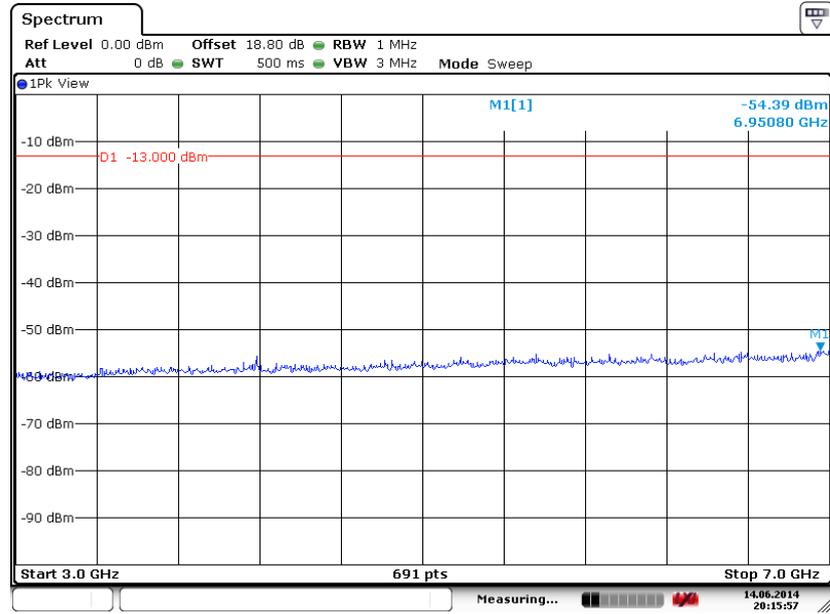

Date: 14.JUN.2014 20:15:57

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

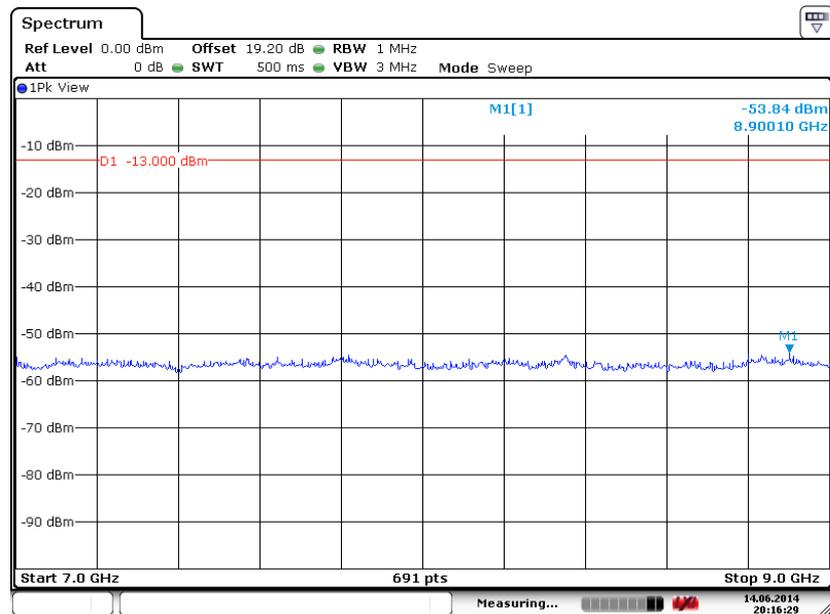


Date: 14.JUN.2014 20:16:29




<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	GSM Link (GMSK)	<b>Frequency :</b>	1880.0 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**

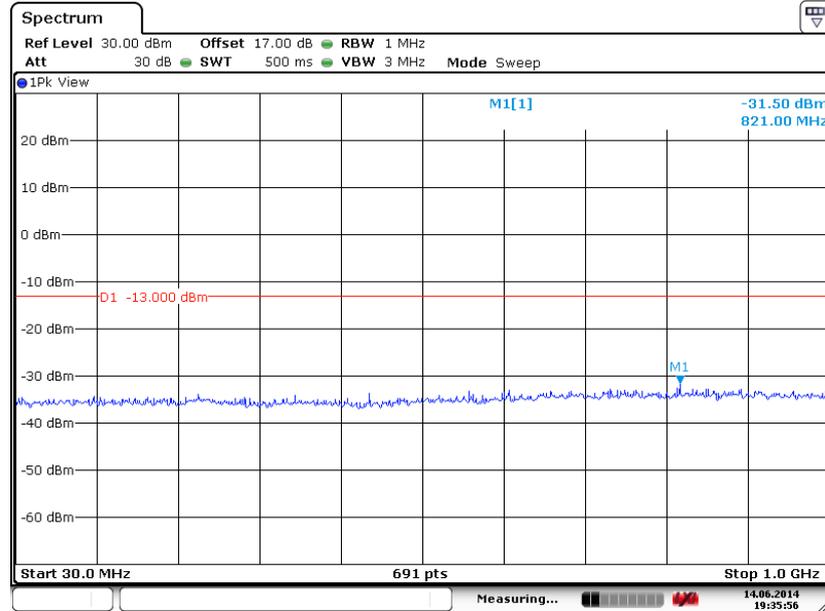

Date: 14.JUN.2014 19:35:56


**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

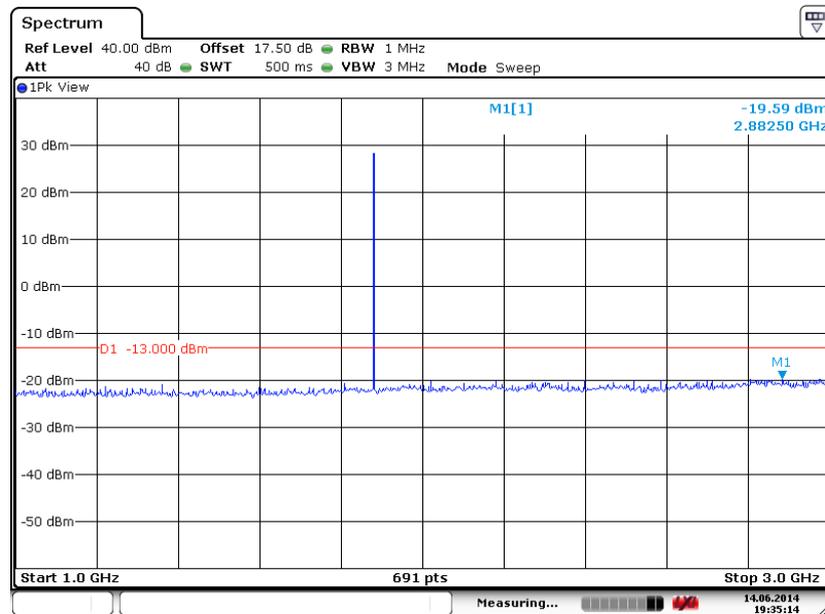

Date: 14.JUN.2014 19:35:14




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

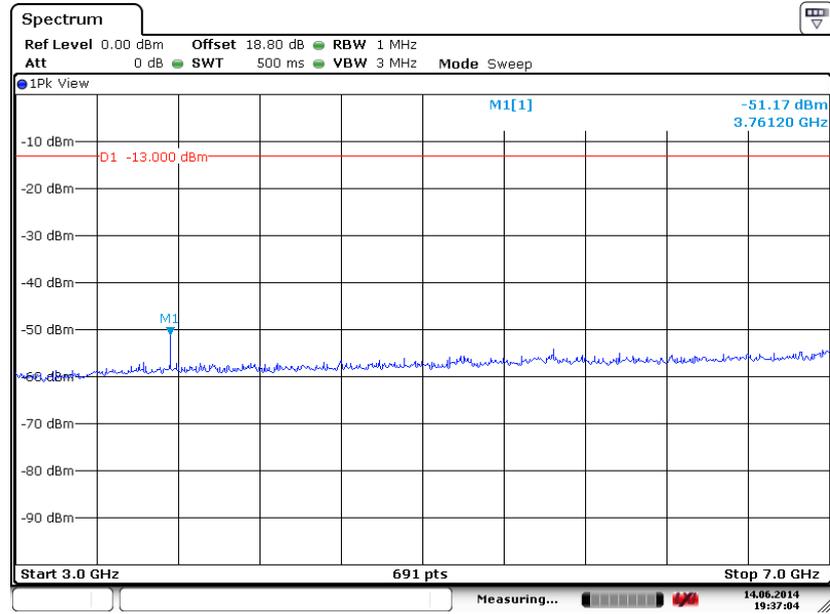

Date: 14.JUN.2014 19:37:04


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

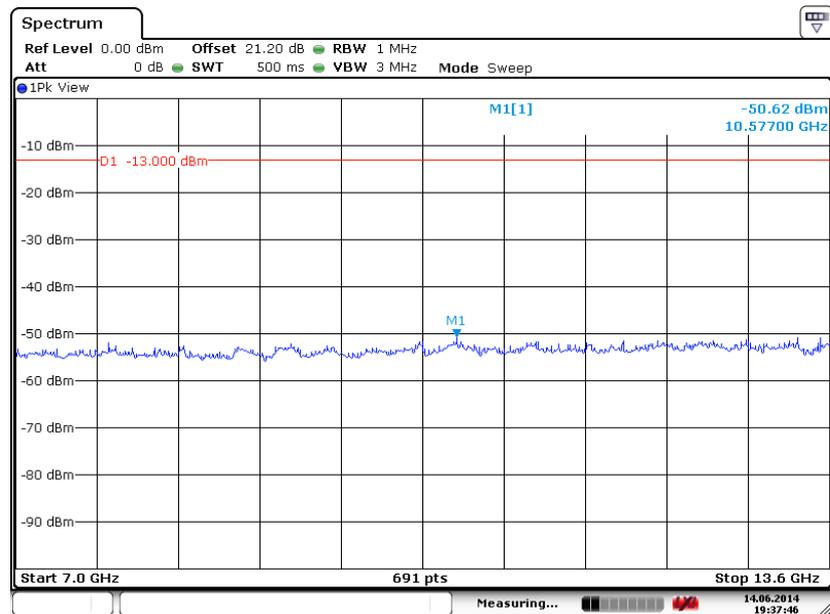

Date: 14.JUN.2014 19:37:46



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

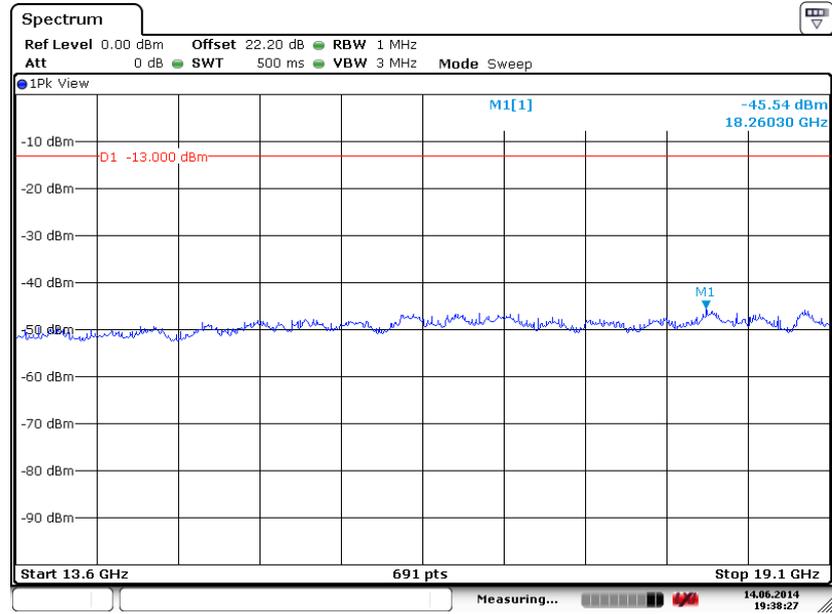


Date: 14.JUN.2014 19:38:27




<b>Band :</b>	GSM1900	<b>Channel :</b>	CH661
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Frequency :</b>	1880.0 MHz

**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**

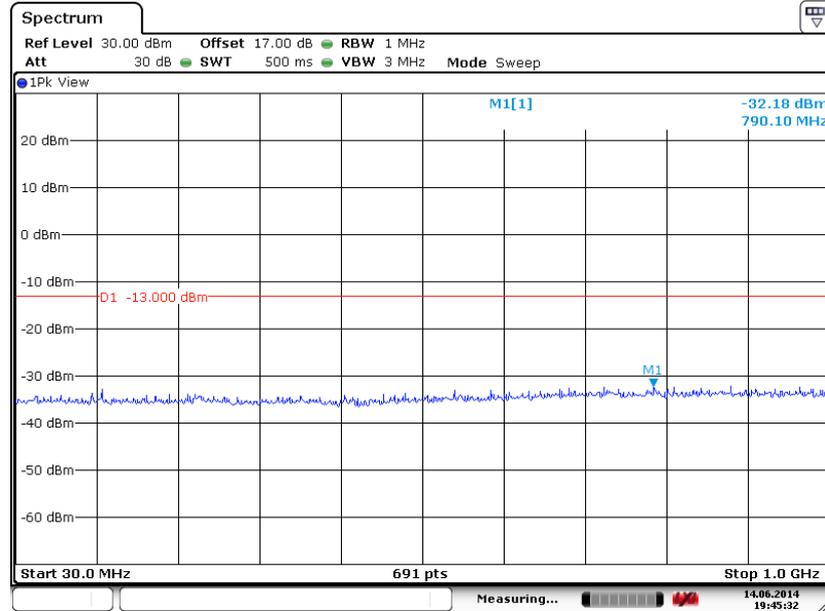

Date: 14.JUN.2014 19:45:32


**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

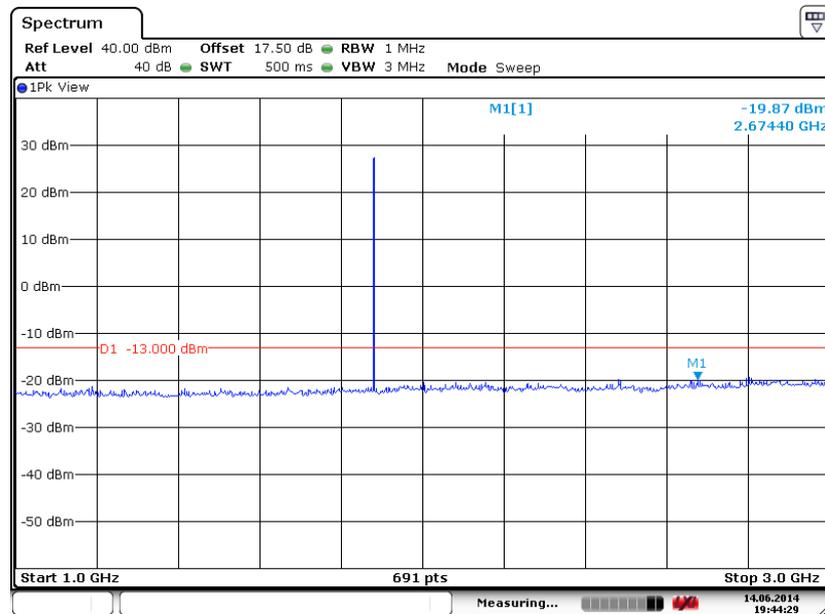

Date: 14.JUN.2014 19:44:29




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

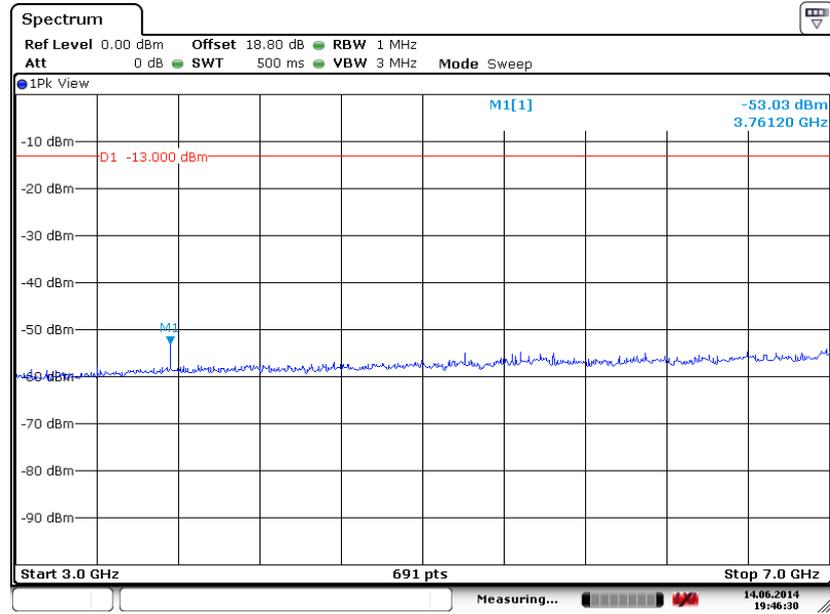

Date: 14.JUN.2014 19:46:30


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

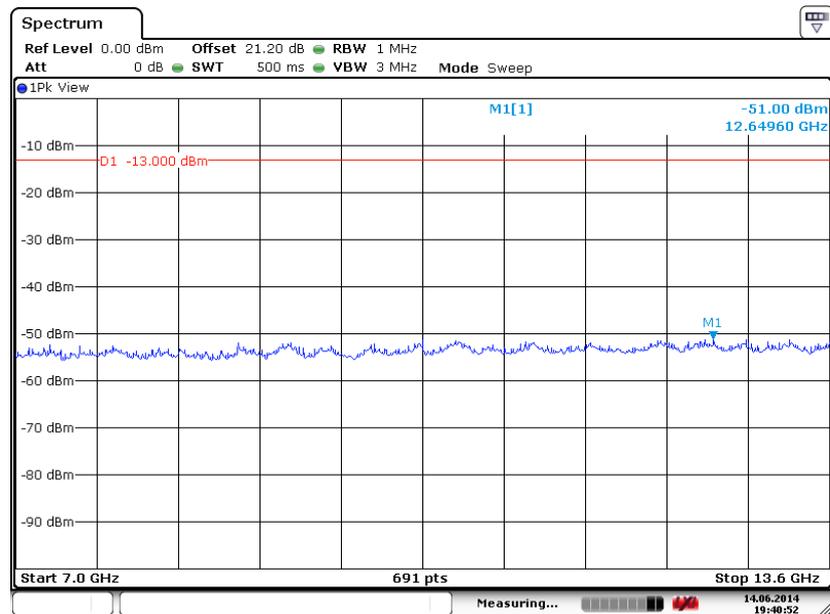

Date: 14.JUN.2014 19:40:52



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

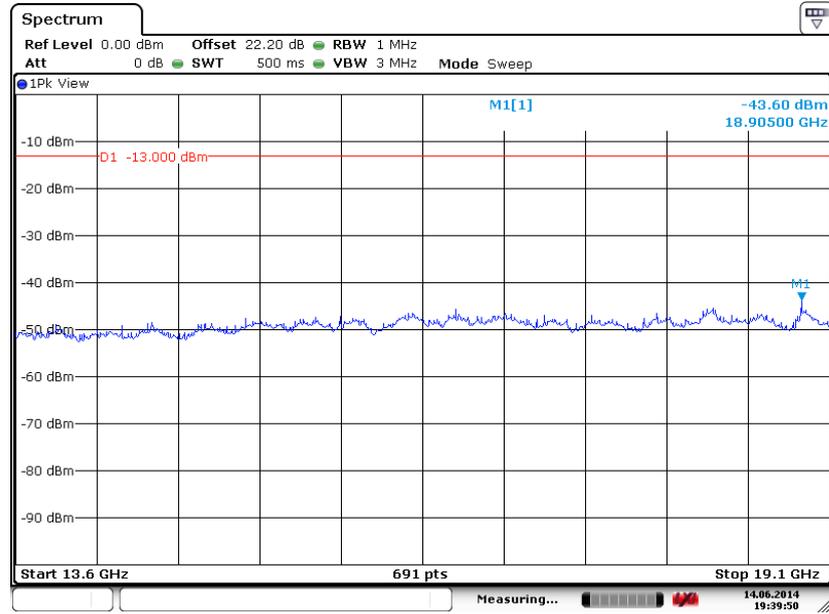


Date: 14.JUN.2014 19:39:50




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

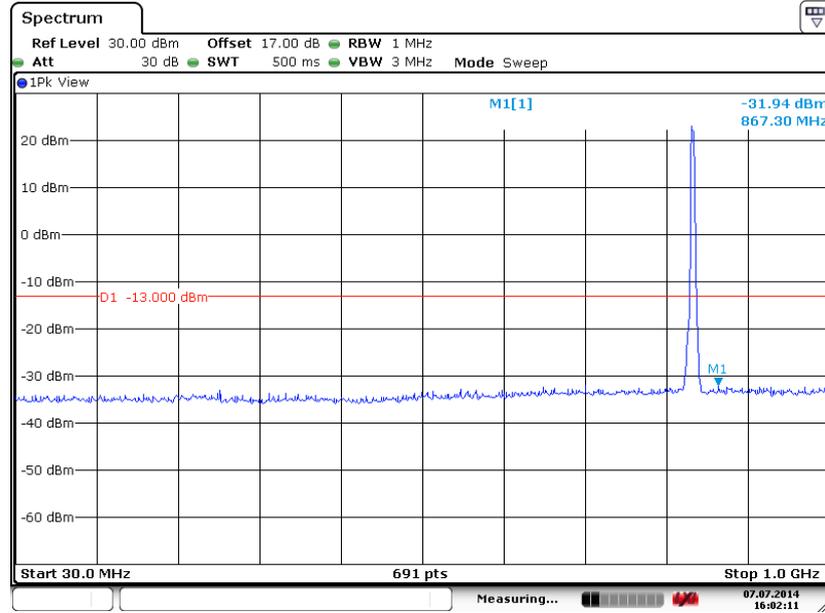


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

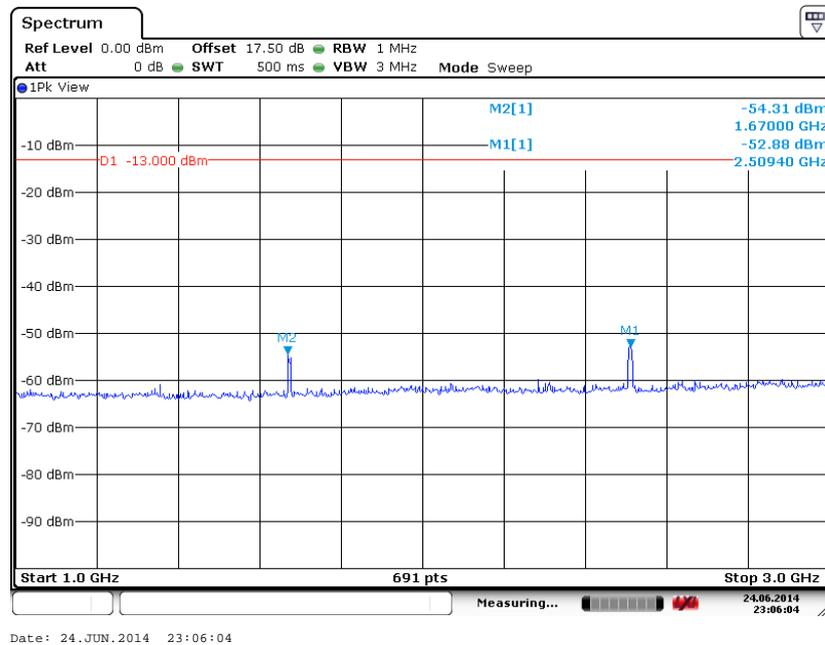




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

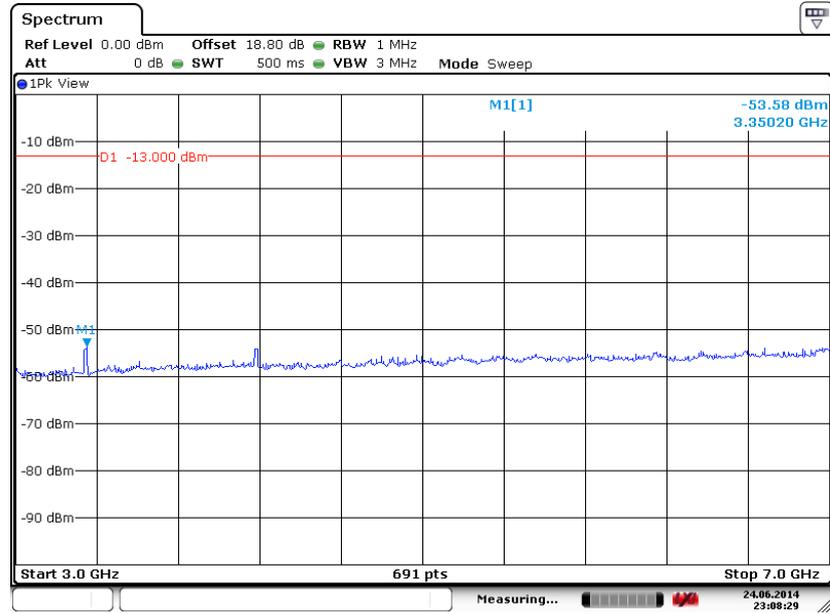

Date: 24.JUN.2014 23:08:29

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

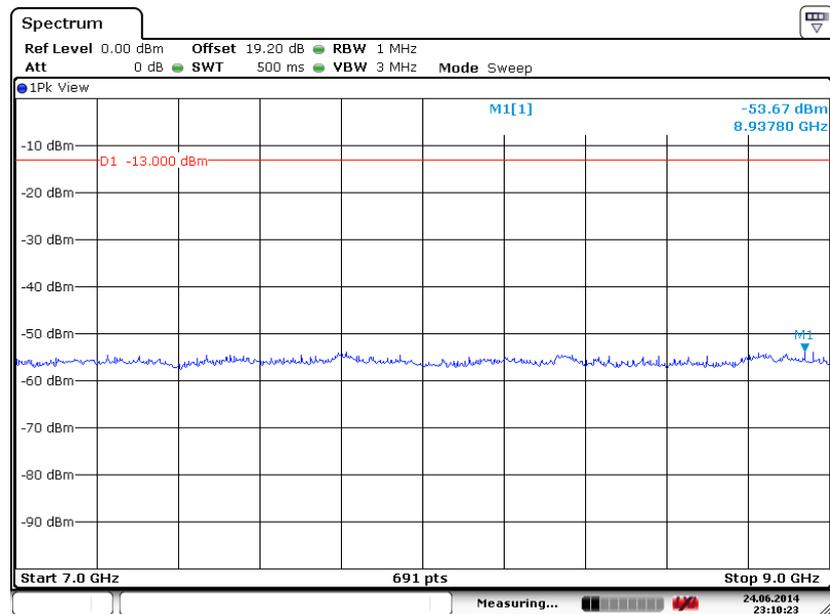


Date: 24.JUN.2014 23:10:23




Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

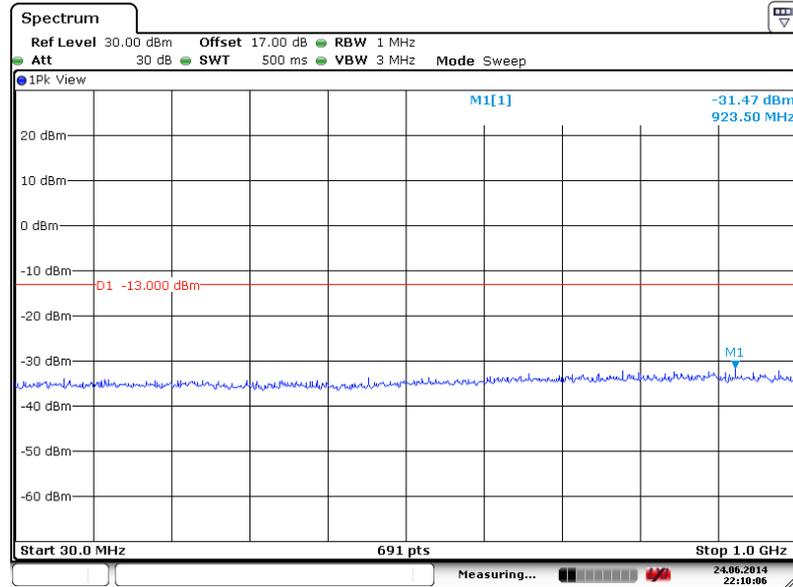

Date: 24.JUN.2014 22:10:06


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

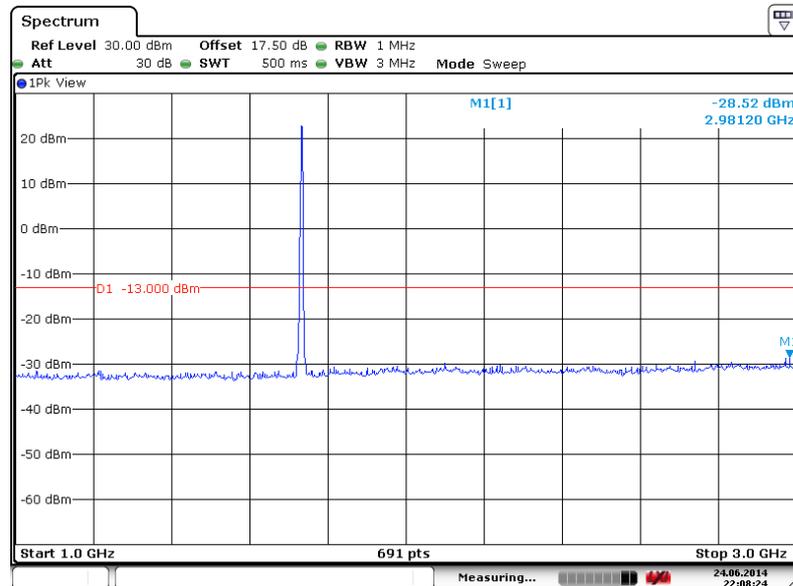

Date: 24.JUN.2014 22:08:24




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

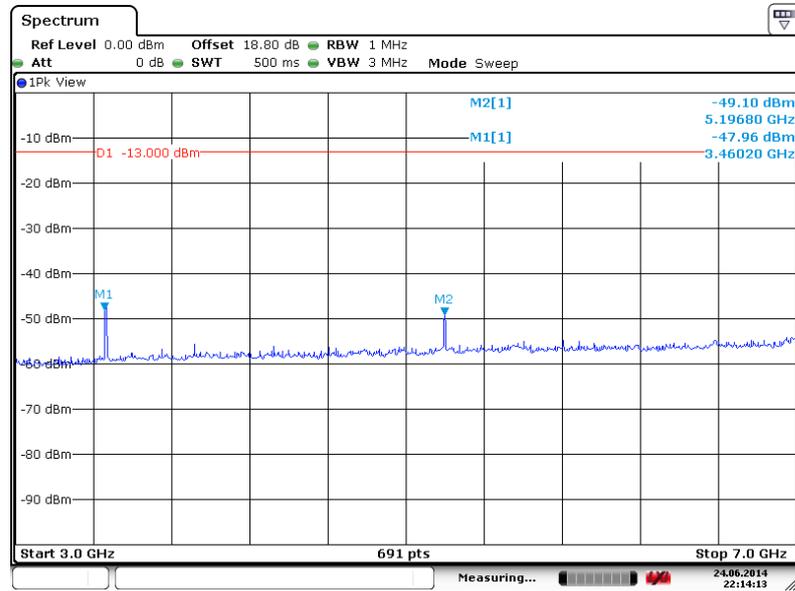

Date: 24.JUN.2014 22:14:13


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

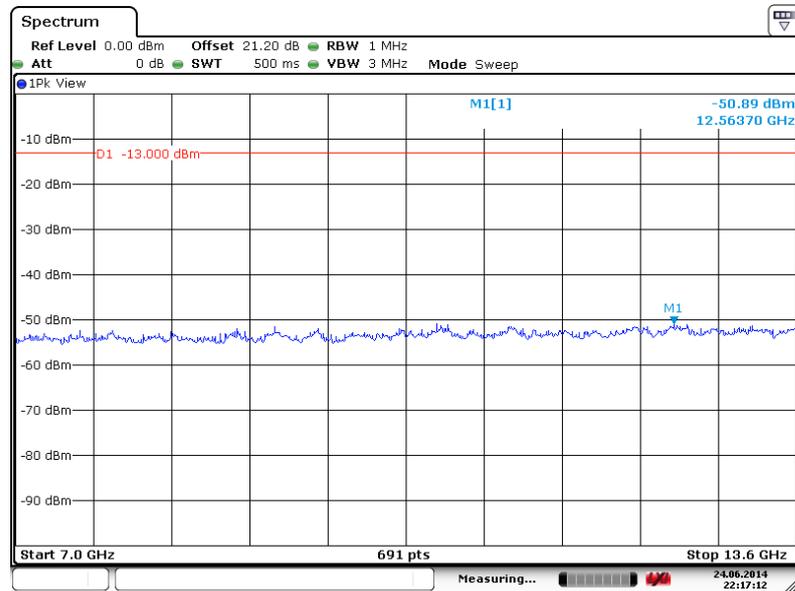

Date: 24.JUN.2014 22:17:12




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

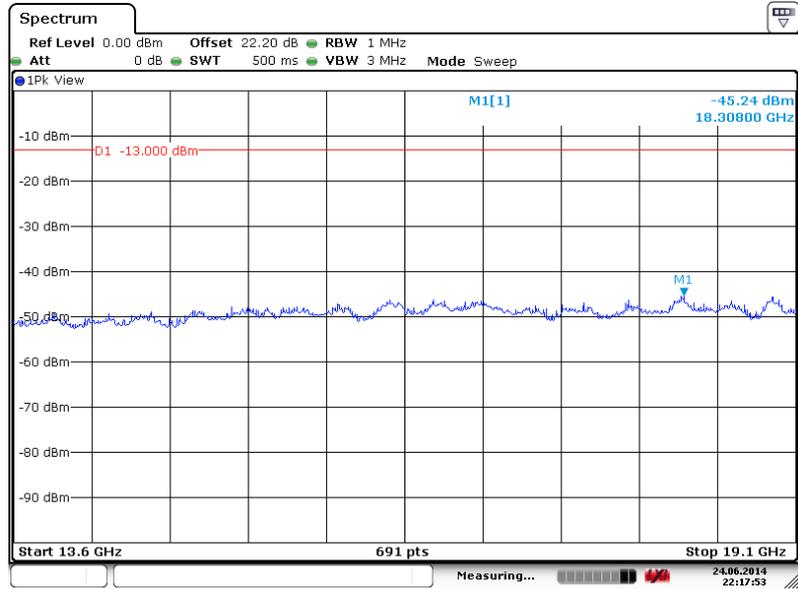




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

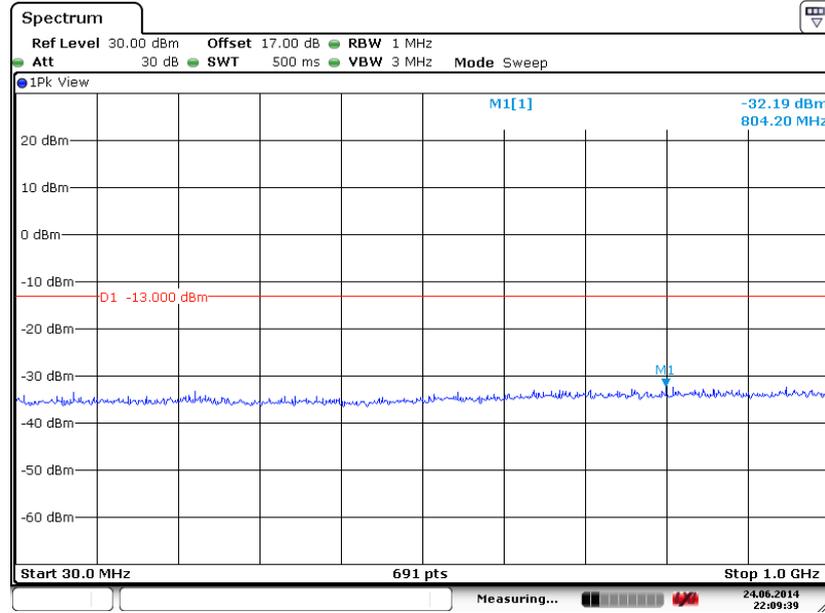

Date: 24.JUN.2014 22:09:39


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

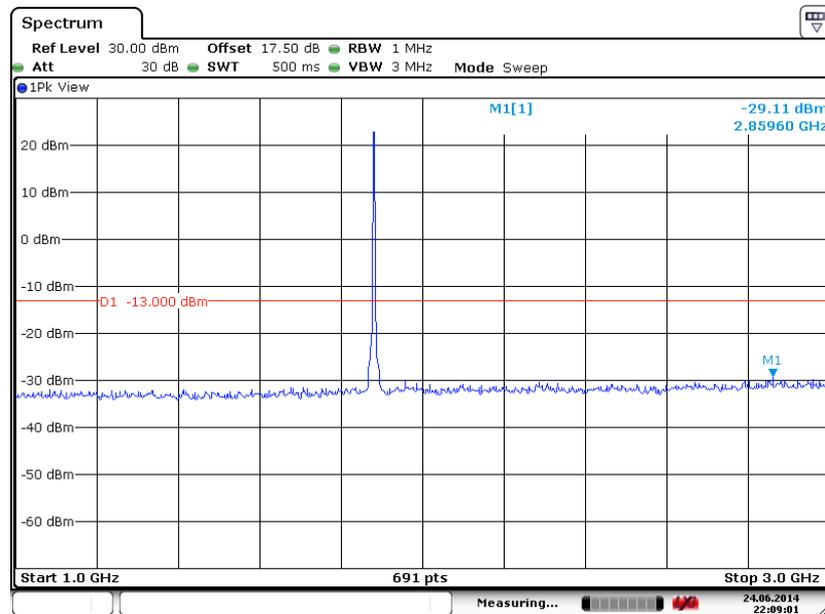


Date: 24.JUN.2014 22:09:01



### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

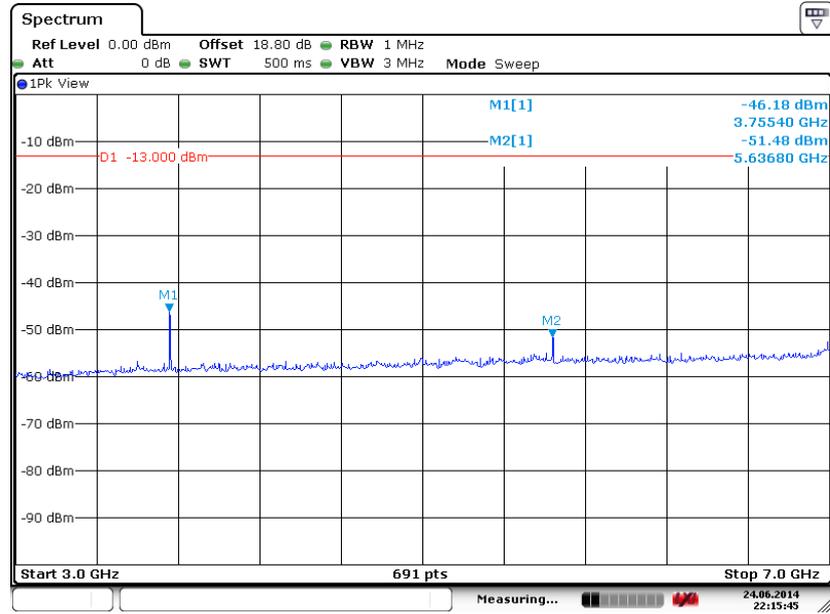


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

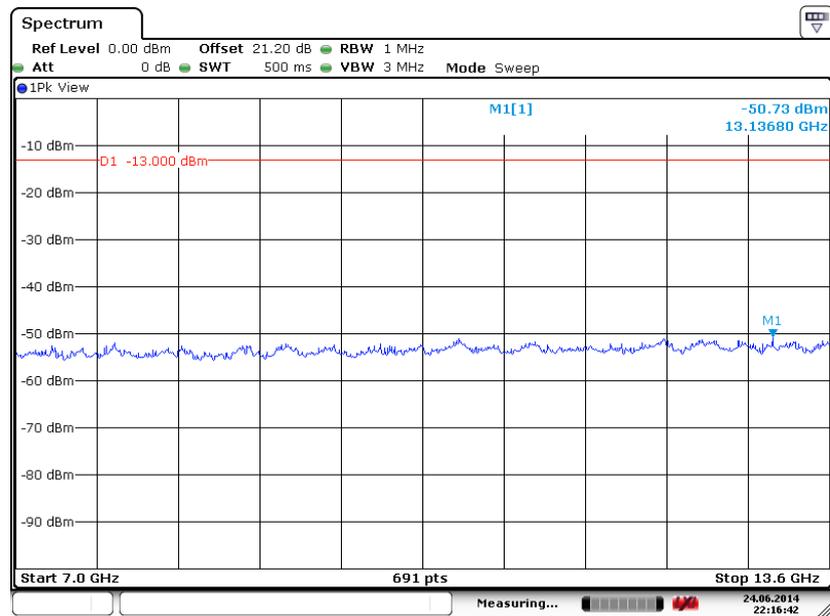



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

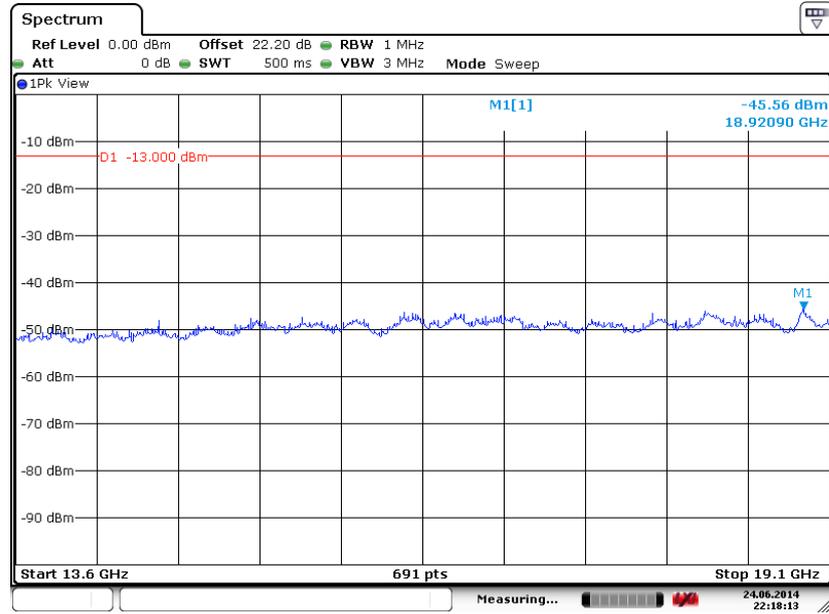

Date: 24.JUN.2014 22:18:12

## 3.7 Field Strength of Spurious Radiation Measurement

### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

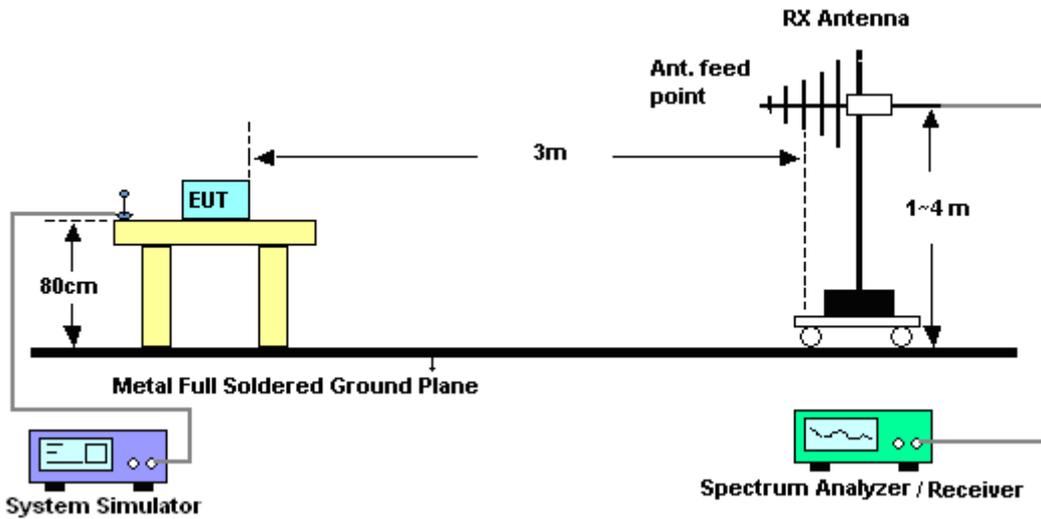

For radiated emissions above 1GHz

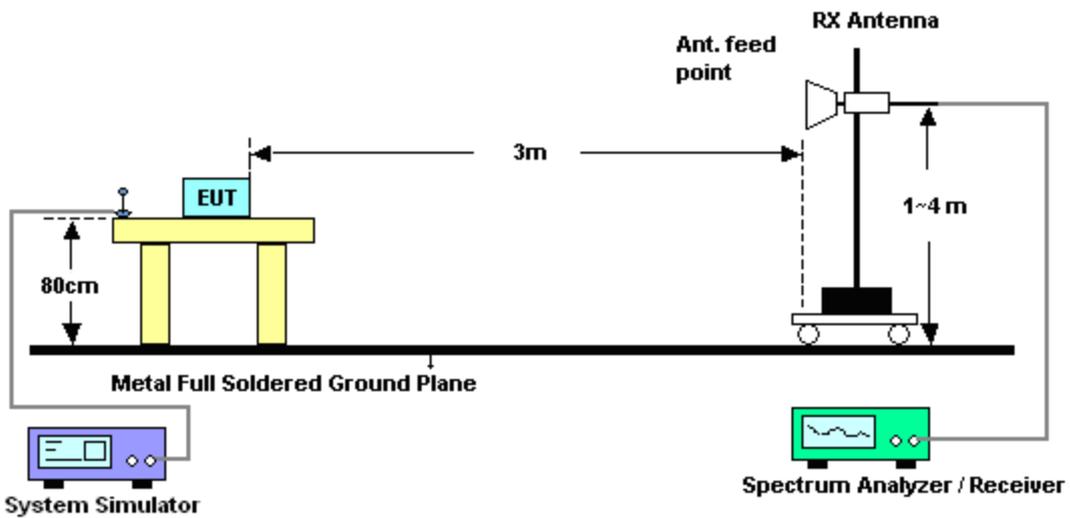

3.7.5 Test Result of Field Strength of Spurious Radiated

<b>Band :</b>	GSM850				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	GSM Link (GMSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-56.32	-13	-43.32	-69.24	-59.29	0.88	6.00	H	Pass
2510	-37.61	-13	-24.61	-62.29	-40.22	1.08	5.84	H	Pass
3346	-61.49	-13	-48.49	-72.09	-65.86	1.14	7.66	H	Pass

<b>Band :</b>	GSM850				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	GSM Link (GMSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-58.51	-13	-45.51	-69.14	-61.48	0.88	6.00	V	Pass
2510	-47.12	-13	-34.12	-67.96	-49.73	1.08	5.84	V	Pass
3346	-60.07	-13	-47.07	-71.90	-64.44	1.14	7.66	V	Pass



<b>Band :</b>	GSM850				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-55.74	-13	-42.74	-68.66	-58.71	0.88	6.00	H	Pass
2510	-43.34	-13	-30.34	-66.89	-45.95	1.08	5.84	H	Pass
3346	-61.98	-13	-48.98	-72.58	-66.35	1.14	7.66	H	Pass

<b>Band :</b>	GSM850				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-59.16	-13	-46.16	-69.79	-62.13	0.88	6.00	V	Pass
2510	-52.15	-13	-39.15	-70.97	-54.76	1.08	5.84	V	Pass
3346	-60.75	-13	-47.75	-72.58	-65.12	1.14	7.66	V	Pass



<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	GSM Link (GMSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-60.25	-13	-47.25	-72.40	-66.99	1.28	8.02	H	Pass
5640	-53.52	-13	-40.52	-71.51	-61.94	1.58	10.00	H	Pass
7520	-54.11	-13	-41.11	-76.05	-64.43	1.78	12.10	H	Pass

<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	GSM Link (GMSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-57.53	-13	-44.53	-72.56	-64.27	1.28	8.02	V	Pass
5640	-55.41	-13	-42.41	-72.49	-63.83	1.58	10	V	Pass
7520	-53.61	-13	-40.61	-75.86	-63.93	1.78	12.1	V	Pass



<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-60.78	-13	-47.78	-72.93	-67.52	1.28	8.02	H	Pass
5640	-54.86	-13	-41.86	-72.85	-63.28	1.58	10.00	H	Pass
7520	-53.13	-13	-40.13	-75.07	-63.45	1.78	12.10	H	Pass

<b>Band :</b>	GSM1900				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-57.95	-13	-44.95	-72.98	-64.69	1.28	8.02	V	Pass
5640	-56.43	-13	-43.43	-73.51	-64.85	1.58	10	V	Pass
7520	-53.44	-13	-40.44	-75.69	-63.76	1.78	12.1	V	Pass



<b>Band :</b>	WCDMA Band V				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-56.65	-13	-43.65	-69.57	-59.62	0.88	6.00	H	Pass
2510	-48.43	-13	-35.43	-70.24	-51.04	1.08	5.84	H	Pass
3346	-61.49	-13	-48.49	-72.09	-65.86	1.14	7.66	H	Pass

<b>Band :</b>	WCDMA Band V				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-59.22	-13	-46.22	-69.85	-62.19	0.88	6.00	V	Pass
2510	-52.17	-13	-39.17	-70.99	-54.78	1.08	5.84	V	Pass
3346	-60.20	-13	-47.20	-72.03	-64.57	1.14	7.66	V	Pass



<b>Band :</b>	WCDMA Band IV		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Jicong Tang		<b>Polarization :</b>	Horizontal					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3465	-58.66	-13	-45.66	-71.07	-65.56	1.4	8.30	H	Pass
5197.5	-46.47	-13	-33.47	-64.91	-55.12	1.65	10.30	H	Pass
6930	-52.35	-13	-39.35	-74.59	-62.90	1.85	12.40	H	Pass

<b>Band :</b>	WCDMA Band IV		<b>Temperature :</b>	23~25°C					
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)		<b>Relative Humidity :</b>	48~52%					
<b>Test Engineer :</b>	Jicong Tang		<b>Polarization :</b>	Vertical					
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3465	-55.98	-13	-42.98	-71.27	-62.88	1.4	8.3	V	Pass
5197.5	-52.37	-13	-39.37	-69.9	-61.02	1.65	10.3	V	Pass
6930	-52.23	-13	-39.23	-74.78	-62.78	1.85	12.4	V	Pass



<b>Band :</b>	WCDMA Band II				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Horizontal			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-61.00	-13	-48.00	-73.15	-67.74	1.28	8.02	H	Pass
5640	-54.86	-13	-41.86	-72.85	-63.28	1.58	10.00	H	Pass
7520	-53.68	-13	-40.68	-75.62	-64.00	1.78	12.10	H	Pass

<b>Band :</b>	WCDMA Band II				<b>Temperature :</b>	23~25°C			
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)				<b>Relative Humidity :</b>	48~52%			
<b>Test Engineer :</b>	Jicong Tang				<b>Polarization :</b>	Vertical			
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-58.18	-13	-45.18	-73.21	-64.92	1.28	8.02	V	Pass
5640	-56.51	-13	-43.51	-73.59	-64.93	1.58	10	V	Pass
7520	-52.79	-13	-39.79	-75.04	-63.11	1.78	12.1	V	Pass

## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

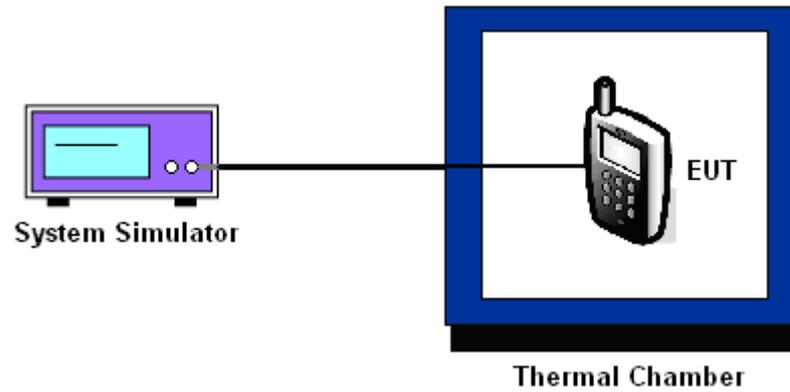

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	23	+0.027	25	+0.029	PASS
-20	22	+0.026	25	+0.029	
-10	21	+0.025	24	+0.028	
0	21	+0.025	23	+0.027	
10	19	+0.022	21	+0.025	
20(Ref.)	20	+0.024	22	+0.026	
30	21	+0.025	22	+0.026	
40	22	+0.026	23	+0.027	
50	23	+0.027	25	+0.029	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	70	+0.037	68	+0.036	PASS
-20	69	+0.036	67	+0.035	
-10	69	+0.036	66	+0.035	
0	68	+0.036	65	+0.034	
10	66	+0.035	63	+0.033	
20(Ref.)	66	+0.035	64	+0.034	
30	67	+0.035	65	+0.034	
40	69	+0.036	66	+0.035	
50	70	+0.037	68	+0.036	



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	9	+0.011	PASS
-20	8	+0.009	
-10	8	+0.009	
0	6	+0.007	
10	5	+0.006	
20(Ref.)	5	+0.006	
30	6	+0.007	
40	8	+0.009	
50	9	+0.011	

<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	1413
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-17	-0.010	PASS
-20	-16	-0.009	
-10	-15	-0.009	
0	-15	-0.009	
10	-13	-0.008	
20(Ref.)	-14	-0.008	
30	-14	-0.008	
40	-15	-0.009	
50	-16	-0.009	



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	12	+0.006	PASS
-20	11	+0.006	
-10	9	+0.005	
0	9	+0.005	
10	7	+0.004	
20(Ref.)	8	+0.004	
30	9	+0.005	
40	11	+0.006	
50	12	+0.006	

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	3.8	21	+0.025	2.5	PASS
		BEP	20	+0.024		
		4.35	21	+0.025		
	EDGE class 8	3.8	23	+0.027		
		BEP	22	+0.026		
		4.35	23	+0.027		
GSM 1900 CH661	GSM	3.8	67	+0.035		
		BEP	67	+0.035		
		4.35	68	+0.036		
	EDGE class 8	3.8	66	+0.035		
		BEP	65	+0.034		
		4.35	66	+0.035		
WCDMA Band V CH4182	RMC 12.2Kbps	3.8	7	+0.008		
		BEP	6	+0.007		
		4.35	7	+0.008		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.8	-16	-0.009		
		BEP	-15	-0.009		
		4.35	-16	-0.009		
WCDMA Band II CH9400	RMC 12.2Kbps	3.8	10	+0.005		
		BEP	9	+0.005		
		4.35	10	+0.005		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.5 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	May 08, 2014	Jun. 14, 2014~ Jul. 07, 2014	May 07, 2015	Conducted (TH01-SZ)
Thermal Chamber	Hongzhan	LP-150U	HD20120425	-40°C~150°C	Feb. 21, 2014	Jun. 14, 2014~ Jul. 07, 2014	Feb. 20, 2015	Conducted (TH01-SZ)
ESCIO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	Jun. 17, 2014~ Jun. 29, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Jun. 17, 2014~ Jun. 29, 2014	May 25, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TESEQ	CBL 6112D	23188	30MHz~2GHz	Oct. 26, 2013	Jun. 17, 2014~ Jun. 29, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Jun. 17, 2014~ Jun. 29, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Double Ridged Horn Antenna	COM-POWER	AH-840	101073	18GHz~40GHz	Jan. 27, 2014	Jun. 17, 2014~ Jun. 29, 2014	Jan. 26, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz	Feb. 21, 2014	Jun. 17, 2014~ Jun. 29, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Jun. 17, 2014~ Jun. 29, 2014	May 07, 2015	Radiation (03CH01-SZ)
AC Source(AVR)	Chroma	61601	616010001985	100Vac~250Vac	Mar. 25, 2014	Jun. 17, 2014~ Jun. 29, 2014	Mar. 24, 2015	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Jun. 17, 2014~ Jun. 29, 2014	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Jun. 17, 2014~ Jun. 29, 2014	NCR	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSP 7	100818	9kHz~7GHz	Sep. 03, 2013	Jun. 20, 2014	Sep. 02, 2014	ERP/EIRP (OTA01-SZ)
Quad-Ridged Horn	ETS-Lindgren	3164-08	00102954	700MHz~10000M Hz	NCR	Jun. 20, 2014	NCR	ERP/EIRP (OTA01-SZ)
Multi-Devices Controller	ETS-Lindgren	2090-OPT1	00108147	N/A	NCR	Jun. 20, 2014	NCR	ERP/EIRP (OTA01-SZ)
Switch Control Mainframe	Agilent	3499A	MY42005451	N/A	NCR	Jun. 20, 2014	NCR	ERP/EIRP (OTA01-SZ)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.9
---	-----