



RF TEST REPORT

Applicant ZTE Corporation
FCC ID SRQ-R218Z
Product Vodafone Mobile WiFi
Model R218z
Report No. RXA1712-0417RF04R2
Issue Date February 6, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	10
5.1. Average Power Output –Conducted	10
5.2. 6dB Bandwidth	14
5.3. Band Edge	18
5.4. Power Spectral Density	20
5.5. Spurious RF Conducted Emissions	27
5.6. Radiated Emissions in the Restricted Band	33
5.7. Radiates Emission	38
5.8. Conducted Emission	66
6. Main Test Instruments	69

Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: December 17, 2017~ January 12, 2018			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description	
Device Type:	Portable Device
Model	R218z
IMEI	355063090001842
Hardware Version	Ver.A(T1)
Software Version	BD_R218zV1.0
Power Supply	Battery/AC adapter
Antenna Type	Internal Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	Antenna 1: 2.6dBi Antenna 2: 2.6dBi
Additional Beamforming Gain	0 dB
Test Mode	802.11b 802.11g, 802.11n(HT20/HT40);
Modulation Type	802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G :16.88dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz
EUT Accessory	
Adapter (market accessory)	Manufacturer:DOKOCOM Model: STC-A51A-A
Battery	Manufacturer: Harbin Coslight Power Co., Ltd. Model: Li3820T43P3h715345
Note: The information of the EUT is declared by the manufacturer. 2. The EUT don't have standard Adapter. The adapter used for testing in this report is the after-market accessory.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**
- **KDB 662911 D01 Multiple Transmitter Output v02r01**

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

The test software is used CMD

Worst-case data rates are shown as following table.

Band	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11b	1 Mbps	1 Mbps	/
802.11g	6 Mbps	6 Mbps	6 Mbps
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8



The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Average Power Output –Conducted	802.11b	802.11b	802.11g 802.11n HT20 802.11n HT40
6dB Bandwidth	--	O	--
Band Edge	--	O	--
Power Spectral Density	802.11b	802.11b	802.11g 802.11n HT20 802.11n HT40
Spurious RF Conducted Emissions	--	802.11b	802.11g 802.11n HT20 802.11n HT40
Radiates Emission in the Restricted Band	--	802.11b	802.11g 802.11n HT20 802.11n HT40
Radiates Emission	--	802.11b	802.11g 802.11n HT20 802.11n HT40
Conducted Emission	--	802.11b	802.11g 802.11n HT20 802.11n HT40
Note: “O”: test all bands			

5. Test Case Results

5.1. Average Power Output –Conducted

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method AVGSA-2 in KDB 558074 D01 /KDB662911 D01 for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Single Antenna Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11b	38	38	38	39	37	37

CDD Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11g	43	42	41	43	42	41

MIMO Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11n HT20	40	40	40	40	39	39
Packet Type	CH3	CH6	CH9	CH3	CH6	CH9
802.11n HT40	43	43	43	42	41	41

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.44	12.52	0.99	0.00
802.11g	2.06	2.18	0.94	0.25
802.11n HT20	1.92	2.02	0.95	0.22
802.11n HT40	0.50	0.66	0.75	1.22
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

SISO Antenna 1

Network Standards	Carrier frequency (MHz)	Read Value (dBm)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	16.44	16.44	30	PASS
	2437	16.85	16.85	30	PASS
	2462	16.63	16.63	30	PASS
Note: Output Power= Read Value +Duty cycle correction factor					

SISO Antenna 2

Network Standards	Carrier frequency (MHz)	Read Value (dBm)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	16.51	16.51	30	PASS
	2437	16.62	16.62	30	PASS
	2462	16.84	16.84	30	PASS
Note: Output Power= Read Value +Duty cycle correction factor					

CDD

Network Standards	Carrier frequency (MHz)	Antenna 1			Antenna 2			Total Power		Limit (dBm)	Conclusion
		Read Value (dBm)	Average Output Power		Read Value (dBm)	Average Output Power		Average Output Power			
			(dBm)	(mW)		(dBm)	(mW)	(mW)	(dBm)		
802.11g	2412	12.99	13.24	21.09	12.83	13.08	20.32	41.40	16.17	30	PASS
	2437	12.53	12.78	18.97	12.99	13.24	21.09	39.99	16.02	30	PASS
	2462	12.21	12.46	17.62	12.66	12.91	19.54	37.15	15.70	30	PASS

Note: 1. Output Power=Read Value+Duty cycle correction factor

2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.

3. The manufacturer declared the transmitter output signals is CDD mode. And $N_{ss}=2$. According to KDB 662911 D01

Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

So directional gain = $G_{ANT} + \text{Array Gain} = 2.6 + 0 = 2.6\text{dBi} < 6\text{dBi}$. So the power limit is 30dBm

MIMO

Network Standards	Carrier frequency (MHz)	Antenna 1			Antenna 2			Total Power		Limit (dBm)	Conclusion
		Read Value (dBm)	Average Output Power		Read Value (dBm)	Average Output Power		Average Output Power			
			(dBm)	(mW)		(dBm)	(mW)	(mW)	(dBm)		
802.11n HT20	2412	12.33	12.55	17.99	12.86	13.08	20.32	38.28	15.83	30	PASS
	2437	12.27	12.49	17.74	12.55	12.77	18.92	36.64	15.64	30	PASS
	2462	12.20	12.42	17.46	12.35	12.57	18.07	35.56	15.51	30	PASS
802.11n HT40	2422	12.42	13.64	23.12	12.31	13.53	22.54	45.71	16.60	30	PASS
	2437	12.70	13.92	24.66	12.59	13.81	24.04	48.75	16.88	30	PASS
	2452	12.20	13.42	21.98	12.86	14.08	25.59	47.64	16.78	30	PASS

Note: 1. Output Power=Read Value+Duty cycle correction factor

2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),

The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$.

3. The manufacturer declared the transmitter output signals is CDD mode. And $N_{ss}=2$. According to KDB 662911 D01

Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$,

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{ss})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

So directional gain = $G_{ANT} + \text{Array Gain} = 2.6 + 0 = 2.6\text{dBi} < 6\text{dBi}$. So the power limit is 30dBm

5.2. 6dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:
Antenna 2

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	14.996	9.124	500	PASS
	2437	15.112	9.593	500	PASS
	2462	15.117	9.578	500	PASS
802.11g	2412	16.455	16.350	500	PASS
	2437	16.468	16.360	500	PASS
	2462	16.449	16.350	500	PASS
802.11n HT20	2412	17.665	17.590	500	PASS
	2437	17.695	17.550	500	PASS
	2462	17.697	17.320	500	PASS
802.11n HT40	2422	35.936	35.500	500	PASS
	2437	35.983	35.350	500	PASS
	2452	35.921	35.210	500	PASS

802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437

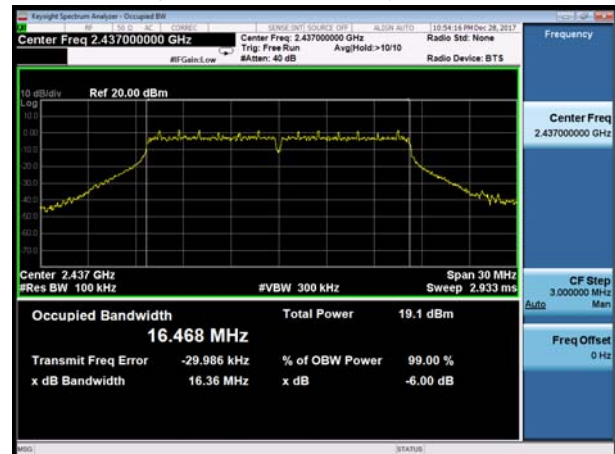

802.11b, Carrier frequency (MHz): 2462




802.11g, Carrier frequency (MHz): 2462



802.11n(HT20), Carrier frequency (MHz): 2412



802.11n(HT40), Carrier frequency (MHz): 2422

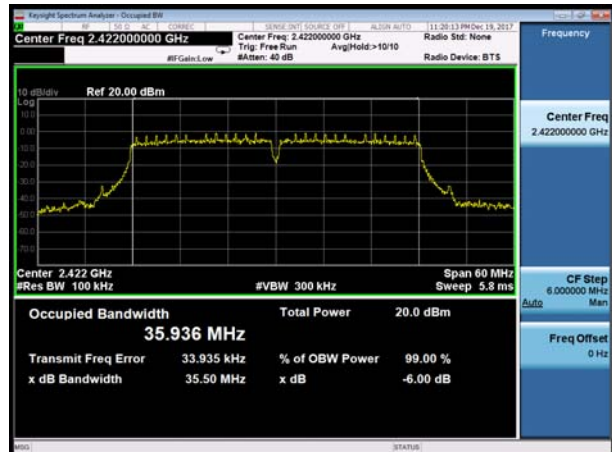

802.11n(HT20), Carrier frequency (MHz): 2437




802.11n(HT40), Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz): 2462



802.11n(HT40), Carrier frequency (MHz): 2452

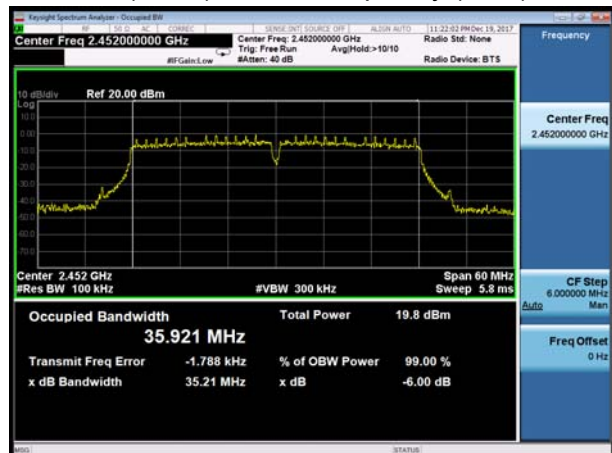

5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results: PASS


802.11b, Channel No.: 1

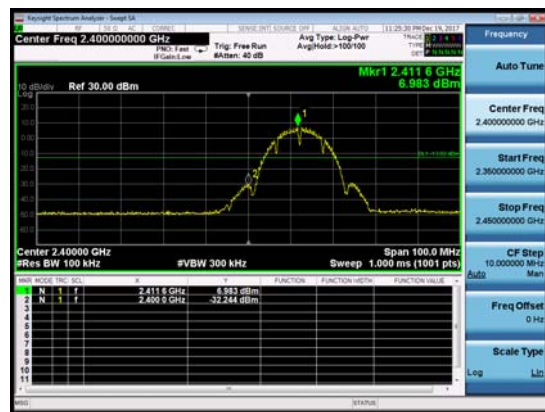


802.11b, Channel No.: 11

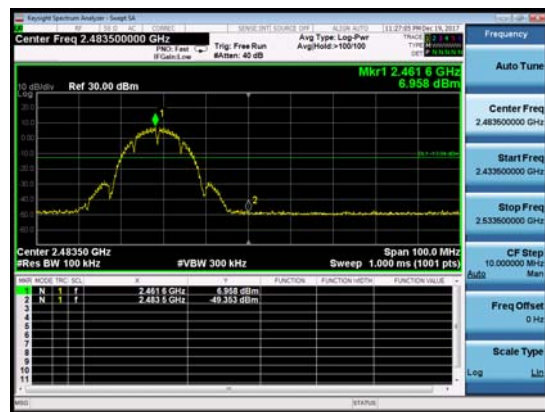


802.11g, Channel No.: 1

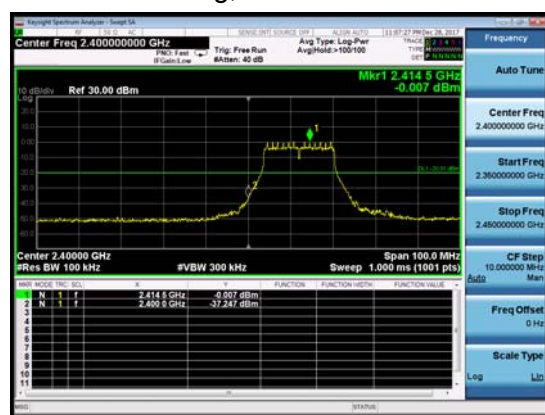


802.11g, Channel No.: 11

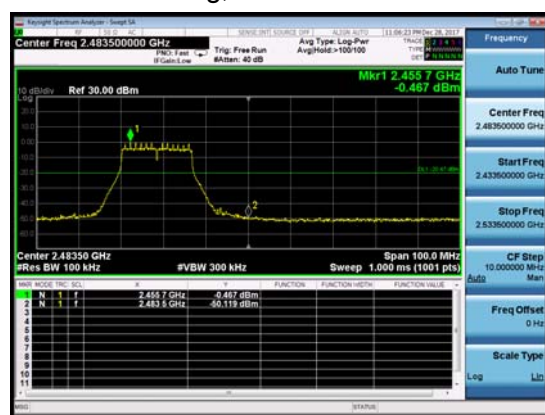


802.11n(HT20), Channel No.: 1

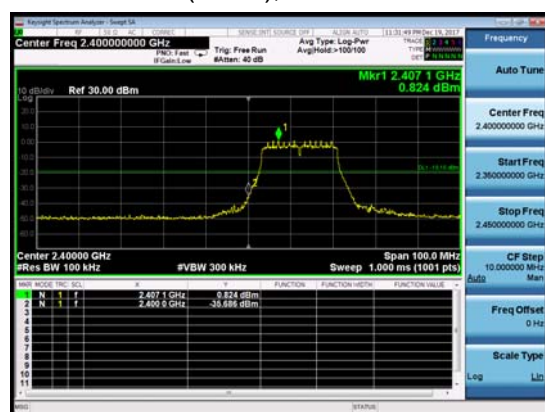

802.11n(HT20), Channel No.: 11

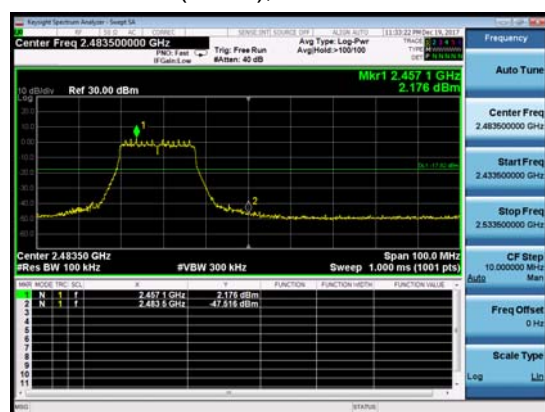

802.11n(HT40), Channel No.: 3

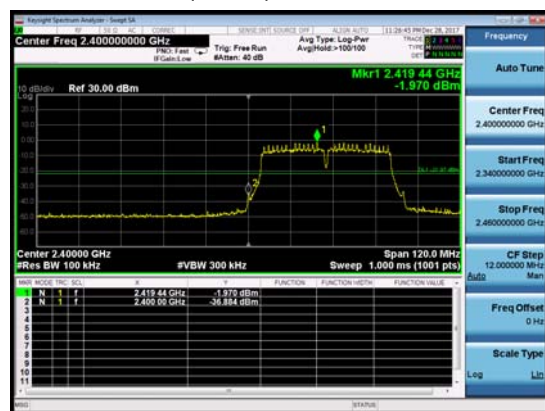

802.11n(HT40), Channel No.: 9



5.4. Power Spectral Density

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Method AVGPSD-2 in KDB 558074 D01 for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. “

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:
SISO Antenna 1

Network Standards	Channel Number	Read Value (dBm)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-16.29	-16.26	8	PASS
	6	-16.11	-16.08	8	PASS
	11	-16.38	-16.35	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

SISO Antenna 2

Network Standards	Channel Number	Read Value (dBm)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-16.40	-16.37	8	PASS
	6	-16.04	-16.01	8	PASS
	11	-15.74	-15.72	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

MIMO

Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)								Limit (dBm / 3kHz)	Conclusion
		Read Value (dBm / 3kHz)	Antenna 1		Read Value (dBm / 3kHz)	Antenna 2		Total PSD			
			(dBm / 3kHz)	(mW/ 3kHz)		(dBm / 3kHz)	(mW/ 3kHz)	(mW/ 3kHz)	(dBm / 3kHz)		
802.11g	1	-24.64	-24.39	0.004	-23.93	-23.69	0.004	0.008	-21.01	8	PASS
	6	-22.57	-22.33	0.006	-22.28	-22.04	0.006	0.012	-19.17	8	PASS
	11	-22.88	-22.63	0.005	-22.12	-21.87	0.007	0.012	-19.23	8	PASS
802.11n HT20	1	-23.05	-22.83	0.005	-22.34	-22.12	0.006	0.011	-19.45	8	PASS
	6	-22.70	-22.48	0.006	-24.57	-24.35	0.004	0.009	-20.31	8	PASS
	11	-22.40	-22.18	0.006	-22.38	-22.15	0.006	0.012	-19.16	8	PASS
802.11n HT40	3	-25.20	-23.98	0.004	-24.44	-23.22	0.005	0.009	-20.57	8	PASS
	6	-24.95	-23.73	0.004	-24.23	-23.01	0.005	0.009	-20.34	8	PASS
	9	-25.11	-23.89	0.004	-23.78	-22.56	0.006	0.010	-20.16	8	PASS

Note: 1. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a), the power spectral density = $10 \log(10^{(\text{PSD antenna1 in dBm}/10)} + 10^{(\text{PSD antenna2 in dBm}/10)})$


2. The manufacturer declared the transmitter output signals is CDD mode. And $N_{ss}=2$. According to KDB 662911 D01 Multiple Transmitter Output v02r01 2)f)(i): If all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$, For power spectral density (PSD) measurements on all devices, Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB=0.

So directional gain = $G_{ANT} + \text{Array Gain} = 2.6 + 0 = 2.6$ dBi < 6dBi. So the power limit is 8dBm.



Antenna 1

802.11b, Channel No.: 1

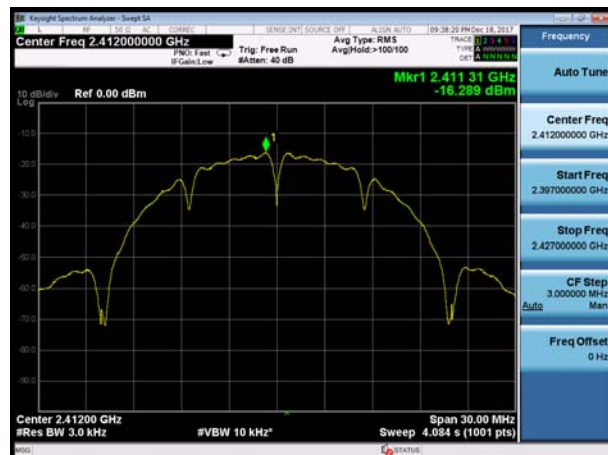


802.11g, Channel No.: 1




802.11b, Channel No.: 6




802.11g, Channel No.: 6

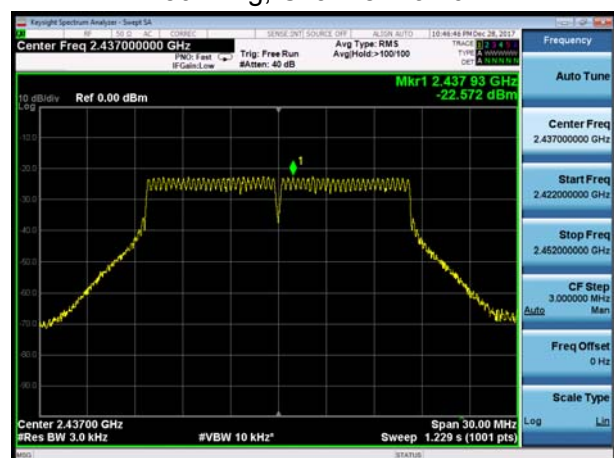


802.11b, Channel No.: 11

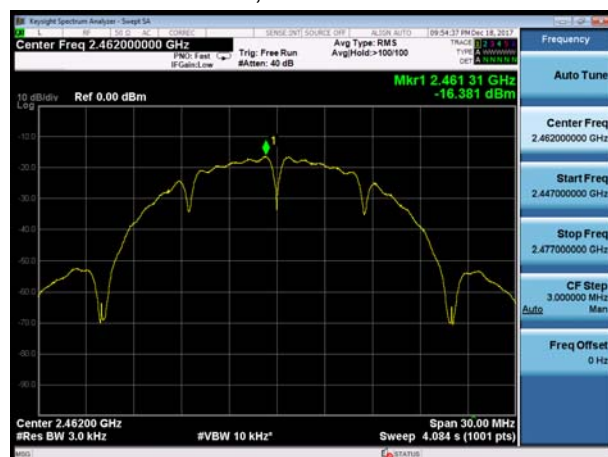


802.11g, Channel No.: 11

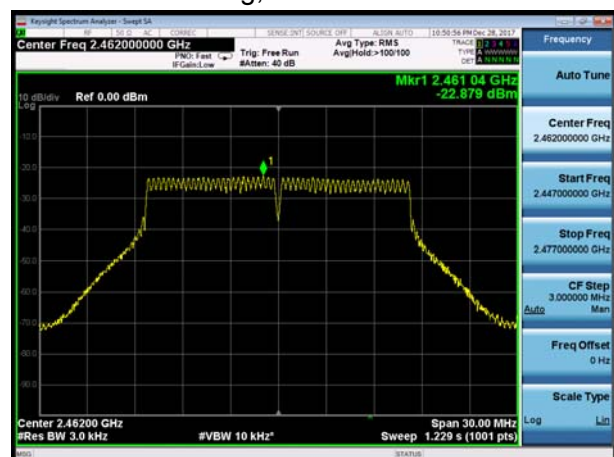


802.11n(HT20), Channel No. 1

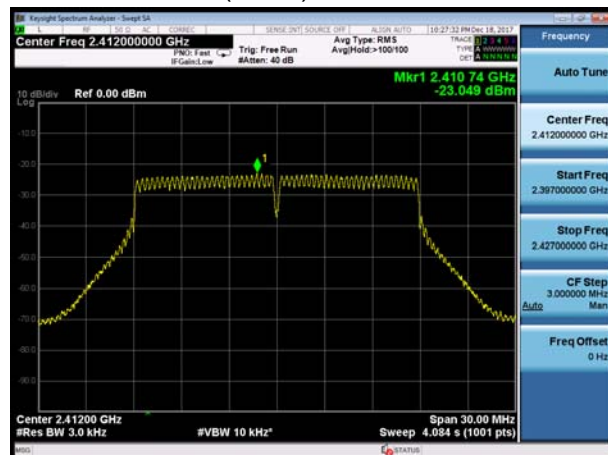

802.11n(HT40), Channel No. 3

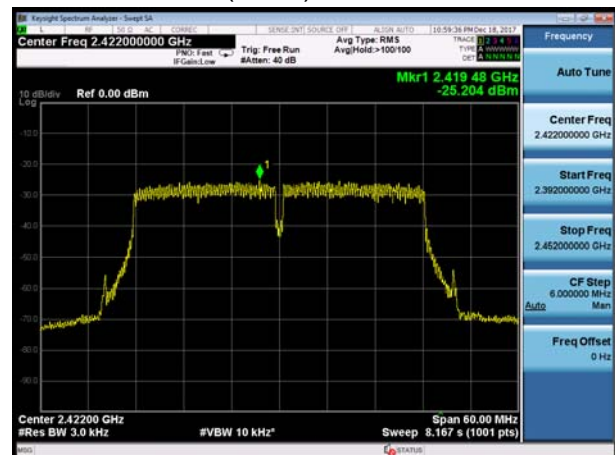


802.11n(HT20), Channel No. 6

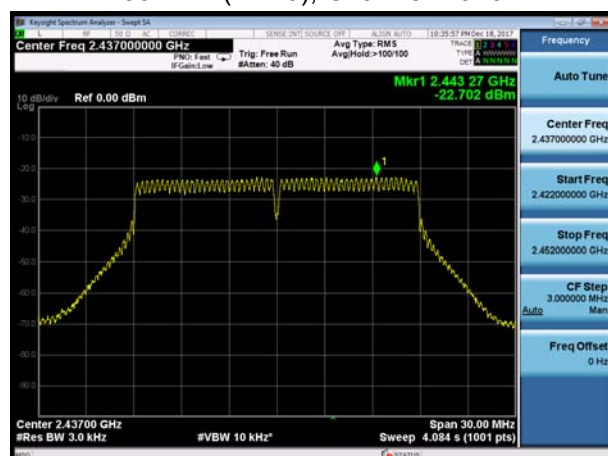


802.11n(HT40), Channel No. 6



802.11n(HT20), Channel No. 11

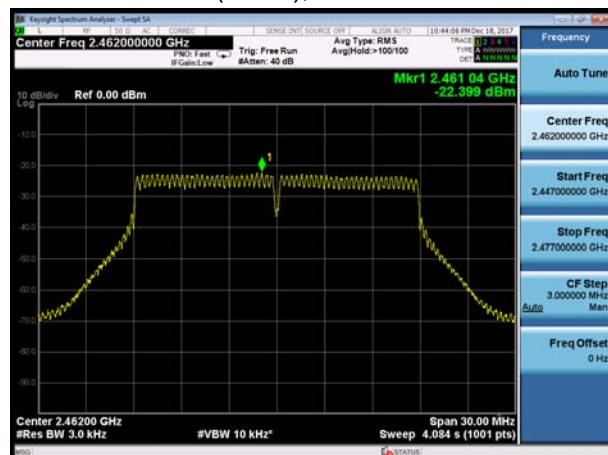


802.11n(HT40), Channel No. 9

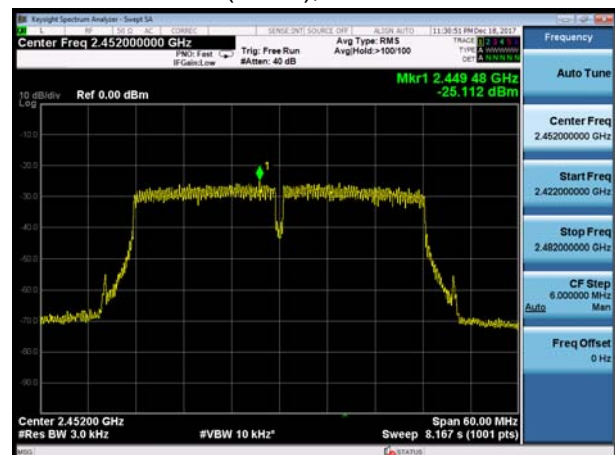



Antenna 2


802.11b, Channel No.: 1

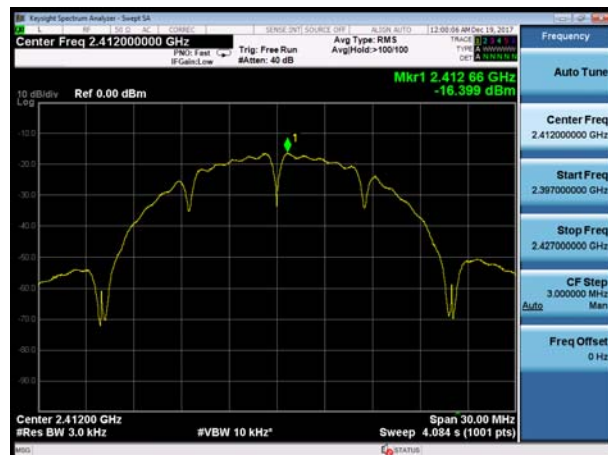


802.11g, Channel No.: 1




802.11b, Channel No.: 6

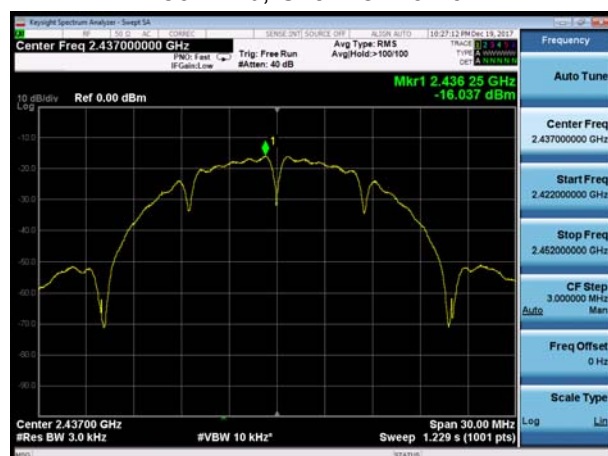


802.11g, Channel No.: 6

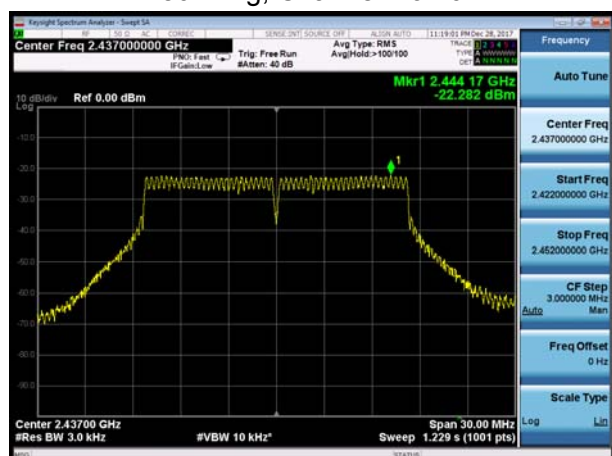

802.11b, Channel No.: 11

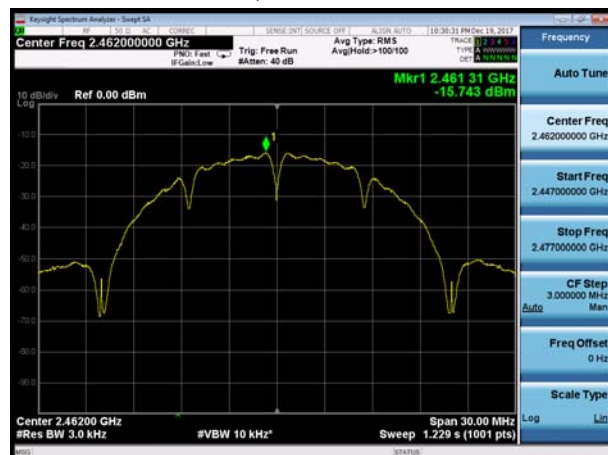


802.11g, Channel No.: 11

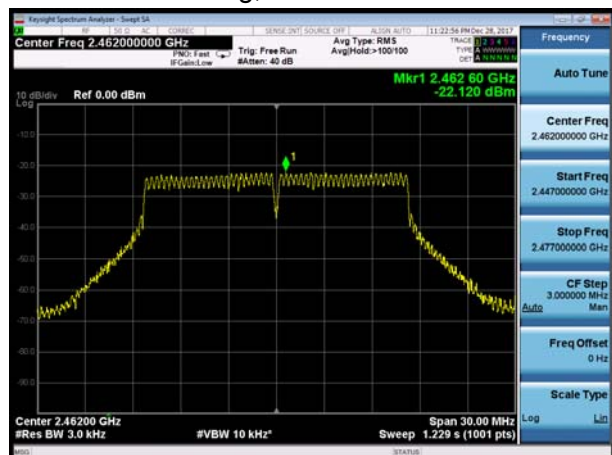




802.11n(HT20), Channel No. 1

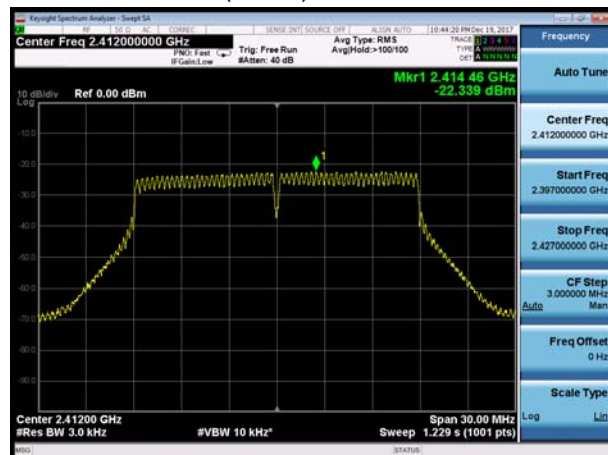


802.11n(HT40), Channel No. 3




802.11n(HT20), Channel No. 6

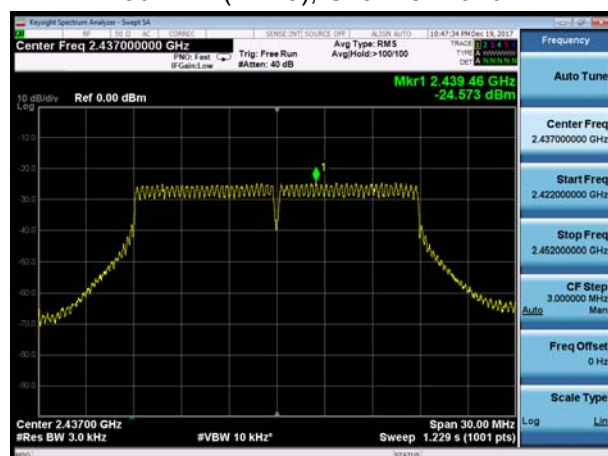


802.11n(HT40), Channel No. 6

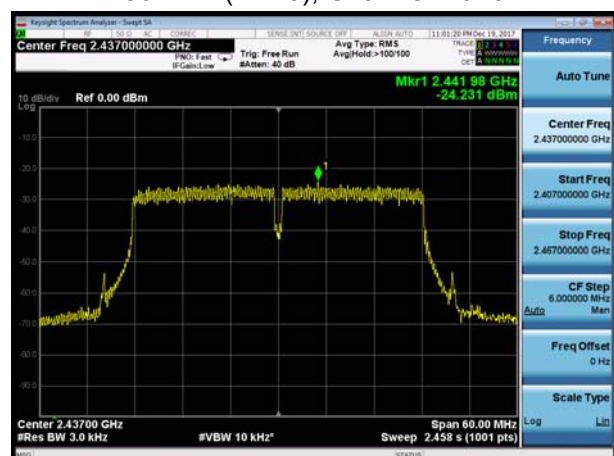

802.11n(HT20), Channel No. 11

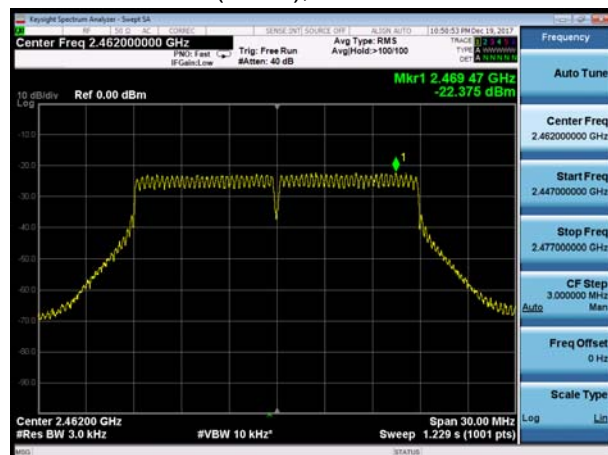

802.11n(HT40), Channel No. 9

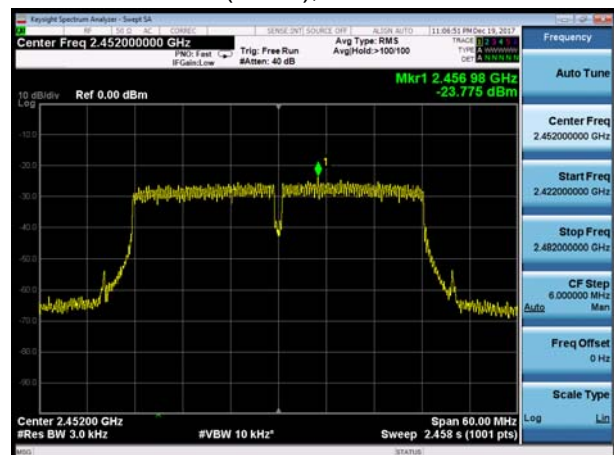

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

SISO Antenna 2

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	14.346	-5.654
	2437	14.406	-5.594
	2462	13.279	-6.721

MIMO

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11g	2412	6.950	-13.050
	2437	9.246	-10.754
	2462	7.773	-12.227
802.11n HT20	2412	10.931	-9.069
	2437	13.546	-6.454
	2462	12.791	-7.209
802.11n HT40	2422	4.449	-15.551
	2437	4.438	-15.562
	2452	-4.471	-24.471

**Measurement Uncertainty**


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:


SISO Antenna 2

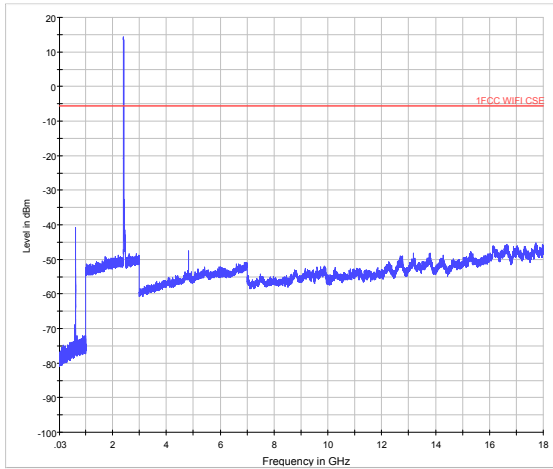


802.11b CH1 30MHz to 18GHz

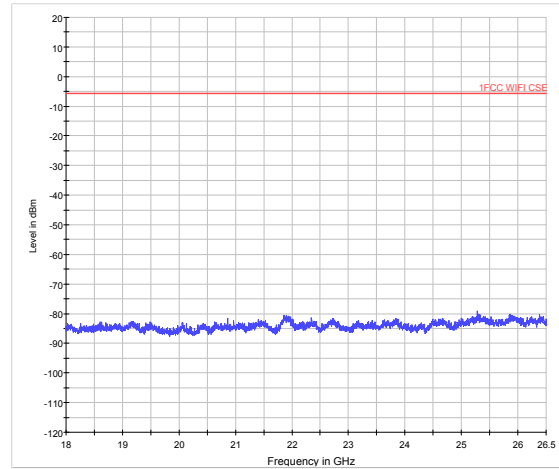


802.11b CH1 18GHz to 26.5GHz

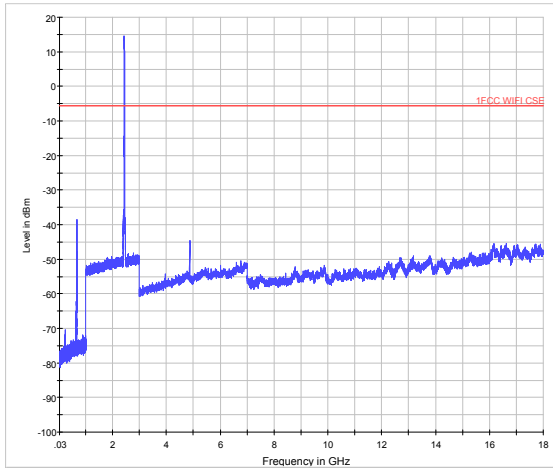


802.11b CH6 30MHz to 18GHz

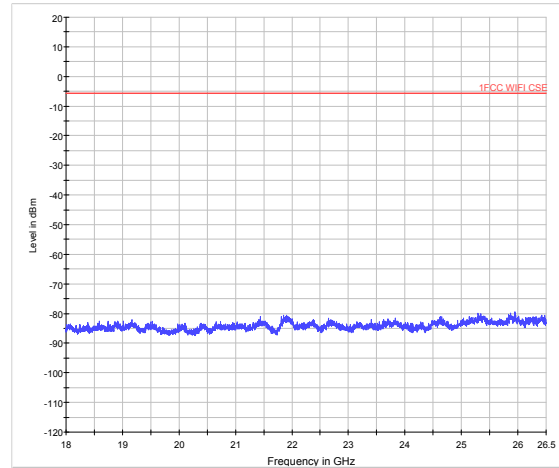

802.11b CH6 18GHz to 26.5GHz

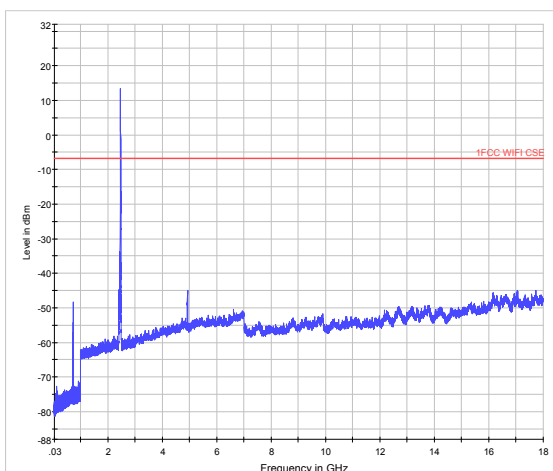


802.11b CH11 30MHz to 18GHz

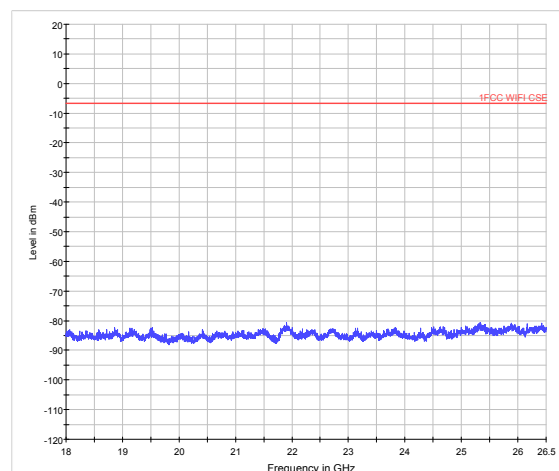


802.11b CH11 18GHz to 26.5GHz




MIMO

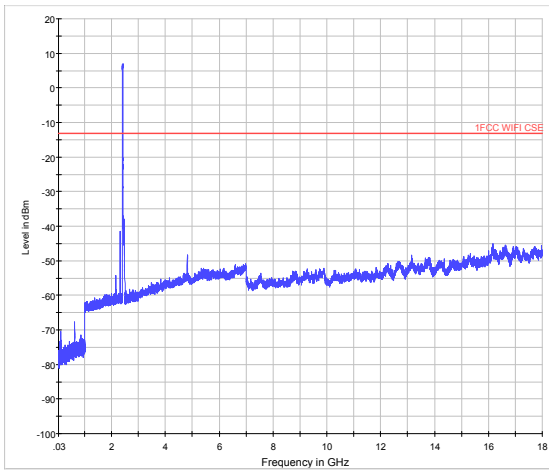


802.11g CH1 30MHz to 18GHz

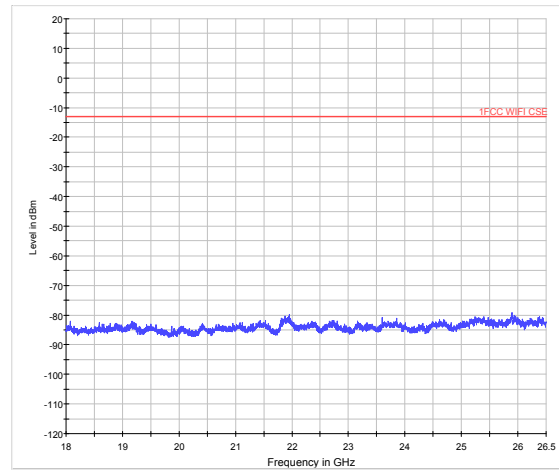


802.11g CH1 18GHz to 26.5GHz

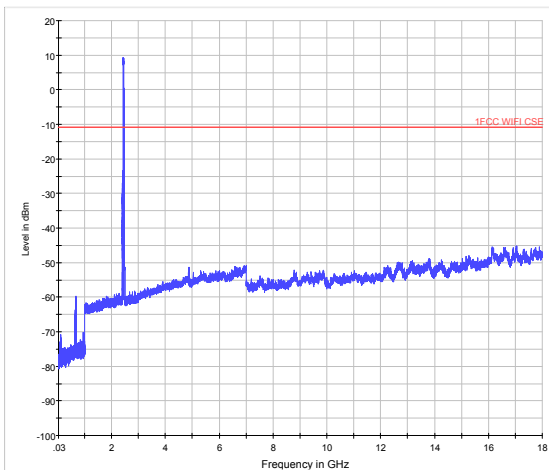


802.11g CH6 30MHz to 18GHz

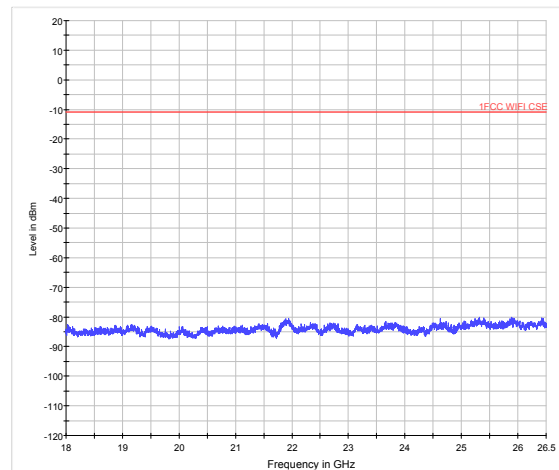


802.11g CH6 18GHz to 26.5GHz

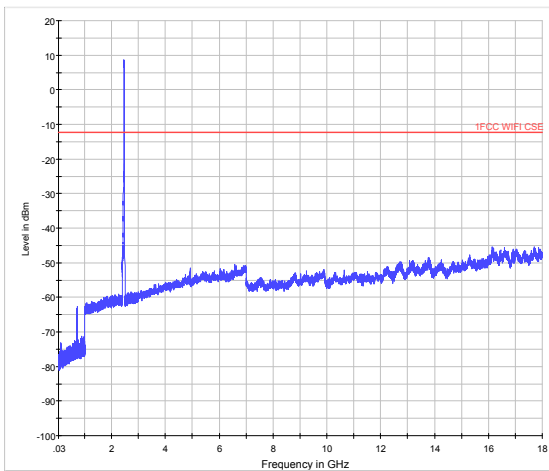


802.11g CH11 30MHz to 18GHz

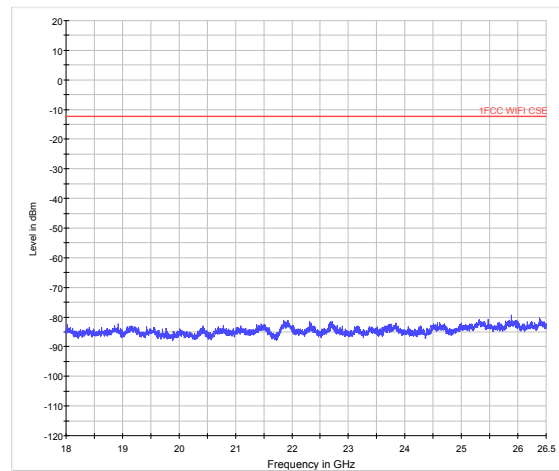


802.11g CH11 18GHz to 26.5GHz

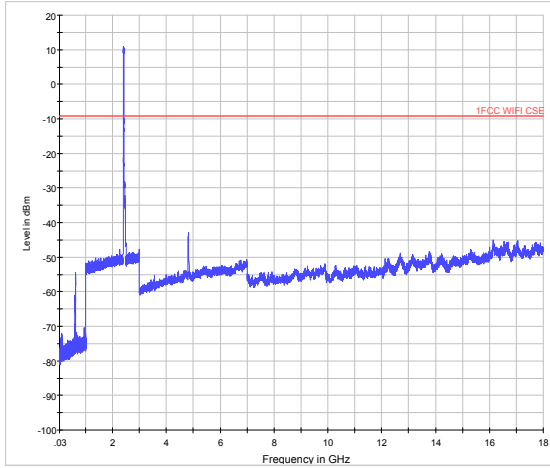


802.11n (HT20) CH1 30MHz to 18GHz

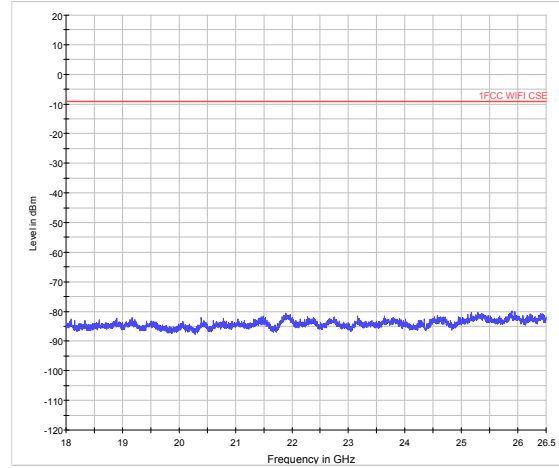


802.11n (HT20) CH1 18GHz to 26.5GHz

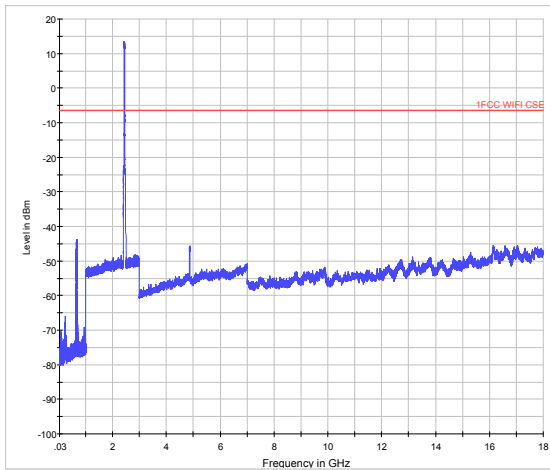


802.11n (HT20) CH6 30MHz to 18GHz

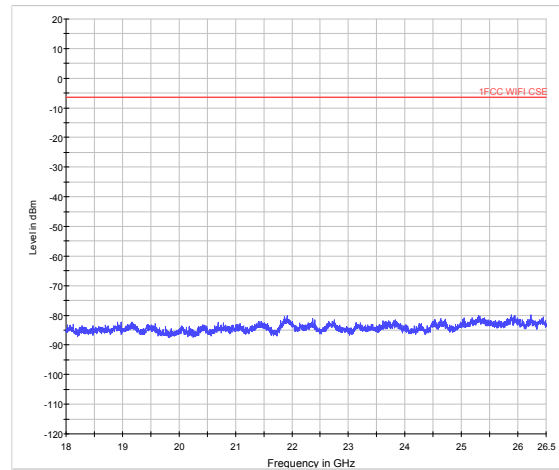


802.11n (HT20) CH6 18GHz to 26.5GHz

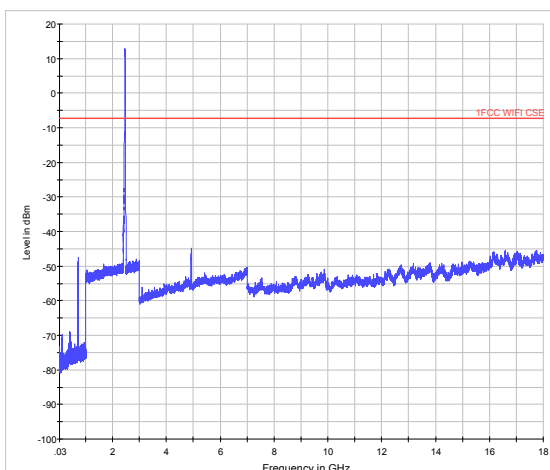


802.11n (HT20) CH11 30MHz to 18GHz

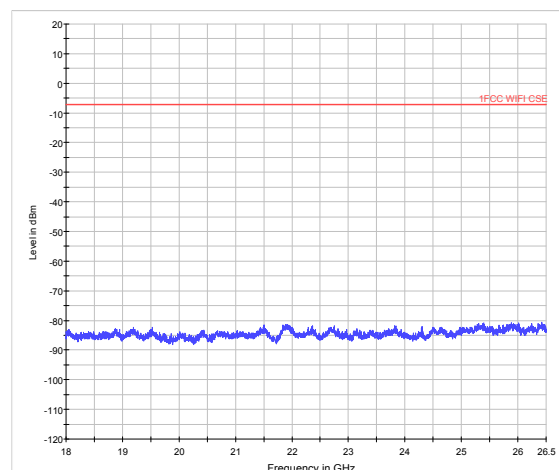


802.11n (HT20) CH11 18GHz to 26.5GHz

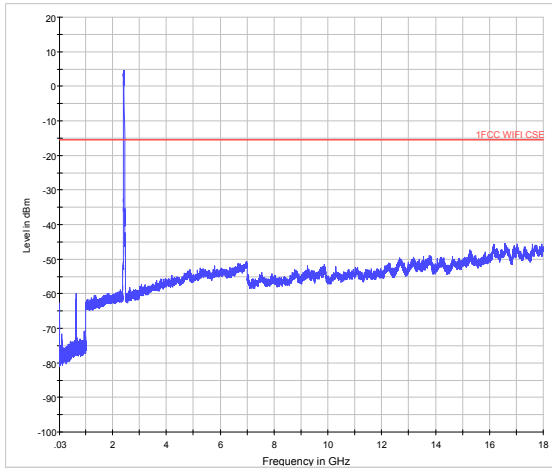


802.11n (HT40) CH1 30MHz to 18GHz

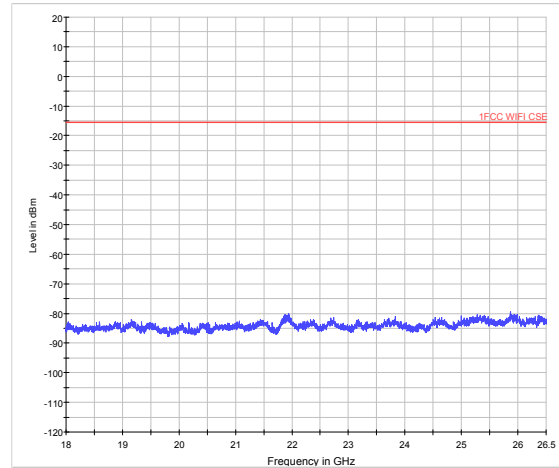


802.11n (HT40) CH1 18GHz to 26.5GHz

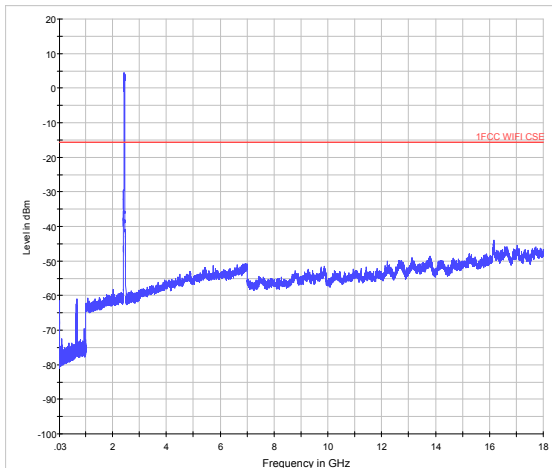


802.11n (HT40) CH6 30MHz to 18GHz

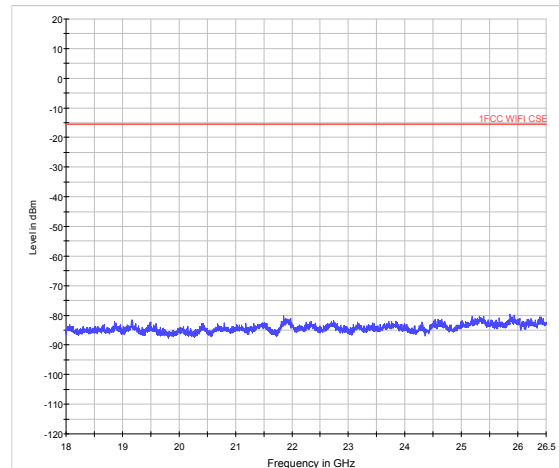

802.11n (HT40) CH6 18GHz to 26.5GHz

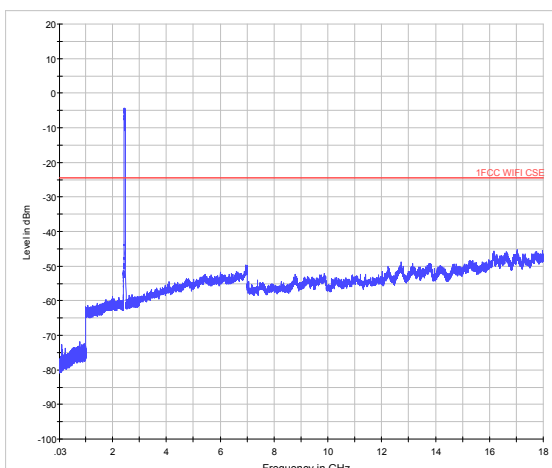

802.11n (HT40) CH11 30MHz to 18GHz

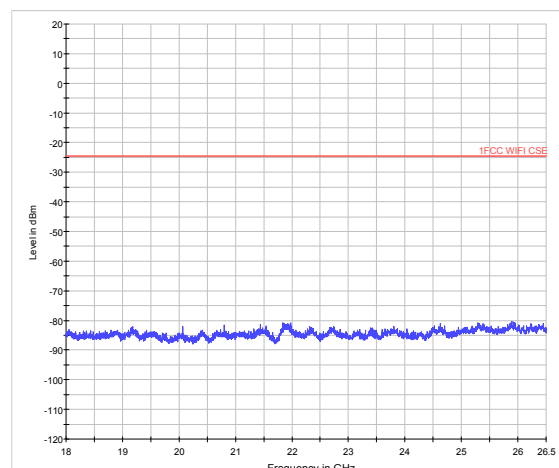

802.11n (HT40) CH11 18GHz to 26.5GHz

5.6. Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

This method refer to KDB 558074.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times \text{RBW}]$
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1 / D$, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)


g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

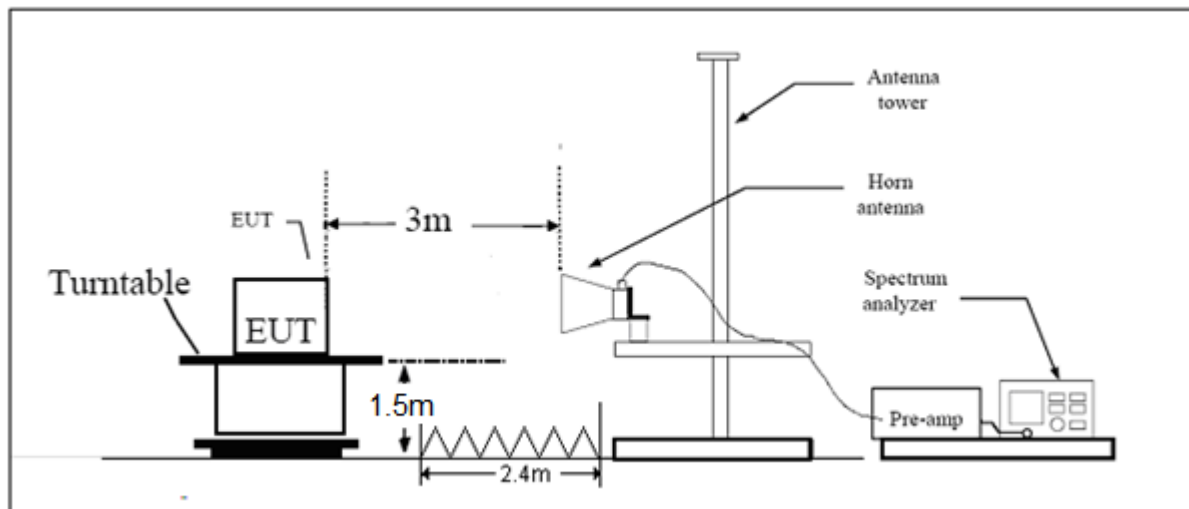

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Results:
PASS

The signal beyond the limit is carrier.

Band	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.44	12.52	0.99	0.00
802.11g	2.06	2.18	0.94	0.25
802.11n HT20	1.92	2.02	0.95	0.22
802.11n HT40	0.50	0.66	0.75	1.22
Note: when Duty cycle>0.98, Duty cycle correction Factor not required.				

SISO Antenna 2
802.11b-Channel 1

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	51.682	--	200.0	V	135	0	51.682	22.318	74
2390	--	40.352	200.0	V	135	0	40.352	13.648	54

802.11b-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	58.862	--	200.0	V	135	0	58.862	15.138	74
2483.5	--	49.962	200.0	V	135	0	49.962	4.038	54

MIMO
802.11g-Channel 1

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	55.125	--	150	V	65	0.25	55.375	18.625	74
2390	--	41.939	150	V	65	0.25	42.189	11.811	54

802.11g-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	62.980	--	150	V	78	0.25	63.230	10.770	74
2483.5	--	44.043	150	V	78	0.25	44.293	9.707	54

802.11n HT20 -Channel 1

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	51.941	--	200	V	90	0.22	52.161	21.839	74
2390	--	38.757	200	V	90	0.22	38.977	15.023	54

802.11n HT20-Channel 11

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	63.117	--	200	V	90	0.22	63.337	10.663	74
2483.5	--	45.014	200	V	90	0.22	45.234	8.766	54

802.11n HT40 -Channel 3

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	42.183	--	150	V	46	1.22	43.403	30.597	74
2390	--	30.878	150	V	46	1.22	32.098	21.902	54

802.11n HT40-Channel 9

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	46.672	--	150	V	46	1.22	47.892	26.108	74
2483.5	--	36.155	150	V	46	1.22	37.375	16.625	54

5.7. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

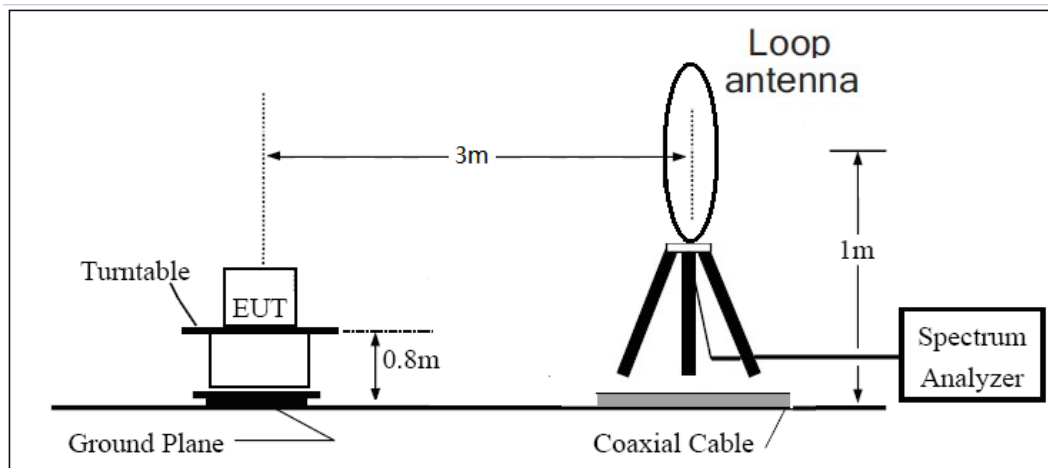

30MHz ~ 1GHz

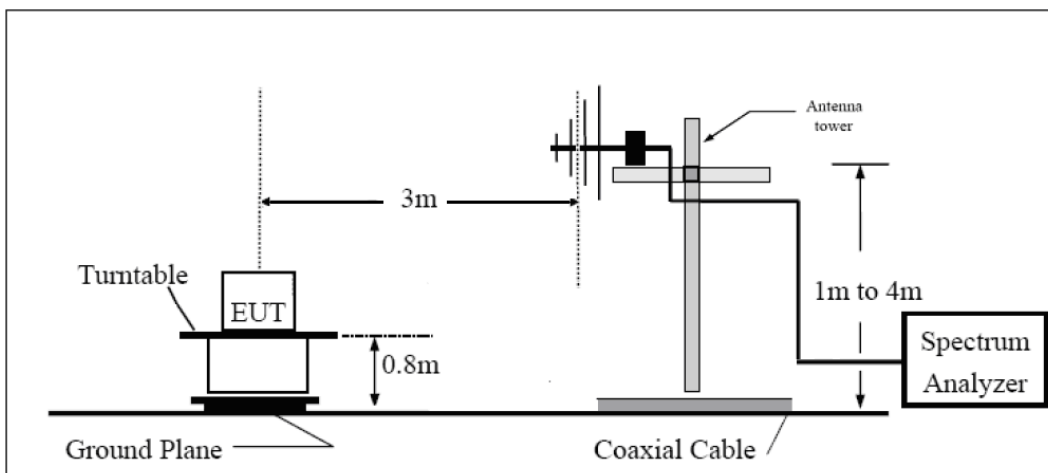

Above 1GHz

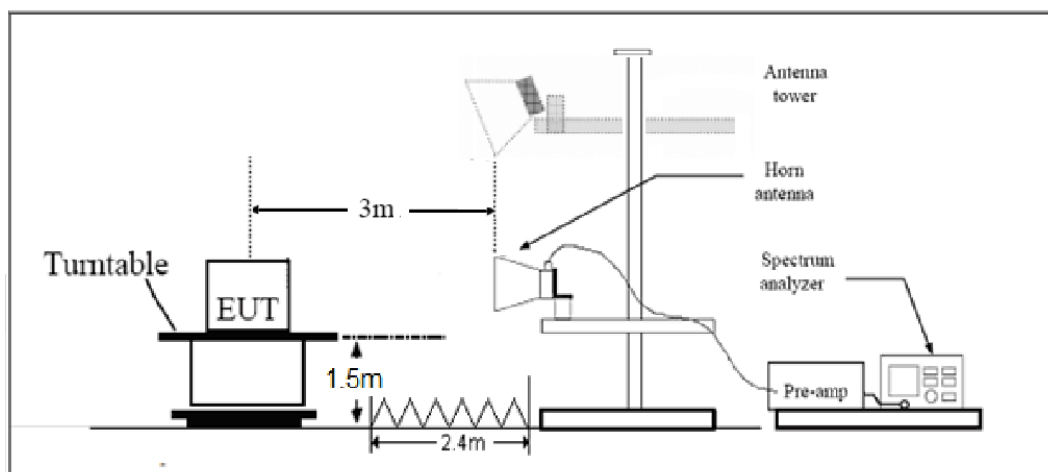

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.


For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

After the pre test, Antenna 2 was selected as the worst antenna.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

RE 0.03-1GHz QP Class B

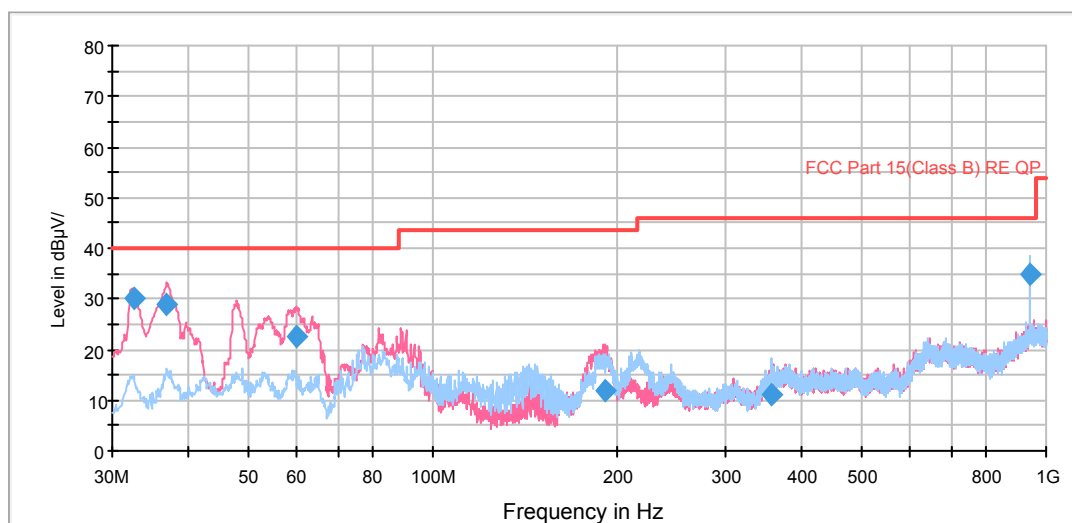

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
32.486250	30.2	49.4	100.0	V	319.0	-19.2	9.8	40.0
36.850000	28.8	47.4	100.0	V	32.0	-18.6	11.2	40.0
59.807500	22.6	44.4	100.0	V	259.0	-21.8	17.4	40.0
191.282500	11.7	37.0	100.0	V	24.0	-25.3	31.8	43.5
357.112500	11.0	30.5	100.0	H	114.0	-19.5	35.0	46.0
939.072500	34.9	45.8	100.0	H	0.0	-10.9	11.1	46.0


Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak


802.11b CH1

FCC RE 1G-3GHz PK+AV Class B

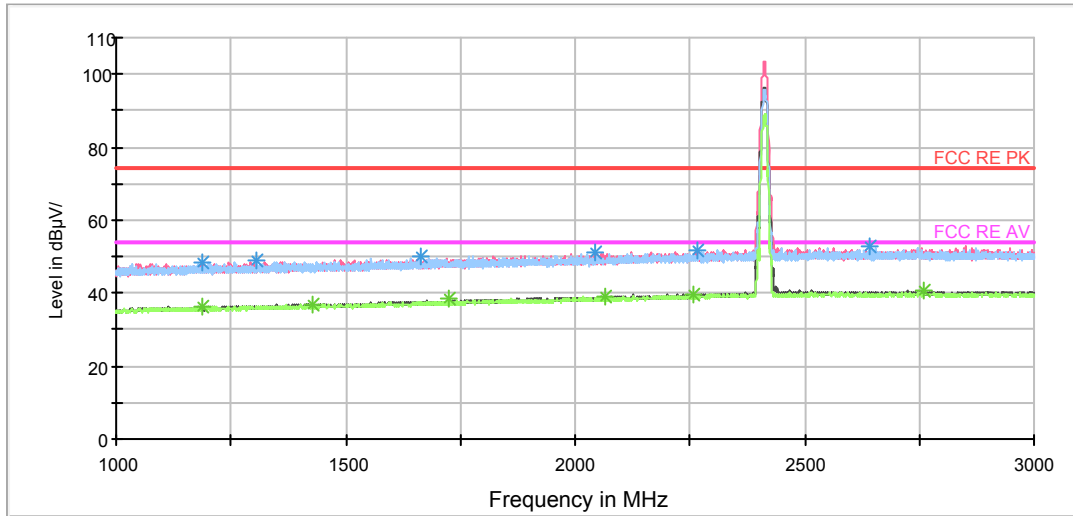


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

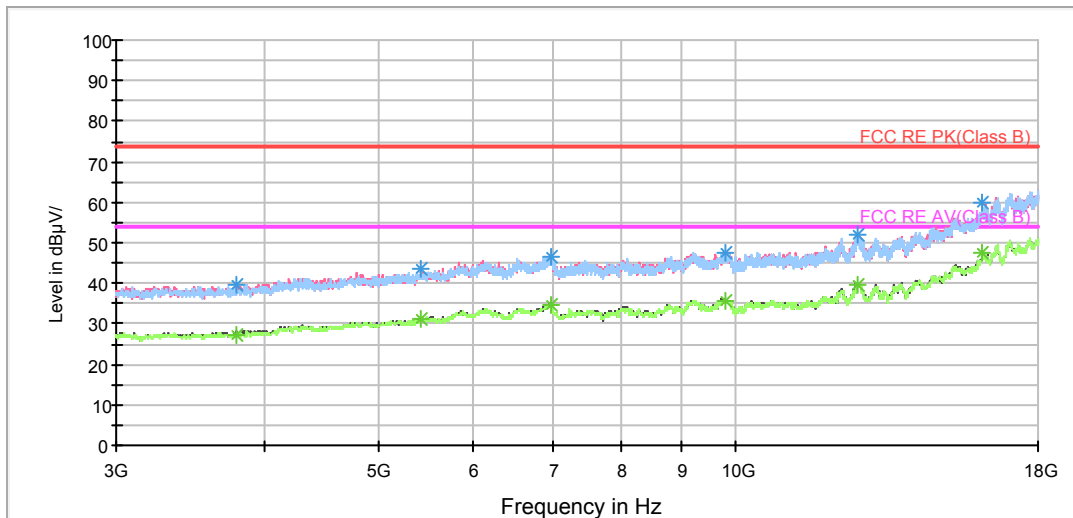

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

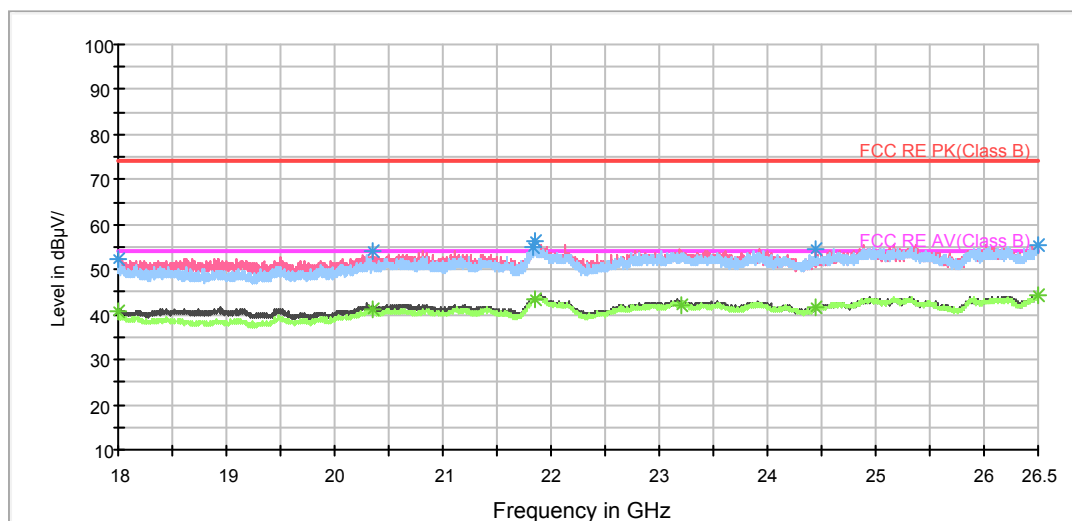

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.600000	48.3	100.0	V	306.0	45.9	2.4	25.7	74
1306.400000	48.8	100.0	H	339.0	46.0	2.8	25.2	74
1661.600000	49.9	100.0	H	12.0	45.9	4.0	24.1	74
2041.600000	50.9	100.0	V	356.0	45.5	5.4	23.1	74
2266.000000	51.7	100.0	V	0.0	45.4	6.3	22.3	74
2644.000000	52.9	100.0	V	355.0	45.6	7.3	21.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1185.600000	36.1	100.0	V	0.0	33.7	2.4	17.9	54
1430.000000	36.8	100.0	V	199.0	33.6	3.2	17.2	54
1724.800000	38.3	100.0	V	111.0	34.1	4.2	15.7	54
2066.400000	39.0	100.0	V	0.0	33.5	5.5	15.0	54
2258.000000	39.5	100.0	V	334.0	33.2	6.3	14.5	54
2760.400000	40.7	100.0	V	253.0	33.3	7.4	13.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH6

FCC RE 1G-3GHz PK+AV Class B

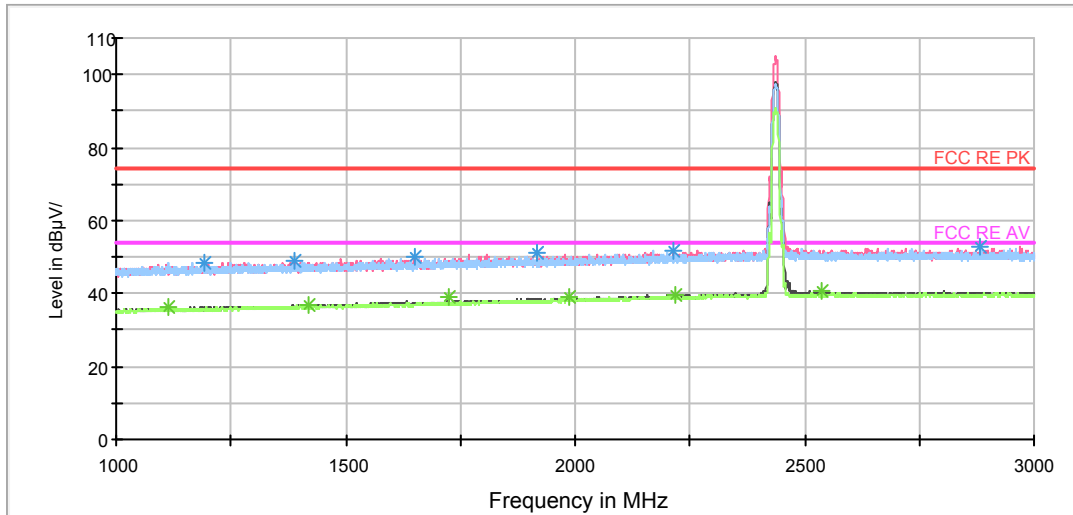


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

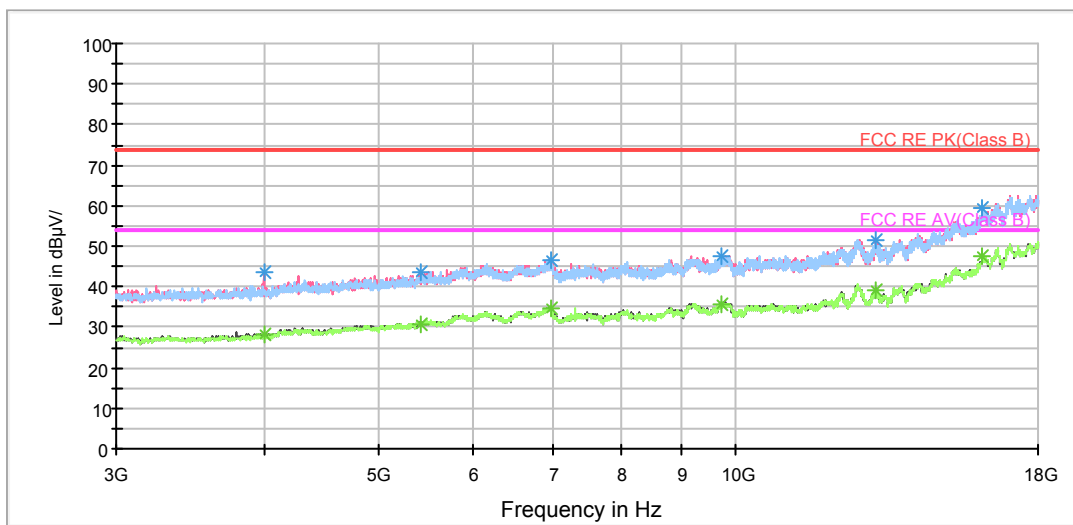

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

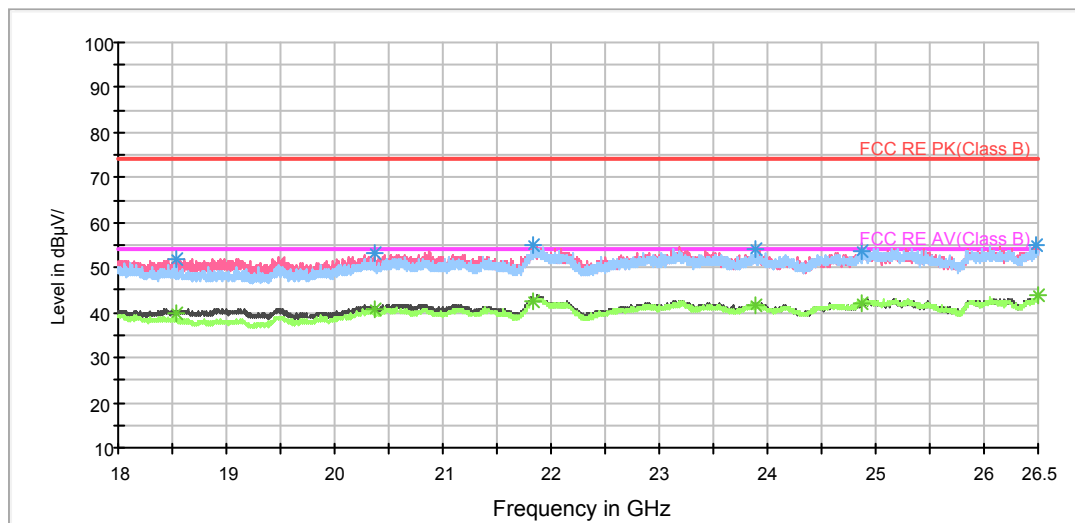

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1192.000000	48.6	100.0	H	7.0	46.2	2.4	25.4	74
1387.200000	48.7	100.0	V	331.0	45.7	3.0	25.3	74
1648.800000	50.0	100.0	V	118.0	46.1	3.9	24.0	74
1918.400000	51.2	100.0	V	279.0	46.3	4.9	22.8	74
2213.600000	51.6	100.0	V	359.0	45.5	6.1	22.4	74
2882.400000	52.9	100.0	V	331.0	45.4	7.5	21.1	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1114.400000	36.2	100.0	V	0.0	34.0	2.2	17.8	54
1420.000000	36.9	100.0	V	358.0	33.8	3.1	17.1	54
1724.800000	39.0	100.0	V	279.0	34.8	4.2	15.0	54
1985.600000	39.0	100.0	V	272.0	33.9	5.1	15.0	54
2216.400000	39.6	100.0	V	288.0	33.5	6.1	14.4	54
2536.400000	40.6	100.0	V	127.0	33.4	7.2	13.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH11

FCC RE 1G-3GHz PK+AV Class B

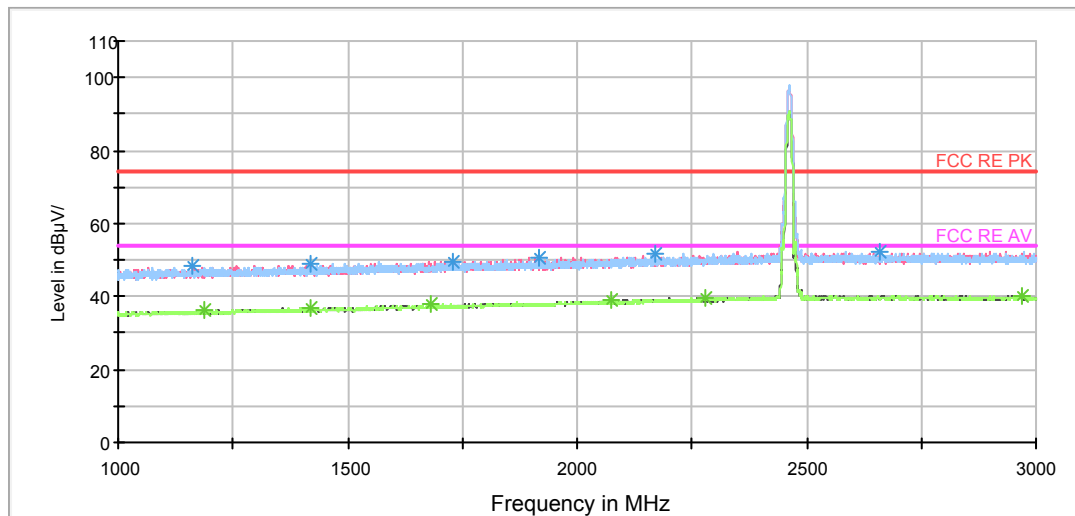


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

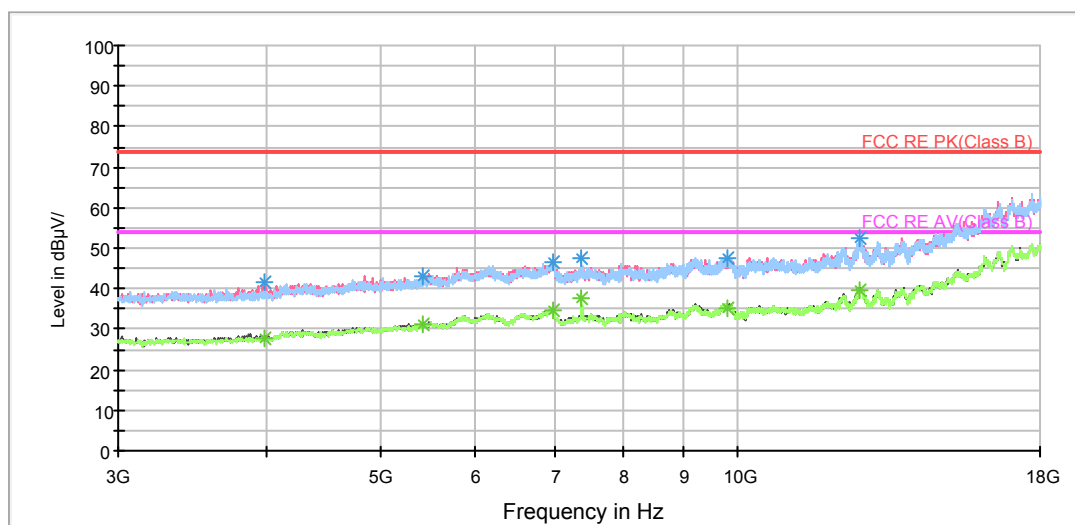

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

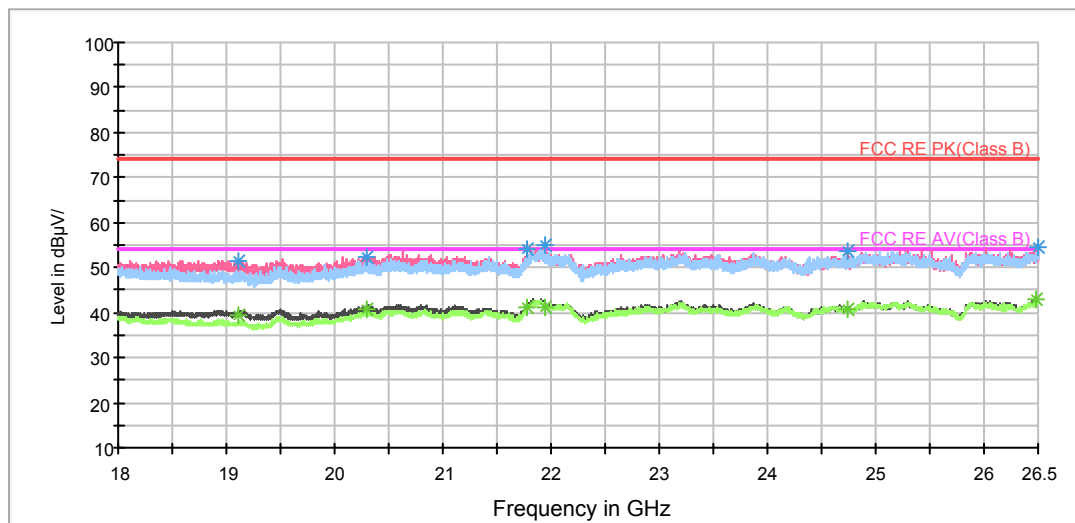

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1160.800000	48.3	100.0	V	235.0	46.0	2.3	25.7	74
1418.400000	48.8	100.0	V	235.0	45.7	3.1	25.2	74
1728.000000	49.6	100.0	V	250.0	45.4	4.2	24.4	74
1917.200000	50.7	100.0	V	358.0	45.8	4.9	23.3	74
2172.000000	51.8	100.0	H	283.0	45.9	5.9	22.2	74
2658.400000	52.1	100.0	V	258.0	44.8	7.3	21.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1188.800000	36.1	100.0	V	272.0	33.7	2.4	17.9	54
1420.000000	36.8	100.0	H	89.0	33.7	3.1	17.2	54
1680.000000	37.7	100.0	H	23.0	33.7	4.0	16.3	54
2072.400000	38.8	100.0	V	348.0	33.3	5.5	15.2	54
2278.400000	39.5	100.0	V	183.0	33.2	6.3	14.5	54
2967.600000	40.2	100.0	V	322.0	32.7	7.5	13.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH1

FCC RE 1G-3GHz PK+AV Class B

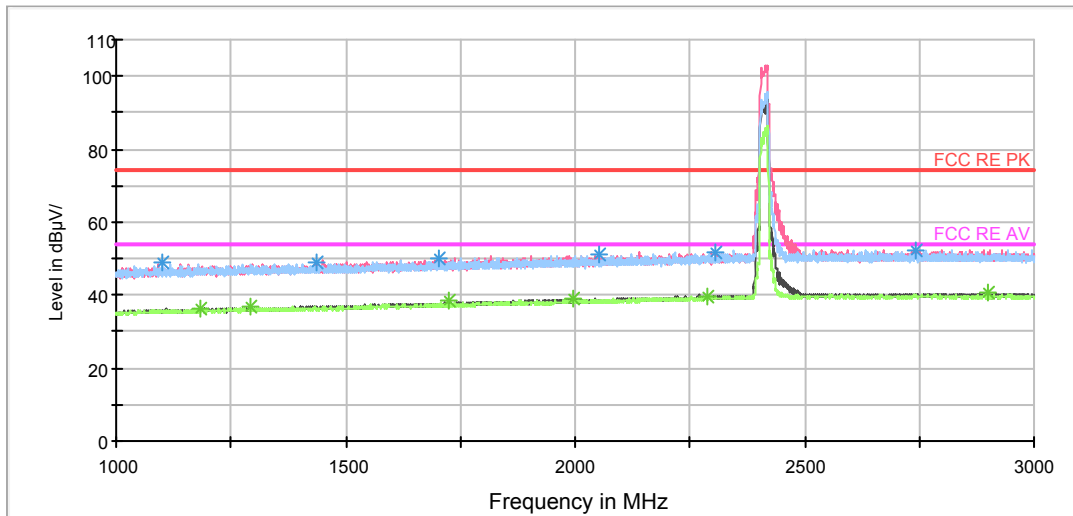


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

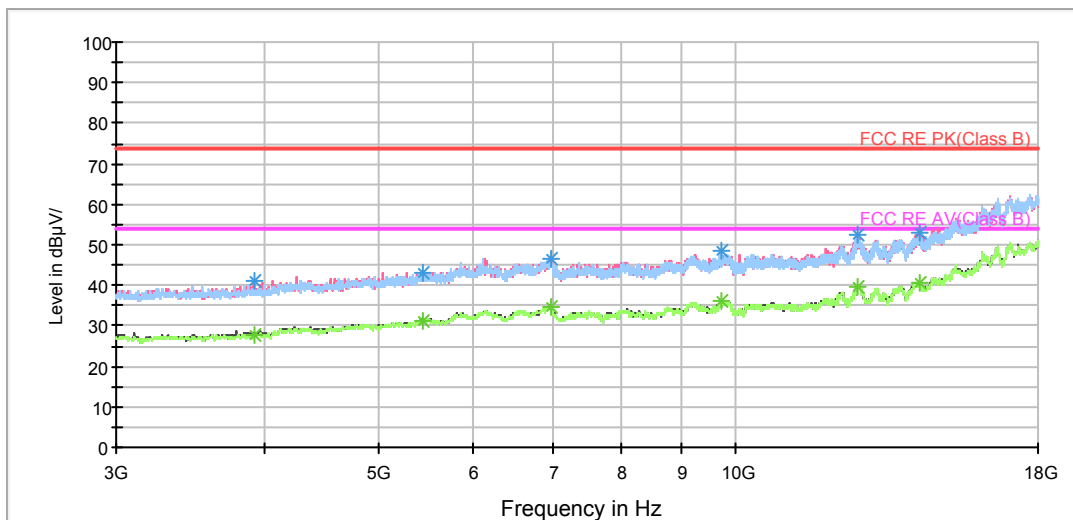

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

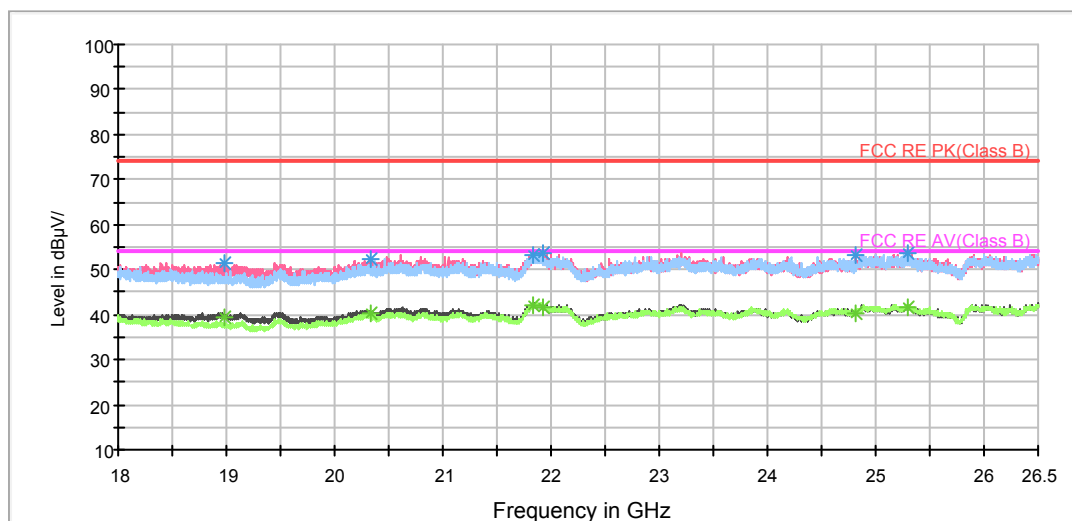

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1098.800000	48.8	100.0	H	87.0	46.7	2.1	25.2	74
1435.200000	48.7	100.0	V	279.0	45.5	3.2	25.3	74
1701.200000	50.0	100.0	V	330.0	45.9	4.1	24.0	74
2052.800000	51.0	100.0	H	64.0	45.6	5.4	23.0	74
2304.800000	51.8	100.0	V	346.0	45.4	6.4	22.2	74
2740.800000	52.4	100.0	V	0.0	45.0	7.4	21.6	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.800000	36.3	100.0	V	0.0	33.9	2.4	17.7	54
1293.200000	36.9	100.0	V	356.0	34.2	2.7	17.1	54
1725.200000	38.2	100.0	V	0.0	34.0	4.2	15.8	54
1996.000000	38.8	100.0	V	242.0	33.6	5.2	15.2	54
2288.800000	39.5	100.0	V	264.0	33.1	6.4	14.5	54
2901.200000	40.5	100.0	V	309.0	33.0	7.5	13.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH6

FCC RE 1G-3GHz PK+AV Class B

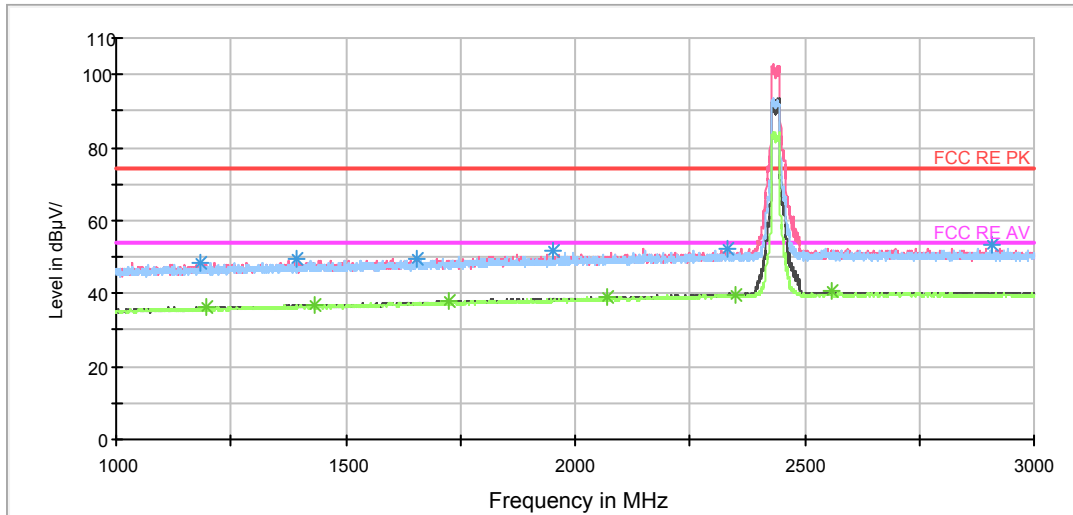


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

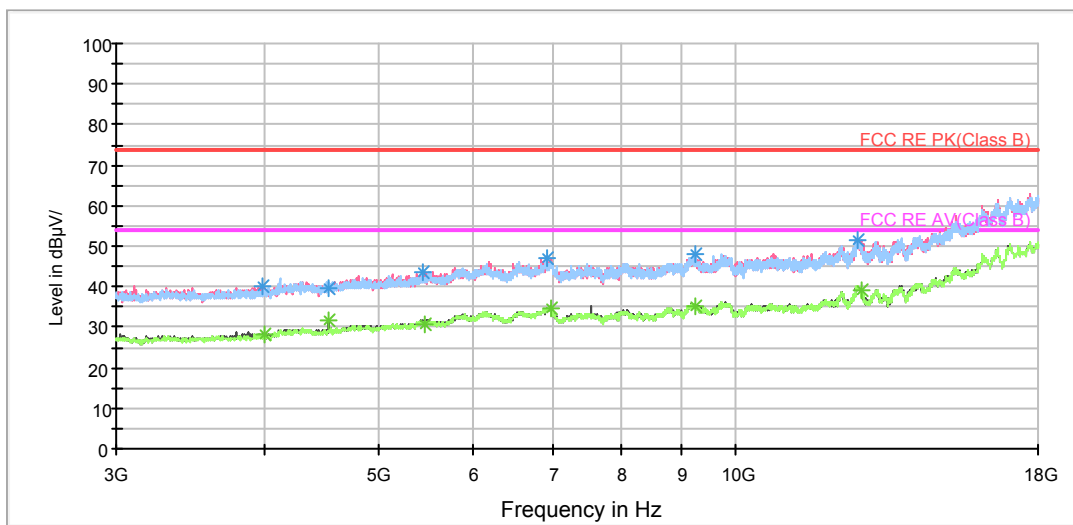

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

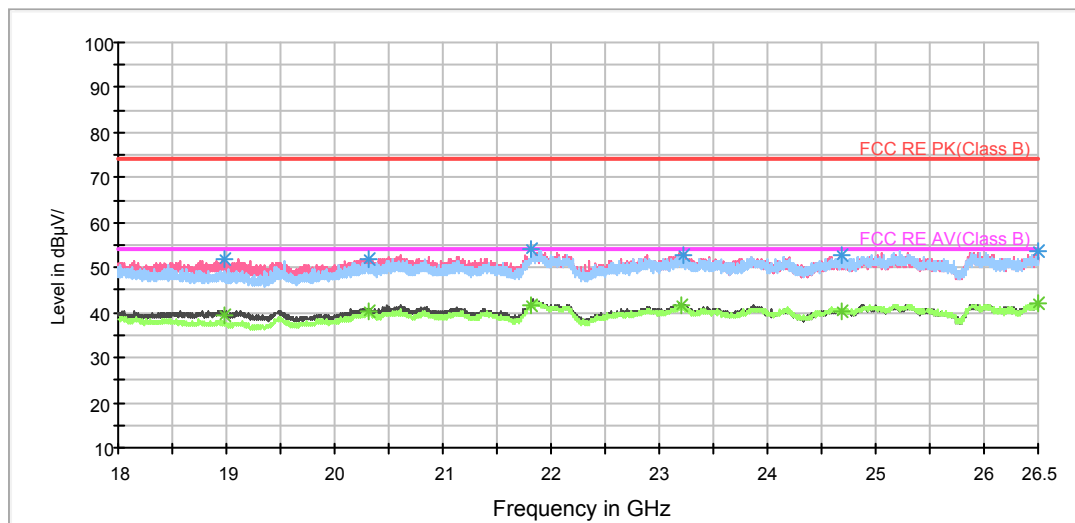

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.000000	48.4	100.0	V	238.0	46.0	2.4	25.6	74
1394.000000	49.3	100.0	V	275.0	46.3	3.0	24.7	74
1653.600000	49.6	100.0	V	275.0	45.7	3.9	24.4	74
1953.200000	51.5	100.0	H	15.0	46.5	5.0	22.5	74
2331.200000	52.1	100.0	H	59.0	45.6	6.5	21.9	74
2908.400000	53.4	100.0	V	354.0	45.9	7.5	20.6	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.800000	36.3	100.0	V	200.0	33.9	2.4	17.7	54
1431.200000	37.0	100.0	V	0.0	33.8	3.2	17.0	54
1724.800000	38.2	100.0	V	357.0	34.0	4.2	15.8	54
2069.600000	39.2	100.0	V	0.0	33.7	5.5	14.8	54
2347.200000	39.7	100.0	V	231.0	33.1	6.6	14.3	54
2558.400000	40.4	100.0	V	305.0	33.2	7.2	13.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH11

FCC RE 1G-3GHz PK+AV Class B

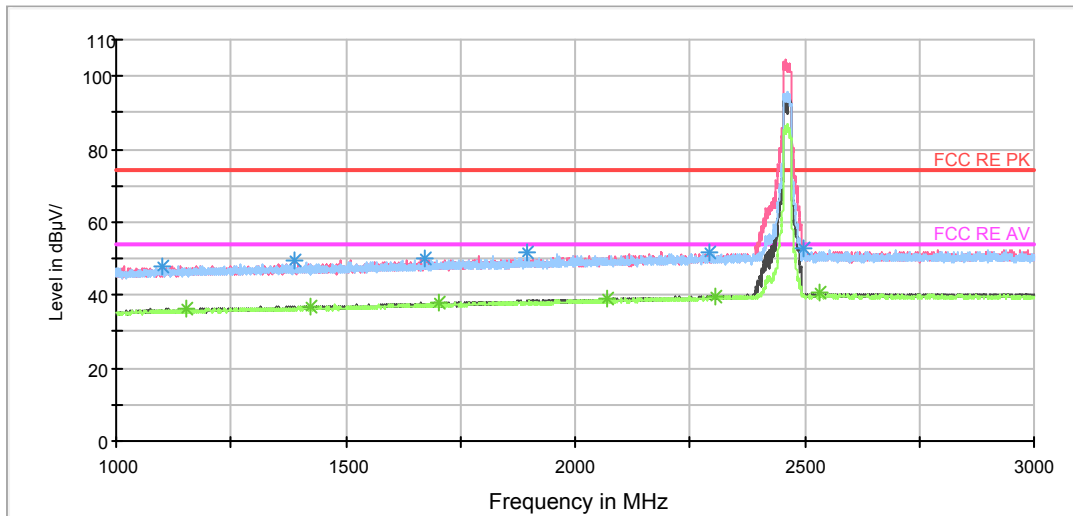


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

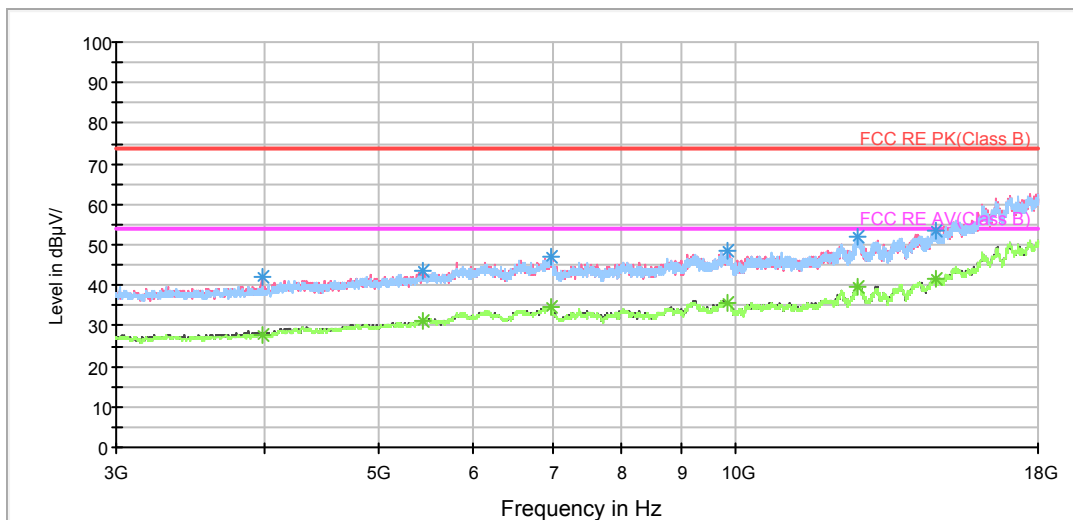

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

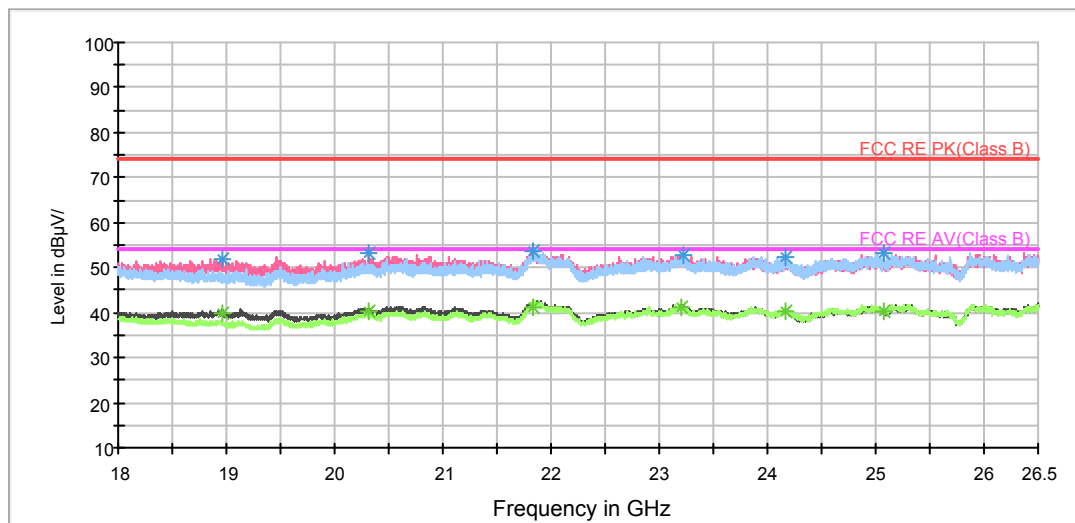

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1101.600000	48.1	100.0	V	347.0	46.0	2.1	25.9	74
1387.200000	49.4	100.0	V	312.0	46.4	3.0	24.6	74
1670.400000	49.9	100.0	H	72.0	45.9	4.0	24.1	74
1893.600000	51.5	100.0	V	355.0	46.7	4.8	22.5	74
2293.600000	51.5	100.0	V	319.0	45.1	6.4	22.5	74
2499.200000	52.7	100.0	H	14.0	45.6	7.1	21.3	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1153.600000	36.2	100.0	H	221.0	33.9	2.3	17.8	54
1424.400000	37.0	100.0	V	297.0	33.9	3.1	17.0	54
1702.000000	38.0	100.0	H	23.0	33.9	4.1	16.0	54
2070.800000	38.9	100.0	H	72.0	33.4	5.5	15.1	54
2306.400000	39.7	100.0	H	183.0	33.3	6.4	14.3	54
2532.400000	40.4	100.0	V	356.0	33.2	7.2	13.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH1

FCC RE 1G-3GHz PK+AV Class B

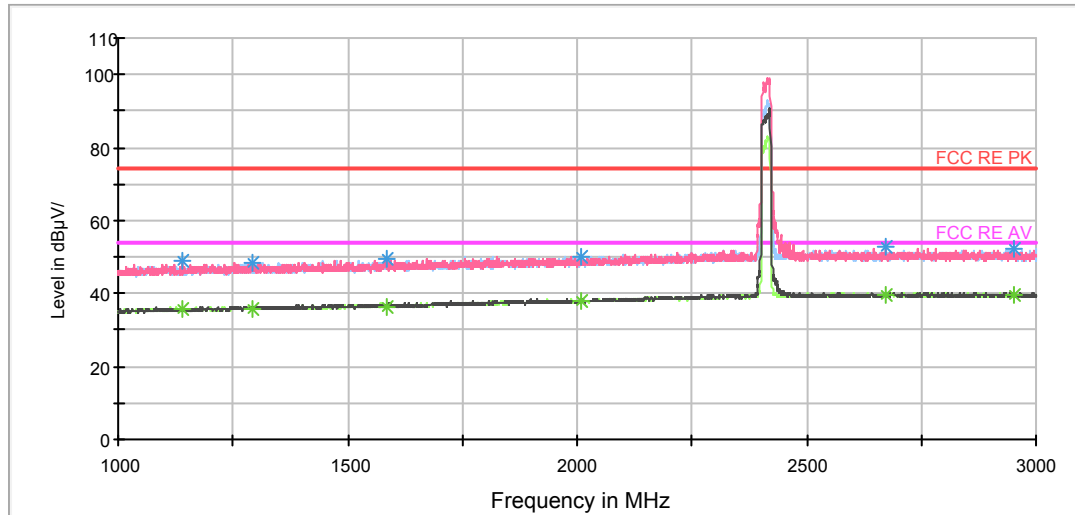


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

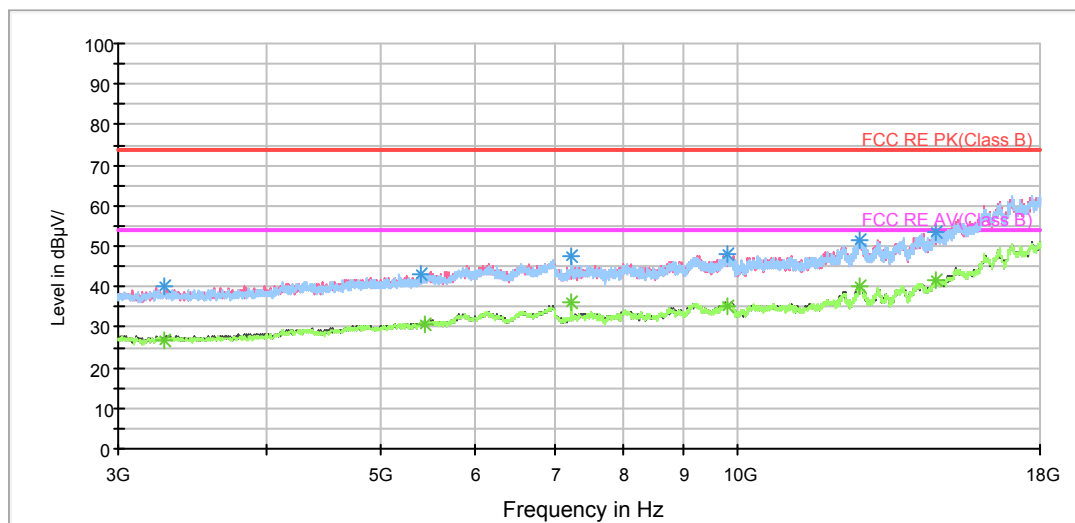

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

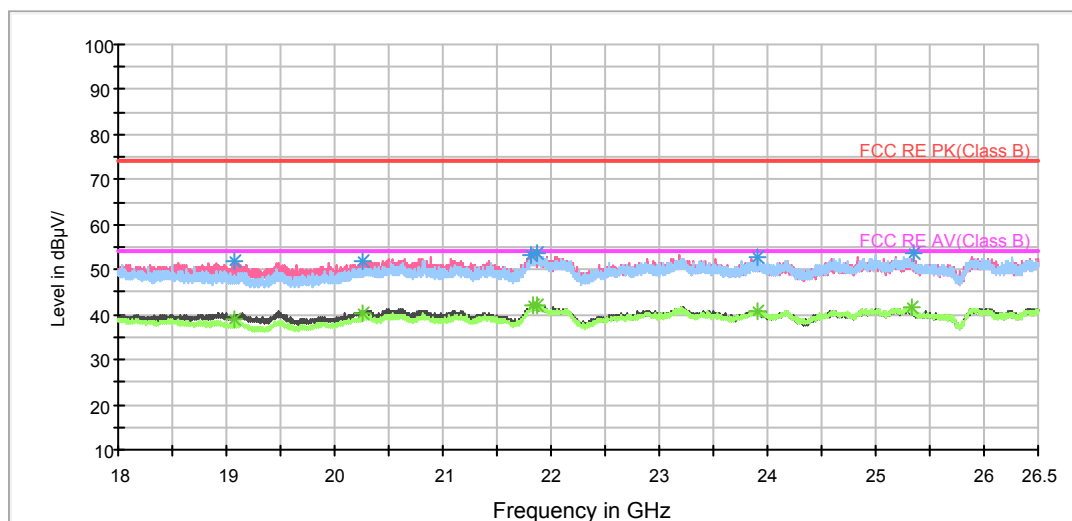

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1141.200000	49.1	100.0	V	0.0	46.8	2.3	24.9	74
1294.400000	48.4	100.0	H	127.0	45.7	2.7	25.6	74
1586.800000	49.3	100.0	V	5.0	45.6	3.7	24.7	74
2008.800000	50.1	100.0	H	354.0	44.9	5.2	23.9	74
2671.200000	52.9	100.0	V	0.0	45.6	7.3	21.1	74
2951.600000	52.3	100.0	H	350.0	44.8	7.5	21.7	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1141.200000	35.5	100.0	V	0.0	33.2	2.3	18.5	54
1294.400000	36.0	100.0	H	127.0	33.3	2.7	18.0	54
1586.800000	36.6	100.0	V	5.0	32.9	3.7	17.4	54
2008.800000	38.1	100.0	H	354.0	32.9	5.2	15.9	54
2671.200000	39.7	100.0	V	0.0	32.4	7.3	14.3	54
2951.600000	39.6	100.0	H	350.0	32.1	7.5	14.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH6


FCC RE 1G-3GHz PK+AV Class B

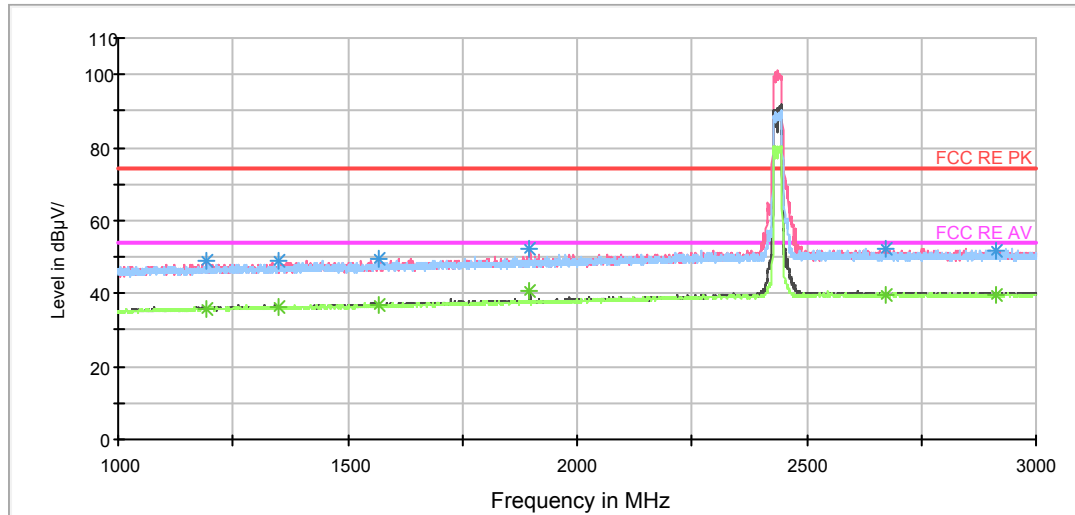

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

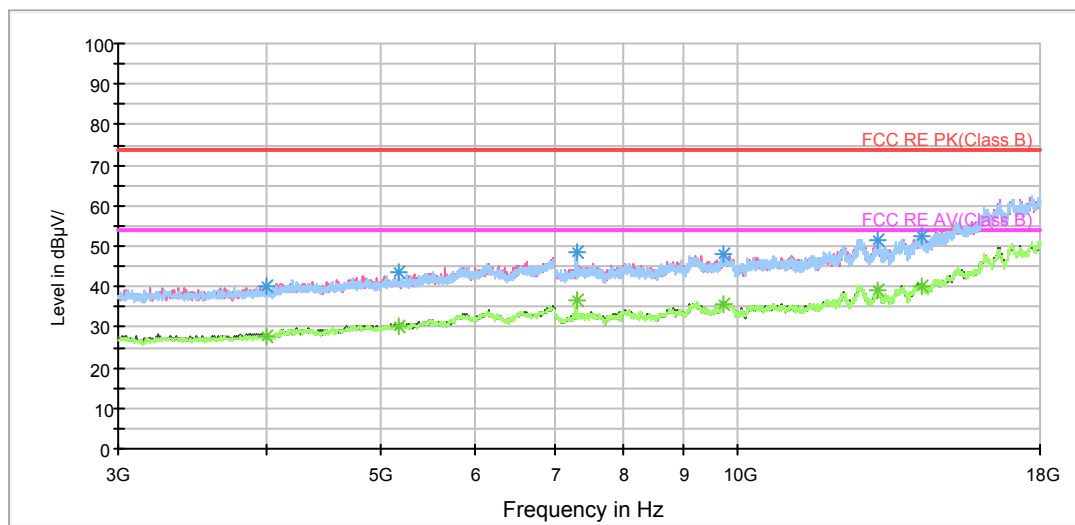

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

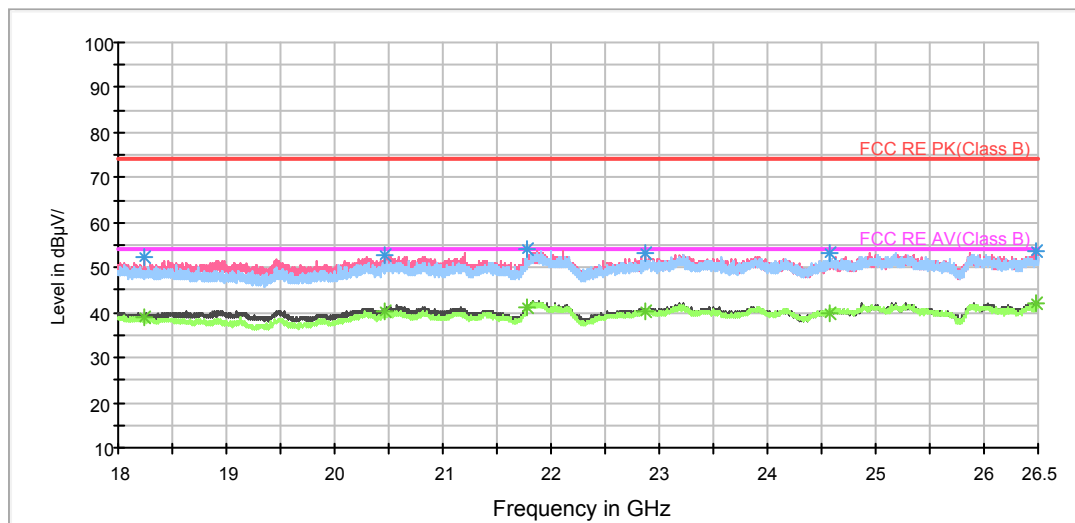

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1192.000000	48.9	100.0	V	235.0	46.5	2.4	25.1	74
1349.600000	49.1	100.0	H	111.0	46.2	2.9	24.9	74
1567.200000	49.7	100.0	H	163.0	46.1	3.6	24.3	74
1897.200000	52.3	100.0	V	287.0	47.5	4.8	21.7	74
2674.000000	52.3	100.0	V	203.0	45.0	7.3	21.7	74
2912.000000	52.0	100.0	H	177.0	44.5	7.5	22.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1192.000000	35.8	100.0	V	235.0	33.4	2.4	18.2	54
1349.600000	36.2	100.0	H	111.0	33.3	2.9	17.8	54
1567.200000	36.6	100.0	H	163.0	33.0	3.6	17.4	54
1897.200000	40.6	100.0	V	287.0	35.8	4.8	13.4	54
2674.000000	39.4	100.0	V	203.0	32.1	7.3	14.6	54
2912.000000	39.4	100.0	H	177.0	31.9	7.5	14.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH11

FCC RE 1G-3GHz PK+AV Class B

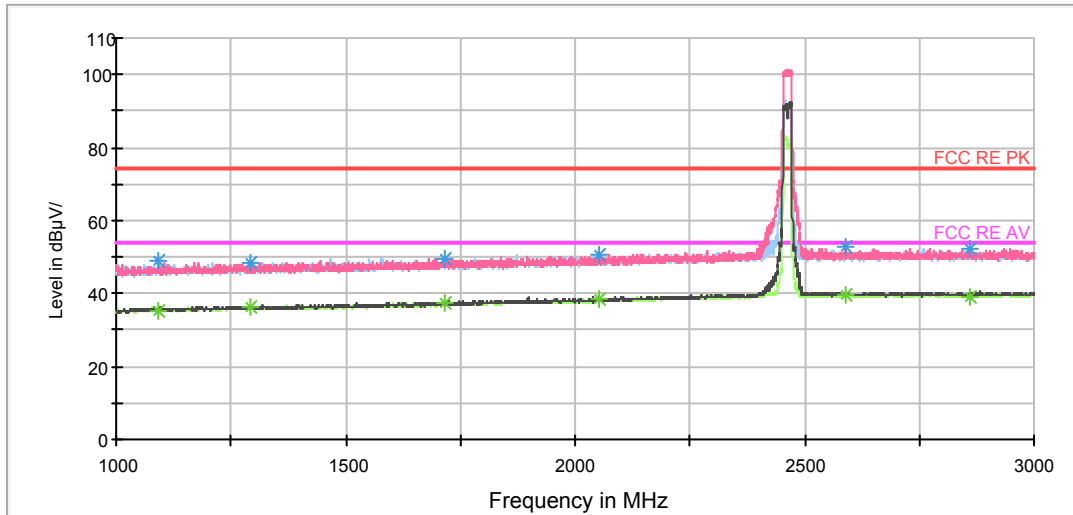


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

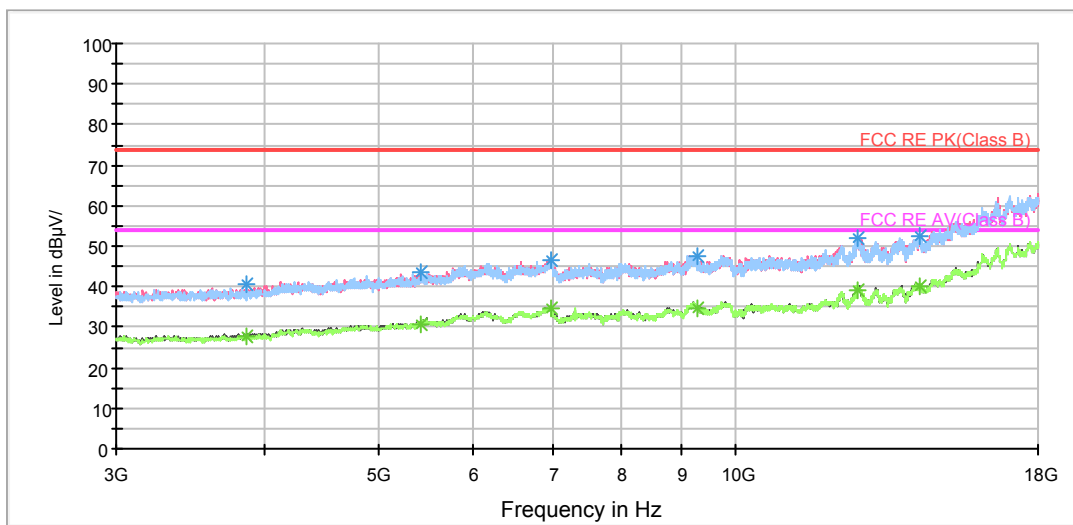

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

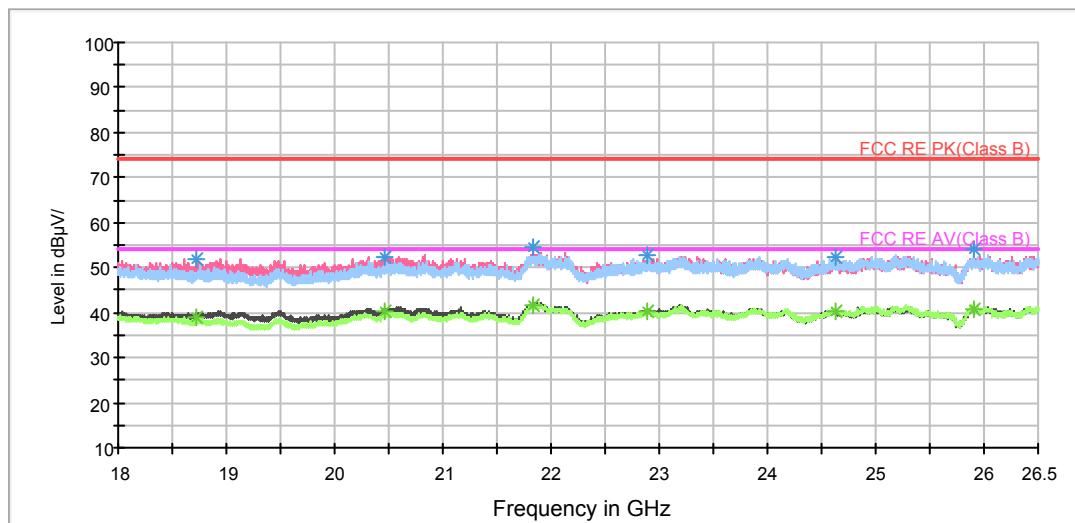

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1090.000000	49.1	100.0	V	17.0	47.0	2.1	24.9	74
1294.000000	48.6	100.0	H	177.0	45.9	2.7	25.4	74
1714.800000	49.7	100.0	H	342.0	45.5	4.2	24.3	74
2052.000000	50.6	100.0	H	214.0	45.2	5.4	23.4	74
2588.400000	52.9	100.0	V	10.0	45.7	7.2	21.1	74
2860.000000	52.1	100.0	H	358.0	44.6	7.5	21.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1090.000000	35.5	100.0	V	17.0	33.4	2.1	18.5	54
1294.000000	36.2	100.0	H	177.0	33.5	2.7	17.8	54
1714.800000	37.1	100.0	H	342.0	32.9	4.2	16.9	54
2052.000000	38.3	100.0	H	214.0	32.9	5.4	15.7	54
2588.400000	39.6	100.0	V	10.0	32.4	7.2	14.4	54
2860.000000	39.3	100.0	H	358.0	31.8	7.5	14.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH3

FCC RE 1G-3GHz PK+AV Class B

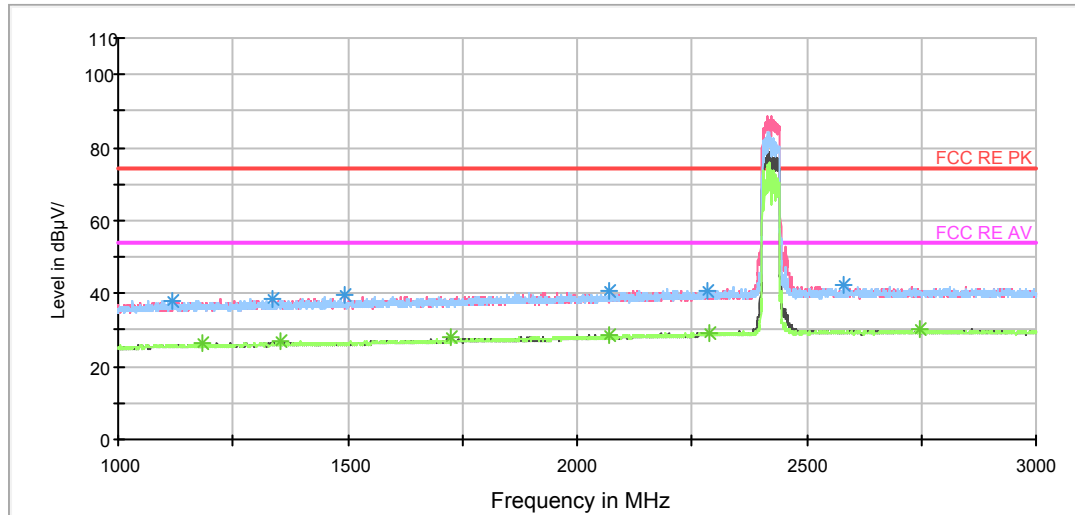


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

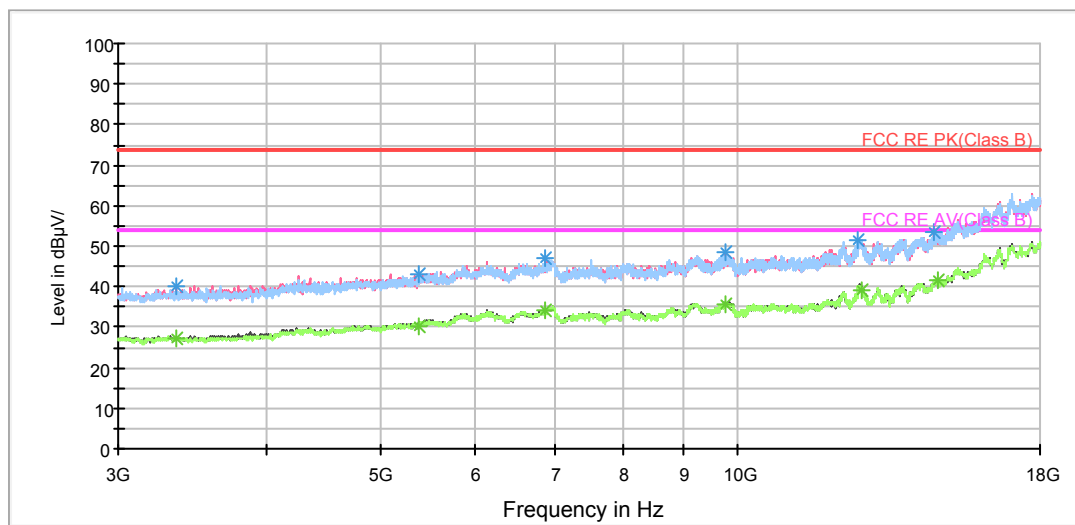

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

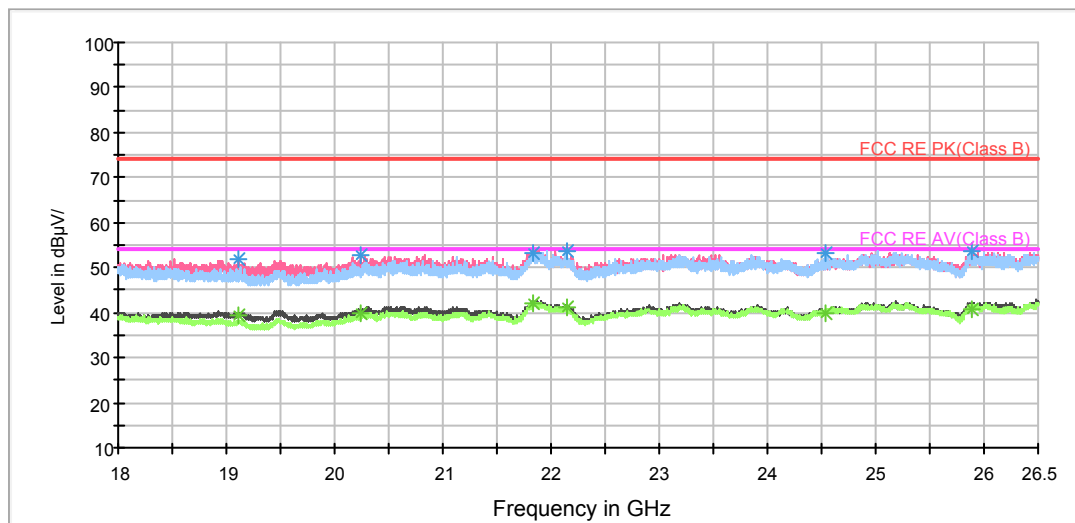

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1117.600000	38.1	100.0	H	88.0	45.9	-7.8	35.9	74
1334.800000	38.7	100.0	V	358.0	45.8	-7.1	35.3	74
1493.200000	39.4	100.0	V	208.0	46.1	-6.7	34.6	74
2070.400000	40.8	100.0	H	301.0	45.3	-4.5	33.2	74
2285.600000	40.9	100.0	V	340.0	44.5	-3.6	33.1	74
2582.400000	42.3	100.0	H	131.0	45.1	-2.8	31.7	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1181.600000	26.2	100.0	H	6.0	33.8	-7.6	27.8	54
1354.800000	26.7	100.0	V	345.0	33.8	-7.1	27.3	54
1724.800000	28.3	100.0	V	285.0	34.1	-5.8	25.7	54
2069.200000	28.5	100.0	V	322.0	33.0	-4.5	25.5	54
2286.400000	29.2	100.0	V	18.0	32.8	-3.6	24.8	54
2747.200000	30.1	100.0	H	6.0	32.7	-2.6	23.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH6


FCC RE 1G-3GHz PK+AV Class B

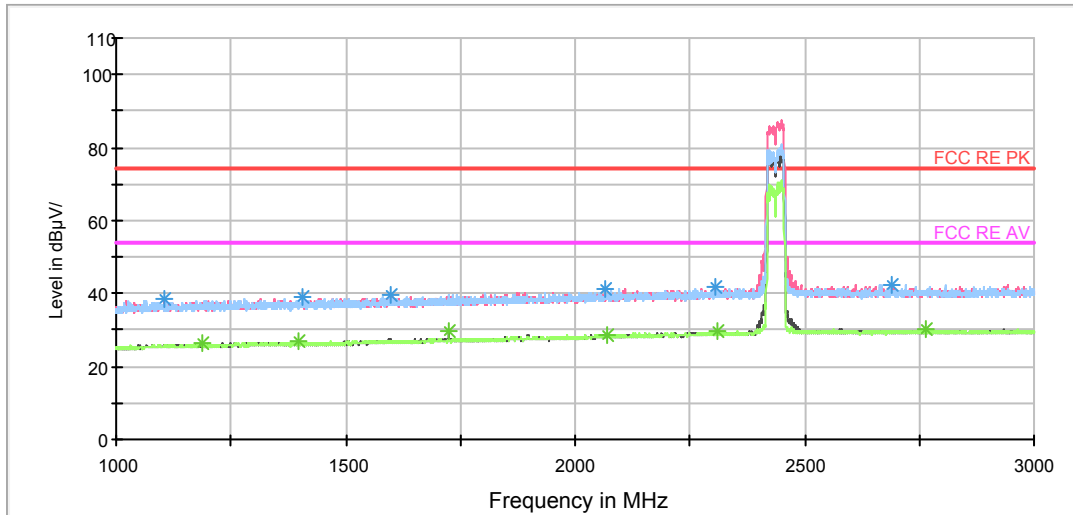

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

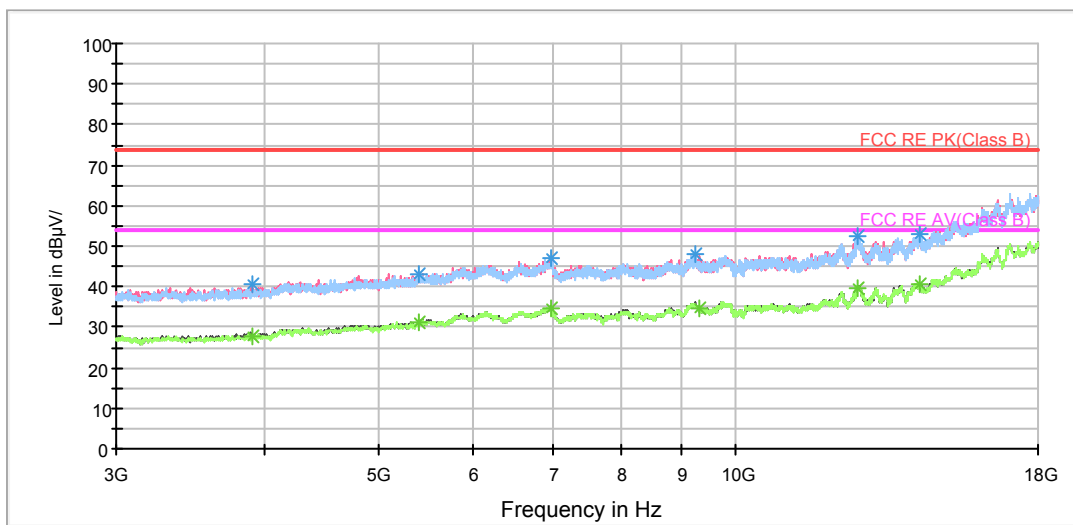

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

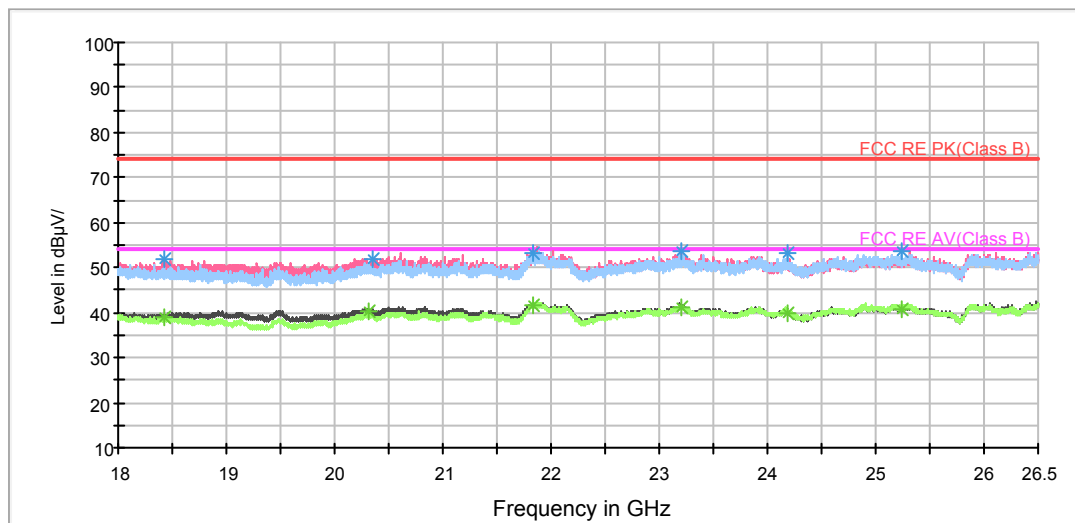

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1104.800000	38.4	100.0	V	339.0	46.3	-7.9	35.6	74
1406.000000	39.0	100.0	H	208.0	45.9	-6.9	35.0	74
1598.000000	39.8	100.0	V	197.0	46.1	-6.3	34.2	74
2067.200000	41.2	100.0	H	149.0	45.7	-4.5	32.8	74
2304.000000	41.7	100.0	V	353.0	45.3	-3.6	32.3	74
2690.400000	42.5	100.0	V	0.0	45.2	-2.7	31.5	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1187.600000	26.2	100.0	V	313.0	33.8	-7.6	27.8	54
1397.600000	26.8	100.0	V	197.0	33.7	-6.9	27.2	54
1725.200000	29.7	100.0	V	292.0	35.5	-5.8	24.3	54
2070.000000	28.8	100.0	V	0.0	33.3	-4.5	25.2	54
2311.600000	29.6	100.0	V	299.0	33.1	-3.5	24.4	54
2765.600000	30.1	100.0	H	120.0	32.7	-2.6	23.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH9

FCC RE 1G-3GHz PK+AV Class B

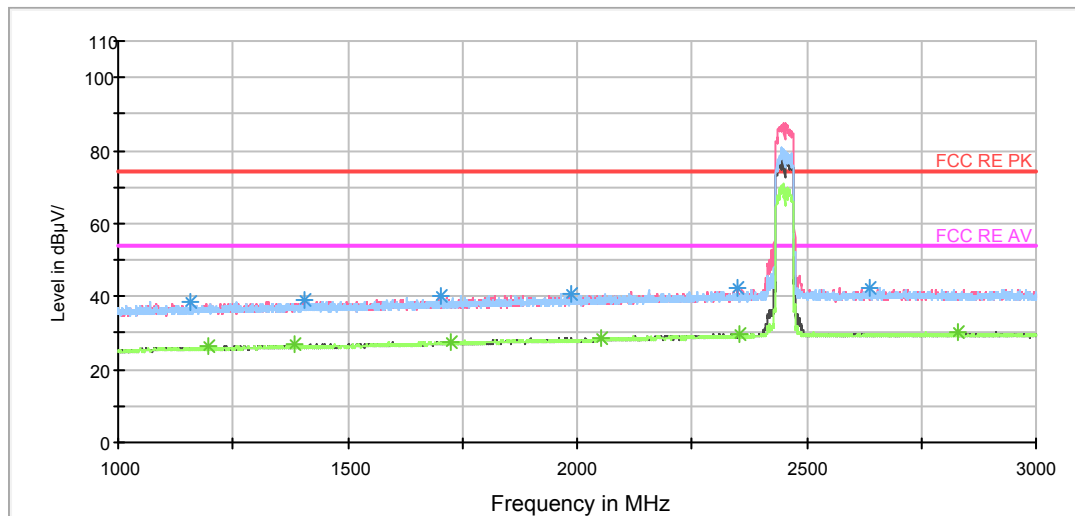


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

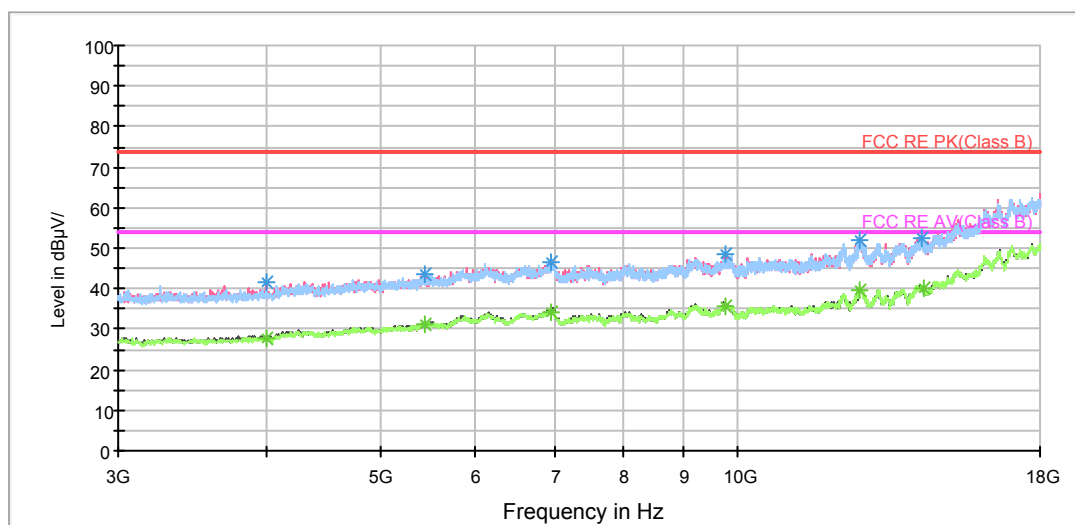

Radiates Emission from 3GHz to 18GHz

BELL_RE 18-26.5GHz PK+AV

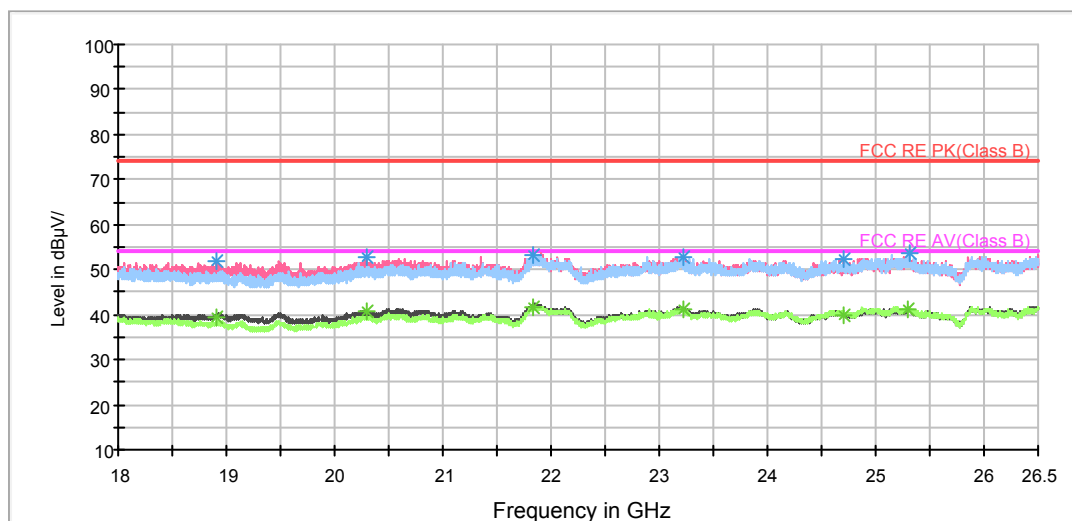

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1157.200000	38.4	100.0	V	358.0	46.1	-7.7	35.6	74
1405.600000	39.1	100.0	V	310.0	46.0	-6.9	34.9	74
1702.800000	40.2	100.0	H	334.0	46.1	-5.9	33.8	74
1988.000000	40.6	100.0	V	0.0	45.5	-4.9	33.4	74
2348.400000	42.3	100.0	V	337.0	45.7	-3.4	31.7	74
2639.600000	42.3	100.0	H	128.0	45.0	-2.7	31.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	26.3	100.0	V	238.0	33.9	-7.6	27.7	54
1382.400000	26.7	100.0	V	358.0	33.7	-7.0	27.3	54
1724.800000	27.6	100.0	V	0.0	33.4	-5.8	26.4	54
2050.400000	28.8	100.0	H	10.0	33.4	-4.6	25.2	54
2352.000000	29.4	100.0	H	150.0	32.8	-3.4	24.6	54
2828.000000	30.3	100.0	H	180.0	32.9	-2.6	23.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.8. Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.
The test is in transmitting mode.

Test Setup

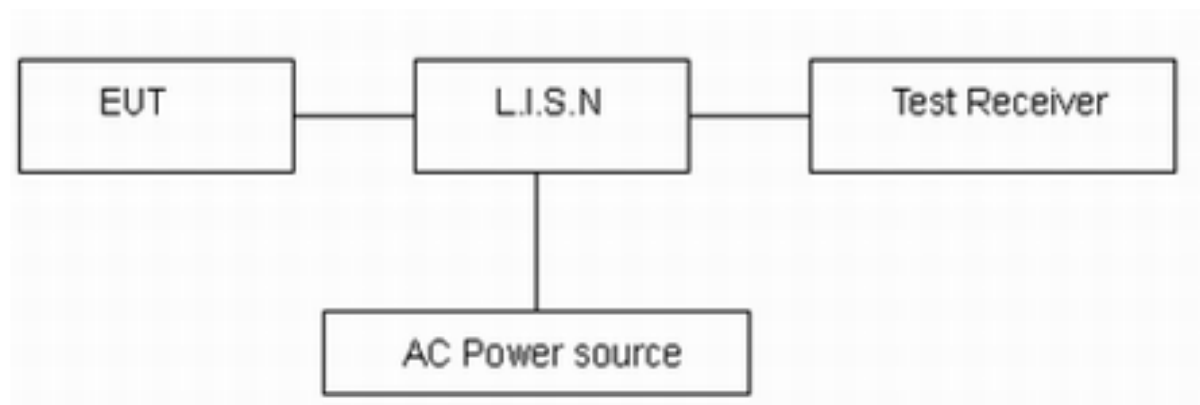

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.


Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

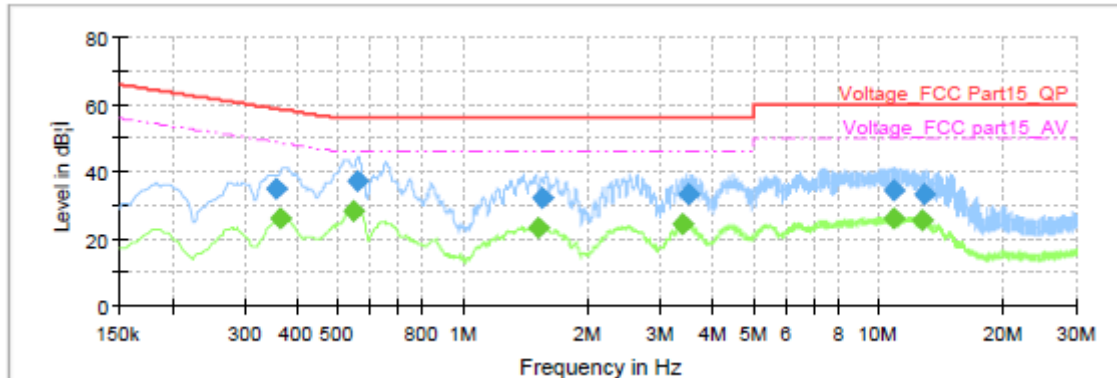

Frequency (MHz)	QuasiPeak (dB _i /V)	Average (dB _i /V)	Limit (dB _i /V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.357000	34.89	---	58.80	23.91	1000.0	9.000	L1	ON	19.6
0.363750	---	26.06	48.64	22.58	1000.0	9.000	L1	ON	19.6
0.546000	---	28.22	46.00	17.78	1000.0	9.000	L1	ON	19.6
0.559500	37.33	---	56.00	18.67	1000.0	9.000	L1	ON	19.6
1.524750	---	23.47	46.00	22.53	1000.0	9.000	L1	ON	19.6
1.554000	32.19	---	56.00	23.81	1000.0	9.000	L1	ON	19.6
3.374250	---	24.19	46.00	21.81	1000.0	9.000	L1	ON	19.6
3.513750	33.09	---	56.00	22.91	1000.0	9.000	L1	ON	19.6
10.889250	---	26.35	50.00	23.65	1000.0	9.000	L1	ON	19.9
10.959000	34.60	---	60.00	25.40	1000.0	9.000	L1	ON	19.9
12.752250	---	25.34	50.00	24.66	1000.0	9.000	L1	ON	19.9
12.957000	33.59	---	60.00	26.41	1000.0	9.000	L1	ON	19.9

L Line

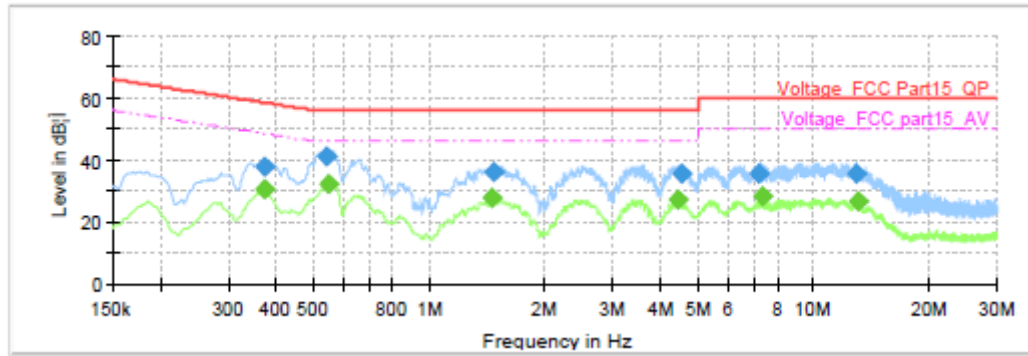

Frequency (MHz)	QuasiPeak (dB _i / V)	Average (dB _i / V)	Limit (dB _i / V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.375000	---	30.37	48.39	18.02	1000.0	9.000	N	ON	19.6
0.375000	38.00	---	58.39	20.39	1000.0	9.000	N	ON	19.6
0.541500	41.13	---	56.00	14.87	1000.0	9.000	N	ON	19.6
0.548250	---	32.23	46.00	13.77	1000.0	9.000	N	ON	19.6
1.461750	---	27.57	46.00	18.43	1000.0	9.000	N	ON	19.6
1.464000	35.87	---	56.00	20.13	1000.0	9.000	N	ON	19.6
4.434000	---	27.37	46.00	18.63	1000.0	9.000	N	ON	19.7
4.526250	35.81	---	56.00	20.19	1000.0	9.000	N	ON	19.7
7.226250	35.77	---	60.00	24.23	1000.0	9.000	N	ON	19.7
7.381500	---	28.55	50.00	21.45	1000.0	9.000	N	ON	19.7
12.918750	35.60	---	60.00	24.40	1000.0	9.000	N	ON	19.9
12.979500	---	26.71	50.00	23.29	1000.0	9.000	N	ON	19.9

N Line

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2017-11-18	2020-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-11-18	2020-11-17
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2014-12-06	2019-12-05
EMI Test Receiver	R&S	ESCS30	100138	2017-12-17	2018-12-16
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
RF Cable	Agilent	SMA 15cm	0001	2017-08-04	2018-02-03
Software (CE)	ROHDE&SCHW ARZ	EMC32	9.26.0	/	/
Software (RE/RSE)	ROHDE&SCHW ARZ	EMC32	8.52.0	/	/

*****END OF REPORT *****