



# TEST REPORT

No. 2014EEB00060-EMC

for

**ZTE Corporation**

**N9520 Wireless Charging Leather Cover、 Wireless Charging**

**Model Name: TWC010,TWC9520R**

**FCC ID: SRQ -TWC010**

with

**Hardware Version: A/0**

**Software Version: /**

**Issued Date: 2014-02-26**

**Test Laboratory:**

*FCC 2.948 Listed: No.310359*

*IC O.A.T.S listed: No.6629C-1*

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT .....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>5</b>
<b>3.4. EUT SET-UPS .....</b>	<b>5</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>6</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>6</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>7</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>9</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>10</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Shenzhen, Telecommunication Metrology Center of MIIT  
Address: No. 12 Building, Shangsha Innovation and Technology Park, Futian District  
Postal Code: 518048  
Telephone: +86(0)755-33322000  
Fax: +86(0)755-33322001


### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.3. Project data


Testing Start Date: 2014-02-14  
Testing End Date: 2014-02-24

### 1.4. Signature




---

Du Zhaoxuan  
(Prepared this test report)



---

Zhang Bojun  
(Reviewed this test report)



---

Lu Minniu  
Director of the laboratory  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: ZTE Corporation  
Address /Post: ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
Country: China  
Fax: +86-21-50801070

### **2.2. Manufacturer Information**

Company Name: ZTE Corporation  
Address /Post: ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
Country: China  
Fax: +86-21-50801070

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	N9520 Wireless Charging Leather Cover、 Wireless Charging
Model Name	TWC010,TWC9520R
FCC ID	SRQ-TWC010

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	A/0	/

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN
AE1	Switching Adapter	/

AE1

Model	STC-A22O50USBA
Manufacturer	RUIDE
Length of DC line	80cm

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. EUT set-ups**

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1	Charging mode
Set.2	EUT1+ PC	USB mode

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-2013 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (11.20 meters×6.10meters×5.60meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. =35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 6 GHz, 3 m distance

## 6. SUMMARY OF TEST RESULTS

<b>Abbreviations used in this clause:</b>	
P	Pass
NA	Not applicable
F	Fail

<b>Items</b>	<b>Test Name</b>	<b>Clause in FCC rules</b>	<b>Section in this report</b>	<b>Verdict</b>
1	Radiated Emission	15.109(a)	A.1	P
2	Conducted Emission	15.107(a)	A.2	P

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CAL PERIOD
1	Test Receiver	ESCI	100701	R&S	2014.07.31	1 year
2	Test Receiver	ESCI	100702	R&S	2014.07.31	1 year
3	Test Receiver	FSP 40	100378	R&S	2014.12.20	1 year
4	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2017.01.20	3 years
5	LISN	ESH2-Z5	100196	R&S	2015.01.14	1 year
6	Dual-Ridge Waveguide Horn Antenna	3117	00066577	ETS-Lindgren	2016.04.01	3 years
7	Universal Radio Communication Tester	E5515C	GB44051324	Agilent	2014.05.21	1 year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **Reference**

FCC: CFR Part 15.109(a)

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Limit from CFR Part 15.109(a)

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

\*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/1MHz	15

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Note: the result contains vertical part and Horizontal part

#### Set.1 Charging mode / Peak detector

Frequency(MHz)	Result(dBuV/m)	Polarity	$A_{Rpl}$ (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
16740.000000	61.0	V	15.3	13.0	74.0
16756.000000	61.0	V	15.4	13.0	74.0
16817.000000	61.2	H	15.7	12.8	74.0
16831.000000	61.1	V	15.8	12.9	74.0
16847.000000	61.5	V	15.9	12.5	74.0
17272.000000	61.0	V	15.6	13.0	74.0

#### Set.1 Charging mode / Average detector

Frequency(MHz)	Result(dBuV/m)	Polarity	$A_{Rpl}$ (dB)	Margin(dB)	Limit (dB $\mu$ V/m)
10513.000000	42.5	V	12.0	11.5	54.0
12158.000000	44.7	V	13.1	9.3	54.0
12668.000000	45.3	V	13.6	8.7	54.0
13637.000000	45.6	V	12.8	8.4	54.0
15773.000000	49.0	V	14.5	5.0	54.0
16804.000000	49.8	V	15.7	4.2	54.0

**Set.2 Charging mode / Peak detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dBμV/m)
15771.000000	59.6	H	14.5	14.4	74.0
16240.000000	59.5	V	14.9	14.5	74.0
16753.000000	59.5	H	15.4	14.5	74.0
16883.000000	59.6	V	16.0	14.4	74.0
17281.000000	59.7	H	15.6	14.3	74.0
17379.000000	59.7	H	15.7	14.3	74.0

**Set.2 Charging mode / Average detector**

Frequency(MHz)	Result(dBuV/m)	Polarity	A <sub>Rpl</sub> (dB)	Margin(dB)	Limit (dBμV/m)
2356.500000	37.6	V	3.7	16.4	54.0
3239.750000	37.9	V	5.6	16.1	54.0
6257.625000	38.2	H	9.4	15.8	54.0
8084.625000	39.7	H	9.3	14.3	54.0
12675.000000	44.2	V	13.6	9.8	54.0
15775.000000	48.1	H	14.5	5.9	54.0

FCC-RE1-Part 15-30M-1G

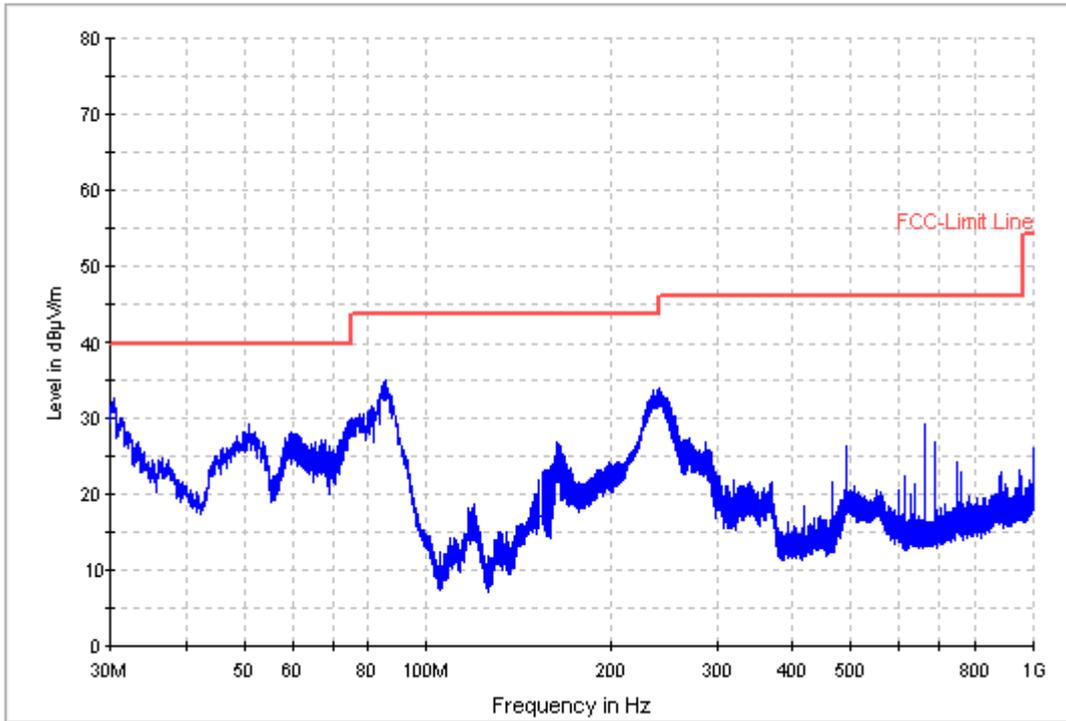


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, Charging mode)

FCC-RE2-1-18G-PEAK+AV

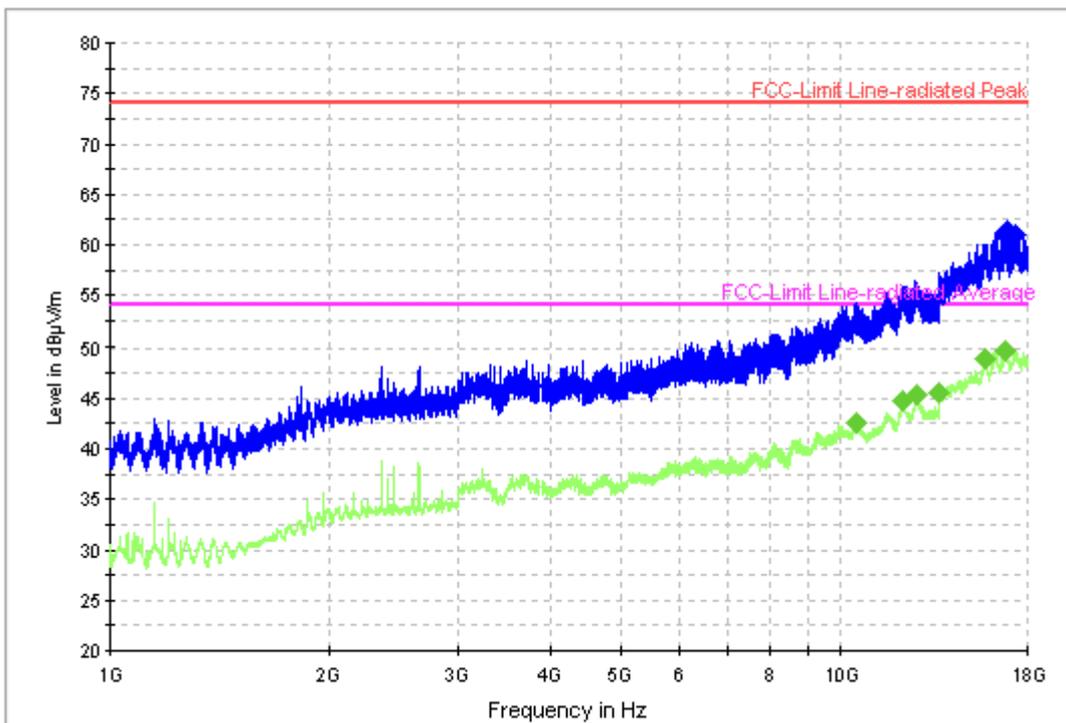


Figure A.2 Radiated Emission from 1GHz to 18GHz (Set.1, Charging mode)

FCC-RE1-Part 15-30M-1G

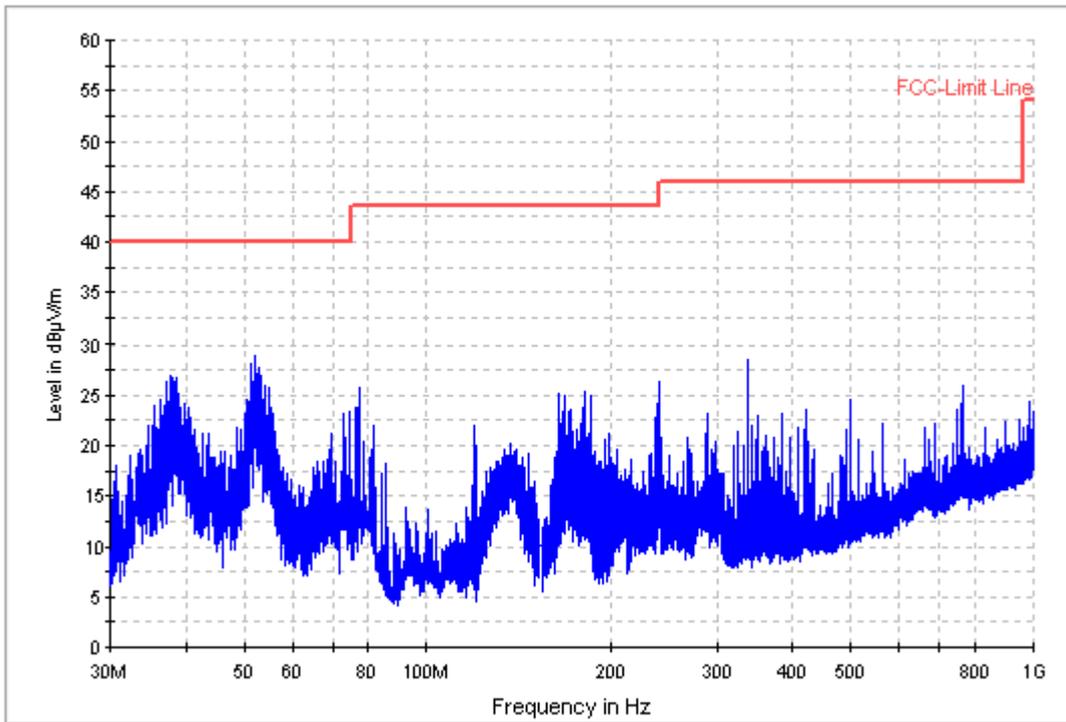


Figure A.3 Radiated Emission from 30MHz to 1GHz (Set.2, USB mode)

FCC-RE2-1-18G-PEAK+AV

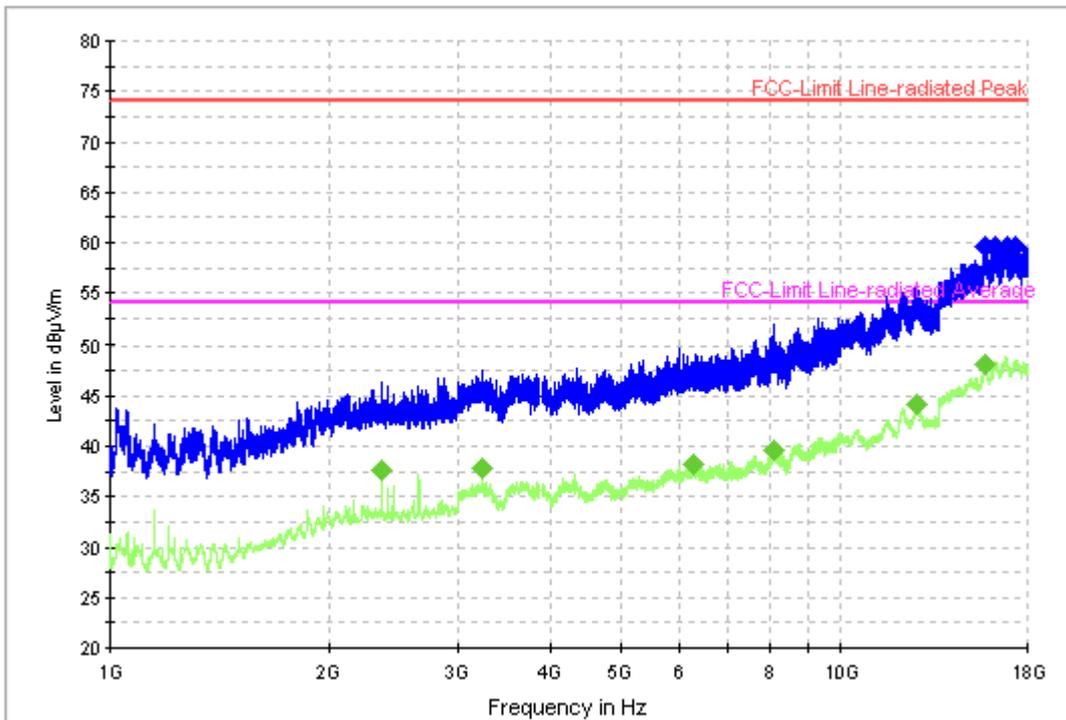


Figure A.4 Radiated Emission from 1GHz to 18GHz (Set.2, USB mode)

## A.2 Conducted Emission (§15.107(a))

### Reference

FCC: CFR Part 15.107(a)

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

### A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is Lenovo Thinkcentre M4099t, and the serial number of the PC is SA08850737. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		


### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

ESH2-Z5 Scan-FCC

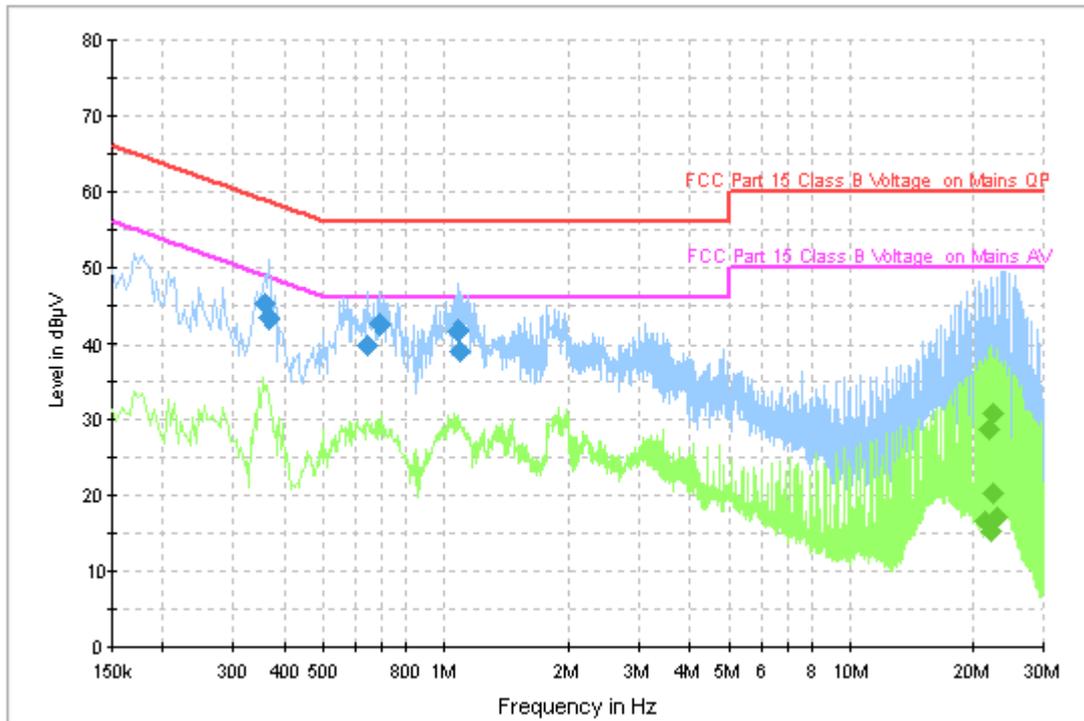

**Figure A.5 Conducted Emission (Set.1, Charging mode)**

#### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.358000	45.1	FLO	N	10.1	13.6	58.8
0.366000	43.3	FLO	N	10.1	15.3	58.6
0.642000	39.9	FLO	N	10.0	16.1	56.0
0.690000	42.5	FLO	N	10.0	13.5	56.0
1.074000	41.8	FLO	N	10.1	14.2	56.0
1.094000	39.0	FLO	N	10.1	17.0	56.0

#### Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
21.630000	16.5	FLO	L1	10.6	33.5	50.0
21.970000	28.8	FLO	L1	10.6	21.2	50.0
22.146000	15.4	FLO	N	10.7	34.6	50.0
22.470000	30.9	FLO	L1	10.6	19.1	50.0
22.566000	20.4	FLO	N	10.7	29.6	50.0
23.006000	17.1	FLO	N	10.6	32.9	50.0

ESH2-Z5 Scan-FCC

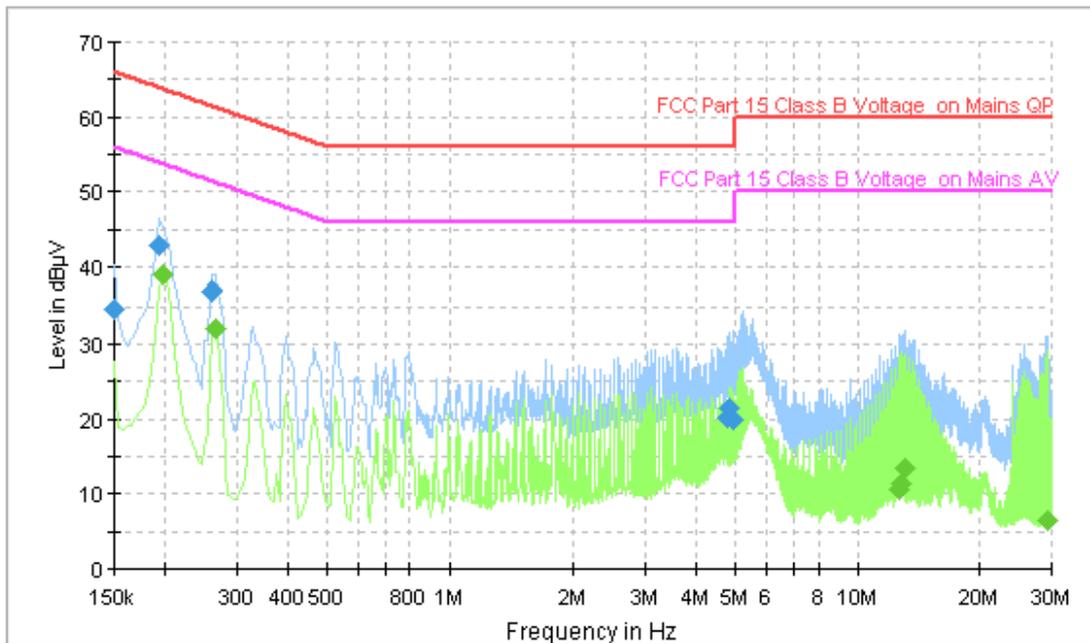


Figure A.6 Conducted Emission (Set.2, USB mode)

**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	34.7	FLO	L1	10.0	31.3	66.0
0.194000	42.8	FLO	L1	10.0	21.0	63.9
0.262000	36.9	FLO	L1	10.0	24.4	61.4
4.782000	20.1	FLO	N	10.2	35.9	56.0
4.850000	21.4	FLO	N	10.2	34.6	56.0
4.918000	19.9	FLO	N	10.2	36.1	56.0

**Final Measurement Detector 2**

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	39.0	FLO	L1	10.0	14.7	53.7
0.266000	32.0	FLO	N	10.1	19.3	51.2
12.622000	10.5	FLO	N	10.5	39.5	50.0
12.870000	11.4	FLO	N	10.5	38.6	50.0
13.126000	13.4	FLO	L1	10.4	36.6	50.0
29.262000	6.4	FLO	N	10.5	43.6	50.0

\*\*\*END OF REPORT\*\*\*