

FCC TEST REPORT (PART 22)

Product: Automotive Multi-function MiFi Terminal

Model Name: VM6200

FCC ID: SRQ-VM6200

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Manufacturer: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Prepared by: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Lab Location: No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

TEL: +86 769 8593 5656

FAX: +86 769 8593 1080

E-MAIL: customerservice.dg@cn.bureauveritas.com

Report No.: RF150420N007-2

Received Date: Apr. 20, 2015

Test Date: Apr. 21, 2015 ~ May 28, 2015

Issued Date: May 29, 2015

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 CERTIFICATION 5

2 SUMMARY OF TEST RESULTS 6

2.1 MEASUREMENT UNCERTAINTY6

2.2 TEST SITE AND INSTRUMENTS.....7

3 GENERAL INFORMATION..... 8

3.1 GENERAL DESCRIPTION OF EUT8

3.2 CONFIGURATION OF SYSTEM UNDER TEST.....9

3.3 DESCRIPTION OF SUPPORT UNITS.....10

3.4 TEST ITEM AND TEST CONFIGURATION10

3.5 EUT OPERATING CONDITIONS.....13

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS.....13

4 TEST TYPES AND RESULTS 14

4.1 OUTPUT POWER MEASUREMENT14

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT14

4.1.2 TEST PROCEDURES14

4.1.3 TEST SETUP.....15

4.1.4 TEST RESULTS16

4.2 FREQUENCY STABILITY MEASUREMENT22

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT22

4.2.2 TEST PROCEDURE.....22

4.2.3 TEST SETUP.....22

4.2.4 TEST RESULTS23

4.3 OCCUPIED BANDWIDTH MEASUREMENT24

4.3.1 TEST PROCEDURES24

4.3.2 TEST SETUP.....24

4.3.3 TEST RESULTS25

4.4 BAND EDGE MEASUREMENT30

4.4.1 LIMITS OF BAND EDGE MEASUREMENT30

4.4.2 TEST SETUP.....30

4.4.3 TEST PROCEDURES30

4.4.4 TEST RESULTS31

4.5 CONDUCTED SPURIOUS EMISSIONS36

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT36

4.5.2 TEST PROCEDURE.....36

4.5.3 TEST SETUP.....36

4.5.4 TEST RESULTS37

4.6 RADIATED EMISSION MEASUREMENT39

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT39

4.6.2 TEST PROCEDURES39

4.6.3 DEVIATION FROM TEST STANDARD39

4.6.4 TEST SETUP.....40

4.6.5 TEST RESULTS41

4.7 PEAK TO AVERAGE RATIO51

4.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT53

4.7.2 TEST SETUP.....53

4.7.3 TEST PROCEDURES53

4.7.4 TEST RESULTS54



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

5	PHOTOGRAPHS OF THE TEST CONFIGURATION	57
6	INFORMATION ON THE TESTING LABORATORIES	58
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	59



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF150420N007-2	Original release	May 29, 2015



1 CERTIFICATION

PRODUCT: Automotive Multi-function MiFi Terminal
BRAND NAME: ZTE
MODEL NAME: VM6200
APPLICANT: ZTE Corporation
TESTED: Apr. 21, 2015 ~ May 28, 2015
TEST SAMPLE: Production Unit
STANDARDS: FCC PART 22, Subpart H

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

TESTED BY :  **DATE :** May 29, 2015
Glyn He/ Project Engineer

APPROVED BY :  **DATE :** May 29, 2015
Sam Tung / Technical Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2			
STANDARD SECTION	1.1.1.1.1.1 TEST TYPE	RESULT	REMARK
2.1046 22.913 (a)	Effective Radiated Power	PASS	Meet the requirement of limit.
2.1055 22.355	Frequency Stability	PASS	Meet the requirement of limit.
2.1049	Occupied Bandwidth	PASS	Meet the requirement of limit.
22.917	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 22.917	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 22.917	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -9.73dB at 2456.67MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

**2.2 TEST SITE AND INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 11,15	May 10,16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 15
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 25, 14	Jul. 24, 15
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 30, 14	May 29, 16
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,15	Mar. 03, 16
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,14	Nov. 19,15
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 11,15	May 10,16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 15
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 19,14	Apr. 18,16
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A
Spectrum Analyzer (10Hz-40GHz)	Rohde&Schwarz	FSV40	101003	Apr. 07,15	Apr. 06,16
Power Meter	Anritsu	ML2495A	1139001	Feb. 20,15	Feb. 19,16
Power Sensor	Anritsu	MA2411B	1126068	Feb. 20,15	Feb. 19,16
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 27,14	Oct. 26,15
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.04,14	Sep. 03,15
Oscilloscope	Agilent	DSO9254A	MY51260160	Oct. 17, 14	Oct. 16, 15
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,14	Nov. 04,15
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,14	Nov. 04,15
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Mar.13, 15	Mar.12, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 04,14	Sep. 03,15

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in Dongguan 966 Chamber.
 3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 502831.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Automotive Multi-function MiFi Terminal	
MODEL NAME	VM6200	
POWER SUPPLY	14Vdc (adapter or host equipment)	
MODULATION TYPE	WCDMA	BPSK
	LTE	QPSK, 16QAM
FREQUENCY RANGE	WCDMA	826.4MHz ~ 846.6MHz
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
MAX. ERP POWER	WCDMA	253mW
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	462mW
	LTE Band 5 (Channel Bandwidth: 3MHz)	356mW
	LTE Band 5 (Channel Bandwidth: 5MHz)	354mW
	LTE Band 5 (Channel Bandwidth: 10MHz)	356mW
EMISSION DESIGNATOR	WCDMA	4M17F9W
	LTE Band 5 (Channel Bandwidth: 1.4MHz)	1M09W7D
	LTE Band 5 (Channel Bandwidth: 3MHz)	2M68W7D
	LTE Band 5 (Channel Bandwidth: 5MHz)	4M49W7D
	LTE Band 5 (Channel Bandwidth: 10MHz)	8M94W7D
ANTENNA TYPE	Fixed Internal antenna with -0.51dBi gain	
HW VERSION	VM6200MD_C	
SW VERSION	VM6200V0.0.2	
I/O PORTS	Refer to user's manual	
DATA CABLE	N/A	



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.





3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

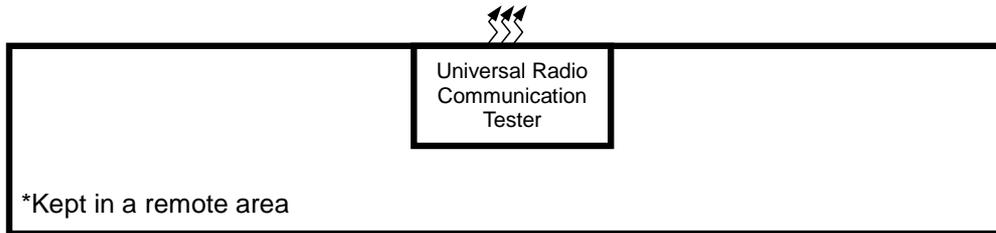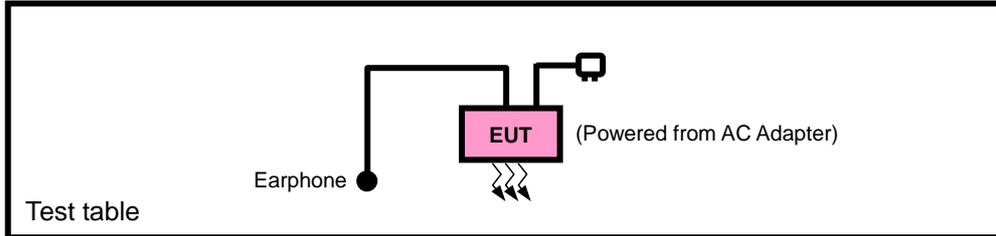

FOR E.R.P. TEST

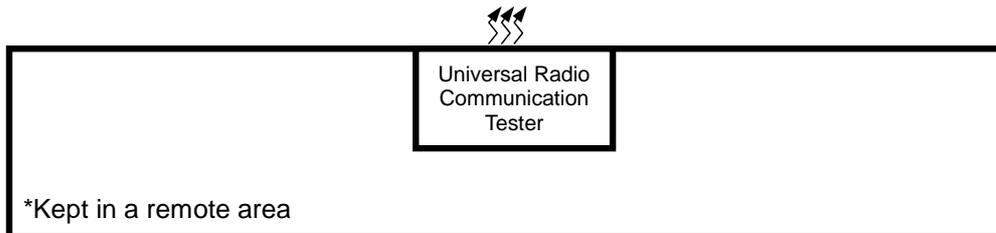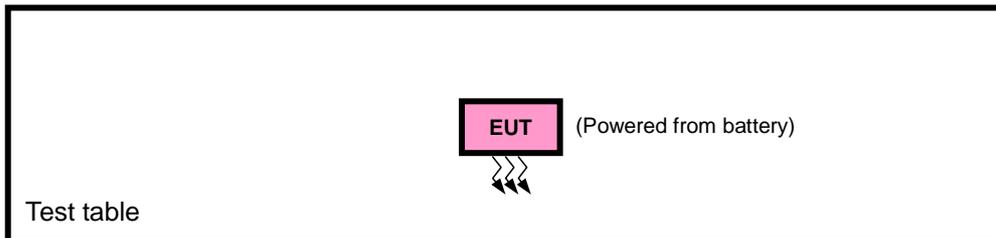



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

3.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for ERP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT with WCDMA or LTE link
B	EUT with WCDMA or LTE link

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	ERP	4132 to 4233	4132, 4182, 4233	WCDMA
B	FREQUENCY STABILITY	4132 to 4233	4182	WCDMA
B	OCCUPIED BANDWIDTH	4132 to 4233	4132, 4182, 4233	WCDMA
B	BAND EDGE	4132 to 4233	4132, 4233	WCDMA
B	CONDCUETED EMISSION	4132 to 4233	4132, 4182, 4233	WCDMA
A	RADIATED EMISSION	4132 to 4233	4182	WCDMA



LTE BAND 5 MODE

TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
FREQUENCY STABILITY	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset
OCCUPIED BANDWIDTH	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK	6 RB / 0 RB Offset
				16QAM	6 RB / 0 RB Offset
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK	15 RB / 0 RB Offset
				16QAM	15 RB / 0 RB Offset
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK	25 RB / 0 RB Offset
				16QAM	25 RB / 0 RB Offset
20450 to 20600	20450, 20525, 20600	10MHz	QPSK	50 RB / 0 RB Offset	
			16QAM	50 RB / 0 RB Offset	
BAND EDGE	20407 to 20643	20407	1.4 MHz	QPSK	1 RB / 0 RB Offset
					6 RB / 0 RB Offset
	20407 to 20643	20643	1.4 MHz	QPSK	1 RB / 5 RB Offset
					6 RB / 0 RB Offset
	20415 to 20635	20415	3 MHz	QPSK	1 RB / 0 RB Offset
					15 RB / 0 RB Offset
	20415 to 20635	20635	3 MHz	QPSK	1 RB / 14 RB Offset
					15 RB / 0 RB Offset
20425 to 20625	20425	5MHz	QPSK	1 RB / 0 RB Offset	
				25 RB / 0 RB Offset	
20425 to 20625	20625	5MHz	QPSK	1 RB / 24 RB Offset	
				25 RB / 0 RB Offset	
20450 to 20600	20450	10MHz	QPSK	1 RB / 0 RB Offset	



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

					50 RB / 0 RB Offset
	20450 to 20600	20600	10MHz	QPSK	1 RB / 49 RB Offset
					50 RB / 0 RB Offset
CONDCUDED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset
RADIATED EMISSION	20407 to 20643	20525	1.4MHz	QPSK	1 RB / 0 RB Offset
	20415 to 20635	20525	3MHz	QPSK	1 RB / 0 RB Offset
	20425 to 20625	20525	5MHz	QPSK	1 RB / 0 RB Offset
	20450 to 20600	20525	10MHz	QPSK	1 RB / 0 RB Offset

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 62%RH	14Vdc (adapter or host equipment)	Yuqiang Yin
FREQUENCY STABILITY	23deg. C, 62%RH	14Vdc (adapter or host equipment)	Yuqiang Yin
OCCUPIED BANDWIDTH	23deg. C, 62%RH	14Vdc (adapter or host equipment)	Yuqiang Yin
BAND EDGE	23deg. C, 62%RH	14Vdc (adapter or host equipment)	Yuqiang Yin
CONDCUDED EMISSION	23deg. C, 62%RH	14Vdc (adapter or host equipment)	Yuqiang Yin
RADIATED EMISSION	25deg. C, 63.6%RH	14Vdc (adapter or host equipment)	Blue Zheng



3.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA mode, and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$ E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi}$.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with GSM, GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

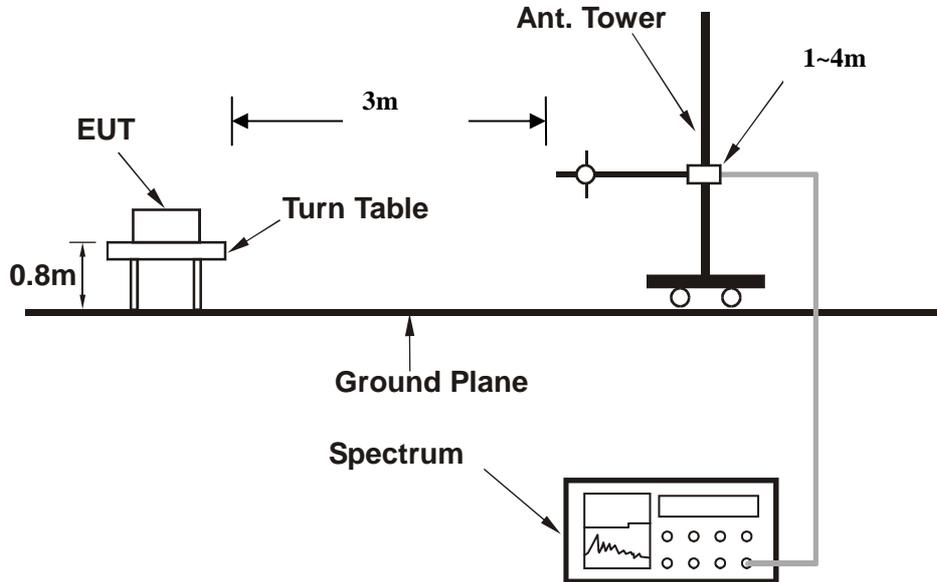

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).



4.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

BAND	WCDMA V		
	4132	4182	4233
CHANNEL	826.4	836.4	846.6
FREQUENCY (MHz)	826.4	836.4	846.6
RMC 12.2K	22.86	22.61	22.13
HSPA			
HSDPA Subtest-1	21.84	21.53	21.03
HSDPA Subtest-2	21.78	21.48	21.02
HSDPA Subtest-3	21.27	21.01	20.59
HSDPA Subtest-4	21.31	21.02	20.41
HSUPA Subtest-1	21.44	21.26	20.88
HSUPA Subtest-2	19.71	19.50	18.83
HSUPA Subtest-3	20.43	20.30	19.76
HSUPA Subtest-4	19.38	19.28	18.76
HSUPA Subtest-5	21.44	21.17	20.99



Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643	3GPP MPR (dB)
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
5/1.4	QPSK	1	0	23.06	22.92	22.9	0
		1	2	22.83	22.94	22.84	0
		1	5	22.9	22.71	22.78	0
		3	0	23.04	22.9	22.88	0
		3	1	22.81	22.92	22.82	0
		3	3	22.88	22.69	22.76	0
		6	0	21.88	21.78	21.78	1
	16QAM	1	0	21.81	21.61	21.73	1
		1	2	21.78	21.64	21.55	1
		1	5	21.8	21.79	21.78	1
		3	0	21.8	21.6	21.72	1
		3	1	21.77	21.63	21.54	1
		3	3	21.79	21.78	21.77	1
		6	0	20.88	20.62	20.59	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635	3GPP MPR (dB)
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz	
5/3	QPSK	1	0	23.08	22.94	22.92	0
		1	7	22.85	22.96	22.86	0
		1	14	22.92	22.73	22.8	0
		8	0	21.85	21.78	21.73	1
		8	3	21.8	21.69	21.66	1
		8	7	21.79	21.68	21.67	1
		15	0	21.9	21.8	21.8	1
	16QAM	1	0	21.83	21.63	21.75	1
		1	7	21.8	21.66	21.57	1
		1	14	21.82	21.81	21.8	1
		8	0	20.86	20.63	20.62	2
		8	3	20.83	20.67	20.63	2
		8	7	20.8	20.67	20.54	2
		15	0	20.9	20.64	20.61	2



Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625	3GPP MPR (dB)
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz	
5/5	QPSK	1	0	23.11	22.97	22.95	0
		1	12	22.88	22.99	22.89	0
		1	24	22.95	22.76	22.83	0
		12	0	21.88	21.81	21.76	1
		12	6	21.83	21.72	21.69	1
		12	13	21.82	21.71	21.7	1
		25	0	21.93	21.83	21.83	1
	16QAM	1	0	21.86	21.66	21.78	1
		1	12	21.83	21.69	21.6	1
		1	24	21.85	21.84	21.83	1
		12	0	20.89	20.66	20.65	2
		12	6	20.86	20.7	20.66	2
		12	13	20.83	20.7	20.57	2
		25	0	20.93	20.67	20.64	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	3GPP MPR (dB)
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/10	QPSK	1	0	23.16	23.02	23	0
		1	24	22.93	23.04	22.94	0
		1	49	23	22.81	22.88	0
		25	0	21.93	21.86	21.81	1
		25	12	21.88	21.77	21.74	1
		25	25	21.87	21.76	21.75	1
		50	0	21.98	21.88	21.88	1
	16QAM	1	0	21.91	21.71	21.83	1
		1	24	21.88	21.74	21.65	1
		1	49	21.9	21.89	21.88	1
		25	0	20.94	20.71	20.7	2
		25	12	20.91	20.75	20.71	2
		25	25	20.88	20.75	20.62	2
		50	0	20.98	20.72	20.69	2



ERP POWER (dBm)

WCDMA

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
4132	826.4	-10.96	35.85	22.74	187.93	H
4182	836.4	-10.91	37.09	24.03	252.93	H
4233	846.6	-11.02	37.00	23.83	241.55	H
4132	826.4	-19.77	36.85	14.93	31.12	V
4182	836.4	-19.69	37.56	15.72	37.33	V
4233	846.6	-19.55	37.77	16.07	40.46	V

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20407	824.7	-9.46	35.47	23.86	243.22	H	1
20525	836.5	-8.08	36.88	26.65	462.38	H	1
20643	848.3	-9.52	36.92	25.25	334.97	H	1
20407	824.7	-18.22	36.59	16.22	41.88	V	1
20525	836.5	-17.46	37.35	17.74	59.43	V	1
20643	848.3	-18.44	37.71	17.12	51.52	V	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20407	824.7	-10.71	35.47	22.61	182.39	H	1
20525	836.5	-9.32	36.88	25.41	347.54	H	1
20643	848.3	-10.52	36.92	24.25	266.07	H	1
20407	824.7	-19.46	36.59	14.98	31.48	V	1
20525	836.5	-18.62	37.35	16.58	45.50	V	1
20643	848.3	-19.47	37.71	16.09	40.64	V	1



CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20415	825.5	-9.44	35.45	23.86	243.22	H	1
20525	836.5	-9.27	36.88	25.46	351.56	H	1
20635	847.5	-9.50	36.82	25.17	328.85	H	1
20415	825.5	-18.23	36.54	16.16	41.30	V	1
20525	836.5	-18.63	37.35	16.57	45.39	V	1
20635	847.5	-19.41	37.64	16.08	40.55	V	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20415	825.5	-10.69	35.45	22.61	182.39	H	1
20525	836.5	-10.26	36.88	24.47	279.90	H	1
20635	847.5	-10.50	36.82	24.17	261.22	H	1
20415	825.5	-19.35	36.54	15.04	31.92	V	1
20525	836.5	-19.63	37.35	15.57	36.06	V	1
20635	847.5	-19.46	37.64	16.03	40.09	V	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20425	826.5	-9.41	35.59	24.03	252.93	H	1
20525	836.5	-9.24	36.88	25.49	354.00	H	1
20625	846.5	-9.47	36.90	25.28	337.29	H	1
20425	826.5	-18.23	36.51	16.13	41.02	V	1
20525	836.5	-18.74	37.35	16.46	44.26	V	1
20625	846.5	-18.38	37.62	17.09	51.17	V	1



CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20425	826.5	-10.66	35.59	22.78	189.67	H	1
20525	836.5	-10.23	36.88	24.50	281.84	H	1
20625	846.5	-10.47	36.90	24.28	267.92	H	1
20425	826.5	-19.48	36.51	14.88	30.76	V	1
20525	836.5	-19.66	37.35	15.54	35.81	V	1
20625	846.5	-19.37	37.62	16.10	40.74	V	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20450	829	-9.36	35.71	24.20	263.03	H	1
20525	836.5	-9.19	36.85	25.51	355.63	H	1
20600	844	-9.42	37.01	25.44	349.95	H	1
20450	829	-18.12	36.56	16.29	42.56	V	1
20525	836.5	-18.52	37.32	16.65	46.24	V	1
20600	844	-18.44	37.62	17.03	50.47	V	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
20450	829	-10.61	35.71	22.95	197.24	H	1
20525	836.5	-10.18	36.85	24.52	283.14	H	1
20600	844	-10.42	37.01	24.44	277.97	H	1
20450	829	-19.46	36.56	14.95	31.26	V	1
20525	836.5	-18.63	37.32	16.54	45.08	V	1
20600	844	-19.42	37.62	16.05	40.27	V	1

REMARKS: 1. ERP Output Power (dBm) = SPA Reading (dBm) + Correction Factor (dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss.



4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

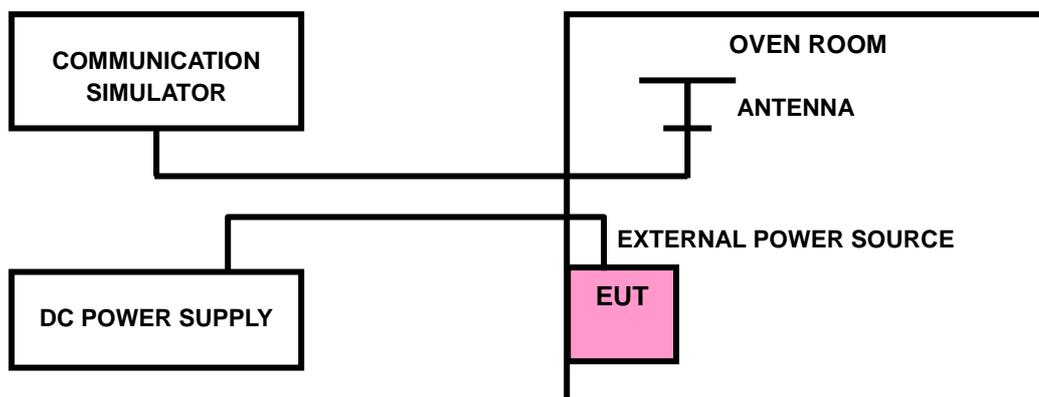



4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

Voltage (Volts)	Frequency Error (ppm)					Limit (ppm)
	WCDMA	LTE Band 5				
		1.4 MHz	3 MHz	5 MHz	10MHz	
14	0.001	-0.001	-0.003	0.001	0.001	2.5
12	-0.003	-0.005	-0.006	-0.003	-0.004	2.5
15	0.005	0.004	0.007	0.004	0.006	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 12Vdc to 15Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

Voltage (Volts)	Frequency Error (ppm)					Limit (ppm)
	WCDMA	LTE Band 5				
		1.4 MHz	3 MHz	5 MHz	10MHz	
-30	-0.018	-0.013	-0.012	-0.011	-0.013	2.5
-20	-0.016	-0.010	-0.009	-0.009	-0.011	2.5
-10	-0.013	-0.007	-0.007	-0.007	-0.008	2.5
0	-0.011	-0.007	-0.006	-0.006	-0.007	2.5
10	-0.007	-0.004	-0.004	-0.003	-0.004	2.5
20	-0.004	-0.001	-0.002	-0.001	0.000	2.5
30	-0.003	-0.003	-0.004	-0.003	-0.003	2.5
40	0.000	-0.006	-0.006	-0.006	-0.005	2.5
50	0.002	-0.007	-0.008	-0.006	-0.008	2.5
60	0.005	-0.009	-0.010	-0.009	-0.011	2.5




4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST SETUP

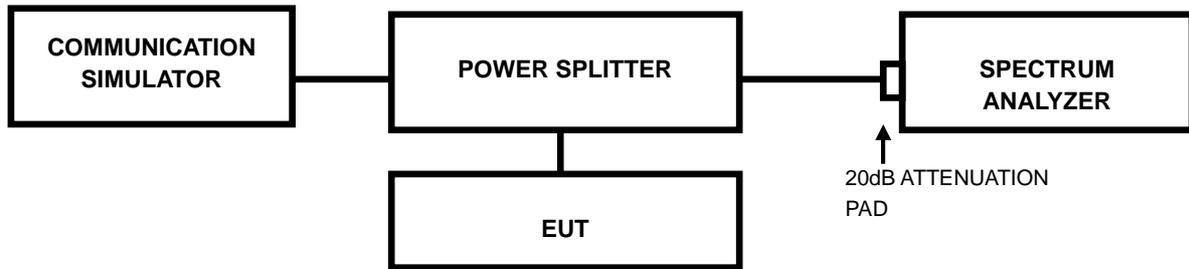




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

4.3.3 TEST RESULTS

CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	26dB Bandwidth (MHz)
		WCDMA	
4132	826.4	4.17	4.66
4182	836.4	4.17	4.67
4233	846.6	4.17	4.68

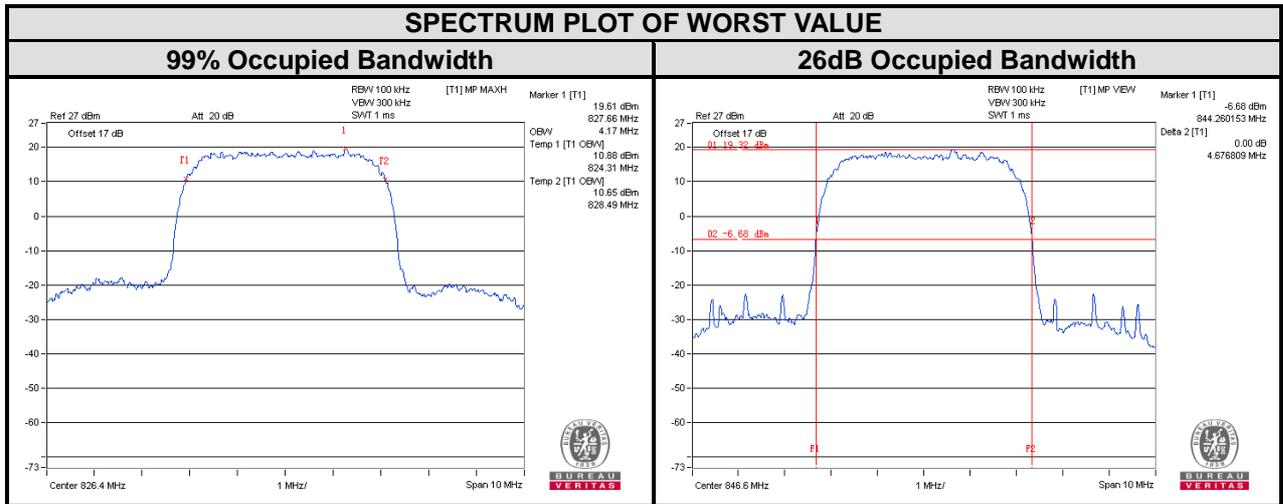




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

LTE band 5							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	1.09	1.09	20407	824.7	1.25	1.26
20525	836.5	1.09	1.08	20525	836.5	1.25	1.25
20643	848.3	1.09	1.08	20643	848.3	1.25	1.25

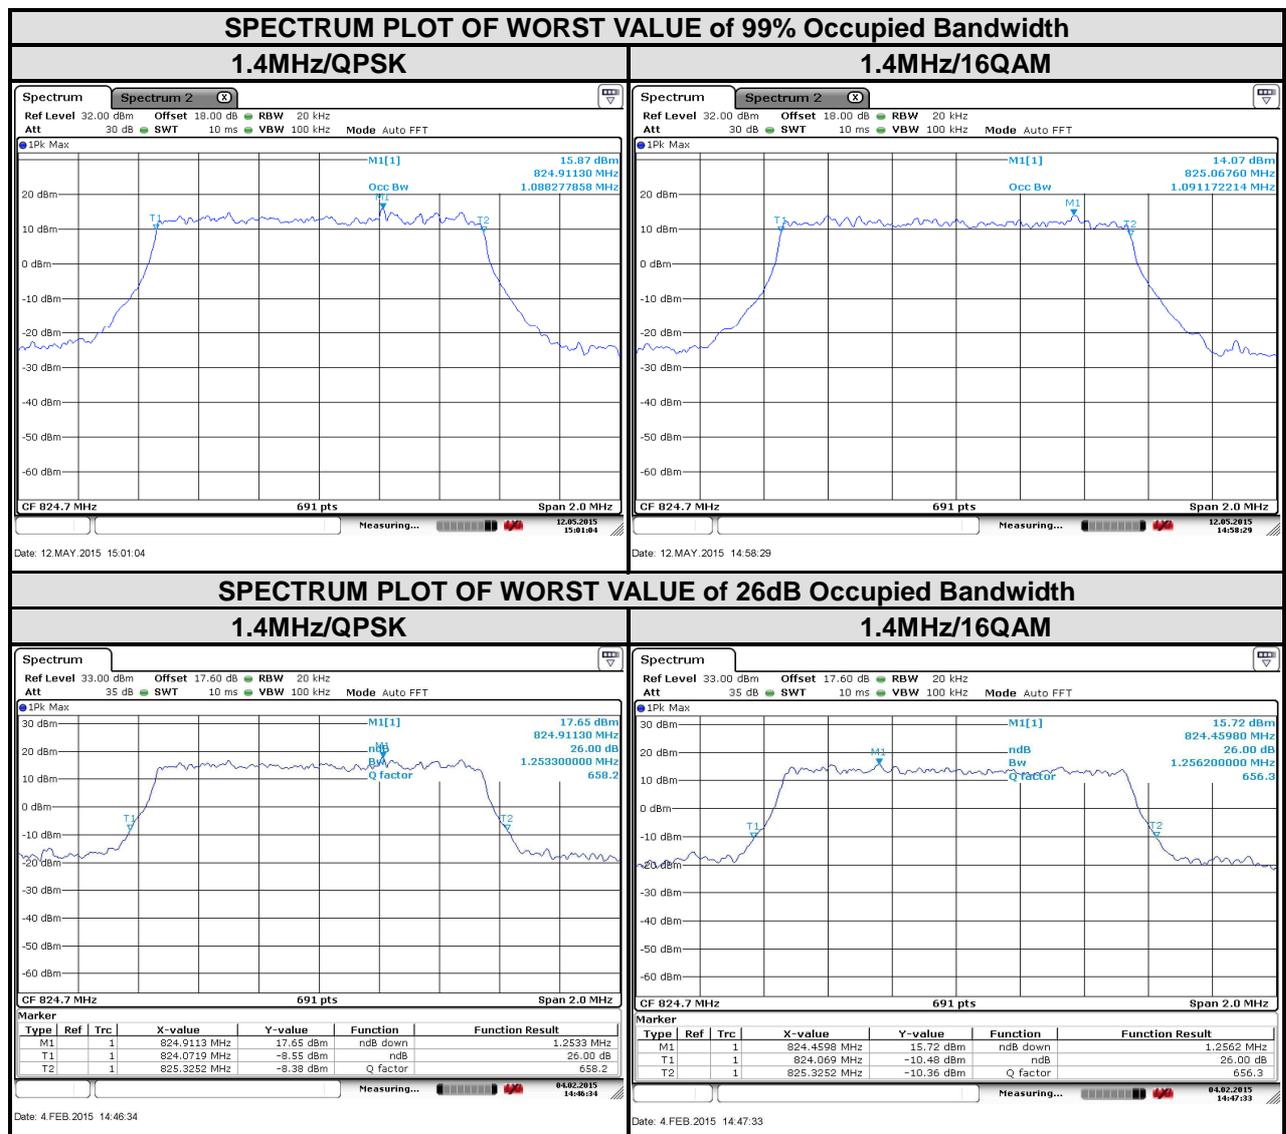




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

LTE band 5							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20415	825.5	2.68	2.68	20415	825.5	2.92	2.87
20525	836.5	2.68	2.68	20525	836.5	2.89	2.89
20635	847.5	2.68	2.68	20635	847.5	2.91	2.89


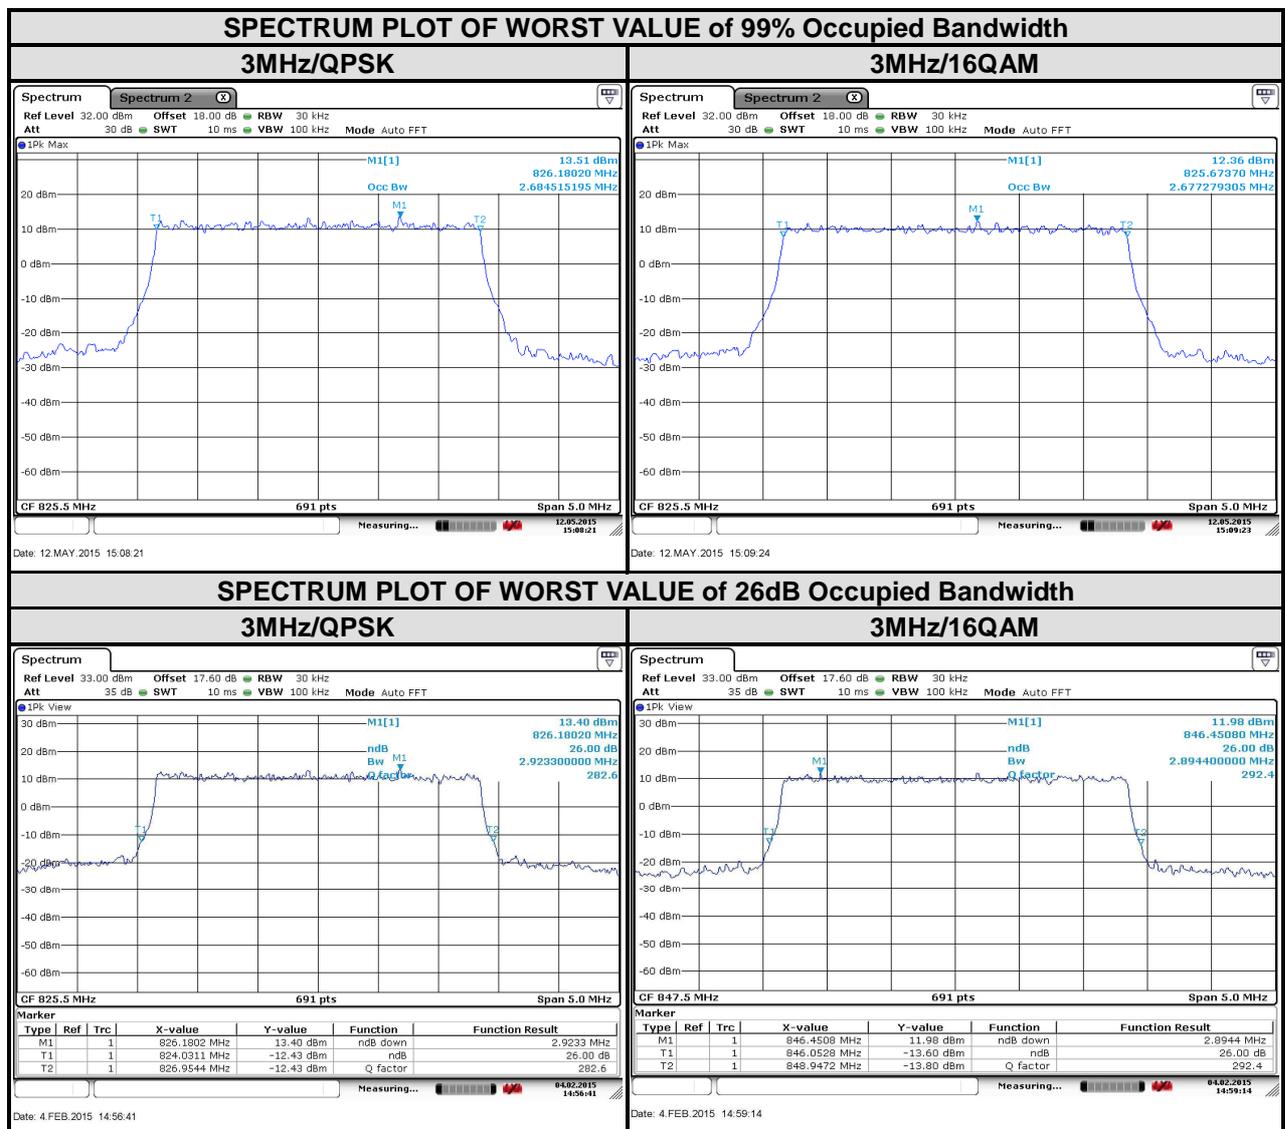




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

LTE band 5							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	4.47	4.49	20425	826.5	4.96	4.95
20525	836.5	4.49	4.46	20525	836.5	4.92	4.92
20625	846.5	4.47	4.47	20625	846.5	4.94	4.96

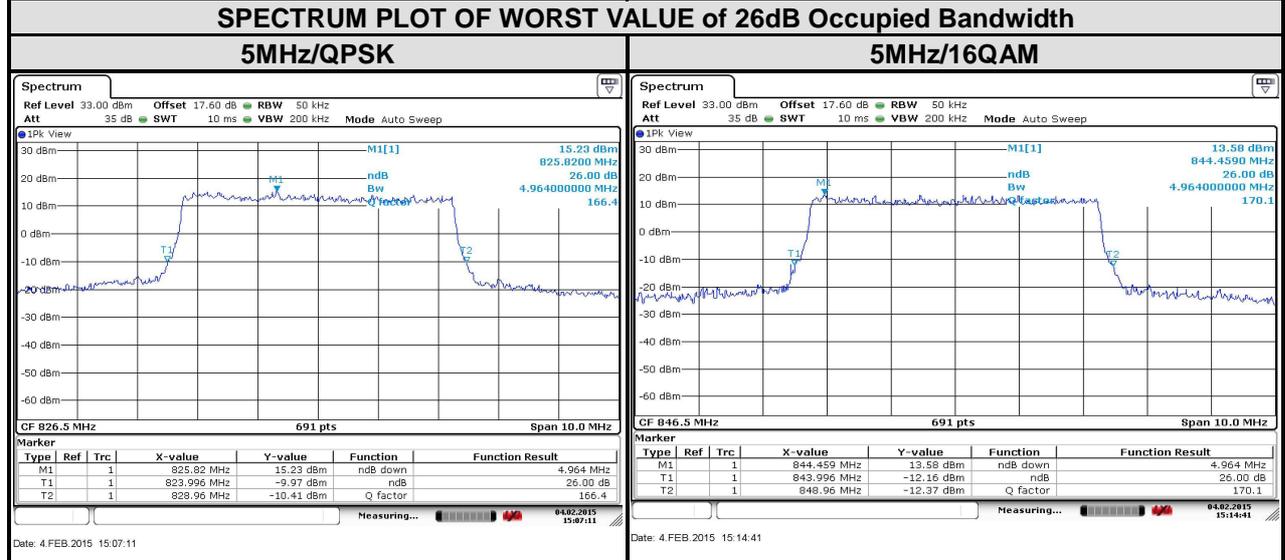
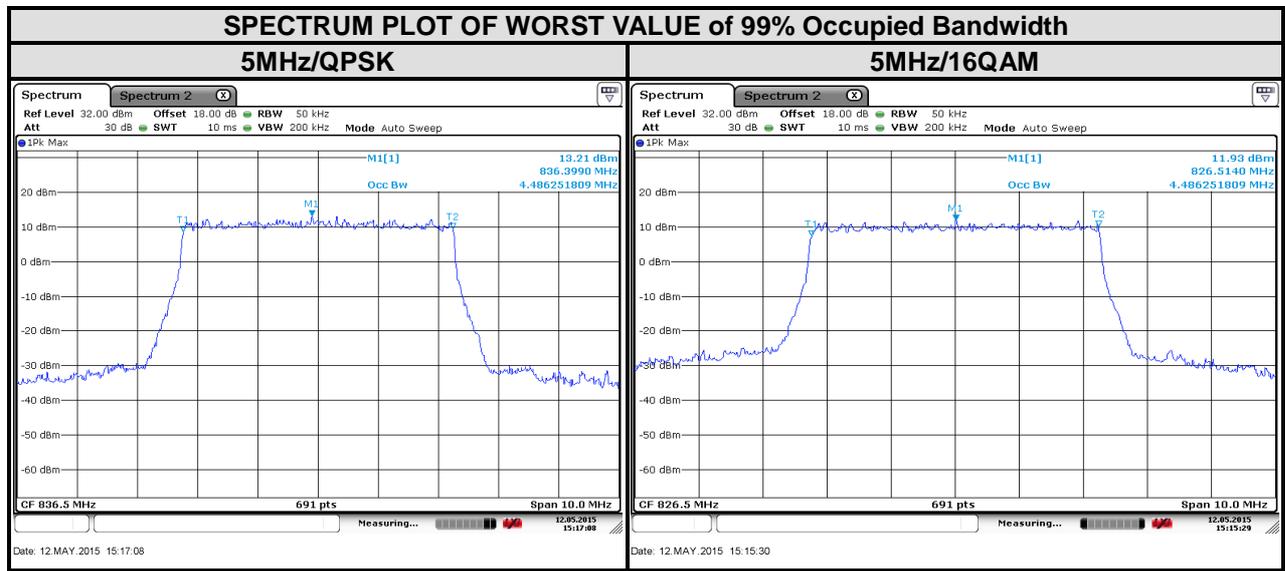




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

LTE band 5							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26 dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20450	829	8.94	8.94	20450	829	9.73	9.68
20525	836.5	8.94	8.91	20525	836.5	9.68	9.68
20600	844	8.91	8.91	20600	844	9.73	9.73

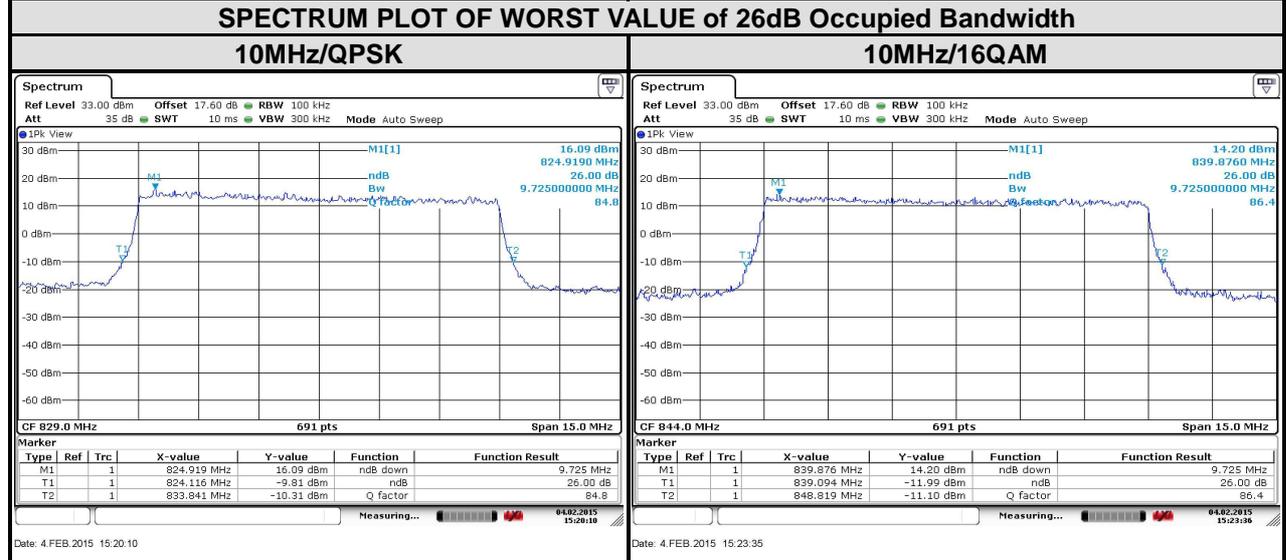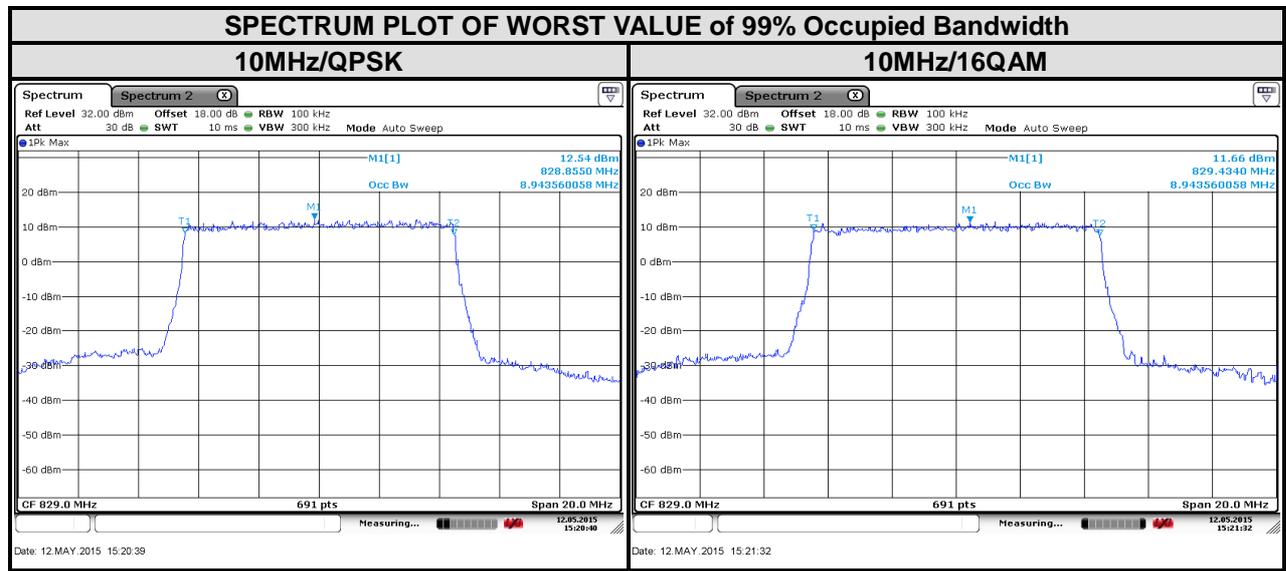


4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST SETUP

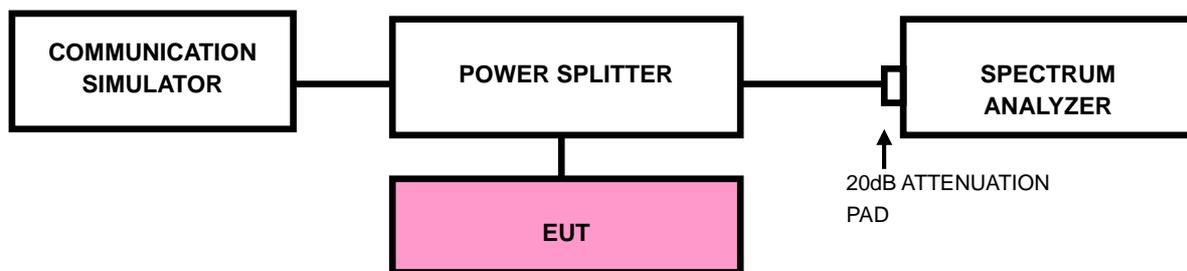


4.4.3 TEST PROCEDURES

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz).
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)



- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. Record the max trace plot into the test report.

4.4.4 TEST RESULTS

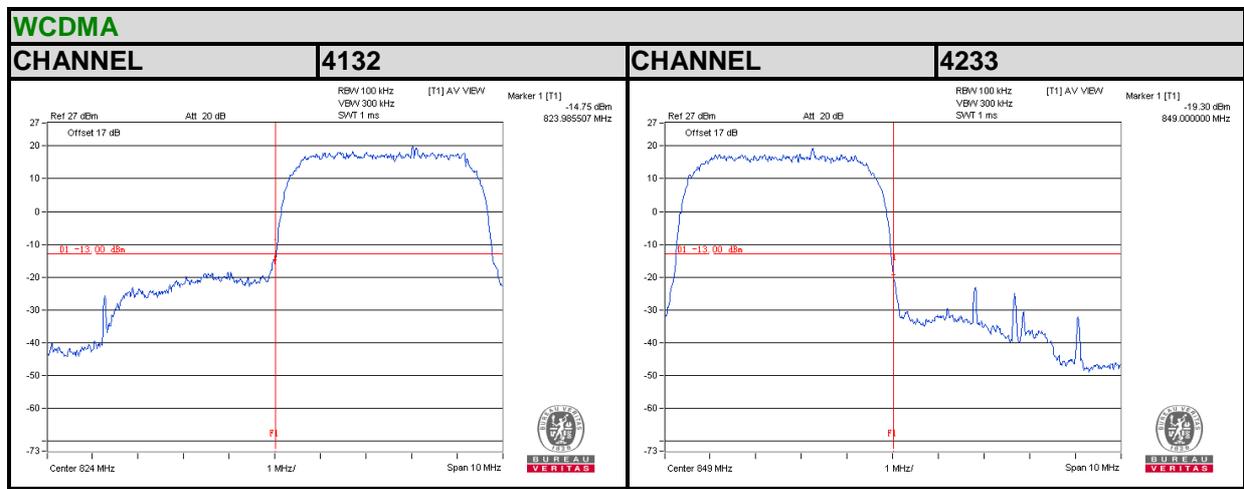





BUREAU VERITAS

Test Report No.: RF150420N007-2

LTE Band5

Channel Bandwidth: 1.4MHz



CHANNEL 20407 1 RB CHANNEL 20643 1 RB

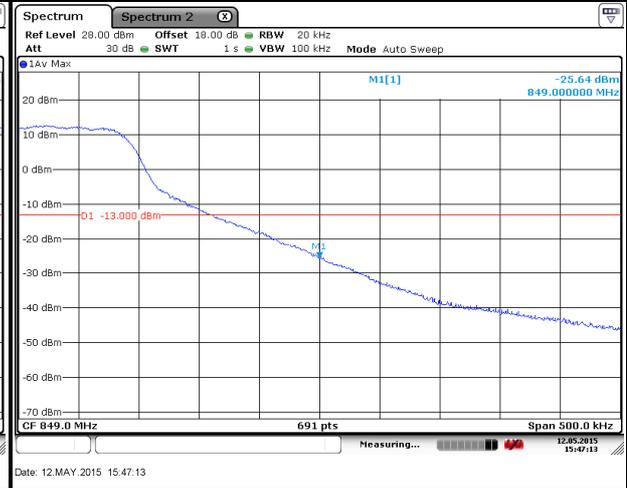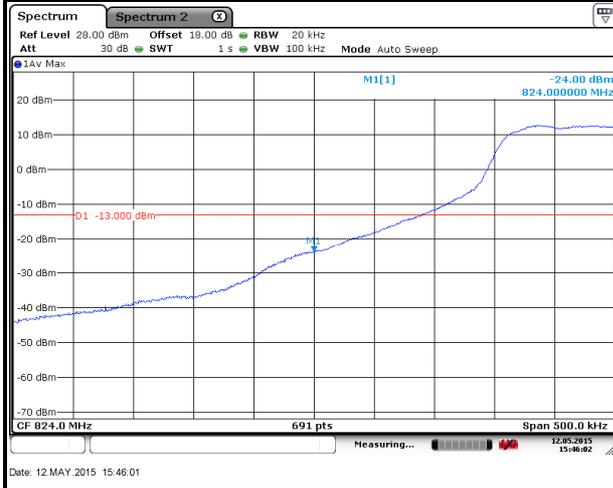

LTE Band5

Channel Bandwidth: 1.4MHz

CHANNEL 20407 Full RB CHANNEL 20643 Full RB

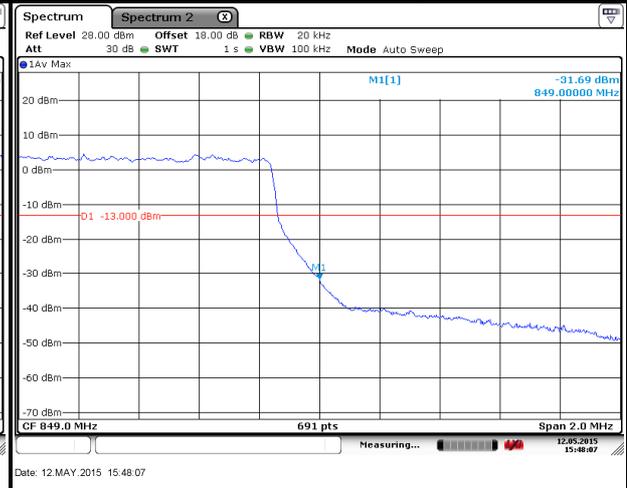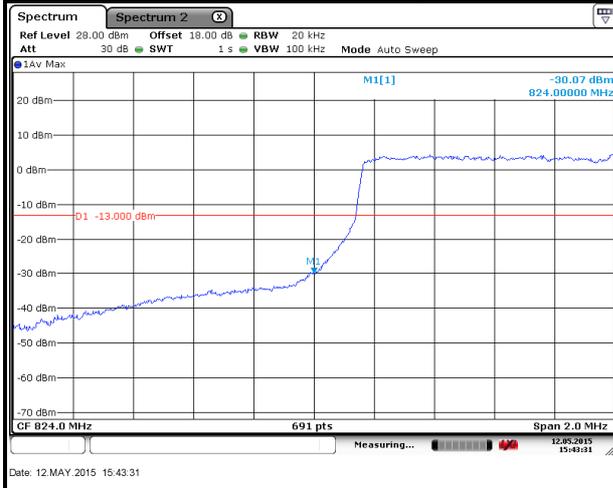




BUREAU VERITAS

Test Report No.: RF150420N007-2


LTE Band5

Channel Bandwidth: 3MHz

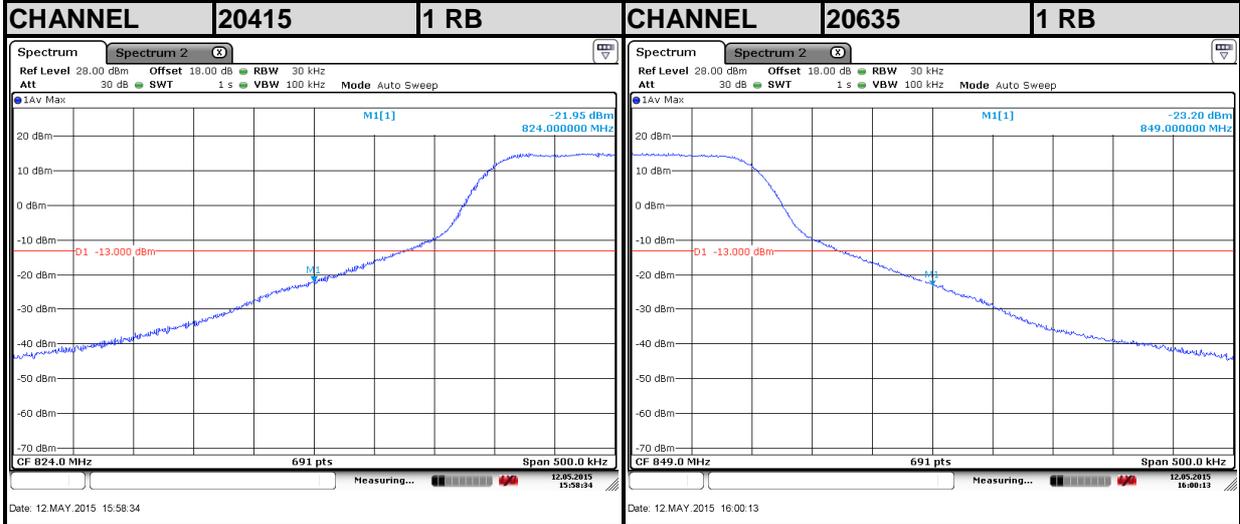

LTE Band5

Channel Bandwidth: 3MHz

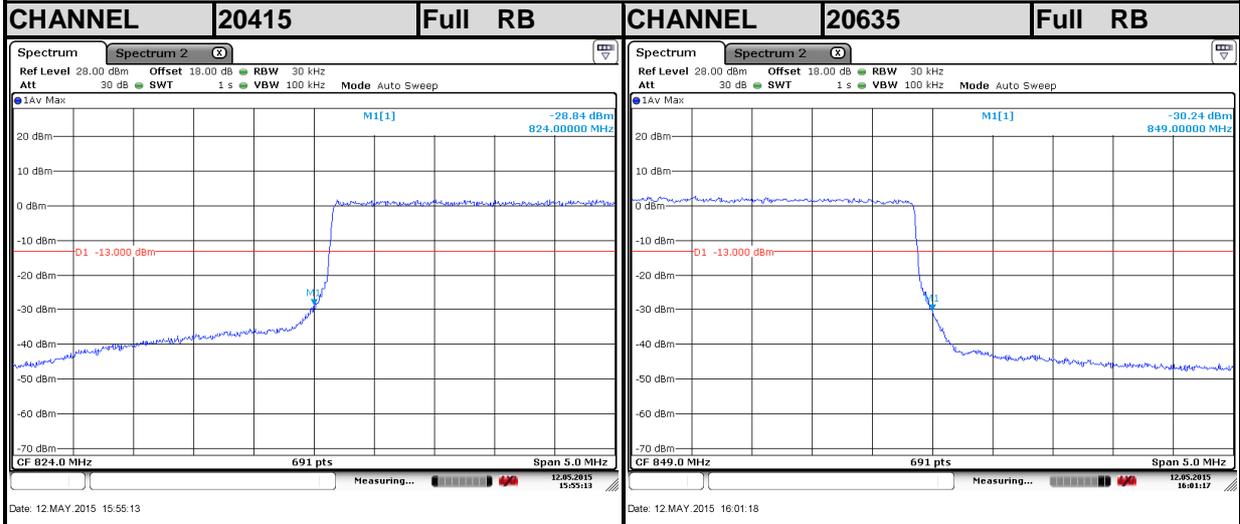





BUREAU VERITAS

Test Report No.: RF150420N007-2

LTE Band5

Channel Bandwidth: 5MHz



CHANNEL 20425 1 RB CHANNEL 20625 1 RB

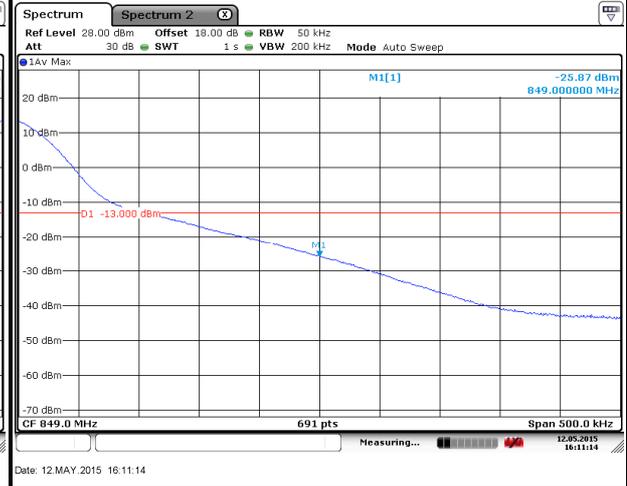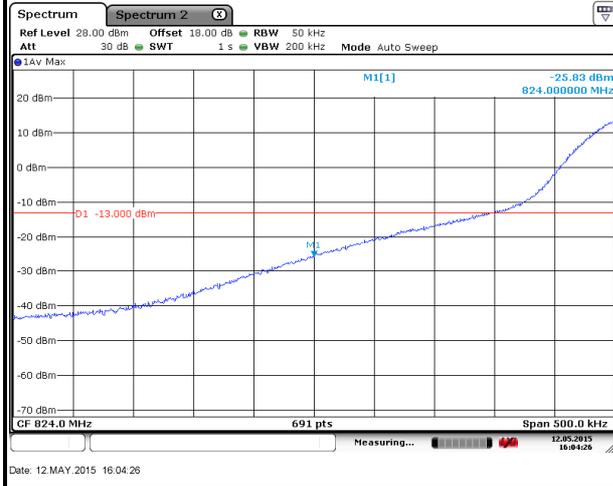

LTE Band5

Channel Bandwidth: 5MHz



CHANNEL 20425 Full RB CHANNEL 20625 Full RB

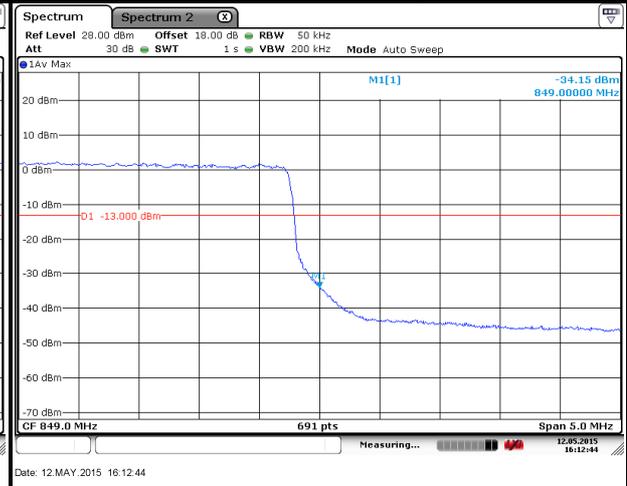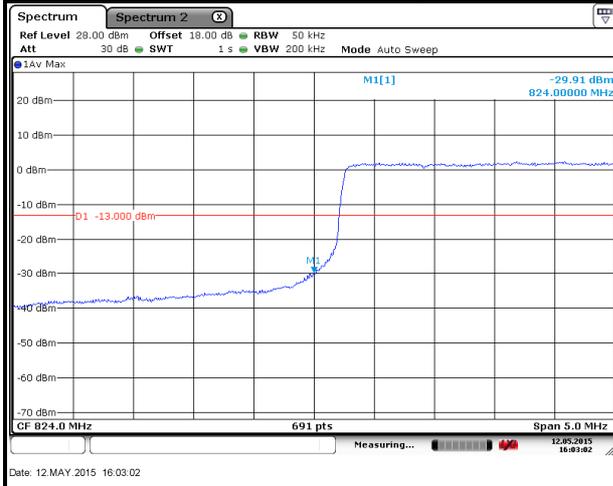



BUREAU VERITAS

Test Report No.: RF150420N007-2

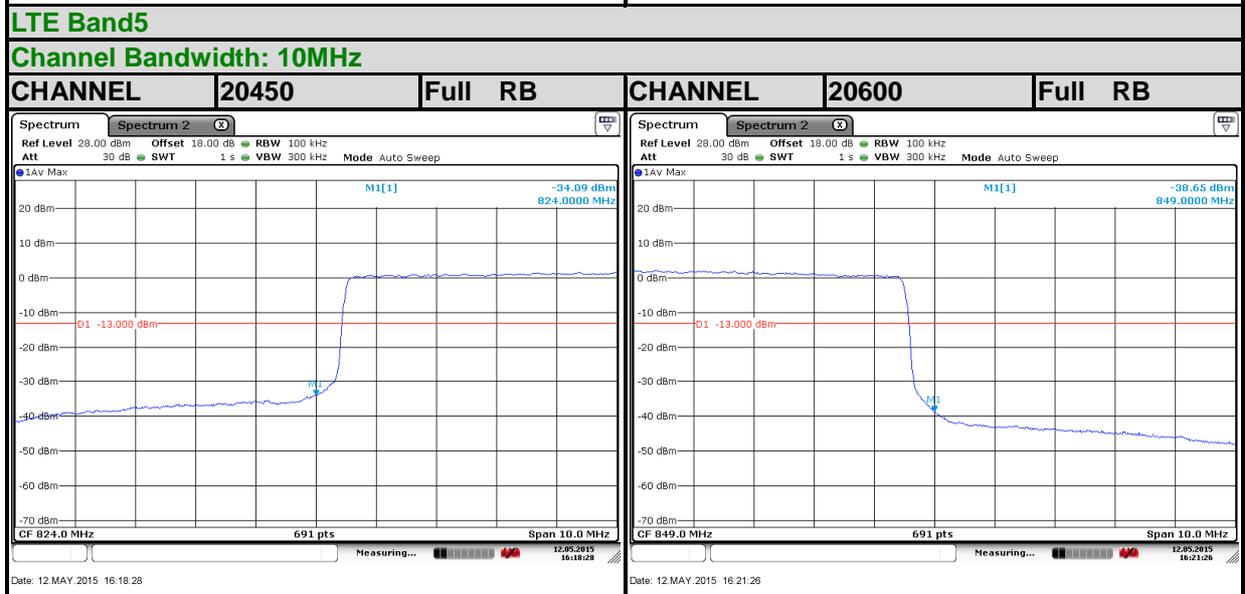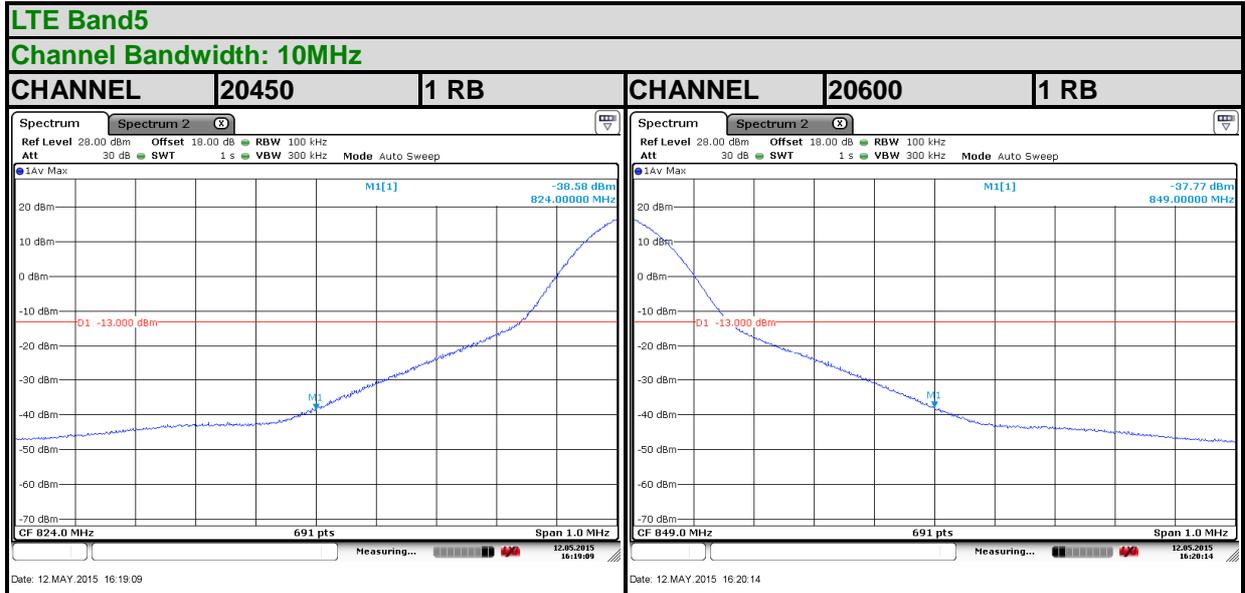



4.5 CONDUCTED SPURIOUS EMISSIONS


4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 9GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.3 TEST SETUP

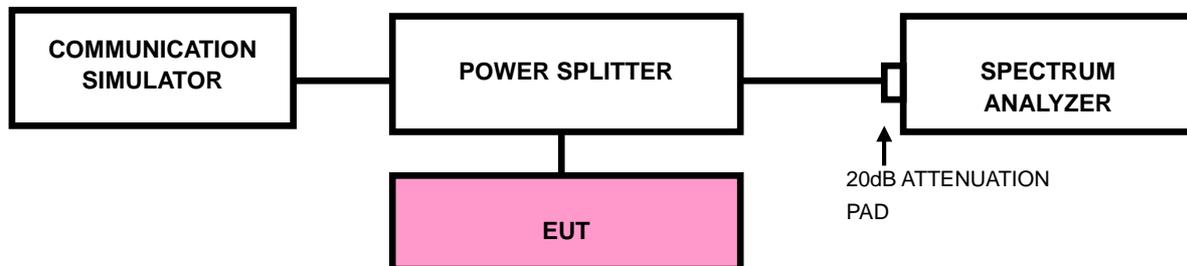




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2


4.5.4 TEST RESULTS

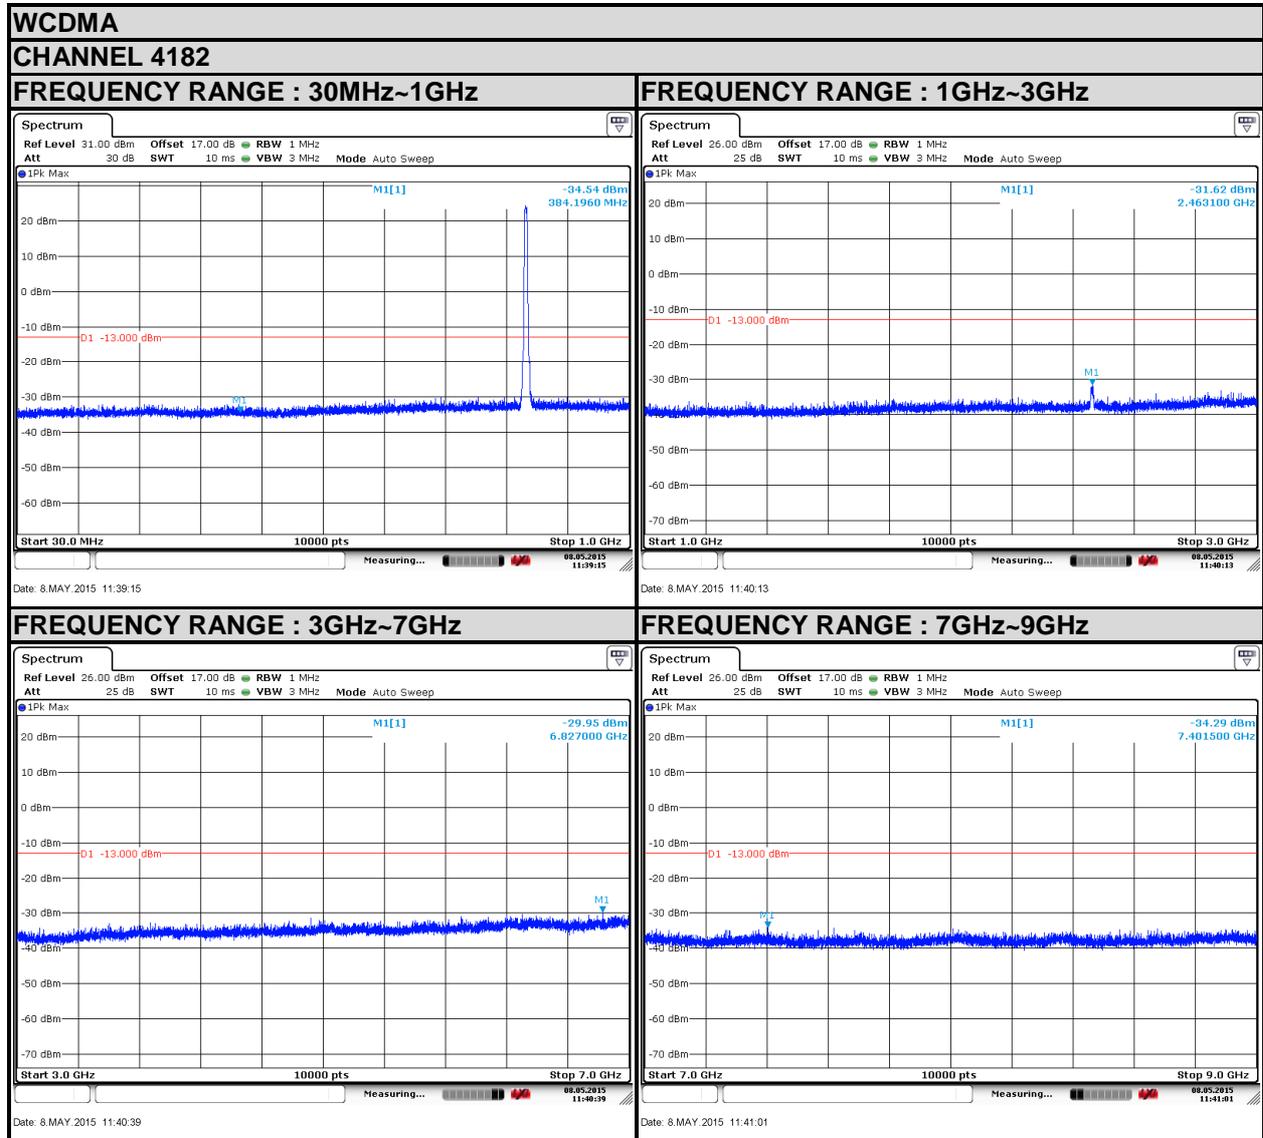



BUREAU VERITAS

Test Report No.: RF150420N007-2

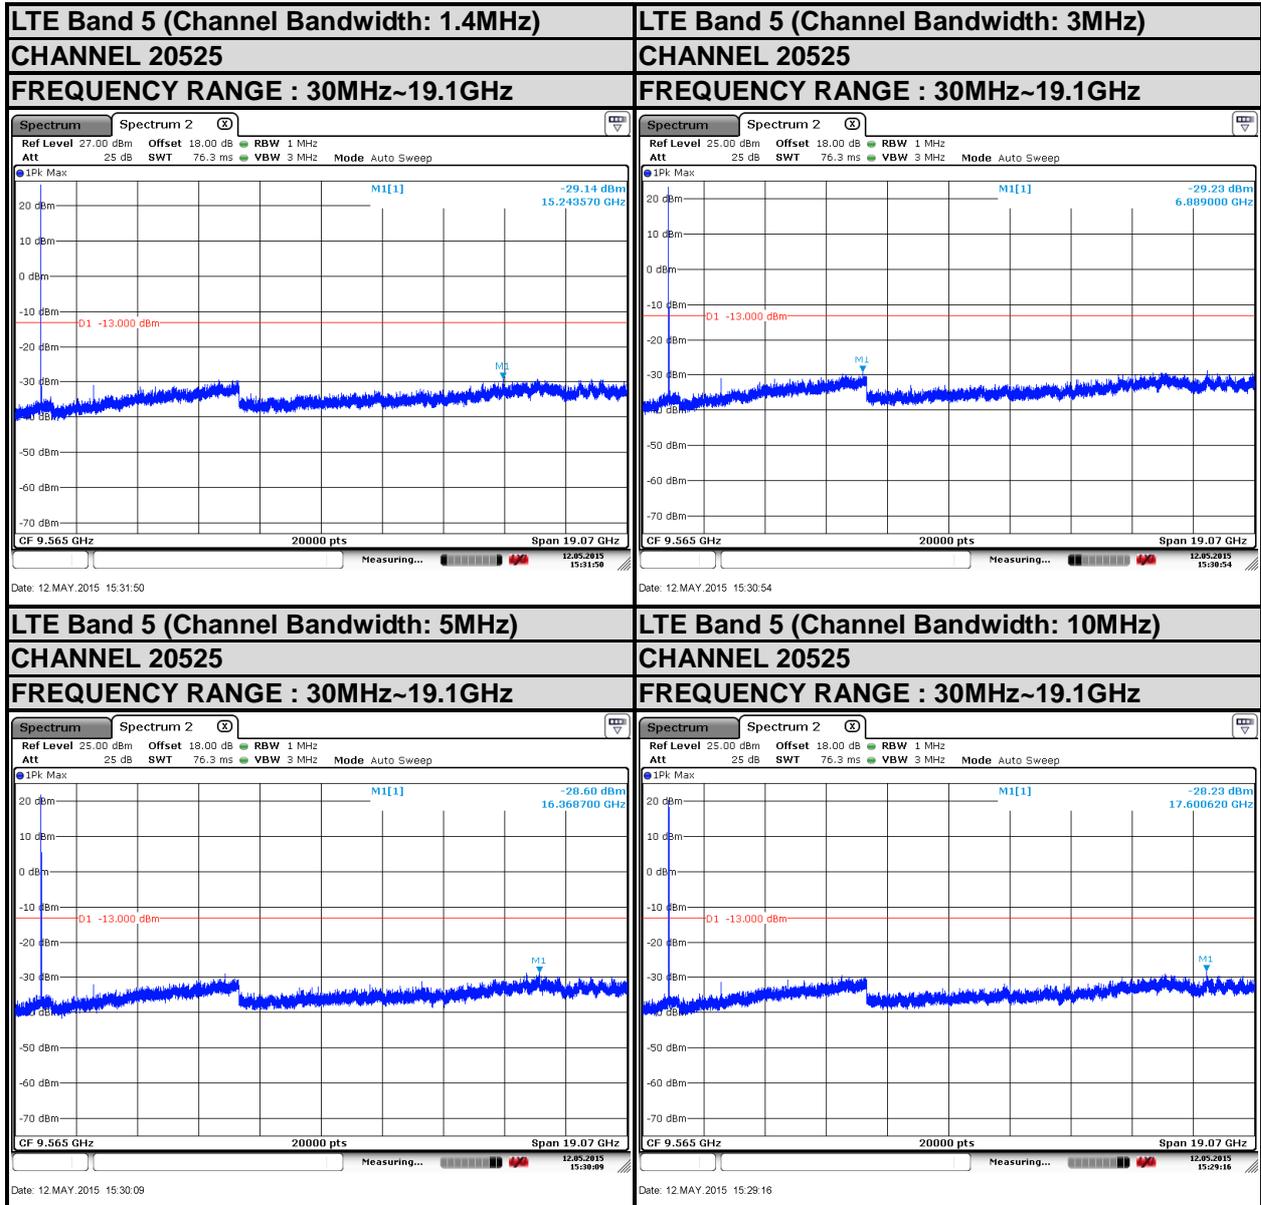



4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.3 DEVIATION FROM TEST STANDARD

No deviation



4.6.4 TEST SETUP

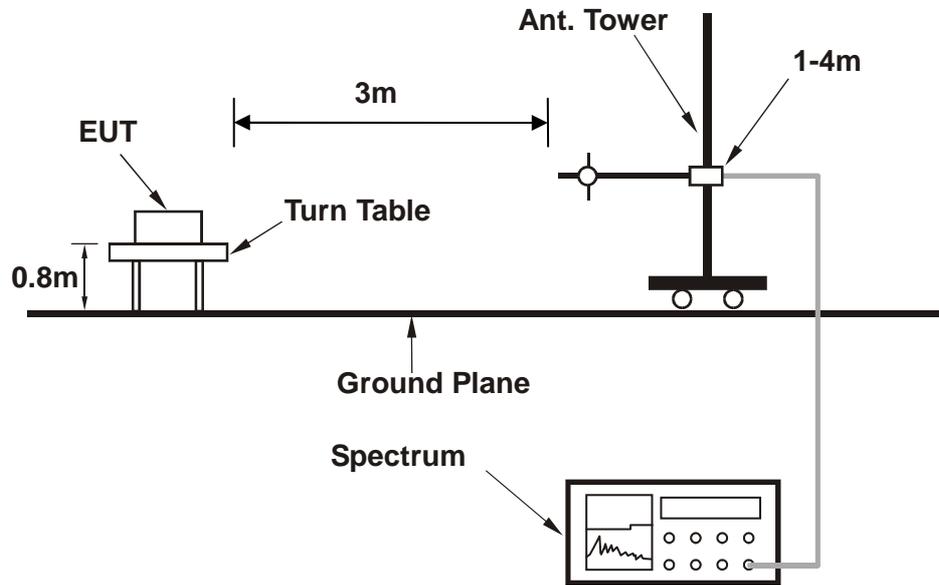

For the actual test configuration, please refer to the attached file (Test Setup Photo).




4.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

WCDMA:

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

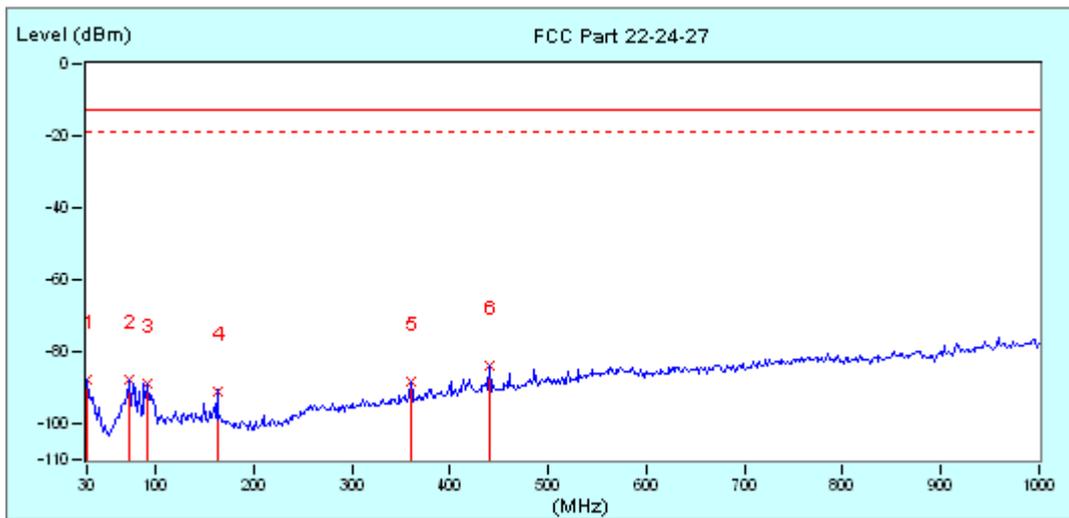


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	30.00	-12.55	-75.37	-87.92	-13.00	-74.92	100	0
2	73.65	-24.54	-63.18	-87.72	-13.00	-74.72	100	0
3	91.43	-21.06	-67.79	-88.85	-13.00	-75.85	100	0
4	162.57	-19.43	-71.91	-91.34	-13.00	-78.34	100	0
5	359.80	-13.30	-74.87	-88.17	-13.00	-75.17	100	0
*	440.63	-10.80	-73.18	-83.98	-13.00	-70.98	100	0



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Blue Zheng		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

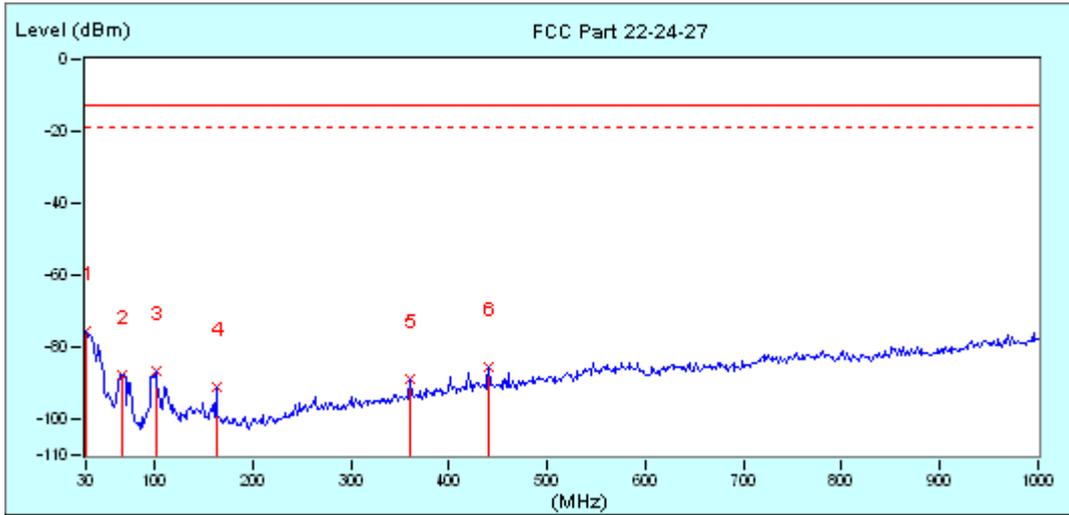


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
*	1	-12.55	-63.09	-75.64	-13.00	-62.64	100	0
	2	-25.19	-62.55	-87.74	-13.00	-74.74	100	0
	3	-20.11	-66.28	-86.39	-13.00	-73.39	100	0
	4	-19.43	-71.83	-91.26	-13.00	-78.26	100	0
	5	-13.30	-75.70	-89.00	-13.00	-76.00	100	0
	6	-10.80	-74.62	-85.42	-13.00	-72.42	100	0



ABOVE 1GHz DATA

WCDMA:

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

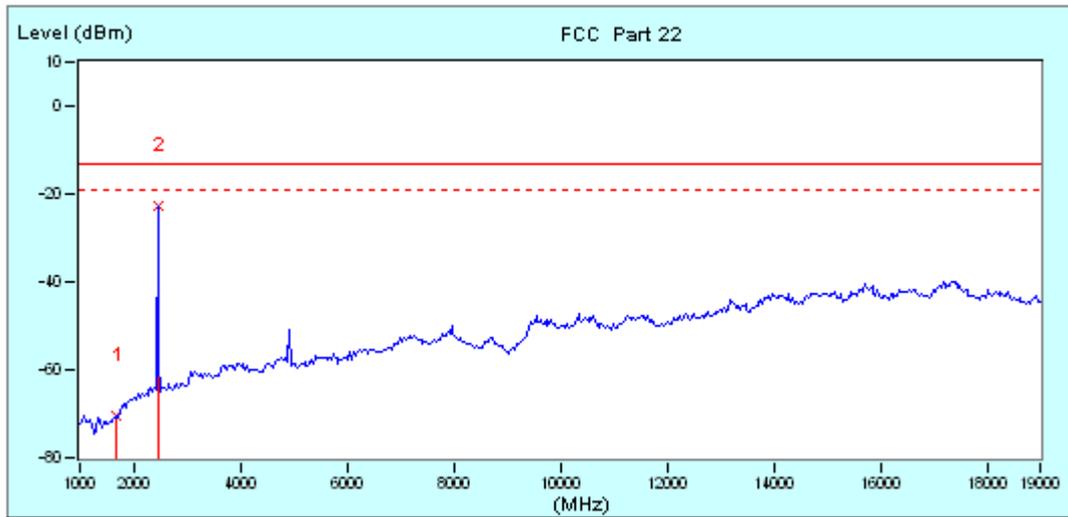


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table	
							cm	deg
1	1665.00 (PK)	-2.32	-68.07	-70.39	-13.00	-57.39	150	0
*	2456.67 (PK)	3.38	-26.11	-22.73	-13.00	-9.73	150	0



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

MODE	TX channel 4182	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

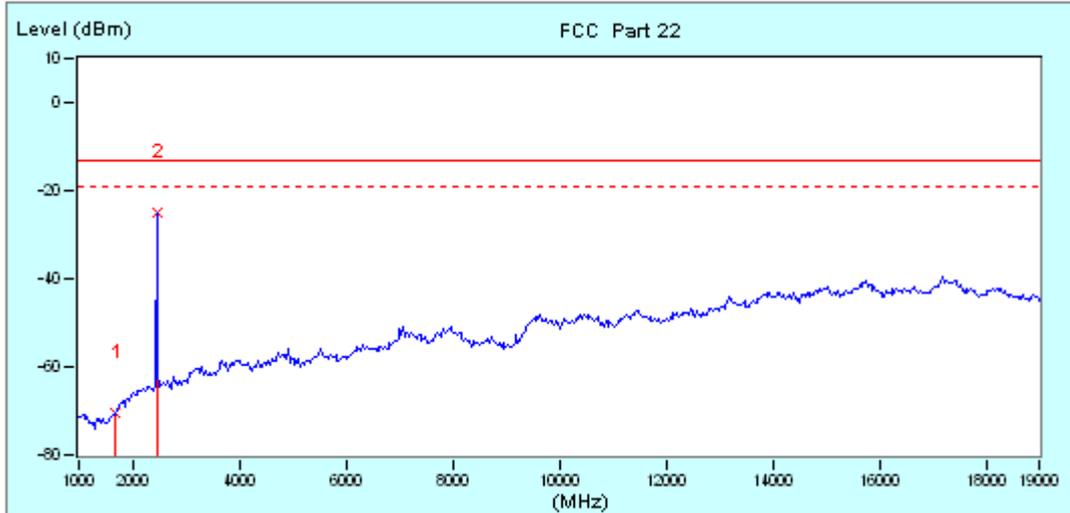

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1665.00 (PK)	-2.32	-67.95	-70.27	-13.00	-57.27	150	0
*	2	3.38	-28.25	-24.87	-13.00	-11.87	150	0



**BUREAU
VERITAS**


Test Report No.: RF150420N007-2

Above 1GHz

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

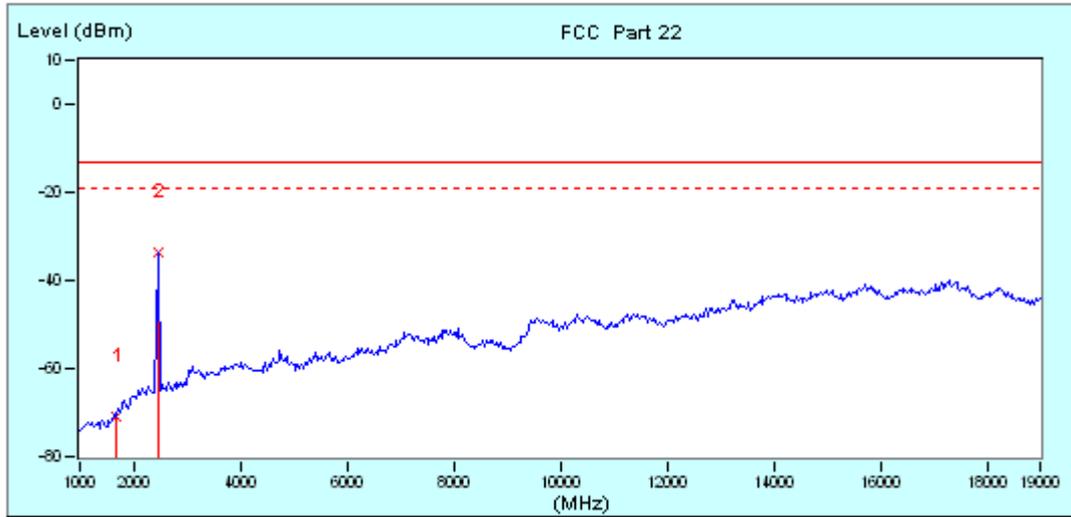


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1690.00 (PK)	-2.01	-68.86	-70.87	-13.00	-57.87	150	0
*	2470.00 (PK)	3.42	-36.88	-33.46	-13.00	-20.46	150	0



CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

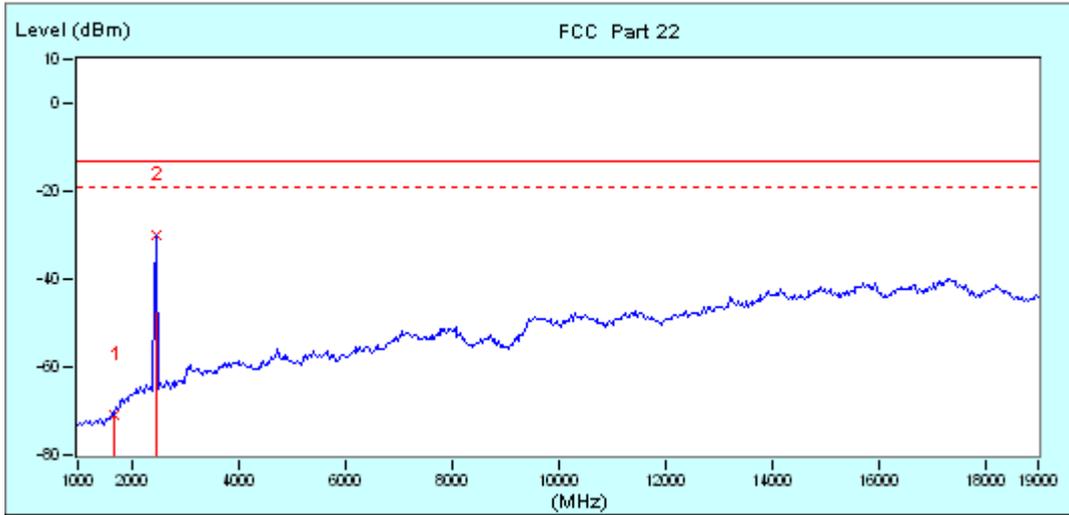

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1690.00 (PK)	-2.01	-68.86	-70.87	-13.00	-57.87	150	0
*	2470.00 (PK)	3.42	-33.56	-30.14	-13.00	-17.14	150	0




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

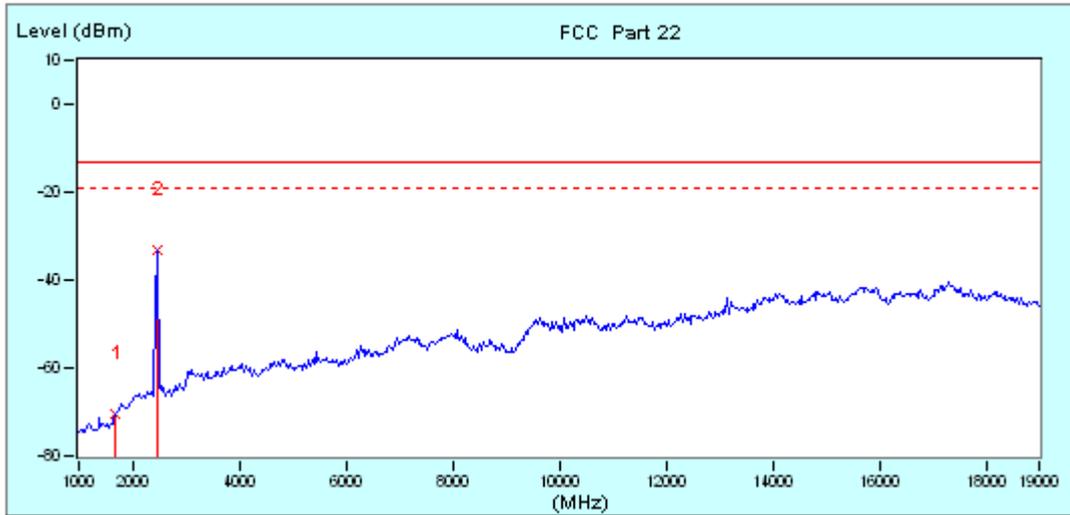

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1690.00 (PK)	-2.01	-68.53	-70.54	-13.00	-57.54	150	0
*	2470.00 (PK)	3.42	-36.48	-33.06	-13.00	-20.06	150	0




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

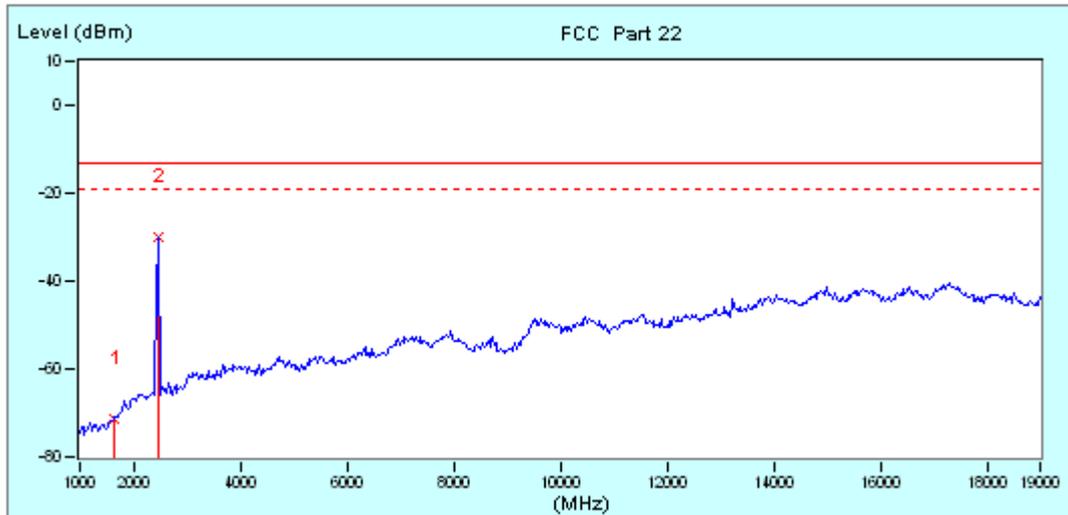


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1630.00 (PK)	-2.76	-68.75	-71.51	-13.00	-58.51	150	0
*	2	3.42	-33.61	-30.19	-13.00	-17.19	150	0



CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

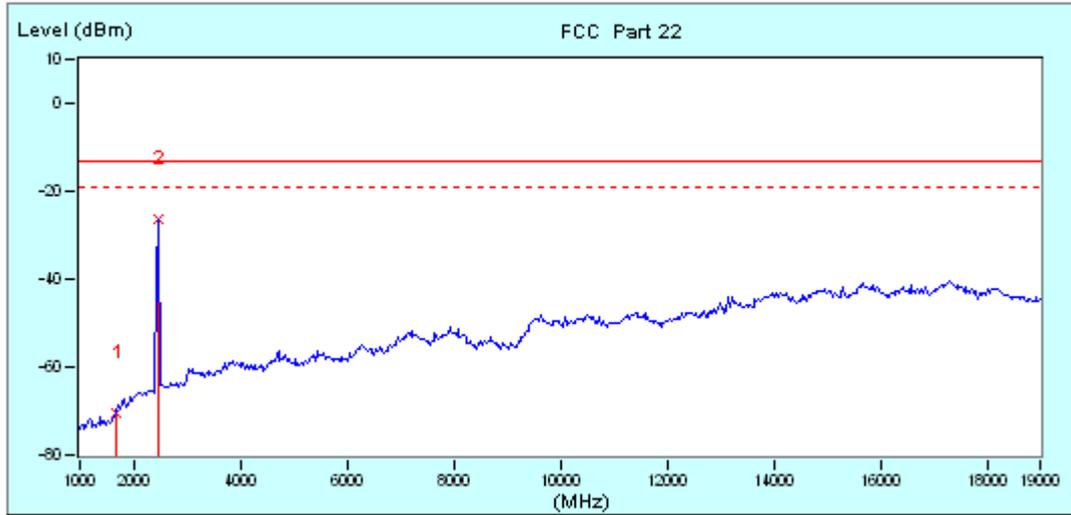


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1690.00 (PK)	-2.01	-68.53	-70.54	-13.00	-57.54	150	0
*	2470.00 (PK)	3.42	-29.94	-26.52	-13.00	-13.52	150	0



CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

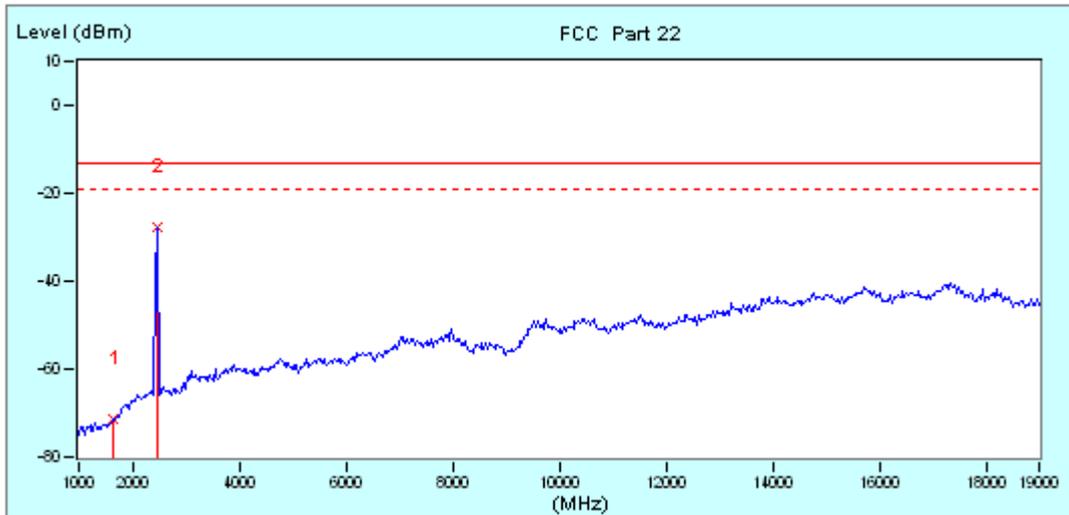


No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1660.00 (PK)	-2.39	-69.15	-71.54	-13.00	-58.54	150	0
*	2	3.42	-31.16	-27.74	-13.00	-14.74	150	0



CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

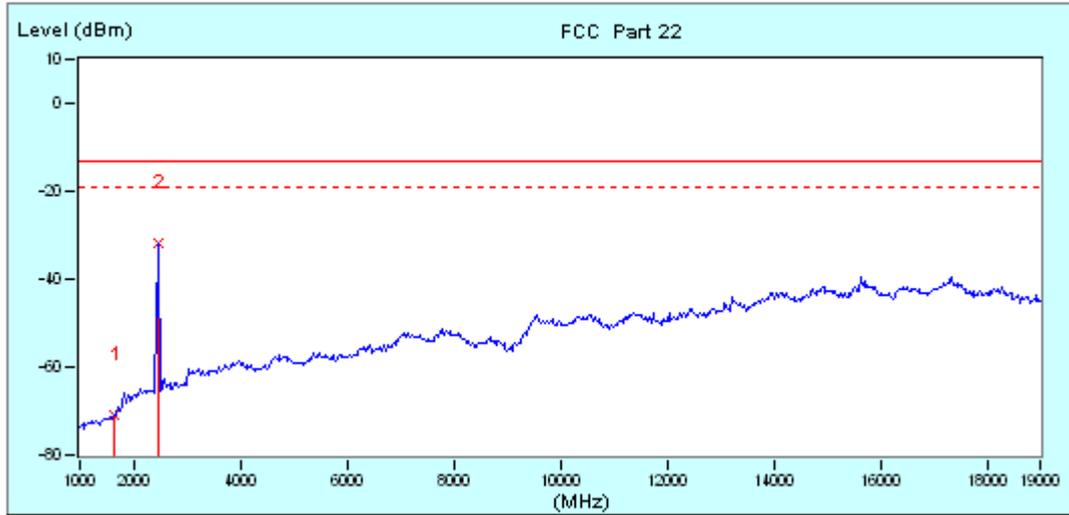

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
1	1660.00 (PK)	-2.39	-68.32	-70.71	-13.00	-57.71	150	0
* 2	2470.00 (PK)	3.42	-35.17	-31.75	-13.00	-18.75	150	0




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	24deg. C, 60%RH	INPUT POWER	14Vdc (adapter or host equipment)
TESTED BY	Bob Chen		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

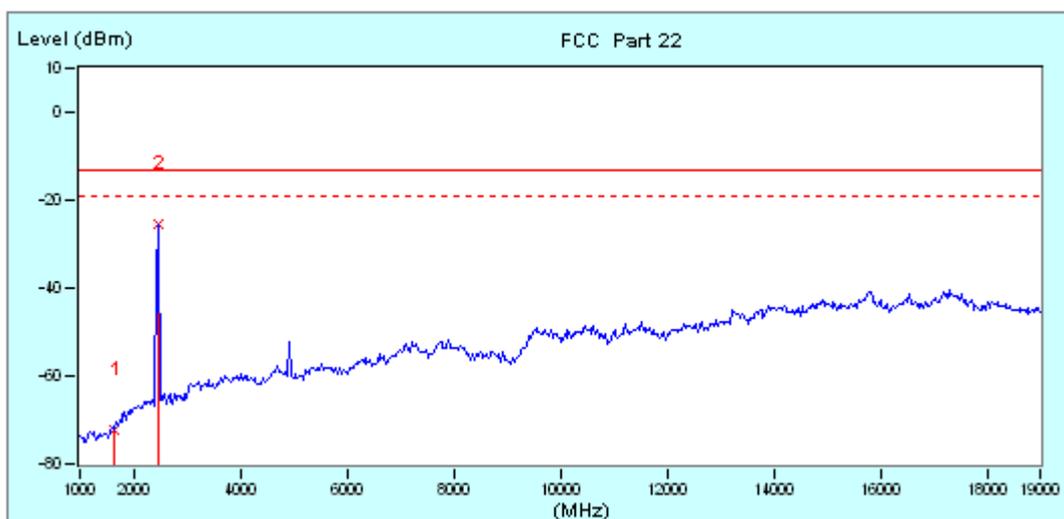

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Li mit dBm	Margin dB	Tower / Table cm deg	
1	1660.00 (PK)	-2.39	-69.72	-72.11	-13.00	-59.11	150	0
*	2	3.42	-28.92	-25.50	-13.00	-12.50	150	0




4.7 PEAK TO AVERAGE RATIO

4.7.1 LIMITS OF peak to average ratio MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.7.2 TEST SETUP

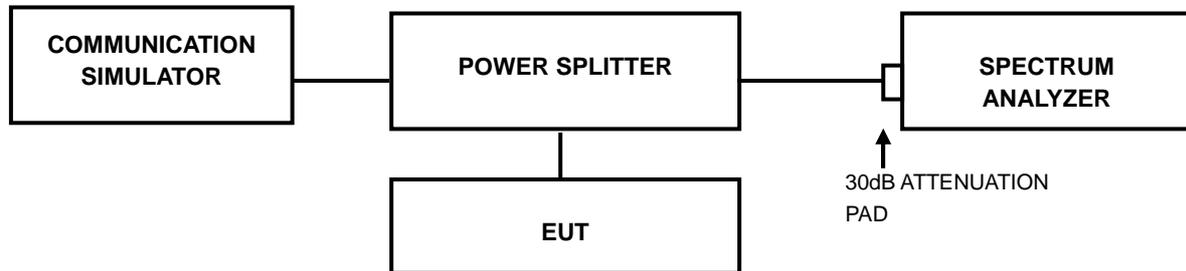

4.7.3 TEST PROCEDURES


1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



4.7.4 TEST RESULTS

WCDMA


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
4182	836.4	3.28

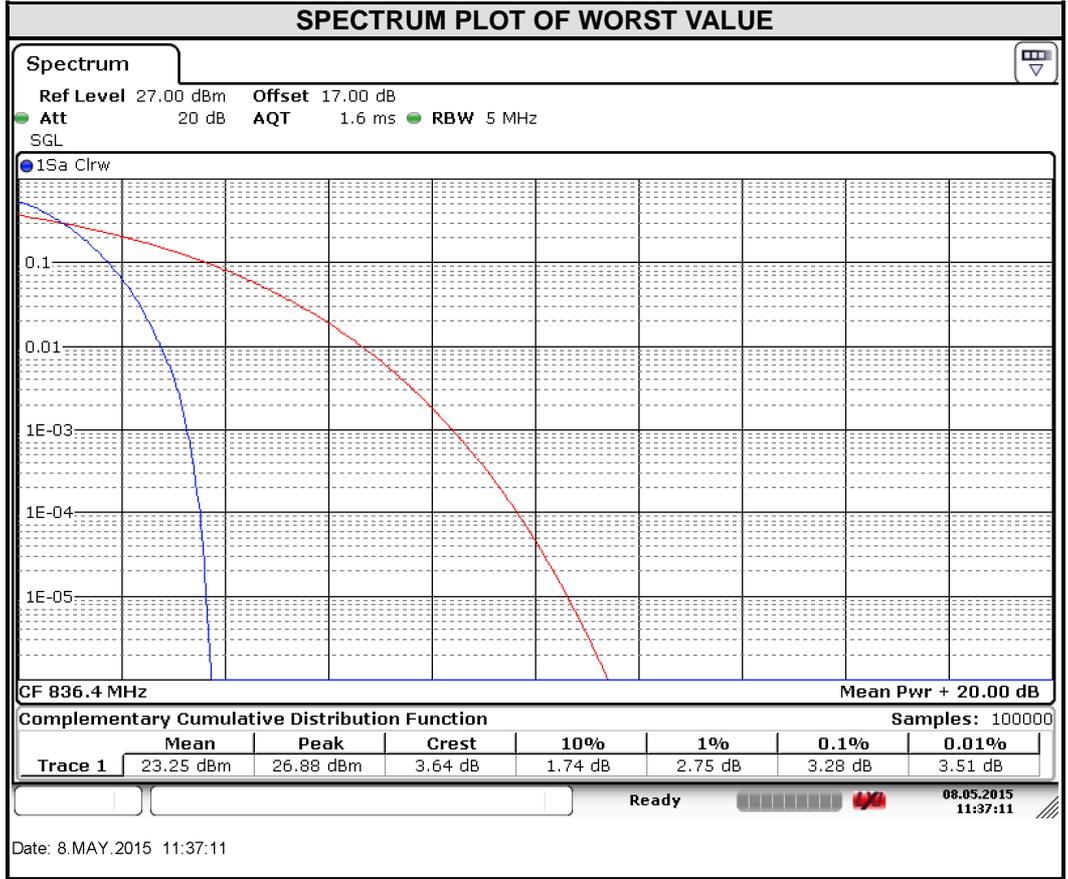



LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20407	824.7	5.62	6.61	20415	825.5	5.57	6.32
20525	836.5	5.42	6.52	20525	836.5	5.57	6.38
20643	848.3	5.33	6.41	20635	847.5	5.48	6.38

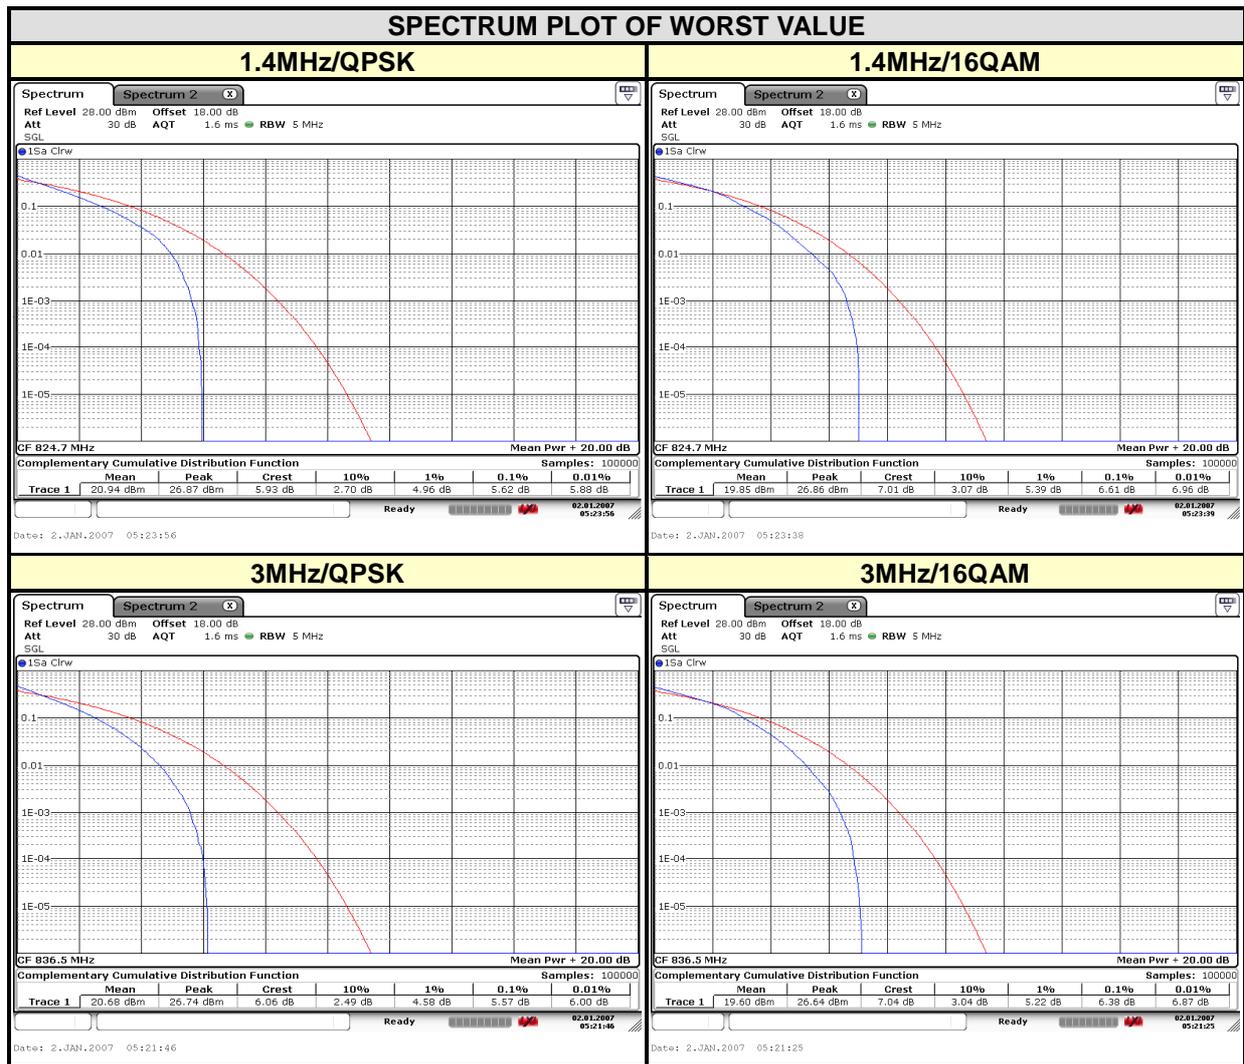




**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20425	826.5	5.51	6.29	20450	829	5.80	6.55
20525	836.5	5.25	6.38	20525	836.5	5.74	6.43
20625	846.5	5.19	6.14	20600	844	5.62	6.35

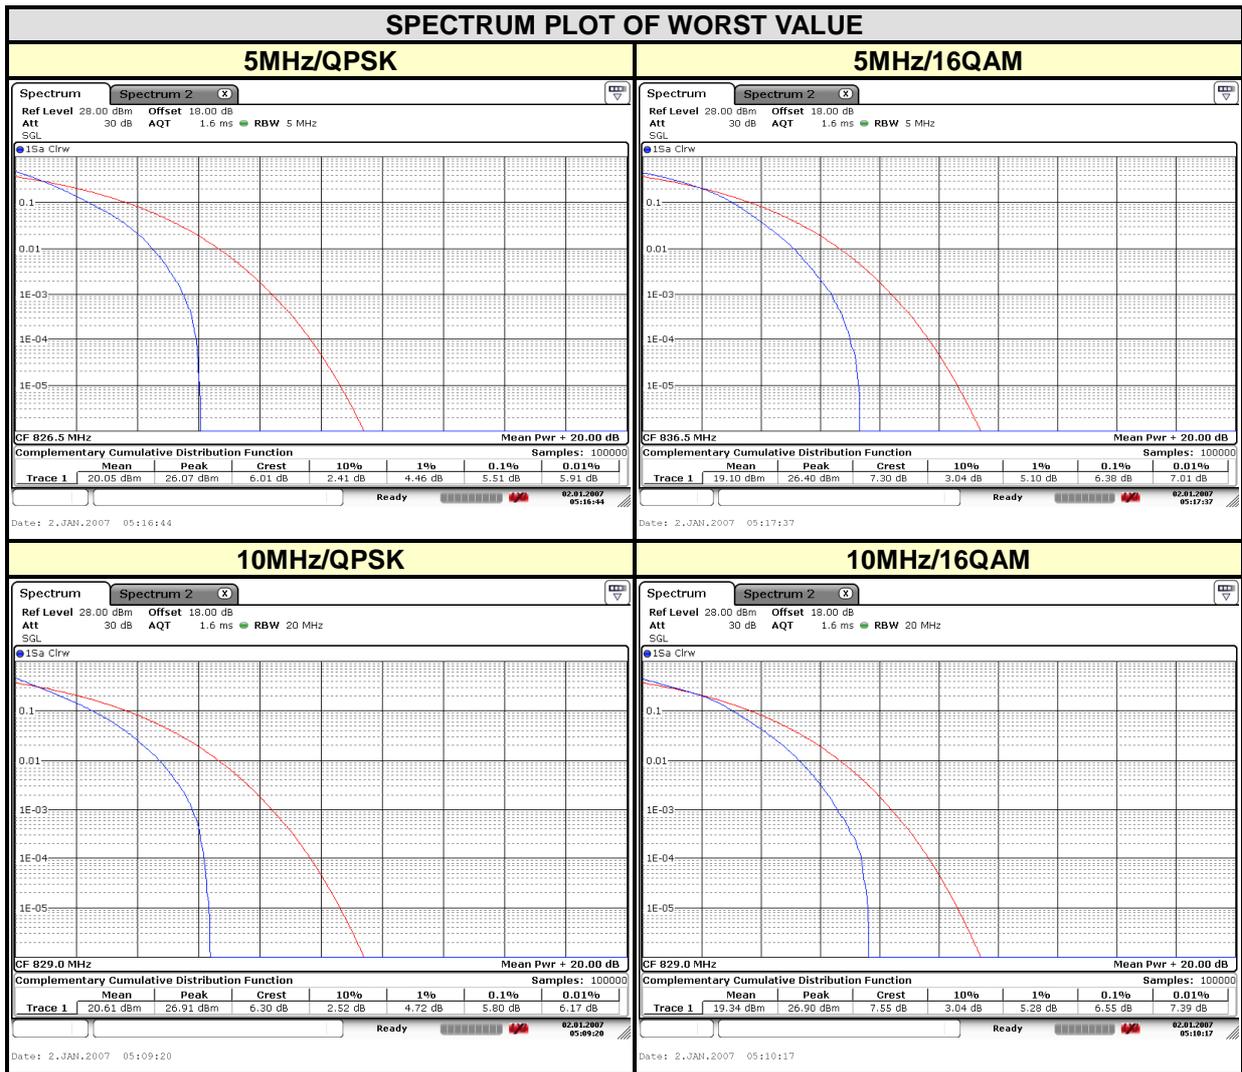



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Dongguan EMC/RF Lab:

Tel: +86-769-85935656

Fax: +86-769-85931080

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



**BUREAU
VERITAS**

Test Report No.: RF150420N007-2

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---