



# FCC Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : LTE/WCDMA/GSM(GPRS) Multi-Mode Digital  
Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : Z232TL  
**FCC ID** : SRQ-Z232TL  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product testing was completed on Jul. 08, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1. GENERAL DESCRIPTION .....5**

    1.1. Applicant.....5

    1.2. Manufacturer .....5

    1.3. Product Feature of Equipment Under Test .....5

    1.4. Product Specification of Equipment Under Test .....6

    1.5. Modification of EUT .....7

    1.6. Test Location .....7

    1.7. Applicable Standards .....7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8**

    2.1. Test Mode .....8

    2.2. Connection Diagram of Test System ..... 10

    2.3. Support Unit used in test configuration and system..... 12

    2.4. EUT Operation Test Setup ..... 13

**3. TEST RESULT.....14**

    3.1. Test of AC Conducted Emission Measurement ..... 14

    3.2. Test of Radiated Emission Measurement ..... 20

**4. LIST OF MEASURING EQUIPMENT .....26**

**5. UNCERTAINTY OF EVALUATION .....27**

**APPENDIX A. SETUP PHOTOGRAPHS**

**APPENDIX B. PRODUCT EQUALITY DECLARATION**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 11.77 dB at 0.420 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 1.58 dB at 36.480 MHz for Quasi-Peak



# 1. General Description

## 1.1. Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2. Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
<b>Brand Name</b>	ZTE
<b>Model Name</b>	Z232TL
<b>FCC ID</b>	SRQ-Z232TL
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
<b>IMEI Code</b>	Conduction: 860550030008653 Radiation: 860550030006525
<b>HW Version</b>	Z232TLHWV1.0
<b>SW Version</b>	Z232TLV1.0.0B03
<b>EUT Stage</b>	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz Glonass: 1602 MHz + n × 0.5625MHz (n=-7,-6,-5,...0,...6)
<b>Antenna Type</b>	WWAN : PIFA Antenna Bluetooth : PIFA Antenna GPS/Glonass : PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : QPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS/Glonass : BPSK



### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	CO01-KS	03CH02-KS	418269

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	☒
2.	Data application transferred mode (EUT with notebook)	☒	☒	☒

**Abbreviations:**

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz




Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	<p>Mode 1: GSM850 Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + Camera &lt;Fig.1&gt;</p> <p>Mode 2: WCDMA Band V Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 &lt;Fig.1&gt;</p> <p>Mode 3: LTE Band 4 Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + Glonass Rx &lt;Fig.2&gt;</p> <p>Mode 4: LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx &lt;Fig.3&gt;</p>
Radiated Emissions < 1GHz	1/2	<p>Mode 1: GSM850 Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + Camera &lt;Fig.1&gt;</p> <p>Mode 2: WCDMA Band V Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 &lt;Fig.1&gt;</p> <p>Mode 3: LTE Band 4 Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + Glonass Rx &lt;Fig.2&gt;</p> <p>Mode 4: LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx &lt;Fig.3&gt;</p>
Radiated Emissions ≥ 1GHz	1/2	<p>Mode 1: WCDMA Band V Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4 &lt;Fig.1&gt;</p> <p>Mode 2: LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx &lt;Fig.3&gt;</p>


**Remark:**

1. The worst case of AC is mode 1; and the USB Link mode of AC is mode 4, only the test data of this mode was reported.
2. The worst case of RE < 1G is mode 2; and the USB Link mode of RE is mode 4, only the test data of this mode was reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.


## 2.2. Connection Diagram of Test System

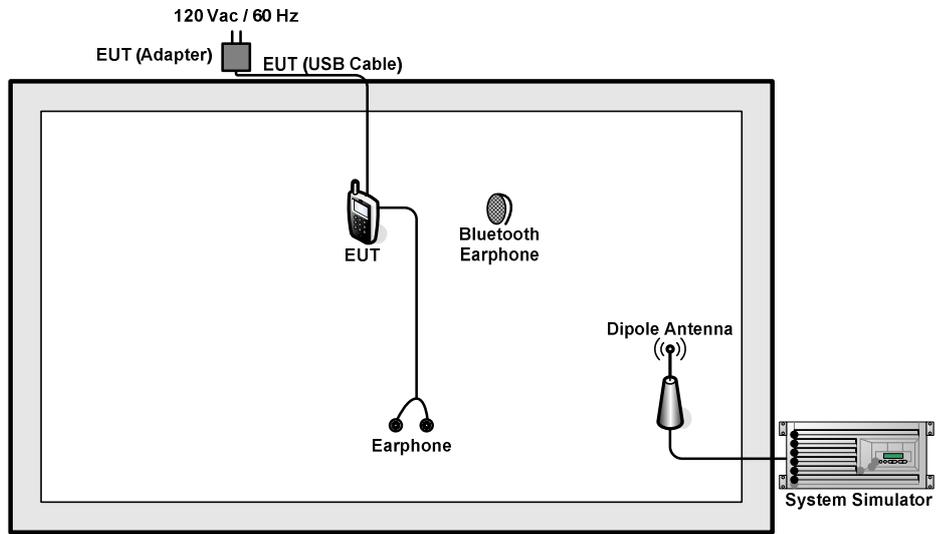

<Fig.1>

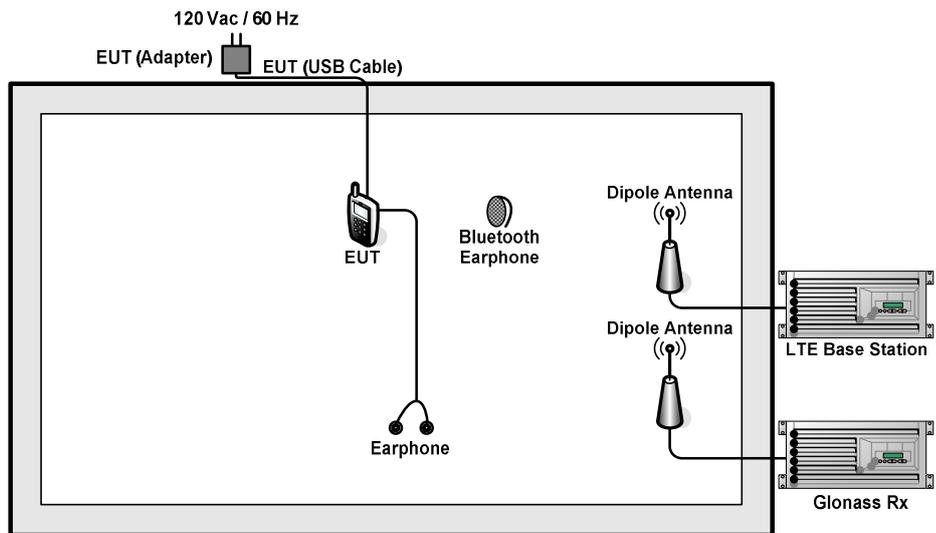

<Fig.2>

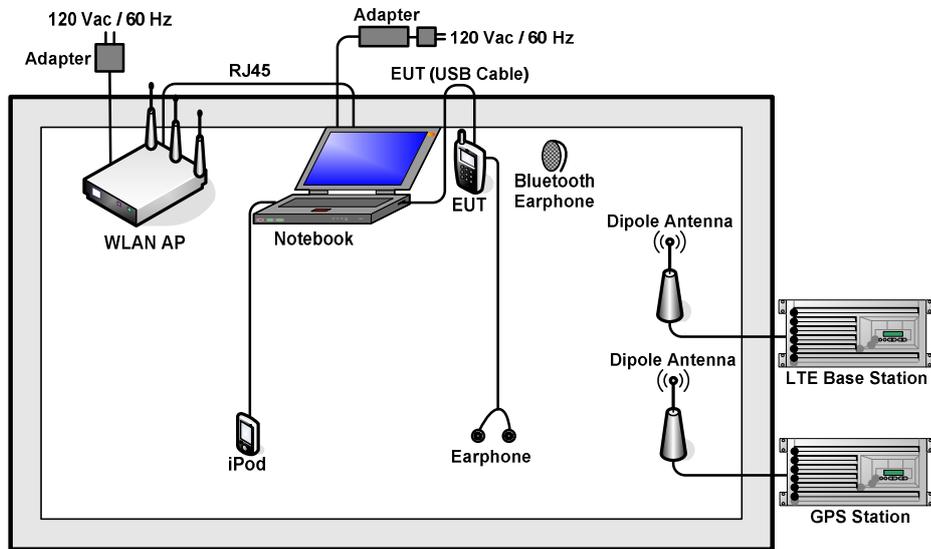

<Fig.3>



### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
4.	Glomass Station	RACELOGIC	RLLS03-2RP	N/A	N/A	Unshielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	Unshielded, 0.53 m
6.	Bluetooth Earphone	Lenovo	LBH301	N/A	N/A	N/A
7.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	Notebook	DELL	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	SD Card	Kingston	4GB	N/A	N/A	N/A
10.	iPod	Apple	A1199	FCC DoC	Shielded, 1.2 m	N/A
11.	Earphone	Lenovo	LH102	N/A	Unshielded, 1.2m	N/A
12.	WLAN AP	D-link	DIR855	KA2DIR855A2	N/A	Unshielded, 1.8 m



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GPS/Glonass unction to make the EUT receive continuous signals from GPS/Glonass station.
3. Execute "Video player" to play MPEG4 files.
4. Turn on camera to capture images.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

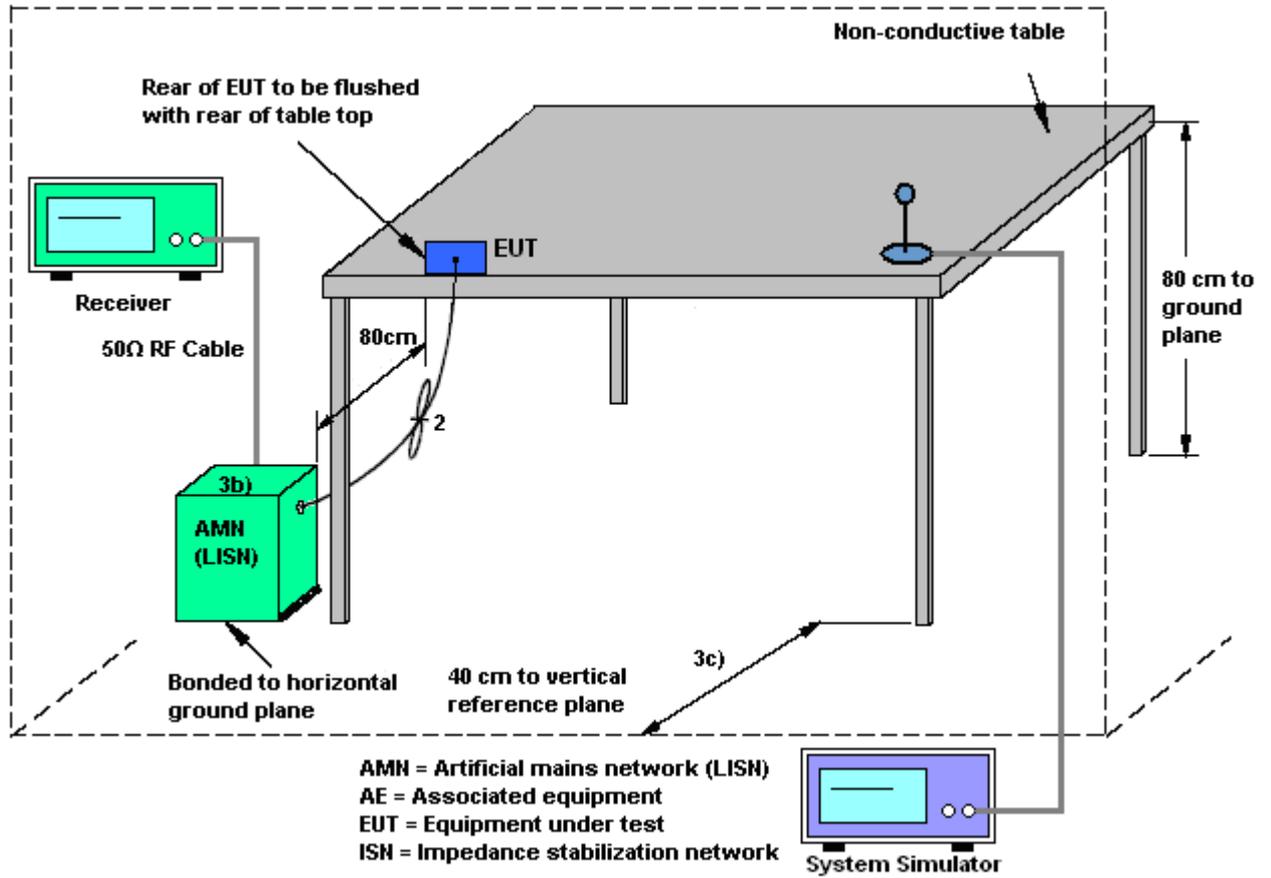



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + Camera		

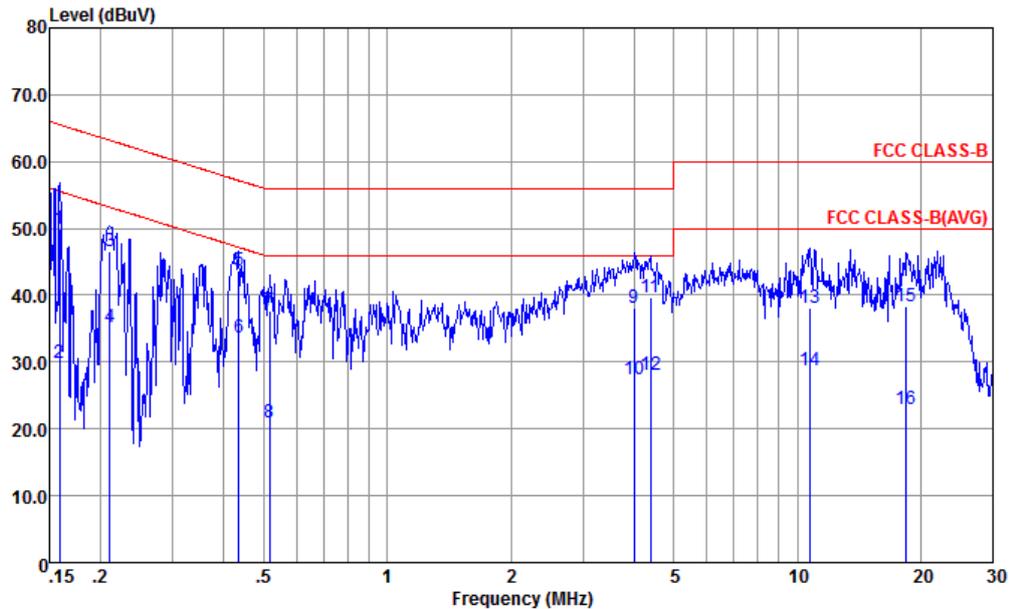


Site : CO01-KS  
Condition : FCC CLASS-B LISN-L-20151024 LINE

mode : Mode 1  
: 860550030008653 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	49.88	-15.64	65.52	39.30	0.47	10.11	QP
2	0.16	29.78	-25.74	55.52	19.20	0.47	10.11	Average
3	0.21	46.65	-16.53	63.18	36.30	0.22	10.13	QP
4	0.21	35.25	-17.93	53.18	24.90	0.22	10.13	Average
5	0.44	43.60	-13.55	57.15	33.20	0.23	10.17	QP
6 *	0.44	33.70	-13.45	47.15	23.30	0.23	10.17	Average
7	0.52	37.69	-18.31	56.00	27.30	0.23	10.16	QP
8	0.52	20.89	-25.11	46.00	10.50	0.23	10.16	Average
9	4.01	38.15	-17.85	56.00	27.79	0.19	10.17	QP
10	4.01	27.45	-18.55	46.00	17.09	0.19	10.17	Average
11	4.38	39.66	-16.34	56.00	29.30	0.19	10.17	QP
12	4.38	28.16	-17.84	46.00	17.80	0.19	10.17	Average
13	10.73	38.04	-21.96	60.00	27.50	0.25	10.29	QP
14	10.73	28.74	-21.26	50.00	18.20	0.25	10.29	Average
15	18.43	38.26	-21.74	60.00	27.50	0.27	10.49	QP
16	18.43	23.06	-26.94	50.00	12.30	0.27	10.49	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + Camera		

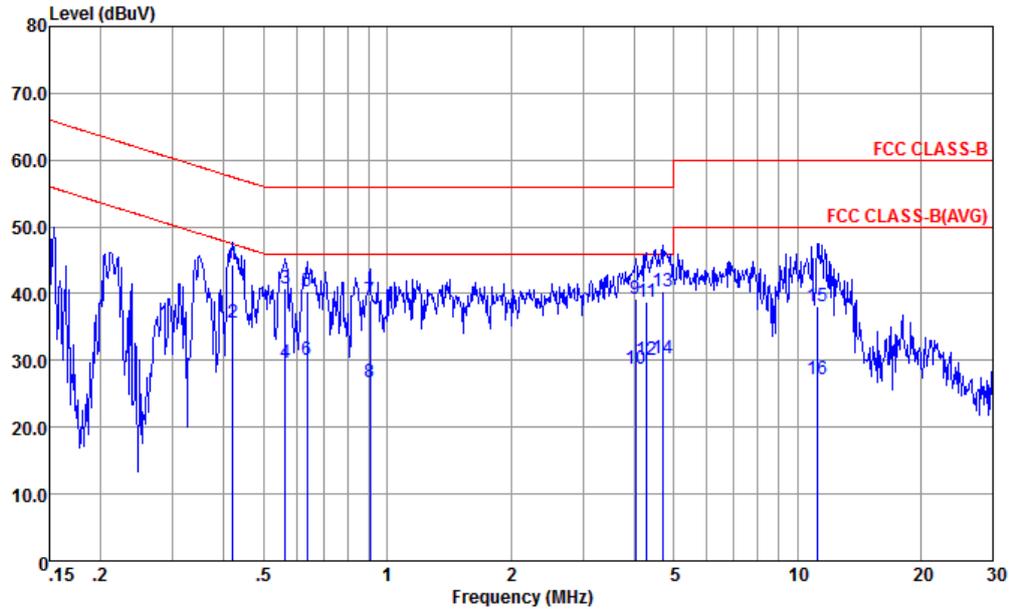


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL  
 mode : Mode 1  
 : 860550030008653 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.42	44.29	-13.17	57.46	33.80	0.32	10.17	QP
2 *	0.42	35.69	-11.77	47.46	25.20	0.32	10.17	Average
3	0.56	40.79	-15.21	56.00	30.30	0.33	10.16	QP
4	0.56	29.69	-16.31	46.00	19.20	0.33	10.16	Average
5	0.64	40.29	-15.71	56.00	29.80	0.33	10.16	QP
6	0.64	30.09	-15.91	46.00	19.60	0.33	10.16	Average
7	0.91	39.10	-16.90	56.00	28.60	0.36	10.14	QP
8	0.91	26.80	-19.20	46.00	16.30	0.36	10.14	Average
9	4.03	39.13	-16.87	56.00	28.60	0.36	10.17	QP
10	4.03	28.83	-17.17	46.00	18.30	0.36	10.17	Average
11	4.29	38.73	-17.27	56.00	28.20	0.36	10.17	QP
12	4.29	30.13	-15.87	46.00	19.60	0.36	10.17	Average
13	4.70	40.34	-15.66	56.00	29.80	0.36	10.18	QP
14	4.70	30.24	-15.76	46.00	19.70	0.36	10.18	Average
15	11.20	38.17	-21.83	60.00	27.59	0.28	10.30	QP
16	11.20	27.17	-22.83	50.00	16.59	0.28	10.30	Average



Test Mode :	Mode 4	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

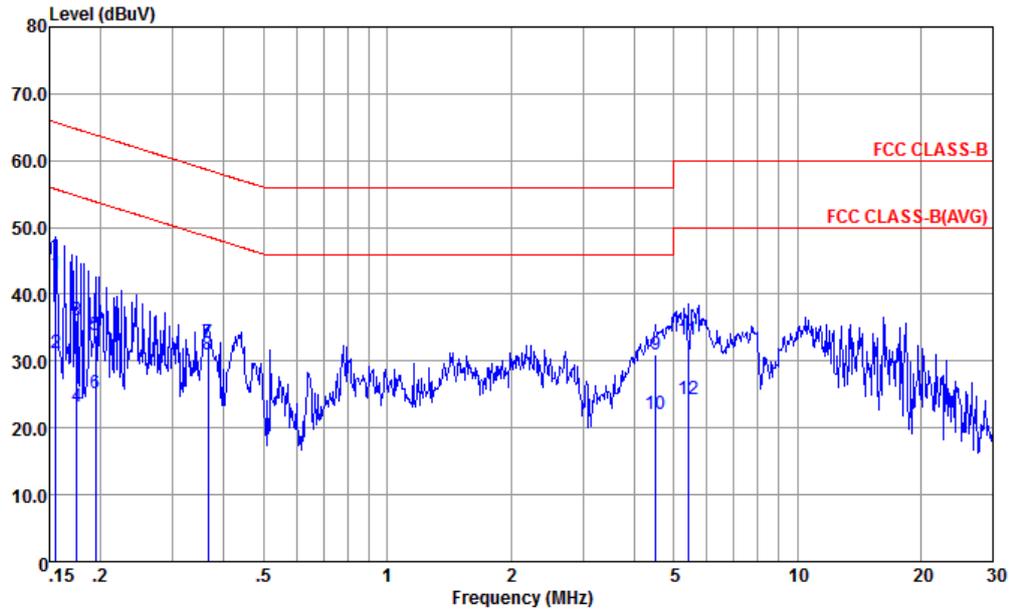


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-20151024 LINE

mode : Mode 4  
 : 860550030008653 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	42.90	-22.79	65.69	32.30	0.49	10.11	QP
2	0.16	31.20	-24.49	55.69	20.60	0.49	10.11	Average
3	0.17	36.08	-28.64	64.72	25.60	0.36	10.12	QP
4	0.17	23.08	-31.64	54.72	12.60	0.36	10.12	Average
5	0.19	33.97	-29.87	63.84	23.60	0.25	10.12	QP
6	0.19	25.27	-28.57	53.84	14.90	0.25	10.12	Average
7	0.37	32.69	-25.92	58.61	22.30	0.23	10.16	QP
8 *	0.37	30.99	-17.62	48.61	20.60	0.23	10.16	Average
9	4.53	30.96	-25.04	56.00	20.59	0.19	10.18	QP
10	4.53	21.96	-24.04	46.00	11.59	0.19	10.18	Average
11	5.42	33.19	-26.81	60.00	22.80	0.20	10.19	QP
12	5.42	24.19	-25.81	50.00	13.80	0.20	10.19	Average



Test Mode :	Mode 4	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

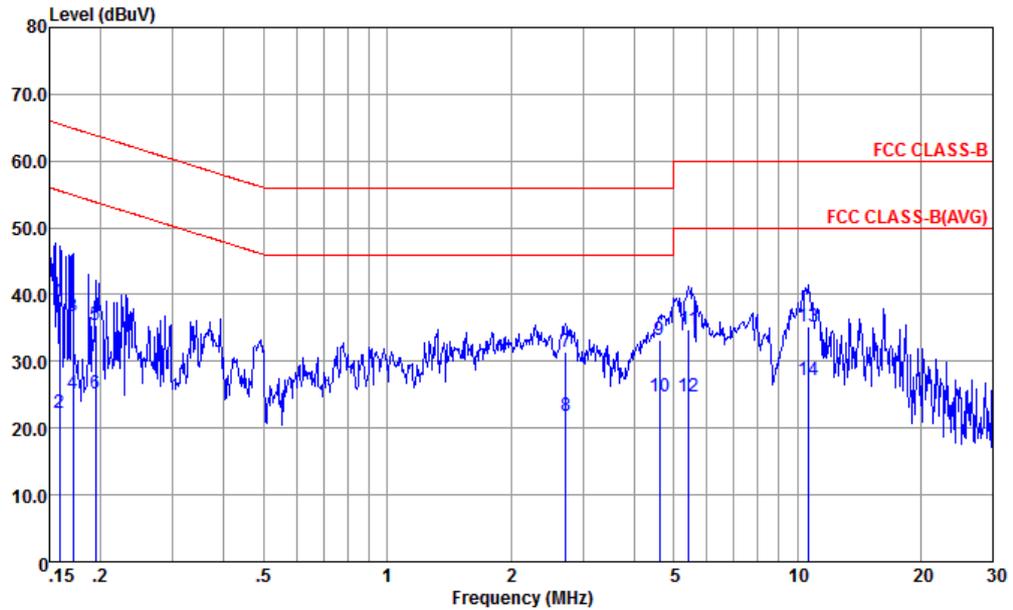

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL

mode : Mode 4  
 : 860550030008653 #9

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	39.01	-26.51	65.52	28.60	0.30	10.11	QP
2	0.16	22.31	-33.21	55.52	11.90	0.30	10.11	Average
3	0.17	36.72	-28.18	64.90	26.30	0.30	10.12	QP
4	0.17	25.12	-29.78	54.90	14.70	0.30	10.12	Average
5	0.19	35.33	-28.51	63.84	24.90	0.31	10.12	QP
6	0.19	25.23	-28.61	53.84	14.80	0.31	10.12	Average
7	2.72	31.32	-24.68	56.00	20.80	0.37	10.15	QP
8	2.72	21.82	-24.18	46.00	11.30	0.37	10.15	Average
9	4.62	33.14	-22.86	56.00	22.60	0.36	10.18	QP
10 *	4.62	24.74	-21.26	46.00	14.20	0.36	10.18	Average
11	5.45	34.83	-25.17	60.00	24.30	0.34	10.19	QP
12	5.45	24.63	-25.37	50.00	14.10	0.34	10.19	Average
13	10.62	35.16	-24.84	60.00	24.60	0.28	10.28	QP
14	10.62	27.16	-22.84	50.00	16.60	0.28	10.28	Average



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

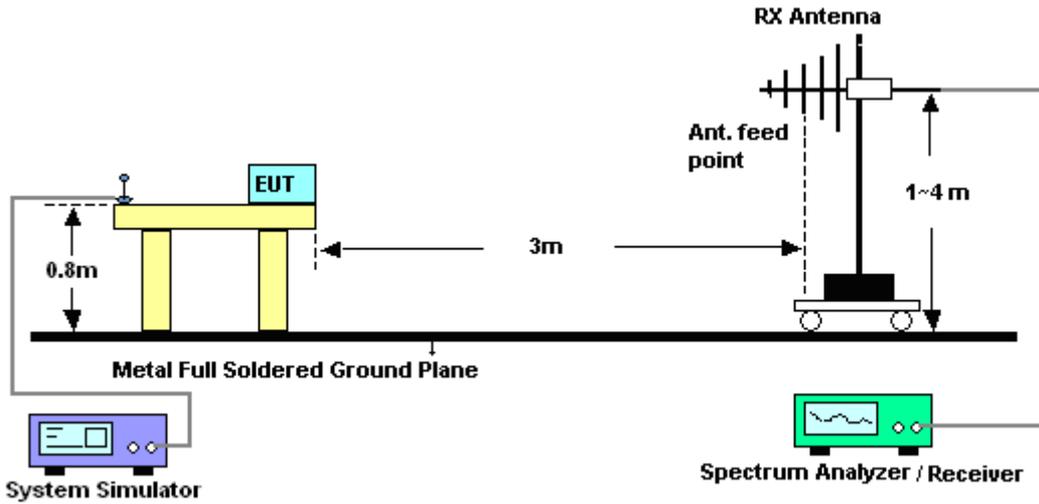


For radiated emissions above 1GHz

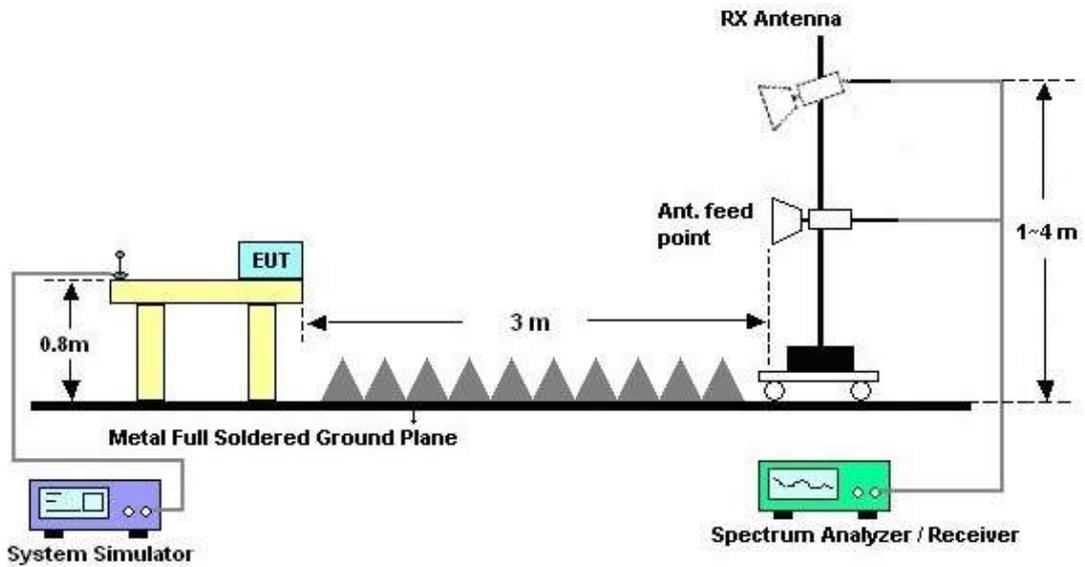



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Carl Ni	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band V Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4		
Remark :	#7 is system simulator signal which can be ignored.		

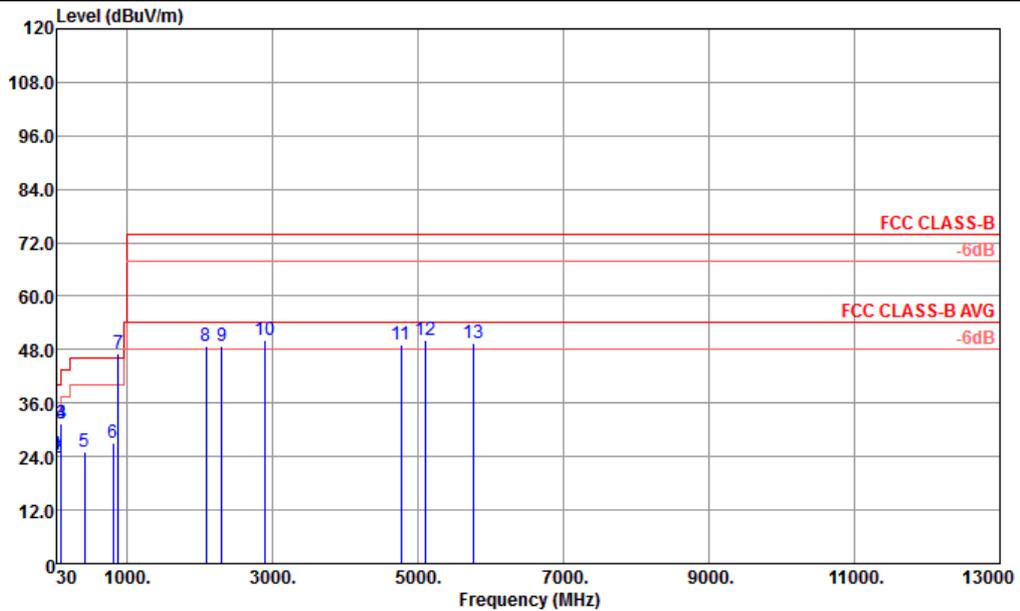


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 966-02 LF ANT HORIZONTAL  
 Mode : 2  
 IMEI : 860550030006525

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.81	24.25	-15.75	40.00	29.40	25.80	0.11	31.06	---	---	Peak HORIZONTAL
2	35.94	23.59	-16.41	40.00	30.07	24.30	0.12	30.90	---	---	Peak HORIZONTAL
3	97.77	31.45	-12.05	43.50	43.85	17.77	0.23	30.40	---	---	Peak HORIZONTAL
4	101.55	31.47	-12.03	43.50	43.33	18.30	0.24	30.40	166	320	Peak HORIZONTAL
5	414.10	25.03	-20.97	46.00	29.65	25.08	0.94	30.64	---	---	Peak HORIZONTAL
6	810.30	27.13	-18.87	46.00	29.44	26.72	1.45	30.48	---	---	Peak HORIZONTAL
7 *	881.70	46.97			48.46	27.45	1.59	30.53	---	---	Peak HORIZONTAL
8	2082.00	48.86	-25.14	74.00	47.59	30.79	5.05	34.57	---	---	Peak HORIZONTAL
9	2306.00	48.85	-25.15	74.00	45.63	31.31	5.67	33.76	---	---	Peak HORIZONTAL
10	2886.00	50.20	-23.80	74.00	43.10	32.31	2.90	28.11	---	---	Peak HORIZONTAL
11	4767.00	49.19	-24.81	74.00	41.06	35.03	6.00	32.90	---	---	Peak HORIZONTAL
12	5103.00	50.12	-23.88	74.00	43.86	34.88	6.29	34.91	---	---	Peak HORIZONTAL
13	5763.00	49.41	-24.59	74.00	43.29	35.24	6.91	36.03	---	---	Peak HORIZONTAL



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Carl Ni	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band V Idle + Bluetooth Idle + USB Cable (Charging from Adapter) + Earphone + MPEG4		
Remark :	#7 is system simulator signal which can be ignored.		

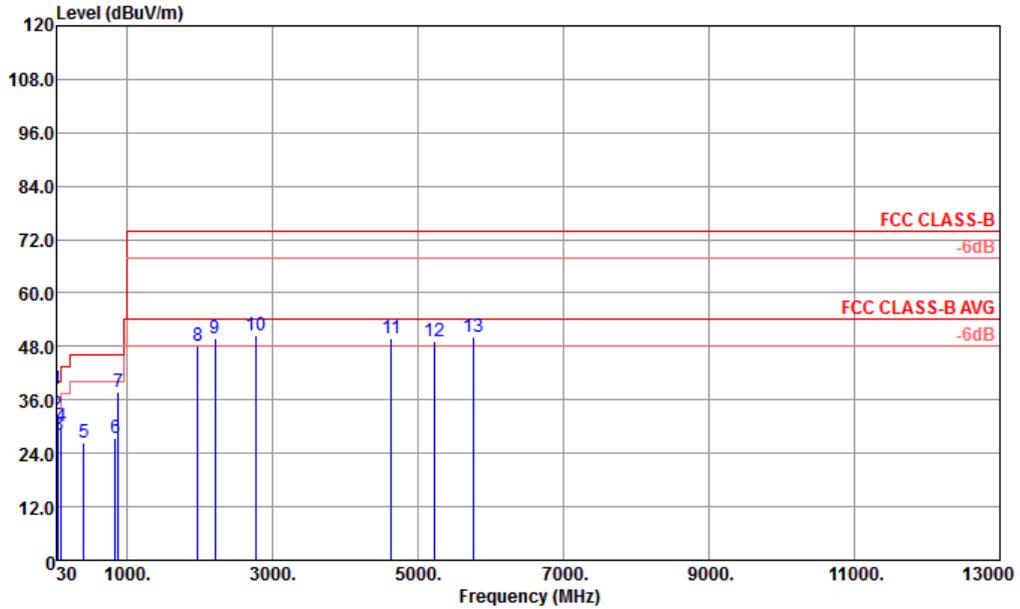


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 966-02 LF ANT VERTICAL  
 Mode : 2  
 IMEI : 860550030006525

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	cm	deg		
			dB	dBuV/m	dBuV	dB	dB				
1	36.48	38.42	-1.58	40.00	44.90	24.30	0.12	30.90	100	0 QP	VERTICAL
2	43.23	32.88	-7.12	40.00	43.27	20.30	0.13	30.82	---	---	Peak
3	52.68	28.13	-11.87	40.00	44.39	14.33	0.15	30.74	---	---	Peak
4	96.69	29.94	-13.56	43.50	42.34	17.77	0.23	30.40	---	---	Peak
5	403.60	26.45	-19.55	46.00	30.96	25.24	0.93	30.68	---	---	Peak
6	836.20	27.29	-18.71	46.00	29.30	27.03	1.39	30.43	---	---	Peak
7	881.70	37.72			39.21	27.45	1.59	30.53	---	---	Peak
8	1972.00	48.13	-25.87	74.00	48.31	30.21	4.47	34.86	---	---	Peak
9	2212.00	49.81	-24.19	74.00	47.00	31.20	5.78	34.17	---	---	Peak
10	2766.00	50.56	-23.44	74.00	44.28	32.03	2.81	28.56	---	---	Peak
11	4629.00	49.78	-24.22	74.00	41.03	35.18	5.47	31.90	---	---	Peak
12	5226.00	49.03	-24.97	74.00	42.58	35.01	6.94	35.50	---	---	Peak
13	5757.00	50.02	-23.98	74.00	43.90	35.24	6.91	36.03	---	---	Peak



Test Mode :	Mode 4	Temperature :	21~22°C
Test Engineer :	Carl Ni	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#6 is system simulator signal which can be ignored.		

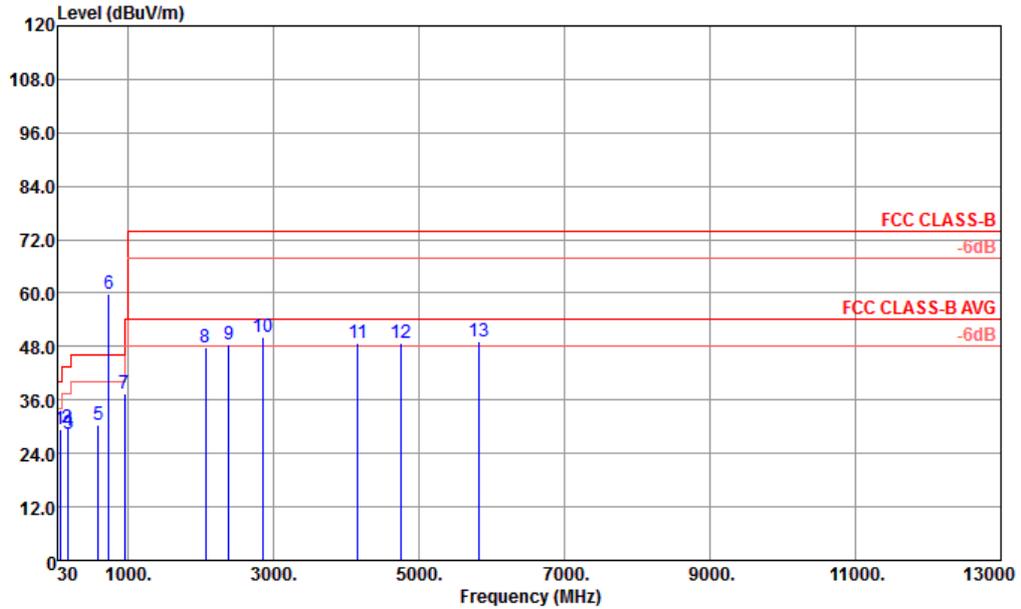


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 966-02 LF ANT HORIZONTAL  
 Mode : 4  
 IMEI : 860550030006525

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	63.48	29.30	-10.70	40.00	47.16	12.57	0.17	30.60	102	54	Peak HORIZONTAL
2	165.54	29.73	-13.77	43.50	42.92	16.86	0.35	30.40	---	---	Peak HORIZONTAL
3	174.72	28.46	-15.04	43.50	41.99	16.50	0.37	30.40	---	---	Peak HORIZONTAL
4	181.47	28.96	-14.54	43.50	42.85	16.13	0.38	30.40	---	---	Peak HORIZONTAL
5	596.10	30.49	-15.51	46.00	35.46	24.34	0.90	30.21	---	---	Peak HORIZONTAL
6 *	737.50	59.91			62.74	26.34	1.31	30.48	---	---	Peak HORIZONTAL
7	948.90	37.34	-8.66	46.00	37.76	28.37	1.71	30.50	---	---	Peak HORIZONTAL
8	2064.00	47.78	-26.22	74.00	46.72	30.73	4.90	34.57	---	---	Peak HORIZONTAL
9	2390.00	48.53	-25.47	74.00	44.75	31.40	5.59	33.21	---	---	Peak HORIZONTAL
10	2860.00	50.15	-23.85	74.00	43.03	32.22	2.85	27.95	---	---	Peak HORIZONTAL
11	4164.00	48.85	-25.15	74.00	39.06	35.08	6.60	31.89	---	---	Peak HORIZONTAL
12	4758.00	48.92	-25.08	74.00	40.69	35.05	5.91	32.73	---	---	Peak HORIZONTAL
13	5826.00	49.17	-24.83	74.00	43.04	35.15	6.47	35.49	---	---	Peak HORIZONTAL



Test Mode :	Mode 4	Temperature :	21~22°C
Test Engineer :	Carl Ni	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 12 Idle + Bluetooth Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#7 is system simulator signal which can be ignored.		

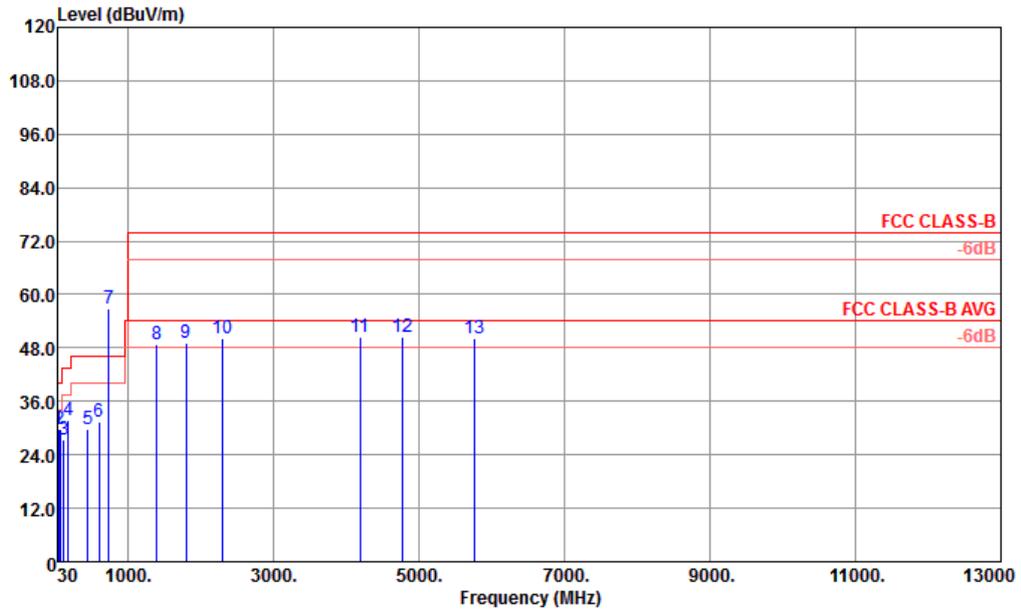

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 966-02 LF ANT VERTICAL  
 Mode : 4  
 IMEI : 860550030006525

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	Pol/Phas	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	42.15	29.63	-10.37	40.00	39.26	21.10	0.13	30.86	---	---	Peak	VERTICAL
2	63.48	29.80	-10.20	40.00	47.66	12.57	0.17	30.60	100	230	Peak	VERTICAL
3	122.61	27.39	-16.11	43.50	39.53	17.99	0.27	30.40	---	---	Peak	VERTICAL
4	174.99	31.79	-11.71	43.50	45.42	16.40	0.37	30.40	---	---	Peak	VERTICAL
5	449.80	29.66	-16.34	46.00	34.75	24.50	0.91	30.50	---	---	Peak	VERTICAL
6	598.20	31.42	-14.58	46.00	36.40	24.32	0.90	30.20	---	---	Peak	VERTICAL
7 *	737.50	56.83			59.66	26.34	1.31	30.48	---	---	Peak	VERTICAL
8	1398.00	48.89	-25.11	74.00	53.02	28.58	3.35	36.06	---	---	Peak	VERTICAL
9	1796.00	49.09	-24.91	74.00	50.90	29.33	4.59	35.73	---	---	Peak	VERTICAL
10	2288.00	50.24	-23.76	74.00	47.01	31.29	5.70	33.76	---	---	Peak	VERTICAL
11	4191.00	50.31	-23.69	74.00	40.52	35.11	6.59	31.91	---	---	Peak	VERTICAL
12	4773.00	50.45	-23.55	74.00	42.32	35.03	6.00	32.90	---	---	Peak	VERTICAL
13	5754.00	50.10	-23.90	74.00	44.24	35.24	6.91	36.29	---	---	Peak	VERTICAL



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 29, 2016	Jun. 29, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Jun. 29, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Jun. 29, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Jun. 29, 2016	Oct. 23, 2016	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jul. 08, 2016	Sep. 09, 2016	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz; Max 30dB	Apr. 22, 2016	Jul. 08, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 12, 2015	Jul. 08, 2016	Sep. 11, 2016	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 07, 2015	Jul. 08, 2016	Nov. 06, 2016	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Jul. 08, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1~26.5GHz Gain 30dB	Oct. 24, 2015	Jul. 08, 2016	Oct. 23, 2016	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Jul. 08, 2016	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 08, 2016	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 08, 2016	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------



## **Appendix B. Product Equality Description**

**ZTE CORPORATION****Product Change Description**

As the applicant of the below model, [ZTE Corporation] declares that the product,

[Z232TL]

[ZTE Corporation]

FCC ID: SRQ-Z232TL

HW: Z232TLHWV1.0

is the variant of the initial certified product,

[Z320]

[ZTE Corporation]

[Project Number:16ZTE013]

FCC ID: SRQ-Z320

HW: u79B

**SOFTWARE MODIFICATIONS:**

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: Yes, different app setup and different software requirements for new carrier. But all these differences have no impact on RF performance or CTIA 1725.

And Z232TL updated hardware version number from u79B to Z232TLHWV1.0, this is only HW number update by following carrier's requirement. Actually, nothing different between them.

**HARDWARE MODIFICATION:**

Band changes: NO

Power Amplifier changes: NO  
Antenna changes: NO  
PCB Layout changes: NO  
Components on PCB changes: NO  
LCD changes: NO  
Speaker changes: NO  
Camera changes: NO  
Vibrator changes: NO  
Bluetooth changes: NO  
FM changes: NO  
Other changes: NO

**MECHANICAL MODIFICATIONS:**

Use new metal front/back cover or keypad: NO  
Mechanical shell changes: NO  
Other changes detailed: NO

**ACCESSORY MODIFICATIONS:**

Battery changes: NO  
AC Adaptor changes: NO  
Earphone changes: NO



APPROVED BY: Min Zhang

Project Manager: Zhang shaoyang

Date:2016-8-15

Company: ZTE Corporation

Address: B109, #889, Bibo Rd, Zhangjiang Hi-Tech Park, Shanghai,China

Tel: +86-21-68896840

Fax: +86-21-68896835