

FCC RF Test Report


APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE Ufi
BRAND NAME : ZTE
MODEL NAME : Z288L
FCC ID : SRQ-Z288L
STANDARD : 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on May 06, 2014 and testing was completed on Jun. 25, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C.



TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5

1.1 Applicant 5

1.2 Manufacturer 5

1.3 Product Feature of Equipment Under Test 5

1.4 Product Specification subjective to this standard 5

1.5 Modification of EUT 5

1.6 Maximum ERP Power, Frequency Tolerance, and Emission Designator 6

1.7 Testing Location 6

1.8 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

2.1 Test Mode 8

2.2 Connection Diagram of Test System 9

2.3 Support Unit used in test configuration and system 9

2.4 Measurement Results Explanation Example 10

3 TEST RESULT 11

3.1 Conducted Output Power Measurement 11

3.2 Peak-to-Average Ratio 13

3.3 Effective Radiated Power Measurement 16

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement 19

3.5 Conducted Band Edge Measurement 25

3.6 Conducted Spurious Emission Measurement 34

3.7 Radiated Spurious Emission Measurement 39

3.8 Frequency Stability Measurement 43

4 LIST OF MEASURING EQUIPMENT 45

5 UNCERTAINTY OF EVALUATION 46

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d) §27.50(d)(5)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§27.50(b)(10)	Effective Radiated Power	ERP < 3 Watt	PASS	-
3.4	§2.1049 §27.53(g)(3)	99% Occupied Bandwidth and 26dB Bandwidth Measurement	Reporting Only	PASS	-
3.5	§2.1051 §27.53(c)(2)	Conducted Band Edge Measurement	$< 43+10\log_{10}(P[\text{Watt}])$	PASS	-
3.6	§2.1051 §27.53(c)(2)	Conducted Spurious Emission	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.7	§2.1053 §27.53(c)(2)	Radiated Spurious Emission	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 38.49 dB at 2335.000 MHz
3.8	§2.1055 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm	PASS	



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,
P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,
P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Ufi
Brand Name	ZTE
Model Name	Z288L
FCC ID	SRQ-Z288L
EUT supports Radios application	CDMA/EV-DO/LTE/WLAN 2.4GHz 802.11b/g/n HT20
HW Version	Z288LHWV1.0
SW Version	TF_US_Z288LV0.0.0B03
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 13 : 779.5 MHz ~ 784.5 MHz
Rx Frequency	LTE Band 13 : 748.5 MHz ~ 753.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	22.41 dBm
Antenna Type	IFA Antenna
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	BW	Maximum ERP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 27	LTE Band 13	QPSK	5MHz	0.1355	-	4M54G7D
Part 27	LTE Band 13	16QAM	5MHz	0.1059	-	4M54D7W
Part 27	LTE Band 13	QPSK	10MHz	0.1072	0.0256	9M16G7D
Part 27	LTE Band 13	16QAM	10MHz	0.0853	-	9M16D7W

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	OTA01-KS	149928

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC Registration No.
	03CH08-HY		TW1022



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.




2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	13	-	-	v	v	-	-	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	13	-	-		v	-	-		v	v		v		v	
26dB and 99% Bandwidth	13	-	-	v	v	-	-	v	v			v		v	
Conducted Band Edge	13	-	-	v	v	-	-	v	v	v		v	v	v	v
Conducted Spurious Emission	13	-	-	v	v	-	-	v	v	v			v	v	v
Frequency Stability	13	-	-		v	-	-	v				v		v	
E.R.P.	13	-	-	v	v	-	-	v	v	v			v	v	v
Radiated Spurious Emission	13	-	-	v	v	-	-	v		v				v	
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-“means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 														

2.2 Connection Diagram of Test System

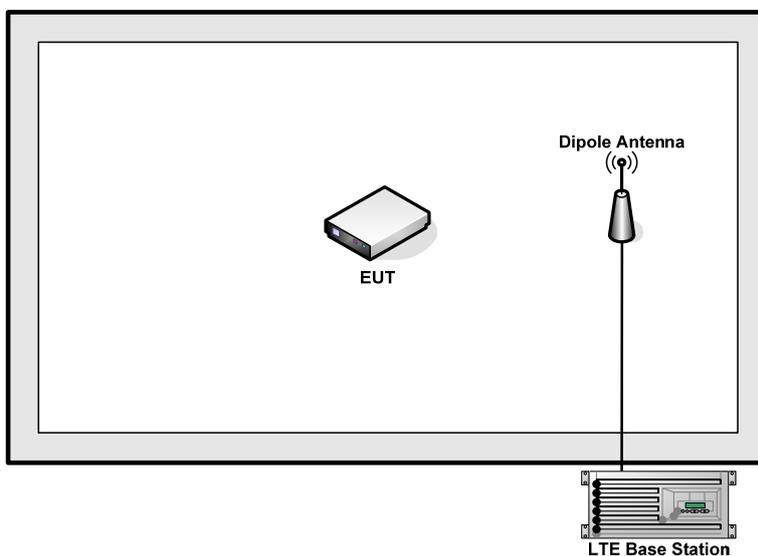

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6 dB.

Example :

Offset (dB) = RF cable loss(dB) = 6 (dB)

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup

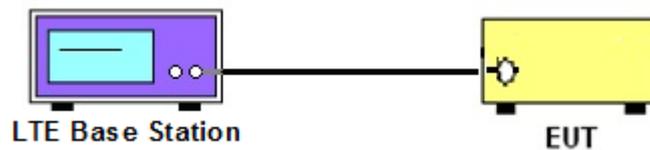



3.1.5 Test Result of Conducted Output Power

<LTE Band 13 Conducted Power>

BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					23230	
Frequency (MHz)					782	
10	QPSK	1	0		22.39	
10	QPSK	1	24		22.38	
10	QPSK	1	49		22.35	
10	QPSK	25	0		21.38	
10	QPSK	25	12		21.34	
10	QPSK	25	24		21.33	
10	QPSK	50	0		21.40	
10	16QAM	1	0		21.44	
10	16QAM	1	24		21.42	
10	16QAM	1	49		21.40	
10	16QAM	25	0		20.28	
10	16QAM	25	12		20.26	
10	16QAM	25	24		20.25	
10	16QAM	50	0		20.36	
Channel				23205	23230	23255
Frequency (MHz)				779.5	782	784.5
5	QPSK	1	0	22.41	22.37	22.36
5	QPSK	1	12	22.40	22.35	22.30
5	QPSK	1	24	22.38	22.28	22.13
5	QPSK	12	0	21.44	21.43	21.41
5	QPSK	12	6	21.41	21.39	21.32
5	QPSK	12	11	21.32	21.27	21.30
5	QPSK	25	0	21.39	21.36	21.41
5	16QAM	1	0	21.28	21.64	21.55
5	16QAM	1	12	21.26	21.54	21.43
5	16QAM	1	24	21.18	21.17	21.16
5	16QAM	12	0	20.42	20.43	20.29
5	16QAM	12	6	20.34	20.32	20.21
5	16QAM	12	11	20.19	20.31	20.20
5	16QAM	25	0	20.37	20.37	20.24

Note: Maximum average power for LTE.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

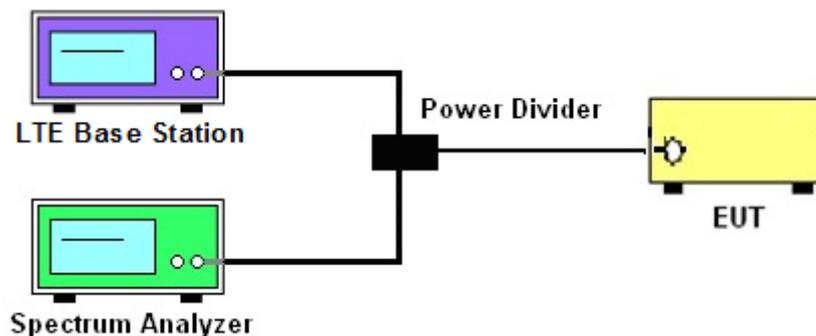




3.2.5 Test Result of Peak-to-Average Ratio

LTE Band 13						
BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					23230	
Frequency (MHz)					782	
10	16QAM	1	0		5.96	
10	16QAM	50	0		6.56	

3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Peak-to-Average Ratio on LTE Band 13


10MHz / 16QAM in Ch. 23230 (1RB Size)

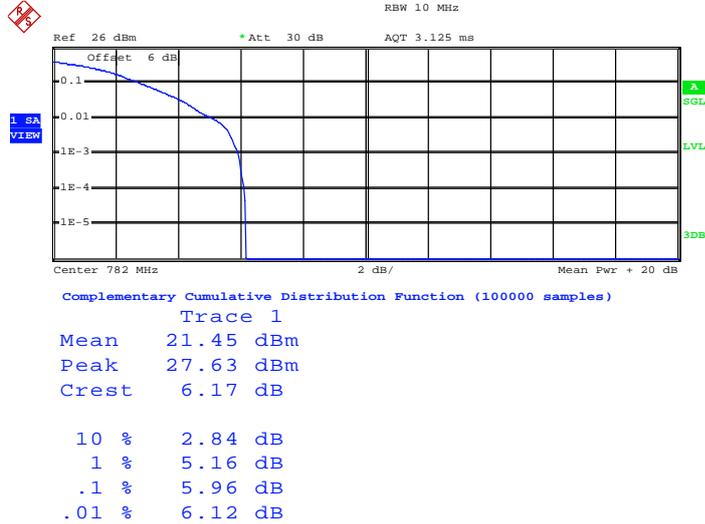

Date: 18.JUN.2014 17:27:21

Peak-to-Average Ratio on LTE Band 13

10MHz / 16QAM in Ch. 23230 (50RB Size)

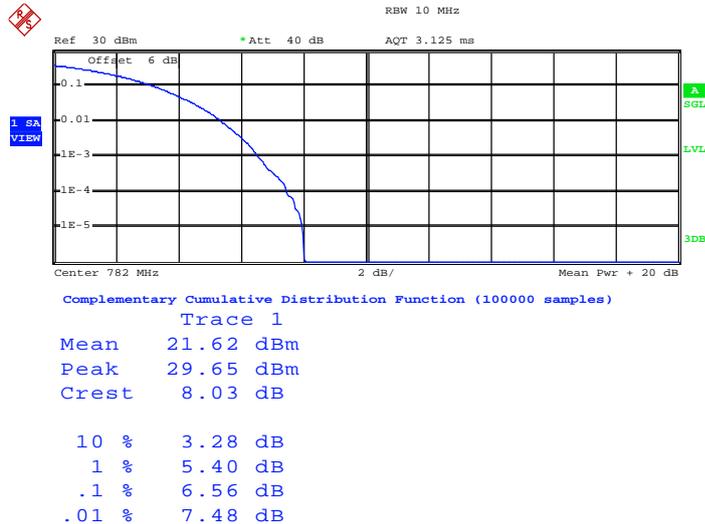

Date: 11.JUN.2014 23:43:30

3.3 Effective Radiated Power Measurement

3.3.1 Description of the ERP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. Mobile and portable (hand-held) stations operating are limited to average ERP of 3 watts with LTE band 13.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer which used a channel power option across EUT's signal bandwidth per section 4.0 of KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP.
6. Taking the record of maximum ERP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP of the substitution antenna.
10. $ERP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

3.3.4 Test Setup

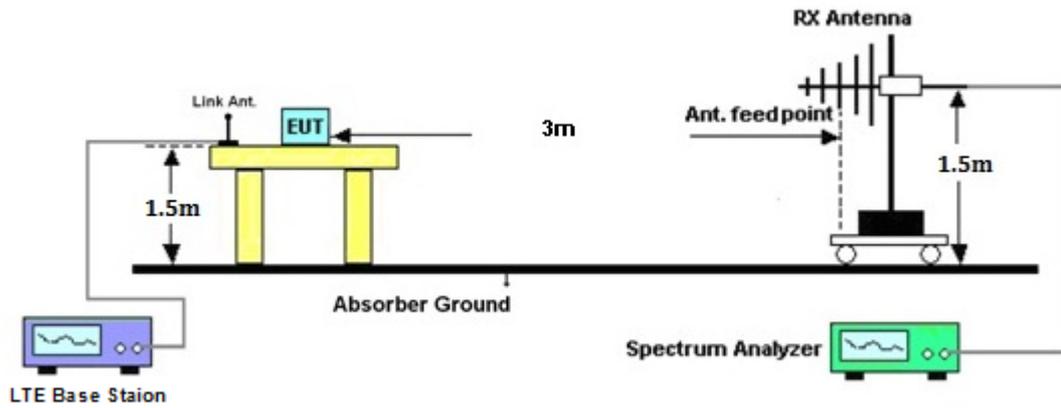



3.3.5 Test Result of ERP

LTE Band 13 Radiated Power ERP								
LTE Band	Channel BW (MHz)	Modulation	RB Configuration		Freq. (MHz)	ERP (dBm)	ERP (W)	H/V
			RB Size	RB Offset				
13	5	QPSK	1	0	779.5	20.44	0.1107	H
13	5	QPSK	1	0	782	21.32	0.1355	H
13	5	QPSK	1	0	784.5	20.78	0.1197	H
13	5	QPSK	1	0	779.5	6.55	0.0045	V
13	5	QPSK	1	0	782	6.91	0.0049	V
13	5	QPSK	1	0	784.5	6.60	0.0046	V
13	5	16QAM	1	0	779.5	19.28	0.0847	H
13	5	16QAM	1	0	782	20.25	0.1059	H
13	5	16QAM	1	0	784.5	19.69	0.0931	H
13	5	16QAM	1	0	779.5	5.51	0.0036	V
13	5	16QAM	1	0	782	5.88	0.0039	V
13	5	16QAM	1	0	784.5	5.61	0.0036	V
13	10	QPSK	1	0	782	20.30	0.1072	H
13	10	QPSK	1	0	782	6.48	0.0044	V
13	10	16QAM	1	0	782	19.31	0.0853	H
13	10	16QAM	1	0	782	5.50	0.0035	V

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.4.4 Test Setup

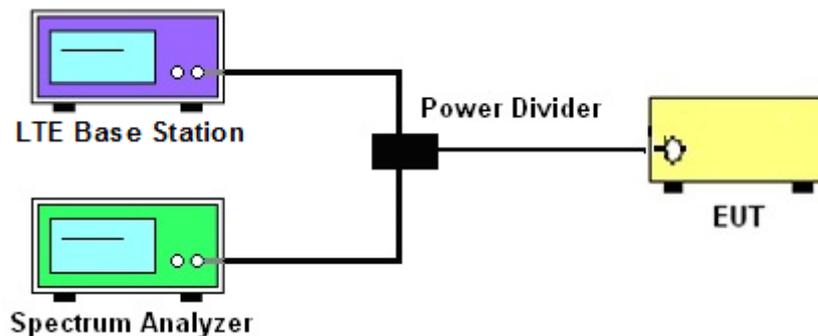

3.4.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Modes	LTE Band 13				
	BW / Mod.	5MHz / QPSK	5MHz / 16QAM	10MHz / QPSK	10MHz / 16QAM
99% OBW (MHz)		4.54	4.54	9.16	9.16
26dB BW (MHz)		5.16	5.18	10.32	10.24

Note:

The maximum RB configurations of the 99% Occupied Bandwidth and 26dB Bandwidth summary as below:


BW5MHz RB setting : RB Size 25, RB offset 0

BW10MHz RB setting : RB Size 50, RB offset 0

3.4.6 Test Result (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth


Band :	LTE Band 13	BW / Mod. :	5MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 23230

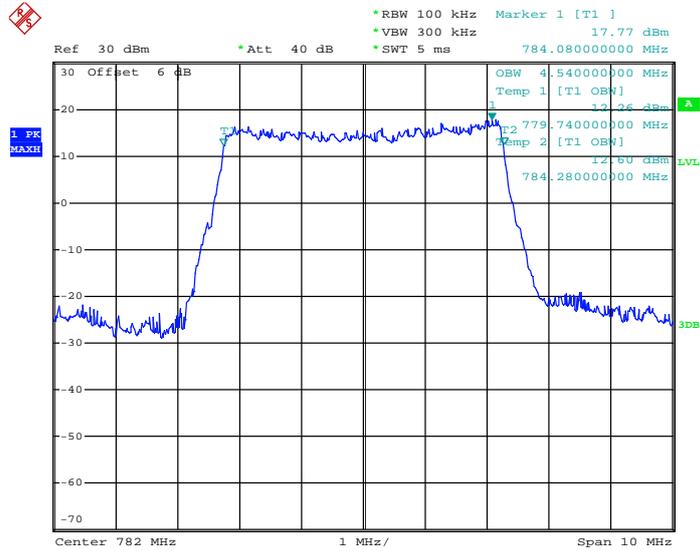

Date: 11.JUN.2014 23:48:52

26dB Bandwidth Plot on Channel 23230

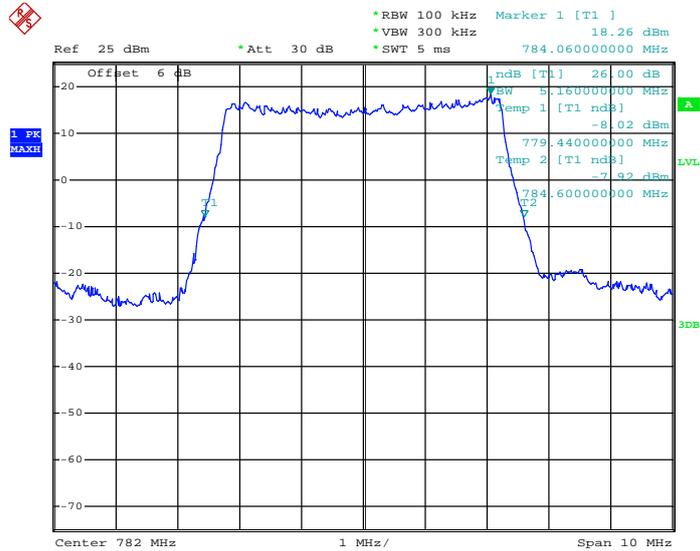


Date: 11.JUN.2014 23:26:09




Band :	LTE Band 13	BW / Mod. :	5MHz / 16QAM
---------------	-------------	--------------------	--------------

99% Occupied Bandwidth Plot on Channel 23230

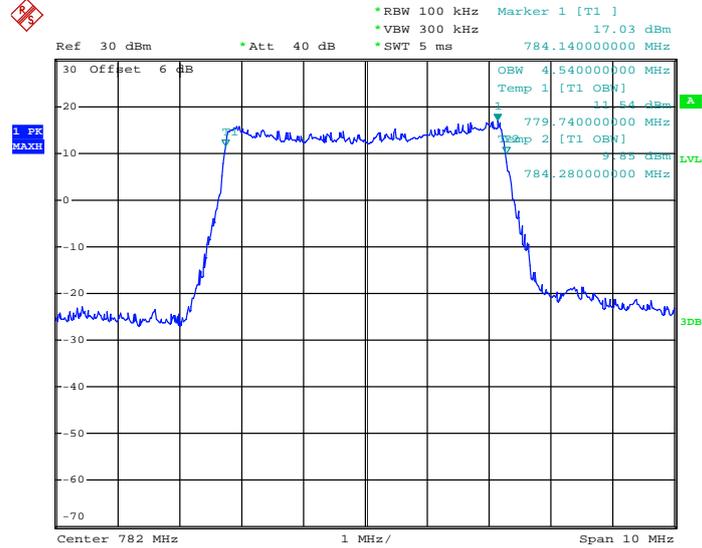

Date: 11.JUN.2014 23:48:42

26dB Bandwidth Plot on Channel 23230

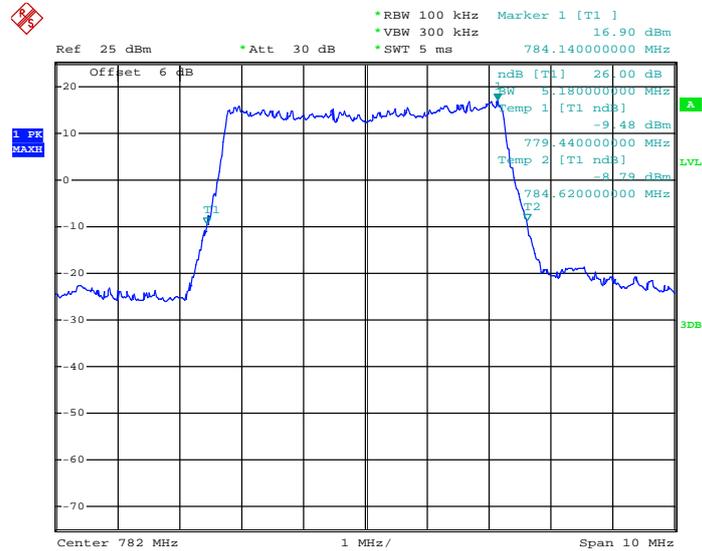


Date: 11.JUN.2014 23:25:45




Band :	LTE Band 13	BW / Mod. :	10MHz / QPSK
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 23230

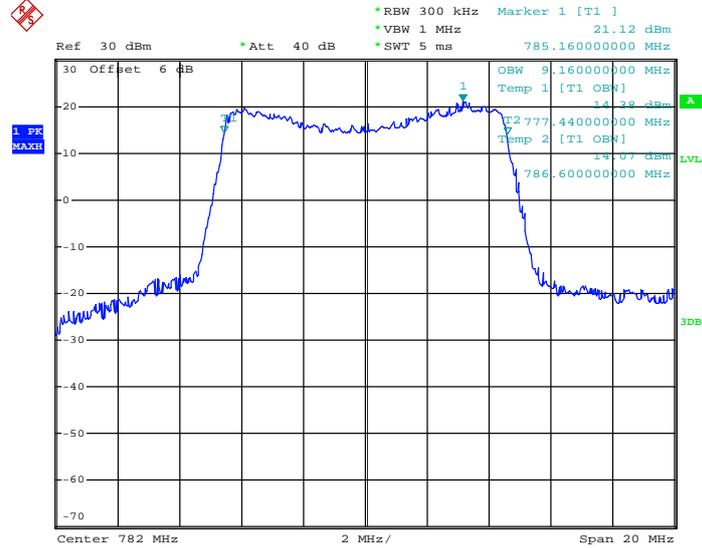

Date: 11.JUN.2014 23:51:34

26dB Bandwidth Plot on Channel 23230

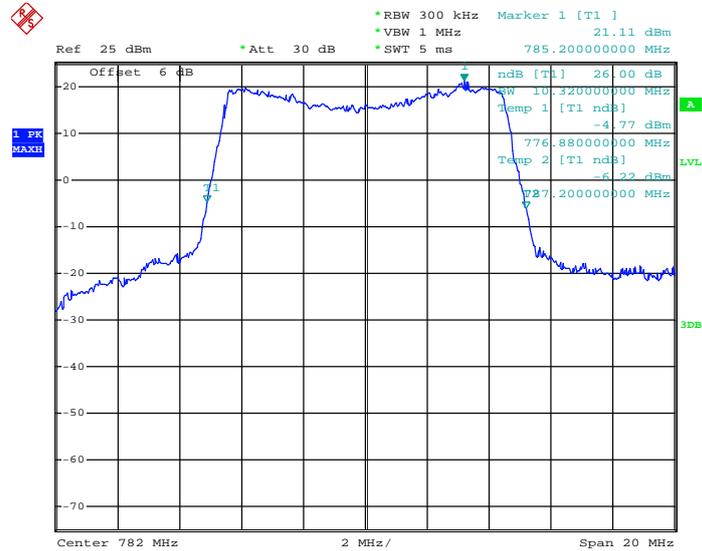


Date: 11.JUN.2014 23:29:13




Band :	LTE Band 13	BW / Mod. :	10MHz / 16QAM
---------------	-------------	--------------------	---------------

99% Occupied Bandwidth Plot on Channel 23230

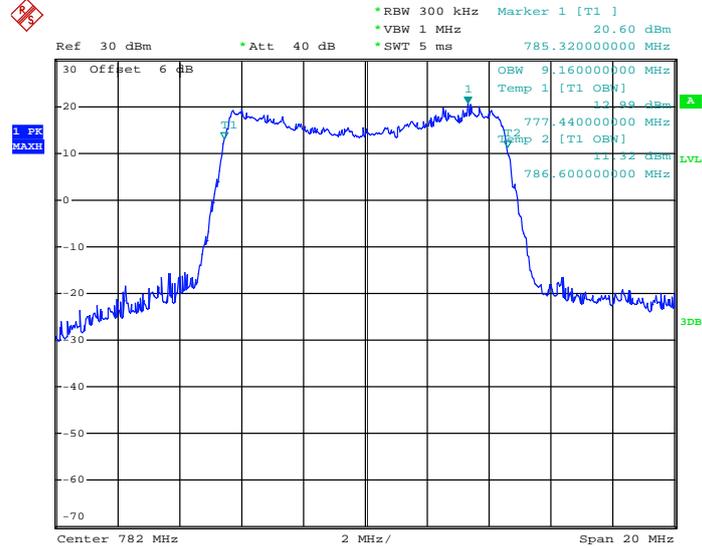

Date: 11.JUN.2014 23:51:46

26dB Bandwidth Plot on Channel 23230

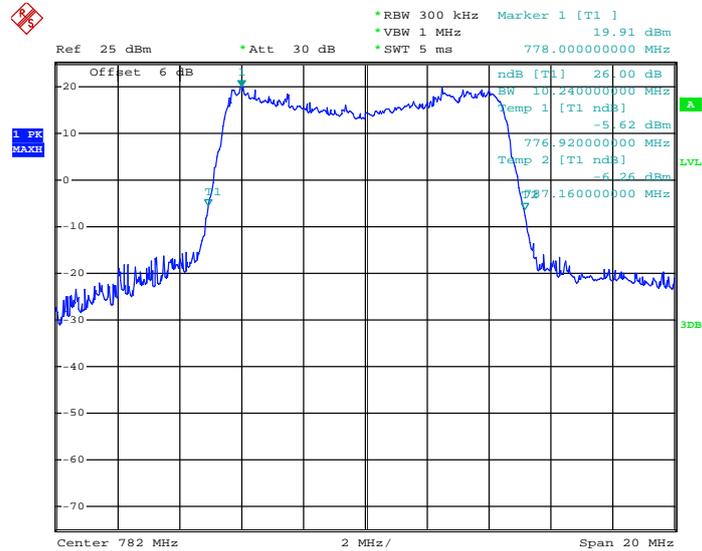

Date: 11.JUN.2014 23:29:33

3.5 Conducted Band Edge Measurement

3.5.1 Description of Conducted Band Edge Measurement

27.53 (c) and RSS – 130 for Band 13

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.5.4 Test Setup

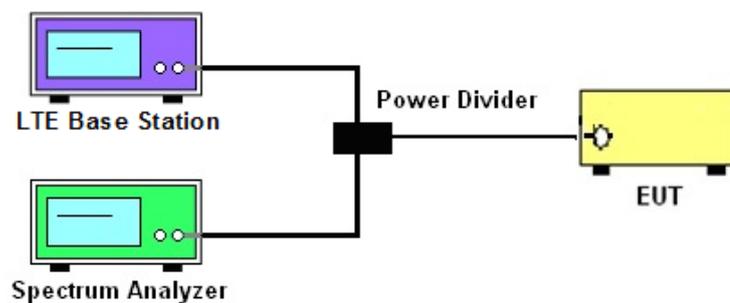

3.5.5 Test Result (Plots) of Conducted Band Edge


Band :	LTE Band 13	Band Width :	5MHz / QPSK
---------------	-------------	---------------------	-------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

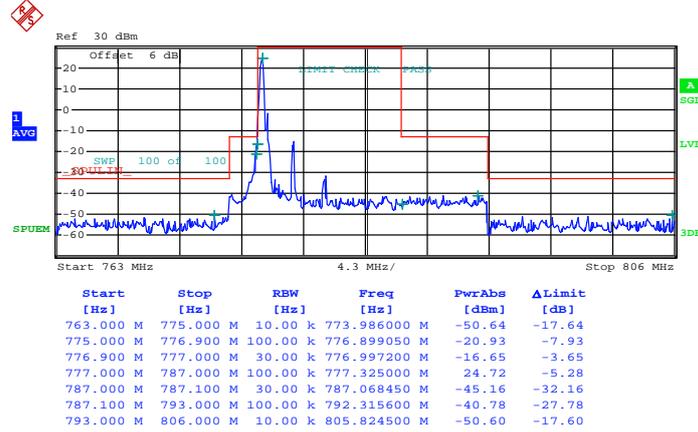

Date: 25.JUN.2014 18:26:32


Lower Band Edge Plot for QPSK-RB Size 25, RB Offset 0

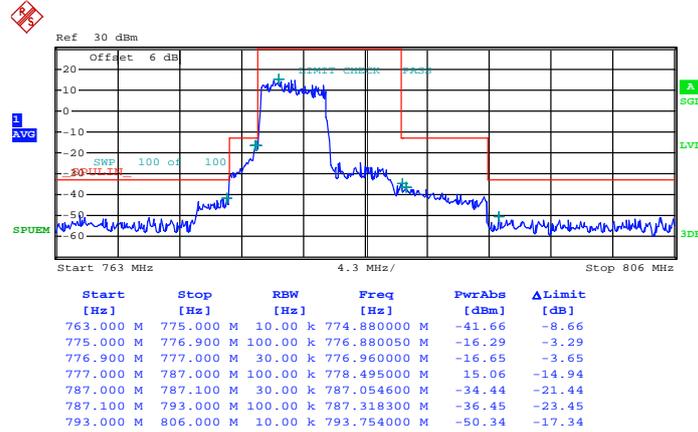

Date: 25.JUN.2014 18:20:01




Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 24

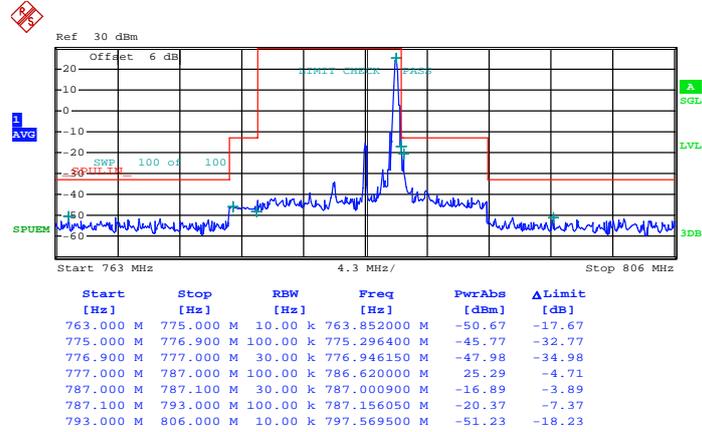

Date: 25.JUN.2014 19:07:18

Higher Band Edge Plot for QPSK-RB Size 25, RB Offset 0

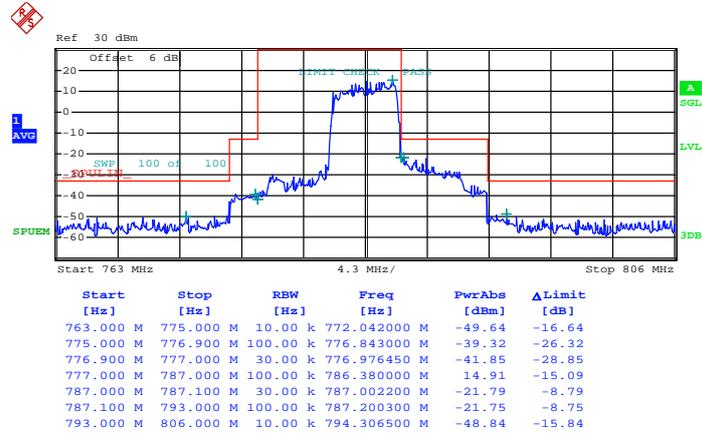


Date: 25.JUN.2014 19:13:17



Band :	LTE Band 13	Band Width :	5MHz / 16QAM
---------------	-------------	---------------------	--------------

Lower Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

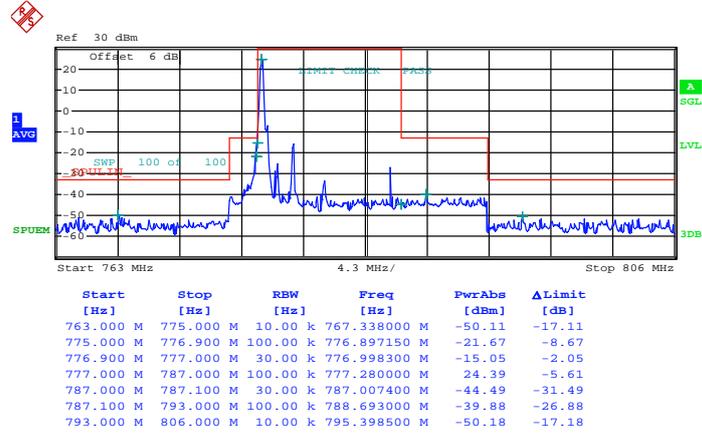

Date: 25.JUN.2014 18:28:19


Lower Band Edge Plot for 16QAM-RB Size 25, RB Offset 0



Date: 25.JUN.2014 18:16:38




Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 24

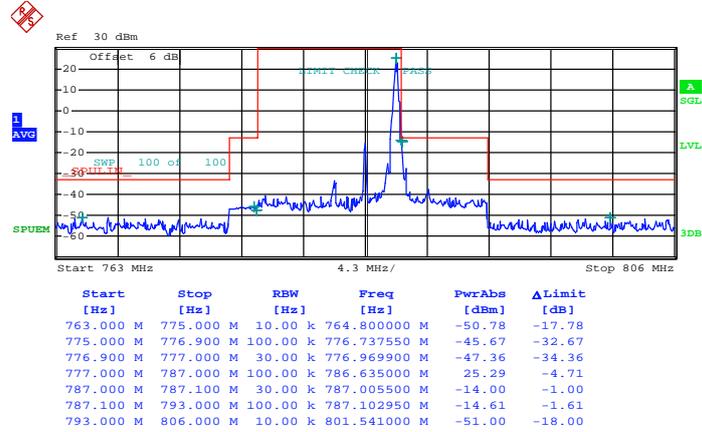

Date: 25.JUN.2014 18:38:34

Higher Band Edge Plot for 16QAM-RB Size 25, RB Offset 0

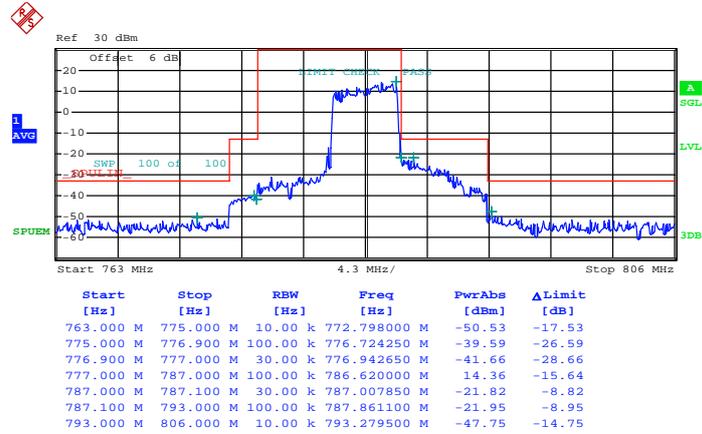


Date: 25.JUN.2014 19:15:24



Band :	LTE Band 13	Band Width :	10MHz / QPSK
---------------	-------------	---------------------	--------------

Middle Band Edge Plot for QPSK-RB Size 1, RB Offset 0

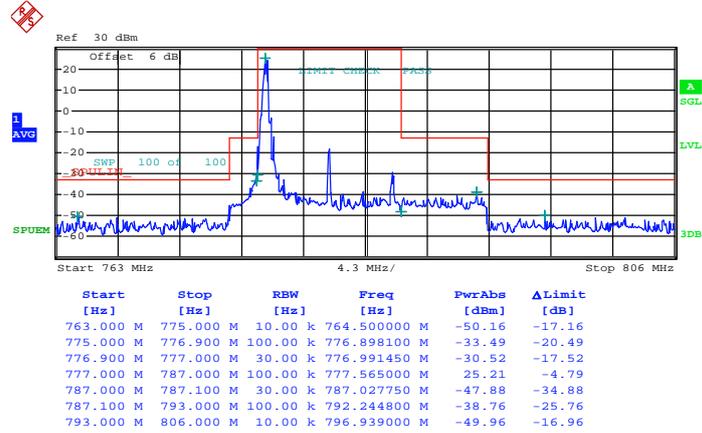

Date: 25.JUN.2014 19:33:43


Middle Band Edge Plot for QPSK-RB Size 50, RB Offset 0



Date: 25.JUN.2014 19:27:10



Middle Band Edge Plot for QPSK-RB Size 1, RB Offset 49

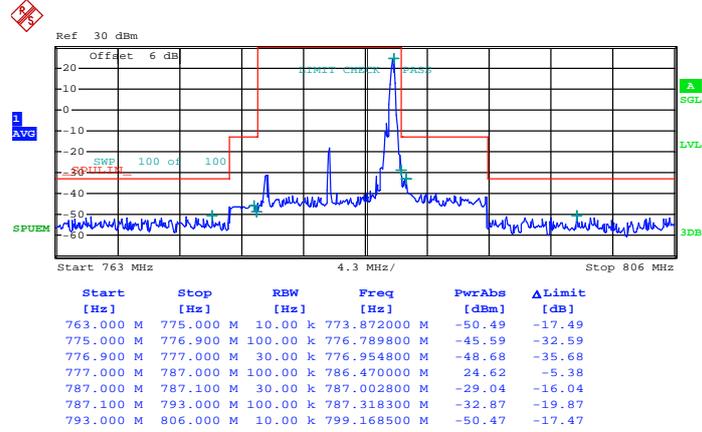


Date: 25.JUN.2014 19:40:15




Band :	LTE Band 13	Band Width :	10MHz / 16QAM
--------	-------------	--------------	---------------

Middle Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

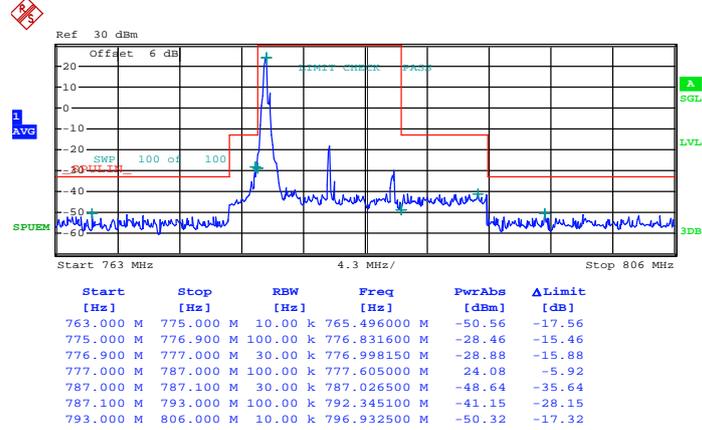

Date: 25.JUN.2014 19:35:41


Middle Band Edge Plot for 16QAM-RB Size 50, RB Offset 0

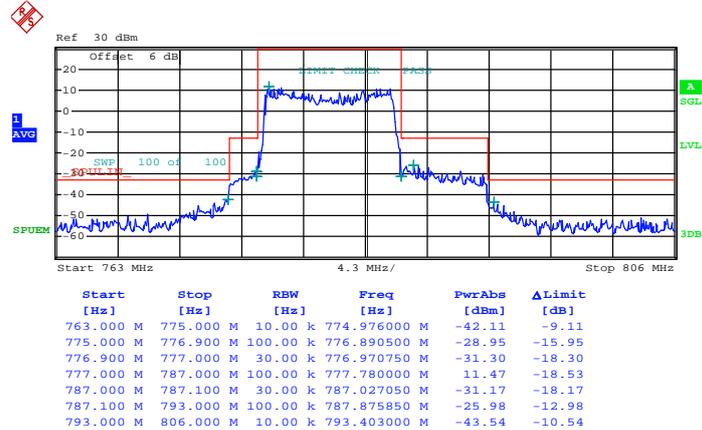

Date: 25.JUN.2014 19:25:01



Middle Band Edge Plot for 16QAM-RB Size 1, RB Offset 49

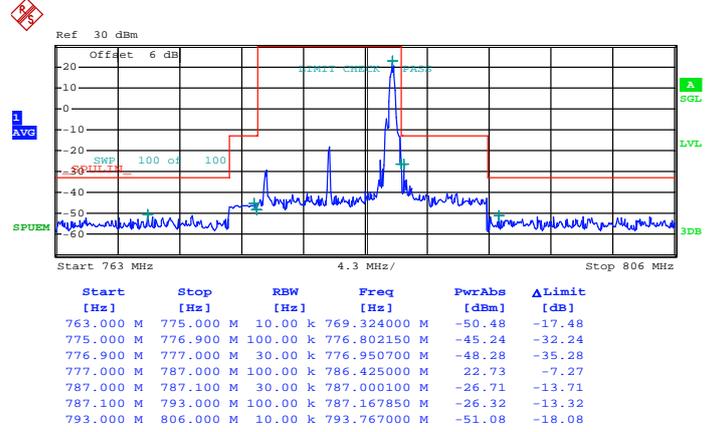

Date: 25.JUN.2014 19:37:56

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$


3.6.4 Test Setup

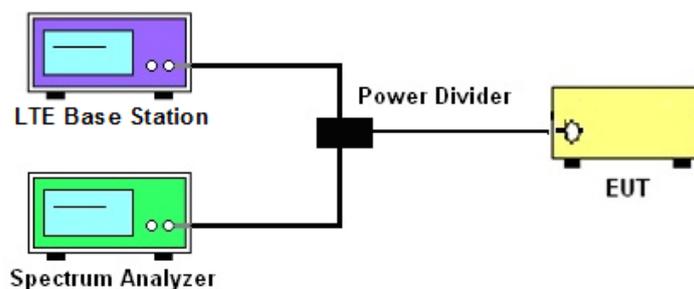

3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	LTE Band 13	Channel :	CH23205 (Low)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

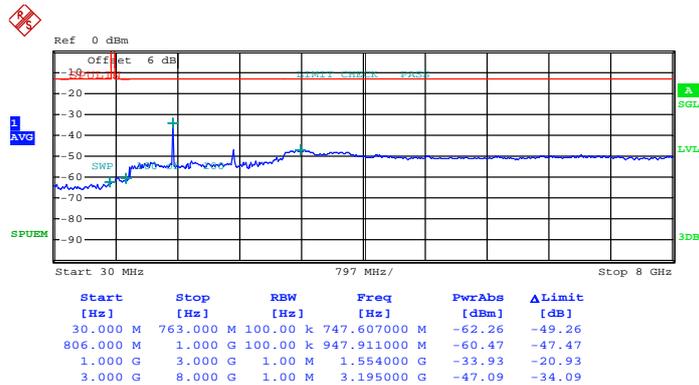

Date: 17.JUN.2014 02:50:39

16QAM (RB Size 1, RB Offset 0)

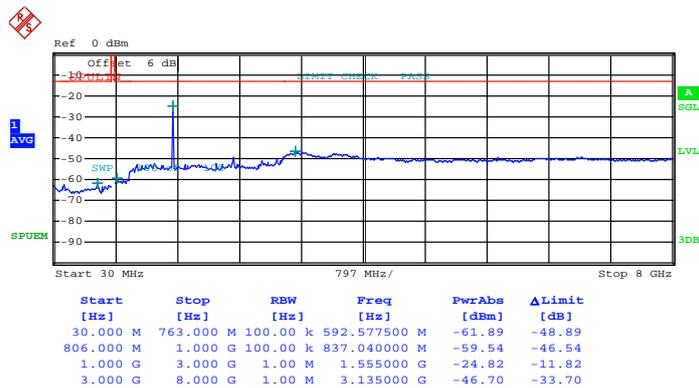


Date: 17.JUN.2014 02:53:54




Band :	LTE Band 13	Channel :	CH23230 (Middle)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

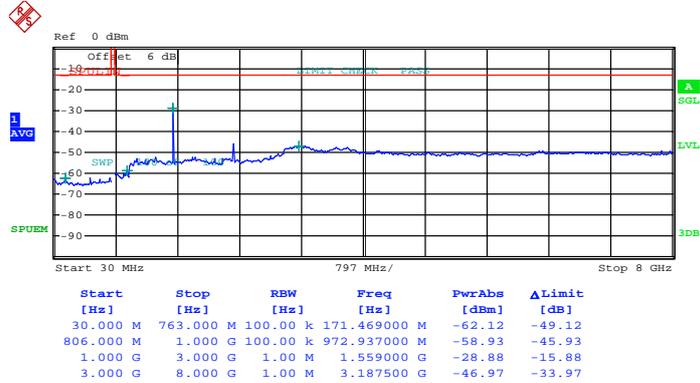

Date: 17.JUN.2014 03:01:03

16QAM (RB Size 1, RB Offset 0)

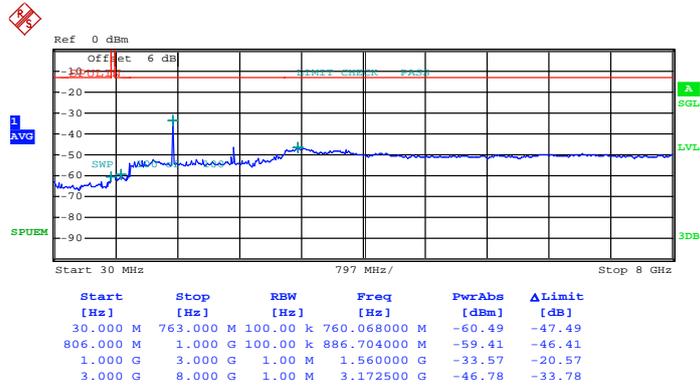


Date: 17.JUN.2014 02:57:47




Band :	LTE Band 13	Channel :	CH23255 (High)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

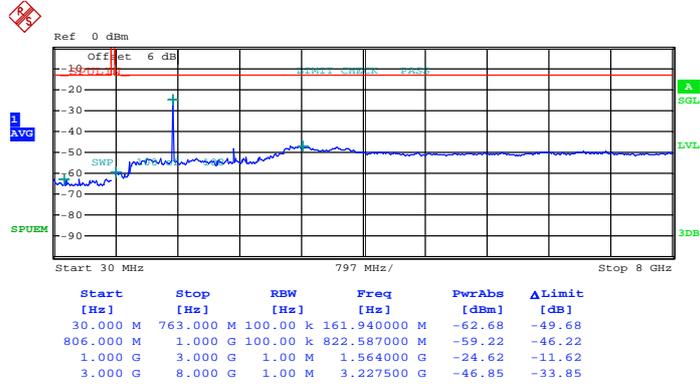

Date: 17.JUN.2014 03:04:34

16QAM (RB Size 1, RB Offset 0)

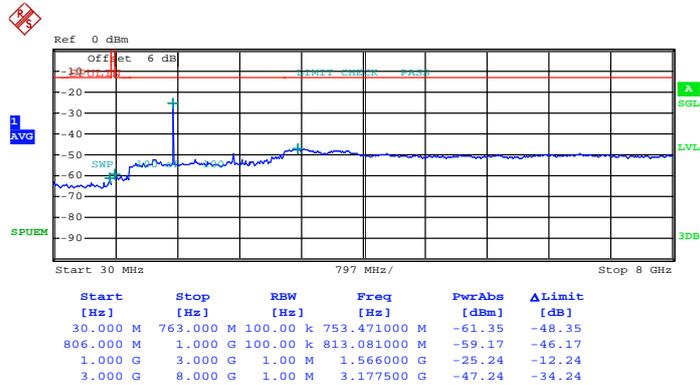


Date: 17.JUN.2014 03:07:53




Band :	LTE Band 13	Channel :	CH23230 (Middle)
Band Width :	10MHz		

QPSK (RB Size 1, RB Offset 0)

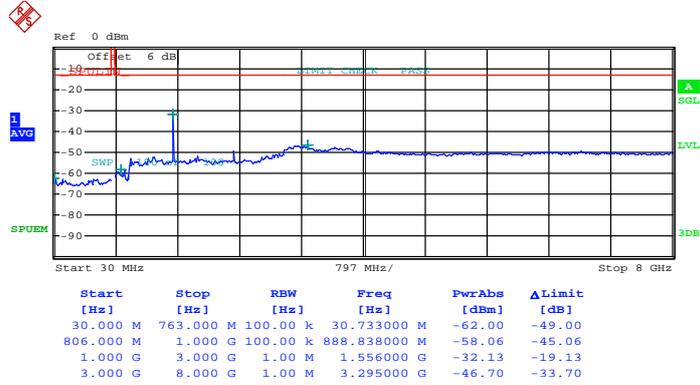

Date: 17.JUN.2014 03:20:33

16QAM (RB Size 1, RB Offset 0)

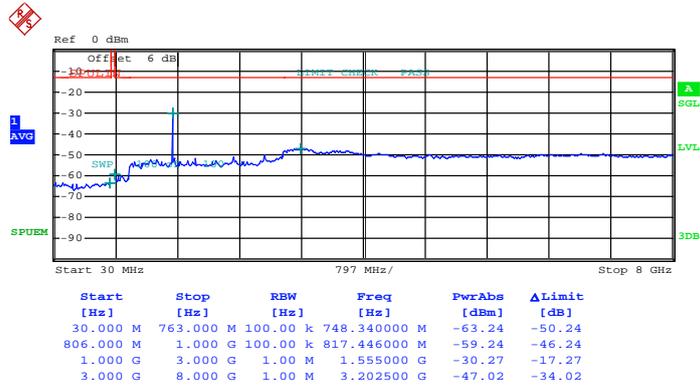

Date: 17.JUN.2014 03:23:54

3.7 Radiated Spurious Emission Measurement

3.7.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.


11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
12. ERP (dBm) = EIRP - 2.15

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

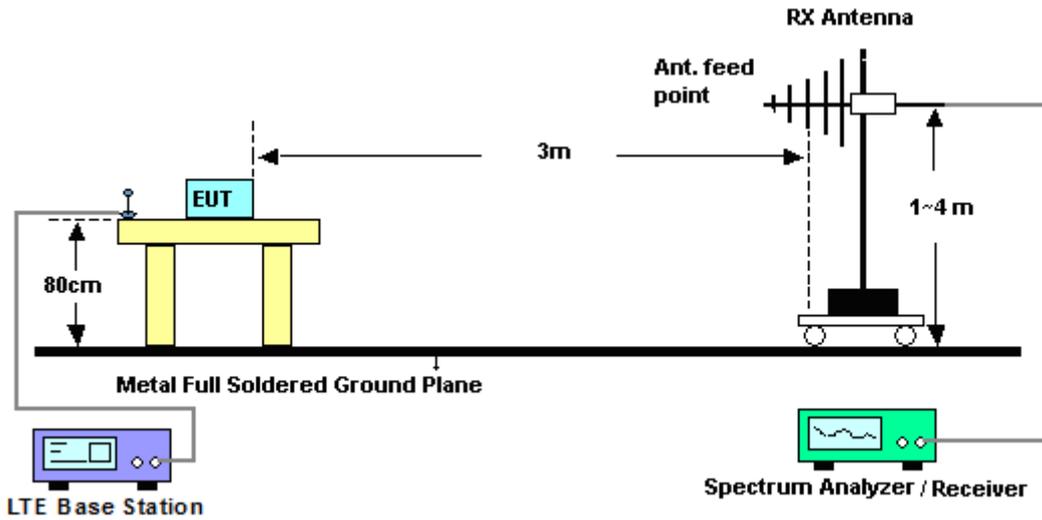

For radiated emissions above 1GHz

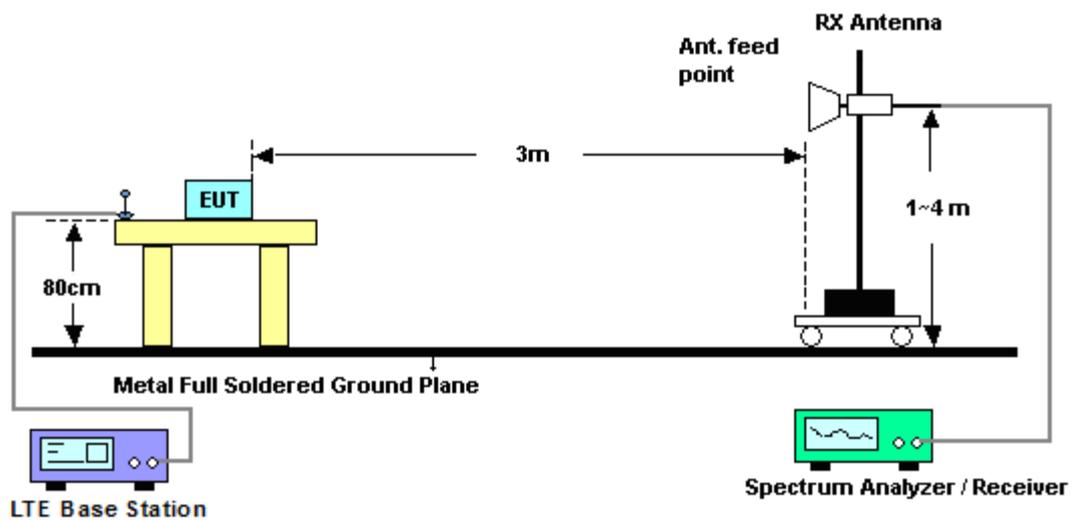



3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	LTE Band 13					Temperature :	23~24°C		
Test Mode :	5MHz QPSK RB Size 1 Offset 0					Relative Humidity :	46~47%		
Test Engineer :	Eric Shih					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1561	-55.52	-13	-42.52	-61.52	-59.5	1.51	5.49	H	Pass
2339.52	-53.78	-13	-40.78	-63.84	-57.85	1.98	6.05	H	Pass
3119.36	-53.16	-13	-40.16	-64.88	-58.33	2.39	7.56	H	Pass

Band :	LTE Band 13					Temperature :	23~24°C		
Test Mode :	5MHz QPSK RB Size 1 Offset 0					Relative Humidity :	46~47%		
Test Engineer :	Eric Shih					Polarization :	Vertical		
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1561	-53.00	-13	-40.00	-58.98	-56.98	1.51	5.49	V	Pass
2339.52	-53.89	-13	-40.89	-64.06	-57.96	1.98	6.05	V	Pass
3119.36	-52.39	-13	-39.39	-64	-57.56	2.39	7.56	V	Pass



Band :	LTE Band 13				Temperature :	23~24°C			
Test Mode :	10MHz QPSK RB Size 1 Offset 0				Relative Humidity :	46~47%			
Test Engineer :	Eric Shih				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1555	-56.14	-13	-43.14	-62.15	-57.97	1.51	5.49	H	Pass
2335	-51.49	-13	-38.49	-61.59	-53.41	1.98	6.05	H	Pass
3112	-52.53	-13	-39.53	-64.31	-55.55	2.39	7.56	H	Pass

Band :	LTE Band 13				Temperature :	23~24°C			
Test Mode :	10MHz QPSK RB Size 1 Offset 0				Relative Humidity :	46~47%			
Test Engineer :	Eric Shih				Polarization :	Vertical			
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1555	-53.36	-13	-40.36	-59.32	-55.19	1.51	5.49	V	Pass
2335	-52.63	-13	-39.63	-62.79	-54.55	1.98	6.05	V	Pass
3112	-52.51	-13	-39.51	-64.14	-55.53	2.39	7.56	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

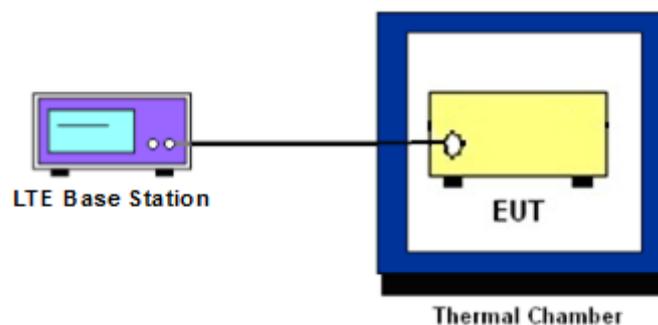

3.8.6 Test Result of Temperature Variation

Band :	LTE Band 13 (QPSK)	Limit (ppm) :	2.5
Temperature (°C)	BW 10MHz		Result
	Deviation (ppm)		
50	0.0147		PASS
40	0.0156		
30	0.0115		
20(Ref.)	0.0102		
10	0.0166		
0	0.0083		
-10	0.0156		
-20	0.0230		
-30	0.0256		

3.8.7 Test Result of Voltage Variation

Band	Bandwidth	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
LTE Band 13 (QPSK)	10M	4.2	0.0128	2.5	PASS
		Normal	0.0045		
		3.3	0.0100		

Remark:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.3 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jun. 11, 2014~ Jun. 25, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Dec. 10, 2013	Jun. 11, 2014~ Jun. 25, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz – 26.5GHz	Jan. 15, 2014	Jun. 09, 2014	Jan. 14, 2015	Radiation (03CH08-HY)
Bilog Antenna	Teseq GmbH	CBL6112D	35379	30MHz~2GHz	Oct. 10, 2013	Jun. 09, 2014	Oct. 09, 2014	Radiation (03CH08-HY)
Horn Antenna	ESCO	3117	000143261	1GHz~18GHz	Jan. 16, 2014	Jun. 09, 2014	Jan. 15, 2015	Radiation (03CH08-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz~40GHz	Oct. 03, 2013	Jun. 09, 2014	Oct. 02, 2014	Radiation (03CH08-HY)
Amplifier	SONOMA	310N	187231	9kHz~1GHz	May 12, 2014	Jun. 09, 2014	May 11, 2015	Radiation (03CH08-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10	1590074	1GHz~18GHz	Jul. 09, 2013	Jun. 09, 2014	Jul. 08, 2014	Radiation (03CH08-HY)
Pre Amplifier	Agilent	8449B	3008A02665	1GHz~26.5GHz	Sep. 04, 2013	Jun. 09, 2014	Sep. 03, 2014	Radiation (03CH08-HY)
Turn Table	Chaintek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 09, 2014	N/A	Radiation (03CH08-HY)
Antenna Mast	MF	MFA520BS	N/A	1m~4m	N/A	Jun. 09, 2014	N/A	Radiation (03CH08-HY)
Spectrum Analyzer	R&S	FSP 7	100819	9kHz~7GHz	May 04, 2014	Jun. 08, 2014	May 03, 2015	ERP (OTA01-KS)
Switch Control	Agilent	3499A	MY42005452	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Dual 1-to-6(4) MW	Agilent	N2276A	MY42000841	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Microwave Switch	Agilent	44476A	MY42002573	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Microwave Switch	Agilent	44476A	MY42002586	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Diagonal Dual	ETS-Lindgren	3164-04	00066993	700MHz~6GHz	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Multi-Devices Controller	ETS-Lindgren	2090-OPT1	00066604	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Conical Log Spiral (Small)	ETS-Lindgren	3102	00066951	1~10GHz	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Turn Table	ETS-Lindgren	2088	N/A	Resolution : 0.1degree	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Limiting Amplifier	ETS-lindgren	109643	920326	10MHz~2.5GHz	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
EMQuest	ETS-Lindgren	EMQ-100	1125	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)
Medium Duty Holder	ETS-Lindgren	2015	N/A	N/A	N/A	Jun. 08, 2014	N/A	ERP (OTA01-KS)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.30
---	------