


# FCC SAR Test Report


APPLICANT : ZTE CORPORATION  
EQUIPMENT : LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : Z5156CC  
FCC ID : SRQ-Z5156CC  
STANDARD : FCC 47 CFR PART 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Jan. 06, 2020 and testing was started from Jan. 13, 2020 and completed on Feb. 23, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Rose Wang / Supervisor



Approved by: Kat Yin / Manager



**Sporton International (Kunshan) Inc.**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



Table of Contents

1. Statement of Compliance ..... 4
2. Administration Data ..... 5
3. Guidance Applied..... 5
4. Equipment Under Test (EUT) Information ..... 6
4.1 General Information ..... 6
4.2 General LTE SAR Test and Reporting Considerations ..... 7
5. RF Exposure Limits..... 9
5.1 Uncontrolled Environment..... 9
5.2 Controlled Environment..... 9
6. Specific Absorption Rate (SAR).....10
6.1 Introduction .....10
6.2 SAR Definition.....10
7. System Description and Setup .....11
7.1 E-Field Probe .....12
7.2 Data Acquisition Electronics (DAE) .....12
7.3 Phantom.....13
7.4 Device Holder.....14
8. Measurement Procedures .....15
8.1 Spatial Peak SAR Evaluation .....15
8.2 Power Reference Measurement.....16
8.3 Area Scan .....16
8.4 Zoom Scan.....17
8.5 Volume Scan Procedures.....17
8.6 Power Drift Monitoring.....17
9. Test Equipment List .....18
10. System Verification .....19
10.1 Tissue Simulating Liquids.....19
10.2 Tissue Verification .....20
10.3 System Performance Check Results.....21
11. RF Exposure Positions .....22
11.1 Ear and handset reference point .....22
11.2 Definition of the cheek position.....23
11.3 Definition of the tilt position.....24
11.4 Body Worn Accessory .....25
11.5 Wireless Router.....25
12. Conducted RF Output Power (Unit: dBm).....26
13. Bluetooth Exclusions Applied .....63
14. Antenna Location .....64
15. SAR Test Results .....65
15.1 Head SAR .....67
15.2 Hotspot SAR .....70
15.3 Body Worn Accessory SAR.....73
15.4 TDD LTE Band 41(HPUE) Linearity Data Analysis.....75
15.5 Repeated SAR Measurement .....76
16. Simultaneous Transmission Analysis .....77
16.1 Head Exposure Conditions .....78
16.2 Hotspot Exposure Conditions.....79
16.3 Body-Worn Accessory Exposure Conditions .....81
16.4 SPLSR Evaluation and Analysis.....82
17. Uncertainty Assessment .....86
18. References .....87
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos





1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ZTE CORPORATION, LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone, Z5156CC, are as follows.

Table with columns: Equipment Class, Frequency Band, Head (Separation 0mm), Hotspot (Separation 10mm), Body-worn (Separation 15mm), Highest Simultaneous Transmission 1g SAR (W/kg). Includes rows for Licensed (GSM, WCDMA, LTE), DTS (WLAN), and DSS (Bluetooth).

Declaration of Conformity: The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. Comments and Explanations: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



## 2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

Manufacturer	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



**4. Equipment Under Test (EUT) Information**

**4.1 General Information**

Product Feature & Specification	
Equipment Name	LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z5156CC
FCC ID	SRQ-Z5156CC
IMEI Code	860103040008824
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) LTE: QPSK, 16QAM WLAN 2.4GHz : 802.11b/g/n HT20 Bluetooth BR/EDR/LE
HW Version	Z5156CCHW1.0
SW Version	Z5156CCV1.0.0B04
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<b>Remark:</b> 1. 802.11n-HT40 is not supported in 2.4GHz WLAN. 2. This device does not support DTM operation and support GRPS/EGRPS mode up to multi-slot class 12. 3. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications. 4. This device supports HPUE for LTE band 41 with class 2 power level, so HPUE SAR has been performed. 5. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of WCDMA band II/IV, LTE band 2/4/41/66. 6. There are two type batteries, with the same battery capacity, only manufacturer different. So we only chose battery 1 to perform full SAR testing.	



**4.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	SRQ-Z5156CC																																																														
Equipment Name	LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 41: 2498.5 MHz ~ 2687.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz LTE Band 71: 665.5 MHz ~ 695.5 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 71: 5MHz, 10MHz, 15MHz, 20MHz																																																														
Uplink Modulations used	QPSK / 16QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R11, Cat 5																																																														
CA Support	Not Supported																																																														
LTE MPR permanently built-in by design	<p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 2/4/41/66.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770
LTE Band 71												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	133147	665.5	133172	668	133197	670.5	133222	673	133222	673	133222	673
M	133247	675.5	133272	678	133297	680.5	133322	683	133322	683	133322	683
H	133447	695.5	133422	693	133397	690.5	133372	688	133372	688	133372	688



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

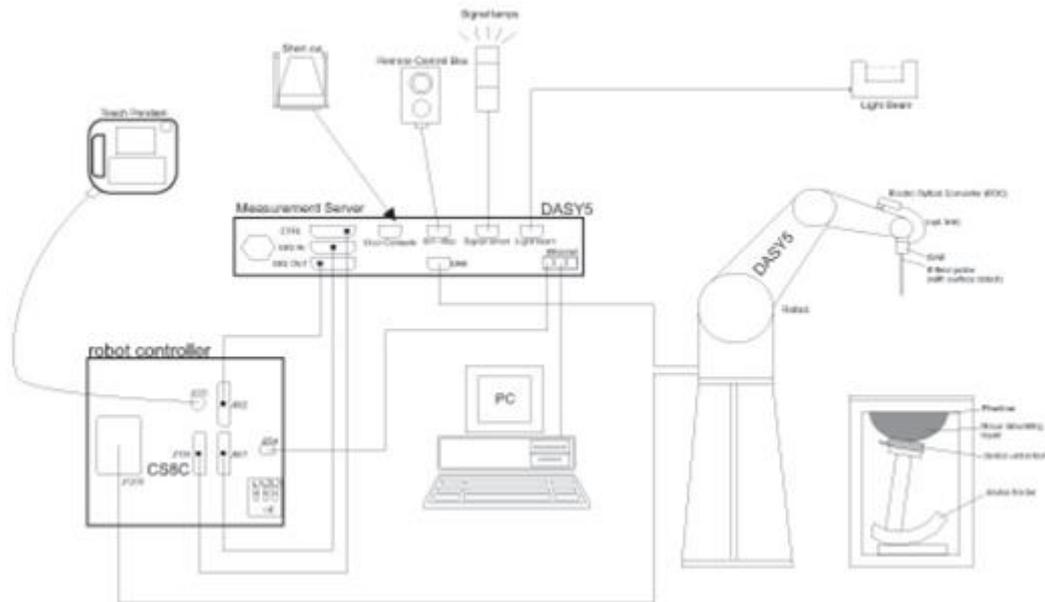

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Photo of DAE**

**7.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 7.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## 8. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**8.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**8.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**8.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



**9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2020/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2020/3/24
SPEAG	2600MHz System Validation Kit	D2600V2	1078	2019/3/6	2020/3/5
SPEAG	Data Acquisition Electronics	DAE4	1210	2019/7/23	2020/7/22
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2019/5/27	2020/5/26
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1754	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2019/10/28	2020/10/27
Anritsu	Vector Signal Generator	MG3710A	6201682672	2020/1/17	2021/1/16
R&S	Power Meter	NRVD	102081	2019/8/15	2020/8/14
R&S	Power Sensor	NRV-Z5	100538	2019/8/14	2020/8/13
R&S	Power Sensor	NRV-Z5	100539	2019/8/14	2020/8/13
R&S	CBT BLUETOOTH TESTER	CBT	101641	2020/1/8	2021/1/7
EXA	Spectrum Analyzer	FSV7	101631	2020/1/8	2021/1/7
Testo	Hygrometer	608-H1	1241332088	2020/1/8	2021/1/7
FLUKE	DIGITAC THERMOMETER	51II	97240029	2019/8/15	2020/8/14
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	

**Note:**

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR



**10.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0


**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Head	22.8	0.912	42.171	0.89	41.90	2.47	0.65	±5	2020/1/13
835	Head	22.9	0.924	41.442	0.90	41.50	2.67	-0.14	±5	2020/1/14
1750	Head	22.6	1.382	39.698	1.37	40.10	0.88	-1.00	±5	2020/1/19
1900	Head	22.9	1.398	41.444	1.40	40.00	-0.14	3.61	±5	2020/1/16
2450	Head	22.7	1.792	40.803	1.80	39.20	-0.44	4.09	±5	2020/2/20
2600	Head	22.6	1.962	40.249	1.96	39.00	0.10	3.20	±5	2020/2/23

**10.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/1/13	750	Head	250	1087	3857	1210	2.11	8.36	8.44	0.96
2020/1/14	835	Head	250	4d151	3857	1210	2.48	9.30	9.92	6.67
2020/1/19	1750	Head	250	1090	3857	1210	9.41	36.40	37.64	3.41
2020/1/16	1900	Head	250	5d170	3857	1210	9.63	39.00	38.52	-1.23
2020/2/20	2450	Head	250	908	3857	1210	13.50	52.80	54.00	2.27
2020/2/23	2600	Head	250	1078	3857	1210	14.30	57.60	57.20	-0.69

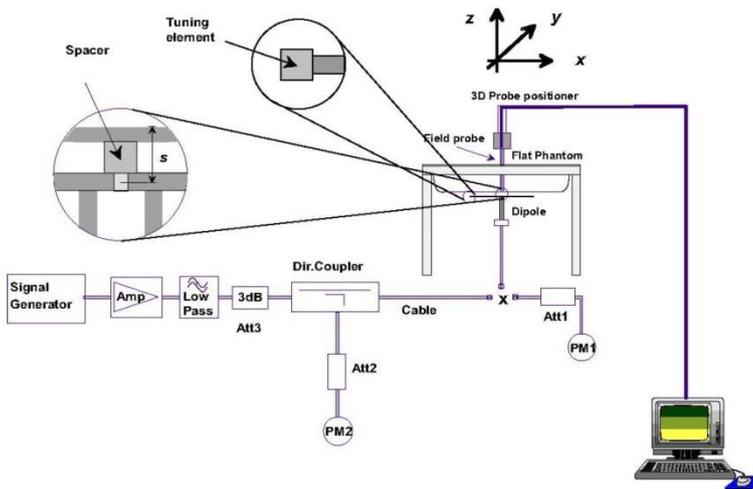

**Fig 10.3.1 System Performance Check Setup**



**Fig 10.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

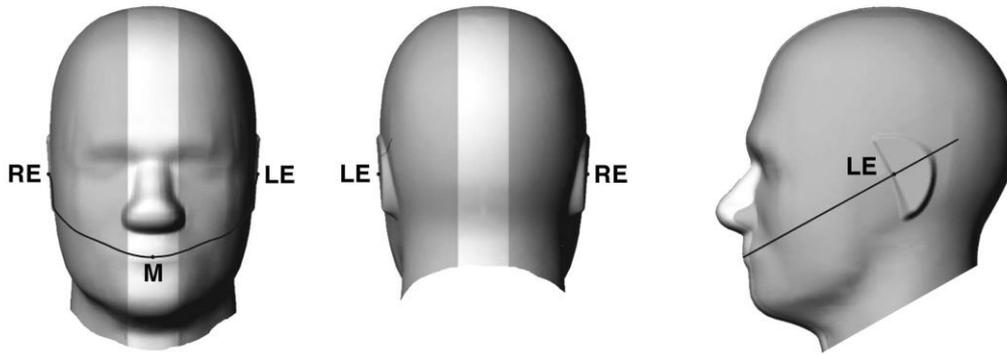


Fig 11.1.1 Front, back, and side views of SAM twin phantom

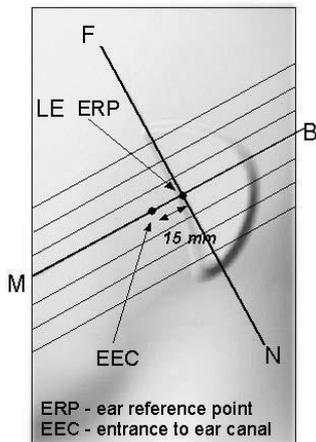


Fig 11.1.2 Close-up side view of phantom showing the ear region.

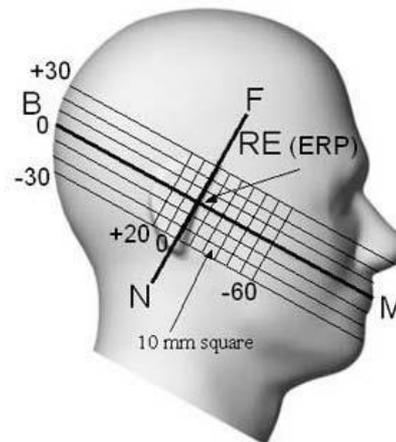


Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

### 11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

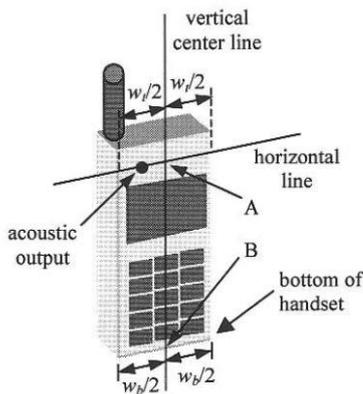


Fig 11.2.1 Handset vertical and horizontal reference lines—“fixed case”

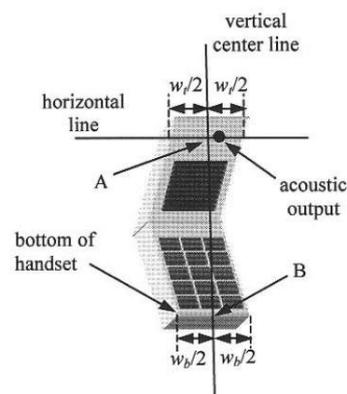


Fig 11.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

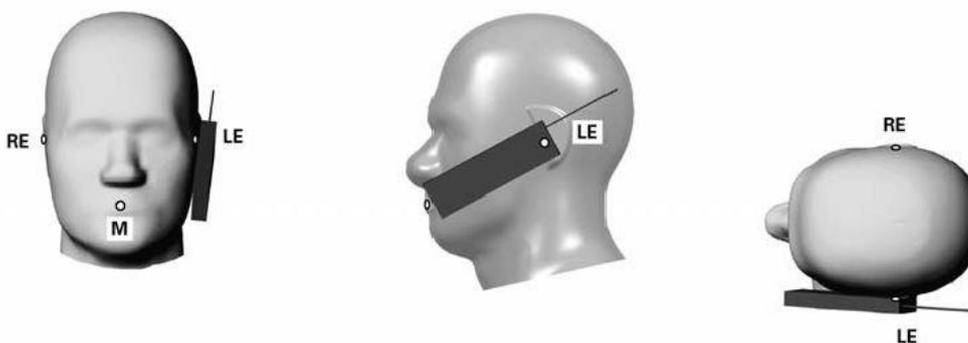


Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

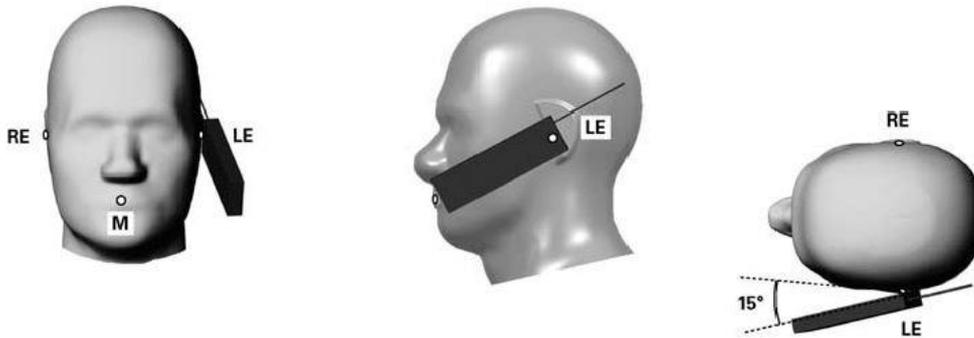


Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

### 11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

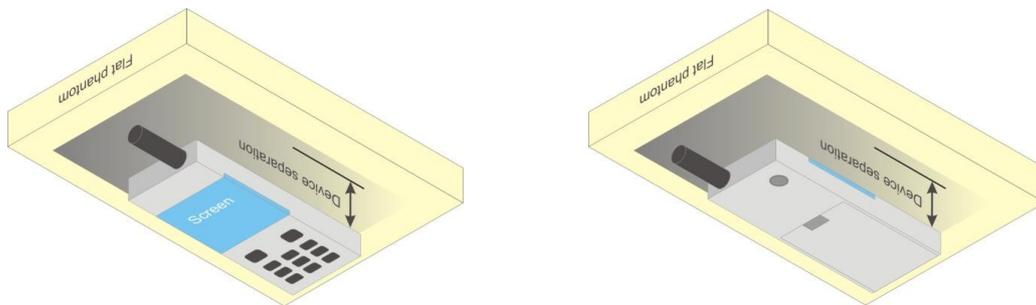


Fig 11.4 Body Worn Position

### 11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

**General Note:**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### <Full Power Mode>

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.43	32.67	32.59	33.00	23.43	23.67	23.59	24.00
GPRS 1 Tx slot	32.42	32.66	32.58	33.00	23.42	23.66	23.58	24.00
GPRS 2 Tx slots	30.37	30.56	30.55	31.00	24.37	24.56	24.55	25.00
GPRS 3 Tx slots	30.44	30.54	30.54	31.00	26.18	26.28	26.28	26.74
GPRS 4 Tx slots	29.26	29.45	29.44	30.00	26.26	26.45	26.44	27.00
EDGE 1 Tx slot	26.86	27.24	27.32	28.00	17.86	18.24	18.32	19.00
EDGE 2 Tx slots	23.74	24.14	24.05	25.00	17.74	18.14	18.05	19.00
EDGE 3 Tx slots	23.58	23.92	23.86	24.00	19.32	19.66	19.60	19.74
EDGE 4 Tx slots	22.38	22.56	22.67	23.00	19.38	19.56	19.67	20.00
<b>GSM1900</b>								
	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.85	29.83	29.95	30.50	20.85	20.83	20.95	21.50
GPRS 1 Tx slot	29.83	29.81	29.94	30.50	20.83	20.81	20.94	21.50
GPRS 2 Tx slots	27.05	27.03	27.20	28.00	21.05	21.03	21.20	22.00
GPRS 3 Tx slots	25.56	25.44	25.42	26.00	21.30	21.18	21.16	21.74
GPRS 4 Tx slots	24.43	24.32	24.45	25.00	21.43	21.32	21.45	22.00
EDGE 1 Tx slot	26.14	26.18	26.24	27.00	17.14	17.18	17.24	18.00
EDGE 2 Tx slots	23.36	23.22	23.54	24.00	17.36	17.22	17.54	18.00
EDGE 3 Tx slots	23.24	23.10	23.36	24.00	18.98	18.84	19.10	19.74
EDGE 4 Tx slots	22.05	22.01	22.17	23.00	19.05	19.01	19.17	20.00

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.  
 The calculated method are shown as below:  
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB  
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB  
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB  
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

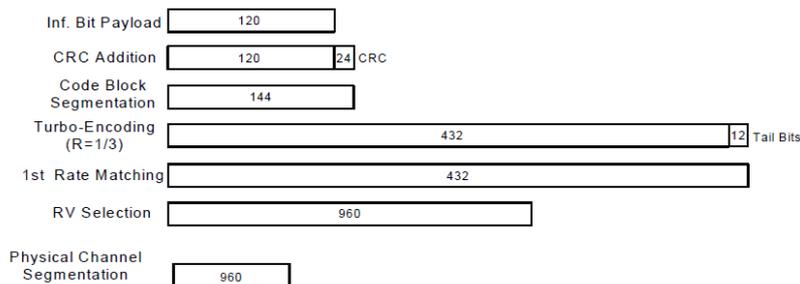

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**<Full Power Mode>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	23.36	23.44	23.31	24.50	23.34	23.35	23.27	24.50	23.40	23.49	23.46	24.50
3GPP Rel 99	RMC 12.2Kbps	23.38	<b>23.46</b>	23.32	24.50	23.34	<b>23.39</b>	23.28	24.50	23.43	<b>23.51</b>	23.48	24.50
3GPP Rel 6	HSDPA Subtest-1	22.25	22.26	22.18	23.50	22.54	22.67	22.47	23.50	22.28	22.38	22.24	23.50
3GPP Rel 6	HSDPA Subtest-2	22.13	22.26	22.07	23.50	22.50	22.55	22.40	23.50	22.30	22.27	22.15	23.50
3GPP Rel 6	HSDPA Subtest-3	21.65	21.75	21.60	23.00	22.03	22.07	21.88	23.00	21.75	21.79	21.68	23.00
3GPP Rel 6	HSDPA Subtest-4	21.62	21.71	21.54	23.00	22.00	22.07	21.87	23.00	21.75	21.78	21.66	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.15	22.14	22.15	23.50	22.51	22.61	22.58	23.50	22.15	22.31	22.15	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.16	22.16	22.14	23.50	22.49	22.58	22.51	23.50	22.16	22.24	22.19	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.56	21.65	21.60	23.00	22.00	22.01	22.01	23.00	21.73	21.75	21.65	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.60	21.54	21.63	23.00	21.99	22.03	22.06	23.00	21.45	21.76	21.70	23.00
3GPP Rel 6	HSUPA Subtest-1	20.56	20.62	20.47	21.50	20.22	20.30	20.18	21.50	20.27	20.34	20.15	21.50
3GPP Rel 6	HSUPA Subtest-2	20.58	20.60	20.51	21.50	20.09	20.27	20.15	21.50	20.30	20.33	20.17	21.50
3GPP Rel 6	HSUPA Subtest-3	21.58	21.61	21.49	22.50	21.19	21.29	21.13	22.50	21.28	21.30	21.19	22.50
3GPP Rel 6	HSUPA Subtest-4	20.05	20.08	19.93	21.50	19.76	19.81	19.67	21.50	19.73	19.83	19.68	21.50
3GPP Rel 6	HSUPA Subtest-5	21.50	21.60	21.40	22.50	21.10	21.20	21.10	22.50	21.30	21.30	21.10	22.50



**<Reduced Power Mode for Hotspot On>**

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	21.45	21.52	21.40	22.50	21.50	21.50	21.34	22.50
3GPP Rel 99	RMC 12.2Kbps	21.46	21.53	21.41	22.50	21.52	21.54	21.40	22.50
3GPP Rel 6	HSDPA Subtest-1	20.46	20.54	20.44	21.50	20.50	20.57	20.48	21.50
3GPP Rel 6	HSDPA Subtest-2	20.46	20.50	20.35	21.50	20.44	20.48	20.41	21.50
3GPP Rel 6	HSDPA Subtest-3	19.98	19.99	19.90	21.00	19.95	20.01	19.86	21.00
3GPP Rel 6	HSDPA Subtest-4	19.93	19.97	19.87	21.00	19.98	19.98	19.93	21.00
3GPP Rel 8	DC-HSDPA Subtest-1	20.44	20.50	20.46	21.50	20.44	20.54	20.43	21.50
3GPP Rel 8	DC-HSDPA Subtest-2	20.43	20.44	20.45	21.50	20.43	20.53	20.43	21.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.78	19.89	19.89	21.00	19.83	19.91	19.89	21.00
3GPP Rel 8	DC-HSDPA Subtest-4	19.82	19.83	19.84	21.00	19.82	19.89	19.82	21.00
3GPP Rel 6	HSUPA Subtest-1	18.54	18.66	18.53	19.50	18.52	18.58	18.48	19.50
3GPP Rel 6	HSUPA Subtest-2	18.48	18.59	18.46	19.50	18.54	18.58	18.43	19.50
3GPP Rel 6	HSUPA Subtest-3	19.51	19.57	19.51	20.50	19.53	19.58	19.48	20.50
3GPP Rel 6	HSUPA Subtest-4	18.08	18.17	18.01	19.50	18.08	18.14	17.96	19.50
3GPP Rel 6	HSUPA Subtest-5	19.40	19.50	19.50	20.50	19.50	19.50	19.40	20.50



**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8821C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE 4 / B5 / B12 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4 SAR test was covered by Band 66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.84	23.12	22.73	24.00	0
20	QPSK	1	49	23.11	23.06	23.06		
20	QPSK	1	99	22.67	22.64	22.68		
20	QPSK	50	0	22.15	22.26	22.25	23.00	1
20	QPSK	50	24	22.11	22.03	22.10		
20	QPSK	50	50	22.06	22.06	22.11		
20	QPSK	100	0	22.08	22.16	22.15	23.00	1
20	16QAM	1	0	22.12	22.08	21.99		
20	16QAM	1	49	22.41	22.37	22.41		
20	16QAM	1	99	22.01	21.95	21.97	22.00	2
20	16QAM	50	0	21.18	21.04	21.25		
20	16QAM	50	24	21.13	21.02	21.12		
20	16QAM	50	50	21.07	21.07	21.12	22.00	2
20	16QAM	100	0	21.09	21.04	21.18		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.01	22.92	22.92	24.00	0
15	QPSK	1	37	23.00	23.00	23.10		
15	QPSK	1	74	22.90	22.85	22.86		
15	QPSK	36	0	22.14	22.02	22.13	23.00	1
15	QPSK	36	20	22.09	22.02	22.09		
15	QPSK	36	39	22.06	22.02	22.15		
15	QPSK	75	0	22.07	22.02	22.12	23.00	1
15	16QAM	1	0	22.32	22.27	22.24		
15	16QAM	1	37	22.48	22.42	22.41		
15	16QAM	1	74	22.22	22.12	22.13	22.00	2
15	16QAM	36	0	21.11	20.99	21.14		
15	16QAM	36	20	21.08	21.04	21.11		
15	16QAM	36	39	20.99	20.99	21.12	22.00	2
15	16QAM	75	0	21.08	21.02	21.14		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.06	22.96	22.95	24.00	0
10	QPSK	1	25	23.11	23.11	23.05		
10	QPSK	1	49	22.98	22.94	22.95		
10	QPSK	25	0	22.10	22.00	22.09	23.00	1
10	QPSK	25	12	22.10	22.00	22.07		
10	QPSK	25	25	22.06	22.00	22.14		
10	QPSK	50	0	22.09	22.01	22.13	23.00	1
10	16QAM	1	0	22.34	22.29	22.21		
10	16QAM	1	25	22.40	22.40	22.37		
10	16QAM	1	49	22.29	22.20	22.15	22.00	2
10	16QAM	25	0	21.11	20.98	21.15		
10	16QAM	25	12	21.13	21.02	21.11		
10	16QAM	25	25	21.07	21.04	21.15	22.00	2
10	16QAM	50	0	21.09	21.00	21.14		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.95	22.86	22.83	24.00	0
5	QPSK	1	12	23.00	23.10	23.09		
5	QPSK	1	24	22.90	22.84	22.85		
5	QPSK	12	0	22.06	21.95	21.97	23.00	1
5	QPSK	12	7	22.10	22.02	22.07		
5	QPSK	12	13	22.04	22.02	22.06		
5	QPSK	25	0	22.02	21.96	22.00		
5	16QAM	1	0	22.28	22.19	22.15	23.00	1
5	16QAM	1	12	22.48	22.39	22.31		
5	16QAM	1	24	22.18	22.09	22.07		
5	16QAM	12	0	21.03	20.97	20.99	22.00	2
5	16QAM	12	7	21.10	21.06	21.06		
5	16QAM	12	13	21.05	21.00	21.06		
5	16QAM	25	0	21.02	20.99	21.05		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.04	22.97	22.91	24.00	0
3	QPSK	1	8	23.06	22.95	22.92		
3	QPSK	1	14	23.00	22.93	22.94		
3	QPSK	8	0	22.06	21.99	21.98	23.00	1
3	QPSK	8	4	22.10	22.01	22.04		
3	QPSK	8	7	22.05	21.97	21.99		
3	QPSK	15	0	22.05	21.98	22.02		
3	16QAM	1	0	22.34	22.26	22.20	23.00	1
3	16QAM	1	8	22.34	22.24	22.18		
3	16QAM	1	14	22.28	22.19	22.14		
3	16QAM	8	0	21.15	21.07	21.08	22.00	2
3	16QAM	8	4	21.15	21.10	21.10		
3	16QAM	8	7	21.11	21.05	21.03		
3	16QAM	15	0	21.07	21.02	20.99		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.99	22.89	22.86	24.00	0
1.4	QPSK	1	3	23.11	23.02	23.00		
1.4	QPSK	1	5	22.98	22.91	22.89		
1.4	QPSK	3	0	23.10	23.01	23.01		
1.4	QPSK	3	1	23.09	23.08	23.05		
1.4	QPSK	3	3	23.10	23.00	22.96		
1.4	QPSK	6	0	22.11	22.02	22.02	23.00	1
1.4	16QAM	1	0	22.28	22.16	22.10	23.00	1
1.4	16QAM	1	3	22.41	22.32	22.29		
1.4	16QAM	1	5	22.29	22.23	22.09		
1.4	16QAM	3	0	22.11	22.04	21.93		
1.4	16QAM	3	1	22.15	22.07	22.00		
1.4	16QAM	3	3	22.11	21.99	21.93		
1.4	16QAM	6	0	21.21	21.10	21.09		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.83	22.94	22.86	24.00	0
20	QPSK	1	49	22.85	22.86	22.85		
20	QPSK	1	99	22.74	22.89	22.80		
20	QPSK	50	0	22.21	22.22	22.16	23.00	1
20	QPSK	50	24	22.12	22.16	22.14		
20	QPSK	50	50	22.08	22.13	22.12		
20	QPSK	100	0	22.13	22.17	22.14	23.00	1
20	16QAM	1	0	22.12	22.19	22.22		
20	16QAM	1	49	22.43	22.50	22.50		
20	16QAM	1	99	22.09	22.03	22.00	22.00	2
20	16QAM	50	0	21.21	21.19	21.18		
20	16QAM	50	24	21.13	21.16	21.14		
20	16QAM	50	50	21.06	21.14	21.12	22.00	2
20	16QAM	100	0	21.10	21.17	21.12		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.91	22.92	22.90	24.00	0
15	QPSK	1	37	22.87	22.88	22.87		
15	QPSK	1	74	22.91	22.91	22.88		
15	QPSK	36	0	22.13	22.15	22.13	23.00	1
15	QPSK	36	20	22.11	22.16	22.14		
15	QPSK	36	39	22.05	22.12	22.07		
15	QPSK	75	0	22.07	22.11	22.09	23.00	1
15	16QAM	1	0	22.30	22.34	22.34		
15	16QAM	1	37	22.47	22.49	22.49		
15	16QAM	1	74	22.23	22.23	22.18	22.00	2
15	16QAM	36	0	21.11	21.11	21.09		
15	16QAM	36	20	21.09	21.13	21.09		
15	16QAM	36	39	21.02	21.08	21.04	22.00	2
15	16QAM	75	0	21.09	21.13	21.10		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.88	22.93	22.87	24.00	0
10	QPSK	1	25	22.90	22.86	22.81		
10	QPSK	1	49	22.81	22.90	22.81		
10	QPSK	25	0	22.07	22.15	22.10	23.00	1
10	QPSK	25	12	22.13	22.17	22.13		
10	QPSK	25	25	22.07	22.10	22.07		
10	QPSK	50	0	22.08	22.11	22.08	23.00	1
10	16QAM	1	0	22.35	22.45	22.38		
10	16QAM	1	25	22.44	22.49	22.46		
10	16QAM	1	49	22.29	22.31	22.26	22.00	2
10	16QAM	25	0	21.09	21.16	21.08		
10	16QAM	25	12	21.12	21.16	21.11		
10	16QAM	25	25	21.07	21.11	21.08	22.00	2
10	16QAM	50	0	21.08	21.11	21.07		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.91	22.93	22.93	24.00	0
5	QPSK	1	12	22.87	22.88	22.87		
5	QPSK	1	24	22.89	22.90	22.87		
5	QPSK	12	0	22.02	22.09	22.04	23.00	1
5	QPSK	12	7	22.12	22.16	22.10		
5	QPSK	12	13	22.08	22.11	22.07		
5	QPSK	25	0	22.01	22.06	22.01	23.00	1
5	16QAM	1	0	22.25	22.33	22.24		
5	16QAM	1	12	22.45	22.46	22.40		
5	16QAM	1	24	22.22	22.25	22.17	22.00	2
5	16QAM	12	0	21.02	21.08	21.04		
5	16QAM	12	7	21.10	21.15	21.08		
5	16QAM	12	13	21.08	21.09	21.04	22.00	2
5	16QAM	25	0	21.03	21.07	21.02		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.93	22.92	22.91	24.00	0
3	QPSK	1	8	22.87	22.91	22.89		
3	QPSK	1	14	22.92	22.90	22.88		
3	QPSK	8	0	22.07	22.10	22.04	23.00	1
3	QPSK	8	4	22.11	22.15	22.06		
3	QPSK	8	7	22.08	22.10	22.04		
3	QPSK	15	0	22.07	22.08	22.04	23.00	1
3	16QAM	1	0	22.31	22.38	22.26		
3	16QAM	1	8	22.35	22.42	22.25		
3	16QAM	1	14	22.35	22.38	22.28	22.00	2
3	16QAM	8	0	21.14	21.18	21.09		
3	16QAM	8	4	21.14	21.21	21.11		
3	16QAM	8	7	21.16	21.18	21.06	22.00	2
3	16QAM	15	0	21.06	21.12	21.01		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.91	22.92	22.90	24.00	0
1.4	QPSK	1	3	22.87	22.87	22.87		
1.4	QPSK	1	5	22.88	22.91	22.92		
1.4	QPSK	3	0	22.91	22.88	22.90		
1.4	QPSK	3	1	22.88	22.90	22.82		
1.4	QPSK	3	3	22.83	22.90	22.83		
1.4	QPSK	6	0	22.12	22.15	22.07	23.00	1
1.4	16QAM	1	0	22.29	22.35	22.24	23.00	1
1.4	16QAM	1	3	22.44	22.49	22.38		
1.4	16QAM	1	5	22.27	22.35	22.27		
1.4	16QAM	3	0	22.11	22.18	22.12		
1.4	16QAM	3	1	22.17	22.23	22.16		
1.4	16QAM	3	3	22.12	22.18	22.10		
1.4	16QAM	6	0	21.17	21.27	21.16	22.00	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.02	23.20	23.03	24.00	0
10	QPSK	1	25	23.16	23.13	23.13		
10	QPSK	1	49	22.97	23.00	22.97		
10	QPSK	25	0	22.10	22.18	22.17	23.00	1
10	QPSK	25	12	22.11	22.14	22.14		
10	QPSK	25	25	22.13	22.14	22.11		
10	QPSK	50	0	22.11	22.16	22.15	23.00	1
10	16QAM	1	0	22.30	22.30	22.33		
10	16QAM	1	25	22.49	22.41	22.43		
10	16QAM	1	49	22.29	22.31	22.30	22.00	2
10	16QAM	25	0	21.10	21.14	21.17		
10	16QAM	25	12	21.12	21.14	21.13		
10	16QAM	25	25	21.14	21.13	21.10	22.00	2
10	16QAM	50	0	21.10	21.13	21.16		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.94	22.97	22.96	24.00	0
5	QPSK	1	12	23.17	23.19	23.19		
5	QPSK	1	24	22.97	22.94	22.94		
5	QPSK	12	0	22.08	22.13	22.09	23.00	1
5	QPSK	12	7	22.14	22.18	22.14		
5	QPSK	12	13	22.13	22.11	22.12		
5	QPSK	25	0	22.10	22.10	22.08	23.00	1
5	16QAM	1	0	22.23	22.22	22.26		
5	16QAM	1	12	22.50	22.50	22.48		
5	16QAM	1	24	22.26	22.22	22.23	22.00	2
5	16QAM	12	0	21.09	21.09	21.08		
5	16QAM	12	7	21.13	21.13	21.14		
5	16QAM	12	13	21.12	21.11	21.11	22.00	2
5	16QAM	25	0	21.10	21.09	21.06		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.04	23.04	23.03	24.00	0
3	QPSK	1	8	23.09	23.04	23.00		
3	QPSK	1	14	23.03	23.04	23.03		
3	QPSK	8	0	22.11	22.10	22.08	23.00	1
3	QPSK	8	4	22.18	22.14	22.15		
3	QPSK	8	7	22.11	22.11	22.11		
3	QPSK	15	0	22.11	22.10	22.09		
3	16QAM	1	0	22.32	22.36	22.33	23.00	1
3	16QAM	1	8	22.40	22.33	22.35		
3	16QAM	1	14	22.34	22.33	22.31		
3	16QAM	8	0	21.15	21.17	21.14	22.00	2
3	16QAM	8	4	21.22	21.19	21.19		
3	16QAM	8	7	21.16	21.14	21.14		
3	16QAM	15	0	21.08	21.09	21.08		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.98	22.97	22.94	24.00	0
1.4	QPSK	1	3	23.10	23.10	23.11		
1.4	QPSK	1	5	23.03	22.98	22.97		
1.4	QPSK	3	0	23.07	23.08	23.06		
1.4	QPSK	3	1	23.13	23.12	23.10		
1.4	QPSK	3	3	23.10	23.07	23.06		
1.4	QPSK	6	0	22.12	22.11	22.08	23.00	1
1.4	16QAM	1	0	22.26	22.24	22.27	23.00	1
1.4	16QAM	1	3	22.37	22.37	22.35		
1.4	16QAM	1	5	22.35	22.26	22.24		
1.4	16QAM	3	0	22.09	22.07	22.08		
1.4	16QAM	3	1	22.14	22.13	22.13		
1.4	16QAM	3	3	22.09	22.10	22.08		
1.4	16QAM	6	0	21.20	21.17	21.16	22.00	2



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.04	23.28	23.07	24.00	0
10	QPSK	1	25	23.19	23.19	23.22		
10	QPSK	1	49	23.17	23.16	23.18		
10	QPSK	25	0	22.17	22.24	22.19	23.00	1
10	QPSK	25	12	22.16	22.17	22.18		
10	QPSK	25	25	22.19	22.23	22.17		
10	QPSK	50	0	22.22	22.23	22.18	23.00	1
10	16QAM	1	0	22.32	22.30	22.32		
10	16QAM	1	25	22.46	22.49	22.48		
10	16QAM	1	49	22.47	22.50	22.48	22.00	2
10	16QAM	25	0	21.18	21.17	21.21		
10	16QAM	25	12	21.17	21.21	21.20		
10	16QAM	25	25	21.23	21.27	21.18	22.00	2
10	16QAM	25	49	21.23	21.27	21.18		
10	16QAM	50	0	21.24	21.18	21.22		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.96	22.96	23.03	24.00	0
5	QPSK	1	12	23.19	23.26	23.27		
5	QPSK	1	24	23.05	23.05	23.08		
5	QPSK	12	0	22.07	22.13	22.20	23.00	1
5	QPSK	12	7	22.12	22.21	22.17		
5	QPSK	12	13	22.10	22.20	22.15		
5	QPSK	25	0	22.05	22.12	22.16	23.00	1
5	16QAM	1	0	22.23	22.23	22.22		
5	16QAM	1	12	22.50	22.49	22.45		
5	16QAM	1	24	22.30	22.32	22.39	22.00	2
5	16QAM	12	0	21.09	21.14	21.21		
5	16QAM	12	7	21.15	21.23	21.18		
5	16QAM	12	13	21.09	21.19	21.17	22.00	2
5	16QAM	12	13	21.09	21.19	21.17		
5	16QAM	25	0	21.06	21.16	21.17		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.06	23.10	23.09	24.00	0
3	QPSK	1	8	23.07	23.08	23.11		
3	QPSK	1	14	23.07	23.13	23.17		
3	QPSK	8	0	22.11	22.12	22.13	23.00	1
3	QPSK	8	4	22.14	22.17	22.19		
3	QPSK	8	7	22.13	22.18	22.17		
3	QPSK	15	0	22.10	22.15	22.12		
3	16QAM	1	0	22.28	22.39	22.35	23.00	1
3	16QAM	1	8	22.32	22.36	22.37		
3	16QAM	1	14	22.34	22.38	22.42		
3	16QAM	8	0	21.18	21.17	21.20	22.00	2
3	16QAM	8	4	21.23	21.27	21.25		
3	16QAM	8	7	21.19	21.21	21.26		
3	16QAM	15	0	21.14	21.16	21.16		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.05	23.04	23.06	24.00	0
1.4	QPSK	1	3	23.17	23.18	23.22		
1.4	QPSK	1	5	23.07	23.11	23.13		
1.4	QPSK	3	0	23.16	23.17	23.21		
1.4	QPSK	3	1	23.21	23.22	23.27		
1.4	QPSK	3	3	23.17	23.21	23.25		
1.4	QPSK	6	0	22.17	22.20	22.19	23.00	1
1.4	16QAM	1	0	22.34	22.37	22.36	23.00	1
1.4	16QAM	1	3	22.45	22.49	22.48		
1.4	16QAM	1	5	22.33	22.34	22.43		
1.4	16QAM	3	0	22.17	22.14	22.19		
1.4	16QAM	3	1	22.22	22.21	22.27		
1.4	16QAM	3	3	22.17	22.18	22.24		
1.4	16QAM	6	0	21.27	21.31	21.30	22.00	2



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	24.00	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.85	22.95	22.85		
20	QPSK	1	49	22.58	22.64	22.67	23.00	1
20	QPSK	1	99	22.84	22.65	22.45		
20	QPSK	50	0	21.60	21.78	21.77		
20	QPSK	50	24	21.57	21.66	21.69	23.00	1
20	QPSK	50	50	21.48	21.67	21.55		
20	QPSK	100	0	21.54	21.66	21.65		
20	16QAM	1	0	21.57	21.75	21.69	23.00	1
20	16QAM	1	49	21.91	22.01	21.98		
20	16QAM	1	99	21.61	21.53	21.59		
20	16QAM	50	0	20.64	20.66	20.77	22.00	2
20	16QAM	50	24	20.60	20.66	20.69		
20	16QAM	50	50	20.48	20.69	20.55		
20	16QAM	100	0	20.54	20.63	20.64		
Channel				132047	132322	132597	24.00	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.41	22.54	22.71		
15	QPSK	1	37	22.58	22.75	22.86	23.00	1
15	QPSK	1	74	22.44	22.45	22.64		
15	QPSK	36	0	21.59	21.65	21.82		
15	QPSK	36	20	21.56	21.68	21.87	23.00	1
15	QPSK	36	39	21.57	21.65	21.81		
15	QPSK	75	0	21.57	21.63	21.84		
15	16QAM	1	0	21.72	21.88	22.12	23.00	1
15	16QAM	1	37	21.93	22.08	22.22		
15	16QAM	1	74	21.82	21.75	21.94		
15	16QAM	36	0	20.55	20.63	20.82	22.00	2
15	16QAM	36	20	20.52	20.67	20.85		
15	16QAM	36	39	20.53	20.64	20.79		
15	16QAM	75	0	20.55	20.65	20.80		
Channel				132022	132322	132622	24.00	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.81	22.91	22.88		
10	QPSK	1	25	22.91	22.90	22.89	23.00	1
10	QPSK	1	49	22.78	22.83	22.80		
10	QPSK	25	0	21.89	21.96	22.05		
10	QPSK	25	12	21.89	21.96	22.00	23.00	1
10	QPSK	25	25	21.84	21.96	21.91		
10	QPSK	50	0	21.86	21.98	22.00		
10	16QAM	1	0	22.14	22.28	22.18	23.00	1
10	16QAM	1	25	22.25	22.35	22.30		
10	16QAM	1	49	22.12	22.17	22.17		
10	16QAM	25	0	20.88	20.98	21.07	22.00	2
10	16QAM	25	12	20.89	21.00	21.02		
10	16QAM	25	25	20.84	20.97	20.94		
10	16QAM	50	0	20.84	20.96	21.01		



Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.73	22.82	22.65	24.00	0
5	QPSK	1	12	22.86	22.80	22.86		
5	QPSK	1	24	22.71	22.78	22.60		
5	QPSK	12	0	21.85	21.91	21.77	23.00	1
5	QPSK	12	7	21.90	22.01	21.82		
5	QPSK	12	13	21.89	21.97	21.79		
5	QPSK	25	0	21.83	21.92	21.75	23.00	1
5	16QAM	1	0	22.04	22.13	22.00		
5	16QAM	1	12	22.28	22.47	22.18		
5	16QAM	1	24	22.02	22.09	22.00	22.00	2
5	16QAM	12	0	20.84	20.90	20.80		
5	16QAM	12	7	20.90	20.99	20.85		
5	16QAM	12	13	20.87	20.95	20.79	22.00	2
5	16QAM	25	0	20.86	20.93	20.70		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.80	22.88	22.89	24.00	0
3	QPSK	1	8	22.79	22.87	22.87		
3	QPSK	1	14	22.79	22.85	22.86		
3	QPSK	8	0	21.84	21.91	21.95	23.00	1
3	QPSK	8	4	21.90	21.93	21.97		
3	QPSK	8	7	21.85	21.91	21.94		
3	QPSK	15	0	21.84	21.90	21.94	23.00	1
3	16QAM	1	0	22.12	22.23	22.10		
3	16QAM	1	8	22.12	22.18	22.19		
3	16QAM	1	14	22.10	22.16	22.18	22.00	2
3	16QAM	8	0	20.92	20.98	21.00		
3	16QAM	8	4	20.92	21.01	21.04		
3	16QAM	8	7	20.91	20.98	21.00	22.00	2
3	16QAM	15	0	20.88	20.92	20.96		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.77	22.86	22.86	24.00	0
1.4	QPSK	1	3	22.89	22.94	22.85		
1.4	QPSK	1	5	22.81	22.90	22.89		
1.4	QPSK	3	0	22.87	22.86	22.91		
1.4	QPSK	3	1	22.94	22.88	22.88		
1.4	QPSK	3	3	22.90	22.90	22.90		
1.4	QPSK	6	0	21.90	21.96	22.00	23.00	1
1.4	16QAM	1	0	22.04	22.22	22.19	23.00	1
1.4	16QAM	1	3	22.15	22.34	22.30		
1.4	16QAM	1	5	22.09	22.20	22.16		
1.4	16QAM	3	0	21.93	22.02	22.01		
1.4	16QAM	3	1	21.99	22.07	22.07		
1.4	16QAM	3	3	21.94	22.00	22.02		
1.4	16QAM	6	0	20.97	21.08	21.10	22.00	2



<LTE Band 71>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				133222	133322	133372	24.00	0
Frequency (MHz)				673	683	688		
20	QPSK	1	0	23.18	23.14	23.10		
20	QPSK	1	49	23.42	23.48	23.39	23.00	1
20	QPSK	1	99	23.03	23.00	23.07		
20	QPSK	50	0	22.38	22.45	22.40		
20	QPSK	50	24	22.40	22.40	22.36	23.00	1
20	QPSK	50	50	22.39	22.25	22.28		
20	QPSK	100	0	22.34	22.41	22.37		
20	16QAM	1	0	22.44	22.40	22.31	23.00	1
20	16QAM	1	49	22.65	22.54	22.57		
20	16QAM	1	99	22.23	22.16	22.30		
20	16QAM	50	0	21.40	21.35	21.42	22.00	2
20	16QAM	50	24	21.39	21.41	21.36		
20	16QAM	50	50	21.49	21.24	21.31		
20	16QAM	100	0	21.41	21.29	21.37		
Channel				133197	133297	133397	24.00	0
Frequency (MHz)				670.5	680.5	690.5		
15	QPSK	1	0	23.35	23.27	23.21		
15	QPSK	1	37	23.45	23.46	23.45	23.00	1
15	QPSK	1	74	23.23	23.15	22.96		
15	QPSK	36	0	22.38	22.38	22.41		
15	QPSK	36	20	22.41	22.38	22.43	23.00	1
15	QPSK	36	39	22.43	22.30	22.48		
15	QPSK	75	0	22.42	22.33	22.44		
15	16QAM	1	0	22.56	22.62	22.64	23.00	1
15	16QAM	1	37	22.53	22.64	22.58		
15	16QAM	1	74	22.35	22.47	22.40		
15	16QAM	36	0	21.39	21.34	21.36	22.00	2
15	16QAM	36	20	21.43	21.34	21.33		
15	16QAM	36	39	21.44	21.27	21.32		
15	16QAM	75	0	21.43	21.32	21.38		



Channel				133172	133272	133422	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				668	678	693		
10	QPSK	1	0	23.12	23.33	23.19	24.00	0
10	QPSK	1	25	23.41	23.43	23.45		
10	QPSK	1	49	22.99	23.21	23.05		
10	QPSK	25	0	22.42	22.36	22.39	23.00	1
10	QPSK	25	12	22.38	22.39	22.45		
10	QPSK	25	25	22.30	22.41	22.30		
10	QPSK	50	0	22.39	22.40	22.35	23.00	1
10	16QAM	1	0	22.57	22.53	22.62		
10	16QAM	1	25	22.59	22.64	22.59		
10	16QAM	1	49	22.50	22.54	22.48	22.00	2
10	16QAM	25	0	21.44	21.37	21.40		
10	16QAM	25	12	21.38	21.41	21.46		
10	16QAM	25	25	21.33	21.42	21.29	22.00	2
10	16QAM	50	0	21.39	21.41	21.34		
Channel				133147	133247	133447	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				665.5	675.5	695.5		
5	QPSK	1	0	23.29	23.26	23.21	24.00	0
5	QPSK	1	12	23.39	23.45	23.40		
5	QPSK	1	24	23.17	23.24	23.09		
5	QPSK	12	0	22.32	22.31	22.32	23.00	1
5	QPSK	12	7	22.35	22.39	22.32		
5	QPSK	12	13	22.37	22.34	22.24		
5	QPSK	25	0	22.36	22.32	22.27	23.00	1
5	16QAM	1	0	22.49	22.44	22.46		
5	16QAM	1	12	22.60	22.79	22.58		
5	16QAM	1	24	22.50	22.45	22.41	22.00	2
5	16QAM	12	0	21.33	21.31	21.28		
5	16QAM	12	7	21.37	21.36	21.28		
5	16QAM	12	13	21.38	21.33	21.21	22.00	2
5	16QAM	25	0	21.37	21.33	21.26		



**<Reduced Power Mode for Hotspot On>**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100	22.00	0
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.11	21.07	21.08	22.00	0
20	QPSK	1	49	21.40	21.46	21.44		
20	QPSK	1	99	21.05	21.06	21.06		
20	QPSK	50	0	21.43	21.54	21.39	22.00	0
20	QPSK	50	24	21.38	21.37	21.44		
20	QPSK	50	50	21.37	21.40	21.40		
20	QPSK	100	0	21.36	21.47	21.39		
20	16QAM	1	0	21.09	21.12	21.03	22.00	0
20	16QAM	1	49	21.51	21.51	21.33		
20	16QAM	1	99	21.09	21.08	21.08		
20	16QAM	50	0	21.14	21.06	21.30	22.00	0
20	16QAM	50	24	21.10	21.08	21.13		
20	16QAM	50	50	21.07	21.13	21.13		
20	16QAM	100	0	21.07	21.07	21.18		
Channel				18675	18900	19125	22.00	0
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	21.29	21.24	21.28	22.00	0
15	QPSK	1	37	21.48	21.56	21.50		
15	QPSK	1	74	21.25	21.25	21.27		
15	QPSK	36	0	21.37	21.36	21.47	22.00	0
15	QPSK	36	20	21.42	21.41	21.45		
15	QPSK	36	39	21.38	21.38	21.44		
15	QPSK	75	0	21.38	21.38	21.44		
15	16QAM	1	0	21.21	21.30	21.25	22.00	0
15	16QAM	1	37	21.43	21.51	21.47		
15	16QAM	1	74	21.28	21.17	21.11		
15	16QAM	36	0	21.08	21.04	21.17	22.00	0
15	16QAM	36	20	21.08	21.08	21.15		
15	16QAM	36	39	21.06	21.08	21.16		
15	16QAM	75	0	21.09	21.10	21.16		
Channel				18650	18900	19150	22.00	0
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	21.29	21.27	21.33	22.00	0
10	QPSK	1	25	21.33	21.42	21.45		
10	QPSK	1	49	21.13	21.21	21.21		
10	QPSK	25	0	21.32	21.29	21.38	22.00	0
10	QPSK	25	12	21.25	21.32	21.37		
10	QPSK	25	25	21.21	21.14	21.25		
10	QPSK	50	0	21.27	21.22	21.30		
10	16QAM	1	0	21.45	21.52	21.39	22.00	0
10	16QAM	1	25	21.46	21.37	21.47		
10	16QAM	1	49	21.39	21.09	21.25		
10	16QAM	25	0	21.35	21.33	21.44	22.00	0
10	16QAM	25	12	21.29	21.36	21.41		
10	16QAM	25	25	21.25	21.17	21.31		
10	16QAM	50	0	21.28	21.24	21.37		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.27	21.22	21.24	22.00	0
5	QPSK	1	12	21.35	21.49	21.28		
5	QPSK	1	24	21.18	21.15	21.10		
5	QPSK	12	0	21.35	21.33	21.24	22.00	0
5	QPSK	12	7	21.40	21.39	21.26		
5	QPSK	12	13	21.33	21.27	21.13		
5	QPSK	25	0	21.30	21.29	21.16	22.00	0
5	16QAM	1	0	21.34	21.32	21.43		
5	16QAM	1	12	21.38	21.46	21.51		
5	16QAM	1	24	21.38	21.31	21.09	22.00	0
5	16QAM	12	0	21.37	21.34	21.26		
5	16QAM	12	7	21.37	21.40	21.26		
5	16QAM	12	13	21.30	21.26	21.12	22.00	0
5	16QAM	25	0	21.31	21.31	21.18		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.39	21.37	21.19	22.00	0
3	QPSK	1	8	21.40	21.34	21.08		
3	QPSK	1	14	21.33	21.18	20.96		
3	QPSK	8	0	21.40	21.39	21.16	22.00	0
3	QPSK	8	4	21.39	21.39	21.15		
3	QPSK	8	7	21.37	21.30	21.04		
3	QPSK	15	0	21.38	21.31	21.09	22.00	0
3	16QAM	1	0	21.34	21.22	21.13		
3	16QAM	1	8	21.38	21.46	21.21		
3	16QAM	1	14	21.08	21.01	21.09	22.00	0
3	16QAM	8	0	21.07	21.04	20.96		
3	16QAM	8	4	21.07	21.10	20.96		
3	16QAM	8	7	21.00	20.96	20.82	22.00	0
3	16QAM	15	0	21.01	21.01	20.88		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.34	21.22	21.13	22.00	0
1.4	QPSK	1	3	21.38	21.46	21.21		
1.4	QPSK	1	5	21.08	21.01	21.19		
1.4	QPSK	3	0	21.07	21.04	20.96		
1.4	QPSK	3	1	21.07	21.10	20.96		
1.4	QPSK	3	3	21.00	20.96	20.82		
1.4	QPSK	6	0	21.01	21.01	20.88	22.00	0
1.4	16QAM	1	0	21.34	21.22	21.13	22.00	0
1.4	16QAM	1	3	21.38	21.46	21.21		
1.4	16QAM	1	5	21.08	21.01	21.09		
1.4	16QAM	3	0	21.07	21.04	20.96		
1.4	16QAM	3	1	21.07	21.10	20.96		
1.4	16QAM	3	3	21.00	20.96	20.82		
1.4	16QAM	6	0	21.01	21.01	20.88	22.00	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	22.00	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.06	21.24	21.39		
20	QPSK	1	49	21.51	21.55	21.53	22.00	0
20	QPSK	1	99	21.29	21.35	21.31		
20	QPSK	50	0	21.48	21.59	21.61		
20	QPSK	50	24	21.54	21.63	21.64	22.00	0
20	QPSK	50	50	21.44	21.57	21.60		
20	QPSK	100	0	21.54	21.53	21.57		
20	16QAM	1	0	21.19	21.28	21.26	22.00	0
20	16QAM	1	49	21.46	21.60	21.54		
20	16QAM	1	99	21.15	21.44	21.36		
20	16QAM	50	0	21.17	21.39	21.42	22.00	0
20	16QAM	50	24	21.19	21.40	21.51		
20	16QAM	50	50	21.30	21.44	21.49		
20	16QAM	100	0	21.25	21.38	21.50	22.00	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.86	20.93	21.03	22.00	0
15	QPSK	1	37	21.04	21.19	21.20		
15	QPSK	1	74	20.88	20.98	20.90		
15	QPSK	36	0	20.95	21.05	21.12	22.00	0
15	QPSK	36	20	20.95	21.11	21.12		
15	QPSK	36	39	20.95	21.11	21.08		
15	QPSK	75	0	20.96	21.05	21.11	22.00	0
15	16QAM	1	0	20.99	21.06	21.18		
15	16QAM	1	37	21.11	21.22	21.34		
15	16QAM	1	74	20.96	21.01	20.91	22.00	0
15	16QAM	36	0	20.73	20.85	20.89		
15	16QAM	36	20	20.71	20.89	20.91		
15	16QAM	36	39	20.70	20.88	20.84	22.00	0
15	16QAM	75	0	20.74	20.87	20.88		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.93	21.03	21.14	22.00	0
10	QPSK	1	25	21.01	21.13	21.19		
10	QPSK	1	49	20.92	21.06	21.05		
10	QPSK	25	0	20.94	21.08	21.12	22.00	0
10	QPSK	25	12	20.97	21.09	21.14		
10	QPSK	25	25	20.92	21.09	21.10		
10	QPSK	50	0	20.94	21.06	21.10	22.00	0
10	16QAM	1	0	20.93	21.20	21.17		
10	16QAM	1	25	21.02	21.19	21.14		
10	16QAM	1	49	21.05	21.17	21.05	22.00	0
10	16QAM	25	0	20.79	20.90	20.92		
10	16QAM	25	12	20.80	20.91	20.93		
10	16QAM	25	25	20.72	20.93	20.86	22.00	0
10	16QAM	50	0	20.74	20.90	20.91		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.00	20.95	20.96	22.00	0
5	QPSK	1	12	21.12	21.20	21.19		
5	QPSK	1	24	20.91	21.00	20.94		
5	QPSK	12	0	20.98	21.04	21.04	22.00	0
5	QPSK	12	7	21.15	21.13	21.10		
5	QPSK	12	13	21.08	21.10	21.08		
5	QPSK	25	0	20.99	21.02	21.01	22.00	0
5	16QAM	1	0	20.98	21.08	21.08		
5	16QAM	1	12	21.21	21.31	21.31		
5	16QAM	1	24	20.88	21.09	20.92	22.00	0
5	16QAM	12	0	20.72	20.87	20.81		
5	16QAM	12	7	20.79	20.91	20.85		
5	16QAM	12	13	20.80	20.90	20.83	22.00	0
5	16QAM	25	0	20.73	20.85	20.83		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	21.41	21.38	21.14	22.00	0
3	QPSK	1	8	21.34	21.43	21.16		
3	QPSK	1	14	21.37	21.36	21.18		
3	QPSK	8	0	21.37	21.37	21.17	22.00	0
3	QPSK	8	4	21.27	21.36	21.27		
3	QPSK	8	7	21.32	21.36	21.10		
3	QPSK	15	0	21.31	21.16	21.15	22.00	0
3	16QAM	1	0	21.19	21.34	21.16		
3	16QAM	1	8	21.41	21.32	21.17		
3	16QAM	1	14	21.29	21.30	21.21	22.00	0
3	16QAM	8	0	21.15	21.02	20.98		
3	16QAM	8	4	21.08	21.03	21.04		
3	16QAM	8	7	21.05	21.01	21.11	22.00	0
3	16QAM	15	0	20.97	20.99	21.01		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.27	21.54	21.30	22.00	0
1.4	QPSK	1	3	21.37	21.55	21.47		
1.4	QPSK	1	5	21.39	21.46	21.26		
1.4	QPSK	3	0	21.34	21.61	21.47		
1.4	QPSK	3	1	21.55	21.59	21.40		
1.4	QPSK	3	3	21.52	21.51	21.47		
1.4	QPSK	6	0	21.46	21.42	21.55	22.00	0
1.4	16QAM	1	0	21.39	21.53	21.42	22.00	0
1.4	16QAM	1	3	21.61	21.62	21.63		
1.4	16QAM	1	5	21.54	21.51	21.48		
1.4	16QAM	3	0	21.12	21.13	21.27		
1.4	16QAM	3	1	21.30	21.23	21.46		
1.4	16QAM	3	3	21.27	21.14	21.37		
1.4	16QAM	6	0	21.40	21.20	21.47	22.00	0



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	21.16	21.21	21.23	22.00	0
20	QPSK	1	49	21.37	21.41	21.36		
20	QPSK	1	99	21.12	21.15	21.21		
20	QPSK	50	0	21.14	21.45	21.38	22.00	0
20	QPSK	50	24	21.10	21.29	21.38		
20	QPSK	50	50	21.11	21.29	21.28		
20	QPSK	100	0	21.11	21.27	21.35		
20	16QAM	1	0	21.16	21.25	21.29	22.00	0
20	16QAM	1	49	21.25	21.35	21.36		
20	16QAM	1	99	21.22	21.24	21.30		
20	16QAM	50	0	21.17	21.28	21.28	22.00	0
20	16QAM	50	24	21.12	21.31	21.37		
20	16QAM	50	50	21.11	21.30	21.36		
20	16QAM	100	0	21.11	21.25	21.28		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	21.16	21.35	21.26	22.00	0
15	QPSK	1	37	21.32	21.54	21.47		
15	QPSK	1	74	21.20	21.31	21.29		
15	QPSK	36	0	21.26	21.45	21.37	22.00	0
15	QPSK	36	20	21.27	21.45	21.38		
15	QPSK	36	39	21.26	21.44	21.34		
15	QPSK	75	0	21.25	21.42	21.35		
15	16QAM	1	0	21.27	21.52	21.42	22.00	0
15	16QAM	1	37	21.49	21.44	21.56		
15	16QAM	1	74	21.22	21.33	21.34		
15	16QAM	36	0	21.04	21.22	21.15	22.00	0
15	16QAM	36	20	21.09	21.25	21.16		
15	16QAM	36	39	21.04	21.23	21.13		
15	16QAM	75	0	21.06	21.24	21.16		
Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	21.30	21.49	21.36	22.00	0
10	QPSK	1	25	21.38	21.53	21.41		
10	QPSK	1	49	21.29	21.43	21.39		
10	QPSK	25	0	21.28	21.46	21.43	22.00	0
10	QPSK	25	12	21.33	21.51	21.40		
10	QPSK	25	25	21.29	21.49	21.41		
10	QPSK	50	0	21.29	21.48	21.44		
10	16QAM	1	0	21.31	21.58	21.51	22.00	0
10	16QAM	1	25	21.38	21.65	21.53		
10	16QAM	1	49	21.47	21.47	21.44		
10	16QAM	25	0	21.07	21.29	21.23	22.00	0
10	16QAM	25	12	21.15	21.32	21.22		
10	16QAM	25	25	21.10	21.32	21.17		
10	16QAM	50	0	21.10	21.28	21.25		




Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	21.17	21.36	21.25	22.00	0
5	QPSK	1	12	21.50	21.67	21.54		
5	QPSK	1	24	21.18	21.37	21.29		
5	QPSK	12	0	21.28	21.44	21.36	22.00	0
5	QPSK	12	7	21.34	21.54	21.45		
5	QPSK	12	13	21.31	21.52	21.40		
5	QPSK	25	0	21.26	21.45	21.38	22.00	0
5	16QAM	1	0	21.25	21.39	21.41		
5	16QAM	1	12	21.64	21.68	21.60		
5	16QAM	1	24	21.19	21.37	21.45	22.00	0
5	16QAM	12	0	21.08	21.25	21.16		
5	16QAM	12	7	21.15	21.36	21.23		
5	16QAM	12	13	21.11	21.35	21.21	22.00	0
5	16QAM	25	0	21.07	21.28	21.18		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	21.31	21.48	21.37	22.00	0
3	QPSK	1	8	21.31	21.47	21.41		
3	QPSK	1	14	21.31	21.45	21.38		
3	QPSK	8	0	21.31	21.50	21.42	22.00	0
3	QPSK	8	4	21.34	21.54	21.44		
3	QPSK	8	7	21.31	21.50	21.40		
3	QPSK	15	0	21.31	21.48	21.40	22.00	0
3	16QAM	1	0	21.43	21.51	21.50		
3	16QAM	1	8	21.35	21.63	21.42		
3	16QAM	1	14	21.36	21.48	21.42	22.00	0
3	16QAM	8	0	21.20	21.39	21.27		
3	16QAM	8	4	21.20	21.39	21.31		
3	16QAM	8	7	21.18	21.38	21.26	22.00	0
3	16QAM	15	0	21.11	21.31	21.21		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	21.21	21.43	21.37	22.00	0
1.4	QPSK	1	3	21.34	21.52	21.44		
1.4	QPSK	1	5	21.22	21.42	21.33		
1.4	QPSK	3	0	21.33	21.51	21.42	22.00	0
1.4	QPSK	3	1	21.38	21.56	21.47		
1.4	QPSK	3	3	21.34	21.49	21.46		
1.4	QPSK	6	0	21.32	21.50	21.42	22.00	0
1.4	16QAM	1	0	21.25	21.57	21.48	22.00	0
1.4	16QAM	1	3	21.41	21.66	21.53		
1.4	16QAM	1	5	21.34	21.58	21.47		
1.4	16QAM	3	0	21.09	21.29	21.26	22.00	0
1.4	16QAM	3	1	21.12	21.33	21.30		
1.4	16QAM	3	3	21.07	21.28	21.26		
1.4	16QAM	6	0	21.22	21.36	21.32	22.00	0

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

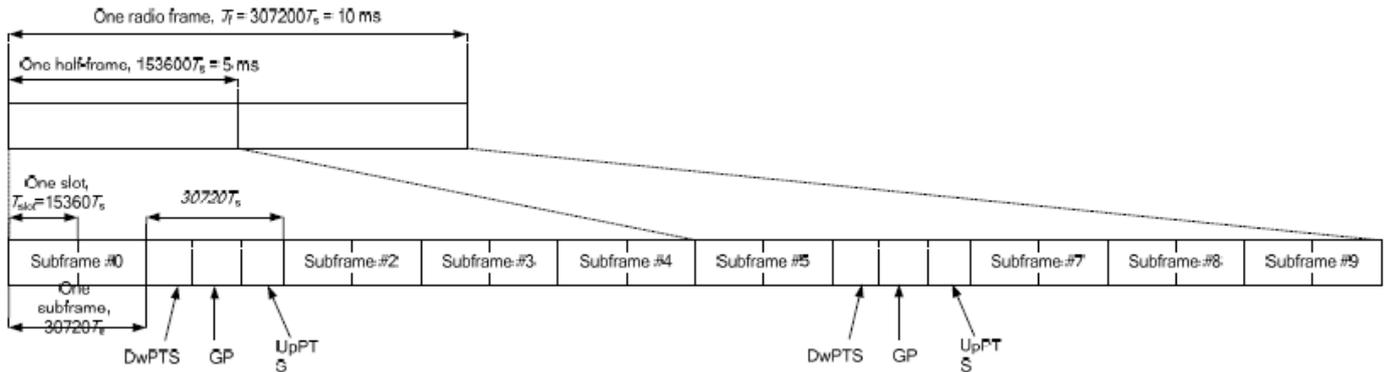

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts		
1	19760 · Ts			20480 · Ts				
2	21952 · Ts			23040 · Ts				
3	24144 · Ts			25600 · Ts				
4	26336 · Ts			7680 · Ts	4384 · Ts	5120 · Ts		
5	6592 · Ts	4384 · Ts	5120 · Ts	20480 · Ts				
6	19760 · Ts			23040 · Ts				
7	21952 · Ts			12800 · Ts				
8	24144 · Ts			-	-	-		
9	13168 · Ts			-	-	-	-	

Special subframe (30720·T <sub>s</sub> ): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T <sub>s</sub> ): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE Band 41 Power class 2

- i. Uplink-downlink configuration: 1. In a half-frame consisted of 5 subframes, uplink operation is in 2 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(2+0.167)/5 = 43.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(2+0.143)/5 = 42.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:2.33 (42.9 %) was used perform testing and considering the theoretical duty cycle of 43.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 42.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $43.3\%/42.9\% = 1.009$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

For LTE Band 41 Power class 3

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.

The device can adjust uplink/downlink configuration automatically according to the transmitting power class level, as followings:

LTE TDD Band	Power Class level	support uplink/downlink configuration
LTE Band 41	> 23	1,2,3,4,5
	=23	0,1,2,3,4,5,6
	< 23	0,1,2,3,4,5,6



<Full Power Mode>

<LTE Band 41>

Power Class 3:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	21.10	21.07	21.36	21.38	21.39		
20	QPSK	1	49	21.86	21.49	21.72	21.68	21.84	22.00	0
20	QPSK	1	99	21.06	20.96	21.29	21.22	21.28		
20	QPSK	50	0	20.25	20.34	20.60	20.59	20.74		
20	QPSK	50	24	20.42	20.26	20.64	20.62	20.71	21.00	1
20	QPSK	50	50	20.78	20.32	20.58	20.54	20.63		
20	QPSK	100	0	20.77	20.33	20.55	20.54	20.71		
20	16QAM	1	0	20.21	20.18	20.52	20.43	20.53	21.00	1
20	16QAM	1	49	20.63	20.58	20.84	20.87	20.93		
20	16QAM	1	99	20.20	20.17	20.34	20.29	20.43		
20	16QAM	50	0	19.28	19.43	19.69	19.56	19.82	20.00	2
20	16QAM	50	24	19.55	19.40	19.73	19.64	19.79		
20	16QAM	50	50	19.58	19.38	19.74	19.66	19.66		
20	16QAM	100	0	19.46	19.40	19.72	19.61	19.74		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	21.35	21.28	21.55	21.48	21.59		
15	QPSK	1	37	21.55	21.45	21.77	21.62	21.76	22.00	0
15	QPSK	1	74	21.31	21.25	21.46	21.39	21.49		
15	QPSK	36	0	20.36	20.26	20.58	20.50	20.69		
15	QPSK	36	20	20.48	20.33	20.69	20.54	20.74	21.00	1
15	QPSK	36	39	20.48	20.36	20.64	20.51	20.62		
15	QPSK	75	0	20.32	20.27	20.63	20.49	20.68		
15	16QAM	1	0	20.39	20.33	20.63	20.62	20.68	21.00	1
15	16QAM	1	37	20.66	20.55	20.82	20.77	20.90		
15	16QAM	1	74	20.38	20.46	20.57	20.50	20.60		
15	16QAM	36	0	19.32	19.21	19.61	19.54	19.74	20.00	2
15	16QAM	36	20	19.43	19.28	19.58	19.57	19.63		
15	16QAM	36	39	19.43	19.36	19.62	19.52	19.71		
15	16QAM	75	0	19.45	19.32	19.68	19.60	19.69		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	21.44	21.25	21.64	21.58	21.73	22.00	0
10	QPSK	1	25	21.57	21.40	21.68	21.60	21.72		
10	QPSK	1	49	21.46	21.32	21.54	21.48	21.63		
10	QPSK	25	0	20.33	20.29	20.61	20.55	20.70	21.00	1
10	QPSK	25	12	20.44	20.38	20.66	20.56	20.72		
10	QPSK	25	25	20.42	20.43	20.73	20.58	20.66		
10	QPSK	50	0	20.50	20.31	20.62	20.59	20.79	21.00	1
10	16QAM	1	0	20.56	20.43	20.51	20.67	20.90		
10	16QAM	1	25	20.54	20.53	20.79	20.74	20.94		
10	16QAM	1	49	20.56	20.38	20.73	20.66	20.72	20.00	2
10	16QAM	25	0	19.29	19.33	19.60	19.52	19.68		
10	16QAM	25	12	19.54	19.40	19.69	19.58	19.77		
10	16QAM	25	25	19.52	19.39	19.73	19.60	19.70	20.00	2
10	16QAM	50	0	19.48	19.47	19.70	19.65	19.76		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.3	2687.5		
5	QPSK	1	0	21.43	21.20	21.46	21.44	21.54	22.00	0
5	QPSK	1	12	21.49	21.42	21.66	21.67	21.77		
5	QPSK	1	24	21.24	21.18	21.43	21.41	21.51		
5	QPSK	12	0	20.34	20.31	20.56	20.44	20.62	21.00	1
5	QPSK	12	7	20.40	20.27	20.65	20.49	20.68		
5	QPSK	12	13	20.43	20.29	20.66	20.56	20.67		
5	QPSK	25	0	20.41	20.21	20.55	20.50	20.65	21.00	1
5	16QAM	1	0	20.60	20.32	20.67	20.58	20.69		
5	16QAM	1	12	20.70	20.52	20.82	20.87	20.88		
5	16QAM	1	24	20.40	20.31	20.58	20.53	20.68	20.00	2
5	16QAM	12	0	19.24	19.13	19.53	19.47	19.57		
5	16QAM	12	7	19.36	19.29	19.68	19.48	19.62		
5	16QAM	12	13	19.39	19.24	19.60	19.56	19.61	20.00	2
5	16QAM	25	0	19.35	19.37	19.68	19.55	19.63		



Power Class 2:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.74	23.76	23.74	23.68	23.76	25.00	0
20	QPSK	1	49	24.20	23.65	23.76	23.79	23.76		
20	QPSK	1	99	23.71	23.64	23.74	23.75	23.65		
20	QPSK	50	0	22.83	22.58	22.60	22.62	22.83	24.00	1
20	QPSK	50	24	22.81	22.63	22.61	22.65	22.81		
20	QPSK	50	50	22.84	22.62	22.71	22.61	22.79		
20	QPSK	100	0	22.66	22.62	22.65	22.61	22.85	24.00	1
20	16QAM	1	0	22.53	22.58	22.52	22.60	22.84		
20	16QAM	1	49	22.90	22.92	22.90	22.82	22.80		
20	16QAM	1	99	22.46	22.55	22.43	22.54	22.74	23.00	2
20	16QAM	50	0	21.46	21.61	21.66	21.64	21.95		
20	16QAM	50	24	21.70	21.60	21.74	21.68	21.92		
20	16QAM	50	50	21.63	21.64	21.77	21.72	21.91	23.00	2
20	16QAM	100	0	21.65	21.63	21.73	21.65	21.90		
Channel				39725	40173	40620	41068	41515		
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.58	23.49	23.46	23.51	23.79	25.00	0
15	QPSK	1	37	23.61	23.70	23.65	23.63	23.80		
15	QPSK	1	74	23.47	23.63	23.45	23.35	23.63		
15	QPSK	36	0	22.59	22.68	22.73	22.56	22.92	24.00	1
15	QPSK	36	20	22.71	22.73	22.72	22.67	22.87		
15	QPSK	36	39	22.60	22.60	22.72	22.72	22.81		
15	QPSK	75	0	22.60	22.60	22.55	22.62	22.85	24.00	1
15	16QAM	1	0	22.77	22.74	22.68	22.75	23.00		
15	16QAM	1	37	22.87	22.90	22.89	22.79	23.00		
15	16QAM	1	74	22.64	22.82	22.65	22.58	22.93	23.00	2
15	16QAM	36	0	21.57	21.50	21.72	21.63	21.95		
15	16QAM	36	20	21.66	21.62	21.67	21.65	21.87		
15	16QAM	36	39	21.67	21.57	21.62	21.70	21.72	23.00	2
15	16QAM	75	0	21.69	21.62	21.68	21.71	21.87		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.51	23.55	23.53	23.51	23.77	25.00	0
10	QPSK	1	25	23.64	23.59	23.56	23.58	23.86		
10	QPSK	1	49	23.60	23.53	23.53	23.43	23.72		
10	QPSK	25	0	22.68	22.59	22.65	22.63	22.86	24.00	1
10	QPSK	25	12	22.65	22.66	22.67	22.74	22.92		
10	QPSK	25	25	22.69	22.64	22.73	22.67	22.86		
10	QPSK	50	0	22.59	22.59	22.57	22.71	22.88	24.00	1
10	16QAM	1	0	22.85	22.79	22.77	22.86	23.17		
10	16QAM	1	25	22.84	22.96	22.94	22.86	23.18		
10	16QAM	1	49	22.89	22.84	22.78	22.86	22.99	23.00	2
10	16QAM	25	0	21.58	21.78	21.71	21.73	22.02		
10	16QAM	25	12	21.65	21.92	21.78	21.69	21.96		
10	16QAM	25	25	21.70	21.70	21.78	21.78	21.96	23.00	2
10	16QAM	50	0	21.70	21.64	21.67	21.66	21.94		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.36	23.42	23.40	23.56	23.64	25.00	0
5	QPSK	1	12	23.40	23.57	23.56	23.34	23.77		
5	QPSK	1	24	23.34	23.36	23.48	23.54	23.69		
5	QPSK	12	0	22.43	22.54	22.58	22.57	22.63	24.00	1
5	QPSK	12	7	22.56	22.65	22.60	22.64	22.87		
5	QPSK	12	13	22.61	22.71	22.62	22.66	22.66		
5	QPSK	25	0	22.42	22.54	22.60	22.68	22.63	24.00	1
5	16QAM	1	0	22.57	22.72	22.80	22.92	22.90		
5	16QAM	1	12	22.68	22.84	22.84	22.69	22.89		
5	16QAM	1	24	22.56	22.67	22.68	22.93	22.98	23.00	2
5	16QAM	12	0	21.50	21.61	21.70	21.68	21.89		
5	16QAM	12	7	21.49	21.80	21.60	21.65	21.88		
5	16QAM	12	13	21.61	21.79	21.70	21.77	21.73	23.00	2
5	16QAM	25	0	21.56	21.74	21.65	21.75	21.77		



**<Reduced Power Mode for Hotspot On>**

**<LTE Band 41>**

**Power Class 3:**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	16.43	16.32	16.34	16.34	16.43		
20	QPSK	1	49	16.67	16.48	16.53	16.40	16.51	18.00	0
20	QPSK	1	99	16.33	16.39	16.42	16.21	16.33		
20	QPSK	50	0	16.16	16.29	16.33	16.31	16.34		
20	QPSK	50	24	16.25	16.30	16.30	16.35	16.32	18.00	0
20	QPSK	50	50	16.54	16.35	16.53	16.40	16.35		
20	QPSK	100	0	16.46	16.40	16.35	16.36	16.41		
20	16QAM	1	0	16.33	16.32	16.32	16.34	16.35	18.00	0
20	16QAM	1	49	16.59	16.66	16.65	16.60	16.52		
20	16QAM	1	99	16.42	16.48	16.47	16.42	16.39		
20	16QAM	50	0	16.42	16.36	16.42	16.38	16.42	18.00	0
20	16QAM	50	24	16.37	16.45	16.47	16.31	16.27		
20	16QAM	50	50	16.32	16.49	16.60	16.43	16.32		
20	16QAM	100	0	16.36	16.42	16.43	16.40	16.37		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	16.16	16.22	16.20	16.12	16.19	18.00	0
15	QPSK	1	37	16.40	16.48	16.41	16.35	16.46		
15	QPSK	1	74	16.14	16.22	16.12	16.11	16.22		
15	QPSK	36	0	16.19	16.28	16.29	16.22	16.35	18.00	0
15	QPSK	36	20	16.35	16.39	16.37	16.26	16.29		
15	QPSK	36	39	16.35	16.37	16.35	16.30	16.34		
15	QPSK	75	0	16.29	16.31	16.34	16.31	16.29		
15	16QAM	1	0	16.21	16.21	16.27	16.22	16.26	18.00	0
15	16QAM	1	37	16.46	16.50	16.53	16.43	16.49		
15	16QAM	1	74	16.26	16.23	16.28	16.17	16.26		
15	16QAM	36	0	16.15	16.27	16.22	16.20	16.31	18.00	0
15	16QAM	36	20	16.20	16.36	16.36	16.20	16.33		
15	16QAM	36	39	16.30	16.29	16.27	16.24	16.16		
15	16QAM	75	0	16.23	16.33	16.39	16.32	16.35		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	16.28	16.24	16.28	16.21	16.29	18.00	0
10	QPSK	1	25	16.24	16.16	16.13	16.10	16.25		
10	QPSK	1	49	16.20	16.28	16.37	16.19	16.31		
10	QPSK	25	0	16.15	16.33	16.26	16.36	16.27	18.00	0
10	QPSK	25	12	16.27	16.34	16.34	16.24	16.32		
10	QPSK	25	25	16.29	16.29	16.41	16.27	16.30		
10	QPSK	50	0	16.26	16.27	16.35	16.36	16.37	18.00	0
10	16QAM	1	0	16.37	16.25	16.40	16.30	16.37		
10	16QAM	1	25	16.37	16.52	16.28	16.42	16.38		
10	16QAM	1	49	16.40	16.35	16.36	16.22	16.42	18.00	0
10	16QAM	25	0	16.20	16.37	16.24	16.23	16.33		
10	16QAM	25	12	16.24	16.35	16.36	16.38	16.33		
10	16QAM	25	25	16.34	16.29	16.40	16.26	16.30	18.00	0
10	16QAM	50	0	16.31	16.41	16.41	16.34	16.36		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	16.10	16.21	16.29	16.19	16.29	18.00	0
5	QPSK	1	12	16.36	16.43	16.43	16.37	16.40		
5	QPSK	1	24	16.17	16.20	16.23	16.19	16.21		
5	QPSK	12	0	16.31	16.32	16.38	16.31	16.25	18.00	0
5	QPSK	12	7	16.26	16.42	16.35	16.33	16.31		
5	QPSK	12	13	16.27	16.38	16.38	16.33	16.36		
5	QPSK	25	0	16.30	16.38	16.41	16.24	16.27	18.00	0
5	16QAM	1	0	16.32	16.34	16.30	16.32	16.35		
5	16QAM	1	12	16.44	16.64	16.61	16.50	16.52		
5	16QAM	1	24	16.29	16.28	16.34	16.31	16.35	18.00	0
5	16QAM	12	0	16.22	16.32	16.33	16.27	16.36		
5	16QAM	12	7	16.32	16.36	16.43	16.31	16.34		
5	16QAM	12	13	16.19	16.25	16.30	16.21	16.29	18.00	0
5	16QAM	25	0	16.38	16.36	16.40	16.36	16.34		



Power Class 2:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	19.49	19.57	19.49	19.53	19.51	21.00	0
20	QPSK	1	49	19.94	19.87	19.63	19.72	19.66		
20	QPSK	1	99	19.47	19.46	19.45	19.49	19.52		
20	QPSK	50	0	18.88	18.87	18.61	18.70	18.68	20.00	1
20	QPSK	50	24	18.81	18.86	18.64	18.75	18.68		
20	QPSK	50	50	18.76	18.81	18.67	18.74	18.62		
20	QPSK	100	0	18.85	18.84	18.63	18.72	18.64		
20	16QAM	1	0	18.76	18.92	18.69	18.81	18.70	20.00	1
20	16QAM	1	49	19.03	19.05	19.00	19.10	19.03		
20	16QAM	1	99	18.82	18.67	18.61	18.65	18.64		
20	16QAM	50	0	17.74	17.96	17.69	17.80	17.77	19.00	2
20	16QAM	50	24	17.89	17.91	17.71	17.87	17.77		
20	16QAM	50	50	18.01	17.90	17.75	17.83	17.70		
20	16QAM	100	0	17.86	17.89	17.71	17.79	17.70		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	19.69	19.69	19.61	19.70	19.63	21.00	0
15	QPSK	1	37	19.81	19.85	19.73	19.81	19.78		
15	QPSK	1	74	19.77	19.68	19.52	19.60	19.61		
15	QPSK	36	0	18.72	18.90	18.64	18.75	18.69	20.00	1
15	QPSK	36	20	18.81	18.89	18.68	18.76	18.68		
15	QPSK	36	39	18.87	18.84	18.63	18.74	18.64		
15	QPSK	75	0	18.79	18.85	18.63	18.74	18.67		
15	16QAM	1	0	18.92	19.13	18.84	18.96	18.86	20.00	1
15	16QAM	1	37	19.01	19.19	18.96	19.06	19.01		
15	16QAM	1	74	18.96	18.92	18.76	18.85	18.86		
15	16QAM	36	0	17.70	17.90	17.62	17.72	17.69	19.00	2
15	16QAM	36	20	17.81	17.87	17.67	17.80	17.68		
15	16QAM	36	39	17.86	17.82	17.63	17.76	17.63		
15	16QAM	75	0	17.81	17.91	17.69	17.80	17.72		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	19.69	19.86	19.58	19.71	19.63	21.00	0
10	QPSK	1	25	19.72	19.78	19.68	19.76	19.75		
10	QPSK	1	49	19.73	19.78	19.53	19.63	19.61		
10	QPSK	25	0	18.74	18.93	18.64	18.75	18.71	20.00	1
10	QPSK	25	12	18.81	18.92	18.71	18.74	18.76		
10	QPSK	25	25	18.84	18.86	18.65	18.75	18.69		
10	QPSK	50	0	18.80	18.90	18.62	18.77	18.69	20.00	1
10	16QAM	1	0	19.04	19.21	18.93	19.08	18.98		
10	16QAM	1	25	19.09	19.24	19.03	19.11	19.10		
10	16QAM	1	49	19.10	19.08	18.91	18.99	19.00	19.00	2
10	16QAM	25	0	17.78	17.98	17.69	17.81	17.77		
10	16QAM	25	12	17.87	17.98	17.75	17.88	17.82		
10	16QAM	25	25	17.91	17.94	17.71	17.83	17.75	19.00	2
10	16QAM	50	0	17.86	17.97	17.72	17.86	17.78		
Channel				39675	40148	40620	41093	41565		
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	19.61	19.74	19.50	19.59	19.56	21.00	0
5	QPSK	1	12	19.72	19.81	19.60	19.68	19.65		
5	QPSK	1	24	19.63	19.72	19.48	19.58	19.56		
5	QPSK	12	0	18.76	18.91	18.66	18.69	18.70	20.00	1
5	QPSK	12	7	18.80	18.94	18.70	18.71	18.76		
5	QPSK	12	13	18.81	18.92	18.68	18.78	18.75		
5	QPSK	25	0	18.77	18.88	18.65	18.76	18.72	20.00	1
5	16QAM	1	0	18.94	19.06	18.86	18.95	18.91		
5	16QAM	1	12	19.08	19.15	18.95	19.03	19.01		
5	16QAM	1	24	18.96	19.05	18.82	18.92	18.90	19.00	2
5	16QAM	12	0	17.79	17.92	17.70	17.75	17.73		
5	16QAM	12	7	17.83	17.96	17.74	17.77	17.80		
5	16QAM	12	13	17.90	17.95	17.74	17.85	17.79	19.00	2
5	16QAM	25	0	17.83	17.94	17.72	17.82	17.77		



**<WLAN Conducted Power>**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.


**<2.4GHz WLAN>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	17.45	18.50	99.31
		6	2437	17.68	18.50	
		11	2462	17.27	18.50	
	802.11g 6Mbps	1	2412	15.12	16.00	96.97
		6	2437	18.00	18.50	
		11	2462	15.79	16.00	
	802.11n-HT20 MCS0	1	2412	14.79	15.00	96.77
		6	2437	17.08	18.50	
		11	2462	14.20	15.00	

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.67 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

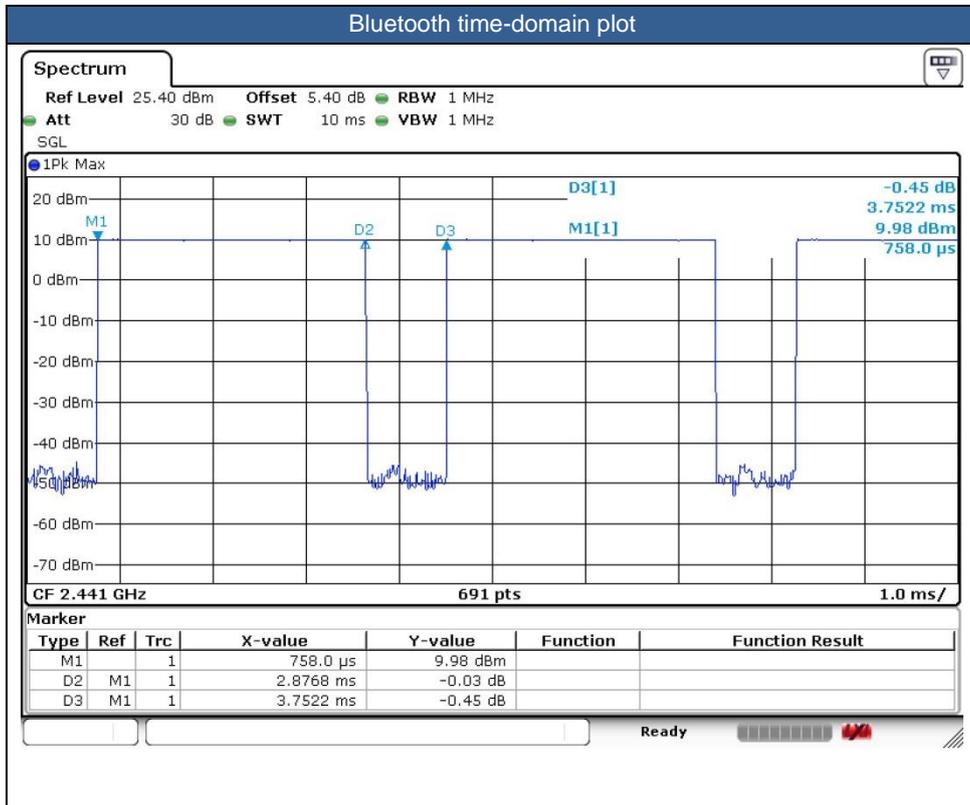

Mode	Channel	Frequency (MHz)	Average power (dBm)
			1Mbps
BR/EDR	CH 00	2402	8.80
	CH 39	2441	<b>9.37</b>
	CH 78	2480	9.11
Tune-up limit (dBm)			10.00

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
LE	CH 00	2402	-2.55
	CH 19	2440	<b>-1.77</b>
	CH 39	2480	-2.43
Tune-up limit (dBm)			0



### 13. Bluetooth Exclusions Applied

Mode Band	Max Average power(dBm)	
	BR/EDR	LE
2.4GHz Bluetooth	10.00	0

**Note:**

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  

$$[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] \cdot [\sqrt{f(GHz)}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison

Hotspot SAR			
Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
10.00	10	2.48	1.6

**Note:**

Per KDB 447498 D01v06, a distance of 10 mm for hotspot SAR is applied to determine SAR test exclusion. The test exclusion threshold is 1.6 which is <= 3, hotspot SAR testing is not required.

Body Worn SAR			
Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
10.00	15	2.48	1.1

**Note:**

Per KDB 447498 D01v06, a distance of 15 mm for body worn SAR is applied to determine SAR test exclusion. The test exclusion threshold is 1.1 which is <= 3, body worn SAR testing is not required.



## **14. Antenna Location**

Detail information can refer to Appendix D.



## **15. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.  
The Reported TDD LTE SAR = measured SAR (W/kg) \* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of WCDMA B2 / B4 and LTE B2 / B4 / B41 / B66.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.

### **GSM Note:**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### **WCDMA Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.



**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 SAR test was covered by LTE B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

**WLAN/Bluetooth Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



**15.1 Head SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 4 Tx slots	Right Cheek	Full	189	836.4	29.45	30.00	1.135	0.01	0.670	<b>0.760</b>
	GSM850	GPRS 4 Tx slots	Right Tilted	Full	189	836.4	29.45	30.00	1.135	-0.01	0.432	0.490
	GSM850	GPRS 4 Tx slots	Left Cheek	Full	189	836.4	29.45	30.00	1.135	0.06	0.626	0.711
	GSM850	GPRS 4 Tx slots	Left Tilted	Full	189	836.4	29.45	30.00	1.135	0.03	0.419	0.476
02	GSM1900	GPRS 4 Tx slots	Right Cheek	Full	810	1909.8	24.45	25.00	1.135	-0.11	0.334	<b>0.379</b>
	GSM1900	GPRS 4 Tx slots	Right Tilted	Full	810	1909.8	24.45	25.00	1.135	0.04	0.118	0.134
	GSM1900	GPRS 4 Tx slots	Left Cheek	Full	810	1909.8	24.45	25.00	1.135	0.07	0.235	0.267
	GSM1900	GPRS 4 Tx slots	Left Tilted	Full	810	1909.8	24.45	25.00	1.135	-0.03	0.181	0.205

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Full	4182	836.4	23.51	24.50	1.256	0.1	0.372	<b>0.467</b>
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Full	4182	836.4	23.51	24.50	1.256	0.09	0.289	0.363
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Full	4182	836.4	23.51	24.50	1.256	0.04	0.368	0.462
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Full	4182	836.4	23.51	24.50	1.256	0.05	0.238	0.299
04	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Full	1413	1732.6	23.39	24.50	1.291	0.03	0.519	<b>0.670</b>
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Full	1413	1732.6	23.39	24.50	1.291	0.04	0.200	0.258
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Full	1413	1732.6	23.39	24.50	1.291	0.01	0.357	0.461
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Full	1413	1732.6	23.39	24.50	1.291	0.1	0.175	0.226
05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Full	9400	1880	23.46	24.50	1.271	0.17	0.308	<b>0.391</b>
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Full	9400	1880	23.46	24.50	1.271	-0.03	0.108	0.137
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Full	9400	1880	23.46	24.50	1.271	0.16	0.214	0.272
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Full	9400	1880	23.46	24.50	1.271	0.13	0.134	0.170



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 71	20M	QPSK	1	49	Right Cheek	Full	133322	683	23.48	24.00	1.127	-0.15	0.292	<b>0.329</b>
	LTE Band 71	20M	QPSK	50	0	Right Cheek	Full	133322	683	22.45	23.00	1.135	-0.07	0.208	0.236
	LTE Band 71	20M	QPSK	1	49	Right Tilted	Full	133322	683	23.48	24.00	1.127	0.06	0.176	0.198
	LTE Band 71	20M	QPSK	50	0	Right Tilted	Full	133322	683	22.45	23.00	1.135	-0.05	0.126	0.143
	LTE Band 71	20M	QPSK	1	49	Left Cheek	Full	133322	683	23.48	24.00	1.127	0.07	0.256	0.289
	LTE Band 71	20M	QPSK	50	0	Left Cheek	Full	133322	683	22.45	23.00	1.135	-0.09	0.188	0.213
	LTE Band 71	20M	QPSK	1	49	Left Tilted	Full	133322	683	23.48	24.00	1.127	0.02	0.167	0.188
	LTE Band 71	20M	QPSK	50	0	Left Tilted	Full	133322	683	22.45	23.00	1.135	-0.04	0.125	0.142
07	LTE Band 12	10M	QPSK	1	0	Right Cheek	Full	23095	707.5	23.28	24.00	1.180	-0.01	0.299	<b>0.353</b>
	LTE Band 12	10M	QPSK	25	0	Right Cheek	Full	23095	707.5	22.24	23.00	1.191	-0.02	0.253	0.301
	LTE Band 12	10M	QPSK	1	0	Right Tilted	Full	23095	707.5	23.28	24.00	1.180	0.06	0.206	0.243
	LTE Band 12	10M	QPSK	25	0	Right Tilted	Full	23095	707.5	22.24	23.00	1.191	-0.07	0.169	0.201
	LTE Band 12	10M	QPSK	1	0	Left Cheek	Full	23095	707.5	23.28	24.00	1.180	0.02	0.290	0.342
	LTE Band 12	10M	QPSK	25	0	Left Cheek	Full	23095	707.5	22.24	23.00	1.191	-0.07	0.253	0.301
	LTE Band 12	10M	QPSK	1	0	Left Tilted	Full	23095	707.5	23.28	24.00	1.180	-0.07	0.209	0.247
	LTE Band 12	10M	QPSK	25	0	Left Tilted	Full	23095	707.5	22.24	23.00	1.191	-0.08	0.181	0.216
08	LTE Band 5	10M	QPSK	1	0	Right Cheek	Full	20525	836.5	23.20	24.00	1.202	-0.06	0.390	<b>0.469</b>
	LTE Band 5	10M	QPSK	25	0	Right Cheek	Full	20525	836.5	22.18	23.00	1.208	-0.04	0.317	0.383
	LTE Band 5	10M	QPSK	1	0	Right Tilted	Full	20525	836.5	23.20	24.00	1.202	-0.02	0.258	0.310
	LTE Band 5	10M	QPSK	25	0	Right Tilted	Full	20525	836.5	22.18	23.00	1.208	-0.04	0.213	0.257
	LTE Band 5	10M	QPSK	1	0	Left Cheek	Full	20525	836.5	23.20	24.00	1.202	0.09	0.381	0.458
	LTE Band 5	10M	QPSK	25	0	Left Cheek	Full	20525	836.5	22.18	23.00	1.208	-0.03	0.314	0.379
	LTE Band 5	10M	QPSK	1	0	Left Tilted	Full	20525	836.5	23.20	24.00	1.202	0.06	0.232	0.279
	LTE Band 5	10M	QPSK	25	0	Left Tilted	Full	20525	836.5	22.18	23.00	1.208	0.03	0.205	0.248
09	LTE Band 66	20M	QPSK	1	0	Right Cheek	Full	132322	1745	22.95	24.00	1.274	0.05	0.494	<b>0.629</b>
	LTE Band 66	20M	QPSK	50	0	Right Cheek	Full	132322	1745	21.78	23.00	1.324	-0.03	0.428	0.567
	LTE Band 66	20M	QPSK	1	0	Right Tilted	Full	132322	1745	22.95	24.00	1.274	-0.09	0.196	0.250
	LTE Band 66	20M	QPSK	50	0	Right Tilted	Full	132322	1745	21.78	23.00	1.324	-0.02	0.173	0.229
	LTE Band 66	20M	QPSK	1	0	Left Cheek	Full	132322	1745	22.95	24.00	1.274	0.05	0.312	0.397
	LTE Band 66	20M	QPSK	50	0	Left Cheek	Full	132322	1745	21.78	23.00	1.324	0.05	0.276	0.366
	LTE Band 66	20M	QPSK	1	0	Left Tilted	Full	132322	1745	22.95	24.00	1.274	-0.06	0.160	0.204
	LTE Band 66	20M	QPSK	50	0	Left Tilted	Full	132322	1745	21.78	23.00	1.324	-0.05	0.137	0.181
10	LTE Band 2	20M	QPSK	1	0	Right Cheek	Full	18900	1880	23.12	24.00	1.225	-0.03	0.326	<b>0.399</b>
	LTE Band 2	20M	QPSK	50	0	Right Cheek	Full	18900	1880	22.26	23.00	1.186	-0.09	0.277	0.328
	LTE Band 2	20M	QPSK	1	0	Right Tilted	Full	18900	1880	23.12	24.00	1.225	-0.02	0.117	0.143
	LTE Band 2	20M	QPSK	50	0	Right Tilted	Full	18900	1880	22.26	23.00	1.186	0.05	0.102	0.121
	LTE Band 2	20M	QPSK	1	0	Left Cheek	Full	18900	1880	23.12	24.00	1.225	0.04	0.208	0.255
	LTE Band 2	20M	QPSK	50	0	Left Cheek	Full	18900	1880	22.26	23.00	1.186	0.07	0.183	0.217
	LTE Band 2	20M	QPSK	1	0	Left Tilted	Full	18900	1880	23.12	24.00	1.225	0.07	0.138	0.169
	LTE Band 2	20M	QPSK	50	0	Left Tilted	Full	18900	1880	22.26	23.00	1.186	0.09	0.120	0.142



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Power Mode	Power Class	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Right Cheek	Full	3	39750	2506	21.86	22.00	1.033	62.9	1.006	0.07	0.043	0.045
11	LTE Band 41	20M	QPSK	1	49	Right Cheek	Full	2	39750	2506	24.20	25.00	1.202	42.9	1.009	0.01	0.052	0.063
	LTE Band 41	20M	QPSK	50	50	Right Cheek	Full	3	39750	2506	20.78	21.00	1.052	62.9	1.006	0.09	0.036	0.038
	LTE Band 41	20M	QPSK	1	49	Right Tilted	Full	3	39750	2506	21.86	22.00	1.033	62.9	1.006	0.08	0.025	0.026
	LTE Band 41	20M	QPSK	50	50	Right Tilted	Full	3	39750	2506	20.78	21.00	1.052	62.9	1.006	0.04	0.020	0.021
	LTE Band 41	20M	QPSK	1	49	Left Cheek	Full	3	39750	2506	21.86	22.00	1.033	62.9	1.006	0.09	0.026	0.027
	LTE Band 41	20M	QPSK	50	50	Left Cheek	Full	3	39750	2506	20.78	21.00	1.052	62.9	1.006	-0.08	0.021	0.022
	LTE Band 41	20M	QPSK	1	49	Left Tilted	Full	3	39750	2506	21.86	22.00	1.033	62.9	1.006	0.02	0.019	0.020
	LTE Band 41	20M	QPSK	50	50	Left Tilted	Full	3	39750	2506	20.78	21.00	1.052	62.9	1.006	0.08	0.017	0.018

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	17.68	18.50	1.208	99.31	1.007	-0.08	0.647	0.787
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	17.68	18.50	1.208	99.31	1.007	-0.07	0.615	0.748
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	17.68	18.50	1.208	99.31	1.007	-0.13	0.926	1.126
12	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	1	2412	17.45	18.50	1.274	99.31	1.007	-0.04	0.906	1.162
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	6	2437	17.68	18.50	1.208	99.31	1.007	0.07	0.787	0.957
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	1	2412	17.45	18.50	1.274	99.31	1.007	-0.04	0.717	0.919

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	39	2441	9.37	10.00	1.156	76.67	1.086	-0.07	0.068	0.085
	Bluetooth	1Mbps	Right Tilted	39	2441	9.37	10.00	1.156	76.67	1.086	-0.1	0.063	0.079
13	Bluetooth	1Mbps	Left Cheek	39	2441	9.37	10.00	1.156	76.67	1.086	-0.03	0.090	0.112
	Bluetooth	1Mbps	Left Tilted	39	2441	9.37	10.00	1.156	76.67	1.086	-0.03	0.076	0.096



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	Full	189	836.4	29.45	30.00	1.135	-0.02	0.629	0.714
	GSM850	GPRS 4 Tx slots	Back	10	Full	189	836.4	29.45	30.00	1.135	0.03	0.871	0.989
	GSM850	GPRS 4 Tx slots	Back	10	Full	128	824.2	29.26	30.00	1.186	0.04	0.883	1.047
14	GSM850	GPRS 4 Tx slots	Back	10	Full	251	848.8	29.44	30.00	1.138	0.04	0.935	1.064
	GSM850	GPRS 4 Tx slots	Left Side	10	Full	189	836.4	29.45	30.00	1.135	0.07	0.515	0.585
	GSM850	GPRS 4 Tx slots	Right Side	10	Full	189	836.4	29.45	30.00	1.135	0.01	0.781	0.886
	GSM850	GPRS 4 Tx slots	Right Side	10	Full	128	824.2	29.26	30.00	1.186	0.07	0.807	0.957
	GSM850	GPRS 4 Tx slots	Right Side	10	Full	251	848.8	29.44	30.00	1.138	0.08	0.692	0.787
	GSM850	GPRS 4 Tx slots	Bottom Side	10	Full	189	836.4	29.45	30.00	1.135	0.18	0.334	0.379
	GSM1900	GPRS 4 Tx slots	Front	10	Full	810	1909.8	24.45	25.00	1.135	-0.01	0.457	0.519
15	GSM1900	GPRS 4 Tx slots	Back	10	Full	810	1909.8	24.45	25.00	1.135	-0.02	0.961	1.091
	GSM1900	GPRS 4 Tx slots	Back	10	Full	512	1850.2	24.43	25.00	1.140	-0.07	0.670	0.764
	GSM1900	GPRS 4 Tx slots	Back	10	Full	661	1880	24.32	25.00	1.169	0.1	0.797	0.932
	GSM1900	GPRS 4 Tx slots	Left Side	10	Full	810	1909.8	24.45	25.00	1.135	0.04	0.226	0.257
	GSM1900	GPRS 4 Tx slots	Right Side	10	Full	810	1909.8	24.45	25.00	1.135	0.15	0.239	0.271
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Full	810	1909.8	24.45	25.00	1.135	0.15	0.812	0.922
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Full	512	1850.2	24.43	25.00	1.140	0.04	0.617	0.704
	GSM1900	GPRS 4 Tx slots	Bottom Side	10	Full	661	1880	24.32	25.00	1.169	0.12	0.708	0.828

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	Full	4182	836.4	23.51	24.50	1.256	-0.04	0.367	0.461
16	WCDMA Band V	RMC 12.2Kbps	Back	10	Full	4182	836.4	23.51	24.50	1.256	-0.03	0.541	0.680
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	Full	4182	836.4	23.51	24.50	1.256	0.09	0.294	0.369
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	Full	4182	836.4	23.51	24.50	1.256	0.06	0.425	0.534
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	Full	4182	836.4	23.51	24.50	1.256	0.14	0.213	0.268
	WCDMA Band IV	RMC 12.2Kbps	Front	10	Reduced	1413	1732.6	21.54	22.50	1.247	-0.11	0.448	0.559
17	WCDMA Band IV	RMC 12.2Kbps	Back	10	Reduced	1413	1732.6	21.54	22.50	1.247	0	0.624	0.778
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	Reduced	1413	1732.6	21.54	22.50	1.247	-0.04	0.141	0.176
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	Reduced	1413	1732.6	21.54	22.50	1.247	0.12	0.263	0.328
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	Reduced	1413	1732.6	21.54	22.50	1.247	0.07	0.441	0.550
	WCDMA Band II	RMC 12.2Kbps	Front	10	Reduced	9400	1880	21.53	22.50	1.250	-0.01	0.275	0.344
18	WCDMA Band II	RMC 12.2Kbps	Back	10	Reduced	9400	1880	21.53	22.50	1.250	0.04	0.585	0.731
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	Reduced	9400	1880	21.53	22.50	1.250	0.06	0.123	0.154
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	Reduced	9400	1880	21.53	22.50	1.250	0.15	0.126	0.158
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	Reduced	9400	1880	21.53	22.50	1.250	0.07	0.563	0.704



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 71	20M	QPSK	1	49	Front	10	Full	133322	683	23.48	24.00	1.127	-0.01	0.274	0.309
	LTE Band 71	20M	QPSK	50	0	Front	10	Full	133322	683	22.45	23.00	1.135	-0.01	0.208	0.236
19	LTE Band 71	20M	QPSK	1	49	Back	10	Full	133322	683	23.48	24.00	1.127	-0.08	0.460	0.519
	LTE Band 71	20M	QPSK	50	0	Back	10	Full	133322	683	22.45	23.00	1.135	-0.01	0.396	0.449
	LTE Band 71	20M	QPSK	1	49	Left Side	10	Full	133322	683	23.48	24.00	1.127	-0.11	0.179	0.202
	LTE Band 71	20M	QPSK	50	0	Left Side	10	Full	133322	683	22.45	23.00	1.135	-0.04	0.138	0.157
	LTE Band 71	20M	QPSK	1	49	Right Side	10	Full	133322	683	23.48	24.00	1.127	-0.09	0.327	0.369
	LTE Band 71	20M	QPSK	50	0	Right Side	10	Full	133322	683	22.45	23.00	1.135	0.01	0.245	0.278
	LTE Band 71	20M	QPSK	1	49	Bottom Side	10	Full	133322	683	23.48	24.00	1.127	0.05	0.118	0.133
	LTE Band 71	20M	QPSK	50	0	Bottom Side	10	Full	133322	683	22.45	23.00	1.135	0.07	0.081	0.092
	LTE Band 12	10M	QPSK	1	0	Front	10	Full	23095	707.5	23.28	24.00	1.180	-0.05	0.270	0.319
	LTE Band 12	10M	QPSK	25	0	Front	10	Full	23095	707.5	22.24	23.00	1.191	-0.07	0.244	0.291
20	LTE Band 12	10M	QPSK	1	0	Back	10	Full	23095	707.5	23.28	24.00	1.180	-0.03	0.455	0.537
	LTE Band 12	10M	QPSK	25	0	Back	10	Full	23095	707.5	22.24	23.00	1.191	-0.09	0.365	0.435
	LTE Band 12	10M	QPSK	1	0	Left Side	10	Full	23095	707.5	23.28	24.00	1.180	0.18	0.219	0.258
	LTE Band 12	10M	QPSK	25	0	Left Side	10	Full	23095	707.5	22.24	23.00	1.191	-0.03	0.184	0.219
	LTE Band 12	10M	QPSK	1	0	Right Side	10	Full	23095	707.5	23.28	24.00	1.180	0.02	0.342	0.404
	LTE Band 12	10M	QPSK	25	0	Right Side	10	Full	23095	707.5	22.24	23.00	1.191	-0.03	0.286	0.341
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10	Full	23095	707.5	23.28	24.00	1.180	-0.01	0.098	0.116
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10	Full	23095	707.5	22.24	23.00	1.191	-0.09	0.090	0.107
	LTE Band 5	10M	QPSK	1	0	Front	10	Full	20525	836.5	23.20	24.00	1.202	-0.05	0.336	0.404
	LTE Band 5	10M	QPSK	25	0	Front	10	Full	20525	836.5	22.18	23.00	1.208	0.01	0.318	0.384
21	LTE Band 5	10M	QPSK	1	0	Back	10	Full	20525	836.5	23.20	24.00	1.202	-0.03	0.464	0.558
	LTE Band 5	10M	QPSK	25	0	Back	10	Full	20525	836.5	22.18	23.00	1.208	-0.02	0.424	0.512
	LTE Band 5	10M	QPSK	1	0	Left Side	10	Full	20525	836.5	23.20	24.00	1.202	-0.03	0.308	0.370
	LTE Band 5	10M	QPSK	25	0	Left Side	10	Full	20525	836.5	22.18	23.00	1.208	-0.06	0.254	0.307
	LTE Band 5	10M	QPSK	1	0	Right Side	10	Full	20525	836.5	23.20	24.00	1.202	0.08	0.418	0.503
	LTE Band 5	10M	QPSK	25	0	Right Side	10	Full	20525	836.5	22.18	23.00	1.208	0.07	0.341	0.412
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10	Full	20525	836.5	23.20	24.00	1.202	-0.06	0.190	0.228
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10	Full	20525	836.5	22.18	23.00	1.208	-0.08	0.172	0.208
	LTE Band 66	20M	QPSK	1	49	Front	10	Reduced	132322	1745	21.41	22.00	1.146	-0.03	0.450	0.515
	LTE Band 66	20M	QPSK	50	0	Front	10	Reduced	132322	1745	21.45	22.00	1.135	-0.08	0.435	0.494
	LTE Band 66	20M	QPSK	1	49	Back	10	Reduced	132322	1745	21.41	22.00	1.146	-0.04	0.586	0.671
22	LTE Band 66	20M	QPSK	50	0	Back	10	Reduced	132322	1745	21.45	22.00	1.135	-0.02	0.640	0.726
	LTE Band 66	20M	QPSK	1	49	Left Side	10	Reduced	132322	1745	21.41	22.00	1.146	0.02	0.120	0.137
	LTE Band 66	20M	QPSK	50	0	Left Side	10	Reduced	132322	1745	21.45	22.00	1.135	0.03	0.127	0.144
	LTE Band 66	20M	QPSK	1	49	Right Side	10	Reduced	132322	1745	21.41	22.00	1.146	0.03	0.260	0.298
	LTE Band 66	20M	QPSK	50	0	Right Side	10	Reduced	132322	1745	21.45	22.00	1.135	0.01	0.277	0.314
	LTE Band 66	20M	QPSK	1	49	Bottom Side	10	Reduced	132322	1745	21.41	22.00	1.146	-0.12	0.438	0.502
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10	Reduced	132322	1745	21.45	22.00	1.135	0.13	0.443	0.503



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	49	Front	10	Reduced	18900	1880	21.46	22.00	1.132	0.08	0.276	0.313
	LTE Band 2	20M	QPSK	50	0	Front	10	Reduced	18900	1880	21.54	22.00	1.112	-0.13	0.291	0.324
23	LTE Band 2	20M	QPSK	1	49	Back	10	Reduced	18900	1880	21.46	22.00	1.132	-0.01	0.835	<b>0.946</b>
	LTE Band 2	20M	QPSK	1	49	Back	10	Reduced	18700	1860	21.40	22.00	1.148	-0.1	0.766	0.879
	LTE Band 2	20M	QPSK	1	49	Back	10	Reduced	19100	1900	21.44	22.00	1.138	-0.06	0.766	0.871
	LTE Band 2	20M	QPSK	50	0	Back	10	Reduced	18900	1880	21.54	22.00	1.112	-0.09	0.730	0.812
	LTE Band 2	20M	QPSK	50	0	Back	10	Reduced	18700	1860	21.43	22.00	1.140	-0.04	0.717	0.818
	LTE Band 2	20M	QPSK	50	0	Back	10	Reduced	19100	1900	21.39	22.00	1.151	-0.06	0.681	0.784
	LTE Band 2	20M	QPSK	100	0	Back	10	Reduced	18900	1880	21.47	22.00	1.130	-0.09	0.685	0.774
	LTE Band 2	20M	QPSK	1	49	Left Side	10	Reduced	18900	1880	21.46	22.00	1.132	0.09	0.162	0.183
	LTE Band 2	20M	QPSK	50	0	Left Side	10	Reduced	18900	1880	21.54	22.00	1.112	0.03	0.183	0.203
	LTE Band 2	20M	QPSK	1	49	Right Side	10	Reduced	18900	1880	21.46	22.00	1.132	0.02	0.174	0.197
	LTE Band 2	20M	QPSK	50	0	Right Side	10	Reduced	18900	1880	21.54	22.00	1.112	0.03	0.143	0.159
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10	Reduced	18900	1880	21.46	22.00	1.132	-0.06	0.800	0.906
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10	Reduced	18700	1860	21.40	22.00	1.148	0.01	0.786	0.902
	LTE Band 2	20M	QPSK	1	49	Bottom Side	10	Reduced	19100	1900	21.44	22.00	1.138	0.09	0.721	0.820
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Reduced	18900	1880	21.54	22.00	1.112	-0.01	0.732	0.814
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Reduced	18700	1860	21.43	22.00	1.140	0.07	0.691	0.788
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10	Reduced	19100	1900	21.39	22.00	1.151	0.11	0.725	0.834
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10	Reduced	18900	1880	21.47	22.00	1.130	0.12	0.750	0.847

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Power Class	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Front	10	Reduced	3	39750	2506	16.67	18.00	1.358	62.9	1.006	0.02	0.054	0.074
	LTE Band 41	20M	QPSK	50	50	Front	10	Reduced	3	39750	2506	16.54	18.00	1.400	62.9	1.006	0.06	0.054	0.076
	LTE Band 41	20M	QPSK	1	49	Back	10	Reduced	3	39750	2506	16.67	18.00	1.358	62.9	1.006	0.08	0.313	0.428
24	LTE Band 41	20M	QPSK	1	49	Back	10	Reduced	2	39750	2506	19.94	21.00	1.276	42.9	1.009	0.04	0.465	<b>0.599</b>
	LTE Band 41	20M	QPSK	50	50	Back	10	Reduced	3	39750	2506	16.54	18.00	1.400	62.9	1.006	0.04	0.213	0.300
	LTE Band 41	20M	QPSK	1	49	Left Side	10	Reduced	3	39750	2506	16.67	18.00	1.358	62.9	1.006	0.03	0.003	0.004
	LTE Band 41	20M	QPSK	50	50	Left Side	10	Reduced	3	39750	2506	16.54	18.00	1.400	62.9	1.006	-0.05	0.004	0.006
	LTE Band 41	20M	QPSK	1	49	Right Side	10	Reduced	3	39750	2506	16.67	18.00	1.358	62.9	1.006	0.06	0.016	0.022
	LTE Band 41	20M	QPSK	50	50	Right Side	10	Reduced	3	39750	2506	16.54	18.00	1.400	62.9	1.006	0.15	0.016	0.023
	LTE Band 41	20M	QPSK	1	49	Bottom Side	10	Reduced	3	39750	2506	16.67	18.00	1.358	62.9	1.006	-0.04	0.134	0.183
	LTE Band 41	20M	QPSK	50	50	Bottom Side	10	Reduced	3	39750	2506	16.54	18.00	1.400	62.9	1.006	0.08	0.162	0.228

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHZ	802.11b 1Mbps	Front	10	6	2437	17.68	18.50	1.208	99.31	1.007	-0.05	0.260	0.316
25	WLAN2.4GHZ	802.11b 1Mbps	Back	10	6	2437	17.68	18.50	1.208	99.31	1.007	-0.02	0.379	<b>0.461</b>
	WLAN2.4GHZ	802.11b 1Mbps	Right Side	10	6	2437	17.68	18.50	1.208	99.31	1.007	0.02	0.087	0.105
	WLAN2.4GHZ	802.11b 1Mbps	Top Side	10	6	2437	17.68	18.50	1.208	99.31	1.007	0.04	0.356	0.433



**15.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	15	Full	189	836.4	29.45	30.00	1.135	-0.01	0.645	0.732
	GSM850	GPRS 4 Tx slots	Back	15	Full	189	836.4	29.45	30.00	1.135	0.02	0.821	0.932
26	GSM850	GPRS 4 Tx slots	Back	15	Full	128	824.2	29.26	30.00	1.186	0.08	0.817	<b>0.969</b>
	GSM850	GPRS 4 Tx slots	Back	15	Full	251	848.8	29.44	30.00	1.138	-0.01	0.766	0.871
	GSM1900	GPRS 4 Tx slots	Front	15	Full	810	1909.8	24.45	25.00	1.135	-0.04	0.472	0.536
27	GSM1900	GPRS 4 Tx slots	Back	15	Full	810	1909.8	24.45	25.00	1.135	-0.01	0.870	<b>0.987</b>
	GSM1900	GPRS 4 Tx slots	Back	15	Full	512	1850.2	24.43	25.00	1.140	-0.08	0.642	0.732
	GSM1900	GPRS 4 Tx slots	Back	15	Full	661	1880	24.32	25.00	1.169	-0.05	0.764	0.893

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	15	Full	4182	836.4	23.51	24.50	1.256	-0.06	0.373	0.468
28	WCDMA Band V	RMC 12.2Kbps	Back	15	Full	4182	836.4	23.51	24.50	1.256	-0.1	0.424	<b>0.533</b>
	WCDMA Band IV	RMC 12.2Kbps	Front	15	Full	1413	1732.6	23.39	24.50	1.291	-0.14	0.500	0.646
29	WCDMA Band IV	RMC 12.2Kbps	Back	15	Full	1413	1732.6	23.39	24.50	1.291	-0.02	0.619	<b>0.799</b>
	WCDMA Band II	RMC 12.2Kbps	Front	15	Full	9400	1880	23.46	24.50	1.271	-0.04	0.324	0.412
30	WCDMA Band II	RMC 12.2Kbps	Back	15	Full	9400	1880	23.46	24.50	1.271	0.01	0.596	<b>0.757</b>

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 71	20M	QPSK	1	49	Front	15	Full	133322	683	23.48	24.00	1.127	0.01	0.224	0.252
	LTE Band 71	20M	QPSK	50	0	Front	15	Full	133322	683	22.45	23.00	1.135	0.02	0.174	0.197
31	LTE Band 71	20M	QPSK	1	49	Back	15	Full	133322	683	23.48	24.00	1.127	0	0.370	<b>0.417</b>
	LTE Band 71	20M	QPSK	50	0	Back	15	Full	133322	683	22.45	23.00	1.135	-0.03	0.298	0.338
	LTE Band 12	10M	QPSK	1	0	Front	15	Full	23095	707.5	23.28	24.00	1.180	-0.01	0.258	0.305
	LTE Band 12	10M	QPSK	25	0	Front	15	Full	23095	707.5	22.24	23.00	1.191	0.05	0.225	0.268
32	LTE Band 12	10M	QPSK	1	0	Back	15	Full	23095	707.5	23.28	24.00	1.180	-0.11	0.445	<b>0.525</b>
	LTE Band 12	10M	QPSK	25	0	Back	15	Full	23095	707.5	22.24	23.00	1.191	-0.06	0.313	0.373
	LTE Band 5	10M	QPSK	1	0	Front	15	Full	20525	836.5	23.20	24.00	1.202	0.05	0.323	0.388
	LTE Band 5	10M	QPSK	25	0	Front	15	Full	20525	836.5	22.18	23.00	1.208	0.07	0.278	0.336
33	LTE Band 5	10M	QPSK	1	0	Back	15	Full	20525	836.5	23.20	24.00	1.202	-0.03	0.385	<b>0.463</b>
	LTE Band 5	10M	QPSK	25	0	Back	15	Full	20525	836.5	22.18	23.00	1.208	0.01	0.319	0.385
	LTE Band 66	20M	QPSK	1	0	Front	15	Full	132322	1745	22.95	24.00	1.274	-0.02	0.411	0.523
	LTE Band 66	20M	QPSK	50	0	Front	15	Full	132322	1745	21.78	23.00	1.324	-0.15	0.355	0.470
34	LTE Band 66	20M	QPSK	1	0	Back	15	Full	132322	1745	22.95	24.00	1.274	-0.14	0.506	<b>0.644</b>
	LTE Band 66	20M	QPSK	50	0	Back	15	Full	132322	1745	21.78	23.00	1.324	-0.06	0.442	0.585
	LTE Band 2	20M	QPSK	1	0	Front	15	Full	18900	1880	23.12	24.00	1.225	-0.08	0.271	0.332
	LTE Band 2	20M	QPSK	50	0	Front	15	Full	18900	1880	22.26	23.00	1.186	-0.06	0.234	0.277
35	LTE Band 2	20M	QPSK	1	0	Back	15	Full	18900	1880	23.12	24.00	1.225	-0.01	0.498	<b>0.610</b>
	LTE Band 2	20M	QPSK	50	0	Back	15	Full	18900	1880	22.26	23.00	1.186	-0.02	0.436	0.517



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Power Class	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	49	Front	15	Full	3	39750	2506	21.86	22.00	1.033	62.9	1.006	0.05	0.157	0.163
	LTE Band 41	20M	QPSK	50	50	Front	15	Full	3	39750	2506	20.78	21.00	1.052	62.9	1.006	0.03	0.126	0.133
	LTE Band 41	20M	QPSK	1	49	Back	15	Full	3	39750	2506	21.86	22.00	1.033	62.9	1.006	0.02	0.390	0.405
36	LTE Band 41	20M	QPSK	1	49	Back	15	Full	2	39750	2506	24.20	25.00	1.202	42.9	1.009	0.09	0.486	0.590
	LTE Band 41	20M	QPSK	50	50	Back	15	Full	3	39750	2506	20.78	21.00	1.052	62.9	1.006	0.04	0.313	0.331

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15	Full	6	2437	17.68	18.50	1.208	99.31	1.007	-0.13	0.139	0.169
37	WLAN2.4GHz	802.11b 1Mbps	Back	15	Full	6	2437	17.68	18.50	1.208	99.31	1.007	0.09	0.186	0.226



15.4 TDD LTE Band 41(HPUE) Linearity Data Analysis

Table with 3 columns: Parameter, LTE Band 41 (Power Class 3), and LTE Band 41 (Power Class 2). Rows include Maximum Tune up Power, Reported 1g SAR, Duty Cycle, Frame Averaged, Linearity SAR, and % deviation from expected linearity.

Table with 3 columns: Parameter, LTE Band 41 (Power Class 3), and LTE Band 41 (Power Class 2). Rows include Maximum Tune up Power, Reported 1g SAR, Duty Cycle, Frame Averaged, Linearity SAR, and % deviation from expected linearity.

Table with 3 columns: Parameter, LTE Band 41 (Power Class 3), and LTE Band 41 (Power Class 2). Rows include Maximum Tune up Power, Reported 1g SAR, Duty Cycle, Frame Averaged, Linearity SAR, and % deviation from expected linearity.

General Note:

- 1. The device can adjust uplink/downlink configuration automatically according to the transmitting power class level for LTE band 41.
2. According to TCB Workshop May 2017, Rel. 14 has introduced HPUE Power Class 2 for Band 41. HPUE Power Class 2 does not support uplink downlink configurations 0 and 6.
3. Power class 3 is expected to be the dominant use configuration; therefore, SAR should be tested as normally required.
4. Power class 2 is tested using the highest SAR test configuration in power class 3 of each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in power class 2.
5. Separate SAR testing for Power Class 2 is not required when - the reported SAR vs. output power can be linearly scaled with < 10% - discrepancy between power classes and all reported 1g SAR are < 1.4 W/kg (The same procedures should be adapted for measurements according to extremity limits by applying a factor of 2.5 for extremity exposure.)

**15.5 Repeated SAR Measurement**

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Left Cheek	0	Full	6	2437	17.68	18.50	1.208	99.31	1.007	-0.13	0.926	1	1.126
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Left Cheek	0	Full	6	2437	17.68	18.50	1.208	99.31	1.007	0.11	0.911	1.016	1.108
1st	GSM850	-	-	-	-	GPRS 4 Tx slots	Back	10	Full	251	848.8	29.44	30.00	1.138	-	-	0.04	0.935	1	1.064
2nd	GSM850	-	-	-	-	GPRS 4 Tx slots	Back	10	Full	251	848.8	29.44	30.00	1.138	-	-	0.04	0.921	1.015	1.048
1st	GSM1900	-	-	-	-	GPRS 4 Tx slots	Back	10	Full	810	1909.8	24.45	25.00	1.135	-	-	-0.02	0.961	1	1.091
2nd	GSM1900	-	-	-	-	GPRS 4 Tx slots	Back	10	Full	810	1909.8	24.45	25.00	1.135	-	-	0.09	0.953	1.008	1.082

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

## 16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset		
		Head	Body-worn	Hotspot
1.	GSM Voice + WLAN2.4GHz	Yes	Yes	
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes
5.	GSM Voice + Bluetooth	Yes	Yes	
6.	GPRS/EDGE + Bluetooth	Yes	Yes	Yes
7.	WCDMA+ Bluetooth	Yes	Yes	Yes
8.	LTE + Bluetooth	Yes	Yes	Yes

**General Note:**

- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation < 1.6W/kg.
  - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - The SPLSR calculated results please refer to section 16.4.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Hotspot	Body worn
	Test separation	10 mm	15 mm
10.00 dBm	Estimated SAR (W/kg)	0.210 W/kg	0.140 W/kg



16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2		1+3 Summed 1g SAR (W/kg)	
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)	Summed 1g SAR (W/kg)	SPLSR		Case No
GSM	GSM850	Right Cheek	0.760	0.787	0.085	1.55			0.85
		Right Tilted	0.490	0.748	0.079	1.24			0.57
		Left Cheek	0.711	1.162	0.112	1.87	0.04	#01	0.82
		Left Tilted	0.476	0.957	0.096	1.43			0.57
	GSM1900	Right Cheek	0.379	0.787	0.085	1.17			0.46
		Right Tilted	0.134	0.748	0.079	0.88			0.21
		Left Cheek	0.267	1.162	0.112	1.43			0.38
		Left Tilted	0.205	0.957	0.096	1.16			0.30
WCDMA	WCDMA II	Right Cheek	0.391	0.787	0.085	1.18			0.48
		Right Tilted	0.137	0.748	0.079	0.89			0.22
		Left Cheek	0.272	1.162	0.112	1.43			0.38
		Left Tilted	0.170	0.957	0.096	1.13			0.27
	WCDMA IV	Right Cheek	0.670	0.787	0.085	1.46			0.76
		Right Tilted	0.258	0.748	0.079	1.01			0.34
		Left Cheek	0.461	1.162	0.112	1.62	0.02	#02	0.57
		Left Tilted	0.226	0.957	0.096	1.18			0.32
	WCDMA V	Right Cheek	0.467	0.787	0.085	1.25			0.55
		Right Tilted	0.363	0.748	0.079	1.11			0.44
		Left Cheek	0.462	1.162	0.112	1.62	0.03	#03	0.57
		Left Tilted	0.299	0.957	0.096	1.26			0.40
LTE	LTE Band 2	Right Cheek	0.399	0.787	0.085	1.19			0.48
		Right Tilted	0.143	0.748	0.079	0.89			0.22
		Left Cheek	0.255	1.162	0.112	1.42			0.37
		Left Tilted	0.169	0.957	0.096	1.13			0.27
	LTE Band 5	Right Cheek	0.469	0.787	0.085	1.26			0.55
		Right Tilted	0.310	0.748	0.079	1.06			0.39
		Left Cheek	0.458	1.162	0.112	1.62	0.03	#04	0.57
		Left Tilted	0.279	0.957	0.096	1.24			0.38
	LTE Band 12	Right Cheek	0.353	0.787	0.085	1.14			0.44
		Right Tilted	0.243	0.748	0.079	0.99			0.32
		Left Cheek	0.342	1.162	0.112	1.50			0.45
		Left Tilted	0.247	0.957	0.096	1.20			0.34
	LTE Band 66	Right Cheek	0.629	0.787	0.085	1.42			0.71
		Right Tilted	0.250	0.748	0.079	1.00			0.33
		Left Cheek	0.397	1.162	0.112	1.56			0.51
		Left Tilted	0.204	0.957	0.096	1.16			0.30
	LTE Band 71	Right Cheek	0.329	0.787	0.085	1.12			0.41
		Right Tilted	0.198	0.748	0.079	0.95			0.28
		Left Cheek	0.289	1.162	0.112	1.45			0.40
		Left Tilted	0.188	0.957	0.096	1.15			0.28
	LTE Band 41	Right Cheek	0.063	0.787	0.085	0.85			0.15
		Right Tilted	0.026	0.748	0.079	0.77			0.11
		Left Cheek	0.027	1.162	0.112	1.19			0.14
		Left Tilted	0.020	0.957	0.096	0.98			0.12

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	
			WWAN	2.4GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.714	0.316	0.210	1.03	0.92	
		Back	1.064	0.461	0.210	1.53	1.27	
		Left side	0.585			0.59	0.59	
		Right side	0.957	0.105	0.210	1.06	1.17	
		Top side		0.433	0.210	0.43	0.21	
		Bottom side	0.379			0.38	0.38	
	GSM1900	Front	0.519	0.316	0.210	0.84	0.73	
		Back	1.091	0.461	0.210	1.55	1.30	
		Left side	0.257			0.26	0.26	
		Right side	0.271	0.105	0.210	0.38	0.48	
		Top side		0.433	0.210	0.43	0.21	
		Bottom side	0.922			0.92	0.92	
	WCDMA	WCDMA II	Front	0.344	0.316	0.210	0.66	0.55
			Back	0.731	0.461	0.210	1.19	0.94
Left side			0.154			0.15	0.15	
Right side			0.158	0.105	0.210	0.26	0.37	
Top side				0.433	0.210	0.43	0.21	
Bottom side			0.704			0.70	0.70	
WCDMA IV		Front	0.559	0.316	0.210	0.88	0.77	
		Back	0.778	0.461	0.210	1.24	0.99	
		Left side	0.176			0.18	0.18	
		Right side	0.328	0.105	0.210	0.43	0.54	
		Top side		0.433	0.210	0.43	0.21	
		Bottom side	0.550			0.55	0.55	
WCDMA V		Front	0.461	0.316	0.210	0.78	0.67	
		Back	0.680	0.461	0.210	1.14	0.89	
		Left side	0.369			0.37	0.37	
		Right side	0.534	0.105	0.210	0.64	0.74	
		Top side		0.433	0.210	0.43	0.21	
		Bottom side	0.268			0.27	0.27	



WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth Estimated 1g SAR (W/kg)		
LTE	LTE Band 2	Front	0.324	0.316	0.210	0.64	0.53
		Back	0.946	0.461	0.210	1.41	1.16
		Left side	0.203			0.20	0.20
		Right side	0.197	0.105	0.210	0.30	0.41
		Top side		0.433	0.210	0.43	0.21
		Bottom side	0.906			0.91	0.91
	LTE Band 5	Front	0.404	0.316	0.210	0.72	0.61
		Back	0.558	0.461	0.210	1.02	0.77
		Left side	0.370			0.37	0.37
		Right side	0.503	0.105	0.210	0.61	0.71
		Top side		0.433	0.210	0.43	0.21
		Bottom side	0.228			0.23	0.23
	LTE Band 12	Front	0.319	0.316	0.210	0.64	0.53
		Back	0.537	0.461	0.210	1.00	0.75
		Left side	0.258			0.26	0.26
		Right side	0.404	0.105	0.210	0.51	0.61
		Top side		0.433	0.210	0.43	0.21
		Bottom side	0.116			0.12	0.12
	LTE Band 66	Front	0.515	0.316	0.210	0.83	0.73
		Back	0.726	0.461	0.210	1.19	0.94
		Left side	0.144			0.14	0.14
		Right side	0.314	0.105	0.210	0.42	0.52
		Top side		0.433	0.210	0.43	0.21
		Bottom side	0.503			0.50	0.50
	LTE Band 71	Front	0.309	0.316	0.210	0.63	0.52
		Back	0.519	0.461	0.210	0.98	0.73
		Left side	0.202			0.20	0.20
		Right side	0.369	0.105	0.210	0.47	0.58
		Top side		0.433	0.210	0.43	0.21
		Bottom side	0.133			0.13	0.13
LTE Band 41	Front	0.076	0.316	0.210	0.39	0.29	
	Back	0.599	0.461	0.210	1.06	0.81	
	Left side	0.006			0.01	0.01	
	Right side	0.023	0.105	0.210	0.13	0.23	
	Top side		0.433	0.210	0.43	0.21	
	Bottom side	0.228			0.23	0.23	



**16.3 Body-Worn Accessory Exposure Conditions**


WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)		
GSM	GSM850	Front	0.732	0.169	0.140	0.90	0.87
		Back	0.969	0.226	0.140	1.20	1.11
	GSM1900	Front	0.536	0.169	0.140	0.71	0.68
		Back	0.987	0.226	0.140	1.21	1.13
WCDMA	WCDMA II	Front	0.412	0.169	0.140	0.58	0.55
		Back	0.757	0.226	0.140	0.98	0.90
	WCDMA IV	Front	0.646	0.169	0.140	0.82	0.79
		Back	0.799	0.226	0.140	1.03	0.94
	WCDMA V	Front	0.468	0.169	0.140	0.64	0.61
		Back	0.533	0.226	0.140	0.76	0.67
LTE	LTE Band 2	Front	0.332	0.169	0.140	0.50	0.47
		Back	0.610	0.226	0.140	0.84	0.75
	LTE Band 5	Front	0.388	0.169	0.140	0.56	0.53
		Back	0.463	0.226	0.140	0.69	0.60
	LTE Band 12	Front	0.305	0.169	0.140	0.47	0.45
		Back	0.525	0.226	0.140	0.75	0.67
	LTE Band 66	Front	0.523	0.169	0.140	0.69	0.66
		Back	0.644	0.226	0.140	0.87	0.78
	LTE Band 71	Front	0.252	0.169	0.140	0.42	0.39
		Back	0.417	0.226	0.140	0.64	0.56
	LTE Band 41	Front	0.163	0.169	0.140	0.33	0.30
		Back	0.590	0.226	0.140	0.82	0.73

**16.4 SPLSR Evaluation and Analysis**


**General Note:**

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2.  $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$  for 1g SAR, simultaneously transmission SAR measurement is not necessary.


Case #01	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Left Cheek	0.711	0	44.34	-38.11	-3.23	68.6	1.87	0.04	Not required
	WLAN2.4GHz		1.162	0	-1.07	13.22	-1.12				

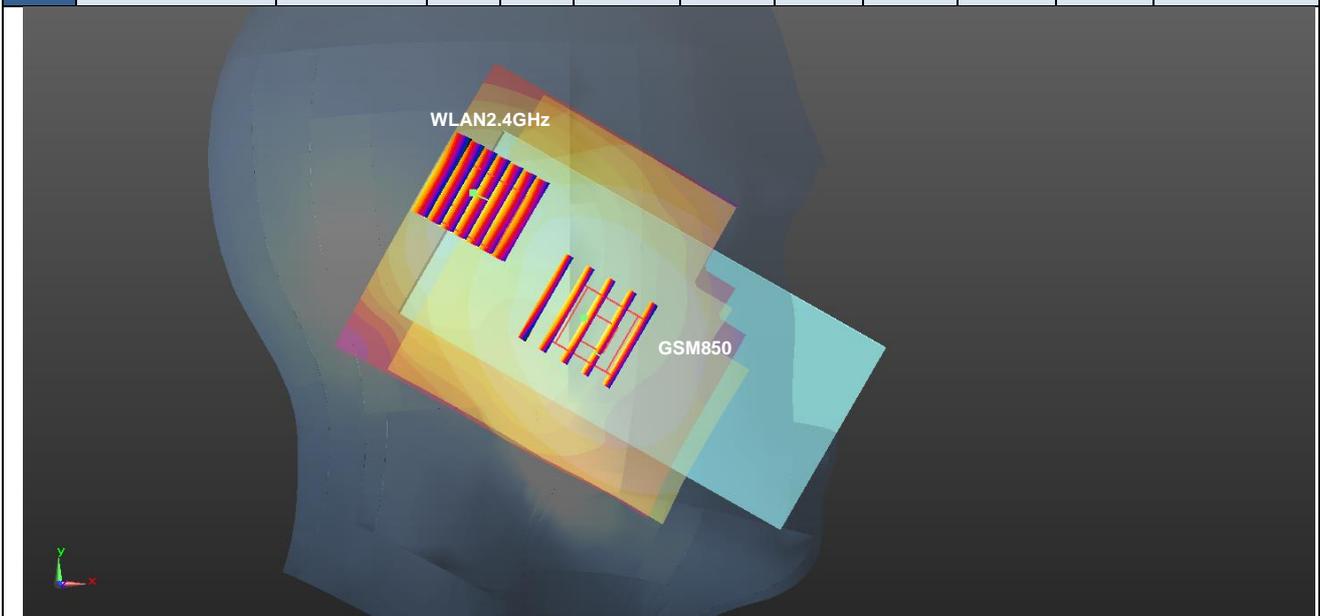


Case #02	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band IV	Left Cheek	0.461	0	55.43	-63.57	0.1	95.3	1.62	0.02	Not required
	WLAN2.4GHz		1.162	0	-1.07	13.22	-1.12				

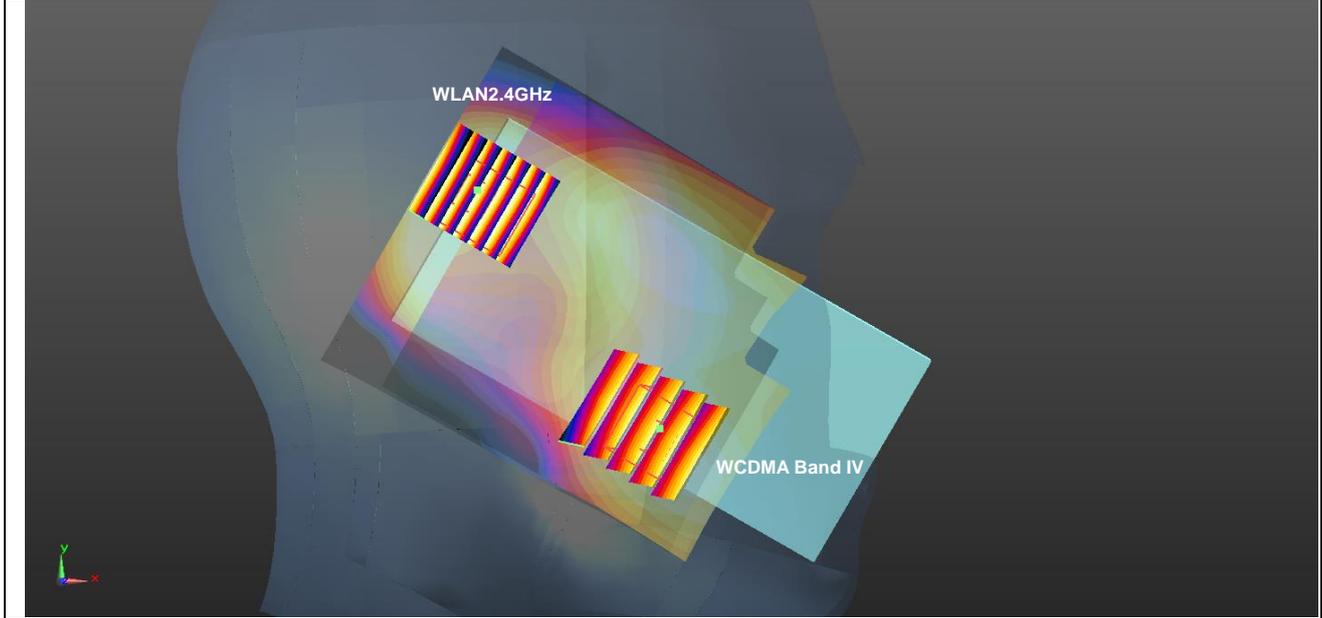

Case #03	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Left Cheek	0.462	0	43.38	-39.54	-3.21	69.0	1.62	0.03	Not required
	WLAN2.4GHz		1.162	0	-1.07	13.22	-1.12				

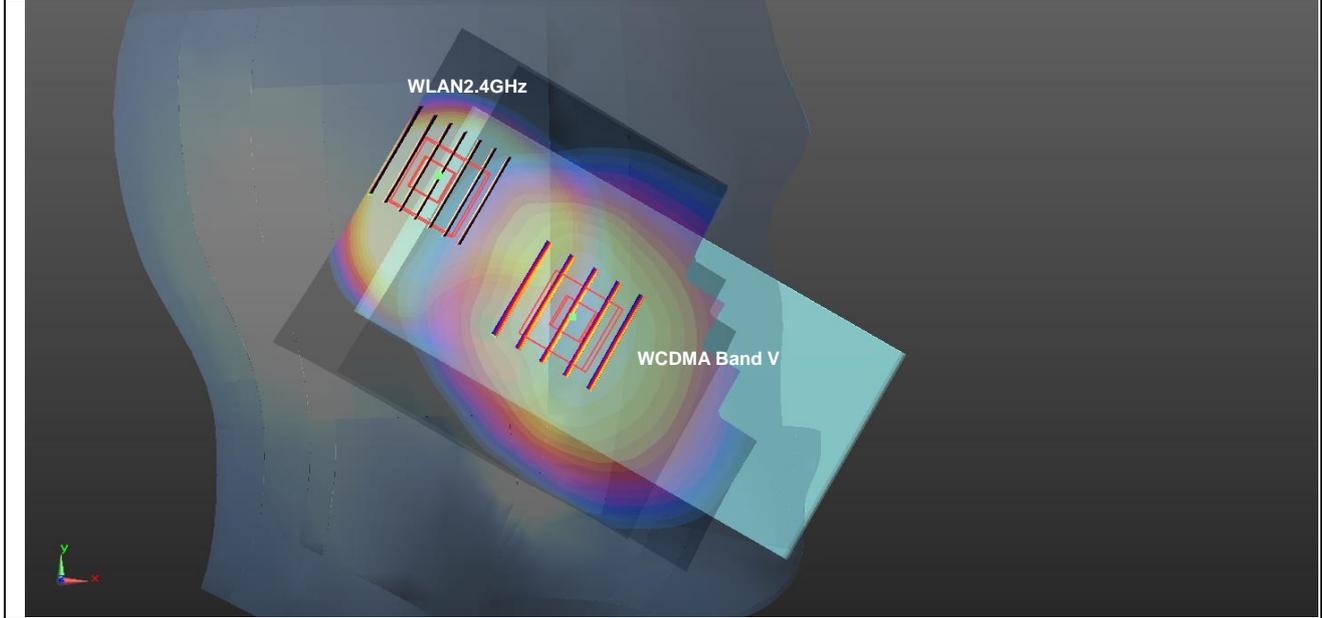

Case #04	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Left Cheek	0.458	0	44.77	-40.34	-3.09	70.5	1.62	0.03	Not required
	WLAN2.4GHz		1.162	0	-1.07	13.22	-1.12				

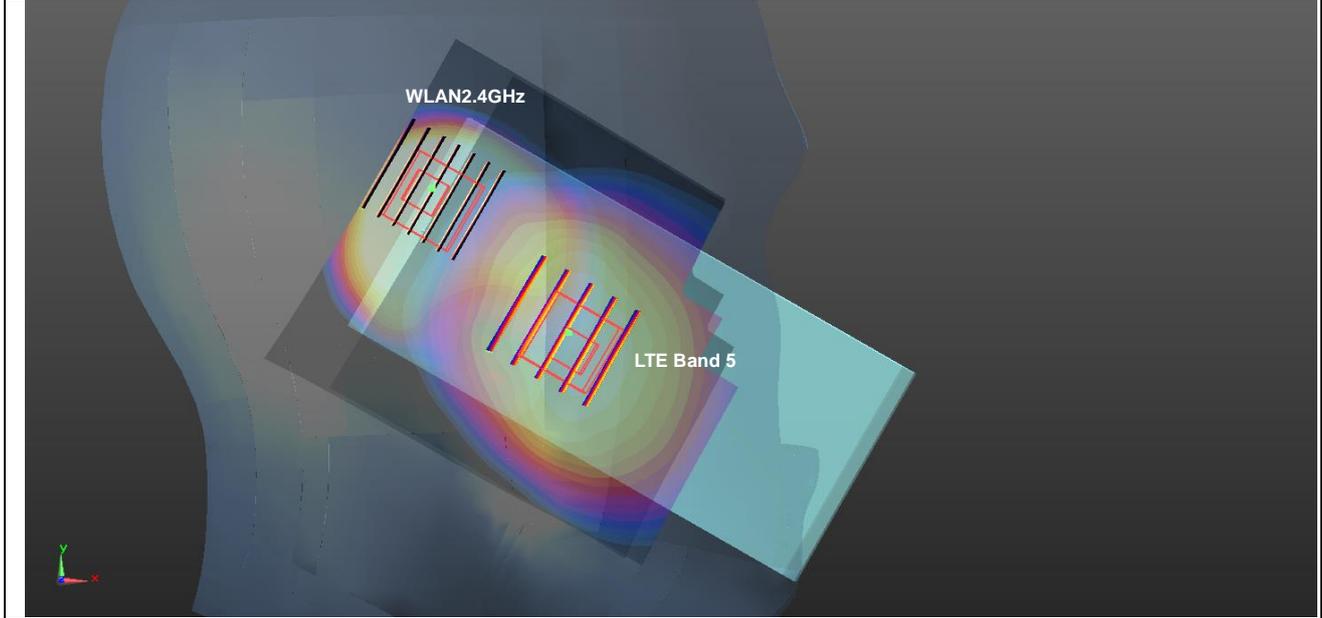

**Test Engineer :** Nick Hu, Yuan Zhao, Jiaxing Chang, Yuankai Kong



## **17. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.

-----THE END-----



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

### System Check\_Head\_750MHz

**DUT: D750V3 - SN:1087**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.912 \text{ S/m}$ ;  $\epsilon_r = 42.171$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.77, 9.77, 9.77); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $2.50 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $48.60 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$   
Peak SAR (extrapolated) =  $2.58 \text{ W/kg}$   
**SAR(1 g) =  $2.11 \text{ W/kg}$ ; SAR(10 g) =  $1.41 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $2.38 \text{ W/kg}$

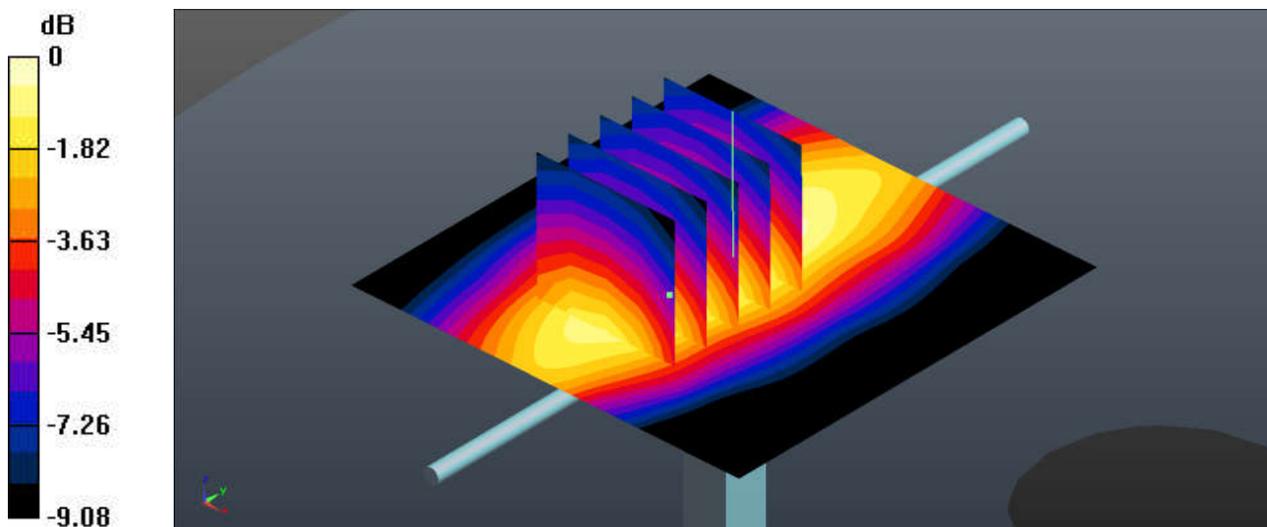

0 dB =  $2.50 \text{ W/kg} = 3.98 \text{ dBW/kg}$

### System Check\_Head\_835MHz

**DUT: D835V2 - SN:4d151**

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.924 \text{ S/m}$ ;  $\epsilon_r = 41.442$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.9 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $2.98 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $50.10 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$

Peak SAR (extrapolated) =  $3.08 \text{ W/kg}$

**SAR(1 g) =  $2.48 \text{ W/kg}$ ; SAR(10 g) =  $1.62 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.83 \text{ W/kg}$

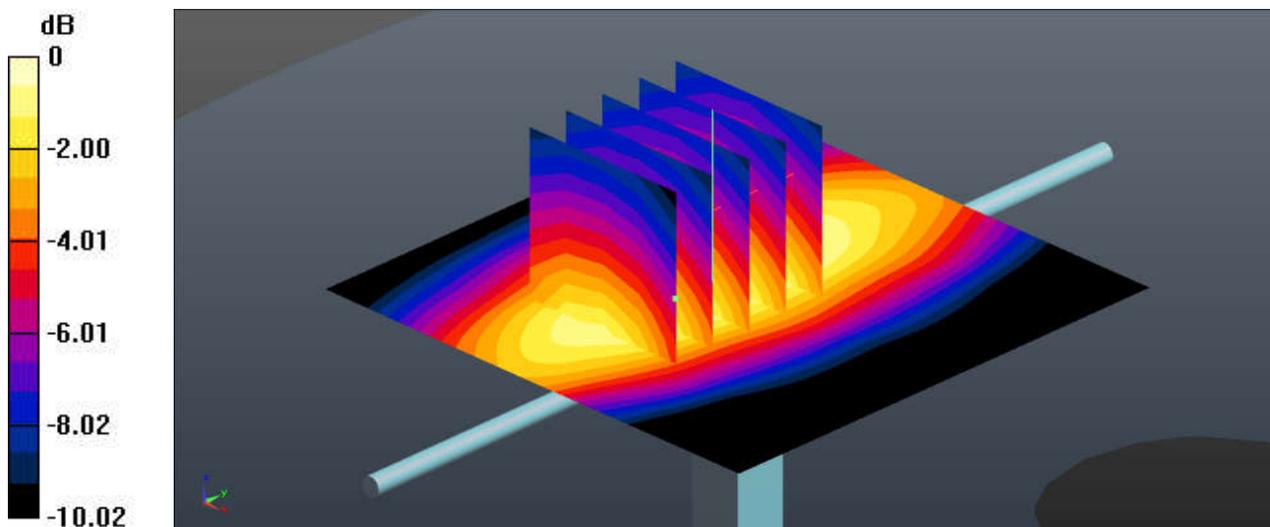

0 dB =  $2.98 \text{ W/kg} = 4.74 \text{ dBW/kg}$

### System Check\_Head\_1750MHz

**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.382$  S/m;  $\epsilon_r = 39.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.46, 8.46, 8.46); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.4 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.18 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.41 W/kg; SAR(10 g) = 4.99 W/kg**

Maximum value of SAR (measured) = 13.2 W/kg

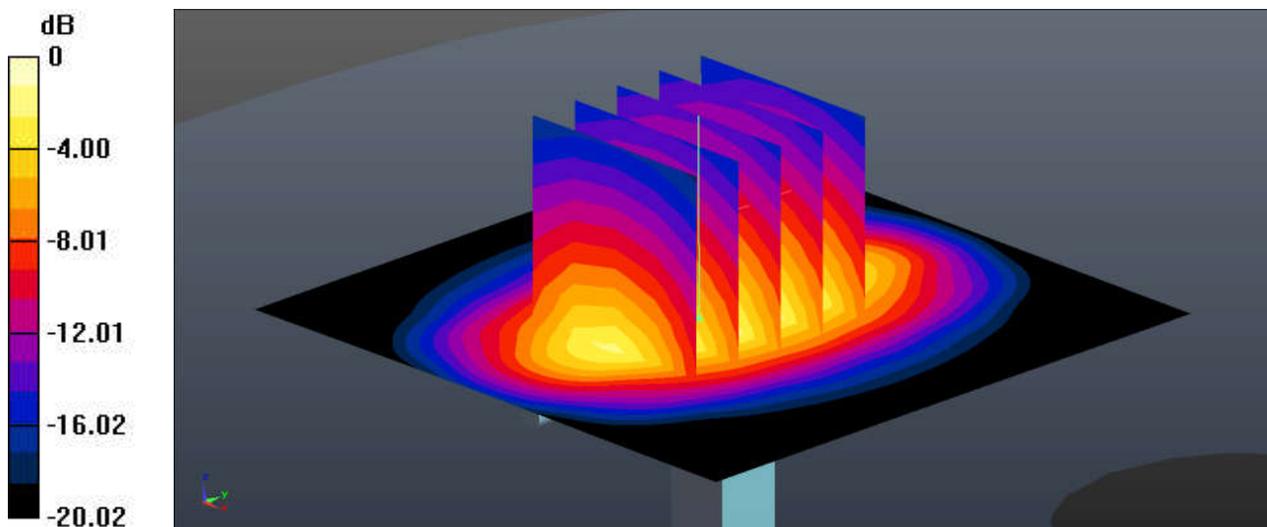

0 dB = 13.4 W/kg = 11.27 dBW/kg

### System Check\_Head\_1900MHz

**DUT: D1900V2 - SN:5d170**


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.398 \text{ S/m}$ ;  $\epsilon_r = 41.444$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.1, 8.1, 8.1); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $13.0 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $81.37 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$   
Peak SAR (extrapolated) =  $14.9 \text{ W/kg}$   
**SAR(1 g) =  $9.63 \text{ W/kg}$ ; SAR(10 g) =  $4.91 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $12.6 \text{ W/kg}$

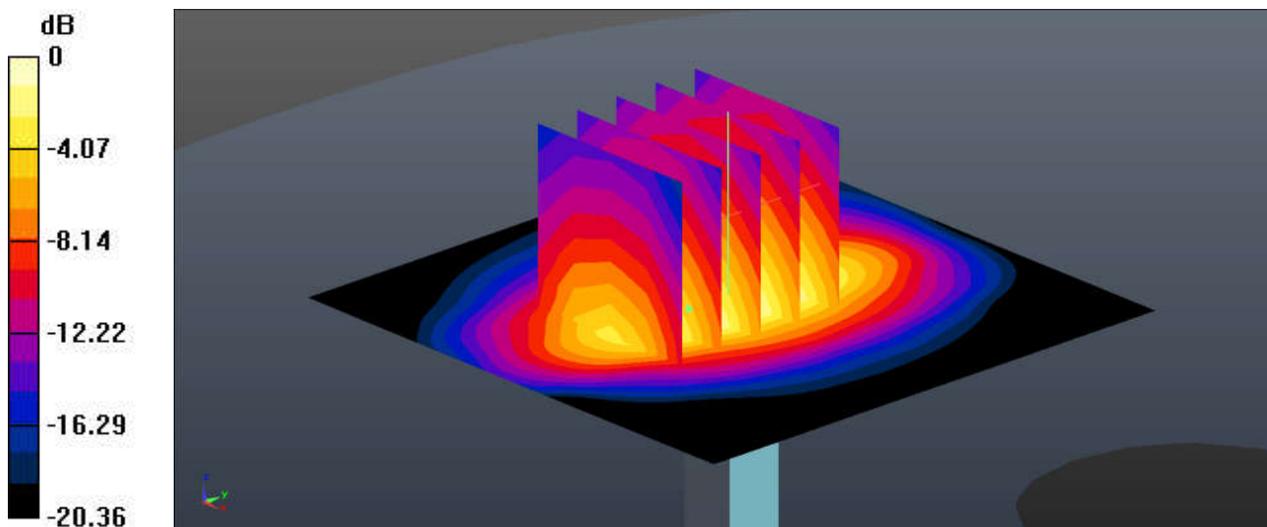

0 dB =  $13.0 \text{ W/kg} = 11.14 \text{ dBW/kg}$

### System Check\_Head\_2450MHz

**DUT: D2450V2 - SN:908**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.792$  S/m;  $\epsilon_r = 40.803$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.5, 7.5, 7.5); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 22.7 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.18 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.6 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.19 W/kg**

Maximum value of SAR (measured) = 22.4 W/kg

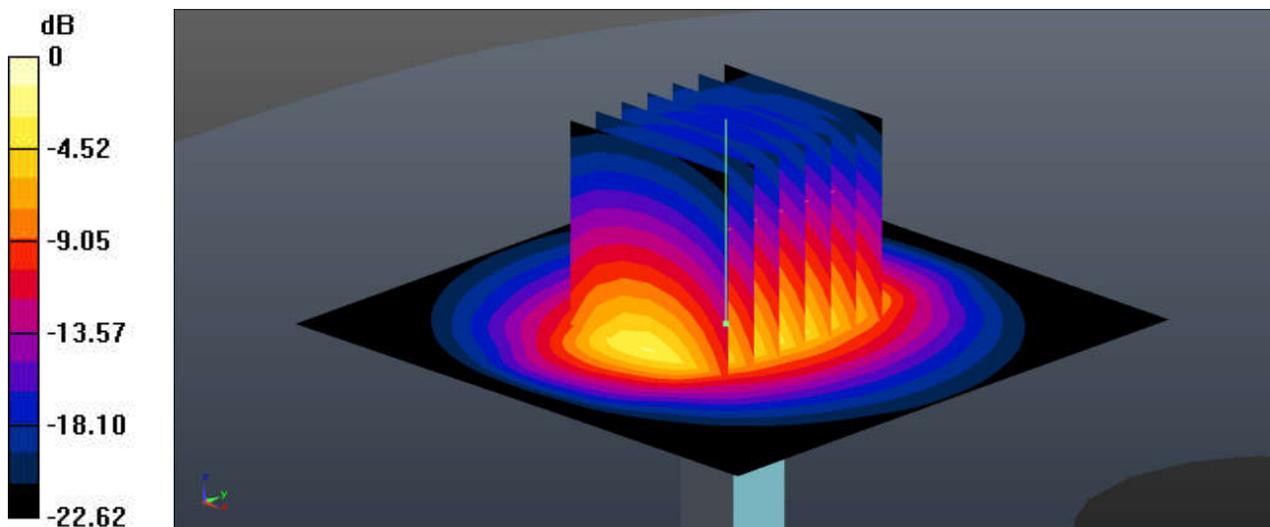

0 dB = 22.7 W/kg = 13.56 dBW/kg

### System Check\_Head\_2600MHz

**DUT: D2600V2 - SN:1078**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.962$  S/m;  $\epsilon_r = 40.249$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.31, 7.31, 7.31); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 25.7 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.6 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 32.5 W/kg

**SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.21 W/kg**

Maximum value of SAR (measured) = 25.2 W/kg

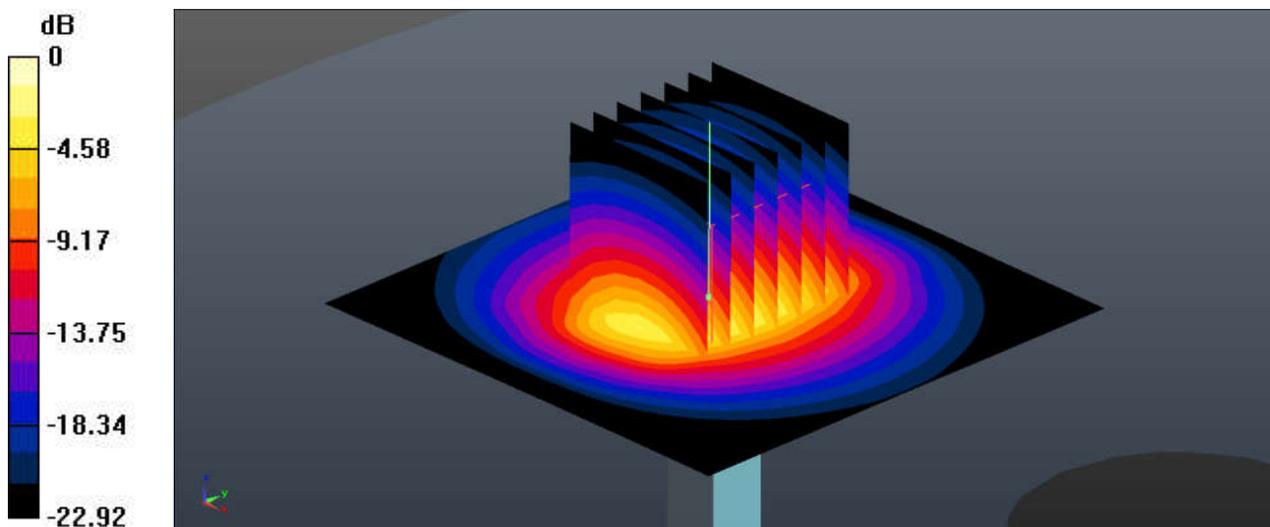

0 dB = 25.7 W/kg = 14.10 dBW/kg



## **Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

**01\_GSM850\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch189**

Communication System: UID 0, GSM850-4UP (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
 Medium: HSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.925$  S/m;  $\epsilon_r = 41.431$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch189/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.788 W/kg


**Ch189/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.891 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.855 W/kg

**SAR(1 g) = 0.670 W/kg; SAR(10 g) = 0.510 W/kg**

Maximum value of SAR (measured) = 0.792 W/kg

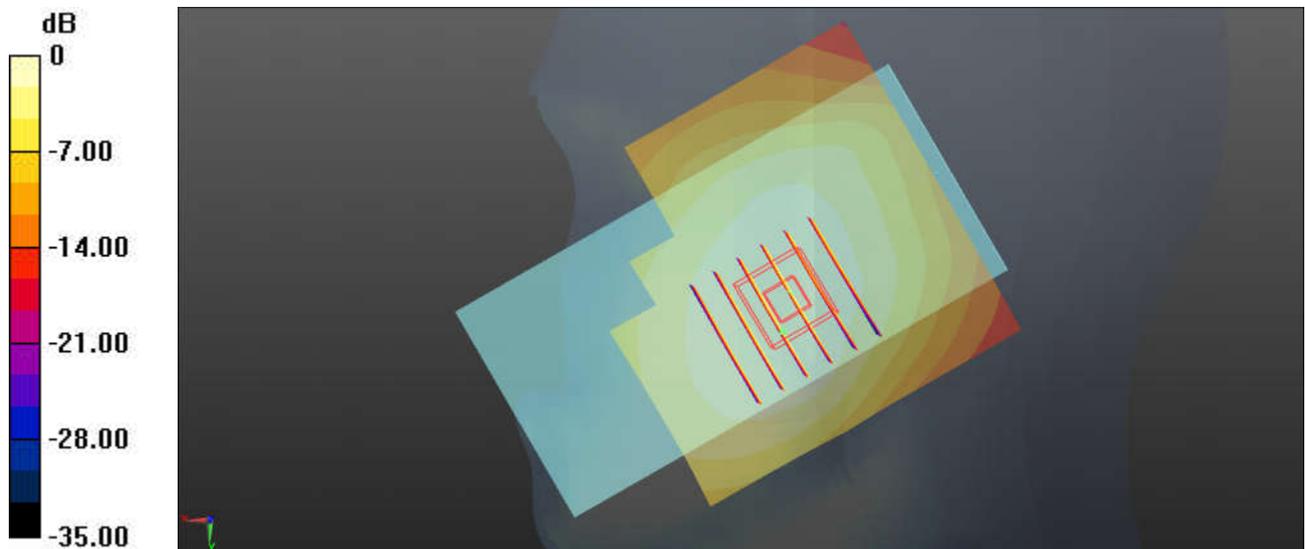

0 dB = 0.788 W/kg = -1.03 dBW/kg

**02\_GSM1900\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch810**

Communication System: UID 0, PCS-4UP (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08  
 Medium: HSL\_1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.408$  S/m;  $\epsilon_r = 41.405$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.1, 8.1, 8.1); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch810/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.412 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.749 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.531 W/kg

**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.198 W/kg**

Maximum value of SAR (measured) = 0.390 W/kg

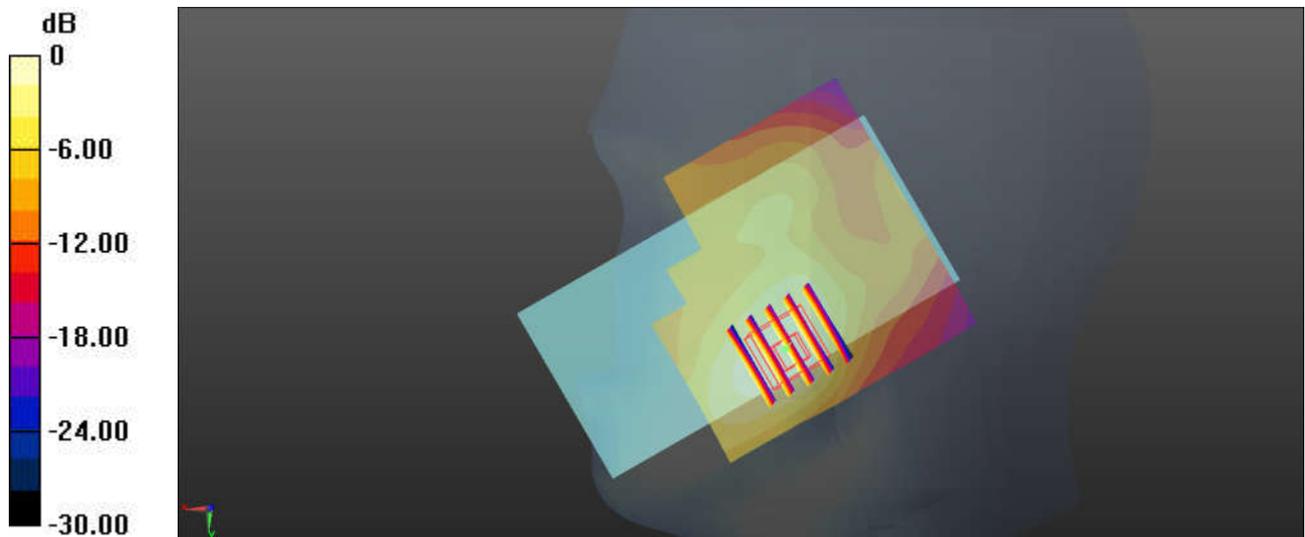

0 dB = 0.412 W/kg = -3.85 dBW/kg

**03\_WCDMA Band V\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch4182**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
 Medium: HSL\_850 Medium parameters used:  $f = 836.4 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 41.431$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch4182/Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.406 \text{ W/kg}$


**Ch4182/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.458 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$

Peak SAR (extrapolated) =  $0.485 \text{ W/kg}$

**SAR(1 g) =  $0.372 \text{ W/kg}$ ; SAR(10 g) =  $0.281 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.444 \text{ W/kg}$

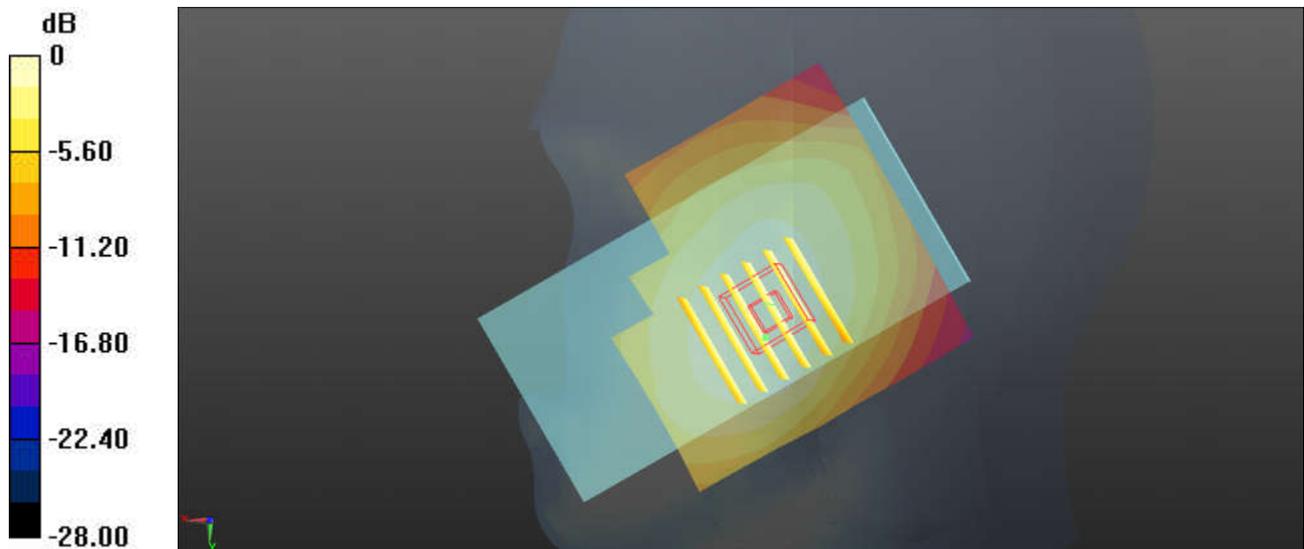

0 dB =  $0.406 \text{ W/kg} = -3.91 \text{ dBW/kg}$

**04\_WCDMA Band IV\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch1413**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 39.777$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.46, 8.46, 8.46); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch1413/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.723 W/kg


**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.31 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.827 W/kg

**SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.323 W/kg**

Maximum value of SAR (measured) = 0.698 W/kg

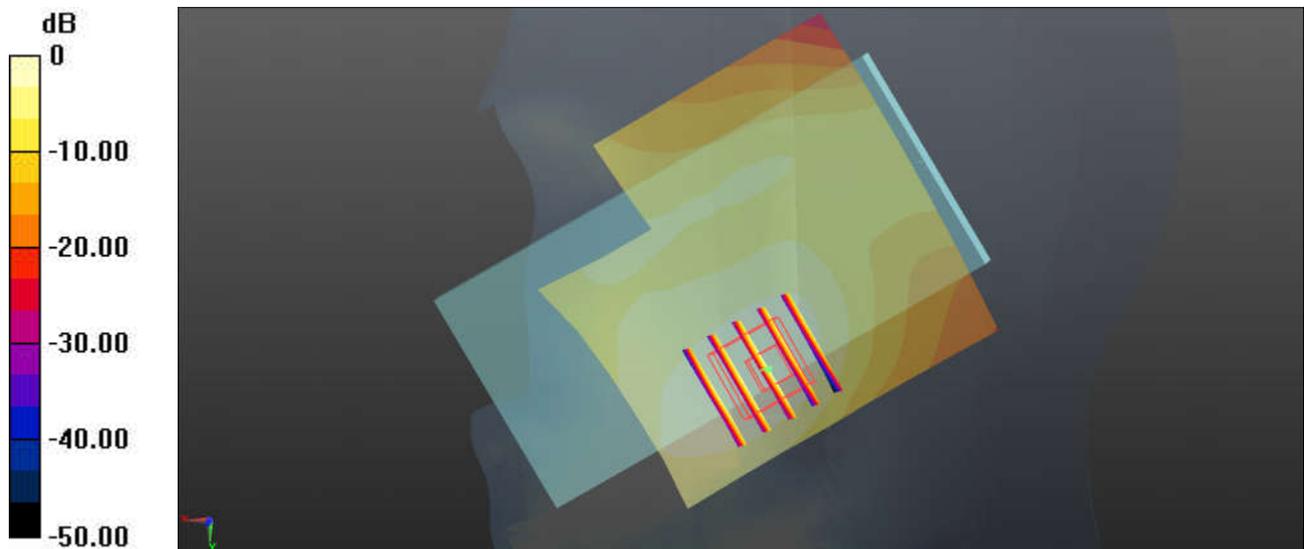

0 dB = 0.723 W/kg = -1.41 dBW/kg

**05\_WCDMA Band II\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch9400**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.378$  S/m;  $\epsilon_r = 41.531$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.1, 8.1, 8.1); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch9400/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.906 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.519 W/kg

**SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 0.425 W/kg

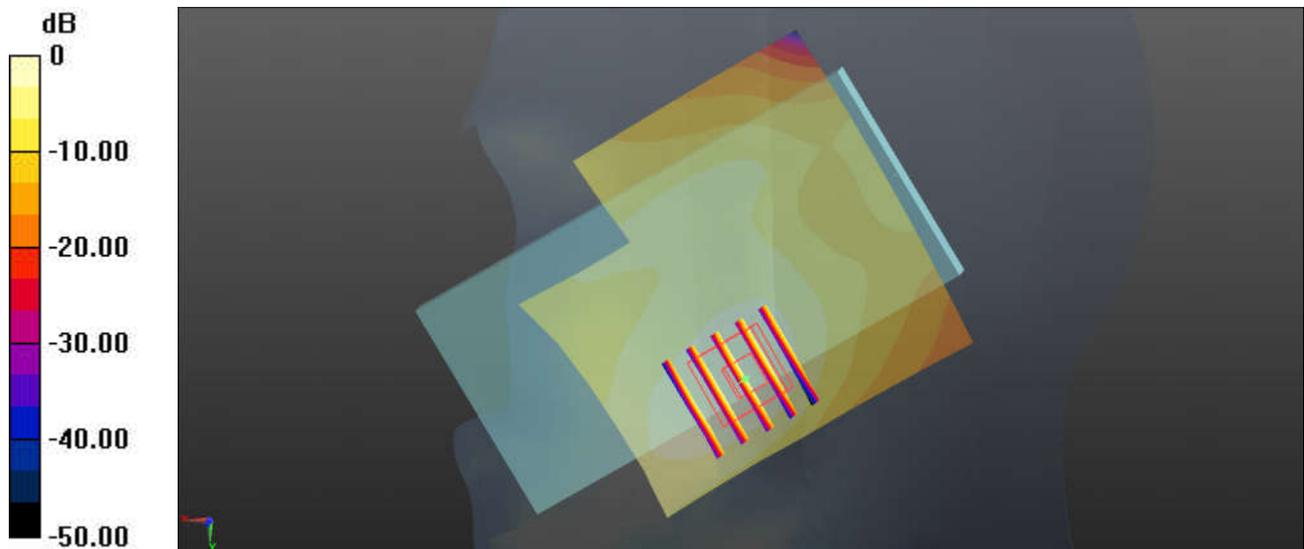

0 dB = 0.442 W/kg = -3.55 dBW/kg

**06\_LTE Band 71\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch133322**


Communication System: UID 0, LTE-FDD (0); Frequency: 683 MHz; Duty Cycle: 1:1  
 Medium: HSL\_750 Medium parameters used:  $f = 683 \text{ MHz}$ ;  $\sigma = 0.849 \text{ S/m}$ ;  $\epsilon_r = 43.106$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.77, 9.77, 9.77); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch133322/Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.335 \text{ W/kg}$

**Ch133322/Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.511 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.352 \text{ W/kg}$   
**SAR(1 g) =  $0.292 \text{ W/kg}$ ; SAR(10 g) =  $0.233 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.331 \text{ W/kg}$

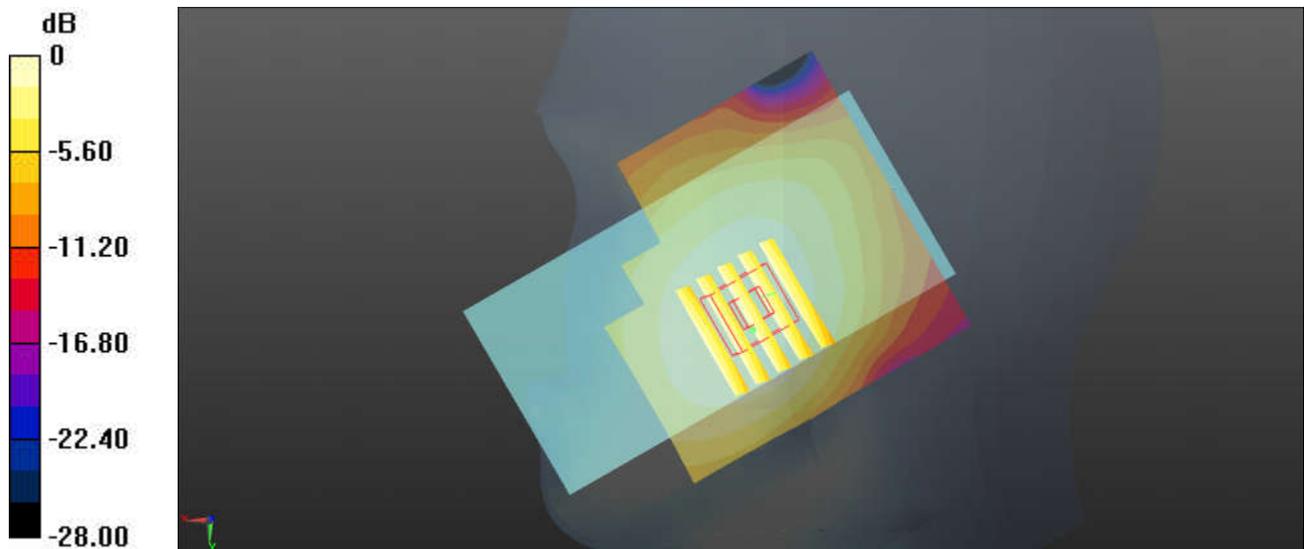

0 dB =  $0.335 \text{ W/kg} = -4.75 \text{ dBW/kg}$

**07\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch23095**

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_750 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.872$  S/m;  $\epsilon_r = 42.759$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.77, 9.77, 9.77); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch23095/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.352 W/kg


**Ch23095/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.002 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.368 W/kg

**SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.238 W/kg**

Maximum value of SAR (measured) = 0.344 W/kg

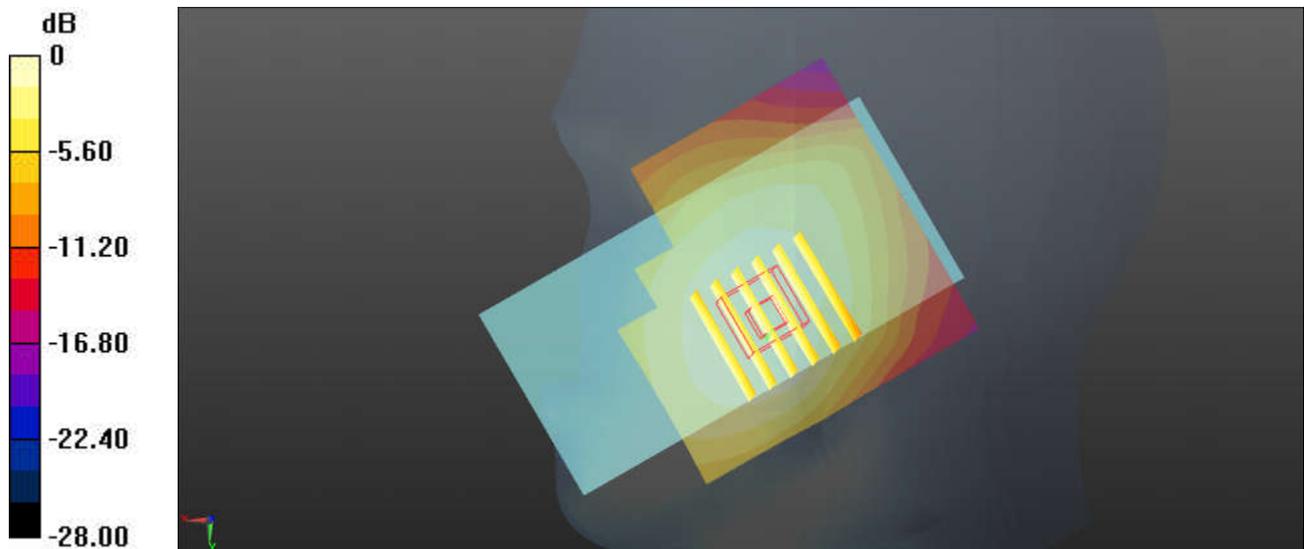

0 dB = 0.352 W/kg = -4.53 dBW/kg

**08\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch20525**

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_850 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.925$  S/m;  $\epsilon_r = 41.43$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch20525/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.465 W/kg


**Ch20525/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.805 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.505 W/kg

**SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.295 W/kg**

Maximum value of SAR (measured) = 0.464 W/kg

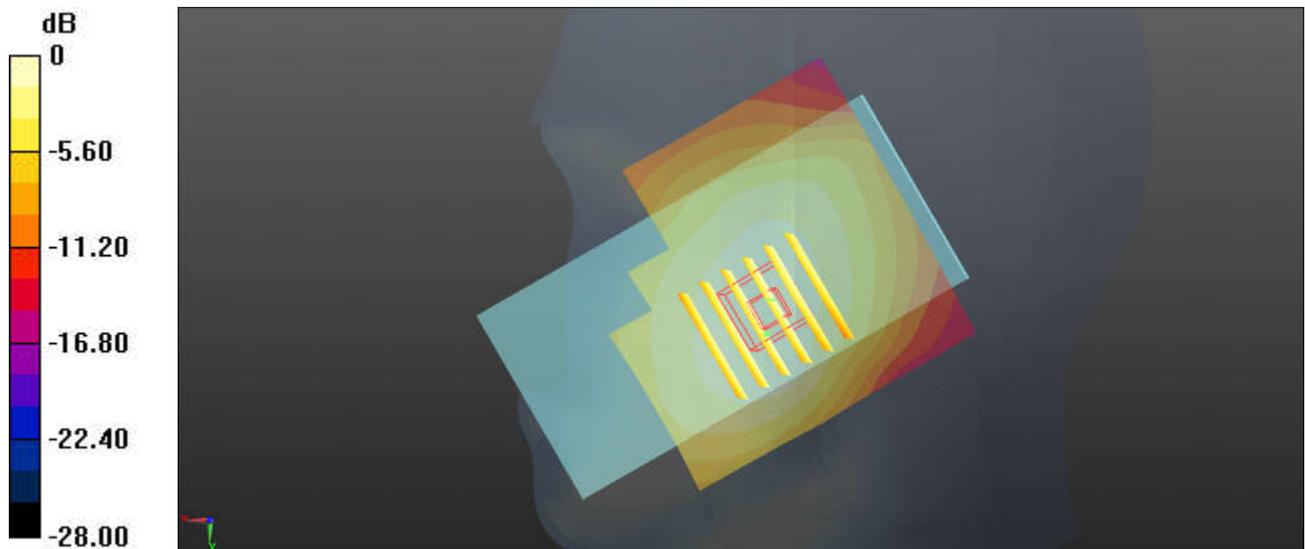

0 dB = 0.465 W/kg = -3.33 dBW/kg

**09\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch132322**


Communication System: UID 0, LTE-FDD (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.376$  S/m;  $\epsilon_r = 39.723$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.46, 8.46, 8.46); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch132322/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.691 W/kg

**Ch132322/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 10.16 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 0.805 W/kg  
**SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.305 W/kg**  
 Maximum value of SAR (measured) = 0.661 W/kg

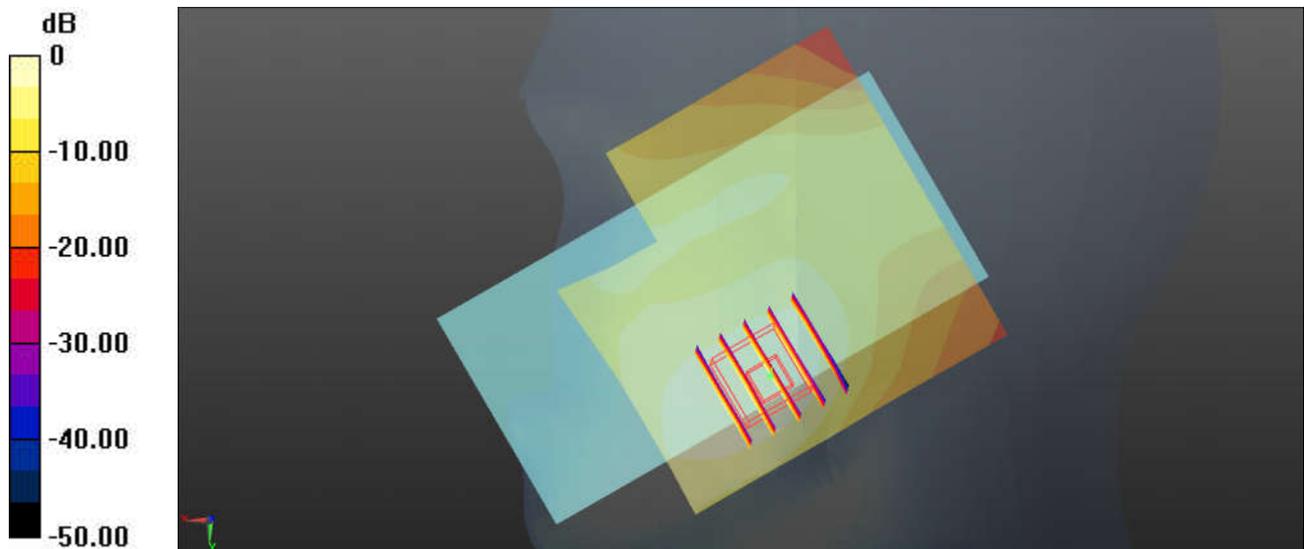

0 dB = 0.691 W/kg = -1.61 dBW/kg

**10\_LTE Band 2\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch18900**

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.378$  S/m;  $\epsilon_r = 41.531$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.1, 8.1, 8.1); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch18900/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.472 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.114 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.562 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.194 W/kg**

Maximum value of SAR (measured) = 0.451 W/kg

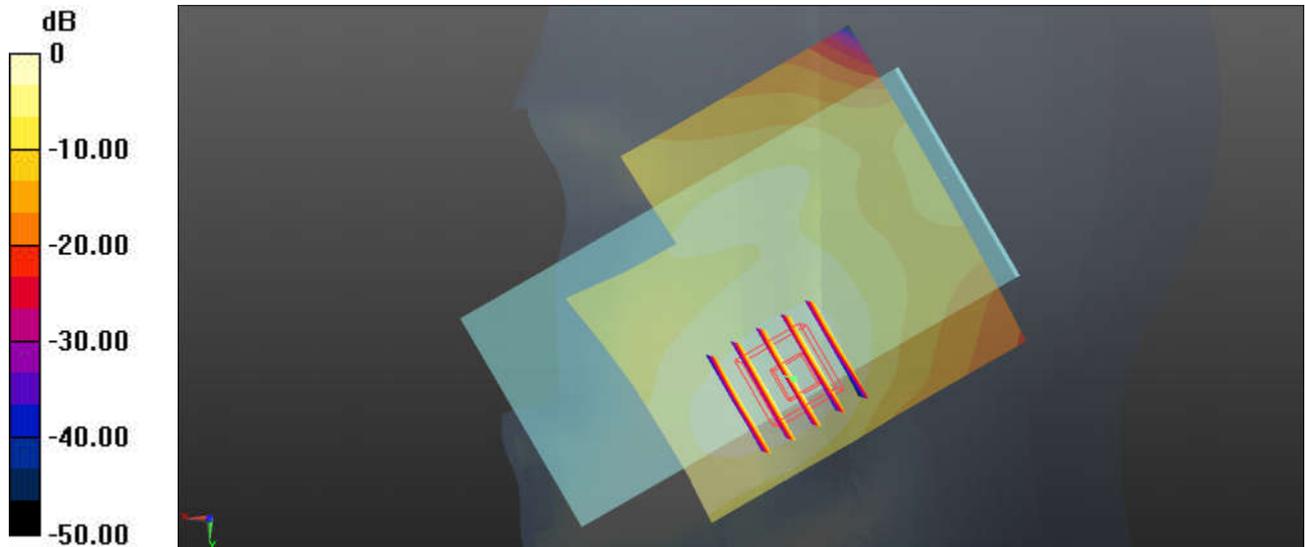

0 dB = 0.472 W/kg = -3.26 dBW/kg

### 11\_LTE Band 41-HPUE\_20M\_QPSK\_1RB\_49Offset\_Right Cheek\_0mm\_Ch39750

Communication System: UID 0, LTE-TDD (0); Frequency: 2506 MHz; Duty Cycle: 1:2.33  
Medium: HSL\_2600 Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.857$  S/m;  $\epsilon_r = 40.66$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.31, 7.31, 7.31); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch39750/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0634 W/kg


**Ch39750/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.141 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0643 W/kg

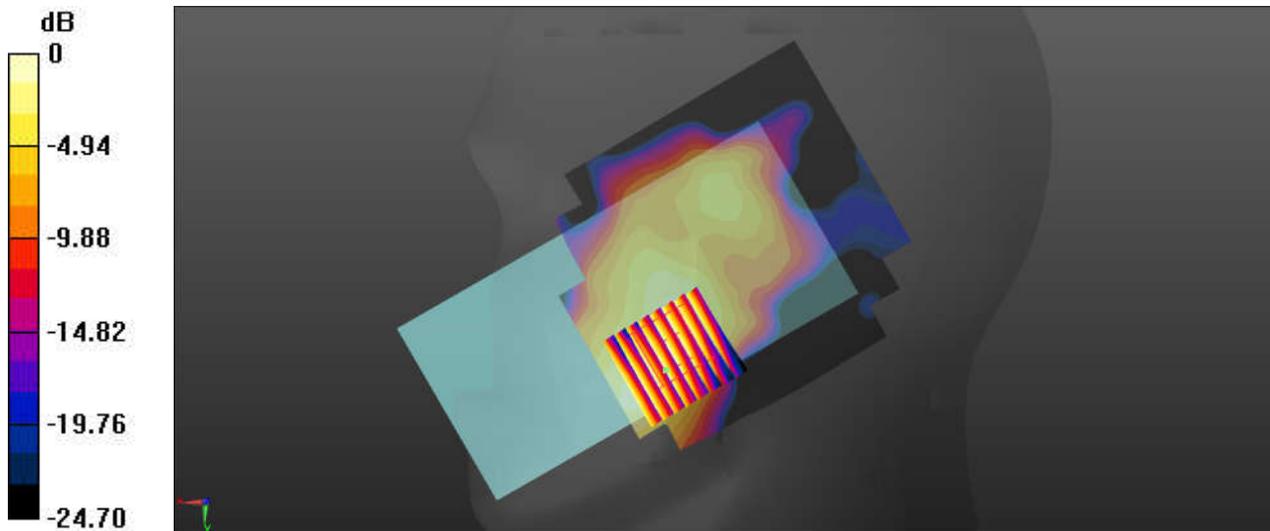

**12\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_0mm\_Ch1**

Communication System: UID 0, 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.007  
 Medium: HSL\_2450 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.748$  S/m;  $\epsilon_r = 40.967$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.5, 7.5, 7.5); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch1/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.35 W/kg


**Ch1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.82 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.04 W/kg

**SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.455 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

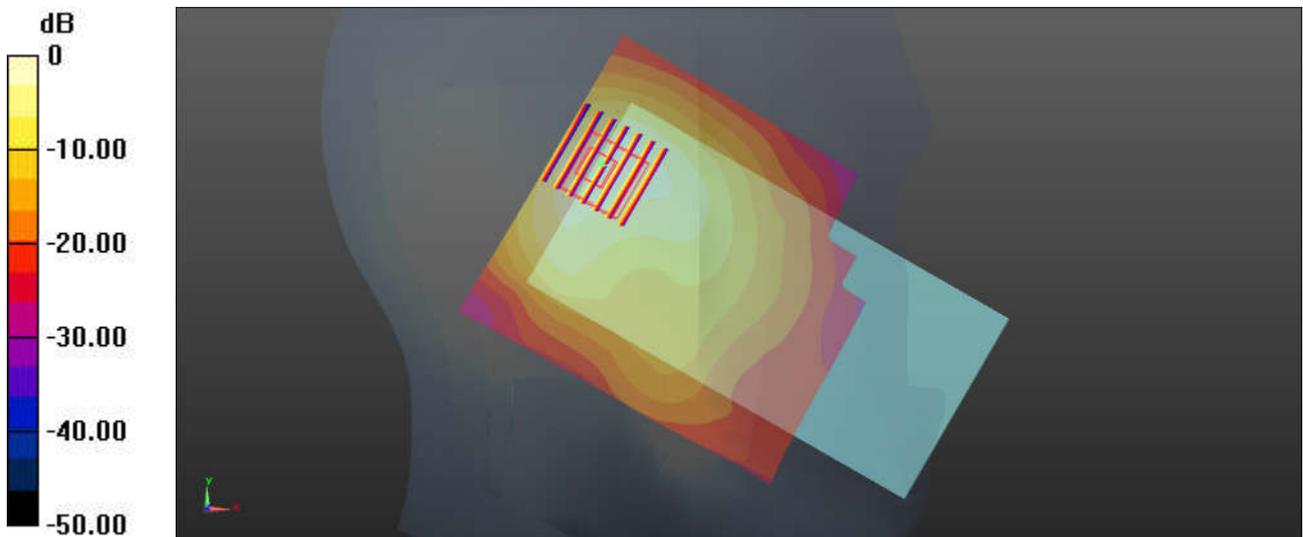

0 dB = 1.35 W/kg = 1.30 dBW/kg

### 13\_Bluetooth\_1Mbps\_Left Cheek\_0mm\_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.304  
 Medium: HSL\_2450 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.781$  S/m;  $\epsilon_r = 40.843$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.5, 7.5, 7.5); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch39/Area Scan (81x71x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 0.154 W/kg


**Ch39/Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 7.969 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.211 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.160 W/kg

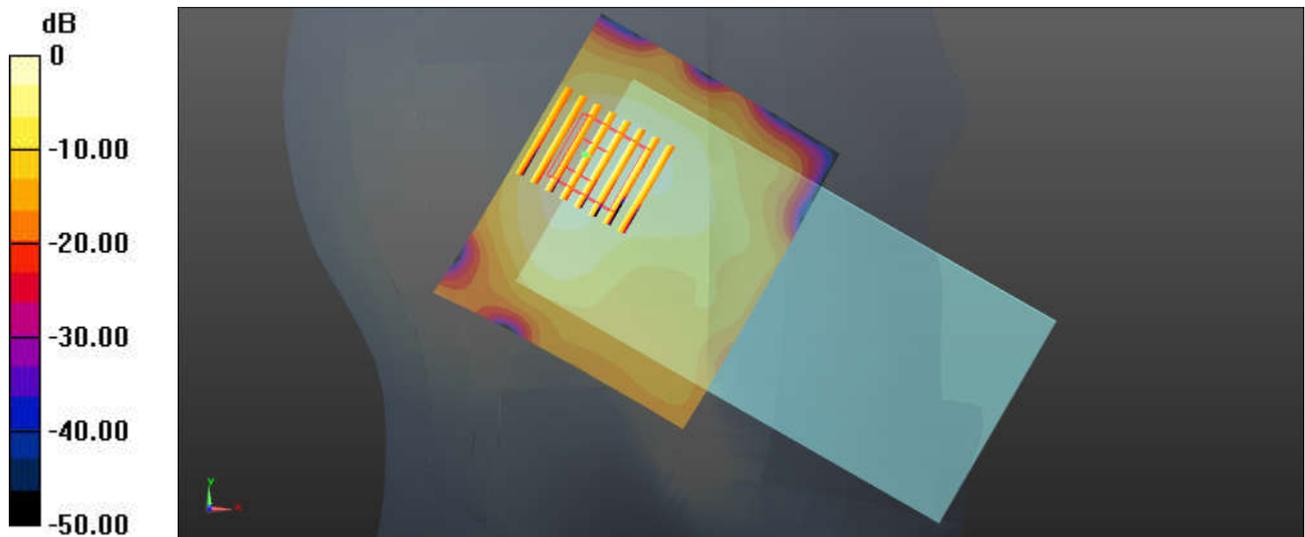

0 dB = 0.154 W/kg = -8.12 dBW/kg

**14\_GSM850\_GPRS 4 Tx slots\_Back\_10mm\_Ch251**

Communication System: UID 0, GSM850-4UP (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08  
 Medium: HSL\_850 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 41.301$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch251/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.79 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.513 W/kg**

Maximum value of SAR (measured) = 1.41 W/kg


**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.79 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.644 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

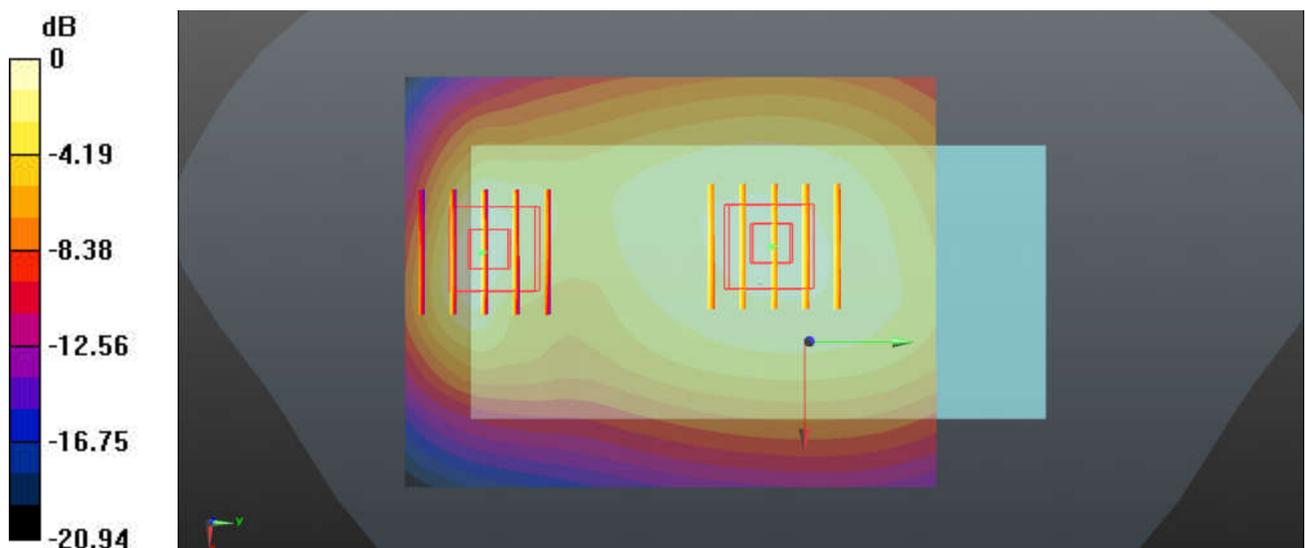

0 dB = 1.31 W/kg = 1.17 dBW/kg

**15\_GSM1900\_GPRS 4 Tx slots\_Back\_10mm\_Ch810**

Communication System: UID 0, PCS-4UP (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08  
 Medium: HSL\_1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.408$  S/m;  $\epsilon_r = 41.405$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.1, 8.1, 8.1); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch810/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.24 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.526 W/kg**

Maximum value of SAR (measured) = 1.16 W/kg

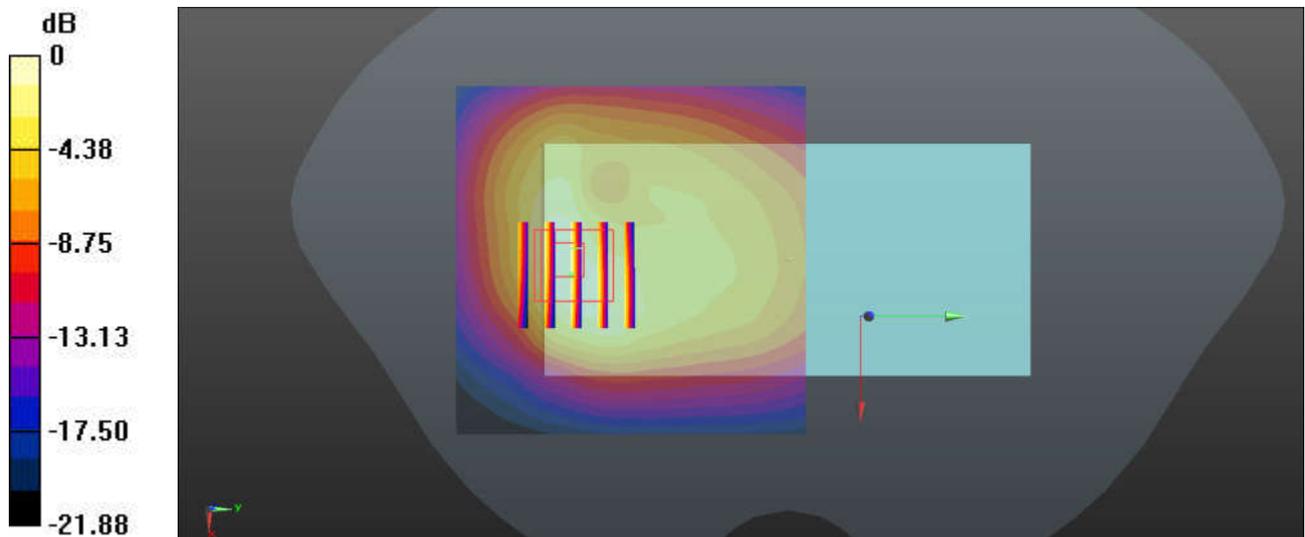

0 dB = 1.24 W/kg = 0.93 dBW/kg

**16\_WCDMA Band V\_RMC 12.2Kbps\_Back\_10mm\_Ch4182**

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
 Medium: HSL\_850 Medium parameters used:  $f = 836.4 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 41.431$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch4182/Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.620 \text{ W/kg}$


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.17 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$

Peak SAR (extrapolated) =  $0.960 \text{ W/kg}$

**SAR(1 g) =  $0.541 \text{ W/kg}$ ; SAR(10 g) =  $0.294 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.667 \text{ W/kg}$

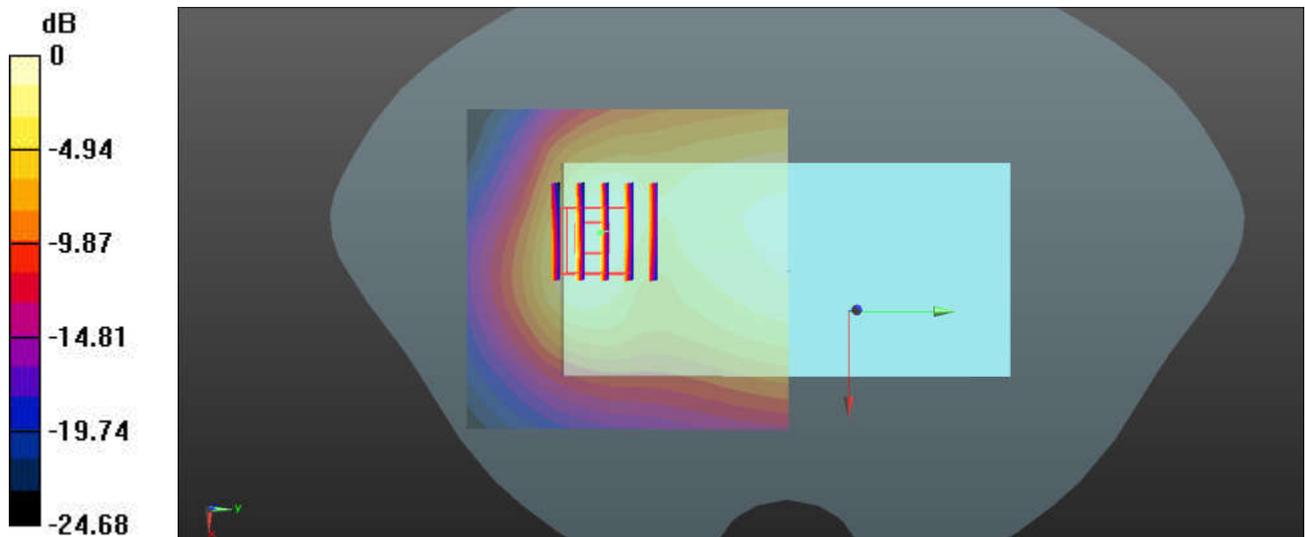

0 dB =  $0.620 \text{ W/kg} = -2.08 \text{ dBW/kg}$

**17\_WCDMA Band IV\_RMC 12.2Kbps\_Back\_10mm\_Ch1413**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1750 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.363$  S/m;  $\epsilon_r = 39.777$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.46, 8.46, 8.46); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch1413/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.706 W/kg


**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.636 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 0.746 W/kg

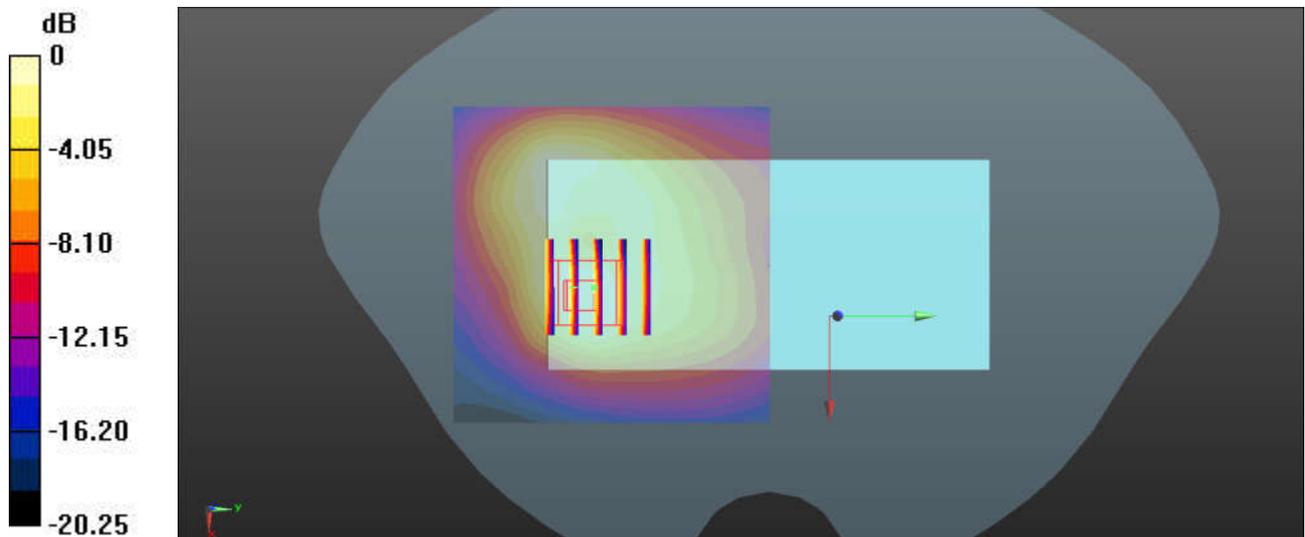

0 dB = 0.706 W/kg = -1.51 dBW/kg

**18\_WCDMA Band II\_RMC 12.2Kbps\_Back\_10mm\_Ch9400**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.378$  S/m;  $\epsilon_r = 41.531$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.1, 8.1, 8.1); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch9400/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.714 W/kg


**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.823 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.326 W/kg**

Maximum value of SAR (measured) = 0.722 W/kg

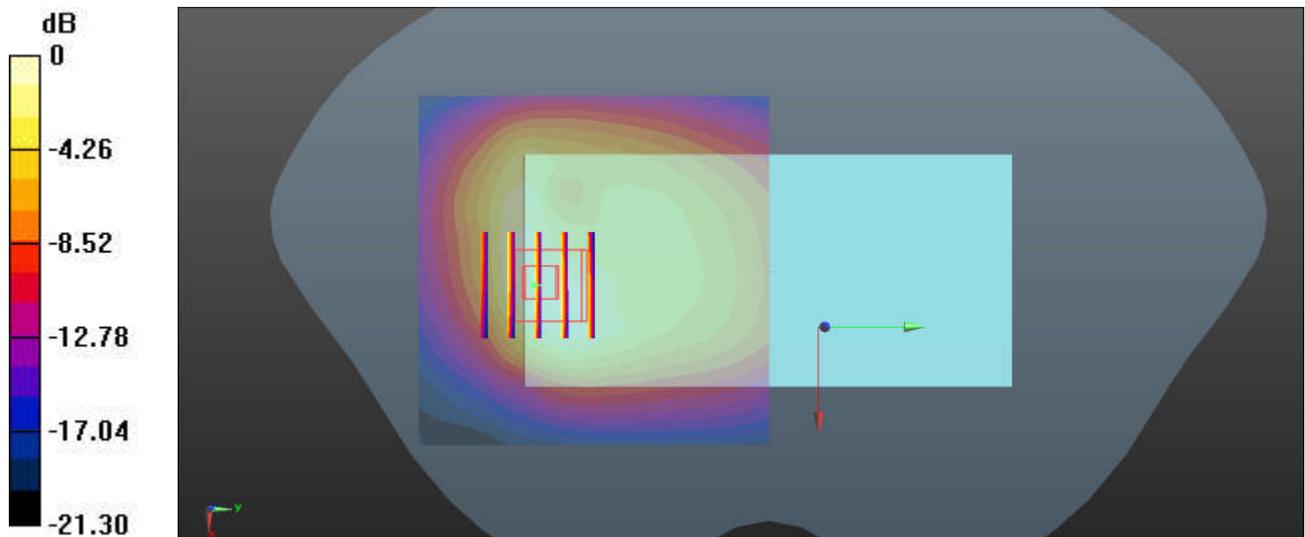

0 dB = 0.714 W/kg = -1.46 dBW/kg

**19\_LTE Band 71\_20M\_QPSK\_1RB\_49Offset\_Back\_10mm\_Ch133322**


Communication System: UID 0, LTE-FDD (0); Frequency: 683 MHz;Duty Cycle: 1:1  
 Medium: HSL\_750 Medium parameters used: f = 683 MHz;  $\sigma = 0.849$  S/m;  $\epsilon_r = 43.106$ ;  
 $\rho = 1000\text{kg/m}^3$   
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.77, 9.77, 9.77); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch133322/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.507 W/kg

**Ch133322/Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 25.20 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.735 W/kg  
**SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.298 W/kg**  
 Maximum value of SAR (measured) = 0.553 W/kg

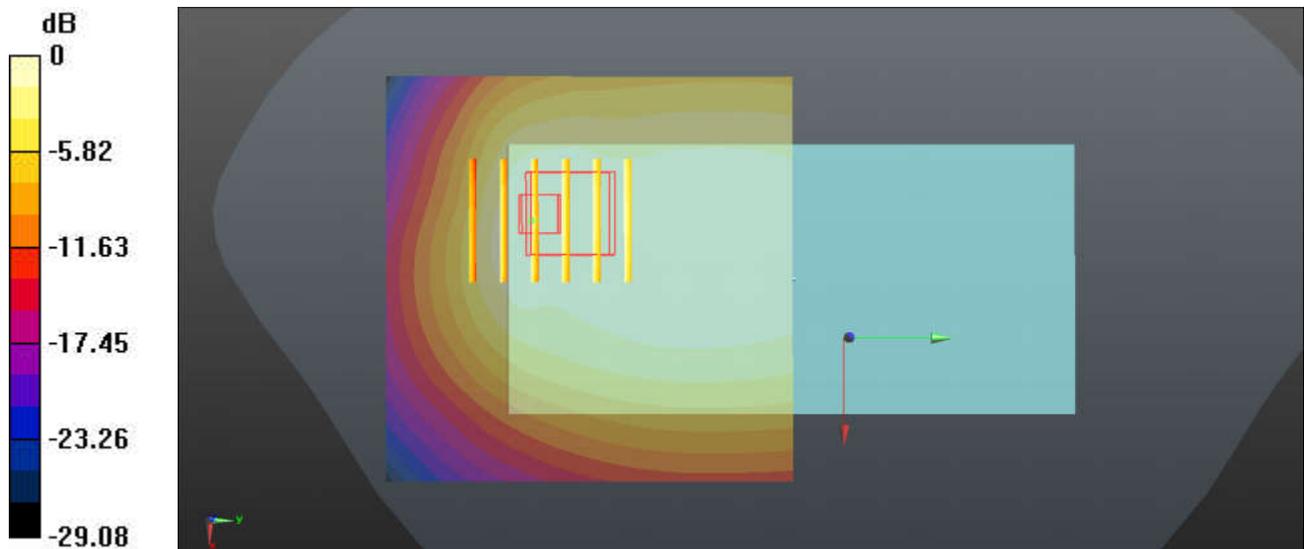

0 dB = 0.507 W/kg = -2.95 dBW/kg

**20\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch23095**


Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_750 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.872$  S/m;  $\epsilon_r = 42.759$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.77, 9.77, 9.77); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch23095/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.494 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 25.40 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.556 W/kg  
**SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.354 W/kg**  
 Maximum value of SAR (measured) = 0.495 W/kg

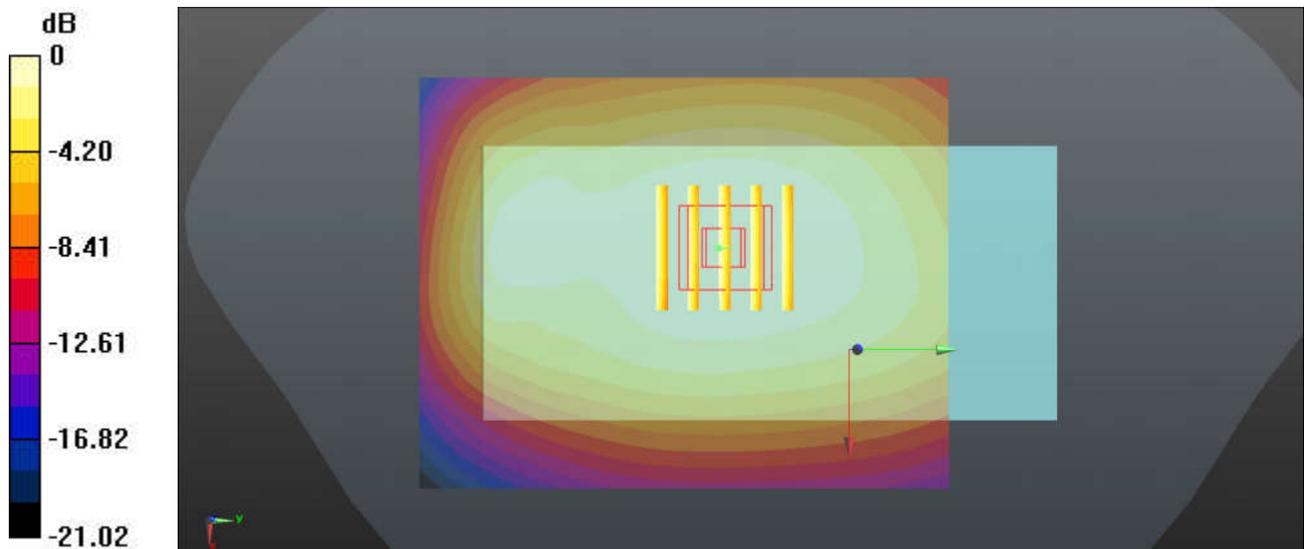

0 dB = 0.494 W/kg = -3.06 dBW/kg

**21\_LTE Band 5\_10M\_QPSK\_1RB\_0Offset\_Back\_10mm\_Ch20525**

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium: HSL\_850 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.925$  S/m;  $\epsilon_r = 41.43$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.48, 9.48, 9.48); Calibrated: 2019.5.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2019.7.23
- Phantom: SAM1; Type: SAM; Serial: TP-1753
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Ch20525/Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.516 W/kg


**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.32 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.824 W/kg

**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.256 W/kg**

Maximum value of SAR (measured) = 0.586 W/kg

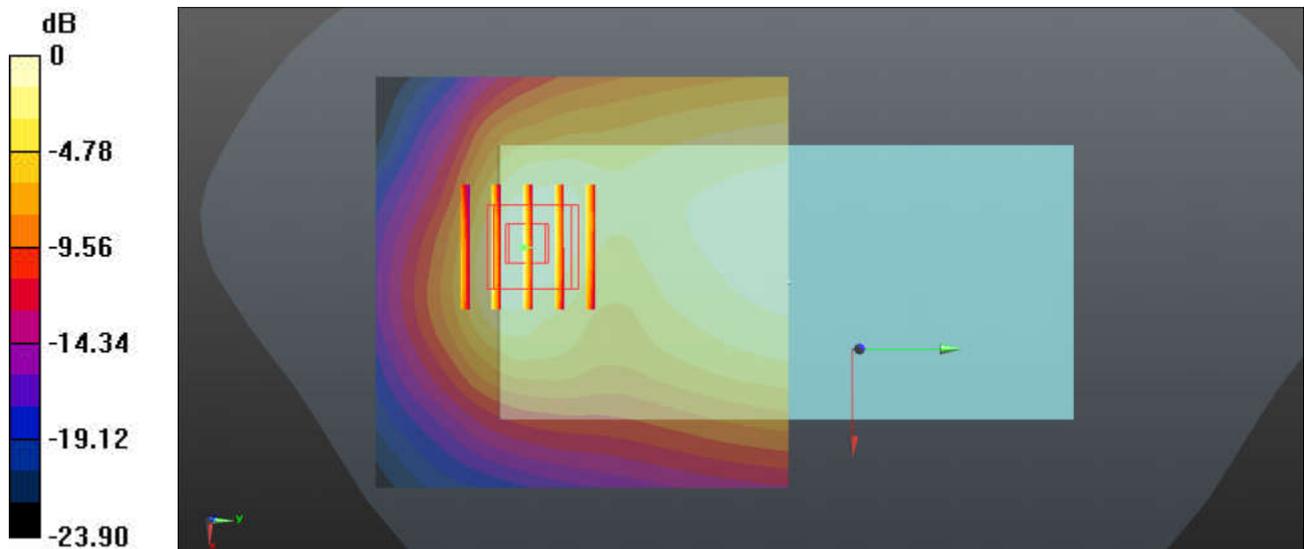

0 dB = 0.516 W/kg = -2.87 dBW/kg