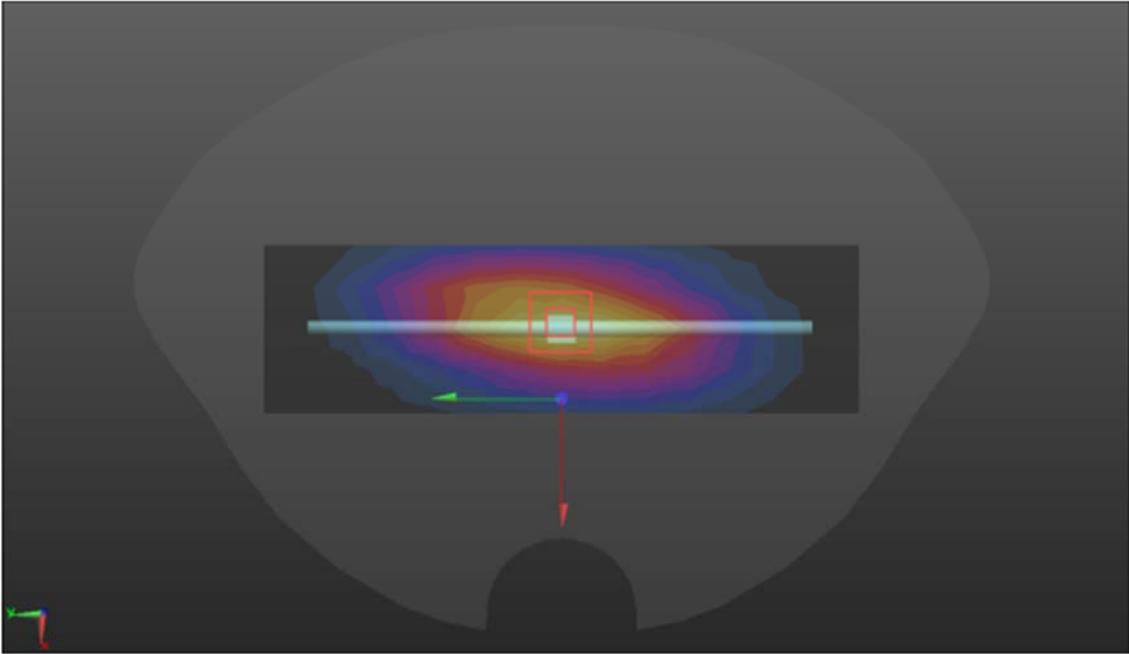
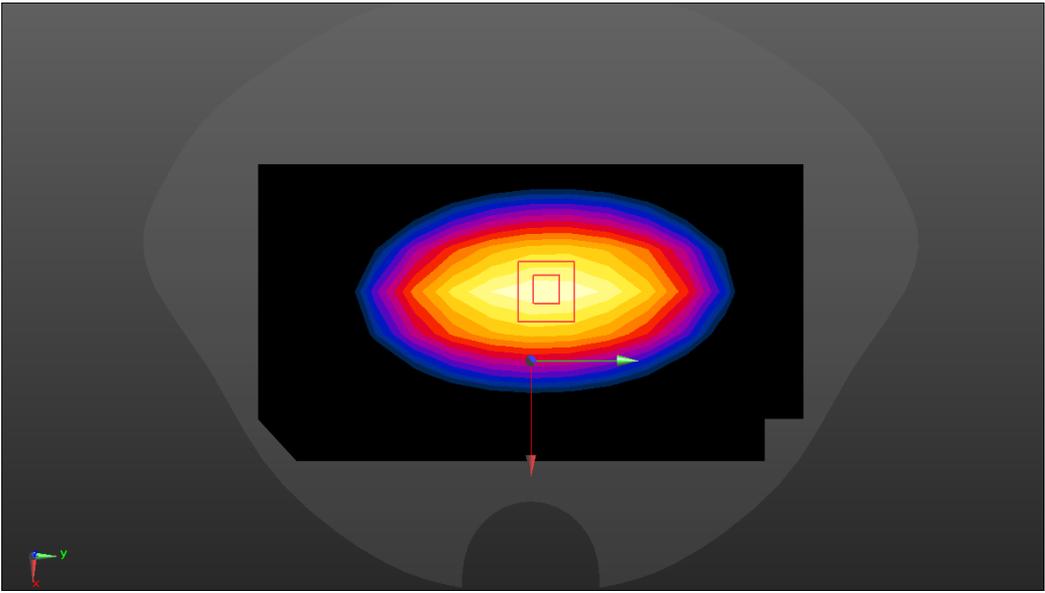
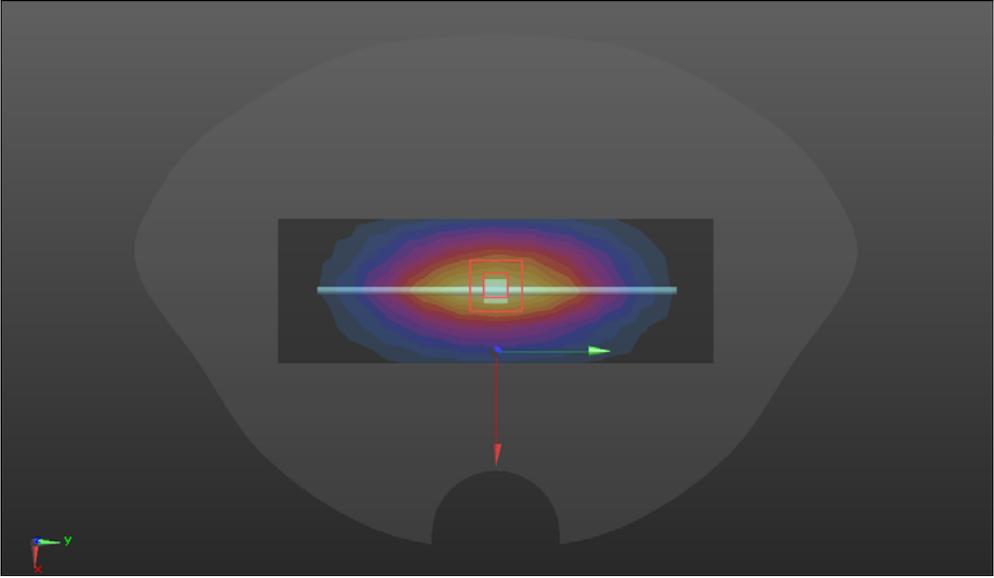
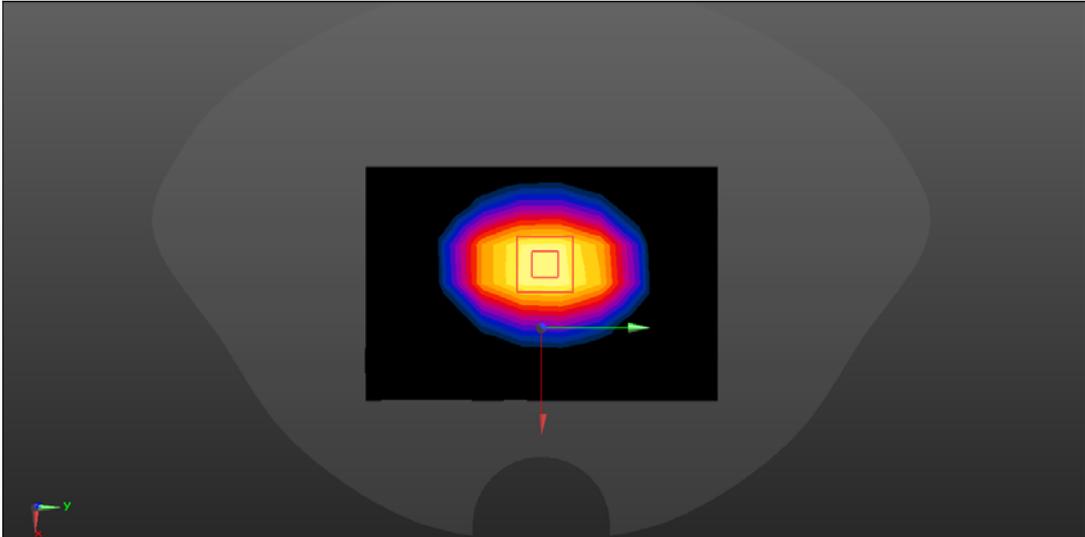


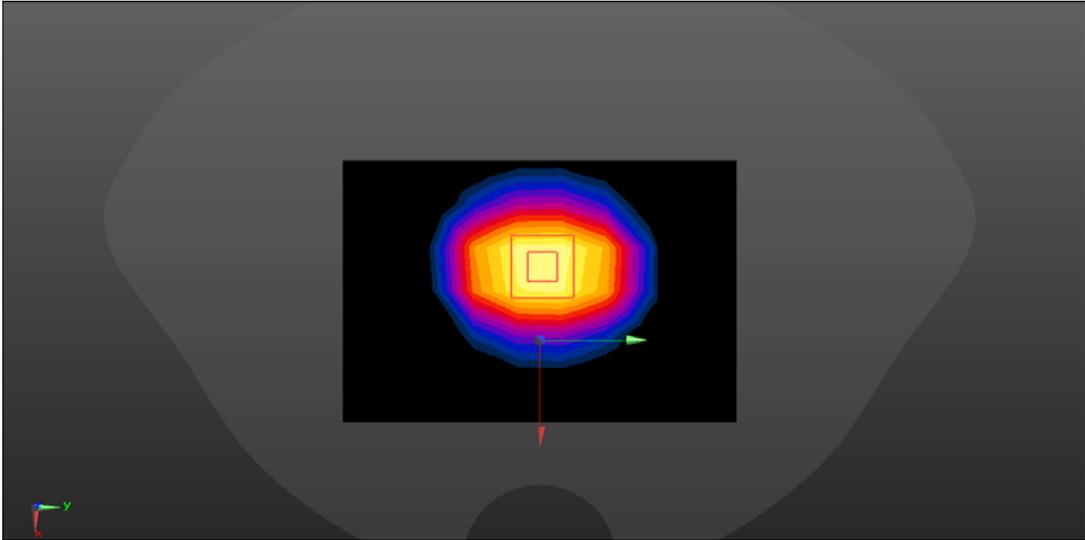
ANNEX A – TEST PLOTS

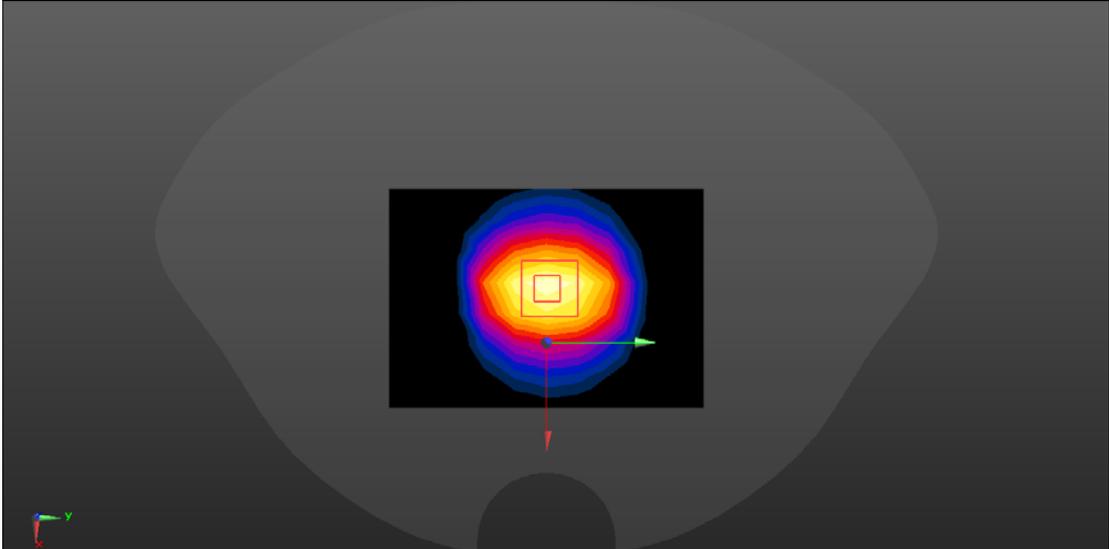
System check	750MHz
<p>Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 39.55$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75) @ 750 MHz; Calibrated: 10/30/2020 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 9/30/2020 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>D750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.51 W/kg</p> <p>D750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 55.69 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 2.87 W/kg SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.22 W/kg Maximum value of SAR (measured) = 2.53 W/kg</p> 	

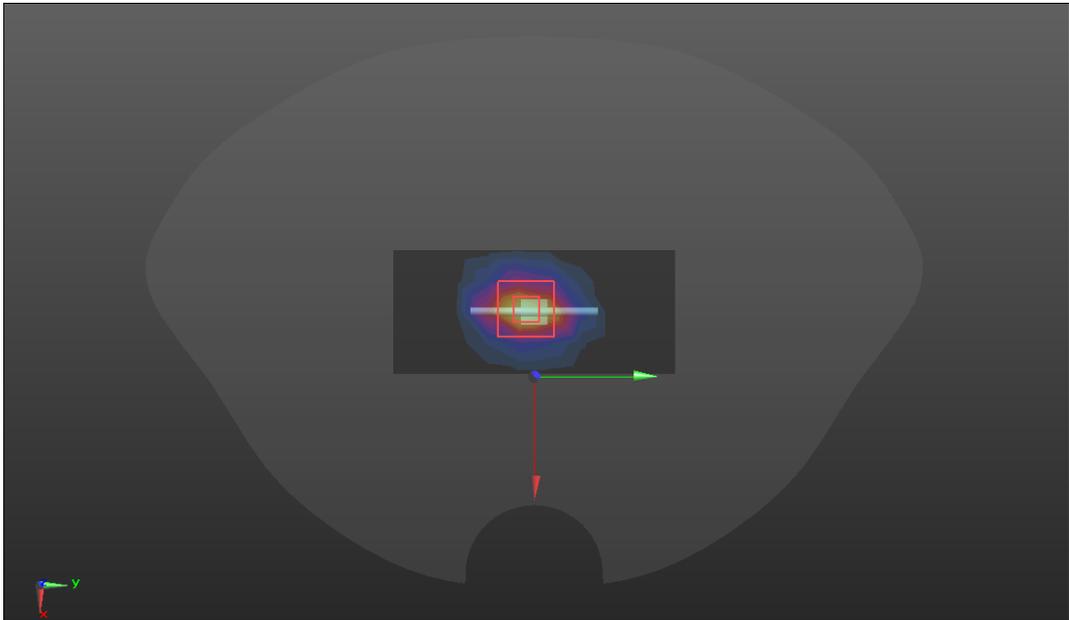
System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.87 \text{ S/m}$; $\epsilon_r = 39.55$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.48, 9.48, 9.48) @ 835 MHz; Calibrated: 10/30/2020 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 9/30/2020 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>Configuration 835/835/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.72 W/kg</p> <p>Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 51.67 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 3.58 W/kg SAR(1 g) = 2.27 W/kg; SAR(10 g) = 1.51 W/kg Maximum value of SAR (measured) = 2.75 W/kg</p> 	

System check	900MHz
<p>Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 41.96$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 900 MHz; Calibrated: 10/30/2020 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 9/30/2020 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 3.42 W/kg</p> <p>D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 62.05 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.94 W/kg SAR(1 g) = 2.52 W/kg; SAR(10 g) = 1.6 W/kg Maximum value of SAR (measured) = 3.46 W/kg</p> 	

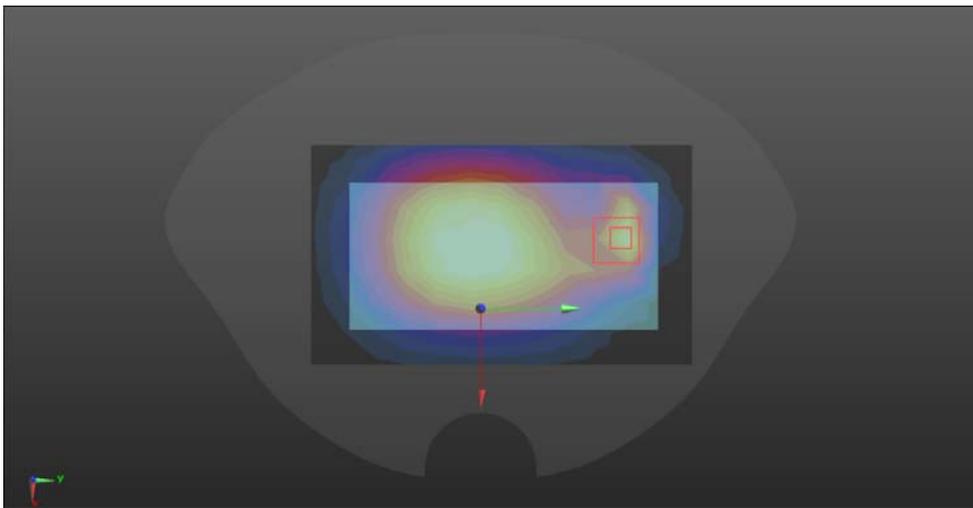
System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 38.08$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(8.41, 8.41, 8.41) @ 1800 MHz; Calibrated: 10/30/2020 • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 9/30/2020 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 8.31 W/kg</p> <p>Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 76.60 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.56 W/kg; SAR(10 g) = 4.97 W/kg Maximum value of SAR (measured) = 12.1 W/kg</p> 	

System check	2000MHz
<p>Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.38 \text{ S/m}$; $\epsilon_r = 40.18$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.09, 8.09, 8.09) @ 2000 MHz; Calibrated: 10/30/2020 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 9/30/2020 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 8.40 W/kg</p> <p>Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 76.22 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 10.3 W/kg; SAR(10 g) = 4.96 W/kg Maximum value of SAR (measured) = 12.9 W/kg</p> 	

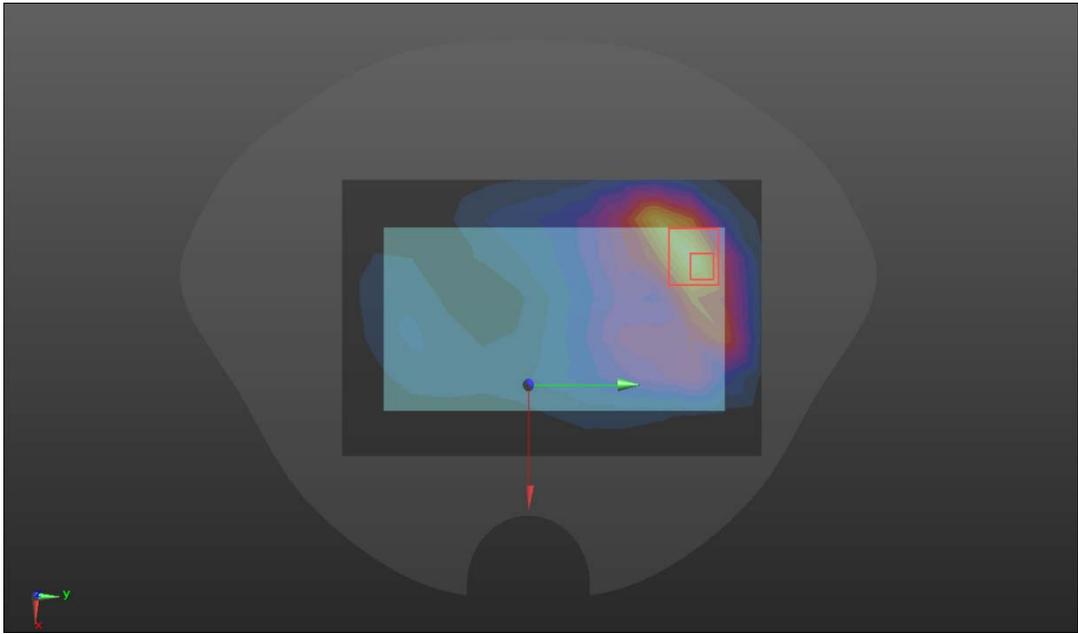
System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 40.04$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.5, 7.5, 7.5) @ 2450 MHz; Calibrated: 10/30/2020 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 9/30/2020 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.2 W/kg</p> <p>System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 108.3 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 28.2 W/kg SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.14 W/kg Maximum value of SAR (measured) = 22.6 W/kg</p> 	

System check	2600MHz
<p>Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 39.77$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37) @ 2600 MHz; Calibrated: 10/30/2020 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 9/30/2020 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>D2600/Dipole 2600MHz/Area Scan (5x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.0 W/kg</p> <p>D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 107.0 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 27.8 W/kg SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.65 W/kg Maximum value of SAR (measured) = 21.7 W/kg</p> 	

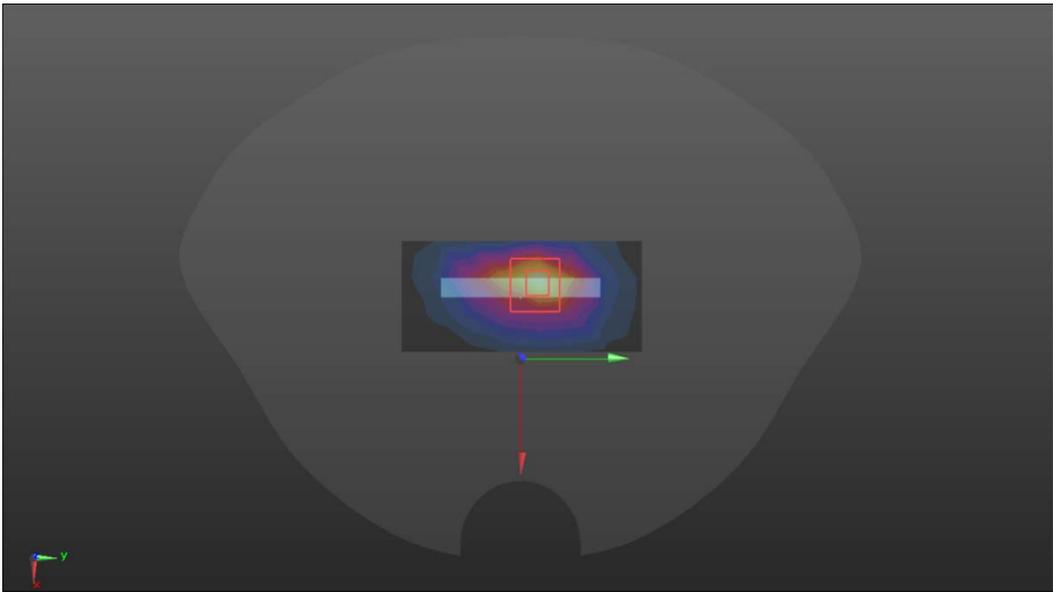
GSM 850

Hotspot	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042</p> <p>Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³</p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14(7483) • BACK/GSM 850/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.871 W/kg • BACK/GSM 850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 33.07 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.12 W/kg SAR(1 g) = 0.594 W/kg; SAR(10 g) = 0.332 W/kg Maximum value of SAR (measured) = 0.923 W/kg 	
	

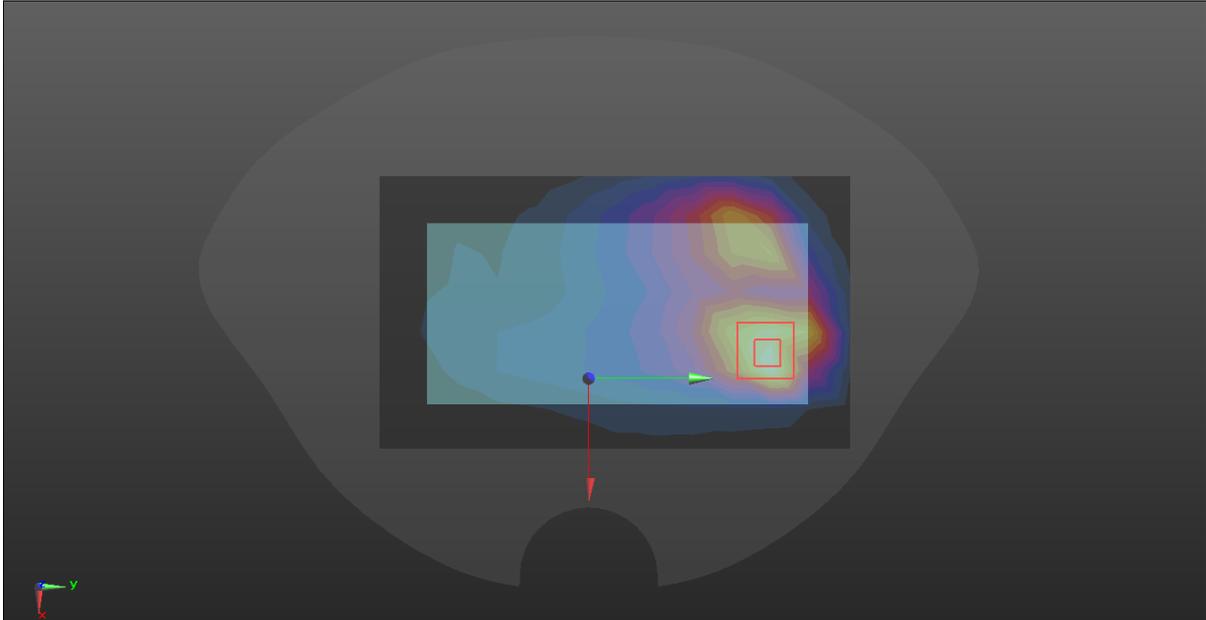
GSM 1900

Hotspot	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1747.4 MHz; Duty Cycle: 1:8.30042</p> <p>Medium parameters used (interpolated): $f = 1747.4$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.043$; $\rho = 1000$ kg/m³</p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14(7483) • BACK/GSM 1900/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.704 W/kg • BACK/GSM 1900/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 7.019 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.919 W/kg SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.277 W/kg Maximum value of SAR (measured) = 0.760 W/kg 	
	

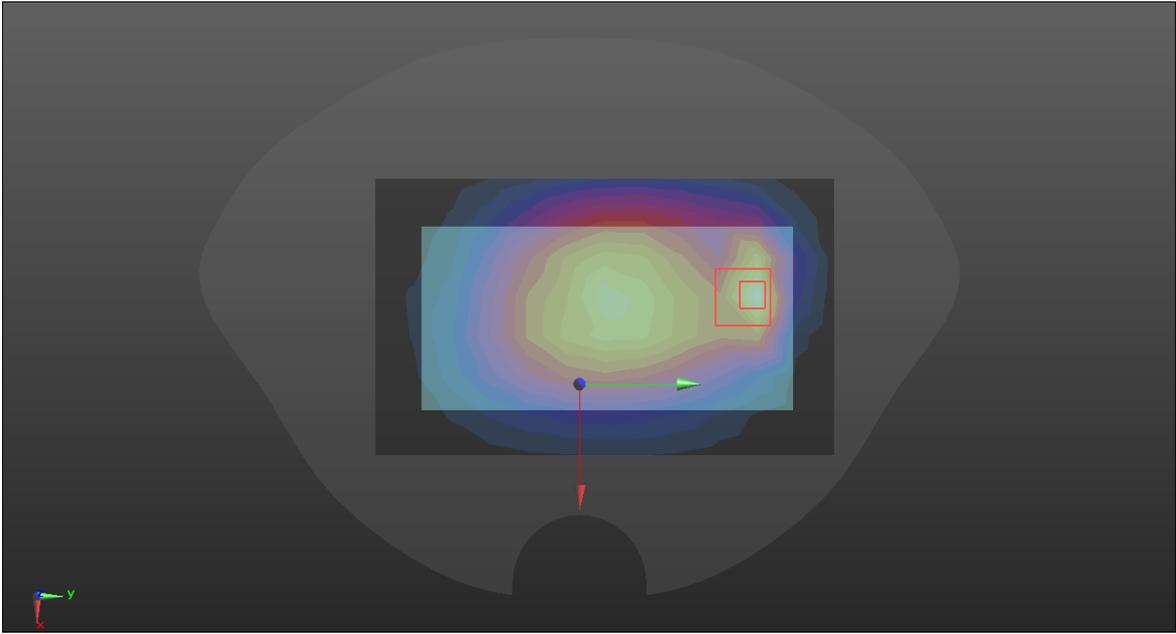
WCDMA BandII

Hotspot	Bottom
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1</p> <p>Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³</p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BOTTOM/WCDMA B2/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm</p> <p>Maximum value of SAR (measured) = 0.615 W/kg</p> <p>BOTTOM/WCDMA B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm</p> <p>Reference Value = 19.10 V/m; Power Drift = 0.17 dB</p> <p>Peak SAR (extrapolated) = 0.743 W/kg</p> <p>SAR(1 g) = 0.531W/kg; SAR(10 g) = 0.270 W/kg</p>	
 <p>Maximum value of SAR (measured) = 0.680 W/kg</p>	

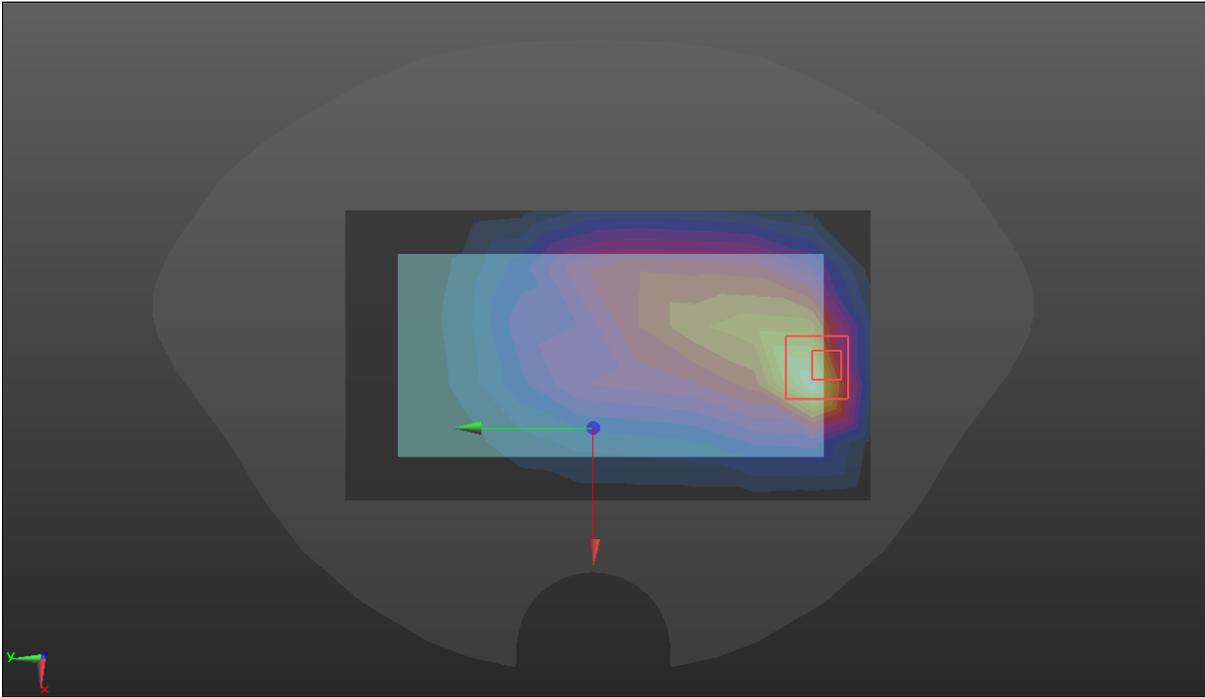
WCDMA BandIV

Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/WCDMA B4/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.716 W/kg</p> <p>BACK/WCDMA B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.16 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.34 W/kg SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.318 W/kg Maximum value of SAR (measured) = 1.06 W/kg</p>	
	

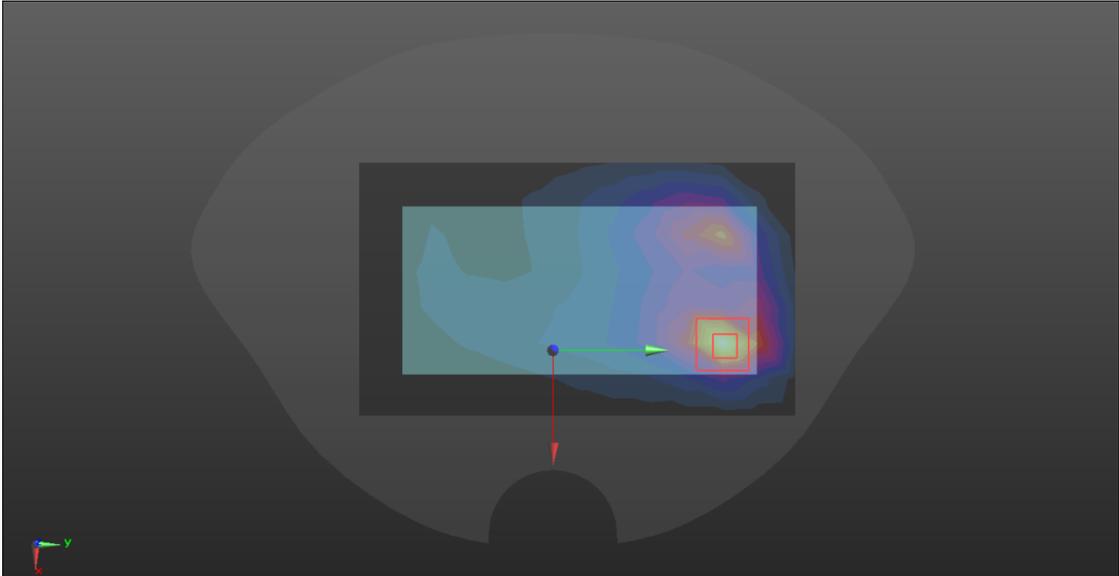
WCDMA BandV

Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1</p> <p>Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³</p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/WCDMA B5/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm</p> <p>Maximum value of SAR (measured) = 0.477 W/kg</p> <p>BACK/WCDMA B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm</p> <p>Reference Value = 21.66 V/m; Power Drift = -0.05 dB</p> <p>Peak SAR (extrapolated) = 0.578 W/kg</p> <p>SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.196 W/kg</p> <p>Maximum value of SAR (measured) = 0.491 W/kg</p>	
	

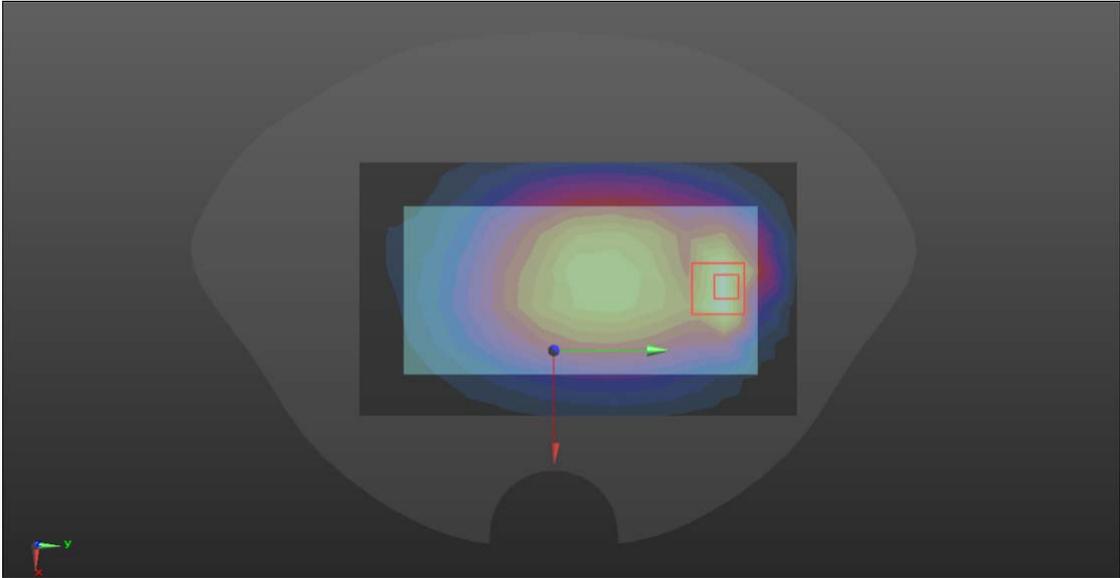
LTE Band2

Hotspot	BACK
<p>Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/LTE B2/Area Scan (4x8x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.512 W/kg</p> <p>BACK/LTE B2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 19.27 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.675 W/kg SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.235 W/kg Maximum value of SAR (measured) = 0.583 W/kg</p>	
	

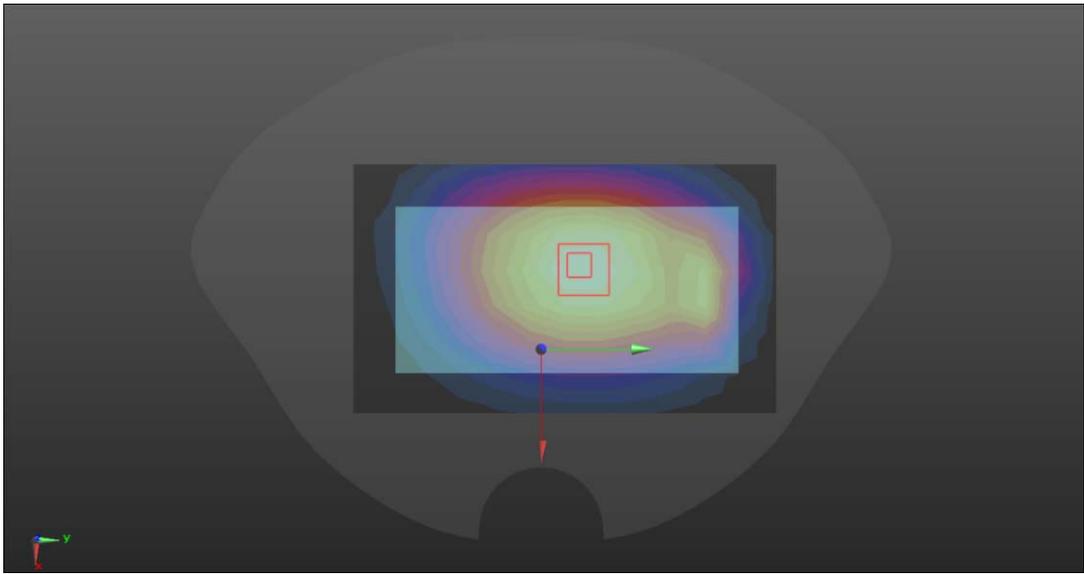
LTE Band4

Hotspot	Front
<p>Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>FRONT/LTE B4/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.916 W/kg</p> <p>FRONT/LTE B4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.137 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 1.21 W/kg SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.328 W/kg Maximum value of SAR (measured) = 1.053 W/kg</p>	
	

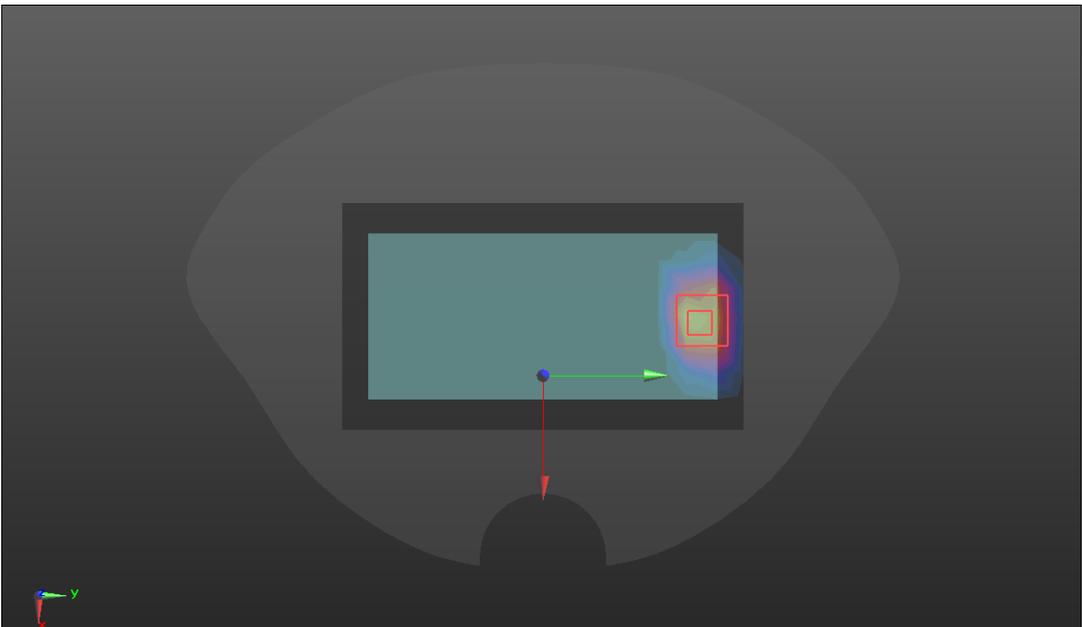
LTE Band5

Hotspot	Back
<p>Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/LTE B5/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.313 W/kg</p> <p>BACK/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 17.09 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.404 W/kg SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.141 W/kg Maximum value of SAR (measured) = 0.333 W/kg</p>	
	

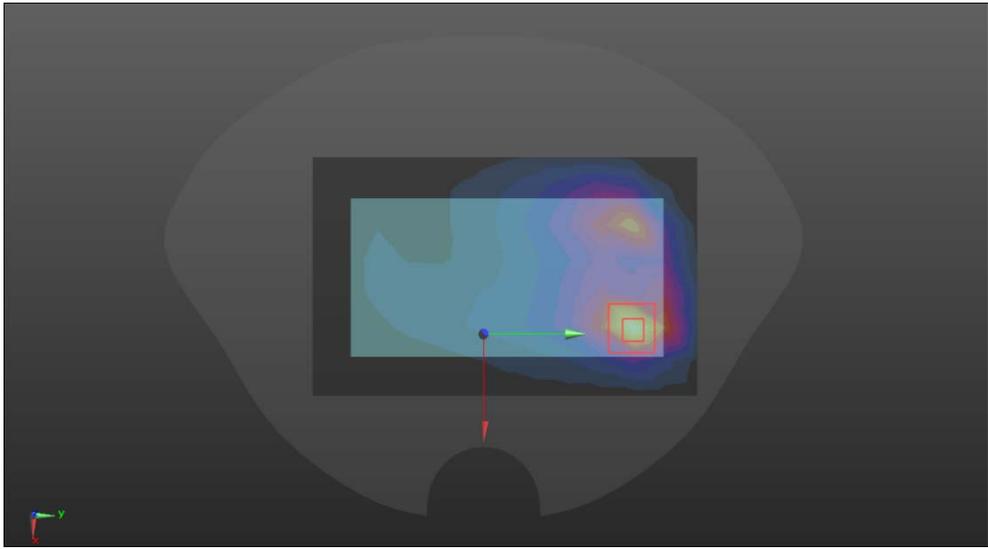
LTE Band12

Hotspot	Back
<p>Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 42.115$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BACK/LTE B12/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.505 W/kg BACK/LTE B12/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 23.36 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.576 W/kg SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.322 W/kg Maximum value of SAR (measured) = 0.529 W/kg 	
	

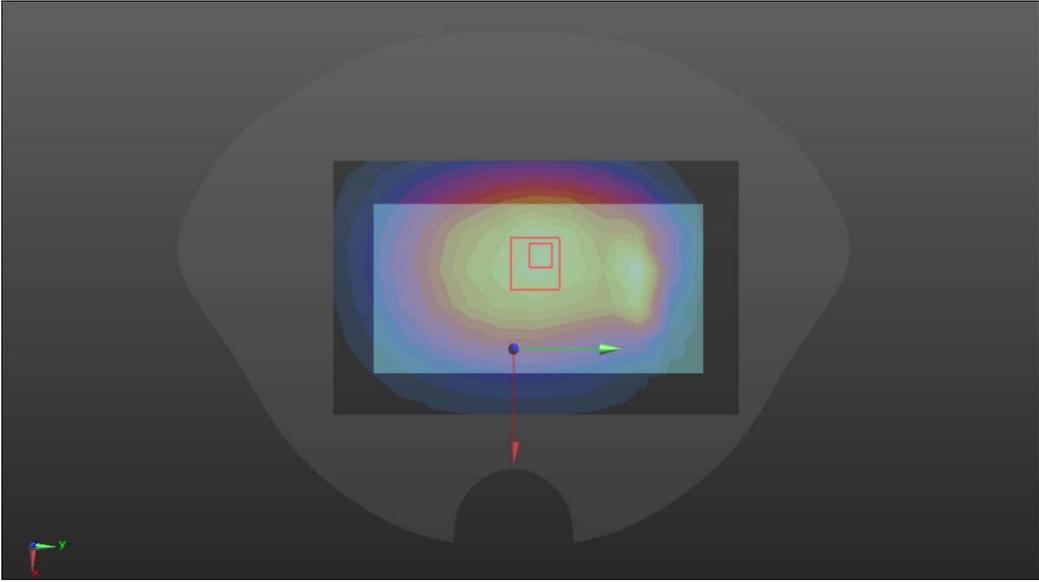
LTE Band41

Hotspot	Back
<p>Communication System: UID 0, LTE BAND41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37) @ 2593 MHz; Calibrated: 2020/10/30 • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/LTE B41 /Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 1.41 W/kg</p> <p>BACK/LTE B41/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.274 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 2.04 W/kg SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.517 W/kg Maximum value of SAR (measured) = 1.51 W/kg</p>	
	

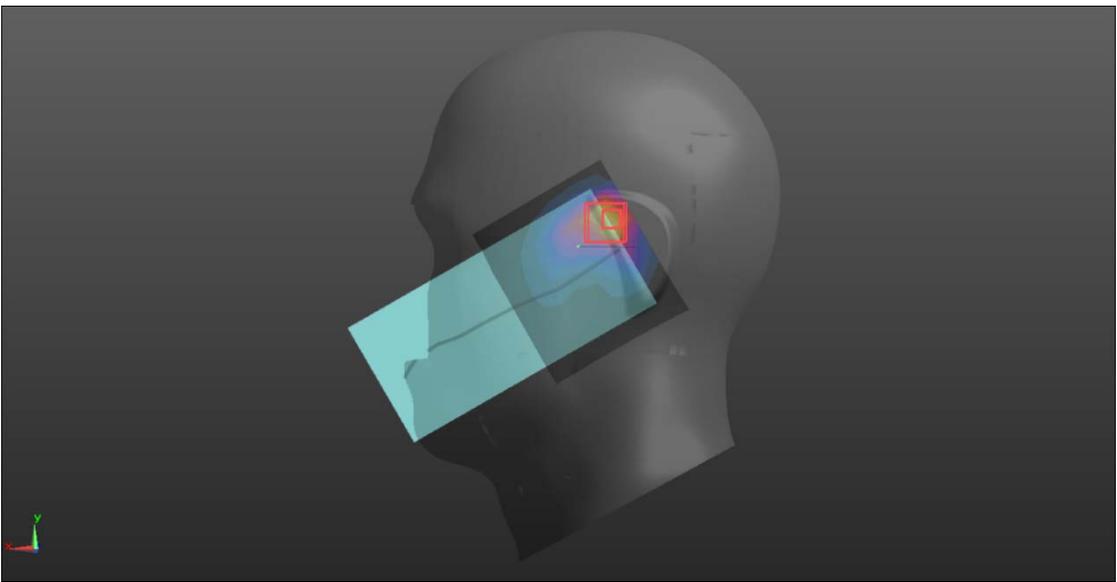
LTE Band66

Hotspot	Back
<p>Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.047$; $\rho = 1000$ kg/m³ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27); Calibrated: 2020/10/30; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/LTE B66/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.885 W/kg</p> <p>BACK/LTE B66/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.075 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 1.09 W/kg SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.270 W/kg Maximum value of SAR (measured) = 0.872 W/kg</p>	
	

LTE Band71

Hotspot	Back
<p>Communication System: UID 0, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) (0); Frequency: 683 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 683 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 42.242$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 2020/10/30; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/LTE B71/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.437 W/kg</p> <p>BACK/LTE B71/Zoom Scan (7x10x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.63 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.527 W/kg SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.252 W/kg Maximum value of SAR (measured) = 0.426 W/kg</p>	
	

WIFI

Head	Left Cheek
<p>Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.812$ S/m; $\epsilon_r = 39.183$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30; Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 2020/9/30 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>LC/WIFI 2.4/Area Scan (9x8x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.671 W/kg</p> <p>LC/WIFI 2.4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm</p> <p>Reference Value = 13.57 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.987 W/kg</p> <p>SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.224 W/kg Maximum value of SAR (measured) = 0.749 W/kg</p> 	

BT

Head	Left Cheek
<p>Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.09 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³ Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> • Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 2020/10/30; • Sensor-Surface: 1.4mm (Mechanical Surface Detection) • Electronics: DAE4 Sn720; Calibrated: 2020/9/30 • Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx • Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>LC/BT/Area Scan (9x8x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.108 W/kg</p> <p>LC/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.054 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.149 W/kg SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.032 W/kg Maximum value of SAR (measured) = 0.116 W/kg</p> 