



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z6530V
FCC ID : SRQ-Z6530V
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a data re-used report which is only valid together with the original test report. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

1 GENERAL DESCRIPTION..... 4

1.1 Applicant 4

1.2 Manufacturer..... 4

1.3 Product Feature of Equipment Under Test..... 4

1.4 Product Specification of Equipment Under Test..... 4

1.5 Modification of EUT 5

1.6 Testing Location 5

1.7 Applicable Standards..... 5

1.8 Re-use of Measured Data 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

2.1 Carrier Frequency and Channel 8

2.2 Test Mode..... 9

2.3 EUT Operation Test Setup 9

2.4 Measurement Results Explanation Example..... 9

3 TEST RESULT 10

3.1 Maximum Conducted Output Power Measurement 10

4 LIST OF MEASURING EQUIPMENT..... 12

APPENDIX A. REFERENCE REPORT



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE Digital Mobile Phone
Brand Name	ZTE
Model Name	Z6530V
FCC ID	SRQ-Z6530V
EUT supports Radios application	LTE/NFC/FM Receiver/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR / EDR / LE
HW Version	Z6530VHW1.0
SW Version	Z6530VV1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11n HT20 : 15.76 dBm / 0.0377 W 802.11n HT40 : 14.58 dBm / 0.0287 W 802.11ac VHT20: 15.85 dBm / 0.0385 W 802.11ac VHT40: 14.82 dBm / 0.0303 W 802.11ac VHT80: 14.14 dBm / 0.0259 W
Type of Modulation	802.11n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	IFA Antenna with gain -2.0 dBi



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH06-KS	CN1257	314309

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013



1.8 Re-use of Measured Data

1.6.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: Z6530V, FCC ID: SRQ-Z6530V) is electrically identical to the reference device (Model: Z6530M, FCC ID: SRQ-Z6530M) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 484596 D01.

1.6.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration.

The re-used RF data includes the following bands provided in Appendix A (Sporton RF Report No. FR951606F for the reference device Model: Z6530M, FCC ID: SRQ-Z6530M).

1.6.3 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test	Report Title/Section
NII (B1)	SRQ-Z6530M	Part15E(FR951606E)	All sections applicable except Conducted Power
NII (B4)	SRQ-Z6530M	Part15E(FR951606F)	All sections applicable except Conducted Power



1.6.4 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for the radiated spurious emission, the test result were consistent with FCC ID: SRQ-Z6530M.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

Test Item	Mode	SRQ-Z6530M Worst Result	SRQ-Z6530V Worst Result	Difference (dB)
Radiated Spurious Emission (dBuV/m)	802. 11ac VHT80	52.77	50.42	2.35
	802. 11ac VHT80	62.23	60.10	2.13



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss

$$\text{Offset} = \text{RF cable loss}$$

Following shows an offset computation example with cable loss 6.9 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.9 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup

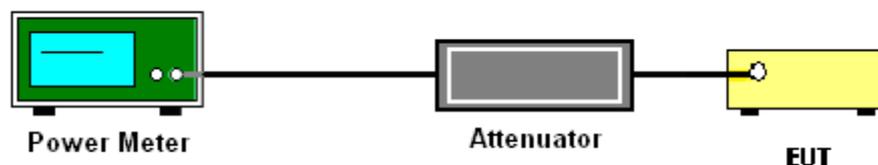



3.1.5 Test Result of Maximum Conducted Output Power

FCC Band IV									
Mod.	Data Rate	NTX	Channel	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail
HT20	MCS0	1	149	5745	0.12	15.73	30.00	-2.00	Pass
HT20	MCS0	1	157	5785	0.12	15.76	30.00	-2.00	Pass
HT20	MCS0	1	165	5825	0.12	15.44	30.00	-2.00	Pass
HT40	MCS0	1	151	5755	0.24	14.52	30.00	-2.00	Pass
HT40	MCS0	1	159	5795	0.24	14.58	30.00	-2.00	Pass
VHT20	MCS0	1	149	5745	0.12	15.77	30.00	-2.00	Pass
VHT20	MCS0	1	157	5785	0.12	15.85	30.00	-2.00	Pass
VHT20	MCS0	1	165	5825	0.12	15.74	30.00	-2.00	Pass
VHT40	MCS0	1	151	5755	0.10	14.71	30.00	-2.00	Pass
VHT40	MCS0	1	159	5795	0.10	14.82	30.00	-2.00	Pass
VHT80	MCS0	1	155	5775	0.50	14.14	30.00	-2.00	Pass



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Aug. 05, 2019	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 14, 2019	Aug. 05, 2019	Jan. 13, 2020	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 14, 2019	Aug. 05, 2019	Jan. 13, 2020	Conducted (TH01-KS)



Appendix A. Reference Report

Please refer to Sporton report number FR951606F which is issued separately.