



# FCC Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : LTE/CDMA/WCDMA/GSM(GPRS)Multi-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : Z719DL  
**FCC ID** : SRQ-Z719DL  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was received on Apr. 21, 2017 and testing was completed on May 02, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**Sporton International (KunShan) INC.**  
**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1. GENERAL DESCRIPTION .....5**

    1.1. Applicant.....5

    1.2. Manufacturer .....5

    1.3. Product Feature of Equipment Under Test .....5

    1.4. Product Specification of Equipment Under Test .....6

    1.5. Modification of EUT .....7

    1.6. Test Location .....7

    1.7. Applicable Standards .....7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....8**

    2.1. Test Mode .....8

    2.2. Connection Diagram of Test System .....9

    2.3. Support Unit used in test configuration and system..... 11

    2.4. EUT Operation Test Setup .....11

**3. TEST RESULT.....12**

    3.1. Test of AC Conducted Emission Measurement .....12

    3.2. Test of Radiated Emission Measurement .....19

**4. LIST OF MEASURING EQUIPMENT .....23**

**5. UNCERTAINTY OF EVALUATION .....24**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 5.20 dB at 0.174 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.99 dB at 165.810 MHz



# 1. General Description

## 1.1. Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

## 1.2. Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE/CDMA/WCDMA/GSM(GPRS)Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z719DL
FCC ID	SRQ-Z719DL
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+ (16QAM uplink is not supported)/LTE/WLAN 2.4GHz 802.11b/g/n HT20/Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v 4.1 LE
IMEI Code	Conduction: 990008850009866 Radiation: 990008850008058
HW Version	Z719DLHWV1.0
SW Version	Z719DLV1.0.0B01
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz Glonass: 1602 MHz + n × 0.5625MHz (n=-7,-6,-5,...,0,...,6)
<b>Antenna Type</b>	WWAN : IFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna GPS/Glonass : IFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported) LTE: QPSK / 16QAM CDMA2000 : QPSK CDMA2000 1xEV-DO : 8PSK 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK



	Bluetooth (3Mbps) : 8-DPSK GPS/Glonass : BPSK
--	--

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

<b>Test Site</b>	Sporton International (KunShan) INC.		
<b>Test Site Location</b>	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	CO01-KS	03CH02-KS	418269

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Rear) <Fig.1> Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Front) <Fig.1> Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + MPEG4<Fig.1> Mode 4: LTE Band 2 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Glonass Rx<Fig.2> Mode 5: LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx<Fig.3>
Radiated Emissions < 1GHz	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Rear) <Fig.1> Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Front) <Fig.1> Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + MPEG4<Fig.1> Mode 4: LTE Band 2 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Glonass Rx<Fig.2> Mode 5: LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx<Fig.3>
Radiated Emissions ≥ 1GHz	Mode 1: LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx<Fig.3>
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>The worst case of AC is mode 1; and the USB Link mode of AC is mode 5, the test data of this mode was reported.</li> <li>The worst case of RE &lt; 1G is mode 5; only the test data of this mode was reported.</li> <li>Data Link with Notebook means data application transferred mode between EUT and Notebook.</li> </ol>	


## 2.2. Connection Diagram of Test System

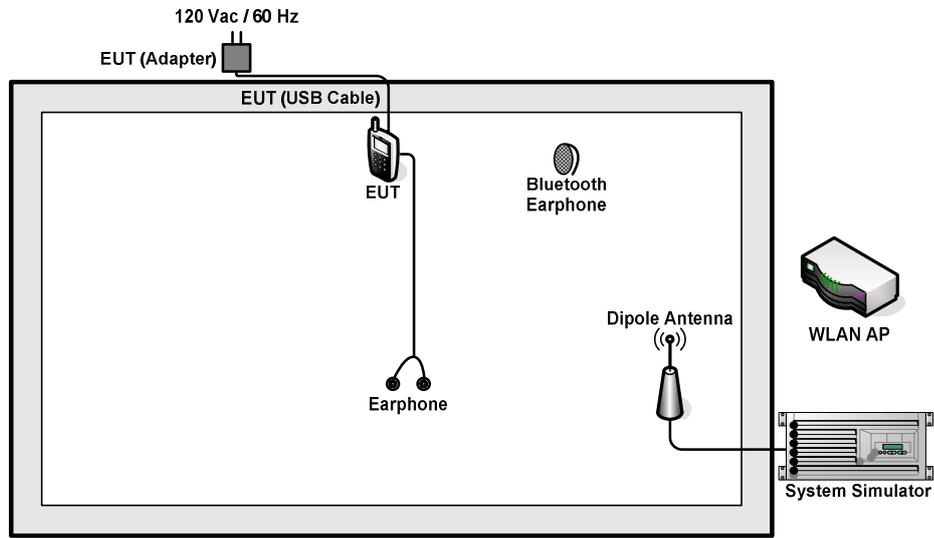

<Fig.1>

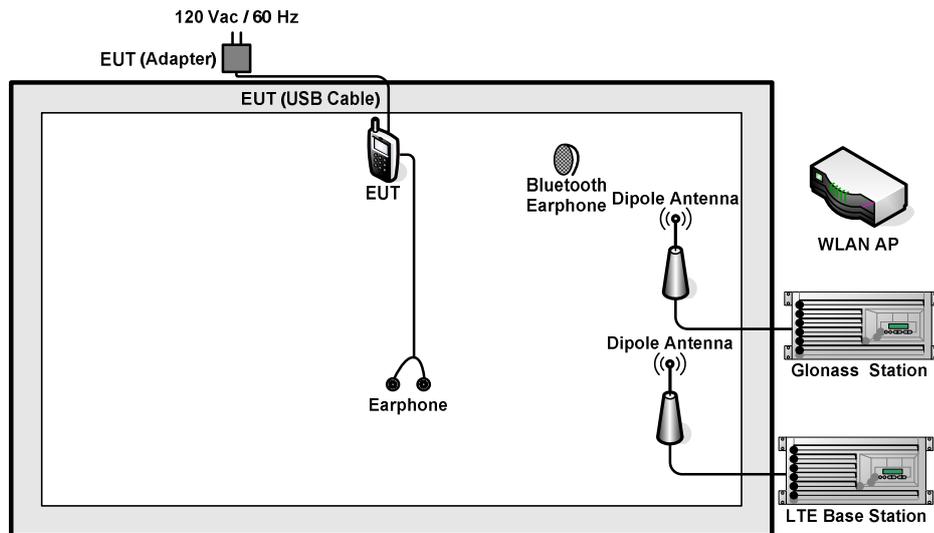

<Fig.2>

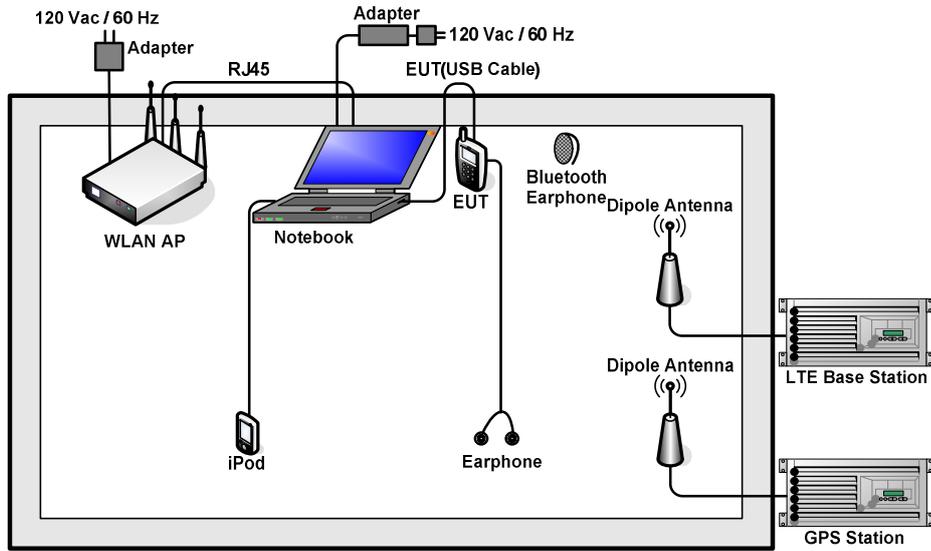

<Fig.3>

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
4.	Glonass Station	RACELOGIC	RLLS03-2RP	N/A	N/A	Unshielded, 1.8 m
5.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
6.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
7.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
8.	Notebook	DELL	Latitude3440	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
9.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
10.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
11.	SD Card	Kingston	4GB	N/A	N/A	N/A
12.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
13.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A
14.	Earphone	Lenovo	LH102	N/A	Unshielded, 1.2 m	N/A
15.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A

### 2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator’s paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GPS/Glonass function to make the EUT receive continuous signals from GPS/Glonass station.
3. Execute “Video player” to play MPEG4 files.
4. Turn on camera to capture images.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

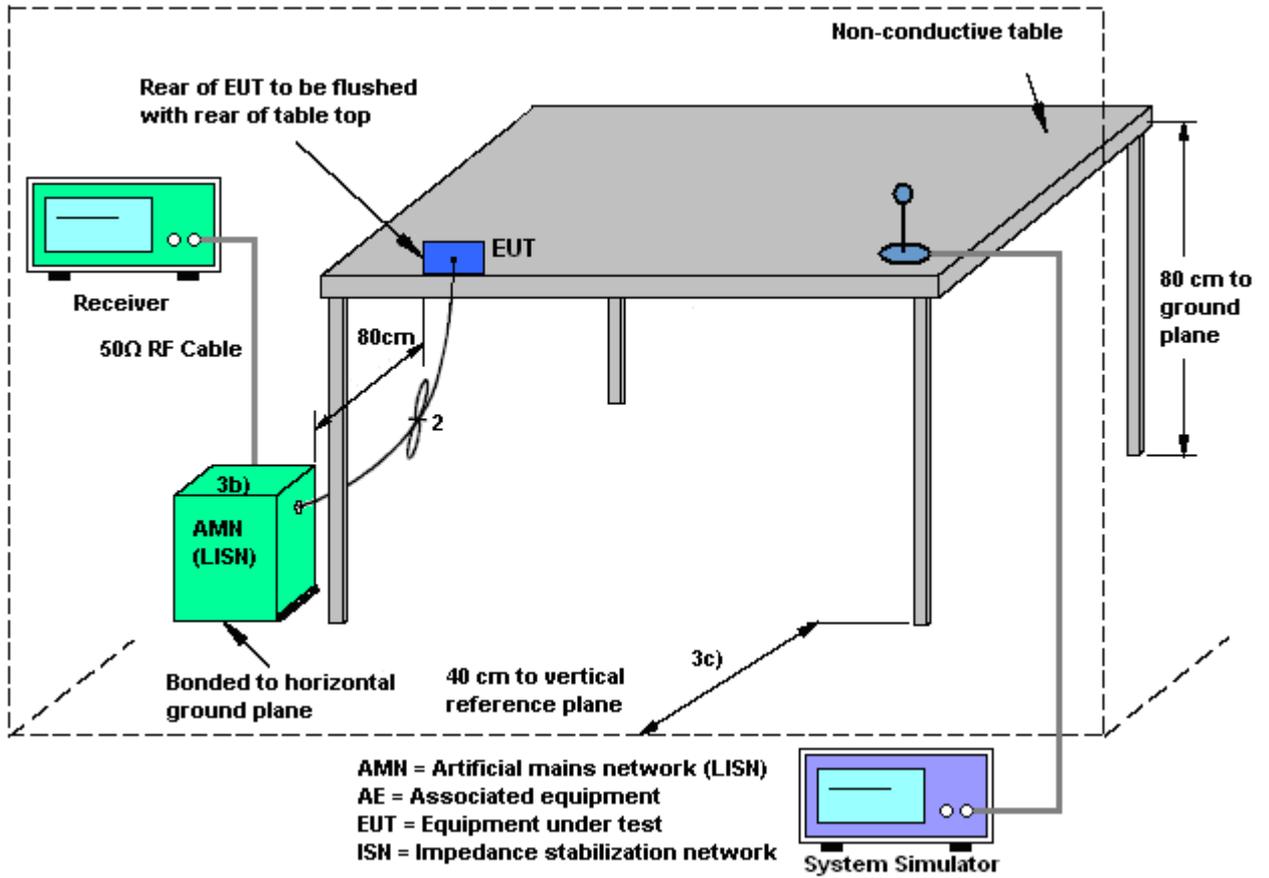



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Rear)		

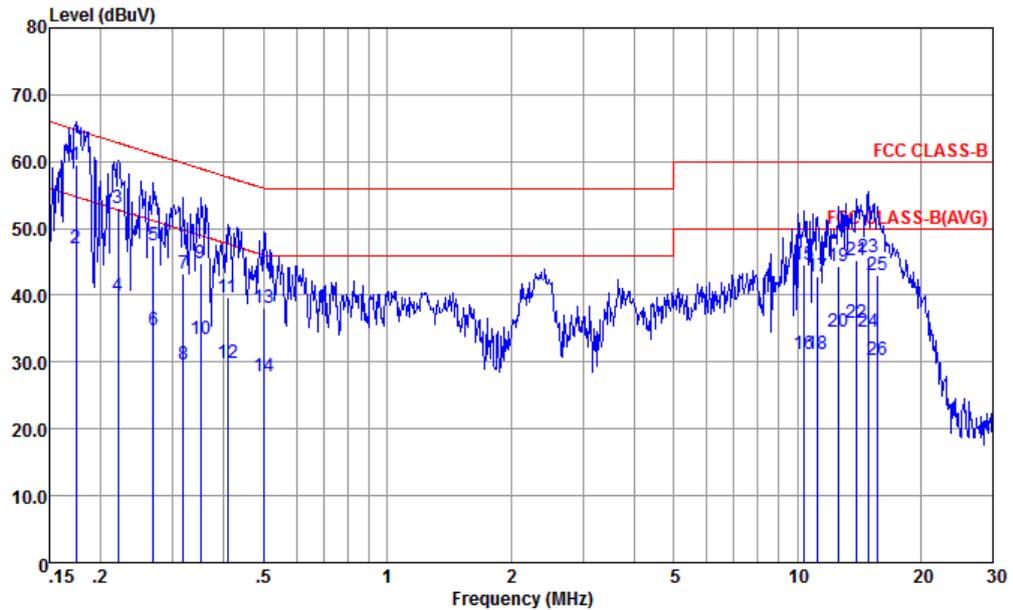


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-161017-060103 LINE  
 Project : (FC) 742101  
 mode : Mode 1  
 : 990008850009866 #17

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.174	59.57	-5.20	64.77	48.80	0.41	10.36	QP
2	0.174	46.97	-7.80	54.77	36.20	0.41	10.36	Average
3	0.221	53.08	-9.71	62.79	42.50	0.27	10.31	QP
4	0.221	39.78	-13.01	52.79	29.20	0.27	10.31	Average
5	0.269	47.45	-13.71	61.16	36.90	0.27	10.28	QP
6	0.269	34.75	-16.41	51.16	24.20	0.27	10.28	Average
7	0.318	43.31	-16.44	59.75	32.80	0.27	10.24	QP
8	0.318	29.71	-20.04	49.75	19.20	0.27	10.24	Average
9	0.350	44.80	-14.16	58.96	34.30	0.27	10.23	QP
10	0.350	33.40	-15.56	48.96	22.90	0.27	10.23	Average
11	0.408	39.67	-18.01	57.68	29.20	0.27	10.20	QP
12	0.408	29.77	-17.91	47.68	19.30	0.27	10.20	Average
13	0.502	38.06	-17.94	56.00	27.60	0.27	10.19	QP
14	0.502	27.96	-18.04	46.00	17.50	0.27	10.19	Average
15	10.397	44.55	-15.45	60.00	33.90	0.30	10.35	QP
16	10.397	31.25	-18.75	50.00	20.60	0.30	10.35	Average
17	11.198	42.86	-17.14	60.00	32.20	0.29	10.37	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Rear)		

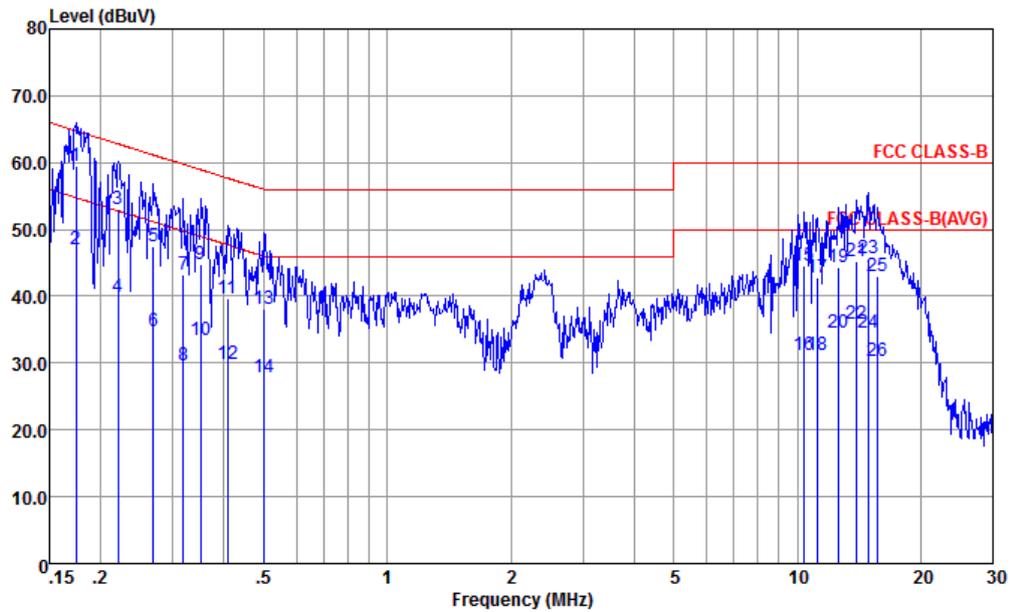


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-161017-060103 LINE  
 Project : (FC) 742101  
 mode : Mode 1  
 : 990008850009866 #17

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	11.198	31.26	-18.74	50.00	20.60	0.29	10.37	Average
19	12.582	44.29	-15.71	60.00	33.60	0.29	10.40	QP
20	12.582	34.49	-15.51	50.00	23.80	0.29	10.40	Average
21	13.915	45.31	-14.69	60.00	34.60	0.28	10.43	QP
22	13.915	35.91	-14.09	50.00	25.20	0.28	10.43	Average
23	14.907	45.63	-14.37	60.00	34.90	0.28	10.45	QP
24	14.907	34.53	-15.47	50.00	23.80	0.28	10.45	Average
25	15.718	43.00	-17.00	60.00	32.20	0.28	10.52	QP
26	15.718	30.40	-19.60	50.00	19.60	0.28	10.52	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable(Charging from Adapter) + Earphone + Camera (Rear)		

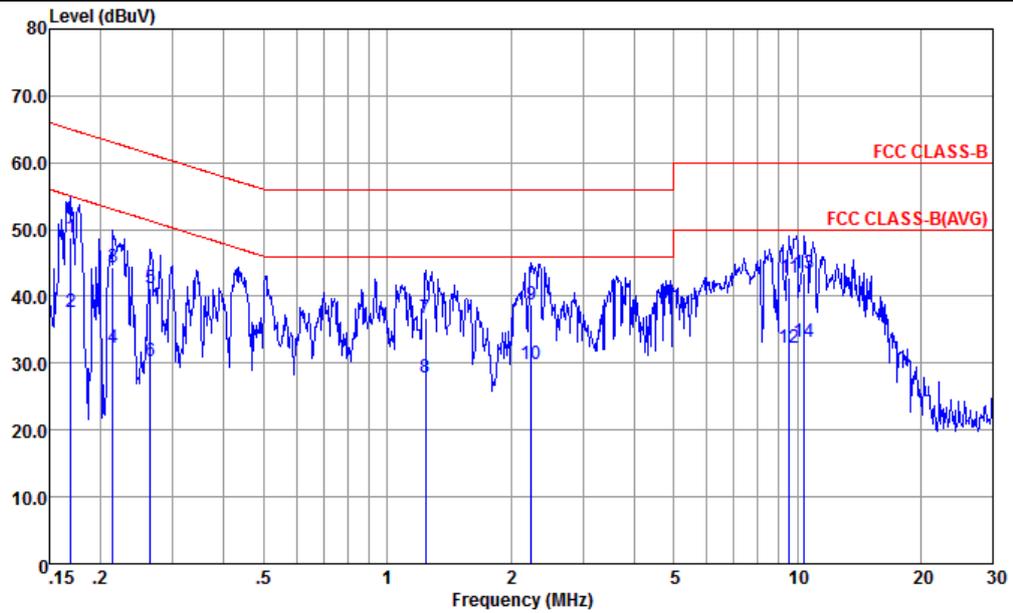


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-161017-060103 NEUTRAL  
 Project : (FC) 742101  
 mode : Mode 1  
 : 990008850009866 #17

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.169	48.90	-16.09	64.99	38.19	0.34	10.37	QP
2	0.169	37.60	-17.39	54.99	26.89	0.34	10.37	Average
3	0.214	44.25	-18.80	63.05	33.60	0.33	10.32	QP
4	0.214	32.25	-20.80	53.05	21.60	0.33	10.32	Average
5	0.264	41.22	-20.07	61.29	30.59	0.35	10.28	QP
6	0.264	30.22	-21.07	51.29	19.59	0.35	10.28	Average
7	1.242	36.79	-19.21	56.00	26.20	0.40	10.19	QP
8	1.242	27.79	-18.21	46.00	17.20	0.40	10.19	Average
9	2.249	38.80	-17.20	56.00	28.19	0.41	10.20	QP
10	2.249	29.80	-16.20	46.00	19.19	0.41	10.20	Average
11	9.552	42.82	-17.18	60.00	32.20	0.29	10.33	QP
12	9.552	32.22	-17.78	50.00	21.60	0.29	10.33	Average
13	10.397	43.43	-16.57	60.00	32.80	0.28	10.35	QP
14	10.397	33.23	-16.77	50.00	22.60	0.28	10.35	Average



Test Mode :	Mode 5	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

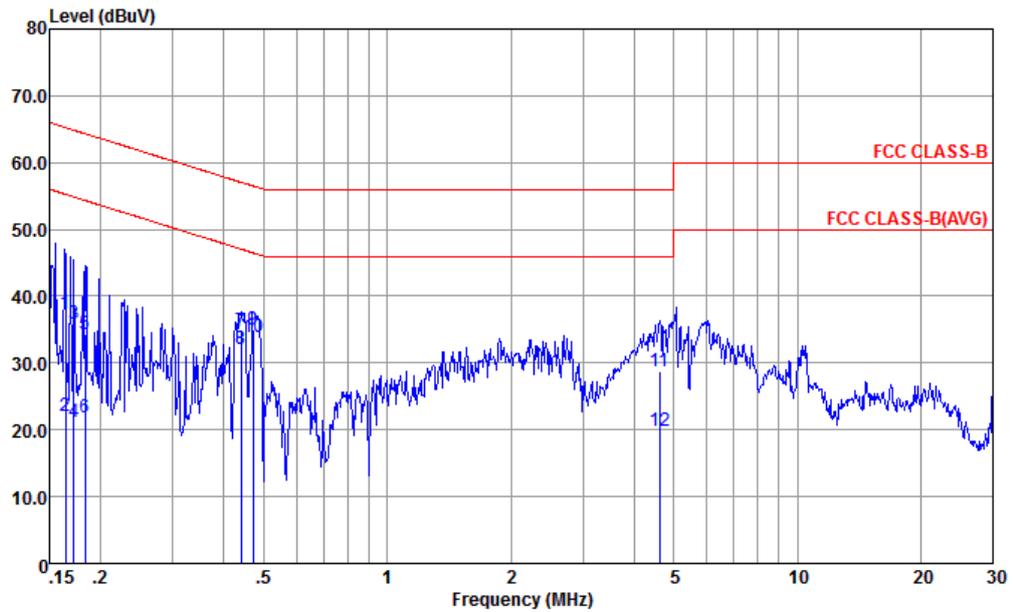


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-161017-060103 LINE  
 Project : (FC) 742101  
 mode : Mode 5  
 : 990008850009866 #17

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	37.44	-27.81	65.25	26.61	0.46	10.37	QP
2	0.164	22.04	-33.21	55.25	11.21	0.46	10.37	Average
3	0.172	35.98	-28.88	64.86	25.21	0.41	10.36	QP
4	0.172	21.08	-33.78	54.86	10.31	0.41	10.36	Average
5	0.183	34.30	-30.03	64.33	23.60	0.35	10.35	QP
6	0.183	21.90	-32.43	54.33	11.20	0.35	10.35	Average
7	0.440	34.76	-22.31	57.07	24.30	0.27	10.19	QP
8	0.440	32.06	-15.01	47.07	21.60	0.27	10.19	Average
9	0.471	35.06	-21.43	56.49	24.60	0.27	10.19	QP
10 *	0.471	33.96	-12.53	46.49	23.50	0.27	10.19	Average
11	4.622	28.65	-27.35	56.00	18.20	0.21	10.24	QP
12	4.622	19.75	-26.25	46.00	9.30	0.21	10.24	Average



Test Mode :	Mode 5	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

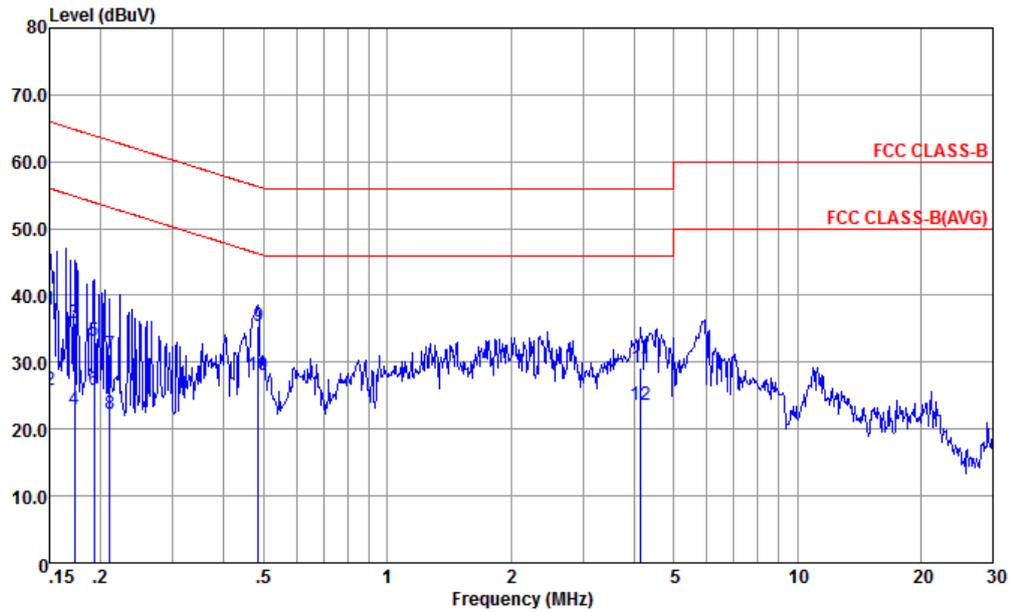

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-161017-060103 NEUTRAL  
 Project : (FC) 742101  
 mode : Mode 5  
 : 990008850009866 #17

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	37.93	-28.07	66.00	27.20	0.34	10.39	QP
2	0.150	25.93	-30.07	56.00	15.20	0.34	10.39	Average
3	0.173	35.90	-28.91	64.81	25.20	0.34	10.36	QP
4	0.173	22.90	-31.91	54.81	12.20	0.34	10.36	Average
5	0.192	33.27	-30.66	63.93	22.60	0.33	10.34	QP
6	0.192	25.87	-28.06	53.93	15.20	0.33	10.34	Average
7	0.211	31.26	-31.92	63.18	20.61	0.33	10.32	QP
8	0.211	22.26	-30.92	53.18	11.61	0.33	10.32	Average
9	0.484	35.47	-20.80	56.27	24.90	0.38	10.19	QP
10 *	0.484	28.17	-18.10	46.27	17.60	0.38	10.19	Average
11	4.158	29.23	-26.77	56.00	18.60	0.39	10.24	QP
12	4.158	23.53	-22.47	46.00	12.90	0.39	10.24	Average



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

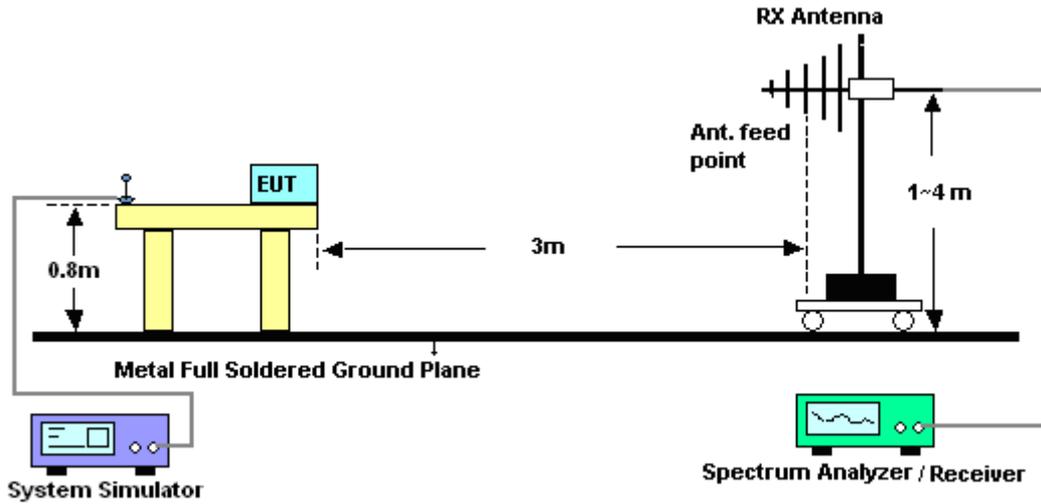


For radiated emissions above 1GHz

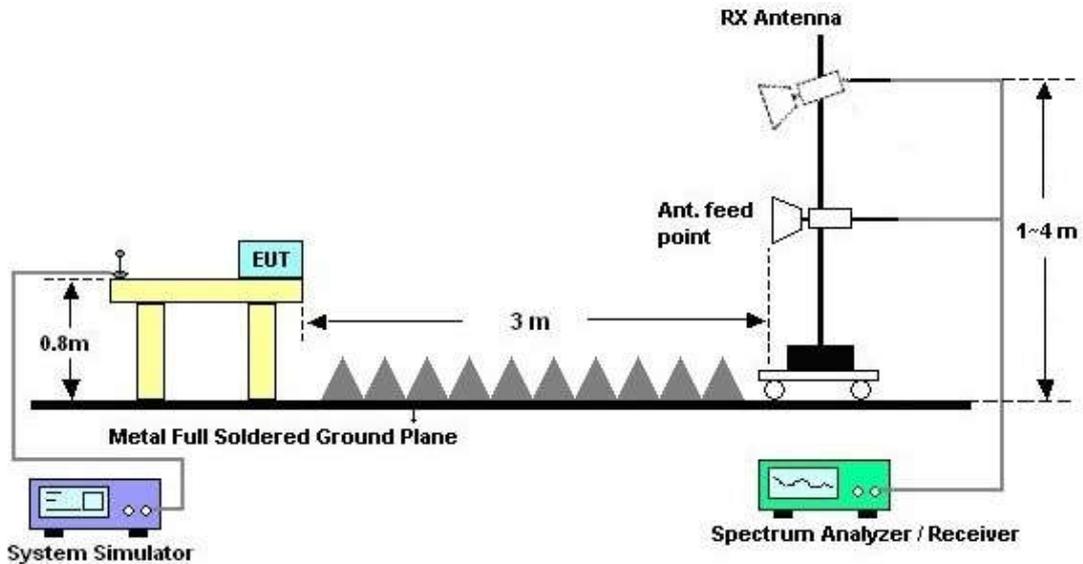



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 5	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#6 is system simulator signal which can be ignored.		

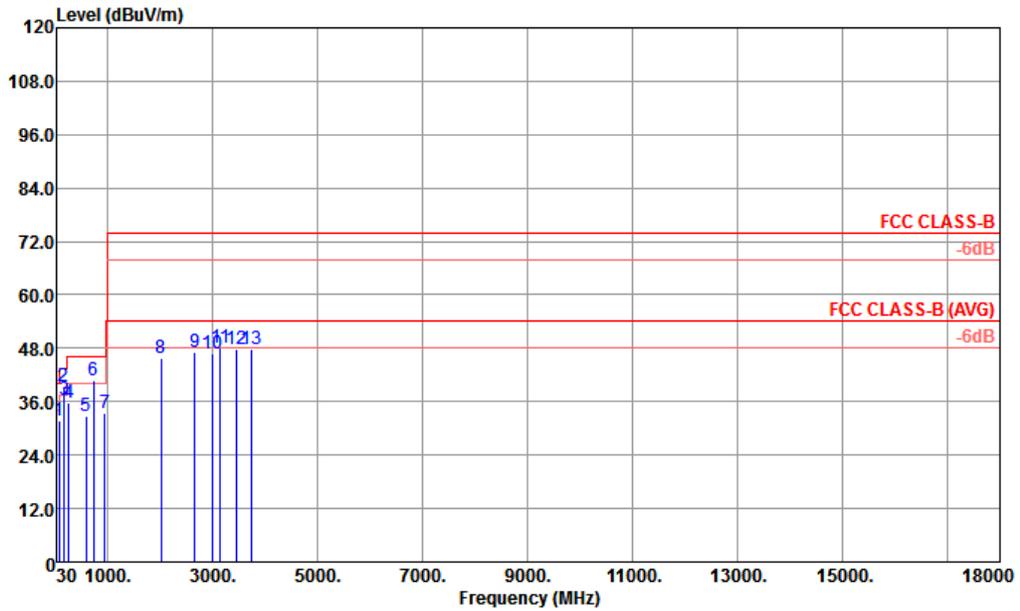


Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 02 LF ANT HORIZONTAL  
 Project : (FC) 742101  
 Mode : 5  
 IMEI : 990008850008058/01 #22

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	84.54	31.81	-8.19	40.00	47.91	15.70	0.21	32.01	---	---	Peak
2 !	165.81	39.51	-3.99	43.50	53.95	16.96	0.35	31.75	100	0	Peak
3	174.72	36.41	-7.09	43.50	51.08	16.68	0.37	31.72	---	---	Peak
4	269.76	35.80	-10.20	46.00	49.18	17.42	0.53	31.33	---	---	Peak
5	597.50	32.63	-13.37	46.00	36.65	24.60	0.90	29.52	---	---	Peak
6 !	736.80	40.64			41.30	26.63	1.31	28.60	---	---	Peak
7	948.20	33.38	-12.62	46.00	30.34	28.46	1.71	27.13	---	---	Peak
8	2028.00	45.81	-28.19	74.00	43.55	30.25	4.76	32.75	---	---	Peak
9	2660.00	47.04	-26.96	74.00	42.62	31.56	3.31	30.45	---	---	Peak
10	2990.00	46.94	-27.06	74.00	40.28	32.35	3.14	28.83	---	---	Peak
11	3156.00	48.07	-25.93	74.00	40.19	32.97	5.41	30.50	---	---	Peak
12	3459.00	47.86	-26.14	74.00	38.75	33.39	5.98	30.26	---	---	Peak
13	3738.00	47.65	-26.35	74.00	36.89	34.49	6.39	30.12	---	---	Peak



Test Mode :	Mode 5	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 12 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#6 is system simulator signal which can be ignored.		

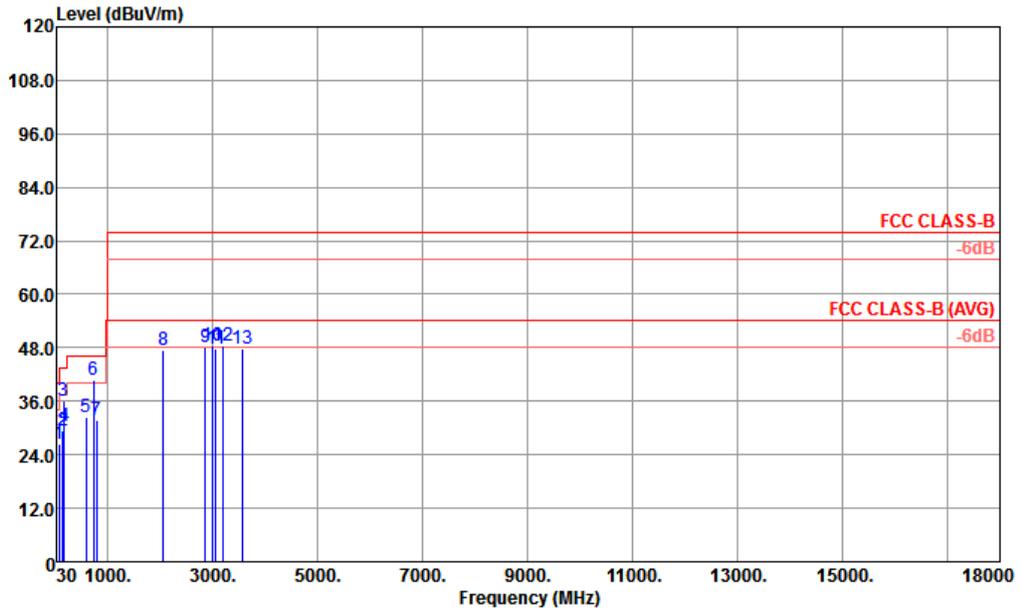

Site : 03CH02-KS  
 Condition : FCC CLASS-B 3m 02 LF ANT VERTICAL  
 Project : (FC) 742101  
 Mode : 5  
 IMEI : 990008850008058/01 #22

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	84.54	26.40	-13.60	40.00	42.50	15.70	0.21	32.01	---	---	Peak
2	155.55	29.36	-14.14	43.50	43.51	17.30	0.33	31.78	---	---	Peak
3	165.54	36.00	-7.50	43.50	50.44	16.96	0.35	31.75	100	246	Peak
4	175.26	30.35	-13.15	43.50	45.08	16.62	0.37	31.72	---	---	Peak
5	598.20	32.51	-13.49	46.00	36.52	24.60	0.90	29.51	---	---	Peak
6	735.40	40.69			41.38	26.62	1.31	28.62	---	---	Peak
7	798.40	31.63	-14.37	46.00	31.86	26.51	1.47	28.21	---	---	Peak
8	2070.00	47.36	-26.64	74.00	44.93	30.40	5.05	33.02	---	---	Peak
9	2866.00	48.15	-25.85	74.00	43.20	32.00	2.85	29.90	---	---	Peak
10	2988.00	48.40	-25.60	74.00	41.79	32.35	3.09	28.83	---	---	Peak
11	3072.00	47.84	-26.16	74.00	40.63	32.65	4.11	29.55	---	---	Peak
12	3201.00	48.34	-25.66	74.00	39.93	33.10	6.05	30.74	---	---	Peak
13	3585.00	47.83	-26.17	74.00	38.31	33.57	6.07	30.12	---	---	Peak



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	May 01, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	May 01, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	May 01, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	May 01, 2017	Oct. 12, 2017	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Aug. 09, 2016	May 02, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44G,MAX 30dB	Apr. 18, 2017	May 02, 2017	Apr. 17, 2018	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz-2GHz	Aug. 20, 2016	May 02, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	May 02, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 09, 2016	May 02, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 13, 2016	May 02, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	May 02, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	May 02, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	May 02, 2017	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.7dB
---	-------