

HAC_E_Dipole_835_130606**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2012-12-12;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn679; Calibrated: 2013-1-16
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

E Scan - measurement distance from the probe sensor center to CD835

=15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated

grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 103.7 V/m; Power Drift = -0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 106.7 V/m

Average value of Total=(106.7+106) /2 = 106.35 V/m)

PMF scaled E-field


Grid 1 M4 105.3 V/m	Grid 2 M4 106.7 V/m	Grid 3 M4 104.9 V/m
Grid 4 M4 63.11 V/m	Grid 5 M4 63.81 V/m	Grid 6 M4 62.47 V/m
Grid 7 M4 104.7 V/m	Grid 8 M4 106.0 V/m	Grid 9 M4 104.1 V/m

Cursor:

Total = 106.7 V/m

E Category: M4

Location: 0.5, -70, 9.7 mm

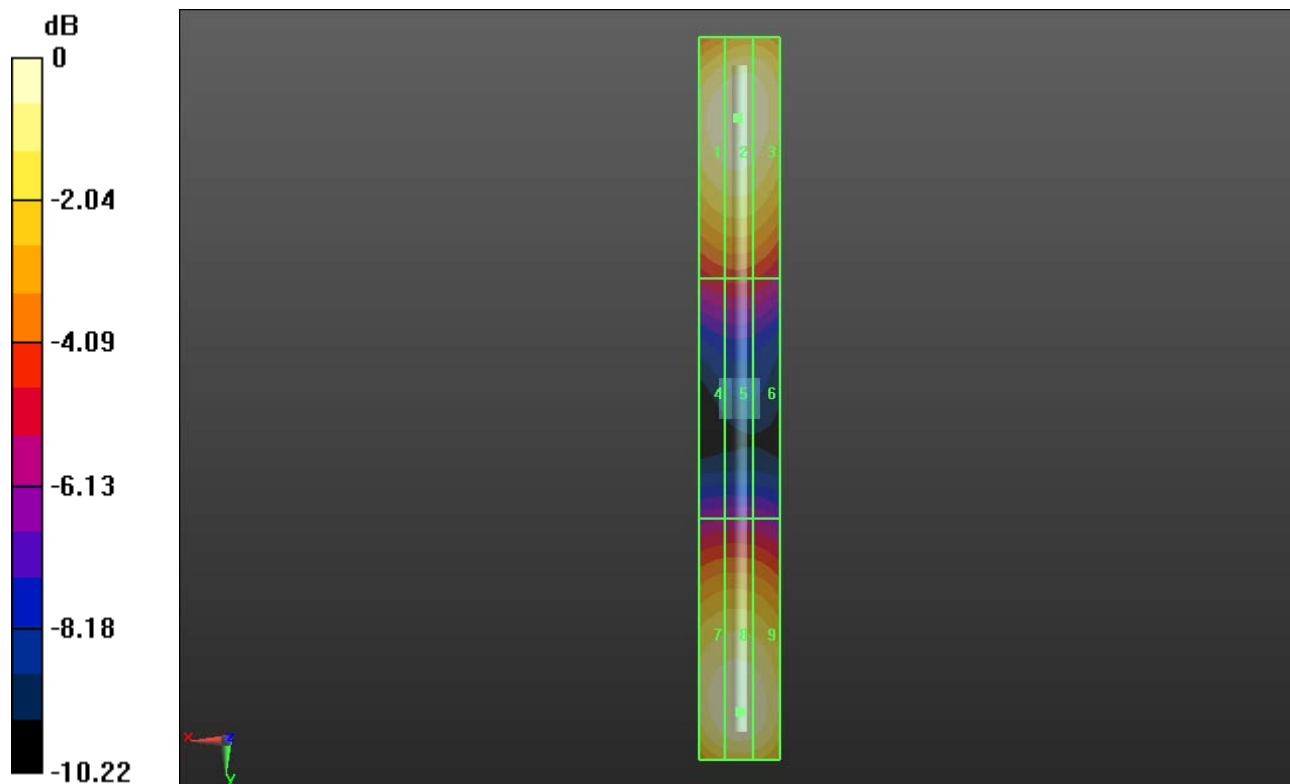

HAC_E_Dipole_1880_130606**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2012-12-12;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn679; Calibrated: 2013-1-16
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (4); SEMCAD X Version 14.6.8 (7028)

E Scan - measurement distance from the probe sensor center to CD1880

=15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated

grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 142.6 V/m; Power Drift = 0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.79 V/m

Average value of Total=(87.79+82.91) /2 = 85.35 V/m)

PMF scaled E-field



Grid 1 M3 86.11 V/m	Grid 2 M3 87.79 V/m	Grid 3 M3 86.67 V/m
Grid 4 M3 69.19 V/m	Grid 5 M3 69.98 V/m	Grid 6 M3 68.73 V/m
Grid 7 M3 81.38 V/m	Grid 8 M3 82.91 V/m	Grid 9 M3 81.83 V/m

Cursor:

Total = 87.79 V/m

E Category: M3

Location: 0, -31, 9.7 mm

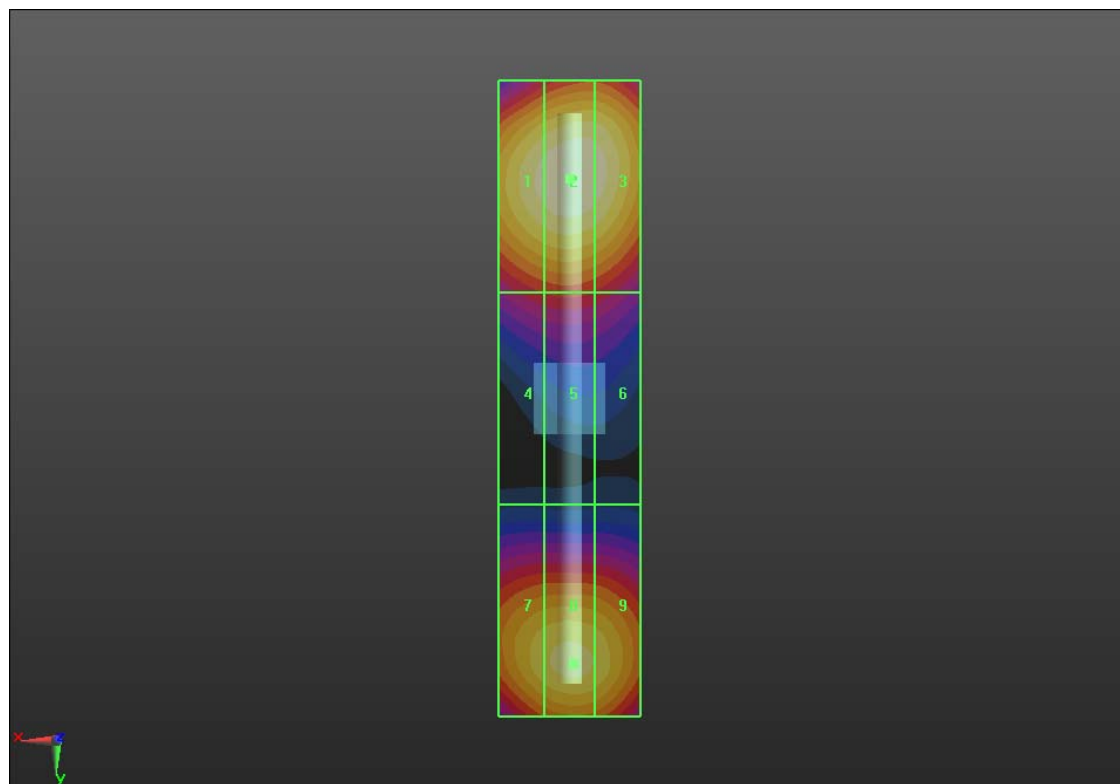

0 dB = 87.79 V/m = 38.87 dBV/m