



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/LTE Multi-mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z836F
FCC ID : SRQ-Z836F
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

This is a data re-used report which is only valid together with the original test report. The product testing was completed on Feb. 11, 2017. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant.....5

 1.2 Manufacturer5

 1.3 Product Feature of Equipment Under Test5

 1.4 Product Specification of Equipment Under Test6

 1.5 Modification of EUT6

 1.6 Maximum ERP/EIRP Power.....7

 1.7 Testing Location8

 1.8 Applicable Standards8

 1.9 Re-use of Measured Data9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST10

 2.1 Test Mode.....10

 2.2 Connection Diagram of Test System11

 2.3 Support Unit used in test configuration12

3 CONDUCTED TEST RESULT.....13

 3.1 Measuring Instruments.....13

 3.2 Test Setup13

 3.3 Test Result of Conducted Test.....13

 3.4 Conducted Output Power and ERP/EIRP14

4 RADIATED TEST ITEMS15

 4.1 Measuring Instruments.....15

 4.2 Test Setup15

 4.3 Test Result of Radiated Test.....15

 4.4 Field Strength of Spurious Radiation Measurement16

5 LIST OF MEASURING EQUIPMENT17

6 UNCERTAINTY OF EVALUATION18

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS

APPENDIX D. REFERENCE REPORT

APPENDIX E. PRODUCT EQUALITY DECLARATION



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 43.58 dB at 2508.000 MHz



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/LTE Multi-mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z836F
FCC ID	SRQ-Z836F
EUT supports Radios application	GSM/GPRS/EGPRS/ WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v3.0+EDR/Bluetooth v4.0 LE/ Bluetooth v4.1 LE Bluetooth v4.2 LE
IMEI Code	Radiation: 864356030001722
HW Version	Z836FHWV1.0
SW Version	Z836FV1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824.2 MHz ~ 848.8 MHz 1900: 1850.2 MHz ~ 1909.8MHz WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869.2 MHz ~ 893.8 MHz 1900: 1930.2 MHz ~ 1989.8 MHz WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	GSM/GPRS/EDGE: 850: 32.55 dBm 1900: 29.27 dBm WCDMA: Band V: 22.71 dBm Band II: 22.23 dBm Band IV: 22.56 dBm
Antenna Type	PIFA Antenna
Antenna Gain	Cellular Band: -1.00 dBi PCS Band: -1.00 dBi AWS Band: 0.00 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : BPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM uplink is not supported)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum ERP/EIRP Power

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP(W)
Part 22H	GSM850 GSM	GMSK	0.8710
Part 22H	GSM850 EDGE class 8	8PSK	0.2153
Part 22H	WCDMA Band V RMC 12.2Kbps	BPSK	0.0904
Part 24E	GSM1900 GSM	GMSK	0.6714
Part 24E	GSM1900 EDGE class 8	8PSK	0.2624
Part 24E	WCDMA Band II RMC 12.2Kbps	BPSK	0.1327
Part 27L	WCDMA Band IV RMC 12.2Kbps	BPSK	0.1803



1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH03-KS	306251

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Re-use of Measured Data

1.9.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: Z836F, FCC ID: SRQ-Z836F) is electrically identical to the reference device (Model: Z836BL, FCC ID: SRQ-Z836BL) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

1.9.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration as Appendix E.

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FG692313A for the reference device Model: Z836BL, FCC ID: SRQ-Z836BL):

1.9.3 Spot Check Verification Data Section

In order to confirm hardware similarity of the subject device with the reference device, spot check measurements were performed on the subject device for radiated spurious emission and ERP/EIRP.

Assertions concerning the similarity of these devices are based on representations by the applicant. The applicant accepts full responsibility for the validity of the similarity claim, and for the determination that verification test data are sufficient to support it.

1.9.4 Reference detail Section:

Equipment Class	Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
PCE (2G/3G)	SRQ-Z836BL	Part22H.24E.27L (FG692313A)	All sections applicable for conducted
PCE (LTE)	SRQ-Z836BL	Part22H.24E.27L.27H (FG692313B)	All sections applicable for conducted and full test of LTE band 66



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.


All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:


Test Modes		
Band	Radiated TCs	ERP/EIRP TCs
GSM 850	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band IV	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

For 24E

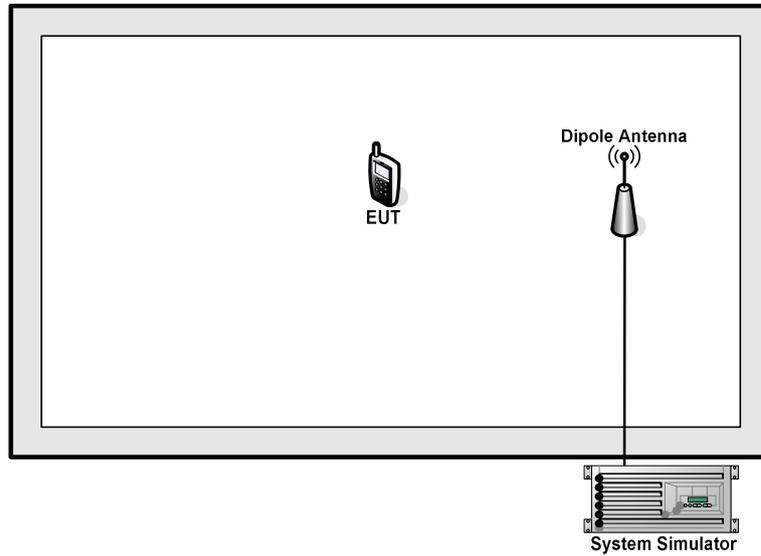

For 22H.27L

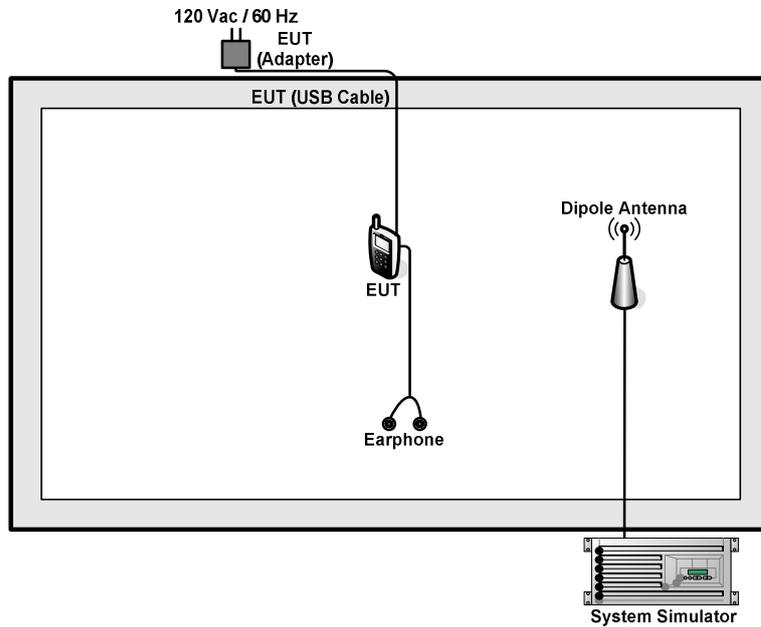



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8m
4.	Earphone	Lenovo	SH100	N/A	Unshielded,1.2m	N/A

3 Conducted Test Result

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

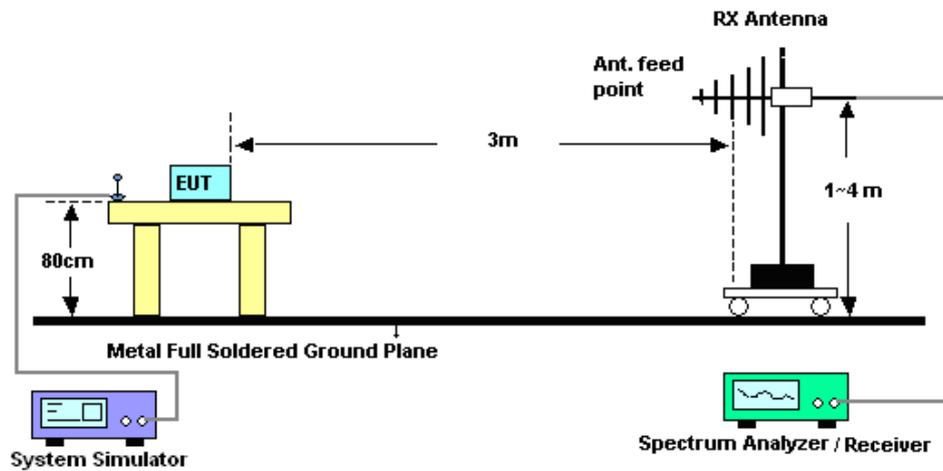

4.2.2 For radiated test above 1GHz

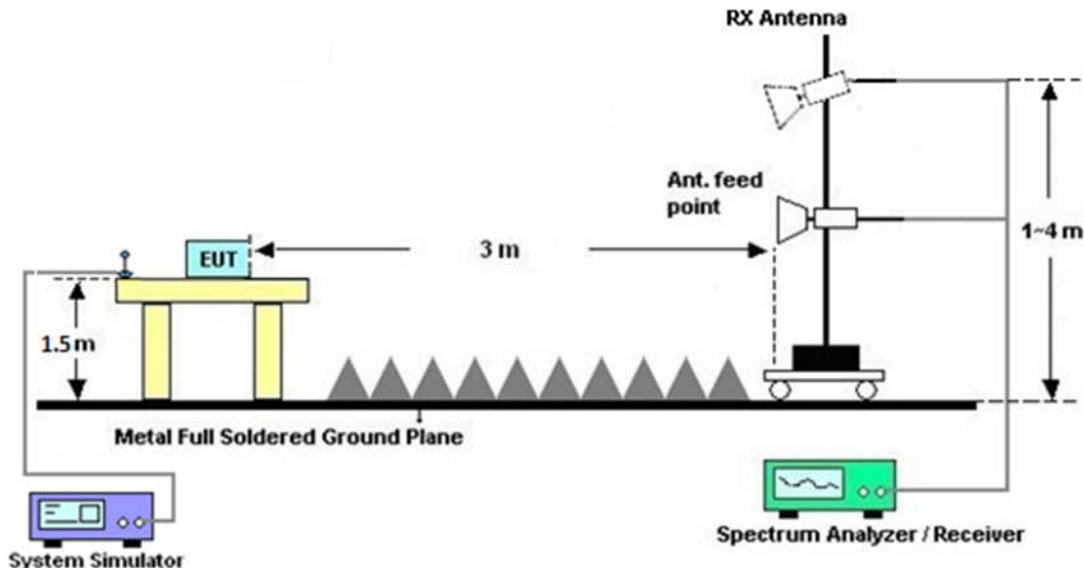

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)] \text{ (dB)}$
= $[30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Feb. 11, 2017	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Feb. 11, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Feb. 11, 2017	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Feb. 11, 2017	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Feb. 11, 2017	Aug. 08, 2017	Radiation (03CH03-KS)
High Gain Amplifier	MITEQ	AMF-7D-00 101800-30-1	1943529	1GHz~18GHz	Jan. 19, 2017	Feb. 11, 2017	Jan. 18, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Feb. 11, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35 -HG	1887435	18GHz~40GHz	Oct. 13, 2016	Feb. 11, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 11, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 11, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 11, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.55	32.50	32.42	29.20	29.27	28.96
GPRS class 8	32.53	32.49	32.40	29.17	29.26	28.95
GPRS class 10	30.82	30.85	30.86	28.03	27.91	27.90
EGPRS class 8	26.48	26.33	26.48	25.01	25.19	25.09
EGPRS class 10	24.88	24.87	25.00	23.60	23.69	23.52

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
AMR 12.2Kbps	22.70	22.60	22.58	22.06	22.22	22.19	22.52	22.55	22.42
RMC 12.2Kbps	22.71	22.62	22.60	22.07	22.23	22.20	22.53	22.56	22.45
HSDPA Subtest-1	21.65	21.60	21.58	21.00	21.04	21.03	21.55	21.57	21.46
HSDPA Subtest-2	21.64	21.60	21.58	21.01	21.05	21.00	21.50	21.51	21.45
HSDPA Subtest-3	21.19	21.18	21.10	20.50	20.60	20.58	20.95	20.96	20.90
HSDPA Subtest-4	21.15	21.13	21.10	20.52	20.64	20.60	20.96	20.97	20.92
HSUPA Subtest-1	21.30	21.28	21.20	20.62	20.80	20.75	20.90	20.95	20.85
HSUPA Subtest-2	20.37	20.30	20.30	20.00	20.10	20.08	20.05	20.10	20.00
HSUPA Subtest-3	20.45	20.42	20.40	19.95	20.05	20.01	20.10	20.15	20.02
HSUPA Subtest-4	20.92	20.90	20.85	20.50	20.59	20.56	20.65	20.68	20.60
HSUPA Subtest-5	21.38	21.30	21.28	20.56	20.71	20.70	21.00	21.05	20.95



ERP/EIRP

GSM850 (G_T - L_C = -1.00 dBi)			
Channel	128	189	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.4	848.8
(MHz)			
Conducted Power (dBm)	32.55	32.50	32.42
Conducted Power (Watts)	1.7989	1.7783	1.7458
ERP(dBm)	29.40	29.35	29.27
ERP(Watts)	0.8710	0.8610	0.8453

GSM850 (EDGE) (G_T - L_C = -1.00 dBi)			
Channel	128	189	251
	(Low)	(Mid)	(High)
Frequency	824.2	836.4	848.8
(MHz)			
Conducted Power (dBm)	26.48	26.33	26.48
Conducted Power (Watts)	0.4446	0.4295	0.4446
ERP(dBm)	23.33	23.18	23.33
ERP(Watts)	0.2153	0.2080	0.2153



GSM1900 (G _T - L _C = -1.00 dBi)			
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)			
Conducted Power (dBm)	29.20	29.27	28.96
Conducted Power (Watts)	0.8318	0.8453	0.7870
EIRP(dBm)	28.20	28.27	27.96
EIRP(Watts)	0.6607	0.6714	0.6252

GSM1900 (EDGE) (G _T - L _C = -1.00 dBi)			
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency	1850.2	1880	1909.8
(MHz)			
Conducted Power (dBm)	25.01	25.19	25.09
Conducted Power (Watts)	0.3170	0.3304	0.3228
EIRP(dBm)	24.01	24.19	24.09
EIRP(Watts)	0.2518	0.2624	0.2564



WCDMA Band V ($G_T - L_C = -1.00$ dBi)			
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency	826.4	836.4	846.6
(MHz)			
Conducted Power (dBm)	22.71	22.62	22.60
Conducted Power (Watts)	0.1866	0.1828	0.1820
ERP(dBm)	19.56	19.47	19.45
ERP(Watts)	0.0904	0.0885	0.0881

WCDMA Band II ($G_T - L_C = -1.00$ dBi)			
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency	1852.4	1880	1907.6
(MHz)			
Conducted Power (dBm)	22.07	22.23	22.20
Conducted Power (Watts)	0.1611	0.1671	0.1660
EIRP(dBm)	21.07	21.23	21.20
EIRP(Watts)	0.1279	0.1327	0.1318



WCDMA Band IV ($G_T - L_C = 0.00$ dBi)			
Channel	1312	1413	1513
	(Low)	(Mid)	(High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	22.53	22.56	22.45
Conducted Power (Watts)	0.1791	0.1803	0.1758
EIRP(dBm)	22.53	22.56	22.45
EIRP(Watts)	0.1791	0.1803	0.1758



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-62.38	-13	-49.38	-61.01	-64.24	1.19	5.20	H
	2508	-56.58	-13	-43.58	-59.57	-58.80	1.53	5.90	H
	3345	-68.14	-13	-55.14	-72.09	-70.93	1.76	6.70	H
	1672	-58.82	-13	-45.82	-56.78	-60.68	1.19	5.20	V
	2508	-60.27	-13	-47.27	-62.25	-62.49	1.53	5.90	V
	3345	-67.99	-13	-54.99	-71.31	-70.78	1.76	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE class 8)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-65.42	-13	-52.42	-64.05	-67.28	1.19	5.20	H
	2510	-64.96	-13	-51.96	-67.95	-67.18	1.53	5.90	H
	3345	-67.85	-13	-54.85	-71.80	-70.64	1.76	6.70	H
	1672	-58.73	-13	-45.73	-56.69	-60.59	1.19	5.20	V
	2510	-64.24	-13	-51.24	-66.22	-66.46	1.53	5.90	V
	3345	-67.83	-13	-54.83	-71.15	-70.62	1.76	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-70.88	-13	-57.88	-74.39	-75.87	1.88	6.87	H
	5640	-67.76	-13	-54.76	-75.95	-75.06	2.38	9.68	H
	7520	-64.60	-13	-51.60	-76.63	-73.67	2.74	11.81	H
	3760	-70.20	-13	-57.20	-73.99	-75.19	1.88	6.87	V
	5640	-67.33	-13	-54.33	-75.9	-74.63	2.38	9.68	V
	7520	-65.67	-13	-52.67	-76.38	-74.74	2.74	11.81	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE class 8)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3762	-69.94	-13	-56.94	-73.45	-74.93	1.88	6.87	H
	5640	-68.51	-13	-55.51	-76.70	-75.81	2.38	9.68	H
	7520	-65.44	-13	-52.44	-77.47	-74.51	2.74	11.81	H
	3762	-70.29	-13	-57.29	-74.08	-75.28	1.88	6.87	V
	5640	-67.90	-13	-54.90	-76.47	-75.20	2.38	9.68	V
	7520	-66.29	-13	-53.29	-77	-75.36	2.74	11.81	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-67.58	-13	-54.58	-66.21	-69.44	1.19	5.20	H
	2510	-65.29	-13	-52.29	-68.28	-67.51	1.53	5.90	H
	3345	-67.78	-13	-54.78	-71.73	-70.57	1.76	6.70	H
	1672	-68.71	-13	-55.71	-66.67	-70.57	1.19	5.20	V
	2510	-67.48	-13	-54.48	-69.46	-69.70	1.53	5.90	V
	3345	-68.44	-13	-55.44	-71.76	-71.23	1.76	6.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3762	-69.99	-13	-56.99	-73.50	-74.98	1.88	6.87	H
	5640	-67.43	-13	-54.43	-75.62	-74.73	2.38	9.68	H
	7520	-64.13	-13	-51.13	-76.16	-73.20	2.74	11.81	H
	3762	-69.12	-13	-56.12	-72.91	-74.11	1.88	6.87	V
	5640	-66.47	-13	-53.47	-75.04	-73.77	2.38	9.68	V
	7520	-64.88	-13	-51.88	-75.59	-73.95	2.74	11.81	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3468	-64.61	-13	-51.61	-71.40	-69.50	1.81	6.70	H
	5196	-61.56	-13	-48.56	-74.24	-68.46	2.23	9.13	H
	6930	-60.13	-13	-47.13	-75.31	-68.19	2.60	10.66	H
	3468	-66.78	-13	-53.78	-71.98	-71.67	1.81	6.70	V
	5196	-60.23	-13	-47.23	-73.78	-67.13	2.23	9.13	V
	6930	-60.59	-13	-47.59	-75.64	-68.65	2.6	10.66	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Appendix D. Reference Report

Please refer to Sporton report number FG692313A which is issued separately.



Appendix E. Product Equality Declaration

ZTE CORPORATION**Product Change Description**

As the applicant of the below model, [ZTE Corporation] declares that the product,

[Z836F]
Project NO:17ZTE039
[ZTE Corporation]

is the variant of the initial certified product,

[Z836BL]
Project NO:16ZTE341
[ZTE Corporation]

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO
MMS/STK changes: NO
JAVA changes: NO
Other changes detailed: Matched the requirements of operator.

HARDWARE MODIFICATION:

Band changes: Yes, added the B66
Power Amplifier changes: NO
Antenna changes: Yes, added the B66
PCB Layout changes: NO
Components on PCB changes: NO
LCD changes: NO
Speaker changes: NO
Camera changes: NO
Vibrator changes: NO
Bluetooth changes: NO


FM changes: NO
Other changes:

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: NO
Mechanical shell changes: NO
Other changes detailed: NO

ACCESSORY MODIFICATIONS:

Battery changes: NO
AC Adaptor changes: NO
Earphone changes: NO

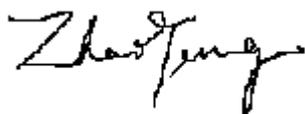

APPROVED BY: zhaoyang

Project Manager:

Date:2016-12-28

Company: ZTE Corporation

Address: B109, #889, Bibo Rd, Zhangjiang Hi-Tech Park, Shanghai,China

Tel: +86-21-68896840

Fax: +86-21-68896835