



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/ LTE Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : A1P
MARKETING NAME : A1P
FCC ID : SRQ-ZTEA1P
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on May 04, 2015 and testing was completed on May 20, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.

No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China

SPORTON INTERNATIONAL (KUNSHAN) INC.

TEL : 86-0512-5790-0158

FAX : 86-0512-5790-0958

FCC ID : SRQ-ZTEA1P

Page Number : 1 of 36

Report Issued Date : Jun. 24, 2015

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 11

 2.4 Connection Diagram of Test System..... 13

 2.5 Support Unit used in test configuration and system 14

 2.6 EUT Operation Test Setup 14

 2.7 Measurement Results Explanation Example..... 15

3 TEST RESULT..... 16

 3.1 26dB & 99% Occupied Bandwidth Measurement 16

 3.2 Maximum Conducted Output Power Measurement 18

 3.3 Power Spectral Density Measurement 20

 3.4 Unwanted Radiated Emission Measurement 23

 3.5 AC Conducted Emission Measurement..... 28

 3.6 Frequency Stability Measurement..... 32

 3.7 Automatically Discontinue Transmission 33

 3.8 Antenna Requirements 34

4 LIST OF MEASURING EQUIPMENTS 35

5 UNCERTAINTY OF EVALUATION 36

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	RSS-247 Section 6	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	FCC ≤24 dBm	Pass	-
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	FCC ≤11 dBm	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	≤ -17, -27 dBm	Pass	Under limit 5.09 dB at 5150.000 MHz
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 9.42 dB at 0.480 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-247 6.4(2)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	WCDMA/ LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	A1P
Marketing Name	A1P
FCC ID	SRQ-ZTEA1P
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+(Downlink Only)/DC-HSDPA/LTE/NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.1 LE
IMEI Code	Conducted: 004401783420967/004401783420901 Radiation: 004401783421007/004401783421001 Conduction: 004401783420843/004401783420801
HW Version	wtqD
SW Version	A1PV1.0.0B08
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz
Maximum Output Power to Antenna	802.11a : 12.63 dBm / 0.0183 W 802.11n HT20 : 11.39 dBm / 0.0138 W 802.11n HT40 : 11.39 dBm / 0.0138 W 802.11ac VHT20 : 8.29 dBm / 0.0067 W 802.11ac VHT40 : 8.38 dBm / 0.0069 W 802.11ac VHT80 : 7.97 dBm / 0.0063 W
99% Occupied Bandwidth	802.11a : 16.90 MHz 802.11n HT20 : 17.85 MHz 802.11n HT40 : 36.10 MHz 802.11ac VHT20: 17.85 MHz 802.11ac VHT40 : 36.10 MHz 802.11ac VHT80 : 74.76 MHz
Antenna Type / Gain	PIFA Antenna with gain 0.30 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.		
	TH01-SZ		

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	03CH02-KS	CO01-KS	418269/4086E

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240
	42	5210		

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 36	5180	12.42	CH 44	12.58	12.52	12.60	12.32	12.44	12.52	12.61
CH 44	5220	12.63								
CH 48	5240	12.56								

5GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 36	5180	10.78	CH 48	11.30	11.37	11.32	11.28	11.36	11.37	11.34
CH 44	5220	10.94								
CH 48	5240	11.39								

5GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 38	5190	11.05	CH 46	11.36	11.34	11.31	11.24	11.28	11.26	11.14
CH 46	5230	11.39								

5GHz 802.11ac VHT20 RF Output Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0									
CH 36	5180	7.93	CH 48	8.08	8.24	8.03	8.14	8.24	8.18	8.18	8.20
CH 44	5220	8.07									
CH 48	5240	8.29									

5GHz 802.11ac VHT40 RF Output Power (dBm)												
Power vs. Channel			Power vs. MCS Index									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 38	5190MHz	8.12	CH 46	8.30	8.32	8.22	8.31	8.35	8.21	8.19	8.28	8.28
CH 46	5230MHz	8.38										



5GHz 802.11ac VHT80 RF Output Power (dBm)												
Power vs. Channel			Power vs. MCS Index									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 42	5210	7.97	CH 42	7.89	7.80	7.83	7.88	7.94	7.84	7.90	7.92	7.92



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) +
Emission	Earphone
Remark: For Radiated TCs, the tests were performed with adapter, USB cable and earphone.	



Ch. #		Band I : 5150-5250 MHz	
		802.11a	
L	Low	36	
M	Middle	44	
H	High	48	

Ch. #		Band I : 5150-5250 MHz	
		802.11n HT20	
L	Low	36	
M	Middle	44	
H	High	48	

Ch. #		Band I : 5150-5250 MHz	
		802.11n HT40	
L	Low	38	
M	Middle	-	
H	High	46	


Ch. #		Band I : 5150-5250 MHz	
		802.11ac VHT20	
L	Low	36	
M	Middle	44	
H	High	48	

Ch. #		Band I : 5150-5250 MHz	
		802.11ac VHT40	
L	Low	38	
M	Middle	-	
H	High	46	


Ch. #		Band I : 5150-5250 MHz	
		802.11ac VHT80	
L	Low	-	
M	Middle	42	
H	High	-	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

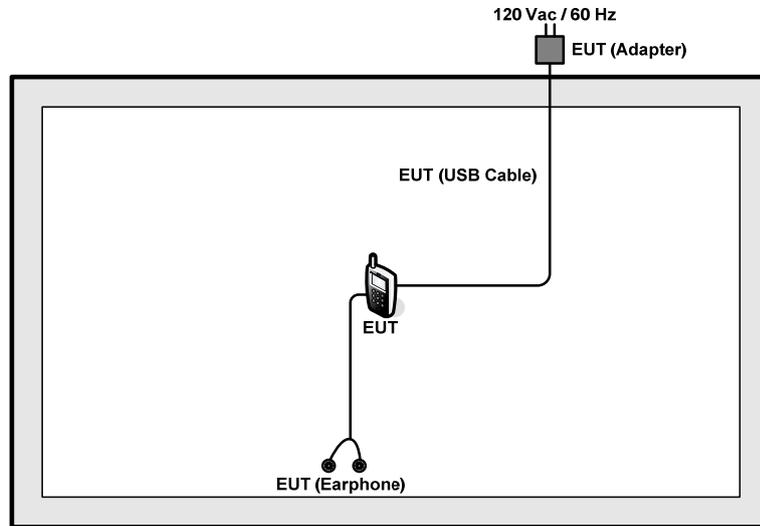

<AC Conducted Emission Mode>

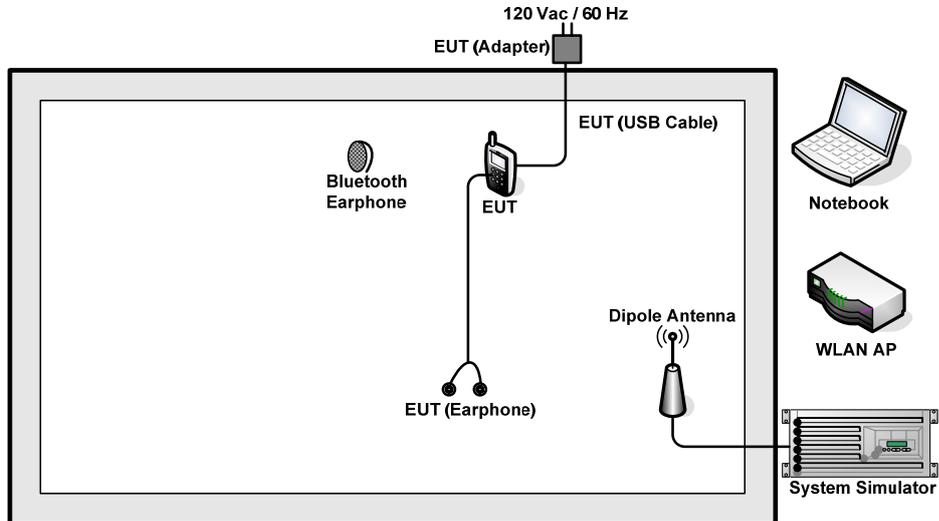

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Shielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
6.	DC Power Supply	GW INSTEK	GPD-2303S	N/A	N/A	Unshielded, 1.8 m

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.5 + 10 = 16.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.



3.1.4 Test Setup

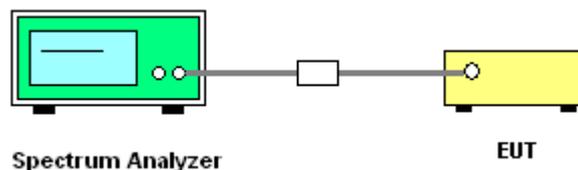



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

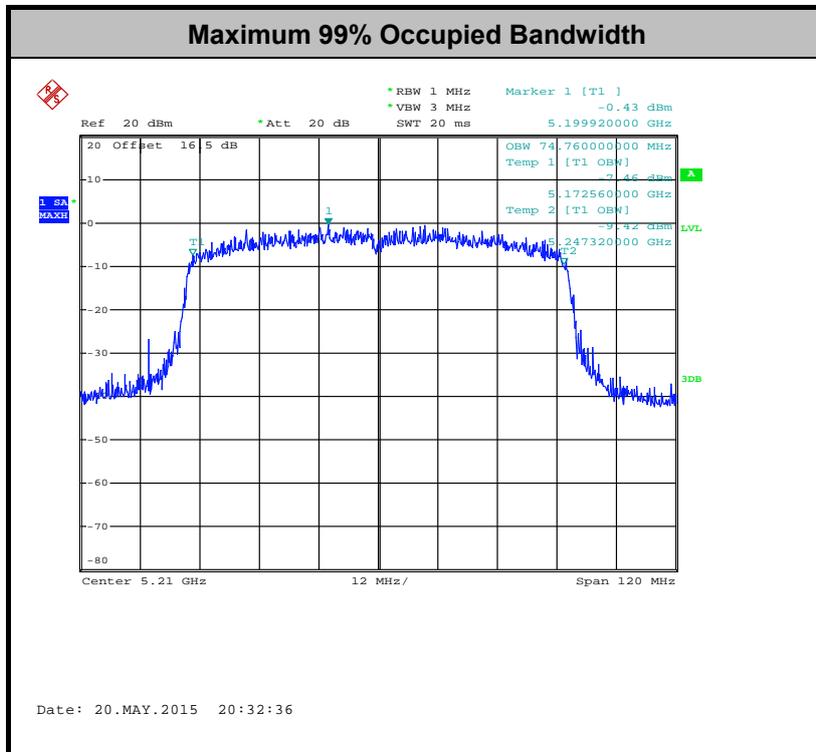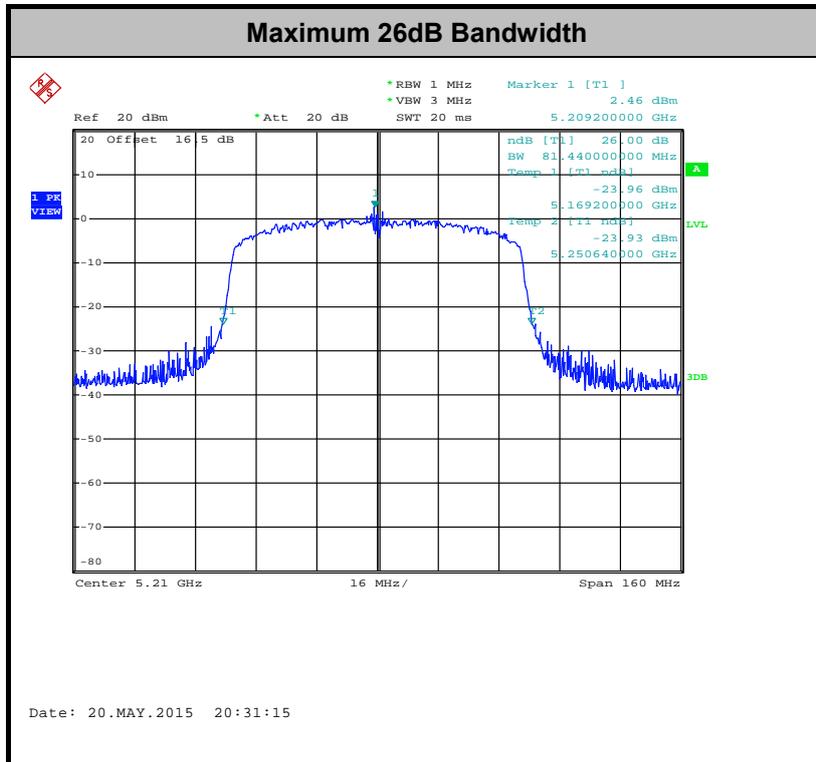

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

<IC RSS-247 Section 6>

For the 5.15–5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

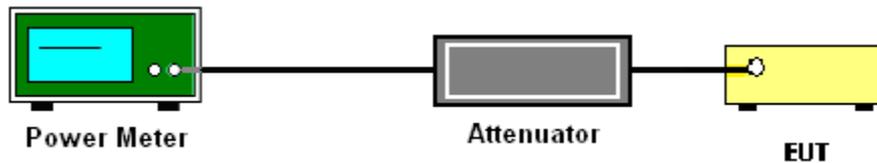

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

<IC RSS-247 Section 6>

For the 5.15–5.25 GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

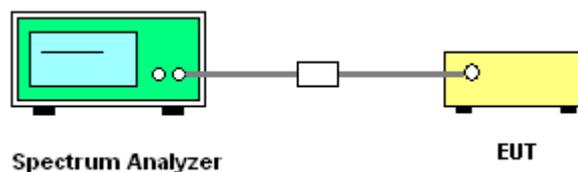



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
802.11a	94.47	2.05	0.49	1kHz
802.11n HT20	94.13	1.93	0.52	1kHz
802.11n HT40	89.43	0.95	1.05	3kHz
802.11n VHT20	94.23	1.93	0.52	1kHz
802.11n VHT40	88.93	0.95	1.05	3kHz
802.11n VHT80	82.14	0.46	2.17	3kHz


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

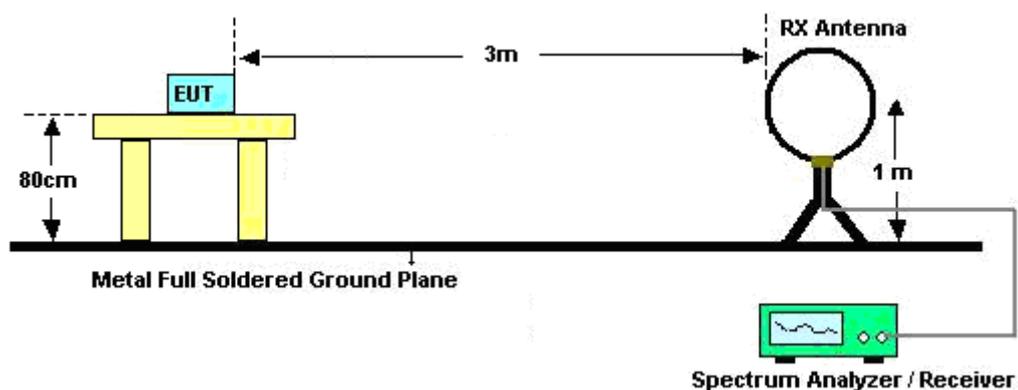

For radiated emissions from 30MHz to 1GHz

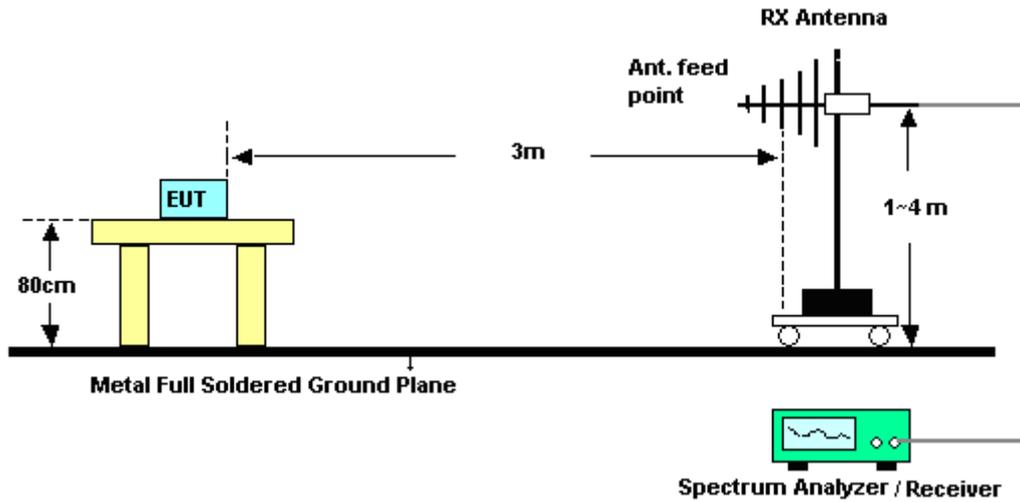

For radiated emissions above 1GHz

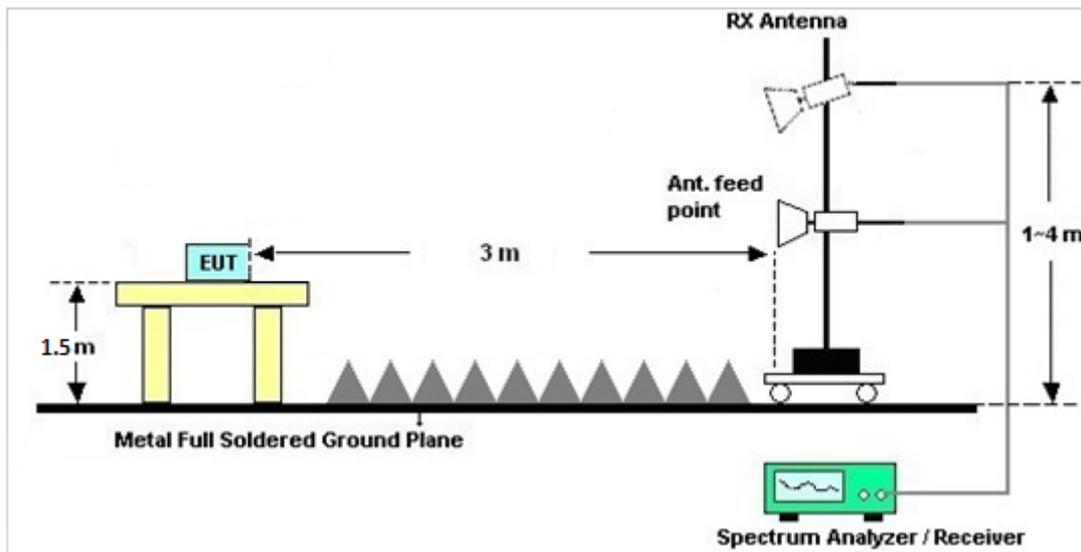

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

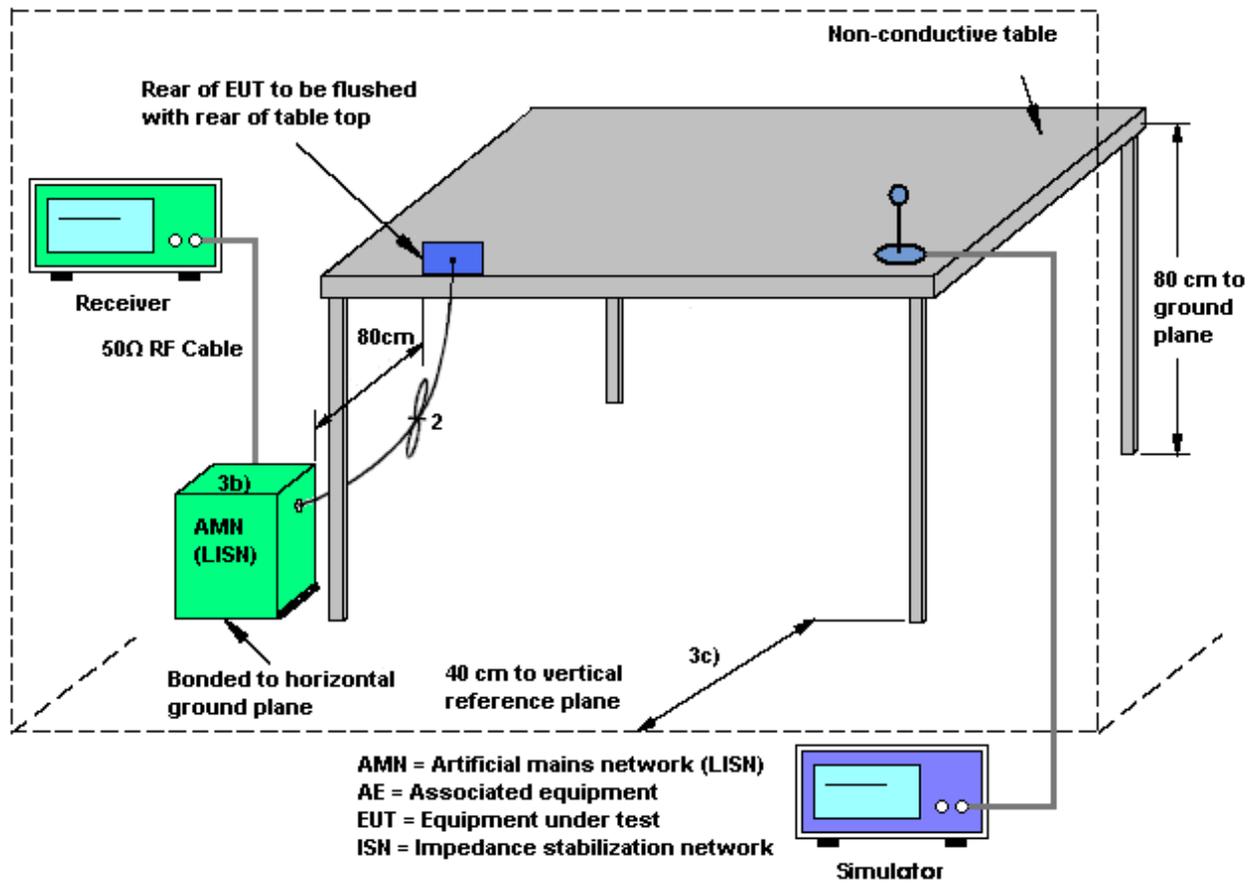



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone		

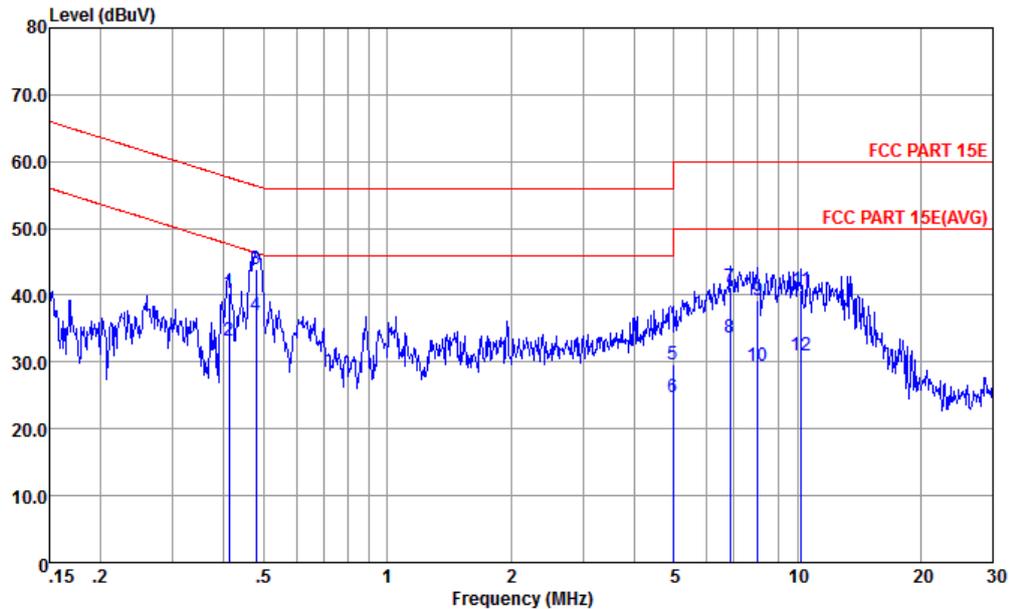


Site : CO01-KS
 Condition : FCC PART 15E LISN-L20140306 LINE

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.41	40.42	-17.22	57.64	29.50	0.30	10.62	QP
2	0.41	33.22	-14.42	47.64	22.30	0.30	10.62	Average
3	0.48	43.94	-12.42	56.36	33.10	0.22	10.62	QP
4 *	0.48	36.94	-9.42	46.36	26.10	0.22	10.62	Average
5	4.98	29.55	-26.45	56.00	18.50	0.20	10.85	QP
6	4.98	24.65	-21.35	46.00	13.60	0.20	10.85	Average
7	6.84	41.32	-18.68	60.00	30.20	0.20	10.92	QP
8	6.84	33.62	-16.38	50.00	22.50	0.20	10.92	Average
9	8.02	39.24	-20.76	60.00	28.10	0.20	10.94	QP
10	8.02	29.34	-20.66	50.00	18.20	0.20	10.94	Average
11	10.23	40.76	-19.24	60.00	29.60	0.20	10.96	QP
12	10.23	31.06	-18.94	50.00	19.90	0.20	10.96	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone		

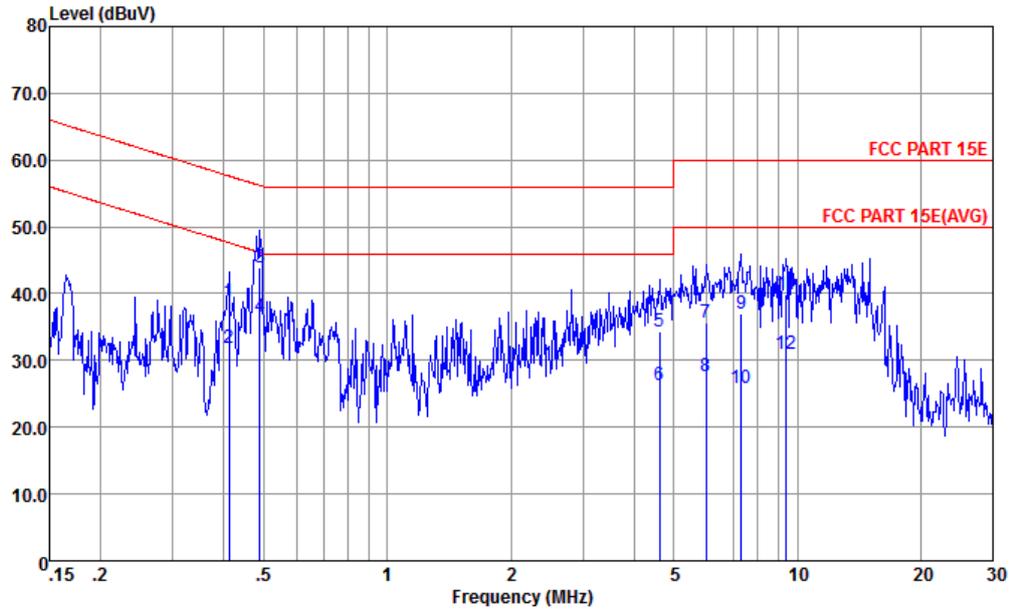

Site : CO01-KS
 Condition : FCC PART 15E LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.41	38.81	-18.83	57.64	27.80	0.39	10.62	QP
2	0.41	31.91	-15.73	47.64	20.90	0.39	10.62	Average
3	0.49	43.83	-12.36	56.19	32.90	0.31	10.62	QP
4 *	0.49	36.53	-9.66	46.19	25.60	0.31	10.62	Average
5	4.62	34.34	-21.66	56.00	23.30	0.20	10.84	QP
6	4.62	26.34	-19.66	46.00	15.30	0.20	10.84	Average
7	5.99	35.58	-24.42	60.00	24.50	0.20	10.88	QP
8	5.99	27.68	-22.32	50.00	16.60	0.20	10.88	Average
9	7.29	36.93	-23.07	60.00	25.80	0.20	10.93	QP
10	7.29	25.93	-24.07	50.00	14.80	0.20	10.93	Average
11	9.40	39.96	-20.04	60.00	28.80	0.20	10.96	QP
12	9.40	31.06	-18.94	50.00	19.90	0.20	10.96	Average

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

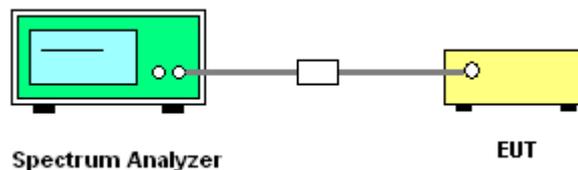

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	May 20, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	10Hz~40GHz	Jan. 28, 2015	May 20, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	0.3GHz~40GHz	Jan. 28, 2015	May 20, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 29, 2014	May 27, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	May 27, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	May 27, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	May 27, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	May 27, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	May 27, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	May 27, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	May 04, 2015	May 27, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz Gain 30dB	Oct. 28, 2014	May 27, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 27, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	May 27, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	May 27, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 04, 2015	May 08, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	May 08, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	May 08, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	May 08, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
---	--------



Appendix A. Conducted Test Results

Test Engineer:	Mygai Chen	Temperature:	21~25	°C
Test Date:	2015/5/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.85	20.95	-	22.27		
11a	6Mbps	1	44	5220	16.90	21.05	-	22.28		
11a	6Mbps	1	48	5240	16.90	21.00	-	22.28		
HT20	MCS0	1	36	5180	17.80	21.95	-	22.50		
HT20	MCS0	1	44	5220	17.80	22.10	-	22.50		
HT20	MCS0	1	48	5240	17.85	22.00	-	22.52		
HT40	MCS0	1	38	5190	36.10	41.85	-	23.01		
HT40	MCS0	1	46	5230	36.10	41.85	-	23.01		
VHT20	MCS0	1	36	5180	17.85	21.90	-	22.52		
VHT20	MCS0	1	44	5220	17.80	21.95	-	22.50		
VHT20	MCS0	1	48	5240	17.80	21.95	-	22.50		
VHT40	MCS0	1	38	5190	36.10	41.76	-	23.01		
VHT40	MCS0	1	46	5230	36.00	42.12	-	23.01		
VHT80	MCS0	1	42	5210	74.76	81.44	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.25	12.42	24.00	0.30		Pass
11a	6Mbps	1	44	5220	0.25	12.63	24.00	0.30		Pass
11a	6Mbps	1	48	5240	0.25	12.56	24.00	0.30		Pass
HT20	MCS0	1	36	5180	0.26	10.78	24.00	0.30		Pass
HT20	MCS0	1	44	5220	0.26	10.94	24.00	0.30		Pass
HT20	MCS0	1	48	5240	0.26	11.39	24.00	0.30		Pass
HT40	MCS0	1	38	5190	0.48	11.05	24.00	0.30		Pass
HT40	MCS0	1	46	5230	0.48	11.39	24.00	0.30		Pass
VHT20	MCS0	1	36	5180	0.26	7.93	24.00	0.30		Pass
VHT20	MCS0	1	44	5220	0.26	8.07	24.00	0.30		Pass
VHT20	MCS0	1	48	5240	0.26	8.29	24.00	0.30		Pass
VHT40	MCS0	1	38	5190	0.51	8.12	24.00	0.30		Pass
VHT40	MCS0	1	46	5230	0.51	8.38	24.00	0.30		Pass
VHT80	MCS0	1	42	5210	0.85	7.97	24.00	0.30		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.25	1.56	11.00	0.30		Pass
11a	6Mbps	1	44	5220	0.25	1.81	11.00	0.30		Pass
11a	6Mbps	1	48	5240	0.25	1.73	11.00	0.30		Pass
HT20	MCS0	1	36	5180	0.26	-0.15	11.00	0.30		Pass
HT20	MCS0	1	44	5220	0.26	0.24	11.00	0.30		Pass
HT20	MCS0	1	48	5240	0.26	0.51	11.00	0.30		Pass
HT40	MCS0	1	38	5190	0.48	-2.58	11.00	0.30		Pass
HT40	MCS0	1	46	5230	0.48	-2.63	11.00	0.30		Pass
VHT20	MCS0	1	36	5180	0.26	-2.88	11.00	0.30		Pass
VHT20	MCS0	1	44	5220	0.26	-2.86	11.00	0.30		Pass
VHT20	MCS0	1	48	5240	0.26	-2.68	11.00	0.30		Pass
VHT40	MCS0	1	38	5190	0.51	-5.59	11.00	0.30		Pass
VHT40	MCS0	1	46	5230	0.51	-5.52	11.00	0.30		Pass
VHT80	MCS0	1	42	5210	0.85	-8.63	11.00	0.30		Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	20	3.5	
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	20	4.2	
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	20	3.8	
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	-10	3.8	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	50	3.8	



Appendix B. Radiated Test Results

Band 1 - 5150~5250MHz WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz	*	5176	101.71	-	-	94.25	31.89	10.17	34.6	171	222	P	H
	*	5176	92.05	-	-	84.59	31.89	10.17	34.6	171	222	A	H
		5148.85	64.18	-9.82	74	56.79	31.87	10.15	34.63	171	222	P	H
		5149.7	41.9	-12.1	54	34.51	31.87	10.15	34.63	171	222	A	H
	*	5182	100.09	-	-	92.63	31.89	10.17	34.6	150	146	P	V
	*	5182	90.3	-	-	82.84	31.89	10.17	34.6	150	146	A	V
		5149.9	64.35	-9.65	74	56.96	31.87	10.15	34.63	150	146	P	V
		5149.75	42.25	-11.75	54	34.86	31.87	10.15	34.63	150	146	A	V
802.11a CH 44 5220MHz	*	5222	103.35	-	-	95.8	31.9	10.23	34.58	283	228	P	H
	*	5216	93.32	-	-	85.79	31.9	10.21	34.58	283	228	A	H
	*	5220	102.26	-	-	94.71	31.9	10.23	34.58	159	157	P	V
	*	5222	91.94	-	-	84.39	31.9	10.23	34.58	159	157	A	V
802.11a CH 48 5240MHz	*	5242	103.24	-	-	95.68	31.89	10.24	34.57	300	225	P	H
	*	5242	93.33	-	-	85.77	31.89	10.24	34.57	300	225	A	H
		5367.25	53.03	-20.97	74	45.32	31.88	10.37	34.54	300	225	P	H
		5354.05	39.41	-14.59	54	31.73	31.88	10.35	34.55	300	225	A	H
	*	5236	102.32	-	-	94.76	31.9	10.23	34.57	286	166	P	V
	*	5242	92.24	-	-	84.68	31.89	10.24	34.57	286	166	A	V
		5391.4	52.58	-21.42	74	44.86	31.87	10.39	34.54	286	166	P	V
		5354.25	39.39	-14.61	54	31.71	31.88	10.35	34.55	286	166	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36		10359	48.03	-25.97	74	55.8	38.68	14.65	61.1	150	169	P	H
5180MHz		10359	48.49	-25.51	74	56.26	38.68	14.65	61.1	150	155	P	V
802.11a CH 44		10440	47.82	-26.18	74	55.47	38.71	14.71	61.07	150	166	P	H
5220MHz		10440	48.17	-25.83	74	55.82	38.71	14.71	61.07	150	189	P	V
802.11a CH 48		10479	48.52	-25.48	74	56.1	38.73	14.73	61.04	150	195	P	H
5240MHz		10479	48.25	-25.75	74	55.83	38.73	14.73	61.04	150	188	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz	*	5184	100.26	-	-	92.78	31.89	10.19	34.6	181	191	P	H
	*	5178	90.62	-	-	83.16	31.89	10.17	34.6	181	191	A	H
		5148.9	63.71	-10.29	74	56.32	31.87	10.15	34.63	181	191	P	H
		5146.55	41.12	-12.88	54	33.73	31.87	10.15	34.63	181	191	A	H
	*	5178	101.18	-	-	93.72	31.89	10.17	34.6	290	310	P	V
	*	5182	91.02	-	-	83.56	31.89	10.17	34.6	290	310	A	V
		5149.3	64.29	-9.71	74	56.9	31.87	10.15	34.63	290	310	P	V
	5147.8	41.34	-12.66	54	33.95	31.87	10.15	34.63	290	310	A	V	
802.11n HT20 CH 44 5220MHz	*	5220	102.28	-	-	94.73	31.9	10.23	34.58	212	197	P	H
	*	5218	92.09	-	-	84.56	31.9	10.21	34.58	212	197	A	H
	*	5216	102.3	-	-	94.77	31.9	10.21	34.58	222	287	P	V
	*	5218	92.68	-	-	85.15	31.9	10.21	34.58	222	287	A	V
802.11n HT20 CH 48 5240MHz	*	5238	100.97	-	-	93.4	31.9	10.24	34.57	237	190	P	H
	*	5238	90.71	-	-	83.14	31.9	10.24	34.57	237	190	A	H
		5393.85	52.04	-21.96	74	44.32	31.87	10.39	34.54	237	190	P	H
		5356.1	39.66	-14.34	54	31.98	31.88	10.35	34.55	237	190	A	H
	*	5236	101.17	-	-	93.61	31.9	10.23	34.57	185	311	P	V
	*	5242	92.33	-	-	84.77	31.89	10.24	34.57	185	311	A	V
		5372.75	53.21	-20.79	74	45.5	31.88	10.37	34.54	185	311	P	V
	5350.55	39.7	-14.3	54	32.02	31.88	10.35	34.55	185	311	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10359	48.28	-25.72	74	56.05	38.68	14.65	61.1	150	148	P	H
802.11n HT20 CH 44 5220MHz		10440	47.12	-26.88	74	54.77	38.71	14.71	61.07	200	185	P	H
802.11n HT20 CH 48 5240MHz		10440	48.12	-25.88	74	55.77	38.71	14.71	61.07	150	132	P	V
802.11n HT20 CH 48 5240MHz		10479	48.25	-25.75	74	55.83	38.73	14.73	61.04	150	184	P	H
802.11n HT20 CH 48 5240MHz		10479	48.85	-25.15	74	56.43	38.73	14.73	61.04	150	102	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz	*	5194	99.32	-	-	91.81	31.9	10.19	34.58	227	191	P	H
	*	5194	89.45	-	-	81.94	31.9	10.19	34.58	227	191	A	H
	!	5150	68.91	-5.09	74	61.52	31.87	10.15	34.63	227	191	P	H
		5149.95	47.27	-6.73	54	39.88	31.87	10.15	34.63	227	191	A	H
	*	5194	98.3	-	-	90.79	31.9	10.19	34.58	164	272	P	V
	*	5194	88.44	-	-	80.93	31.9	10.19	34.58	164	272	A	V
	!	5149.45	68.51	-5.49	74	61.12	31.87	10.15	34.63	164	272	P	V
	5149.85	47.27	-6.73	54	39.88	31.87	10.15	34.63	164	272	A	V	
802.11n HT40 CH 46 5230MHz	*	5234	99.88	-	-	92.32	31.9	10.23	34.57	225	179	P	H
	*	5236	89.55	-	-	81.99	31.9	10.23	34.57	225	179	A	H
		5351.5	58.7	-15.3	74	51.02	31.88	10.35	34.55	225	179	P	H
		5350.4	39.81	-14.19	54	32.13	31.88	10.35	34.55	225	179	A	H
	*	5232	98.02	-	-	90.46	31.9	10.23	34.57	243	277	P	V
	*	5234	88.12	-	-	80.56	31.9	10.23	34.57	243	277	A	V
		5352.05	57.22	-16.78	74	49.54	31.88	10.35	34.55	243	277	P	V
	5353.7	39.89	-14.11	54	32.21	31.88	10.35	34.55	243	277	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	48.12	-25.88	74	55.87	38.69	14.66	61.1	300	250	P	H
		10380	47.53	-26.47	74	55.28	38.69	14.66	61.1	162	250	P	V
802.11n HT40 CH 46 5230MHz		10461	47.96	-26.04	74	55.57	38.72	14.72	61.05	150	300	P	H
		10461	47.35	-26.65	74	54.96	38.72	14.72	61.05	260	145	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 36 5180MHz	*	5182	97.92	-	-	90.46	31.89	10.17	34.6	150	330	P	H
	*	5182	88.02	-	-	80.56	31.89	10.17	34.6	150	330	A	H
		5149.55	60.61	-13.39	74	53.22	31.87	10.15	34.63	150	330	P	H
		5147.5	40.84	-13.16	54	33.45	31.87	10.15	34.63	150	330	A	H
	*	5176	96.52	-	-	89.06	31.89	10.17	34.6	155	161	P	V
	*	5182	86.44	-	-	78.98	31.89	10.17	34.6	155	161	A	V
		5149.85	60.57	-13.43	74	53.18	31.87	10.15	34.63	155	161	P	V
	5149.15	40.51	-13.49	54	33.12	31.87	10.15	34.63	155	161	A	V	
802.11ac VHT20 CH 44 5220MHz	*	5218	99.75	-	-	92.22	31.9	10.21	34.58	150	222	P	H
	*	5216	89.38	-	-	81.85	31.9	10.21	34.58	150	222	A	H
	*	5222	97.38	-	-	89.83	31.9	10.23	34.58	159	168	P	V
	*	5222	87.31	-	-	79.76	31.9	10.23	34.58	159	168	A	V
802.11ac VHT20 CH 48 5240MHz	*	5238	97.19	-	-	89.62	31.9	10.24	34.57	201	221	P	H
	*	5242	87.11	-	-	79.55	31.89	10.24	34.57	201	221	A	H
		5357.7	52.96	-21.04	74	45.28	31.88	10.35	34.55	201	221	P	H
		5361.7	39.17	-14.83	54	31.48	31.88	10.35	34.54	201	221	A	H
	*	5240	97.56	-	-	89.99	31.9	10.24	34.57	150	172	P	V
	*	5242	87.69	-	-	80.13	31.89	10.24	34.57	150	172	A	V
		5389.6	52.86	-21.14	74	45.14	31.87	10.39	34.54	150	172	P	V
	5351.7	39.25	-14.75	54	31.57	31.88	10.35	34.55	150	172	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20		10359	48.86	-25.14	74	56.63	38.68	14.65	61.1	150	131	P	H
CH 36 5180MHz		10359	48.26	-25.74	74	56.03	38.68	14.65	61.1	150	56	P	V
802.11ac VHT20		10440	48.12	-25.88	74	55.77	38.71	14.71	61.07	150	326	P	H
CH 44 5220MHz		10440	48.26	-25.74	74	55.91	38.71	14.71	61.07	150	148	P	V
802.11ac VHT20		10479	48.22	-25.78	74	55.8	38.73	14.73	61.04	150	163	P	H
CH 48 5240MHz		10480	48.62	-25.38	74	56.2	38.73	14.73	61.04	220	189	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz	*	5198	97.26	-	-	89.75	31.9	10.19	34.58	236	243	P	H
	*	5194	87.69	-	-	80.18	31.9	10.19	34.58	236	243	A	H
		5149.25	66.27	-7.73	74	58.88	31.87	10.15	34.63	236	243	P	H
		5149.25	42.67	-11.33	54	35.28	31.87	10.15	34.63	236	243	A	H
	*	5194	94.87	-	-	87.36	31.9	10.19	34.58	287	33	P	V
	*	5194	83.62	-	-	76.11	31.9	10.19	34.58	287	33	A	V
		5149.8	60.47	-13.53	74	53.08	31.87	10.15	34.63	287	33	P	V
	5149.45	41	-13	54	33.61	31.87	10.15	34.63	287	33	A	V	
802.11ac VHT40 CH 46 5230MHz	*	5238	96.65	-	-	89.08	31.9	10.24	34.57	256	228	P	H
	*	5234	87.14	-	-	79.58	31.9	10.23	34.57	256	228	A	H
		5351.4	55.5	-18.5	74	47.82	31.88	10.35	34.55	256	228	P	H
		5351.55	39.93	-14.07	54	32.25	31.88	10.35	34.55	256	228	A	H
	*	5222	94.34	-	-	86.79	31.9	10.23	34.58	249	27	P	V
	*	5226	84.72	-	-	77.16	31.9	10.23	34.57	249	27	A	V
		5361.65	54.56	-19.44	74	46.87	31.88	10.35	34.54	249	27	P	V
	5360.1	39.81	-14.19	54	32.13	31.88	10.35	34.55	249	27	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40		10380	49.22	-24.78	74	56.97	38.69	14.66	61.1	178	162	P	H
CH 38 5190MHz		10380	48.86	-25.14	74	56.61	38.69	14.66	61.1	148	258	P	V
802.11ac VHT40		10461	48.26	-25.74	74	55.87	38.72	14.72	61.05	165	323	P	H
CH 46 5230MHz		10460	48.26	-25.74	74	55.89	38.71	14.72	61.06	150	178	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz	*	5210	93.06	-	-	85.53	31.9	10.21	34.58	220	117	P	H
	*	5216	82.17	-	-	74.64	31.9	10.21	34.58	220	117	A	H
		5142.35	59.91	-14.09	74	52.55	31.87	10.12	34.63	220	117	P	H
		5146.5	42.71	-11.29	54	35.32	31.87	10.15	34.63	220	117	A	H
		5356.65	54.63	-19.37	74	46.95	31.88	10.35	34.55	220	117	P	H
		5351	41.18	-12.82	54	33.5	31.88	10.35	34.55	220	117	A	H
	*	5202	93.83	-	-	86.3	31.9	10.21	34.58	271	280	P	V
	*	5204	83.34	-	-	75.81	31.9	10.21	34.58	271	280	A	V
		5148.25	62.34	-11.66	74	54.95	31.87	10.15	34.63	271	280	P	V
		5146.2	44.15	-9.85	54	36.76	31.87	10.15	34.63	271	280	A	V
		5362	54.44	-19.56	74	46.75	31.88	10.35	34.54	271	280	P	V
	5351.3	41.15	-12.85	54	33.47	31.88	10.35	34.55	271	280	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10419	47.83	-26.17	74	55.52	38.7	14.69	61.08	148	23	P	H
CH 42 5210MHz		10420	47.82	-26.18	74	55.51	38.7	14.69	61.08	188	236	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a LF		98.87	23.84	-19.66	43.5	45.38	11.96	1.8	35.3	-	-	P	H
		223.03	27.83	-18.17	46	50.17	10.32	2.33	34.99	100	360	P	H
		340.4	24.77	-21.23	46	42.3	14.39	3.1	35.02	-	-	P	H
		474.26	24.4	-21.6	46	38.41	17.14	3.58	34.73	-	-	P	H
		576.11	22.39	-23.61	46	34.45	18.36	4.32	34.74	-	-	P	H
		767.2	24.49	-21.51	46	34.28	19.97	4.69	34.45	-	-	P	H
		30	30.48	-9.52	40	45.43	19.1	1.17	35.22	100	133	P	V
		221.09	22.66	-23.34	46	45.08	10.25	2.32	34.99	-	-	P	V
		341.37	24.23	-21.77	46	41.74	14.41	3.11	35.03	-	-	P	V
		555.74	21.32	-24.68	46	33.44	18.23	4.2	34.55	-	-	P	V
		723.55	21.2	-24.8	46	31.59	19.54	4.71	34.64	-	-	P	V
		917.55	21.68	-24.32	46	29.57	21.51	5.16	34.56	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz
WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 LF		98.87	22.84	-20.66	43.5	44.38	11.96	1.8	35.3	-	-	P	H
		191.02	23.96	-19.54	43.5	46.98	9.72	2.29	35.03	-	-	P	H
		223.03	26.83	-19.17	46	49.17	10.32	2.33	34.99	100	185	P	H
		340.4	23.77	-22.23	46	41.3	14.39	3.1	35.02	-	-	P	H
		489.78	24.92	-21.08	46	38.62	17.24	3.68	34.62	-	-	P	H
		553.8	24.86	-21.14	46	36.99	18.22	4.18	34.53	-	-	P	H
		30	29.48	-10.52	40	44.43	19.1	1.17	35.22	200	152	P	V
		98.87	20.88	-22.62	43.5	42.42	11.96	1.8	35.3	-	-	P	V
		156.1	21.62	-21.88	43.5	43.62	10.99	1.93	34.92	-	-	P	V
		221.09	25.66	-20.34	46	48.08	10.25	2.32	34.99	-	-	P	V
		323.91	23.88	-22.12	46	41.84	14.03	2.93	34.92	-	-	P	V
		473.29	18.9	-27.1	46	32.91	17.14	3.58	34.73	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz
WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		34.85	16.89	-23.11	40	33.38	17.6	1.18	35.27	-	-	P	H
		98.87	22.84	-20.66	43.5	44.38	11.96	1.8	35.3	-	-	P	H
		223.03	30.83	-15.17	46	53.17	10.32	2.33	34.99	100	169	P	H
		489.78	24.92	-21.08	46	38.62	17.24	3.68	34.62	-	-	P	H
		563.5	25.79	-20.21	46	37.89	18.28	4.24	34.62	-	-	P	H
		782.72	21.59	-24.41	46	31.22	20.13	4.73	34.49	-	-	P	H
		30	33.48	-6.52	40	48.43	19.1	1.17	35.22	162	22	P	V
		98.87	24.88	-18.62	43.5	46.42	11.96	1.8	35.3	-	-	P	V
		252.13	21.25	-24.75	46	42.24	11.48	2.39	34.86	-	-	P	V
		341.37	23.23	-22.77	46	40.74	14.41	3.11	35.03	-	-	P	V
		488.81	26.55	-19.45	46	40.28	17.23	3.67	34.63	-	-	P	V
	723.55	22.2	-23.8	46	32.59	19.54	4.71	34.64	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz
WIFI 802.11ac VHT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT20 LF		98.87	21.84	-21.66	43.5	43.38	11.96	1.8	35.3	-	-	P	H
		181.32	26.1	-17.4	43.5	48.7	10.07	2.3	34.97	-	-	P	H
		223.03	28.83	-17.17	46	51.17	10.32	2.33	34.99	100	162	P	H
		474.26	23.4	-22.6	46	37.41	17.14	3.58	34.73	-	-	P	H
		563.5	24.79	-21.21	46	36.89	18.28	4.24	34.62	-	-	P	H
		864.2	21.85	-24.15	46	29.93	21.19	5.13	34.4	-	-	P	H
		30	30.48	-9.52	40	45.43	19.1	1.17	35.22	200	228	P	V
		98.87	23.88	-19.62	43.5	45.42	11.96	1.8	35.3	-	-	P	V
		221.09	20.66	-25.34	46	43.08	10.25	2.32	34.99	-	-	P	V
		341.37	28.23	-17.77	46	45.74	14.41	3.11	35.03	-	-	P	V
		488.81	24.55	-21.45	46	38.28	17.23	3.67	34.63	-	-	P	V
		540.22	25.06	-20.94	46	37.47	18.02	4.08	34.51	-	-	P	V
Remark	3. No other spurious found. 4. All results are PASS against limit line.												



Emission below 1GHz

WIFI 802.11ac VHT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT40 LF		98.87	23.84	-19.66	43.5	45.38	11.96	1.8	35.3	-	-	P	H
		223.03	30.83	-15.17	46	53.17	10.32	2.33	34.99	100	165	P	H
		563.5	27.79	-18.21	46	39.89	18.28	4.24	34.62	-	-	P	H
		705.12	19.01	-26.99	46	29.69	19.35	4.77	34.8	-	-	P	H
		864.2	20.85	-25.15	46	28.93	21.19	5.13	34.4	-	-	P	H
		953.44	20.15	-33.85	54	27.73	21.72	5.25	34.55	-	-	P	H
		30	32.48	-7.52	40	47.43	19.1	1.17	35.22	156	22	P	V
		98.87	21.88	-21.62	43.5	43.42	11.96	1.8	35.3	-	-	P	V
		252.13	21.25	-24.75	46	42.24	11.48	2.39	34.86	-	-	P	V
		323.91	28.88	-17.12	46	46.84	14.03	2.93	34.92	-	-	P	V
		488.81	23.55	-22.45	46	37.28	17.23	3.67	34.63	-	-	P	V
		683.78	19.75	-26.25	46	30.66	19.2	4.73	34.84	-	-	P	V
Remark	5. No other spurious found. 6. All results are PASS against limit line.												



Emission below 1GHz

WiFi 802.11ac VHT80 (LF @ 3m)

WiFi	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		98.87	22.84	-20.66	43.5	44.38	11.96	1.8	35.3	-	-	P	H
		223.03	32.83	-13.17	46	55.17	10.32	2.33	34.99	100	165	P	H
		474.26	24.4	-21.6	46	38.41	17.14	3.58	34.73	-	-	P	H
		563.5	29.79	-16.21	46	41.89	18.28	4.24	34.62	-	-	P	H
		767.2	19.49	-26.51	46	29.28	19.97	4.69	34.45	-	-	P	H
		973.81	20.01	-33.99	54	27.35	21.84	5.44	34.62	-	-	P	H
		30	33.48	-6.52	40	48.43	19.1	1.17	35.22	200	185	P	V
		98.87	22.88	-20.62	43.5	44.42	11.96	1.8	35.3	-	-	P	V
		222.06	22.53	-23.47	46	44.91	10.28	2.33	34.99	-	-	P	V
		323.91	25.88	-20.12	46	43.84	14.03	2.93	34.92	-	-	P	V
		488.81	24.55	-21.45	46	38.28	17.23	3.67	34.63	-	-	P	V
		728.4	19.92	-26.08	46	30.24	19.58	4.7	34.6	-	-	P	V
Remark	7. No other spurious found. 8. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.