



# FCC RF Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : WCDMA/LTE Multi-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : A1P  
**MARKETING NAME** : A1P  
**FCC ID** : SRQ-ZTEA1P  
**STANDARD** : FCC Part 15 Subpart C §15.225  
**CLASSIFICATION** : (DXX) Low Power Communication Device Transmitter

The product was received on May 04, 2015 and testing was completed on May 28, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

---

Reviewed by: Joseph Lin / Supervisor

---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



## Table of Contents

**REVISION HISTORY** ..... 3

**SUMMARY OF THE TEST RESULT** ..... 4

**1. GENERAL INFORMATION** ..... 5

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Details ..... 5

    1.4 Modification of EUT ..... 5

    1.5 Testing Location ..... 6

    1.6 Applicable Standards ..... 7

    1.7 Test Modes ..... 7

    1.8 Test Configurations ..... 8

    1.9 Table for Supporting Units ..... 8

**2. CONDUCTED EMISSION TEST** ..... 9

    2.1 Measuring Instruments ..... 9

    2.2 Test setup ..... 9

    2.3 Test Result of Conducted Emission Test ..... 9

    2.4 AC Power Line Conducted Emissions Measurement ..... 10

**3. CONDUCTED TEST ITEMS** ..... 11

    3.1 Measuring Instruments ..... 11

    3.2 Test Setup ..... 11

    3.3 Test Result of Conducted Test Items ..... 11

    3.4 20dB Spectrum Bandwidth Measurement ..... 12

    3.5 Frequency Stability Measurement ..... 12

**4. RADIATED TEST ITEMS** ..... 13

    4.1 Measuring Instruments ..... 13

    4.2 Test Setup ..... 13

    4.3 Test Result of Radiated Test Items ..... 13

    4.4 Field Strength of Fundamental Emissions and Mask Measurement ..... 14

    4.5 Radiated Emissions Measurement ..... 15

**5. LIST OF MEASURING EQUIPMENT** ..... 17

**APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST**

**APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS**

    B.1. Test Result of 20dB Spectrum Bandwidth

    B.2 Test Result of Frequency Stability

**APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS**

    C.1 Test Result of Field Strength of Fundamental Emissions

    C.2 Results of Radiated Emissions (9 kHz~30MHz)

    C.3 Results of Radiated Emissions (30MHz~1GHz)

**APPENDIX D. SETUP PHOTOGRAPHS OF EUT**





### SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	8.16 dB at 0.490MHz
3.2	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	69.76 dB at 13.560 MHz
3.3	2.1049	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d) 15.209	Radiated Emissions	Complies	10.52 dB at 30.000 MHz
3.5	15.225(e)	Frequency Stability	Complies	-
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3 dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±5.1 dB	Confidence levels of 95%



# 1. GENERAL INFORMATION

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Product Details

Items	Description
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.64 KHz
99%OBW	2.24 KHz
Antenna Type	Loop Antenna
Type of Modulation	ASK

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-SZ	
<b>Test Engineer</b>	Ting You	
<b>Temperature</b>	24~26°C	
<b>Relative Humidity</b>	50~53%	

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	03CH02-KS	CO01-KS	418269/4086E
<b>Test Engineer</b>	Paul Yang	Eko Guan	
<b>Temperature</b>	21~22°C	22~24°C	
<b>Relative Humidity</b>	41~42%	40~42%	

**Note:** The test site complies with ANSI C63.4 2009 requirement.



### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013


### 1.7 Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz
<b>Note:</b> 1. The EUT was programmed to be in continuously transmitting mode. 2. The ancillary equipment, RFID card, is used to make the EUT (RFID) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.	

### 1.8 Test Configurations

<AC Conducted Emissions>

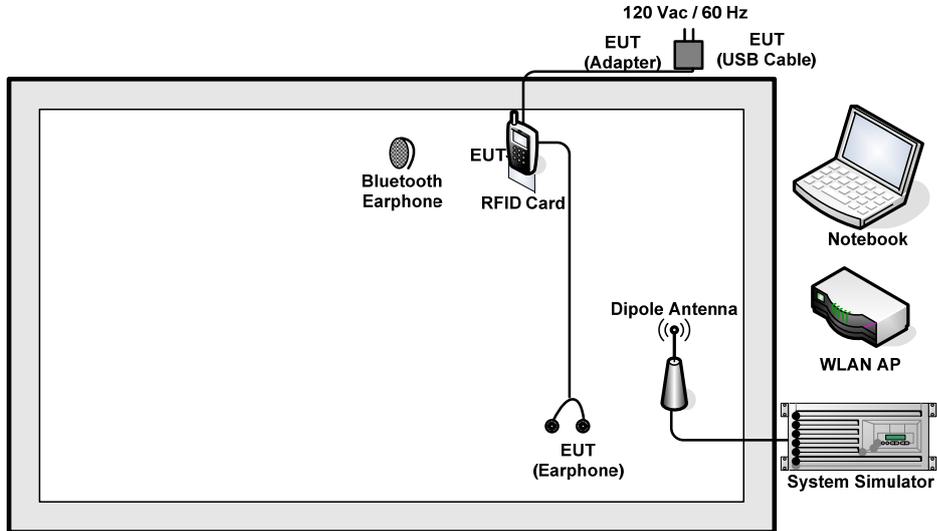

< For Fundamental Emissions and Mask and Radiated Emissions Measurement >

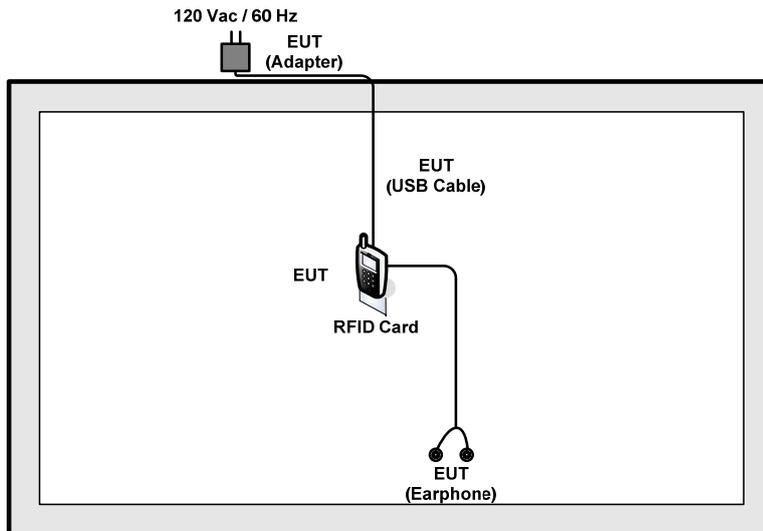

### 1.9 Table for Supporting Units


Support Unit	Manufacturer	Model	FCC ID
RFID Card	N/A	N/A	N/A
System Simulator	N/A	CBT	N/A
WLAN AP	N/A	WRT600N	Q87-WRT600NV11
Notebook	N/A	G80	PRC4
Bluetooth Earphone	N/A	BH-102	PYAHS-107W

## 2. CONDUCTED EMISSION TEST

### 2.1 Measuring Instruments

See list of measuring instruments of this test report.

### 2.2 Test setup

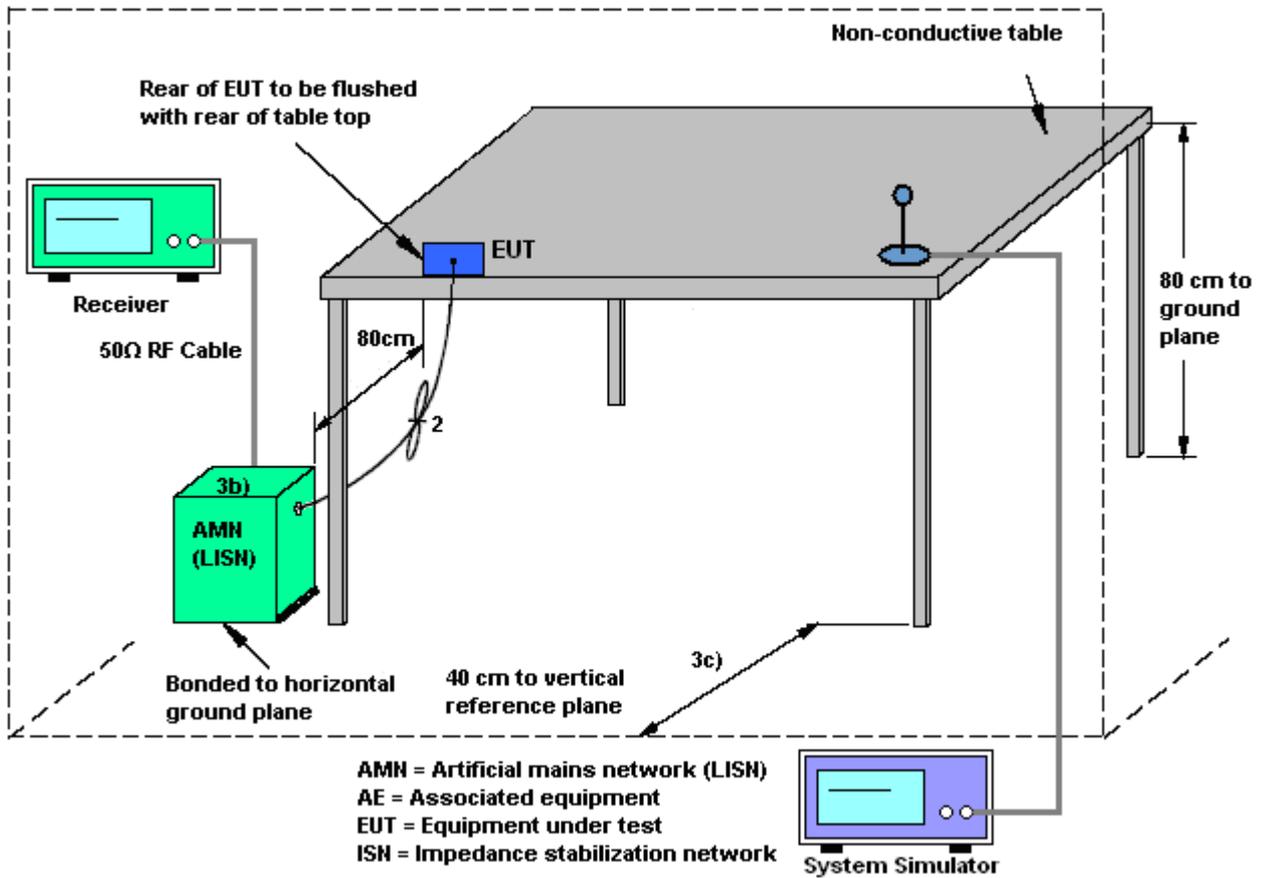

### 2.3 Test Result of Conducted Emission Test

Please refer to Appendix A.

## 2.4 AC Power Line Conducted Emissions Measurement

### 2.4.1 Limit

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 2.4.2 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3. CONDUCTED TEST ITEMS

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup

##### 3.2.1 20dB Spectrum Bandwidth

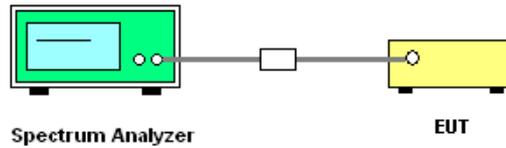

##### 3.2.2 Frequency Stability

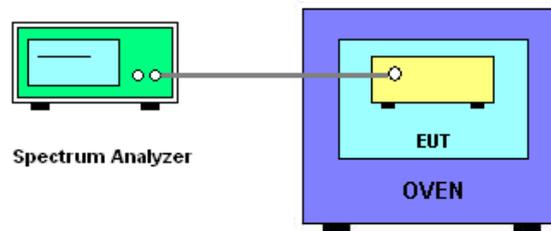

#### 3.3 Test Result of Conducted Test Items

Please refer to Appendix B.



### 3.4 20dB Spectrum Bandwidth Measurement

#### 3.4.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band 13.553~13.567MHz

#### 3.4.2 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

### 3.5 Frequency Stability Measurement

#### 3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 3.5.2 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.


## 4. RADIATED TEST ITEMS

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated emissions below 30MHz

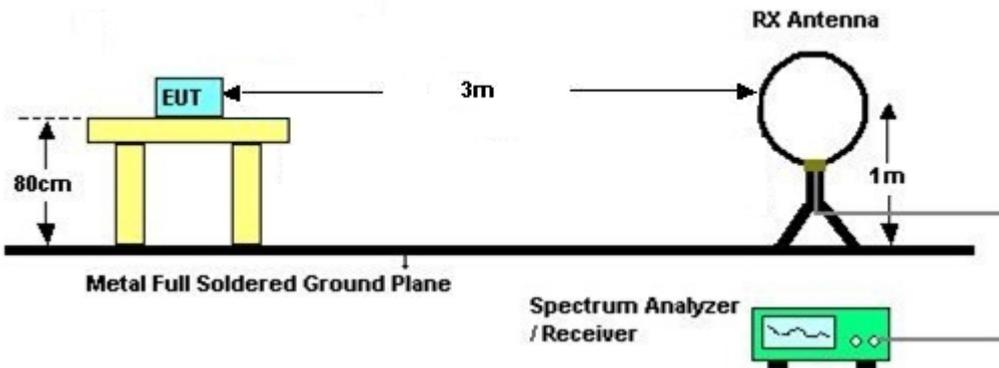

#### 4.2.2 For radiated emissions above 30MHz

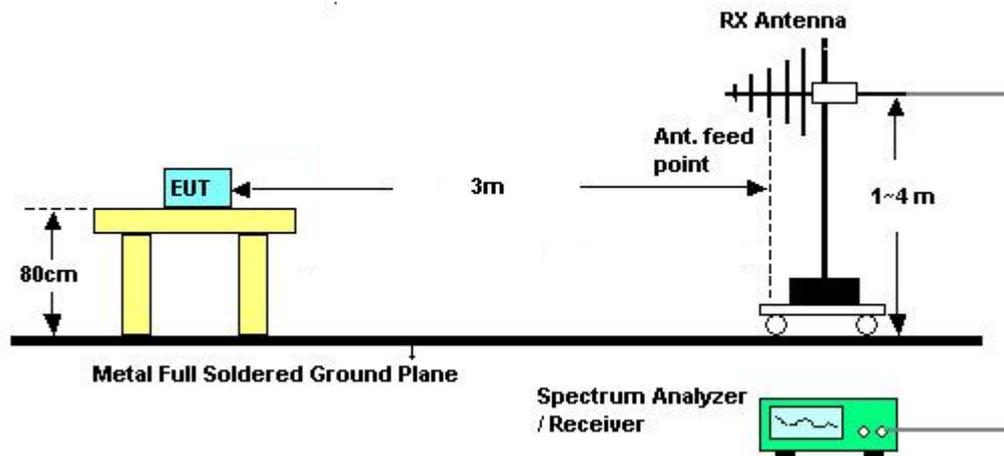

### 4.3 Test Result of Radiated Test Items

Please refer to Appendix C.

#### 4.4 Field Strength of Fundamental Emissions and Mask Measurement

##### 4.4.1 Limit

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)			
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553~13.567MHz			
Freq. of Emission (MHz)	Field Strength (μV/m) at 30m	Field Strength (dBμV/m) at 30m	Field Strength (dBμV/m) at 10m	Field Strength (dBμV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

##### 4.4.2 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553~13.567MHz.

Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).

## 4.5 Radiated Emissions Measurement

### 4.5.1 Limit

The field strength of any emissions which appear outside of 13.553~13.567MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.



### 4.5.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

### 4.5.4 Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

### 4.5.5 Antenna Anti-Replacement Construction


An embedded-in antenna design is used.



### 5. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~40GHz	Jan. 28, 2015	May 21, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 28, 2015	May 21, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 28, 2015	May 21, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 29, 2014	May 28, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	May 28, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	May 28, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	May 28, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	May 28, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	May 28, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	May 28, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	May 04, 2015	May 28, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz Gain 30dB	Oct. 28, 2014	May 28, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 28, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	May 28, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	May 28, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	May 04, 2015	May 08, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	May 08, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	May 08, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	May 08, 2015	Oct. 24, 2015	Conduction (CO01-KS)


## Appendix A. Test Results of Conducted Emission Test

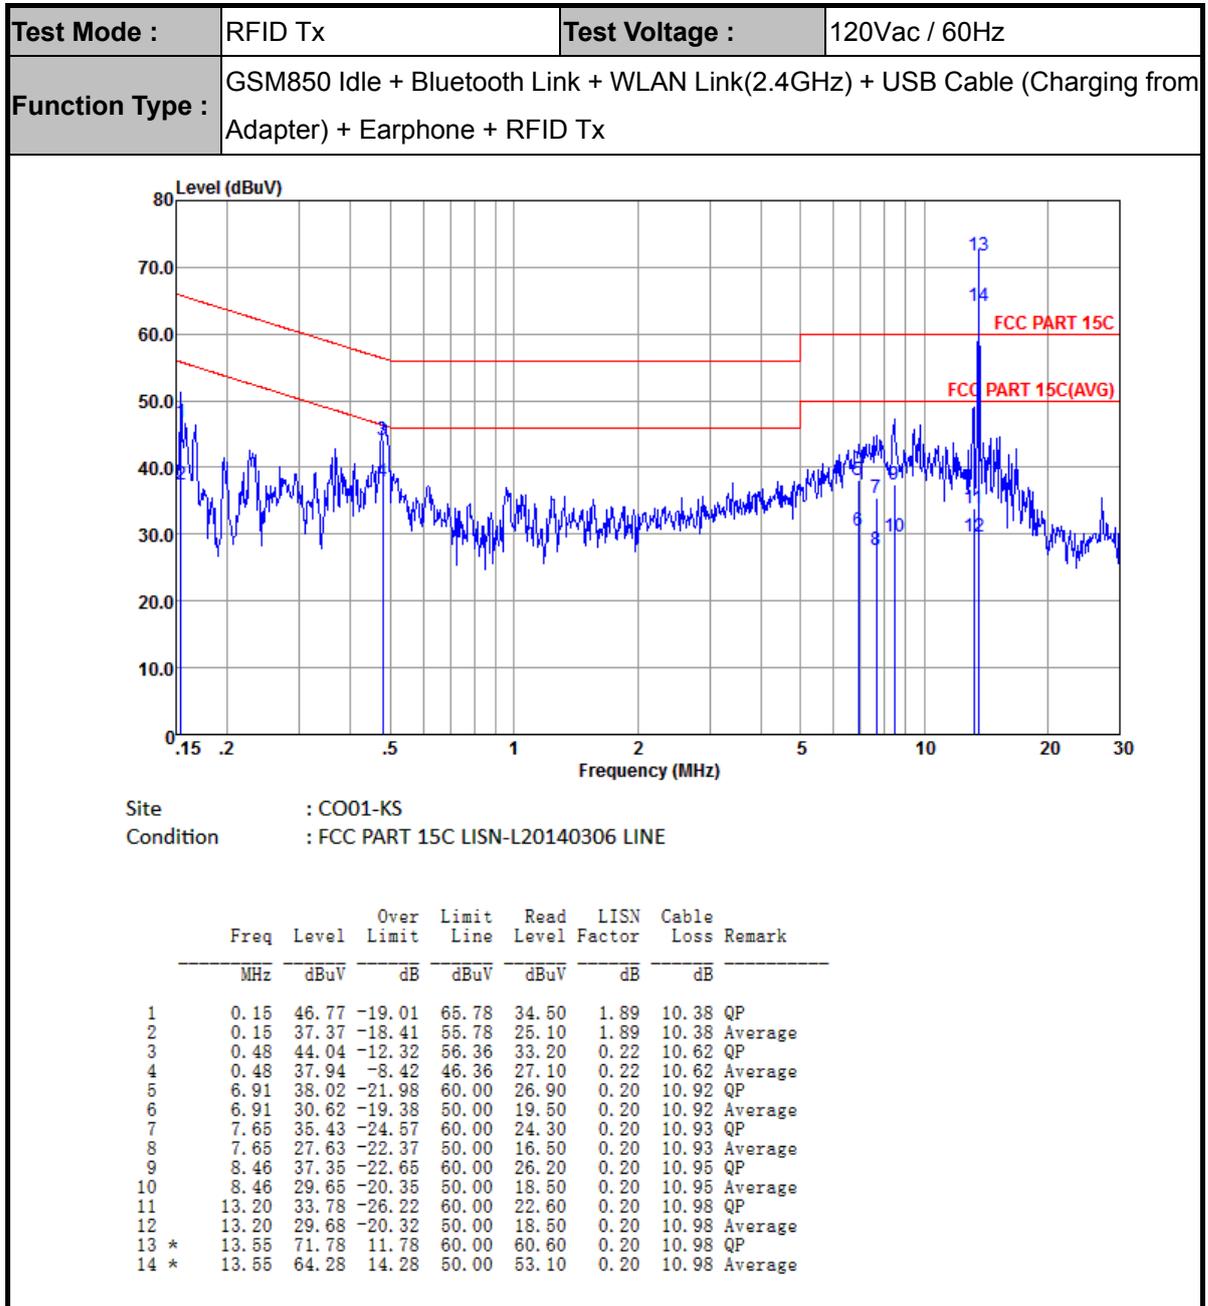

(1) The EUT is with RFID antenna during testing.



Test Mode :	RFID Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4GHz) + USB Cable (Charging from Adapter) + Earphone + RFID Tx		

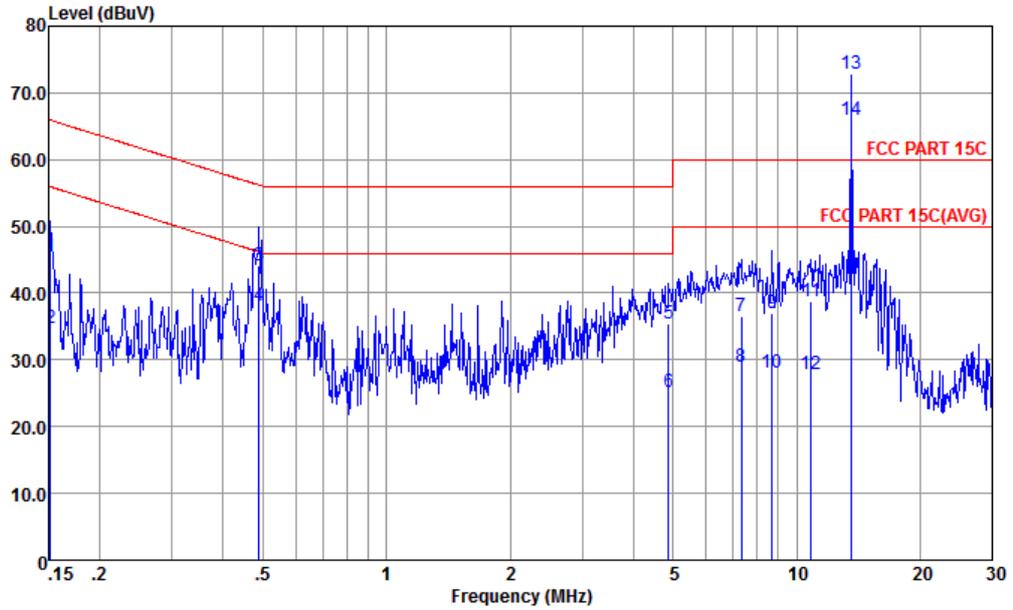


Site : CO01-KS  
 Condition : FCC PART 15C LISN-N20140306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	45.55	-20.36	65.91	33.30	1.88	10.37	QP
2	0.15	34.75	-21.16	55.91	22.50	1.88	10.37	Average
3	0.49	44.23	-11.96	56.19	33.30	0.31	10.62	QP
4	0.49	38.03	-8.16	46.19	27.10	0.31	10.62	Average
5	4.87	35.35	-20.65	56.00	24.30	0.20	10.85	QP
6	4.87	25.25	-20.75	46.00	14.20	0.20	10.85	Average
7	7.33	36.53	-23.47	60.00	25.40	0.20	10.93	QP
8	7.33	28.93	-21.07	50.00	17.80	0.20	10.93	Average
9	8.73	36.95	-23.05	60.00	25.80	0.20	10.95	QP
10	8.73	28.15	-21.85	50.00	17.00	0.20	10.95	Average
11	10.85	38.68	-21.32	60.00	27.51	0.21	10.96	QP
12	10.85	27.78	-22.22	50.00	16.61	0.21	10.96	Average
13 *	13.56	72.97	12.97	60.00	61.71	0.28	10.98	QP
14 *	13.56	65.87	15.87	50.00	54.61	0.28	10.98	Average

(1) The EUT is with RFID antenna during testing.



Test Mode :	RFID Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4GHz) + USB Cable (Charging from Adapter) + Earphone + RFID Tx		

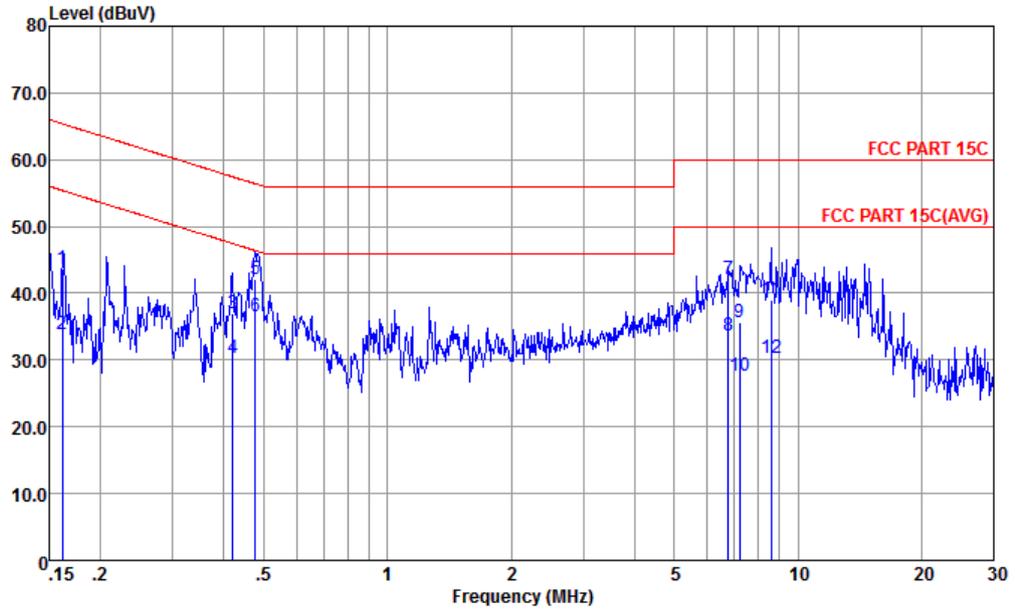


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L20140306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	43.65	-21.73	65.38	31.50	1.75	10.40	QP
2	0.16	33.95	-21.43	55.38	21.80	1.75	10.40	Average
3	0.42	37.01	-20.45	57.46	26.10	0.29	10.62	QP
4	0.42	30.41	-17.05	47.46	19.50	0.29	10.62	Average
5	0.48	42.04	-14.37	56.41	31.20	0.22	10.62	QP
6 *	0.48	36.44	-9.97	46.41	25.60	0.22	10.62	Average
7	6.77	42.21	-17.79	60.00	31.10	0.20	10.91	QP
8	6.77	33.71	-16.29	50.00	22.60	0.20	10.91	Average
9	7.21	35.73	-24.27	60.00	24.60	0.20	10.93	QP
10	7.21	27.63	-22.37	50.00	16.50	0.20	10.93	Average
11	8.59	38.95	-21.05	60.00	27.80	0.20	10.95	QP
12	8.59	30.25	-19.75	50.00	19.10	0.20	10.95	Average

(2) The RFID antenna is replaced by a dummy load during test.



Test Mode :	RFID Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link(2.4GHz) + USB Cable (Charging from Adapter) + Earphone + RFID Tx		

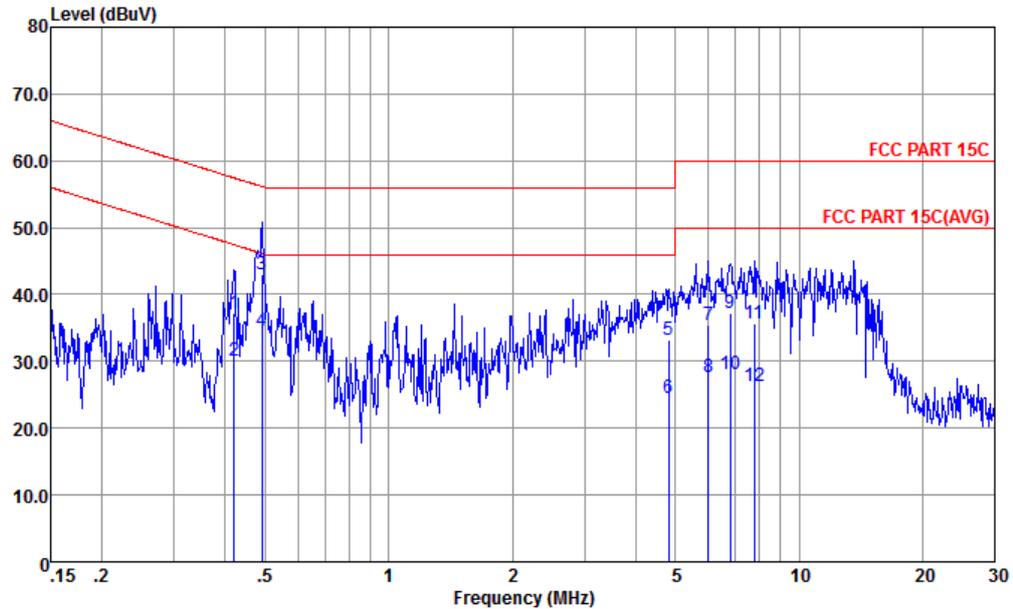

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N20140306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.42	37.20	-20.26	57.46	26.20	0.38	10.62	QP
2	0.42	30.10	-17.36	47.46	19.10	0.38	10.62	Average
3	0.49	43.03	-13.11	56.14	32.10	0.31	10.62	QP
4 *	0.49	34.63	-11.51	46.14	23.70	0.31	10.62	Average
5	4.82	33.14	-22.86	56.00	22.09	0.20	10.85	QP
6	4.82	24.54	-21.46	46.00	13.49	0.20	10.85	Average
7	6.02	35.38	-24.62	60.00	24.30	0.20	10.88	QP
8	6.02	27.68	-22.32	50.00	16.60	0.20	10.88	Average
9	6.81	37.32	-22.68	60.00	26.20	0.20	10.92	QP
10	6.81	28.02	-21.98	50.00	16.90	0.20	10.92	Average
11	7.77	35.64	-24.36	60.00	24.50	0.20	10.94	QP
12	7.77	26.24	-23.76	50.00	15.10	0.20	10.94	Average

(2) The RFID antenna is replaced by a dummy load during test.



## Appendix B. Test Results of Conducted Test Items

### B.1 Test Result of 20dB Spectrum Bandwidth

Test mode	RFID Tx	Test Frequency (MHz)	13.56
<p>Ref 20 dBm *Att 40 dB SWT 20 ms</p> <p>*RBW 1 kHz Marker 1 [T1 ] 2.22 dBm            *VBW 3 kHz 13.560360000 MHz</p> <p>n dB [T1] 20.00 dB            BW 2.640000000 kHz            Temp 1 [T1] -17.53 dBm            13.559200000 MHz            Temp 2 [T1] -18.02 dBm            13.561660000 MHz</p> <p>Center 13.56 MHz 1 kHz/ Span 10 kHz</p> <p>Date: 21.MAY.2015 12:07:34</p>		<p>Ref 20 dBm *Att 40 dB SWT 20 ms</p> <p>*RBW 1 kHz Marker 1 [T1 ] 2.25 dBm            *VBW 3 kHz 13.560360000 MHz</p> <p>OBW 2.240000000 kHz            Temp 1 [T1] -12.13 dBm            13.559200000 MHz            Temp 2 [T1] -12.48 dBm            13.561460000 MHz</p> <p>Center 13.56 MHz 1 kHz/ Span 10 kHz</p> <p>Date: 21.MAY.2015 12:07:01</p>	
<b>20dB Bandwidth (kHz)</b>	2.64	<b>99% Occupied BW (kHz)</b>	2.24
<b>Frequency range (MHz)</b>	$f_L > 13.553$	13.55902	<b>Test Result</b>
	$f_H < 13.567$	13.56166	<b>Complies</b>




B.2 Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
120	13.560340	-20	13.560360
102	13.560340	-10	13.560360
138	13.560340	0	13.560360
-	-	10	13.560340
-	-	20	13.560350
-	-	30	13.560200
-	-	40	13.560300
-	-	50	13.560290
<b>Max.Deviation (MHz)</b>	0.000340	<b>Max.Deviation (MHz)</b>	0.000360
<b>Max.Deviation (ppm)</b>	25.0737	<b>Max.Deviation (ppm)</b>	26.5487
<b>Limit</b>	<b>FS &lt; ±100 ppm</b>	<b>Limit</b>	<b>FS &lt; ±100 ppm</b>
<b>Test Result</b>	<b>PASS</b>	<b>Test Result</b>	<b>PASS</b>



## Appendix C. Test Results of Radiated Test Items

### C.1 Test Result of Field Strength of Fundamental Emissions

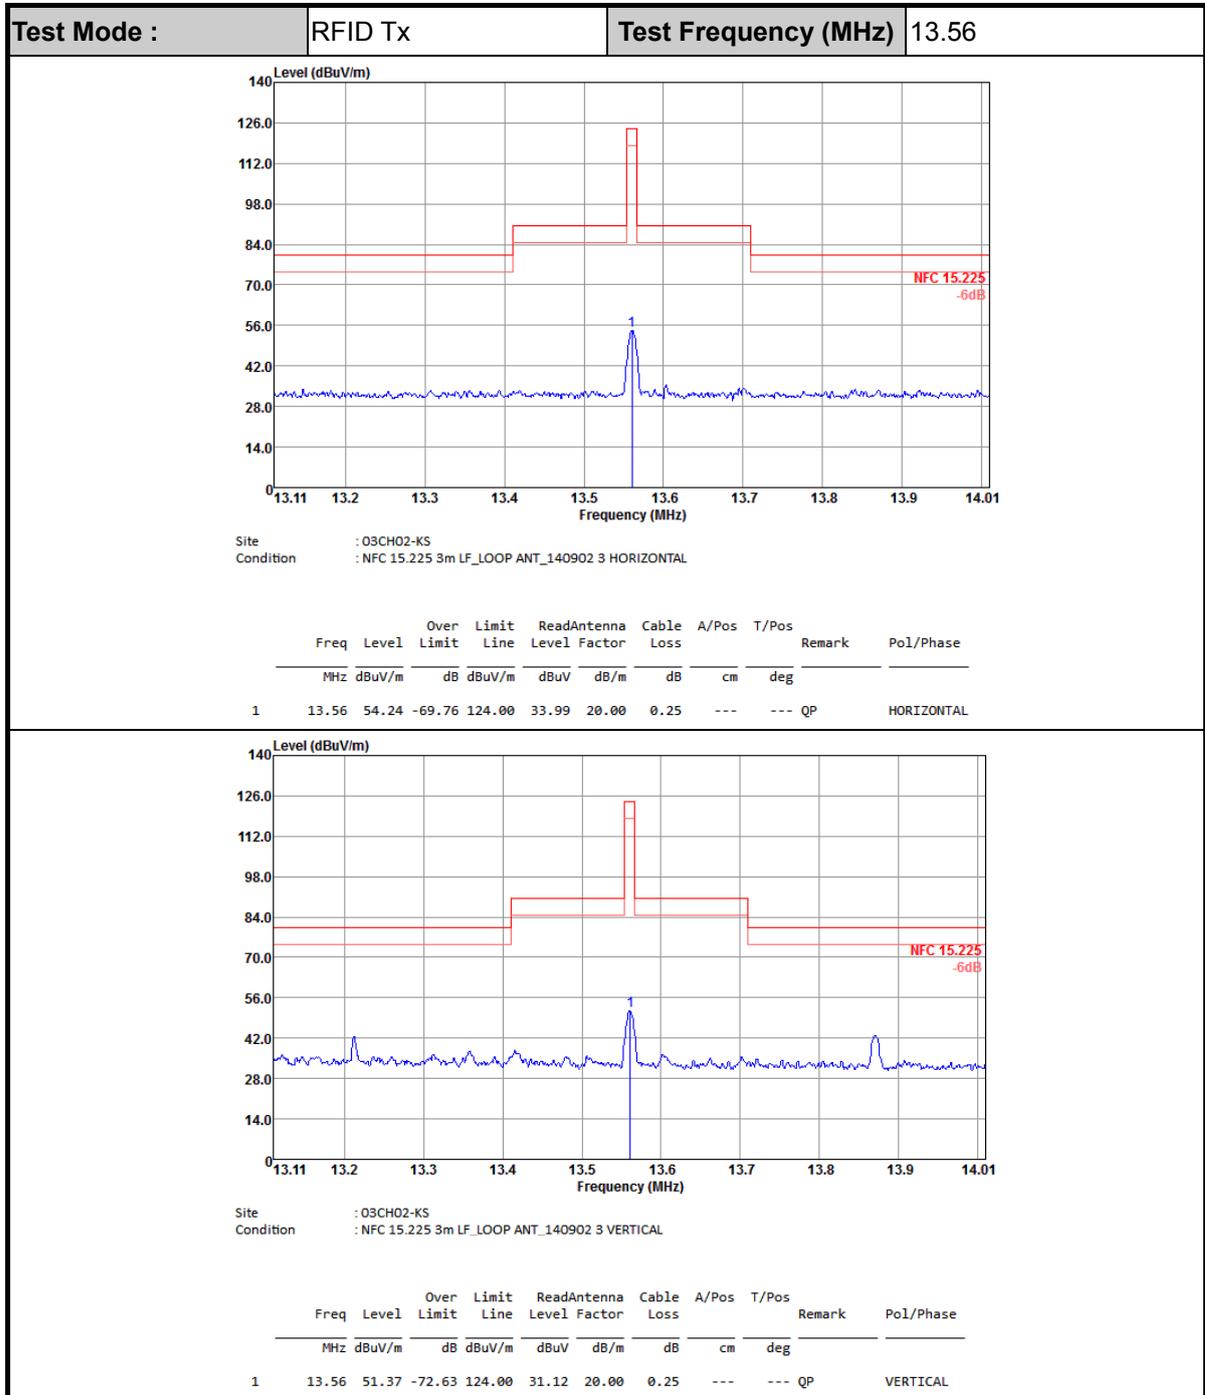

**Note:** All RFID's spurious emissions are below 20dB of limits.



C.2 Results of Radiated Emissions (9 kHz~30MHz)

Test Mode :		RFID Tx			Polarization :		Horizontal		
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01986	77.18	-44.46	121.64	57.12	20	0.06	-	-	Average
0.06328	47.02	-64.55	111.57	27.01	20	0.01	-	-	Average
1.273	48.52	-16.98	65.5	28.47	20	0.05	-	-	QP
2.936	46.91	-22.63	69.54	26.83	20	0.08	-	-	QP
4.37	46.93	-22.61	69.54	26.77	20	0.16	-	-	QP
13.559	55.17	-14.37	69.54	34.92	20	0.25	-	-	QP
25.835	35.57	-33.97	69.54	15.23	20	0.34	-	-	QP

Test Mode :		RFID Tx			Polarization :		Vertical		
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.01986	78.34	-43.3	121.64	58.28	20	0.06	-	-	Average
0.03509	43.94	-72.76	116.7	23.93	20	0.01	-	-	Average
1.273	54.02	-11.48	65.5	33.97	20	0.05	-	-	QP
2.57	52.35	-17.19	69.54	32.28	20	0.07	-	-	QP
4.532	42.25	-27.29	69.54	22.09	20	0.16	-	-	QP
13.559	52.2	-17.34	69.54	31.95	20	0.25	-	-	QP
29.55	38.79	-30.75	69.54	18.43	20	0.36	-	-	QP

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. Limit line = specific limits (dBμV) + distance extrapolation factor.



C.3 Results of Radiated Emissions (30MHz~1GHz)

Test Mode :		RFID Tx			Polarization :		Horizontal			
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
34.85	17.89	-22.11	40	34.38	17.6	1.18	35.27	-	-	Peak
62.98	17.78	-22.22	40	44.99	6.64	1.35	35.2	-	-	Peak
105.66	23.07	-20.43	43.5	44.58	12	1.82	35.33	-	-	Peak
198.78	23.62	-19.88	43.5	46.97	9.44	2.29	35.08	-	-	Peak
223.03	26.83	-19.17	46	49.17	10.32	2.33	34.99	200	33	Peak
537.31	23.82	-22.18	46	36.3	17.97	4.06	34.51	-	-	Peak

Test Mode :		RFID Tx			Polarization :		Vertical			
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	29.48	-10.52	40	44.43	19.1	1.17	35.22	100	321	Peak
44.55	28.47	-11.53	40	51.22	10.8	1.17	34.72	-	-	Peak
98.87	22.88	-20.62	43.5	44.42	11.96	1.8	35.3	-	-	Peak
222.06	23.53	-22.47	46	45.91	10.28	2.33	34.99	-	-	Peak
288.02	23.51	-22.49	46	42.67	13.01	2.61	34.78	-	-	Peak
341.37	23.23	-22.77	46	40.74	14.41	3.11	35.03	-	-	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.