



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE A2017U
FCC ID : SRQ-ZTEA2017U
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Mar. 16, 2016 and testing was completed on Apr. 17, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

1.1 Applicant 5

1.2 Manufacturer 5

1.3 Product Feature of Equipment Under Test 5

1.4 Product Specification of Equipment Under Test 6

1.5 Modification of EUT 6

1.6 Testing Location 7

1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

2.1 Carrier Frequency Channel 8

2.2 Pre-Scanned RF Power 9

2.3 Test Mode 11

2.4 Connection Diagram of Test System 13

2.5 Support Unit used in test configuration and system 14

2.6 EUT Operation Test Setup 14

2.7 Measurement Results Explanation Example 14

3 TEST RESULT 15

3.1 26dB & 99% Occupied Bandwidth Measurement 15

3.2 Maximum Conducted Output Power Measurement 17

3.3 Power Spectral Density Measurement 18

3.4 Unwanted Radiated Emission Measurement 21

3.5 AC Conducted Emission Measurement 25

3.6 Frequency Stability Measurement 29

3.7 Automatically Discontinue Transmission 30

3.8 Antenna Requirements 31

4 LIST OF MEASURING EQUIPMENTS 32

5 UNCERTAINTY OF EVALUATION 33

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR631604E	Rev. 01	Initial issue of report	May 25, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC ≤24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC ≤11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm (depend on band)&15.209(a)	Pass	Under limit 4.51 dB at 6906.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.07 dB at 0.200 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE A2017U
FCC ID	SRQ-ZTEA2017U
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/HS PA+(16QAM uplink is not supported)/DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5GHz 802.11a/n HT20/HT40 WLAN5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR Bluetooth v4.1 LE Bluetooth v4.2 LE
IMEI Code	Conducted: 990006780003751 Radiation: 990006780003629 Conduction: 990006780003793
HW Version	wwdB
SW Version	A2017UV1.0.0B07
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 12.81 dBm / 0.0191 W 802.11n HT20 : 9.71 dBm / 0.0094 W 802.11n HT40 : 10.21 dBm / 0.0105 W 802.11ac VHT20 : 9.68 dBm / 0.0093 W 802.11ac VHT40 : 10.13 dBm / 0.0103 W 802.11ac VHT80 : 9.94 dBm / 0.0099 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.78 MHz 802.11n HT20 : 17.73 MHz 802.11n HT40 : 35.86 MHz 802.11ac VHT20: 17.68 MHz 802.11ac VHT40 : 35.86 MHz 802.11ac VHT80 : 74.93 MHz
Antenna Type	PIFA Antenna with gain -1.5 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	CO01-KS	03CH03-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

WLAN 5GHz 802.11a Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 36	5180	12.81	CH 36	12.77	12.76	12.75	12.31	12.32	12.28	12.26
CH 44	5220	12.74								
CH 48	5240	12.54								

WLAN 5GHz 802.11n-HT20 Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 36	5180	9.71	CH 36	9.65	9.69	9.24	9.20	9.18	9.30	9.22
CH 44	5220	9.58								
CH 48	5240	9.48								

WLAN 5GHz 802.11n-HT40 Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 38	5190	10.21	CH 38	10.17	10.07	10.18	10.13	10.15	10.19	10.16
CH 46	5230	10.09								

WLAN 5GHz 802.11ac VHT20 Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0									
CH 36	5180	9.68	CH 36	9.49	9.65	9.20	9.08	9.15	9.11	9.22	9.12
CH 44	5220	9.47									
CH 48	5240	9.30									



WLAN 5GHz 802.11ac VHT40 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 38	5190	10.13	CH 38	10.08	10.03	10.05	10.10	10.06	10.11	10.02	10.09	10.12
CH 46	5230	9.82										

WLAN 5GHz 802.11ac VHT80 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 42	5210	9.94	CH 42	9.91	9.89	9.21	9.08	9.20	9.50	9.35	9.23	9.21



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable.	



Ch. #		Band I : 5180-5240 MHz	
		802.11a	
L	Low	36	
M	Middle	44	
H	High	48	

Ch. #		Band I : 5180-5240 MHz	
		802.11n HT20	
L	Low	36	
M	Middle	44	
H	High	48	

Ch. #		Band I : 5180-5240 MHz	
		802.11n HT40	
L	Low	38	
M	Middle	-	
H	High	46	


Ch. #		Band I : 5180-5240 MHz	
		802.11ac VHT20	
L	Low	36	
M	Middle	44	
H	High	48	

Ch. #		Band I : 5180-5240 MHz	
		802.11ac VHT40	
L	Low	38	
M	Middle	-	
H	High	46	


Ch. #		Band I : 5180-5240 MHz	
		802.11ac VHT80	
L	Low	-	
M	Middle	42	
H	High	-	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

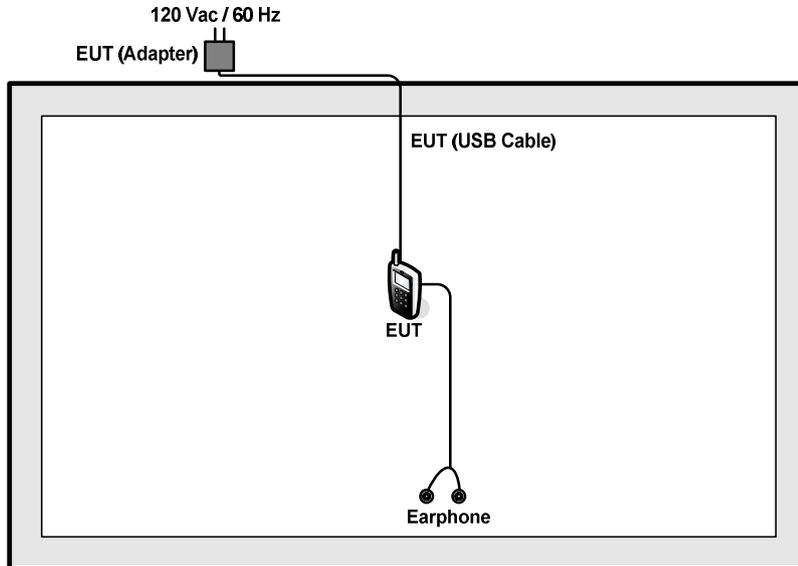

<AC Conducted Emission Mode>

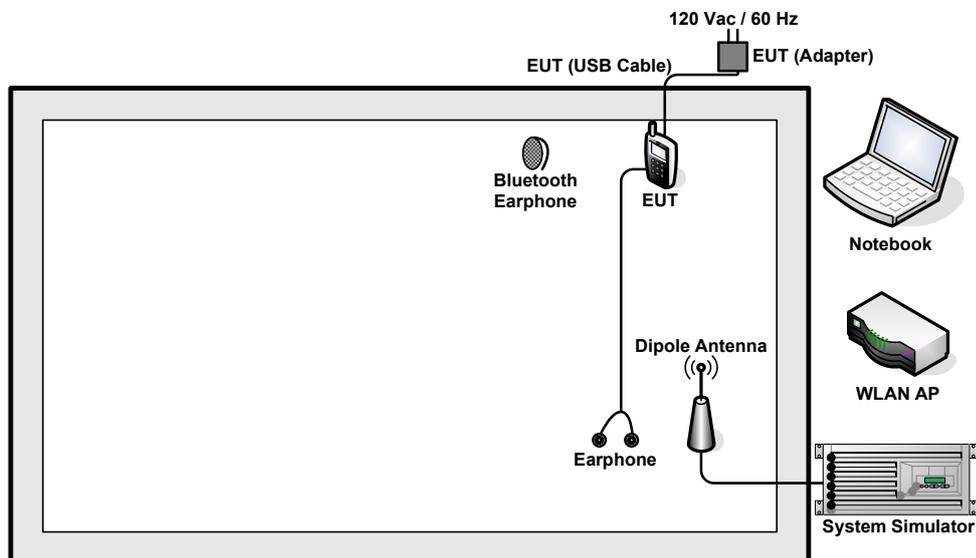

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
5.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
6.	Earphone	Lenovo	LH102	N/A	Unshielded, 1.2 m	N/A
7.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.2 dB.

Offset (dB) = RF cable loss(dB).

= 6.2 (dB)

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.



3.1.4 Test Setup

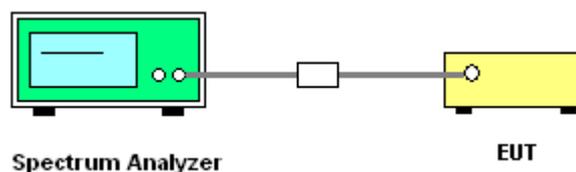



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

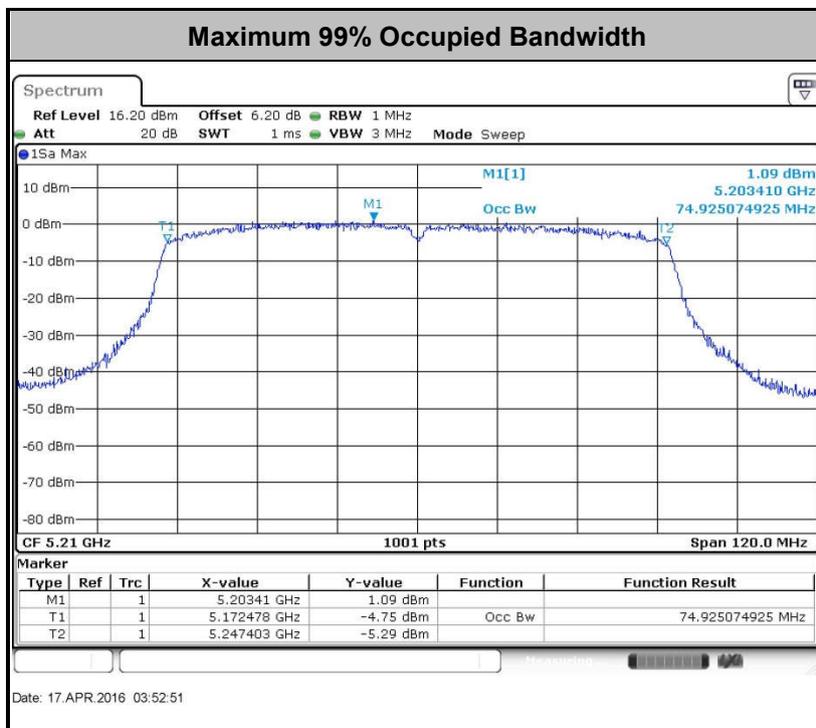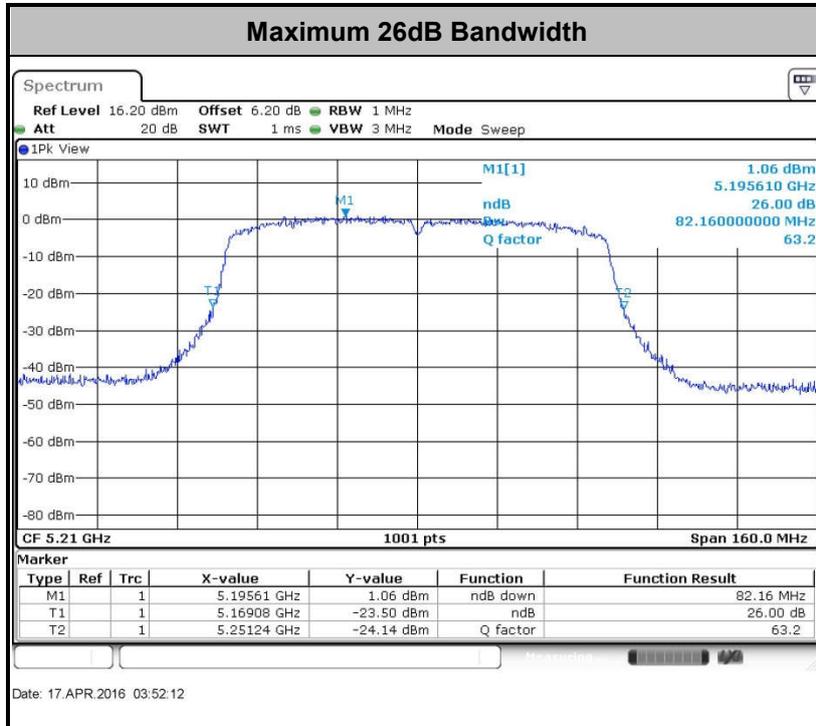

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

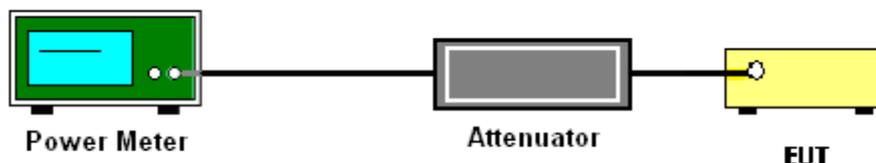

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

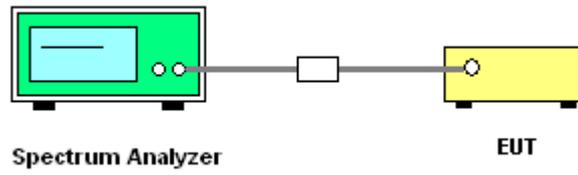



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

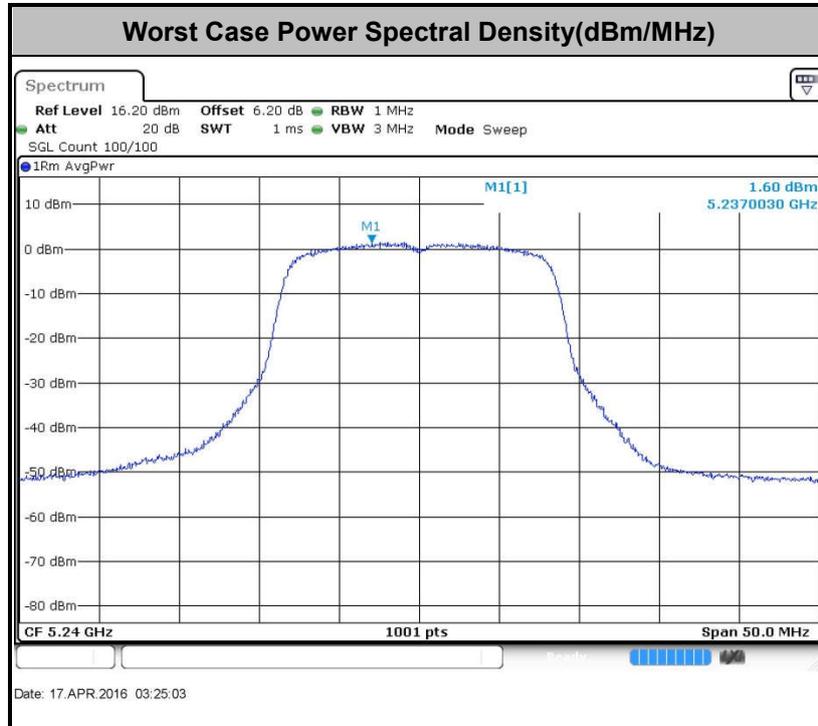

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 D01 v01r01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


- 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

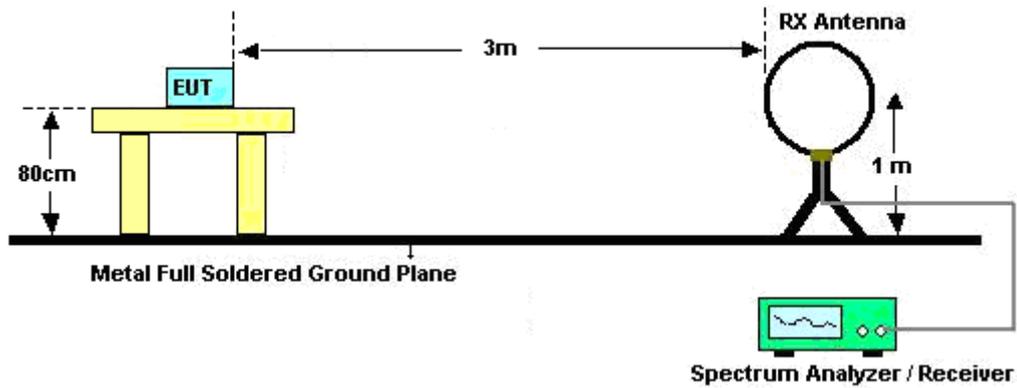

For radiated emissions from 30MHz to 1GHz

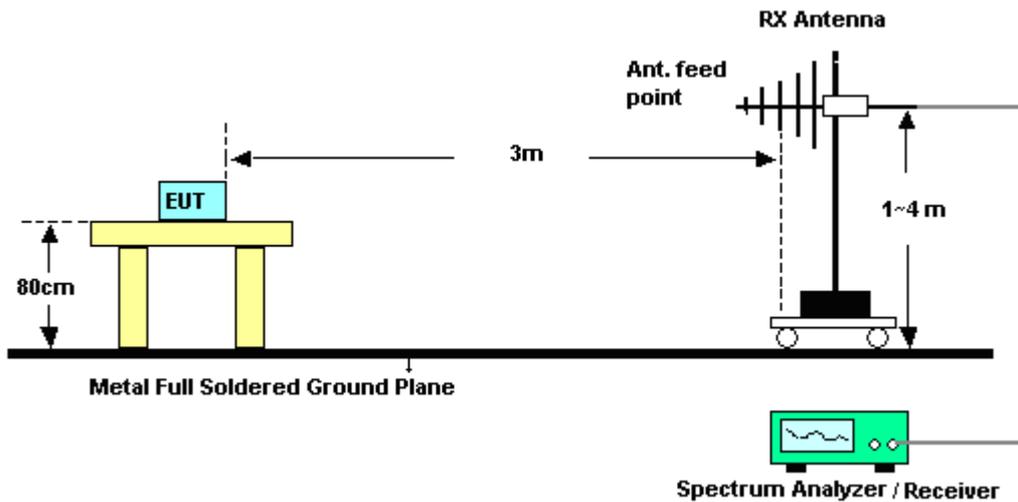

For radiated emissions above 1GHz

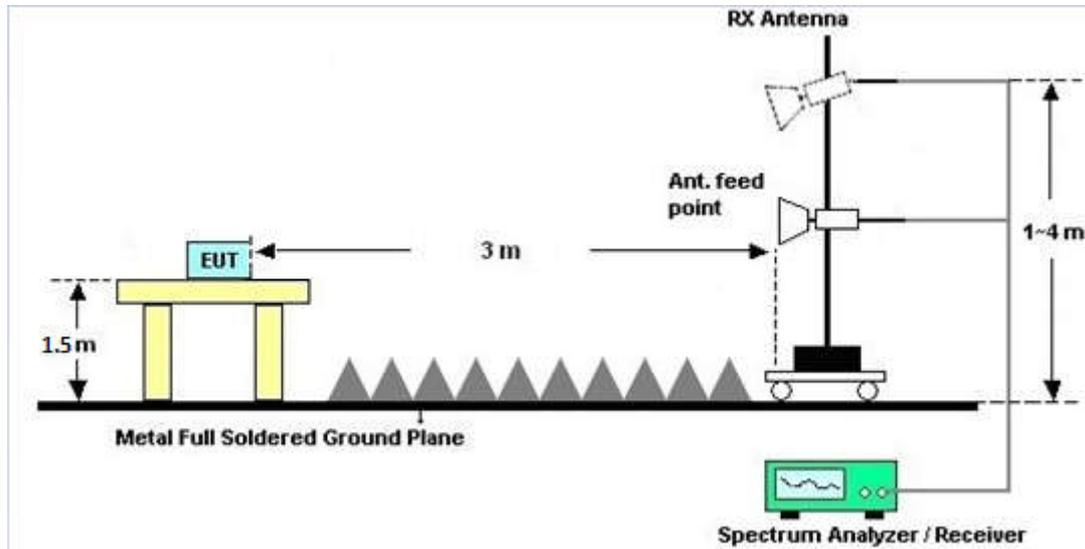

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

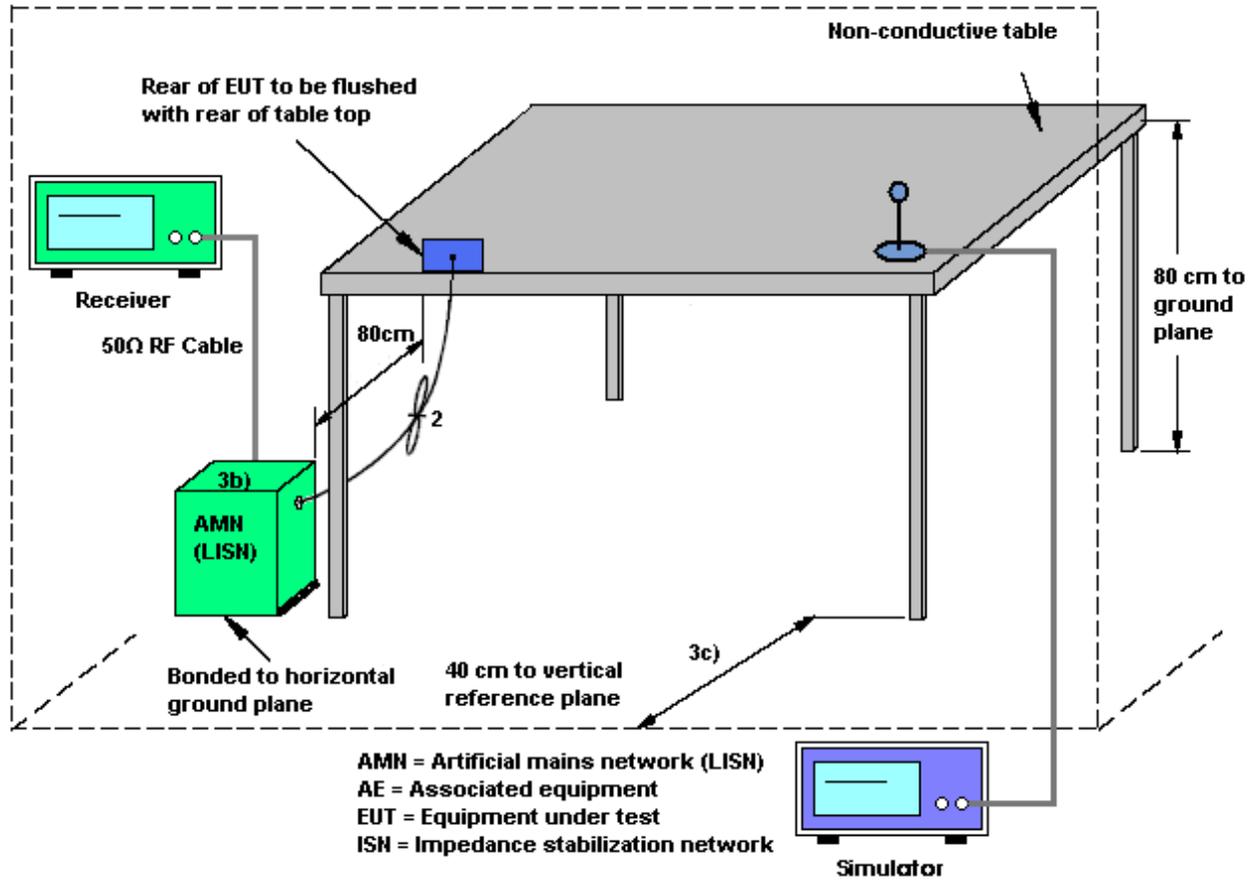



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	43~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)		

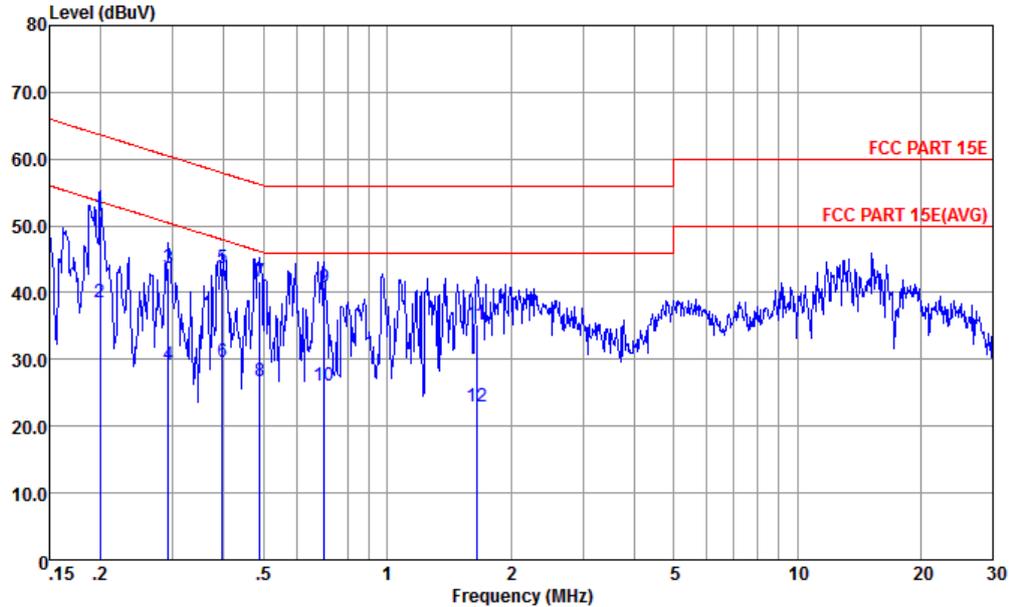


Site : CO01-KS
 Condition : FCC PART 15E LISN-L-20151024 LINE
 mode : Mode 1
 : 990006780003793 #13

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.20	51.55	-12.07	63.62	41.20	0.22	10.13	QP
2	0.20	38.45	-15.17	53.62	28.10	0.22	10.13	Average
3	0.29	43.67	-16.79	60.46	33.30	0.22	10.15	QP
4	0.29	29.17	-21.29	50.46	18.80	0.22	10.15	Average
5	0.40	43.60	-14.35	57.95	33.20	0.23	10.17	QP
6	0.40	29.60	-18.35	47.95	19.20	0.23	10.17	Average
7	0.49	41.59	-14.60	56.19	31.20	0.23	10.16	QP
8	0.49	26.69	-19.50	46.19	16.30	0.23	10.16	Average
9	0.70	40.69	-15.31	56.00	30.30	0.24	10.15	QP
10	0.70	25.99	-20.01	46.00	15.60	0.24	10.15	Average
11	1.65	35.14	-20.86	56.00	24.80	0.20	10.14	QP
12	1.65	22.94	-23.06	46.00	12.60	0.20	10.14	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	43~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)		

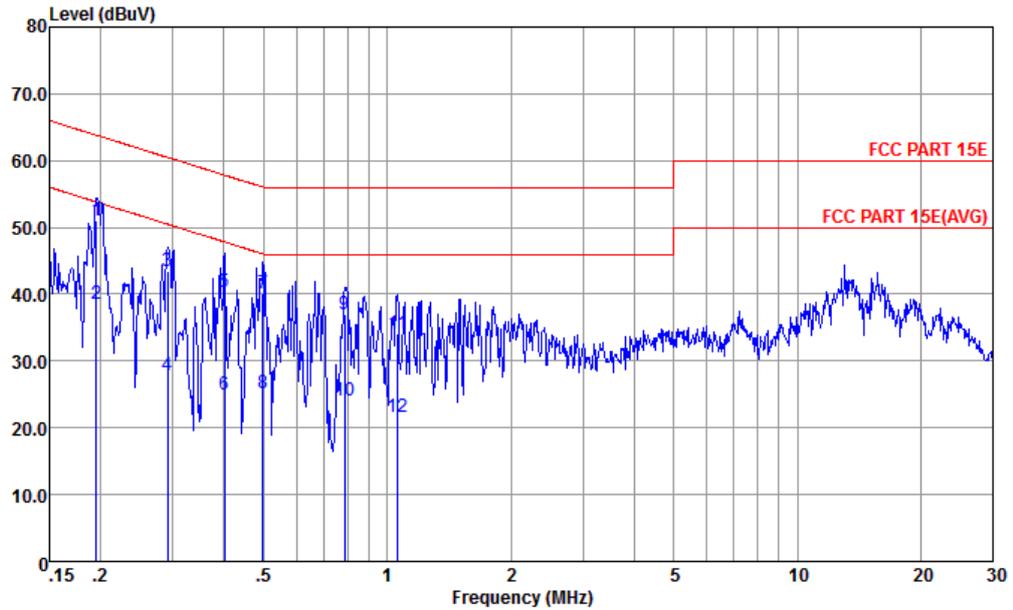

Site : CO01-KS
 Condition : FCC PART 15E LISN-N-20151024 NEUTRAL

mode : Mode 1
 : 990006780003793 #13

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.20	51.04	-12.76	63.80	40.60	0.31	10.13	QP
2	0.20	38.54	-15.26	53.80	28.10	0.31	10.13	Average
3	0.29	43.36	-17.14	60.50	32.90	0.31	10.15	QP
4	0.29	27.96	-22.54	50.50	17.50	0.31	10.15	Average
5	0.40	40.29	-17.52	57.81	29.80	0.32	10.17	QP
6	0.40	24.99	-22.82	47.81	14.50	0.32	10.17	Average
7	0.50	40.08	-15.97	56.05	29.60	0.32	10.16	QP
8	0.50	25.08	-20.97	46.05	14.60	0.32	10.16	Average
9	0.79	37.10	-18.90	56.00	26.60	0.35	10.15	QP
10	0.79	24.00	-22.00	46.00	13.50	0.35	10.15	Average
11	1.06	34.11	-21.89	56.00	23.60	0.37	10.14	QP
12	1.06	21.71	-24.29	46.00	11.20	0.37	10.14	Average

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

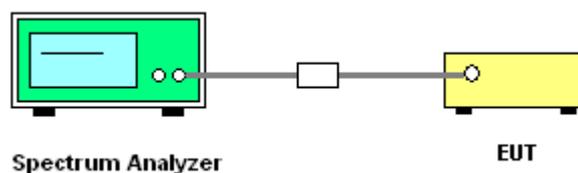

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2015	Mar. 24, 2016~ Apr. 17, 2016	May 03, 2016	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 24, 2015	Mar. 24, 2016~ Apr. 17, 2016	Oct. 23, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 20, 2016	Mar. 24, 2016~ Apr. 17, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Mar. 24, 2016~ Apr. 17, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Mar. 24, 2016~ Apr. 17, 2016	Oct. 23, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Mar. 24, 2016~ Apr. 15, 2016	Sep. 09, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Jun. 05, 2015	Mar. 24, 2016~ Apr. 15, 2016	Jun. 04, 2016	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	Mar. 24, 2016~ Apr. 15, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	25MHz-2GHz	Mar. 12, 2016	Mar. 24, 2016~ Apr. 15, 2016	Mar. 11, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120 D	9120D-1356	1GHz~18GHz	Jun. 25, 2015	Mar. 24, 2016~ Apr. 15, 2016	Jun. 24, 2016	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18Ghz-40Ghz	Oct. 10, 2015	Mar. 24, 2016~ Apr. 15, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz-3000M Hz	Aug. 10, 2015	Mar. 24, 2016~ Apr. 15, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Mar. 24, 2016~ Apr. 15, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Aug. 27, 2015	Mar. 24, 2016~ Apr. 15, 2016	Aug. 26, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 24, 2016~ Apr. 15, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 24, 2016~ Apr. 15, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 24, 2016~ Apr. 15, 2016	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	May 04, 2015	Mar. 28, 2016	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Mar. 28, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Mar. 28, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Mar. 28, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------



Appendix A. Conducted Test Results

Test Engineer:	Issac Song	Temperature:	24~25	°C
Test Date:	2016/3/24~2016/4/17	Relative Humidity:	49~51	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.73	20.43	-	22.24		
11a	6Mbps	1	44	5220	16.73	20.43	-	22.24		
11a	6Mbps	1	48	5240	16.78	20.38	-	22.25		
HT20	MCS0	1	36	5180	17.73	21.33	-	22.49		
HT20	MCS0	1	44	5220	17.68	21.58	-	22.48		
HT20	MCS0	1	48	5240	17.68	21.53	-	22.48		
HT40	MCS0	1	38	5190	35.86	41.36	-	23.01		
HT40	MCS0	1	46	5230	35.86	41.54	-	23.01		
VHT20	MCS0	1	36	5180	17.68	21.18	-	22.48		
VHT20	MCS0	1	44	5220	17.68	21.53	-	22.48		
VHT20	MCS0	1	48	5240	17.63	21.43	-	22.46		
VHT40	MCS0	1	38	5190	35.86	41.45	-	23.01		
VHT40	MCS0	1	46	5230	35.86	41.45	-	23.01		
VHT80	MCS0	1	42	5210	74.93	82.16	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.20	12.81	24.00	-1.50		Pass
11a	6Mbps	1	44	5220	0.20	12.74	24.00	-1.50		Pass
11a	6Mbps	1	48	5240	0.20	12.54	24.00	-1.50		Pass
HT20	MCS0	1	36	5180	0.25	9.71	24.00	-1.50		Pass
HT20	MCS0	1	44	5220	0.25	9.58	24.00	-1.50		Pass
HT20	MCS0	1	48	5240	0.25	9.48	24.00	-1.50		Pass
HT40	MCS0	1	38	5190	0.44	10.21	24.00	-1.50		Pass
HT40	MCS0	1	46	5230	0.44	10.09	24.00	-1.50		Pass
VHT20	MCS0	1	36	5180	0.23	9.68	24.00	-1.50		Pass
VHT20	MCS0	1	44	5220	0.23	9.47	24.00	-1.50		Pass
VHT20	MCS0	1	48	5240	0.23	9.30	24.00	-1.50		Pass
VHT40	MCS0	1	38	5190	0.37	10.13	24.00	-1.50		Pass
VHT40	MCS0	1	46	5230	0.37	9.82	24.00	-1.50		Pass
VHT80	MCS0	1	42	5210	0.91	9.94	24.00	-1.50		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.20	1.30	11.00	-1.50		Pass
11a	6Mbps	1	44	5220	0.20	1.41	11.00	-1.50		Pass
11a	6Mbps	1	48	5240	0.20	1.80	11.00	-1.50		Pass
HT20	MCS0	1	36	5180	0.25	-1.56	11.00	-1.50		Pass
HT20	MCS0	1	44	5220	0.25	-1.73	11.00	-1.50		Pass
HT20	MCS0	1	48	5240	0.25	-1.68	11.00	-1.50		Pass
HT40	MCS0	1	38	5190	0.44	-4.01	11.00	-1.50		Pass
HT40	MCS0	1	46	5230	0.44	-4.35	11.00	-1.50		Pass
VHT20	MCS0	1	36	5180	0.23	-1.63	11.00	-1.50		Pass
VHT20	MCS0	1	44	5220	0.23	-1.81	11.00	-1.50		Pass
VHT20	MCS0	1	48	5240	0.23	-1.68	11.00	-1.50		Pass
VHT40	MCS0	1	38	5190	0.37	-4.13	11.00	-1.50		Pass
VHT40	MCS0	1	46	5230	0.37	-4.36	11.00	-1.50		Pass
VHT80	MCS0	1	42	5210	0.91	-7.81	11.00	-1.50		Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5180.025	0.025	4.83	20	3.6	
11a	6Mbps	1	36	5180	5180.025	0.025	4.83	20	4.4	
11a	6Mbps	1	36	5180	5180.025	0.025	4.83	20	3.85	
11a	6Mbps	1	36	5180	5180.025	0.025	4.83	-30	3.85	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	50	3.85	



Appendix B. Radiated Spurious Emission

15E Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5145.75	49.55	-24.45	74	46.11	31.84	8.13	36.53	100	126	P	H
		5150	40.01	-13.99	54	36.57	31.84	8.13	36.53	100	126	A	H
	*	5184	99.06	-	-	95.55	31.85	8.17	36.51	100	126	P	H
	*	5182	91.87	-	-	88.36	31.85	8.17	36.51	100	126	A	H
		5145.05	48.96	-25.04	74	45.52	31.84	8.13	36.53	300	78	P	V
		5150	39.15	-14.85	54	35.71	31.84	8.13	36.53	300	78	A	V
	*	5182	98.28	-	-	94.77	31.85	8.17	36.51	300	78	P	V
	*	5182	90.63	-	-	87.12	31.85	8.17	36.51	300	78	A	V
802.11a CH 44 5220MHz	*	5220	98.57	-	-	95.01	31.86	8.2	36.5	100	124	P	H
	*	5218	91.09	-	-	87.53	31.86	8.2	36.5	100	124	A	H
	*	5218	97.94	-	-	94.38	31.86	8.2	36.5	301	78	P	V
	*	5218	91.21	-	-	87.65	31.86	8.2	36.5	301	78	A	V
802.11a CH 48 5240MHz	*	5236	98.76	-	-	95.18	31.87	8.21	36.5	100	124	P	H
	*	5238	91.25	-	-	87.67	31.87	8.21	36.5	100	124	A	H
		5385.1	46.22	-27.78	74	42.48	31.92	8.32	36.5	100	124	P	H
		5354.4	37.11	-16.89	54	33.41	31.91	8.29	36.5	100	124	A	H
	*	5242	98.13	-	-	94.53	31.88	8.22	36.5	300	77	P	V
	*	5242	90.67	-	-	87.07	31.88	8.22	36.5	300	77	A	V
		5350.35	46.74	-27.26	74	43.04	31.91	8.29	36.5	300	77	P	V
		5353.55	36.98	-17.02	54	33.28	31.91	8.29	36.5	300	77	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		6906	49.89	-24.11	74	44.3	32.83	9.34	36.58	100	126	P	H
		6906	44.52	-9.48	54	38.93	32.83	9.34	36.58	100	126	A	H
		10359	44.11	-29.89	74	53.65	38.02	13.54	61.1	100	0	P	H
		6906	52.85	-21.15	74	47.26	32.83	9.34	36.58	300	78	P	V
		6906	46.32	-7.68	54	40.73	32.83	9.34	36.58	300	78	A	V
		10359	44.56	-29.44	74	54.1	38.02	13.54	61.1	100	360	P	V
802.11a CH 44 5220MHz		6960	51.6	-22.4	74	45.79	33.01	9.36	36.56	100	124	P	H
		6960	46.14	-7.86	54	40.33	33.01	9.36	36.56	100	124	A	H
		10440	42.8	-31.2	74	52.23	38.06	13.58	61.07	100	0	P	H
		6960	48.21	-25.79	74	42.4	33.01	9.36	36.56	301	78	P	V
		6960	44.69	-9.31	54	38.88	33.01	9.36	36.56	301	78	A	V
		10440	43.4	-30.6	74	52.83	38.06	13.58	61.07	100	360	P	V
802.11a CH 48 5240MHz		6986	45.34	-28.66	74	39.47	33.06	9.37	36.56	100	124	P	H
		6986	40.39	-13.61	54	34.52	33.06	9.37	36.56	100	124	A	H
		10479	44.43	-29.57	74	53.77	38.09	13.61	61.04	100	0	P	H
		6986	48.77	-25.23	74	42.9	33.06	9.37	36.56	300	77	P	V
		6986	44.4	-9.6	54	38.53	33.06	9.37	36.56	300	77	A	V
		10479	43.98	-30.02	74	53.32	38.09	13.61	61.04	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		5127.3	48.53	-25.47	74	45.12	31.84	8.11	36.54	241	119	P	H
		5147.05	38.91	-15.09	54	35.47	31.84	8.13	36.53	241	119	A	H
	*	5178	95.09	-	-	91.58	31.85	8.17	36.51	241	119	P	H
	*	5178	87.37	-	-	83.86	31.85	8.17	36.51	241	119	A	H
		5149.2	48.68	-25.32	74	45.24	31.84	8.13	36.53	300	70	P	V
		5100.05	38.18	-15.82	54	34.83	31.83	8.08	36.56	300	70	A	V
	*	5176	95.46	-	-	91.95	31.85	8.17	36.51	300	70	P	V
	*	5182	88.27	-	-	84.76	31.85	8.17	36.51	300	70	A	V
802.11n HT20 CH 44 5220MHz	*	5218	95.56	-	-	92	31.86	8.2	36.5	100	118	P	H
	*	5218	88.53	-	-	84.97	31.86	8.2	36.5	100	118	A	H
	*	5216	95.65	-	-	92.09	31.86	8.2	36.5	300	66	P	V
	*	5218	88.36	-	-	84.8	31.86	8.2	36.5	300	66	A	V
802.11n HT20 CH 48 5240MHz	*	5244	94.35	-	-	90.75	31.88	8.22	36.5	300	293	P	H
	*	5236	87.3	-	-	83.72	31.87	8.21	36.5	300	293	A	H
		5381.7	45.56	-28.44	74	41.82	31.92	8.32	36.5	300	293	P	H
		5356	36.66	-17.34	54	32.96	31.91	8.29	36.5	300	293	A	H
	*	5238	94.05	-	-	90.47	31.87	8.21	36.5	300	245	P	V
	*	5242	87.13	-	-	83.53	31.88	8.22	36.5	300	245	A	V
		5386.35	45.62	-28.38	74	41.88	31.92	8.32	36.5	300	245	P	V
	5385.5	36.81	-17.19	54	33.07	31.92	8.32	36.5	300	245	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		6906	47.88	-26.12	74	42.29	32.83	9.34	36.58	241	119	P	H
		6906	41.41	-12.59	54	35.82	32.83	9.34	36.58	241	119	A	H
		10360	43.46	-30.54	74	53	38.02	13.54	61.1	100	360	P	H
		6906	54.36	-19.64	74	48.77	32.83	9.34	36.58	300	70	P	V
	!	6906	49.49	-4.51	54	43.9	32.83	9.34	36.58	300	70	A	V
		10360	44.09	-29.91	74	53.63	38.02	13.54	61.1	100	0	P	V
802.11n HT20 CH 44 5220MHz		6960	47.68	-26.32	74	41.87	33.01	9.36	36.56	100	118	P	H
		6960	42.52	-11.48	54	36.71	33.01	9.36	36.56	100	118	A	H
		10440	42.86	-31.14	74	52.29	38.06	13.58	61.07	100	0	P	H
		6960	49.82	-24.18	74	44.01	33.01	9.36	36.56	300	66	P	V
		6960	45.73	-8.27	54	39.92	33.01	9.36	36.56	300	66	A	V
		10440	45.06	-28.94	74	54.49	38.06	13.58	61.07	100	360	P	V
802.11n HT20 CH 48 5240MHz		6986	46.38	-27.62	74	40.51	33.06	9.37	36.56	300	293	P	H
		6986	40.38	-13.62	54	34.51	33.06	9.37	36.56	300	293	A	H
		10479	44.25	-29.75	74	53.59	38.09	13.61	61.04	100	0	P	H
		6986	51.25	-22.75	74	45.38	33.06	9.37	36.56	300	245	P	V
		6986	46.7	-7.3	54	40.83	33.06	9.37	36.56	300	245	A	V
		10479	44.54	-29.46	74	53.88	38.09	13.61	61.04	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		5145.65	52.94	-21.06	74	49.5	31.84	8.13	36.53	100	110	P	H
		5149.5	40.72	-13.28	54	37.28	31.84	8.13	36.53	100	110	A	H
	*	5192	91.38	-	-	87.83	31.86	8.19	36.5	100	110	P	H
	*	5198	84.18	-	-	80.63	31.86	8.19	36.5	100	110	A	H
		5148.3	54.51	-19.49	74	51.07	31.84	8.13	36.53	300	64	P	V
		5142.7	40.52	-13.48	54	37.08	31.84	8.13	36.53	300	64	A	V
	*	5198	92.47	-	-	88.92	31.86	8.19	36.5	300	64	P	V
802.11n HT40 CH 46 5230MHz		5188	85.3	-	-	81.79	31.85	8.17	36.51	300	64	A	V
	*	5224	92.89	-	-	89.33	31.86	8.2	36.5	100	117	P	H
	*	5222	85.97	-	-	82.41	31.86	8.2	36.5	100	117	A	H
		5357.3	46.37	-27.63	74	42.67	31.91	8.29	36.5	100	117	P	H
		5375.85	37.6	-16.4	54	33.88	31.91	8.31	36.5	100	117	A	H
	*	5232	93.48	-	-	89.9	31.87	8.21	36.5	300	68	P	V
	*	5234	86.31	-	-	82.73	31.87	8.21	36.5	300	68	A	V
	5395.5	45.55	-28.45	74	41.8	31.92	8.33	36.5	300	68	P	V	
	5350.85	37.65	-16.35	54	33.95	31.91	8.29	36.5	300	68	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		6920	48.91	-25.09	74	43.26	32.88	9.35	36.58	100	110	P	H
		6920	44.78	-9.22	54	39.13	32.88	9.35	36.58	100	110	A	H
		10380	43.74	-30.26	74	53.26	38.03	13.55	61.1	100	0	P	H
		6920	51.06	-22.94	74	45.41	32.88	9.35	36.58	300	64	P	V
		6920	46.61	-7.39	54	40.96	32.88	9.35	36.58	300	64	A	V
		10380	42.98	-31.02	74	52.5	38.03	13.55	61.1	100	360	P	V
802.11n HT40 CH 46 5230MHz		6974	49.83	-24.17	74	44.02	33.01	9.36	36.56	100	117	P	H
		6974	45.52	-8.48	54	39.71	33.01	9.36	36.56	100	117	A	H
		10461	44.44	-29.56	74	53.81	38.08	13.6	61.05	100	0	P	H
		6974	50.34	-23.66	74	44.53	33.01	9.36	36.56	300	68	P	V
		6974	46.04	-7.96	54	40.23	33.01	9.36	36.56	300	68	A	V
		10461	43.47	-30.53	74	52.84	38.08	13.6	61.05	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT20 CH 36 5180MHz		5148.35	48.08	-25.92	74	44.64	31.84	8.13	36.53	100	118	P	H
		5148.7	38.74	-15.26	54	35.3	31.84	8.13	36.53	100	118	A	H
	*	5178	94.72	-	-	91.21	31.85	8.17	36.51	100	118	P	H
	*	5182	87.56	-	-	84.05	31.85	8.17	36.51	100	118	A	H
		5111.6	48.72	-25.28	74	45.34	31.83	8.1	36.55	300	73	P	V
		5149.05	38.83	-15.17	54	35.39	31.84	8.13	36.53	300	73	A	V
	*	5178	95.01	-	-	91.5	31.85	8.17	36.51	300	73	P	V
	*	5182	87.58	-	-	84.07	31.85	8.17	36.51	300	73	A	V
802.11ac VHT20 CH 44 5220MHz	*	5218	94.97	-	-	91.41	31.86	8.2	36.5	100	119	P	H
	*	5218	88.25	-	-	84.69	31.86	8.2	36.5	100	119	A	H
	*	5222	95.55	-	-	91.99	31.86	8.2	36.5	289	66	P	V
	*	5224	87.9	-	-	84.34	31.86	8.2	36.5	289	66	A	V
802.11ac VHT20 CH 48 5240MHz	*	5236	95.26	-	-	91.68	31.87	8.21	36.5	129	120	P	H
	*	5236	87.92	-	-	84.34	31.87	8.21	36.5	129	120	A	H
		5378.25	45.91	-28.09	74	42.17	31.92	8.32	36.5	129	120	P	H
		5352.75	36.6	-17.4	54	32.9	31.91	8.29	36.5	129	120	A	H
	*	5238	95.01	-	-	91.43	31.87	8.21	36.5	286	68	P	V
	*	5238	87.69	-	-	84.11	31.87	8.21	36.5	286	68	A	V
		5373.3	45.3	-28.7	74	41.58	31.91	8.31	36.5	286	68	P	V
	5372.4	36.53	-17.47	54	32.81	31.91	8.31	36.5	286	68	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT20 CH 36 5180MHz		6906	49.38	-24.62	74	43.79	32.83	9.34	36.58	100	118	P	H
		6906	45.21	-8.79	54	39.62	32.83	9.34	36.58	100	118	A	H
		10359	44.01	-29.99	74	53.55	38.02	13.54	61.1	100	0	P	H
		6906	50.58	-23.42	74	44.99	32.83	9.34	36.58	300	73	P	V
		6906	46.71	-7.29	54	41.12	32.83	9.34	36.58	300	73	A	V
		10359	43.8	-30.2	74	53.34	38.02	13.54	61.1	100	360	P	V
802.11ac VHT20 CH 44 5220MHz		6960	47.2	-26.8	74	41.39	33.01	9.36	36.56	100	119	P	H
		6960	42.54	-11.46	54	36.73	33.01	9.36	36.56	100	119	A	H
		10440	43.65	-30.35	74	53.08	38.06	13.58	61.07	100	0	P	H
		6960	49.1	-24.9	74	43.29	33.01	9.36	36.56	289	66	P	V
		6960	45.84	-8.16	54	40.03	33.01	9.36	36.56	289	66	A	V
		10440	43.1	-30.9	74	52.53	38.06	13.58	61.07	100	360	P	V
802.11ac VHT20 CH 48 5240MHz		6986	47.43	-26.57	74	41.56	33.06	9.37	36.56	129	120	P	H
		6986	42.81	-11.19	54	36.94	33.06	9.37	36.56	129	120	A	H
		10479	43.83	-30.17	74	53.17	38.09	13.61	61.04	100	0	P	H
		6986	50.42	-23.58	74	44.55	33.06	9.37	36.56	286	68	P	V
		6986	46.04	-27.96	74	40.17	33.06	9.37	36.56	286	68	A	V
		10479	44.58	-29.42	74	53.92	38.09	13.61	61.04	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT40 CH 38 5190MHz		5138.1	55.1	-18.9	74	51.69	31.84	8.11	36.54	116	123	P	H
		5149.6	40.94	-13.06	54	37.5	31.84	8.13	36.53	116	123	A	H
	*	5198	92.81	-	-	89.26	31.86	8.19	36.5	116	123	P	H
	*	5194	85.68	-	-	82.13	31.86	8.19	36.5	116	123	A	H
		5147.8	53.02	-20.98	74	49.58	31.84	8.13	36.53	305	73	P	V
		5149.55	39.65	-14.35	54	36.21	31.84	8.13	36.53	305	73	A	V
	*	5196	91.3	-	-	87.75	31.86	8.19	36.5	305	73	P	V
	*	5194	84.04	-	-	80.49	31.86	8.19	36.5	305	73	A	V
802.11ac VHT40 CH 46 5230MHz	*	5238	92.63	-	-	89.05	31.87	8.21	36.5	125	123	P	H
	*	5224	85.6	-	-	82.04	31.86	8.2	36.5	125	123	A	H
		5383.65	46.1	-27.9	74	42.36	31.92	8.32	36.5	125	123	P	H
		5353.15	37.28	-16.72	54	33.58	31.91	8.29	36.5	125	123	A	H
	*	5234	91.15	-	-	87.57	31.87	8.21	36.5	338	74	P	V
	*	5226	83.58	-	-	80	31.87	8.21	36.5	338	74	A	V
		5374.35	45.89	-28.11	74	42.17	31.91	8.31	36.5	338	74	P	V
	5354.45	37.02	-16.98	54	33.32	31.91	8.29	36.5	338	74	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		10380	43.07	-30.93	74	52.59	38.03	13.55	61.1	100	0	P	H
VHT40		6920	49.65	-24.35	74	44	32.88	9.35	36.58	305	73	P	V
CH 38		6920	45.11	-8.89	54	39.46	32.88	9.35	36.58	305	73	A	V
5190MHz		10380	44.32	-29.68	74	53.84	38.03	13.55	61.1	100	360	P	V
802.11ac		10461	42.77	-31.23	74	52.14	38.08	13.6	61.05	100	0	P	H
VHT40		6974	48.59	-25.41	74	42.78	33.01	9.36	36.56	338	74	P	V
CH 46		6974	43.48	-10.52	54	37.67	33.01	9.36	36.56	338	74	A	V
5230MHz		10461	44.64	-29.36	74	54.01	38.08	13.6	61.05	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		5135.7	49.37	-24.63	74	45.96	31.84	8.11	36.54	100	116	P	H
		5139.1	40.11	-13.89	54	36.7	31.84	8.11	36.54	100	116	A	H
	*	5198	88.72	-	-	85.17	31.86	8.19	36.5	100	116	P	H
	*	5216	81.35	-	-	77.79	31.86	8.2	36.5	100	116	A	H
		5362.3	47.12	-26.88	74	43.4	31.91	8.31	36.5	100	116	P	H
		5352.75	37.96	-16.04	54	34.26	31.91	8.29	36.5	100	116	A	H
		5111.65	50.24	-23.76	74	46.86	31.83	8.1	36.55	300	75	P	V
		5149.65	40.77	-13.23	54	37.33	31.84	8.13	36.53	300	75	A	V
	*	5196	90.22	-	-	86.67	31.86	8.19	36.5	300	75	P	V
	*	5198	82.62	-	-	79.07	31.86	8.19	36.5	300	75	A	V
		5354.15	46.36	-27.64	74	42.66	31.91	8.29	36.5	300	75	P	V
	5352	37.72	-16.28	54	34.02	31.91	8.29	36.5	300	75	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 42 5210MHz		6946	50.58	-23.42	74	44.81	32.97	9.36	36.56	100	116	P	H
		6946	46.23	-7.77	54	40.46	32.97	9.36	36.56	100	116	A	H
		10419	42.26	-31.74	74	51.72	38.05	13.57	61.08	100	0	P	H
		6946	49.63	-24.37	74	43.86	32.97	9.36	36.56	300	75	P	V
		6946	45.44	-8.56	54	39.67	32.97	9.36	36.56	300	75	A	V
		10419	44.12	-29.88	74	53.58	38.05	13.57	61.08	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Emission below 1GHz
WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 LF		30	23.94	-16.06	40	35.79	18.6	0.65	31.1	-	-	P	H
		90.14	27.15	-16.35	43.5	44.6	11.9	1.15	30.5	-	-	P	H
		156.1	32.95	-10.55	43.5	48.4	13.44	1.51	30.4	152	229	P	H
		200.72	29.59	-13.91	43.5	47.51	10.75	1.73	30.4	-	-	P	H
		291.9	23.19	-22.81	46	36.99	14.63	2.07	30.5	-	-	P	H
		406.36	27.2	-18.8	46	38.34	17.05	2.49	30.68	-	-	P	H
		34.85	31.06	-8.94	40	43.35	17.9	0.71	30.9	-	-	P	V
		48.43	31.17	-8.83	40	50.66	10.47	0.84	30.8	317	159	P	V
		90.14	30.73	-12.77	43.5	48.18	11.9	1.15	30.5	-	-	P	V
		158.04	30.68	-12.82	43.5	46.25	13.31	1.52	30.4	-	-	P	V
		196.84	25.98	-17.52	43.5	43.79	10.88	1.71	30.4	-	-	P	V
	424.79	24.41	-21.59	46	35.26	17.2	2.55	30.6	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	95.496	2.078	0.481	1kHz
802.11n HT20	94.695	1.928	0.519	1kHz
802.11n HT40	90.440	0.946	1.057	3kHz
802.11ac VHT20	94.814	1.938	0.516	1kHz
802.11ac VHT40	91.794	0.962	1.040	3kHz
802.11ac VHT80	81.185	0.466	2.146	3kHz


802.11a

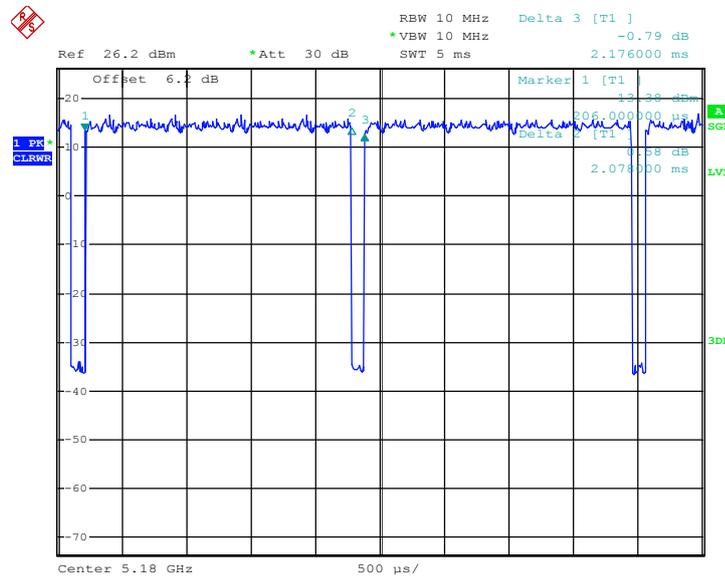

Date: 24.MAR.2016 10:28:32




802.11n HT20

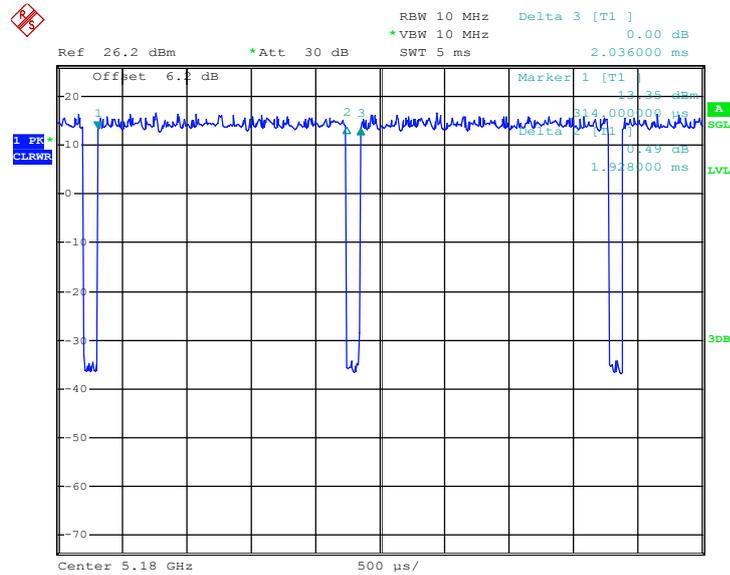

Date: 24.MAR.2016 10:33:09


802.11n HT40

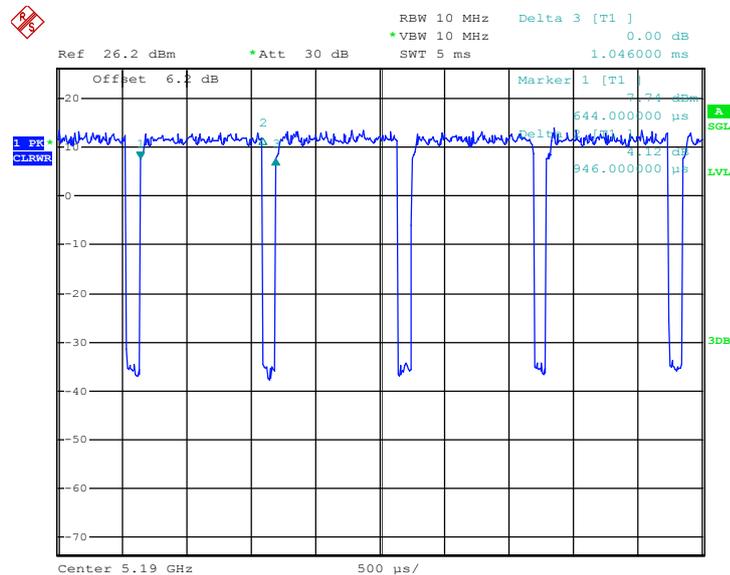

Date: 24.MAR.2016 10:39:08




802.11ac VHT20

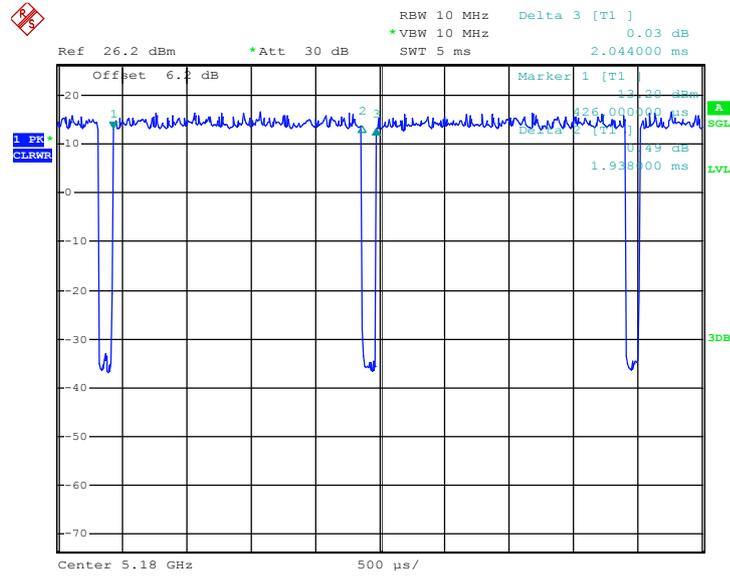

Date: 24.MAR.2016 10:44:14


802.11ac VHT40

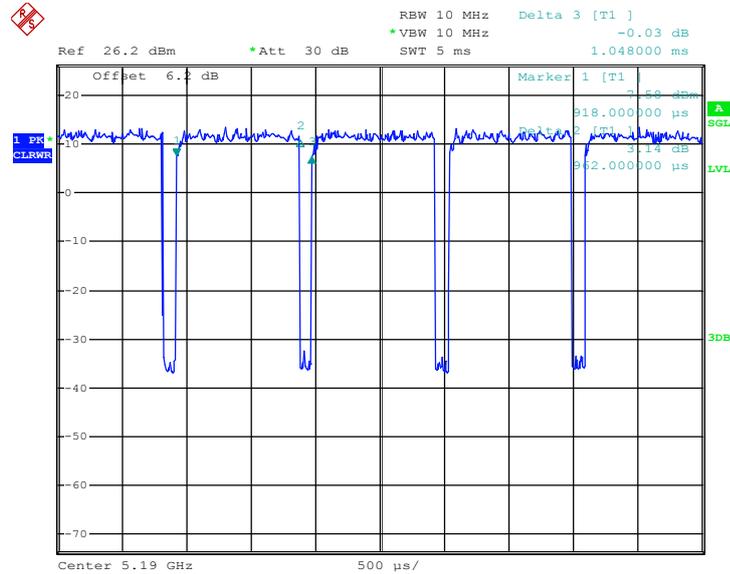

Date: 24.MAR.2016 10:50:36



802.11ac VHT80

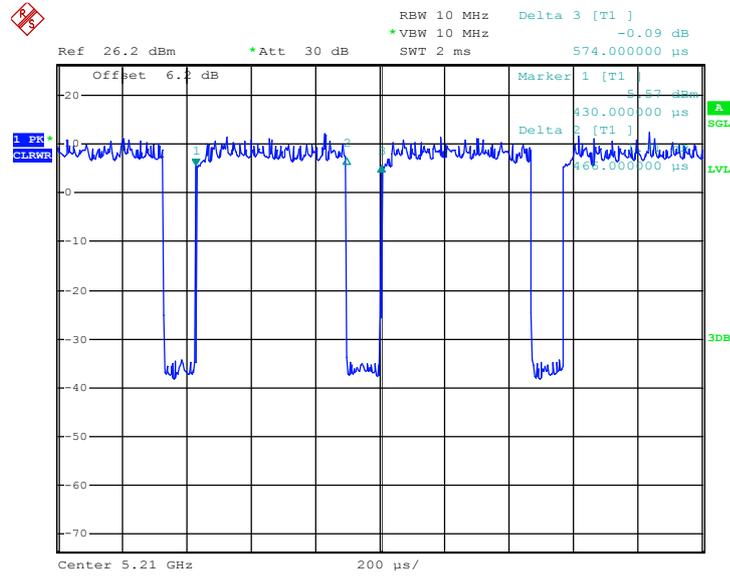

Date: 24.MAR.2016 10:55:50