

FCC SAR Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA / CDMA / LTE Multi-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE A2017U
FCC ID : SRQ-ZTEA2017U
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



Table of Contents

1. Statement of Compliance 4

2. Administration Data 5

3. Guidance Standard 5

4. Equipment Under Test (EUT) Information 6

 4.1 General Information..... 6

 4.2 General LTE SAR Test and Reporting Considerations 8

5. RF Exposure Limits..... 13

 5.1 Uncontrolled Environment 13

 5.2 Controlled Environment..... 13

6. Specific Absorption Rate (SAR) 14

 6.1 Introduction 14

 6.2 SAR Definition 14

7. System Description and Setup..... 15

 7.1 E-Field Probe 16

 7.2 Data Acquisition Electronics (DAE) 16

 7.3 Phantom 17

 7.4 Device Holder..... 18

8. Measurement Procedures..... 19

 8.1 Spatial Peak SAR Evaluation 19

 8.2 Power Reference Measurement..... 20

 8.3 Area Scan..... 20

 8.4 Zoom Scan..... 21

 8.5 Volume Scan Procedures 21

 8.6 Power Drift Monitoring 21

9. Test Equipment List 22

10. System Verification 24

 10.1 Tissue Verification 24

 10.2 System Performance Check Results..... 26

11. RF Exposure Positions 28

 11.1 Ear and handset reference point 28

 11.2 Definition of the cheek position..... 29

 11.3 Definition of the tilt position..... 30

 11.4 Body Worn Accessory 31

 11.5 Product Specific 10g SAR Exposure 31

 11.6 Wireless Router 32

12. Conducted RF Output Power (Unit: dBm) 33

13. Bluetooth Exclusions Applied..... 93

14. Antenna Location 94

15. SAR Test Results 95

 15.1 Head SAR 97

 15.2 Hotspot SAR 105

 15.3 Body Worn Accessory SAR 116

 15.4 Product specific 10g SAR..... 121

 15.5 Repeated SAR Measurement 122

16. Simultaneous Transmission Analysis 123

 16.1 Head Exposure Conditions..... 124

 16.2 Hotspot Exposure Conditions 128

 16.3 Body-Worn Accessory Exposure Conditions 134

17. Uncertainty Assessment..... 136

18. References 139

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION, WCDMA / CDMA / LTE Multi-Mode Digital Mobile Phone, ZTE A2017U** are as follows.

Equipment Class	Frequency Band		Highest 1g SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
			Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.91	0.29	0.29	1.54
		GSM1900	1.06	0.36	0.36	
	WCDMA	Band V	0.94	0.42	0.42	
		Band IV	1.05	1.13	1.17	
		Band II	1.07	0.70	0.70	
	CDMA	CDMA2000 BC10	0.90	0.66	0.77	
		CDMA2000 BC0	0.76	0.59	0.67	
		CDMA2000 BC1	1.19	0.55	0.54	
	LTE	Band 12	0.54	0.24	0.28	
		Band 13	0.88	0.39	0.50	
		Band 26	0.86	0.58	0.76	
		Band 4	1.08	1.09	1.16	
		Band 25	1.03	0.53	0.53	
		Band 30	1.19	0.52	0.52	
Band 7		0.45	0.55	0.55		
Band 41	0.15	0.19	0.19			
DTS	WLAN	2.4GHz WLAN	0.76	0.11	0.11	1.54
NII		5GHz WLAN	0.34	<0.10		1.53
Date of Testing:			2016/04/19 ~ 2016/05/11			

Frequency Band	Highest SAR Summary
	Product Specific 10g SAR (W/kg) (Gap 0mm)
5GHz WLAN	0.22

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; 10-gram SAR for Product Specific 10g SAR, limit: 4.0W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

Applicant	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

Manufacturer	
Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	WCDMA / CDMA / LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE A2017U
FCC ID	SRQ-ZTEA2017U
IMEI Code	990006780003561
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	<ul style="list-style-type: none"> •GSM/GPRS/EGPRS •AMR / RMC 12.2Kbps •HSDPA •HSUPA •DC-HSDPA •HSPA+ (16QAM uplink is not supported) •CDMA2000 : 1xRTT/1xEv-Do(Rel.0)/1xEv-Do(Rev.A) •LTE: QPSK, 16QAM •802.11b/g/n HT20/HT40 •802.11a/n HT20/HT40 •802.11ac VHT20/VHT40/VHT80 •Bluetooth v3.0+EDR, Bluetooth 4.0 LE, Bluetooth 4.2 LE •NFC:ASK
HW Version	wwdB
SW Version	A2017UV1.0.0B07
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
Remark:	<ol style="list-style-type: none"> 1. This device supports VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device supports GPRS/EGPRS mode up to multi-slot class 12. 3. This device WWAN and 2.4GHz WLAN supports Hotspot operation. 4. This device 5.2GHz/5.8GHz WLAN has no Hotspot function. 5. This device has two antennas. The Primary Cellular Antenna is located on the bottom edge of the device and the Secondary Cellular Antenna is located on the top edge of the device.



6. The device is capable of switching between the Top antenna and Bottom antenna based on signal strength. The antenna switching is implemented with a physical, “break-before-make” switch such that only one antenna can be used for cellular transmission at a time.
7. LTE Band 7 and Band 41 are not active at WWAN Top antenna.
8. 5GHz WLAN can only worked at antenna 1.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																							
FCC ID	SRQ-ZTEA2017U																																						
Equipment Name	WCDMA / CDMA / LTE Multi-Mode Digital Mobile Phone																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Voice and Data																																						
LTE MPR permanently built-in by design	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
Power reduction applied to satisfy SAR compliance	No																																						
LTE Release Version	R11, Cat 4																																						
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations as below page and the detail power verification please referred to page87-88.																																						
LTE Carrier Aggregation Additional Information	This device does not support full CA features on 3GPP Release 11. It supports a maximum of 2 carriers in the downlink only. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. Due to carrier capability, only the combinations listed above are supported. The following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																						



Transmission (H, M, L) channel numbers and frequencies in each LTE band													
LTE Band 2													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860	
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900	
LTE Band 4													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720	
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745	
LTE Band 5													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829	
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844	
LTE Band 7													
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510	
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560	
LTE Band 12													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704	
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711	
LTE Band 13													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #
L	23205		779.5		23230		782		23230		782		23230
M	23230		782		23230		782		23230		782		23230
H	23255		784.5		23230		782		23230		782		23230
LTE Band 17													
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #
L	23755		706.5		23780		709		23780		709		23780
M	23790		710		23790		710		23790		710		23790
H	23825		713.5		23800		711		23800		711		23800
LTE Band 25													
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860	
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905	



LTE Band 26										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5
LTE Band 30										
	Bandwidth 5 MHz				Bandwidth 10 MHz					
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)			
L	27685		2307.5		27710		2310			
M	27710		2310							
H	27735		2312.5							
LTE Band 41										
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506		
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5		
M	40620	2593	40620	2593	40620	2593	40620	2593		
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5		
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680		



LTE Carrier Aggregation Combinations																			
Inter-Band Combinations																			
(PCC) B2	(SCC) B4	(PCC) B4	(SCC) B2	(PCC) B2	(SCC) B5	(PCC) B5	(SCC) B2	(PCC) B2	(SCC) B12	(PCC) B12	(SCC) B2	(PCC) B2	(SCC) B13	(PCC) B2	(SCC) B29	(PCC) B4	(SCC) B5	(PCC) B5	(SCC) B4
20M+20M		20M+20M		20M+10M		10M+20M		20M+10M		10M+20M		20M+10M		20M+10M		20M+10M		10M+20M	
20M+15M		20M+15M		20M+5M		10M+15M		20M+5M		10M+15M		20M+5M		20M+5M		20M+5M		10M+15M	
20M+10M		20M+10M		15M+10M		10M+10M		20M+3M		10M+10M		15M+10M		20M+3M		15M+10M		10M+10M	
20M+5M		20M+5M		15M+5M		10M+5M		15M+10M		10M+5M		15M+5M		15M+10M		15M+5M		10M+5M	
15M+20M		20M+3M		10M+10M		5M+20M		15M+5M		5M+20M		10M+10M		15M+5M		10M+10M		5M+20M	
15M+15M		20M+1.4M		10M+5M		5M+15M		15M+3M		5M+15M		10M+5M		15M+3M		10M+5M		5M+15M	
15M+10M		15M+20M		5M+10M		5M+10M		10M+10M		5M+10M		5M+10M		10M+10M		5M+10M		5M+10M	
15M+5M		15M+15M		5M+5M		5M+5M		10M+5M		5M+5M		5M+5M		10M+5M		5M+5M		5M+5M	
10M+20M		15M+10M						10M+3M		3M+20M				10M+3M					
10M+15M		15M+5M						5M+10M		3M+15M				5M+10M					
10M+10M		15M+3M						5M+5M		3M+10M				5M+5M					
10M+5M		15M+1.4M						5M+3M		3M+5M				5M+3M					
5M+20M		10M+20M																	
5M+15M		10M+15M																	
5M+10M		10M+10M																	
5M+5M		10M+5M																	
3M+20M		10M+3M																	
3M+15M		10M+1.4M																	
3M+10M		5M+20M																	
3M+5M		5M+15M																	
1.4M+20M		5M+10M																	
1.4M+15M		5M+5M																	
1.4M+10M		5M+3M																	
1.4M+5M		5M+1.4M																	



LTE Carrier Aggregation Combinations											
Inter-Band Combinations						Intra-Band Combinations					
Non-Contiguous						Contiguous		Non-Contiguous			
(PCC) B4	(SCC) B12	(PCC) B12	(SCC) B4	(PCC) B4	(SCC) B29	(PCC) B41	(SCC) B41	(PCC) B25	(SCC) B25	(PCC) B41	(SCC) B41
20M+10M		10M+20M		20M+10M		20M+20M		20M+20M		20M+20M	
20M+5M		10M+15M		20M+5M		20M+15M		20M+15M		20M+15M	
20M+3M		10M+10M		20M+3M		20M+10M		20M+10M		20M+10M	
15M+10M		10M+5M		15M+10M		20M+5M		20M+5M		20M+5M	
15M+5M		10M+3M		15M+5M		15M+20M		15M+20M		15M+20M	
15M+3M		10M+1.4M		15M+3M		15M+15M		15M+15M		15M+15M	
10M+10M		5M+20M		10M+10M		10M+20M		15M+10M		15M+10M	
10M+5M		5M+15M		10M+5M		5M+20M		15M+5M		15M+5M	
10M+3M		5M+10M		10M+3M				10M+20M		10M+20M	
5M+10M		5M+5M		5M+10M				10M+15M		10M+15M	
5M+5M		5M+3M		5M+5M				10M+10M		10M+10M	
5M+3M		5M+1.4M		5M+3M				10M+5M		10M+5M	
3M+10M		3M+20M						5M+20M		5M+20M	
3M+5M		3M+15M						5M+15M		5M+15M	
3M+3M		3M+10M						5M+10M		5M+10M	
1.4M+10M		3M+5M						5M+5M		5M+5M	
1.4M+5M		3M+3M									
1.4M+3M		3M+1.4M									



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

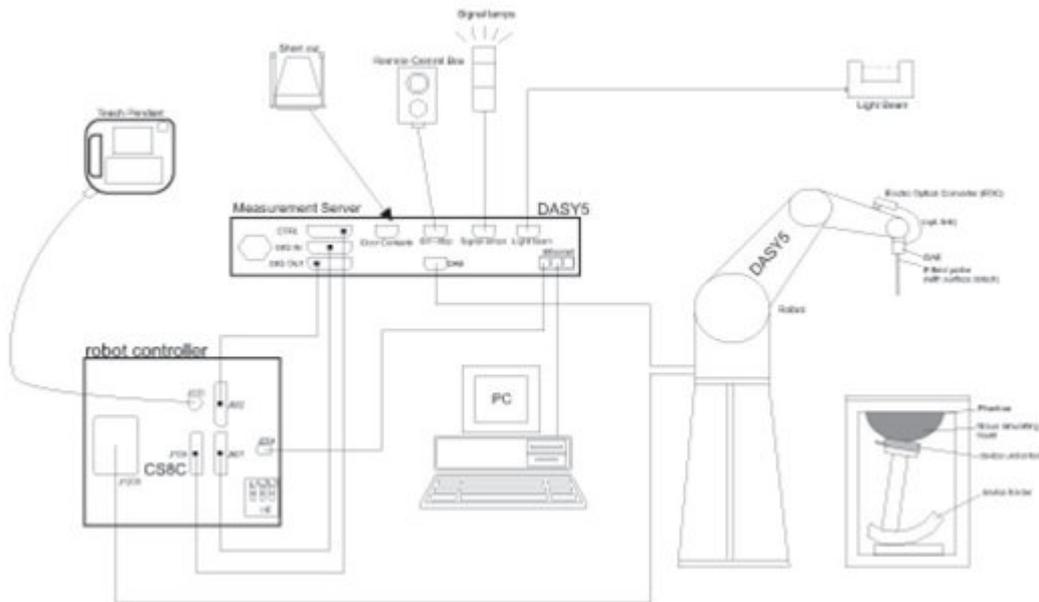

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>


Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

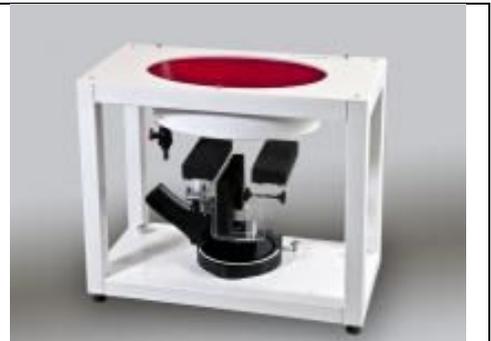

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	Nov. 24, 2015	Nov. 23, 2016
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 24, 2015	Nov. 23, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1069	Nov. 23, 2015	Nov. 22, 2016
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 23, 2015	Nov. 22, 2016
SPEAG	2300MHz System Validation Kit	D2300V2	1006	Jan. 21, 2016	Jan. 20, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	840	Nov. 25, 2015	Nov. 24, 2016
SPEAG	2600MHz System Validation Kit	D2600V2	1061	Nov. 25, 2015	Nov. 24, 2016
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Nov. 26, 2015	Nov. 25, 2016
SPEAG	Data Acquisition Electronics	DAE4	1210	May 21, 2015	May 20, 2016
SPEAG	Data Acquisition Electronics	DAE4	905	Jul. 16, 2015	Jul. 15, 2016
SPEAG	Data Acquisition Electronics	DAE4	1358	Aug. 27, 2015	Aug. 26, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	May 28, 2015	May 27, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 27, 2015	Nov. 26, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3911	Oct. 01, 2015	Sep. 30, 2016
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1644	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1754	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300654	Aug. 10, 2015	Aug. 09, 2016
Anritsu	Radio communication analyzer	MT8820C	6201074235	Oct. 15, 2015	Oct. 14, 2016
Agilent	Wireless Communication Test Set	E5515C	MY52102706	Apr. 22, 2016	Apr. 21, 2017
Agilent	Wireless Communication Test Set	E5515C	MY52102600	Dec. 08, 2015	Dec. 07, 2016
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 22, 2016	Apr. 21, 2017
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Dec. 08, 2015	Dec. 07, 2016
Agilent	Dielectric Probe Kit	85070E	MY44300751	NCR	NCR
SPEAG	DAK Kit	DAK3.5	1144	Nov. 24, 2015	Nov. 23, 2016
R&S	Signal Generator	SMBV100A	258305	Jan. 20, 2016	Jan. 19, 2017
Anritsu	Power Sensor	MA2411B	0917070	Jan. 20, 2016	Jan. 19, 2017
Anritsu	Power Meter	ML2495A	1005002	Jan. 20, 2016	Jan. 19, 2017



Anritsu	Power Sensor	MA2411B	1339163	Jan. 20, 2016	Jan. 19, 2017
Anritsu	Power Meter	ML2495A	1435004	Jan. 20, 2016	Jan. 19, 2017
Anritsu	Power Sensor	MA2411B	1339206	Jan. 20, 2016	Jan. 19, 2017
Anritsu	Power Meter	ML2495A	1438004	Jan. 20, 2016	Jan. 19, 2017
R&S	Spectrum Analyzer	FSP40	100319	Aug. 10, 2015	Aug. 09, 2016
R&S	Spectrum Analyzer	FSP7	101045	Dec. 08, 2015	Dec. 07, 2016
ARRA	Power Divider	A3200-2	N/A	Note1	
AR	Amplifier	5S1G4	333096	Note1	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note1	
AR	Amplifier	5S1G4	342137	Note1	
MCL	Attenuation1	BW-S10W5+	N/A	Note1	
MCL	Attenuation2	BW-S10W5+	N/A	Note1	
MCL	Attenuation3	BW-S10W5+	N/A	Note1	
Woken	Attenuation1	WK0602-XX	N/A	Note1	
PE	Attenuation2	PE7005-10	N/A	Note1	
PE	Attenuation3	PE7005-3	N/A	Note1	
Agilent	Dual Directional Coupler	778D	50422	Note1	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	Head	22.9	0.895	41.820	0.89	41.90	0.56	-0.19	±5	2016/4/21
835	Head	22.9	0.920	41.484	0.90	41.50	2.22	-0.04	±5	2016/4/21
1750	Head	22.6	1.395	40.480	1.37	40.10	1.82	0.95	±5	2016/4/19
1900	Head	22.6	1.423	40.971	1.40	40.00	1.64	2.43	±5	2016/4/19
2300	Head	22.7	1.656	38.854	1.67	39.50	-0.84	-1.64	±5	2016/4/24
5250	Head	22.8	4.854	35.393	4.71	35.95	3.06	-1.55	±5	2016/4/28
5750	Head	22.8	5.363	34.495	5.22	35.35	2.74	-2.42	±5	2016/4/28
750	Head	22.3	0.880	40.797	0.89	41.90	-1.12	-2.63	±5	2016/5/10
835	Head	22.5	0.898	41.874	0.90	41.50	-0.22	0.90	±5	2016/5/8
1750	Head	22.3	1.395	41.214	1.37	40.10	1.82	2.78	±5	2016/5/9
1900	Head	22.6	1.456	40.840	1.40	40.00	4.00	2.10	±5	2016/5/7
2300	Head	22.6	1.667	38.795	1.67	39.50	-0.18	-1.78	±5	2016/5/3
2450	Head	22.1	1.821	37.950	1.80	39.20	1.17	-3.19	±5	2016/5/11
2600	Head	22.2	2.056	37.284	1.96	39.00	4.90	-4.40	±5	2016/5/5
750	Body	22.6	0.956	54.926	0.96	55.50	-0.42	-1.03	±5	2016/4/28
835	Body	22.9	1.000	53.704	0.97	55.20	3.09	-2.71	±5	2016/5/6
1750	Body	22.7	1.528	53.218	1.49	53.40	2.55	-0.34	±5	2016/5/11
1900	Body	22.7	1.551	54.638	1.52	53.30	2.04	2.51	±5	2016/5/8
2300	Body	22.7	1.757	53.752	1.81	52.90	-2.93	1.61	±5	2016/5/2
5250	Body	22.7	5.379	49.115	5.36	48.95	0.35	0.34	±5	2016/4/29
5750	Body	22.7	6.070	47.985	5.94	48.28	2.19	-0.61	±5	2016/4/29
750	Body	22.4	0.947	56.452	0.96	55.50	-1.35	1.72	±5	2016/4/29
835	Body	22.5	0.973	54.784	0.97	55.20	0.31	-0.75	±5	2016/5/4
1750	Body	22.1	1.498	53.247	1.49	53.40	0.54	-0.29	±5	2016/5/6
1900	Body	22.6	1.542	55.338	1.52	53.30	1.45	3.82	±5	2016/4/29
2300	Body	22.5	1.766	53.354	1.81	52.90	-2.43	0.86	±5	2016/4/30
2450	Body	22.2	1.949	53.894	1.95	52.70	-0.05	2.27	±5	2016/5/11
2600	Body	22.5	2.227	52.103	2.16	52.50	3.10	-0.76	±5	2016/4/30



10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<For 1g SAR>

Table with 11 columns: Date, Frequency (MHz), Tissue Type, Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). Rows contain test data from 2016/4/21 to 2016/4/30 for various frequencies and tissue types.

<For 10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2016/4/29	5250	Body	100	1113	3954	905	2.26	21.50	22.6	5.12
2016/4/29	5750	Body	100	1113	3954	905	2.15	21.30	21.5	0.94

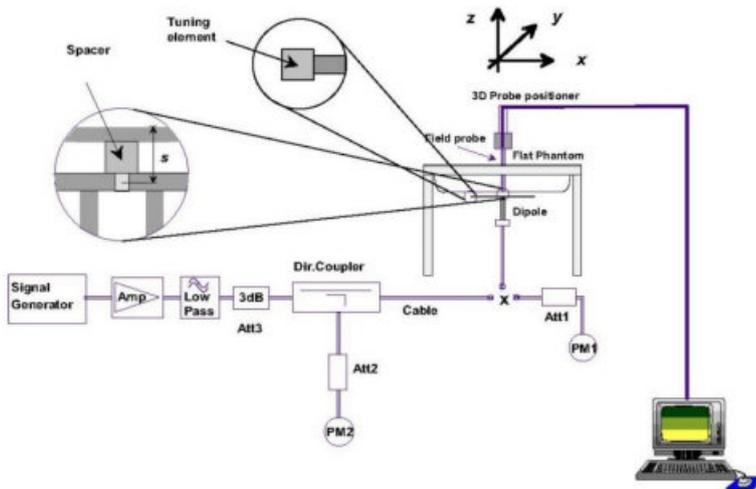


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

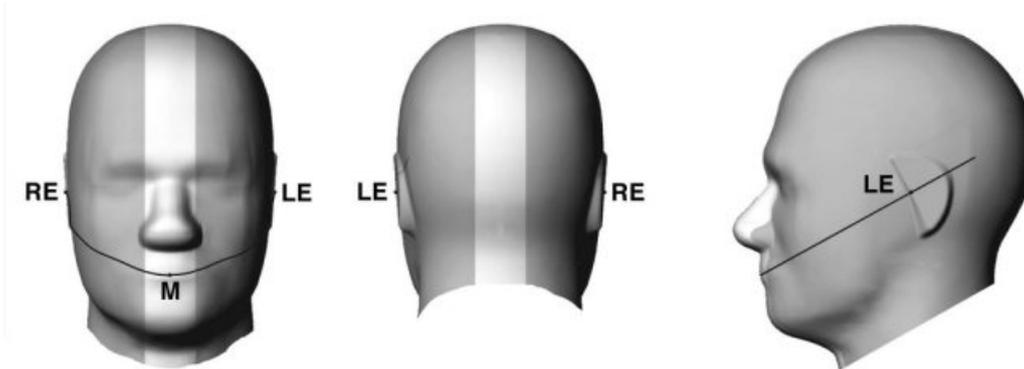


Fig 9.1.1 Front, back, and side views of SAM twin phantom

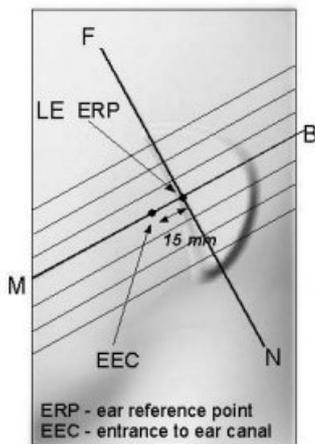


Fig 9.1.2 Close-up side view of phantom showing the ear region.

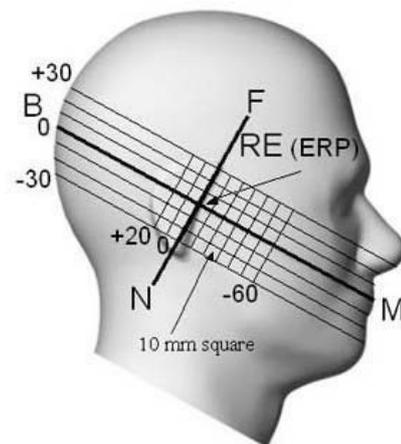


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

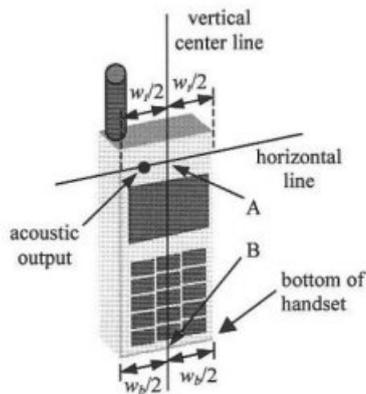


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

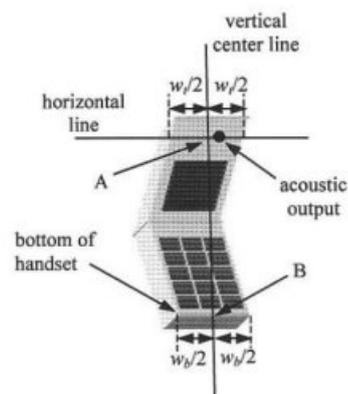


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

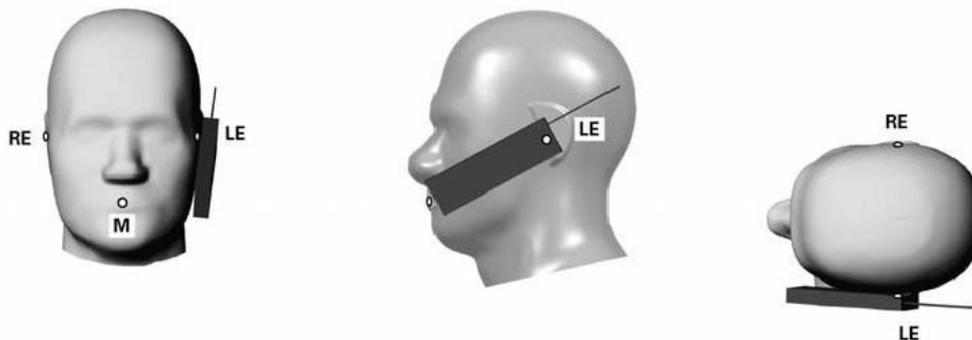


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

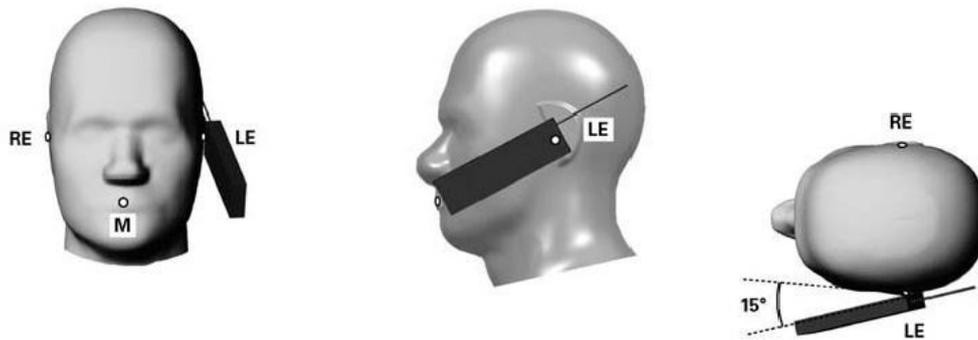


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

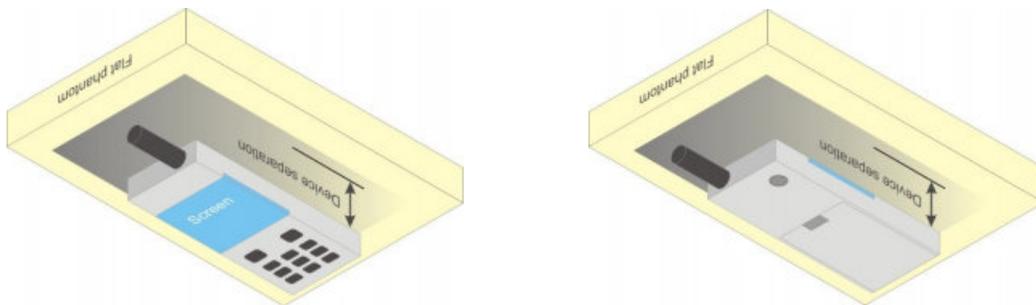


Fig 9.4 Body Worn Position

11.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for Product specific 10g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g Product specific 10g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.



11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W \geq 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

- Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

Top Antenna:

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.46	32.52	32.51	33.00	23.46	23.52	23.51	24.00
GPRS 1 Tx slot	32.44	32.50	32.49	33.00	23.44	23.50	23.49	24.00
GPRS 2 Tx slots	30.35	30.45	30.44	31.00	24.35	24.45	24.44	25.00
GPRS 3 Tx slots	27.94	28.17	28.15	29.00	23.68	23.91	23.89	24.74
GPRS 4 Tx slots	26.55	26.80	26.75	27.50	23.55	23.80	23.75	24.50
EDGE 1 Tx slot	26.52	26.55	26.59	28.00	17.52	17.55	17.59	19.00
EDGE 2 Tx slots	25.38	25.50	25.52	27.00	19.38	19.50	19.52	21.00
EDGE 3 Tx slots	24.78	24.87	24.89	26.00	20.52	20.61	20.63	21.74
EDGE 4 Tx slots	24.62	24.65	24.73	25.00	21.62	21.65	21.73	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	31.17	31.08	31.28	32.00	22.17	22.08	22.28	23.00
GPRS 1 Tx slot	31.15	31.07	31.27	32.00	22.15	22.07	22.27	23.00
GPRS 2 Tx slots	29.08	29.09	29.34	30.00	23.08	23.09	23.34	24.00
GPRS 3 Tx slots	27.61	27.72	27.75	28.50	23.35	23.46	23.49	24.24
GPRS 4 Tx slots	26.45	26.49	26.57	27.50	23.45	23.49	23.57	24.50
EDGE 1 Tx slot	26.39	26.49	26.56	27.00	17.39	17.49	17.56	18.00
EDGE 2 Tx slots	26.30	26.35	26.43	26.50	20.30	20.35	20.43	20.50
EDGE 3 Tx slots	25.24	25.31	25.40	26.00	20.98	21.05	21.14	21.74
EDGE 4 Tx slots	25.09	25.21	25.31	25.50	22.09	22.21	22.31	22.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB



Bottom Antenna:

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.46	32.52	32.51	33.00	23.46	23.52	23.51	24.00
GPRS 1 Tx slot	32.44	32.50	32.49	33.00	23.44	23.50	23.49	24.00
GPRS 2 Tx slots	30.35	30.45	30.44	31.00	24.35	24.45	24.44	25.00
GPRS 3 Tx slots	27.94	28.17	28.15	29.00	23.68	23.91	23.89	24.74
GPRS 4 Tx slots	26.55	26.80	26.75	27.50	23.55	23.80	23.75	24.50
EDGE 1 Tx slot	26.52	26.55	26.59	28.00	17.52	17.55	17.59	19.00
EDGE 2 Tx slots	25.38	25.50	25.52	27.00	19.38	19.50	19.52	21.00
EDGE 3 Tx slots	24.78	24.87	24.89	26.00	20.52	20.61	20.63	21.74
EDGE 4 Tx slots	24.62	24.65	24.73	25.00	21.62	21.65	21.73	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
 The calculated method are shown as below:
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	31.17	31.08	31.28	32.00	22.17	22.08	22.28	23.00
GPRS 1 Tx slot	31.15	31.07	31.27	32.00	22.15	22.07	22.27	23.00
GPRS 2 Tx slots	29.08	29.09	29.34	30.00	23.08	23.09	23.34	24.00
GPRS 3 Tx slots	27.61	27.72	27.75	28.50	23.35	23.46	23.49	24.24
GPRS 4 Tx slots	26.45	26.49	26.57	27.50	23.45	23.49	23.57	24.50
EDGE 1 Tx slot	26.39	26.49	26.56	27.00	17.39	17.49	17.56	18.00
EDGE 2 Tx slots	26.30	26.35	26.43	26.50	20.30	20.35	20.43	20.50
EDGE 3 Tx slots	25.24	25.31	25.40	26.00	20.98	21.05	21.14	21.74
EDGE 4 Tx slots	25.09	25.21	25.31	25.50	22.09	22.21	22.31	22.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
 The calculated method are shown as below:
 Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
 Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
 Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

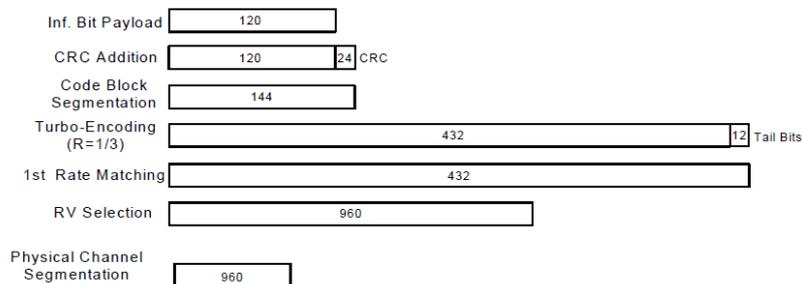


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Top Antenna:

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	21.55	21.51	21.54	22.00	20.31	20.35	20.44	21.00	23.76	23.71	23.78	24.00
3GPP Rel 99	RMC 12.2Kbps	21.56	21.53	21.55	22.00	20.32	20.36	20.46	21.00	23.78	23.72	23.79	24.00
3GPP Rel 6	HSDPA Subtest-1	20.61	20.65	20.61	21.00	19.72	19.74	19.57	20.00	22.83	22.85	22.89	23.00
3GPP Rel 6	HSDPA Subtest-2	20.63	20.68	20.69	21.00	19.74	19.74	19.26	20.00	22.81	22.86	22.91	23.00
3GPP Rel 6	HSDPA Subtest-3	20.18	20.20	20.23	20.50	19.28	19.30	19.10	19.50	22.46	22.43	22.48	22.50
3GPP Rel 6	HSDPA Subtest-4	20.15	20.19	20.14	21.00	18.92	19.30	19.10	19.50	22.43	22.39	22.47	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	20.06	20.09	20.15	21.00	19.63	19.57	19.56	20.00	22.35	22.31	22.25	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	20.08	20.13	20.13	21.00	19.71	19.62	19.47	20.00	22.26	22.28	22.25	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	20.08	20.11	20.15	20.50	19.62	19.69	19.51	20.00	22.31	22.23	22.28	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	20.09	20.15	20.18	20.50	19.62	19.61	19.60	20.00	22.35	22.30	22.31	22.50
3GPP Rel 6	HSUPA Subtest-1	20.75	20.76	20.78	21.00	20.30	20.18	20.55	21.00	22.81	22.68	22.64	23.00
3GPP Rel 6	HSUPA Subtest-2	18.75	18.77	18.80	19.00	18.25	18.16	18.57	19.00	20.76	20.69	20.61	21.00
3GPP Rel 6	HSUPA Subtest-3	19.76	19.77	19.79	20.00	19.32	19.19	19.59	20.00	21.82	21.76	21.81	22.00
3GPP Rel 6	HSUPA Subtest-4	18.77	18.75	18.80	19.00	18.33	18.17	18.56	19.00	20.76	20.71	20.73	21.00
3GPP Rel 6	HSUPA Subtest-5	20.76	20.74	20.77	21.00	20.30	20.20	20.30	21.00	22.71	22.68	22.71	23.00



Bottom Antenna:

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	24.12	24.13	24.15	24.50	22.86	22.83	22.96	23.00	24.65	24.60	24.61	25.00
3GPP Rel 99	RMC 12.2Kbps	24.14	24.15	24.19	24.50	22.88	22.83	22.97	23.00	24.67	24.63	24.63	25.00
3GPP Rel 6	HSDPA Subtest-1	23.13	23.12	23.18	23.50	22.06	22.12	22.27	22.50	23.68	23.61	23.65	24.00
3GPP Rel 6	HSDPA Subtest-2	23.12	23.13	23.17	23.50	22.05	22.15	22.26	22.50	23.67	23.60	23.64	24.00
3GPP Rel 6	HSDPA Subtest-3	22.67	22.68	22.71	23.00	21.53	21.61	21.79	22.00	23.25	23.19	23.21	23.50
3GPP Rel 6	HSDPA Subtest-4	22.64	22.65	22.69	23.00	21.50	21.57	21.76	22.00	23.23	23.16	23.10	23.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.57	22.60	22.63	23.00	21.39	21.47	21.57	22.00	23.11	23.03	23.01	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.59	22.58	22.61	23.00	21.38	21.45	21.53	22.00	23.09	23.03	23.02	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	22.57	22.60	22.62	23.00	21.41	21.47	21.54	22.00	23.09	23.02	22.98	23.50
3GPP Rel 8	DC-HSDPA Subtest-4	22.59	22.61	22.63	23.00	21.45	21.51	21.56	22.00	23.12	23.06	23.03	23.50
3GPP Rel 6	HSUPA Subtest-1	23.25	23.26	23.28	23.50	22.21	22.30	22.34	23.00	23.59	23.49	23.43	24.00
3GPP Rel 6	HSUPA Subtest-2	21.25	21.27	21.30	21.50	20.19	20.29	20.35	21.00	21.58	21.48	21.45	22.00
3GPP Rel 6	HSUPA Subtest-3	22.26	22.27	22.29	22.50	21.20	21.28	21.34	22.00	22.60	22.50	22.45	23.00
3GPP Rel 6	HSUPA Subtest-4	21.27	21.25	21.30	21.50	20.18	20.29	20.32	21.00	21.58	21.54	21.56	22.00
3GPP Rel 6	HSUPA Subtest-5	23.26	23.24	23.27	23.50	22.23	22.33	22.43	23.00	23.59	23.52	23.53	24.00



<CDMA2000 Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, SAR for head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

Top Antenna:

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)	CDMA2000 BC10			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600		1175	476	580	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
RC1 SO55	22.85	22.77	22.74	23.50	22.17	22.23	22.36	22.50	22.87	22.82	22.87	24.00
RC3 SO55	22.93	22.84	22.84	23.50	22.05	22.16	22.28	22.50	22.99	22.95	22.98	24.00
RC3 SO32(F+SCH)	23.03	22.87	23.00	23.50	22.16	22.13	22.27	22.50	23.01	22.94	22.97	24.00
RC3 SO32(+SCH)	22.93	22.83	22.84	23.50	22.14	22.13	22.27	22.50	22.98	22.93	22.95	24.00
RTAP 153.6Kbps	22.92	22.84	22.88	23.50	22.08	22.15	22.31	22.50	22.98	22.92	22.96	24.00
RETAP 4096Bits	22.78	22.69	22.68	23.50	22.09	22.17	22.32	22.50	22.80	22.76	22.82	24.00

Bottom Antenna:

Band	CDMA2000 BC0			Tune-up Limit (dBm)	CDMA2000 BC1			Tune-up Limit (dBm)	CDMA2000 BC10			Tune-up Limit (dBm)
	TX Channel	1013	384		777	25	600		1175	476	580	
Frequency (MHz)	824.7	836.52	848.31		1851.25	1880	1908.75		817.9	820.5	823.1	
RC1 SO55	22.85	22.77	22.74	23.50	24.30	24.27	24.36	24.50	22.87	22.82	22.87	24.00
RC3 SO55	22.93	22.84	22.84	23.50	24.17	24.13	24.37	24.50	22.99	22.95	22.98	24.00
RC3 SO32(F+SCH)	23.03	22.87	23.00	23.50	24.19	24.17	24.40	24.50	23.01	22.94	22.97	24.00
RC3 SO32(+SCH)	22.93	22.83	22.84	23.50	24.18	24.13	24.36	24.50	22.98	22.93	22.95	24.00
RTAP 153.6Kbps	22.92	22.84	22.88	23.50	24.17	24.15	24.38	24.50	22.98	22.92	22.96	24.00
RETAP 4096Bits	22.78	22.69	22.68	23.50	24.02	23.97	24.21	24.50	22.80	22.76	22.82	24.00



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 / B13 / B17 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 / 2 / 5 SAR test was covered by Band 12 / 25 / 26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



Top Antenna

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.07	21.15	21.17	21.50	0
20	QPSK	1	49	20.23	20.35	20.47		
20	QPSK	1	99	20.56	20.61	20.59		
20	QPSK	50	0	19.74	19.70	19.76	20.50	1
20	QPSK	50	24	19.41	19.50	19.47		
20	QPSK	50	50	19.43	19.49	19.48		
20	QPSK	100	0	19.55	19.65	19.68	20.50	1
20	16QAM	1	0	20.30	20.39	20.42		
20	16QAM	1	49	19.55	19.65	19.65		
20	16QAM	1	99	19.78	19.86	19.81	19.50	2
20	16QAM	50	0	18.72	18.71	18.72		
20	16QAM	50	24	18.42	18.53	18.47		
20	16QAM	50	50	18.40	18.48	18.48	19.50	2
20	16QAM	100	0	18.50	18.62	18.63		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	20.80	20.91	20.87	21.50	0
15	QPSK	1	37	20.29	20.34	20.30		
15	QPSK	1	74	20.38	20.49	20.51		
15	QPSK	36	0	19.59	19.68	19.65	20.50	1
15	QPSK	36	20	19.44	19.49	19.47		
15	QPSK	36	39	19.37	19.46	19.38		
15	QPSK	75	0	19.49	19.58	19.52	20.50	1
15	16QAM	1	0	20.15	20.18	20.23		
15	16QAM	1	37	19.51	19.63	19.46		
15	16QAM	1	74	19.73	19.76	19.76	19.50	2
15	16QAM	36	0	18.54	18.63	18.61		
15	16QAM	36	20	18.41	18.49	18.45		
15	16QAM	36	39	18.35	18.43	18.37	19.50	2
15	16QAM	75	0	18.43	18.53	18.47		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	20.61	20.67	20.70	21.50	0
10	QPSK	1	25	20.33	20.30	20.35		
10	QPSK	1	49	20.32	20.36	20.41		
10	QPSK	25	0	19.53	19.56	19.57	20.50	1
10	QPSK	25	12	19.44	19.43	19.42		
10	QPSK	25	25	19.33	19.41	19.41		
10	QPSK	50	0	19.42	19.47	19.46	20.50	1
10	16QAM	1	0	19.95	20.09	19.99		
10	16QAM	1	25	19.61	19.61	19.64		
10	16QAM	1	49	19.69	19.73	19.75	19.50	2
10	16QAM	25	0	18.50	18.51	18.56		
10	16QAM	25	12	18.41	18.40	18.42		
10	16QAM	25	25	18.32	18.39	18.40	19.50	2
10	16QAM	50	0	18.41	18.44	18.42		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	20.43	20.47	20.46	21.50	0
5	QPSK	1	12	20.37	20.28	20.38		
5	QPSK	1	24	20.32	20.40	20.39		
5	QPSK	12	0	19.41	19.38	19.47	20.50	1
5	QPSK	12	7	19.42	19.42	19.44		
5	QPSK	12	13	19.39	19.34	19.39		
5	QPSK	25	0	19.37	19.35	19.38	20.50	1
5	16QAM	1	0	19.74	19.95	19.84		
5	16QAM	1	12	19.77	19.85	19.84		
5	16QAM	1	24	19.99	19.57	19.75	19.50	2
5	16QAM	12	0	18.43	18.41	18.47		
5	16QAM	12	7	18.42	18.43	18.42		
5	16QAM	12	13	18.43	18.38	18.39	19.50	2
5	16QAM	25	0	18.36	18.37	18.42		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	20.34	20.30	20.43	21.50	0
3	QPSK	1	8	20.54	20.30	20.37		
3	QPSK	1	14	20.34	20.25	20.34		
3	QPSK	8	0	19.37	19.36	19.39	20.50	1
3	QPSK	8	4	19.42	19.41	19.30		
3	QPSK	8	7	19.39	19.33	19.39		
3	QPSK	15	0	19.37	19.37	19.39	20.50	1
3	16QAM	1	0	19.41	19.50	19.56		
3	16QAM	1	8	19.66	19.65	19.55		
3	16QAM	1	14	19.72	19.60	19.43	19.50	2
3	16QAM	8	0	18.43	18.43	18.47		
3	16QAM	8	4	18.57	18.51	18.39		
3	16QAM	8	7	18.39	18.41	18.46	19.50	2
3	16QAM	15	0	18.41	18.40	18.41		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	20.26	20.25	20.31	21.50	0
1.4	QPSK	1	3	20.46	20.54	20.55		
1.4	QPSK	1	5	20.26	20.25	20.31		
1.4	QPSK	3	0	20.32	20.32	20.39		
1.4	QPSK	3	1	20.34	20.44	20.45		
1.4	QPSK	3	3	20.37	20.37	20.43	20.50	1
1.4	QPSK	6	0	19.33	19.32	19.33		
1.4	16QAM	1	0	19.49	19.54	19.59	20.50	1
1.4	16QAM	1	3	19.60	19.61	19.62		
1.4	16QAM	1	5	19.51	19.47	19.58		
1.4	16QAM	3	0	19.33	19.31	19.36		
1.4	16QAM	3	1	19.38	19.38	19.48		
1.4	16QAM	3	3	19.41	19.49	19.47	19.50	2
1.4	16QAM	6	0	18.37	18.40	18.42		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.95	21.16	21.10	21.50	0
20	QPSK	1	49	20.33	20.43	20.30		
20	QPSK	1	99	20.36	20.45	20.49		
20	QPSK	50	0	19.63	19.66	19.61	20.50	1
20	QPSK	50	24	19.43	19.24	19.43		
20	QPSK	50	50	19.44	19.37	19.35		
20	QPSK	100	0	19.50	19.54	19.53	20.50	1
20	16QAM	1	0	20.17	20.30	20.16		
20	16QAM	1	49	19.28	19.30	19.49		
20	16QAM	1	99	19.45	19.40	19.50	20.50	1
20	16QAM	50	0	18.74	18.62	18.63		
20	16QAM	50	24	18.29	18.32	18.42		
20	16QAM	50	50	18.33	18.41	18.35	19.50	2
20	16QAM	100	0	18.36	18.55	18.42		
20	16QAM	100	0	18.36	18.55	18.42		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.77	20.80	20.78	21.50	0
15	QPSK	1	37	20.18	20.42	20.43		
15	QPSK	1	74	20.31	20.30	20.34		
15	QPSK	36	0	19.53	19.52	19.57	20.50	1
15	QPSK	36	20	19.38	19.38	19.39		
15	QPSK	36	39	19.28	19.30	19.33		
15	QPSK	75	0	19.41	19.43	19.46	20.50	1
15	16QAM	1	0	20.03	20.07	20.04		
15	16QAM	1	37	19.41	19.46	19.44		
15	16QAM	1	74	19.67	19.64	19.72	20.50	1
15	16QAM	36	0	18.50	18.52	18.53		
15	16QAM	36	20	18.34	18.33	18.38		
15	16QAM	36	39	18.27	18.28	18.30	19.50	2
15	16QAM	75	0	18.34	18.41	18.41		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.55	20.50	20.53	21.50	0
10	QPSK	1	25	20.16	20.25	20.16		
10	QPSK	1	49	20.16	20.23	20.10		
10	QPSK	25	0	19.46	19.35	19.37	20.50	1
10	QPSK	25	12	19.36	19.35	19.39		
10	QPSK	25	25	19.27	19.23	19.26		
10	QPSK	50	0	19.38	19.35	19.37	20.50	1
10	16QAM	1	0	19.99	19.96	19.87		
10	16QAM	1	25	19.44	19.54	19.49		
10	16QAM	1	49	19.56	19.60	19.54	19.50	2
10	16QAM	25	0	18.43	18.35	18.34		
10	16QAM	25	12	18.34	18.36	18.32		
10	16QAM	25	25	18.26	18.25	18.24	19.50	2
10	16QAM	50	0	18.37	18.35	18.37		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.39	20.32	20.42	21.50	0
5	QPSK	1	12	20.29	20.29	20.22		
5	QPSK	1	24	20.20	20.23	20.12		
5	QPSK	12	0	19.37	19.31	19.31	20.50	1
5	QPSK	12	7	19.37	19.35	19.36		
5	QPSK	12	13	19.29	19.22	19.30		
5	QPSK	25	0	19.33	19.29	19.28	20.50	1
5	16QAM	1	0	19.84	19.70	19.82		
5	16QAM	1	12	19.82	19.79	19.81		
5	16QAM	1	24	19.92	19.57	19.50	19.50	2
5	16QAM	12	0	18.35	18.33	18.31		
5	16QAM	12	7	18.37	18.37	18.35		
5	16QAM	12	13	18.32	18.25	18.31	19.50	2
5	16QAM	25	0	18.32	18.33	18.31		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.32	20.32	20.25	21.50	0
3	QPSK	1	8	20.38	20.07	20.28		
3	QPSK	1	14	20.11	20.10	20.16		
3	QPSK	8	0	19.30	19.27	19.29	20.50	1
3	QPSK	8	4	19.40	19.11	19.54		
3	QPSK	8	7	19.27	19.17	19.20		
3	QPSK	15	0	19.30	19.26	19.18	20.50	1
3	16QAM	1	0	19.55	19.58	19.51		
3	16QAM	1	8	19.59	19.35	19.63		
3	16QAM	1	14	19.63	19.17	19.66	19.50	2
3	16QAM	8	0	18.35	18.34	18.37		
3	16QAM	8	4	18.45	18.16	18.42		
3	16QAM	8	7	18.30	18.25	18.25	19.50	2
3	16QAM	15	0	18.30	18.29	18.22		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.20	20.19	20.12	21.50	0
1.4	QPSK	1	3	20.37	20.32	20.10		
1.4	QPSK	1	5	20.15	20.19	20.10		
1.4	QPSK	3	0	20.26	20.30	20.20		
1.4	QPSK	3	1	20.27	20.31	20.21		
1.4	QPSK	3	3	20.18	20.23	20.22	20.50	1
1.4	QPSK	6	0	19.22	19.21	19.17		
1.4	16QAM	1	0	19.48	19.44	19.40	20.50	1
1.4	16QAM	1	3	19.49	19.52	19.45		
1.4	16QAM	1	5	19.43	19.43	19.39		
1.4	16QAM	3	0	19.32	19.28	19.23		
1.4	16QAM	3	1	19.26	19.39	19.33		
1.4	16QAM	3	3	19.16	19.16	19.33		
1.4	16QAM	6	0	18.31	18.32	18.26	19.50	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24.50	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.93	23.97	23.95		
10	QPSK	1	25	23.91	23.91	23.86	23.50	1
10	QPSK	1	49	23.83	23.84	23.76		
10	QPSK	25	0	23.05	23.03	22.97		
10	QPSK	25	12	23.04	23.02	22.94	23.50	1
10	QPSK	25	25	23.01	22.94	22.93		
10	QPSK	50	0	22.98	23.02	23.00		
10	16QAM	1	0	23.31	23.38	23.31	23.50	1
10	16QAM	1	25	23.19	23.16	23.04		
10	16QAM	1	49	23.26	23.26	23.11		
10	16QAM	25	0	21.96	21.95	21.92	22.50	2
10	16QAM	25	12	21.99	21.97	21.88		
10	16QAM	25	25	22.01	21.90	21.89		
10	16QAM	50	0	21.93	21.95	21.97		
Channel				20425	20525	20625	24.50	0
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.97	23.98	23.96	23.50	1
5	QPSK	1	12	23.96	23.95	23.92		
5	QPSK	1	24	23.96	23.92	23.87		
5	QPSK	12	0	22.93	22.94	22.92	23.50	1
5	QPSK	12	7	23.03	22.99	22.99		
5	QPSK	12	13	23.01	22.91	22.97		
5	QPSK	25	0	22.96	22.96	22.94		
5	16QAM	1	0	23.39	23.39	23.30	23.50	1
5	16QAM	1	12	23.40	23.46	23.39		
5	16QAM	1	24	23.28	23.06	23.18		
5	16QAM	12	0	21.90	21.90	21.90	22.50	2
5	16QAM	12	7	21.99	21.98	21.94		
5	16QAM	12	13	22.00	21.87	21.95		
5	16QAM	25	0	21.96	21.95	21.90		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.95	23.92	23.93	24.50	0
3	QPSK	1	8	24.01	24.03	24.02		
3	QPSK	1	14	23.92	23.86	23.82		
3	QPSK	8	0	22.99	22.93	22.90	23.50	1
3	QPSK	8	4	23.08	22.96	22.97		
3	QPSK	8	7	22.97	23.01	22.92		
3	QPSK	15	0	22.92	22.97	22.95	23.50	1
3	16QAM	1	0	23.15	23.12	23.05		
3	16QAM	1	8	23.19	22.97	23.10		
3	16QAM	1	14	23.31	23.03	22.87	22.50	2
3	16QAM	8	0	22.03	21.97	21.94		
3	16QAM	8	4	22.07	21.95	22.03		
3	16QAM	8	7	22.00	22.02	21.96	22.50	2
3	16QAM	15	0	21.93	21.97	21.97		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.85	23.82	23.78	24.50	0
1.4	QPSK	1	3	23.82	23.89	23.67		
1.4	QPSK	1	5	23.87	23.86	23.76		
1.4	QPSK	3	0	23.96	23.92	23.89		
1.4	QPSK	3	1	24.02	23.91	23.90		
1.4	QPSK	3	3	23.97	23.95	23.82		
1.4	QPSK	6	0	22.94	22.91	22.91	23.50	1
1.4	16QAM	1	0	23.13	23.10	23.05	23.50	1
1.4	16QAM	1	3	23.19	23.12	22.94		
1.4	16QAM	1	5	23.13	23.11	23.04		
1.4	16QAM	3	0	22.95	22.96	22.89		
1.4	16QAM	3	1	23.05	22.92	22.88		
1.4	16QAM	3	3	22.99	22.95	22.93		
1.4	16QAM	6	0	21.99	21.97	21.89	22.50	2



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24.50	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.76	23.81	23.79		
10	QPSK	1	25	23.73	23.79	23.76	23.50	1
10	QPSK	1	49	23.73	23.77	23.74		
10	QPSK	25	0	22.87	22.90	22.85		
10	QPSK	25	12	22.84	22.86	22.77	23.50	1
10	QPSK	25	25	22.86	22.78	22.83		
10	QPSK	50	0	22.83	22.90	22.84		
10	16QAM	1	0	23.10	23.15	23.05	23.50	1
10	16QAM	1	25	22.99	23.03	23.00		
10	16QAM	1	49	23.08	23.13	23.11		
10	16QAM	25	0	21.87	21.78	21.74	22.50	2
10	16QAM	25	12	21.85	21.85	21.83		
10	16QAM	25	25	21.81	21.84	21.83		
10	16QAM	50	0	21.90	21.79	21.77		
Channel				23035	23095	23155	24.50	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.81	23.80	23.76	23.50	1
5	QPSK	1	12	23.85	23.84	23.82		
5	QPSK	1	24	23.83	23.86	23.84		
5	QPSK	12	0	22.88	22.83	22.85	23.50	1
5	QPSK	12	7	22.95	22.85	22.82		
5	QPSK	12	13	22.84	22.82	22.78		
5	QPSK	25	0	22.89	22.81	22.78		
5	16QAM	1	0	23.18	23.00	23.18	23.50	1
5	16QAM	1	12	23.33	23.21	23.29		
5	16QAM	1	24	23.12	23.11	23.22		
5	16QAM	12	0	21.91	21.82	21.83	22.50	2
5	16QAM	12	7	21.97	21.85	21.84		
5	16QAM	12	13	21.88	21.79	21.78		
5	16QAM	25	0	21.93	21.79	21.79		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.88	23.82	23.83	24.50	0
3	QPSK	1	8	23.72	23.86	23.97		
3	QPSK	1	14	23.84	23.74	23.81		
3	QPSK	8	0	22.92	22.86	22.77	23.50	1
3	QPSK	8	4	22.86	22.85	22.98		
3	QPSK	8	7	22.93	22.78	22.82		
3	QPSK	15	0	22.88	22.80	22.75	23.50	1
3	16QAM	1	0	23.03	23.02	22.93		
3	16QAM	1	8	22.92	22.87	23.09		
3	16QAM	1	14	22.86	22.95	23.12	22.50	2
3	16QAM	8	0	21.98	21.89	21.82		
3	16QAM	8	4	21.82	21.88	21.93		
3	16QAM	8	7	22.00	21.87	21.90	22.50	2
3	16QAM	15	0	21.92	21.84	21.79		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.76	23.74	23.75	24.50	0
1.4	QPSK	1	3	23.81	23.81	23.85		
1.4	QPSK	1	5	23.80	23.72	23.71		
1.4	QPSK	3	0	23.83	23.83	23.88		
1.4	QPSK	3	1	23.87	23.88	23.96		
1.4	QPSK	3	3	23.92	23.83	23.86	23.50	1
1.4	QPSK	6	0	22.80	22.75	22.79		
1.4	16QAM	1	0	23.00	23.00	23.00	23.50	1
1.4	16QAM	1	3	23.06	23.09	23.04		
1.4	16QAM	1	5	23.05	22.97	22.99		
1.4	16QAM	3	0	22.86	22.81	22.86		
1.4	16QAM	3	1	22.91	22.91	22.95		
1.4	16QAM	3	3	22.93	22.80	22.83		
1.4	16QAM	6	0	21.88	21.82	21.84	22.50	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230			24.50	0
Frequency (MHz)				782				
10	QPSK	1	0		23.90			
10	QPSK	1	25		23.88		23.50	1
10	QPSK	1	49		23.86			
10	QPSK	25	0		22.98			
10	QPSK	25	12		22.96		23.50	1
10	QPSK	25	25		22.88			
10	QPSK	50	0		22.97			
10	16QAM	1	0		23.28		23.50	1
10	16QAM	1	25		23.11			
10	16QAM	1	49		23.30			
10	16QAM	25	0		21.92		22.50	2
10	16QAM	25	12		21.93			
10	16QAM	25	25		21.81			
10	16QAM	50	0		21.89			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.91	23.94	23.95	24.50	0
5	QPSK	1	12	23.89	23.97	24.09		
5	QPSK	1	24	23.86	23.88	23.94		
5	QPSK	12	0	22.92	22.91	22.88	23.50	1
5	QPSK	12	7	23.02	22.92	22.99		
5	QPSK	12	13	22.86	22.88	22.93		
5	QPSK	25	0	22.88	22.90	22.96		
5	16QAM	1	0	23.25	23.26	23.28	23.50	1
5	16QAM	1	12	23.27	23.20	23.30		
5	16QAM	1	24	23.19	23.07	23.21		
5	16QAM	12	0	21.89	21.88	21.85	22.50	2
5	16QAM	12	7	22.02	21.94	21.98		
5	16QAM	12	13	21.88	21.88	21.94		
5	16QAM	25	0	21.90	21.89	21.93		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24.50	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.76	23.78	23.75		
10	QPSK	1	25	23.74	23.73	23.69	23.50	1
10	QPSK	1	49	23.72	23.66	23.67		
10	QPSK	25	0	22.87	22.88	22.83		
10	QPSK	25	12	22.85	22.87	22.79	23.50	1
10	QPSK	25	25	22.70	22.80	22.70		
10	QPSK	50	0	22.80	22.85	22.79		
10	16QAM	1	0	23.07	23.14	23.10	23.50	1
10	16QAM	1	25	23.02	23.00	22.99		
10	16QAM	1	49	23.10	23.07	23.04		
10	16QAM	25	0	21.78	21.80	21.80	22.50	2
10	16QAM	25	12	21.84	21.86	21.76		
10	16QAM	25	25	21.69	21.76	21.67		
10	16QAM	50	0	21.77	21.81	21.75		
Channel				23755	23790	23825	24.50	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.82	23.82	23.73	23.50	1
5	QPSK	1	12	23.78	23.73	23.72		
5	QPSK	1	24	23.86	23.78	23.69		
5	QPSK	12	0	22.82	22.82	22.74	23.50	1
5	QPSK	12	7	22.89	22.85	22.79		
5	QPSK	12	13	22.86	22.82	22.75		
5	QPSK	25	0	22.81	22.80	22.84		
5	16QAM	1	0	23.19	23.16	23.02	23.50	1
5	16QAM	1	12	23.26	23.17	23.15		
5	16QAM	1	24	23.09	23.03	22.95		
5	16QAM	12	0	21.82	21.78	21.74	22.50	2
5	16QAM	12	7	21.87	21.84	21.77		
5	16QAM	12	13	21.83	21.83	21.77		
5	16QAM	25	0	21.82	21.80	21.81		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590	21.50	0
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	21.21	21.23	21.18		
20	QPSK	1	49	20.40	20.35	20.42	20.50	1
20	QPSK	1	99	20.51	20.66	20.53		
20	QPSK	50	0	19.77	19.80	19.77		
20	QPSK	50	24	19.53	19.47	19.55	20.50	1
20	QPSK	50	50	19.48	19.54	19.51		
20	QPSK	100	0	19.59	19.65	19.64		
20	16QAM	1	0	20.43	20.39	20.46	20.50	1
20	16QAM	1	49	19.68	19.66	19.63		
20	16QAM	1	99	19.78	19.92	19.78		
20	16QAM	50	0	18.79	18.79	18.77	19.50	2
20	16QAM	50	24	18.51	18.54	18.52		
20	16QAM	50	50	18.46	18.50	18.47		
20	16QAM	100	0	18.62	18.61	18.63		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	20.95	20.91	21.02	21.50	0
15	QPSK	1	37	20.45	20.39	20.37		
15	QPSK	1	74	20.47	20.52	20.49		
15	QPSK	36	0	19.65	19.70	19.75	20.50	1
15	QPSK	36	20	19.51	19.48	19.56		
15	QPSK	36	39	19.38	19.45	19.45		
15	QPSK	75	0	19.58	19.55	19.66		
15	16QAM	1	0	20.22	20.26	20.35	20.50	1
15	16QAM	1	37	19.61	19.59	19.66		
15	16QAM	1	74	19.78	19.82	19.81		
15	16QAM	36	0	18.59	18.69	18.69	19.50	2
15	16QAM	36	20	18.51	18.63	18.52		
15	16QAM	36	39	18.35	18.43	18.42		
15	16QAM	75	0	18.51	18.50	18.55		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	20.61	20.60	20.63	21.50	0
10	QPSK	1	25	20.32	20.29	20.30		
10	QPSK	1	49	20.33	20.39	20.22		
10	QPSK	25	0	19.47	19.52	19.42	20.50	1
10	QPSK	25	12	19.43	19.41	19.41		
10	QPSK	25	25	19.31	19.38	19.26		
10	QPSK	50	0	19.40	19.43	19.41	20.50	1
10	16QAM	1	0	19.96	20.04	19.98		
10	16QAM	1	25	19.57	19.59	19.58		
10	16QAM	1	49	19.69	19.83	19.63	19.50	2
10	16QAM	25	0	18.44	18.49	18.36		
10	16QAM	25	12	18.35	18.42	18.36		
10	16QAM	25	25	18.27	18.35	18.22	19.50	2
10	16QAM	50	0	18.38	18.41	18.36		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	20.48	20.44	20.38	21.50	0
5	QPSK	1	12	20.35	20.29	20.18		
5	QPSK	1	24	20.30	20.36	20.23		
5	QPSK	12	0	19.34	19.47	19.37	20.50	1
5	QPSK	12	7	19.37	19.40	19.29		
5	QPSK	12	13	19.33	19.33	19.26		
5	QPSK	25	0	19.34	19.36	19.24	20.50	1
5	16QAM	1	0	19.85	19.86	19.77		
5	16QAM	1	12	19.77	19.82	19.67		
5	16QAM	1	24	19.77	19.71	19.61	19.50	2
5	16QAM	12	0	18.33	18.47	18.35		
5	16QAM	12	7	18.36	18.42	18.25		
5	16QAM	12	13	18.35	18.35	18.24	19.50	2
5	16QAM	25	0	18.34	18.36	18.22		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	20.40	20.44	20.28	21.50	0
3	QPSK	1	8	20.49	20.34	20.39		
3	QPSK	1	14	20.30	20.30	20.18		
3	QPSK	8	0	19.39	19.35	19.29	20.50	1
3	QPSK	8	4	19.42	19.29	19.38		
3	QPSK	8	7	19.28	19.32	19.29		
3	QPSK	15	0	19.29	19.36	19.23	20.50	1
3	16QAM	1	0	19.54	19.69	19.37		
3	16QAM	1	8	19.76	19.67	19.52		
3	16QAM	1	14	19.75	19.60	19.52	19.50	2
3	16QAM	8	0	18.45	18.43	18.36		
3	16QAM	8	4	18.52	18.36	18.43		
3	16QAM	8	7	18.36	18.43	18.33	19.50	2
3	16QAM	15	0	18.33	18.40	18.25		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	20.27	20.21	20.12	21.50	0
1.4	QPSK	1	3	20.33	20.35	20.10		
1.4	QPSK	1	5	20.28	20.22	20.13		
1.4	QPSK	3	0	20.36	20.36	20.21		
1.4	QPSK	3	1	20.44	20.36	20.16		
1.4	QPSK	3	3	20.46	20.38	20.26	20.50	1
1.4	QPSK	6	0	19.30	19.28	19.23		
1.4	16QAM	1	0	19.53	19.57	19.38	20.50	1
1.4	16QAM	1	3	19.53	19.55	19.48		
1.4	16QAM	1	5	19.52	19.51	19.38		
1.4	16QAM	3	0	19.33	19.35	19.24		
1.4	16QAM	3	1	19.38	19.34	19.26		
1.4	16QAM	3	3	19.40	19.35	19.15	19.50	2
1.4	16QAM	6	0	18.35	18.35	18.27		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	24.50	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.27	23.30	23.26		
15	QPSK	1	37	23.11	23.07	23.21	23.50	1
15	QPSK	1	74	23.00	22.93	23.16		
15	QPSK	36	0	22.28	22.31	22.30		
15	QPSK	36	20	22.24	22.28	22.29	23.50	1
15	QPSK	36	39	22.15	22.09	22.23		
15	QPSK	75	0	22.21	22.34	22.31		
15	16QAM	1	0	22.37	22.37	22.47	23.50	1
15	16QAM	1	37	22.36	22.50	22.45		
15	16QAM	1	74	22.35	22.19	22.46		
15	16QAM	36	0	21.24	21.18	21.19	22.50	2
15	16QAM	36	20	21.26	21.24	21.29		
15	16QAM	36	39	21.12	21.05	21.26		
15	16QAM	75	0	21.18	21.16	21.25		
Channel				26740	26865	26990	24.50	0
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.16	23.15	23.21	23.50	1
10	QPSK	1	25	23.20	23.19	23.20		
10	QPSK	1	49	23.17	23.03	23.11		
10	QPSK	25	0	22.25	22.22	22.21	23.50	1
10	QPSK	25	12	22.28	22.25	22.32		
10	QPSK	25	25	22.13	22.11	22.22		
10	QPSK	50	0	22.25	22.22	22.32		
10	16QAM	1	0	22.52	22.52	22.62	23.50	1
10	16QAM	1	25	22.43	22.44	22.55		
10	16QAM	1	49	22.60	22.51	22.54		
10	16QAM	25	0	21.20	21.16	21.19	22.50	2
10	16QAM	25	12	21.30	21.22	21.28		
10	16QAM	25	25	21.12	21.10	21.19		
10	16QAM	50	0	21.20	21.17	21.25		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.14	23.18	23.26	24.50	0
5	QPSK	1	12	23.18	23.27	23.29		
5	QPSK	1	24	23.22	23.20	23.30		
5	QPSK	12	0	22.22	22.21	22.37	23.50	1
5	QPSK	12	7	22.23	22.32	22.39		
5	QPSK	12	13	22.15	22.24	22.34		
5	QPSK	25	0	22.16	22.25	22.30	23.50	1
5	16QAM	1	0	22.49	22.63	22.79		
5	16QAM	1	12	22.55	22.74	22.81		
5	16QAM	1	24	22.49	22.36	22.67	22.50	2
5	16QAM	12	0	21.22	21.19	21.29		
5	16QAM	12	7	21.22	21.29	21.35		
5	16QAM	12	13	21.16	21.24	21.32	22.50	2
5	16QAM	25	0	21.16	21.21	21.30		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.16	22.86	23.18	24.50	0
3	QPSK	1	8	23.17	22.86	23.19		
3	QPSK	1	14	23.11	23.18	23.24		
3	QPSK	8	0	22.09	22.28	22.30	23.50	1
3	QPSK	8	4	21.93	22.29	22.41		
3	QPSK	8	7	22.19	22.24	22.34		
3	QPSK	15	0	22.19	22.28	22.32	23.50	1
3	16QAM	1	0	22.33	22.47	22.50		
3	16QAM	1	8	22.35	22.20	22.66		
3	16QAM	1	14	22.40	22.34	22.67	22.50	2
3	16QAM	8	0	21.19	21.35	21.37		
3	16QAM	8	4	21.03	21.39	21.49		
3	16QAM	8	7	21.24	21.32	21.34	22.50	2
3	16QAM	15	0	21.21	21.26	21.31		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.05	23.05	23.15	24.50	0
1.4	QPSK	1	3	23.20	23.10	23.13		
1.4	QPSK	1	5	23.03	22.86	23.11		
1.4	QPSK	3	0	23.13	23.18	23.27		
1.4	QPSK	3	1	23.20	23.25	23.22		
1.4	QPSK	3	3	23.24	23.26	23.24		
1.4	QPSK	6	0	22.06	22.12	22.21	23.50	1
1.4	16QAM	1	0	22.28	22.36	22.40	23.50	1
1.4	16QAM	1	3	22.33	22.43	22.38		
1.4	16QAM	1	5	22.24	22.29	22.37		
1.4	16QAM	3	0	22.15	22.22	22.26		
1.4	16QAM	3	1	22.30	22.24	22.25		
1.4	16QAM	3	3	22.32	22.24	22.19		
1.4	16QAM	6	0	21.13	21.16	21.22	22.50	2



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710			24.50	0
Frequency (MHz)				2310				
10	QPSK	1	0		22.98			
10	QPSK	1	25		23.25		23.50	1
10	QPSK	1	49		22.73			
10	QPSK	25	0		22.38			
10	QPSK	25	12		22.43		23.50	1
10	QPSK	25	25		22.26			
10	QPSK	50	0		22.31			
10	16QAM	1	0		22.30		23.50	1
10	16QAM	1	25		22.15			
10	16QAM	1	49		22.14			
10	16QAM	25	0		21.42		22.50	2
10	16QAM	25	12		21.45			
10	16QAM	25	25		21.43			
10	16QAM	50	0		21.33			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.88	22.98	22.76	24.50	0
5	QPSK	1	12	23.01	22.93	22.64		
5	QPSK	1	24	22.93	22.75	22.55		
5	QPSK	12	0	22.04	22.07	22.16	23.50	1
5	QPSK	12	7	22.10	22.12	22.14		
5	QPSK	12	13	22.09	22.05	22.06		
5	QPSK	25	0	22.05	22.09	22.16		
5	16QAM	1	0	22.24	22.41	22.39	23.50	1
5	16QAM	1	12	22.42	22.38	22.24		
5	16QAM	1	24	22.28	22.25	22.05		
5	16QAM	12	0	21.10	21.14	21.20	22.50	2
5	16QAM	12	7	21.16	21.18	21.19		
5	16QAM	12	13	21.12	21.06	21.09		
5	16QAM	12	13	21.12	21.06	21.09		
5	16QAM	25	0	21.12	21.14	21.24		



Bottom Antenna

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.04	23.65	23.57	24.00	0
20	QPSK	1	49	22.84	22.81	22.79		
20	QPSK	1	99	22.95	23.05	22.94		
20	QPSK	50	0	22.32	22.40	22.22	23.00	1
20	QPSK	50	24	22.22	22.02	21.91		
20	QPSK	50	50	21.99	21.98	21.91		
20	QPSK	100	0	21.75	22.12	22.08	23.00	1
20	16QAM	1	0	22.59	22.88	22.83		
20	16QAM	1	49	22.14	22.17	22.10		
20	16QAM	1	99	22.19	22.37	22.17	22.00	2
20	16QAM	50	0	21.33	21.34	21.22		
20	16QAM	50	24	21.28	21.03	20.92		
20	16QAM	50	50	20.97	20.97	20.93	22.00	2
20	16QAM	100	0	21.05	21.13	21.10		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	23.05	23.40	23.33		
15	QPSK	1	37	22.97	22.77	22.71	24.00	0
15	QPSK	1	74	22.90	22.96	22.87		
15	QPSK	36	0	22.14	22.17	22.13		
15	QPSK	36	20	22.04	22.06	22.27	23.00	1
15	QPSK	36	39	21.99	21.94	21.81		
15	QPSK	75	0	22.10	22.08	21.96		
15	16QAM	1	0	22.44	22.77	22.60	23.00	1
15	16QAM	1	37	22.11	22.07	21.95		
15	16QAM	1	74	22.28	22.30	22.14		
15	16QAM	36	0	21.18	21.12	21.09	22.00	2
15	16QAM	36	20	21.01	20.98	21.28		
15	16QAM	36	39	20.99	20.92	20.78		
15	16QAM	75	0	21.04	21.04	20.93	22.00	2



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.91	23.24	23.19	24.00	0
10	QPSK	1	25	22.85	22.87	22.85		
10	QPSK	1	49	22.85	22.89	22.89		
10	QPSK	25	0	22.11	22.13	22.04	23.00	1
10	QPSK	25	12	22.02	22.03	22.00		
10	QPSK	25	25	21.93	22.02	21.92		
10	QPSK	50	0	22.02	22.03	21.97	23.00	1
10	16QAM	1	0	22.26	22.64	22.58		
10	16QAM	1	25	22.16	22.22	22.13		
10	16QAM	1	49	22.27	22.36	22.25	22.00	2
10	16QAM	25	0	21.11	21.10	20.99		
10	16QAM	25	12	21.04	20.99	20.96		
10	16QAM	25	25	20.95	20.96	20.90	22.00	2
10	16QAM	50	0	21.06	20.99	20.96		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.00	23.02	22.98	24.00	0
5	QPSK	1	12	22.89	22.88	22.83		
5	QPSK	1	24	22.89	22.92	22.86		
5	QPSK	12	0	21.99	21.95	21.98	23.00	1
5	QPSK	12	7	22.03	22.00	21.95		
5	QPSK	12	13	21.91	21.94	21.90		
5	QPSK	25	0	21.96	21.95	21.92	23.00	1
5	16QAM	1	0	22.35	22.27	22.16		
5	16QAM	1	12	22.31	22.35	22.32		
5	16QAM	1	24	22.44	22.20	21.80	22.00	2
5	16QAM	12	0	21.04	20.98	21.01		
5	16QAM	12	7	21.04	21.01	21.01		
5	16QAM	12	13	20.94	20.95	20.92	22.00	2
5	16QAM	25	0	20.99	20.97	20.92		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.97	22.90	22.94	24.00	0
3	QPSK	1	8	23.01	22.98	22.97		
3	QPSK	1	14	22.89	22.83	22.77		
3	QPSK	8	0	21.97	21.96	21.93	23.00	1
3	QPSK	8	4	22.02	21.92	21.96		
3	QPSK	8	7	21.95	21.93	21.90		
3	QPSK	15	0	21.93	21.94	21.90	23.00	1
3	16QAM	1	0	22.10	22.06	22.05		
3	16QAM	1	8	22.26	22.08	21.94		
3	16QAM	1	14	22.30	22.11	21.83	22.00	2
3	16QAM	8	0	21.06	21.00	20.96		
3	16QAM	8	4	21.19	21.04	20.93		
3	16QAM	8	7	21.05	21.01	20.97	22.00	2
3	16QAM	15	0	21.01	21.00	20.96		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.87	22.74	22.74	24.00	0
1.4	QPSK	1	3	23.00	22.78	22.77		
1.4	QPSK	1	5	22.79	22.75	22.72		
1.4	QPSK	3	0	22.82	22.79	22.80		
1.4	QPSK	3	1	22.97	22.88	22.87		
1.4	QPSK	3	3	22.82	22.79	22.80		
1.4	QPSK	6	0	21.84	21.86	21.78	23.00	1
1.4	16QAM	1	0	22.00	22.02	21.99	23.00	1
1.4	16QAM	1	3	22.15	22.14	21.98		
1.4	16QAM	1	5	21.98	22.00	22.01		
1.4	16QAM	3	0	21.83	21.83	21.81		
1.4	16QAM	3	1	21.93	21.89	21.94		
1.4	16QAM	3	3	21.83	21.84	21.78		
1.4	16QAM	6	0	20.95	20.91	20.88	22.00	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.89	22.95	22.94	23.00	0
20	QPSK	1	49	22.14	22.13	22.17		
20	QPSK	1	99	22.39	22.29	22.19		
20	QPSK	50	0	21.56	21.59	21.58	22.50	0.5
20	QPSK	50	24	21.33	21.26	21.36		
20	QPSK	50	50	21.22	21.30	21.25		
20	QPSK	100	0	21.42	21.40	21.38	22.50	0.5
20	16QAM	1	0	22.14	22.29	22.27		
20	16QAM	1	49	21.42	21.43	21.50		
20	16QAM	1	99	21.65	21.53	21.50	21.00	2
20	16QAM	50	0	20.54	20.61	20.54		
20	16QAM	50	24	20.37	20.26	20.33		
20	16QAM	50	50	20.25	20.27	20.24	21.00	2
20	16QAM	100	0	20.40	20.33	20.32		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.62	22.76	22.68	23.00	0
15	QPSK	1	37	22.12	22.26	22.20		
15	QPSK	1	74	22.21	22.25	22.14		
15	QPSK	36	0	21.49	21.57	21.48	22.50	0.5
15	QPSK	36	20	21.37	21.30	21.33		
15	QPSK	36	39	21.24	21.23	21.27		
15	QPSK	75	0	21.43	21.43	21.39	22.50	0.5
15	16QAM	1	0	21.92	22.09	22.01		
15	16QAM	1	37	21.31	21.41	21.33		
15	16QAM	1	74	21.51	21.55	21.48	21.00	2
15	16QAM	36	0	20.44	20.53	20.42		
15	16QAM	36	20	20.33	20.24	20.31		
15	16QAM	36	39	20.24	20.16	20.21	21.00	2
15	16QAM	75	0	20.38	20.41	20.31		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.41	22.46	22.55	23.00	0
10	QPSK	1	25	22.05	22.20	22.18		
10	QPSK	1	49	22.12	22.18	22.13		
10	QPSK	25	0	21.29	21.31	21.37	22.50	0.5
10	QPSK	25	12	21.15	21.31	21.39		
10	QPSK	25	25	21.19	21.24	21.28		
10	QPSK	50	0	21.17	21.35	21.38	22.50	0.5
10	16QAM	1	0	21.86	21.86	21.91		
10	16QAM	1	25	21.34	21.47	21.45		
10	16QAM	1	49	21.50	21.52	21.57	21.00	2
10	16QAM	25	0	20.26	20.28	20.33		
10	16QAM	25	12	20.18	20.30	20.34		
10	16QAM	25	25	20.20	20.17	20.21	21.00	2
10	16QAM	50	0	20.18	20.28	20.34		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.23	22.29	22.40	23.00	0
5	QPSK	1	12	22.04	22.26	22.21		
5	QPSK	1	24	22.03	22.17	22.14		
5	QPSK	12	0	21.16	21.28	21.30	22.50	0.5
5	QPSK	12	7	21.17	21.32	21.31		
5	QPSK	12	13	21.09	21.18	21.30		
5	QPSK	25	0	21.13	21.27	21.27	22.50	0.5
5	16QAM	1	0	21.70	21.48	21.83		
5	16QAM	1	12	21.50	21.67	21.74		
5	16QAM	1	24	21.36	21.21	21.72	21.00	2
5	16QAM	12	0	20.21	20.26	20.29		
5	16QAM	12	7	20.22	20.29	20.30		
5	16QAM	12	13	20.13	20.16	20.30	21.00	2
5	16QAM	25	0	20.17	20.27	20.26		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.24	22.23	22.31	23.00	0
3	QPSK	1	8	22.15	22.04	22.32		
3	QPSK	1	14	22.07	22.07	22.04		
3	QPSK	8	0	21.13	21.23	21.29	22.50	0.5
3	QPSK	8	4	21.19	21.10	21.38		
3	QPSK	8	7	21.11	21.17	21.21		
3	QPSK	15	0	21.12	21.26	21.21	22.50	0.5
3	16QAM	1	0	21.36	21.51	21.46		
3	16QAM	1	8	21.33	21.38	21.61		
3	16QAM	1	14	21.50	21.24	21.66	21.00	2
3	16QAM	8	0	20.25	20.27	20.38		
3	16QAM	8	4	20.35	20.04	20.49		
3	16QAM	8	7	20.19	20.18	20.27	21.00	2
3	16QAM	15	0	20.17	20.26	20.22		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.06	22.13	22.13	23.00	0
1.4	QPSK	1	3	22.11	22.16	22.37		
1.4	QPSK	1	5	22.03	22.17	22.15		
1.4	QPSK	3	0	22.13	22.25	22.23		
1.4	QPSK	3	1	22.08	22.23	22.28		
1.4	QPSK	3	3	22.08	22.26	22.39		
1.4	QPSK	6	0	21.08	21.21	21.23	22.50	0.5
1.4	16QAM	1	0	21.36	21.43	21.42	22.50	0.5
1.4	16QAM	1	3	21.39	21.49	21.47		
1.4	16QAM	1	5	21.31	21.41	21.45		
1.4	16QAM	3	0	21.16	21.27	21.25		
1.4	16QAM	3	1	21.11	21.27	21.44		
1.4	16QAM	3	3	21.24	21.29	21.35		
1.4	16QAM	6	0	20.15	20.26	20.26	21.00	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24.50	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.93	23.97	23.95		
10	QPSK	1	25	23.91	23.91	23.86	23.50	1
10	QPSK	1	49	23.83	23.84	23.76		
10	QPSK	25	0	23.05	23.03	22.97		
10	QPSK	25	12	23.04	23.02	22.94	23.50	1
10	QPSK	25	25	23.01	22.94	22.93		
10	QPSK	50	0	22.98	23.02	23.00		
10	16QAM	1	0	23.31	23.38	23.31	23.50	1
10	16QAM	1	25	23.19	23.16	23.04		
10	16QAM	1	49	23.26	23.26	23.11		
10	16QAM	25	0	21.96	21.95	21.92	22.50	2
10	16QAM	25	12	21.99	21.97	21.88		
10	16QAM	25	25	22.01	21.90	21.89		
10	16QAM	50	0	21.93	21.95	21.97	24.50	0
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.97	23.98	23.96	24.50	0
5	QPSK	1	12	23.96	23.95	23.92		
5	QPSK	1	24	23.96	23.92	23.87		
5	QPSK	12	0	22.93	22.94	22.92	23.50	1
5	QPSK	12	7	23.03	22.99	22.99		
5	QPSK	12	13	23.01	22.91	22.97		
5	QPSK	25	0	22.96	22.96	22.94	23.50	1
5	16QAM	1	0	23.39	23.39	23.30		
5	16QAM	1	12	23.40	23.46	23.39		
5	16QAM	1	24	23.28	23.06	23.18	22.50	2
5	16QAM	12	0	21.90	21.90	21.90		
5	16QAM	12	7	21.99	21.98	21.94		
5	16QAM	12	13	22.00	21.87	21.95	22.50	2
5	16QAM	25	0	21.96	21.95	21.90		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.95	23.92	23.93	24.50	0
3	QPSK	1	8	24.01	24.03	24.02		
3	QPSK	1	14	23.92	23.86	23.82		
3	QPSK	8	0	22.99	22.93	22.90	23.50	1
3	QPSK	8	4	23.08	22.96	22.97		
3	QPSK	8	7	22.97	23.01	22.92		
3	QPSK	15	0	22.92	22.97	22.95	23.50	1
3	16QAM	1	0	23.15	23.12	23.05		
3	16QAM	1	8	23.19	22.97	23.10		
3	16QAM	1	14	23.31	23.03	22.87	22.50	2
3	16QAM	8	0	22.03	21.97	21.94		
3	16QAM	8	4	22.07	21.95	22.03		
3	16QAM	8	7	22.00	22.02	21.96	22.50	2
3	16QAM	15	0	21.93	21.97	21.97		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.85	23.82	23.78	24.50	0
1.4	QPSK	1	3	23.82	23.89	23.67		
1.4	QPSK	1	5	23.87	23.86	23.76		
1.4	QPSK	3	0	23.96	23.92	23.89		
1.4	QPSK	3	1	24.02	23.91	23.90		
1.4	QPSK	3	3	23.97	23.95	23.82	23.50	1
1.4	QPSK	6	0	22.94	22.91	22.91		
1.4	16QAM	1	0	23.13	23.10	23.05	23.50	1
1.4	16QAM	1	3	23.19	23.12	22.94		
1.4	16QAM	1	5	23.13	23.11	23.04		
1.4	16QAM	3	0	22.95	22.96	22.89		
1.4	16QAM	3	1	23.05	22.92	22.88		
1.4	16QAM	3	3	22.99	22.95	22.93	22.50	2
1.4	16QAM	6	0	21.99	21.97	21.89		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
				Channel	20850	21100		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.59	23.89	23.92	24.50	0
20	QPSK	1	49	23.21	23.23	23.57		
20	QPSK	1	99	23.43	23.31	23.85		
20	QPSK	50	0	22.95	22.84	22.98	23.50	1
20	QPSK	50	24	22.82	22.70	22.86		
20	QPSK	50	50	22.89	22.77	22.80		
20	QPSK	100	0	22.85	22.83	22.86	23.50	1
20	16QAM	1	0	22.77	23.32	23.48		
20	16QAM	1	49	22.41	22.85	22.96		
20	16QAM	1	99	22.65	22.82	23.19	22.50	2
20	16QAM	50	0	21.92	21.83	21.90		
20	16QAM	50	24	21.77	21.73	21.78		
20	16QAM	50	50	21.77	21.71	21.76	22.50	2
20	16QAM	100	0	21.85	21.79	21.83		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5	Tune-up limit (dBm)	MPR (dB)
15	QPSK	1	0	23.42	23.84	23.89	24.50	0
15	QPSK	1	37	23.16	23.20	23.73		
15	QPSK	1	74	23.29	23.34	23.87		
15	QPSK	36	0	22.81	22.90	22.96	23.50	1
15	QPSK	36	20	22.79	22.73	22.81		
15	QPSK	36	39	22.76	22.69	22.81		
15	QPSK	75	0	22.81	22.76	22.90	23.50	1
15	16QAM	1	0	22.78	23.39	23.33		
15	16QAM	1	37	22.40	22.90	23.02		
15	16QAM	1	74	22.64	23.07	23.20	22.50	2
15	16QAM	36	0	21.68	21.82	21.82		
15	16QAM	36	20	21.71	21.63	21.76		
15	16QAM	36	39	21.70	21.71	21.78	22.50	2
15	16QAM	75	0	21.72	21.71	21.86		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.38	23.73	23.53	24.50	0
10	QPSK	1	25	23.30	23.43	23.71		
10	QPSK	1	49	23.14	23.27	23.72		
10	QPSK	25	0	22.67	22.72	22.93	23.50	1
10	QPSK	25	12	22.75	22.74	22.96		
10	QPSK	25	25	22.76	22.68	22.82		
10	QPSK	50	0	22.75	22.77	22.90	23.50	1
10	16QAM	1	0	22.71	23.28	23.04		
10	16QAM	1	25	22.70	22.93	23.06		
10	16QAM	1	49	22.48	23.14	23.29	22.50	2
10	16QAM	25	0	21.66	21.70	21.86		
10	16QAM	25	12	21.70	21.75	21.92		
10	16QAM	25	25	21.75	21.63	21.76	22.50	2
10	16QAM	50	0	21.68	21.71	21.85		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.28	23.76	23.68	24.50	0
5	QPSK	1	12	23.23	23.58	23.69		
5	QPSK	1	24	23.20	23.51	23.51		
5	QPSK	12	0	22.54	22.67	22.80	23.50	1
5	QPSK	12	7	22.67	22.71	22.85		
5	QPSK	12	13	22.66	22.72	22.77		
5	QPSK	25	0	22.66	22.69	22.75	23.50	1
5	16QAM	1	0	22.56	22.79	23.05		
5	16QAM	1	12	22.58	23.02	23.07		
5	16QAM	1	24	22.53	22.81	22.98	22.50	2
5	16QAM	12	0	21.54	21.67	21.80		
5	16QAM	12	7	21.67	21.76	21.86		
5	16QAM	12	13	21.66	21.73	21.75	22.50	2
5	16QAM	25	0	21.63	21.72	21.74		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24.50	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.76	23.81	23.79		
10	QPSK	1	25	23.73	23.79	23.76	23.50	1
10	QPSK	1	49	23.73	23.77	23.74		
10	QPSK	25	0	22.87	22.90	22.85		
10	QPSK	25	12	22.84	22.86	22.77	23.50	1
10	QPSK	25	25	22.86	22.78	22.83		
10	QPSK	50	0	22.83	22.90	22.84		
10	16QAM	1	0	23.10	23.15	23.05	23.50	1
10	16QAM	1	25	22.99	23.03	23.00		
10	16QAM	1	49	23.08	23.13	23.11		
10	16QAM	25	0	21.87	21.78	21.74	22.50	2
10	16QAM	25	12	21.85	21.85	21.83		
10	16QAM	25	25	21.81	21.84	21.83		
10	16QAM	50	0	21.90	21.79	21.77		
Channel				23035	23095	23155	24.50	0
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.81	23.80	23.76	23.50	1
5	QPSK	1	12	23.85	23.84	23.82		
5	QPSK	1	24	23.83	23.86	23.84		
5	QPSK	12	0	22.88	22.83	22.85	23.50	1
5	QPSK	12	7	22.95	22.85	22.82		
5	QPSK	12	13	22.84	22.82	22.78		
5	QPSK	25	0	22.89	22.81	22.78		
5	16QAM	1	0	23.18	23.00	23.18	23.50	1
5	16QAM	1	12	23.33	23.21	23.29		
5	16QAM	1	24	23.12	23.11	23.22		
5	16QAM	12	0	21.91	21.82	21.83	22.50	2
5	16QAM	12	7	21.97	21.85	21.84		
5	16QAM	12	13	21.88	21.79	21.78		
5	16QAM	25	0	21.93	21.79	21.79		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.88	23.82	23.83	24.50	0
3	QPSK	1	8	23.72	23.86	23.97		
3	QPSK	1	14	23.84	23.74	23.81		
3	QPSK	8	0	22.92	22.86	22.77	23.50	1
3	QPSK	8	4	22.86	22.85	22.98		
3	QPSK	8	7	22.93	22.78	22.82		
3	QPSK	15	0	22.88	22.80	22.75	23.50	1
3	16QAM	1	0	23.03	23.02	22.93		
3	16QAM	1	8	22.92	22.87	23.09		
3	16QAM	1	14	22.86	22.95	23.12	22.50	2
3	16QAM	8	0	21.98	21.89	21.82		
3	16QAM	8	4	21.82	21.88	21.93		
3	16QAM	8	7	22.00	21.87	21.90	22.50	2
3	16QAM	15	0	21.92	21.84	21.79		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.76	23.74	23.75	24.50	0
1.4	QPSK	1	3	23.81	23.81	23.85		
1.4	QPSK	1	5	23.80	23.72	23.71		
1.4	QPSK	3	0	23.83	23.83	23.88		
1.4	QPSK	3	1	23.87	23.88	23.96		
1.4	QPSK	3	3	23.92	23.83	23.86	23.50	1
1.4	QPSK	6	0	22.80	22.75	22.79		
1.4	16QAM	1	0	23.00	23.00	23.00	23.50	1
1.4	16QAM	1	3	23.06	23.09	23.04		
1.4	16QAM	1	5	23.05	22.97	22.99		
1.4	16QAM	3	0	22.86	22.81	22.86		
1.4	16QAM	3	1	22.91	22.91	22.95		
1.4	16QAM	3	3	22.93	22.80	22.83		
1.4	16QAM	6	0	21.88	21.82	21.84	22.50	2



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230			24.50	0
Frequency (MHz)				782				
10	QPSK	1	0		23.90			
10	QPSK	1	25		23.88		23.50	1
10	QPSK	1	49		23.86			
10	QPSK	25	0		22.98			
10	QPSK	25	12		22.96		23.50	1
10	QPSK	25	25		22.88			
10	QPSK	50	0		22.97			
10	16QAM	1	0		23.28		23.50	1
10	16QAM	1	25		23.11			
10	16QAM	1	49		23.30			
10	16QAM	25	0		21.92		22.50	2
10	16QAM	25	12		21.93			
10	16QAM	25	25		21.81			
10	16QAM	50	0		21.89			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	23.91	23.94	23.95	24.50	0
5	QPSK	1	12	23.89	23.97	24.09		
5	QPSK	1	24	23.86	23.88	23.94		
5	QPSK	12	0	22.92	22.91	22.88	23.50	1
5	QPSK	12	7	23.02	22.92	22.99		
5	QPSK	12	13	22.86	22.88	22.93		
5	QPSK	25	0	22.88	22.90	22.96		
5	16QAM	1	0	23.25	23.26	23.28	23.50	1
5	16QAM	1	12	23.27	23.20	23.30		
5	16QAM	1	24	23.19	23.07	23.21		
5	16QAM	12	0	21.89	21.88	21.85	22.50	2
5	16QAM	12	7	22.02	21.94	21.98		
5	16QAM	12	13	21.88	21.88	21.94		
5	16QAM	25	0	21.90	21.89	21.93		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800	24.50	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.76	23.78	23.75		
10	QPSK	1	25	23.74	23.73	23.69	23.50	1
10	QPSK	1	49	23.72	23.66	23.67		
10	QPSK	25	0	22.87	22.88	22.83		
10	QPSK	25	12	22.85	22.87	22.79	23.50	1
10	QPSK	25	25	22.70	22.80	22.70		
10	QPSK	50	0	22.80	22.85	22.79		
10	16QAM	1	0	23.07	23.14	23.10	23.50	1
10	16QAM	1	25	23.02	23.00	22.99		
10	16QAM	1	49	23.10	23.07	23.04		
10	16QAM	25	0	21.78	21.80	21.80	22.50	2
10	16QAM	25	12	21.84	21.86	21.76		
10	16QAM	25	25	21.69	21.76	21.67		
10	16QAM	50	0	21.77	21.81	21.75		
Channel				23755	23790	23825	24.50	0
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.82	23.82	23.73	23.50	1
5	QPSK	1	12	23.78	23.73	23.72		
5	QPSK	1	24	23.86	23.78	23.69		
5	QPSK	12	0	22.82	22.82	22.74	23.50	1
5	QPSK	12	7	22.89	22.85	22.79		
5	QPSK	12	13	22.86	22.82	22.75		
5	QPSK	25	0	22.81	22.80	22.84		
5	16QAM	1	0	23.19	23.16	23.02	23.50	1
5	16QAM	1	12	23.26	23.17	23.15		
5	16QAM	1	24	23.09	23.03	22.95		
5	16QAM	12	0	21.82	21.78	21.74	22.50	2
5	16QAM	12	7	21.87	21.84	21.77		
5	16QAM	12	13	21.83	21.83	21.77		
5	16QAM	25	0	21.82	21.80	21.81		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	23.40	23.66	23.31	24.00	0
20	QPSK	1	49	23.30	23.29	23.25		
20	QPSK	1	99	23.27	23.58	23.11		
20	QPSK	50	0	22.11	22.77	22.59	23.00	1
20	QPSK	50	24	21.81	22.46	22.52		
20	QPSK	50	50	21.98	22.53	22.54		
20	QPSK	100	0	21.48	22.00	21.55	23.00	1
20	16QAM	1	0	21.99	22.75	21.98		
20	16QAM	1	49	22.58	22.60	22.07		
20	16QAM	1	99	22.73	22.90	21.90	22.00	2
20	16QAM	50	0	21.61	21.72	21.81		
20	16QAM	50	24	21.48	21.47	21.56		
20	16QAM	50	50	21.40	21.51	21.53	22.00	2
20	16QAM	100	0	21.45	21.55	21.48		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	23.05	23.54	23.92	24.00	0
15	QPSK	1	37	23.28	23.28	23.36		
15	QPSK	1	74	23.31	23.45	22.94		
15	QPSK	36	0	22.12	22.67	22.74	23.00	1
15	QPSK	36	20	22.46	22.46	22.53		
15	QPSK	36	39	22.33	22.44	22.43		
15	QPSK	75	0	21.75	22.49	22.57	23.00	1
15	16QAM	1	0	22.36	22.93	22.95		
15	16QAM	1	37	22.45	22.57	22.55		
15	16QAM	1	74	22.67	22.74	22.42	22.00	2
15	16QAM	36	0	21.45	21.66	21.72		
15	16QAM	36	20	21.42	21.45	21.59		
15	16QAM	36	39	21.29	21.44	21.44	22.00	2
15	16QAM	75	0	21.39	21.47	21.58		



Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.92	23.58	23.53	24.00	0
10	QPSK	1	25	23.19	23.27	23.21		
10	QPSK	1	49	23.23	23.40	22.99		
10	QPSK	25	0	22.15	22.46	22.40	23.00	1
10	QPSK	25	12	22.33	22.40	22.41		
10	QPSK	25	25	22.24	22.35	22.27		
10	QPSK	50	0	22.24	22.41	22.42	23.00	1
10	16QAM	1	0	22.43	22.99	22.95		
10	16QAM	1	25	22.44	22.55	22.54		
10	16QAM	1	49	22.58	22.81	22.45	22.00	2
10	16QAM	25	0	21.41	21.44	21.41		
10	16QAM	25	12	21.33	21.37	21.39		
10	16QAM	25	25	21.26	21.34	21.28	22.00	2
10	16QAM	50	0	21.35	21.37	21.38		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	23.13	23.38	23.31	24.00	0
5	QPSK	1	12	23.16	23.28	23.07		
5	QPSK	1	24	23.18	23.32	22.75		
5	QPSK	12	0	22.25	22.42	22.36	23.00	1
5	QPSK	12	7	22.29	22.40	22.29		
5	QPSK	12	13	22.27	22.35	22.10		
5	QPSK	25	0	22.24	22.33	22.24	23.00	1
5	16QAM	1	0	22.40	22.78	22.76		
5	16QAM	1	12	22.64	22.74	22.61		
5	16QAM	1	24	22.46	22.60	22.25	22.00	2
5	16QAM	12	0	21.27	21.45	21.38		
5	16QAM	12	7	21.34	21.40	21.31		
5	16QAM	12	13	21.32	21.35	21.30	22.00	2
5	16QAM	25	0	21.29	21.38	21.28		



Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	23.30	23.45	23.24	24.00	0
3	QPSK	1	8	23.29	23.42	23.15		
3	QPSK	1	14	23.20	23.34	23.06		
3	QPSK	8	0	22.30	22.34	22.30	23.00	1
3	QPSK	8	4	22.43	22.27	22.31		
3	QPSK	8	7	22.25	22.33	21.82		
3	QPSK	15	0	21.88	22.35	22.07	23.00	1
3	16QAM	1	0	21.83	22.58	22.44		
3	16QAM	1	8	21.99	22.54	22.46		
3	16QAM	1	14	22.06	22.57	22.36	22.00	2
3	16QAM	8	0	21.37	21.38	21.30		
3	16QAM	8	4	21.23	21.28	21.06		
3	16QAM	8	7	21.31	21.42	21.39	22.00	2
3	16QAM	15	0	21.28	21.36	21.31		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	23.12	23.23	22.63	24.00	0
1.4	QPSK	1	3	23.28	23.24	22.64		
1.4	QPSK	1	5	23.15	23.20	22.56		
1.4	QPSK	3	0	23.19	23.31	22.58		
1.4	QPSK	3	1	23.20	23.32	22.61		
1.4	QPSK	3	3	23.24	23.33	22.55	23.00	1
1.4	QPSK	6	0	22.26	22.30	21.91		
1.4	16QAM	1	0	22.42	22.44	22.27	23.00	1
1.4	16QAM	1	3	22.59	22.56	22.30		
1.4	16QAM	1	5	22.42	22.48	22.21		
1.4	16QAM	3	0	22.25	22.33	22.05		
1.4	16QAM	3	1	22.34	22.33	22.08		
1.4	16QAM	3	3	22.25	22.33	22.00	22.00	2
1.4	16QAM	6	0	21.35	21.37	21.03		



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965	24.50	0
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.27	23.30	23.26		
15	QPSK	1	37	23.11	23.07	23.21	23.50	1
15	QPSK	1	74	23.00	22.93	23.16		
15	QPSK	36	0	22.28	22.31	22.30		
15	QPSK	36	20	22.24	22.28	22.29	23.50	1
15	QPSK	36	39	22.15	22.09	22.23		
15	QPSK	75	0	22.21	22.34	22.31		
15	16QAM	1	0	22.37	22.37	22.47	23.50	1
15	16QAM	1	37	22.36	22.50	22.45		
15	16QAM	1	74	22.35	22.19	22.46		
15	16QAM	36	0	21.24	21.18	21.19	22.50	2
15	16QAM	36	20	21.26	21.24	21.29		
15	16QAM	36	39	21.12	21.05	21.26		
15	16QAM	75	0	21.18	21.16	21.25	24.50	0
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.16	23.15	23.21	24.50	0
10	QPSK	1	25	23.20	23.19	23.20		
10	QPSK	1	49	23.17	23.03	23.11		
10	QPSK	25	0	22.25	22.22	22.21	23.50	1
10	QPSK	25	12	22.28	22.25	22.32		
10	QPSK	25	25	22.13	22.11	22.22		
10	QPSK	50	0	22.25	22.22	22.32	23.50	1
10	16QAM	1	0	22.52	22.52	22.62		
10	16QAM	1	25	22.43	22.44	22.55		
10	16QAM	1	49	22.60	22.51	22.54	22.50	2
10	16QAM	25	0	21.20	21.16	21.19		
10	16QAM	25	12	21.30	21.22	21.28		
10	16QAM	25	25	21.12	21.10	21.19	22.50	2
10	16QAM	50	0	21.20	21.17	21.25		



Channel				26715	26865	27015	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.14	23.18	23.26	24.50	0
5	QPSK	1	12	23.18	23.27	23.29		
5	QPSK	1	24	23.22	23.20	23.30		
5	QPSK	12	0	22.22	22.21	22.37	23.50	1
5	QPSK	12	7	22.23	22.32	22.39		
5	QPSK	12	13	22.15	22.24	22.34		
5	QPSK	25	0	22.16	22.25	22.30	23.50	1
5	16QAM	1	0	22.49	22.63	22.79		
5	16QAM	1	12	22.55	22.74	22.81		
5	16QAM	1	24	22.49	22.36	22.67	22.50	2
5	16QAM	12	0	21.22	21.19	21.29		
5	16QAM	12	7	21.22	21.29	21.35		
5	16QAM	12	13	21.16	21.24	21.32	22.50	2
5	16QAM	25	0	21.16	21.21	21.30		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.16	22.86	23.18	24.50	0
3	QPSK	1	8	23.17	22.86	23.19		
3	QPSK	1	14	23.11	23.18	23.24		
3	QPSK	8	0	22.09	22.28	22.30	23.50	1
3	QPSK	8	4	21.93	22.29	22.41		
3	QPSK	8	7	22.19	22.24	22.34		
3	QPSK	15	0	22.19	22.28	22.32	23.50	1
3	16QAM	1	0	22.33	22.47	22.50		
3	16QAM	1	8	22.35	22.20	22.66		
3	16QAM	1	14	22.40	22.34	22.67	22.50	2
3	16QAM	8	0	21.19	21.35	21.37		
3	16QAM	8	4	21.03	21.39	21.49		
3	16QAM	8	7	21.24	21.32	21.34	22.50	2
3	16QAM	15	0	21.21	21.26	21.31		



Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.05	23.05	23.15	24.50	0
1.4	QPSK	1	3	23.20	23.10	23.13		
1.4	QPSK	1	5	23.03	22.86	23.11		
1.4	QPSK	3	0	23.13	23.18	23.27		
1.4	QPSK	3	1	23.20	23.25	23.22		
1.4	QPSK	3	3	23.24	23.26	23.24		
1.4	QPSK	6	0	22.06	22.12	22.21	23.50	1
1.4	16QAM	1	0	22.28	22.36	22.40	23.50	1
1.4	16QAM	1	3	22.33	22.43	22.38		
1.4	16QAM	1	5	22.24	22.29	22.37		
1.4	16QAM	3	0	22.15	22.22	22.26		
1.4	16QAM	3	1	22.30	22.24	22.25		
1.4	16QAM	3	3	22.32	22.24	22.19		
1.4	16QAM	6	0	21.13	21.16	21.22	22.50	2



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		22.98		24.50	0
10	QPSK	1	25		23.25			
10	QPSK	1	49		22.73			
10	QPSK	25	0		22.38		23.50	1
10	QPSK	25	12		22.43			
10	QPSK	25	25		22.26			
10	QPSK	50	0		22.31		23.50	1
10	16QAM	1	0		22.30			
10	16QAM	1	25		22.15			
10	16QAM	1	49		22.14		22.50	2
10	16QAM	25	0		21.42			
10	16QAM	25	12		21.45			
10	16QAM	25	25		21.43		22.50	2
10	16QAM	50	0		21.33			
Channel				27685	27710	27735		
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.88	22.98	22.76	24.50	0
5	QPSK	1	12	23.01	22.93	22.64		
5	QPSK	1	24	22.93	22.75	22.55		
5	QPSK	12	0	22.04	22.07	22.16	23.50	1
5	QPSK	12	7	22.10	22.12	22.14		
5	QPSK	12	13	22.09	22.05	22.06		
5	QPSK	25	0	22.05	22.09	22.16	23.50	1
5	16QAM	1	0	22.24	22.42	22.39		
5	16QAM	1	12	22.42	22.38	22.24		
5	16QAM	1	24	22.28	22.25	22.05	22.50	2
5	16QAM	12	0	21.10	21.14	21.20		
5	16QAM	12	7	21.16	21.18	21.19		
5	16QAM	12	13	21.12	21.06	21.09	22.50	2
5	16QAM	25	0	21.12	21.14	21.24		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

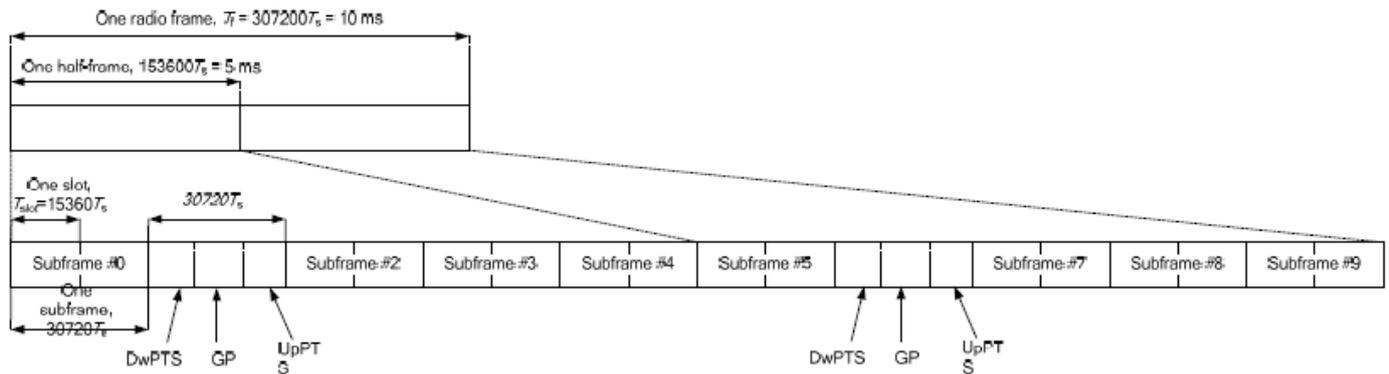


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



Bottom Antenna

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.55	22.69	22.27	22.10	22.64	23.00	0
20	QPSK	1	49	21.91	22.14	21.87	21.86	22.15		
20	QPSK	1	99	21.82	22.16	22.06	21.95	21.41		
20	QPSK	50	0	21.44	21.73	21.28	21.36	21.66	22.50	0.5
20	QPSK	50	24	21.38	21.29	21.08	21.12	21.45		
20	QPSK	50	50	21.21	21.24	21.08	21.09	21.42		
20	QPSK	100	0	21.42	21.57	21.20	21.17	21.33	22.50	0.5
20	16QAM	1	0	22.06	21.71	21.58	21.32	21.83		
20	16QAM	1	49	21.22	21.12	21.02	20.91	21.37		
20	16QAM	1	99	21.18	21.28	21.17	21.08	20.95	21.00	2
20	16QAM	50	0	20.77	20.49	20.29	20.39	20.75		
20	16QAM	50	24	20.46	20.36	20.16	20.14	20.54		
20	16QAM	50	50	20.29	20.30	20.10	20.07	20.42	21.00	2
20	16QAM	100	0	20.49	20.44	20.19	20.15	20.53		
Channel				39725	40173	40620	41068	41515		
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.60	22.41	22.29	22.17	22.59	23.00	0
15	QPSK	1	37	22.12	22.16	21.93	22.06	22.25		
15	QPSK	1	74	21.77	22.21	22.02	21.90	21.73		
15	QPSK	36	0	21.88	21.36	21.32	21.34	21.56	22.50	0.5
15	QPSK	36	20	21.41	21.28	21.08	21.18	21.47		
15	QPSK	36	39	21.28	21.22	21.03	21.05	21.29		
15	QPSK	75	0	21.51	21.35	21.22	21.20	21.48	22.50	0.5
15	16QAM	1	0	22.02	21.58	21.42	21.36	21.72		
15	16QAM	1	37	21.45	21.16	21.07	21.05	21.41		
15	16QAM	1	74	21.24	21.35	21.13	21.03	20.99	21.00	2
15	16QAM	36	0	20.80	20.38	20.26	20.24	20.51		
15	16QAM	36	20	20.41	20.32	20.10	20.15	20.54		
15	16QAM	36	39	20.27	20.27	20.05	19.96	20.37	21.00	2
15	16QAM	75	0	20.53	20.36	20.21	20.12	20.42		



Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.02	22.13	22.11	21.92	22.33	23.00	0
10	QPSK	1	25	22.11	21.95	21.94	21.83	22.10		
10	QPSK	1	49	21.81	21.89	21.87	21.80	21.81		
10	QPSK	25	0	21.21	21.21	21.15	21.09	21.35	22.50	0.5
10	QPSK	25	12	21.22	21.21	21.07	21.06	21.25		
10	QPSK	25	25	21.21	21.18	21.14	21.00	21.17		
10	QPSK	50	0	21.22	21.22	21.07	21.05	21.27	22.50	0.5
10	16QAM	1	0	21.32	21.27	21.24	21.08	21.37		
10	16QAM	1	25	21.20	21.12	21.01	20.95	21.19		
10	16QAM	1	49	21.09	20.99	20.90	20.87	20.97	21.00	2
10	16QAM	25	0	20.28	20.26	20.21	20.07	20.35		
10	16QAM	25	12	20.27	20.24	20.17	20.07	20.26		
10	16QAM	25	25	20.19	20.23	20.16	19.98	20.23	21.00	2
10	16QAM	50	0	20.29	20.27	20.09	20.01	20.29		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	21.86	21.99	21.98	21.92	22.20	23.00	0
5	QPSK	1	12	22.01	21.93	21.92	21.82	22.12		
5	QPSK	1	24	21.88	21.84	21.87	21.80	21.96		
5	QPSK	12	0	21.18	21.13	21.12	20.97	21.22	22.50	0.5
5	QPSK	12	7	21.23	21.19	21.10	21.11	21.28		
5	QPSK	12	13	21.13	21.14	21.14	20.98	21.25		
5	QPSK	25	0	21.12	21.14	21.04	21.03	21.26	22.50	0.5
5	16QAM	1	0	21.16	21.12	21.10	20.99	21.17		
5	16QAM	1	12	21.12	21.11	20.99	20.95	21.15		
5	16QAM	1	24	21.14	21.08	21.02	20.86	20.92	21.00	2
5	16QAM	12	0	20.16	20.14	20.11	19.98	20.19		
5	16QAM	12	7	20.22	20.18	20.08	20.03	20.24		
5	16QAM	12	13	20.12	20.17	20.12	19.93	20.20	21.00	2
5	16QAM	25	0	20.24	20.24	20.11	20.09	20.23		



LTE Carrier Aggregation Conducted Power

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink carrier aggregation only. Uplink carrier aggregation is not supported. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.



Top Antenna

Configure	PCC						SCC				Measured Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 11 Tx. Power (dBm)	LTE Rel 8 Tx. Power (dBm)
Inter-Band	Band 2	20M	1860	18700	1	0	Band 4	20M	2132.5	2175	21.06	21.07
	Band 2	20M	1880	18900	1	0	Band 4	20M	2132.5	2175	21.15	21.15
	Band 2	20M	1900	19100	1	0	Band 4	20M	2132.5	2175	21.14	21.17
	Band 4	20M	1720	20050	1	0	Band 2	20M	1960	900	20.93	20.95
	Band 4	20M	1732.5	20175	1	0	Band 2	20M	1960	900	21.15	21.16
	Band 4	20M	1745	20300	1	0	Band 2	20M	1960	900	21.08	21.10
	Band 2	20M	1860	18700	1	0	Band 5	10M	881.5	2525	21.06	21.07
	Band 2	20M	1880	18900	1	0	Band 5	10M	881.5	2525	21.14	21.15
	Band 2	20M	1900	19100	1	0	Band 5	10M	881.5	2525	21.16	21.17
	Band 5	10M	829	20450	1	0	Band 2	20M	1960	900	23.92	23.93
	Band 5	10M	836.5	20525	1	0	Band 2	20M	1960	900	23.96	23.97
	Band 5	10M	844	20600	1	0	Band 2	20M	1960	900	23.91	23.95
	Band 2	20M	1860	18700	1	0	Band 12	10M	737.5	5095	21.06	21.07
	Band 2	20M	1880	18900	1	0	Band 12	10M	737.5	5095	21.13	21.15
	Band 2	20M	1900	19100	1	0	Band 12	10M	737.5	5095	21.15	21.17
	Band 12	10M	704	23060	1	0	Band 2	20M	1960	900	23.75	23.76
	Band 12	10M	707.5	23095	1	0	Band 2	20M	1960	900	23.81	23.81
	Band 12	10M	711	23130	1	0	Band 2	20M	1960	900	23.76	23.79
	Band 2	20M	1860	18700	1	0	Band 29	10M	722.5	9715	21.05	21.07
	Band 2	20M	1880	18900	1	0	Band 29	10M	722.5	9715	21.12	21.15
	Band 2	20M	1900	19100	1	0	Band 29	10M	722.5	9715	21.14	21.17
	Band 4	20M	1720	20050	1	0	Band 5	10M	881.5	2525	20.92	20.95
	Band 4	20M	1732.5	20175	1	0	Band 5	10M	881.5	2525	21.13	21.16
	Band 4	20M	1745	20300	1	0	Band 5	10M	881.5	2525	21.08	21.10
	Band 5	10M	829	20450	1	0	Band 4	20M	2132.5	2175	23.91	23.93
	Band 5	10M	836.5	20525	1	0	Band 4	20M	2132.5	2175	23.92	23.97
	Band 5	10M	844	20600	1	0	Band 4	20M	2132.5	2175	23.90	23.95
	Band 4	20M	1720	20050	1	0	Band 12	10M	737.5	5095	20.92	20.95
	Band 4	20M	1732.5	20175	1	0	Band 12	10M	737.5	5095	21.11	21.16
	Band 4	20M	1745	20300	1	0	Band 12	10M	737.5	5095	21.08	21.10
	Band 12	10M	704	23060	1	0	Band 4	20M	2132.5	2175	23.75	23.76
	Band 12	10M	707.5	23095	1	0	Band 4	20M	2132.5	2175	23.79	23.81
	Band 12	10M	711	23130	1	0	Band 4	20M	2132.5	2175	23.71	23.79
Band 4	20M	1720	20050	1	0	Band 29	10M	722.5	9715	20.93	20.95	
Band 4	20M	1732.5	20175	1	0	Band 29	10M	722.5	9715	21.13	21.16	
Band 4	20M	1745	20300	1	0	Band 29	10M	722.5	9715	20.08	21.10	
Intra-Band Non-Contiguous	Band 25	20M	1860	26140	1	0	Band 25	5M	1912.5	26665	23.26	23.40
	Band 25	20M	1880	26340	1	0	Band 25	5M	1912.5	26665	23.62	23.66
	Band 25	20M	1905	26590	1	0	Band 25	5M	1852.5	26065	23.28	23.31



Bottom Antenna

Configure	PCC						SCC				Measured Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 11 Tx. Power (dBm)	LTE Rel 8 Tx. Power (dBm)
Inter-Band	Band 2	20M	1860	18700	1	0	Band 4	20M	2132.5	2175	23.01	23.04
	Band 2	20M	1880	18900	1	0	Band 4	20M	2132.5	2175	23.60	23.65
	Band 2	20M	1900	19100	1	0	Band 4	20M	2132.5	2175	23.58	23.57
	Band 4	20M	1720	20050	1	0	Band 2	20M	1960	900	22.81	22.89
	Band 4	20M	1732.5	20175	1	0	Band 2	20M	1960	900	22.91	22.95
	Band 4	20M	1745	20300	1	0	Band 2	20M	1960	900	22.90	22.94
	Band 2	20M	1860	18700	1	0	Band 5	10M	881.5	2525	23.03	23.04
	Band 2	20M	1880	18900	1	0	Band 5	10M	881.5	2525	23.61	23.65
	Band 2	20M	1900	19100	1	0	Band 5	10M	881.5	2525	23.56	23.57
	Band 5	10M	829	20450	1	0	Band 2	20M	1960	900	23.92	23.93
	Band 5	10M	836.5	20525	1	0	Band 2	20M	1960	900	23.91	23.97
	Band 5	10M	844	20600	1	0	Band 2	20M	1960	900	23.94	23.95
	Band 2	20M	1860	18700	1	0	Band 12	10M	737.5	5095	23.04	23.04
	Band 2	20M	1880	18900	1	0	Band 12	10M	737.5	5095	23.61	23.65
	Band 2	20M	1900	19100	1	0	Band 12	10M	737.5	5095	2.61	23.57
	Band 12	10M	704	23060	1	0	Band 2	20M	1960	900	23.73	23.76
	Band 12	10M	707.5	23095	1	0	Band 2	20M	1960	900	23.78	23.81
	Band 12	10M	711	23130	1	0	Band 2	20M	1960	900	23.71	23.79
	Band 2	20M	1860	18700	1	0	Band 29	10M	722.5	9715	23.01	23.04
	Band 2	20M	1880	18900	1	0	Band 29	10M	722.5	9715	23.61	23.65
	Band 2	20M	1900	19100	1	0	Band 29	10M	722.5	9715	23.51	23.57
	Band 4	20M	1720	20050	1	0	Band 5	10M	881.5	2525	22.81	22.89
	Band 4	20M	1732.5	20175	1	0	Band 5	10M	881.5	2525	22.91	22.95
	Band 4	20M	1745	20300	1	0	Band 5	10M	881.5	2525	22.90	22.94
	Band 5	10M	829	20450	1	0	Band 4	20M	2132.5	2175	23.91	23.93
	Band 5	10M	836.5	20525	1	0	Band 4	20M	2132.5	2175	23.96	23.97
	Band 5	10M	844	20600	1	0	Band 4	20M	2132.5	2175	23.92	23.95
	Band 4	20M	1720	20050	1	0	Band 12	10M	737.5	5095	22.88	22.89
	Band 4	20M	1732.5	20175	1	0	Band 12	10M	737.5	5095	22.91	22.95
	Band 4	20M	1745	20300	1	0	Band 12	10M	737.5	5095	22.93	22.94
Band 12	10M	704	23060	1	0	Band 4	20M	2132.5	2175	23.70	23.76	
Band 12	10M	707.5	23095	1	0	Band 4	20M	2132.5	2175	23.80	23.81	
Band 12	10M	711	23130	1	0	Band 4	20M	2132.5	2175	23.73	23.79	
Band 4	20M	1720	20050	1	0	Band 29	10M	722.5	9715	22.90	22.89	
Band 4	20M	1732.5	20175	1	0	Band 29	10M	722.5	9715	22.91	22.95	
Band 4	20M	1745	20300	1	0	Band 29	10M	722.5	9715	22.89	22.94	
Intra-Band Intra-Band Non-Contiguous	Band 25	20M	1860	26140	1	0	Band 25	5M	1912.5	26665	23.43	23.40
	Band 25	20M	1880	26340	1	0	Band 25	5M	1912.5	26665	23.62	23.66
	Band 25	20M	1905	26590	1	0	Band 25	5M	1852.5	26065	23.28	23.31
Intra-Band Intra-Band Contiguous	Band 41	20M	2506	39750	1	0	Band 41	5M	2687.5	41565	22.52	22.55
	Band 41	20M	2593	40620	1	0	Band 41	5M	2498.5	39675	22.25	22.27
	Band 41	20M	2680	41490	1	0	Band 41	5M	2498.5	39675	22.62	22.64
	Band 41	20M	2506	39750	1	0	Band 41	20M	2526	39950	22.53	22.55
	Band 41	20M	2549.5	40185	1	0	Band 41	20M	2529.5	39985	22.68	22.69
	Band 41	20M	2549.5	40185	1	0	Band 41	20M	2569.5	40385	22.68	22.69
	Band 41	20M	2593	40620	1	0	Band 41	20M	2573	40420	22.26	22.27
	Band 41	20M	2593	40620	1	0	Band 41	20M	2613	40820	22.26	22.27
	Band 41	20M	2636.5	41055	1	0	Band 41	20M	2616.5	40855	22.08	22.10
	Band 41	20M	2636.5	41055	1	0	Band 41	20M	2656.5	41255	22.08	22.10
	Band 41	20M	2680	41490	1	0	Band 41	20M	2660	41290	22.61	22.64
	Band 41	20M	2506	39750	1	0	Band 41	20M	2525.8	39948	22.53	22.55
Band 41	20M	2593	40620	1	0	Band 41	20M	2573.2	40422	22.26	22.27	
Band 41	20M	2593	40620	1	0	Band 41	20M	2612.8	40818	22.26	22.27	
Band 41	20M	2680	41490	1	0	Band 41	20M	2660.2	41292	22.61	22.64	

**<WLAN Conducted Power>****General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. When Product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.



<2.4GHz WLAN ANT 1>

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b	CH 1	2412	1Mbps	12.69	13.00	100.00
	CH 6	2437		14.26	15.00	
	CH 11	2462		14.51	15.00	
802.11g	CH 1	2412	6Mbps	11.47	13.00	94.95
	CH 6	2437		12.98	13.50	
	CH 11	2462		13.14	13.50	
802.11n-HT20	CH 1	2412	MCS0	8.16	9.00	94.61
	CH 6	2437		9.44	10.00	
	CH 11	2462		9.67	10.00	
802.11n-HT40	CH 3	2422	MCS0	8.05	9.00	89.58
	CH 6	2437		9.07	10.00	
	CH 9	2452		9.53	10.00	

<2.4GHz WLAN ANT 2>

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b	CH 1	2412	1Mbps	13.47	14.50	100.00
	CH 6	2437		14.21	15.00	
	CH 11	2462		14.28	15.00	
802.11g	CH 1	2412	6Mbps	12.22	13.00	95.39
	CH 6	2437		12.62	13.00	
	CH 11	2462		12.98	13.00	
802.11n-HT20	CH 1	2412	MCS0	8.79	10.00	94.79
	CH 6	2437		9.72	10.00	
	CH 11	2462		9.79	10.00	
802.11n-HT40	CH 3	2422	MCS0	9.04	10.00	89.79
	CH 6	2437		8.98	10.00	
	CH 9	2452		9.62	10.00	



<2.4GHz WLAN ANT 1+2>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN ANT 1+2	802.11b	CH 1	2412	1Mbps	13.51	14.50	100.00
		CH 6	2437		14.43	15.00	
		CH 11	2462		14.72	15.00	
	802.11g	CH 1	2412	6Mbps	12.02	13.50	94.95
		CH 6	2437		12.93	13.50	
		CH 11	2462		13.09	13.50	
	802.11n-HT20	CH 1	2412	MCS0	9.31	10.50	94.33
		CH 6	2437		10.18	10.50	
		CH 11	2462		10.24	10.50	
	802.11n-HT40	CH 3	2422	MCS0	9.10	10.50	89.81
		CH 6	2437		9.51	10.50	
		CH 9	2452		10.00	10.50	



<5GHz WLAN ANT1>

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a	CH 36	5180	6Mbps	12.81	13.00	95.50
	CH 40	5200		12.63	13.00	
	CH 44	5220		12.74	13.00	
	CH 48	5240		12.54	13.00	
802.11n-HT20	CH 36	5180	MCS0	9.71	10.00	94.50
	CH 40	5200		9.53	10.00	
	CH 44	5220		9.58	10.00	
	CH 48	5240		9.48	10.00	
802.11n-HT40	CH 38	5190	MCS0	10.21	11.00	90.44
	CH 46	5230		10.09	11.00	
802.11ac-VHT20	CH 36	5180	MCS0	9.68	10.00	94.81
	CH 40	5200		9.41	10.00	
	CH 44	5220		9.47	10.00	
	CH 48	5240		9.30	10.00	
802.11ac-VHT40	CH 38	5190	MCS0	10.13	11.00	91.79
	CH 46	5230		9.82	11.00	
802.11ac-VHT80	CH 42	5210	MCS0	9.94	11.00	81.18

Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
802.11a	CH 149	5745	MCS0	12.44	13.50	95.50
	CH 157	5785		12.91	13.50	
	CH 165	5825		13.22	13.50	
802.11n-HT20	CH 149	5745	MCS0	9.28	11.00	94.50
	CH 157	5785		9.70	11.00	
	CH 165	5825		10.05	11.00	
802.11n-HT40	CH 151	5755	MCS0	8.92	10.00	90.44
	CH 159	5795		9.67	10.00	
802.11ac-VHT20	CH 149	5745	MCS0	9.24	10.00	94.81
	CH 157	5785		9.74	10.00	
	CH 165	5825		9.99	10.00	
802.11ac-VHT40	CH 151	5755	MCS0	8.82	10.00	91.79
	CH 159	5795		9.66	10.00	
802.11ac-VHT80	CH 155	5775	MCS0	10.16	11.00	81.18

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)		
	Bluetooth v3.0+EDR	Bluetooth v4.0 LE	Bluetooth v4.2 LE
2.4GHz Bluetooth	9.0	1.0	1.0

Note:

1. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$

for 1-g SAR and ≤ 7.5 for 10-g extremity SAR


- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.0	10	2.48	1.3

Note:

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.3 which is ≤ 3, SAR testing is not required.

14. Antenna Location

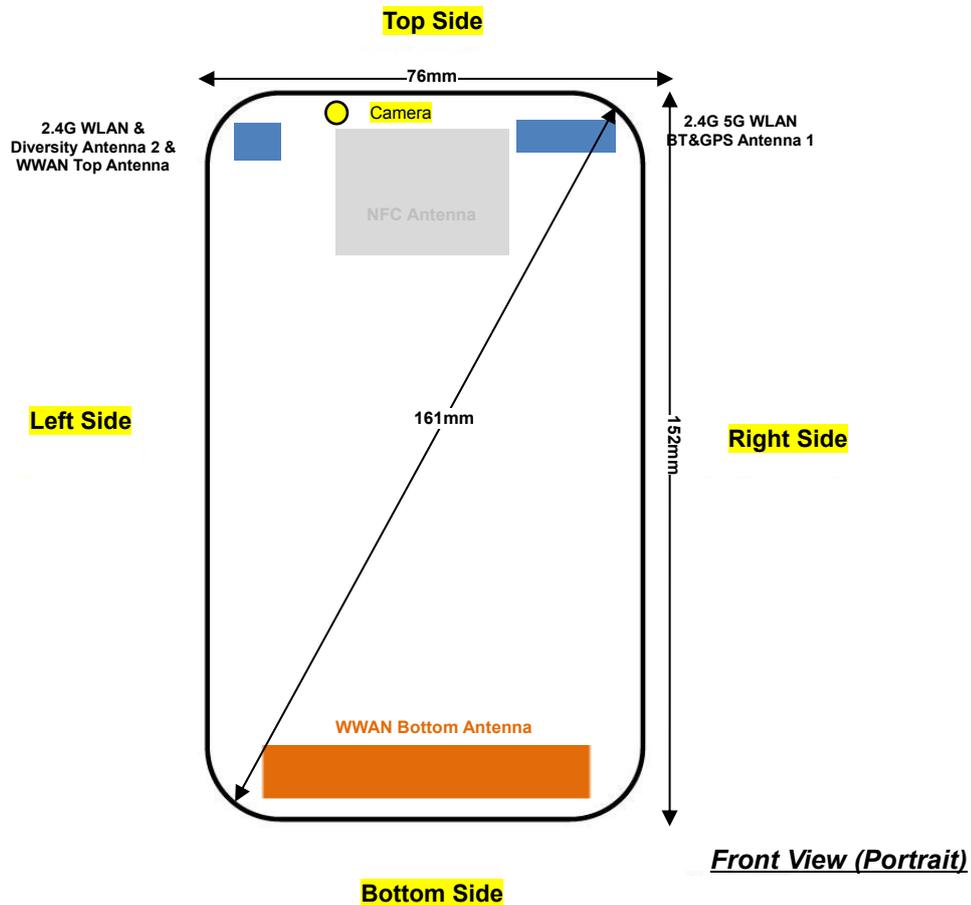

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	≤ 25mm	≤ 25mm	≤ 25mm	146mm	65mm	≤ 25mm
WWAN Bottom Antenna	≤ 25mm	≤ 25mm	136mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN Antenna 1	≤ 25mm	≤ 25mm	≤ 25mm	145mm	≤ 25mm	54mm
WLAN Antenna 2	≤ 25mm	≤ 25mm	≤ 25mm	146mm	65mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Top Antenna	Yes	Yes	Yes	No	No	Yes
WWAN Bottom Antenna	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN Antenna 1	Yes	Yes	Yes	No	Yes	No
WLAN Antenna 2	Yes	Yes	Yes	No	No	Yes

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g Product specific 10g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. All hotspot reported SAR are all less than 1.2W/Kg, so no need to evaluate the extremity SAR. For WLAN5GHz does not support hotspot function, so Product specific 10g SAR full test.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**CMDA Note:**

1. Per KDB 941225 D01v03r01, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03r01, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03r01, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 / B13 / B17 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17/2/5 SAR test was covered by Band 12/25/26; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, for U-NII-1 Head and Body-worn SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
6. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS 2 Tx Slots	Right Cheek	189	836.4	30.45	31.00	1.135	-0.02	Top	0.805	0.914
	GSM850	GPRS 2 Tx Slots	Right Cheek	128	824.2	30.35	31.00	1.161	0.01	Top	0.759	0.882
	GSM850	GPRS 2 Tx Slots	Right Cheek	251	848.8	30.44	31.00	1.138	0.13	Top	0.766	0.871
	GSM850	GPRS 2 Tx Slots	Right Tilted	189	836.4	30.45	31.00	1.135	0.13	Top	0.529	0.600
	GSM850	GPRS 2 Tx Slots	Left Cheek	189	836.4	30.45	31.00	1.135	0.04	Top	0.437	0.496
	GSM850	GPRS 2 Tx Slots	Left Tilted	189	836.4	30.45	31.00	1.135	0.08	Top	0.371	0.421
	GSM850	GPRS (2 Tx slots)	Right Cheek	189	836.4	30.45	31.00	1.135	0.09	Bottom	0.094	0.107
	GSM850	GPRS (2 Tx slots)	Right Tilted	189	836.4	30.45	31.00	1.135	-0.01	Bottom	0.039	0.044
	GSM850	GPRS (2 Tx slots)	Left Cheek	189	836.4	30.45	31.00	1.135	0.01	Bottom	0.070	0.079
	GSM850	GPRS (2 Tx slots)	Left Tilted	189	836.4	30.45	31.00	1.135	0.07	Bottom	0.043	0.049
	GSM1900	GPRS 4 Tx slots	Right Cheek	810	1909.8	26.57	27.50	1.239	0.09	Top	0.827	1.024
02	GSM1900	GPRS 4 Tx slots	Right Cheek	512	1850.2	26.45	27.50	1.274	0.05	Top	0.830	1.057
	GSM1900	GPRS 4 Tx slots	Right Cheek	661	1880	26.49	27.50	1.262	-0.03	Top	0.822	1.037
	GSM1900	GPRS 4 Tx slots	Right Tilted	810	1909.8	26.57	27.50	1.239	0.05	Top	0.434	0.538
	GSM1900	GPRS 4 Tx slots	Left Cheek	810	1909.8	26.57	27.50	1.239	0.01	Top	0.272	0.337
	GSM1900	GPRS 4 Tx slots	Left Tilted	810	1909.8	26.57	27.50	1.239	-0.01	Top	0.221	0.274
	GSM1900	GPRS (4 Tx slots)	Right Cheek	810	1909.8	26.57	27.50	1.239	0.05	Bottom	0.143	0.177
	GSM1900	GPRS (4 Tx slots)	Right Tilted	810	1909.8	26.57	27.50	1.239	0.12	Bottom	0.093	0.115
	GSM1900	GPRS (4 Tx slots)	Left Cheek	810	1909.8	26.57	27.50	1.239	0.04	Bottom	0.209	0.259
	GSM1900	GPRS (4 Tx slots)	Left Tilted	810	1909.8	26.57	27.50	1.239	0.03	Bottom	0.078	0.097



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4233	846.6	23.79	24.00	1.050	0.02	Top	0.810	0.850
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4132	826.4	23.78	24.00	1.052	0.01	Top	0.895	0.942
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4182	836.4	23.72	24.00	1.067	-0.03	Top	0.880	0.939
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4233	846.6	23.79	24.00	1.050	0.08	Top	0.585	0.614
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4233	846.6	23.79	24.00	1.050	0.01	Top	0.513	0.538
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4233	846.6	23.79	24.00	1.050	0.13	Top	0.432	0.453
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4132	826.4	24.67	25.00	1.079	0.04	Bottom	0.229	0.247
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4132	826.4	24.67	25.00	1.079	0.13	Bottom	0.100	0.108
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4132	826.4	24.67	25.00	1.079	0.13	Bottom	0.203	0.219
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4132	826.4	24.67	25.00	1.079	0.03	Bottom	0.119	0.128
04	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1513	1752.6	20.46	21.00	1.132	0.08	Top	0.928	1.051
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1312	1712.4	20.32	21.00	1.169	-0.03	Top	0.894	1.046
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1413	1732.6	20.36	21.00	1.159	-0.03	Top	0.884	1.024
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	1513	1752.6	20.46	21.00	1.132	0.01	Top	0.422	0.478
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1513	1752.6	20.46	21.00	1.132	0.11	Top	0.458	0.519
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	1513	1752.6	20.46	21.00	1.132	-0.02	Top	0.328	0.371
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1513	1752.6	22.97	23.00	1.007	0.04	Bottom	0.166	0.167
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	1513	1752.6	22.97	23.00	1.007	0.07	Bottom	0.104	0.105
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1513	1752.6	22.97	23.00	1.007	0.14	Bottom	0.089	0.090
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	1513	1752.6	22.97	23.00	1.007	0.07	Bottom	0.074	0.075
05	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9262	1852.4	21.56	22.00	1.107	-0.03	Top	0.963	1.066
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9400	1880	21.53	22.00	1.114	-0.09	Top	0.920	1.025
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9538	1907.6	21.55	22.00	1.109	0.02	Top	0.856	0.949
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9262	1852.4	21.56	22.00	1.107	-0.05	Top	0.510	0.564
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	1852.4	21.56	22.00	1.107	-0.01	Top	0.319	0.353
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9262	1852.4	21.56	22.00	1.107	0.02	Top	0.245	0.271
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9538	1907.6	24.19	24.50	1.074	0.08	Bottom	0.313	0.336
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9538	1907.6	24.19	24.50	1.074	0.01	Bottom	0.181	0.194
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9538	1907.6	24.19	24.50	1.074	0.04	Bottom	0.486	0.522
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9538	1907.6	24.19	24.50	1.074	0.06	Bottom	0.170	0.183



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	CDMA2000 BC10	RC3 SO55	Right Cheek	476	817.9	22.99	24.00	1.262	-0.02	Top	0.714	0.901
	CDMA2000 BC10	RC3 SO55	Right Cheek	580	820.5	22.95	24.00	1.274	-0.18	Top	0.488	0.621
	CDMA2000 BC10	RC3 SO55	Right Cheek	684	823.1	22.98	24.00	1.265	-0.16	Top	0.475	0.601
	CDMA2000 BC10	RC3 SO55	Right Tilted	476	817.9	22.99	24.00	1.262	-0.09	Top	0.410	0.517
	CDMA2000 BC10	RC3 SO55	Left Cheek	476	817.9	22.99	24.00	1.262	-0.02	Top	0.458	0.578
	CDMA2000 BC10	RC3 SO55	Left Tilted	476	817.9	22.99	24.00	1.262	-0.03	Top	0.333	0.420
	CDMA2000 BC10	RC3 SO55	Right Cheek	476	817.9	22.99	24.00	1.262	0.02	Bottom	0.343	0.433
	CDMA2000 BC10	RC3 SO55	Right Tilted	476	817.9	22.99	24.00	1.262	0.05	Bottom	0.171	0.216
	CDMA2000 BC10	RC3 SO55	Left Cheek	476	817.9	22.99	24.00	1.262	0.07	Bottom	0.288	0.363
	CDMA2000 BC10	RC3 SO55	Left Tilted	476	817.9	22.99	24.00	1.262	0.12	Bottom	0.198	0.250
07	CDMA2000 BC0	RC3 SO55	Right Cheek	1013	824.7	22.93	23.50	1.140	0.03	Top	0.666	0.759
	CDMA2000 BC0	RC3 SO55	Right Tilted	1013	824.7	22.93	23.50	1.140	-0.04	Top	0.365	0.416
	CDMA2000 BC0	RC3 SO55	Left Cheek	1013	824.7	22.93	23.50	1.140	-0.03	Top	0.423	0.482
	CDMA2000 BC0	RC3 SO55	Left Tilted	1013	824.7	22.93	23.50	1.140	0.05	Top	0.311	0.355
	CDMA2000 BC0	RC3 SO55	Right Cheek	1013	824.7	22.93	23.50	1.140	0.05	Bottom	0.337	0.384
	CDMA2000 BC0	RC3 SO55	Right Tilted	1013	824.7	22.93	23.50	1.140	0.08	Bottom	0.160	0.182
	CDMA2000 BC0	RC3 SO55	Left Cheek	1013	824.7	22.93	23.50	1.140	0.08	Bottom	0.273	0.311
	CDMA2000 BC0	RC3 SO55	Left Tilted	1013	824.7	22.93	23.50	1.140	0.04	Bottom	0.178	0.203
	CDMA2000 BC1	RC3 SO55	Right Cheek	1175	1908.75	22.28	22.50	1.052	0.01	Top	0.925	0.973
08	CDMA2000 BC1	RC3 SO55	Right Cheek	25	1851.25	22.05	22.50	1.109	-0.04	Top	1.070	1.187
	CDMA2000 BC1	RC3 SO55	Right Cheek	600	1880	22.16	22.50	1.081	-0.06	Top	0.999	1.080
	CDMA2000 BC1	RC3 SO55	Right Tilted	1175	1908.75	22.28	22.50	1.052	0.01	Top	0.508	0.534
	CDMA2000 BC1	RC3 SO55	Left Cheek	1175	1908.75	22.28	22.50	1.052	-0.04	Top	0.378	0.398
	CDMA2000 BC1	RC3 SO55	Left Tilted	1175	1908.75	22.28	22.50	1.052	0.01	Top	0.249	0.262
	CDMA2000 BC1	RC3 SO55	Right Cheek	1175	1908.75	24.37	24.50	1.030	0.07	Bottom	0.307	0.316
	CDMA2000 BC1	RC3 SO55	Right Tilted	1175	1908.75	24.37	24.50	1.030	0.06	Bottom	0.230	0.237
	CDMA2000 BC1	RC3 SO55	Left Cheek	1175	1908.75	24.37	24.50	1.030	-0.01	Bottom	0.480	0.495
	CDMA2000 BC1	RC3 SO55	Left Tilted	1175	1908.75	24.37	24.50	1.030	0.08	Bottom	0.184	0.190



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
09	LTE Band 12	10M	QPSK	1RB	0Offset	Right Cheek	23095	707.5	23.81	24.50	1.172	-0.01	Top	0.459	0.538
	LTE Band 12	10M	QPSK	25RB	0Offset	Right Cheek	23095	707.5	22.90	23.50	1.148	0.06	Top	0.327	0.375
	LTE Band 12	10M	QPSK	1RB	0Offset	Right Tilted	23095	707.5	23.81	24.50	1.172	0.16	Top	0.275	0.322
	LTE Band 12	10M	QPSK	25RB	0Offset	Right Tilted	23095	707.5	22.90	23.50	1.148	0.18	Top	0.236	0.271
	LTE Band 12	10M	QPSK	1RB	0Offset	Left Cheek	23095	707.5	23.81	24.50	1.172	-0.01	Top	0.210	0.246
	LTE Band 12	10M	QPSK	25RB	0Offset	Left Cheek	23095	707.5	22.90	23.50	1.148	0.08	Top	0.178	0.204
	LTE Band 12	10M	QPSK	1RB	0Offset	Left Tilted	23095	707.5	23.81	24.50	1.172	0.11	Top	0.177	0.207
	LTE Band 12	10M	QPSK	25RB	0Offset	Left Tilted	23095	707.5	22.90	23.50	1.148	-0.06	Top	0.151	0.173
	LTE Band 12	10M	QPSK	1RB	0offset	Right Cheek	23095	707.5	23.81	24.50	1.172	0.04	Bottom	0.085	0.100
	LTE Band 12	10M	QPSK	1RB	0offset	Right Tilted	23095	707.5	23.81	24.50	1.172	0.11	Bottom	0.023	0.027
	LTE Band 12	10M	QPSK	1RB	0offset	Left Cheek	23095	707.5	23.81	24.50	1.172	0.03	Bottom	0.076	0.089
	LTE Band 12	10M	QPSK	1RB	0offset	Left Tilted	23095	707.5	23.81	24.50	1.172	0.08	Bottom	0.049	0.057
	LTE Band 12	10M	QPSK	25RB	0offset	Right Cheek	23095	707.5	22.90	23.50	1.148	0.07	Bottom	0.073	0.084
	LTE Band 12	10M	QPSK	25RB	0offset	Right Tilted	23095	707.5	22.90	23.50	1.148	0.06	Bottom	0.034	0.039
	LTE Band 12	10M	QPSK	25RB	0offset	Left Cheek	23095	707.5	22.90	23.50	1.148	0.04	Bottom	0.066	0.076
	LTE Band 12	10M	QPSK	25RB	0offset	Left Tilted	23095	707.5	22.90	23.50	1.148	0.13	Bottom	0.041	0.047
10	LTE Band 13	10M	QPSK	1RB	0Offset	Right Cheek	23230	782	23.90	24.50	1.148	0.07	Top	0.764	0.877
	LTE Band 13	10M	QPSK	25RB	0Offset	Right Cheek	23230	782	22.98	23.50	1.127	0.06	Top	0.495	0.558
	LTE Band 13	10M	QPSK	50RB	0Offset	Right Cheek	23230	782	22.97	23.50	1.130	0.07	Top	0.491	0.555
	LTE Band 13	10M	QPSK	1RB	0Offset	Right Tilted	23230	782	23.90	24.50	1.148	0.08	Top	0.421	0.483
	LTE Band 13	10M	QPSK	25RB	0Offset	Right Tilted	23230	782	22.98	23.50	1.127	0.08	Top	0.346	0.390
	LTE Band 13	10M	QPSK	1RB	0Offset	Left Cheek	23230	782	23.90	24.50	1.148	-0.06	Top	0.340	0.390
	LTE Band 13	10M	QPSK	25RB	0Offset	Left Cheek	23230	782	22.98	23.50	1.127	-0.02	Top	0.283	0.319
	LTE Band 13	10M	QPSK	1RB	0Offset	Left Tilted	23230	782	23.90	24.50	1.148	0.17	Top	0.294	0.338
	LTE Band 13	10M	QPSK	25RB	0Offset	Left Tilted	23230	782	22.98	23.50	1.127	0.02	Top	0.246	0.277
	LTE Band 13	10M	QPSK	1RB	0offset	Right Cheek	23230	782	23.90	24.50	1.148	0.09	Bottom	0.191	0.219
	LTE Band 13	10M	QPSK	1RB	0offset	Right Tilted	23230	782	23.90	24.50	1.148	0.07	Bottom	0.087	0.100
	LTE Band 13	10M	QPSK	1RB	0offset	Left Cheek	23230	782	23.90	24.50	1.148	0.08	Bottom	0.166	0.191
	LTE Band 13	10M	QPSK	1RB	0offset	Left Tilted	23230	782	23.90	24.50	1.148	-0.01	Bottom	0.100	0.115
	LTE Band 13	10M	QPSK	25RB	0offset	Right Cheek	23230	782	22.98	23.50	1.127	0.05	Bottom	0.162	0.183
	LTE Band 13	10M	QPSK	25RB	0offset	Right Tilted	23230	782	22.98	23.50	1.127	0.1	Bottom	0.075	0.085
	LTE Band 13	10M	QPSK	25RB	0offset	Left Cheek	23230	782	22.98	23.50	1.127	0.05	Bottom	0.142	0.160
	LTE Band 13	10M	QPSK	25RB	0offset	Left Tilted	23230	782	22.98	23.50	1.127	0.05	Bottom	0.085	0.096



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
11	LTE Band 26	15M	QPSK	1RB	0Offset	Right Cheek	26865	831.5	23.30	24.50	1.318	0.11	Top	0.653	0.861
	LTE Band 26	15M	QPSK	36RB	0Offset	Right Cheek	26865	831.5	22.31	23.50	1.315	-0.01	Top	0.538	0.708
	LTE Band 26	15M	QPSK	75RB	0Offset	Right Cheek	26865	831.5	22.34	23.50	1.306	0.03	Top	0.516	0.674
	LTE Band 26	15M	QPSK	1RB	0Offset	Right Tilted	26865	831.5	23.30	24.50	1.318	0.08	Top	0.464	0.612
	LTE Band 26	15M	QPSK	36RB	0Offset	Right Tilted	26865	831.5	22.31	23.50	1.315	0.05	Top	0.407	0.535
	LTE Band 26	15M	QPSK	1RB	0Offset	Left Cheek	26865	831.5	23.30	24.50	1.318	0.01	Top	0.400	0.527
	LTE Band 26	15M	QPSK	36RB	0Offset	Left Cheek	26865	831.5	22.31	23.50	1.315	-0.06	Top	0.349	0.459
	LTE Band 26	15M	QPSK	1RB	0Offset	Left Tilted	26865	831.5	23.30	24.50	1.318	0.05	Top	0.335	0.442
	LTE Band 26	15M	QPSK	36RB	0Offset	Left Tilted	26865	831.5	22.31	23.50	1.315	-0.07	Top	0.294	0.387
	LTE Band 26	15M	QPSK	1RB	0offset	Right Cheek	26865	831.5	23.30	24.50	1.318	0.04	Bottom	0.223	0.294
	LTE Band 26	15M	QPSK	1RB	0offset	Right Tilted	26865	831.5	23.30	24.50	1.318	0.14	Bottom	0.149	0.196
	LTE Band 26	15M	QPSK	1RB	0offset	Left Cheek	26865	831.5	23.30	24.50	1.318	0.08	Bottom	0.209	0.276
	LTE Band 26	15M	QPSK	1RB	0offset	Left Tilted	26865	831.5	23.30	24.50	1.318	0.08	Bottom	0.169	0.223
	LTE Band 26	15M	QPSK	36RB	0offset	Right Cheek	26865	831.5	22.31	23.50	1.315	0.02	Bottom	0.180	0.237
	LTE Band 26	15M	QPSK	36RB	0offset	Right Tilted	26865	831.5	22.31	23.50	1.315	0.05	Bottom	0.116	0.153
	LTE Band 26	15M	QPSK	36RB	0offset	Left Cheek	26865	831.5	22.31	23.50	1.315	0.05	Bottom	0.173	0.228
	LTE Band 26	15M	QPSK	36RB	0offset	Left Tilted	26865	831.5	22.31	23.50	1.315	0.11	Bottom	0.134	0.176
12	LTE Band 4	20M	QPSK	1RB	0Offset	Right Cheek	20175	1732.5	21.16	21.50	1.081	-0.05	Top	1.000	1.081
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Cheek	20175	1732.5	19.66	20.50	1.213	-0.01	Top	0.746	0.905
	LTE Band 4	20M	QPSK	100RB	0Offset	Right Cheek	20175	1732.5	19.54	20.50	1.247	-0.02	Top	0.711	0.887
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Tilted	20175	1732.5	21.16	21.50	1.081	0.03	Top	0.621	0.672
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Tilted	20175	1732.5	19.66	20.50	1.213	-0.02	Top	0.452	0.548
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Cheek	20175	1732.5	21.16	21.50	1.081	0.01	Top	0.538	0.582
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Cheek	20175	1732.5	19.66	20.50	1.213	0.01	Top	0.394	0.478
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Tilted	20175	1732.5	21.16	21.50	1.081	0.01	Top	0.476	0.515
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Tilted	20175	1732.5	19.66	20.50	1.213	0.15	Top	0.320	0.388
	LTE Band 4	20M	QPSK	1RB	0offset	Right Cheek	20175	1732.5	22.95	23.00	1.012	0.03	Bottom	0.138	0.140
	LTE Band 4	20M	QPSK	1RB	0offset	Right Tilted	20175	1732.5	22.95	23.00	1.012	0.12	Bottom	0.052	0.053
	LTE Band 4	20M	QPSK	1RB	0offset	Left Cheek	20175	1732.5	22.95	23.00	1.012	0.08	Bottom	0.073	0.074
	LTE Band 4	20M	QPSK	1RB	0offset	Left Tilted	20175	1732.5	22.95	23.00	1.012	0.02	Bottom	0.039	0.039
	LTE Band 4	20M	QPSK	50RB	0offset	Right Cheek	20175	1732.5	21.59	22.50	1.233	0.07	Bottom	0.103	0.127
	LTE Band 4	20M	QPSK	50RB	0offset	Right Tilted	20175	1732.5	21.59	22.50	1.233	0.11	Bottom	0.039	0.048
	LTE Band 4	20M	QPSK	50RB	0offset	Left Cheek	20175	1732.5	21.59	22.50	1.233	0.03	Bottom	0.053	0.065
	LTE Band 4	20M	QPSK	50RB	0offset	Left Tilted	20175	1732.5	21.59	22.50	1.233	0.06	Bottom	0.028	0.035



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	LTE Band 25	20M	QPSK	1RB	0Offset	Right Cheek	26340	1880	21.23	21.50	1.064	-0.07	Top	0.922	0.981
	LTE Band 25	20M	QPSK	1RB	0Offset	Right Cheek	26140	1860	21.21	21.50	1.069	-0.03	Top	0.960	1.026
	LTE Band 25	20M	QPSK	1RB	0Offset	Right Cheek	26590	1905	21.18	21.50	1.076	-0.03	Top	0.908	0.977
	LTE Band 25	20M	QPSK	50RB	0Offset	Right Cheek	26340	1880	19.80	20.50	1.175	-0.02	Top	0.666	0.782
	LTE Band 25	20M	QPSK	100RB	0Offset	Right Cheek	26340	1880	19.65	20.50	1.216	-0.03	Top	0.641	0.780
	LTE Band 25	20M	QPSK	1RB	0Offset	Right Tilted	26340	1880	21.23	21.50	1.064	-0.08	Top	0.524	0.558
	LTE Band 25	20M	QPSK	50RB	0Offset	Right Tilted	26340	1880	19.80	20.50	1.175	0.02	Top	0.374	0.439
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Cheek	26340	1880	21.23	21.50	1.064	0.04	Top	0.383	0.408
	LTE Band 25	20M	QPSK	50RB	0Offset	Left Cheek	26340	1880	19.80	20.50	1.175	0.01	Top	0.276	0.324
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Tilted	26340	1880	21.23	21.50	1.064	-0.06	Top	0.285	0.303
	LTE Band 25	20M	QPSK	50RB	0Offset	Left Tilted	26340	1880	19.80	20.50	1.175	-0.14	Top	0.181	0.213
	LTE Band 25	20M	QPSK	1RB	0offset	Right Cheek	26340	1880	23.66	24.00	1.081	0.14	Bottom	0.296	0.320
	LTE Band 25	20M	QPSK	1RB	0offset	Right Tilted	26340	1880	23.66	24.00	1.081	0.09	Bottom	0.143	0.155
LTE Band 25	20M	QPSK	1RB	0offset	Left Cheek	26340	1880	23.66	24.00	1.081	0.03	Bottom	0.417	0.451	
LTE Band 25	20M	QPSK	1RB	0offset	Left Tilted	26340	1880	23.66	24.00	1.081	0.14	Bottom	0.133	0.144	
LTE Band 25	20M	QPSK	50RB	0offset	Right Cheek	26340	1880	22.77	23.00	1.054	0.09	Bottom	0.224	0.236	
LTE Band 25	20M	QPSK	50RB	0offset	Right Tilted	26340	1880	22.77	23.00	1.054	0.07	Bottom	0.117	0.123	
LTE Band 25	20M	QPSK	50RB	0offset	Left Cheek	26340	1880	22.77	23.00	1.054	0.01	Bottom	0.348	0.367	
LTE Band 25	20M	QPSK	50RB	0offset	Left Tilted	26340	1880	22.77	23.00	1.054	0.12	Bottom	0.109	0.115	
14	LTE Band 30	10M	QPSK	1RB	25Offset	Right Cheek	27710	2310	23.25	23.50	1.059	0.06	Top	1.120	1.186
	LTE Band 30	10M	QPSK	25RB	12Offset	Right Cheek	27710	2310	22.43	22.50	1.016	0.01	Top	0.949	0.964
	LTE Band 30	10M	QPSK	50RB	0Offset	Right Cheek	27710	2310	22.31	22.50	1.045	0.17	Top	0.947	0.989
	LTE Band 30	10M	QPSK	1RB	25Offset	Right Tilted	27710	2310	23.25	23.50	1.059	0.04	Top	0.846	0.896
	LTE Band 30	10M	QPSK	25RB	12Offset	Right Tilted	27710	2310	22.43	22.50	1.016	0.05	Top	0.742	0.754
	LTE Band 30	10M	QPSK	50RB	0Offset	Right Tilted	27710	2310	22.31	22.50	1.045	0.08	Top	0.732	0.765
	LTE Band 30	10M	QPSK	1RB	25Offset	Left Cheek	27710	2310	23.25	23.50	1.059	0.04	Top	0.412	0.436
	LTE Band 30	10M	QPSK	25RB	12Offset	Left Cheek	27710	2310	22.43	22.50	1.016	0.1	Top	0.352	0.358
	LTE Band 30	10M	QPSK	1RB	25Offset	Left Tilted	27710	2310	23.25	23.50	1.059	0.19	Top	0.494	0.523
	LTE Band 30	10M	QPSK	25RB	12Offset	Left Tilted	27710	2310	22.43	22.50	1.016	0.16	Top	0.451	0.458
	LTE Band 30	10M	QPSK	1RB	25offset	Right Cheek	27710	2310	23.25	24.50	1.334	0.09	Bottom	0.130	0.173
	LTE Band 30	10M	QPSK	1RB	25offset	Right Tilted	27710	2310	23.25	24.50	1.334	0.01	Bottom	0.100	0.133
	LTE Band 30	10M	QPSK	1RB	25offset	Left Cheek	27710	2310	23.25	24.50	1.334	0.17	Bottom	0.242	0.323
LTE Band 30	10M	QPSK	1RB	25offset	Left Tilted	27710	2310	23.25	24.50	1.334	0.02	Bottom	0.091	0.121	
LTE Band 30	10M	QPSK	25RB	12offset	Right Cheek	27710	2310	22.43	23.50	1.279	0.06	Bottom	0.113	0.145	
LTE Band 30	10M	QPSK	25RB	12offset	Right Tilted	27710	2310	22.43	23.50	1.279	0.05	Bottom	0.084	0.107	
LTE Band 30	10M	QPSK	25RB	12offset	Left Cheek	27710	2310	22.43	23.50	1.279	0.04	Bottom	0.202	0.258	
LTE Band 30	10M	QPSK	25RB	12offset	Left Tilted	27710	2310	22.43	23.50	1.279	0.04	Bottom	0.079	0.101	



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1RB	0offset	Right Cheek	21350	2560	23.92	24.50	1.143	0.06	Bottom	0.163	0.186
	LTE Band 7	20M	QPSK	1RB	0offset	Right Tilted	21350	2560	23.92	24.50	1.143	0.08	Bottom	0.161	0.184
15	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	21350	2560	23.92	24.50	1.143	0.01	Bottom	0.395	0.451
	LTE Band 7	20M	QPSK	1RB	0offset	Left Tilted	21350	2560	23.92	24.50	1.143	0.01	Bottom	0.115	0.131
	LTE Band 7	20M	QPSK	50RB	0offset	Right Cheek	21350	2560	22.98	23.50	1.127	0.03	Bottom	0.112	0.126
	LTE Band 7	20M	QPSK	50RB	0offset	Right Tilted	21350	2560	22.98	23.50	1.127	0.04	Bottom	0.104	0.117
	LTE Band 7	20M	QPSK	50RB	0offset	Left Cheek	21350	2560	22.98	23.50	1.127	0.01	Bottom	0.273	0.308
	LTE Band 7	20M	QPSK	50RB	0offset	Left Tilted	21350	2560	22.98	23.50	1.127	0.08	Bottom	0.076	0.086

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1RB	0offset	Right Cheek	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.08	Bottom	0.055	0.059
	LTE Band 41	20M	QPSK	1RB	0offset	Right Tilted	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.17	Bottom	0.052	0.056
16	LTE Band 41	20M	QPSK	1RB	0offset	Left Cheek	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.04	Bottom	0.137	0.148
	LTE Band 41	20M	QPSK	1RB	0offset	Left Tilted	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.06	Bottom	0.037	0.040
	LTE Band 41	20M	QPSK	50RB	0offset	Right Cheek	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.04	Bottom	0.036	0.043
	LTE Band 41	20M	QPSK	50RB	0offset	Right Tilted	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.08	Bottom	0.034	0.041
	LTE Band 41	20M	QPSK	50RB	0offset	Left Cheek	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.05	Bottom	0.094	0.113
	LTE Band 41	20M	QPSK	50RB	0offset	Left Tilted	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.06	Bottom	0.023	0.028



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Peak SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.335	0.08	0.185	0.207
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.326	0.01	0.183	0.205
17	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	1.4	0.06	0.676	0.757
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	1.29	0.01	0.570	0.638
18	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.217	0.02	0.118	0.139
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.178			
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.0634			
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.0524			
	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.167			
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.155			
19	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.682	0.07	0.328	0.350
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.623			

Plot No.	Band	Mode	Test Position	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Peak SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Right Cheek	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	0.337			
	WLAN 5.2GHz	802.11a 6Mbps	Right Tilted	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	0.250			
	WLAN 5.2GHz	802.11a 6Mbps	Left Cheek	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	0.492			
20	WLAN 5.2GHz	802.11a 6Mbps	Left Tilted	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	0.504	-0.06	0.208	0.228
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	0.244			
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	0.412			
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	0.676			
21	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	0.734	0.02	0.303	0.338



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx Slots	Front	10	189	836.4	30.45	31.00	1.135	-0.03	Top	0.142	0.161
22	GSM850	GPRS 2 Tx Slots	Back	10	189	836.4	30.45	31.00	1.135	-0.03	Top	0.258	0.293
	GSM850	GPRS 2 Tx Slots	Left Side	10	189	836.4	30.45	31.00	1.135	-0.02	Top	0.171	0.194
	GSM850	GPRS 2 Tx Slots	Top Side	10	189	836.4	30.45	31.00	1.135	0.12	Top	0.126	0.143
	GSM850	GPRS (2 Tx slots)	Front	10	189	836.4	30.45	31.00	1.135	0.03	Bottom	0.109	0.124
	GSM850	GPRS (2 Tx slots)	Back	10	189	836.4	30.45	31.00	1.135	0.05	Bottom	0.186	0.211
	GSM850	GPRS (2 Tx slots)	Left side	10	189	836.4	30.45	31.00	1.135	0.04	Bottom	0.074	0.084
	GSM850	GPRS (2 Tx slots)	Right side	10	189	836.4	30.45	31.00	1.135	0.06	Bottom	0.226	0.257
	GSM850	GPRS (2 Tx slots)	Bottom side	10	189	836.4	30.45	31.00	1.135	0.06	Bottom	0.087	0.099
	GSM1900	GPRS 4 Tx slots	Front	10	810	1909.8	26.57	27.50	1.239	-0.06	Top	0.082	0.102
	GSM1900	GPRS 4 Tx slots	Back	10	810	1909.8	26.57	27.50	1.239	-0.05	Top	0.068	0.084
	GSM1900	GPRS 4 Tx slots	Left Side	10	810	1909.8	26.57	27.50	1.239	-0.16	Top	0.075	0.093
	GSM1900	GPRS 4 Tx slots	Top Side	10	810	1909.8	26.57	27.50	1.239	-0.17	Top	0.038	0.047
	GSM1900	GPRS (4 Tx slots)	Front	10	810	1909.8	26.57	27.50	1.239	-0.03	Bottom	0.207	0.256
23	GSM1900	GPRS (4 Tx slots)	Back	10	810	1909.8	26.57	27.50	1.239	-0.02	Bottom	0.290	0.359
	GSM1900	GPRS (4 Tx slots)	Left side	10	810	1909.8	26.57	27.50	1.239	0.11	Bottom	0.207	0.256
	GSM1900	GPRS (4 Tx slots)	Right side	10	810	1909.8	26.57	27.50	1.239	0.07	Bottom	0.069	0.085
	GSM1900	GPRS (4 Tx slots)	Bottom side	10	810	1909.8	26.57	27.50	1.239	-0.01	Bottom	0.126	0.156



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
24	WCDMA Band V	RMC 12.2Kbps	Front	10	4233	846.6	23.79	24.00	1.050	0.09	Top	0.196	0.206
	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	23.79	24.00	1.050	0.1	Top	0.402	0.422
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	4233	846.6	23.79	24.00	1.050	0.01	Top	0.206	0.216
	WCDMA Band V	RMC 12.2Kbps	Top Side	10	4233	846.6	23.79	24.00	1.050	0.1	Top	0.148	0.155
	WCDMA Band V	RMC 12.2Kbps	Front	10	4132	826.4	24.67	25.00	1.079	-0.03	Bottom	0.227	0.245
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	24.67	25.00	1.079	0.01	Bottom	0.370	0.399
	WCDMA Band V	RMC 12.2Kbps	Left side	10	4132	826.4	24.67	25.00	1.079	0.05	Bottom	0.171	0.184
	WCDMA Band V	RMC 12.2Kbps	Right side	10	4132	826.4	24.67	25.00	1.079	0.07	Bottom	0.366	0.395
	WCDMA Band V	RMC 12.2Kbps	Bottom side	10	4132	826.4	24.67	25.00	1.079	0.01	Bottom	0.176	0.190
25	WCDMA Band IV	RMC 12.2Kbps	Front	10	1513	1752.6	20.46	21.00	1.132	-0.12	Top	0.154	0.174
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	20.46	21.00	1.132	-0.06	Top	0.146	0.165
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	1513	1752.6	20.46	21.00	1.132	0.08	Top	0.113	0.128
	WCDMA Band IV	RMC 12.2Kbps	Top Side	10	1513	1752.6	20.46	21.00	1.132	0.04	Top	0.117	0.132
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1513	1752.6	22.97	23.00	1.007	0.08	Bottom	0.685	0.690
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	22.97	23.00	1.007	0.14	Bottom	1.110	1.118
	WCDMA Band IV	RMC 12.2Kbps	Left side	10	1513	1752.6	22.97	23.00	1.007	-0.07	Bottom	0.139	0.140
	WCDMA Band IV	RMC 12.2Kbps	Right side	10	1513	1752.6	22.97	23.00	1.007	-0.03	Bottom	0.247	0.249
	WCDMA Band IV	RMC 12.2Kbps	Bottom side	10	1513	1752.6	22.97	23.00	1.007	0.17	Bottom	1.050	1.057
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	22.88	23.00	1.028	0.17	Bottom	1.020	1.049
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	22.83	23.00	1.040	0.06	Bottom	1.090	1.134
	WCDMA Band IV	RMC 12.2Kbps	Bottom side	10	1312	1712.4	22.88	23.00	1.028	0.03	Bottom	1.100	1.131
25	WCDMA Band IV	RMC 12.2Kbps	Bottom side	10	1413	1732.6	22.83	23.00	1.040	0.02	Bottom	1.120	1.165



Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band II	RMC 12.2Kbps	Front	10	9262	1852.4	21.56	22.00	1.107	0.01	Top	0.123	0.136
	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	21.56	22.00	1.107	-0.03	Top	0.116	0.128
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	9262	1852.4	21.56	22.00	1.107	-0.03	Top	0.127	0.141
	WCDMA Band II	RMC 12.2Kbps	Top Side	10	9262	1852.4	21.56	22.00	1.107	-0.04	Top	0.082	0.091
	WCDMA Band II	RMC 12.2Kbps	Front	10	9538	1907.6	24.19	24.50	1.074	0.07	Bottom	0.517	0.555
26	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	24.19	24.50	1.074	-0.11	Bottom	0.647	0.695
	WCDMA Band II	RMC 12.2Kbps	Left side	10	9538	1907.6	24.19	24.50	1.074	0.05	Bottom	0.594	0.638
	WCDMA Band II	RMC 12.2Kbps	Right side	10	9538	1907.6	24.19	24.50	1.074	0.07	Bottom	0.095	0.102
	WCDMA Band II	RMC 12.2Kbps	Bottom side	10	9538	1907.6	24.19	24.50	1.074	0.11	Bottom	0.277	0.297



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Antenna	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RTAP153.6K	Front	10	476	817.9	22.98	24.00	1.265	Top	-0.09	0.125	0.158
	CDMA2000 BC10	RTAP153.6K	Back	10	476	817.9	22.98	24.00	1.265	Top	-0.01	0.260	0.329
	CDMA2000 BC10	RTAP153.6K	Left Side	10	476	817.9	22.98	24.00	1.265	Top	-0.07	0.132	0.167
	CDMA2000 BC10	RTAP153.6K	Top Side	10	476	817.9	22.98	24.00	1.265	Top	-0.02	0.101	0.128
	CDMA2000 BC10	RTAP153.6K	Front	10	476	817.9	22.98	24.00	1.265	Bottom	0.03	0.396	0.501
	CDMA2000 BC10	RTAP153.6K	Back	10	476	817.9	22.98	24.00	1.265	Bottom	0.04	0.559	0.707
	CDMA2000 BC10	RTAP153.6K	Left side	10	476	817.9	22.98	24.00	1.265	Bottom	0.02	0.238	0.301
27	CDMA2000 BC10	RTAP153.6K	Right side	10	476	817.9	22.98	24.00	1.265	Bottom	0.02	0.609	0.770
	CDMA2000 BC10	RTAP153.6K	Bottom side	10	476	817.9	22.98	24.00	1.265	Bottom	0.1	0.267	0.338
	CDMA2000 BC0	RTAP153.6K	Front	10	1013	824.7	22.92	23.50	1.143	Top	-0.04	0.111	0.127
	CDMA2000 BC0	RTAP153.6K	Back	10	1013	824.7	22.92	23.50	1.143	Top	-0.04	0.274	0.313
	CDMA2000 BC0	RTAP153.6K	Left Side	10	1013	824.7	22.92	23.50	1.143	Top	-0.03	0.118	0.135
	CDMA2000 BC0	RTAP153.6K	Top Side	10	1013	824.7	22.92	23.50	1.143	Top	-0.04	0.092	0.105
	CDMA2000 BC0	RTAP153.6K	Front	10	1013	824.7	22.92	23.50	1.143	Bottom	-0.02	0.370	0.423
	CDMA2000 BC0	RTAP153.6K	Back	10	1013	824.7	22.92	23.50	1.143	Bottom	0.02	0.503	0.575
	CDMA2000 BC0	RTAP153.6K	Left side	10	1013	824.7	22.92	23.50	1.143	Bottom	0.01	0.227	0.259
28	CDMA2000 BC0	RTAP153.6K	Right side	10	1013	824.7	22.92	23.50	1.143	Bottom	-0.01	0.582	0.665
	CDMA2000 BC0	RTAP153.6K	Bottom side	10	1013	824.7	22.92	23.50	1.143	Bottom	0.15	0.264	0.302
	CDMA2000 BC1	RTAP153.6K	Front	10	1175	1908.75	22.31	22.50	1.045	Top	-0.05	0.073	0.076
	CDMA2000 BC1	RTAP153.6K	Back	10	1175	1908.75	22.31	22.50	1.045	Top	-0.04	0.050	0.052
	CDMA2000 BC1	RTAP153.6K	Left Side	10	1175	1908.75	22.31	22.50	1.045	Top	0.08	0.062	0.065
	CDMA2000 BC1	RTAP153.6K	Top Side	10	1175	1908.75	22.31	22.50	1.045	Top	0.07	0.028	0.029
	CDMA2000 BC1	RTAP153.6K	Front	10	1175	1908.75	24.38	24.50	1.028	Bottom	0.07	0.424	0.436
29	CDMA2000 BC1	RTAP153.6K	Back	10	1175	1908.75	24.38	24.50	1.028	Bottom	-0.07	0.523	0.538
	CDMA2000 BC1	RTAP153.6K	Left side	10	1175	1908.75	24.38	24.50	1.028	Bottom	0.03	0.502	0.516
	CDMA2000 BC1	RTAP153.6K	Right side	10	1175	1908.75	24.38	24.50	1.028	Bottom	0.11	0.135	0.139
	CDMA2000 BC1	RTAP153.6K	Bottom side	10	1175	1908.75	24.38	24.50	1.028	Bottom	0.06	0.270	0.278



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	0Offset	Front	10	23095	707.5	23.81	24.50	1.172	0	Top	0.096	0.113
	LTE Band 12	10M	QPSK	25RB	0Offset	Front	10	23095	707.5	22.90	23.50	1.148	-0.1	Top	0.082	0.094
	LTE Band 12	10M	QPSK	1RB	0Offset	Back	10	23095	707.5	23.81	24.50	1.172	0.03	Top	0.206	0.241
	LTE Band 12	10M	QPSK	25RB	0Offset	Back	10	23095	707.5	22.90	23.50	1.148	0	Top	0.179	0.206
	LTE Band 12	10M	QPSK	1RB	0Offset	Left Side	10	23095	707.5	23.81	24.50	1.172	0.04	Top	0.089	0.104
	LTE Band 12	10M	QPSK	25RB	0Offset	Left Side	10	23095	707.5	22.90	23.50	1.148	0.06	Top	0.079	0.091
	LTE Band 12	10M	QPSK	1RB	0Offset	Top Side	10	23095	707.5	23.81	24.50	1.172	0.1	Top	0.087	0.102
	LTE Band 12	10M	QPSK	25RB	0Offset	Top Side	10	23095	707.5	22.90	23.50	1.148	0.06	Top	0.074	0.085
	LTE Band 12	10M	QPSK	1RB	0offset	Front	10	23095	707.5	23.81	24.50	1.172	0.02	Bottom	0.130	0.152
	LTE Band 12	10M	QPSK	1RB	0offset	Back	10	23095	707.5	23.81	24.50	1.172	0.01	Bottom	0.181	0.212
	LTE Band 12	10M	QPSK	1RB	0offset	Left side	10	23095	707.5	23.81	24.50	1.172	0.04	Bottom	0.142	0.166
30	LTE Band 12	10M	QPSK	1RB	0offset	Right side	10	23095	707.5	23.81	24.50	1.172	0.05	Bottom	0.235	0.275
	LTE Band 12	10M	QPSK	1RB	0offset	Bottom side	10	23095	707.5	23.81	24.50	1.172	0.13	Bottom	0.076	0.089
	LTE Band 12	10M	QPSK	25RB	0offset	Front	10	23095	707.5	22.90	23.50	1.148	-0.1	Bottom	0.115	0.132
	LTE Band 12	10M	QPSK	25RB	0offset	Back	10	23095	707.5	22.90	23.50	1.148	0.03	Bottom	0.208	0.239
	LTE Band 12	10M	QPSK	25RB	0offset	Left side	10	23095	707.5	22.90	23.50	1.148	0.01	Bottom	0.124	0.142
	LTE Band 12	10M	QPSK	25RB	0offset	Right side	10	23095	707.5	22.90	23.50	1.148	0.06	Bottom	0.200	0.230
	LTE Band 12	10M	QPSK	25RB	0offset	Bottom side	10	23095	707.5	22.90	23.50	1.148	0.09	Bottom	0.065	0.075
	LTE Band 13	10M	QPSK	1RB	0Offset	Front	10	23230	782	23.90	24.50	1.148	0.03	Top	0.161	0.185
	LTE Band 13	10M	QPSK	25RB	0Offset	Front	10	23230	782	22.98	23.50	1.127	-0.04	Top	0.133	0.150
	LTE Band 13	10M	QPSK	1RB	0Offset	Back	10	23230	782	23.90	24.50	1.148	-0.01	Top	0.339	0.389
	LTE Band 13	10M	QPSK	25RB	0Offset	Back	10	23230	782	22.98	23.50	1.127	0.01	Top	0.281	0.317
	LTE Band 13	10M	QPSK	1RB	0Offset	Left Side	10	23230	782	23.90	24.50	1.148	0.09	Top	0.240	0.276
	LTE Band 13	10M	QPSK	25RB	0Offset	Left Side	10	23230	782	22.98	23.50	1.127	-0.03	Top	0.206	0.232
	LTE Band 13	10M	QPSK	1RB	0Offset	Top Side	10	23230	782	23.90	24.50	1.148	0.05	Top	0.153	0.176
	LTE Band 13	10M	QPSK	25RB	0Offset	Top Side	10	23230	782	22.98	23.50	1.127	0.1	Top	0.125	0.141
	LTE Band 13	10M	QPSK	1RB	0offset	Front	10	23230	782	23.90	24.50	1.148	-0.02	Bottom	0.244	0.280
	LTE Band 13	10M	QPSK	1RB	0offset	Back	10	23230	782	23.90	24.50	1.148	0.01	Bottom	0.312	0.358
	LTE Band 13	10M	QPSK	1RB	0offset	Left side	10	23230	782	23.90	24.50	1.148	0.02	Bottom	0.302	0.347
31	LTE Band 13	10M	QPSK	1RB	0offset	Right side	10	23230	782	23.90	24.50	1.148	0.05	Bottom	0.439	0.504
	LTE Band 13	10M	QPSK	1RB	0offset	Bottom side	10	23230	782	23.90	24.50	1.148	0.18	Bottom	0.138	0.158
	LTE Band 13	10M	QPSK	25RB	0offset	Front	10	23230	782	22.98	23.50	1.127	0.03	Bottom	0.203	0.229
	LTE Band 13	10M	QPSK	25RB	0offset	Back	10	23230	782	22.98	23.50	1.127	-0.01	Bottom	0.259	0.292
	LTE Band 13	10M	QPSK	25RB	0offset	Left side	10	23230	782	22.98	23.50	1.127	0.03	Bottom	0.248	0.280
	LTE Band 13	10M	QPSK	25RB	0offset	Right side	10	23230	782	22.98	23.50	1.127	0.03	Bottom	0.363	0.409
	LTE Band 13	10M	QPSK	25RB	0offset	Bottom side	10	23230	782	22.98	23.50	1.127	0.17	Bottom	0.111	0.125



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1RB	0Offset	Front	10	26865	831.5	23.30	24.50	1.318	0.04	Top	0.156	0.206
	LTE Band 26	15M	QPSK	36RB	0Offset	Front	10	26865	831.5	22.31	23.50	1.315	-0.08	Top	0.133	0.175
	LTE Band 26	15M	QPSK	1RB	0Offset	Back	10	26865	831.5	23.30	24.50	1.318	-0.02	Top	0.307	0.405
	LTE Band 26	15M	QPSK	36RB	0Offset	Back	10	26865	831.5	22.31	23.50	1.315	-0.03	Top	0.269	0.354
	LTE Band 26	15M	QPSK	1RB	0Offset	Left Side	10	26865	831.5	23.30	24.50	1.318	0.03	Top	0.192	0.253
	LTE Band 26	15M	QPSK	36RB	0Offset	Left Side	10	26865	831.5	22.31	23.50	1.315	0.05	Top	0.165	0.217
	LTE Band 26	15M	QPSK	1RB	0Offset	Top Side	10	26865	831.5	23.30	24.50	1.318	0.14	Top	0.142	0.187
	LTE Band 26	15M	QPSK	36RB	0Offset	Top Side	10	26865	831.5	22.31	23.50	1.315	0.15	Top	0.116	0.153
	LTE Band 26	15M	QPSK	1RB	0offset	Front	10	26865	831.5	23.30	24.50	1.318	-0.03	Bottom	0.318	0.419
	LTE Band 26	15M	QPSK	1RB	0offset	Back	10	26865	831.5	23.30	24.50	1.318	0.03	Bottom	0.442	0.583
	LTE Band 26	15M	QPSK	1RB	0offset	Left side	10	26865	831.5	23.30	24.50	1.318	0.01	Bottom	0.161	0.212
32	LTE Band 26	15M	QPSK	1RB	0offset	Right side	10	26865	831.5	23.30	24.50	1.318	0.01	Bottom	0.576	0.759
	LTE Band 26	15M	QPSK	1RB	0offset	Bottom side	10	26865	831.5	23.30	24.50	1.318	0.01	Bottom	0.192	0.253
	LTE Band 26	15M	QPSK	36RB	0offset	Front	10	26865	831.5	22.31	23.50	1.315	-0.01	Bottom	0.255	0.335
	LTE Band 26	15M	QPSK	36RB	0offset	Back	10	26865	831.5	22.31	23.50	1.315	0.07	Bottom	0.349	0.459
	LTE Band 26	15M	QPSK	36RB	0offset	Left side	10	26865	831.5	22.31	23.50	1.315	0.02	Bottom	0.123	0.162
	LTE Band 26	15M	QPSK	36RB	0offset	Right side	10	26865	831.5	22.31	23.50	1.315	0.02	Bottom	0.461	0.606
	LTE Band 26	15M	QPSK	36RB	0offset	Bottom side	10	26865	831.5	22.31	23.50	1.315	0.06	Bottom	0.156	0.205



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10	20175	1732.5	21.16	21.50	1.081	-0.12	Top	0.163	0.176
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10	20175	1732.5	19.66	20.50	1.213	-0.11	Top	0.121	0.147
	LTE Band 4	20M	QPSK	1RB	0Offset	Back	10	20175	1732.5	21.16	21.50	1.081	-0.04	Top	0.151	0.163
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10	20175	1732.5	19.66	20.50	1.213	0.01	Top	0.116	0.141
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Side	10	20175	1732.5	21.16	21.50	1.081	-0.08	Top	0.109	0.118
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Side	10	20175	1732.5	19.66	20.50	1.213	-0.12	Top	0.081	0.098
	LTE Band 4	20M	QPSK	1RB	0Offset	Top Side	10	20175	1732.5	21.16	21.50	1.081	-0.04	Top	0.088	0.095
	LTE Band 4	20M	QPSK	50RB	0Offset	Top Side	10	20175	1732.5	19.66	20.50	1.213	-0.13	Top	0.064	0.078
	LTE Band 4	20M	QPSK	1RB	0offset	Front	10	20175	1732.5	22.95	23.00	1.012	-0.01	Bottom	0.720	0.728
	LTE Band 4	20M	QPSK	1RB	0offset	Back	10	20175	1732.5	22.95	23.00	1.012	0.17	Bottom	1.080	1.093
	LTE Band 4	20M	QPSK	1RB	0offset	Left side	10	20175	1732.5	22.95	23.00	1.012	0.18	Bottom	0.124	0.125
	LTE Band 4	20M	QPSK	1RB	0offset	Right side	10	20175	1732.5	22.95	23.00	1.012	0.02	Bottom	0.206	0.208
33	LTE Band 4	20M	QPSK	1RB	0offset	Bottom side	10	20175	1732.5	22.95	23.00	1.012	0.12	Bottom	1.150	1.163
	LTE Band 4	20M	QPSK	50RB	0offset	Front	10	20175	1732.5	21.59	22.50	1.233	-0.03	Bottom	0.519	0.640
	LTE Band 4	20M	QPSK	50RB	0offset	Back	10	20175	1732.5	21.59	22.50	1.233	0.06	Bottom	0.786	0.969
	LTE Band 4	20M	QPSK	50RB	0offset	Left side	10	20175	1732.5	21.59	22.50	1.233	0.07	Bottom	0.090	0.111
	LTE Band 4	20M	QPSK	50RB	0offset	Right side	10	20175	1732.5	21.59	22.50	1.233	-0.06	Bottom	0.153	0.189
	LTE Band 4	20M	QPSK	50RB	0offset	Bottom side	10	20175	1732.5	21.59	22.50	1.233	0.08	Bottom	0.832	1.026
	LTE Band 4	20M	QPSK	100RB	0offset	Back	10	20175	1732.5	21.40	22.50	1.288	0.01	Bottom	0.774	0.997
	LTE Band 4	20M	QPSK	100RB	0offset	Bottom side	10	20175	1732.5	21.40	22.50	1.288	0.09	Bottom	0.807	1.040



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1RB	0Offset	Front	10	26340	1880	21.23	21.50	1.064	0.17	Top	0.096	0.102
	LTE Band 25	20M	QPSK	50RB	0Offset	Front	10	26340	1880	19.8	20.50	1.175	0.11	Top	0.066	0.078
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10	26340	1880	21.23	21.50	1.064	0.17	Top	0.088	0.094
	LTE Band 25	20M	QPSK	50RB	0Offset	Back	10	26340	1880	19.8	20.50	1.175	0.12	Top	0.062	0.073
	LTE Band 25	20M	QPSK	1RB	0Offset	Left Side	10	26340	1880	21.23	21.50	1.064	0.05	Top	0.083	0.088
	LTE Band 25	20M	QPSK	50RB	0Offset	Left Side	10	26340	1880	19.8	20.50	1.175	0.09	Top	0.058	0.068
	LTE Band 25	20M	QPSK	1RB	0Offset	Top Side	10	26340	1880	21.23	21.50	1.064	0.1	Top	0.041	0.044
	LTE Band 25	20M	QPSK	50RB	0Offset	Top Side	10	26340	1880	19.8	20.50	1.175	0.07	Top	0.027	0.032
	LTE Band 25	20M	QPSK	1RB	0offset	Front	10	26340	1880	23.66	24.00	1.081	0.01	Bottom	0.433	0.468
34	LTE Band 25	20M	QPSK	1RB	0offset	Back	10	26340	1880	23.66	24.00	1.081	-0.07	Bottom	0.493	0.533
	LTE Band 25	20M	QPSK	1RB	0offset	Left side	10	26340	1880	23.66	24.00	1.081	0.01	Bottom	0.329	0.356
	LTE Band 25	20M	QPSK	1RB	0offset	Right side	10	26340	1880	23.66	24.00	1.081	0.02	Bottom	0.183	0.198
	LTE Band 25	20M	QPSK	1RB	0offset	Bottom side	10	26340	1880	23.66	24.00	1.081	-0.03	Bottom	0.383	0.414
	LTE Band 25	20M	QPSK	50RB	0offset	Front	10	26340	1880	22.77	23.00	1.054	0.16	Bottom	0.331	0.349
	LTE Band 25	20M	QPSK	50RB	0offset	Back	10	26340	1880	22.77	23.00	1.054	-0.04	Bottom	0.424	0.447
	LTE Band 25	20M	QPSK	50RB	0offset	Left side	10	26340	1880	22.77	23.00	1.054	0.01	Bottom	0.283	0.298
	LTE Band 25	20M	QPSK	50RB	0offset	Right side	10	26340	1880	22.77	23.00	1.054	0.07	Bottom	0.143	0.151
	LTE Band 25	20M	QPSK	50RB	0offset	Bottom side	10	26340	1880	22.77	23.00	1.054	-0.09	Bottom	0.305	0.322



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30	10M	QPSK	1RB	25Offset	Front	10	27710	2310	23.25	24.50	1.334	-0.01	Top	0.172	0.229
	LTE Band 30	10M	QPSK	25RB	12Offset	Front	10	27710	2310	22.43	23.50	1.279	0.15	Top	0.160	0.205
	LTE Band 30	10M	QPSK	1RB	25Offset	Back	10	27710	2310	23.25	24.50	1.334	-0.04	Top	0.266	0.355
	LTE Band 30	10M	QPSK	25RB	12Offset	Back	10	27710	2310	22.43	23.50	1.279	0.04	Top	0.219	0.280
	LTE Band 30	10M	QPSK	1RB	25Offset	Left Side	10	27710	2310	23.25	24.50	1.334	0.11	Top	0.213	0.284
	LTE Band 30	10M	QPSK	25RB	12Offset	Left Side	10	27710	2310	22.43	23.50	1.279	-0.04	Top	0.187	0.239
	LTE Band 30	10M	QPSK	1RB	25Offset	Top Side	10	27710	2310	23.25	24.50	1.334	0.06	Top	0.137	0.183
	LTE Band 30	10M	QPSK	25RB	12Offset	Top Side	10	27710	2310	22.43	23.50	1.279	0.03	Top	0.117	0.150
	LTE Band 30	10M	QPSK	1RB	25offset	Front	10	27710	2310	23.25	24.50	1.334	0.02	Bottom	0.356	0.475
35	LTE Band 30	10M	QPSK	1RB	25offset	Back	10	27710	2310	23.25	24.50	1.334	-0.1	Bottom	0.388	0.517
	LTE Band 30	10M	QPSK	1RB	25offset	Left side	10	27710	2310	23.25	24.50	1.334	-0.05	Bottom	0.352	0.469
	LTE Band 30	10M	QPSK	1RB	25offset	Right side	10	27710	2310	23.25	24.50	1.334	-0.01	Bottom	0.023	0.031
	LTE Band 30	10M	QPSK	1RB	25offset	Bottom side	10	27710	2310	23.25	24.50	1.334	0.03	Bottom	0.226	0.301
	LTE Band 30	10M	QPSK	25RB	12offset	Front	10	27710	2310	22.43	23.50	1.279	0.03	Bottom	0.315	0.403
	LTE Band 30	10M	QPSK	25RB	12offset	Back	10	27710	2310	22.43	23.50	1.279	-0.03	Bottom	0.362	0.463
	LTE Band 30	10M	QPSK	25RB	12offset	Left side	10	27710	2310	22.43	23.50	1.279	-0.01	Bottom	0.312	0.399
	LTE Band 30	10M	QPSK	25RB	12offset	Right side	10	27710	2310	22.43	23.50	1.279	0.02	Bottom	0.02	0.026
	LTE Band 30	10M	QPSK	25RB	12offset	Bottom side	10	27710	2310	22.43	23.50	1.279	0.06	Bottom	0.207	0.265



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
36	LTE Band 7	20M	QPSK	1RB	0offset	Front	10	21350	2560	23.92	24.50	1.143	0.18	Bottom	0.421	0.481
	LTE Band 7	20M	QPSK	1RB	0offset	Back	10	21350	2560	23.92	24.50	1.143	-0.09	Bottom	0.484	0.553
	LTE Band 7	20M	QPSK	1RB	0offset	Left side	10	21350	2560	23.92	24.50	1.143	-0.02	Bottom	0.429	0.490
	LTE Band 7	20M	QPSK	1RB	0offset	Right side	10	21350	2560	23.92	24.50	1.143	0.04	Bottom	0.023	0.026
	LTE Band 7	20M	QPSK	1RB	0offset	Bottom side	10	21350	2560	23.92	24.50	1.143	0.03	Bottom	0.247	0.282
	LTE Band 7	20M	QPSK	50RB	0offset	Front	10	21350	2560	22.98	23.50	1.127	0.06	Bottom	0.311	0.351
	LTE Band 7	20M	QPSK	50RB	0offset	Back	10	21350	2560	22.98	23.50	1.127	-0.08	Bottom	0.254	0.286
	LTE Band 7	20M	QPSK	50RB	0offset	Left side	10	21350	2560	22.98	23.50	1.127	0.02	Bottom	0.324	0.365
	LTE Band 7	20M	QPSK	50RB	0offset	Right side	10	21350	2560	22.98	23.50	1.127	-0.03	Bottom	0.018	0.020
	LTE Band 7	20M	QPSK	50RB	0offset	Bottom side	10	21350	2560	22.98	23.50	1.127	0.08	Bottom	0.202	0.228

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
37	LTE Band 41	20M	QPSK	1RB	0offset	Front	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.07	Bottom	0.149	0.161
	LTE Band 41	20M	QPSK	1RB	0offset	Back	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.1	Bottom	0.174	0.188
	LTE Band 41	20M	QPSK	1RB	0offset	Left side	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.08	Bottom	0.148	0.160
	LTE Band 41	20M	QPSK	1RB	0offset	Right side	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.02	Bottom	0.010	0.011
	LTE Band 41	20M	QPSK	1RB	0offset	Bottom side	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.07	Bottom	0.084	0.091
	LTE Band 41	20M	QPSK	50RB	0offset	Front	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.03	Bottom	0.098	0.118
	LTE Band 41	20M	QPSK	50RB	0offset	Back	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.14	Bottom	0.113	0.136
	LTE Band 41	20M	QPSK	50RB	0offset	Left side	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.1	Bottom	0.102	0.123
	LTE Band 41	20M	QPSK	50RB	0offset	Right side	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	-0.09	Bottom	0.008	0.010
	LTE Band 41	20M	QPSK	50RB	0offset	Bottom side	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.08	Bottom	0.059	0.071



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Peak SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
38	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.13	0.08	0.096	0.107
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.098			
	WLAN 2.4GHz	802.11b 1Mbps	Right side	10	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.112			
	WLAN 2.4GHz	802.11b 1Mbps	Top side	10	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.0745			
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.0295			
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.025			
39	WLAN 2.4GHz	802.11b 1Mbps	Left side	10	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.0359	-0.02	0.024	0.028
	WLAN 2.4GHz	802.11b 1Mbps	Top side	10	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.025			
40	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0673	0.02	0.044	0.047
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0578			
	WLAN 2.4GHz	802.11b 1Mbps	Left side	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0253			
	WLAN 2.4GHz	802.11b 1Mbps	Right side	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0525			
	WLAN 2.4GHz	802.11b 1Mbps	Top side	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0486			



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 2 Tx Slots	Front	10	189	836.4	30.45	31.00	1.135	-0.03	Top	0.142	0.161
41	GSM850	GPRS 2 Tx Slots	Back	10	189	836.4	30.45	31.00	1.135	-0.03	Top	0.258	0.293
	GSM850	GPRS (2 Tx slots)	Front	10	189	836.4	30.45	31.00	1.135	0.03	Bottom	0.109	0.124
	GSM850	GPRS (2 Tx slots)	Back	10	189	836.4	30.45	31.00	1.135	0.05	Bottom	0.186	0.211
	GSM1900	GPRS 4 Tx slots	Front	10	810	1909.8	26.57	27.50	1.239	-0.06	Top	0.082	0.102
	GSM1900	GPRS 4 Tx slots	Back	10	810	1909.8	26.57	27.50	1.239	-0.05	Top	0.068	0.084
	GSM1900	GPRS (4 Tx slots)	Front	10	810	1909.8	26.57	27.50	1.239	-0.03	Bottom	0.207	0.256
42	GSM1900	GPRS (4 Tx slots)	Back	10	810	1909.8	26.57	27.50	1.239	-0.02	Bottom	0.290	0.359

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4233	846.6	23.79	24.00	1.050	0.09	Top	0.196	0.206
43	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	23.79	24.00	1.050	0.1	Top	0.402	0.422
	WCDMA Band V	RMC 12.2Kbps	Front	10	4132	826.4	24.67	25.00	1.079	-0.03	Bottom	0.227	0.245
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	24.67	25.00	1.079	0.01	Bottom	0.370	0.399
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1513	1752.6	20.46	21.00	1.132	-0.12	Top	0.154	0.174
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	20.46	21.00	1.132	-0.06	Top	0.146	0.165
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1513	1752.6	22.97	23.00	1.007	0.08	Bottom	0.685	0.690
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	22.97	23.00	1.007	0.14	Bottom	1.110	1.118
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	22.88	23.00	1.028	0.17	Bottom	1.020	1.049
44	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	22.83	23.00	1.040	0.06	Bottom	1.090	1.134
	WCDMA Band II	RMC 12.2Kbps	Front	10	9262	1852.4	21.56	22.00	1.107	-0.01	Top	0.123	0.136
	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	21.56	22.00	1.107	-0.03	Top	0.116	0.128
	WCDMA Band II	RMC 12.2Kbps	Front	10	9538	1907.6	24.19	24.50	1.074	0.07	Bottom	0.517	0.555
45	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	24.19	24.50	1.074	-0.11	Bottom	0.647	0.695



<CDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	CDMA2000 BC10	RC3 SO32	Front	10	476	817.9	23.01	24.00	1.256	0.03	Top	0.120	0.151
	CDMA2000 BC10	RC3 SO32	Back	10	476	817.9	23.01	24.00	1.256	-0.03	Top	0.268	0.337
	CDMA2000 BC10	RC3 SO32	Front	10	476	817.9	23.01	24.00	1.256	0.02	Bottom	0.365	0.458
46	CDMA2000 BC10	RC3 SO32	Back	10	476	817.9	23.01	24.00	1.256	0.03	Bottom	0.525	0.659
	CDMA2000 BC0	RC3 SO32	Front	10	1013	824.7	23.03	23.50	1.114	0.01	Top	0.110	0.123
	CDMA2000 BC0	RC3 SO32	Back	10	1013	824.7	23.03	23.50	1.114	0.03	Top	0.251	0.280
	CDMA2000 BC0	RC3 SO32	Front	10	1013	824.7	23.03	23.50	1.114	-0.01	Bottom	0.310	0.345
47	CDMA2000 BC0	RC3 SO32	Back	10	1013	824.7	23.03	23.50	1.114	0.02	Bottom	0.526	0.586
	CDMA2000 BC1	RC3 SO32	Front	10	1175	1908.75	22.27	22.50	1.054	0.04	Top	0.073	0.077
	CDMA2000 BC1	RC3 SO32	Back	10	1175	1908.75	22.27	22.50	1.054	-0.19	Top	0.059	0.062
	CDMA2000 BC1	RC3 SO32	Front	10	1175	1908.75	24.4	24.50	1.023	0.05	Bottom	0.430	0.440
48	CDMA2000 BC1	RC3 SO32	Back	10	1175	1908.75	24.4	24.50	1.023	-0.06	Bottom	0.538	0.551



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	0Offset	Front	10	23095	707.5	23.81	24.50	1.172	0	Top	0.096	0.113
	LTE Band 12	10M	QPSK	25RB	0Offset	Front	10	23095	707.5	22.90	23.50	1.148	-0.1	Top	0.082	0.094
49	LTE Band 12	10M	QPSK	1RB	0Offset	Back	10	23095	707.5	23.81	24.50	1.172	0.03	Top	0.206	0.241
	LTE Band 12	10M	QPSK	25RB	0Offset	Back	10	23095	707.5	22.90	23.50	1.148	0	Top	0.179	0.206
	LTE Band 12	10M	QPSK	1RB	0offset	Front	10	23095	707.5	23.81	24.50	1.172	0.02	Bottom	0.130	0.152
	LTE Band 12	10M	QPSK	1RB	0offset	Back	10	23095	707.5	23.81	24.50	1.172	0.01	Bottom	0.181	0.212
	LTE Band 12	10M	QPSK	25RB	0offset	Front	10	23095	707.5	22.90	23.50	1.148	-0.1	Bottom	0.115	0.132
	LTE Band 12	10M	QPSK	25RB	0offset	Back	10	23095	707.5	22.90	23.50	1.148	0.03	Bottom	0.208	0.239
	LTE Band 13	10M	QPSK	1RB	0Offset	Front	10	23230	782	23.90	24.50	1.148	0.03	Top	0.161	0.185
	LTE Band 13	10M	QPSK	25RB	0Offset	Front	10	23230	782	22.98	23.50	1.127	-0.04	Top	0.133	0.150
50	LTE Band 13	10M	QPSK	1RB	0Offset	Back	10	23230	782	23.90	24.50	1.148	-0.01	Top	0.339	0.389
	LTE Band 13	10M	QPSK	25RB	0Offset	Back	10	23230	782	22.98	23.50	1.127	0.01	Top	0.281	0.317
	LTE Band 13	10M	QPSK	1RB	0offset	Front	10	23230	782	23.90	24.50	1.148	-0.02	Bottom	0.244	0.280
	LTE Band 13	10M	QPSK	1RB	0offset	Back	10	23230	782	23.90	24.50	1.148	0.01	Bottom	0.312	0.358
	LTE Band 13	10M	QPSK	25RB	0offset	Front	10	23230	782	22.98	23.50	1.127	0.03	Bottom	0.203	0.229
	LTE Band 13	10M	QPSK	25RB	0offset	Back	10	23230	782	22.98	23.50	1.127	-0.01	Bottom	0.259	0.292
	LTE Band 26	15M	QPSK	1RB	0Offset	Front	10	26865	831.5	23.30	24.50	1.318	0.04	Top	0.156	0.206
	LTE Band 26	15M	QPSK	36RB	0Offset	Front	10	26865	831.5	22.31	23.50	1.315	-0.08	Top	0.133	0.175
	LTE Band 26	15M	QPSK	1RB	0Offset	Back	10	26865	831.5	23.30	24.50	1.318	-0.02	Top	0.307	0.405
	LTE Band 26	15M	QPSK	36RB	0Offset	Back	10	26865	831.5	22.31	23.50	1.315	-0.03	Top	0.269	0.354
	LTE Band 26	15M	QPSK	1RB	0offset	Front	10	26865	831.5	23.30	24.50	1.318	-0.03	Bottom	0.318	0.419
51	LTE Band 26	15M	QPSK	1RB	0offset	Back	10	26865	831.5	23.30	24.50	1.318	0.03	Bottom	0.442	0.583
	LTE Band 26	15M	QPSK	36RB	0offset	Front	10	26865	831.5	22.31	23.50	1.315	-0.01	Bottom	0.255	0.335
	LTE Band 26	15M	QPSK	36RB	0offset	Back	10	26865	831.5	22.31	23.50	1.315	0.07	Bottom	0.349	0.459
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10	20175	1732.5	21.16	21.50	1.081	-0.12	Top	0.163	0.176
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10	20175	1732.5	19.66	20.50	1.213	-0.11	Top	0.121	0.147
	LTE Band 4	20M	QPSK	1RB	0Offset	Back	10	20175	1732.5	21.16	21.50	1.081	-0.04	Top	0.151	0.163
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10	20175	1732.5	19.66	20.50	1.213	0.01	Top	0.116	0.141
	LTE Band 4	20M	QPSK	1RB	0offset	Front	10	20175	1732.5	22.95	23.00	1.012	-0.01	Bottom	0.720	0.728
52	LTE Band 4	20M	QPSK	1RB	0offset	Back	10	20175	1732.5	22.95	23.00	1.012	0.17	Bottom	1.080	1.093
	LTE Band 4	20M	QPSK	50RB	0offset	Front	10	20175	1732.5	21.59	22.50	1.233	-0.03	Bottom	0.519	0.640
	LTE Band 4	20M	QPSK	50RB	0offset	Back	10	20175	1732.5	21.59	22.50	1.233	0.06	Bottom	0.786	0.969
	LTE Band 4	20M	QPSK	100RB	0offset	Back	10	20175	1732.5	21.40	22.50	1.288	0.01	Bottom	0.774	0.997



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1RB	0Offset	Front	10	26340	1880	21.23	21.50	1.064	0.17	Top	0.096	0.102
	LTE Band 25	20M	QPSK	50RB	0Offset	Front	10	26340	1880	19.8	20.50	1.175	0.11	Top	0.066	0.078
	LTE Band 25	20M	QPSK	1RB	0Offset	Back	10	26340	1880	21.23	21.50	1.064	0.17	Top	0.088	0.094
	LTE Band 25	20M	QPSK	50RB	0Offset	Back	10	26340	1880	19.8	20.50	1.175	0.12	Top	0.062	0.073
	LTE Band 25	20M	QPSK	1RB	0offset	Front	10	26340	1880	23.66	24.00	1.081	0.01	Bottom	0.433	0.468
53	LTE Band 25	20M	QPSK	1RB	0offset	Back	10	26340	1880	23.66	24.00	1.081	-0.07	Bottom	0.493	0.533
	LTE Band 25	20M	QPSK	50RB	0offset	Front	10	26340	1880	22.77	23.00	1.054	0.16	Bottom	0.331	0.349
	LTE Band 25	20M	QPSK	50RB	0offset	Back	10	26340	1880	22.77	23.00	1.054	-0.04	Bottom	0.424	0.447
	LTE Band 30	10M	QPSK	1RB	25Offset	Front	10	27710	2310	23.25	24.50	1.334	-0.01	Top	0.172	0.229
	LTE Band 30	10M	QPSK	25RB	12Offset	Front	10	27710	2310	22.43	23.50	1.279	0.15	Top	0.160	0.205
	LTE Band 30	10M	QPSK	1RB	25Offset	Back	10	27710	2310	23.25	24.50	1.334	-0.04	Top	0.266	0.355
	LTE Band 30	10M	QPSK	25RB	12Offset	Back	10	27710	2310	22.43	23.50	1.279	0.04	Top	0.219	0.280
	LTE Band 30	10M	QPSK	1RB	25offset	Front	10	27710	2310	23.25	24.50	1.334	0.02	Bottom	0.356	0.475
54	LTE Band 30	10M	QPSK	1RB	25offset	Back	10	27710	2310	23.25	24.50	1.334	-0.1	Bottom	0.388	0.517
	LTE Band 30	10M	QPSK	25RB	12offset	Front	10	27710	2310	22.43	23.50	1.279	0.03	Bottom	0.315	0.403
	LTE Band 30	10M	QPSK	25RB	12offset	Back	10	27710	2310	22.43	23.50	1.279	-0.03	Bottom	0.362	0.463

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1RB	0offset	Front	10	21350	2560	23.92	24.50	1.143	0.18	Bottom	0.421	0.481
55	LTE Band 7	20M	QPSK	1RB	0offset	Back	10	21350	2560	23.92	24.50	1.143	-0.09	Bottom	0.484	0.553
	LTE Band 7	20M	QPSK	50RB	0offset	Front	10	21350	2560	22.98	23.50	1.127	0.06	Bottom	0.311	0.351
	LTE Band 7	20M	QPSK	50RB	0offset	Back	10	21350	2560	22.98	23.50	1.127	-0.08	Bottom	0.254	0.286

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Antenna	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1RB	0offset	Front	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.07	Bottom	0.149	0.161
56	LTE Band 41	20M	QPSK	1RB	0offset	Back	10	40185	2549.5	22.69	23.00	1.074	62.9	1.006	0.1	Bottom	0.174	0.188
	LTE Band 41	20M	QPSK	50RB	0offset	Front	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.03	Bottom	0.098	0.118
	LTE Band 41	20M	QPSK	50RB	0offset	Back	10	40185	2549.5	21.73	22.50	1.194	62.9	1.006	0.14	Bottom	0.113	0.136



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Peak SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
57	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.13	0.08	0.096	0.107
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Ant 1	11	2462	14.51	15.00	1.119	100	1.000	0.098			
58	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.0295	-0.01	0.020	0.024
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Ant 2	11	2462	14.28	15.00	1.180	100	1.000	0.025			
59	WLAN 2.4GHz	802.11b 1Mbps	Front	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0673	0.02	0.044	0.047
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	Ant 1+2	11	2462	14.72	15.00	1.067	100	1.000	0.0578			

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Peak SAR	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
60	WLAN 5.2GHz	802.11a 6Mbps	Front	10	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	0.151	0.01	0.014	0.015
	WLAN 5.2GHz	802.11a 6Mbps	Back	10	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	0.000			
61	WLAN 5.8GHz	802.11a 6Mbps	Front	10	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	0.045	0.02	0.014	0.016
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	0.000			



15.4 Product specific 10g SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Antenna	Peak SAR	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
62	WLAN 5.2GHz	802.11a 6Mbps	Front	0	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	Top	0.730	0.03	0.078	0.085
	WLAN 5.2GHz	802.11a 6Mbps	Back	0	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	Top	0.061			
	WLAN 5.2GHz	802.11a 6Mbps	Right Side	0	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	Top	0.051			
	WLAN 5.2GHz	802.11a 6Mbps	Top Side	0	Ant 1	36	5180	12.81	13	1.045	95.5	1.047	Top	0.267			
63	WLAN 5.8GHz	802.11a 6Mbps	Front	0	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	Top	2.480	0.03	0.199	0.222
	WLAN 5.8GHz	802.11a 6Mbps	Back	0	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	Top	0.105			
	WLAN 5.8GHz	802.11a 6Mbps	Right Side	0	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	Top	0.707			
	WLAN 5.8GHz	802.11a 6Mbps	Top Side	0	Ant 1	165	5825	13.22	13.5	1.067	95.5	1.047	Top	0.199			



15.5 Repeated SAR Measurement

No.	Band	BW (MHz)	RB Size	RB offset	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Antenna	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band V	-	-	-	RMC12.2Kbps	Right Cheek	-	4132	826.4	23.78	24.00	1.052	Top	0.01	0.895	1	0.942
2nd	WCDMA Band V	-	-	-	RMC12.2Kbps	Right Cheek	-	4132	826.4	23.78	24.00	1.052	Top	0.12	0.891	1.004	0.937
1st	CDMA2000 BC1	-	-	-	RC3 SO55	Right Cheek	-	25	1851.25	22.05	22.50	1.109	Top	-0.04	1.070	1	1.187
2nd	CDMA2000 BC1	-	-	-	RC3 SO55	Right Cheek	-	25	1851.25	22.05	22.50	1.109	Top	0.14	1.040	1.029	1.154
1st	LTE Band 30	10M	QPSK	1RB	25Offset	Right Cheek	-	27710	2310	23.25	23.50	1.059	Top	0.06	1.120	1	1.186
2nd	LTE Band 30	10M	QPSK	1RB	25Offset	Right Cheek	-	27710	2310	23.25	23.50	1.059	Top	-0.13	1.100	1.018	1.165
1st	LTE Band 4	20M	QPSK	1RB	0offset	Bottom side	10	20175	1732.5	22.95	23.00	1.012	Bottom	0.12	1.150	1	1.163
2nd	LTE Band 4	20M	QPSK	1RB	0offset	Bottom side	10	20175	1732.5	22.95	23.00	1.012	Bottom	0.16	1.130	1.018	1.143

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz(SISO)	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz(SISO)	Yes	Yes	Yes	Hotspot
3.	WCDMA + WLAN2.4GHz(SISO)	Yes	Yes	Yes	Hotspot
4.	CDMA + WLAN2.4GHz(SISO)	Yes	Yes	Yes	Hotspot
5.	LTE + WLAN2.4GHz(SISO)	Yes	Yes	Yes	Hotspot
6.	GSM Voice + WLAN2.4GHz(MIMO)	Yes	Yes		
7.	GPRS/EDGE + WLAN2.4GHz(MIMO)	Yes	Yes	Yes	WWAN VoIP
8.	WCDMA + WLAN2.4GHz(MIMO)	Yes	Yes	Yes	WWAN VoIP
9.	CDMA+ WLAN2.4GHz(MIMO)	Yes	Yes	Yes	WWAN VoIP
10.	LTE + WLAN2.4GHz(MIMO)	Yes	Yes	Yes	WWAN VoIP
11.	GSM Voice + Bluetooth		Yes		
12.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP
13.	CDMA+ Bluetooth		Yes		WWAN VoIP
14.	WCDMA+ Bluetooth		Yes		WWAN VoIP
15.	LTE + Bluetooth		Yes		WWAN VoIP
16.	GSM Voice + WLAN5.2/5.8GHz(SISO)	Yes	Yes		
17.	GPRS/EDGE + WLAN5.2/5.8GHz(SISO)	Yes	Yes		WiFi Direct(GC only)
18.	WCDMA + WLAN5.2/5.8GHz(SISO)	Yes	Yes		WiFi Direct(GC only)
19.	CDMA+ WLAN5.2/5.8GHz(SISO)	Yes	Yes		WiFi Direct(GC only)
20.	LTE + WLAN5.2/5.8GHz(SISO)	Yes	Yes		WiFi Direct(GC only)

General Note:

- This device supported VoIP in GPRS, EGPRS, CDMA, WCDMA and LTE (e.g. 3rd party VoIP) and LTE Supports VoLTE operation.
- This device 5GHz WLAN SISO has no Hotspot operation.
- EUT will choose each GSM, CDMA, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WLAN2.4GHz and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- Chose the worse zoom scan SAR of WLAN2.4GHz and WLAN 5GHz SAR for co-located with WWAN analysis.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $(\max. \text{ power of channel, including tune-up tolerance, mW}) / (\min. \text{ test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	
	Test separation	Body worn
9.0 dBm	Estimated SAR (W/kg)	10 mm 0.168 W/kg



16.1 Head Exposure Conditions

Top Antenna:

WWAN Band		Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.914	0.207	0.139	0.350	0.338	1.12	1.05	1.26	1.25
		Right Tilted	0.600	0.205	0.139	0.350	0.338	0.81	0.74	0.95	0.94
		Left Cheek	0.496	0.757	0.139	0.350	0.338	1.25	0.64	0.85	0.83
		Left Tilted	0.421	0.638	0.139	0.350	0.338	1.06	0.56	0.77	0.76
	GSM1900	Right Cheek	1.057	0.207	0.139	0.350	0.338	1.26	1.20	1.41	1.40
		Right Tilted	0.538	0.205	0.139	0.350	0.338	0.74	0.68	0.89	0.88
		Left Cheek	0.337	0.757	0.139	0.350	0.338	1.09	0.48	0.69	0.68
		Left Tilted	0.274	0.638	0.139	0.350	0.338	0.91	0.41	0.62	0.61
WCDMA	Band V	Right Cheek	0.942	0.207	0.139	0.350	0.338	1.15	1.08	1.29	1.28
		Right Tilted	0.614	0.205	0.139	0.350	0.338	0.82	0.75	0.96	0.95
		Left Cheek	0.538	0.757	0.139	0.350	0.338	1.30	0.68	0.89	0.88
		Left Tilted	0.453	0.638	0.139	0.350	0.338	1.09	0.59	0.80	0.79
	Band IV	Right Cheek	1.051	0.207	0.139	0.350	0.338	1.26	1.19	1.40	1.39
		Right Tilted	0.478	0.205	0.139	0.350	0.338	0.68	0.62	0.83	0.82
		Left Cheek	0.519	0.757	0.139	0.350	0.338	1.28	0.66	0.87	0.86
		Left Tilted	0.371	0.638	0.139	0.350	0.338	1.01	0.51	0.72	0.71
	Band II	Right Cheek	1.066	0.207	0.139	0.350	0.338	1.27	1.21	1.42	1.40
		Right Tilted	0.564	0.205	0.139	0.350	0.338	0.77	0.70	0.91	0.90
		Left Cheek	0.353	0.757	0.139	0.350	0.338	1.11	0.49	0.70	0.69
		Left Tilted	0.271	0.638	0.139	0.350	0.338	0.91	0.41	0.62	0.61
CDMA	CDMA2000 BC10	Right Cheek	0.901	0.207	0.139	0.350	0.338	1.11	1.04	1.25	1.24
		Right Tilted	0.517	0.205	0.139	0.350	0.338	0.72	0.66	0.87	0.86
		Left Cheek	0.578	0.757	0.139	0.350	0.338	1.34	0.72	0.93	0.92
		Left Tilted	0.420	0.638	0.139	0.350	0.338	1.06	0.56	0.77	0.76
	CDMA2000 BC0	Right Cheek	0.759	0.207	0.139	0.350	0.338	0.97	0.90	1.11	1.10
		Right Tilted	0.416	0.205	0.139	0.350	0.338	0.62	0.56	0.77	0.75
		Left Cheek	0.482	0.757	0.139	0.350	0.338	1.24	0.62	0.83	0.82
		Left Tilted	0.355	0.638	0.139	0.350	0.338	0.99	0.49	0.71	0.69
	CDMA2000 BC1	Right Cheek	1.187	0.207	0.139	0.350	0.338	1.39	1.33	1.54	1.53
		Right Tilted	0.534	0.205	0.139	0.350	0.338	0.74	0.67	0.88	0.87
		Left Cheek	0.398	0.757	0.139	0.350	0.338	1.16	0.54	0.75	0.74
		Left Tilted	0.262	0.638	0.139	0.350	0.338	0.90	0.40	0.61	0.60



WWAN Band	Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	Band 12	Right Cheek	0.538	0.207	0.139	0.350	0.338	0.75	0.68	0.89	0.88
		Right Tilted	0.322	0.205	0.139	0.350	0.338	0.53	0.46	0.67	0.66
		Left Cheek	0.246	0.757	0.139	0.350	0.338	1.00	0.39	0.60	0.58
		Left Tilted	0.207	0.638	0.139	0.350	0.338	0.85	0.35	0.56	0.55
	Band 13	Right Cheek	0.877	0.207	0.139	0.350	0.338	1.08	1.02	1.23	1.22
		Right Tilted	0.483	0.205	0.139	0.350	0.338	0.69	0.62	0.83	0.82
		Left Cheek	0.390	0.757	0.139	0.350	0.338	1.15	0.53	0.74	0.73
		Left Tilted	0.338	0.638	0.139	0.350	0.338	0.98	0.48	0.69	0.68
	Band 26	Right Cheek	0.861	0.207	0.139	0.350	0.338	1.07	1.00	1.21	1.20
		Right Tilted	0.612	0.205	0.139	0.350	0.338	0.82	0.75	0.96	0.95
		Left Cheek	0.527	0.757	0.139	0.350	0.338	1.28	0.67	0.88	0.87
		Left Tilted	0.442	0.638	0.139	0.350	0.338	1.08	0.58	0.79	0.78
	Band 4	Right Cheek	1.081	0.207	0.139	0.350	0.338	1.29	1.22	1.43	1.42
		Right Tilted	0.672	0.205	0.139	0.350	0.338	0.88	0.81	1.02	1.01
		Left Cheek	0.582	0.757	0.139	0.350	0.338	1.34	0.72	0.93	0.92
		Left Tilted	0.515	0.638	0.139	0.350	0.338	1.15	0.65	0.87	0.85
	Band 25	Right Cheek	1.026	0.207	0.139	0.350	0.338	1.23	1.17	1.38	1.36
		Right Tilted	0.558	0.205	0.139	0.350	0.338	0.76	0.70	0.91	0.90
		Left Cheek	0.408	0.757	0.139	0.350	0.338	1.17	0.55	0.76	0.75
		Left Tilted	0.303	0.638	0.139	0.350	0.338	0.94	0.44	0.65	0.64
	Band 30	Right Cheek	1.186	0.207	0.139	0.350	0.338	1.39	1.33	1.54	1.52
		Right Tilted	0.896	0.205	0.139	0.350	0.338	1.10	1.04	1.25	1.23
		Left Cheek	0.436	0.757	0.139	0.350	0.338	1.19	0.58	0.79	0.77
		Left Tilted	0.523	0.638	0.139	0.350	0.338	1.16	0.66	0.87	0.86



Bottom Antenna:

WWAN Band		Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.107	0.207	0.139	0.350	0.338	0.31	0.25	0.46	0.45
		Right Tilted	0.044	0.205	0.139	0.350	0.338	0.25	0.18	0.39	0.38
		Left Cheek	0.079	0.757	0.139	0.350	0.338	0.84	0.22	0.43	0.42
		Left Tilted	0.049	0.638	0.139	0.350	0.338	0.69	0.19	0.40	0.39
	GSM1900	Right Cheek	0.177	0.207	0.139	0.350	0.338	0.38	0.32	0.53	0.52
		Right Tilted	0.115	0.205	0.139	0.350	0.338	0.32	0.25	0.47	0.45
		Left Cheek	0.259	0.757	0.139	0.350	0.338	1.02	0.40	0.61	0.60
		Left Tilted	0.097	0.638	0.139	0.350	0.338	0.74	0.24	0.45	0.44
WCDMA	Band V	Right Cheek	0.247	0.207	0.139	0.350	0.338	0.45	0.39	0.60	0.59
		Right Tilted	0.108	0.205	0.139	0.350	0.338	0.31	0.25	0.46	0.45
		Left Cheek	0.219	0.757	0.139	0.350	0.338	0.98	0.36	0.57	0.56
		Left Tilted	0.128	0.638	0.139	0.350	0.338	0.77	0.27	0.48	0.47
	Band IV	Right Cheek	0.167	0.207	0.139	0.350	0.338	0.37	0.31	0.52	0.51
		Right Tilted	0.105	0.205	0.139	0.350	0.338	0.31	0.24	0.46	0.44
		Left Cheek	0.090	0.757	0.139	0.350	0.338	0.85	0.23	0.44	0.43
		Left Tilted	0.075	0.638	0.139	0.350	0.338	0.71	0.21	0.43	0.41
	Band II	Right Cheek	0.336	0.207	0.139	0.350	0.338	0.54	0.48	0.69	0.67
		Right Tilted	0.194	0.205	0.139	0.350	0.338	0.40	0.33	0.54	0.53
		Left Cheek	0.522	0.757	0.139	0.350	0.338	1.28	0.66	0.87	0.86
		Left Tilted	0.183	0.638	0.139	0.350	0.338	0.82	0.32	0.53	0.52
CDMA	CDMA2000 BC10	Right Cheek	0.433	0.207	0.139	0.350	0.338	0.64	0.57	0.78	0.77
		Right Tilted	0.216	0.205	0.139	0.350	0.338	0.42	0.36	0.57	0.55
		Left Cheek	0.363	0.757	0.139	0.350	0.338	1.12	0.50	0.71	0.70
		Left Tilted	0.250	0.638	0.139	0.350	0.338	0.89	0.39	0.60	0.59
	CDMA2000 BC0	Right Cheek	0.384	0.207	0.139	0.350	0.338	0.59	0.52	0.73	0.72
		Right Tilted	0.182	0.205	0.139	0.350	0.338	0.39	0.32	0.53	0.52
		Left Cheek	0.311	0.757	0.139	0.350	0.338	1.07	0.45	0.66	0.65
		Left Tilted	0.203	0.638	0.139	0.350	0.338	0.84	0.34	0.55	0.54
	CDMA2000 BC1	Right Cheek	0.316	0.207	0.139	0.350	0.338	0.52	0.46	0.67	0.65
		Right Tilted	0.237	0.205	0.139	0.350	0.338	0.44	0.38	0.59	0.58
		Left Cheek	0.495	0.757	0.139	0.350	0.338	1.25	0.63	0.85	0.83
		Left Tilted	0.190	0.638	0.139	0.350	0.338	0.83	0.33	0.54	0.53



WWAN Band	Exposure Position	1	2	3	4	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1					
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
LTE	Band 12	Right Cheek	0.100	0.207	0.139	0.035	0.338	0.31	0.24	0.14	0.44
		Right Tilted	0.039	0.205	0.139	0.035	0.338	0.24	0.18	0.07	0.38
		Left Cheek	0.089	0.757	0.139	0.035	0.338	0.85	0.23	0.12	0.43
		Left Tilted	0.057	0.638	0.139	0.035	0.338	0.70	0.20	0.09	0.40
	Band 13	Right Cheek	0.219	0.207	0.139	0.035	0.338	0.43	0.36	0.25	0.56
		Right Tilted	0.100	0.205	0.139	0.035	0.338	0.31	0.24	0.14	0.44
		Left Cheek	0.191	0.757	0.139	0.035	0.338	0.95	0.33	0.23	0.53
		Left Tilted	0.115	0.638	0.139	0.035	0.338	0.75	0.25	0.15	0.45
	Band 26	Right Cheek	0.294	0.207	0.139	0.035	0.338	0.50	0.43	0.33	0.63
		Right Tilted	0.196	0.205	0.139	0.035	0.338	0.40	0.34	0.23	0.53
		Left Cheek	0.276	0.757	0.139	0.035	0.338	1.03	0.42	0.31	0.61
		Left Tilted	0.223	0.638	0.139	0.035	0.338	0.86	0.36	0.26	0.56
	Band 4	Right Cheek	0.140	0.207	0.139	0.035	0.338	0.35	0.28	0.18	0.48
		Right Tilted	0.053	0.205	0.139	0.035	0.338	0.26	0.19	0.09	0.39
		Left Cheek	0.074	0.757	0.139	0.035	0.338	0.83	0.21	0.11	0.41
		Left Tilted	0.039	0.638	0.139	0.035	0.338	0.68	0.18	0.07	0.38
	Band 25	Right Cheek	0.320	0.207	0.139	0.035	0.338	0.53	0.46	0.36	0.66
		Right Tilted	0.155	0.205	0.139	0.035	0.338	0.36	0.29	0.19	0.49
		Left Cheek	0.451	0.757	0.139	0.035	0.338	1.21	0.59	0.49	0.79
		Left Tilted	0.144	0.638	0.139	0.035	0.338	0.78	0.28	0.18	0.48
	Band 30	Right Cheek	0.173	0.207	0.139	0.035	0.338	0.38	0.31	0.21	0.51
		Right Tilted	0.133	0.205	0.139	0.035	0.338	0.34	0.27	0.17	0.47
		Left Cheek	0.323	0.757	0.139	0.035	0.338	1.08	0.46	0.36	0.66
		Left Tilted	0.121	0.638	0.139	0.035	0.338	0.76	0.26	0.16	0.46
	Band 7	Right Cheek	0.186	0.207	0.139	0.035	0.338	0.39	0.33	0.22	0.52
		Right Tilted	0.184	0.205	0.139	0.035	0.338	0.39	0.32	0.22	0.52
		Left Cheek	0.451	0.757	0.139	0.035	0.338	1.21	0.59	0.49	0.79
		Left Tilted	0.131	0.638	0.139	0.035	0.338	0.77	0.27	0.17	0.47
	Band 41	Right Cheek	0.059	0.207	0.139	0.035	0.338	0.27	0.20	0.09	0.40
		Right Tilted	0.056	0.205	0.139	0.035	0.338	0.26	0.20	0.09	0.39
		Left Cheek	0.148	0.757	0.139	0.035	0.338	0.91	0.29	0.18	0.49
		Left Tilted	0.040	0.638	0.139	0.035	0.338	0.68	0.18	0.08	0.38



16.2 Hotspot Exposure Conditions

Top Antenna:

WWAN Band		Exposure Position	1	2	3	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
GSM	GSM850	Front	0.161	0.107	0.028	0.047	0.27	0.19	0.21
		Back	0.293	0.107	0.028	0.047	0.40	0.32	0.34
		Left side	0.194		0.028	0.047	0.19	0.22	0.24
		Right side		0.107		0.047	0.11		0.05
		Top side	0.143	0.107	0.028	0.047	0.25	0.17	0.19
	GSM1900	Front	0.102	0.107	0.028	0.047	0.21	0.13	0.15
		Back	0.084	0.107	0.028	0.047	0.19	0.11	0.13
		Left side	0.093		0.028	0.047	0.09	0.12	0.14
		Right side		0.107		0.047	0.11		0.05
		Top side	0.047	0.107	0.028	0.047	0.15	0.08	0.09
WCDMA	Band V	Front	0.206	0.107	0.028	0.047	0.31	0.23	0.25
		Back	0.422	0.107	0.028	0.047	0.53	0.45	0.47
		Left side	0.216		0.028	0.047	0.22	0.24	0.26
		Right side		0.107		0.047	0.11		0.05
		Top side	0.155	0.107	0.028	0.047	0.26	0.18	0.20
	Band IV	Front	0.174	0.107	0.028	0.047	0.28	0.20	0.22
		Back	0.165	0.107	0.028	0.047	0.27	0.19	0.21
		Left side	0.128		0.028	0.047	0.13	0.16	0.18
		Right side		0.107		0.047	0.11		0.05
		Top side	0.132	0.107	0.028	0.047	0.24	0.16	0.18
	Band II	Front	0.136	0.107	0.028	0.047	0.24	0.16	0.18
		Back	0.128	0.107	0.028	0.047	0.24	0.16	0.18
		Left side	0.141		0.028	0.047	0.14	0.17	0.19
		Right side		0.107		0.047	0.11		0.05
		Top side	0.091	0.107	0.028	0.047	0.20	0.12	0.14



WWAN Band		Exposure Position	1	2	3	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
CDMA	CDMA2000 BC10	Front	0.158	0.107	0.028	0.047	0.27	0.19	0.21
		Back	0.329	0.107	0.028	0.047	0.44	0.36	0.38
		Left side	0.167		0.028	0.047	0.17	0.20	0.21
		Right side		0.107		0.047	0.11		0.05
		Top side	0.128	0.107	0.028	0.047	0.24	0.16	0.18
	CDMA2000 BC0	Front	0.127	0.107	0.028	0.047	0.23	0.16	0.17
		Back	0.313	0.107	0.028	0.047	0.42	0.34	0.36
		Left side	0.135		0.028	0.047	0.14	0.16	0.18
		Right side		0.107		0.047	0.11		0.05
		Top side	0.105	0.107	0.028	0.047	0.21	0.13	0.15
	CDMA2000 BC1	Front	0.076	0.107	0.028	0.047	0.18	0.10	0.12
		Back	0.052	0.107	0.028	0.047	0.16	0.08	0.10
		Left side	0.065		0.028	0.047	0.07	0.09	0.11
		Right side		0.107		0.047	0.11		0.05
		Top side	0.029	0.107	0.028	0.047	0.14	0.06	0.08
LTE	Band 12	Front	0.113	0.107	0.028	0.047	0.22	0.14	0.16
		Back	0.241	0.107	0.028	0.047	0.35	0.27	0.29
		Left side	0.104		0.028	0.047	0.10	0.13	0.15
		Right side		0.107		0.047	0.11		0.05
		Top side	0.102	0.107	0.028	0.047	0.21	0.13	0.15
	Band 13	Front	0.185	0.107	0.028	0.047	0.29	0.21	0.23
		Back	0.389	0.107	0.028	0.047	0.50	0.42	0.44
		Left side	0.276		0.028	0.047	0.28	0.30	0.32
		Right side		0.107		0.047	0.11		0.05
		Top side	0.176	0.107	0.028	0.047	0.28	0.20	0.22



WWAN Band		Exposure Position	1	2	3	5	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE	Band 26	Front	0.206	0.107	0.028	0.047	0.31	0.23	0.25
		Back	0.405	0.107	0.028	0.047	0.51	0.43	0.45
		Left side	0.253		0.028	0.047	0.25	0.28	0.30
		Right side		0.107		0.047	0.11		0.05
		Top side	0.187	0.107	0.028	0.047	0.29	0.22	0.23
	Band 4	Front	0.176	0.107	0.028	0.047	0.28	0.20	0.22
		Back	0.163	0.107	0.028	0.047	0.27	0.19	0.21
		Left side	0.118		0.028	0.047	0.12	0.15	0.17
		Right side		0.107		0.047	0.11		0.05
		Top side	0.095	0.107	0.028	0.047	0.20	0.12	0.14
	Band 25	Front	0.102	0.107	0.028	0.047	0.21	0.13	0.15
		Back	0.094	0.107	0.028	0.047	0.20	0.12	0.14
		Left side	0.088		0.028	0.047	0.09	0.12	0.14
		Right side		0.107		0.047	0.11		0.05
		Top side	0.044	0.107	0.028	0.047	0.15	0.07	0.09
	Band 30	Front	0.229	0.107	0.028	0.047	0.34	0.26	0.28
		Back	0.355	0.107	0.028	0.047	0.46	0.38	0.40
		Left side	0.284		0.028	0.047	0.28	0.31	0.33
		Right side		0.107		0.047	0.11		0.05
		Top side	0.183	0.107	0.028	0.047	0.29	0.21	0.23



Bottom Antenna:

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	2.4GHz WLAN Ant 1+2 1g SAR (W/kg)			
GSM	GSM850	Front	0.124	0.107	0.028	0.047	0.23	0.15	0.17
		Back	0.211	0.107	0.028	0.047	0.32	0.24	0.26
		Left side	0.084		0.028	0.047	0.08	0.11	0.13
		Right side	0.257	0.107		0.047	0.36	0.26	0.30
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.099				0.10	0.10	0.10
	GSM1900	Front	0.256	0.107	0.028	0.047	0.36	0.28	0.30
		Back	0.359	0.107	0.028	0.047	0.47	0.39	0.41
		Left side	0.256		0.028	0.047	0.26	0.28	0.30
		Right side	0.085	0.107		0.047	0.19	0.09	0.13
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.156				0.16	0.16	0.16
WCDMA	Band V	Front	0.245	0.107	0.028	0.047	0.35	0.27	0.29
		Back	0.399	0.107	0.028	0.047	0.51	0.43	0.45
		Left side	0.184		0.028	0.047	0.18	0.21	0.23
		Right side	0.395	0.107		0.047	0.50	0.40	0.44
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.190				0.19	0.19	0.19
	Band IV	Front	0.690	0.107	0.028	0.047	0.80	0.72	0.74
		Back	1.134	0.107	0.028	0.047	1.24	1.16	1.18
		Left side	0.140		0.028	0.047	0.14	0.17	0.19
		Right side	0.249	0.107		0.047	0.36	0.25	0.30
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	1.165				1.17	1.17	1.17
	Band II	Front	0.555	0.107	0.028	0.047	0.66	0.58	0.60
		Back	0.695	0.107	0.028	0.047	0.80	0.72	0.74
		Left side	0.638		0.028	0.047	0.64	0.67	0.69
		Right side	0.102	0.107		0.047	0.21	0.10	0.15
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.297				0.30	0.30	0.30



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 2 1g SAR (W/kg)	2.4GHz WLAN Ant 1+2 1g SAR (W/kg)			
CDMA	CDMA2000 BC10	Front	0.501	0.107	0.028	0.047	0.61	0.53	0.55
		Back	0.707	0.107	0.028	0.047	0.81	0.74	0.75
		Left side	0.301		0.028	0.047	0.30	0.33	0.35
		Right side	0.770	0.107		0.047	0.88	0.77	0.82
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.338				0.34	0.34	0.34
	CDMA2000 BC0	Front	0.423	0.107	0.028	0.047	0.53	0.45	0.47
		Back	0.575	0.107	0.028	0.047	0.68	0.60	0.62
		Left side	0.259		0.028	0.047	0.26	0.29	0.31
		Right side	0.665	0.107		0.047	0.77	0.67	0.71
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.302				0.30	0.30	0.30
	CDMA2000 BC1	Front	0.436	0.107	0.028	0.047	0.54	0.46	0.48
		Back	0.538	0.107	0.028	0.047	0.65	0.57	0.59
		Left side	0.516		0.028	0.047	0.52	0.54	0.56
		Right side	0.139	0.107		0.047	0.25	0.14	0.19
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.278				0.28	0.28	0.28
LTE	Band 12	Front	0.152	0.107	0.028	0.047	0.26	0.18	0.20
		Back	0.239	0.107	0.028	0.047	0.35	0.27	0.29
		Left side	0.166		0.028	0.047	0.17	0.19	0.21
		Right side	0.275	0.107		0.047	0.38	0.28	0.32
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.089				0.09	0.09	0.09
	Band 13	Front	0.280	0.107	0.028	0.047	0.39	0.31	0.33
		Back	0.358	0.107	0.028	0.047	0.47	0.39	0.41
		Left side	0.347		0.028	0.047	0.35	0.38	0.39
		Right side	0.504	0.107		0.047	0.61	0.50	0.55
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.158				0.16	0.16	0.16
	Band 26	Front	0.419	0.107	0.028	0.047	0.53	0.45	0.47
		Back	0.583	0.107	0.028	0.047	0.69	0.61	0.63
		Left side	0.212		0.028	0.047	0.21	0.24	0.26
		Right side	0.759	0.107		0.047	0.87	0.76	0.81
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.253				0.25	0.25	0.25



WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE	Band 4	Front	0.728	0.107	0.028	0.047	0.84	0.76	0.78
		Back	1.093	0.107	0.028	0.047	1.20	1.12	1.14
		Left side	0.125		0.028	0.047	0.13	0.15	0.17
		Right side	0.208	0.107		0.047	0.32	0.21	0.26
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	1.163				1.16	1.16	1.16
	Band 25	Front	0.468	0.107	0.028	0.047	0.58	0.50	0.52
		Back	0.533	0.107	0.028	0.047	0.64	0.56	0.58
		Left side	0.356		0.028	0.047	0.36	0.38	0.40
		Right side	0.198	0.107		0.047	0.31	0.20	0.25
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.414				0.41	0.41	0.41
	Band 30	Front	0.475	0.107	0.028	0.047	0.58	0.50	0.52
		Back	0.517	0.107	0.028	0.047	0.62	0.55	0.56
		Left side	0.469		0.028	0.047	0.47	0.50	0.52
		Right side	0.031	0.107		0.047	0.14	0.03	0.08
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.301				0.30	0.30	0.30
	Band 7	Front	0.481	0.107	0.028	0.047	0.59	0.51	0.53
		Back	0.553	0.107	0.028	0.047	0.66	0.58	0.60
		Left side	0.490		0.028	0.047	0.49	0.52	0.54
		Right side	0.026	0.107		0.047	0.13	0.03	0.07
		Top side		0.107	0.028	0.047	0.11	0.03	0.05
		Bottom side	0.282				0.28	0.28	0.28
Band 41	Front	0.161	0.107	0.028	0.047	0.27	0.19	0.21	
	Back	0.188	0.107	0.028	0.047	0.30	0.22	0.24	
	Left side	0.160		0.028	0.047	0.16	0.19	0.21	
	Right side	0.011	0.107		0.047	0.12	0.01	0.06	
	Top side		0.107	0.028	0.047	0.11	0.03	0.05	
	Bottom side	0.091				0.09	0.09	0.09	



16.3 Body-Worn Accessory Exposure Conditions

Top Antenna:

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2	5GHz WLAN Ant 1	Bluetooth Ant 1					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
GSM	GSM850	Front	0.161	0.107	0.024	0.047	0.016	0.168	0.27	0.19	0.21	0.18	0.33
		Back	0.293	0.107	0.024	0.047	0.016	0.168	0.40	0.32	0.34	0.31	0.46
	GSM1900	Front	0.102	0.107	0.024	0.047	0.016	0.168	0.21	0.13	0.15	0.12	0.27
		Back	0.084	0.107	0.024	0.047	0.016	0.168	0.19	0.11	0.13	0.10	0.25
WCDMA	Band V	Front	0.206	0.107	0.024	0.047	0.016	0.168	0.31	0.23	0.25	0.22	0.37
		Back	0.422	0.107	0.024	0.047	0.016	0.168	0.53	0.45	0.47	0.44	0.59
	Band IV	Front	0.174	0.107	0.024	0.047	0.016	0.168	0.28	0.20	0.22	0.19	0.34
		Back	0.165	0.107	0.024	0.047	0.016	0.168	0.27	0.19	0.21	0.18	0.33
	Band II	Front	0.136	0.107	0.024	0.047	0.016	0.168	0.24	0.16	0.18	0.15	0.30
		Back	0.128	0.107	0.024	0.047	0.016	0.168	0.24	0.15	0.18	0.14	0.30
CDMA	CDMA2000 BC10	Front	0.151	0.107	0.024	0.047	0.016	0.168	0.26	0.18	0.20	0.17	0.32
		Back	0.337	0.107	0.024	0.047	0.016	0.168	0.44	0.36	0.38	0.35	0.51
	CDMA2000 BC0	Front	0.123	0.107	0.024	0.047	0.016	0.168	0.23	0.15	0.17	0.14	0.29
		Back	0.280	0.107	0.024	0.047	0.016	0.168	0.39	0.30	0.33	0.30	0.45
	CDMA2000 BC1	Front	0.077	0.107	0.024	0.047	0.016	0.168	0.18	0.10	0.12	0.09	0.25
		Back	0.062	0.107	0.024	0.047	0.016	0.168	0.17	0.09	0.11	0.08	0.23
LTE	Band 12	Front	0.113	0.107	0.024	0.047	0.016	0.168	0.22	0.14	0.16	0.13	0.28
		Back	0.241	0.107	0.024	0.047	0.016	0.168	0.35	0.27	0.29	0.26	0.41
	Band 13	Front	0.185	0.107	0.024	0.047	0.016	0.168	0.29	0.21	0.23	0.20	0.35
		Back	0.389	0.107	0.024	0.047	0.016	0.168	0.50	0.41	0.44	0.41	0.56
	Band 26	Front	0.206	0.107	0.024	0.047	0.016	0.168	0.31	0.23	0.25	0.22	0.37
		Back	0.405	0.107	0.024	0.047	0.016	0.168	0.51	0.43	0.45	0.42	0.57
	Band 4	Front	0.176	0.107	0.024	0.047	0.016	0.168	0.28	0.20	0.22	0.19	0.34
		Back	0.163	0.107	0.024	0.047	0.016	0.168	0.27	0.19	0.21	0.18	0.33
	Band 25	Front	0.102	0.107	0.024	0.047	0.016	0.168	0.21	0.13	0.15	0.12	0.27
		Back	0.094	0.107	0.024	0.047	0.016	0.168	0.20	0.12	0.14	0.11	0.26
	Band 30	Front	0.229	0.107	0.024	0.047	0.016	0.168	0.34	0.25	0.28	0.25	0.40
		Back	0.355	0.107	0.024	0.047	0.016	0.168	0.46	0.38	0.40	0.37	0.52



Bottom Antenna:

WWAN Band		Exposure Position	1	2	3	4	5	6	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+5 Summed 1g SAR (W/kg)	1+6 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN Ant 1	2.4GHz WLAN Ant 2	2.4GHz WLAN Ant 1+2	WLAN 5GHz Ant 1	Bluetooth Ant 1					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
GSM	GSM850	Front	0.124	0.107	0.024	0.047	0.016	0.168	0.23	0.15	0.17	0.14	0.29
		Back	0.211	0.107	0.024	0.047	0.016	0.168	0.32	0.24	0.26	0.23	0.38
	GSM1900	Front	0.256	0.107	0.024	0.047	0.016	0.168	0.36	0.28	0.30	0.27	0.42
		Back	0.359	0.107	0.024	0.047	0.016	0.168	0.47	0.38	0.41	0.38	0.53
WCDMA	Band V	Front	0.245	0.107	0.024	0.047	0.016	0.168	0.35	0.27	0.29	0.26	0.41
		Back	0.399	0.107	0.024	0.047	0.016	0.168	0.51	0.42	0.45	0.42	0.57
	Band IV	Front	0.690	0.107	0.024	0.047	0.016	0.168	0.80	0.71	0.74	0.71	0.86
		Back	1.134	0.107	0.024	0.047	0.016	0.168	1.24	1.16	1.18	1.15	1.30
	Band II	Front	0.555	0.107	0.024	0.047	0.016	0.168	0.66	0.58	0.60	0.57	0.72
		Back	0.695	0.107	0.024	0.047	0.016	0.168	0.80	0.72	0.74	0.71	0.86
CDMA	CDMA2000 BC10	Front	0.458	0.107	0.024	0.047	0.016	0.168	0.57	0.48	0.51	0.47	0.63
		Back	0.659	0.107	0.024	0.047	0.016	0.168	0.77	0.68	0.71	0.68	0.83
	CDMA2000 BC0	Front	0.345	0.107	0.024	0.047	0.016	0.168	0.45	0.37	0.39	0.36	0.51
		Back	0.586	0.107	0.024	0.047	0.016	0.168	0.69	0.61	0.63	0.60	0.75
	CDMA2000 BC1	Front	0.440	0.107	0.024	0.047	0.016	0.168	0.55	0.46	0.49	0.46	0.61
		Back	0.551	0.107	0.024	0.047	0.016	0.168	0.66	0.58	0.60	0.57	0.72
LTE	Band 12	Front	0.152	0.107	0.024	0.047	0.016	0.168	0.26	0.18	0.20	0.17	0.32
		Back	0.239	0.107	0.024	0.047	0.016	0.168	0.35	0.26	0.29	0.26	0.41
	Band 13	Front	0.280	0.107	0.024	0.047	0.016	0.168	0.39	0.30	0.33	0.30	0.45
		Back	0.358	0.107	0.024	0.047	0.016	0.168	0.47	0.38	0.41	0.37	0.53
	Band 26	Front	0.419	0.107	0.024	0.047	0.016	0.168	0.53	0.44	0.47	0.44	0.59
		Back	0.583	0.107	0.024	0.047	0.016	0.168	0.69	0.61	0.63	0.60	0.75
	Band 4	Front	0.728	0.107	0.024	0.047	0.016	0.168	0.84	0.75	0.78	0.74	0.90
		Back	1.093	0.107	0.024	0.047	0.016	0.168	1.20	1.12	1.14	1.11	1.26
	Band 25	Front	0.468	0.107	0.024	0.047	0.016	0.168	0.58	0.49	0.52	0.48	0.64
		Back	0.533	0.107	0.024	0.047	0.016	0.168	0.64	0.56	0.58	0.55	0.70
	Band 30	Front	0.475	0.107	0.024	0.047	0.016	0.168	0.58	0.50	0.52	0.49	0.64
		Back	0.517	0.107	0.024	0.047	0.016	0.168	0.62	0.54	0.56	0.53	0.69
	Band 7	Front	0.481	0.107	0.024	0.047	0.016	0.168	0.59	0.51	0.53	0.50	0.65
		Back	0.553	0.107	0.024	0.047	0.016	0.168	0.66	0.58	0.60	0.57	0.72
Band 41	Front	0.161	0.107	0.024	0.047	0.016	0.168	0.27	0.19	0.21	0.18	0.33	
	Back	0.188	0.107	0.024	0.047	0.016	0.168	0.30	0.21	0.24	0.20	0.36	

Test Engineer : Frank Qiao and Kat Yin

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASy uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.8%	12.7%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.5%	25.4%

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



18. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [7] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [9] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [10] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz_160421

DUT: D750V3 - SN:1065

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750_160421 Medium parameters used: $f = 750$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.82$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.52, 10.52, 10.52); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.63 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.10 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.4 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

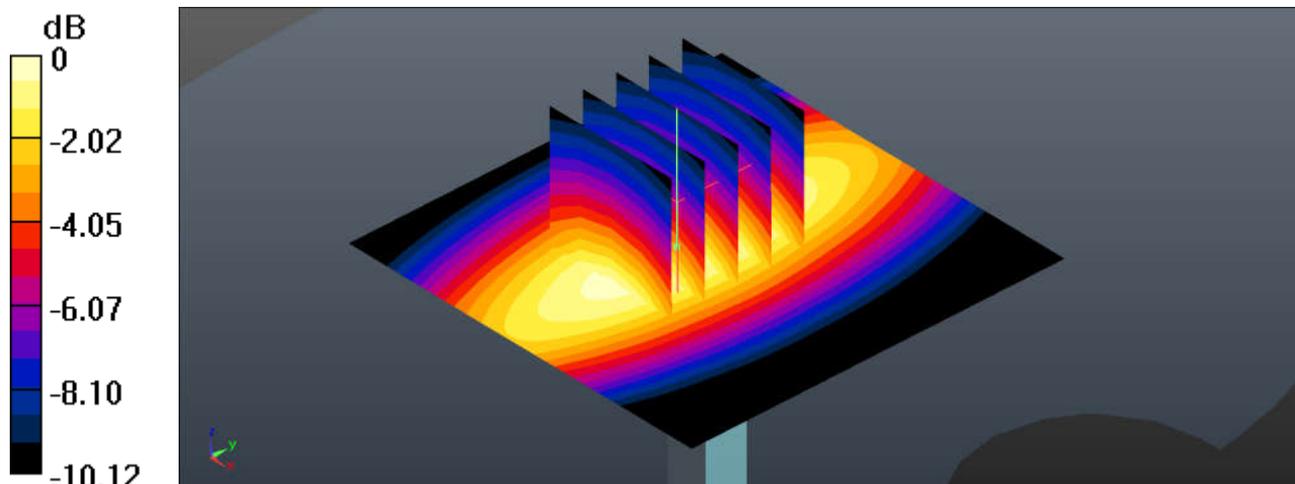

0 dB = 2.65 W/kg = 4.23 dBW/kg

System Check_Head_835MHz_160421

DUT: D835V2 - SN:4d091

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_160421 Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.484$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.1, 10.1, 10.1); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.06 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.03 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.06 W/kg

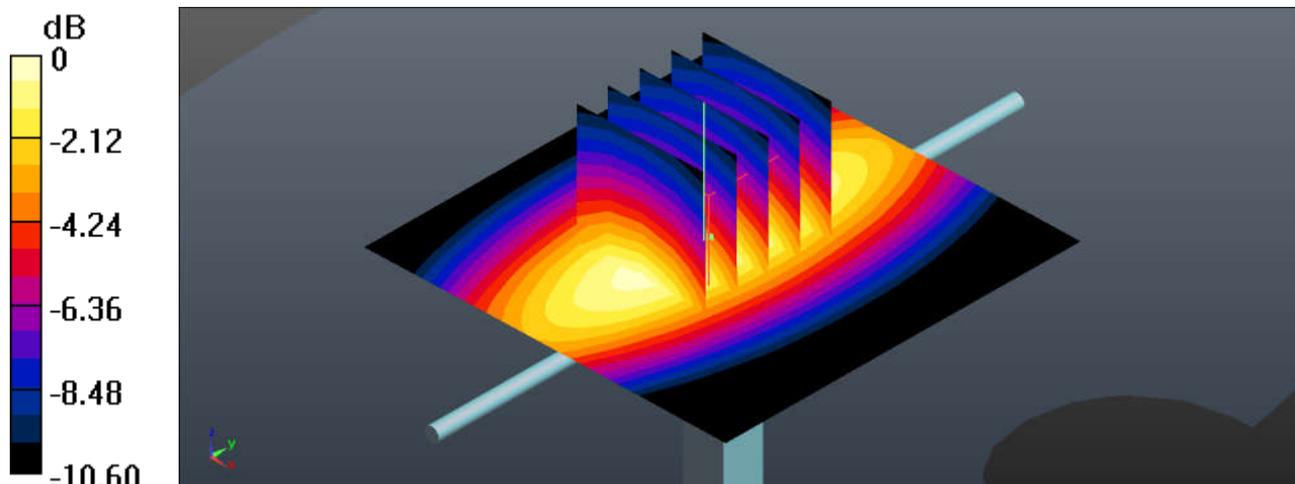

0 dB = 3.06 W/kg = 4.86 dBW/kg

System Check_Head_1750MHz_160419

DUT: D1750V2 - SN:1069

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750_160419 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 40.48$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.06, 8.06, 8.06); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.2 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 79.27 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 8.96 W/kg; SAR(10 g) = 4.57 W/kg

Maximum value of SAR (measured) = 13.1 W/kg

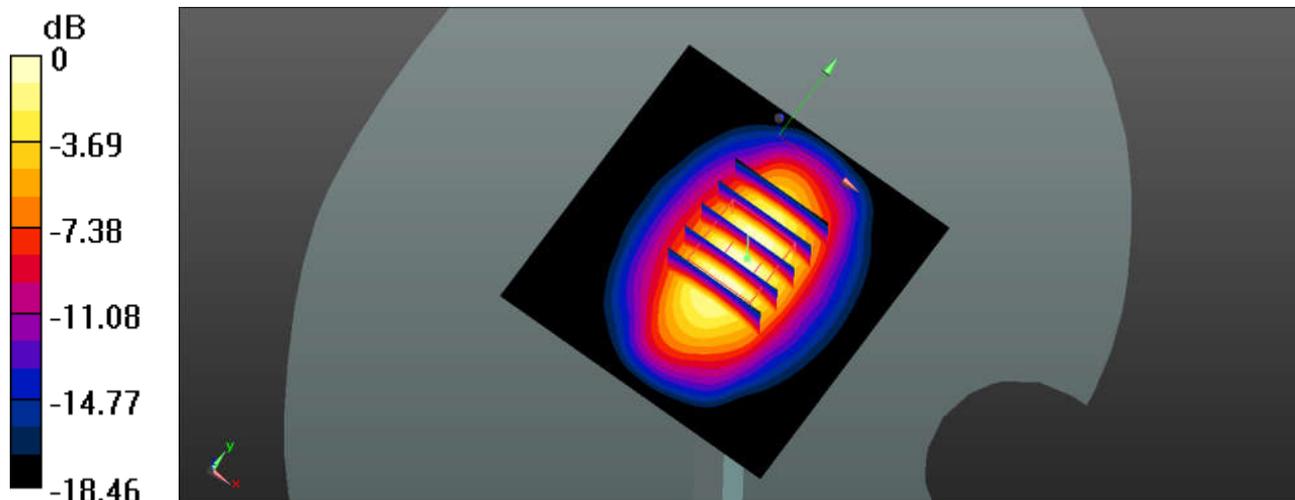

0 dB = 13.1 W/kg

System Check_Head_1900MHz_160419

DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_160419 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 40.971$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.81, 7.81, 7.81); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 17.1 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.52 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 21.9 W/kg

SAR(1 g) = 9.43 W/kg; SAR(10 g) = 4.78 W/kg

Maximum value of SAR (measured) = 17.2 W/kg

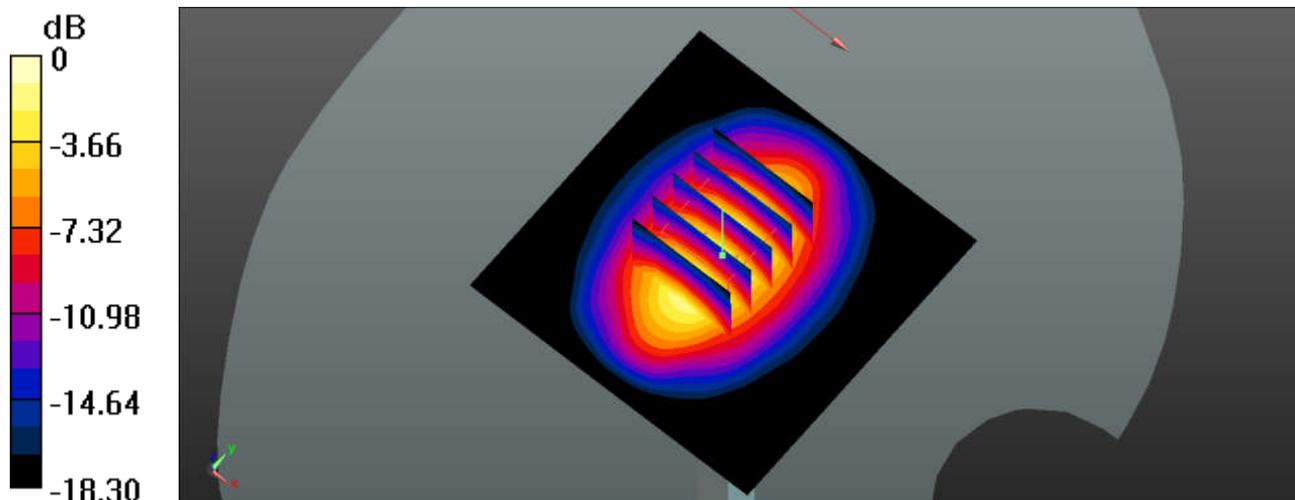

0 dB = 16.2 W/kg

System Check_Head_2300MHz_160424

DUT: D2300V2 - SN:1006

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: HSL_2300_160424 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.656$ S/m; $\epsilon_r = 38.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.44, 7.44, 7.44); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 20.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.66 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 27.0 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.94 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

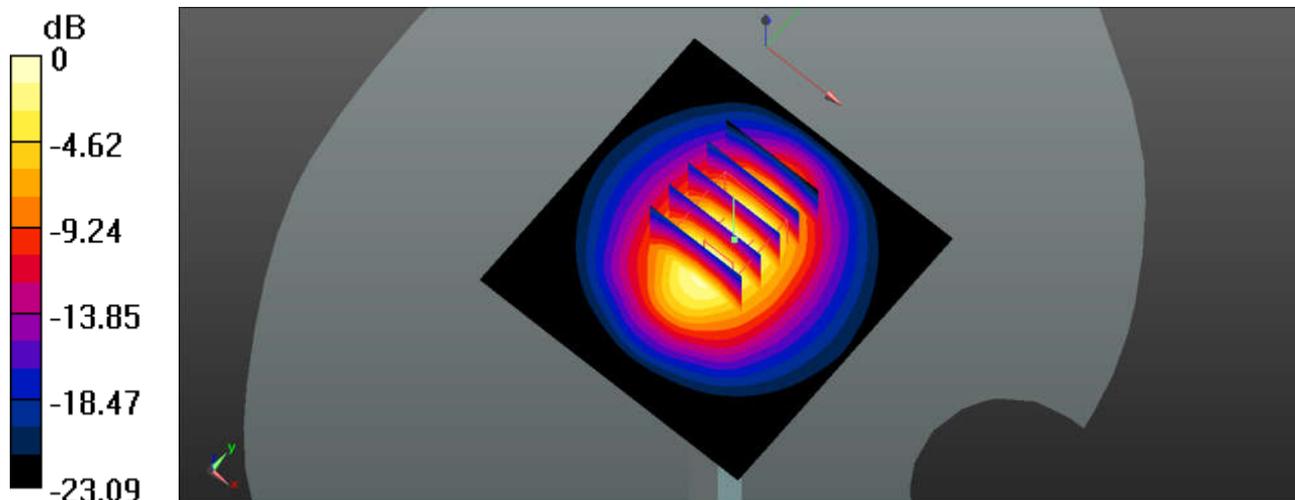

0 dB = 45.0 W/kg

System Check_Head_5250MHz_160428

DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: HSL_5000_160428 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.854$ S/m; $\epsilon_r = 35.393$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.97, 4.97, 4.97); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical SurfaceDetection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 16.1 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 40.60 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 31.2 W/kg
SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.41 W/kg
Maximum value of SAR (measured) = 19.5 W/kg

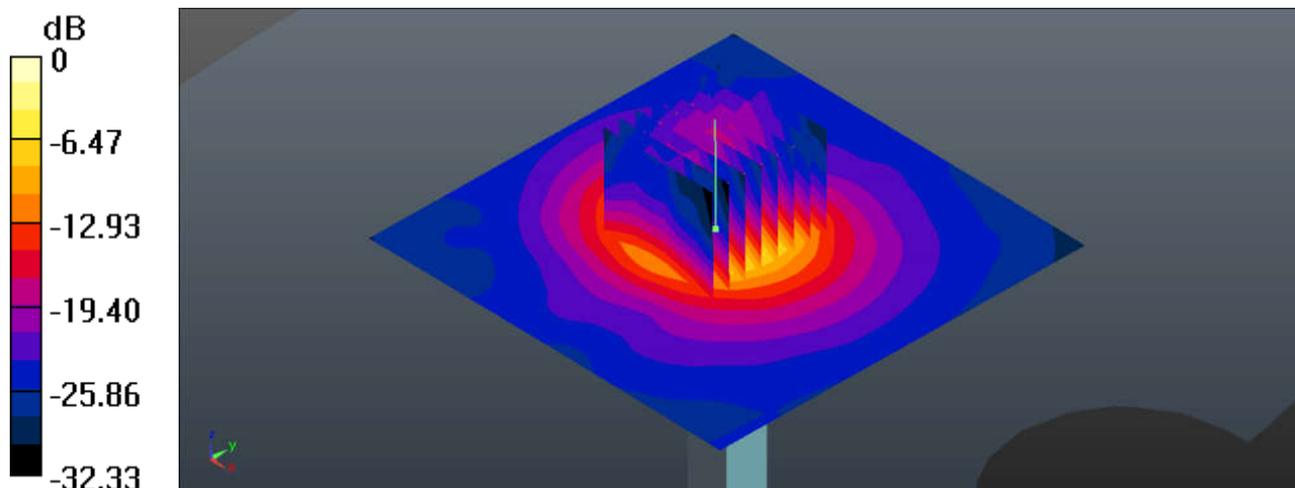

0 dB = 19.5 W/kg = 12.90 dBW/kg

System Check_Head_5750MHz_160428

DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium: HSL_5000_160428 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.363$ S/m; $\epsilon_r = 34.495$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.38, 4.38, 4.38); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical SurfaceDetection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 15.6 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 38.42 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 30.8 W/kg
SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.3 W/kg
Maximum value of SAR (measured) = 18.8 W/kg

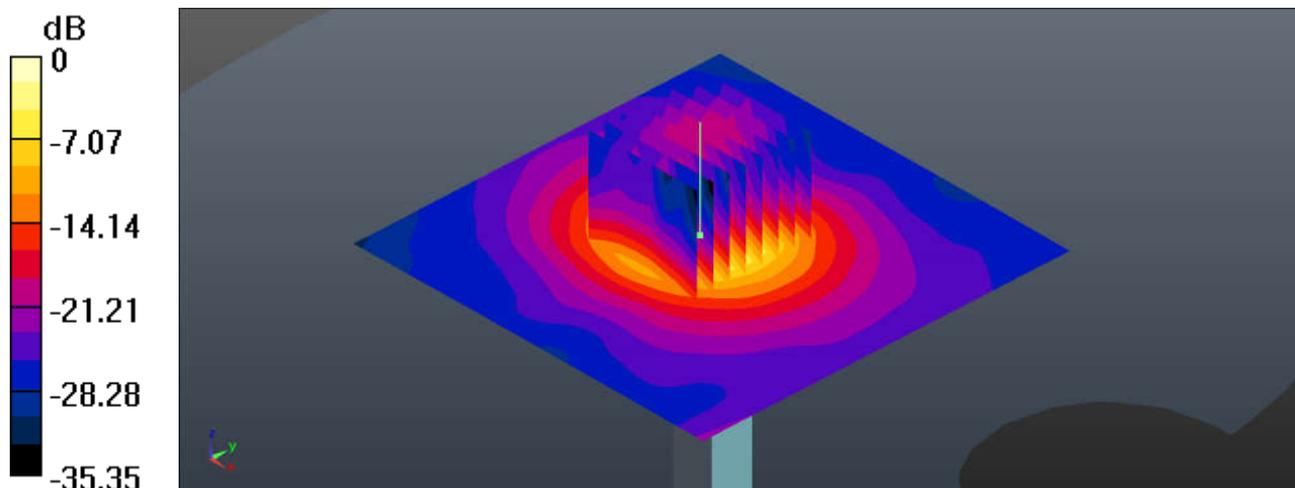

0 dB = 18.8 W/kg = 12.74 dBW/kg

System Check_Head_750MHz_20160510

DUT: D750V3-SN:1065

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750_2016/05/10 Medium parameters used: $f = 750$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 40.797$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.06, 10.06, 10.06); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.93 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 58.96 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.43 W/kg
SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.51 W/kg
Maximum value of SAR (measured) = 2.92 W/kg

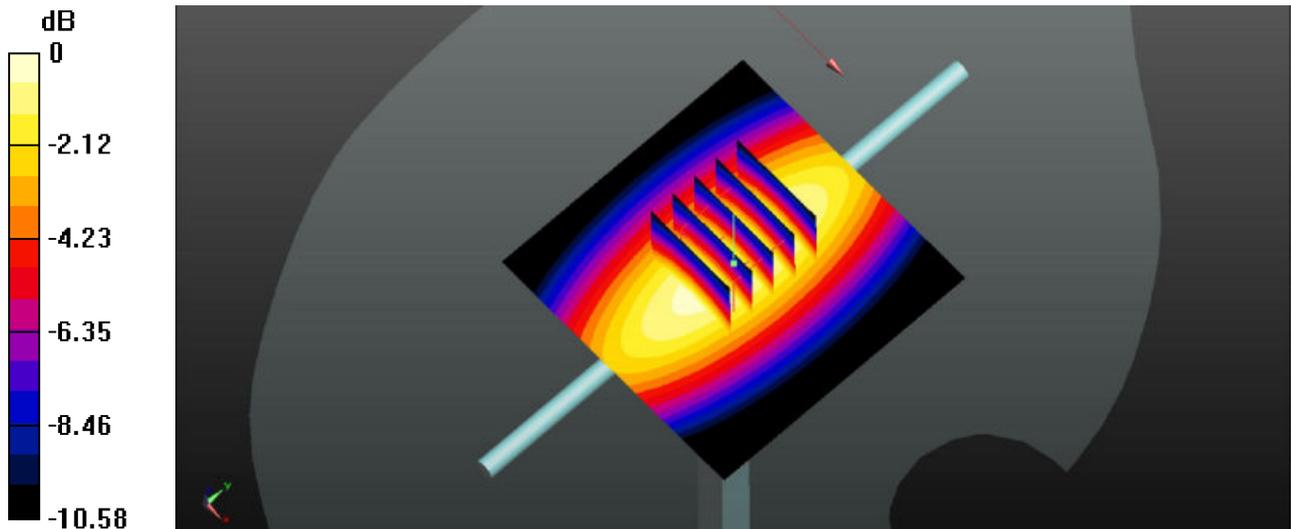

0 dB = 2.92 W/kg

System Check_Head_835MHz_20160508

DUT: D835V2-SN:4d091

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_2016/05/08 Medium parameters used: $f = 835$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.874$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.75, 9.75, 9.75); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.10 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.74 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.6 W/kg

Maximum value of SAR (measured) = 3.07 W/kg

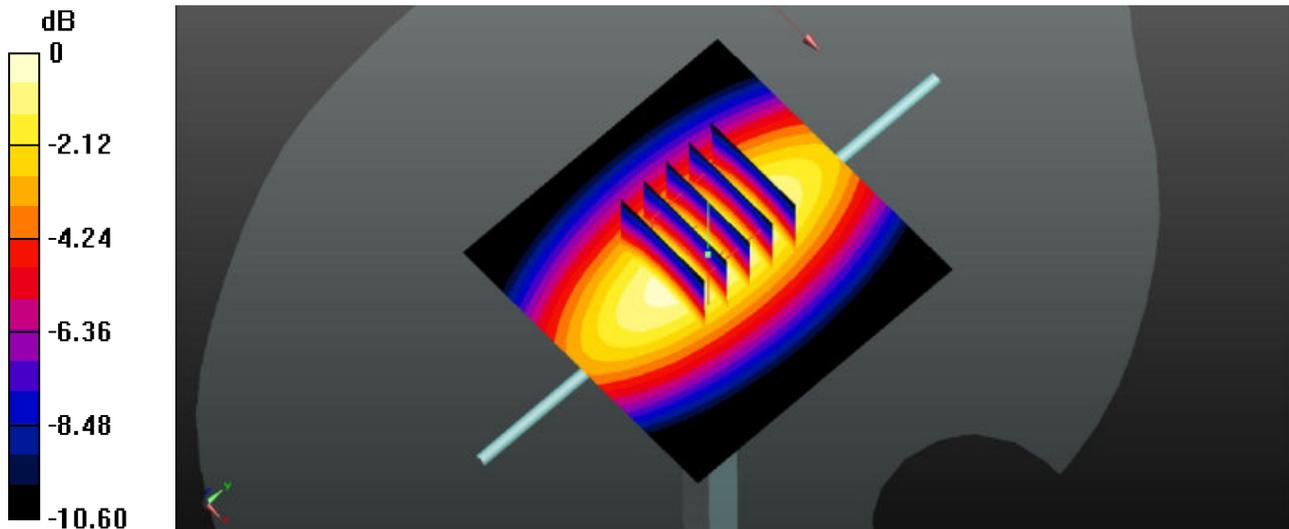

0 dB = 3.07 W/kg

System Check_Head_1750MHz_20160509

DUT: D1750V2-SN:1069

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750_2016/05/09 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 41.214$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.41, 8.41, 8.41); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 13.4 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 98.93 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 16.8 W/kg
SAR(1 g) = 9.31 W/kg; SAR(10 g) = 4.93 W/kg
Maximum value of SAR (measured) = 13.1 W/kg

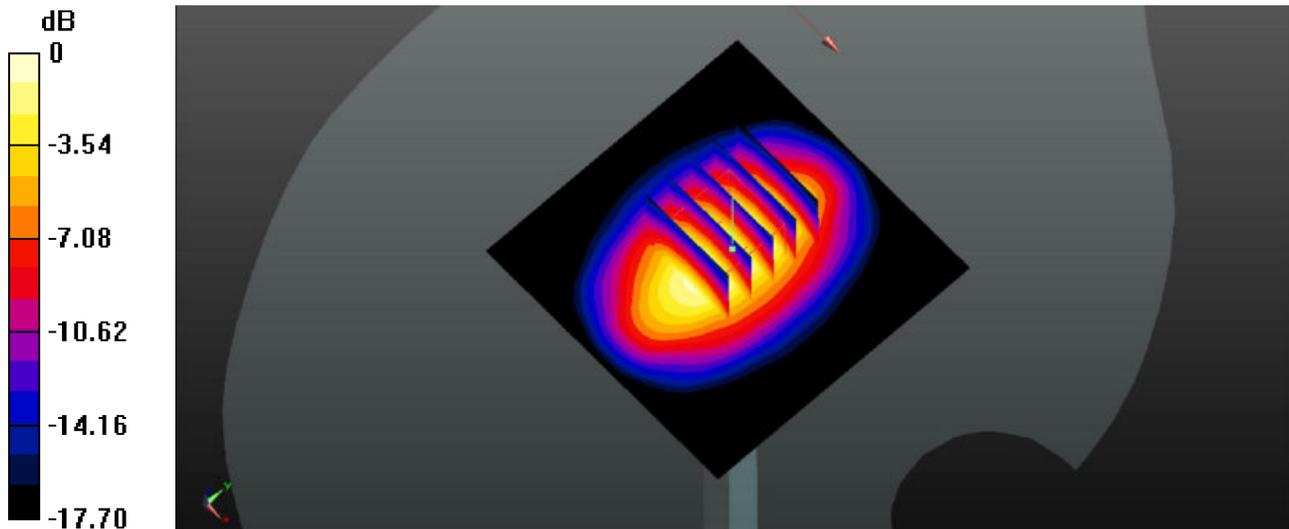

System Check_Head_1900MHz_20160507

DUT: D1900V2-SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_2016/05/07 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.456$ S/m; $\epsilon_r = 40.84$;
 $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.12, 8.12, 8.12); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 15.0 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 99.87 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 19.4 W/kg
SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.38 W/kg
Maximum value of SAR (measured) = 14.9 W/kg

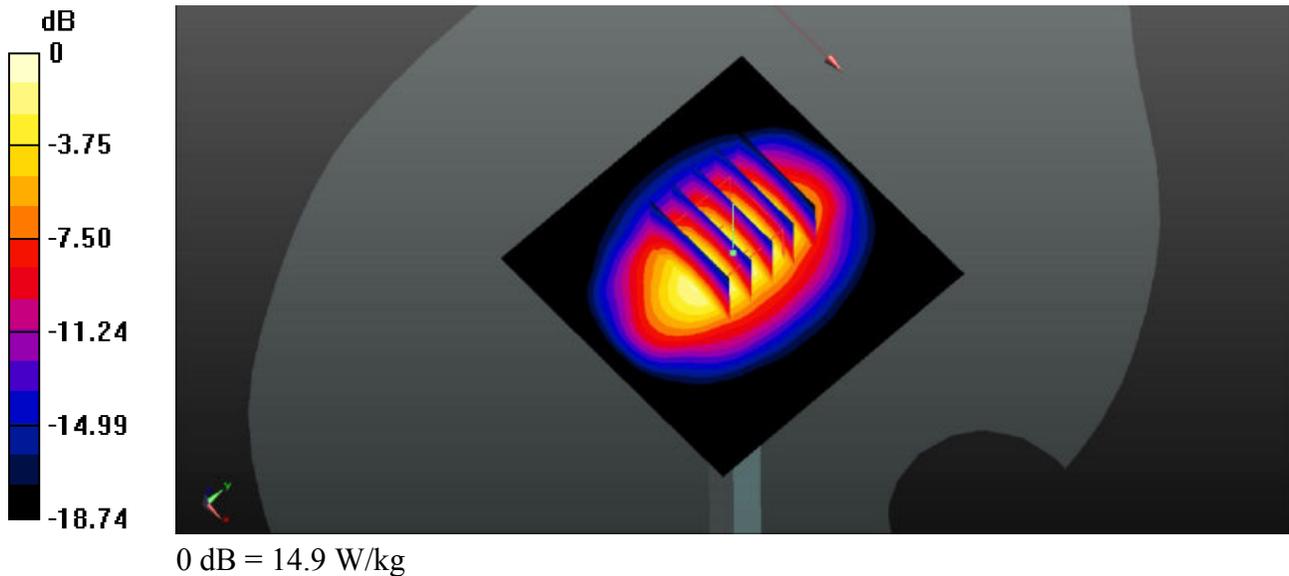

System Check_Head_2300MHz_20160503

DUT: D2300V2-SN:1006

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: HSL_2300_2016/05/03 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 18.4 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 83.44 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 26.0 W/kg
SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.29 W/kg
Maximum value of SAR (measured) = 18.5 W/kg

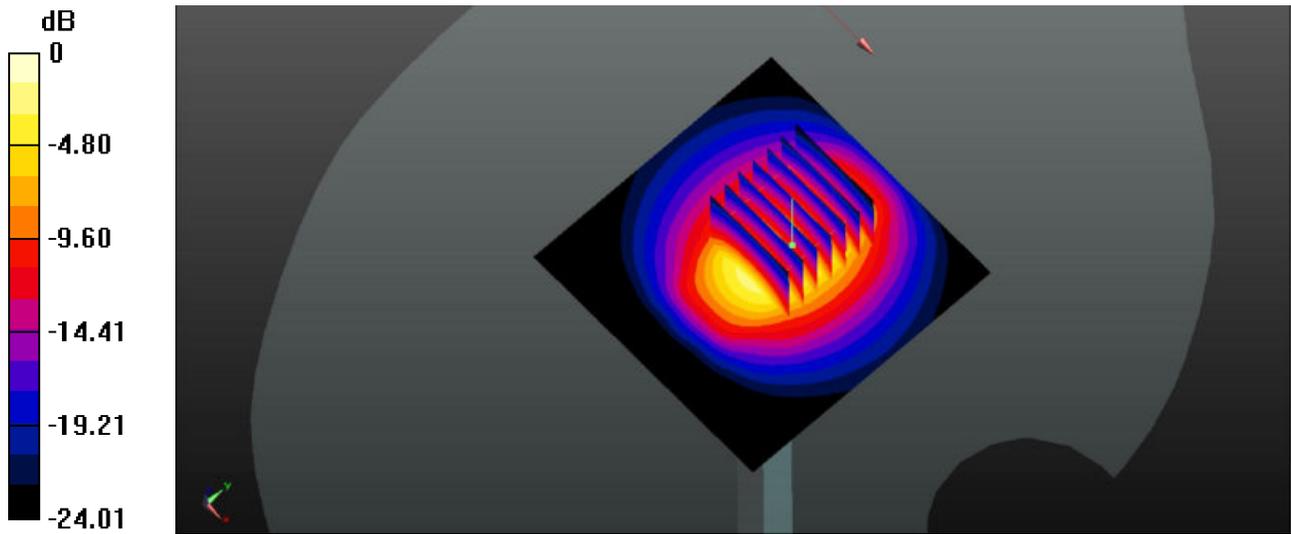

0 dB = 18.5 W/kg

System Check_Head_2450MHz_20160511

DUT: D2450V2-SN:840

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_2016/05/11 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.821$ S/m; $\epsilon_r = 37.95$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.31, 7.31, 7.31); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 22.2 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 92.91 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 30.1 W/kg
SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.33 W/kg
Maximum value of SAR (measured) = 21.7 W/kg

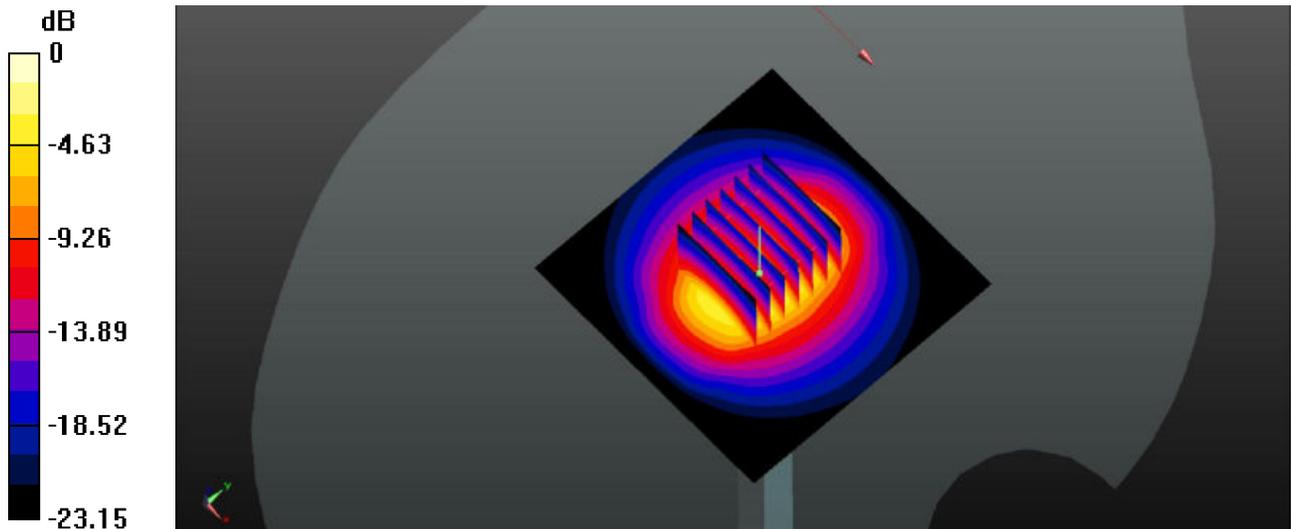

0 dB = 21.7 W/kg

System Check_Head_2600MHz_20160505

DUT: D2600V2-SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600_2016/05/05 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.056$ S/m; $\epsilon_r = 37.284$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.18, 7.18, 7.18); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 26.0 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 94.58 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 36.5 W/kg
SAR(1 g) = 15.2 W/kg; SAR(10 g) = 7.07 W/kg
Maximum value of SAR (measured) = 25.9 W/kg

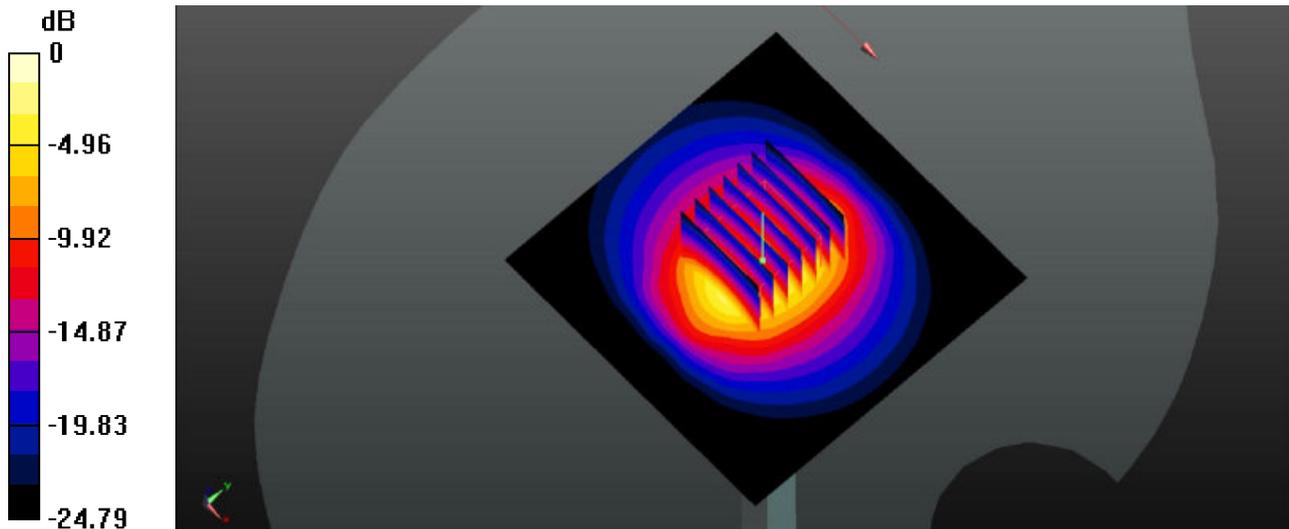

0 dB = 25.9 W/kg

System Check_Body_750MHz_160428

DUT: D750V3 - SN:1065


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL_750_160428 Medium parameters used: $f = 750$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 54.926$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.22, 10.22, 10.22); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.82 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.49 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.26 W/kg
SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.56 W/kg
Maximum value of SAR (measured) = 2.84 W/kg

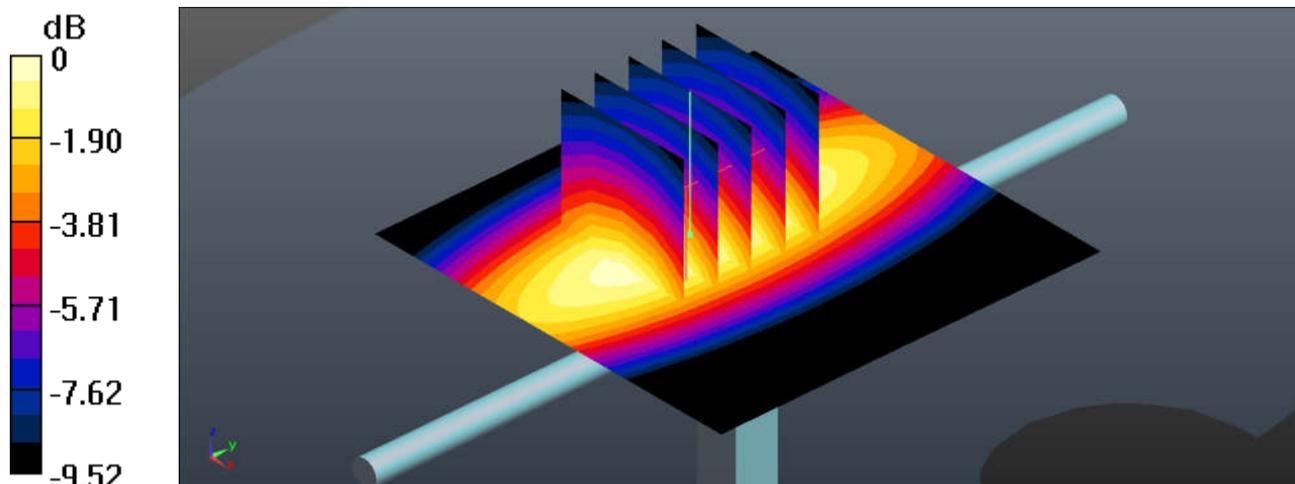

0 dB = 2.84 W/kg = 4.53 dBW/kg

System Check_Body_835MHz_160506

DUT: D835V2 - SN:4d091

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_160506 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 53.704$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.17, 10.17, 10.17); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.20 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.98 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 3.69 W/kg

SAR(1 g) = 2.56 W/kg ; SAR(10 g) = 1.69 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

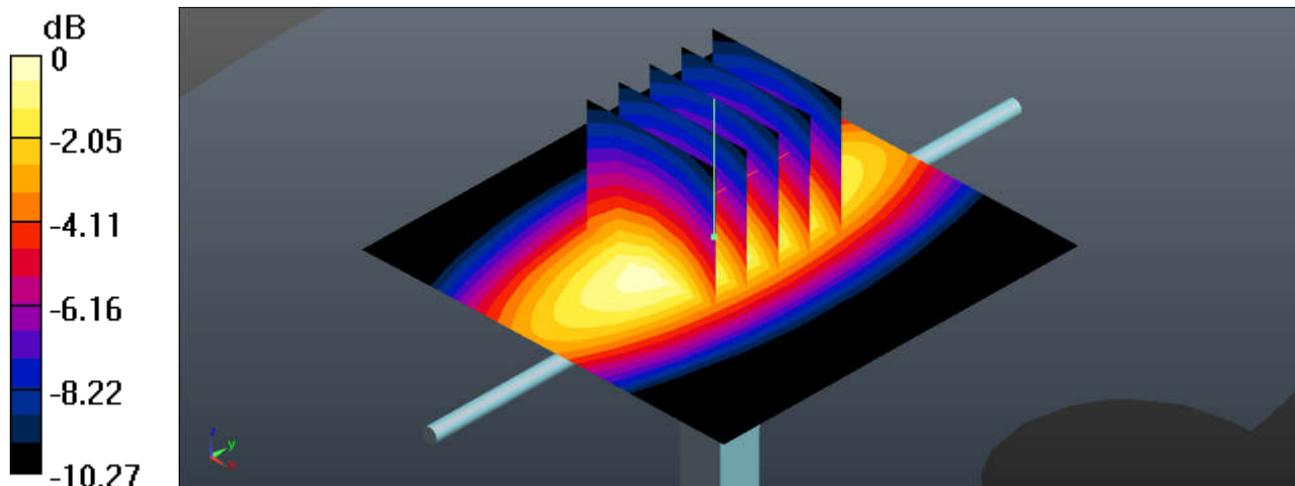

0 dB = $3.21 \text{ W/kg} = 5.07 \text{ dBW/kg}$

System Check_Body_1750MHz_160511

DUT: D1750V2 - SN:1069


Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: MSL_1750_160511 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.528$ S/m; $\epsilon_r = 53.218$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(8.17, 8.17, 8.17); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.1 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 78.61 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 15.9 W/kg
SAR(1 g) = 9.46 W/kg; SAR(10 g) = 5.19 W/kg
Maximum value of SAR (measured) = 12.9 W/kg

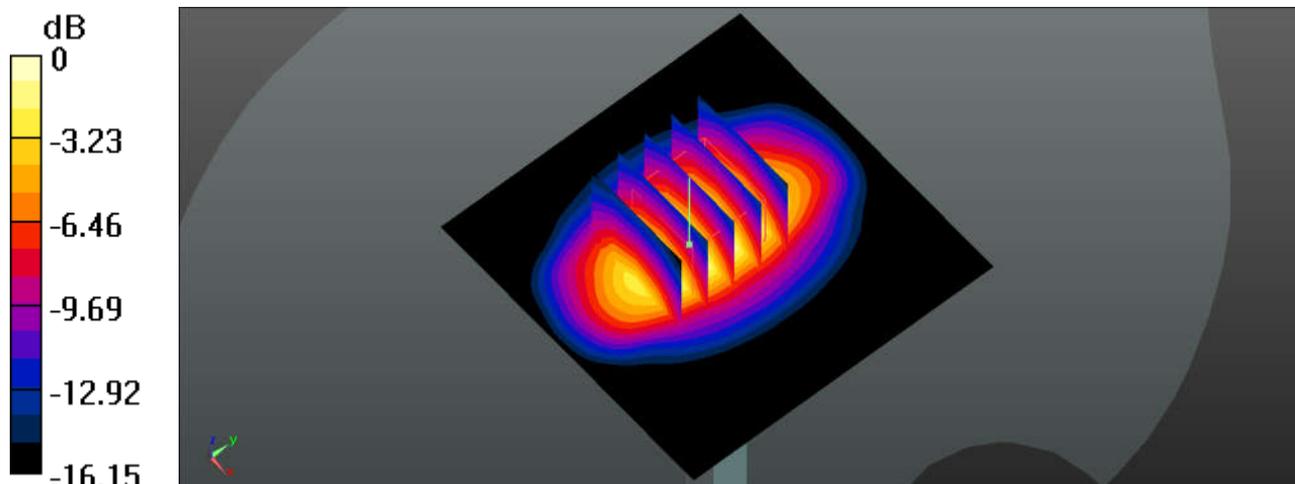

0 dB = 12.9 W/kg = 11.11 dBW/kg

System Check_Body_1900MHz_160508

DUT: D1900V2 - SN:5d118


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL_1900_160508 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.551$ S/m; $\epsilon_r = 54.638$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.54, 7.54, 7.54); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 14.2 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 73.44 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.33 W/kg
Maximum value of SAR (measured) = 14.1 W/kg

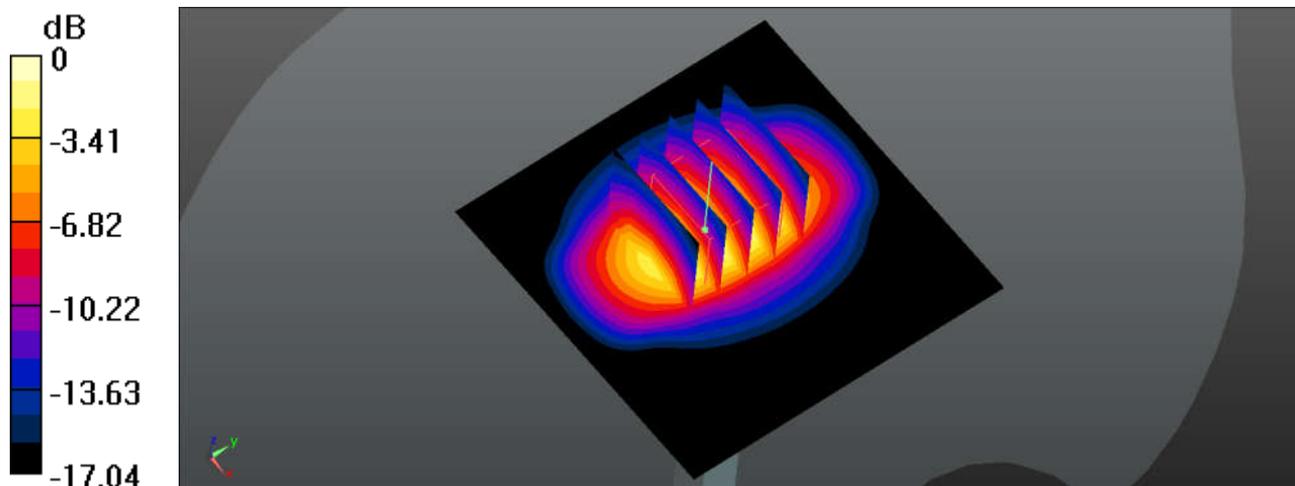

0 dB = 14.1 W/kg = 11.49 dBW/kg

System Check_Body_2300MHz_160502

DUT: D2300V2 - SN:1006


Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1
Medium: MSL_2300_160502 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.757$ S/m; $\epsilon_r = 53.752$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.43, 7.43, 7.43); Calibrated: 2015.5.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2015.5.21
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 16.5 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 88.71 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 23.4 W/kg
SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.94 W/kg
Maximum value of SAR (measured) = 16.1 W/kg

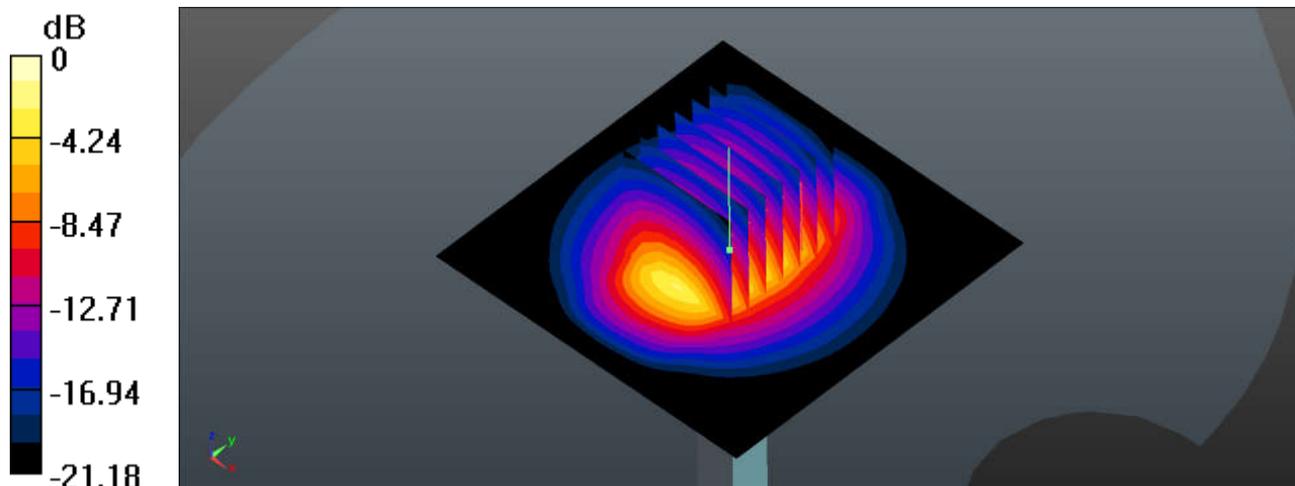

0 dB = 16.1 W/kg = 12.07 dBW/kg

System Check_Body_5250MHz_160429

DUT: D5GHzV2 - SN:1113


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium: MSL_5000_160429 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.379$ S/m; $\epsilon_r = 49.115$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.25, 4.25, 4.25); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical SurfaceDetection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 14.6 W/kg

Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 42.77 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 29.0 W/kg
SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.26 W/kg
Maximum value of SAR (measured) = 18.9 W/kg

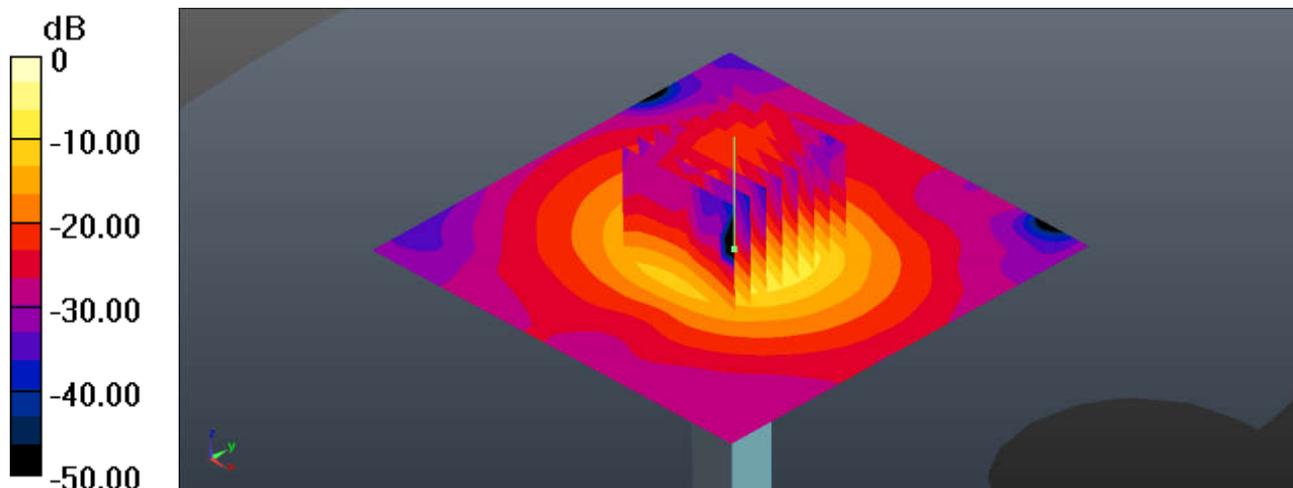

0 dB = 18.9 W/kg = 12.76 dBW/kg

System Check_Body_5750MHz_160429

DUT: D5GHzV2 - SN:1113

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL_5000_160429 Medium parameters used: $f = 5750$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 47.985$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.77, 3.77, 3.77); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical SurfaceDetection)
- Electronics: DAE4 Sn905; Calibrated: 2015.7.16
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.6 W/kg


Pin=100mW/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 30.96 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

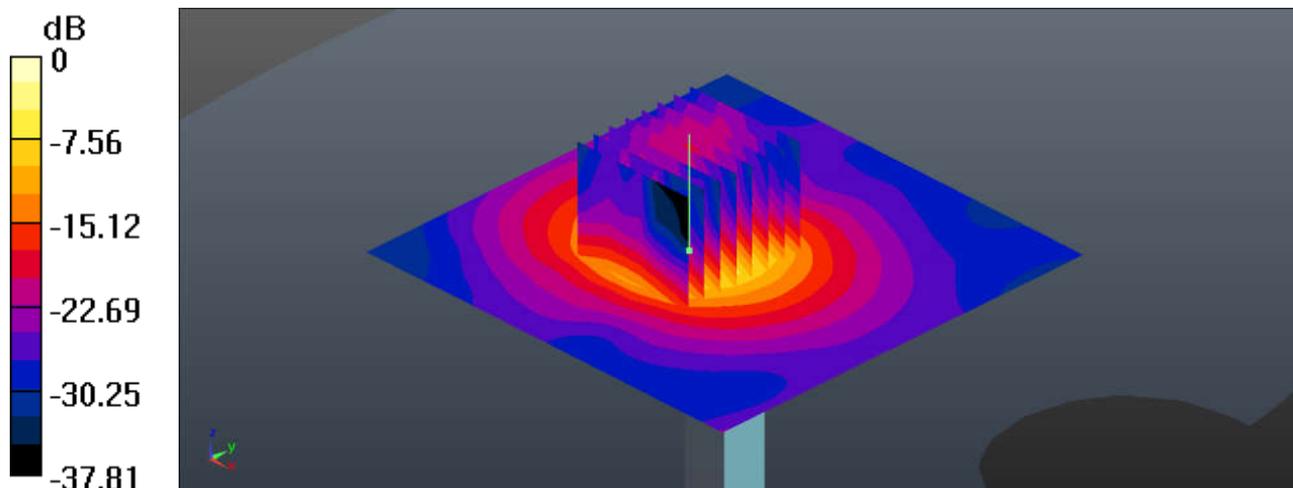

0 dB = 19.0 W/kg = 12.79 dBW/kg

System Check_Body_750MHz_20160429

DUT: D750V3-SN:1065

Communication System: UID 0, CW; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: MSL_750_2016/04/29 Medium parameters used: $f = 750$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 56.452$;
 $\rho = 1000$ kg/m³


Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.08, 10.08, 10.08); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.63 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 48.19 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 3.08 W/kg
SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.38 W/kg
Maximum value of SAR (measured) = 2.61 W/kg

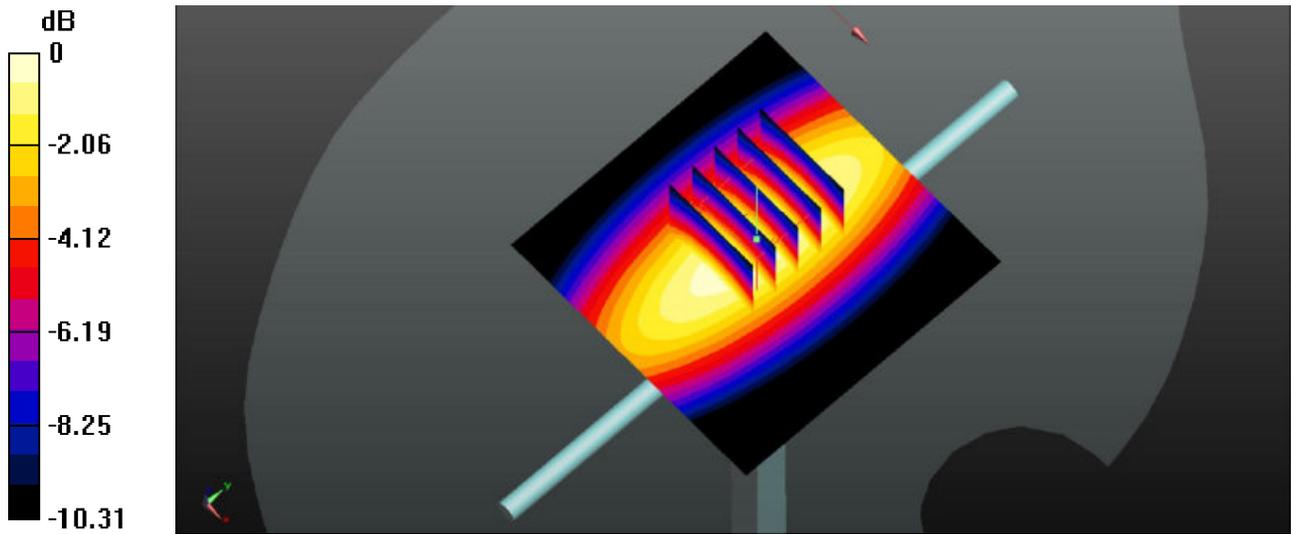

0 dB = 2.61 W/kg

System Check_Body_835MHz_20160504

DUT: D835V2-SN:4d091

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_2016/05/04 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 54.784$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.9 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.8, 9.8, 9.8); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 3.09 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.58 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.46 W/kg ; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.11 W/kg

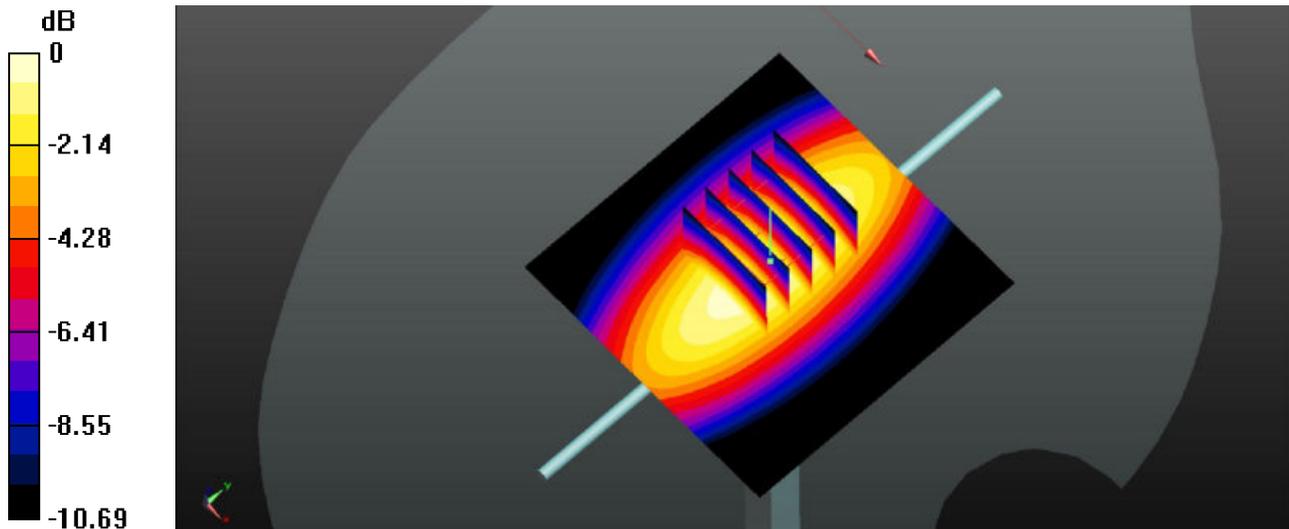

0 dB = 3.11 W/kg

System Check_Body_1750MHz_20160506

DUT: D1750V2-SN:1069

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1750_2016/05/06 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.498$ S/m; $\epsilon_r = 53.247$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.01, 8.01, 8.01); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 12.6 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 90.46 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 16.1 W/kg
SAR(1 g) = 8.99 W/kg; SAR(10 g) = 4.73 W/kg
Maximum value of SAR (measured) = 12.6 W/kg

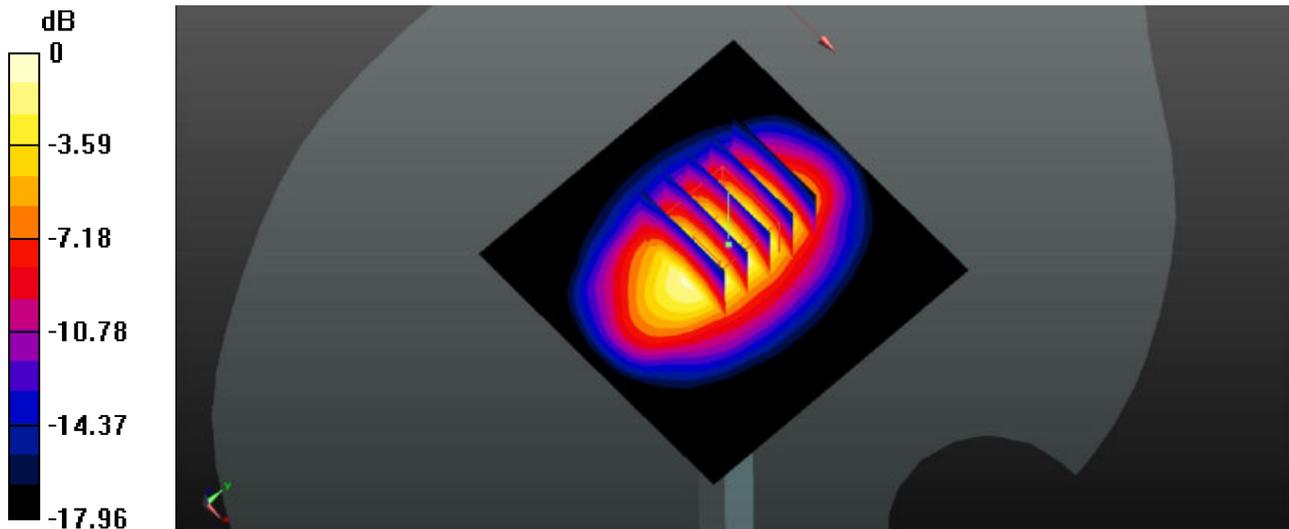

0 dB = 12.6 W/kg

System Check_Body_1900MHz_20160429

DUT: D1900V2-SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_2016/04/29 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.542$ S/m; $\epsilon_r = 55.338$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 15.2 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 86.01 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 19.4 W/kg
SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.52 W/kg
Maximum value of SAR (measured) = 15.1 W/kg

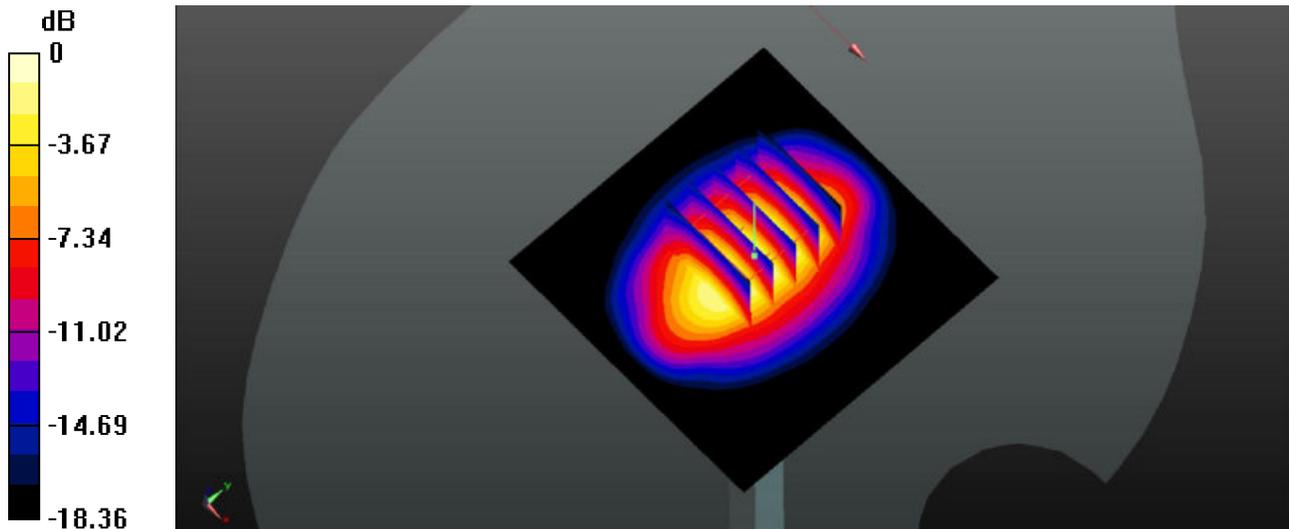

System Check_Body_2300MHz_20160430

DUT: D2300V2-SN:1006

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: MSL_2300_2016/04/30 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 53.354$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.55, 7.55, 7.55); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 18.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 102.2 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 24.1 W/kg
SAR(1 g) = 12.5 W/kg; SAR(10 g) = 6.06 W/kg
Maximum value of SAR (measured) = 18.5 W/kg

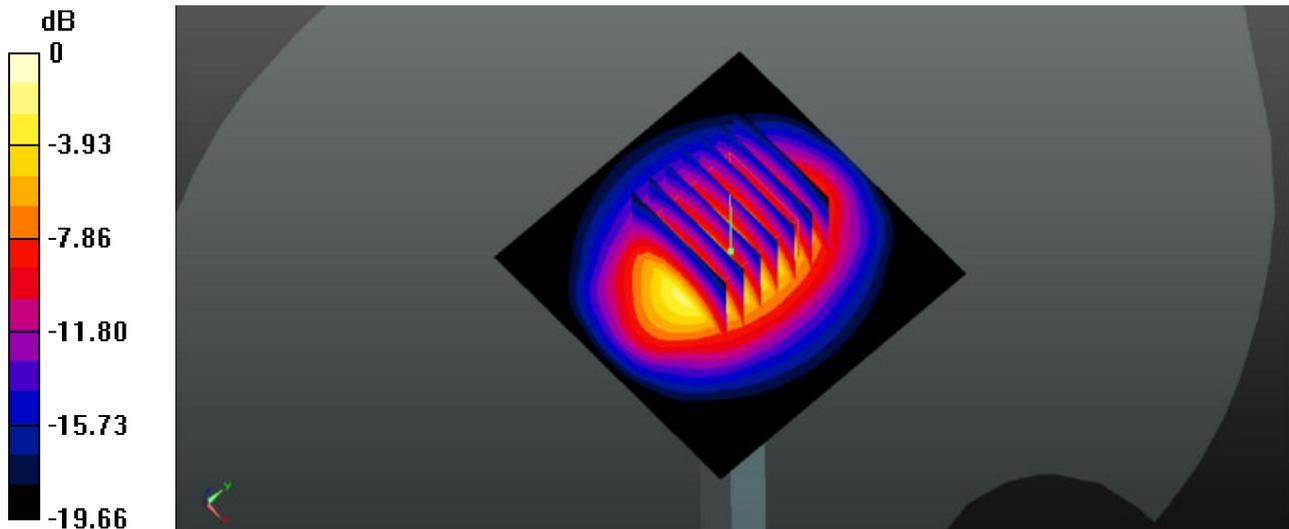

System Check_Body_2450MHz_20160511

DUT: D2450V2-SN:840

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_2016/05/11 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 53.894$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.34, 7.34, 7.34); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 18.6 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 84.65 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 25.0 W/kg
SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.68 W/kg
Maximum value of SAR (measured) = 18.8 W/kg

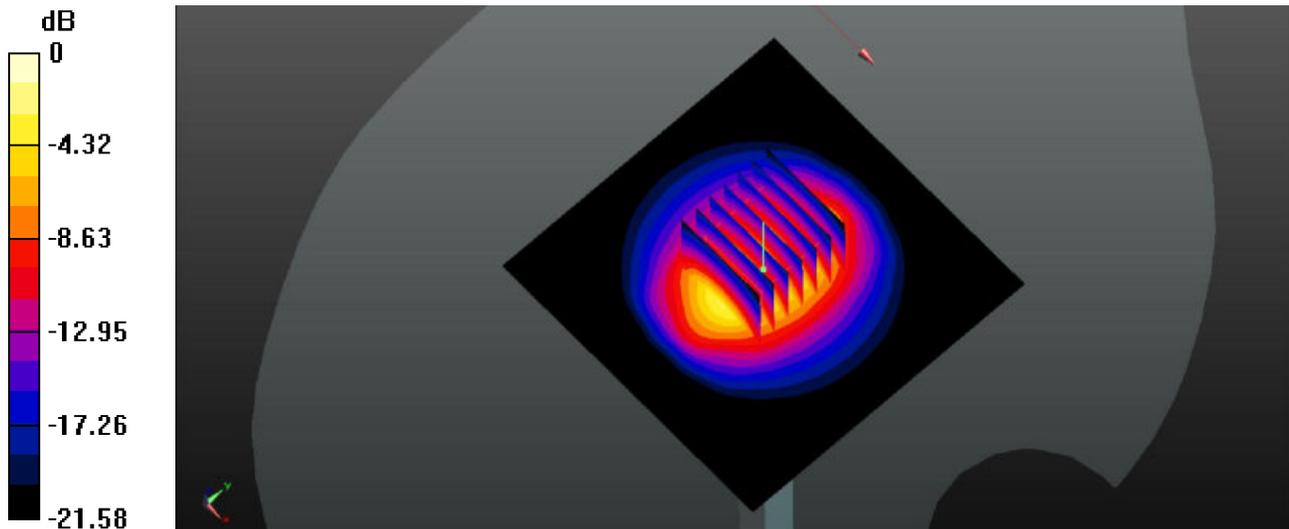

0 dB = 18.8 W/kg

System Check_Body_2600MHz_20160430

DUT: D2600V2-SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL_2600_2016/04/30 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.227$ S/m; $\epsilon_r = 52.103$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.14, 7.14, 7.14); Calibrated: 2015/10/1;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 23.1 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 86.93 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 31.4 W/kg
SAR(1 g) = 14.9 W/kg; SAR(10 g) = 6.6 W/kg
Maximum value of SAR (measured) = 23.1 W/kg

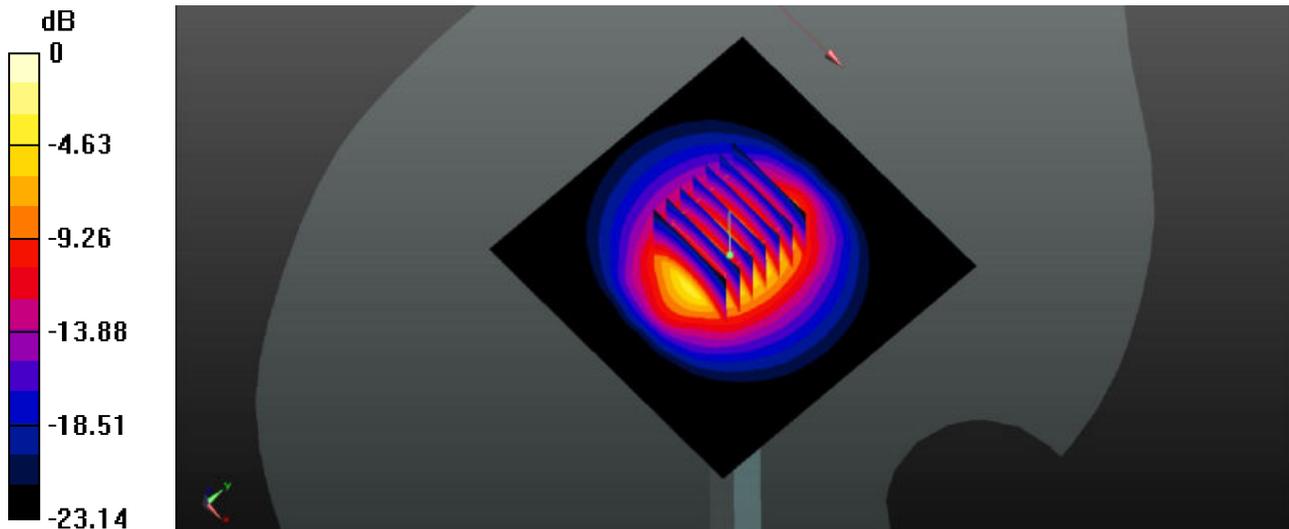

0 dB = 23.1 W/kg