



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE A2017U
FCC ID : SRQ-ZTEA2017U
STANDARD : FCC 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Mar. 16, 2016 and testing was completed on May 19, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-D-2010 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant.....	5
1.2	Manufacturer	5
1.3	Feature of Equipment Under Test.....	5
1.4	Product Specification of Equipment Under Test	5
1.5	Modification of EUT	6
1.6	Maximum Frequency Tolerance and Emission Designator	6
1.7	Testing Site.....	7
1.8	Applied Standards	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1	Test Mode.....	8
2.2	Connection Diagram of Test System	9
2.3	Support Unit used in test configuration and system.....	9
2.4	Measurement Results Explanation Example	10
3	TEST RESULT.....	11
3.1	Measuring Instruments.....	11
3.2	Test Setup	11
3.3	Test Result of Conducted Test.....	11
3.4	Conducted Output Power.....	12
3.5	99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	12
3.6	Emissions Mask Measurement	13
3.7	Emissions Mask – Out Of Band Emissions Measurement.....	14
3.8	Frequency Stability.....	15
4	RADIATED TEST ITEMS	16
4.1	Measuring Instruments.....	16
4.2	Test Setup	16
4.3	Test Result of Radiated Test.....	16
4.4	Field Strength of Spurious Radiation Measurement	17
5	LIST OF MEASURING EQUIPMENT	18
6	UNCERTAINTY OF EVALUATION	19

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	N/A , Reporting only	PASS	-
3.5	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	N/A, Reporting only	PASS	-
3.6	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.7	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.8	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-
4.4	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 27.75 dB at 4093.050MHz



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE A2017U
FCC ID	SRQ-ZTEA2017U
EUT supports Radios application	CDMA/EV-DO/ GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
IMEI Code	Conducted: 990006780003645 Radiation: 990006780003520
HW Version	wwdB
SW Version	A2017UV1.0.0B07
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	LTE Band 26 : 814.7 ~ 823.3 MHz
Rx Frequency	LTE Band 26 : 859.7 ~ 868.3 MHz
Bandwidth	1.4MHz/3MHz/5MHz/10MHz/15MHz
Maximum Output Power to Top/ Bottom Antenna	24.15 dBm
Antenna Type	PIFA Antenna
Type of Modulation	QPSK / 16QAM

Remark: This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M10G7D
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M09W7D
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M75G7D
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M73W7D
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M51G7D
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M50W7D
Part 90S	LTE Band 26	QPSK	10 MHz	0.0065 ppm	9M05G7D
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M01W7D
Part 90S	LTE Band 26	QPSK	15 MHz	-	13M4G7D
Part 90S	LTE Band 26	16QAM	15 MHz	-	13M5W7D



1.7 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	
	TH01-KS	

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH01-SZ	831040

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 90(S)
- ♦ ANSI / TIA / EIA-603-D-2010

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.


2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v			v	v	v	v
Conducted Band Edge	26	v	v	v	v	v	-	v	v	v		v	v		v
Conducted Spurious Emission	26	v	v	v	v	v	-	v	v	v			v	v	v
Frequency Stability	26				v		-	v				v		v	
Radiated Spurious Emission	26	v	v	v	v	-	-	v	v	v				v	
Note	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 														

2.2 Connection Diagram of Test System

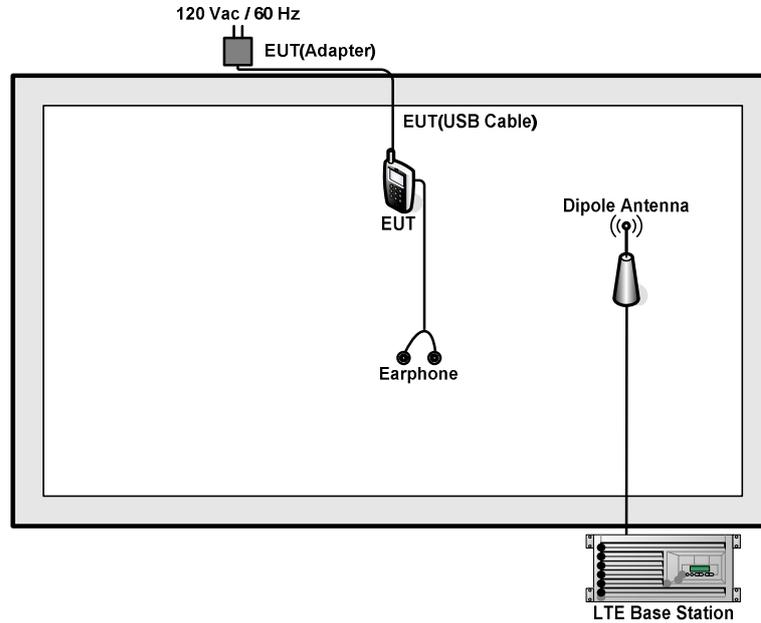

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0 m	N/A



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 4.5 dB.

$$\begin{aligned} \text{Offset (dB)} &= \text{RF cable loss (dB)}. \\ &= 4.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 99% Occupied Bandwidth and 26dB Bandwidth, Emissions Mask and Emissions Mask – Out Of Band Emissions

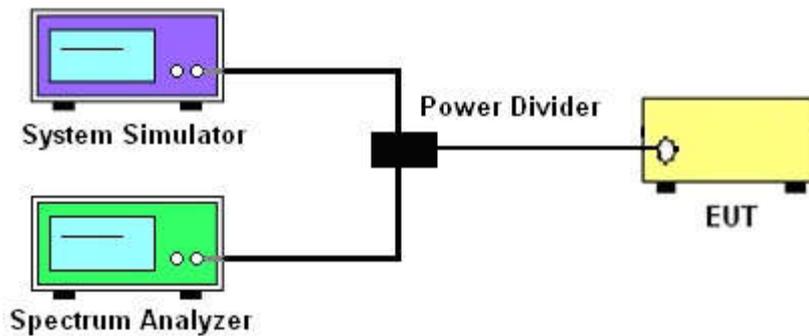

3.2.3 Frequency Stability

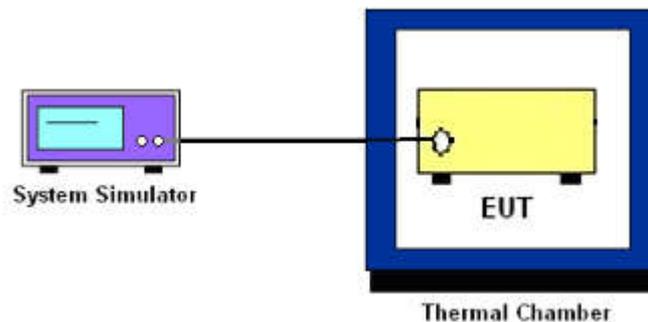

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the LTE Base Station.

3.5 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.5.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.



3.6 Emissions Mask Measurement

3.6.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.



3.7 Emissions Mask – Out Of Band Emissions Measurement

3.7.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. The final test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency according to FCC Part 90.213.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

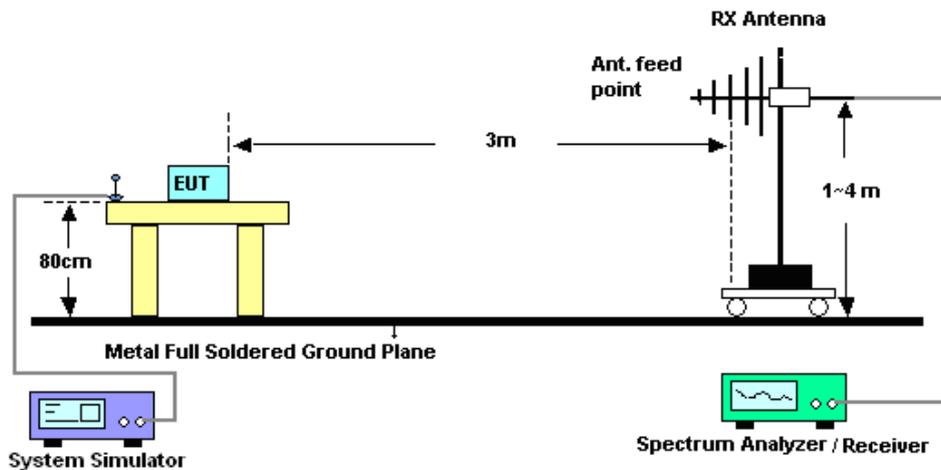

4.2.2 For radiated test above 1GHz

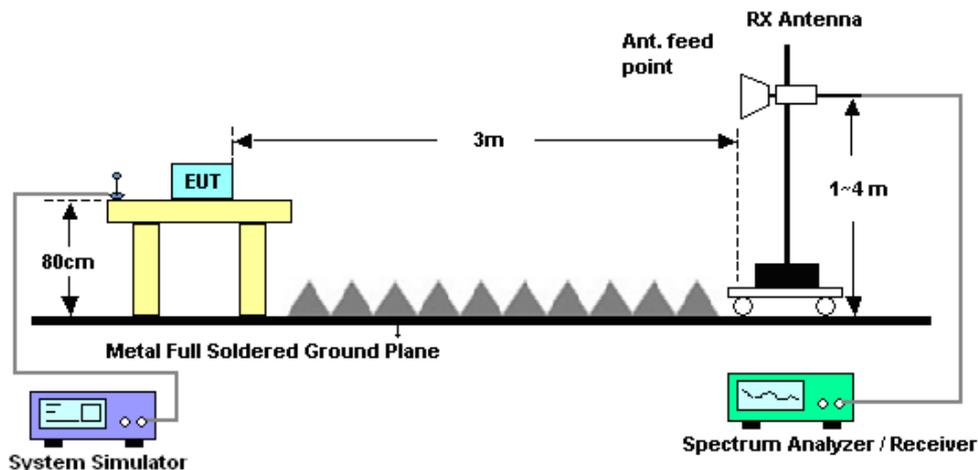

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

4.4.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$
 $= -13 \text{ dBm.}$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	Apr. 01, 2016~ May 19, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Apr. 01, 2016~ May 19, 2016	Oct. 23, 2016	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY5226018 5	20Hz~26.5GHz	May 26, 2015	Apr. 27, 2016	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	KEYSIGHT	N9010A	MY5515021 3	10Hz~44GHz; Max 30dBm	Jun. 07, 2015	Apr. 27, 2016	Jun. 06, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Oct. 17, 2015	Apr. 27, 2016	Oct. 16, 2016	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 17, 2015	Apr. 27, 2016	Oct. 16, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY3950130 2	500MHz~26.5GHz	Jan. 12, 2016	Apr. 27, 2016	Jan. 11, 2017	Radiation (03CH01-SZ)
Amplifier	HP	8447F	3113A04622	9kHz~1300MHz / 30 dB	Aug. 07, 2015	Apr. 27, 2016	Aug. 06, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	NCR	Apr. 27, 2016	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 27, 2016	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 27, 2016	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Top/Bottom Antenna

BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					26765	
Frequency (MHz)					821.5	
15	QPSK	1	0		23.27	
15	QPSK	1	37		23.11	
15	QPSK	1	74		23.00	
15	QPSK	36	0		22.28	
15	QPSK	36	20		22.24	
15	QPSK	36	39		22.15	
15	QPSK	75	0		22.21	
15	16QAM	1	0		22.37	
15	16QAM	1	37		22.36	
15	16QAM	1	74		22.35	
15	16QAM	36	0		21.24	
15	16QAM	36	20		21.26	
15	16QAM	36	39		21.12	
15	16QAM	75	0		21.18	
Channel					26740	
Frequency (MHz)					819	
10	QPSK	1	0		23.66	
10	QPSK	1	25		23.74	
10	QPSK	1	49		23.66	
10	QPSK	25	0		22.76	
10	QPSK	25	12		22.81	
10	QPSK	25	25		22.70	
10	QPSK	50	0		22.78	
10	16QAM	1	0		23.01	
10	16QAM	1	25		23.01	
10	16QAM	1	49		23.09	
10	16QAM	25	0		21.76	
10	16QAM	25	12		21.80	
10	16QAM	25	25		21.68	
10	16QAM	50	0		21.76	



BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel				26715	26740	26765
Frequency (MHz)				816.5	819	821.5
5	QPSK	1	0	23.73	23.81	23.81
5	QPSK	1	12	23.77	23.79	23.76
5	QPSK	1	24	23.81	23.82	23.80
5	QPSK	12	0	22.78	22.83	22.84
5	QPSK	12	7	22.80	22.81	22.81
5	QPSK	12	13	22.73	22.73	22.75
5	QPSK	25	0	22.75	22.75	22.77
5	16QAM	1	0	23.08	23.14	23.14
5	16QAM	1	12	23.14	23.24	23.24
5	16QAM	1	24	23.09	23.34	23.54
5	16QAM	12	0	21.81	21.84	21.82
5	16QAM	12	7	21.84	21.81	21.76
5	16QAM	12	13	21.76	21.76	21.74
5	16QAM	25	0	21.80	21.78	21.79



BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819	822.5
3	QPSK	1	0	23.69	23.80	23.76
3	QPSK	1	8	23.76	23.87	23.90
3	QPSK	1	14	23.67	23.77	23.80
3	QPSK	8	0	22.71	22.77	22.83
3	QPSK	8	4	22.53	22.84	22.95
3	QPSK	8	7	22.75	22.73	22.88
3	QPSK	15	0	22.78	22.76	22.90
3	16QAM	1	0	22.86	23.01	23.13
3	16QAM	1	8	22.94	23.10	23.21
3	16QAM	1	14	23.01	23.17	23.53
3	16QAM	8	0	21.75	21.83	21.91
3	16QAM	8	4	21.60	22.09	22.02
3	16QAM	8	7	21.86	21.80	21.92
3	16QAM	15	0	21.83	21.79	21.94
Channel				26697	26740	26783
Frequency (MHz)				814.7	819	823.3
1.4	QPSK	1	0	23.60	23.68	23.70
1.4	QPSK	1	3	23.82	23.90	23.80
1.4	QPSK	1	5	23.57	23.67	23.74
1.4	QPSK	3	0	23.74	23.80	23.93
1.4	QPSK	3	1	23.85	23.83	23.98
1.4	QPSK	3	3	23.80	23.80	24.15
1.4	QPSK	6	0	22.65	22.69	22.82
1.4	16QAM	1	0	22.84	22.90	23.07
1.4	16QAM	1	3	22.93	22.92	23.10
1.4	16QAM	1	5	22.77	22.84	22.96
1.4	16QAM	3	0	22.71	22.80	22.88
1.4	16QAM	3	1	22.77	22.85	23.16
1.4	16QAM	3	3	22.80	22.95	23.09
1.4	16QAM	6	0	21.71	21.77	21.88

Note: Maximum average power for LTE.




26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.22	1.22	3.05	3.04	4.89	4.91	-	-	-	-	-	-
Middle CH	1.23	1.22	3.03	3.00	4.89	4.99	9.83	9.93	14.69	14.30	-	-
Highest CH	1.24	1.23	3.03	3.03	4.93	4.96	-	-	-	-	-	-




LTE Band 26

Lowest Channel / 1.4MHz / QPSK

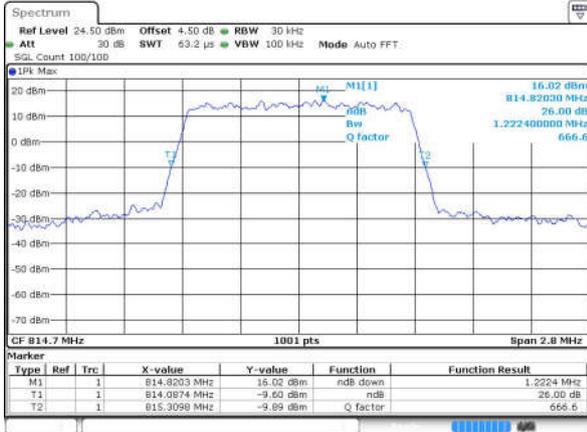


Date: 1.APR.2016 18:16:01

Lowest Channel / 1.4MHz / 16QAM

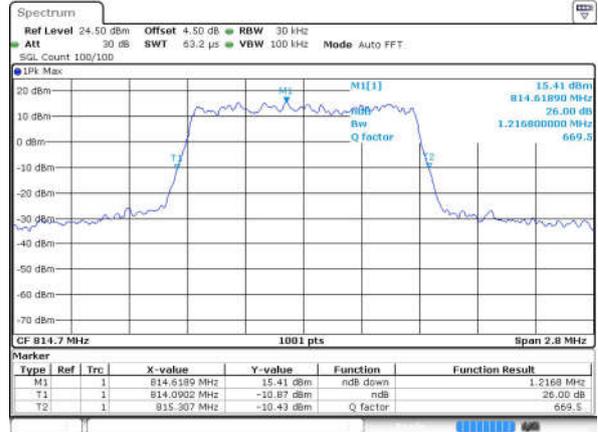

Date: 1.APR.2016 18:16:15

Middle Channel / 1.4MHz / QPSK

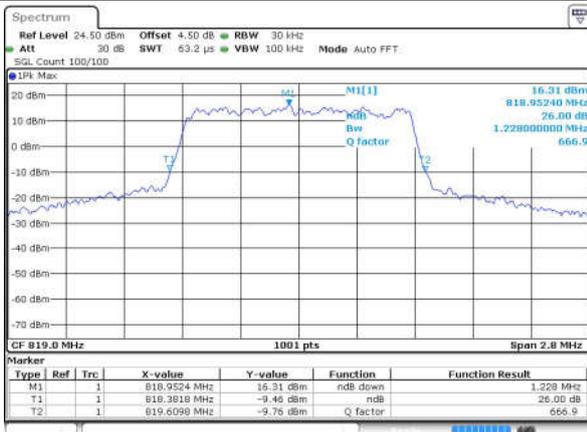


Date: 1.APR.2016 18:45:11

Middle Channel / 1.4MHz / 16QAM




Date: 1.APR.2016 18:16:50

Highest Channel / 1.4MHz / QPSK

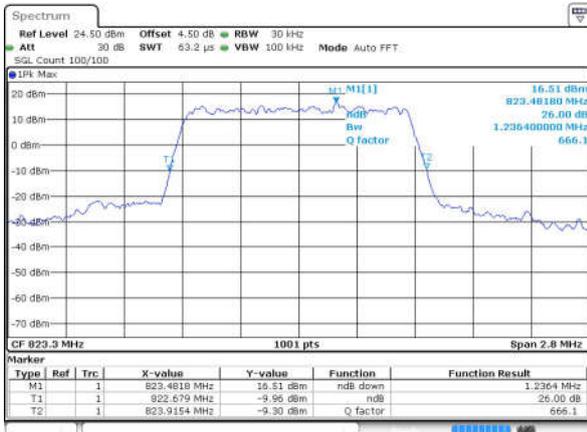

Date: 1.APR.2016 18:17:50

Highest Channel / 1.4MHz / 16QAM

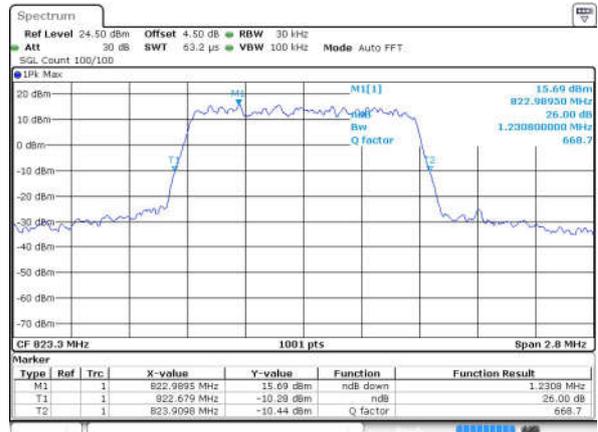


Date: 1.APR.2016 18:18:20




LTE Band 26

Lowest Channel / 3MHz / QPSK

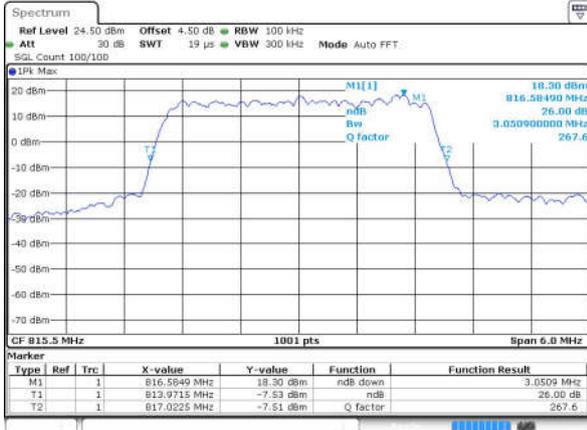


Date: 1.APR.2016 18:26:51

Lowest Channel / 3MHz / 16QAM

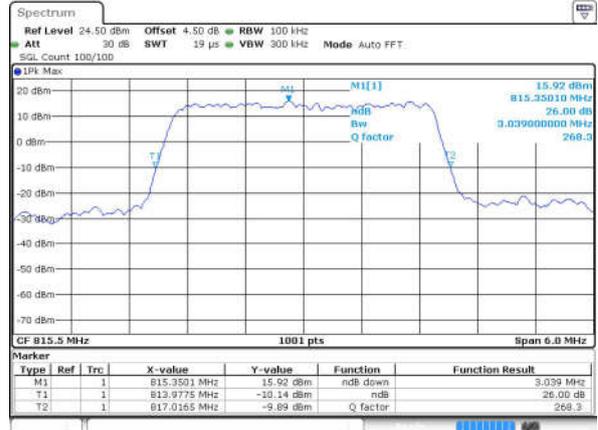


Date: 1.APR.2016 18:28:10

Middle Channel / 3MHz / QPSK

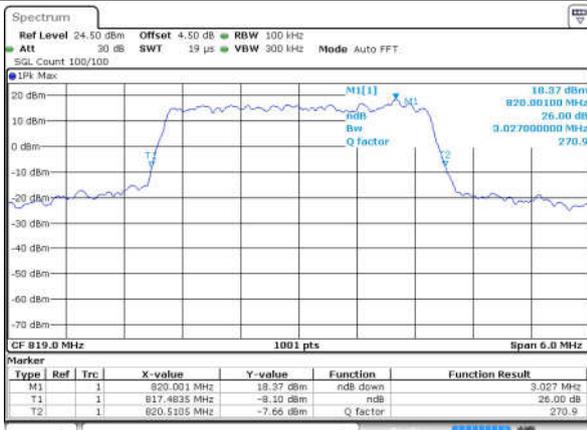


Date: 1.APR.2016 18:30:58

Middle Channel / 3MHz / 16QAM

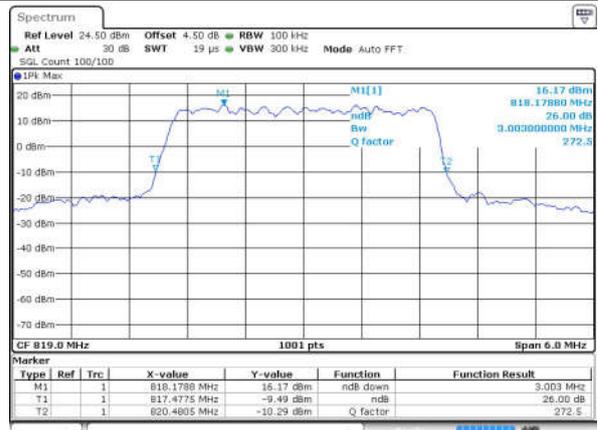


Date: 1.APR.2016 18:28:59

Highest Channel / 3MHz / QPSK

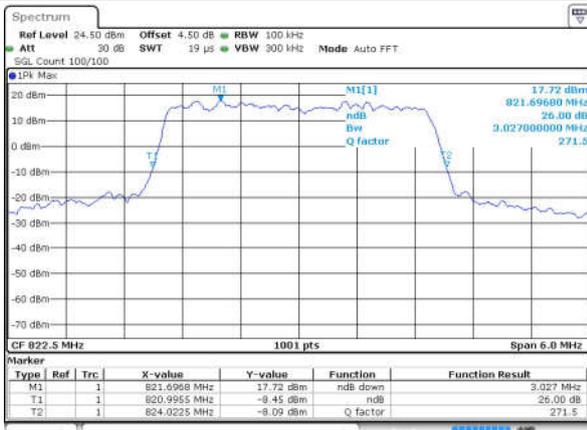

Date: 1.APR.2016 18:31:33

Highest Channel / 3MHz / 16QAM

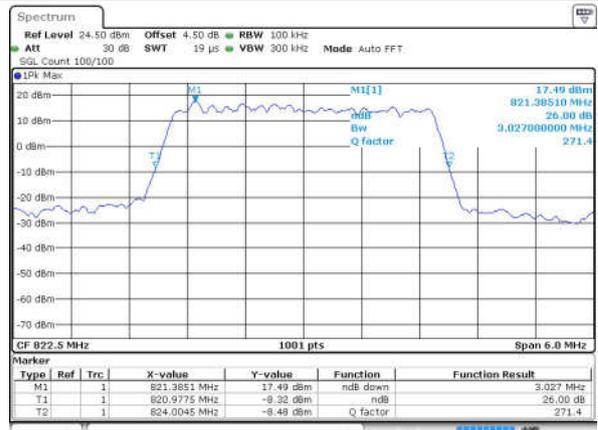


Date: 1.APR.2016 18:32:24




LTE Band 26

Lowest Channel / 5MHz / QPSK

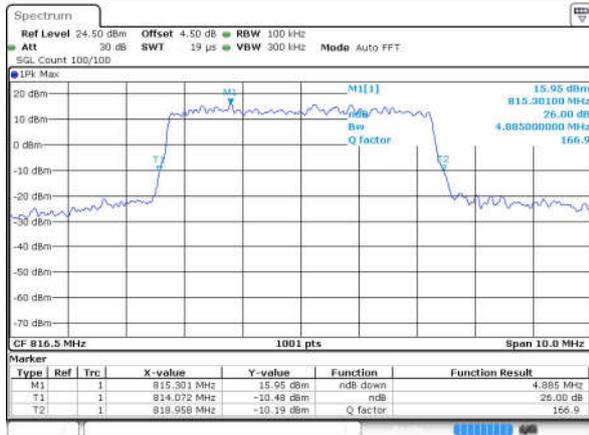


Date: 1.APR.2016 18:34:55

Lowest Channel / 5MHz / 16QAM

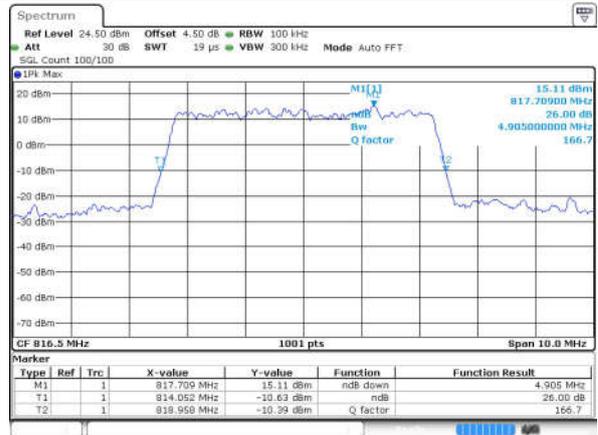


Date: 1.APR.2016 18:33:07

Middle Channel / 5MHz / QPSK

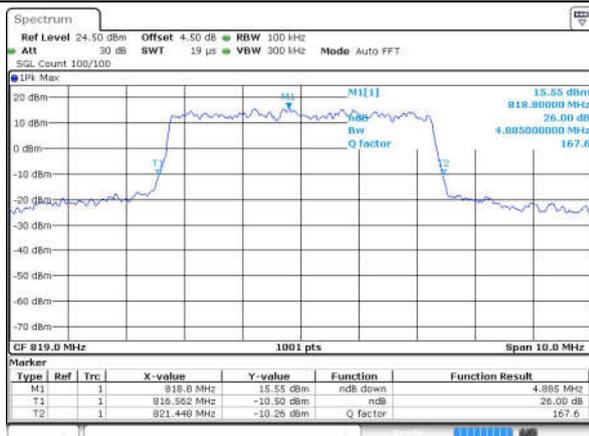


Date: 1.APR.2016 18:35:32

Middle Channel / 5MHz / 16QAM

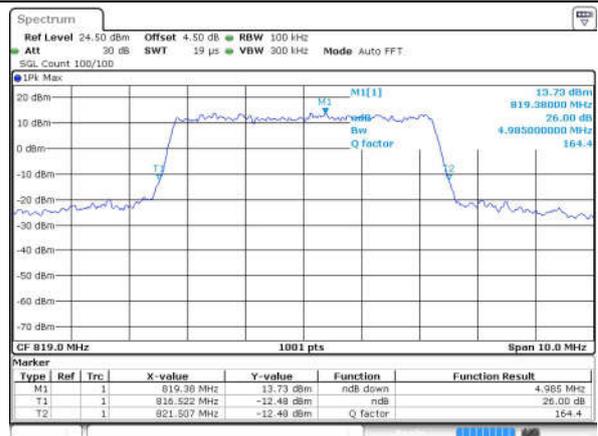


Date: 1.APR.2016 18:36:04

Highest Channel / 5MHz / QPSK

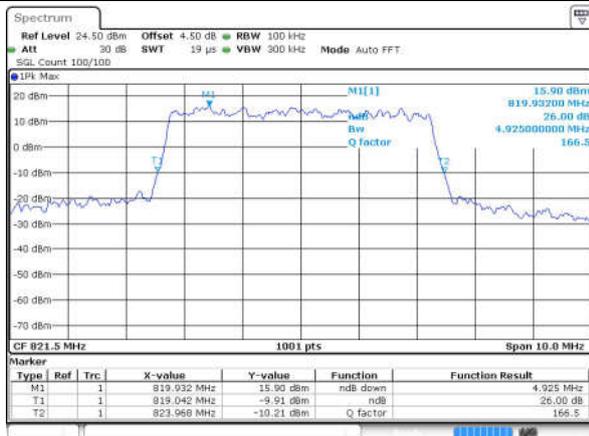

Date: 1.APR.2016 18:36:18

Highest Channel / 5MHz / 16QAM

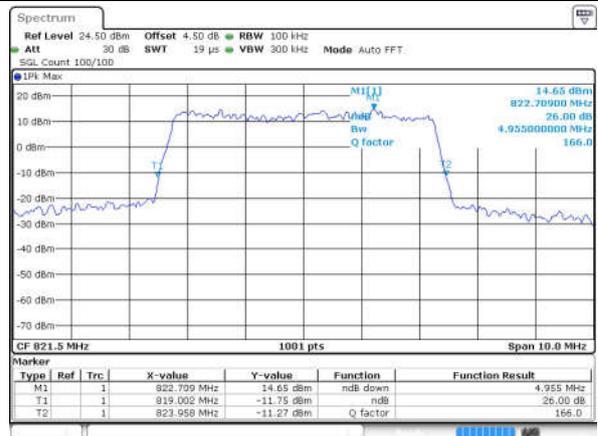


Date: 1.APR.2016 18:37:00




LTE Band 26

Middle Channel / 10MHz / QPSK

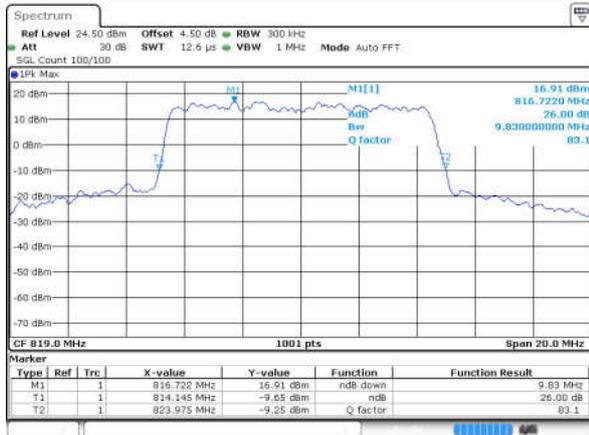


Date: 1 APR 2016 18:39:54

Middle Channel / 10MHz / 16QAM

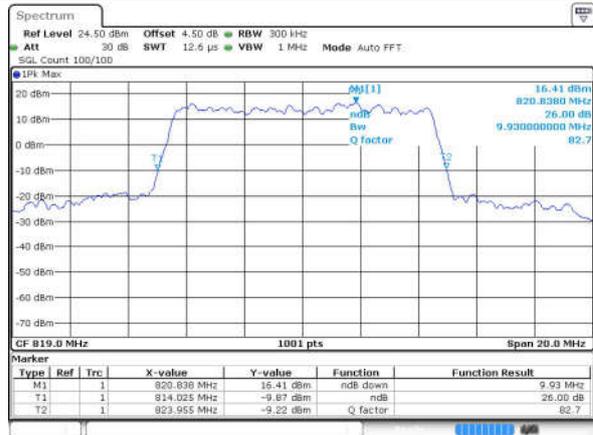


Date: 1 APR 2016 18:42:06

Middle Channel / 15MHz / QPSK

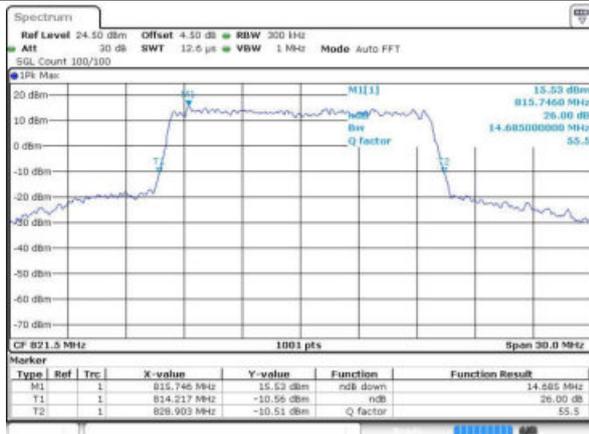

Date: 1 APR 2016 18:44:21

Middle Channel / 15MHz / 16QAM

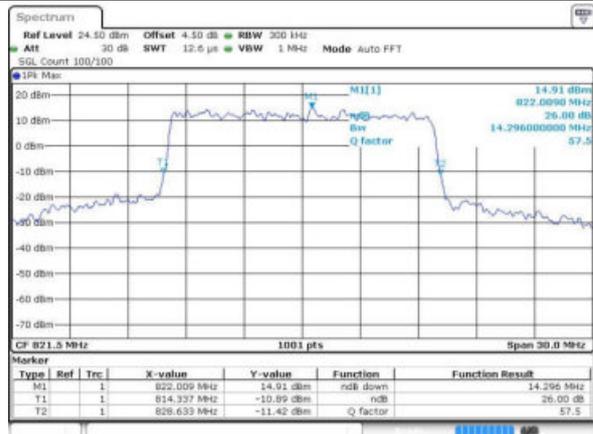

Date: 1 APR 2016 18:42:37




Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.10	1.09	2.75	2.73	4.49	4.50	-	-	-	-	-	-
Middle CH	1.10	1.09	2.71	2.72	4.51	4.49	9.05	9.01	13.43	13.52	-	-
Highest CH	1.10	1.08	2.73	2.73	4.49	4.48	-	-	-	-	-	-




LTE Band 26

Lowest Channel / 1.4MHz / QPSK

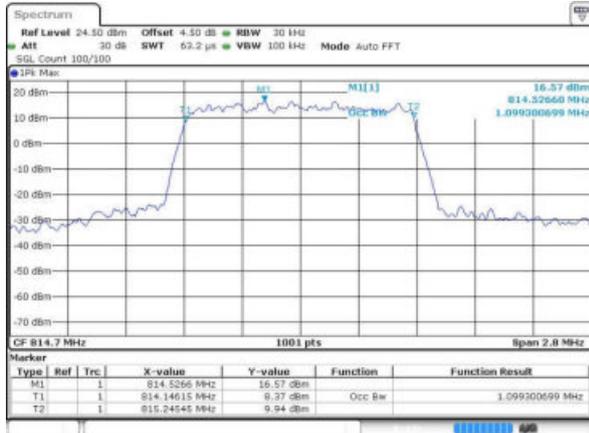


Date: 1 APR 2016 16:14:42

Lowest Channel / 1.4MHz / 16QAM

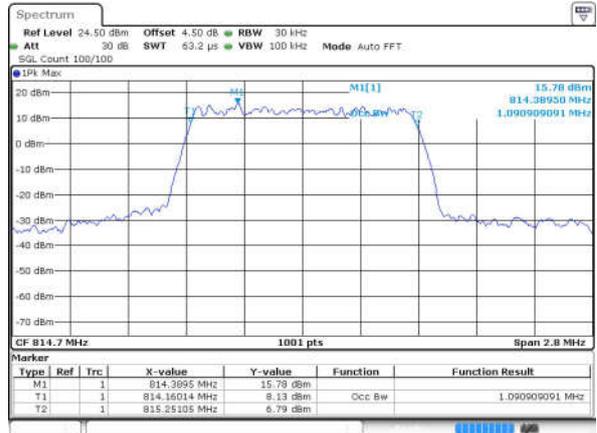


Date: 1 APR 2016 16:15:10

Middle Channel / 1.4MHz / QPSK

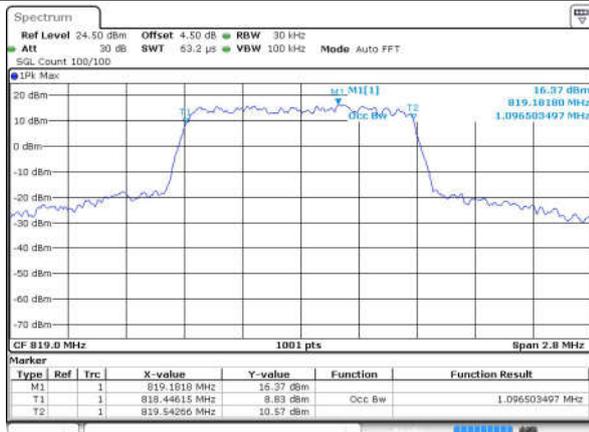


Date: 1 APR 2016 16:17:07

Middle Channel / 1.4MHz / 16QAM

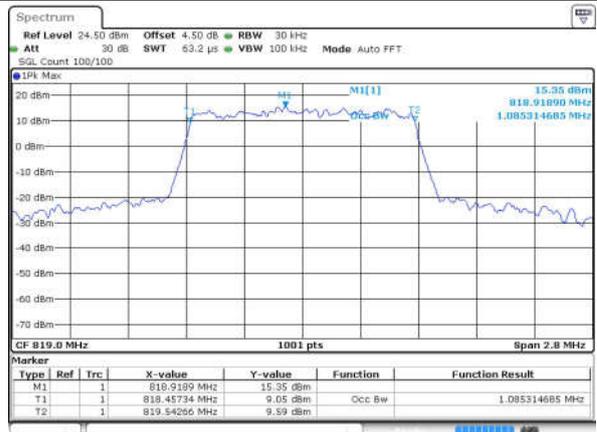


Date: 1 APR 2016 16:15:32

Highest Channel / 1.4MHz / QPSK

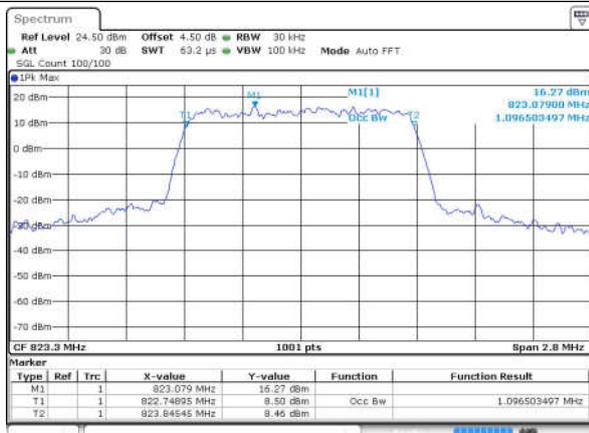

Date: 1 APR 2016 16:17:38

Highest Channel / 1.4MHz / 16QAM

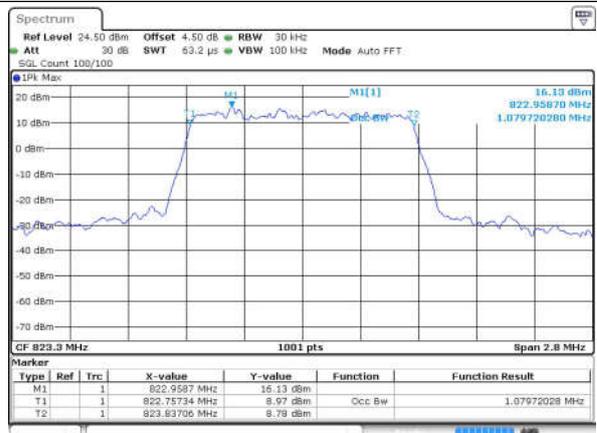


Date: 1 APR 2016 16:18:04




LTE Band 26

Lowest Channel / 3MHz / QPSK

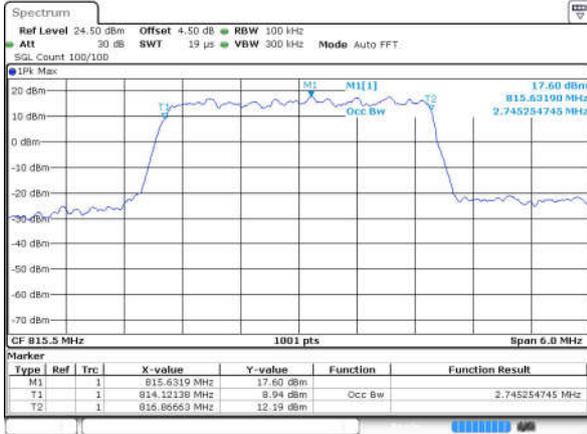


Date: 1.APR.2016 18:28:33

Lowest Channel / 3MHz / 16QAM

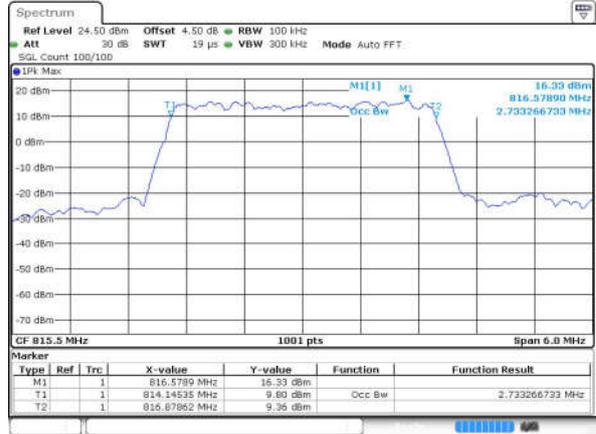


Date: 1.APR.2016 18:27:15

Middle Channel / 3MHz / QPSK

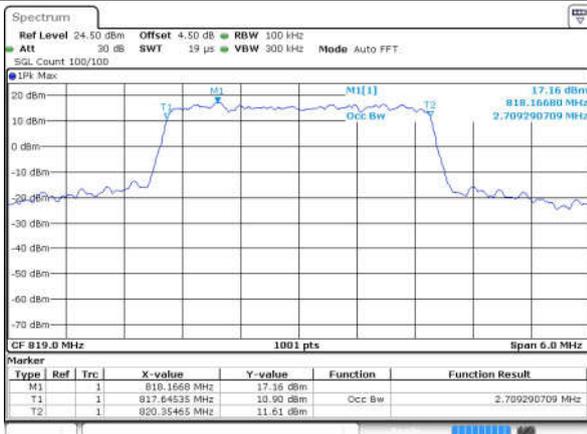


Date: 1.APR.2016 18:29:21

Middle Channel / 3MHz / 16QAM

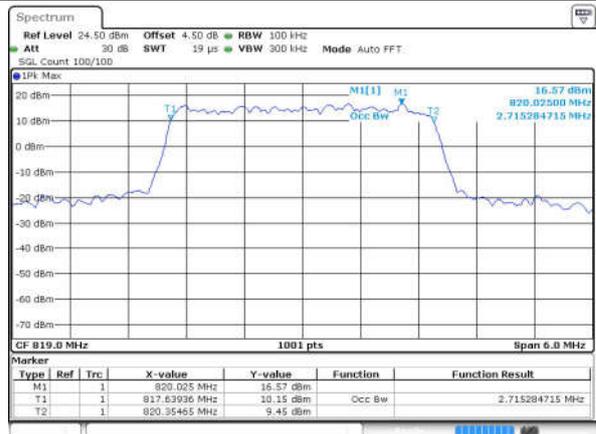


Date: 1.APR.2016 18:28:42

Highest Channel / 3MHz / QPSK

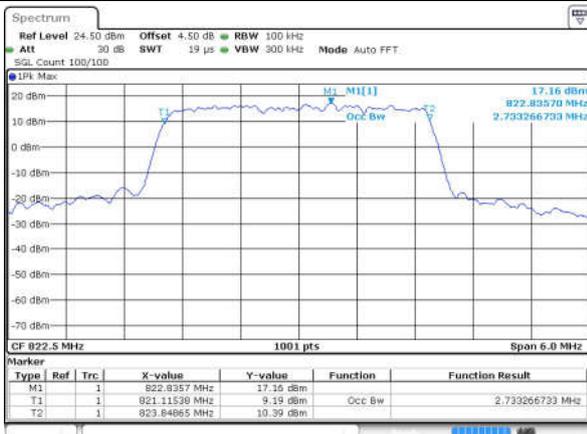

Date: 1.APR.2016 18:31:21

Highest Channel / 3MHz / 16QAM

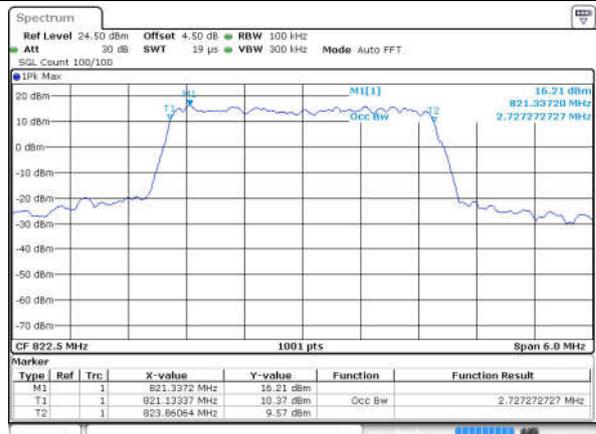


Date: 1.APR.2016 18:32:09




LTE Band 26

Lowest Channel / 5MHz / QPSK

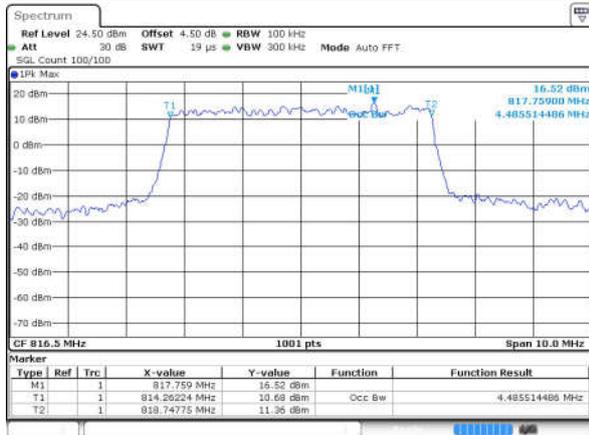


Date: 1.APR.2016 18:47:47

Lowest Channel / 5MHz / 16QAM

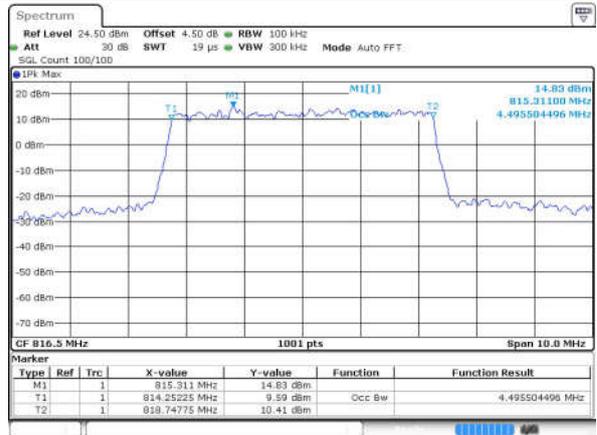


Date: 1.APR.2016 18:48:20

Middle Channel / 5MHz / QPSK

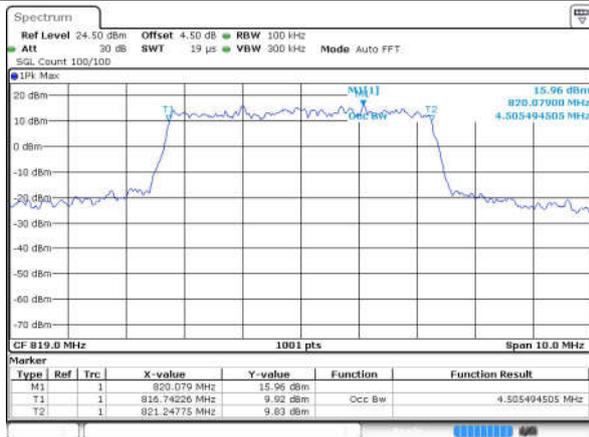


Date: 1.APR.2016 18:35:20

Middle Channel / 5MHz / 16QAM

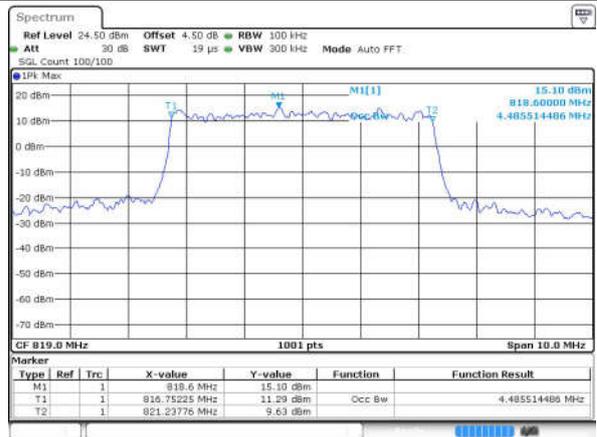


Date: 1.APR.2016 18:35:51

Highest Channel / 5MHz / QPSK

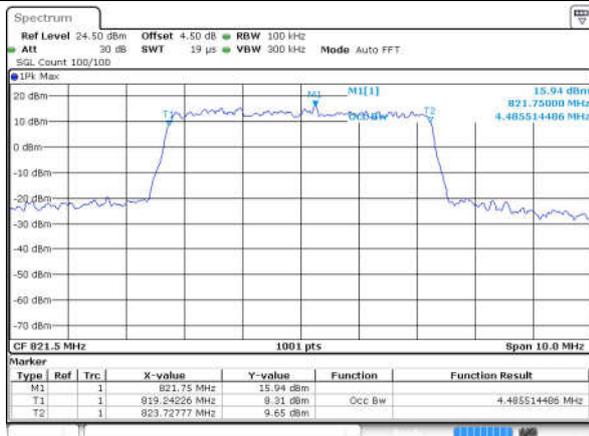

Date: 1.APR.2016 18:37:44

Highest Channel / 5MHz / 16QAM

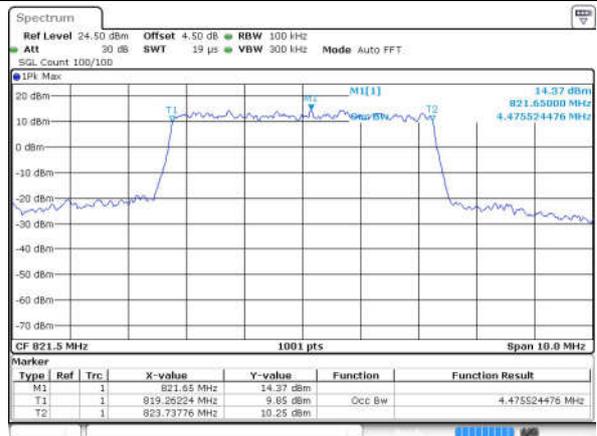


Date: 1.APR.2016 18:36:32




LTE Band 26

Middle Channel / 10MHz / QPSK

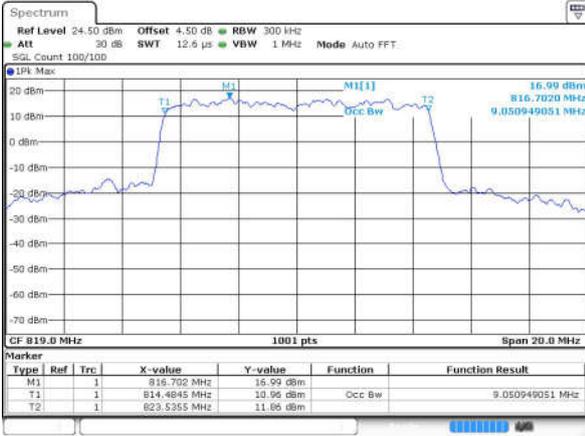

Date: 1 APR 2016 18:39:41


Middle Channel / 10MHz / 16QAM

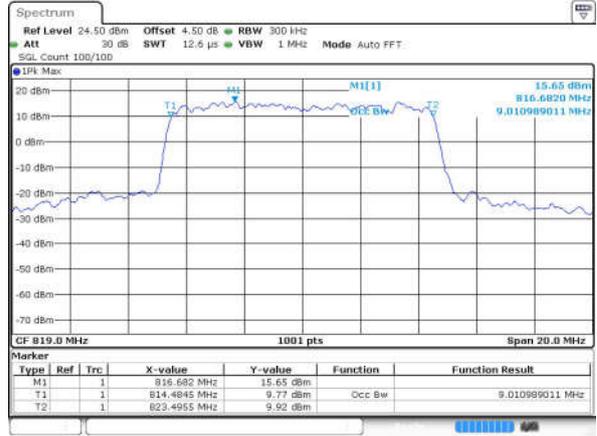

Date: 1 APR 2016 18:41:58


LTE Band 26

Middle Channel / 15MHz / QPSK

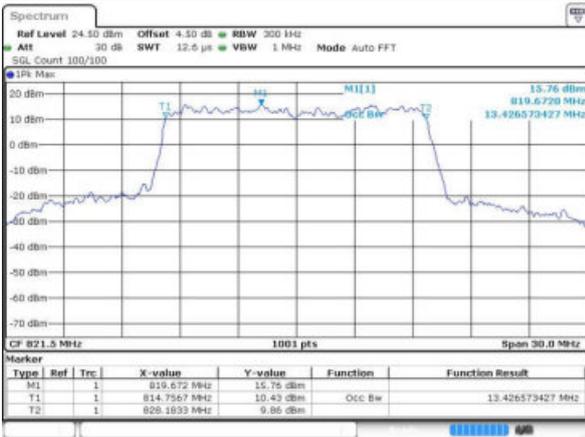

Date: 1 APR 2016 16:42:46


Middle Channel / 15MHz / 16QAM

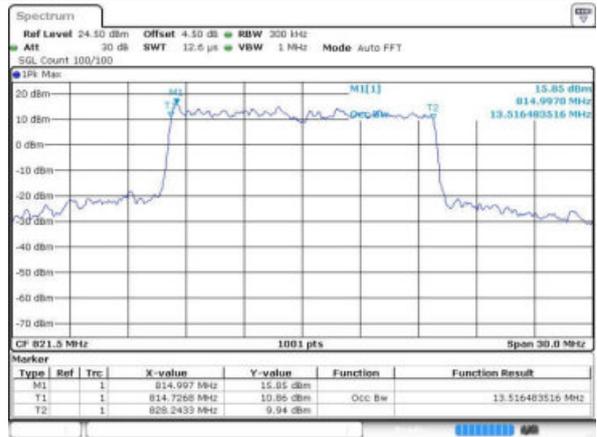

Date: 1 APR 2016 16:42:26




Conducted Band Edge

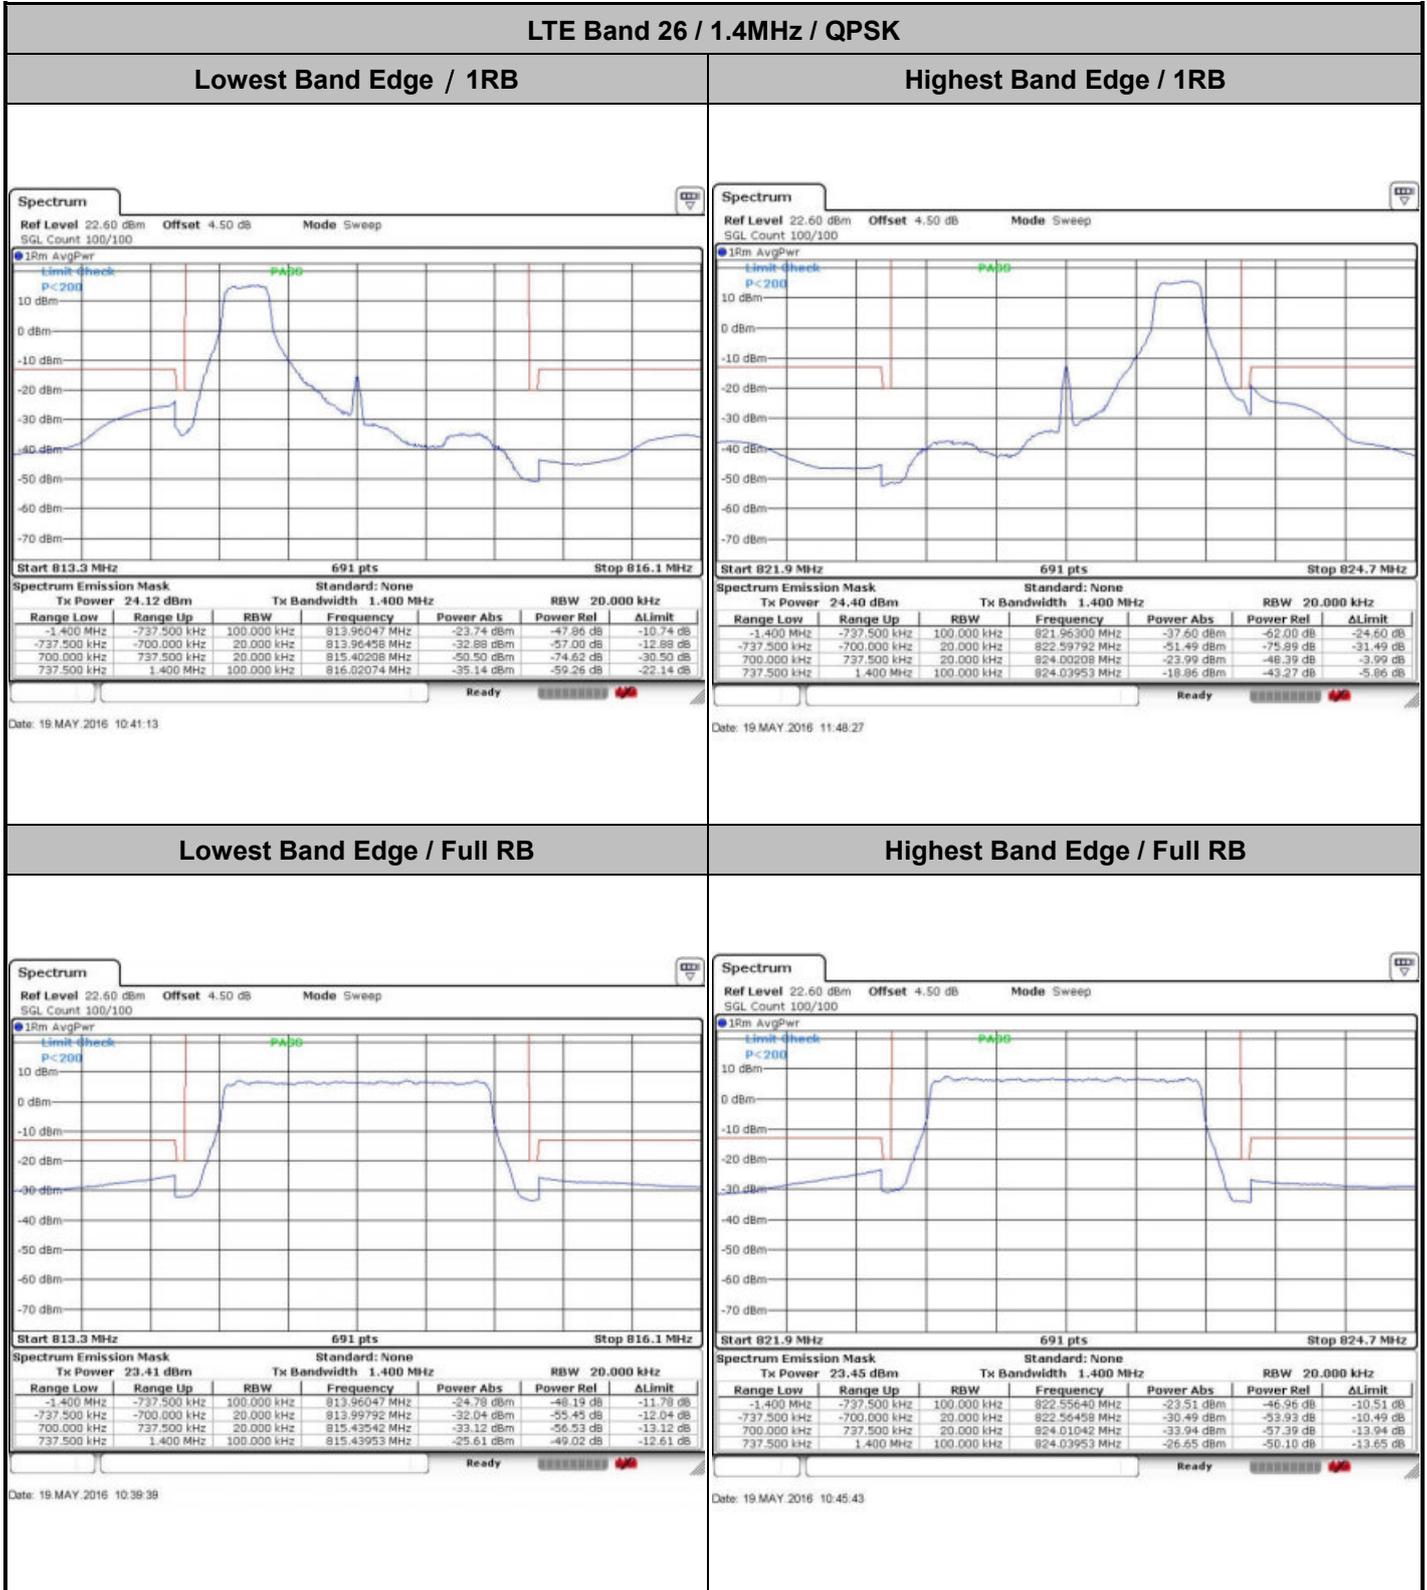




LTE Band 26 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

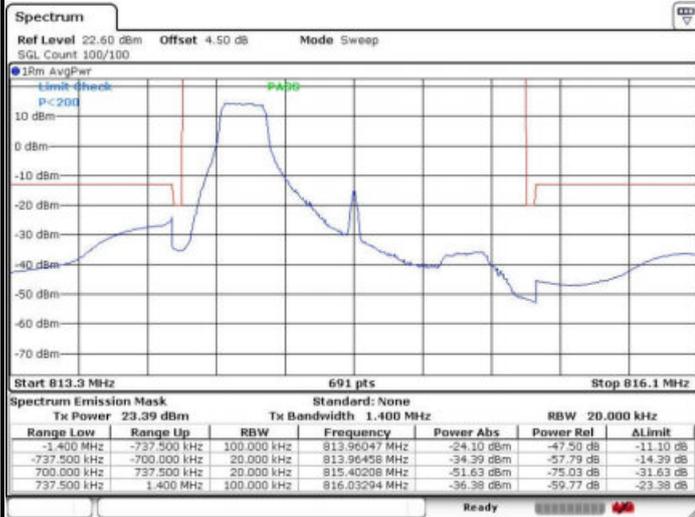


Date: 19 MAY 2016 10:42:27

Highest Band Edge / 1 RB

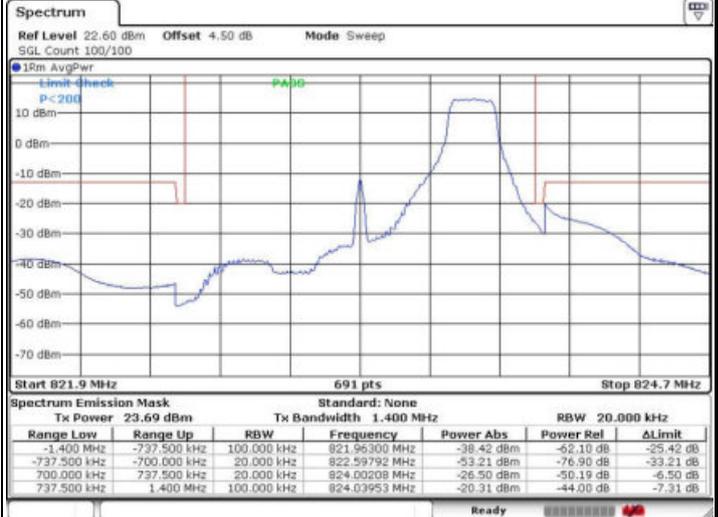


Date: 19 MAY 2016 11:49:30

Lowest Band Edge / Full RB

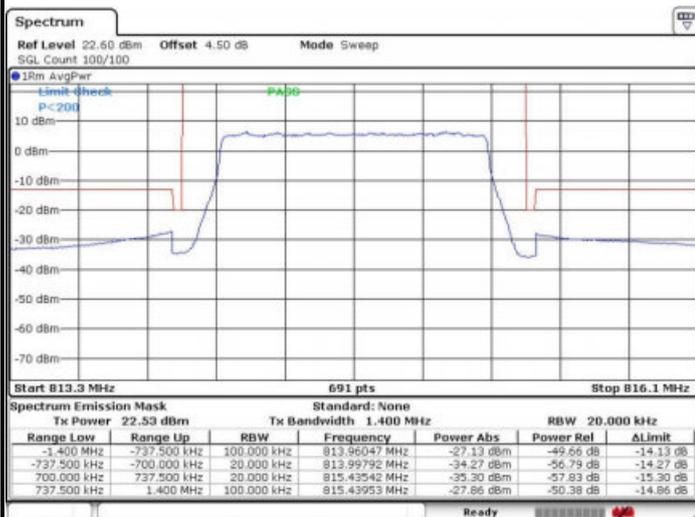

Date: 19 MAY 2016 10:38:07

Highest Band Edge / Full RB

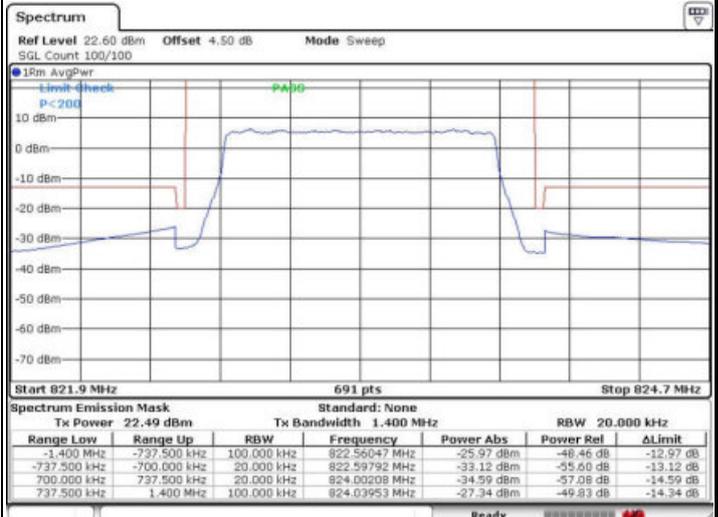


Date: 19 MAY 2016 10:44:29




LTE Band 26 / 3MHz / QPSK

Lowest Band Edge / 1RB

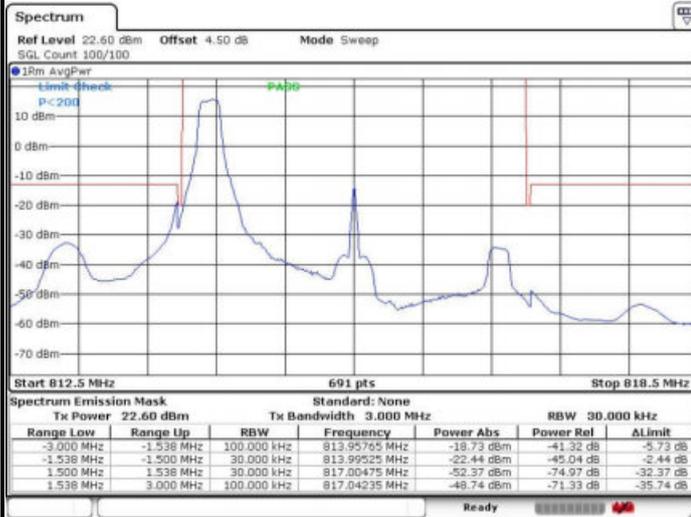


Date: 19 MAY 2016 10:18:19

Highest Band Edge / 1 RB

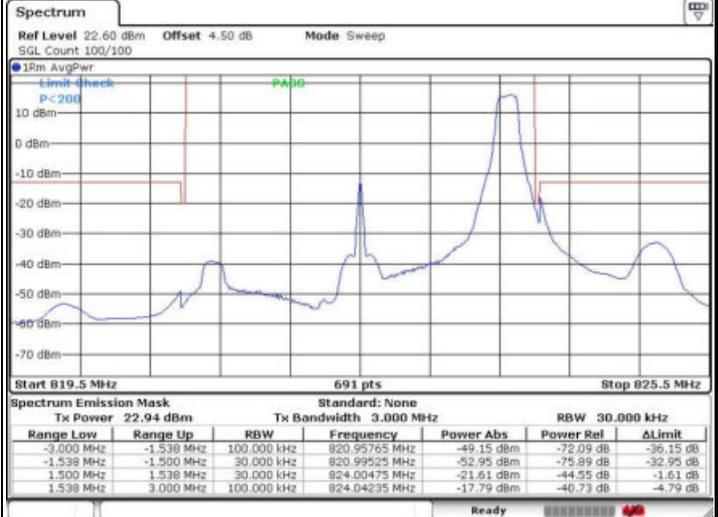


Date: 19 MAY 2016 10:28:22

Lowest Band Edge / Full RB

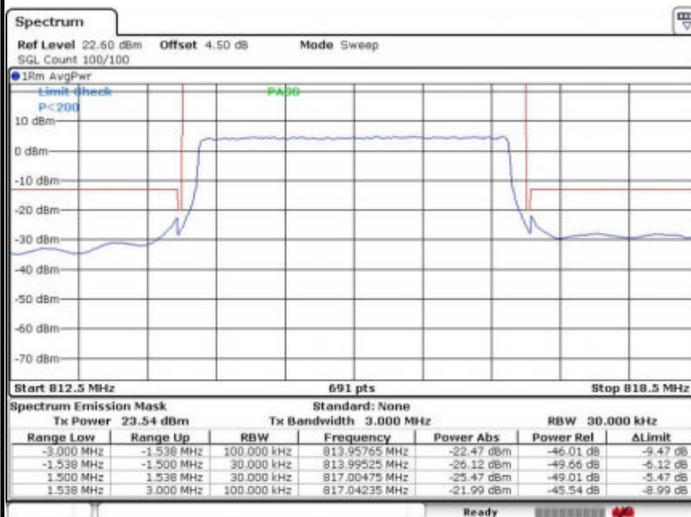

Date: 19 MAY 2016 10:20:32

Highest Band Edge / Full RB

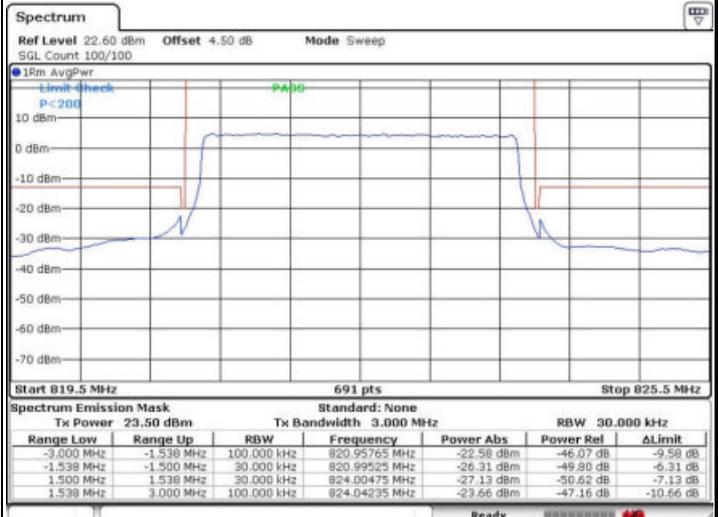


Date: 19 MAY 2016 10:26:51




LTE Band 26 / 3MHz / 16QAM

Lowest Band Edge / 1 RB

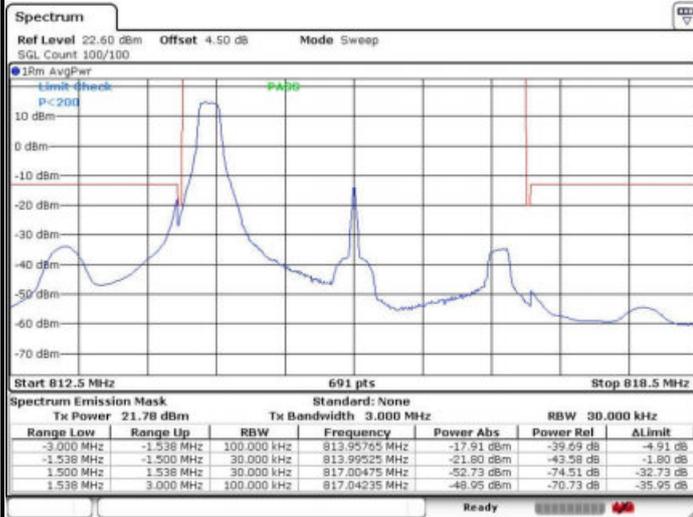


Date: 19 MAY 2016 10:14:44

Highest Band Edge / 1 RB

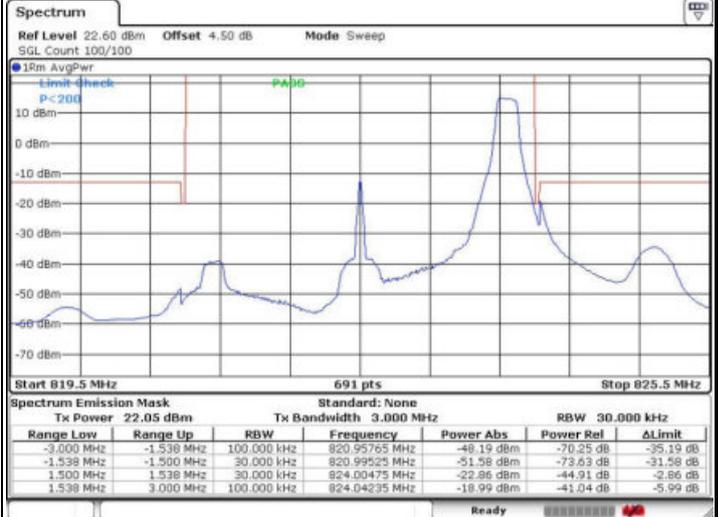


Date: 19 MAY 2016 10:29:51

Lowest Band Edge / Full RB

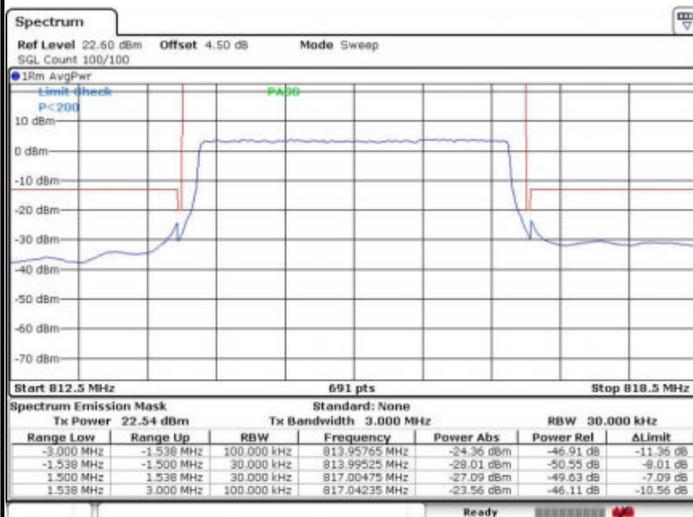

Date: 19 MAY 2016 10:21:45

Highest Band Edge / Full RB

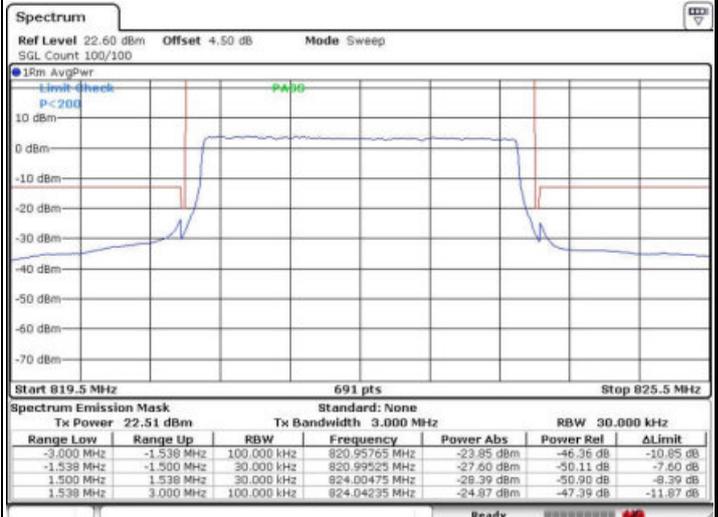


Date: 19 MAY 2016 10:25:33




LTE Band 26 / 5MHz / QPSK

Lowest Band Edge / 1 RB

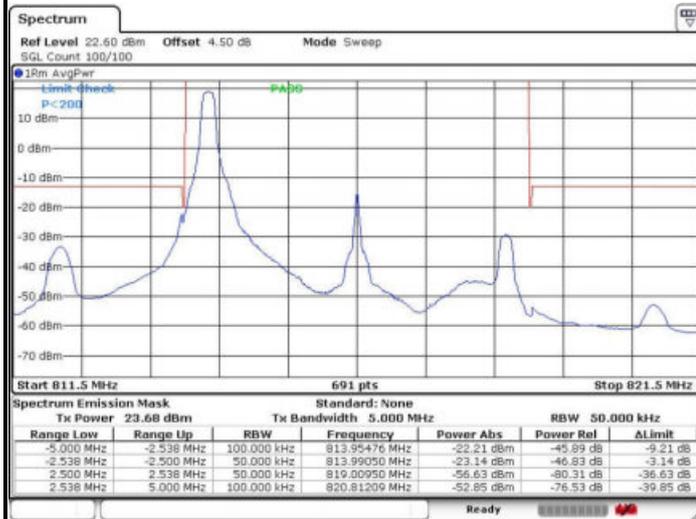

Date: 19 MAY 2016 10:58:15

Highest Band Edge / 1 RB

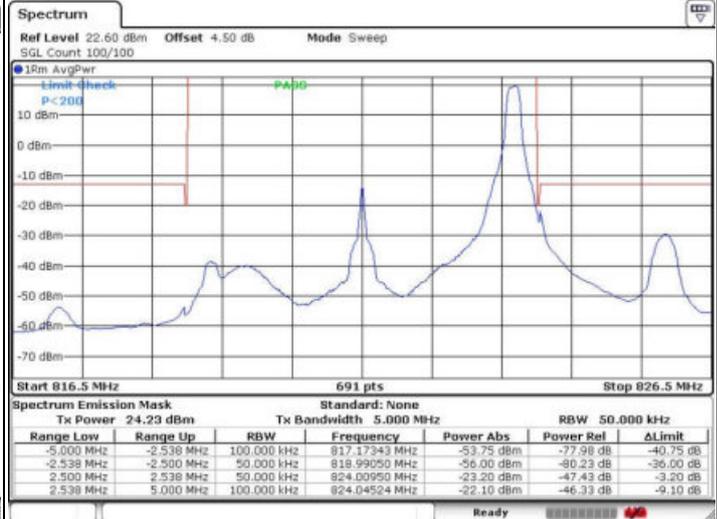


Date: 19 MAY 2016 11:04:37

Lowest Band Edge / Full RB



Date: 19 MAY 2016 10:57:05

Highest Band Edge / Full RB

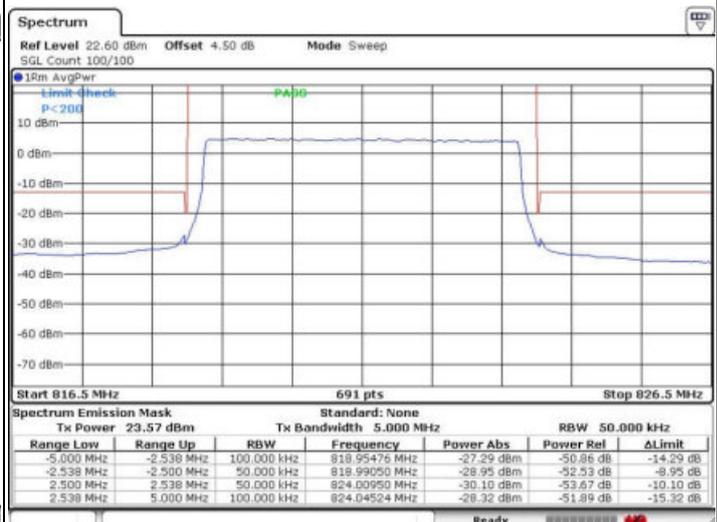


Date: 19 MAY 2016 11:03:29




LTE Band 26 / 5MHz / 16QAM

Lowest Band Edge / 1RB

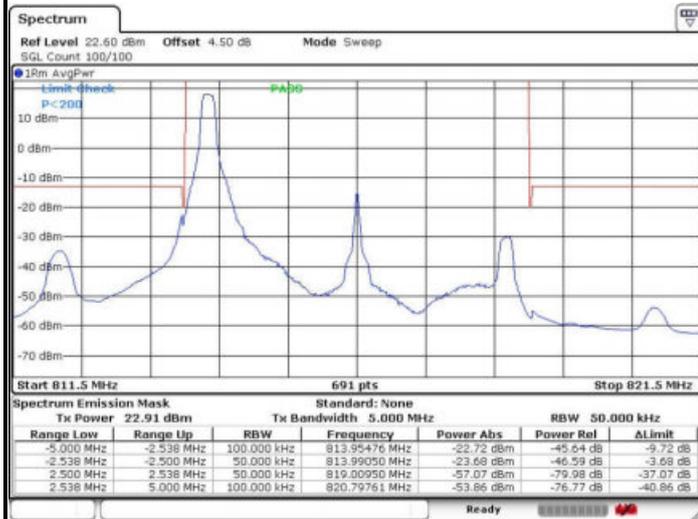


Date: 19 MAY 2016 10:59:23

Highest Band Edge / 1 RB

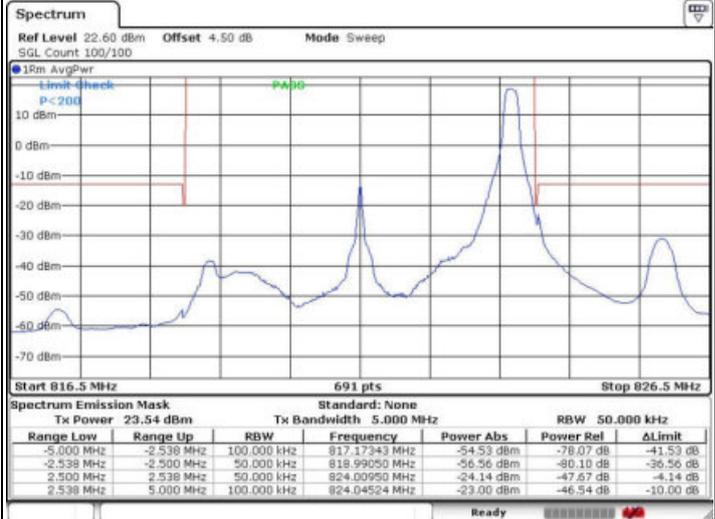


Date: 19 MAY 2016 11:05:51

Lowest Band Edge / Full RB

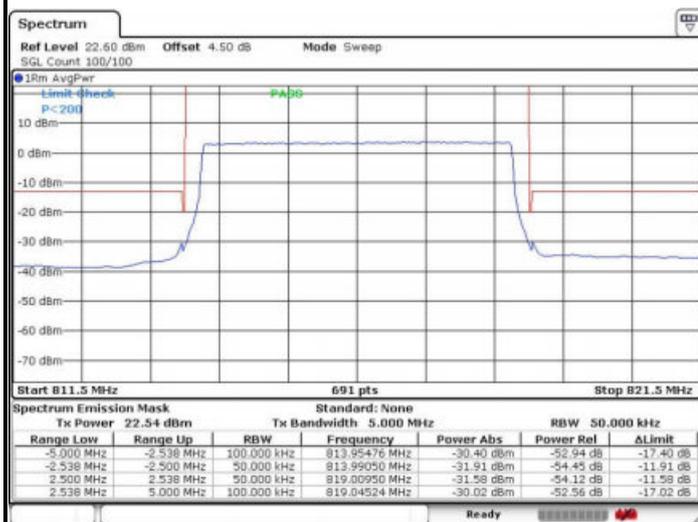

Date: 19 MAY 2016 10:55:38

Highest Band Edge / Full RB

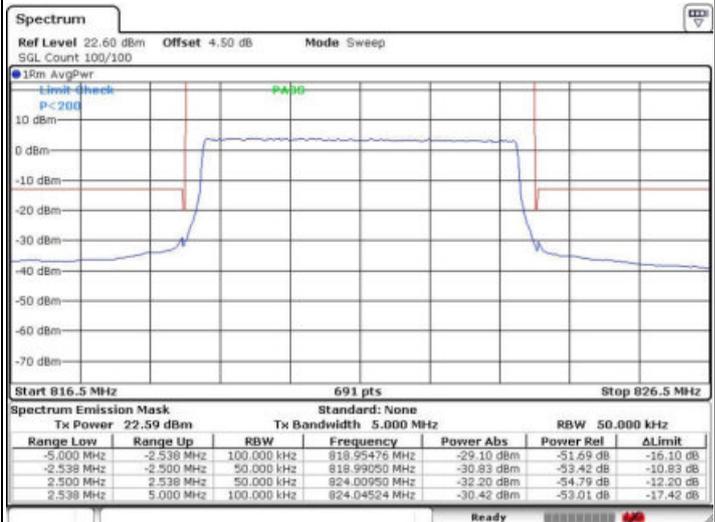


Date: 19 MAY 2016 11:02:03




LTE Band 26 / 10MHz / QPSK

Lowest Band Edge / 1 RB

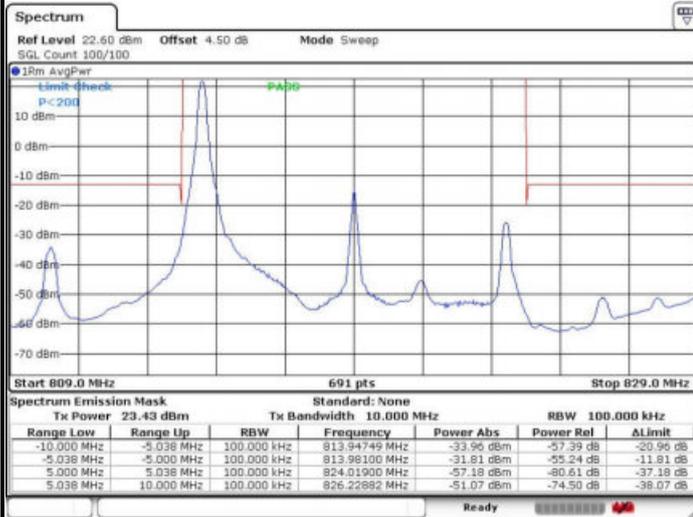


Date: 19 MAY 2016 11:11:56

Highest Band Edge / 1 RB

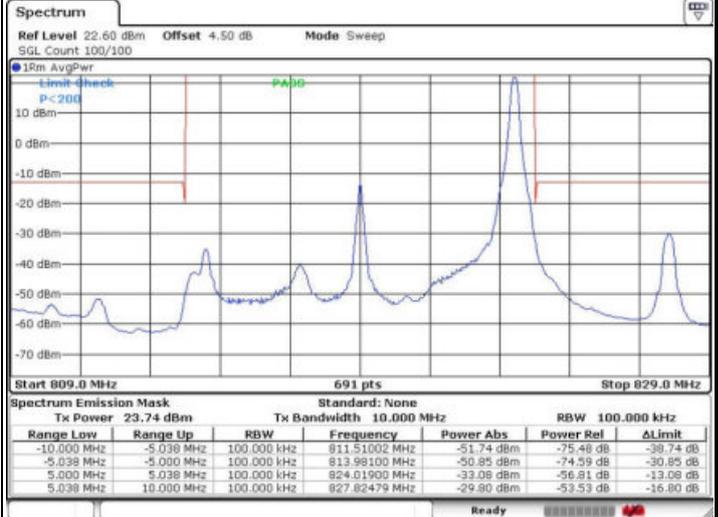

Date: 19 MAY 2016 11:15:26

Band Edge / Full RB

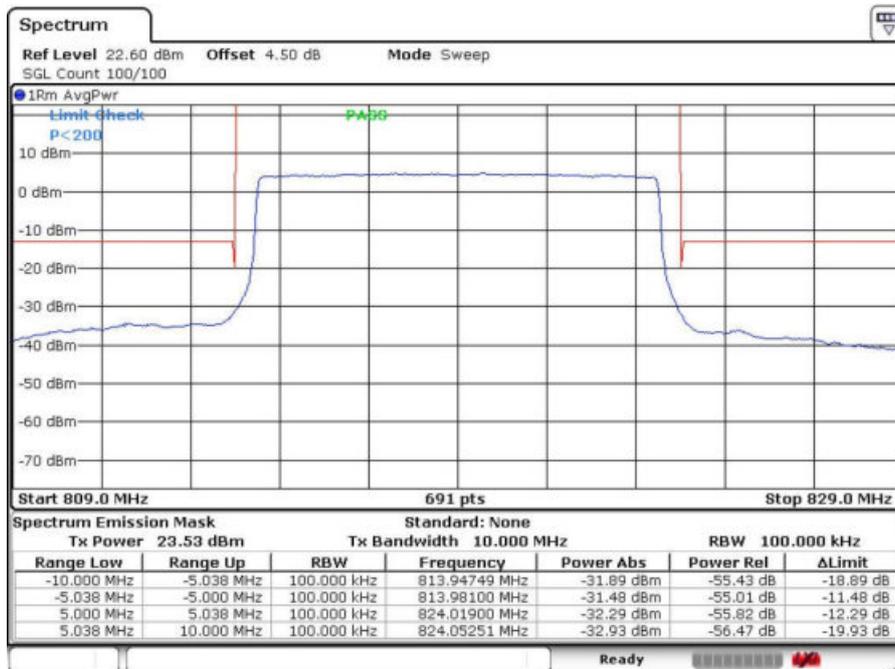


Date: 19 MAY 2016 11:10:52




LTE Band 26 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

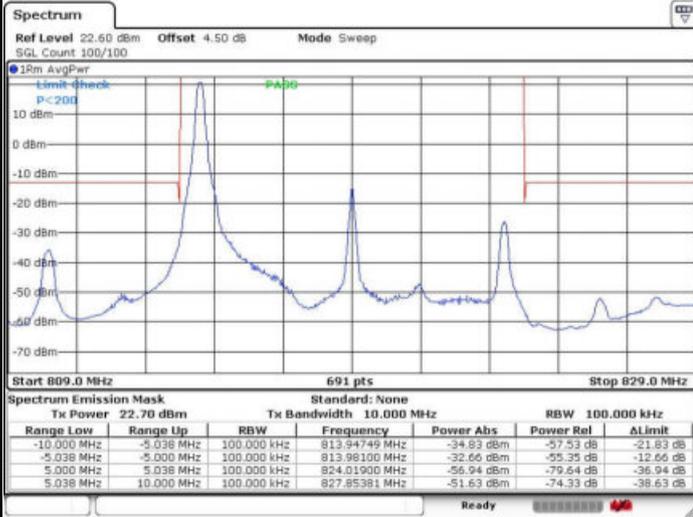


Date: 19 MAY 2016 11:13:12

Highest Band Edge / 1 RB

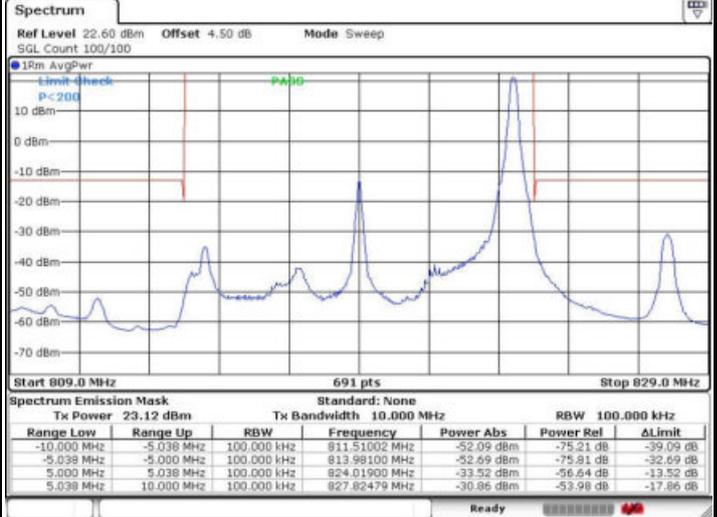

Date: 19 MAY 2016 11:14:20

Band Edge / Full RB

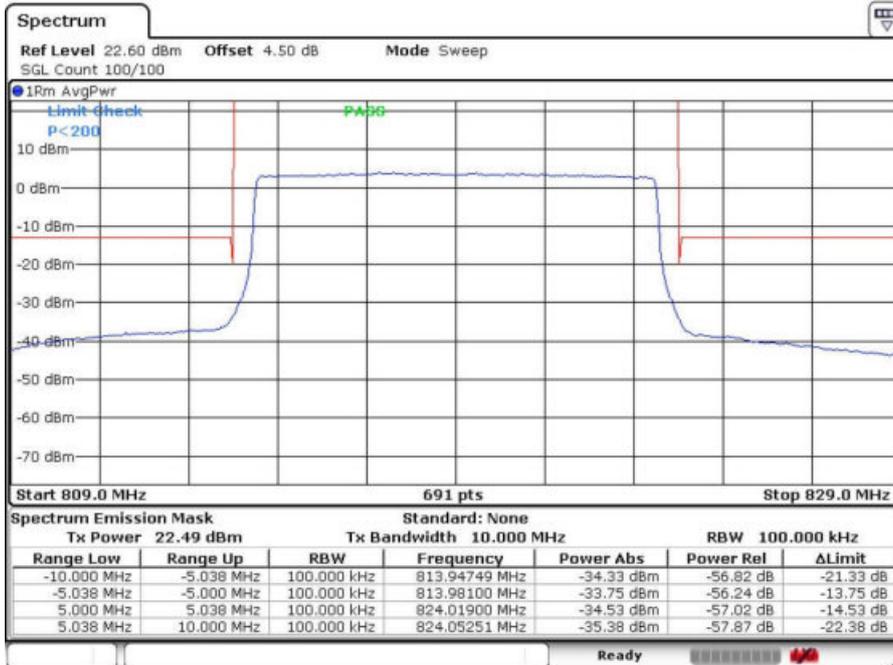


Date: 19 MAY 2016 11:09:10




LTE Band 26 / 15MHz QPSK

Lowest Band Edge / 1 RB

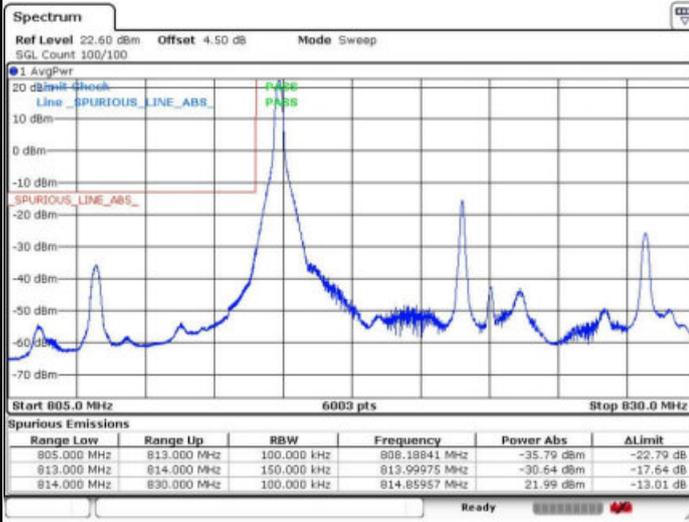

Date: 19 MAY 2016 11:35:37


Lowest Band Edge / Full RB

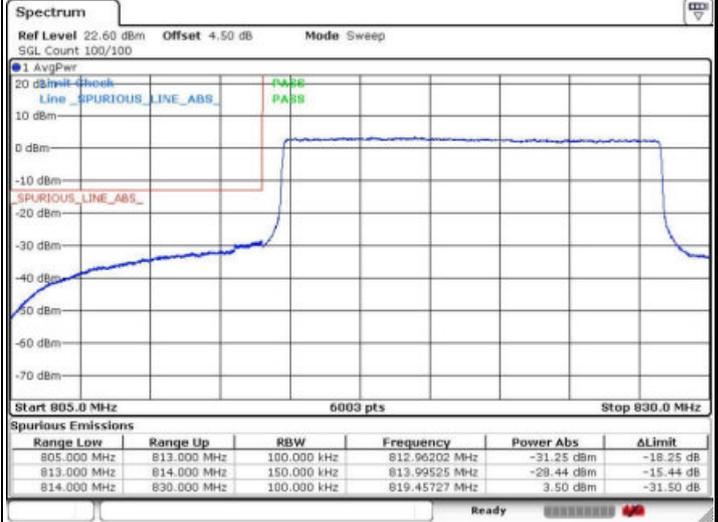

Date: 19 MAY 2016 11:37:52


LTE Band 26 / 15MHz 16QAM

Lowest Band Edge / 1 RB

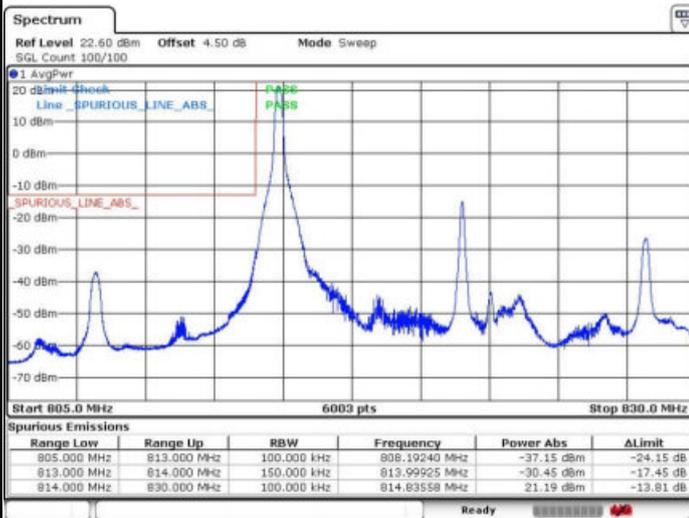

Date: 19 MAY 2016 11:36:22


Lowest Band Edge / Full RB

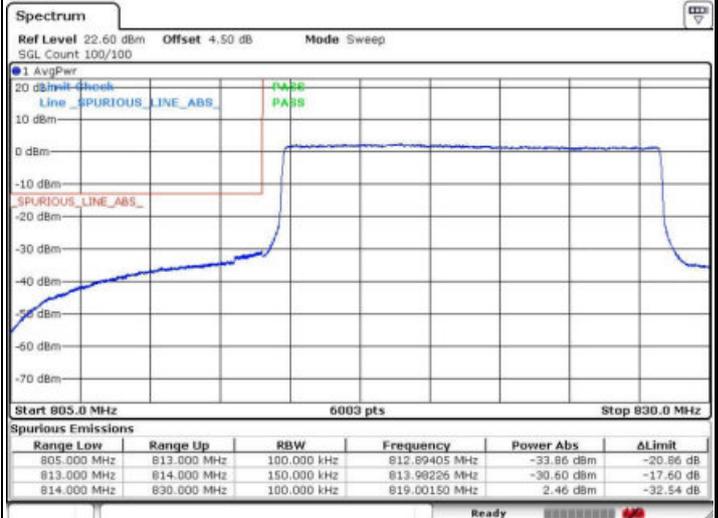

Date: 19 MAY 2016 11:37:06




Conducted Spurious Emission

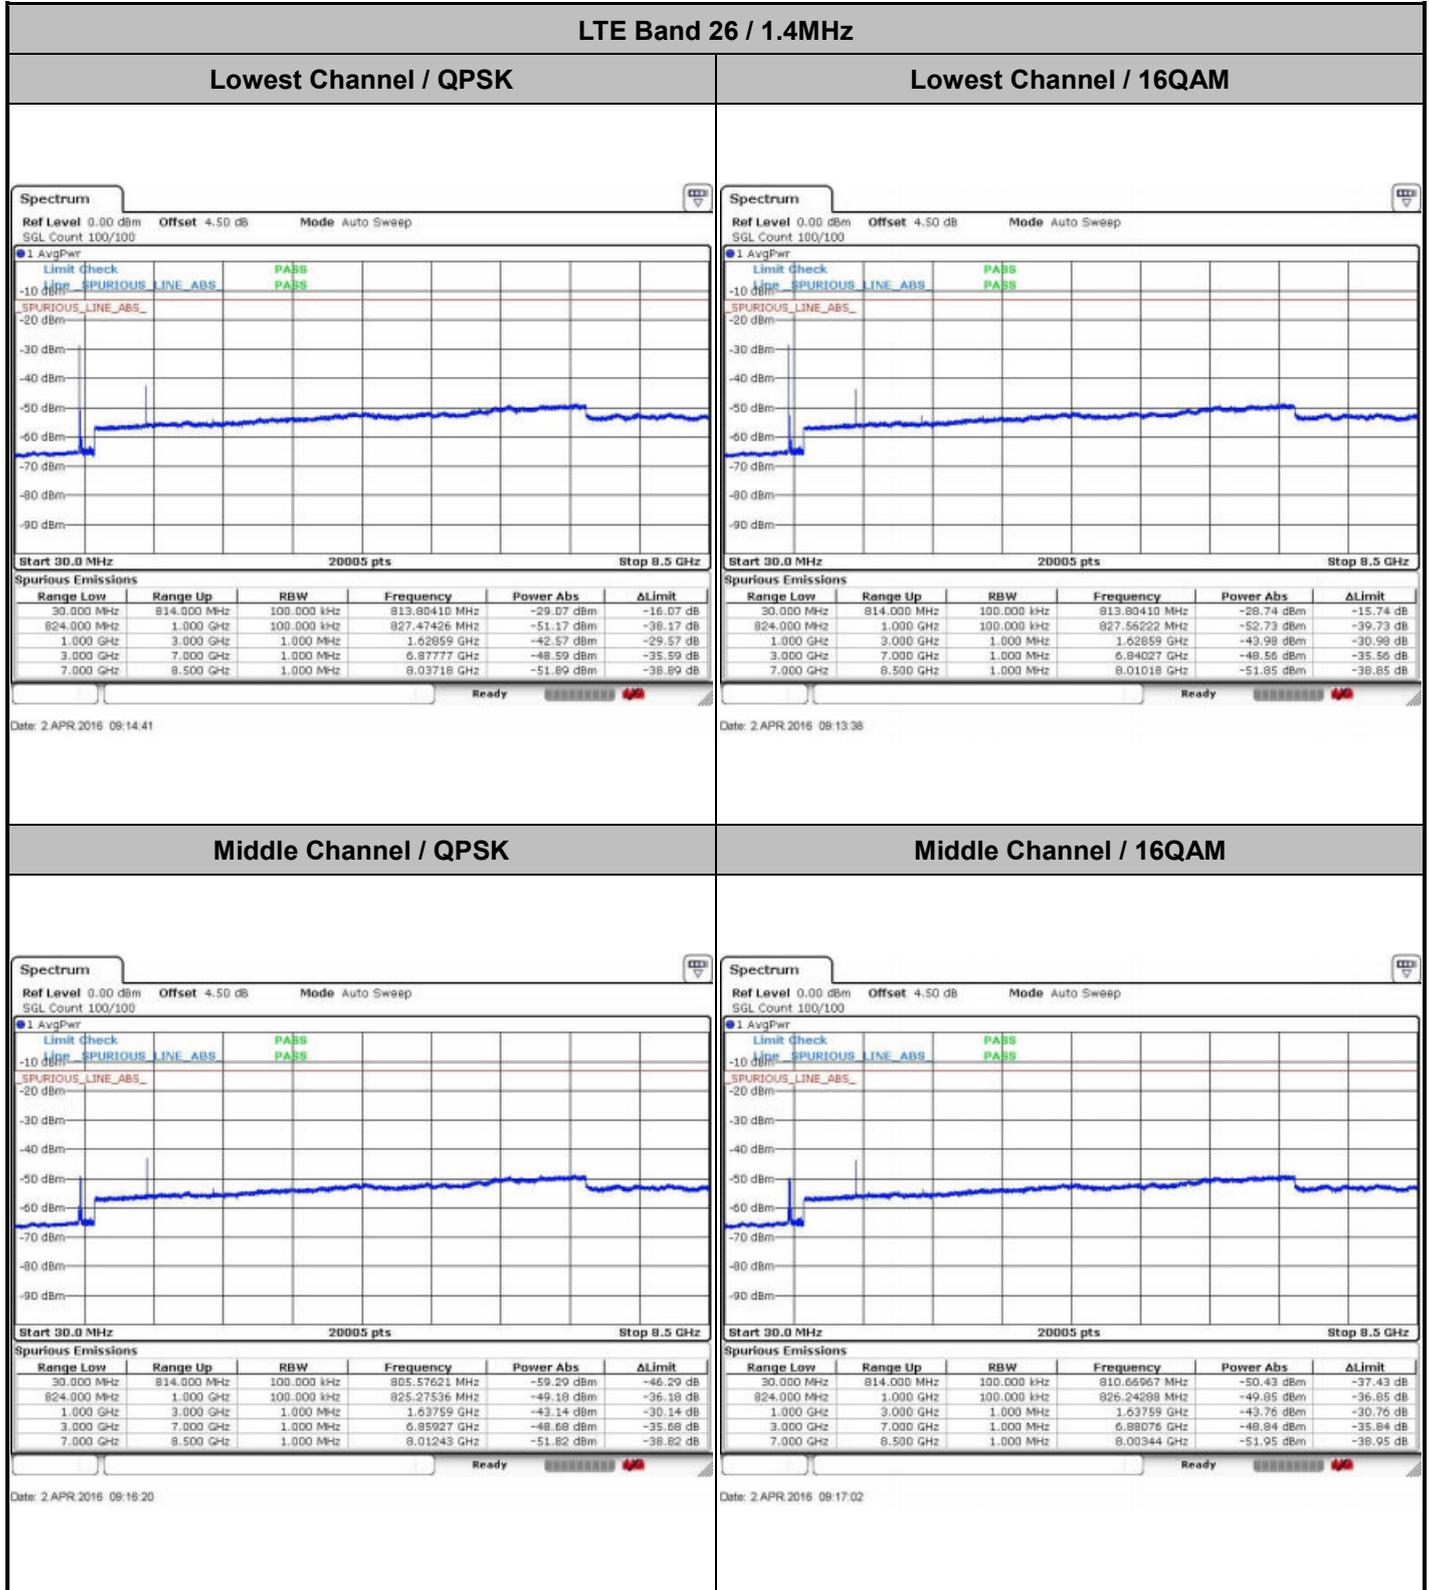






LTE Band 26 / 1.4MHz


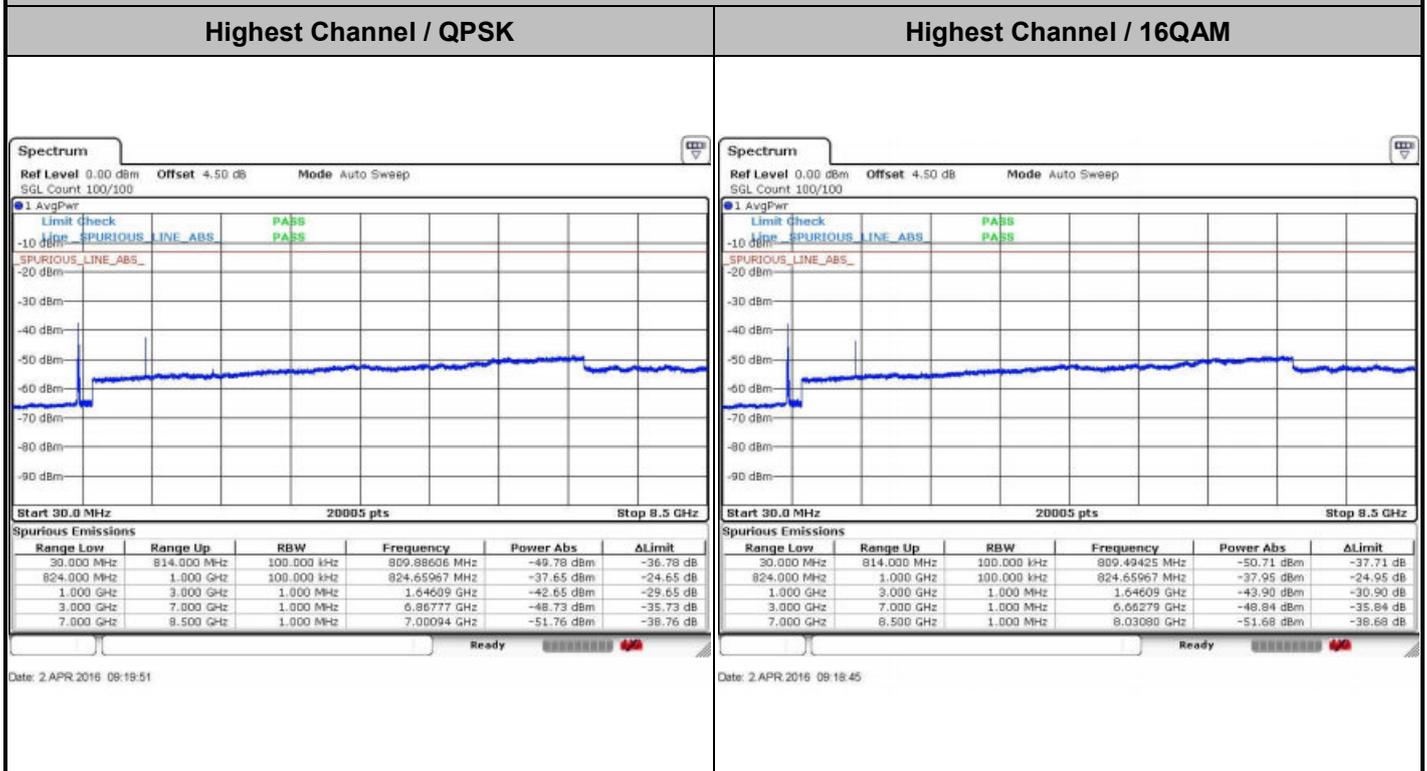



LTE Band 26 / 3MHz

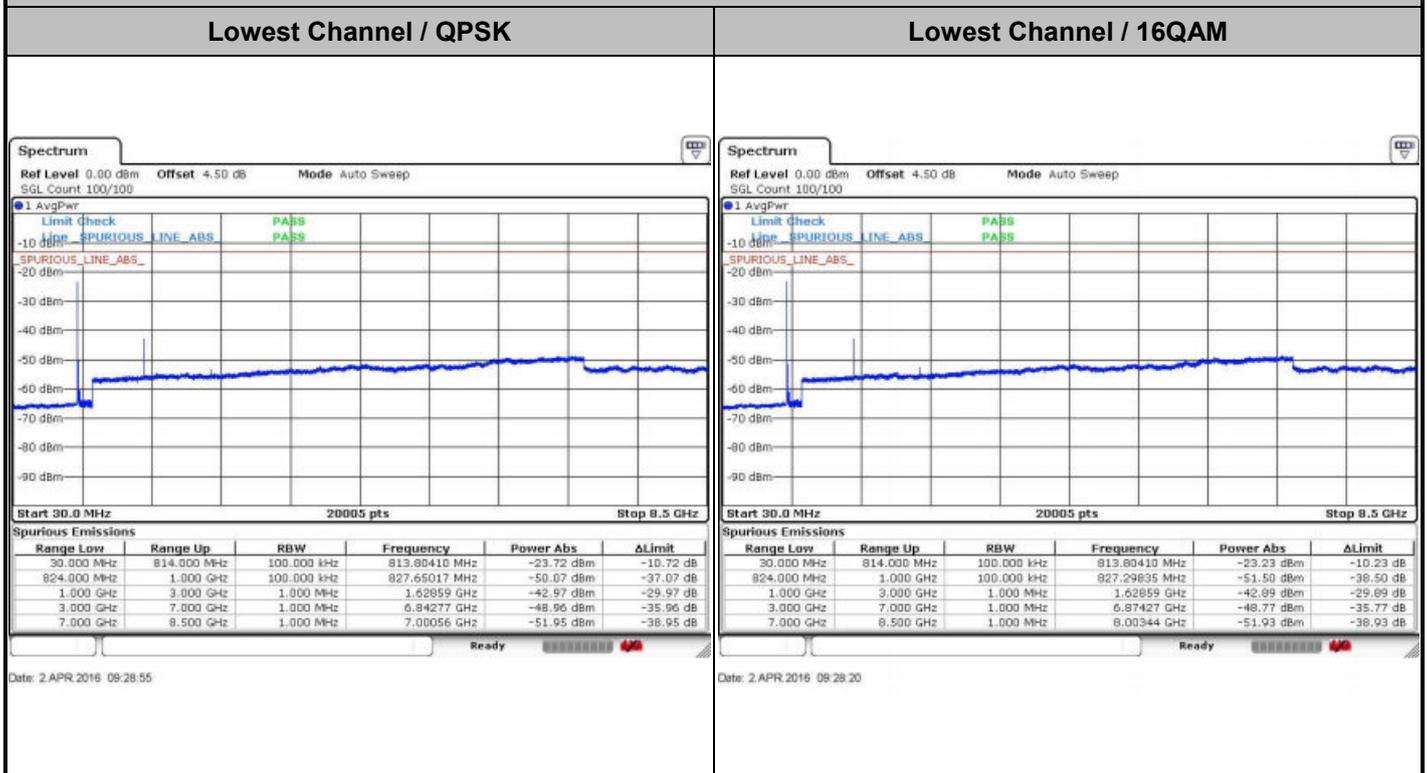

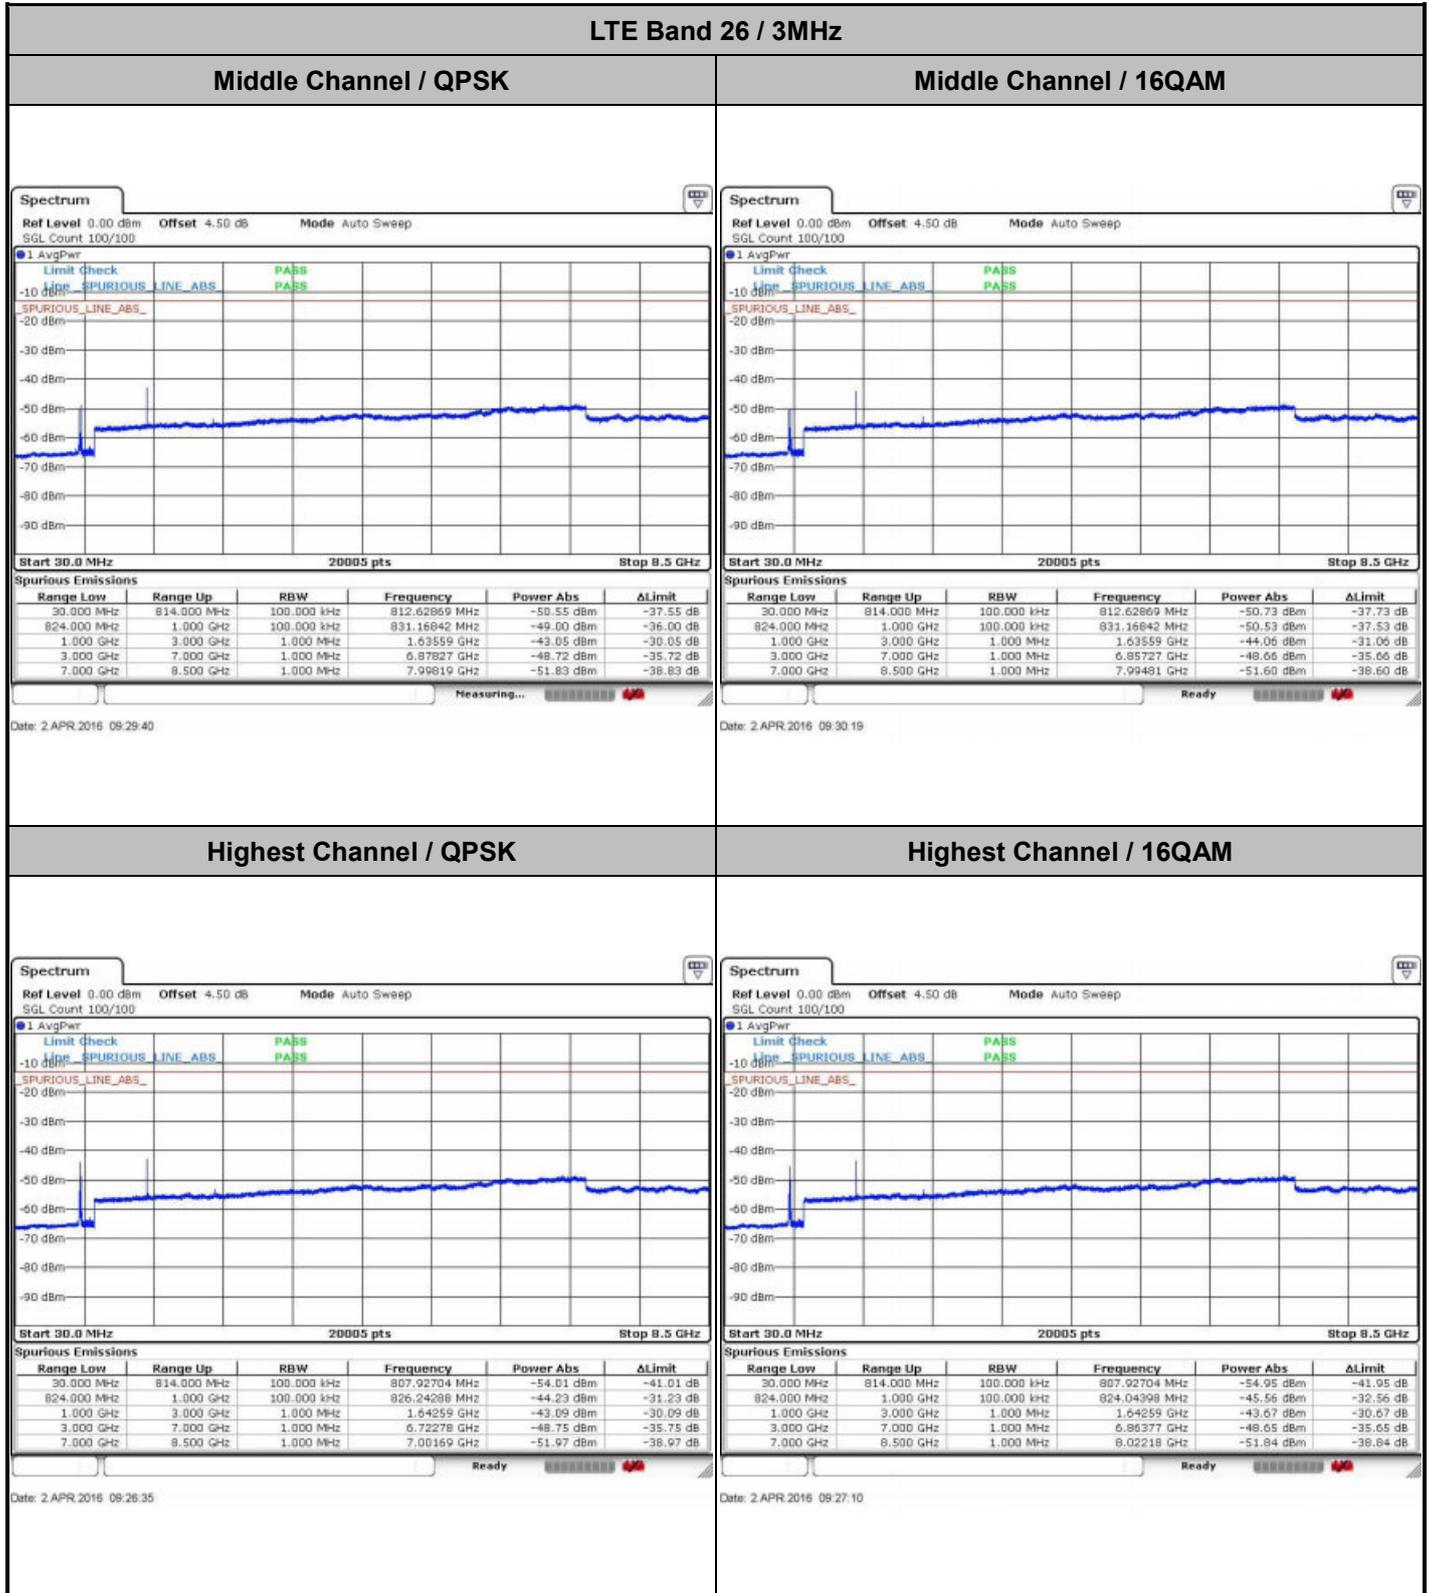

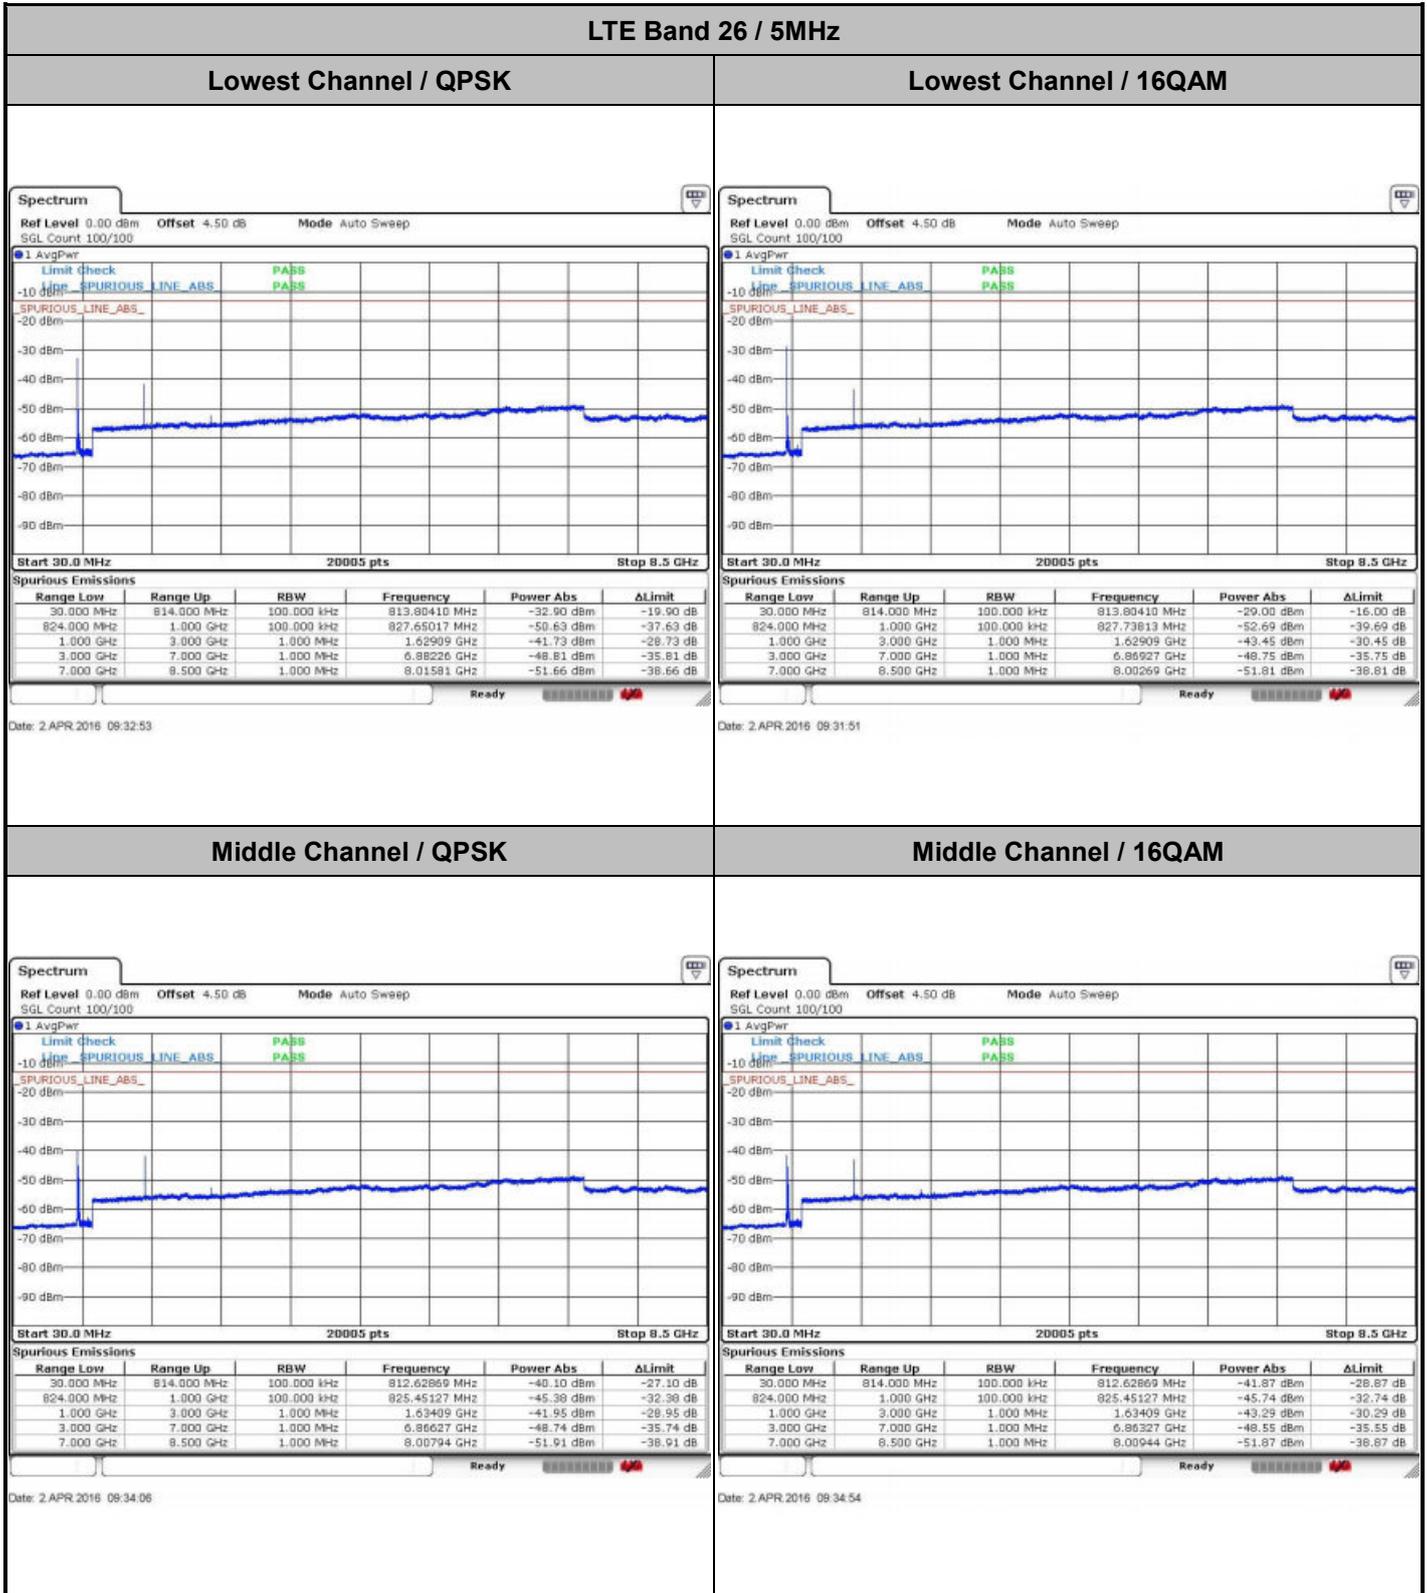

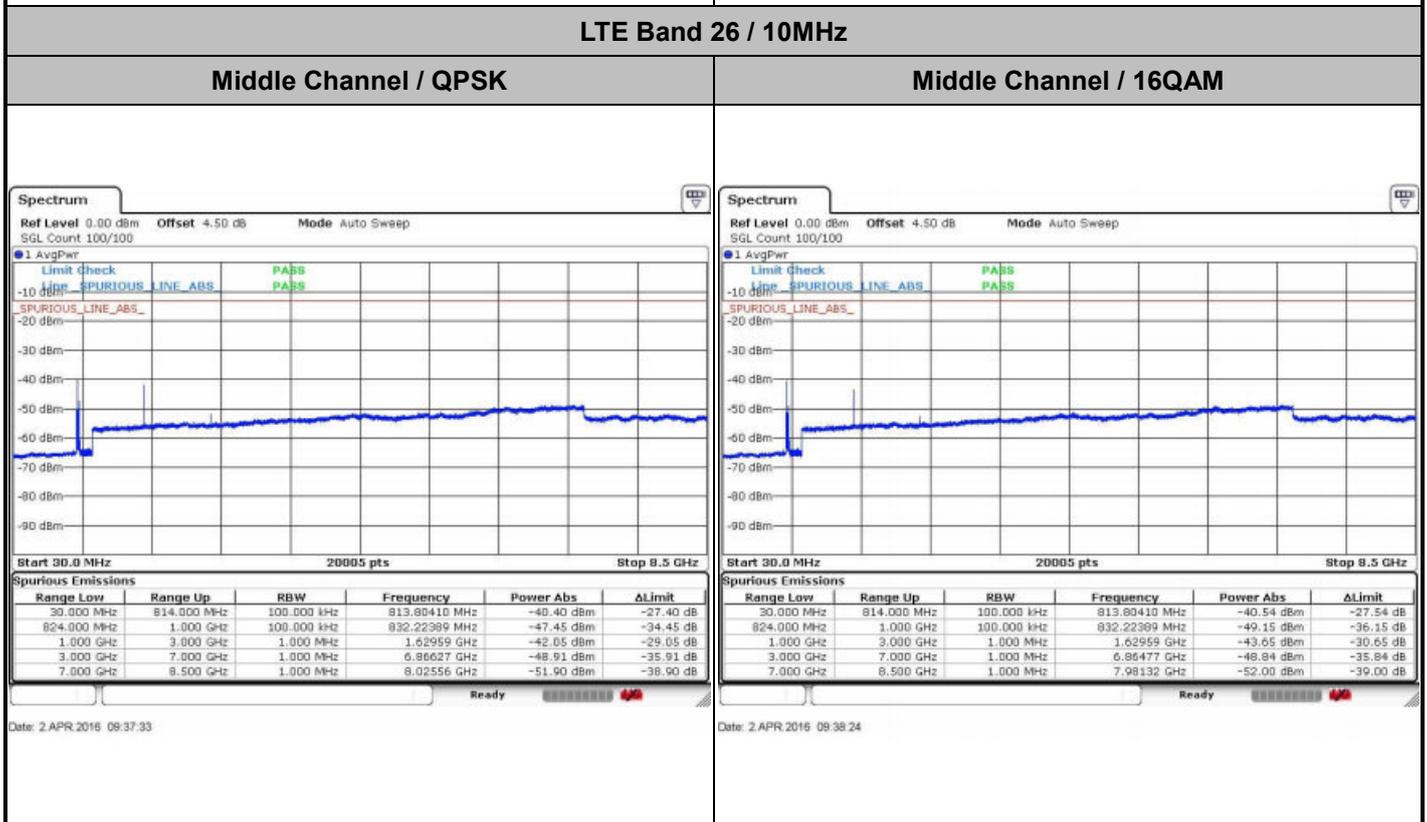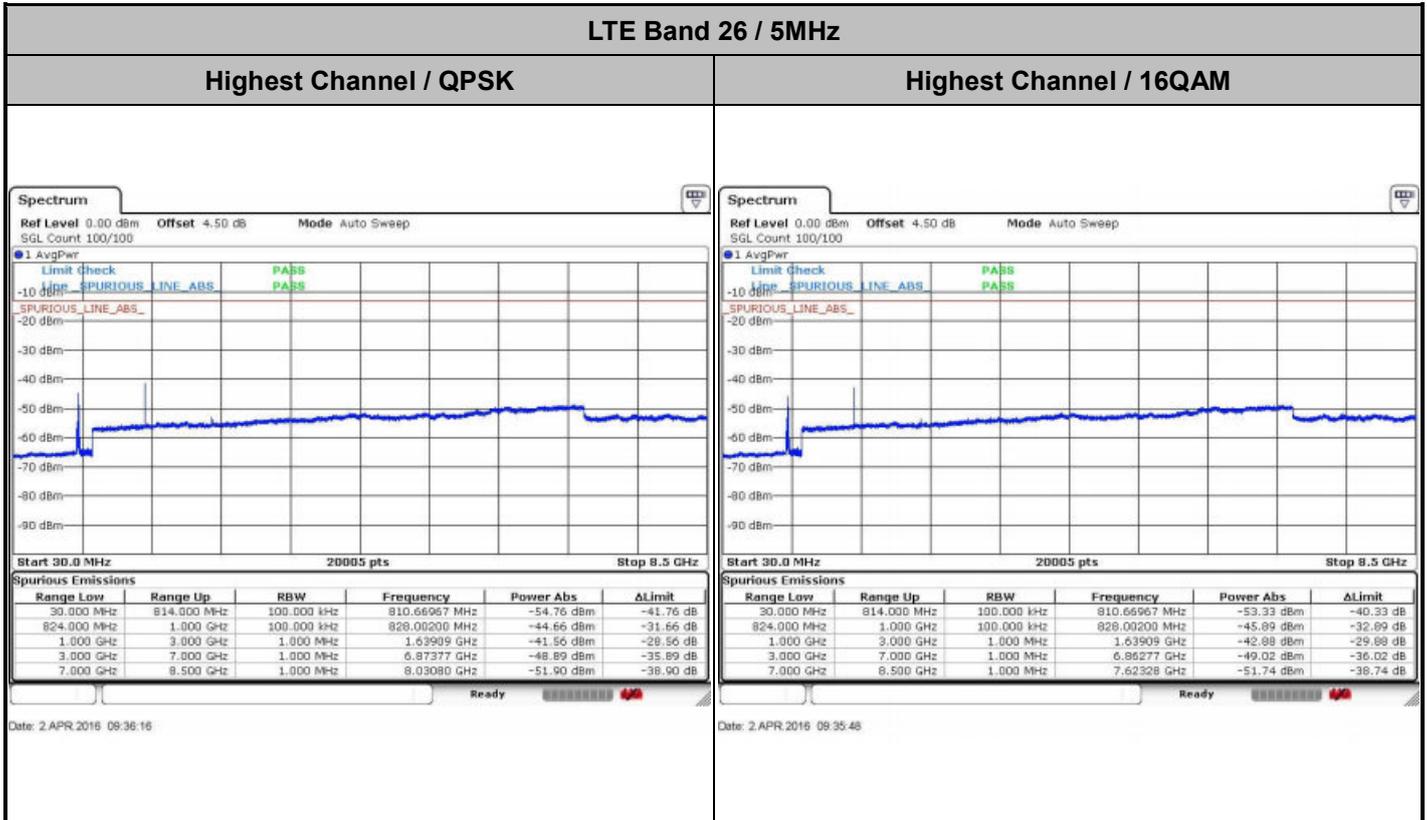

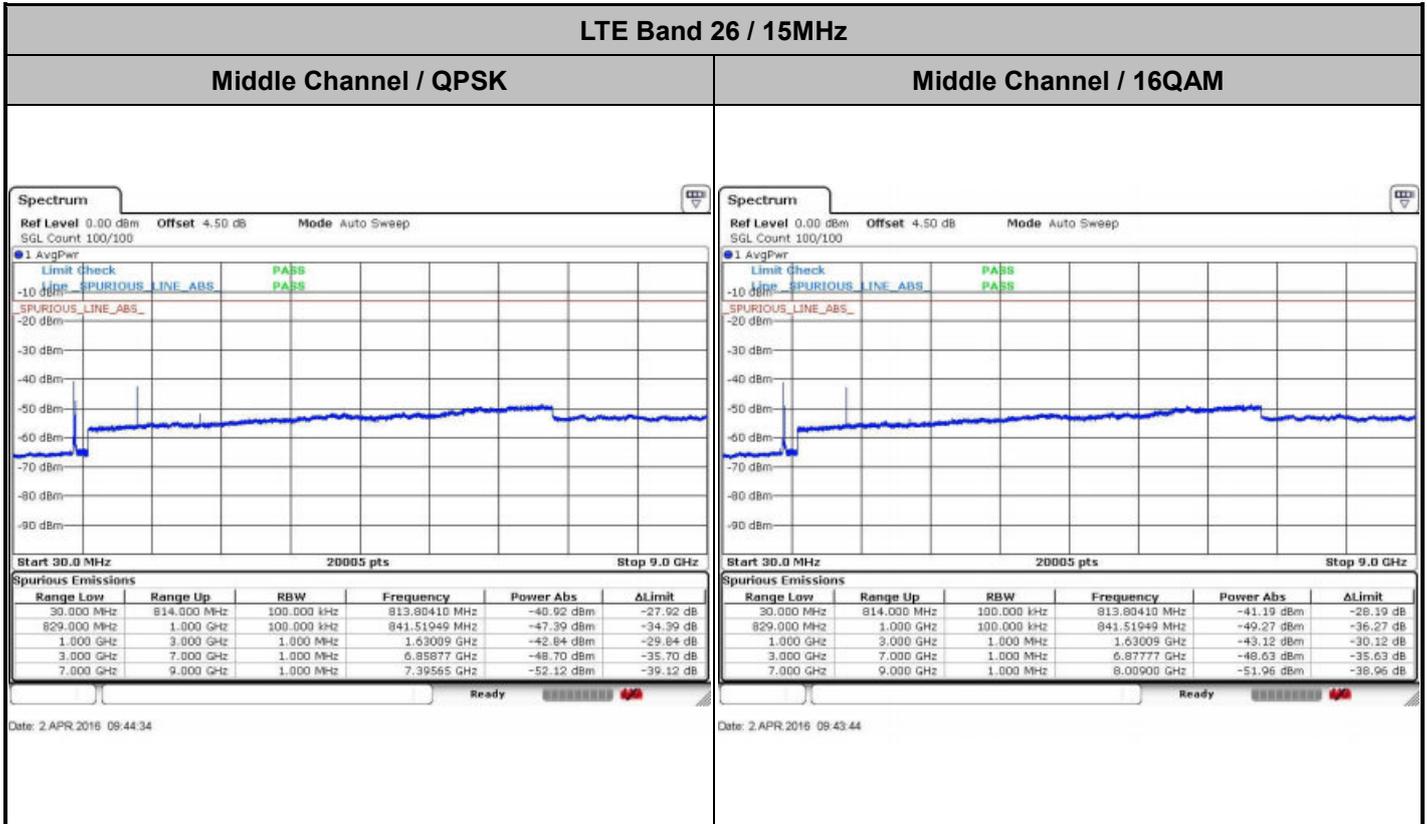



Frequency Stability

Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	2.5ppm
		Deviation (ppm)	Result
50	Normal Voltage	0.0049	PASS
40	Normal Voltage	0.0065	
30	Normal Voltage	0.0010	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0029	
0	Normal Voltage	0.0051	
-10	Normal Voltage	0.0049	
-20	Normal Voltage	0.0042	
-30	Normal Voltage	0.0018	
20	Maximum Voltage	0.0033	
20	Normal Voltage	0.0033	
20	Battery End Point	0.0033	

Note: Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.4 V



Appendix B. Test Results of Radiated Test

Top Antenna

LTE Band 26 / 1.4MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1636.74	-62.68	-13	-49.68	-64.29	-69.37	0.56	9.40	H
	2455.11	-52.14	-13	-39.14	-56.04	-59.84	0.75	10.60	H
	3273.48	-56.47	-13	-43.47	-65.77	-66.07	0.85	12.60	H
	4091.85	-48.79	-13	-35.79	-59.61	-58.35	0.89	12.60	H
	1636.74	-62.45	-13	-49.45	-64.90	-69.14	0.56	9.40	V
	2455.11	-56.32	-13	-43.32	-60.70	-64.02	0.75	10.60	V
	3273.48	-57.37	-13	-44.37	-64.23	-66.97	0.85	12.60	V
	4091.85	-47.05	-13	-34.05	-57.34	-56.61	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 3MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1635.3	-62.82	-13	-49.82	-64.43	-69.51	0.56	9.40	H
	2452.95	-54.44	-13	-41.44	-58.34	-62.14	0.75	10.60	H
	3270.6	-56.54	-13	-43.54	-65.84	-66.14	0.85	12.60	H
	4088.25	-48.67	-13	-35.67	-59.49	-58.23	0.89	12.60	H
	1635.3	-61.99	-13	-48.99	-64.44	-68.68	0.56	9.40	V
	2452.95	-56.48	-13	-43.48	-60.86	-64.18	0.75	10.60	V
	3270.6	-58.68	-13	-45.68	-65.54	-68.28	0.85	12.60	V
	4088.25	-45.38	-13	-32.38	-55.79	-54.94	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 5MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1633.5	-63.03	-13	-50.03	-64.64	-69.72	0.56	9.40	H
	2450.25	-54.36	-13	-41.36	-58.26	-62.06	0.75	10.60	H
	3267	-56.64	-13	-43.64	-65.94	-66.24	0.85	12.60	H
	4083.75	-47.91	-13	-34.91	-58.73	-57.47	0.89	12.60	H
	1633.5	-61.78	-13	-48.78	-64.23	-68.47	0.56	9.40	V
	2450.25	-56.43	-13	-43.43	-60.81	-64.13	0.75	10.60	V
	3267	-57.74	-13	-44.74	-64.60	-67.34	0.85	12.60	V
	4083.75	-45.34	-13	-32.34	-55.76	-54.90	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 10MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1629	-62.56	-13	-49.56	-64.17	-69.25	0.56	9.40	H
	2443.5	-53.50	-13	-40.50	-57.40	-61.20	0.75	10.60	H
	3258	-56.69	-13	-43.69	-65.99	-66.29	0.85	12.60	H
	4072.5	-49.59	-13	-36.59	-60.41	-59.15	0.89	12.60	H
	1629	-61.13	-13	-48.13	-63.58	-67.82	0.56	9.40	V
	2443.5	-54.65	-13	-41.65	-59.03	-62.35	0.75	10.60	V
	3258	-58.10	-13	-45.10	-64.96	-67.70	0.85	12.60	V
	4072.5	-45.16	-13	-32.16	-55.61	-54.72	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Bottom Antenna

LTE Band 26 / 1.4MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1637.22	-60.75	-13	-47.75	-68.32	-67.43	0.57	9.40	H
	2455.83	-56.66	-13	-43.66	-68.94	-64.37	0.74	10.60	H
	3274.44	-53.33	-13	-40.33	-68.93	-62.93	0.85	12.60	H
	4093.05	-40.75	-13	-27.75	-60.44	-50.31	0.89	12.60	H
	1637.22	-61.78	-13	-48.78	-68.61	-68.46	0.57	9.40	V
	2455.83	-57.89	-13	-44.89	-69.39	-65.60	0.74	10.60	V
	3274.44	-55.47	-13	-42.47	-70.08	-65.07	0.85	12.60	V
	4093.05	-46.89	-13	-33.89	-64.37	-56.45	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 3MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1635.28	-61.27	-13	-48.27	-68.84	-67.95	0.57	9.40	H
	2452.92	-56.57	-13	-43.57	-68.85	-64.28	0.74	10.60	H
	3270.56	-52.75	-13	-39.75	-68.35	-62.35	0.85	12.60	H
	4088.2	-42.22	-13	-29.22	-61.51	-51.78	0.89	12.60	H
	1635.28	-61.77	-13	-48.77	-68.60	-68.45	0.57	9.40	V
	2452.92	-57.81	-13	-44.81	-69.31	-65.52	0.74	10.60	V
	3270.56	-54.57	-13	-41.57	-69.18	-64.17	0.85	12.60	V
	4088.2	-47.72	-13	-34.72	-65.20	-57.28	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 5MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1633.36	-60.52	-13	-47.52	-68.09	-67.20	0.57	9.40	H
	2450.04	-57.01	-13	-44.01	-69.29	-64.72	0.74	10.60	H
	3266.72	-53.59	-13	-40.59	-69.19	-63.19	0.85	12.60	H
	4083.4	-44.40	-13	-31.40	-62.50	-53.96	0.89	12.60	H
	1633.36	-61.12	-13	-48.12	-67.95	-67.80	0.57	9.40	V
	2450.04	-57.29	-13	-44.29	-68.79	-65.00	0.74	10.60	V
	3266.72	-56.18	-13	-43.18	-70.79	-65.78	0.85	12.60	V
	4083.4	-47.84	-13	-34.84	-65.32	-57.40	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 26 / 10MHz / 16QAM / RB Size 1 Offset 0									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1629.18	-61.48	-13	-48.48	-69.05	-68.16	0.57	9.40	H
	2443.77	-57.87	-13	-44.87	-70.15	-65.58	0.74	10.60	H
	3258.36	-54.27	-13	-41.27	-69.87	-63.87	0.85	12.60	H
	4072.95	-46.36	-13	-33.36	-64.25	-55.92	0.89	12.60	H
	1629.18	-62.21	-13	-49.21	-69.04	-68.89	0.57	9.40	V
	2443.77	-58.47	-13	-45.47	-69.97	-66.18	0.74	10.60	V
	3258.36	-56.48	-13	-43.48	-71.09	-66.08	0.85	12.60	V
	4072.95	-49.65	-13	-36.65	-67.13	-59.21	0.89	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.