



Variant FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE A2017U
FCC ID : SRQ-ZTEA2017U
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a variant report which is only valid together with the original test report. The product was received on Jun. 14, 2016 and testing was completed on Jun. 27, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Applicant5

1.2 Manufacturer5

1.3 Product Feature of Equipment Under Test.....5

1.4 Product Specification of Equipment Under Test.....6

1.5 Modification of EUT6

1.6 Testing Location7

1.7 Applicable Standards.....7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST8

2.1 Carrier Frequency Channel8

2.2 Pre-Scanned RF Power.....9

2.3 Test Mode.....11

2.4 Connection Diagram of Test System.....12

2.5 Support Unit used in test configuration and system13

2.6 EUT Operation Test Setup13

2.7 Measurement Results Explanation Example.....13

3 TEST RESULT14

3.1 Maximum Conducted Output Power Measurement14

3.2 Unwanted Radiated Emission Measurement15

3.3 Antenna Requirements.....19

4 LIST OF MEASURING EQUIPMENTS.....20

5 UNCERTAINTY OF EVALUATION21

APPENDIX A. RADIATED TEST RESULTS

APPENDIX B. DUTY CYCLE PLOTS

APPENDIX C. SETUP PHOTOGRAPHS

APPENDIX D. PRODUCT EQUALITY DECLARATION



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|-----------------------|--------------------------------|--|--------|---|
| 3.1 | 15.407(a) | Maximum Conducted Output Power | FCC ≤24 dBm (depend on band) | Pass | - |
| 3.2 | 15.407(b) | Unwanted Emissions | ≤ -17, -27 dBm (depend on band)&15.209(a) | Pass | Under limit 6.43 dB at 55.220 MHz |
| 3.3 | 15.203 & 15.407(a) | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|--|--|
| Equipment | WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone |
| Brand Name | ZTE |
| Model Name | ZTE A2017U |
| FCC ID | SRQ-ZTEA2017U |
| EUT supports Radios application | CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/HS PA+(16QAM uplink is not supported)/DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5GHz 802.11a/n HT20/HT40 WLAN5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR Bluetooth v4.0 LE Bluetooth v4.2 LE |
| IMEI Code | Conducted: 990006780003819 Radiation: NA |
| HW Version | wwdB |
| SW Version | A2017UV1.0.0B07 |
| EUT Stage | Production Unit |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|--|
| Tx/Rx Frequency Range | 5180 MHz ~ 5240 MHz |
| Maximum Output Power to Antenna | <5180 MHz ~ 5240 MHz> 802.11a : 12.77 dBm / 0.0189 W 802.11n HT20 : 9.71 dBm / 0.0094 W 802.11n HT40 : 10.14 dBm / 0.0103 W 802.11ac VHT20 : 9.65 dBm / 0.0092 W 802.11ac VHT40 : 10.05 dBm / 0.0101 W 802.11ac VHT80 : 9.76 dBm / 0.0095 W |
| Antenna Type | PIFA Antenna with gain -1.5 dBi |
| Type of Modulation | 802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) |

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

| | | | |
|---------------------------|---|-----------|-----------------------------|
| Test Site | SPORTON INTERNATIONAL (KUNSHAN) INC. | | |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958 | | |
| Test Site No. | Sporton Site No. | | FCC Registration No. |
| | TH01-KS | 03CH03-KS | 306251 |

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- ♦ FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|--------------------------------------|-----------|-------------|-----------|-------------|
| 5180-5240 MHz Band 1 (U-NII-1) | 36 | 5180 | 44 | 5220 |
| | 38 | 5190 | 46 | 5230 |
| | 40 | 5200 | 48 | 5240 |

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

| WLAN 5GHz 802.11a Average Power (dBm) | | | | | | | | | | |
|---------------------------------------|-----------------|-----------|---------------------|-------|--------|--------|--------|--------|--------|--------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | |
| Channel | Frequency (MHz) | Data Rate | Channel | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
| | | 6Mbps | | | | | | | | |
| CH 36 | 5180 | 12.77 | CH 36 | 12.75 | 12.74 | 12.73 | 12.30 | 12.19 | 12.22 | 12.31 |
| CH 44 | 5220 | 12.71 | | | | | | | | |
| CH 48 | 5240 | 12.23 | | | | | | | | |

| WLAN 5GHz 802.11n-HT20 Average Power (dBm) | | | | | | | | | | |
|--|-----------------|-----------|---------------------|------|------|------|------|------|------|------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | |
| Channel | Frequency (MHz) | MCS Index | Channel | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| | | MCS0 | | | | | | | | |
| CH 36 | 5180 | 9.71 | CH 36 | 9.61 | 9.67 | 9.32 | 9.26 | 9.25 | 9.28 | 9.20 |
| CH 44 | 5220 | 9.57 | | | | | | | | |
| CH 48 | 5240 | 9.08 | | | | | | | | |

| WLAN 5GHz 802.11n-HT40 Average Power (dBm) | | | | | | | | | | |
|--|-----------------|-----------|---------------------|-------|------|------|-------|-------|------|-------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | |
| Channel | Frequency (MHz) | MCS Index | Channel | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| | | MCS0 | | | | | | | | |
| CH 38 | 5190 | 10.14 | CH 38 | 10.03 | 9.92 | 9.97 | 10.02 | 10.04 | 9.94 | 10.09 |
| CH 46 | 5230 | 10.02 | | | | | | | | |

| WLAN 5GHz 802.11ac VHT20 Average Power (dBm) | | | | | | | | | | | |
|--|-----------------|-----------|---------------------|------|------|------|------|------|------|------|------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | | |
| Channel | Frequency (MHz) | MCS Index | Channel | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 | MCS8 |
| | | MCS0 | | | | | | | | | |
| CH 36 | 5180 | 9.65 | CH 36 | 9.59 | 9.62 | 9.25 | 9.21 | 9.17 | 9.27 | 9.20 | 9.23 |
| CH 44 | 5220 | 9.45 | | | | | | | | | |
| CH 48 | 5240 | 8.98 | | | | | | | | | |



| WLAN 5GHz 802.11ac VHT40 Average Power (dBm) | | | | | | | | | | | | |
|--|-----------------|-----------|---------------------|------|------|------|------|------|------|-------|------|------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | | | |
| Channel | Frequency (MHz) | MCS Index | Channel | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 | MCS8 | MCS9 |
| | | MCS0 | | | | | | | | | | |
| CH 38 | 5190 | 10.05 | CH 38 | 9.90 | 9.87 | 9.89 | 9.92 | 9.93 | 9.99 | 10.02 | 9.98 | 9.95 |
| CH 46 | 5230 | 9.80 | | | | | | | | | | |

| WLAN 5GHz 802.11ac VHT80 Average Power (dBm) | | | | | | | | | | | | |
|--|-----------------|-----------|---------------------|------|------|------|------|------|------|------|------|------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | | | |
| Channel | Frequency (MHz) | MCS Index | Channel | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 | MCS8 | MCS9 |
| | | MCS0 | | | | | | | | | | |
| CH 42 | 5210 | 9.76 | CH 42 | 9.72 | 9.73 | 9.17 | 9.00 | 8.96 | 9.21 | 8.99 | 9.02 | 8.97 |



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

| Modulation | Data Rate |
|----------------|-----------|
| 802.11a | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |
| 802.11ac VHT20 | MCS0 |
| 802.11ac VHT40 | MCS0 |
| 802.11ac VHT80 | MCS0 |

| | | |
|--------------|------------|-------------------------------|
| Ch. # | | Band I : 5180-5240 MHz |
| | | 802.11a |
| L | Low | 36 |

| | | |
|--------------|------------|-------------------------------|
| Ch. # | | Band I : 5180-5240 MHz |
| | | 802.11n HT20 |
| L | Low | 36 |

| | | |
|--------------|------------|-------------------------------|
| Ch. # | | Band I : 5180-5240 MHz |
| | | 802.11n HT40 |
| L | Low | 38 |

| | | |
|--------------|------------|-------------------------------|
| Ch. # | | Band I : 5180-5240 MHz |
| | | 802.11ac VHT20 |
| L | Low | 36 |


| | | |
|--------------|------------|-------------------------------|
| Ch. # | | Band I : 5180-5240 MHz |
| | | 802.11ac VHT40 |
| L | Low | 38 |

| | | |
|--------------|---------------|-------------------------------|
| Ch. # | | Band I : 5180-5240 MHz |
| | | 802.11ac VHT80 |
| M | Middle | 42 |


2.4 Connection Diagram of Test System

<WLAN Tx Mode>

For 802.11a, 802.11ac VHT80

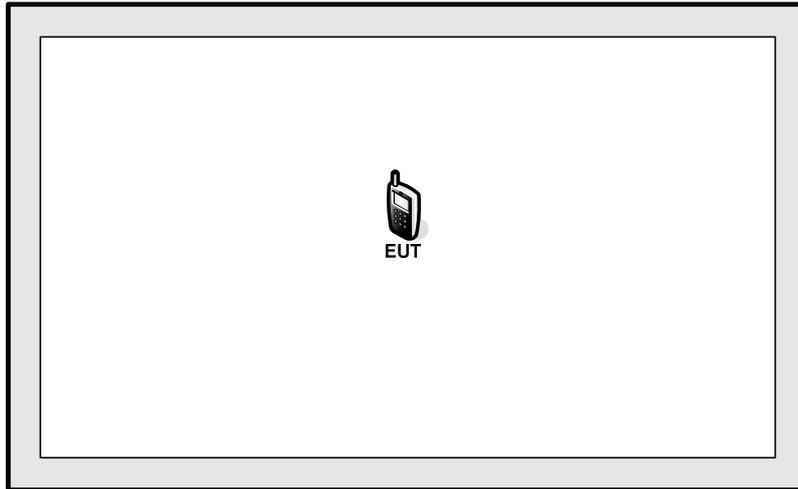

For 802.11a/n HT20/HT40, 802.11ac VHT20/VHT40

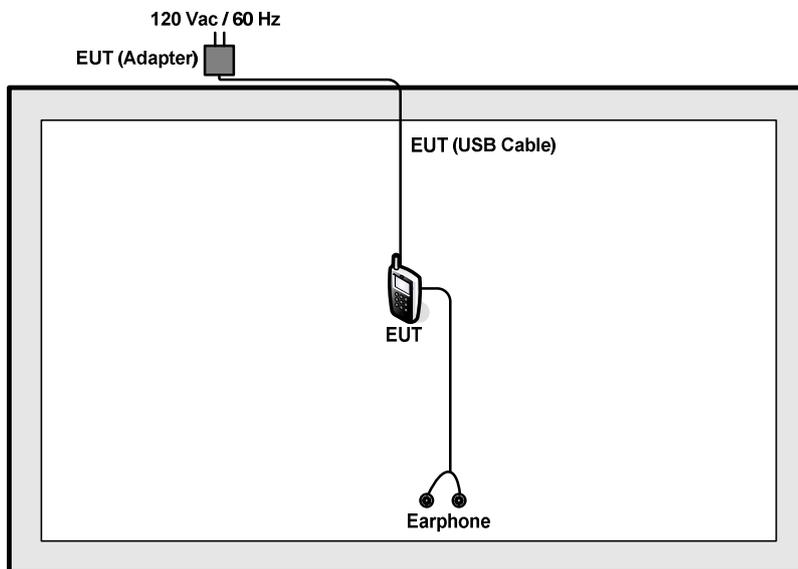



2.5 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|-----------|------------|------------|--------|-------------------|------------|
| 1. | Earphone | Lenovo | SH100 | N/A | Unshielded, 1.2 m | N/A |

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.0 dB.

Offset (dB) = RF cable loss(dB).
= 7.0 (dB)

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup

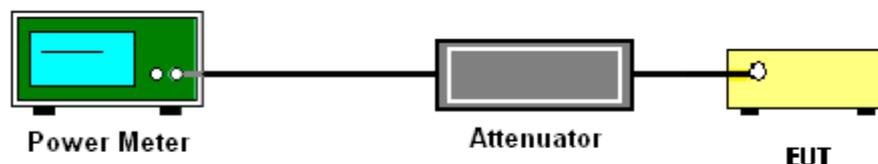



3.2 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

| EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|------------|-------------------------------|
| -17 | 78.3 |
| - 27 | 68.3 |

- (3) KDB789033 D01 v01r03 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


- 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

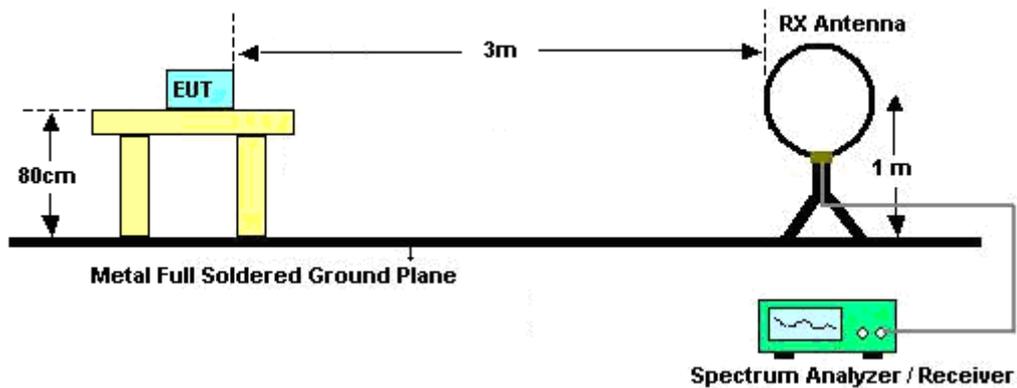

For radiated emissions from 30MHz to 1GHz

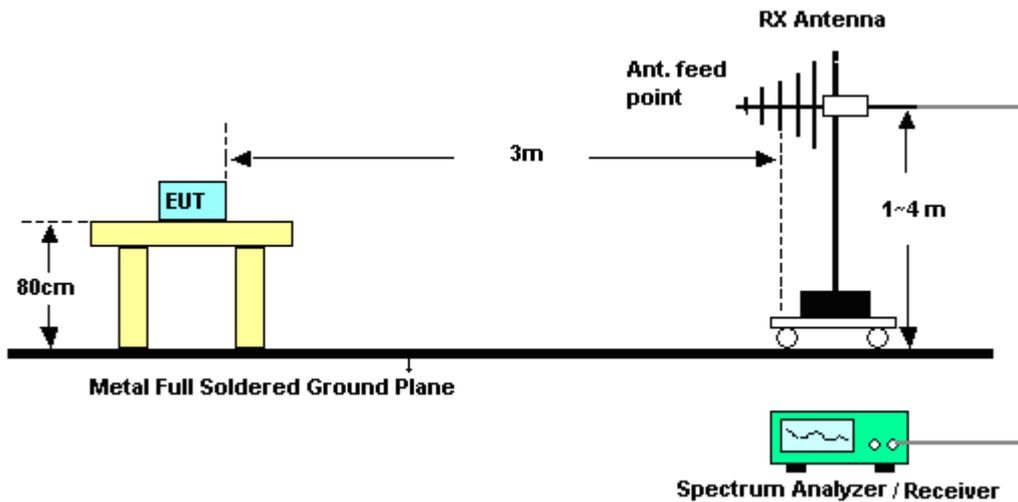

For radiated emissions above 1GHz

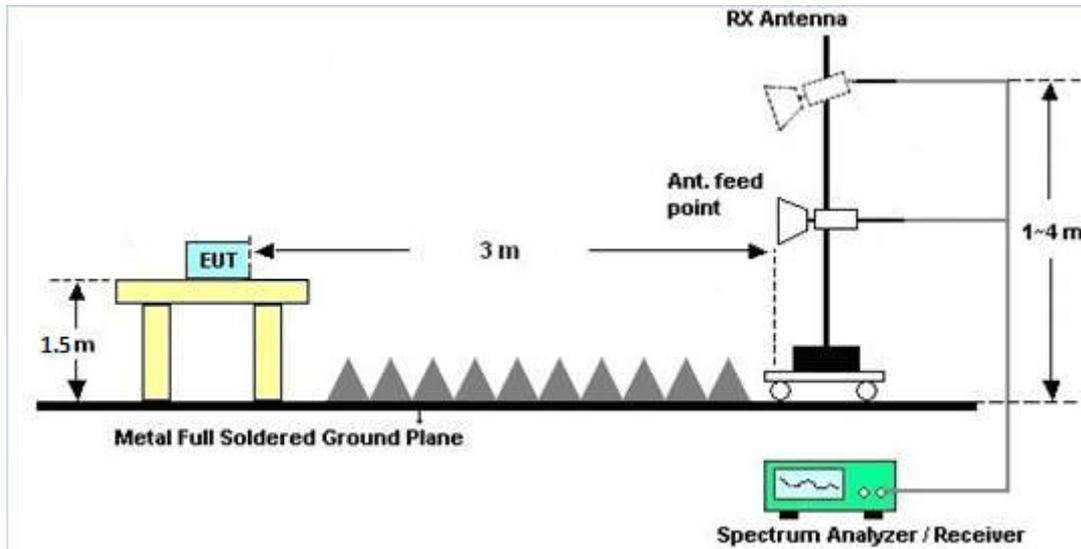

3.2.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.2.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

3.2.7 Duty Cycle

Please refer to Appendix B.

3.2.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.3 Antenna Requirements

3.3.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipments

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-----------------------|--------------|---------------|------------|-------------------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer | R&S | FSV40 | 101040 | 10Hz~40GHz | Sep. 10, 2015 | Jun. 18, 2016 | Sep. 09, 2016 | Conducted (TH01-KS) |
| Pulse Power Sensor | Anritsu | MA2411B | 0917070 | 300MHz~40GHz | Jan. 20, 2016 | Jun. 18, 2016 | Jan. 19, 2017 | Conducted (TH01-KS) |
| Power Meter | Anritsu | ML2495A | 1005002 | 50MHz Bandwidth | Jan. 20, 2016 | Jun. 18, 2016 | Jan. 19, 2017 | Conducted (TH01-KS) |
| EMI Test Receiver | R&S | ESR7 | 101403 | 9kHz~7GHz; Max 30dBm | Sep. 10, 2015 | Jun. 18, 2016~ Jun. 27, 2016 | Sep. 09, 2016 | Radiation (03CH03-KS) |
| EXA Spectrum Analyzer | Keysight | N9010A | MY55150244 | 10Hz~44GHz | Apr. 22, 2016 | Jun. 18, 2016~ Jun. 27, 2016 | Apr. 21, 2017 | Radiation (03CH03-KS) |
| Loop Antenna | R&S | HFH2-Z2 | 100321 | 9kHz~30MHz | Nov. 07, 2015 | Jun. 18, 2016~ Jun. 27, 2016 | Nov. 06, 2016 | Radiation (03CH03-KS) |
| Bilog Antenna | TeseQ | CBL6112D | 35406 | 25MHz~2GHz | Apr. 16, 2016 | Jun. 18, 2016~ Jun. 27, 2016 | Apr. 15, 2017 | Radiation (03CH03-KS) |
| Horn Antenna | Schwarzbeck | BBHA9120D | 9120D-1356 | 1GHz~18GHz | Apr. 16, 2016 | Jun. 18, 2016~ Jun. 27, 2016 | Apr. 15, 2017 | Radiation (03CH03-KS) |
| SHF-EHF Horn | com-power | AH-840 | 101070 | 18Ghz~40Ghz | Oct. 10, 2015 | Jun. 18, 2016~ Jun. 27, 2016 | Oct. 09, 2016 | Radiation (03CH03-KS) |
| Amplifier | Burgeon | BPA-530 | 102212 | 0.01MHz~3000M Hz | Aug. 10, 2015 | Jun. 18, 2016~ Jun. 27, 2016 | Aug. 09, 2016 | Radiation (03CH03-KS) |
| Amplifier | Agilent | 8449B | 3008A02370 | 1GHz~26.5GHz | Oct. 24, 2015 | Jun. 18, 2016~ Jun. 27, 2016 | Oct. 23, 2016 | Radiation (03CH03-KS) |
| Amplifier | MITEQ | TTA1840-35-HG | 1887435 | 18~40GHz | Aug. 27, 2015 | Jun. 18, 2016~ Jun. 27, 2016 | Aug. 26, 2016 | Radiation (03CH03-KS) |
| AC Power Source | Chroma | 61601 | F104090004 | N/A | NCR | Jun. 18, 2016~ Jun. 27, 2016 | NCR | Radiation (03CH03-KS) |
| Turn Table | ChamPro | EM 1000-T | 060762-T | 0~360 degree | NCR | Jun. 18, 2016~ Jun. 27, 2016 | NCR | Radiation (03CH03-KS) |
| Antenna Mast | ChamPro | EM 1000-A | 060762-A | 1 m~4 m | NCR | Jun. 18, 2016~ Jun. 27, 2016 | NCR | Radiation (03CH03-KS) |

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.5 dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.5dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.6dB |
|---|-------|



Appendix A. Radiated Spurious Emission

Band 1 - 5150~5250MHz WIFI 802.11a (Band Edge @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|-----------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11a CH 36 5180MHz | | 5147.68 | 49.31 | -24.69 | 74 | 45.87 | 31.84 | 8.13 | 36.53 | 300 | 110 | P | H |
| | | 5150 | 39.3 | -14.7 | 54 | 35.86 | 31.84 | 8.13 | 36.53 | 300 | 110 | A | H |
| | * | 5178 | 97.68 | - | - | 94.17 | 31.85 | 8.17 | 36.51 | 300 | 110 | P | H |
| | * | 5182 | 90.75 | - | - | 87.24 | 31.85 | 8.17 | 36.51 | 300 | 110 | A | H |
| | | 5146.08 | 46.22 | -27.78 | 74 | 42.78 | 31.84 | 8.13 | 36.53 | 100 | 90 | P | V |
| | | 5143.2 | 37.51 | -16.49 | 54 | 34.07 | 31.84 | 8.13 | 36.53 | 100 | 90 | A | V |
| | * | 5178 | 89.35 | - | - | 85.84 | 31.85 | 8.17 | 36.51 | 100 | 90 | P | V |
| | * | 5182 | 82.11 | - | - | 78.6 | 31.85 | 8.17 | 36.51 | 100 | 90 | A | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |

Band 1 5150~5250MHz WIFI 802.11a (Harmonic @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11a | | 10360 | 44.35 | -29.65 | 74 | 53.89 | 38.02 | 13.54 | 61.1 | 100 | 0 | P | H |
| CH 36 5180MHz | | 10360 | 44.44 | -29.56 | 74 | 53.98 | 38.02 | 13.54 | 61.1 | 100 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|----------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11n HT20 CH 36 5180MHz | | 5147.04 | 47.5 | -26.5 | 74 | 44.06 | 31.84 | 8.13 | 36.53 | 301 | 113 | P | H |
| | | 5149.6 | 37.51 | -16.49 | 54 | 34.07 | 31.84 | 8.13 | 36.53 | 301 | 113 | A | H |
| | * | 5182 | 91.72 | - | - | 88.21 | 31.85 | 8.17 | 36.51 | 301 | 113 | P | H |
| | * | 5182 | 84.67 | - | - | 81.16 | 31.85 | 8.17 | 36.51 | 301 | 113 | A | H |
| | | 5128.32 | 47.47 | -26.53 | 74 | 44.06 | 31.84 | 8.11 | 36.54 | 100 | 86 | P | V |
| | | 5143.04 | 37.2 | -16.8 | 54 | 33.76 | 31.84 | 8.13 | 36.53 | 100 | 86 | A | V |
| | * | 5178 | 89.64 | - | - | 86.13 | 31.85 | 8.17 | 36.51 | 100 | 86 | P | V |
| | | 5182 | 82.35 | - | - | 78.84 | 31.85 | 8.17 | 36.51 | 100 | 86 | A | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |

Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|----------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11n HT20 CH 36 5180MHz | | 10360 | 45.19 | -28.81 | 74 | 54.73 | 38.02 | 13.54 | 61.1 | 100 | 360 | P | H |
| | | 10360 | 43.66 | -30.34 | 74 | 53.2 | 38.02 | 13.54 | 61.1 | 100 | 0 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT40 CH 38 5190MHz | | 5146.88 | 53.95 | -20.05 | 74 | 50.51 | 31.84 | 8.13 | 36.53 | 100 | 121 | P | H |
| | | 5148.96 | 40.77 | -13.23 | 54 | 37.33 | 31.84 | 8.13 | 36.53 | 100 | 121 | A | H |
| | * | 5184 | 92.66 | - | - | 89.15 | 31.85 | 8.17 | 36.51 | 100 | 121 | P | H |
| | * | 5188 | 85.42 | - | - | 81.91 | 31.85 | 8.17 | 36.51 | 100 | 121 | A | H |
| | | 5149.28 | 52.79 | -21.21 | 74 | 49.35 | 31.84 | 8.13 | 36.53 | 311 | 85 | P | V |
| | | 5149.12 | 38.7 | -15.3 | 54 | 35.26 | 31.84 | 8.13 | 36.53 | 311 | 85 | A | V |
| | * | 5196 | 89.93 | - | - | 86.38 | 31.86 | 8.19 | 36.5 | 311 | 85 | P | V |
| * | 5196 | 82.49 | - | - | 78.94 | 31.86 | 8.19 | 36.5 | 311 | 85 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |

Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|----------------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-------------------|--------------|
| 802.11n HT40 CH 38 5190MHz | | 10380 | 44.58 | -29.42 | 74 | 54.1 | 38.03 | 13.55 | 61.1 | 100 | 0 | P | H |
| | | 10380 | 45.19 | -28.81 | 74 | 54.71 | 38.03 | 13.55 | 61.1 | 100 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|------------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11ac VHT20 CH 36 5180MHz | * | 5184 | 91.92 | - | - | 88.41 | 31.85 | 8.17 | 36.51 | 400 | 201 | P | H |
| | * | 5178 | 85 | - | - | 81.49 | 31.85 | 8.17 | 36.51 | 400 | 201 | A | H |
| | | 5140.96 | 48.47 | -25.53 | 74 | 45.03 | 31.84 | 8.13 | 36.53 | 400 | 201 | P | H |
| | | 5147.36 | 37.87 | -16.13 | 54 | 34.43 | 31.84 | 8.13 | 36.53 | 400 | 201 | A | H |
| | * | 5184 | 90.18 | - | - | 86.67 | 31.85 | 8.17 | 36.51 | 400 | 87 | P | V |
| | * | 5178 | 82.74 | - | - | 79.23 | 31.85 | 8.17 | 36.51 | 400 | 87 | A | V |
| | | 5131.04 | 47.11 | -26.89 | 74 | 43.7 | 31.84 | 8.11 | 36.54 | 400 | 87 | P | V |
| | 5141.28 | 37.29 | -16.71 | 54 | 33.85 | 31.84 | 8.13 | 36.53 | 400 | 87 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |

Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|------------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11ac VHT20 CH 36 5180MHz | | 10360 | 42.82 | -31.18 | 74 | 52.36 | 38.02 | 13.54 | 61.1 | 100 | 360 | P | H |
| | | 10360 | 43.38 | -30.62 | 74 | 52.92 | 38.02 | 13.54 | 61.1 | 100 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|------------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11ac VHT40 CH 38 5190MHz | * | 5182 | 91.16 | - | - | 87.65 | 31.85 | 8.17 | 36.51 | 120 | 113 | P | H |
| | * | 5188 | 84.18 | - | - | 80.67 | 31.85 | 8.17 | 36.51 | 120 | 113 | A | H |
| | | 5149.6 | 53.01 | -20.99 | 74 | 49.57 | 31.84 | 8.13 | 36.53 | 120 | 113 | P | H |
| | | 5145.92 | 39.5 | -14.5 | 54 | 36.06 | 31.84 | 8.13 | 36.53 | 120 | 113 | A | H |
| | * | 5194 | 91.24 | - | - | 87.69 | 31.86 | 8.19 | 36.5 | 300 | 62 | P | V |
| | * | 5194 | 83.53 | - | - | 79.98 | 31.86 | 8.19 | 36.5 | 300 | 62 | A | V |
| | | 5149.44 | 50.99 | -23.01 | 74 | 47.55 | 31.84 | 8.13 | 36.53 | 300 | 62 | P | V |
| | 5149.92 | 39.88 | -14.12 | 54 | 36.44 | 31.84 | 8.13 | 36.53 | 300 | 62 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |

Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|------------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11ac VHT40 CH 38 5190MHz | | 10380 | 44.57 | -29.43 | 74 | 54.09 | 38.03 | 13.55 | 61.1 | 100 | 360 | P | H |
| | | 10380 | 44.47 | -29.53 | 74 | 53.99 | 38.03 | 13.55 | 61.1 | 100 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|------------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11ac VHT80 CH 42 5210MHz | | 5149.28 | 46.58 | -27.42 | 74 | 43.14 | 31.84 | 8.13 | 36.53 | 141 | 120 | P | H |
| | | 5109.6 | 37.95 | -16.05 | 54 | 34.57 | 31.83 | 8.1 | 36.55 | 141 | 120 | A | H |
| | * | 5192 | 84.99 | - | - | 81.44 | 31.86 | 8.19 | 36.5 | 141 | 120 | P | H |
| | * | 5198 | 76.93 | - | - | 73.38 | 31.86 | 8.19 | 36.5 | 141 | 120 | A | H |
| | | 5372.64 | 44.03 | -29.97 | 74 | 40.31 | 31.91 | 8.31 | 36.5 | 141 | 120 | P | H |
| | | 5371.92 | 36.03 | -17.97 | 54 | 32.31 | 31.91 | 8.31 | 36.5 | 141 | 120 | A | H |
| | | 5122.72 | 47.43 | -26.57 | 74 | 44.02 | 31.84 | 8.11 | 36.54 | 300 | 65 | P | V |
| | | 5146.4 | 38.55 | -15.45 | 54 | 35.11 | 31.84 | 8.13 | 36.53 | 300 | 65 | A | V |
| | * | 5200 | 87.54 | - | - | 83.99 | 31.86 | 8.19 | 36.5 | 300 | 65 | P | V |
| | * | 5216 | 79.97 | - | - | 76.41 | 31.86 | 8.2 | 36.5 | 300 | 65 | A | V |
| | | 5366.88 | 44.79 | -29.21 | 74 | 41.07 | 31.91 | 8.31 | 36.5 | 300 | 65 | P | V |
| | 5353.02 | 36.63 | -17.37 | 54 | 32.93 | 31.91 | 8.29 | 36.5 | 300 | 65 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |

Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

| WIFI Ant. 1 | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|------------------------------|---|-------------------|------------------|-------------------|-----------------------|-------------------|-------------------------|-------------------|----------------------|----------------|-------------------|-----------------|------------|
| 802.11ac VHT80 CH 42 5210MHz | | 10420 | 42.21 | -31.79 | 74 | 51.67 | 38.05 | 13.57 | 61.08 | 100 | 360 | P | H |
| | | 10420 | 42.46 | -31.54 | 74 | 51.92 | 38.05 | 13.57 | 61.08 | 100 | 360 | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Emission below 1GHz
WIFI 802.11n HT40 (LF @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|-----------------------|--|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11n HT40 LF | | 55.22 | 28.48 | -11.52 | 40 | 52.59 | 7.6 | 0.89 | 32.6 | 100 | 214 | P | H |
| | | 69.77 | 24.5 | -15.5 | 40 | 48.12 | 7.9 | 1 | 32.52 | - | - | P | H |
| | | 104.69 | 25.06 | -18.44 | 43.5 | 42.95 | 13.17 | 1.24 | 32.3 | - | - | P | H |
| | | 178.41 | 30.06 | -13.44 | 43.5 | 48.9 | 12.04 | 1.62 | 32.5 | - | - | P | H |
| | | 303.54 | 25.38 | -20.62 | 46 | 40.57 | 14.97 | 2.15 | 32.31 | - | - | P | H |
| | | 335.55 | 26.25 | -19.75 | 46 | 40.62 | 15.54 | 2.25 | 32.16 | - | - | P | H |
| | | 55.22 | 33.57 | -6.43 | 40 | 57.68 | 7.6 | 0.89 | 32.6 | 100 | 214 | P | V |
| | | 70.74 | 27.75 | -12.25 | 40 | 51.12 | 8.14 | 1 | 32.51 | - | - | P | V |
| | | 100.81 | 26.15 | -17.35 | 43.5 | 44.12 | 13.11 | 1.22 | 32.3 | - | - | P | V |
| | | 155.13 | 29.16 | -14.34 | 43.5 | 46.57 | 13.5 | 1.51 | 32.42 | - | - | P | V |
| | | 185.2 | 22.29 | -21.21 | 43.5 | 41.57 | 11.61 | 1.65 | 32.54 | - | - | P | V |
| | | 323.91 | 25.59 | -20.41 | 46 | 40.29 | 15.33 | 2.21 | 32.24 | - | - | P | V |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | |



Note symbol

| | |
|-----|--|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| ! | Test result is over limit line. |
| P/A | P eak or A verage |
| H/V | H orizontal or V ertical |



A calculation example for radiated spurious emission is shown as below:

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| CH 01 | | | | | | | | | | | | | |
| 2412MHz | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

- 1. Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- 1. Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- 2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- 1. Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- 2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix B. Duty Cycle Plots

| Band | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|----------------|---------------|-------|----------|-------------|
| 802.11a | 95.98 | 2.07 | 0.48 | 1kHz |
| 802.11n HT20 | 95.07 | 1.93 | 0.52 | 1kHz |
| 802.11n HT40 | 89.93 | 0.94 | 1.06 | 3kHz |
| 802.11ac VHT20 | 95.43 | 1.94 | 0.52 | 1kHz |
| 802.11ac VHT40 | 89.33 | 0.95 | 1.05 | 3kHz |
| 802.11ac VHT80 | 82.26 | 0.46 | 2.17 | 3kHz |


802.11a

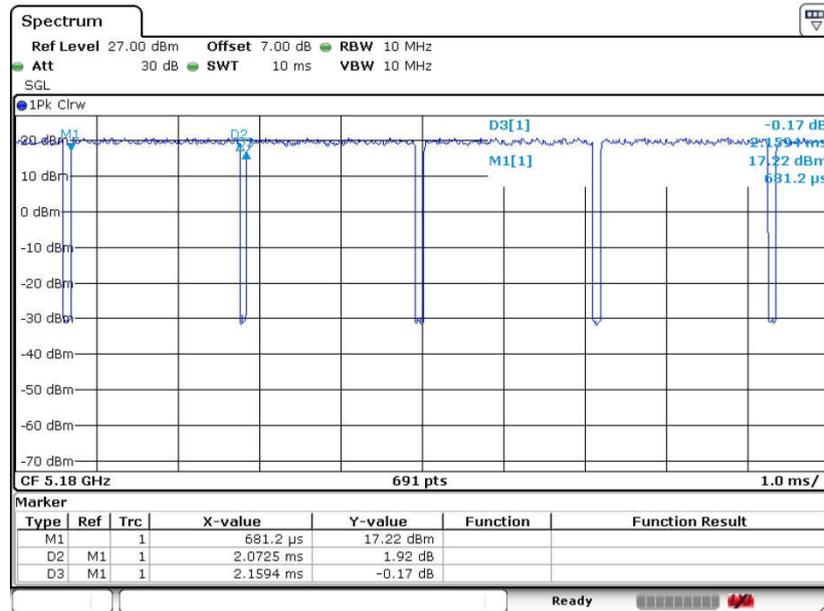

Date: 18 JUN 2016 16:05:19




802.11n HT20

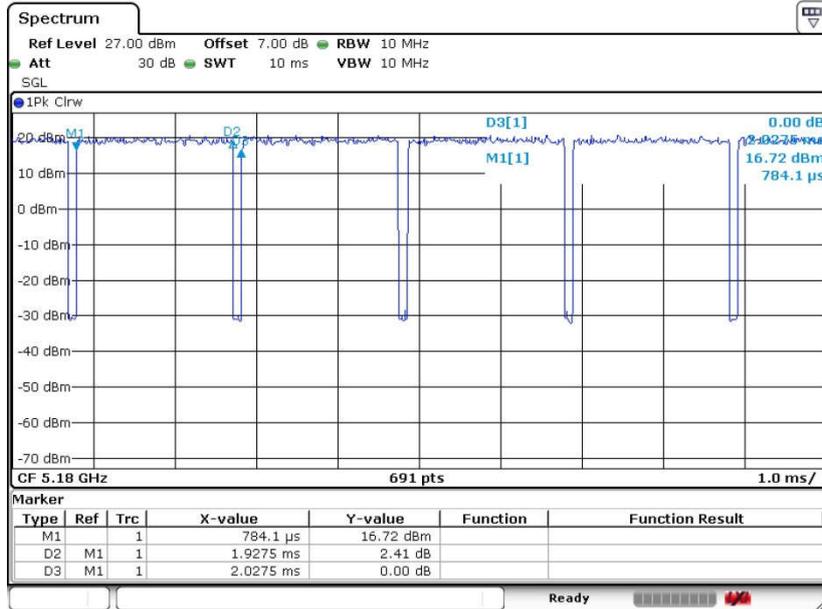

Date: 18 JUN 2016 17:21:48


802.11n HT40

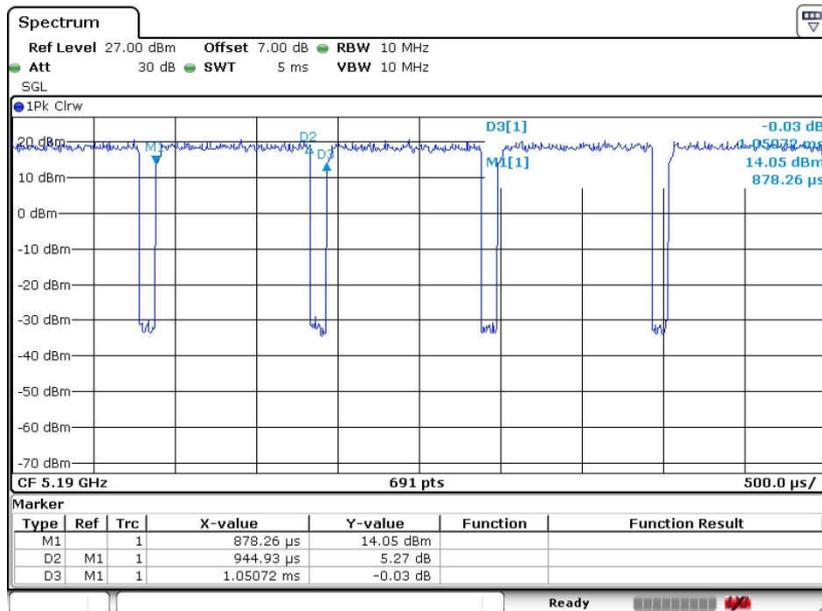

Date: 18 JUN 2016 16:44:06




802.11ac VHT20

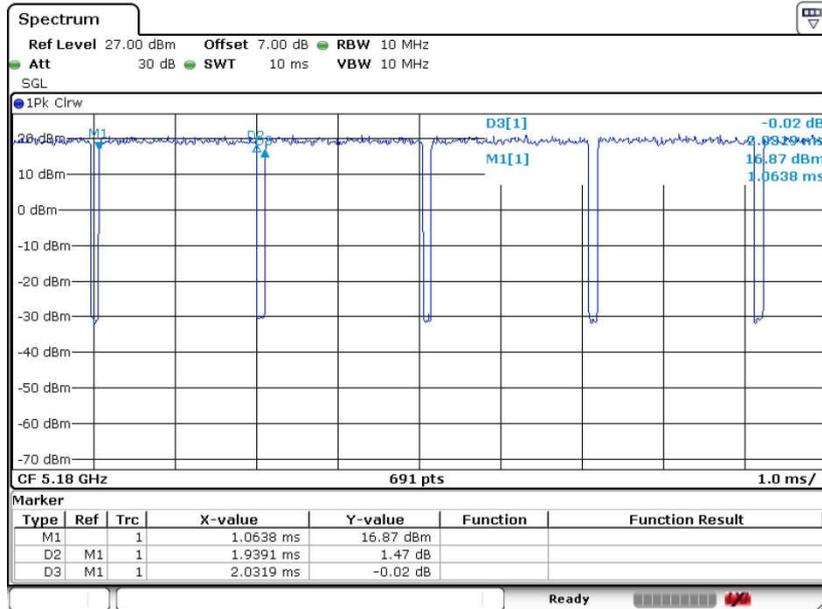

Date: 18 JUN 2016 16:52:24


802.11ac VHT40

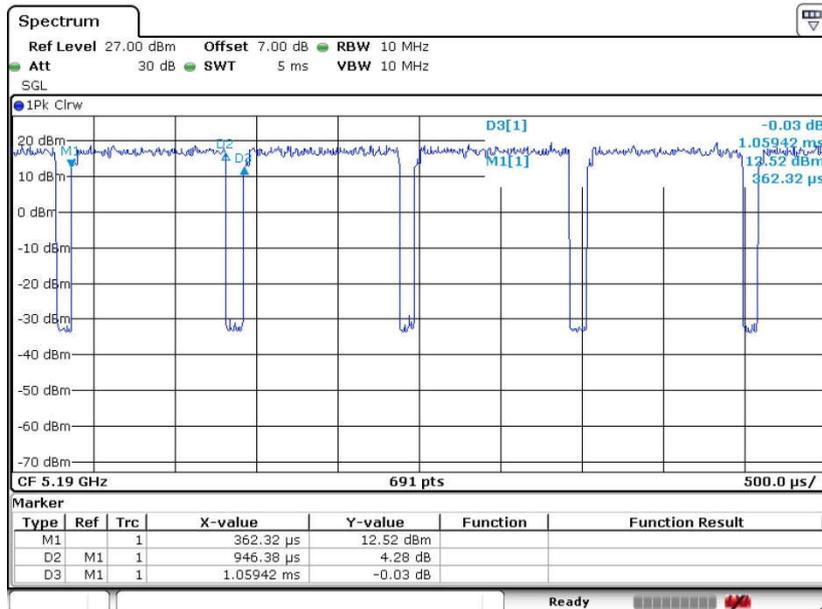

Date: 18 JUN 2016 17:01:24



802.11ac VHT80

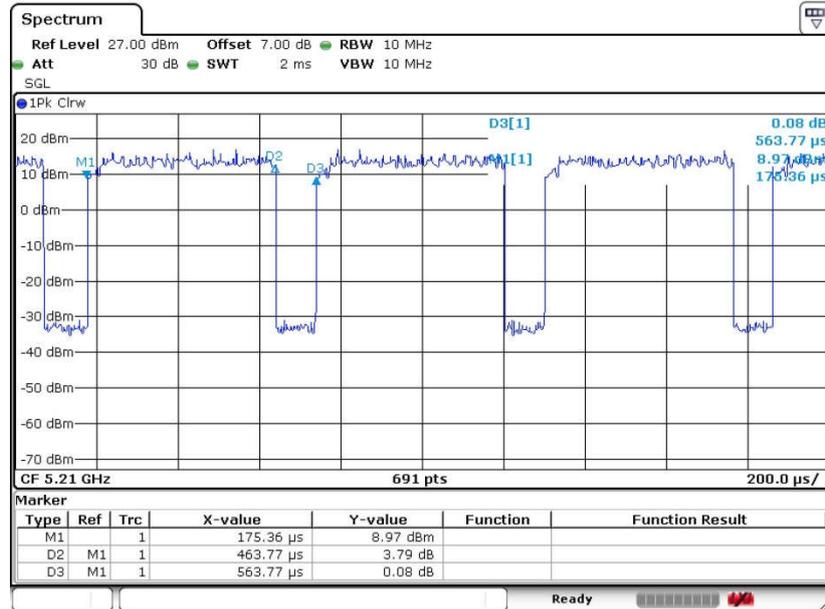

Date: 18 JUN 2016 17:18:44



Appendix D. Product Equality Declaration

ZTE CORPORATION**Product Change Description**

As the applicant of the below model, [ZTE Corporation] declares that the product,

[ZTE A2017U]

[ZTE Corporation]

is the variant of the initial certified product,

[ZTE A2017U]

[ZTE Corporation]

[Project Number:16ZTE027]

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: NO

HARDWARE MODIFICATION:

Band changes: NO

Power Amplifier changes: NO

Antenna changes: GPS/WiFi/Bluetooth 3in1 antenna is now updated.

Aiming at improving GPS performance, we updated this antenna and this result to 1dB efficiency better than previous one. Meanwhile, WiFi/Bluetooth efficiency was slightly down.

Before



After




PCB Layout changes: NO


Components on PCB changes: NO

LCD changes: Yes, Added touch key and touch key FPC

Before

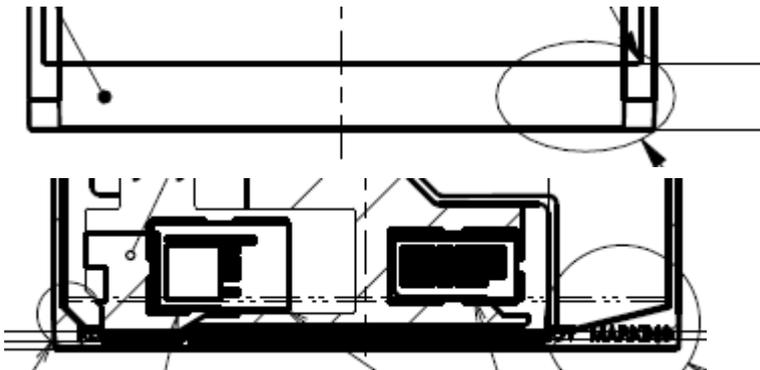

After

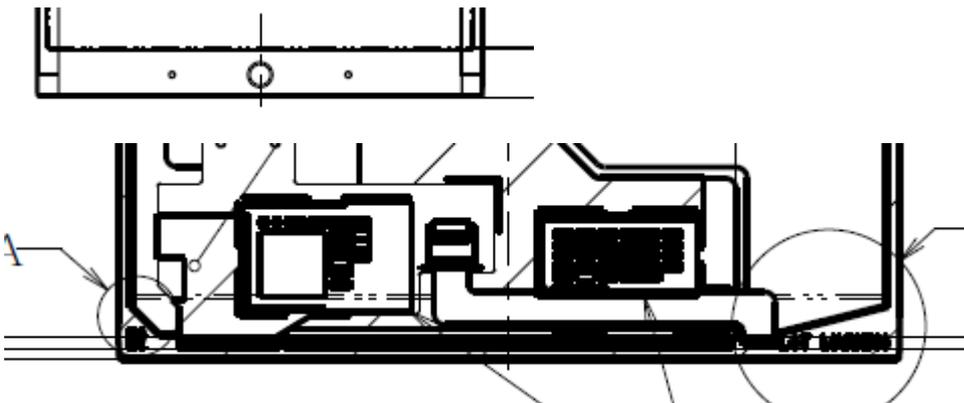

Speaker changes: NO

Camera changes: NO

Vibrator changes: NO

Bluetooth changes: NO

FM changes: NO

Other changes: NO

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: NO

Mechanical shell changes: NO


Other changes detailed: NO

ACCESSORY MODIFICATIONS:

Battery changes:NO

AC Adaptor changes:NO

Earphone changes:NO



APPROVED BY: Min zhang

Project Manager: Li xiaofeng

Date:2016-6-6

Company: ZTE Corporation

Address: B109, #889, Bibo Rd, Zhangjiang Hi-Tech Park, Shanghai,China

Tel:+86-21-68896840

Fax: +86-21-68896835