



Variant FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE A2017U
FCC ID : SRQ-ZTEA2017U
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

This is a variant report which is only valid together with the original test report. The product was received on Jun. 14, 2016 and testing was completed on Jun. 27, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant.....5

 1.2 Manufacturer.....5

 1.3 Feature of Equipment Under Test.....5

 1.4 Product Specification of Equipment Under Test.....6

 1.6 Modification of EUT.....7

 1.7 Testing Location.....7

 1.8 Applicable Standards.....7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST8

 2.1 Carrier Frequency and Channel.....8

 2.2 Pre-Scanned RF Power.....9

 2.3 Test Mode.....10

 2.4 Connection Diagram of Test System.....11

 2.5 Support Unit used in test configuration and system.....12

 2.6 EUT Operation Test Setup.....12

 2.7 Measurement Results Explanation Example.....12

3 TEST RESULT.....13

 3.1 Maximum Conducted Output Power Measurement.....13

 3.2 Unwanted Emissions Measurement.....14

 3.3 Antenna Requirements.....19

4 LIST OF MEASURING EQUIPMENT20

5 UNCERTAINTY OF EVALUATION21

APPENDIX A. RADIATED TEST RESULTS

APPENDIX B. DUTY CYCLE PLOTS

APPENDIX C. SETUP PHOTOGRAPHS

APPENDIX D. PRODUCT EQUALITY DECLARATION



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.2	15.407(b)	Unwanted Emissions	$\leq 15.407(b)(4)(i)$ & 15.209(a)	Pass	Under limit 6.22 dB at 53.280 MHz
3.3	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE A2017U
FCC ID	SRQ-ZTEA2017U
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5GHz 802.11a/n HT20/HT40 WLAN5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR Bluetooth v4.0 LE Bluetooth v4.2 LE
IMEI Code	Conducted: 990006780003819 Radiation: NA
HW Version	wwdB
SW Version	A2017UV1.0.0B07
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	802.11a : 13.17 dBm / 0.0207 W 802.11n HT20 : 10.04 dBm / 0.0101 W 802.11n HT40 : 9.66 dBm / 0.0092 W 802.11ac VHT20: 9.85 dBm / 0.0097 W 802.11ac VHT40: 9.63 dBm / 0.0092 W 802.11ac VHT80: 9.90 dBm / 0.0098 W
Antenna Type / Gain	PIFA Antenna with gain -1.5 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)



1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151	5755	159	5795
	153	5765	161	5805
	155	5775	165	5825

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables.

WLAN 5GHz 802.11a Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 149	5745	12.28	CH 165	13.08	13.10	13.14	12.70	12.63	12.62	12.77
CH 157	5785	12.72								
CH 165	5825	13.17								

WLAN 5GHz 802.11n-HT20 Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 149	5745	9.24	CH 165	10.00	10.01	9.75	9.69	9.68	9.72	9.67
CH 157	5785	9.54								
CH 165	5825	10.04								

WLAN 5GHz 802.11n-HT40 Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 151	5755	8.91	CH 159	9.58	9.55	9.54	9.59	9.64	9.56	9.62
CH 159	5795	9.66								

WLAN 5GHz 802.11ac VHT20 Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0									
CH 149	5745	9.19	CH 165	9.55	9.67	9.34	9.26	9.25	9.31	9.22	9.31
CH 157	5785	9.54									
CH 165	5825	9.85									

WLAN 5GHz 802.11ac VHT40 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 151	5755	8.81	CH 159	8.52	9.56	9.53	9.55	9.61	9.59	9.62	9.57	9.54
CH 159	5795	9.63										

WLAN 5GHz 802.11n-HT80 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 155	5775	9.90	CH 155	9.82	9.87	9.23	9.14	9.12	9.27	9.15	9.18	9.12



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


Ch. #		Band IV : 5745-5825 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	-	-
M	Middle	-	-	-
H	High	-	165	159

Ch. #		Band IV : 5745-5825 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	-	-	155
H	High	-	-	-


2.4 Connection Diagram of Test System

<WLAN Tx Mode>

For 802.11a, 802.11ac VHT80

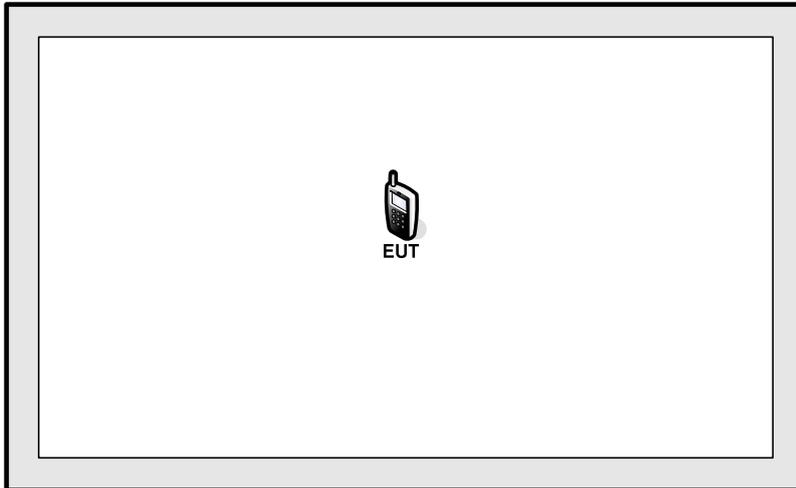

For 802.11a/n HT20/HT40, 802.11ac VHT20/VHT40

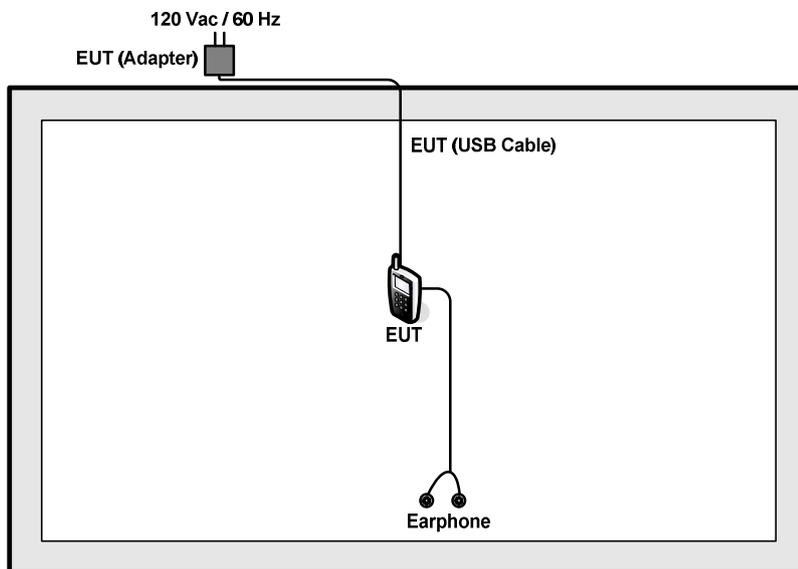



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned} \text{Offset (dB)} &= \text{RF cable loss(dB)}. \\ &= 7.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup

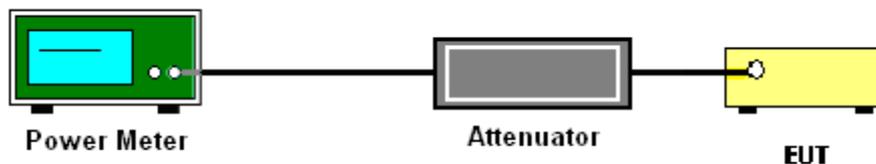



3.2 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.2.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBµV/m)
-17	78.3
- 27	68.3

(3) KDB 789033 D02 General UNII Test Procedures New Rules v01r03 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

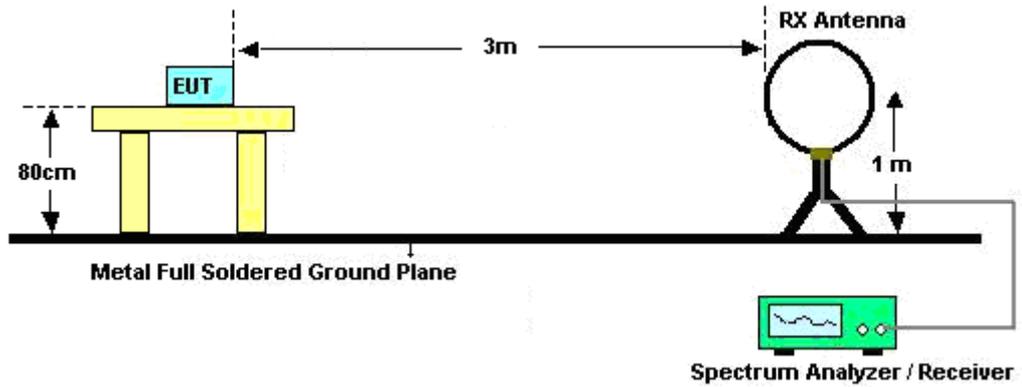

For radiated emissions from 30MHz to 1GHz

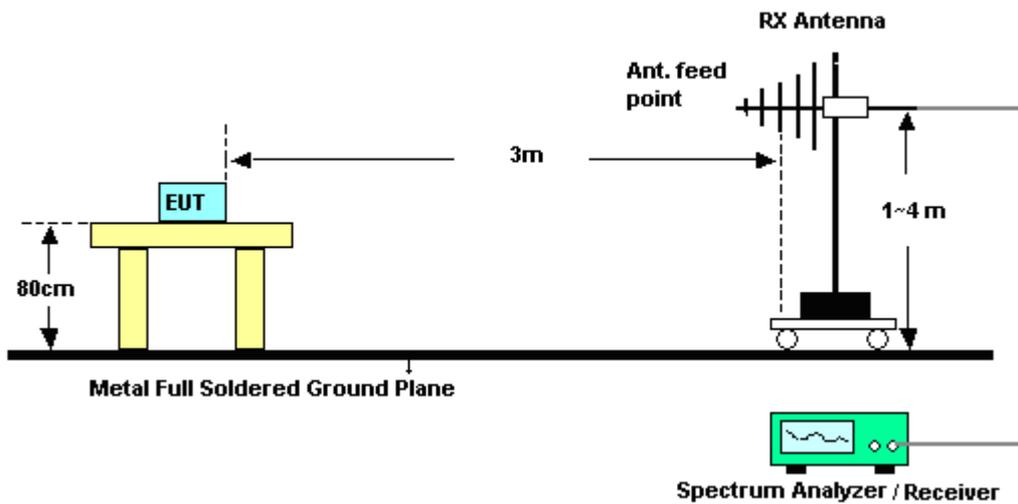

For radiated emissions above 1GHz

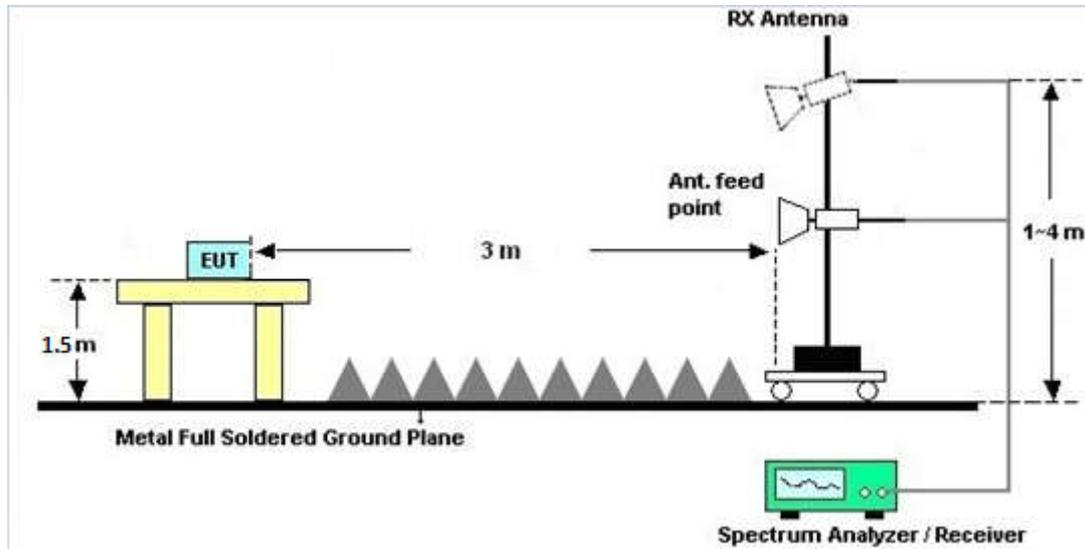

3.2.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.2.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

3.2.7 Duty Cycle

Please refer to Appendix B.

3.2.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.3 Antenna Requirements

3.3.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	Jun. 18, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Jun. 18, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Jun. 18, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jun. 18, 2016~ Jun. 27, 2016	Sep. 09, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Jun. 18, 2016~ Jun. 27, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	Jun. 18, 2016~ Jun. 27, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Jun. 18, 2016~ Jun. 27, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Jun. 18, 2016~ Jun. 27, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18Ghz~40Ghz	Oct. 10, 2015	Jun. 18, 2016~ Jun. 27, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz~3000M Hz	Aug. 10, 2015	Jun. 18, 2016~ Jun. 27, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Jun. 18, 2016~ Jun. 27, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Aug. 27, 2015	Jun. 18, 2016~ Jun. 27, 2016	Aug. 26, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 18, 2016~ Jun. 27, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 18, 2016~ Jun. 27, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 18, 2016~ Jun. 27, 2016	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
-------------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5dB
-------------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
-------------------------------------------------------------------------	-------



Appendix A. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz	*	5742	97.18	-	-	92.84	32.05	8.58	36.29	300	117	P	H
	*	5744	90.03	-	-	85.69	32.05	8.58	36.29	300	117	A	H
		5692	47.75	-51.65	99.4	43.44	32.02	8.54	36.25	300	117	P	H
		5719.6	48.28	-62.51	110.79	43.95	32.04	8.57	36.28	300	117	P	H
		5724.7	47.74	-73.88	121.62	43.41	32.04	8.57	36.28	300	117	P	H
	*	5744	93.8	-	-	89.46	32.05	8.58	36.29	106	92	P	V
	*	5744	86.21	-	-	81.87	32.05	8.58	36.29	106	92	A	V
		5698.5	46.53	-57.66	104.19	42.22	32.02	8.54	36.25	106	92	P	V
		5716.4	47.92	-61.97	109.89	43.61	32.03	8.55	36.27	106	92	P	V
		5721.2	45.98	-67.66	113.64	41.65	32.04	8.57	36.28	106	92	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a		11490	42.89	-31.11	74	50.64	38.59	14.2	60.54	100	360	P	H
CH 149 5745MHz		11490	43.21	-30.79	74	50.96	38.59	14.2	60.54	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz	*	5826	94.61	-	-	90.24	32.08	8.64	36.35	270	117	P	H
	*	5822	87.25	-	-	82.88	32.08	8.64	36.35	270	117	A	H
		5851.62	46.29	-72.32	118.61	41.91	32.09	8.65	36.36	270	117	P	H
		5862.83	47.11	-61.6	108.71	42.72	32.1	8.66	36.37	270	117	P	H
		5879.36	46.27	-55.79	102.06	41.88	32.1	8.67	36.38	270	117	P	H
	*	5824	90.58	-	-	86.21	32.08	8.64	36.35	104	89	P	V
	*	5826	83.07	-	-	78.7	32.08	8.64	36.35	104	89	A	V
		5852.95	45.54	-70.03	115.57	41.16	32.09	8.65	36.36	104	89	P	V
		5872.14	46.2	-59.9	106.1	41.81	32.1	8.67	36.38	104	89	P	V
	5885.44	45.58	-51.97	97.55	41.19	32.1	8.67	36.38	104	89	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		11650	42.96	-31.04	74	50.24	38.9	14.29	60.47	100	0	P	H
		11650	44.79	-29.21	74	52.07	38.9	14.29	60.47	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz	*	5790	89.65	-	-	85.28	32.07	8.62	36.32	100	114	P	H
	*	5798	82.24	-	-	77.87	32.07	8.62	36.32	100	114	A	H
		5852.88	46	-69.73	115.73	41.62	32.09	8.65	36.36	100	114	P	H
		5863.36	48.33	-60.23	108.56	43.94	32.1	8.66	36.37	100	114	P	H
		5878.88	46.28	-56.14	102.42	41.89	32.1	8.67	36.38	100	114	P	H
	*	5792	90.37	-	-	86	32.07	8.62	36.32	306	72	P	V
	*	5788	82.76	-	-	78.39	32.07	8.62	36.32	306	72	A	V
		5854.16	46.2	-66.61	112.81	41.81	32.1	8.66	36.37	306	72	P	V
		5865.36	48.72	-59.28	108	44.33	32.1	8.66	36.37	306	72	P	V
		5880	47.02	-54.57	101.59	42.63	32.1	8.67	36.38	306	72	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		11590	42.9	-31.1	74	50.34	38.79	14.26	60.49	100	0	P	H
		11590	43.38	-30.62	74	50.82	38.79	14.26	60.49	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz	*	5746	87.94	-	-	83.6	32.05	8.58	36.29	400	176	P	H
	*	5744	81.09	-	-	76.75	32.05	8.58	36.29	400	176	A	H
		5688.6	45.65	-51.24	96.89	41.34	32.02	8.54	36.25	400	176	P	H
		5715.8	46.89	-62.84	109.73	42.58	32.03	8.55	36.27	400	176	P	H
		5722.3	45.51	-70.63	116.14	41.18	32.04	8.57	36.28	400	176	P	H
	*	5746	93.17	-	-	88.83	32.05	8.58	36.29	344	80	P	V
	*	5744	85.79	-	-	81.45	32.05	8.58	36.29	344	80	A	V
		5697	46.64	-56.45	103.09	42.33	32.02	8.54	36.25	344	80	P	V
		5716.8	46.9	-63.11	110.01	42.59	32.03	8.55	36.27	344	80	P	V
	5721.7	46.48	-68.3	114.78	42.15	32.04	8.57	36.28	344	80	P	V	

Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		11490	42.52	-31.48	74	50.27	38.59	14.2	60.54	100	360	P	H
		11490	42.93	-31.07	74	50.68	38.59	14.2	60.54	100	360	P	V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												
---------------	---------------------------------------------------------------------------------------------	--	--	--	--	--	--	--	--	--	--	--	--



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz	*	5752	83.54	-	-	79.2	32.05	8.59	36.3	105	103	P	H
	*	5762	76.06	-	-	71.72	32.05	8.59	36.3	105	103	A	H
		5685.88	45.67	-49.21	94.88	41.36	32.02	8.54	36.25	105	103	P	H
		5708.12	46.21	-61.37	107.58	41.9	32.03	8.55	36.27	105	103	P	H
		5720.2	46.31	-65.05	111.36	41.98	32.04	8.57	36.28	105	103	P	H
	*	5746	89.16	-	-	84.82	32.05	8.58	36.29	328	66	P	V
	*	5748	82.39	-	-	78.05	32.05	8.58	36.29	328	66	A	V
		5699.64	46.6	-58.43	105.03	42.29	32.02	8.54	36.25	328	66	P	V
		5711.56	47.81	-60.73	108.54	43.5	32.03	8.55	36.27	328	66	P	V
	5723.4	53.01	-65.64	118.65	48.68	32.04	8.57	36.28	328	66	P	V	

Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 151 5755MHz		11510	42.18	-31.82	74	49.91	38.6	14.21	60.54	100	360	P	H
		11510	42.68	-31.32	74	50.41	38.6	14.21	60.54	100	360	P	V

Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												
---------------	---------------------------------------------------------------------------------------------	--	--	--	--	--	--	--	--	--	--	--	--



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz	*	5752	85.29	-	-	80.95	32.05	8.59	36.3	100	112	P	H
	*	5752	78	-	-	73.66	32.05	8.59	36.3	100	112	A	H
		5692.2	47.99	-51.56	99.55	43.68	32.02	8.54	36.25	100	112	P	H
		5706.36	47.51	-59.57	107.08	43.2	32.03	8.55	36.27	100	112	P	H
		5724.12	47.37	-72.92	120.29	43.04	32.04	8.57	36.28	100	112	P	H
		5852.56	46.61	-69.85	116.46	42.23	32.09	8.65	36.36	100	112	P	H
		5865.12	47	-61.06	108.06	42.61	32.1	8.66	36.37	100	112	P	H
		5875.12	46.83	-58.38	105.21	42.44	32.1	8.67	36.38	100	112	P	H
	*	5754	88.85	-	-	84.51	32.05	8.59	36.3	314	69	P	V
	*	5762	81.45	-	-	77.11	32.05	8.59	36.3	314	69	A	V
		5691.64	48.94	-50.2	99.14	44.63	32.02	8.54	36.25	314	69	P	V
		5706.36	48.66	-58.42	107.08	44.35	32.03	8.55	36.27	314	69	P	V
		5724.92	51.33	-70.79	122.12	47	32.04	8.57	36.28	314	69	P	V
		5854.48	47.24	-64.85	112.09	42.85	32.1	8.66	36.37	314	69	P	V
		5874.8	47.21	-58.15	105.36	42.82	32.1	8.67	36.38	314	69	P	V
		5879.36	47.04	-55.02	102.06	42.65	32.1	8.67	36.38	314	69	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		11550	44.16	-29.84	74	51.72	38.71	14.24	60.51	100	360	P	H
		11550	42.79	-31.21	74	50.35	38.71	14.24	60.51	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11 ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11 ac VHT80 LF		55.22	27.39	-12.61	40	51.5	7.6	0.89	32.6	100	215	P	H
		69.77	25.16	-14.84	40	48.78	7.9	1	32.52	-	-	P	H
		97.9	23.76	-19.74	43.5	41.97	12.9	1.2	32.31	-	-	P	H
		177.44	29.54	-13.96	43.5	48.32	12.1	1.62	32.5	-	-	P	H
		193.93	26.79	-16.71	43.5	46.56	11.06	1.7	32.53	-	-	P	H
		296.75	24.95	-21.05	46	40.33	14.8	2.11	32.29	-	-	P	H
		53.28	33.78	-6.22	40	57.17	8.28	0.88	32.55	100	265	P	V
		103.72	27.39	-16.11	43.5	45.31	13.15	1.23	32.3	-	-	P	V
		148.34	31.01	-12.49	43.5	48.21	13.77	1.47	32.44	-	-	P	V
		186.17	27.22	-16.28	43.5	46.56	11.55	1.66	32.55	-	-	P	V
		306.45	25.77	-20.23	46	40.89	15.02	2.16	32.3	-	-	P	V
	323.91	25.73	-20.27	46	40.43	15.33	2.21	32.24	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	95.98	2.07	0.48	1kHz
802.11n HT20	95.07	1.93	0.52	1kHz
802.11n HT40	89.93	0.94	1.06	3kHz
802.11ac VHT20	95.43	1.94	0.52	1kHz
802.11ac VHT40	89.33	0.95	1.05	3kHz
802.11ac VHT80	82.26	0.46	2.17	3kHz


802.11a

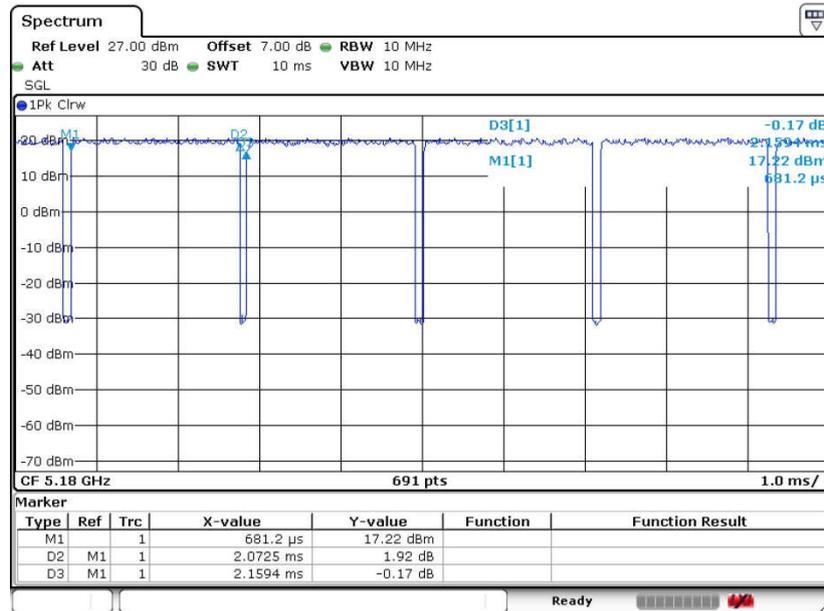

Date: 18 JUN 2016 16:05:19




802.11n HT20

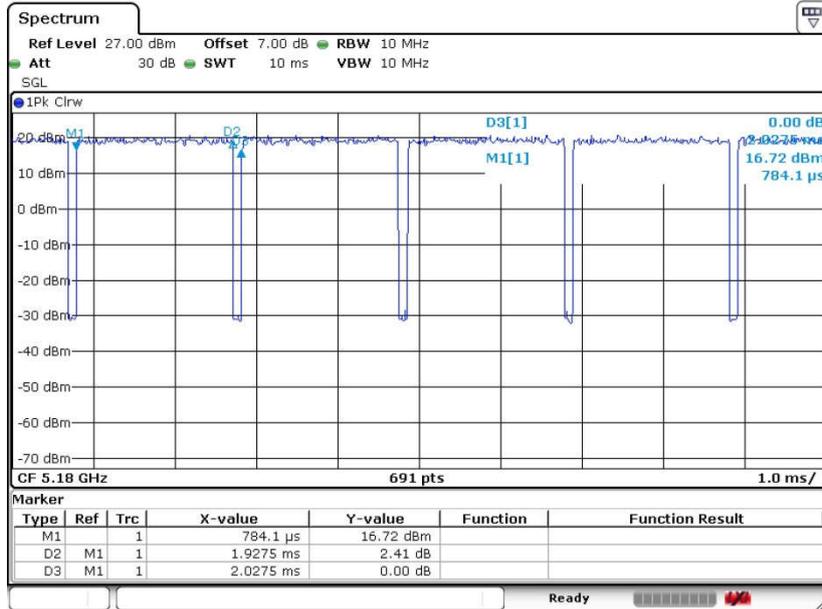

Date: 18 JUN 2016 17:21:48


802.11n HT40

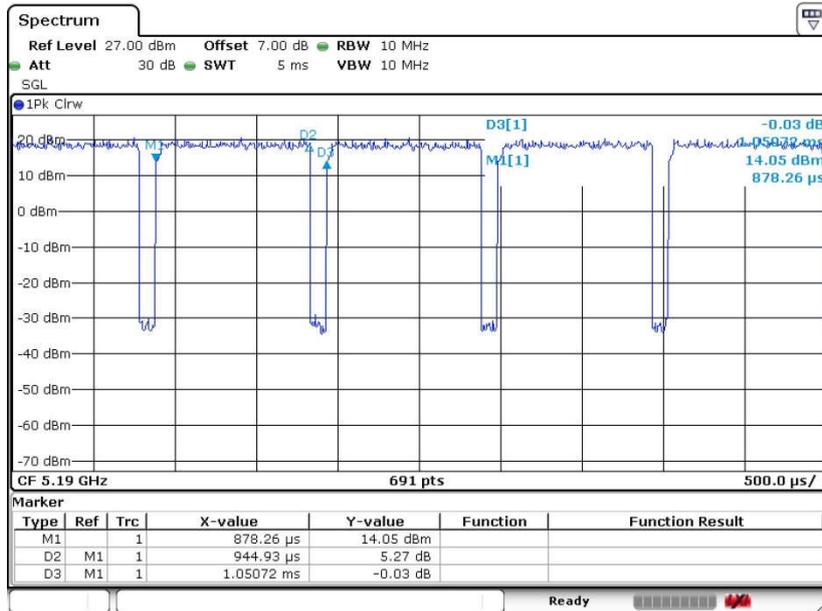

Date: 18 JUN 2016 16:44:06




802.11ac VHT20

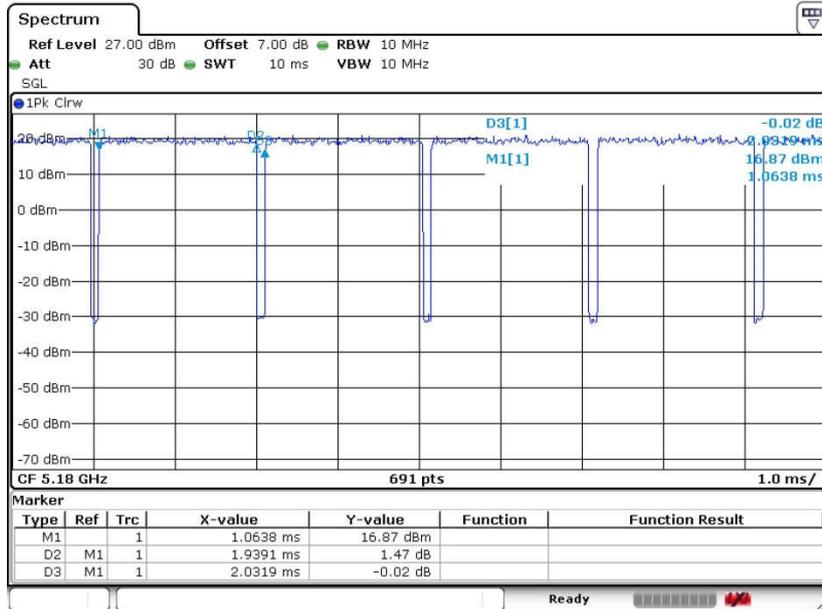

Date: 18 JUN 2016 16:52:24


802.11ac VHT40

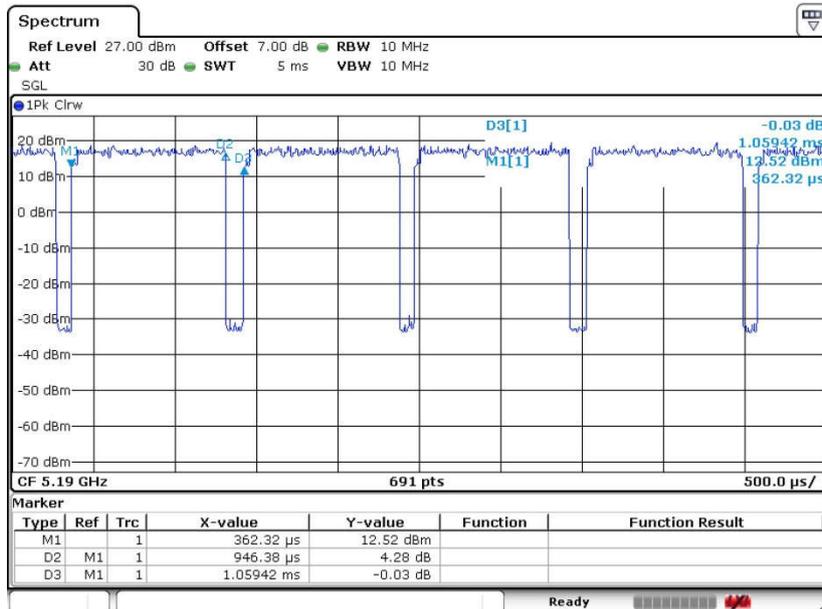

Date: 18 JUN 2016 17:01:24



802.11ac VHT80

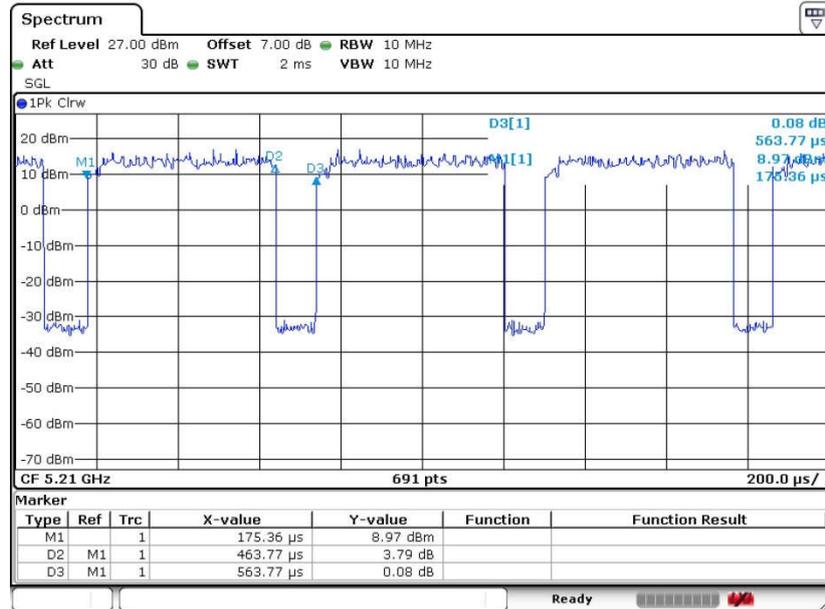

Date: 18 JUN 2016 17:18:44



Appendix D. Product Equality Declaration

ZTE CORPORATION**Product Change Description**

As the applicant of the below model, [ZTE Corporation] declares that the product,

[ZTE A2017U]

[ZTE Corporation]

is the variant of the initial certified product,

[ZTE A2017U]

[ZTE Corporation]

[Project Number:16ZTE027]

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: NO

HARDWARE MODIFICATION:

Band changes: NO

Power Amplifier changes: NO

Antenna changes: GPS/WiFi/Bluetooth 3in1 antenna is now updated.

Aiming at improving GPS performance, we updated this antenna and this result to 1dB efficiency better than previous one. Meanwhile, WiFi/Bluetooth efficiency was slightly down.

Before



After




PCB Layout changes: NO


Components on PCB changes: NO

LCD changes: Yes, Added touch key and touch key FPC

Before

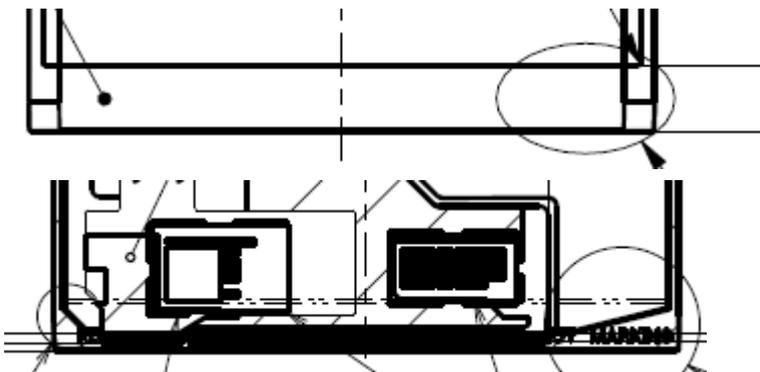

After

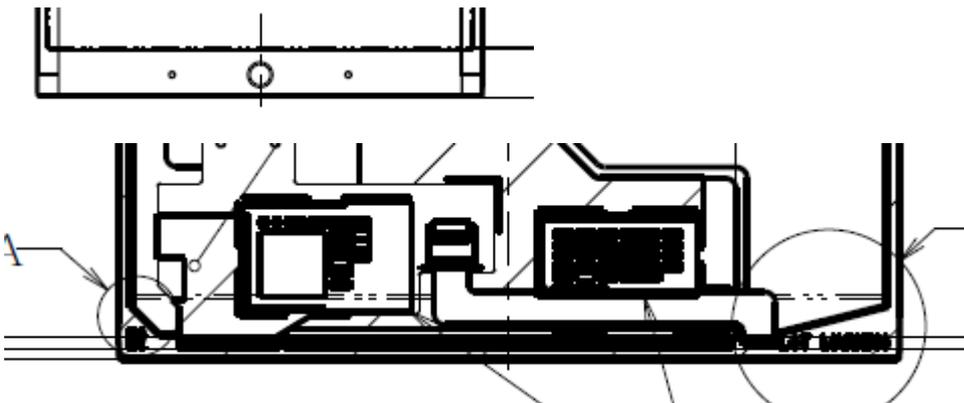

Speaker changes: NO

Camera changes: NO

Vibrator changes: NO

Bluetooth changes: NO

FM changes: NO

Other changes: NO

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: NO

Mechanical shell changes: NO


Other changes detailed: NO

ACCESSORY MODIFICATIONS:

Battery changes:NO

AC Adaptor changes:NO

Earphone changes:NO



APPROVED BY: Min zhang

Project Manager: Li xiaofeng

Date:2016-6-6

Company: ZTE Corporation

Address: B109, #889, Bibo Rd, Zhangjiang Hi-Tech Park, Shanghai,China

Tel:+86-21-68896840

Fax: +86-21-68896835