



Variant FCC Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/CDMA/LTE Multi-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE A2017U
FCC ID : SRQ-ZTEA2017U
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Jun. 14, 2016 and testing was completed on Jul. 07, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	8
1.6. Test Location	8
1.7. Applicable Standards	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	9
2.1. Test Mode	9
2.2. Connection Diagram of Test System	11
2.3. Support Unit used in test configuration and system.....	12
2.4. EUT Operation Test Setup	13
3. TEST RESULT.....	14
3.1. Test of AC Conducted Emission Measurement	14
3.2. Test of Radiated Emission Measurement	22
4. LIST OF MEASURING EQUIPMENT	28
5. UNCERTAINTY OF EVALUATION	29
APPENDIX A. SETUP PHOTOGRAPHS	
APPENDIX B. PRODUCT EQUALITY DECLARATION	



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 7.65 dB at 0.190 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.40 dB at 52.410 MHz



1. General Description

1.1. Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2. Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/CDMA/LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE A2017U
FCC ID	SRQ-ZTEA2017U
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.2 LE
IMEI Code	Conduction/Radiation: 990006780003793
HW Version	wwdB
SW Version	A2017UV1.0.0B07
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8MHz CDMA2000 BC0 : 824.70 MHz ~ 848.31 MHz CDMA2000 BC1 : 1851.25 MHz ~ 1908.75 MHz CDMA2000 BC10 : 817.9 MHz ~ 823.1 MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7MHz ~ 1914.3 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz CDMA2000 BC0 : 869.70 MHz ~ 893.31 MHz CDMA2000 BC1 : 1931.25 MHz ~ 1988.75 MHz CDMA2000 BC10 : 862.9 MHz ~ 868.1 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7MHz ~ 1994.3 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 29 : 718.5 MHz ~726.5 MHz LTE Band 30 : 2352.5 MHz ~2357.5 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz Glonass: 1602 MHz + n× 0.5625MHz (n=-7,-6,-5,...0,...,6) NFC : 13.56 MHz



Standards-related Product Specification	
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GPS/Glonass: IFA Antenna NFC : Loop Antenna
Type of Modulation	CDMA2000 1xRTT: QPSK CDMA2000 1xEV-DO: QPSK/8PSK GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA/DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) DC-HSDPA: 64QAM HSPA+: 16QAM (Uplink is not supported) LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS/Glonass : BPSK NFC: ASK



1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	CO01-KS	03CH02-KS	418269

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	☒
2.	Data application transferred mode (EUT connected with notebook)	☒	☒	☒

Abbreviations:

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz




Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear) <Fig.1> Mode 2: LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig.2>
Radiated Emissions < 1GHz	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear) <Fig.1> Mode 2: LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig.2>
Radiated Emissions ≥ 1GHz	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear) <Fig.1> Mode 2: LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig.2>


Remark:

1. The worst case of AC is mode 1; and the USB Link mode of AC is mode 2; the test data of these modes are reported.
2. The worst case of RE < 1G is mode 1; and the USB Link mode of RE is mode 2; the test data of these modes are reported.
3. Data Link with notebook means data application transferred mode between EUT and notebook.

2.2. Connection Diagram of Test System

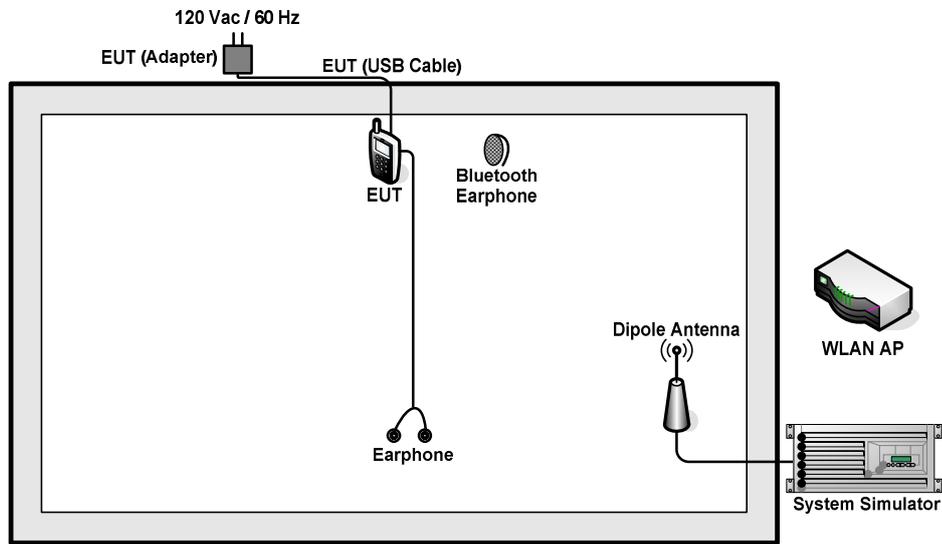

<Fig.1>

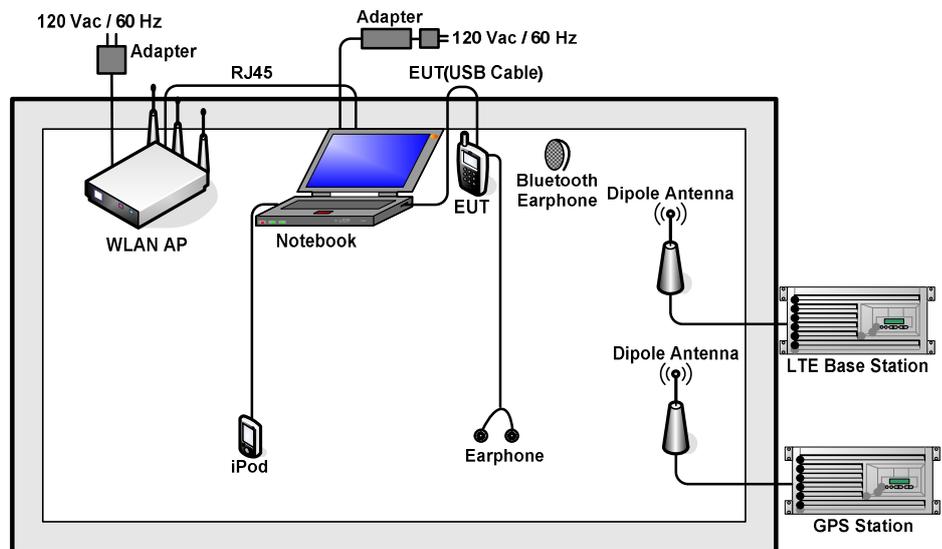

<Fig.2>



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
5.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
6.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
7.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A
8.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A
9.	Bluetooth Earphone	Lenovo	BH301	N/A	N/A	N/A
10.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A
11.	Earphone	Lenovo	LH102	N/A	Unshielded, 1.2 m	N/A
12.	SD Card	Kingston	4GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Ultra	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.
3. Turn on camera to capture images.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

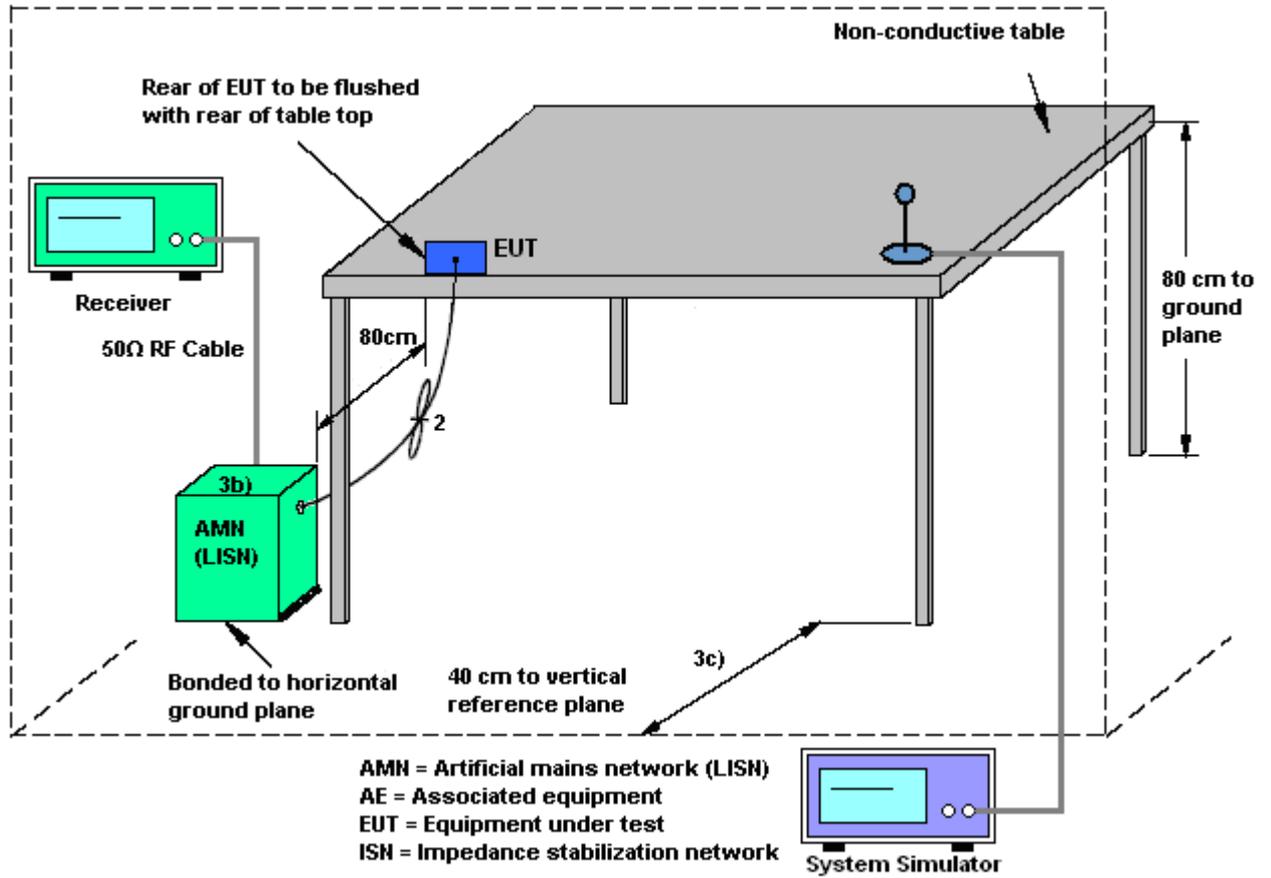



3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear)		

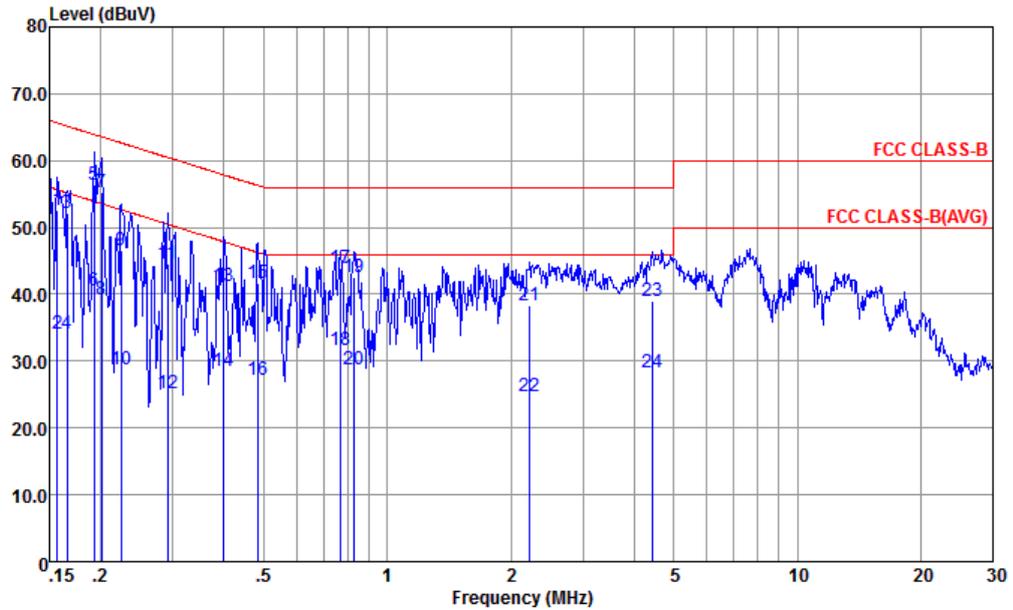


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-20151024 LINE
 Project : (FC) 631604-01
 mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	52.70	-12.95	65.65	42.10	0.49	10.11	QP
2	0.16	34.20	-21.45	55.65	23.60	0.49	10.11	Average
3	0.17	52.04	-13.12	65.16	41.50	0.42	10.12	QP
4	0.17	34.14	-21.02	55.16	23.60	0.42	10.12	Average
5 *	0.19	56.28	-7.65	63.93	45.90	0.26	10.12	QP
6	0.19	40.58	-13.35	53.93	30.20	0.26	10.12	Average
7	0.20	55.25	-8.33	63.58	44.90	0.22	10.13	QP
8	0.20	39.15	-14.43	53.58	28.80	0.22	10.13	Average
9	0.22	46.65	-16.01	62.66	36.30	0.22	10.13	QP
10	0.22	28.65	-24.01	52.66	18.30	0.22	10.13	Average
11	0.29	44.57	-15.93	60.50	34.20	0.22	10.15	QP
12	0.29	25.27	-25.23	50.50	14.90	0.22	10.15	Average
13	0.40	41.30	-16.56	57.86	30.90	0.23	10.17	QP
14	0.40	28.60	-19.26	47.86	18.20	0.23	10.17	Average
15	0.48	41.59	-14.68	56.27	31.20	0.23	10.16	QP
16	0.48	27.19	-19.08	46.27	16.80	0.23	10.16	Average
17	0.77	43.99	-12.01	56.00	33.60	0.24	10.15	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear)		

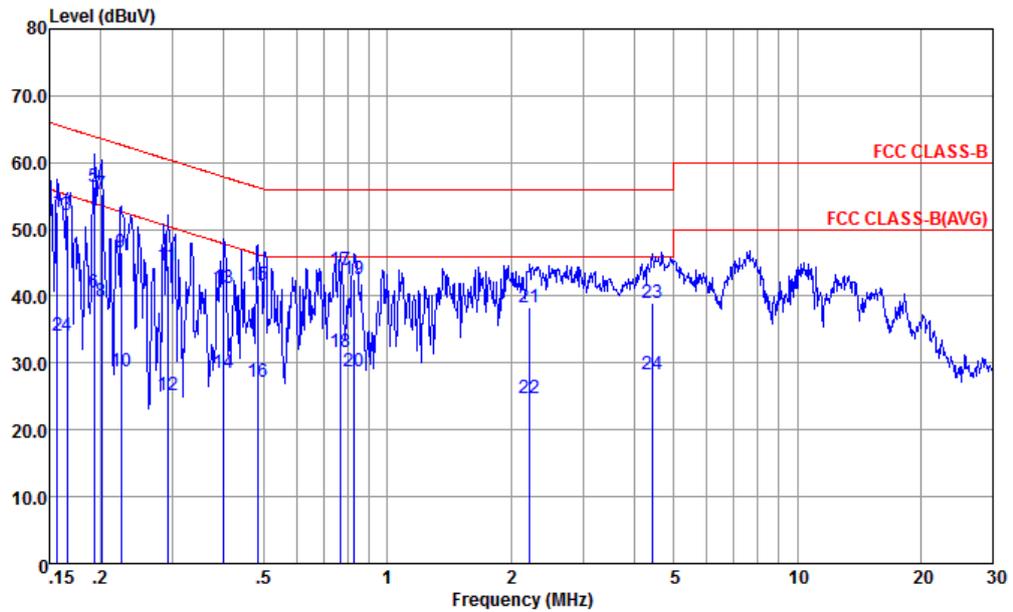


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-20151024 LINE
 Project : (FC) 631604-01
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
18	0.77	31.69	-14.31	46.00	21.30	0.24	10.15	Average
19	0.83	42.49	-13.51	56.00	32.11	0.24	10.14	QP
20	0.83	28.69	-17.31	46.00	18.31	0.24	10.14	Average
21	2.22	38.23	-17.77	56.00	27.91	0.18	10.14	QP
22	2.22	24.63	-21.37	46.00	14.31	0.18	10.14	Average
23	4.43	38.96	-17.04	56.00	28.60	0.19	10.17	QP
24	4.43	28.26	-17.74	46.00	17.90	0.19	10.17	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear)		

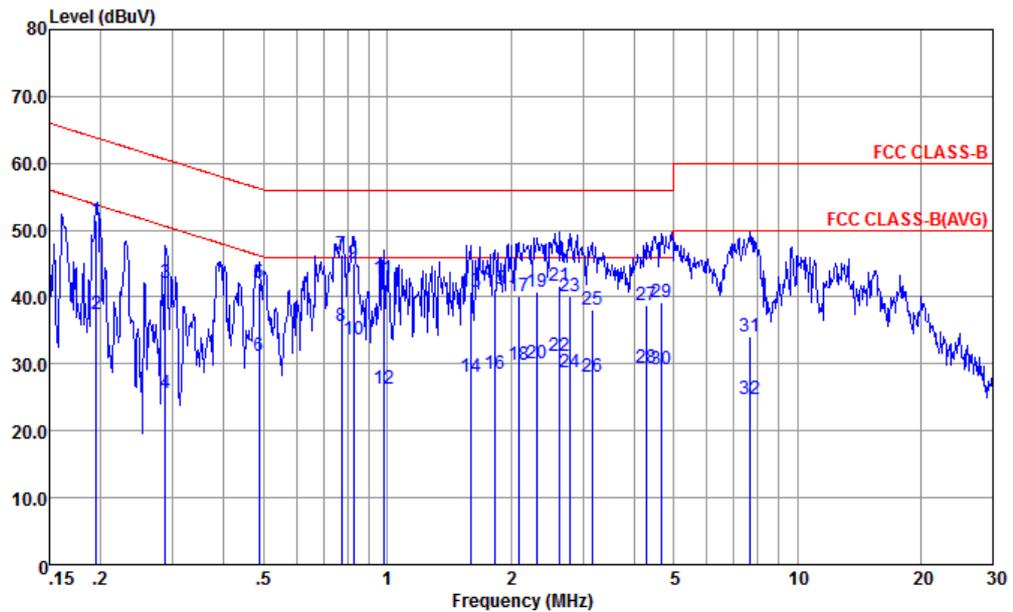


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL
 Project : (FC) 631604-01
 mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	51.54	-12.26	63.80	41.10	0.31	10.13	QP
2	0.20	37.34	-16.46	53.80	26.90	0.31	10.13	Average
3	0.29	42.06	-18.53	60.59	31.60	0.31	10.15	QP
4	0.29	25.66	-24.93	50.59	15.20	0.31	10.15	Average
5	0.49	42.08	-14.15	56.23	31.60	0.32	10.16	QP
6	0.49	31.28	-14.95	46.23	20.80	0.32	10.16	Average
7 *	0.78	46.30	-9.70	56.00	35.80	0.35	10.15	QP
8	0.78	35.70	-10.30	46.00	25.20	0.35	10.15	Average
9	0.83	45.10	-10.90	56.00	34.61	0.35	10.14	QP
10	0.83	33.60	-12.40	46.00	23.11	0.35	10.14	Average
11	0.98	42.70	-13.30	56.00	32.19	0.37	10.14	QP
12	0.98	26.40	-19.60	46.00	15.89	0.37	10.14	Average
13	1.60	40.82	-15.18	56.00	30.30	0.38	10.14	QP
14	1.60	28.12	-17.88	46.00	17.60	0.38	10.14	Average
15	1.83	41.12	-14.88	56.00	30.60	0.38	10.14	QP
16	1.83	28.42	-17.58	46.00	17.90	0.38	10.14	Average
17	2.09	40.12	-15.88	56.00	29.60	0.38	10.14	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear)		

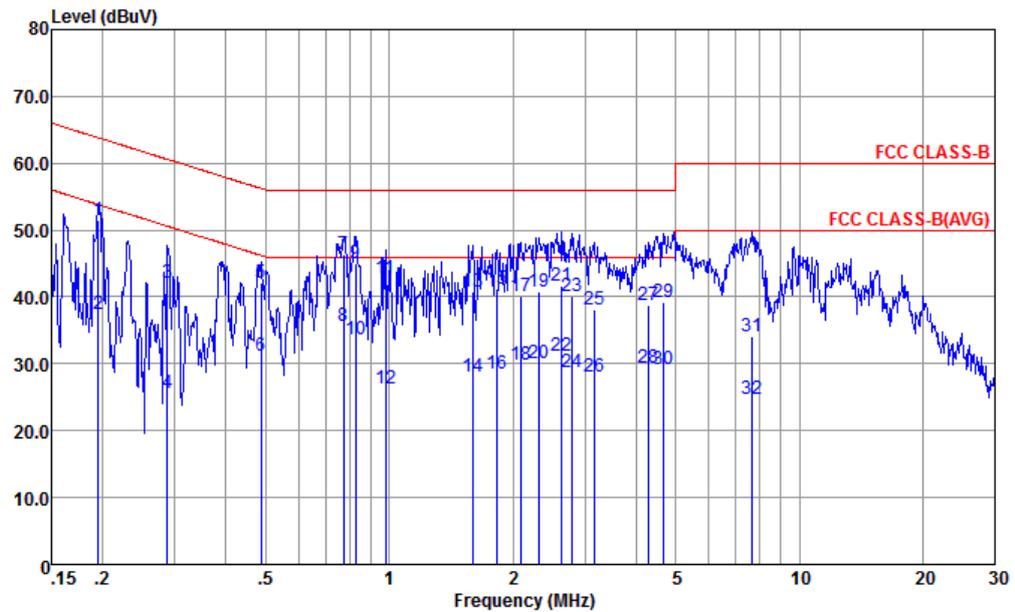


Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL
 Project : (FC) 631604-01
 mode : Mode 1
 : #4

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18	2.09	29.82	-16.18	46.00	19.30	0.38	10.14	Average
19	2.32	40.82	-15.18	56.00	30.29	0.38	10.15	QP
20	2.32	30.12	-15.88	46.00	19.59	0.38	10.15	Average
21	2.64	41.72	-14.28	56.00	31.20	0.37	10.15	QP
22	2.64	31.12	-14.88	46.00	20.60	0.37	10.15	Average
23	2.79	40.12	-15.88	56.00	29.60	0.37	10.15	QP
24	2.79	28.82	-17.18	46.00	18.30	0.37	10.15	Average
25	3.16	38.13	-17.87	56.00	27.60	0.37	10.16	QP
26	3.16	28.03	-17.97	46.00	17.50	0.37	10.16	Average
27	4.27	38.83	-17.17	56.00	28.30	0.36	10.17	QP
28	4.27	29.43	-16.57	46.00	18.90	0.36	10.17	Average
29	4.65	39.14	-16.86	56.00	28.60	0.36	10.18	QP
30	4.65	29.14	-16.86	46.00	18.60	0.36	10.18	Average
31	7.65	34.12	-25.88	60.00	23.60	0.29	10.23	QP
32	7.65	24.72	-25.28	50.00	14.20	0.29	10.23	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

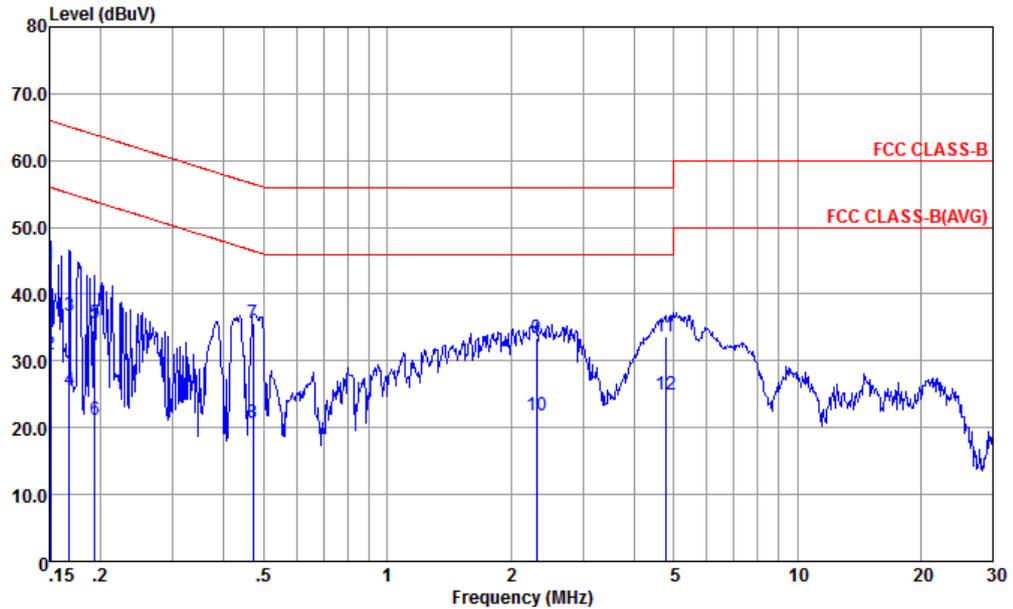


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-20151024 LINE
 Project : (FC) 631604-01
 mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	44.24	-21.72	65.96	33.60	0.53	10.11	QP
2	0.15	30.94	-25.02	55.96	20.30	0.53	10.11	Average
3	0.17	36.83	-28.25	65.08	26.30	0.41	10.12	QP
4	0.17	25.63	-29.45	55.08	15.10	0.41	10.12	Average
5	0.19	35.58	-28.31	63.89	25.20	0.26	10.12	QP
6	0.19	21.18	-32.71	53.89	10.80	0.26	10.12	Average
7 *	0.47	35.69	-20.80	56.49	25.30	0.23	10.16	QP
8	0.47	20.69	-25.80	46.49	10.30	0.23	10.16	Average
9	2.31	33.53	-22.47	56.00	23.20	0.18	10.15	QP
10	2.31	21.93	-24.07	46.00	11.60	0.18	10.15	Average
11	4.77	33.57	-22.43	56.00	23.20	0.19	10.18	QP
12	4.77	24.87	-21.13	46.00	14.50	0.19	10.18	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

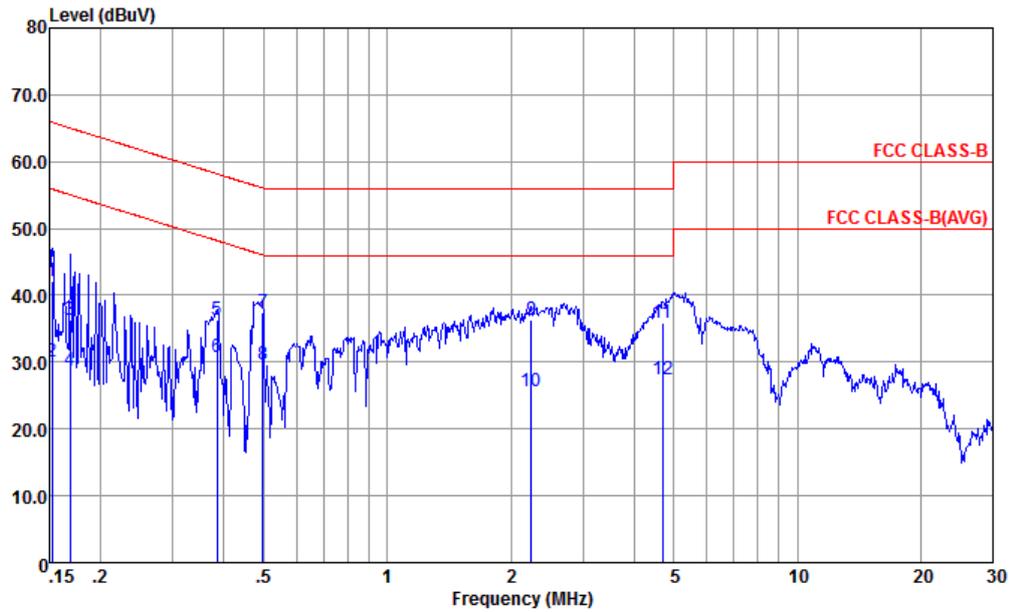

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-20151024 NEUTRAL
 Project : (FC) 631604-01
 mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	42.01	-23.86	65.87	31.60	0.30	10.11	QP
2	0.15	30.01	-25.86	55.87	19.60	0.30	10.11	Average
3	0.17	36.32	-28.71	65.03	25.90	0.30	10.12	QP
4	0.17	28.72	-26.31	55.03	18.30	0.30	10.12	Average
5	0.39	36.39	-21.78	58.17	25.90	0.32	10.17	QP
6	0.39	30.79	-17.38	48.17	20.30	0.32	10.17	Average
7	0.50	37.38	-18.67	56.05	26.90	0.32	10.16	QP
8 *	0.50	29.58	-16.47	46.05	19.10	0.32	10.16	Average
9	2.25	36.32	-19.68	56.00	25.80	0.38	10.14	QP
10	2.25	25.62	-20.38	46.00	15.10	0.38	10.14	Average
11	4.70	35.84	-20.16	56.00	25.30	0.36	10.18	QP
12	4.70	27.44	-18.56	46.00	16.90	0.36	10.18	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

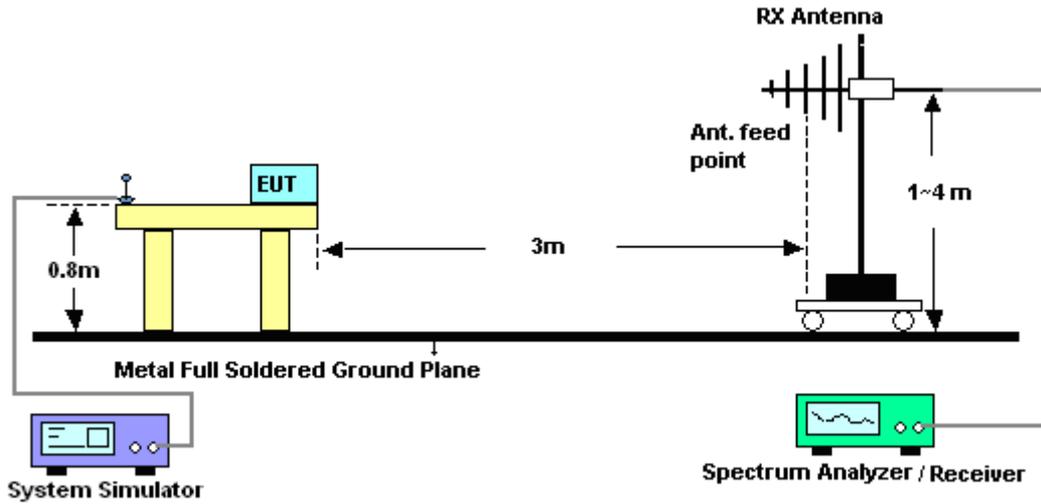


For radiated emissions above 1GHz

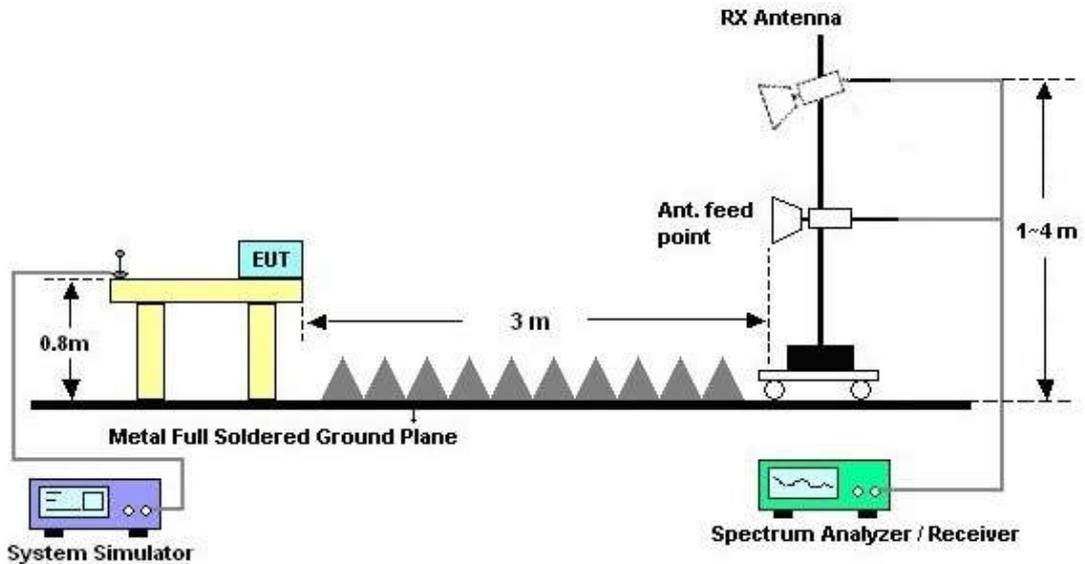



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear)		
Remark :	#7 is system simulator signal which can be ignored.		

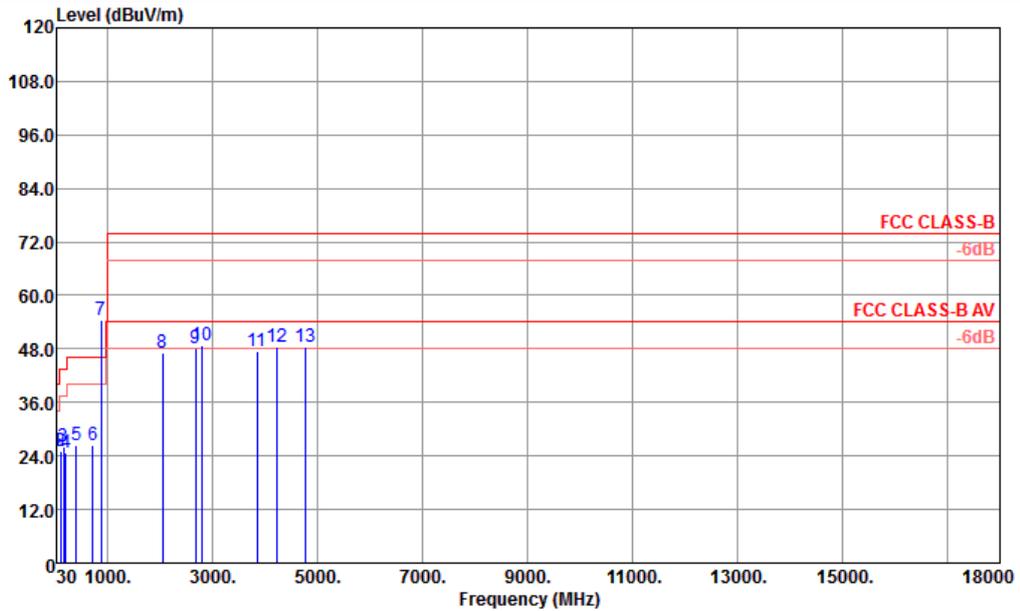


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 966-02 LF ANT HORIZONTAL
 Project : (FC) 631604-01

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.27	24.92	-15.08	40.00	30.11	25.80	0.11	31.10	100	145	Peak HORIZONTAL
2	101.82	25.20	-18.30	43.50	37.06	18.30	0.24	30.40	---	---	Peak HORIZONTAL
3	162.03	26.01	-17.49	43.50	39.01	17.05	0.35	30.40	---	---	Peak HORIZONTAL
4	212.52	24.81	-18.69	43.50	38.94	15.87	0.43	30.43	---	---	Peak HORIZONTAL
5	407.10	26.30	-19.70	46.00	30.84	25.20	0.93	30.67	---	---	Peak HORIZONTAL
6	724.20	26.38	-19.62	46.00	29.06	26.51	1.26	30.45	---	---	Peak HORIZONTAL
7 *	881.00	54.35			55.85	27.45	1.58	30.53	---	---	Peak HORIZONTAL
8	2048.00	47.00	-27.00	74.00	46.05	30.67	4.90	34.62	---	---	Peak HORIZONTAL
9	2680.00	48.25	-25.75	74.00	43.16	31.85	3.21	29.97	---	---	Peak HORIZONTAL
10	2804.00	48.94	-25.06	74.00	41.75	32.10	2.71	27.62	---	---	Peak HORIZONTAL
11	3849.00	47.52	-26.48	74.00	37.94	34.64	6.53	31.59	---	---	Peak HORIZONTAL
12	4233.00	48.37	-25.63	74.00	38.84	35.13	6.17	31.77	---	---	Peak HORIZONTAL
13	4770.00	48.32	-25.68	74.00	40.19	35.03	6.00	32.90	---	---	Peak HORIZONTAL



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle(2.4G) + USB Cable (Charging from Adapter) + Earphone + Camera(Rear)		
Remark :	#7 is system simulator signal which can be ignored.		

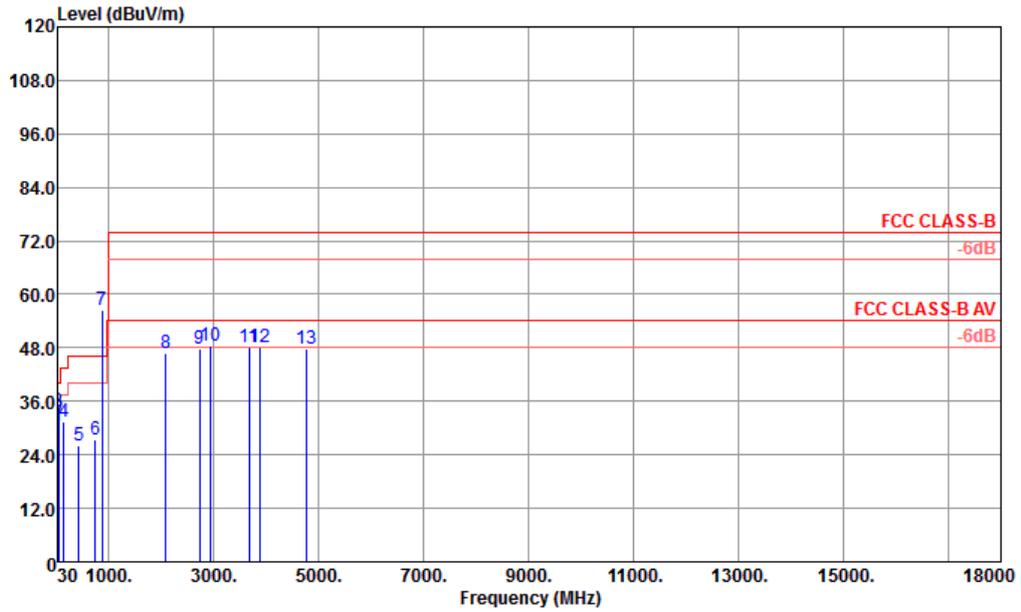


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 966-02 LF ANT VERTICAL
 Project : (FC) 631604-01

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1	32.70	30.53	-9.47	40.00	36.10	25.30	0.11	30.98	---	---	Peak	VERTICAL
2	48.36	32.14	-7.86	40.00	45.45	17.35	0.14	30.80	---	---	Peak	VERTICAL
3	52.41	33.60	-6.40	40.00	49.42	14.77	0.15	30.74	100	147	Peak	VERTICAL
4	157.71	31.32	-12.18	43.50	44.15	17.23	0.34	30.40	---	---	Peak	VERTICAL
5	436.50	26.19	-19.81	46.00	31.11	24.72	0.91	30.55	---	---	Peak	VERTICAL
6	750.10	27.40	-18.60	46.00	30.32	26.22	1.36	30.50	---	---	Peak	VERTICAL
7 *	881.00	56.63			58.13	27.45	1.58	30.53	---	---	Peak	VERTICAL
8	2094.00	46.83	-27.17	74.00	45.35	30.79	5.20	34.51	---	---	Peak	VERTICAL
9	2738.00	47.90	-26.10	74.00	42.06	31.96	2.91	29.03	---	---	Peak	VERTICAL
10	2930.00	48.58	-25.42	74.00	41.59	32.43	3.00	28.44	---	---	Peak	VERTICAL
11	3678.00	48.06	-25.94	74.00	38.85	34.23	6.24	31.26	---	---	Peak	VERTICAL
12	3885.00	48.18	-25.82	74.00	38.60	34.69	6.50	31.61	---	---	Peak	VERTICAL
13	4776.00	47.86	-26.14	74.00	39.73	35.03	6.00	32.90	---	---	Peak	VERTICAL



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#6 is system simulator signal which can be ignored.		

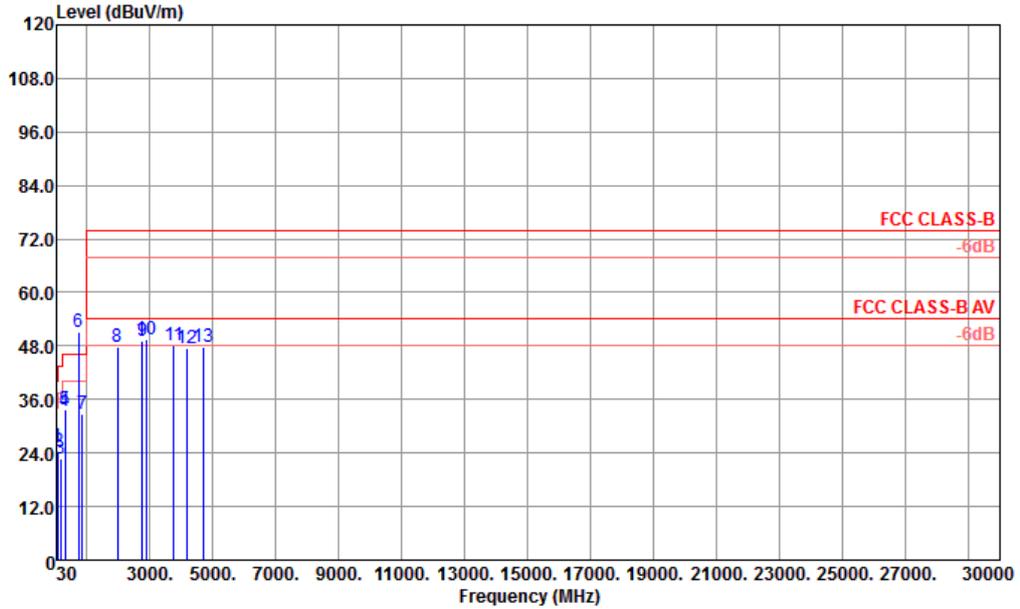


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 966-02 LF ANT HORIZONTAL
 Project : (FC) 631604-01

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg		
1	42.96	25.54	-14.46	40.00	35.95	20.30	0.13	30.84	---	---	Peak	HORIZONTAL
2	96.15	24.37	-19.13	43.50	36.77	17.77	0.23	30.40	---	---	Peak	HORIZONTAL
3	161.76	22.83	-20.67	43.50	35.84	17.05	0.34	30.40	---	---	Peak	HORIZONTAL
4	299.19	33.29	-12.71	46.00	45.39	17.80	0.60	30.50	---	---	Peak	HORIZONTAL
5	302.80	33.71	-12.29	46.00	45.71	17.90	0.61	30.51	100	159	Peak	HORIZONTAL
6 *	739.60	51.08			53.92	26.32	1.32	30.48	---	---	Peak	HORIZONTAL
7	854.40	32.81	-13.19	46.00	34.60	27.23	1.40	30.42	---	---	Peak	HORIZONTAL
8	1972.00	47.81	-26.19	74.00	47.99	30.21	4.47	34.86	---	---	Peak	HORIZONTAL
9	2754.00	49.12	-24.88	74.00	42.78	31.99	2.91	28.56	---	---	Peak	HORIZONTAL
10	2892.00	49.39	-24.61	74.00	42.29	32.31	2.90	28.11	---	---	Peak	HORIZONTAL
11	3756.00	48.03	-25.97	74.00	38.58	34.50	6.44	31.49	---	---	Peak	HORIZONTAL
12	4158.00	47.31	-26.69	74.00	37.59	35.08	6.53	31.89	---	---	Peak	HORIZONTAL
13	4722.00	47.63	-26.37	74.00	39.29	35.08	5.83	32.57	---	---	Peak	HORIZONTAL



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Jason Peng	Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Function Type :	LTE Band 17 Idle + Bluetooth Idle + WLAN Idle(5G) + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#7 is system simulator signal which can be ignored.		

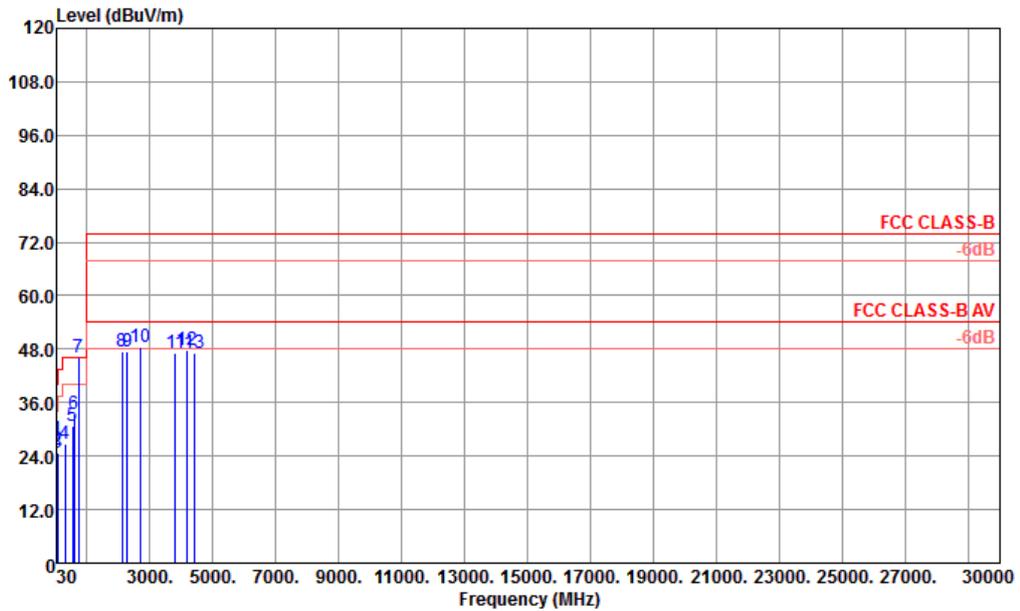

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m 966-02 LF ANT VERTICAL
 Project : (FC) 631604-01

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	A/Pos	T/Pos	Remark	Pol/Phas
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	42.96	27.63	-12.37	40.00	38.04	20.30	0.13	30.84	100	65 Peak	VERTICAL
2	47.01	25.51	-14.49	40.00	38.82	17.35	0.14	30.80	---	Peak	VERTICAL
3	55.11	24.76	-15.24	40.00	41.39	13.90	0.15	30.68	---	Peak	VERTICAL
4	295.14	26.90	-19.10	46.00	39.04	17.77	0.59	30.50	---	Peak	VERTICAL
5	535.90	30.62	-15.38	46.00	35.88	24.18	0.89	30.33	---	Peak	VERTICAL
6	599.60	33.38	-12.62	46.00	38.38	24.30	0.90	30.20	---	Peak	VERTICAL
7 *	740.30	46.16			49.02	26.30	1.32	30.48	---	Peak	VERTICAL
8	2112.00	47.45	-26.55	74.00	45.86	30.85	5.20	34.46	---	Peak	VERTICAL
9	2290.00	47.39	-26.61	74.00	44.16	31.29	5.70	33.76	---	Peak	VERTICAL
10	2682.00	48.39	-25.61	74.00	43.30	31.85	3.21	29.97	---	Peak	VERTICAL
11	3795.00	47.09	-26.91	74.00	37.49	34.55	6.59	31.54	---	Peak	VERTICAL
12	4191.00	47.92	-26.08	74.00	38.13	35.11	6.59	31.91	---	Peak	VERTICAL
13	4413.00	47.24	-26.76	74.00	38.55	35.25	4.72	31.28	---	Peak	VERTICAL



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jun. 30, 2016	Sep. 09, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Jun. 30, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Jun. 30, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Jun. 30, 2016	Oct. 23, 2016	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jul. 07, 2016	Sep. 09, 2016	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz; Max 30dB	Apr. 22, 2016	Jul. 07, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 12, 2015	Jul. 07, 2016	Sep. 11, 2016	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 07, 2015	Jul. 07, 2016	Nov. 06, 2016	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Jul. 07, 2016	Mar. 02, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Jul. 07, 2016	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1~26.5GHz Gain 30dB	Oct. 24, 2015	Jul. 07, 2016	Oct. 23, 2016	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-H G	1887435	18GHz~40GHz	Jan. 20, 2016	Jul. 07, 2016	Jan. 19, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Jul. 07, 2016	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 07, 2016	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 07, 2016	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix B. Product Equality Declaration

ZTE CORPORATION**Product Change Description**

As the applicant of the below model, [ZTE Corporation] declares that the product,

[ZTE A2017U]

[ZTE Corporation]

is the variant of the initial certified product,

[ZTE A2017U]

[ZTE Corporation]

[Project Number:16ZTE027]

SOFTWARE MODIFICATIONS:

Protocol Stack changes: NO

MMS/STK changes: NO

JAVA changes: NO

Other changes detailed: NO

HARDWARE MODIFICATION:

Band changes: NO

Power Amplifier changes: NO

Antenna changes: GPS/WiFi/Bluetooth 3in1 antenna is now updated.

Aiming at improving GPS performance, we updated this antenna and this result to 1dB efficiency better than previous one. Meanwhile, WiFi/Bluetooth efficiency was slightly down.

Before



After




PCB Layout changes: NO


Components on PCB changes: NO

LCD changes: Yes, Added touch key and touch key FPC

Before

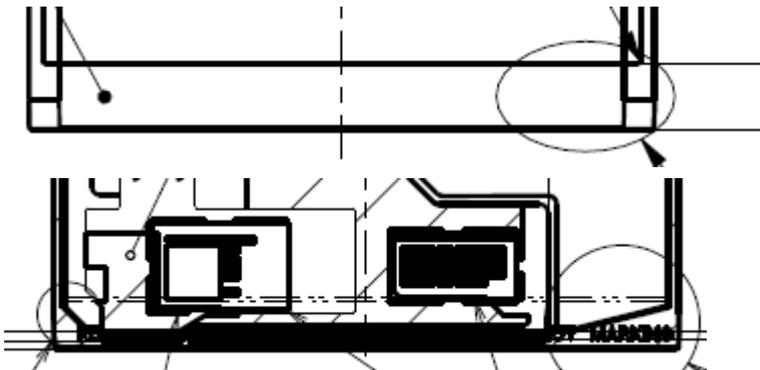

After

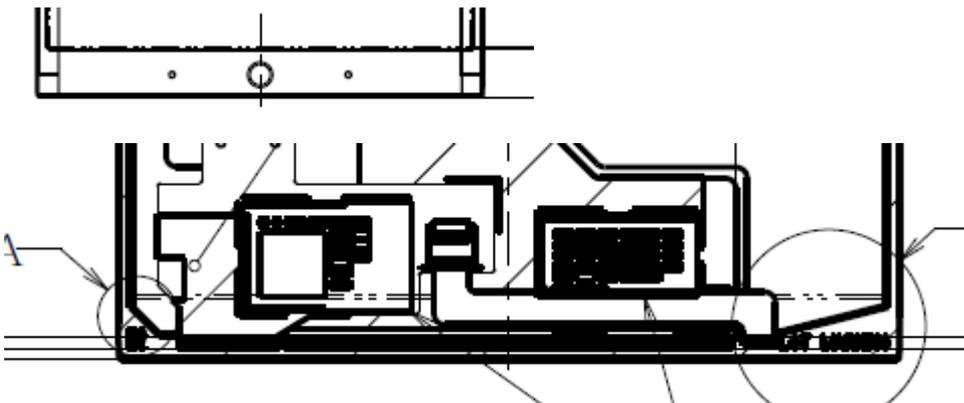

Speaker changes: NO

Camera changes: NO

Vibrator changes: NO

Bluetooth changes: NO

FM changes: NO

Other changes: NO

MECHANICAL MODIFICATIONS:

Use new metal front/back cover or keypad: NO

Mechanical shell changes: NO


Other changes detailed: NO

ACCESSORY MODIFICATIONS:

Battery changes:NO

AC Adaptor changes:NO

Earphone changes:NO



APPROVED BY: Min zhang

Project Manager: Li xiaofeng

Date:2016-6-6

Company: ZTE Corporation

Address: B109, #889, Bibo Rd, Zhangjiang Hi-Tech Park, Shanghai,China

Tel:+86-21-68896840

Fax: +86-21-68896835