



RF TEST REPORT

Applicant ZTE Corporation

FCC ID SRQ-ZTEBLADEA321

Product LTE/WCDMA/GSM (GPRS)
Multi-Mode Digital Mobile Phone

Model ZTE BLADE A321
/ ZTE BLADE A320SE

Report No. RXA1706-0187RF05

Issue Date July 13, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location	5
2	General Description of Equipment under Test	6
2.1	Applied Standards	7
3	Information about the FHSS characteristics	8
3.1	Pseudorandom Frequency Hopping Sequence	8
3.2	Equal Hopping Frequency Use	9
3.3	System Receiver Input Bandwidth	9
4	Test Information	10
4.1	Test Mode	10
4.2	Peak Power Output –Conducted	11
4.3	Occupied Bandwidth (20dB)	15
4.4	Frequency Separation	19
4.5	Time of Occupancy (Dwell Time)	21
4.6	Band Edge Compliance	23
4.7	Spurious Radiated Emissions in the Restricted Band	26
4.8	Number of hopping Frequency	29
4.9	Spurious RF Conducted Emissions	31
4.10	Radiates Emission	35
4.11	Conducted Emission	62
5	Main Test Instruments	65
ANNEX A: EUT Appearance and Test Setup		66
A.1	EUT Appearance	66
A.2	Test Setup	68

Summary of Measurement Results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Peak Power Output -Conducted	15.247(b)(1)	PASS
2	Occupied Bandwidth (20dB)	15.247(a)(1)	PASS
3	Frequency Separation	15.247(a)(1)	PASS
4	Time of Occupancy (Dwell Time)	15.247(a)(1)(iii)	PASS
5	Band Edge Compliance	15.247(d)	PASS
6	Spurious Radiated Emissions in the restricted band	15.247(d),15.205,15.209	PASS
7	Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
8	Spurious RF Conducted Emissions	15.247(d)	PASS
9	Radiates Emission	15.247(d),15.205,15.209	PASS
10	AC Power Line Conducted Emission	15.207	PASS
Date of Testing: June 16, 2017~ July7, 2017			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description			
Model:	ZTE BLADE A321 / ZTE BLADE A320SE		
IMEI:	865984030000177		
HW Version:	ucuA		
SW Version:	GEN_ LA_A321_V1.0		
Power Supply:	Battery/AC adapter		
Antenna Type:	Internal Antenna		
Antenna Gain:	2.20 dBi for 2402MHz 2.03 dBi for 2441MHz 1.62 dBi for 2480MHz		
Test Mode(s):	Basic Rate	Enhanced Data Rate(EDR)	
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)		
	GFSK	π/4 DQPSK	8DPSK
Packet Type: (Maximum Payload)	DH5	2DH5	3DH5
Max. Conducted Power	9.865dBm		
Tested Frequency Range(s):	2400 ~ 2483.5 MHz		
EUT Accessory			
Battery	Manufacturer: BYD Model: Li3822T43P4h736040 Power Rating: DC 3.8V, 2200mAh, Li-ion		
Adapter	Manufacturer: DOCOKOM Model: STC-A508A-Z		
USB Cable	99cm Cable, Shielded		
Note: 1. The information of the EUT is declared by the manufacturer.			



2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **DA00-705 Filing and Frequency Measurement Guidelines For Frequency Hopping Spread Spectrum System (2000).**


3 Information about the FHSS characteristics

3.1 Pseudorandom Frequency Hopping Sequence

Frequency Hopping Systems. A spread spectrum system in which the carrier is modulated with the coded information in a conventional manner causing a conventional spreading of the RF energy about the frequency carrier. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence. The wide RF bandwidth needed by such a system is not required by spreading of the RF energy about the carrier but rather to accommodate the range of frequencies to which the carrier frequency can hop. The test of a frequency hopping system is that the near term distribution of hops appears random, the long term distribution appears evenly distributed over the hop set, and sequential hops are randomly distributed in both direction and magnitude of change in the hop set.

The selection scheme chooses a segment of 32 hop frequencies spanning about 64 MHz and visits these hops in a pseudo-random order. Next, a different 32-hop segment is chosen, etc. In the page, master page response, slave page response, page scan, inquiry, inquiry response and inquiry scan hopping sequences, the same 32-hop segment is used all the time (the segment is selected by the address; different devices will have different paging segments).

When the basic channel hopping sequence is selected, the output constitutes a pseudo-random sequence that slides through the 79 hops. The principle is depicted in the figure below.

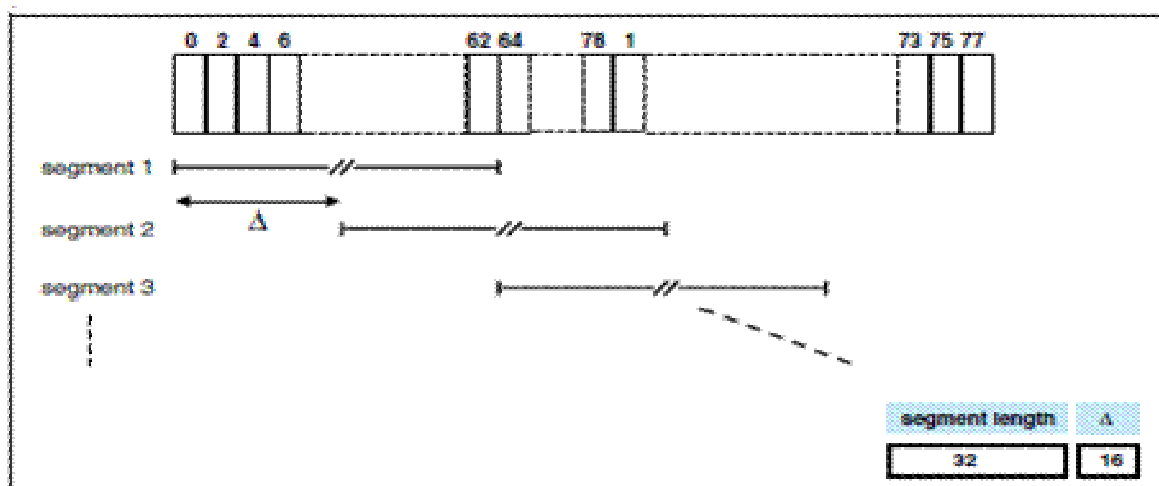

Hop selection scheme in CONNECTION state.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45, etc.

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

3.2 Equal Hopping Frequency Use

All Bluetooth units participating in the Pico net are time and hop-synchronized to the channel. Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

3.3 System Receiver Input Bandwidth

Each channel bandwidth is 1MHz. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

4 Test Information

4.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test Modes		
Band	Radiated Test Cases	Conducted Test Cases
BT	3DH5 8DPSK (Channel 0/39/78)	DH5 GFSK(Channel 0/39/78) 2DH5 $\pi/4$ -DQPSK(Channel 0/39/78) 3DH5 8DPSK(Channel 0/39/78)

Note: The maximum RF output power levels are 3DH5 for 8DPSK modulation, For RSE and CSE, only the maximum RF output power is chosen.

4.2 Peak Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used. RBW is set to 2 MHz; VBW is set to 6 MHz. These measurements have been tested at following channels: 0, 39, and 78.

Test Setup

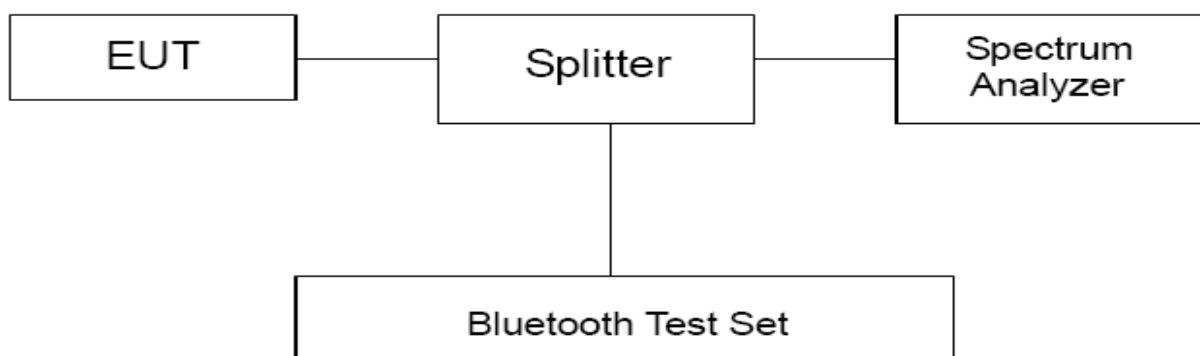

Limits

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

Peak Output Power	$\leq 0.125W$ (21dBm)
-------------------	-----------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.44$ dB.


**Test Results**

Channel	Frequency (MHz)	Peak Output Power (dBm)			Conclusion
		DH5	2DH5	3DH5	
0	2402	8.837	9.514	9.768	PASS
39	2441	9.135	9.576	9.865	PASS
78	2480	7.603	8.480	8.485	PASS


Note: The measured power density (dBm) has the offset with cable loss already.




BT DH5 CH0, Carrier frequency (MHz): 2402

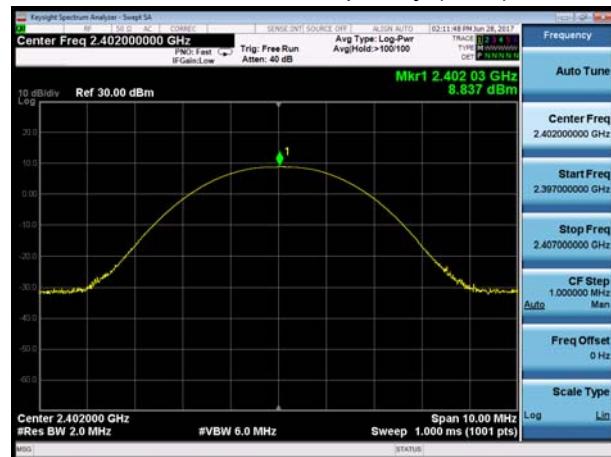


BT 2DH5 CH0, Carrier frequency (MHz): 2402

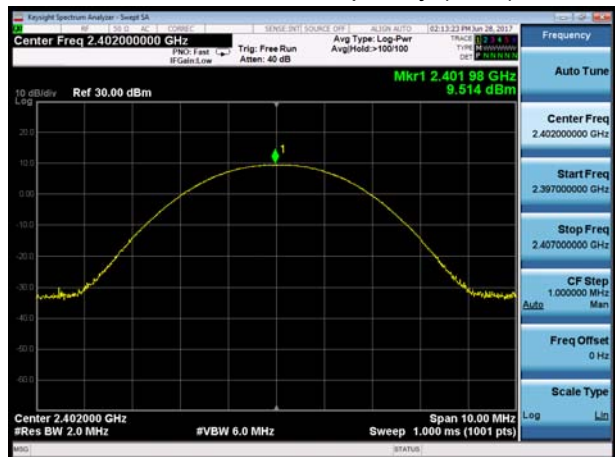


BT DH5 CH39, Carrier frequency (MHz): 2441

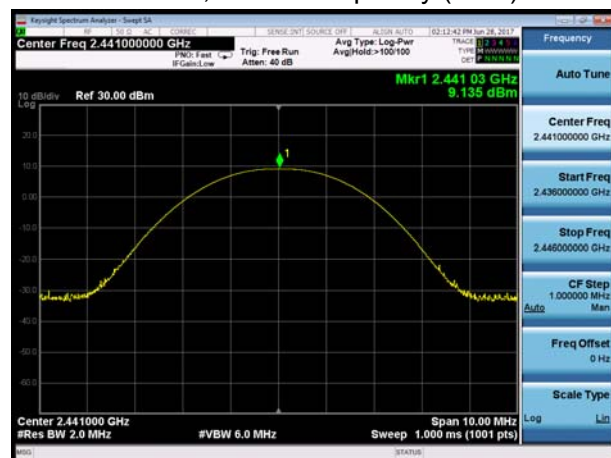


BT 2DH5 CH39, Carrier frequency (MHz): 2441

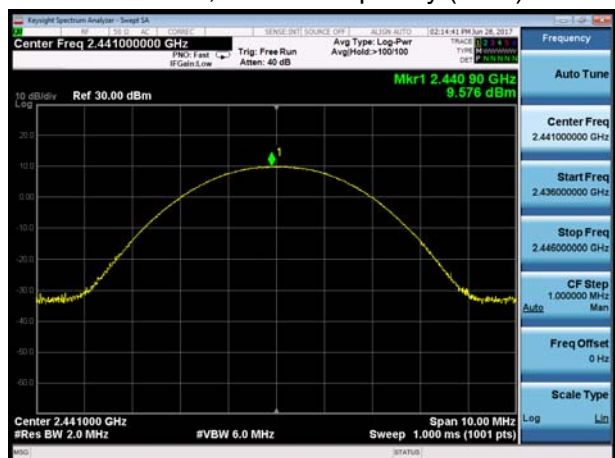

BT DH5 CH78, Carrier frequency (MHz): 2480

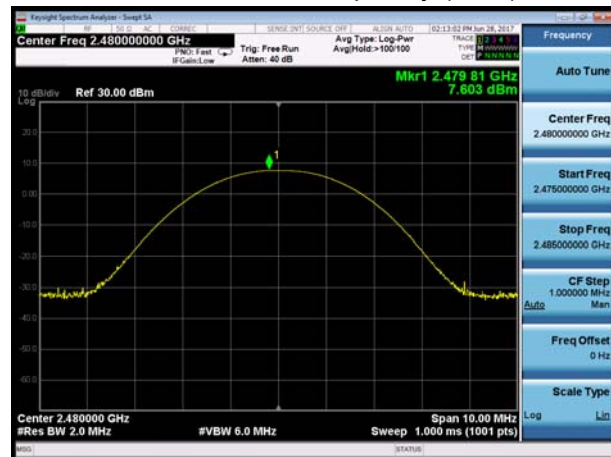


BT 2DH5 CH78, Carrier frequency (MHz): 2480

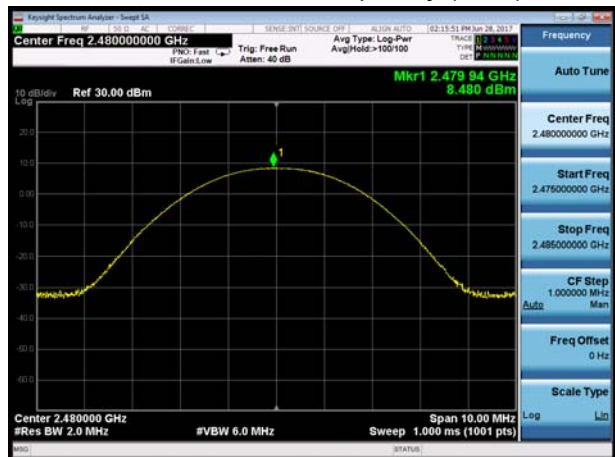





BT 3DH5 CH0, Carrier frequency (MHz): 2402

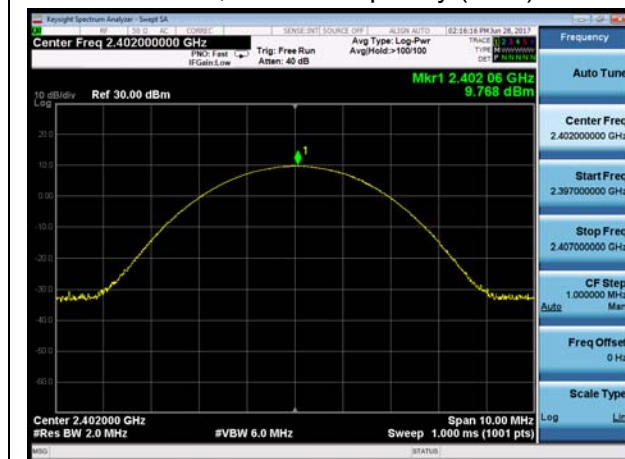

BT 3DH5 CH39, Carrier frequency (MHz): 2441

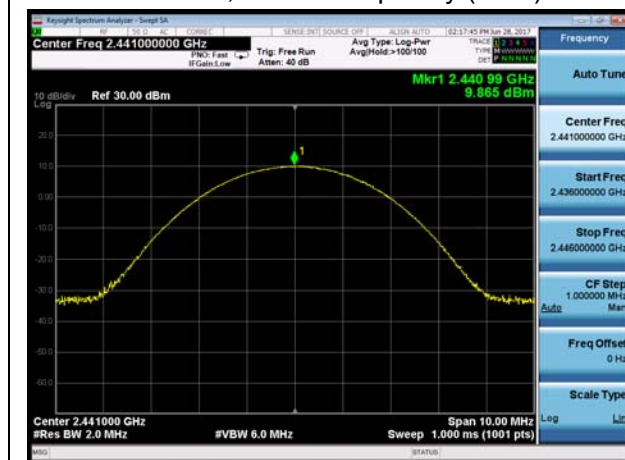

BT 3DH5 CH78, Carrier frequency (MHz): 2480

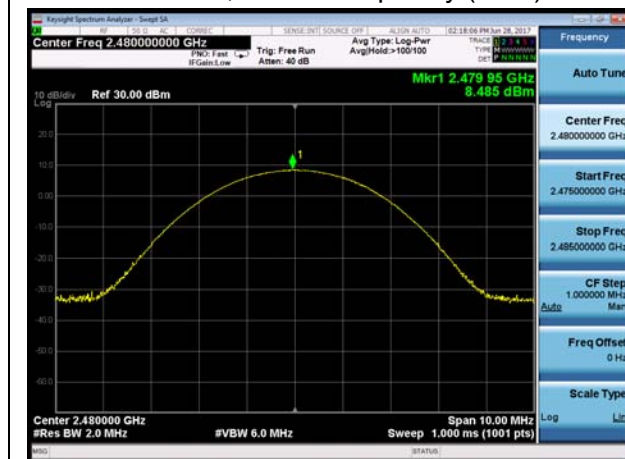

4.3 Occupied Bandwidth (20dB)


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz and VBW is set to 100kHz on spectrum analyzer. -20dB occupied bandwidths are recorded.

Test Setup

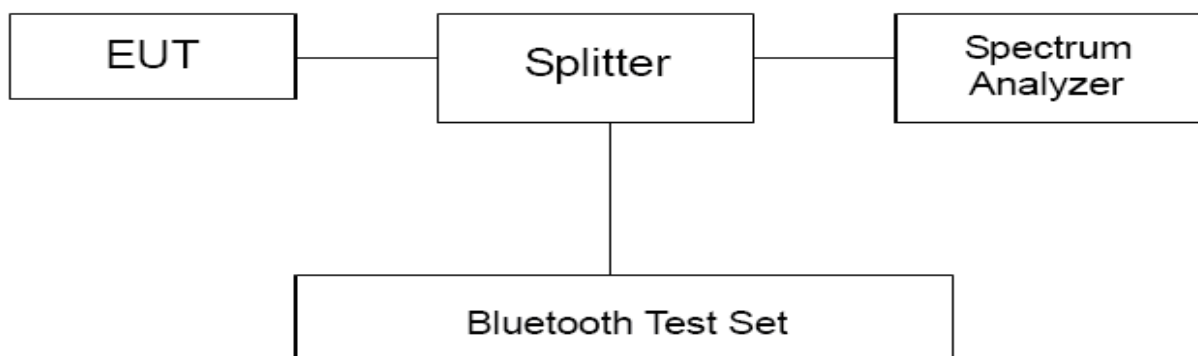

Limits

No specific occupied bandwidth requirements in part 15.247(a) (1).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.

Test Results

Mode	Channel	Frequency (MHz)	20dB Bandwidth(kHz)
DH5	0	2402	941.7
DH5	39	2441	944.9
DH5	78	2480	941.0
2DH5	0	2402	1284
2DH5	39	2441	1283
2DH5	78	2480	1290
3DH5	0	2402	1296
3DH5	39	2441	1280
3DH5	78	2480	1288



BT DH5 CH0, Carrier frequency (MHz): 2402




BT 2DH5 CH0, Carrier frequency (MHz): 2402



BT DH5 CH39, Carrier frequency (MHz): 2441



BT 2DH5 CH39, Carrier frequency (MHz): 2441

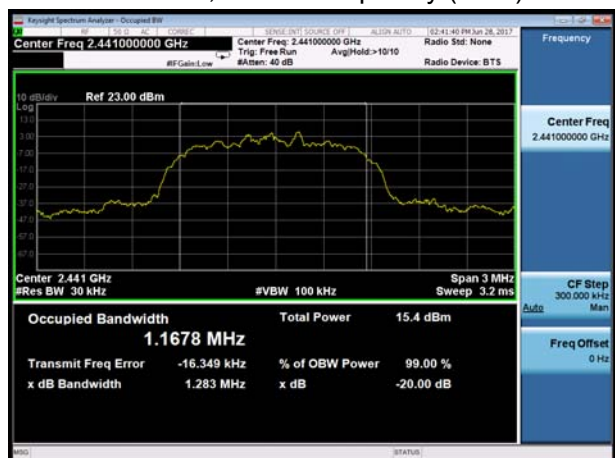

BT DH5 CH78, Carrier frequency (MHz): 2480



BT 2DH5 CH78, Carrier frequency (MHz): 2480



BT 3DH5 CH0, Carrier frequency (MHz): 2402



BT 3DH5 CH39, Carrier frequency (MHz): 2441



BT 3DH5 CH78, Carrier frequency (MHz): 2480



4.4 Frequency Separation


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 30 kHz and VBW is set to 100 kHz on spectrum analyzer. Set EUT on Hopping on mode.

Test setup

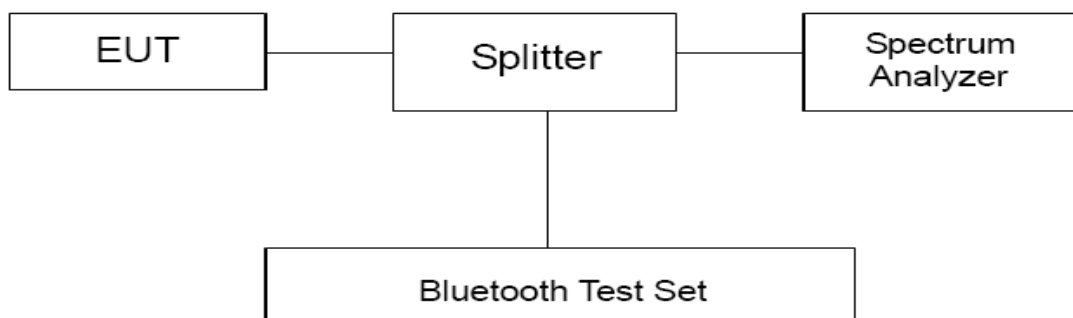

Limits

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. ”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.

Test Results:


Packet type	Carrier frequency (MHz)	Carrier frequency separation(kHz)	20dB Bandwidth(kHz)	Limit (kHz)	Conclusion
DH5	2441	1068	944.9	629.93	PASS
2DH5	2441	996	1283	855.33	PASS
3DH5	2441	996	1280	853.33	PASS

Note: The limit is two-thirds of 20 dB bandwidth.

BT DH5 CH39, Carrier frequency (MHz): 2441



BT 2DH5 CH39, Carrier frequency (MHz): 2441

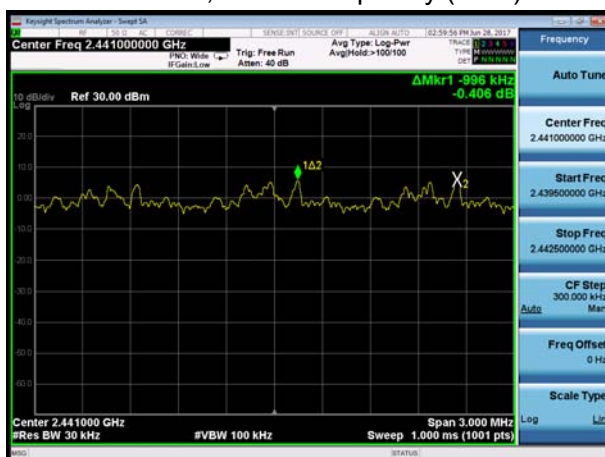

BT 3DH5 CH39, Carrier frequency (MHz): 2441



4.5 Time of Occupancy (Dwell Time)

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 1MHz on spectrum analyzer. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 0.4s with:

The selected EUT Packet type uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600(ch*hop/s) for all channels. So the final hopping rate for all channel is $1600/6=266.67(\text{ch*hop/s})$

Test Setup

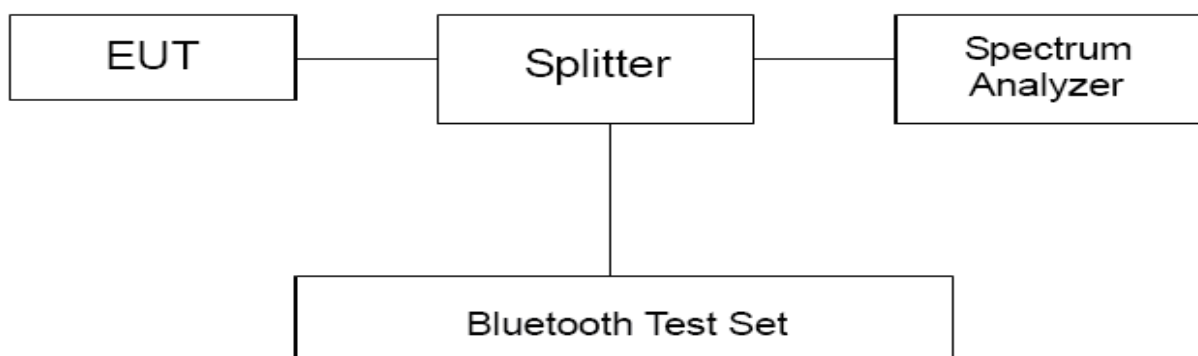

Limits

Rule Part15.247(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

Dwell time	$\leq 400\text{ms}$
------------	---------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$.


Requirements	Uncertainty					
Dwell Time	DH5	$U=0.70\text{ms}$	2DH5	$U=0.70\text{ms}$	3DH5	$U=0.70\text{ms}$

Test Results:


Channel 39					
Packet type	hop rate (1/s)	Time slot length(ms)	Dwell time (ms)	Limit (ms)	Conclusion
DH5	266.67	2.88	307.20	400	PASS
2DH5	266.67	2.88	307.20	400	PASS
3DH5	266.67	2.88	307.20	400	PASS

Note: Dwell time = time slot length * hop rate * 0.4s


BT DH5 CH39, Carrier frequency (MHz): 2441

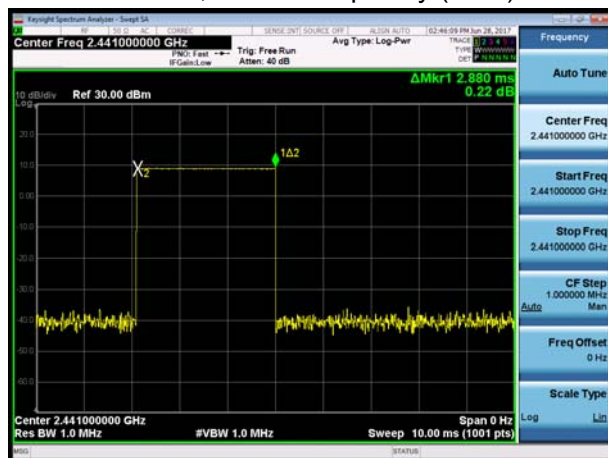

BT 2DH5 CH39, Carrier frequency (MHz): 2441

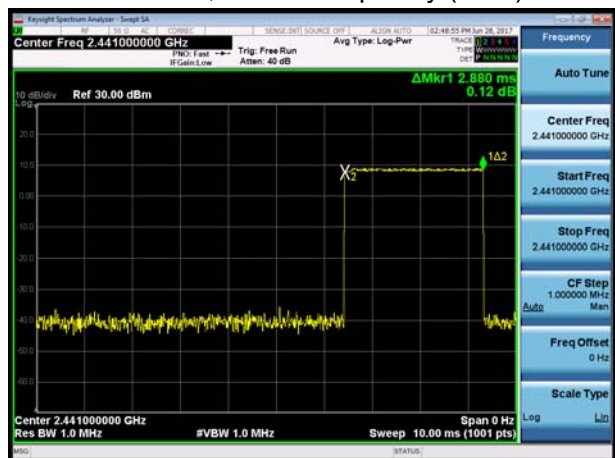

BT 3DH5 CH39, Carrier frequency (MHz): 2441

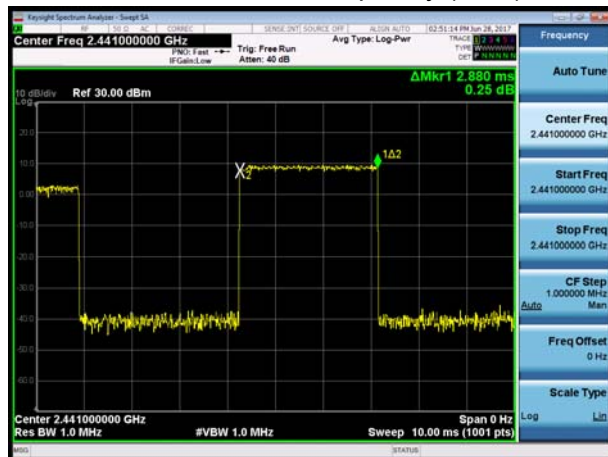

4.6 Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The lowest and highest channels were measured. The peak detector is used. RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. EUT test for Hopping On mode and Hopping Off mode.

Test Setup

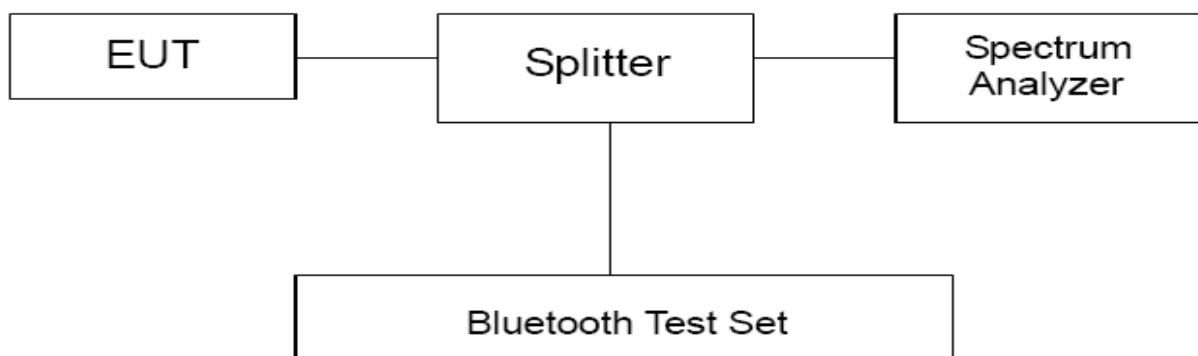

Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results

Hopping On


BT DH5 CH0, Carrier frequency (MHz): 2402

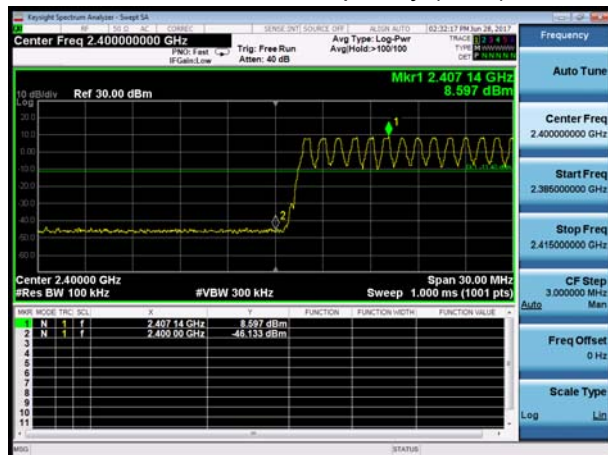


BT DH5 CH78, Carrier frequency (MHz): 2480

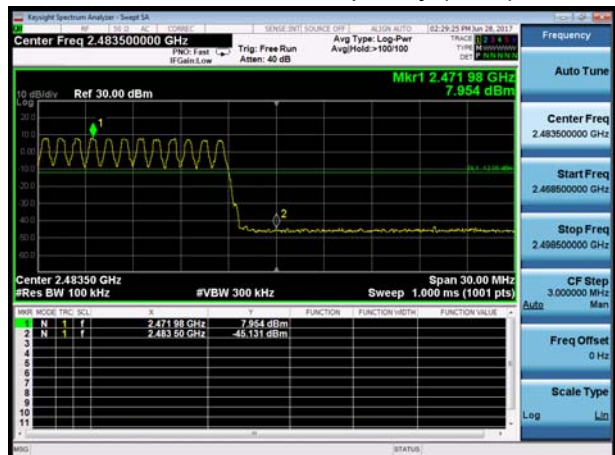


BT 2DH5 CH0, Carrier frequency (MHz): 2402

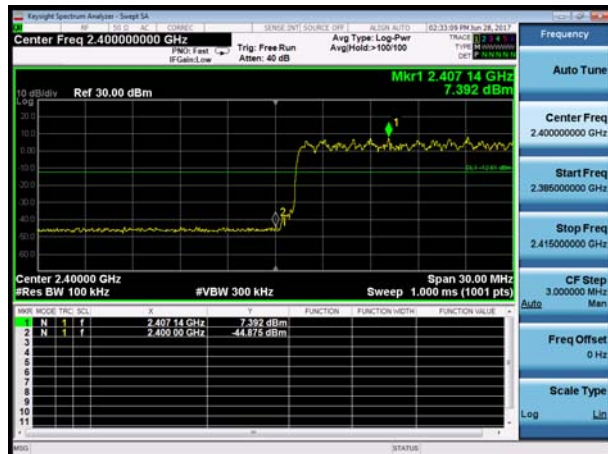


BT 2DH5 CH78, Carrier frequency (MHz): 2480

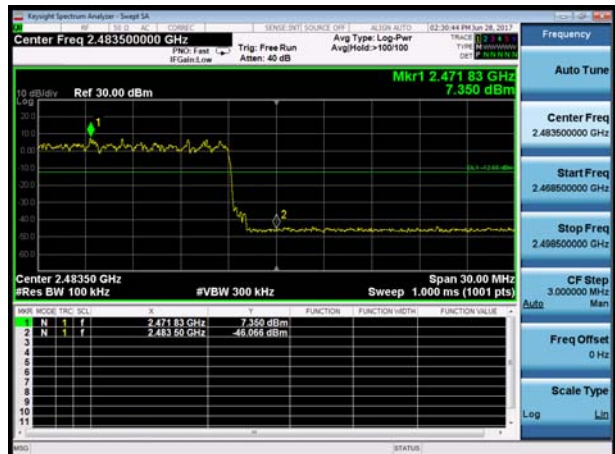

BT 3DH5 CH0, Carrier frequency (MHz): 2402

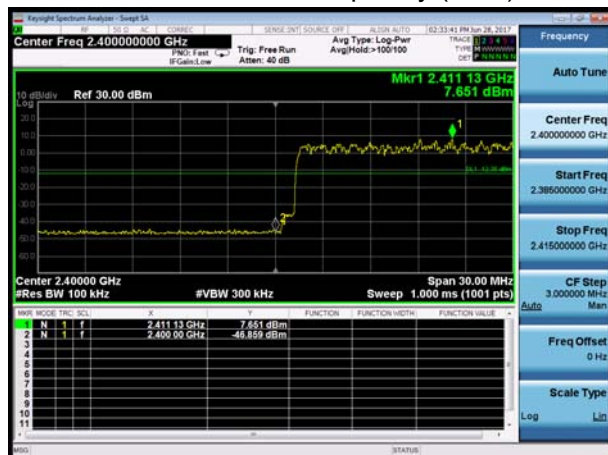


BT 3DH5 CH78, Carrier frequency (MHz): 2480

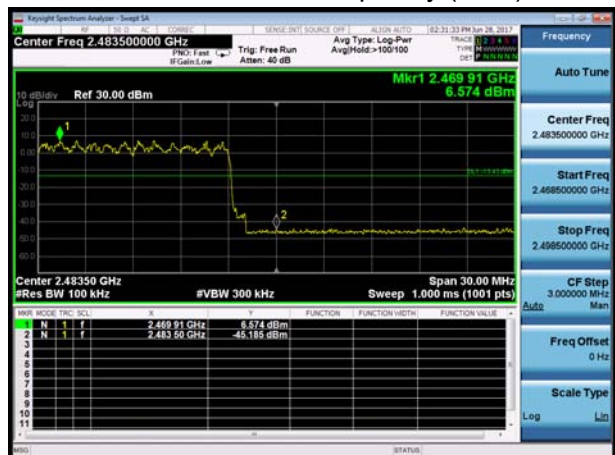




Hopping Off


BT DH5 CH0, Carrier frequency (MHz): 2402

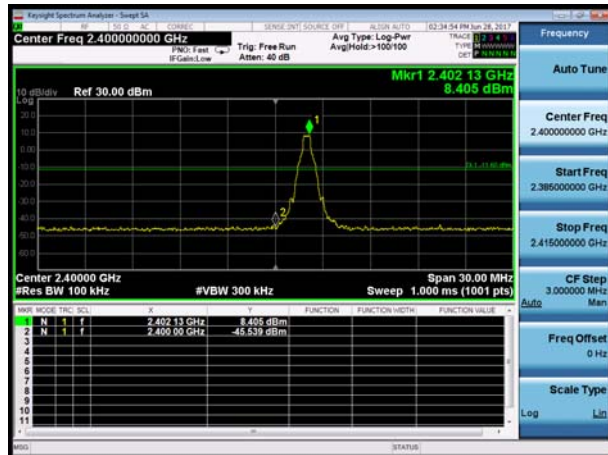


BT DH5 CH78, Carrier frequency (MHz): 2480

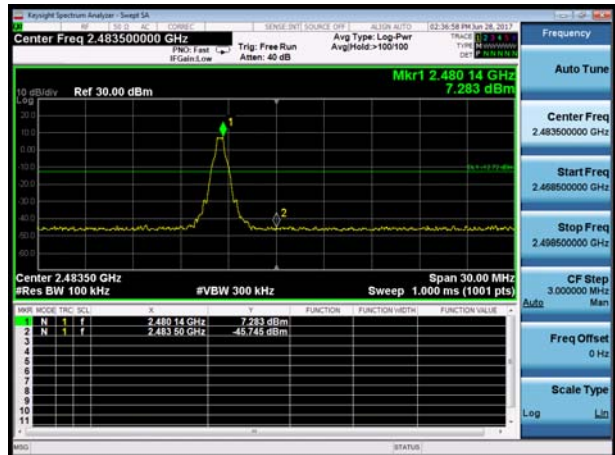


BT 2DH5 CH0, Carrier frequency (MHz): 2402

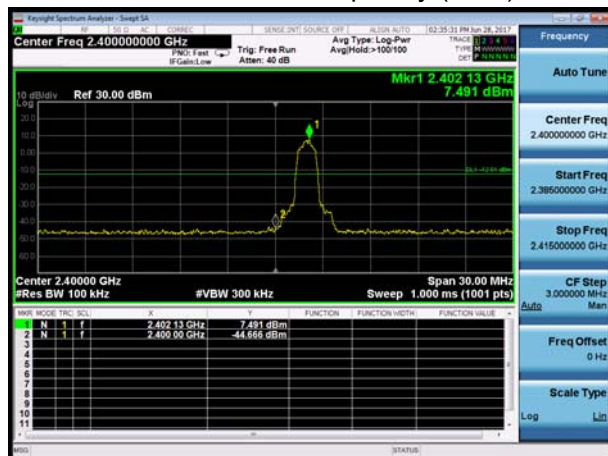


BT 2DH5 CH78, Carrier frequency (MHz): 2480

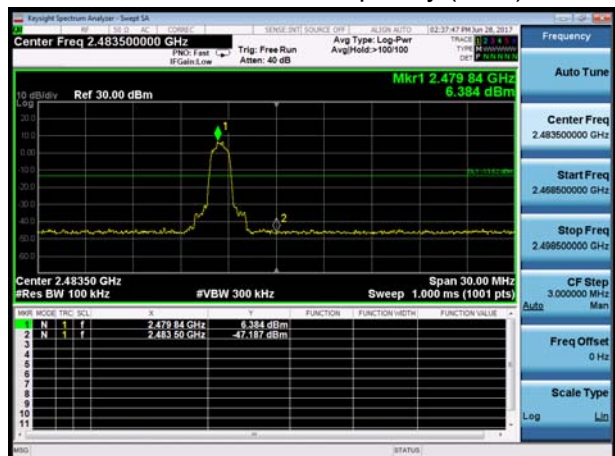

BT 3DH5 CH0, Carrier frequency (MHz): 2402

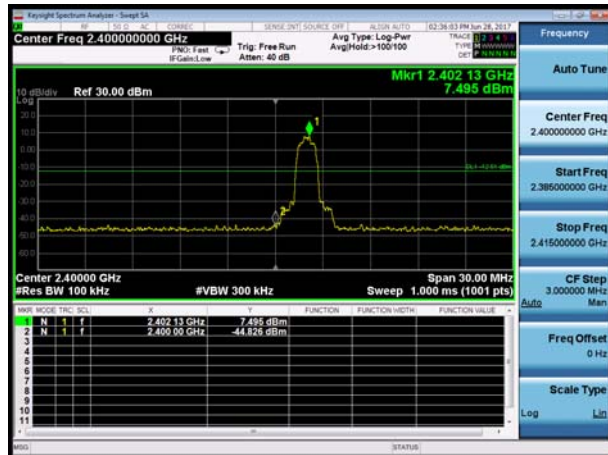

BT 3DH5 CH78, Carrier frequency (MHz): 2480

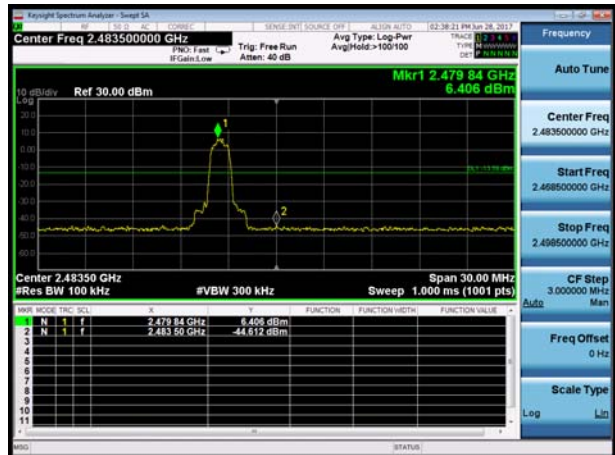

4.7 Spurious Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.


Set the spectrum analyzer in the following:

- (a) PEAK: RBW=1MHz; VBW=3MHz / Sweep=AUTO
 - (b) The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
- If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak- average correction factor, derived from the appropriate duty cycle calculation.

This setting method can refer to **DA00-705**.

The test is in transmitting mode. The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis) and docking mode. The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

Test setup

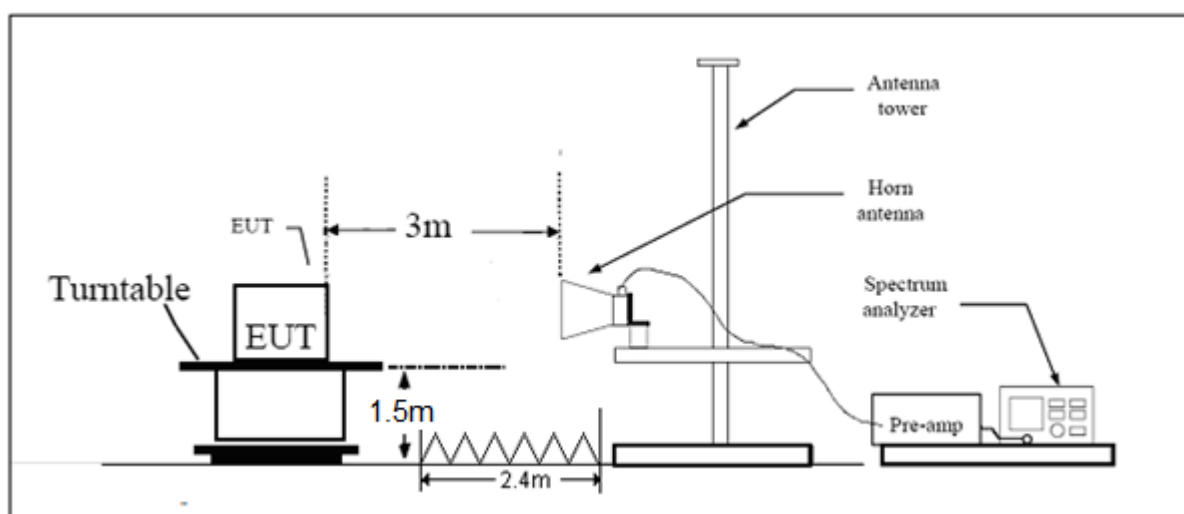

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74dBuV/m

Average Limit=54dBuV/m


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.




Test Results:


DH5-Channel 0: Peak

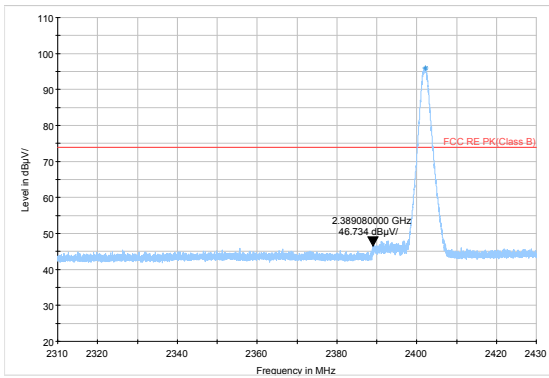


DH5-Channel 0: Average

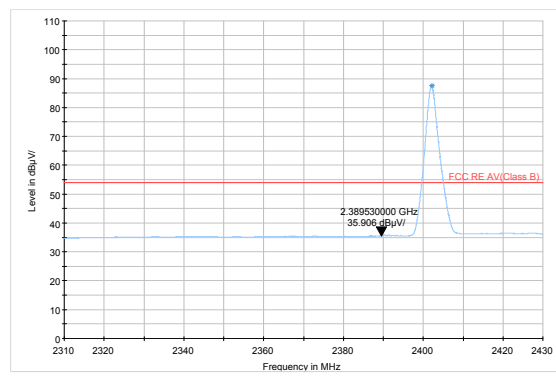


DH5-Channel 78: Peak

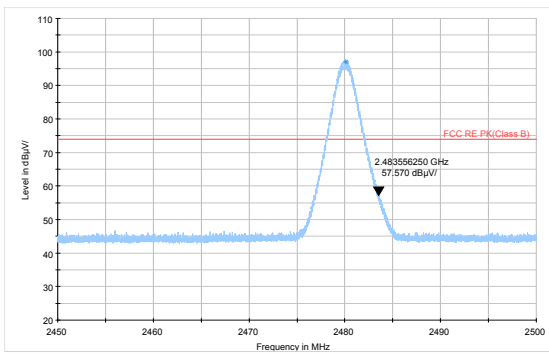


DH5-Channel 78: Average

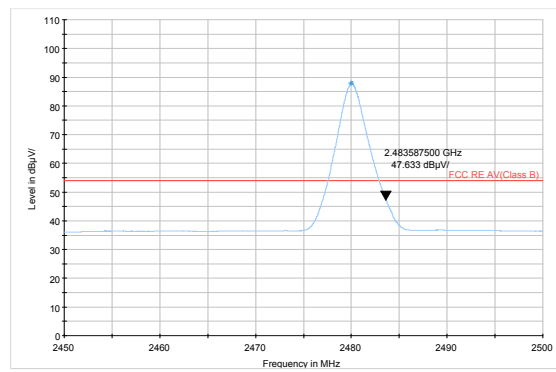


3DH5-Channel 0: Peak

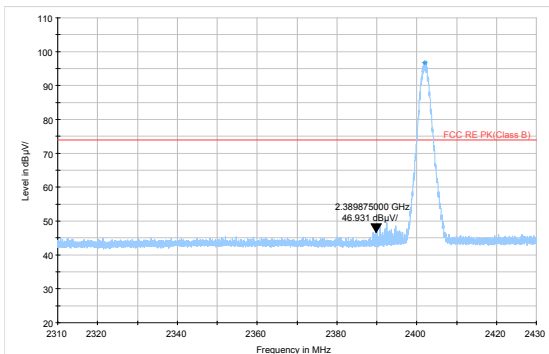


3DH5-Channel 0: Average

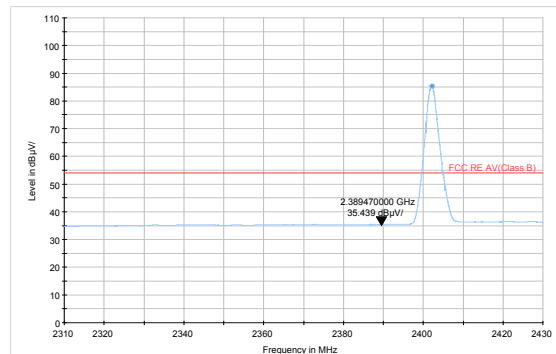

3DH5-Channel 78: Peak

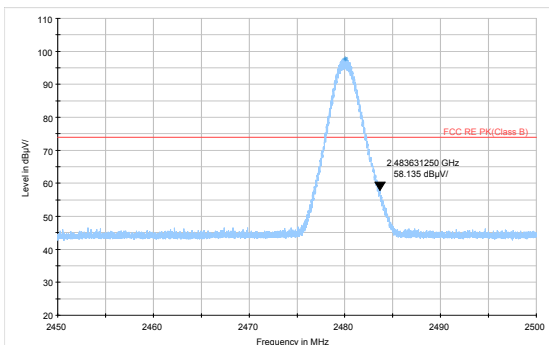

3DH5-Channel 78: Average

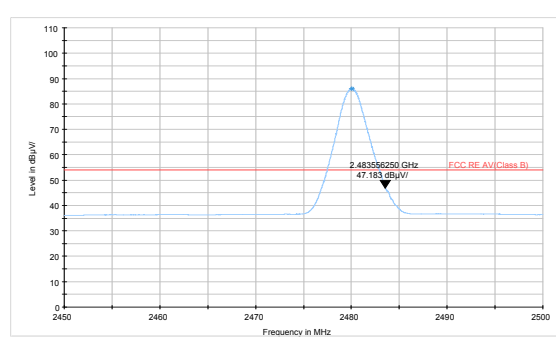

4.8 Number of hopping Frequency


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 1 MHz on spectrum analyzer. Set EUT on Hopping on mode.

Test setup

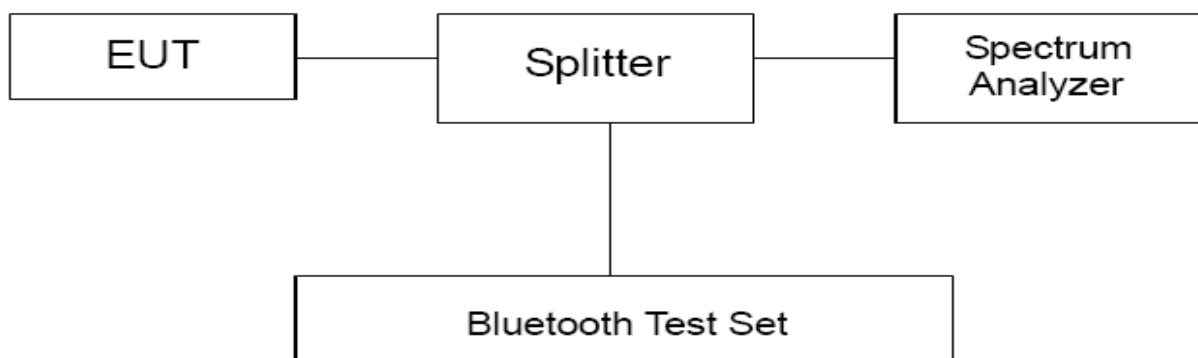

Limits


Rule Part 15.247(a) (1) (iii) specifies that" Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels."

Limits	≥ 15 channels
--------	---------------


Test Results:

	Number of hopping channels	conclusion
DH5	79	PASS
2DH5	79	PASS
3DH5	79	PASS


DH5 2400 MHz – 2483.5 MHz

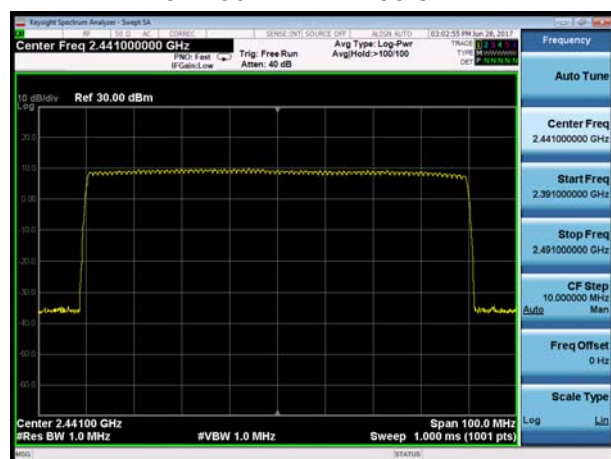

2DH5 2400 MHz – 2483.5 MHz

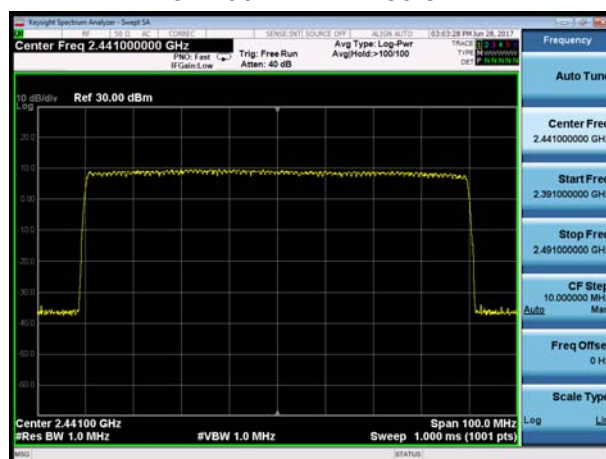

3DH5 2400 MHz – 2483.5 MHz

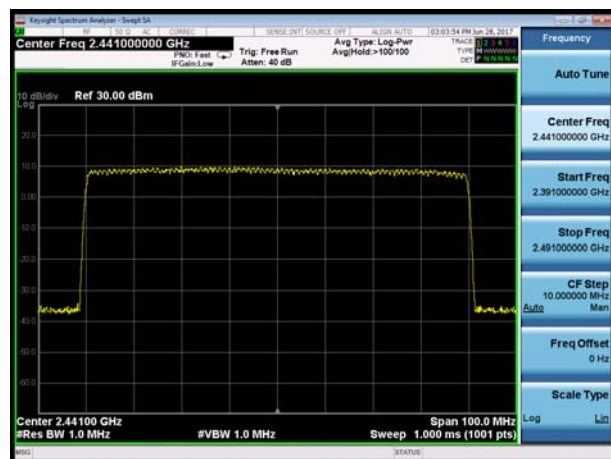

4.9 Spurious RF Conducted Emissions

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW 100kHz and VBW 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup

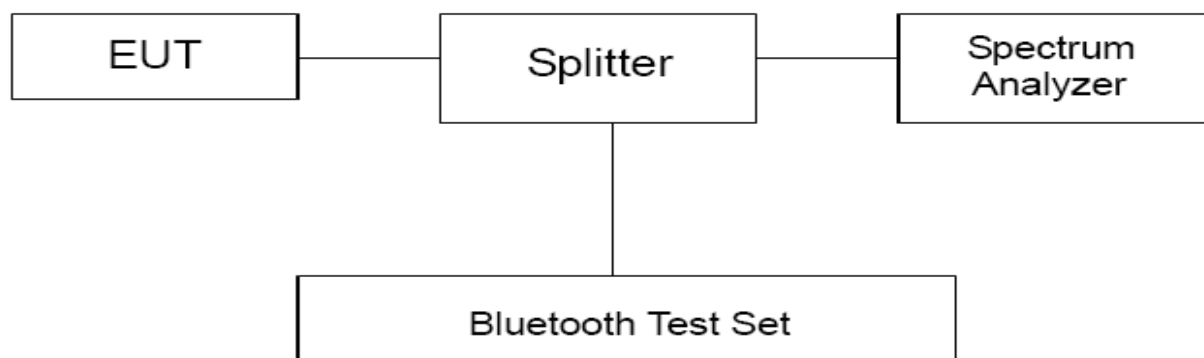

Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
DH5	2402	6.431	-13.569
	2441	7.436	-12.564
	2480	5.803	-14.197
EDR (3DH5)	2402	1.778	-18.222
	2441	3.145	-16.855
	2480	2.322	-17.678




Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

**Test Results:**


GFSK-CH0 30MHz to 18GHz

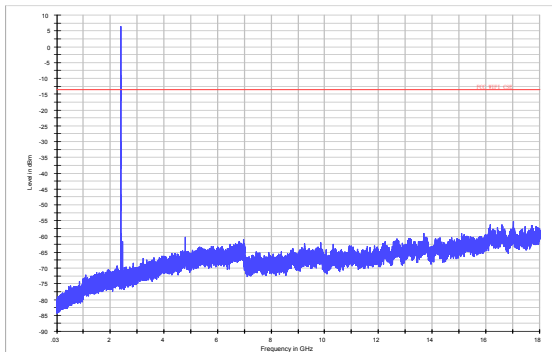


GFSK-CH0 18GHz to 26.5GHz

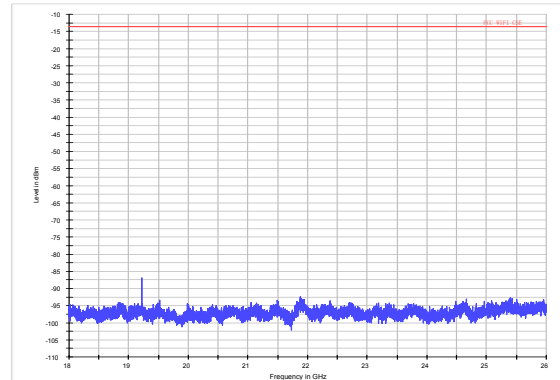


GFSK-CH39 30MHz to 18GHz

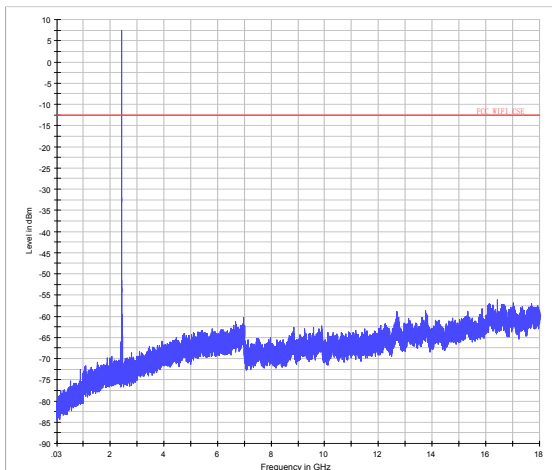


GFSK-CH39 18GHz to 26.5GHz

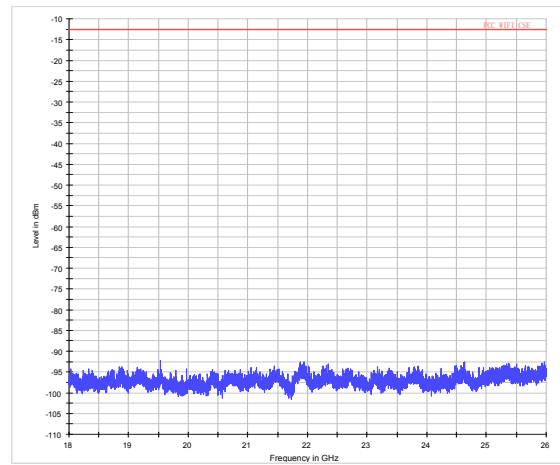

GFSK-CH78 30MHz to 18GHz

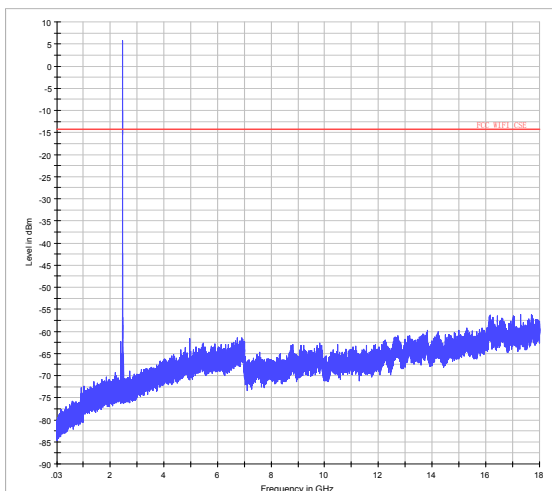


GFSK-CH78 18GHz to 26.5GHz

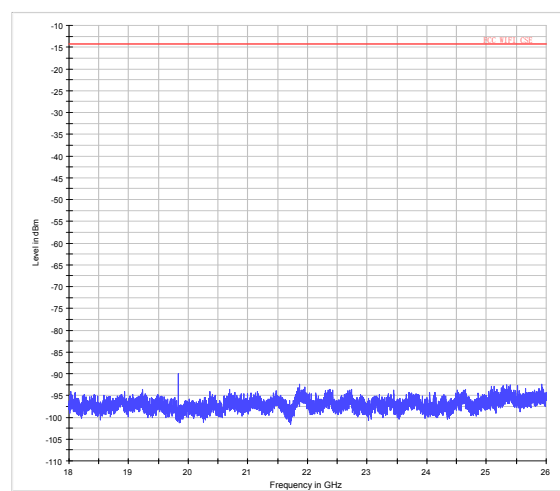





EDR-CH0 30MHz to 18GHz

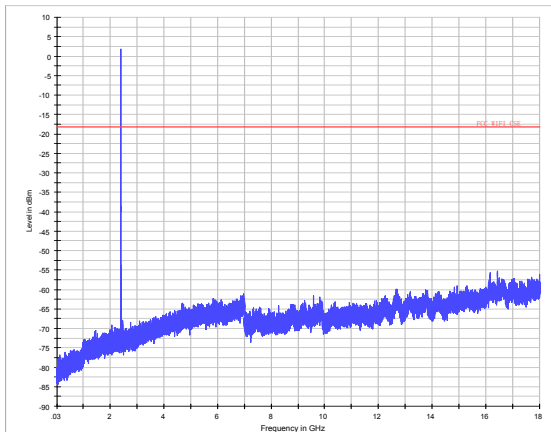


EDR-CH0 18GHz to 26.5GHz

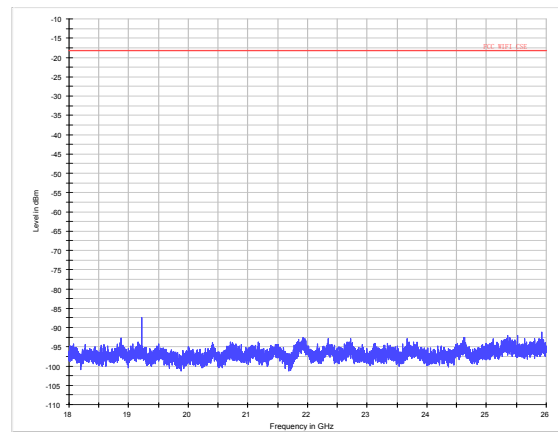


EDR-CH39 30MHz to 18GHz

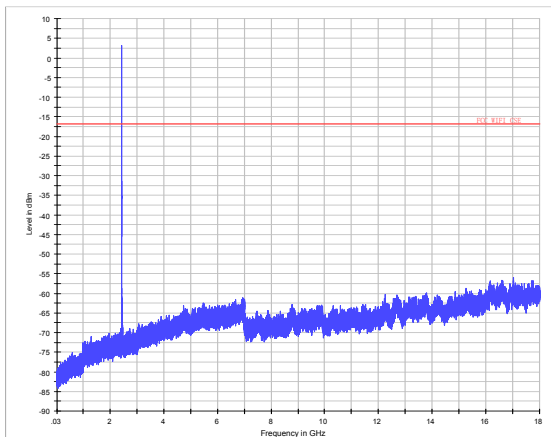


EDR-CH39 18GHz to 26.5GHz

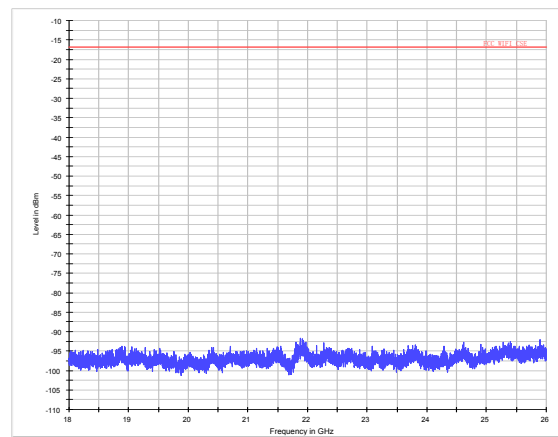

EDR-CH78 30MHz to 18GHz

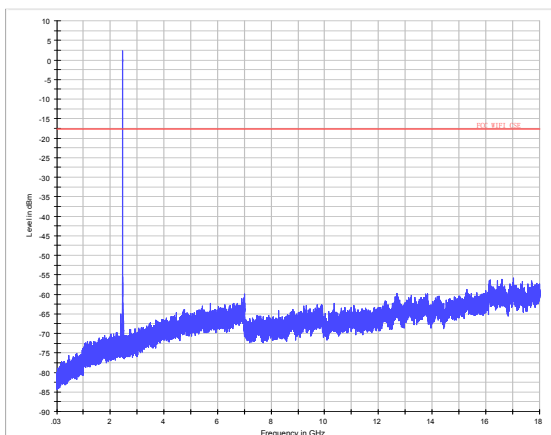

EDR-CH78 18GHz to 26.5GHz

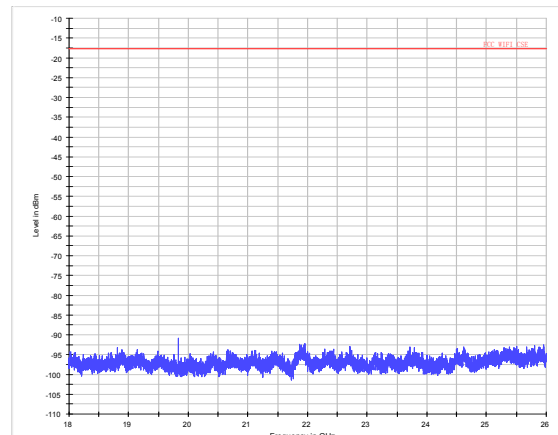

4.10 Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded. Then this mode was measured in the following mode: EUT with cradle and EUT without cradle. The worst emission was found in EUT with cradle mode and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

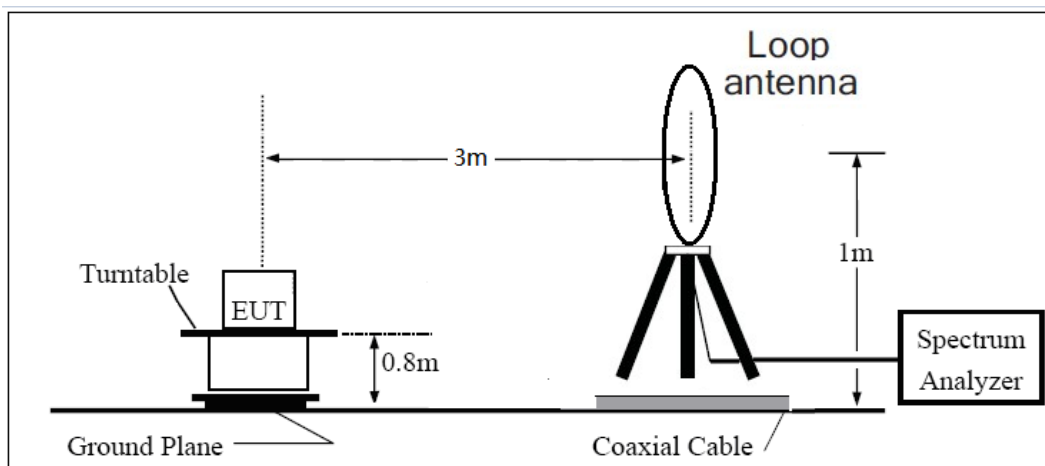

30MHz ~ 1GHz

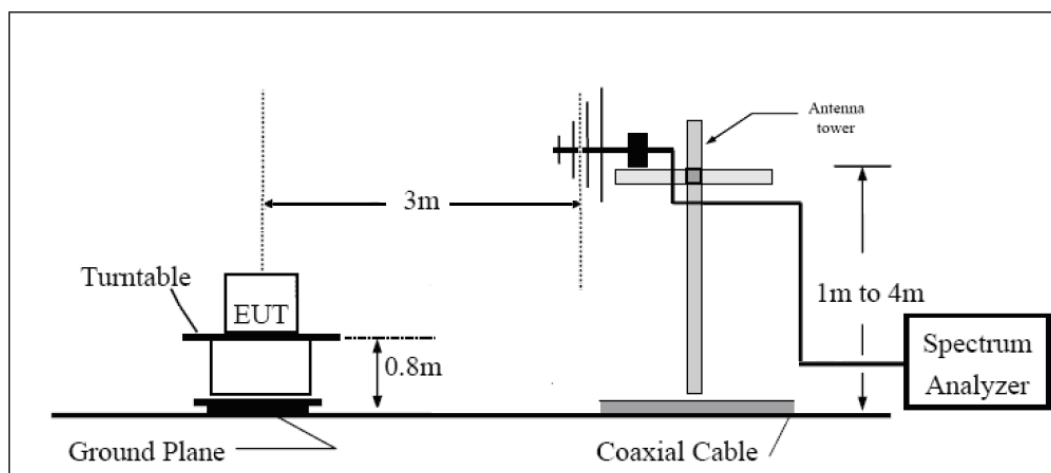

Above 1GHz

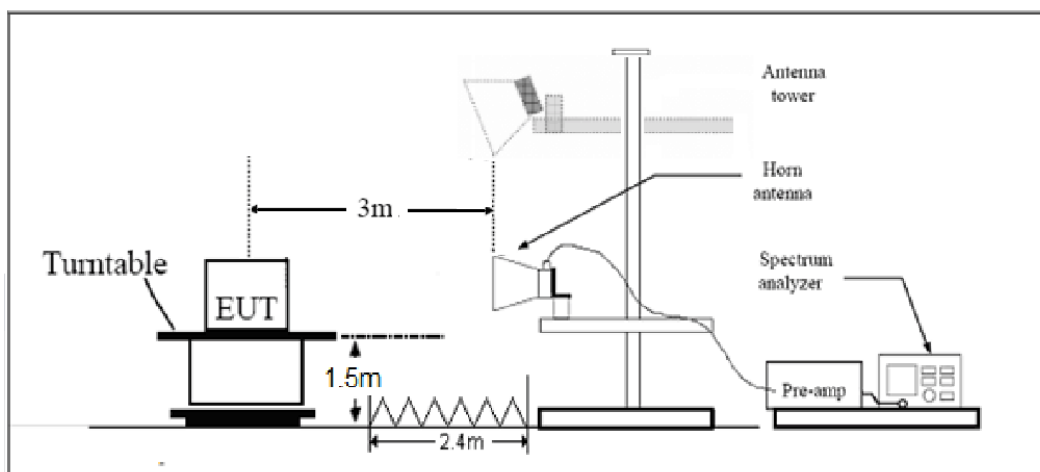

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

GFSK-Channel 0

FCC RE 0.03-1GHz QP Class B

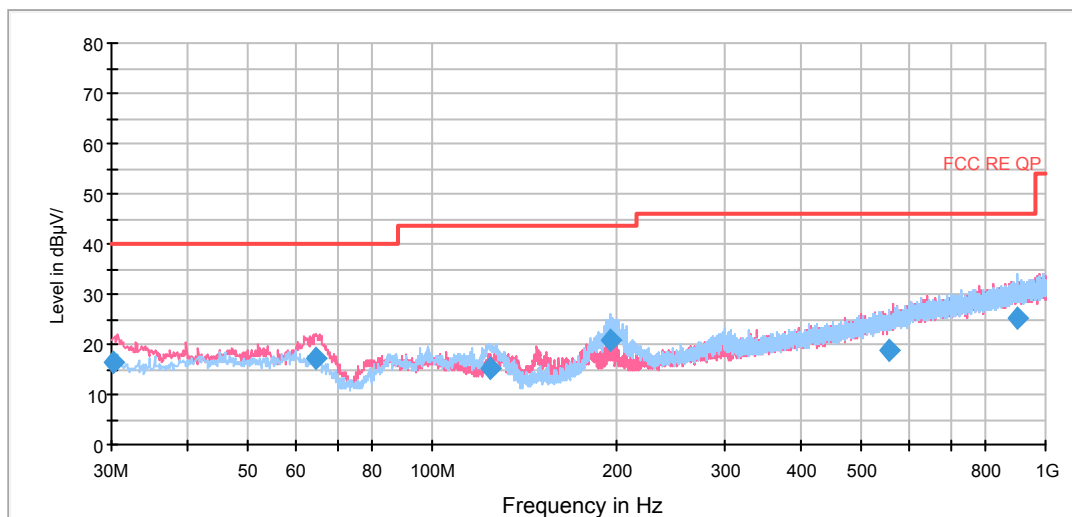


Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.127500	16.3	100.0	V	138.0	4.2	12.1	23.7	40.0
64.518750	17.3	100.0	V	127.0	6.4	10.9	22.7	40.0
124.328750	15.4	225.0	H	0.0	5.2	10.2	28.1	43.5
195.262500	20.7	175.0	H	252.0	8.8	11.9	22.8	43.5
555.978750	18.9	213.0	H	310.0	-2.9	21.8	27.1	46.0
901.987500	25.3	175.0	H	346.0	-1.5	26.8	20.7	46.0

RE 1G-3GHz PK+AV

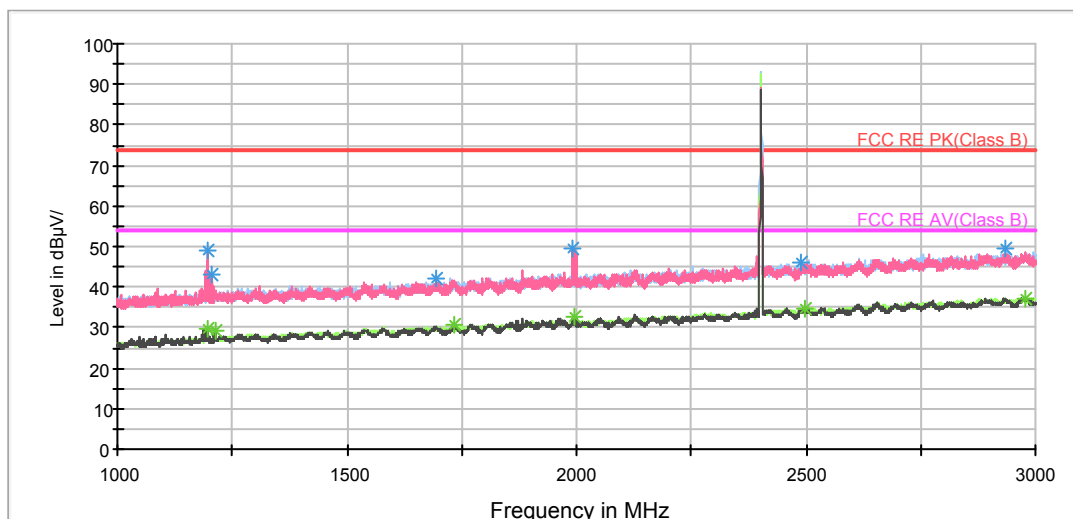


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	48.9	202.0	V	159.0	57.1	-8.2	25.1	74
1207.250000	43.2	202.0	V	167.0	51.3	-8.1	30.8	74
1696.000000	42.0	101.0	H	114.0	47.0	-5.0	32.0	74
1991.250000	49.6	102.0	V	147.0	52.9	-3.3	24.4	74
2489.750000	46.1	101.0	H	99.0	45.8	0.3	27.9	74
2935.750000	49.3	202.0	H	109.0	47.5	1.8	24.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	29.8	202.0	V	167.0	38.0	-8.2	24.2	54
1214.000000	29.0	202.0	V	159.0	37.0	-8.0	25.0	54
1732.000000	30.5	202.0	H	123.0	35.3	-4.8	23.5	54
1997.750000	32.6	102.0	V	154.0	35.9	-3.3	21.4	54
2496.750000	34.5	101.0	H	59.0	34.5	0.0	19.5	54
2977.250000	37.4	102.0	V	95.0	35.2	2.2	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV_BELL SWEEP

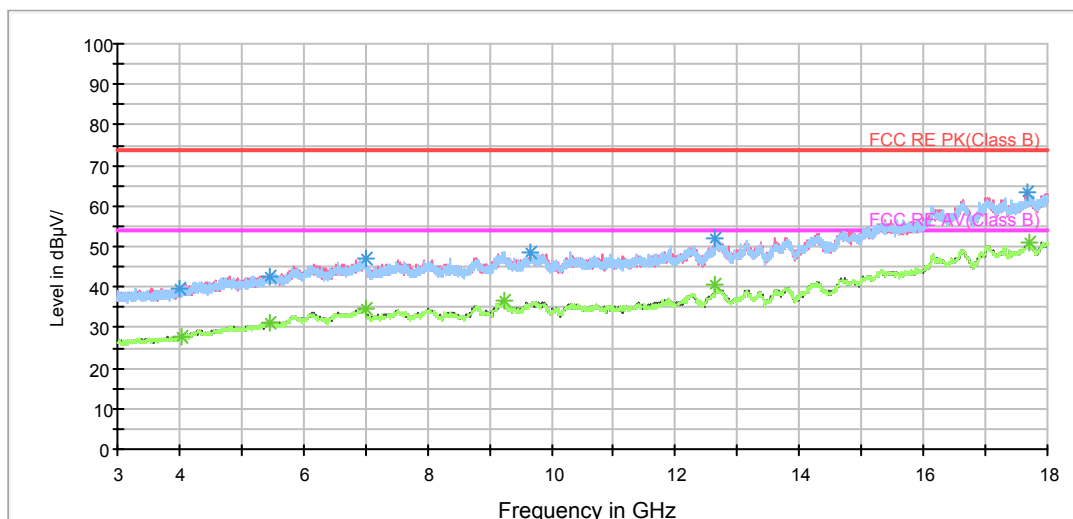


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4008.750000	39.6	205.0	H	273.0	40.7	-1.1	34.4	74
5445.000000	42.8	205.0	H	0.0	39.9	2.9	31.2	74
6995.625000	46.8	105.0	H	0.0	40.3	6.5	27.2	74
9648.750000	48.6	205.0	V	252.0	38.8	9.8	25.4	74
12639.375000	52.2	105.0	V	0.0	37.7	14.5	21.8	74
17692.500000	63.5	105.0	V	248.0	38.9	24.6	10.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4040.625000	27.8	205.0	V	338.0	28.8	-1.0	26.2	54
5450.625000	31.2	205.0	V	0.0	28.4	2.8	22.8	54
6997.500000	34.6	105.0	V	0.0	28.1	6.5	19.4	54
9240.000000	36.5	205.0	V	34.0	26.6	9.9	17.5	54
12641.250000	40.4	205.0	V	61.0	25.9	14.5	13.6	54
17701.875000	51.2	105.0	H	29.0	26.5	24.7	2.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

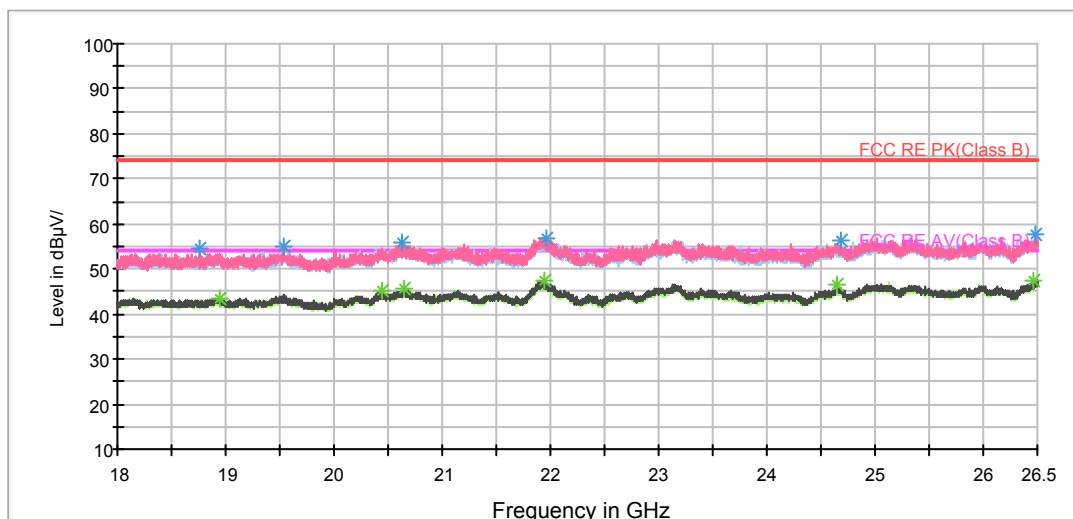


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18759.687500	54.3	105.0	V	0.0	54.3	0.0	19.7	74
19540.625000	54.8	105.0	V	88.0	54.8	0.0	19.2	74
20629.687500	55.8	105.0	V	0.0	57.0	-1.2	18.2	74
21963.125000	56.9	105.0	V	59.0	58.1	-1.2	17.1	74
24684.187500	56.4	105.0	H	309.0	56.6	-0.2	17.6	74
26489.375000	57.7	105.0	H	350.0	56.6	1.1	16.3	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18944.562500	43.5	105.0	V	123.0	43.5	0.0	10.5	54
20440.562500	45.0	105.0	V	48.0	45.9	-0.9	9.0	54
20655.187500	45.5	105.0	V	175.0	46.8	-1.3	8.5	54
21953.562500	47.3	105.0	V	123.0	48.6	-1.3	6.7	54
24656.562500	46.4	105.0	H	198.0	46.6	-0.2	7.6	54
26468.125000	47.5	105.0	H	71.0	46.4	1.1	6.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

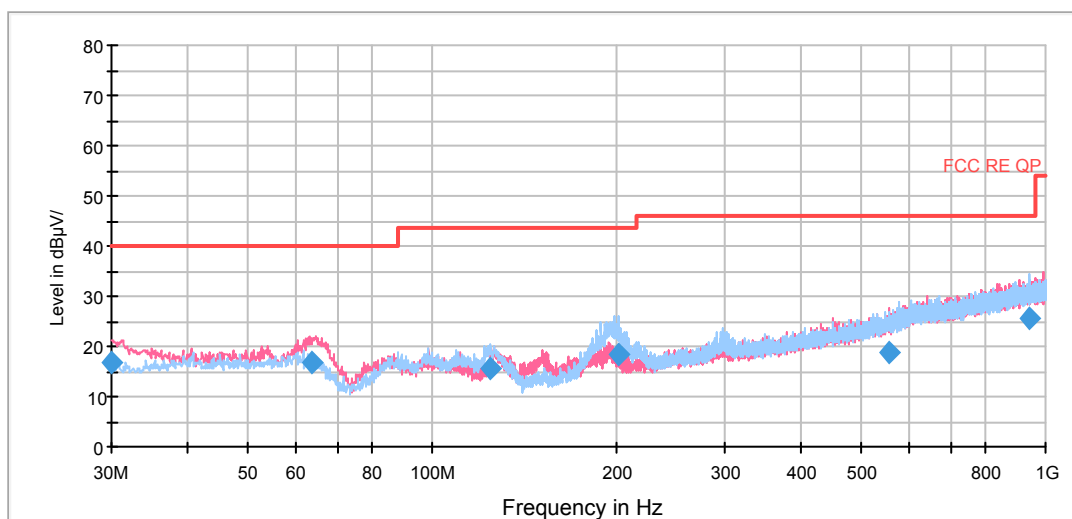

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.000000	16.6	100.0	V	117.0	4.5	12.1	23.4	40.0
63.580000	16.8	100.0	V	155.0	5.7	11.1	23.2	40.0
124.410000	15.4	225.0	H	0.0	5.2	10.2	28.1	43.5
201.608750	18.6	100.0	H	240.0	6.4	12.2	24.9	43.5
557.153750	18.9	213.0	V	30.0	-2.9	21.8	27.1	46.0
939.898750	25.7	100.0	H	75.0	-1.4	27.1	20.3	46.0

RE 1G-3GHz PK+AV

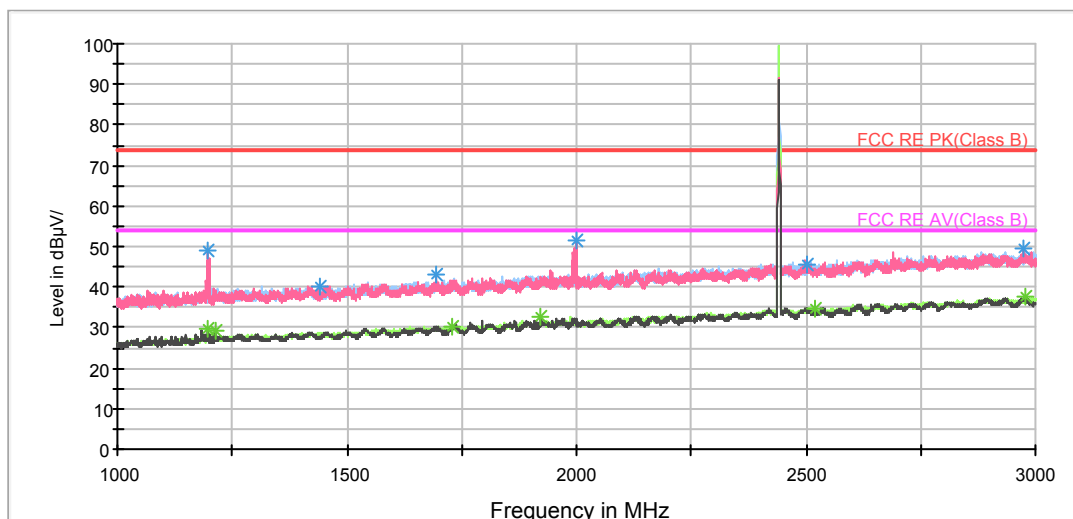


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.250000	49.1	202.0	V	160.0	57.3	-8.2	24.9	74
1441.250000	40.3	202.0	H	125.0	47.2	-6.9	33.7	74
1696.250000	43.1	202.0	V	269.0	48.1	-5.0	30.9	74
1999.750000	51.6	202.0	V	144.0	55.0	-3.4	22.4	74
2502.750000	45.4	202.0	H	208.0	45.6	-0.2	28.6	74
2972.750000	49.3	202.0	V	357.0	47.1	2.2	24.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.250000	29.7	202.0	V	160.0	37.9	-8.2	24.3	54
1212.000000	29.0	202.0	V	160.0	37.0	-8.0	25.0	54
1731.000000	30.4	202.0	H	0.0	35.3	-4.9	23.6	54
1923.500000	32.7	202.0	V	68.0	36.6	-3.9	21.3	54
2520.750000	34.8	202.0	H	29.0	35.1	-0.3	19.2	54
2977.500000	37.4	202.0	V	211.0	35.2	2.2	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV_BELL SWEEP

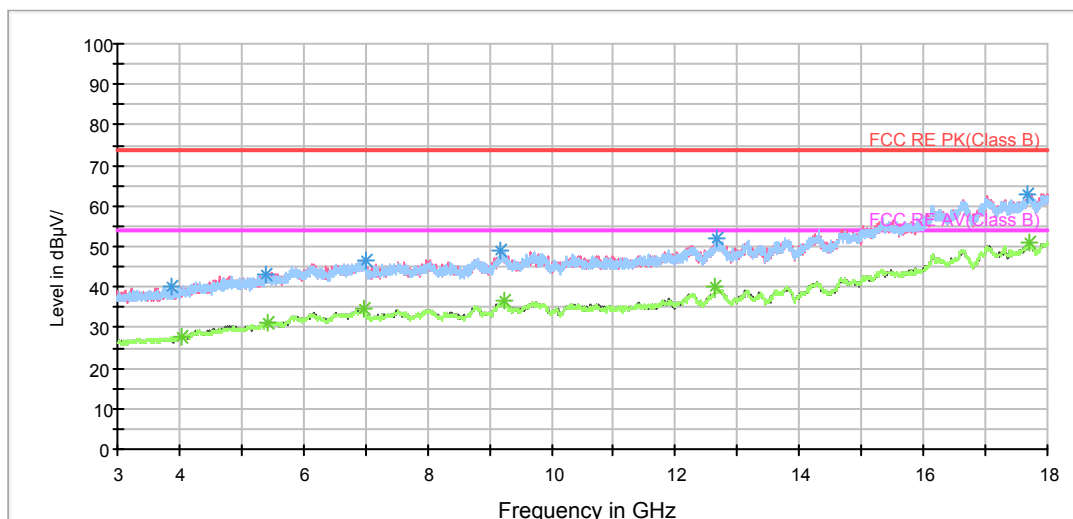


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3868.125000	39.9	106.0	H	7.0	41.4	-1.5	34.1	74
5386.875000	43.3	106.0	H	0.0	40.9	2.4	30.7	74
6995.625000	46.4	205.0	V	57.0	39.9	6.5	27.6	74
9166.875000	48.9	205.0	V	0.0	38.7	10.2	25.1	74
12656.250000	52.1	105.0	V	0.0	38.2	13.9	21.9	74
17692.500000	63.1	205.0	V	0.0	38.5	24.6	10.9	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4040.625000	27.8	205.0	H	0.0	28.8	-1.0	26.2	54
5439.375000	31.2	106.0	H	89.0	28.3	2.9	22.8	54
6991.875000	34.8	205.0	V	169.0	28.3	6.5	19.2	54
9234.375000	36.5	105.0	V	81.0	26.6	9.9	17.5	54
12641.250000	40.1	105.0	V	357.0	25.6	14.5	13.9	54
17709.375000	51.1	106.0	H	115.0	26.4	24.7	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

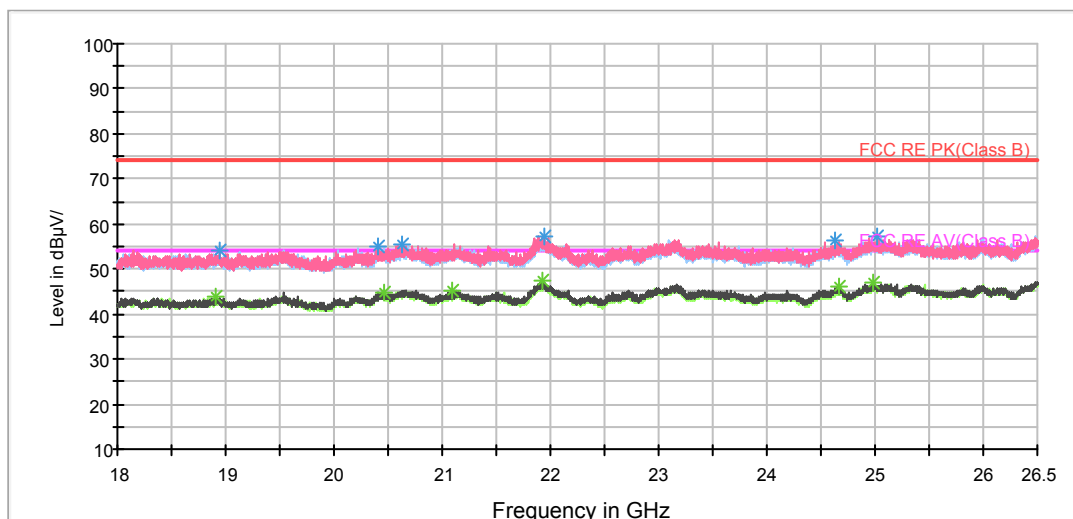


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18938.187500	54.1	105.0	V	27.0	54.1	0.0	19.9	74
20416.125000	55.0	105.0	V	71.0	55.9	-0.9	19.0	74
20625.437500	55.6	105.0	V	7.0	56.8	-1.2	18.4	74
21942.937500	57.4	105.0	H	340.0	58.8	-1.4	16.6	74
24625.750000	56.2	105.0	V	0.0	56.4	-0.2	17.8	74
25021.000000	57.2	105.0	V	0.0	56.2	1.0	16.8	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18912.687500	43.7	105.0	V	0.0	43.6	0.1	10.3	54
20454.375000	44.7	105.0	H	71.0	45.6	-0.9	9.3	54
21098.250000	45.3	105.0	V	257.0	46.7	-1.4	8.7	54
21920.625000	47.3	105.0	V	247.0	48.8	-1.5	6.7	54
24667.187500	46.1	105.0	V	247.0	46.3	-0.2	7.9	54
24981.687500	47.0	105.0	V	48.0	46.0	1.0	7.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

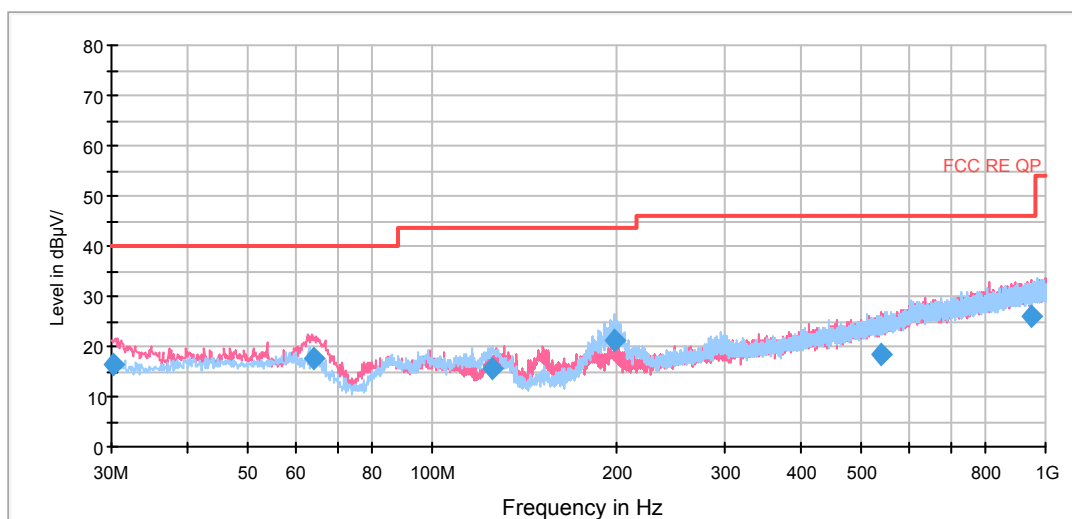

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.127500	16.4	100.0	V	160.0	4.3	12.1	23.6	40.0
64.228750	17.5	100.0	V	133.0	6.5	11.0	22.5	40.0
124.900000	15.5	225.0	H	0.0	5.3	10.2	28.0	43.5
197.975000	21.1	175.0	H	238.0	9.0	12.1	22.4	43.5
540.987500	18.4	100.0	V	339.0	-3.0	21.4	27.6	46.0
947.215000	25.9	225.0	V	321.0	-1.3	27.2	20.1	46.0

RE 1G-3GHz PK+AV

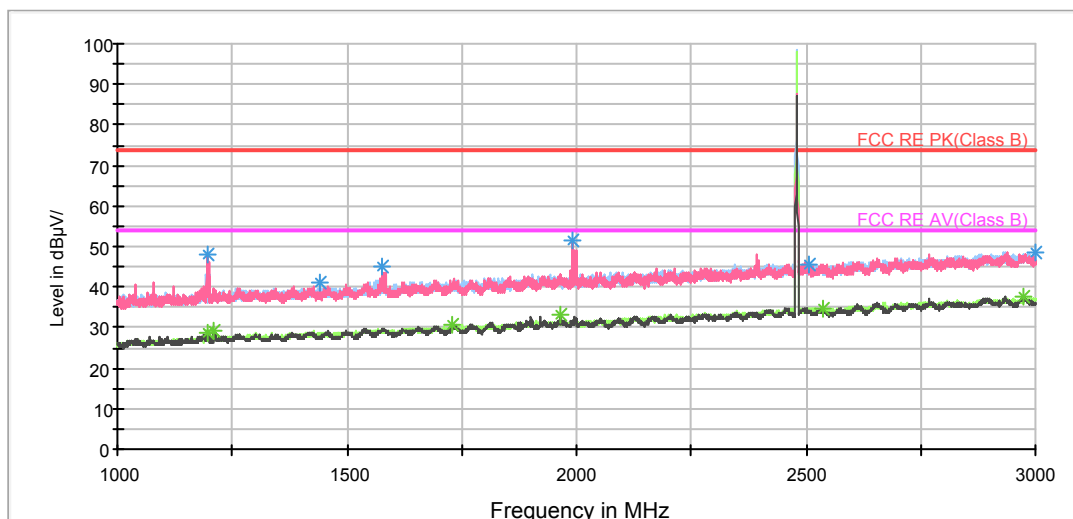


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	48.1	202.0	V	158.0	56.3	-8.2	25.9	74
1441.000000	40.9	202.0	H	205.0	47.8	-6.9	33.1	74
1576.250000	45.3	102.0	V	222.0	51.7	-6.4	28.7	74
1992.500000	51.5	102.0	V	163.0	54.8	-3.3	22.5	74
2507.000000	45.5	102.0	V	0.0	45.7	-0.2	28.5	74
2998.000000	48.5	102.0	H	0.0	46.2	2.3	25.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	29.0	202.0	V	187.0	37.2	-8.2	25.0	54
1210.250000	29.2	202.0	V	216.0	37.3	-8.1	24.8	54
1731.250000	30.7	102.0	V	9.0	35.6	-4.9	23.3	54
1965.500000	33.0	102.0	V	171.0	36.4	-3.4	21.0	54
2536.000000	34.5	202.0	V	0.0	34.9	-0.4	19.5	54
2971.750000	37.7	102.0	V	76.0	35.5	2.2	16.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV_BELL SWEEP

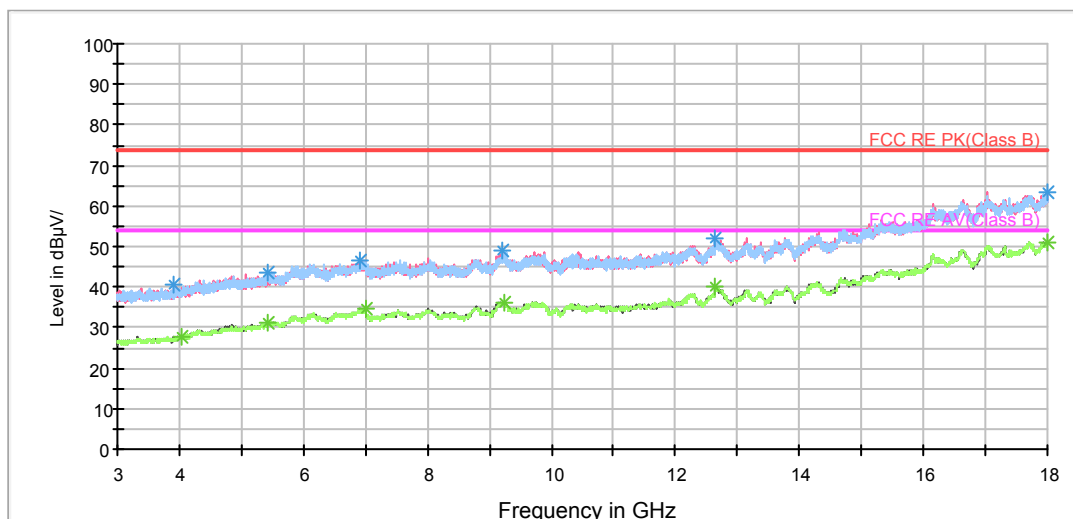


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3916.875000	40.4	205.0	H	272.0	41.6	-1.2	33.6	74
5430.000000	43.4	205.0	H	272.0	40.6	2.8	30.6	74
6915.000000	46.7	105.0	V	0.0	40.5	6.2	27.3	74
9196.875000	49.2	205.0	H	245.0	39.0	10.2	24.8	74
12646.875000	51.8	205.0	H	0.0	37.5	14.3	22.2	74
18000.000000	63.5	105.0	V	135.0	38.0	25.5	10.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4042.500000	27.7	205.0	H	326.0	28.7	-1.0	26.3	54
5435.625000	31.1	205.0	H	326.0	28.2	2.9	22.9	54
6995.625000	34.6	205.0	V	0.0	28.1	6.5	19.4	54
9232.500000	36.3	105.0	V	218.0	26.4	9.9	17.7	54
12641.250000	40.3	105.0	V	0.0	25.8	14.5	13.7	54
18000.000000	51.1	205.0	V	0.0	25.6	25.5	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

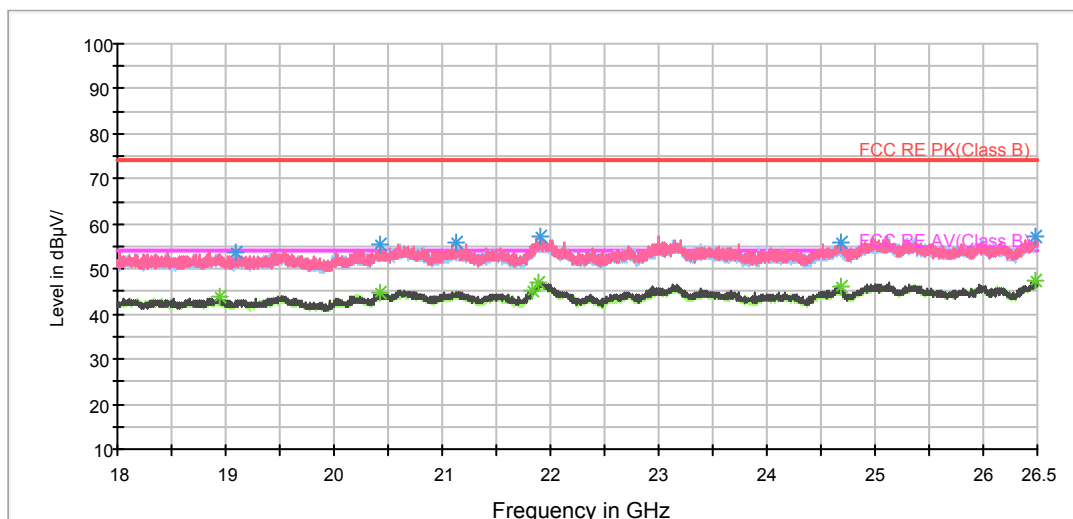


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19100.750000	53.7	105.0	H	296.0	54.2	-0.5	20.3	74
20434.187500	55.5	105.0	V	81.0	56.4	-0.9	18.5	74
21131.187500	55.8	105.0	V	8.0	57.2	-1.4	18.2	74
21910.000000	57.3	105.0	V	197.0	58.8	-1.5	16.7	74
24679.937500	55.8	105.0	V	208.0	56.0	-0.2	18.2	74
26479.812500	57.2	105.0	V	132.0	56.1	1.1	16.8	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18942.437500	43.8	105.0	V	40.0	43.8	0.0	10.2	54
20420.375000	44.7	105.0	V	176.0	45.6	-0.9	9.3	54
21834.562500	45.2	105.0	V	30.0	47.1	-1.9	8.8	54
21895.125000	47.0	105.0	H	0.0	48.6	-1.6	7.0	54
24690.562500	46.2	105.0	V	102.0	46.4	-0.2	7.8	54
26483.000000	47.4	105.0	V	333.0	46.3	1.1	6.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

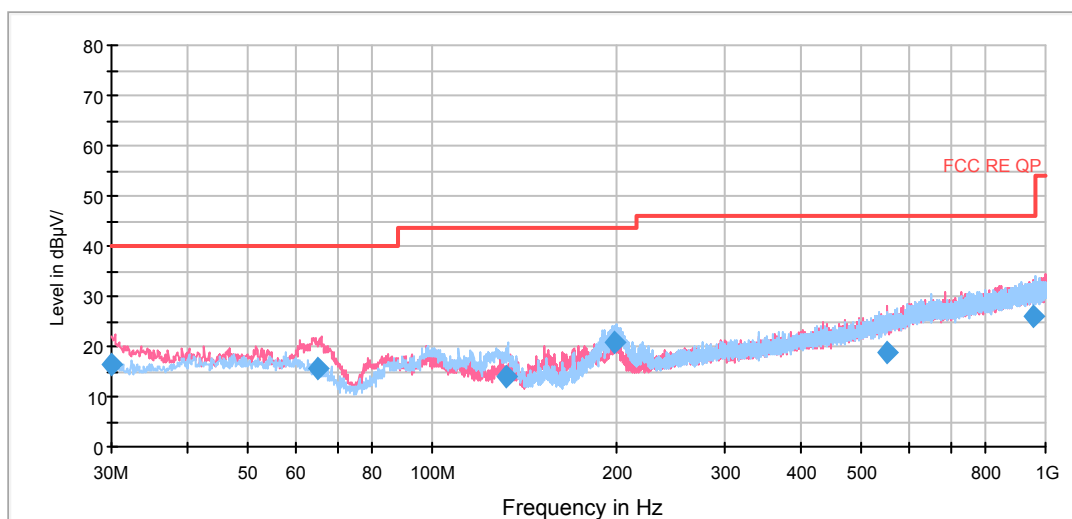

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.000000	16.3	100.0	V	113.0	4.2	12.1	23.7	40.0
65.290000	15.7	100.0	V	144.0	5.3	10.4	24.3	40.0
132.098750	14.0	175.0	H	42.0	4.7	9.3	29.5	43.5
198.985000	20.9	125.0	H	273.0	8.8	12.1	22.6	43.5
551.981250	18.6	125.0	V	256.0	-3.0	21.6	27.4	46.0
952.992500	25.9	175.0	V	97.0	-1.4	27.3	20.1	46.0

RE 1G-3GHz PK+AV

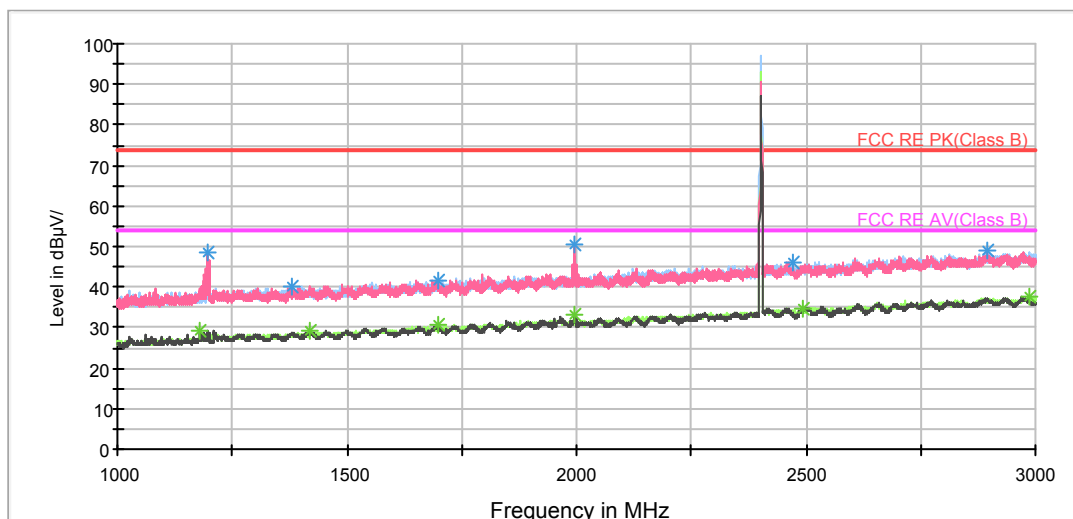


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.250000	48.7	202.0	V	164.0	56.9	-8.2	25.3	74
1381.750000	40.2	202.0	V	93.0	47.2	-7.0	33.8	74
1698.250000	41.8	102.0	V	83.0	46.8	-5.0	32.2	74
1994.750000	50.6	202.0	V	140.0	53.8	-3.2	23.4	74
2472.500000	45.8	202.0	H	0.0	46.1	-0.3	28.2	74
2895.250000	49.0	102.0	H	245.0	46.9	2.1	25.0	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1179.750000	29.3	202.0	V	172.0	37.3	-8.0	24.7	54
1417.250000	29.3	102.0	H	179.0	36.2	-6.9	24.7	54
1697.500000	30.6	102.0	V	23.0	35.6	-5.0	23.4	54
1994.750000	32.9	202.0	V	140.0	36.1	-3.2	21.1	54
2492.750000	34.6	102.0	V	83.0	34.4	0.2	19.4	54
2989.000000	37.7	202.0	H	22.0	35.5	2.2	16.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV_BELL SWEEP

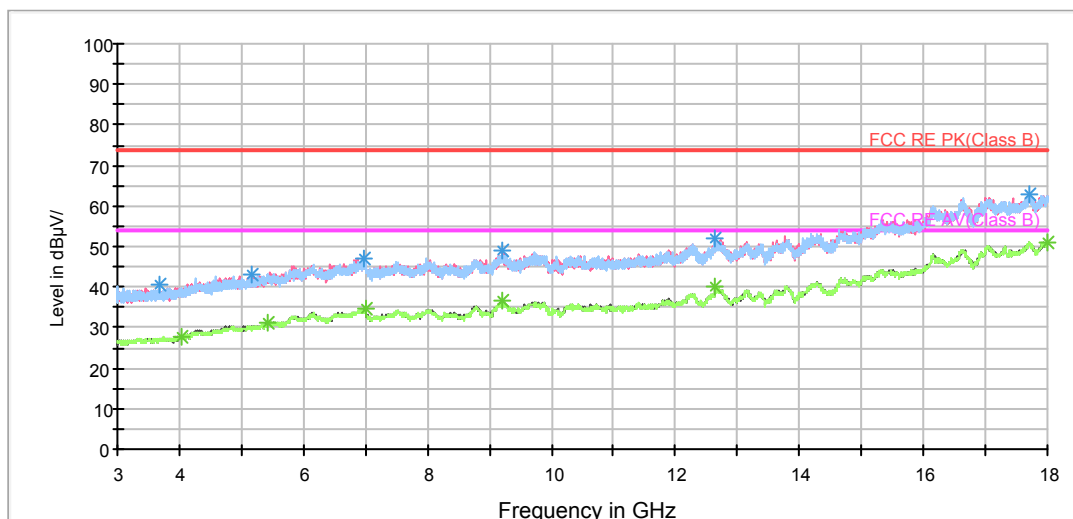


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3675.000000	40.5	106.0	H	252.0	42.3	-1.8	33.5	74
5161.875000	43.0	205.0	V	8.0	41.0	2.0	31.0	74
6991.875000	46.9	106.0	H	0.0	40.4	6.5	27.1	74
9213.750000	48.9	106.0	V	190.0	38.9	10.0	25.1	74
12646.875000	51.8	106.0	V	271.0	37.5	14.3	22.2	74
17720.625000	62.8	205.0	H	0.0	38.2	24.6	11.2	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4038.750000	27.8	205.0	H	0.0	28.8	-1.0	26.2	54
5431.875000	31.3	106.0	V	0.0	28.5	2.8	22.7	54
6997.500000	34.6	205.0	V	143.0	28.1	6.5	19.4	54
9210.000000	36.4	205.0	V	225.0	26.3	10.1	17.6	54
12641.250000	40.3	205.0	H	331.0	25.8	14.5	13.7	54
17998.125000	51.1	205.0	V	198.0	25.7	25.4	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

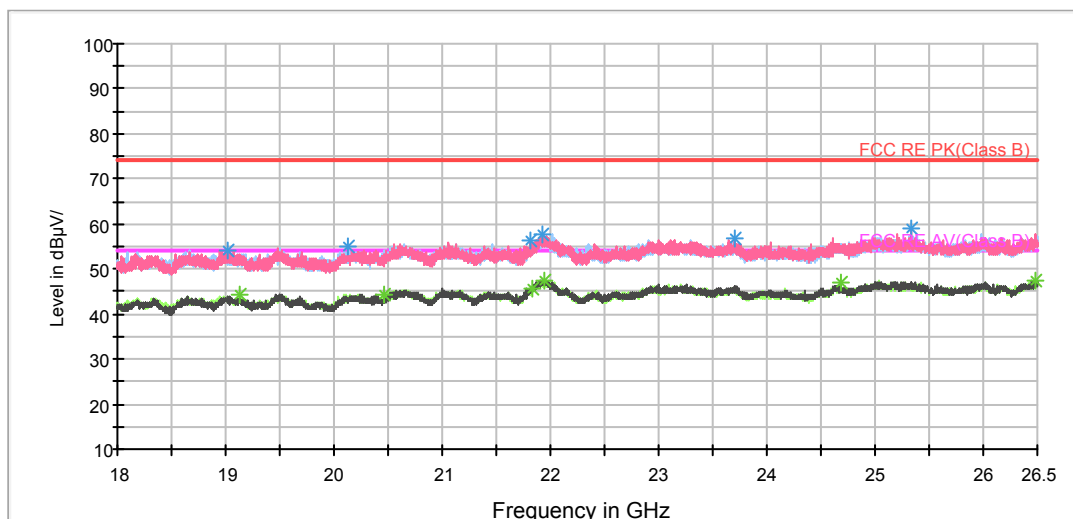


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19025.312500	54.1	105.0	H	229.0	54.4	-0.3	19.9	74
20138.812500	54.8	105.0	H	281.0	56.2	-1.4	19.2	74
21816.500000	56.3	105.0	V	52.0	58.3	-2.0	17.7	74
21928.062500	57.8	105.0	V	250.0	59.2	-1.4	16.2	74
23696.062500	57.0	105.0	V	217.0	57.7	-0.7	17.0	74
25329.125000	58.9	105.0	V	0.0	58.4	0.5	15.1	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19133.687500	44.1	105.0	H	302.0	44.6	-0.5	9.9	54
20459.687500	44.5	105.0	H	346.0	45.4	-0.9	9.5	54
21838.812500	45.7	105.0	H	271.0	47.6	-1.9	8.3	54
21947.187500	47.6	105.0	H	166.0	48.9	-1.3	6.4	54
24682.062500	46.9	105.0	V	135.0	47.1	-0.2	7.1	54
26484.062500	47.5	105.0	H	0.0	46.4	1.1	6.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

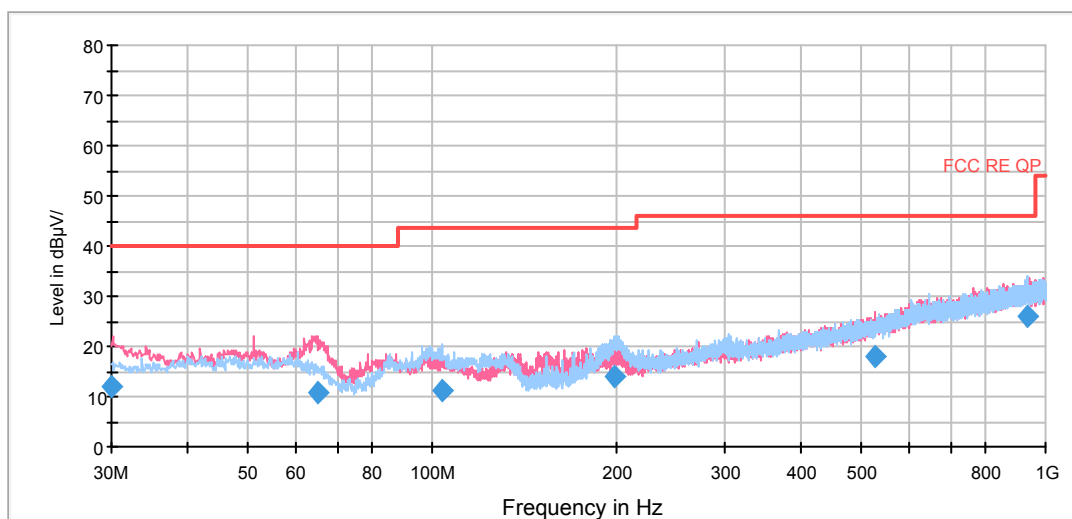

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.040000	12.0	111.0	V	154.0	-0.1	12.1	28.0	40.0
65.116250	11.0	100.0	V	123.0	0.5	10.5	29.0	40.0
103.601250	11.3	200.0	H	26.0	-1.6	12.9	32.2	43.5
198.980000	13.9	175.0	H	233.0	1.8	12.1	29.6	43.5
527.406250	18.1	204.0	V	17.0	-3.0	21.1	27.9	46.0
937.998750	25.8	125.0	H	144.0	-1.4	27.2	20.2	46.0

RE 1G-3GHz PK+AV

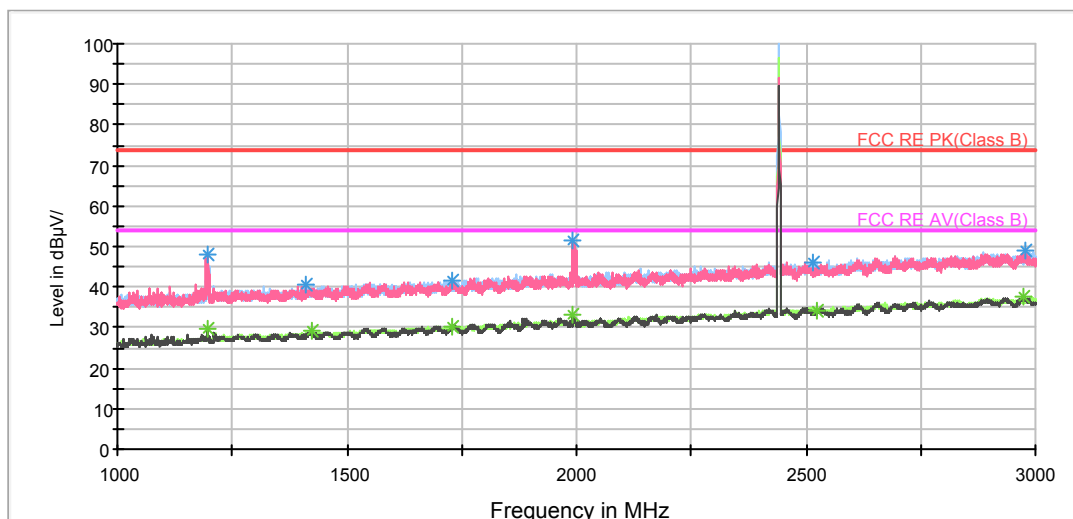


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.250000	48.1	202.0	V	177.0	56.3	-8.2	25.9	74
1412.000000	40.4	102.0	V	0.0	47.5	-7.1	33.6	74
1730.500000	41.6	202.0	V	288.0	46.5	-4.9	32.4	74
1993.250000	51.7	102.0	V	178.0	55.0	-3.3	22.3	74
2513.500000	46.1	102.0	H	0.0	46.3	-0.2	27.9	74
2980.250000	49.0	102.0	V	75.0	46.8	2.2	25.0	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.250000	29.5	202.0	V	177.0	37.7	-8.2	24.5	54
1422.250000	29.0	102.0	V	67.0	35.9	-6.9	25.0	54
1730.250000	30.4	102.0	V	118.0	35.4	-5.0	23.6	54
1991.250000	32.9	102.0	V	178.0	36.2	-3.3	21.1	54
2525.000000	34.2	102.0	H	165.0	34.5	-0.3	19.8	54
2972.500000	37.5	202.0	V	303.0	35.3	2.2	16.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV_BELL SWEEP

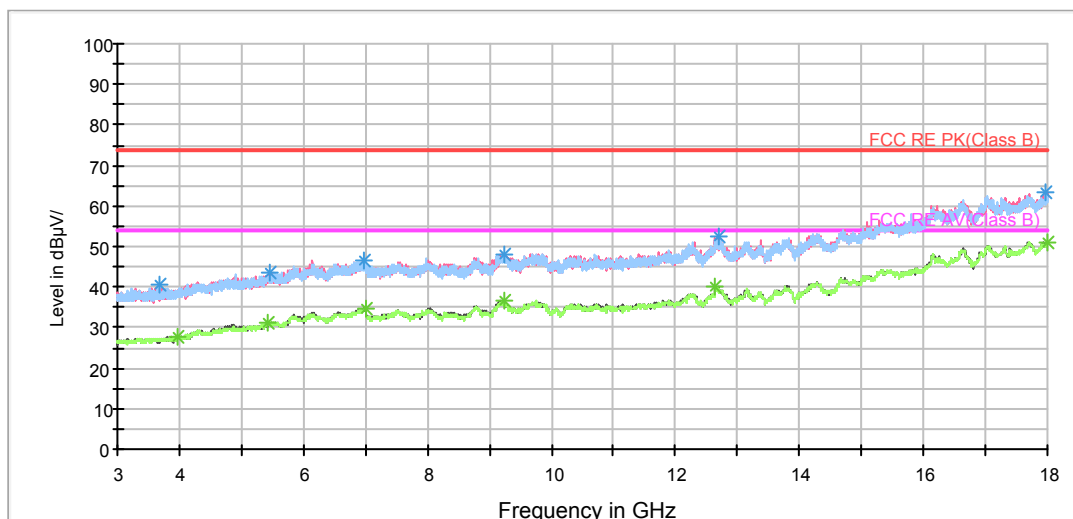


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3665.625000	40.6	205.0	H	247.0	42.5	-1.9	33.4	74
5446.875000	43.4	105.0	V	354.0	40.6	2.8	30.6	74
6961.875000	46.7	205.0	V	0.0	40.5	6.2	27.3	74
9234.375000	48.3	205.0	V	114.0	38.4	9.9	25.7	74
12688.125000	52.3	205.0	V	169.0	38.1	14.2	21.7	74
17983.125000	63.5	106.0	H	59.0	38.5	25.0	10.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3971.250000	27.7	106.0	H	0.0	28.6	-0.9	26.3	54
5416.875000	31.1	205.0	H	192.0	28.4	2.7	22.9	54
6997.500000	34.7	106.0	H	87.0	28.2	6.5	19.3	54
9226.875000	36.6	205.0	H	357.0	26.7	9.9	17.4	54
12641.250000	40.2	105.0	V	327.0	25.7	14.5	13.8	54
17994.375000	51.1	205.0	V	60.0	25.8	25.3	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

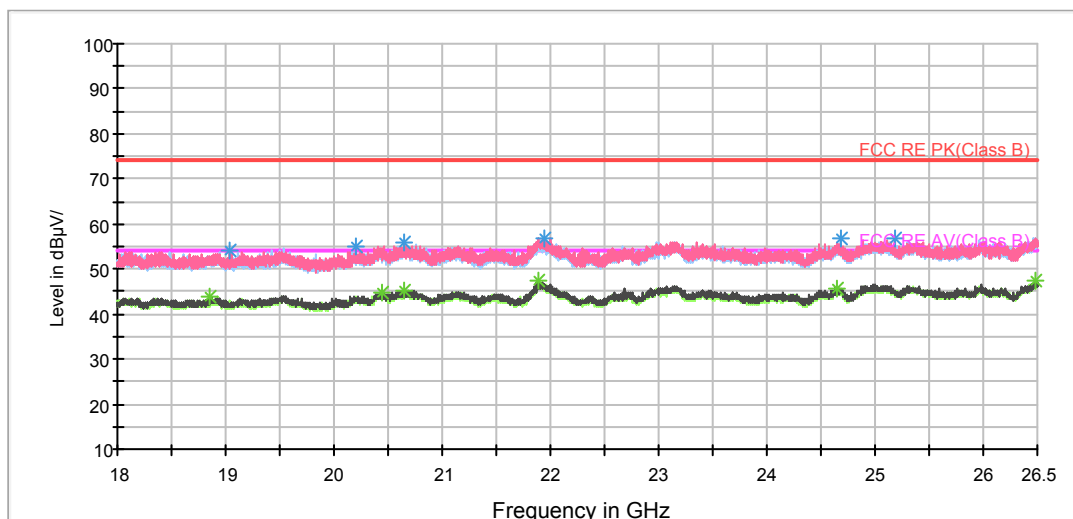


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19030.625000	53.9	105.0	V	0.0	54.2	-0.3	20.1	74
20199.375000	55.2	105.0	V	76.0	56.5	-1.3	18.8	74
20642.437500	55.7	105.0	V	45.0	56.9	-1.2	18.3	74
21946.125000	56.7	105.0	H	230.0	58.0	-1.3	17.3	74
24676.750000	56.7	105.0	H	61.0	56.9	-0.2	17.3	74
25176.125000	57.0	105.0	V	24.0	56.3	0.7	17.0	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18850.000000	43.9	105.0	V	76.0	43.8	0.1	10.1	54
20436.312500	44.8	105.0	V	45.0	45.7	-0.9	9.2	54
20647.750000	45.3	105.0	V	13.0	46.5	-1.2	8.7	54
21891.937500	47.4	105.0	V	234.0	49.0	-1.6	6.6	54
24655.500000	45.9	105.0	V	55.0	46.1	-0.2	8.1	54
26483.000000	47.3	105.0	V	139.0	46.2	1.1	6.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

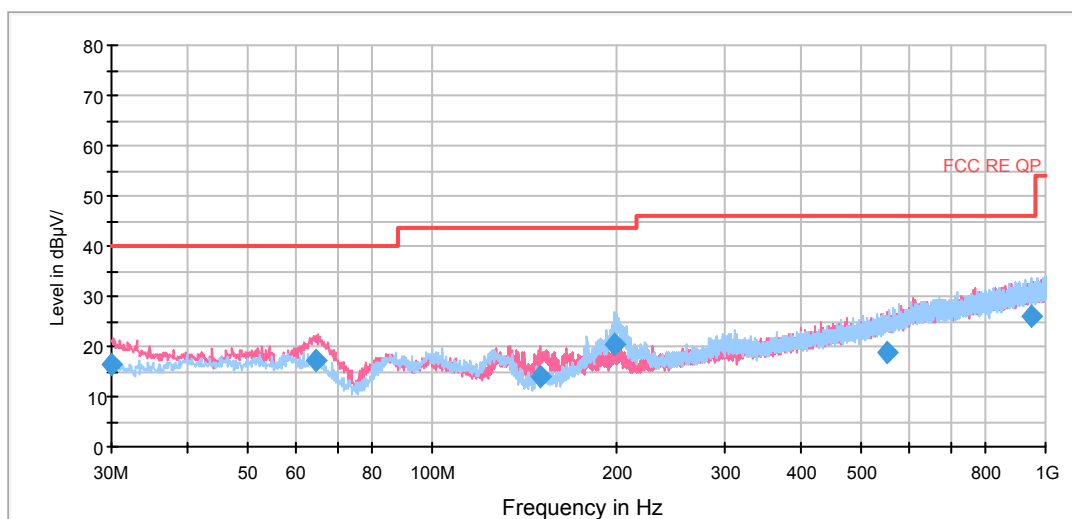

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.000000	16.5	100.0	V	155.0	4.4	12.1	23.5	40.0
64.561250	17.2	100.0	V	102.0	6.3	10.9	22.8	40.0
149.960000	13.8	100.0	V	131.0	4.6	9.2	29.7	43.5
198.336250	20.4	175.0	H	247.0	8.4	12.0	23.1	43.5
553.196250	18.7	100.0	V	332.0	-3.0	21.7	27.3	46.0
951.420000	25.9	125.0	H	356.0	-1.3	27.2	20.1	46.0

RE 1G-3GHz PK+AV

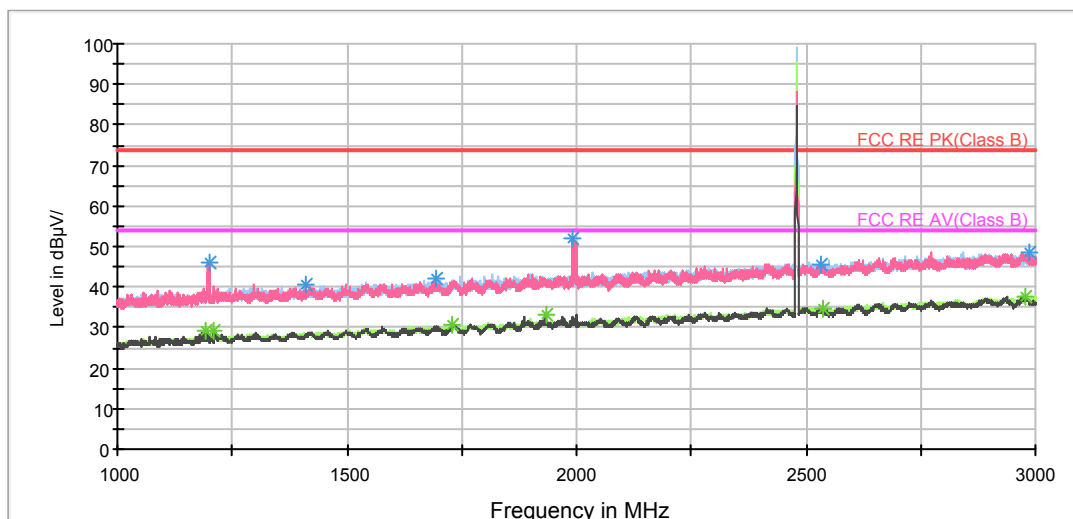


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.000000	46.1	202.0	V	195.0	54.3	-8.2	27.9	74
1411.750000	40.6	202.0	V	305.0	47.7	-7.1	33.4	74
1692.750000	42.0	102.0	H	269.0	47.0	-5.0	32.0	74
1993.000000	51.8	202.0	V	144.0	55.1	-3.3	22.2	74
2532.500000	45.7	202.0	V	0.0	46.1	-0.4	28.3	74
2986.000000	48.6	102.0	H	342.0	46.4	2.2	25.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.500000	29.0	202.0	V	166.0	37.2	-8.2	25.0	54
1211.500000	29.2	202.0	V	211.0	37.2	-8.0	24.8	54
1731.000000	30.5	202.0	V	345.0	35.4	-4.9	23.5	54
1932.500000	33.1	202.0	V	144.0	36.8	-3.7	20.9	54
2536.250000	34.7	202.0	V	268.0	35.1	-0.4	19.3	54
2977.750000	37.5	102.0	V	130.0	35.3	2.2	16.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV_BELL SWEEP

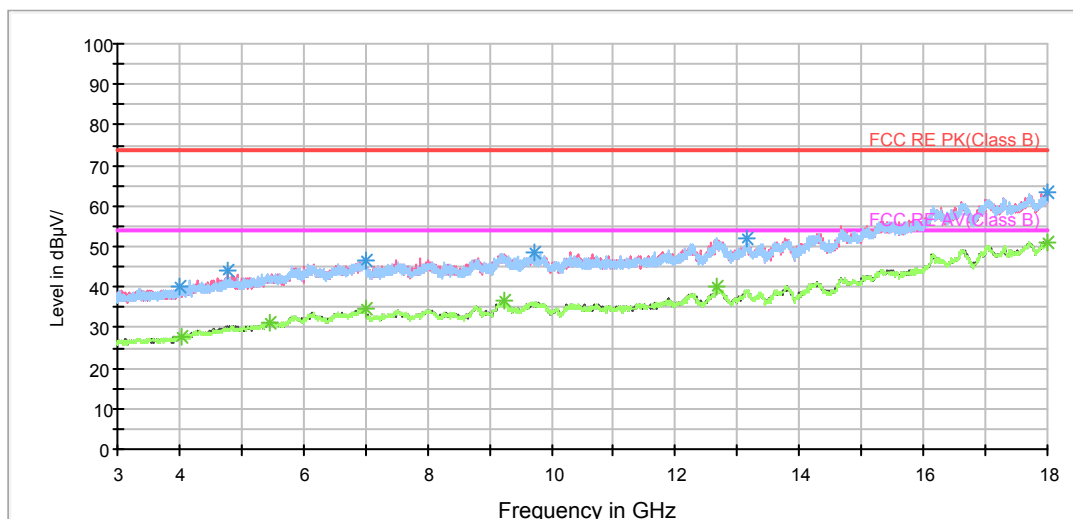


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3990.000000	40.0	205.0	V	4.0	41.0	-1.0	34.0	74
4775.625000	43.9	205.0	V	338.0	42.8	1.1	30.1	74
6993.750000	46.8	106.0	V	355.0	40.3	6.5	27.2	74
9710.625000	48.6	205.0	V	0.0	39.1	9.5	25.4	74
13155.000000	52.0	205.0	H	109.0	37.8	14.2	22.0	74
17998.125000	63.6	205.0	V	4.0	38.2	25.4	10.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4038.750000	27.7	105.0	H	87.0	28.7	-1.0	26.3	54
5443.125000	31.3	105.0	H	0.0	28.4	2.9	22.7	54
6995.625000	34.8	205.0	V	85.0	28.3	6.5	19.2	54
9240.000000	36.6	205.0	V	0.0	26.7	9.9	17.4	54
12650.625000	40.2	205.0	V	0.0	26.1	14.1	13.8	54
18000.000000	51.1	105.0	H	0.0	25.6	25.5	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

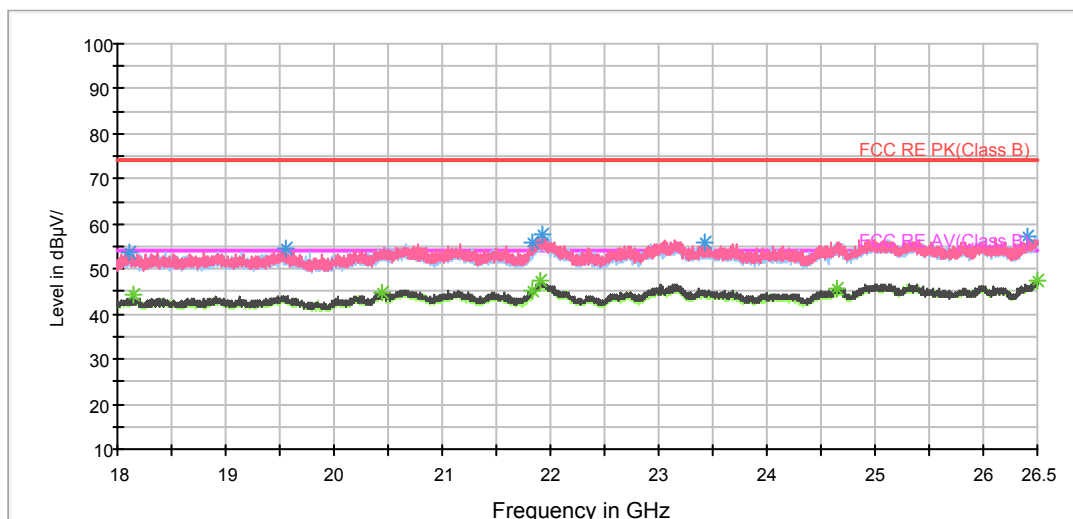

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18112.625000	53.8	105.0	H	0.0	52.4	1.4	20.2	74
19555.500000	54.7	105.0	V	215.0	54.8	-0.1	19.3	74
21837.750000	55.9	105.0	H	83.0	57.8	-1.9	18.1	74
21918.500000	57.8	105.0	V	92.0	59.3	-1.5	16.2	74
23431.500000	55.9	105.0	V	257.0	56.0	-0.1	18.1	74
26413.937500	57.4	105.0	V	133.0	56.4	1.0	16.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18140.250000	44.1	105.0	V	123.0	42.8	1.3	9.9	54
20443.750000	44.6	105.0	H	307.0	45.5	-0.9	9.4	54
21830.312500	45.4	105.0	V	144.0	47.3	-1.9	8.6	54
21903.625000	47.3	105.0	V	19.0	48.9	-1.6	6.7	54
24641.687500	45.7	105.0	V	40.0	45.9	-0.2	8.3	54
26494.687500	47.4	105.0	V	144.0	46.3	1.1	6.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

4.11 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

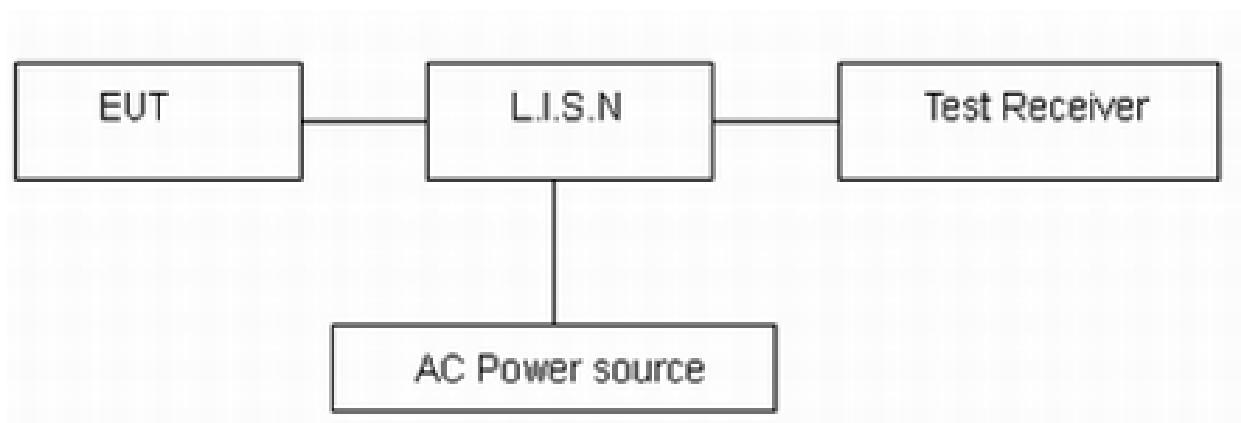

Note: AC Power source is used to 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=2.69$ dB.



Test Results:

Following plots, Blue trace uses the peak detection, Green trace uses the average detection.


Basic Rate-CH0 L Line

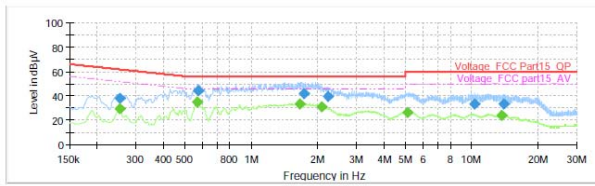

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	29.26	51.64	22.38	1000.0	9.000	L1	ON	19.1
0.253500	38.36	---	51.64	23.28	1000.0	9.000	L1	ON	19.1
0.570750	---	34.76	46.00	11.24	1000.0	9.000	L1	ON	19.3
0.570750	43.81	---	56.00	12.19	1000.0	9.000	L1	ON	19.3
1.835250	---	33.57	46.00	12.43	1000.0	9.000	L1	ON	19.2
1.736250	42.05	---	56.00	13.95	1000.0	9.000	L1	ON	19.2
2.089500	---	30.65	46.00	15.35	1000.0	9.000	L1	ON	19.1
2.240250	39.62	---	56.00	16.38	1000.0	9.000	L1	ON	19.1
5.113500	---	26.37	50.00	23.63	1000.0	9.000	L1	ON	19.1
10.340250	33.28	---	60.00	26.72	1000.0	9.000	L1	ON	19.4
13.591500	---	23.95	50.00	26.05	1000.0	9.000	L1	ON	19.5
13.897500	33.03	---	60.00	26.97	1000.0	9.000	L1	ON	19.5


Basic Rate-CH0 N Line

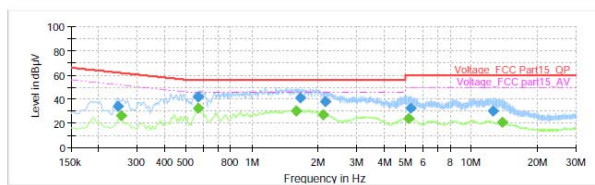

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	33.80	---	61.94	28.14	1000.0	9.000	N	ON	19.1
0.253500	---	26.27	51.64	25.37	1000.0	9.000	N	ON	19.1
0.570750	---	32.62	46.00	13.38	1000.0	9.000	N	ON	19.3
0.570750	42.06	---	56.00	13.94	1000.0	9.000	N	ON	19.3
1.594500	---	30.62	46.00	15.38	1000.0	9.000	N	ON	19.2
1.653000	40.88	---	56.00	15.12	1000.0	9.000	N	ON	19.2
2.103000	---	27.38	46.00	18.62	1000.0	9.000	N	ON	19.1
2.145750	37.61	---	56.00	18.39	1000.0	9.000	N	ON	19.1
5.160750	---	24.11	50.00	25.89	1000.0	9.000	N	ON	19.1
5.300250	32.41	---	60.00	27.59	1000.0	9.000	N	ON	19.1
12.516000	30.32	---	60.00	29.68	1000.0	9.000	N	ON	19.4
13.751250	---	20.78	50.00	29.22	1000.0	9.000	N	ON	19.4


Basic Rate-CH39 L Line

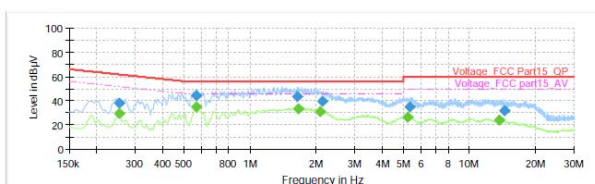

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	29.28	51.64	22.37	1000.0	9.000	L1	ON	19.1
0.253500	38.31	---	51.64	23.33	1000.0	9.000	L1	ON	19.1
0.568500	---	34.74	46.00	11.26	1000.0	9.000	L1	ON	19.3
0.568500	44.45	---	56.00	11.55	1000.0	9.000	L1	ON	19.3
1.549500	---	43.36	56.00	12.64	1000.0	9.000	L1	ON	19.2
1.653000	---	33.59	46.00	12.41	1000.0	9.000	L1	ON	19.2
2.089500	---	30.67	46.00	15.33	1000.0	9.000	L1	ON	19.1
2.134500	39.75	---	56.00	16.25	1000.0	9.000	L1	ON	19.1
5.217000	---	26.64	50.00	23.36	1000.0	9.000	L1	ON	19.1
5.363250	34.99	---	60.00	25.01	1000.0	9.000	L1	ON	19.1
13.726500	---	23.99	50.00	26.01	1000.0	9.000	L1	ON	19.5
14.469000	31.55	---	60.00	28.45	1000.0	9.000	L1	ON	19.5


Basic Rate-CH39 N Line

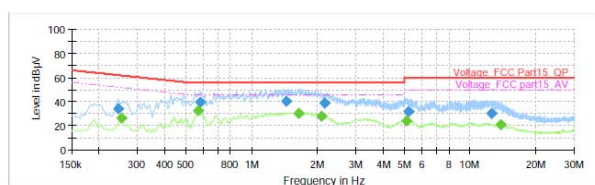

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	33.84	---	61.94	28.10	1000.0	9.000	N	ON	19.1
0.253500	---	26.20	51.64	25.44	1000.0	9.000	N	ON	19.1
0.568500	---	32.61	46.00	13.39	1000.0	9.000	N	ON	19.3
0.570750	39.45	---	56.00	16.55	1000.0	9.000	N	ON	19.3
1.443750	39.99	---	56.00	16.01	1000.0	9.000	N	ON	19.2
1.635000	---	30.47	46.00	15.53	1000.0	9.000	N	ON	19.2
2.091750	---	27.74	46.00	18.26	1000.0	9.000	N	ON	19.1
2.148000	38.37	---	56.00	17.63	1000.0	9.000	N	ON	19.1
5.086500	---	24.18	50.00	25.82	1000.0	9.000	N	ON	19.1
5.219250	31.82	---	60.00	28.18	1000.0	9.000	N	ON	19.1
12.500250	30.02	---	60.00	29.98	1000.0	9.000	N	ON	19.4
13.771500	---	20.78	50.00	29.22	1000.0	9.000	N	ON	19.4


Basic Rate-CH78 L Line

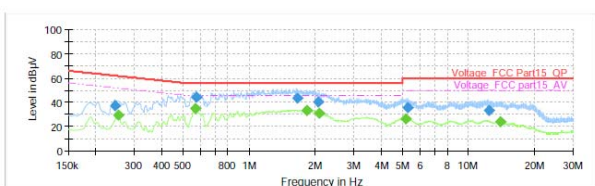

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	37.18	---	61.94	24.76	1000.0	9.000	L1	ON	19.1
0.253500	---	29.31	51.64	22.33	1000.0	9.000	L1	ON	19.1
0.568500	---	34.76	46.00	11.24	1000.0	9.000	L1	ON	19.3
0.570750	44.50	---	56.00	11.50	1000.0	9.000	L1	ON	19.3
1.650750	43.60	---	56.00	12.40	1000.0	9.000	L1	ON	19.2
1.835250	---	33.29	46.00	12.71	1000.0	9.000	L1	ON	19.2
2.055750	40.19	---	56.00	15.81	1000.0	9.000	L1	ON	19.1
2.091750	---	30.83	46.00	15.17	1000.0	9.000	L1	ON	19.1
5.151750	---	26.53	50.00	23.47	1000.0	9.000	L1	ON	19.1
5.271000	35.61	---	60.00	24.39	1000.0	9.000	L1	ON	19.1
12.423750	33.58	---	60.00	26.42	1000.0	9.000	L1	ON	19.4
13.897500	---	24.07	50.00	25.93	1000.0	9.000	L1	ON	19.5

Basic Rate-CH78 N Line

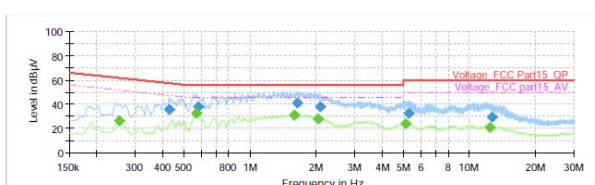


Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	26.23	51.64	25.41	1000.0	9.000	N	ON	19.1
0.426750	35.35	---	57.32	21.96	1000.0	9.000	N	ON	19.2
0.568500	---	32.62	46.00	13.38	1000.0	9.000	N	ON	19.3
0.584250	38.33	---	56.00	17.67	1000.0	9.000	N	ON	19.3
1.592250	---	30.83	46.00	15.17	1000.0	9.000	N	ON	19.2
1.648500	41.27	---	56.00	14.73	1000.0	9.000	N	ON	19.2
2.044500	---	28.07	46.00	17.93	1000.0	9.000	N	ON	19.1
2.094000	38.07	---	56.00	17.93	1000.0	9.000	N	ON	19.1
5.095500	---	24.15	50.00	25.85	1000.0	9.000	N	ON	19.1
5.273250	32.17	---	60.00	27.83	1000.0	9.000	N	ON	19.1
12.410250	---	20.94	50.00	29.06	1000.0	9.000	N	ON	19.4
12.696000	29.53	---	60.00	30.47	1000.0	9.000	N	ON	19.4




EDR-CH0 L Line

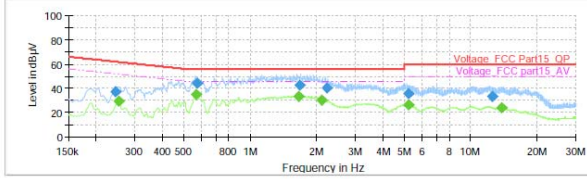

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	37.12	---	61.94	24.83	1000.0	9.000	L1	ON	19.1
0.253500	---	29.31	51.64	22.33	1000.0	9.000	L1	ON	19.1
0.570750	---	34.69	46.00	11.31	1000.0	9.000	L1	ON	19.3
0.573000	44.48	---	56.00	11.52	1000.0	9.000	L1	ON	19.3
1.653000	---	33.57	46.00	12.43	1000.0	9.000	L1	ON	19.2
1.680000	42.38	---	56.00	13.62	1000.0	9.000	L1	ON	19.2
2.100750	---	30.47	46.00	15.53	1000.0	9.000	L1	ON	19.1
2.224500	40.02	---	56.00	15.98	1000.0	9.000	L1	ON	19.1
5.210250	---	26.59	50.00	23.41	1000.0	9.000	L1	ON	19.1
5.217000	35.71	---	60.00	24.29	1000.0	9.000	L1	ON	19.1
12.455250	33.21	---	60.00	26.79	1000.0	9.000	L1	ON	19.4
13.776000	---	24.04	50.00	25.96	1000.0	9.000	L1	ON	19.5


EDR-CH0 N Line

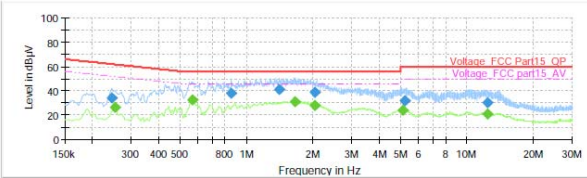

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	33.95	---	61.94	28.00	1000.0	9.000	N	ON	19.1
0.253500	---	26.19	51.64	25.46	1000.0	9.000	N	ON	19.1
0.568500	---	32.71	46.00	13.29	1000.0	9.000	N	ON	19.3
0.854250	38.30	---	56.00	17.70	1000.0	9.000	N	ON	19.2
1.671750	41.18	---	56.00	14.82	1000.0	9.000	N	ON	19.2
1.653000	---	30.87	46.00	15.13	1000.0	9.000	N	ON	19.2
2.046750	---	27.98	46.00	18.02	1000.0	9.000	N	ON	19.1
2.051250	38.59	---	56.00	17.41	1000.0	9.000	N	ON	19.1
5.104500	---	24.03	50.00	25.97	1000.0	9.000	N	ON	19.1
5.219250	31.88	---	60.00	28.12	1000.0	9.000	N	ON	19.1
12.378750	---	20.93	50.00	29.07	1000.0	9.000	N	ON	19.4
12.437250	30.30	---	60.00	29.70	1000.0	9.000	N	ON	19.4


EDR-CH39 L Line

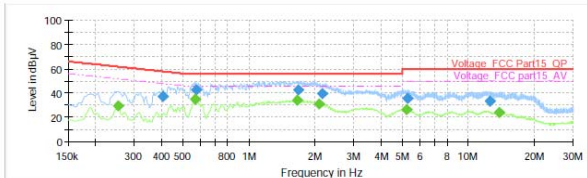

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	29.31	51.64	22.33	1000.0	9.000	L1	ON	19.1
0.406500	36.89	---	57.72	20.83	1000.0	9.000	L1	ON	19.2
0.570750	---	34.65	46.00	11.35	1000.0	9.000	L1	ON	19.3
0.577500	42.64	---	56.00	13.36	1000.0	9.000	L1	ON	19.3
1.653000	---	33.76	46.00	12.24	1000.0	9.000	L1	ON	19.2
1.671750	42.41	---	56.00	13.59	1000.0	9.000	L1	ON	19.2
2.056250	---	30.68	46.00	15.32	1000.0	9.000	L1	ON	19.1
2.166000	39.88	---	56.00	16.12	1000.0	9.000	L1	ON	19.1
5.230500	---	26.39	50.00	23.61	1000.0	9.000	L1	ON	19.1
5.271000	35.87	---	60.00	24.13	1000.0	9.000	L1	ON	19.1
12.509250	33.01	---	60.00	26.99	1000.0	9.000	L1	ON	19.4
13.857000	---	24.07	50.00	25.93	1000.0	9.000	L1	ON	19.5


EDR-CH39 N Line

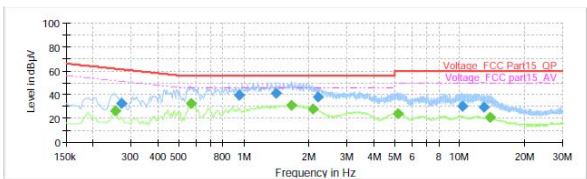

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	26.18	51.64	25.46	1000.0	9.000	N	ON	19.1
0.271500	32.37	---	61.07	28.70	1000.0	9.000	N	ON	19.1
0.568500	---	32.68	46.00	13.32	1000.0	9.000	N	ON	19.3
0.946500	39.27	---	56.00	16.73	1000.0	9.000	N	ON	19.2
1.405500	41.19	---	56.00	14.81	1000.0	9.000	N	ON	19.2
1.653000	---	30.88	46.00	15.12	1000.0	9.000	N	ON	19.2
2.089500	---	27.94	46.00	18.06	1000.0	9.000	N	ON	19.1
2.199750	37.85	---	56.00	18.15	1000.0	9.000	N	ON	19.1
5.160750	---	24.08	50.00	25.92	1000.0	9.000	N	ON	19.1
10.257000	30.35	---	60.00	29.65	1000.0	9.000	N	ON	19.4
12.959250	29.21	---	60.00	30.79	1000.0	9.000	N	ON	19.5
13.836750	---	20.81	50.00	29.19	1000.0	9.000	N	ON	19.4


EDR-CH78 L Line

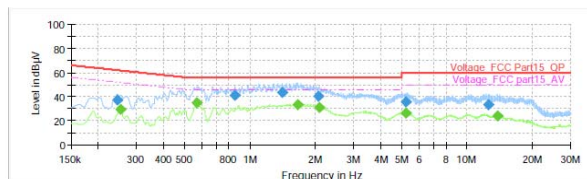

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	37.13	---	61.94	24.81	1000.0	9.000	L1	ON	19.1
0.253500	---	29.30	51.64	22.34	1000.0	9.000	L1	ON	19.1
0.568500	---	34.70	46.00	11.30	1000.0	9.000	L1	ON	19.3
0.856500	41.19	---	56.00	14.81	1000.0	9.000	L1	ON	19.2
1.405500	43.33	---	56.00	12.67	1000.0	9.000	L1	ON	19.2
1.655250	---	33.70	46.00	12.30	1000.0	9.000	L1	ON	19.2
2.058000	39.96	---	56.00	16.04	1000.0	9.000	L1	ON	19.1
2.089500	---	30.78	46.00	15.22	1000.0	9.000	L1	ON	19.1
5.219250	35.75	---	60.00	24.25	1000.0	9.000	L1	ON	19.1
5.237250	---	26.37	50.00	23.63	1000.0	9.000	L1	ON	19.1
12.561000	32.97	---	60.00	27.03	1000.0	9.000	L1	ON	19.5
13.859250	---	24.18	50.00	25.82	1000.0	9.000	L1	ON	19.5

EDR-CH78 N Line

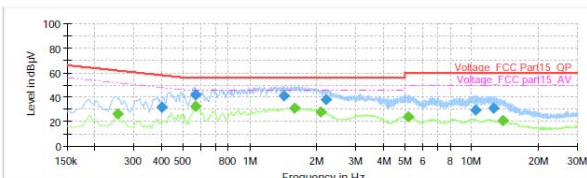

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	26.21	51.64	25.43	1000.0	9.000	N	ON	19.1
0.402000	31.67	---	57.81	26.14	1000.0	9.000	N	ON	19.2
0.568500	---	32.64	46.00	13.36	1000.0	9.000	N	ON	19.3
0.570750	42.10	---	56.00	13.90	1000.0	9.000	N	ON	19.3
1.423500	40.85	---	56.00	15.15	1000.0	9.000	N	ON	19.2
1.592250	---	30.87	46.00	15.13	1000.0	9.000	N	ON	19.2
2.064000	---	27.79	46.00	18.21	1000.0	9.000	N	ON	19.1
2.195250	37.84	---	56.00	18.16	1000.0	9.000	N	ON	19.1
5.194500	---	23.74	50.00	26.26	1000.0	9.000	N	ON	19.1
10.369500	29.76	---	60.00	30.24	1000.0	9.000	N	ON	19.4
12.462000	30.69	---	60.00	29.31	1000.0	9.000	N	ON	19.4
13.857000	---	20.79	50.00	29.21	1000.0	9.000	N	ON	19.4

5 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
BT Base Station Simulator	R&S	CBT	100271	2017-05-14	2018-05-13
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2020-02-17
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
Artificial main network	R&S	ENV216	101171	2016-12-16	2019-12-15
Signal Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	NA	NA
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2015-01-30	2018-01-29
RF Cable	Agilent	SMA 15cm	0001	2017-02-06	2017-08-05

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side

a: EUT



b: Battery




c: Adapter




d: USB Cable

Picture 1 EUT and Accessory

A.2 Test Setup

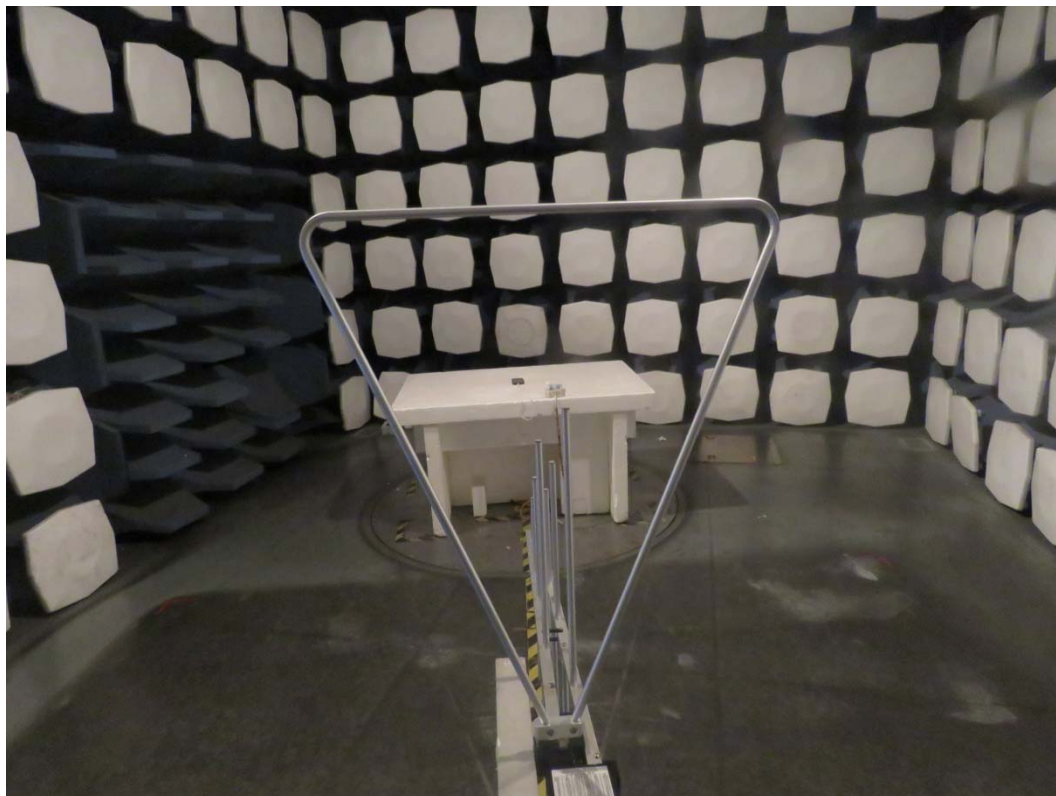

Below 1GHz

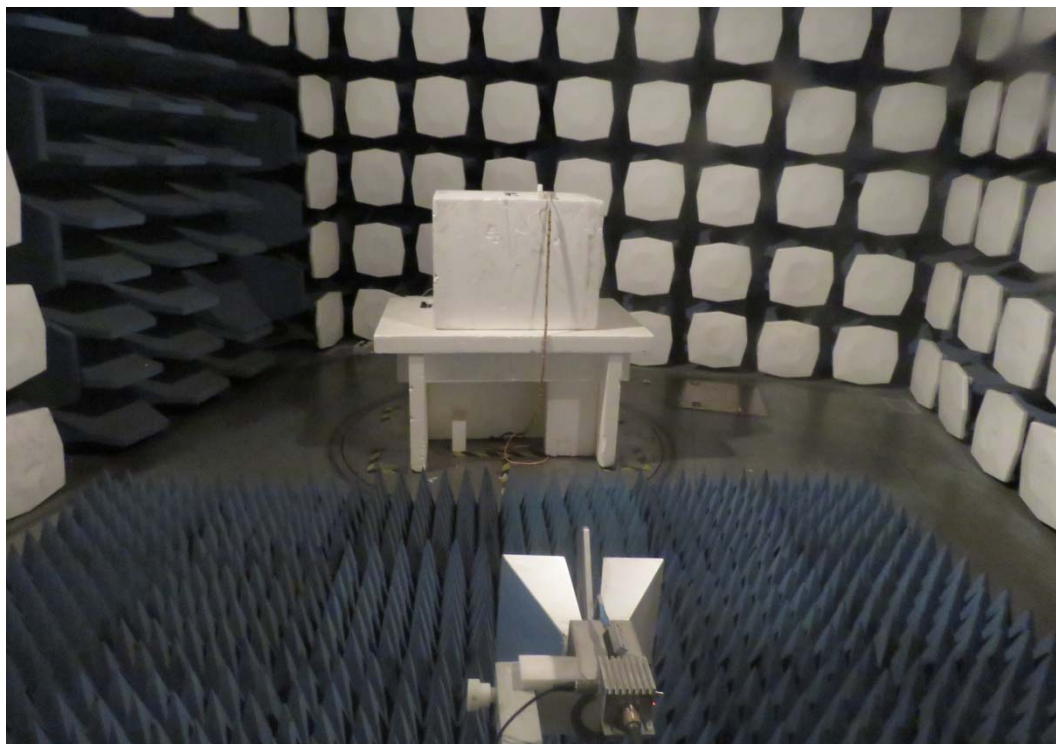

Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup