



RF TEST REPORT

Applicant ZTE Corporation

FCC ID SRQ-ZTEBLADEA531

Product LTE/WCDMA/GSM(GPRS)
Multi-Mode Digital Mobile Phone

Model ZTE Blade A531

Report No. R1808A0389-R3

Issue Date September 30, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR47 Part 27C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Jiang peng Lan

Performed by: Jiangpeng Lan

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
3	Applied Standards	8
4	Test Configuration	9
5	Test Case Results	11
5.1	RF Power Output	11
5.2	Effective Isotropic Radiated Power	17
5.3	Occupied Bandwidth	22
5.4	Band Edge Compliance	29
5.5	Peak-to-Average Power Ratio (PAPR)	46
5.6	Frequency Stability.....	49
5.7	Spurious Emissions at Antenna Terminals	53
5.8	Radiates Spurious Emission	72
6	Main Test Instruments	86

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(d)(4) /27.50(h)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(h) /27.53(m)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 /27.53(h) /27.53(m)	PASS
8	Radiates Spurious Emission	2.1053 /27.53(h) /27.53(m)	PASS
Date of Testing: August 21, 2018 ~ September 28, 2018			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description			
Model	ZTE Blade A531		
IMEI	869983030005984		
Hardware Version	uyjB		
Software Version	MVS_PE_A531_V1.0		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Test Mode(s)	WCDMA Band IV; LTE Band 4; LTE Band 7;		
Test Modulation	(WCDMA)QPSK; (LTE)QPSK 16QAM;		
HSDPA UE Category	14		
HSUPA UE Category	7		
LTE Release	12		
Maximum E.I.R.P./ E.R.P.	WCDMA Band IV:	20.26dBm	
	LTE Band 4:	21.07dBm	
	LTE Band 7:	24.15dBm	
Rated Power Supply Voltage:	3.8V		
Extreme Voltage	Minimum: 3.0V Maximum: 4.35V		
Extreme Temperature	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
EUT Accessory			
Adapter 1	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A51A-Z		
Adapter 2	Manufacturer: DONGGUAN AOHAI POWER TECHNOLOGY CO., LTD. Model: STC-A51A-Z		



Adapter 3	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A51A-Z
Battery 1	Manufacturer: Jiade Energy Technology (Zhuhai) Co., Ltd. Model: Li3826T43P4h705949
Battery 2	Manufacturer: Zhongshan Tianmao Battery Co.,Ltd. Model: Li3826T43P4h705949
Earphone	Manufacturer: Shen zhen FDC Electronic Co.,Ltd. Model: DEM-66
USB Cable 1	Manufacturer: Shen Zhen Shi Yi HUA XING Electron Co.,Ltd 100cm Cable, Shielded
USB Cable 2	Manufacturer: kingpower-tech 100cm Cable, Shielded
Note: The information of the EUT is declared by the manufacturer. 2. There is more than one USB cable/one Battery, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 1/ Battery 1) will be recorded in this report.	

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2018)

FCC CFR47 Part 27C (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in WCDMA/LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for WCDMA Band IV:

Test items	Modes/Modulation
	WCDMA Band IV
RF power output	RMC HSDPA/HSUPA
Effective Isotropic Radiated power	RMC
Occupied Bandwidth	RMC
Band Edge Compliance	RMC
Peak-to-Average Power Ratio	RMC
Frequency Stability	RMC
Spurious Emissions at Antenna Terminals	RMC
Radiates Spurious Emission	RMC

Test modes are chosen to be reported as the worst case configuration below for LTE Band 4/7:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	LTE 4	O	O	O	O	O	O	O	O	O	-	O	O	-	O
	LTE 7	-	-	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	LTE 4	O	O	O	O	O	O	O	O	-	-	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	LTE 4	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	LTE 4	O	O	O	O	O	O	O	-	O	-	-	O	O	O
	LTE 7	-	-	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	LTE 4	O	-	O	-	-	O	O	-	O	-	-	O	O	O
	LTE 7	-	-	O	-	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

5 Test Case Results

5.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

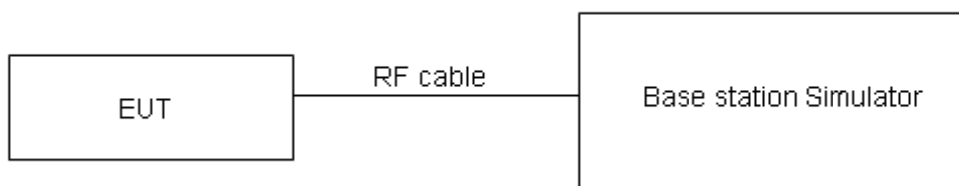

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.



Test Results

WCDMA Band IV		Conducted Power(dBm)		
		Channel 1312	Channel 1413	Channel 1513
		1712.4 (MHz)	1732.6 (MHz)	1752.6(MHz)
RMC		22.07	22.10	22.09
HSDPA	Sub - Test 1	21.54	21.53	21.54
	Sub - Test 2	21.51	21.56	21.52
	Sub - Test 3	20.98	21.01	21.04
	Sub - Test 4	21.00	21.02	21.02
HSUPA	Sub - Test 1	20.47	20.52	20.48
	Sub - Test 2	18.45	18.49	18.49
	Sub - Test 3	19.45	19.51	19.47
	Sub - Test 4	18.41	18.45	18.44
	Sub - Test 5	21.90	21.94	21.93

LTE Band 4				AV Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19957/1710.7	20175/1732.5	20393/1754.3
1.4MHz	QPSK	1	0	23.00	22.86	22.88
		1	2	22.84	22.74	22.89
		1	5	22.85	22.68	22.76
		3	0	22.73	22.72	22.57
		3	2	22.65	22.57	22.75
		3	3	22.78	22.63	22.69
		6	0	21.73	21.64	21.89
	16QAM	1	0	22.39	22.36	22.41
		1	2	22.35	22.19	22.28
		1	5	22.12	22.12	22.08
		3	0	21.60	21.56	21.47
		3	2	21.65	21.58	21.68
		3	3	21.69	21.62	21.64
		6	0	20.95	20.88	21.01
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19965/1711.5	20175/1732.5	20385/1753.5
3MHz	QPSK	1	0	23.02	22.90	22.91
		1	7	22.87	22.79	22.93
		1	14	22.88	22.73	22.80
		8	0	21.91	21.92	21.78
		8	4	21.85	21.75	21.95
		8	7	21.96	21.82	21.87
		15	0	21.76	21.68	21.92
	16QAM	1	0	22.42	22.38	22.44
		1	7	22.38	22.24	22.32
		1	14	22.14	22.16	22.11
		8	0	20.84	20.82	20.72
		8	4	20.89	20.84	20.93
		8	7	20.92	20.87	20.90
		15	0	20.98	20.92	21.04
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				19975/1712.5	20175/1732.5	20375/1752.5
5MHz	QPSK	1	0	22.99	22.88	22.87
		1	13	22.85	22.75	22.90
		1	24	22.85	22.68	22.76
		12	0	21.88	21.87	21.74
		12	6	21.83	21.71	21.90
		12	13	21.94	21.80	21.83
		25	0	21.74	21.67	21.90



	16QAM	1	0	22.39	22.34	22.41
		1	13	22.35	22.22	22.29
		1	24	22.11	22.14	22.07
		12	0	20.82	20.78	20.69
		12	6	20.86	20.79	20.89
		12	13	20.89	20.82	20.86
		25	0	20.96	20.88	20.99
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20000/1715	20175/1732.5	20350/1750
10MHz	QPSK	1	0	23.01	22.89	22.90
		1	25	22.88	22.80	22.94
		1	49	22.87	22.72	22.79
		25	0	21.91	21.92	21.78
		25	13	21.86	21.76	21.94
		25	25	21.96	21.84	21.88
		50	0	21.82	21.69	21.94
	16QAM	1	0	22.41	22.37	22.43
		1	25	22.38	22.26	22.32
		1	49	22.14	22.16	22.10
		25	0	20.85	20.83	20.73
		25	13	20.88	20.83	20.92
		25	25	20.92	20.87	20.90
		50	0	20.99	20.93	21.03
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20025/1717.5	20175/1732.5	20325/1747.5
15MHz	QPSK	1	0	23.00	22.85	22.88
		1	38	22.86	22.79	22.91
		1	74	22.84	22.67	22.75
		36	0	21.89	21.88	21.75
		36	18	21.83	21.71	21.90
		36	39	21.93	21.81	21.84
		75	0	21.80	21.65	21.89
	16QAM	1	0	22.36	22.35	22.41
		1	38	22.36	22.23	22.30
		1	74	22.11	22.12	22.07
		36	0	20.82	20.81	20.70
		36	18	20.85	20.78	20.88
		36	39	20.90	20.83	20.87
		75	0	20.96	20.88	20.99
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20050/1720	20175/1732.5	20300/1745
20MHz	QPSK	1	0	22.97	22.81	22.85
		1	50	22.85	22.75	22.89



		1	99	22.82	22.66	22.72
		50	0	21.86	21.83	21.71
		50	25	21.81	21.67	21.87
		50	50	21.90	21.76	21.80
		100	0	21.77	21.60	21.85
	16QAM	1	0	22.34	22.31	22.36
		1	50	22.32	22.21	22.26
		1	99	22.09	22.09	22.05
		50	0	20.79	20.77	20.67
		50	25	20.82	20.76	20.85
		50	50	20.87	20.78	20.83
		100	0	20.94	20.84	20.96

LTE Band 7				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20775/2502.5	21100/2535	21425/2567.5
5MHz	QPSK	1	0	22.16	22.18	22.11
		1	13	22.26	22.22	22.22
		1	24	22.21	22.22	22.29
		12	0	22.47	22.04	22.15
		12	6	22.48	22.21	22.17
		12	13	22.22	22.03	22.18
		25	0	22.10	22.06	22.30
	16QAM	1	0	22.84	22.87	22.87
		1	13	22.53	22.56	22.57
		1	24	22.48	22.44	22.46
		12	0	20.98	21.29	21.42
		12	6	20.89	21.20	21.18
		12	13	21.29	21.34	21.49
		25	0	21.41	21.31	21.56
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20800/2505	21100/2535	21400/2565
10MHz	QPSK	1	0	22.18	22.19	22.14
		1	25	22.29	22.27	22.26
		1	49	22.23	22.26	22.32
		25	0	22.50	22.09	22.19
		25	13	22.51	22.26	22.21
		25	25	22.24	22.07	22.23
		50	0	22.18	22.08	22.34
	16QAM	1	0	22.86	22.90	22.89
		1	25	22.56	22.60	22.60
		1	49	22.51	22.46	22.49



		25	0	21.01	21.34	21.46
		25	13	20.91	21.24	21.21
		25	25	21.32	21.39	21.53
		50	0	21.44	21.36	21.60
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20825/2507.5	21100/2535	21375/2562.5
15MHz	QPSK	1	0	22.17	22.15	22.12
		1	38	22.27	22.26	22.23
		1	74	22.20	22.21	22.28
		36	0	22.48	22.05	22.16
		36	18	22.48	22.21	22.17
		36	39	22.21	22.04	22.19
		75	0	22.16	22.04	22.29
	16QAM	1	0	22.81	22.88	22.87
		1	38	22.54	22.57	22.58
		1	74	22.48	22.42	22.46
		36	0	20.98	21.32	21.43
		36	18	20.88	21.19	21.17
		36	39	21.30	21.35	21.50
		75	0	21.41	21.31	21.56
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20850/2510	21100/2535	21350/2560
20MHz	QPSK	1	0	22.14	22.11	22.09
		1	50	22.26	22.22	22.21
		1	99	22.18	22.20	22.25
		50	0	22.45	22.00	22.12
		50	25	22.46	22.17	22.14
		50	50	22.18	21.99	22.15
		100	0	22.13	21.99	22.25
	16QAM	1	0	22.79	22.84	22.82
		1	50	22.50	22.55	22.54
		1	99	22.46	22.39	22.44
		50	0	20.95	21.28	21.40
		50	25	20.85	21.17	21.14
		50	50	21.27	21.30	21.46
		100	0	21.39	21.27	21.53

5.2 Effective Isotropic Radiated Power

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
 - a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
 - b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
 - c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
 - d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
 - e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
 - f) The maximum ERP is the maximum value determined in the preceding step.
 - g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

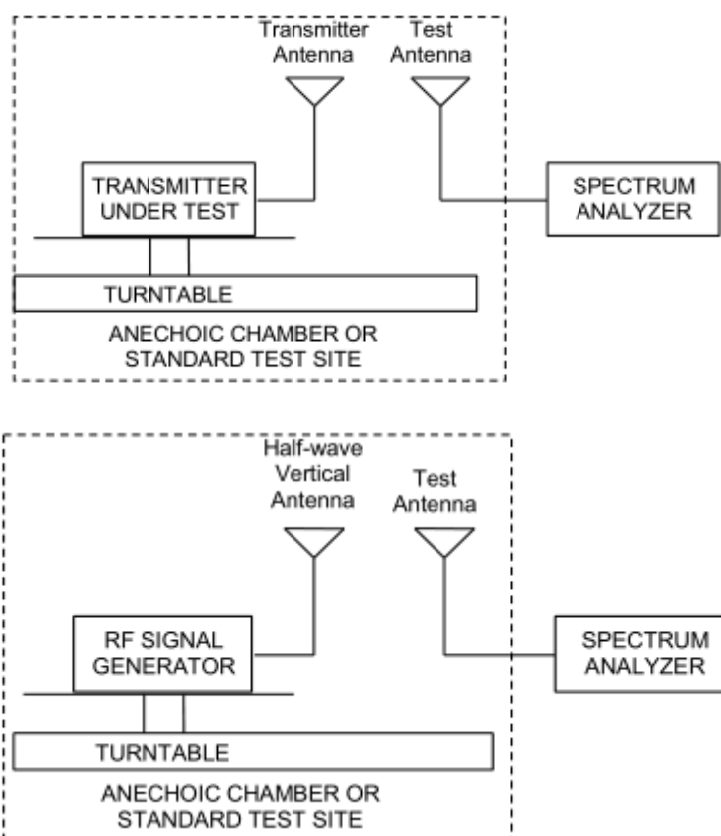

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Rule Part 27.50(h) (2) specifies that “Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.”

Part 27.50(d)(4)Limit	$\leq$ 1 W (30 dBm)
Part 27.50(h)(2) Limit	$\leq$ 2 W (33 dBm)

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19$ dB

Test Results

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
WCDMA Band IV	Low	1712.4	Horizontal	19.68	30	Pass
	Mid	1732.6	Horizontal	20.19	30	Pass
	High	1752.6	Horizontal	20.26	30	Pass

LTE Band 4						
Bandwidth	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	1710.7	Horizontal	19.86	30	Pass
	Mid	1732.5	Horizontal	19.97	30	Pass
	High	1754.3	Horizontal	20.23	30	Pass
3 MHz (QPSK)	Low	1711.5	Horizontal	19.68	30	Pass
	Mid	1732.5	Horizontal	20.12	30	Pass
	High	1753.5	Horizontal	20.87	30	Pass
5 MHz (QPSK)	Low	1712.5	Horizontal	19.19	30	Pass
	Mid	1732.5	Horizontal	19.91	30	Pass
	High	1752.5	Horizontal	20.95	30	Pass
10 MHz (QPSK)	Low	1715	Horizontal	19.76	30	Pass
	Mid	1732.5	Horizontal	20.10	30	Pass
	High	1750	Horizontal	20.55	30	Pass
15 MHz (QPSK)	Low	1717.5	Horizontal	19.98	30	Pass
	Mid	1732.5	Horizontal	20.13	30	Pass
	High	1747.5	Horizontal	20.89	30	Pass
20 MHz (QPSK)	Low	1720	Horizontal	19.69	30	Pass
	Mid	1732.5	Horizontal	20.44	30	Pass
	High	1745	Horizontal	21.07	30	Pass
1.4 MHz (16QAM)	Low	1710.7	Horizontal	19.23	30	Pass
	Mid	1732.5	Horizontal	19.37	30	Pass
	High	1754.3	Horizontal	19.87	30	Pass
3 MHz (16QAM)	Low	1711.5	Horizontal	19.06	30	Pass
	Mid	1732.5	Horizontal	19.51	30	Pass
	High	1753.5	Horizontal	20.23	30	Pass
5 MHz (16QAM)	Low	1712.5	Horizontal	18.59	30	Pass
	Mid	1732.5	Horizontal	19.47	30	Pass
	High	1752.5	Horizontal	20.19	30	Pass
10 MHz (16QAM)	Low	1715	Horizontal	19.27	30	Pass
	Mid	1732.5	Horizontal	19.68	30	Pass
	High	1750	Horizontal	20.13	30	Pass



15 MHz (16QAM)	Low	1717.5	Horizontal	19.43	30	Pass
	Mid	1732.5	Horizontal	19.68	30	Pass
	High	1747.5	Horizontal	20.23	30	Pass
20 MHz (16QAM)	Low	1720	Horizontal	19.13	30	Pass
	Mid	1732.5	Horizontal	20.01	30	Pass
	High	1745	Horizontal	20.63	30	Pass

LTE Band 7						
Band width	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
5 MHz (QPSK)	Low	2502.5	Horizontal	21.88	33	Pass
	Mid	2535	Horizontal	22.93	33	Pass
	High	2567.5	Horizontal	24.15	33	Pass
10 MHz (QPSK)	Low	2505	Horizontal	19.86	33	Pass
	Mid	2535	Horizontal	20.86	33	Pass
	High	2565	Horizontal	22.31	33	Pass
15 MHz (QPSK)	Low	2507.5	Horizontal	21.06	33	Pass
	Mid	2535	Horizontal	20.17	33	Pass
	High	2562.5	Horizontal	22.59	33	Pass
20 MHz (QPSK)	Low	2510	Horizontal	22.06	33	Pass
	Mid	2535	Horizontal	22.12	33	Pass
	High	2560	Horizontal	23.12	33	Pass
5 MHz (16QAM)	Low	2502.5	Horizontal	21.32	33	Pass
	Mid	2535	Horizontal	22.41	33	Pass
	High	2567.5	Horizontal	23.68	33	Pass
10 MHz (16QAM)	Low	2505	Horizontal	19.34	33	Pass
	Mid	2535	Horizontal	20.21	33	Pass
	High	2565	Horizontal	21.67	33	Pass
15 MHz (16QAM)	Low	2507.5	Horizontal	20.53	33	Pass
	Mid	2535	Horizontal	19.68	33	Pass
	High	2562.5	Horizontal	21.99	33	Pass
20 MHz (16QAM)	Low	2510	Horizontal	21.47	33	Pass
	Mid	2535	Horizontal	21.73	33	Pass
	High	2560	Horizontal	22.38	33	Pass

Note: 1. EIRP= E.R.P+2.15

5.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51 kHz, VBW is set to 160 kHz for WCDMA Band IV.

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4 (1.4MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4 (3MHz).


RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 4/7 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/7 (10MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 4/7 (15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

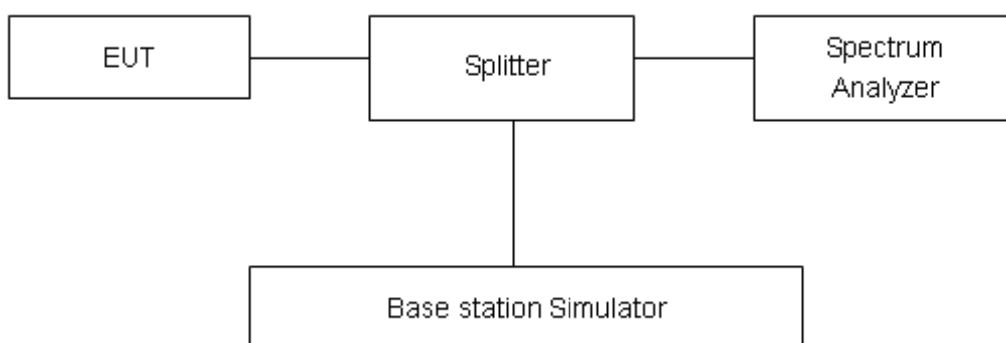

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.

Test Result


Mode	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
WCDMA Band IV (RMC)	1312	1712.4	4.1515	4.660
	1413	1732.6	4.1448	4.644
	1513	1752.6	4.1474	4.626

LTE Band 4						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20175	1732.5	1.1418	1.475
		3	20175	1732.5	2.7875	3.460
		5	20175	1732.5	4.5283	5.470
		10	20175	1732.5	9.0789	10.460
		15	20175	1732.5	13.5320	15.790
		20	20175	1732.5	17.9910	20.030
	16QAM	1.4	20175	1732.5	1.1454	1.545
		3	20175	1732.5	2.7870	3.348
		5	20175	1732.5	4.5551	5.477
		10	20175	1732.5	9.0928	10.430
		15	20175	1732.5	13.5220	15.020
		20	20175	1732.5	17.9920	20.060


LTE Band 7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	21100	2535	4.5323	5.332
		10	21100	2535	9.1181	10.560
		15	21100	2535	13.5270	15.510
		20	21100	2535	17.9560	19.800
	16QAM	5	21100	2535	4.5576	5.410
		10	21100	2535	9.1319	11.090
		15	21100	2535	13.5410	15.000
		20	21100	2535	18.0360	19.940




WCDMA Band IV CH-Low

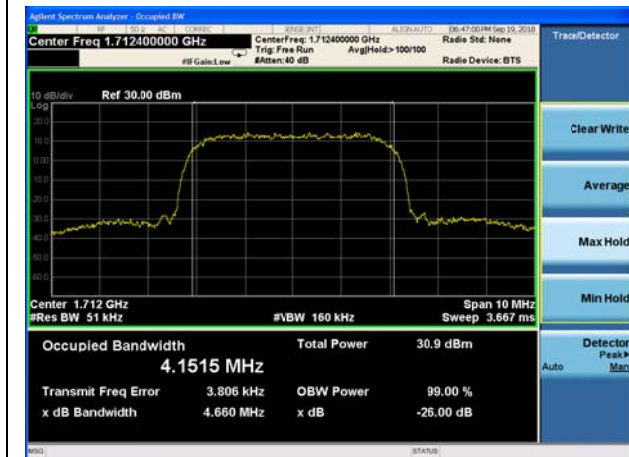

WCDMA Band IV CH Middle

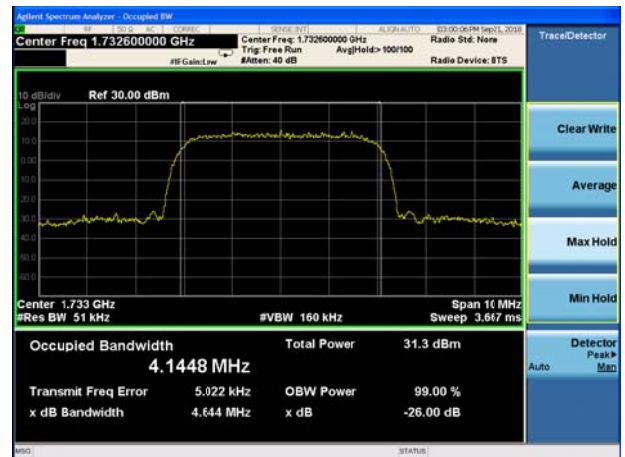


WCDMA Band IV CH High

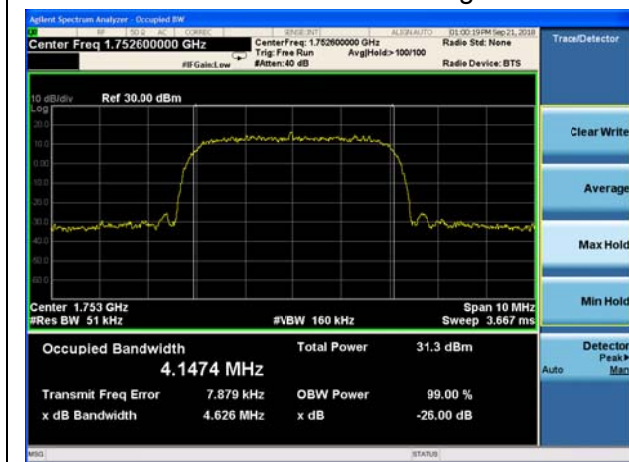




LTE Band 4 QPSK 1.4MHz CH-Middle

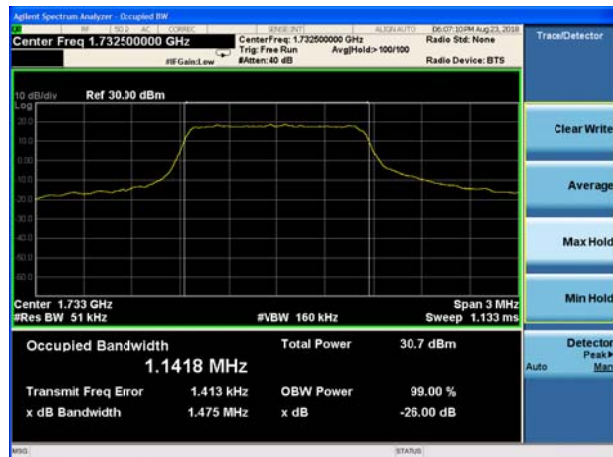


LTE Band 4 16QAM 1.4MHz CH-Middle



LTE Band 4 QPSK 3MHz CH-Middle

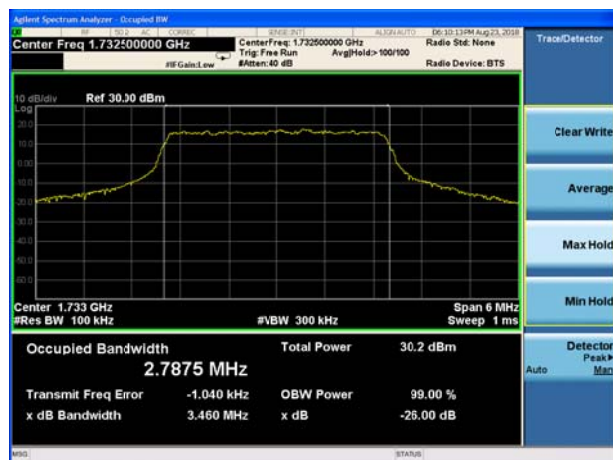

LTE Band 4 16QAM 3MHz CH-Middle

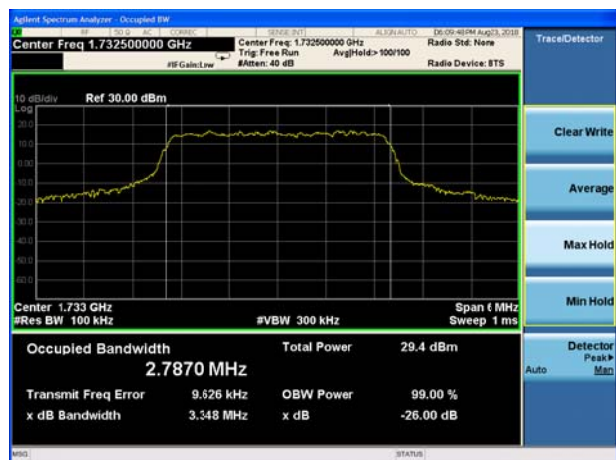

LTE Band 4 QPSK 5MHz CH-Middle



LTE Band 4 16QAM 5MHz CH-Middle






LTE Band 4 QPSK 10MHz CH-Middle




LTE Band 4 16QAM 10MHz CH-Middle




LTE Band 4 QPSK 15MHz CH-Middle

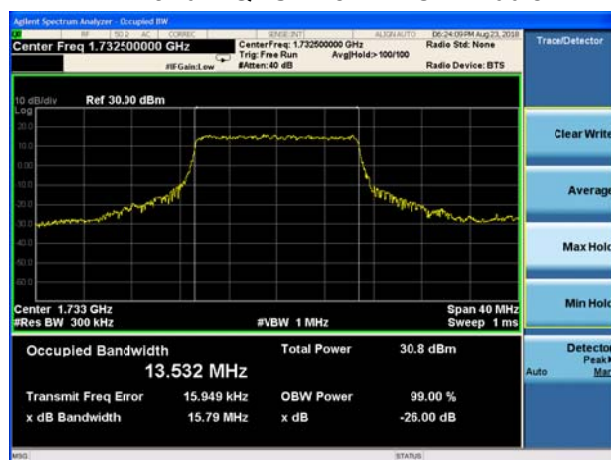


LTE Band 4 16QAM 15MHz CH-Middle

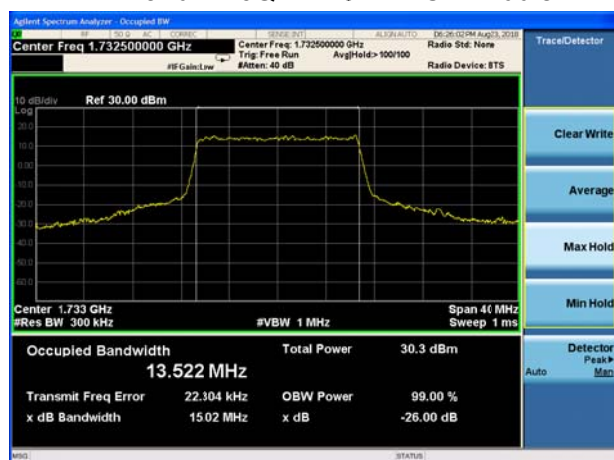

LTE Band 4 QPSK 20MHz CH-Middle

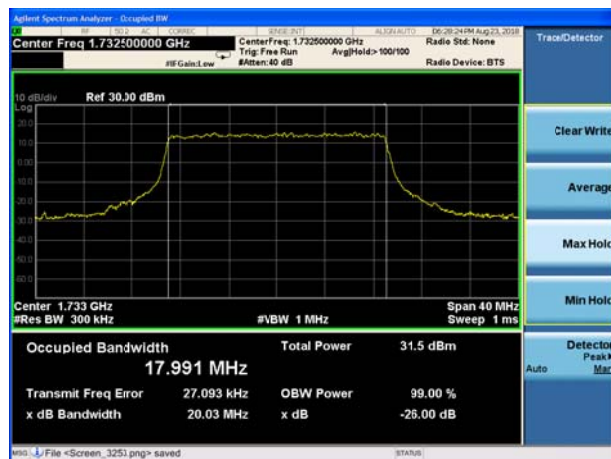


LTE Band 4 16QAM 20MHz CH-Middle

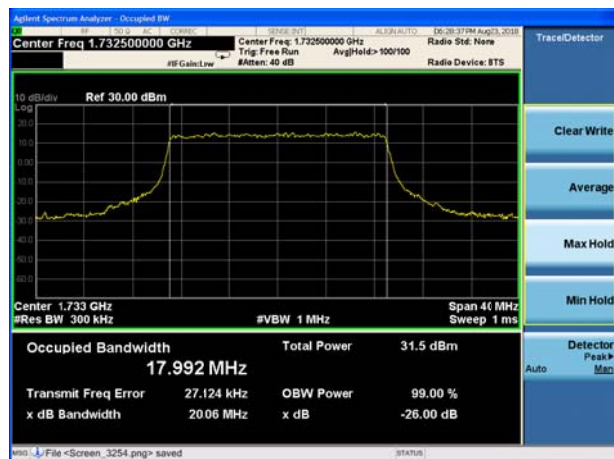




LTE Band 7 QPSK 5MHz CH-Middle

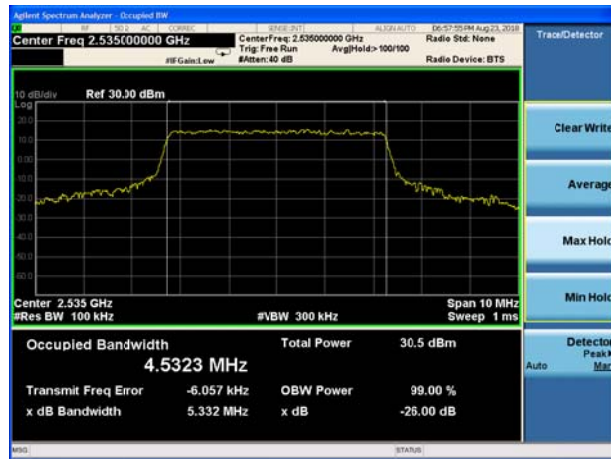


LTE Band 7 16QAM 5MHz CH-Middle




LTE Band 7 QPSK 10MHz CH-Middle

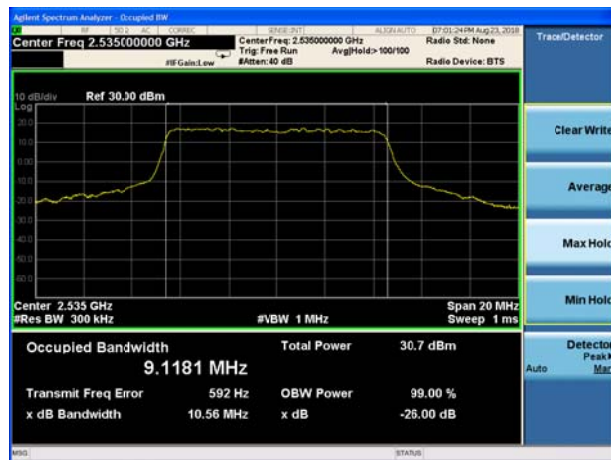


LTE Band 7 16QAM 10MHz CH-Middle

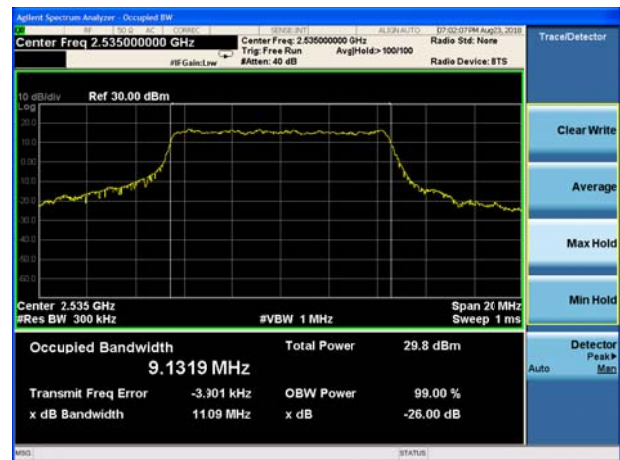

LTE Band 7 QPSK 15MHz CH-Middle

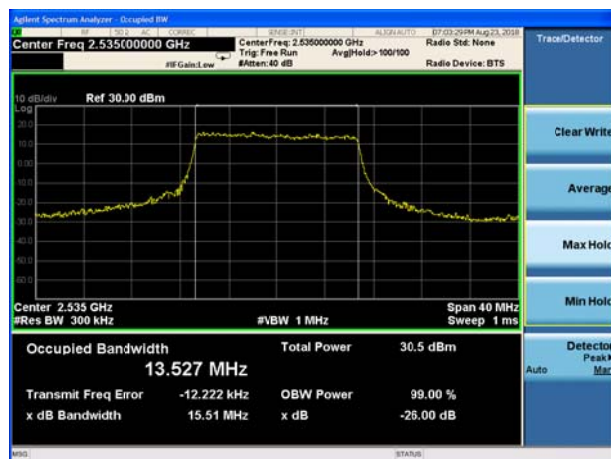


LTE Band 7 16QAM 15MHz CH-Middle

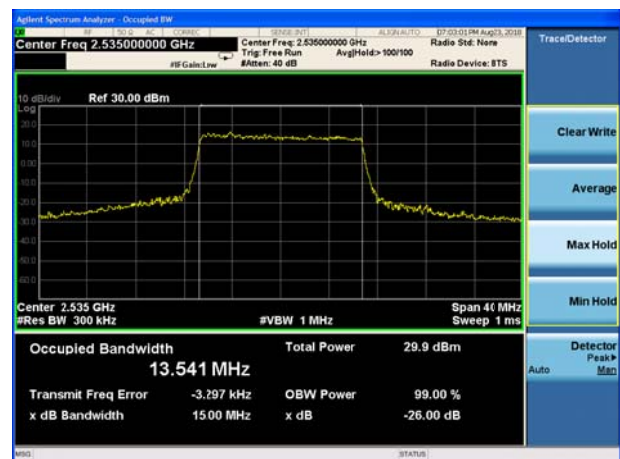



LTE Band 7 QPSK 20MHz CH-Middle

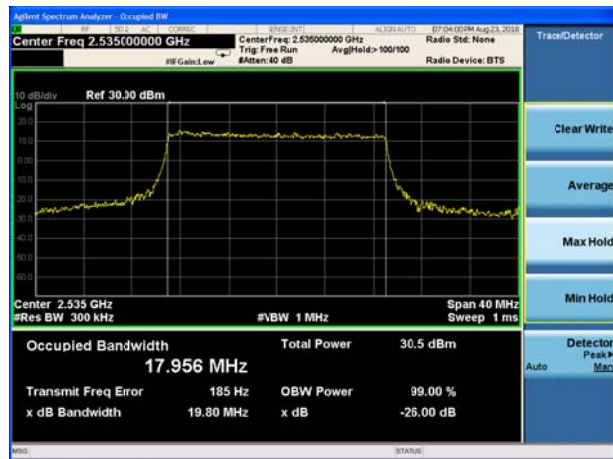

LTE Band 7 16QAM 20MHz CH-Middle



5.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

1.The EUT was connected to spectrum analyzer and system simulator via a power divider.

2. The band edges of low and high channels for the highest RF powers were measured.

RBW is set to 51 kHz, VBW is set to 160 kHz for WCDMA Band IV.

RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 4 (1.4MHz).

RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 4 (3MHz).

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 4 (5MHz).

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 4 (10MHz).

RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 4 (15MHz).

RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 4 (20MHz).

RBW is set to 50 kHz, VBW is set to 200 kHz for LTE Band 7 (5MHz).

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 7 (10MHz).

RBW is set to 200 kHz, VBW is set to 1MHz for LTE Band 7 (15MHz/20MHz).


on spectrum analyzer.

3. Set spectrum analyzer with RMS detector.

4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5. Checked that all the results comply with the emission limit line.

Test Setup

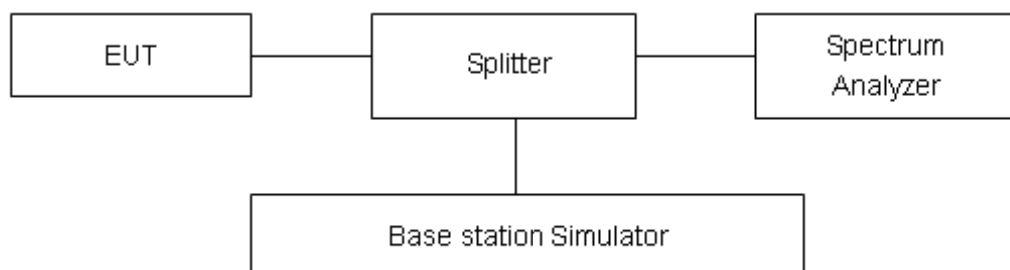

Limits



Rule Part 27.53(h)/ specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB”

Part 27.53(m) (4)/ specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log (P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)} = -13 \text{ dBm.}$$

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684 \text{ dB}$.




Test Result

All the test traces in the plots shows the test results clearly.







LTE Band 4 QPSK 1.4MHz CH-Low, 1 RB

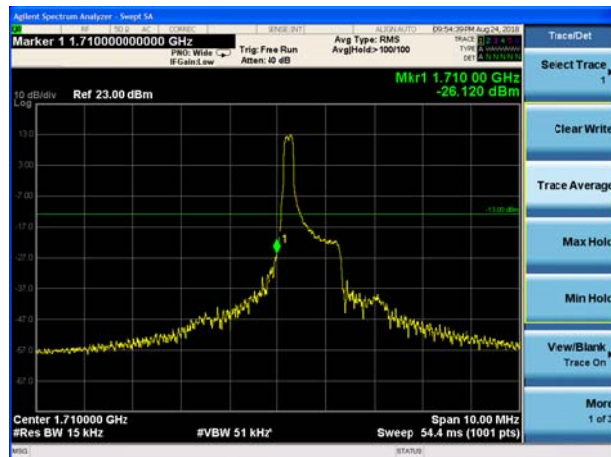


LTE Band 4 QPSK 1.4MHz CH-High, 1 RB

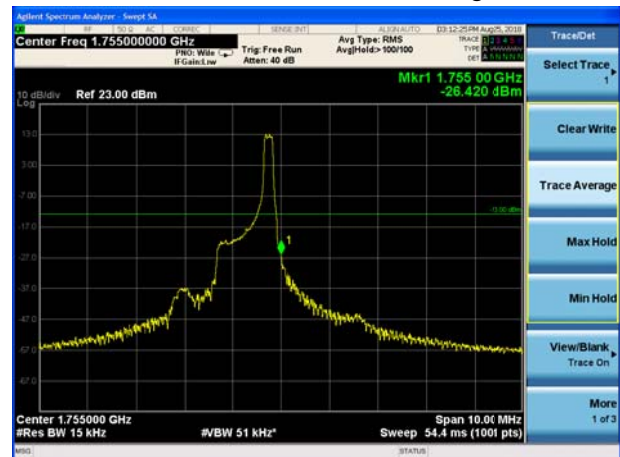


LTE Band 4 QPSK 1.4MHz CH-Low, 100%RB

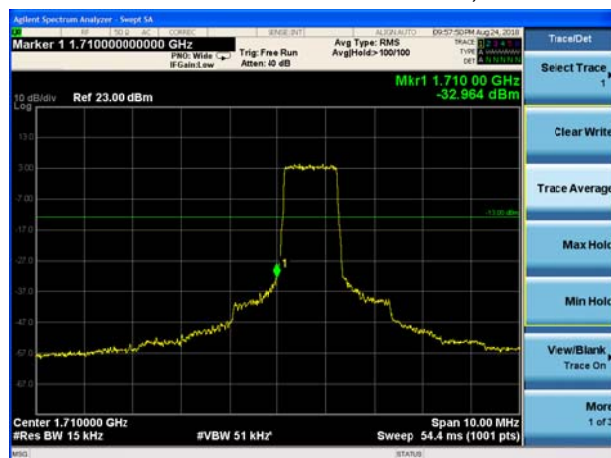


LTE Band 4 QPSK 1.4MHz CH-High, 100%RB

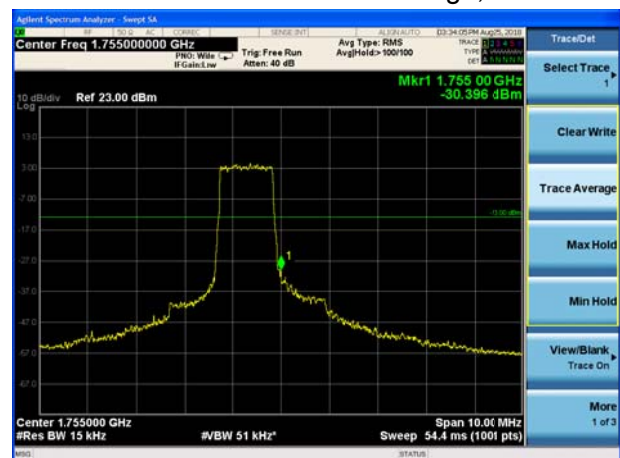

LTE Band 4 QPSK 3MHz CH-Low, 1 RB

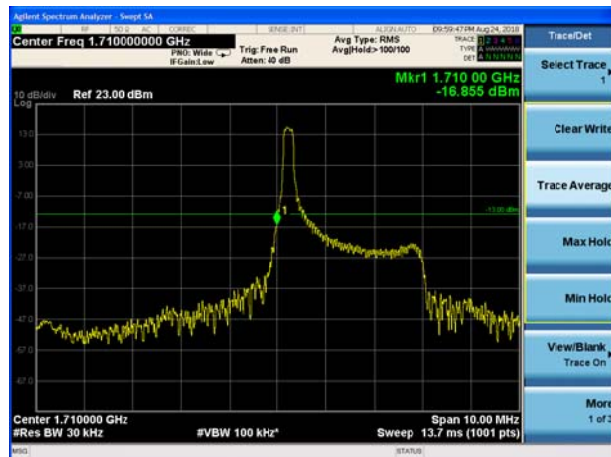

LTE Band 4 QPSK 3MHz CH-High, 1 RB

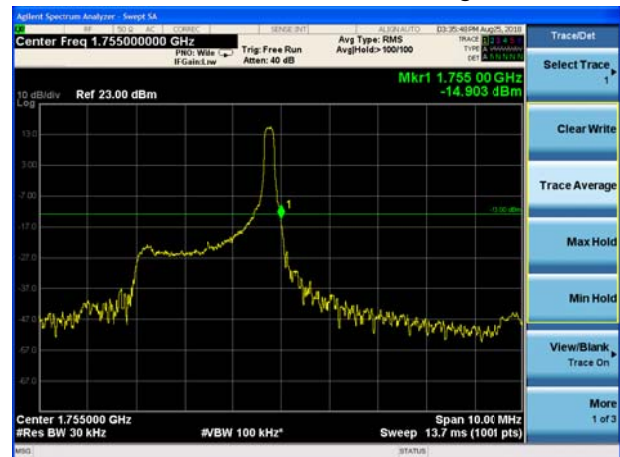




LTE Band 4 QPSK 3MHz CH-Low, 100%RB




LTE Band 4 QPSK 3MHz CH-High, 100%RB




LTE Band 4 QPSK 5MHz CH-Low, 1 RB

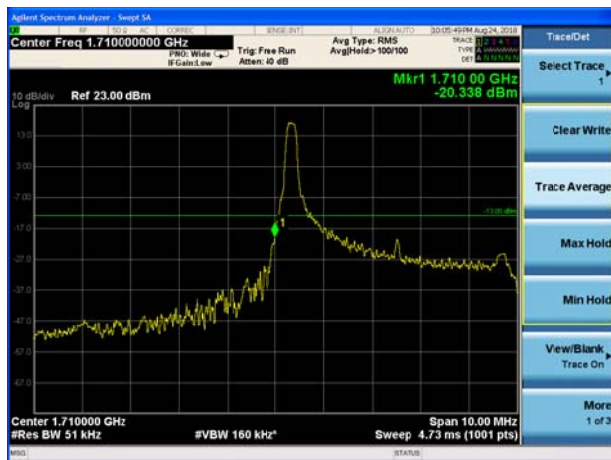


LTE Band 4 QPSK 5MHz CH-High, 1 RB

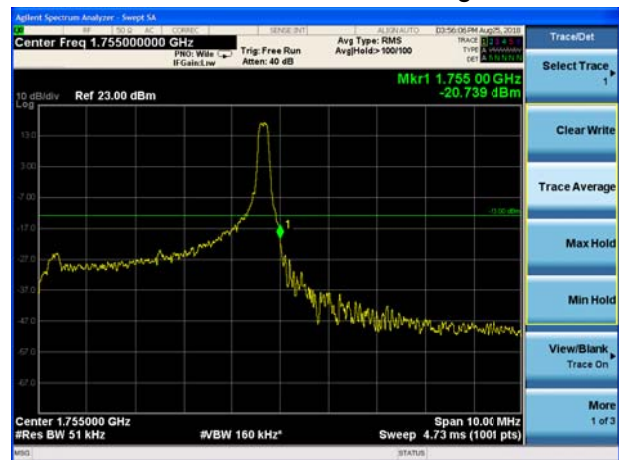

LTE Band 4 QPSK 5MHz CH-Low, 100%RB

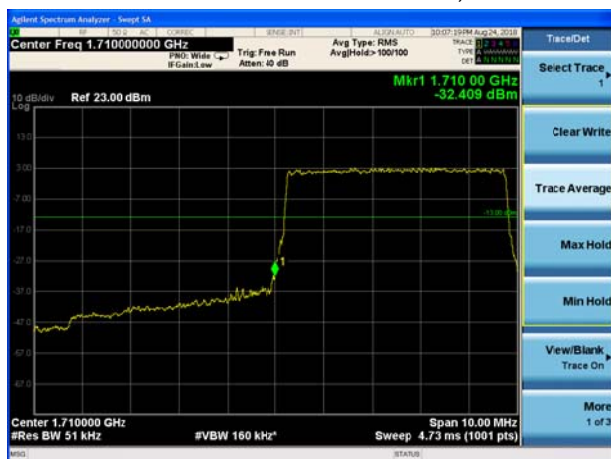


LTE Band 4 QPSK 5MHz CH-High, 100%RB

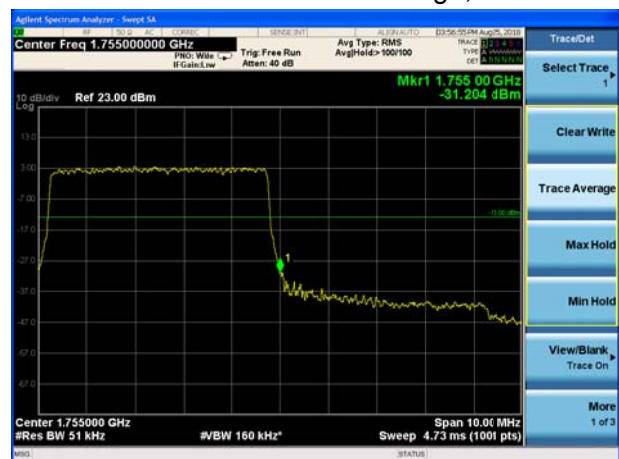





LTE Band 4 QPSK 10MHz CH-Low, 1 RB

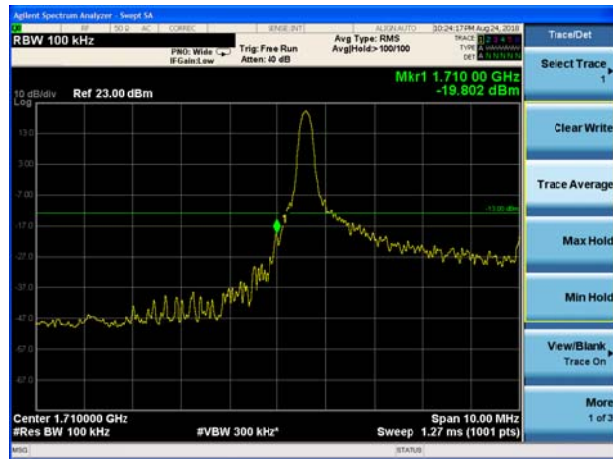


LTE Band 4 QPSK 10MHz CH-High, 1 RB

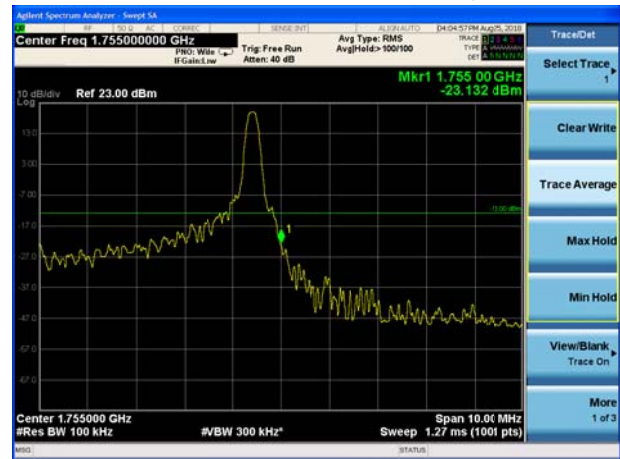


LTE Band 4 QPSK 10MHz CH-Low, 100%RB

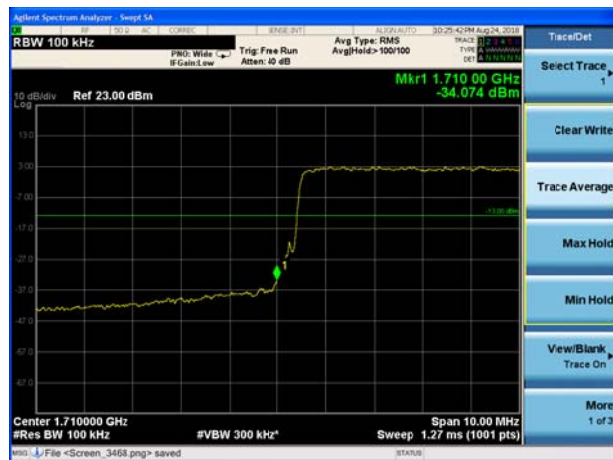


LTE Band 4 QPSK 10MHz CH-High, 100%RB

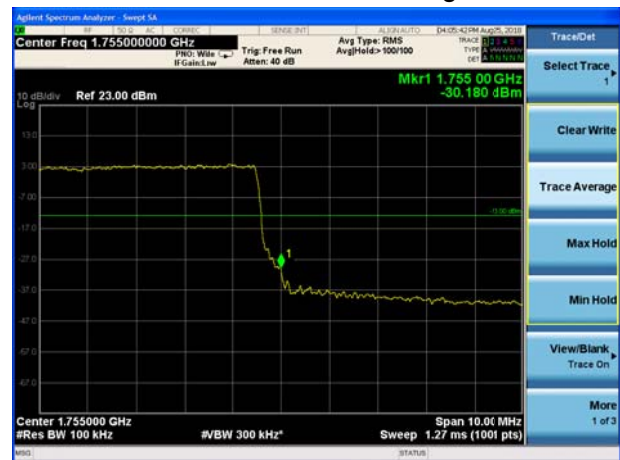

LTE Band 4 QPSK 15MHz CH-Low, 1 RB

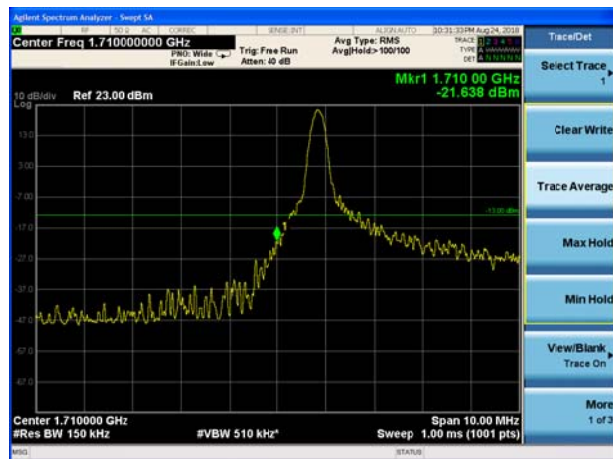

LTE Band 4 QPSK 15MHz CH-High, 1 RB

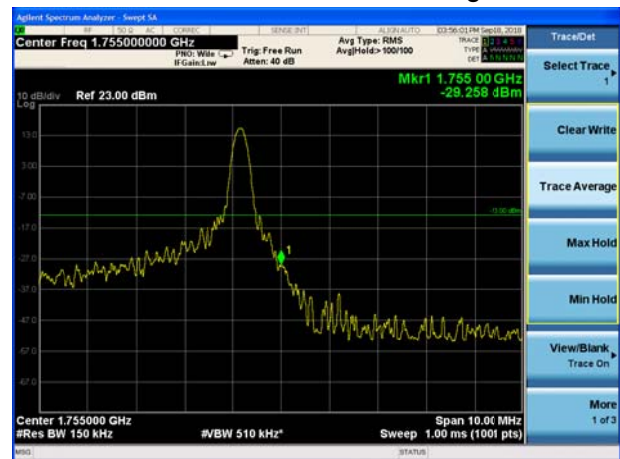




LTE Band 4 QPSK 15MHz CH-Low, 100%RB




LTE Band 4 QPSK 15MHz CH-High, 100%RB




LTE Band 4 QPSK 20MHz CH-Low, 1 RB

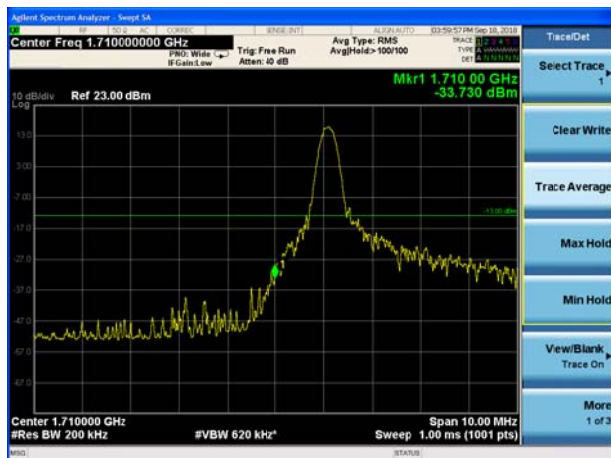

LTE Band 4 QPSK 20MHz CH-High, 1 RB

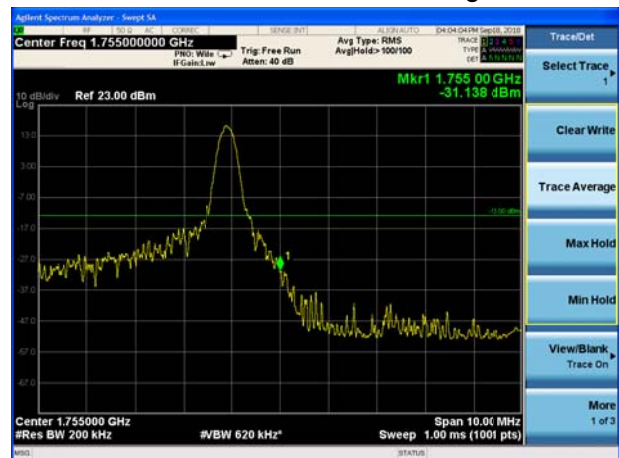

LTE Band 4 QPSK 20MHz CH-Low, 100%RB

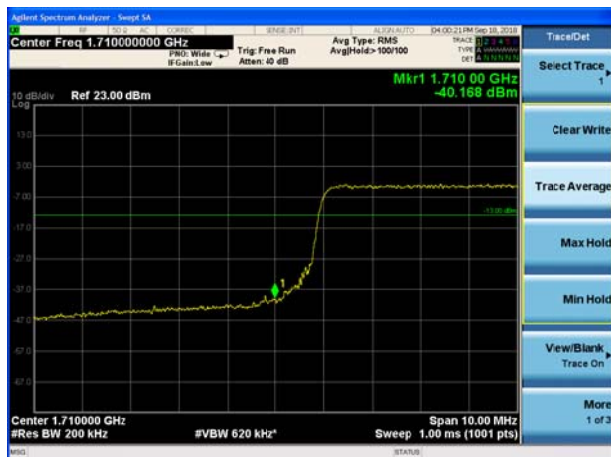


LTE Band 4 QPSK 20MHz CH-High, 100%RB







LTE Band 4 16QAM 1.4MHz CH-Low, 1 RB

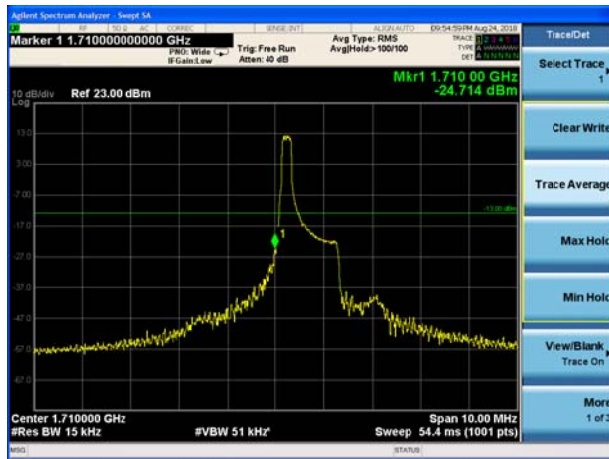


LTE Band 4 16QAM 1.4MHz CH-High, 1 RB

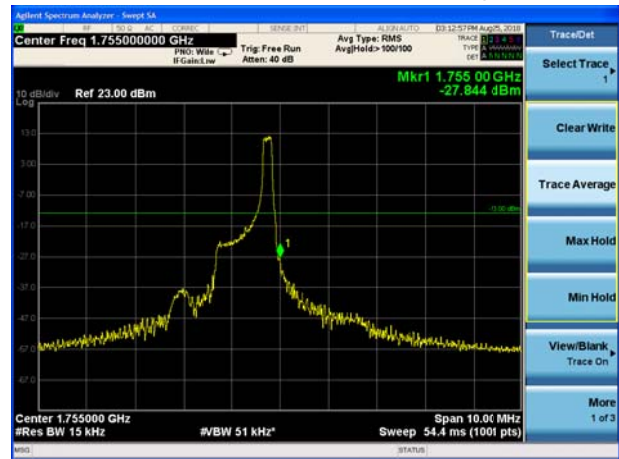


LTE Band 4 16QAM 1.4MHz CH-Low, 100%RB

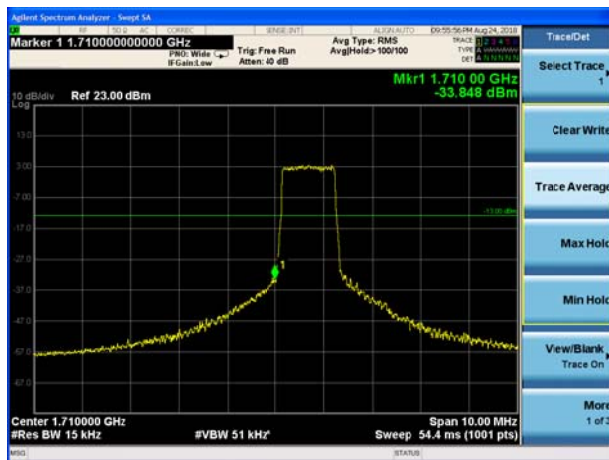


LTE Band 4 16QAM 1.4MHz CH-High, 100%RB

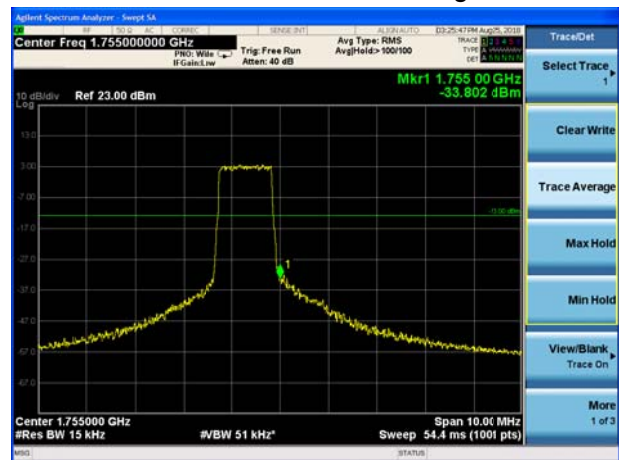

LTE Band 4 16QAM 3MHz CH-Low, 1 RB

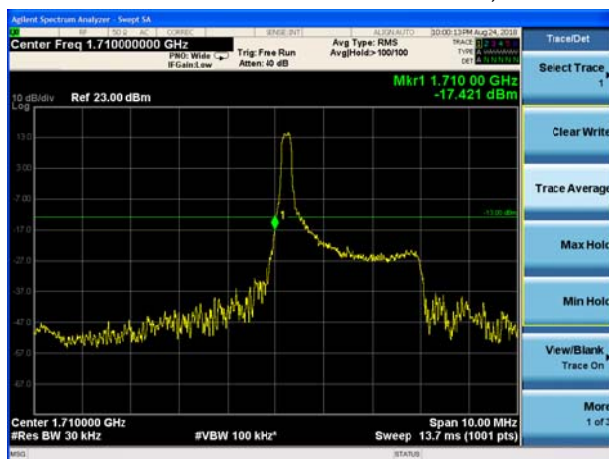

LTE Band 4 16QAM 3MHz CH-High, 1 RB

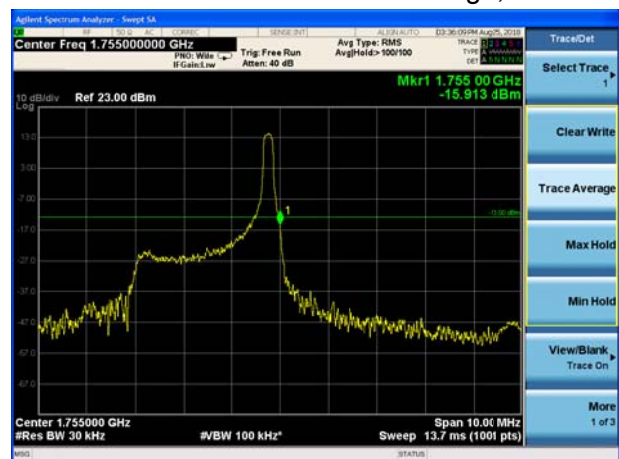




LTE Band 4 16QAM 3MHz CH-Low, 100%RB




LTE Band 4 16QAM 3MHz CH-High, 100%RB




LTE Band 4 16QAM 5MHz CH-Low, 1 RB

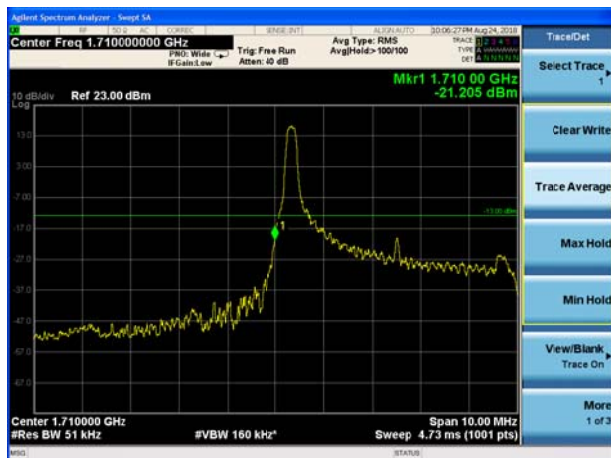

LTE Band 4 16QAM 5MHz CH-High, 1 RB

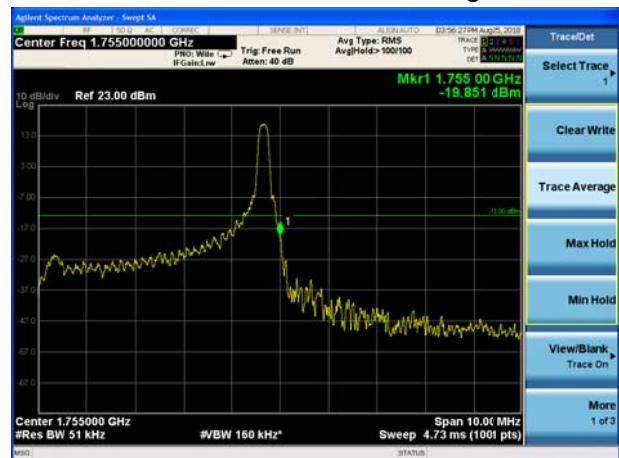

LTE Band 4 16QAM 5MHz CH-Low, 100%RB

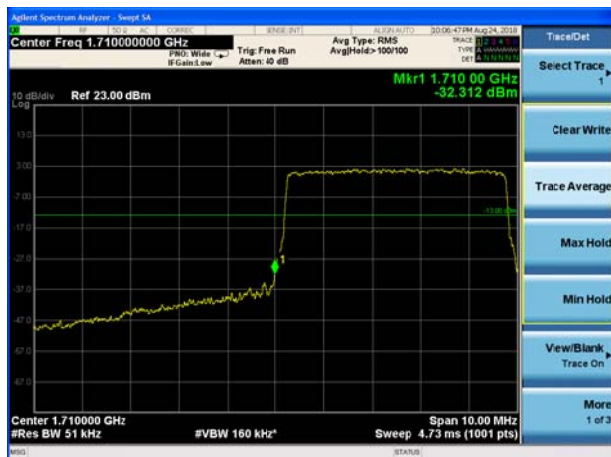


LTE Band 4 16QAM 5MHz CH-High, 100%RB







LTE Band 4 16QAM 10MHz CH-Low, 1 RB

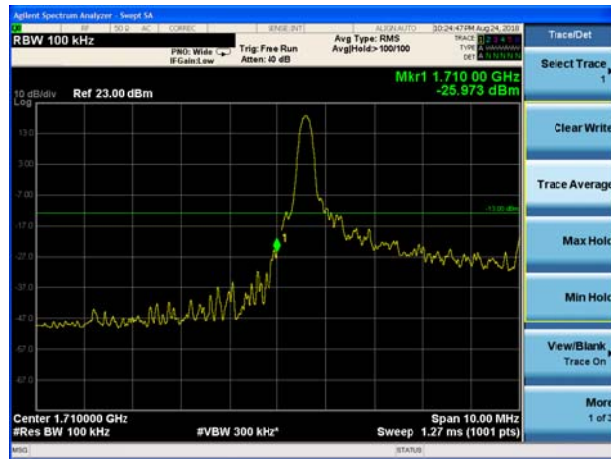


LTE Band 4 16QAM 10MHz CH-High, 1 RB

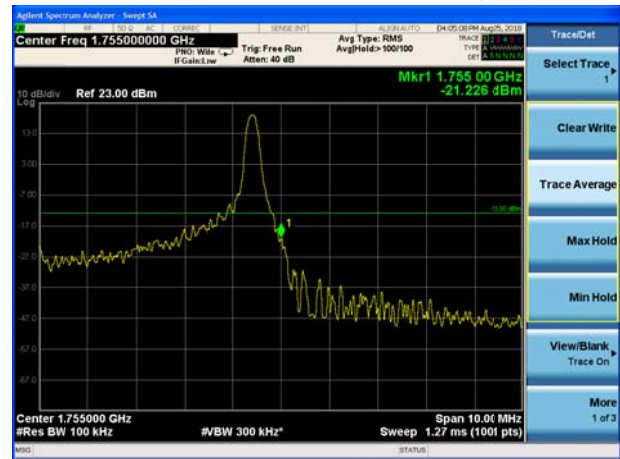


LTE Band 4 16QAM 10MHz CH-Low, 100%RB

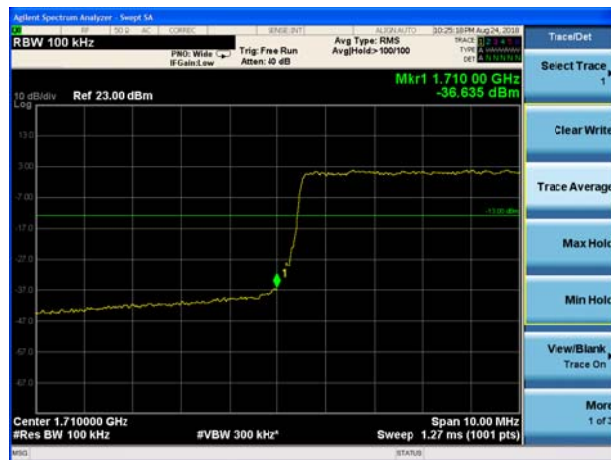


LTE Band 4 16QAM 10MHz CH-High, 100%RB

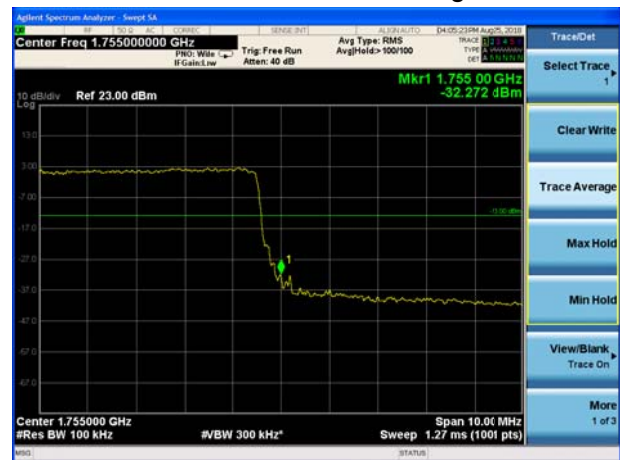

LTE Band 4 16QAM 15MHz CH-Low, 1 RB

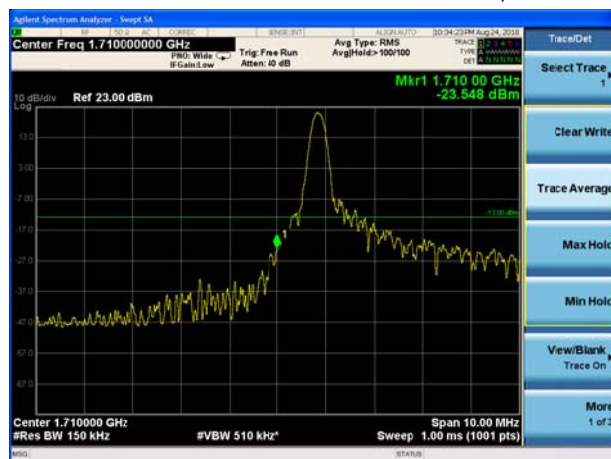


LTE Band 4 16QAM 15MHz CH-High, 1 RB

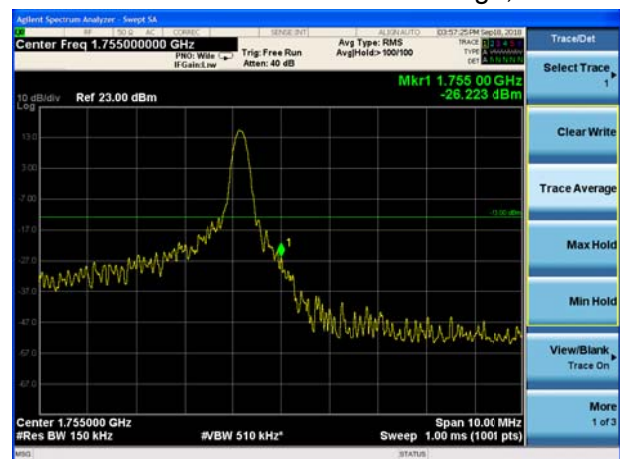




LTE Band 4 16QAM 15MHz CH-Low, 100%RB

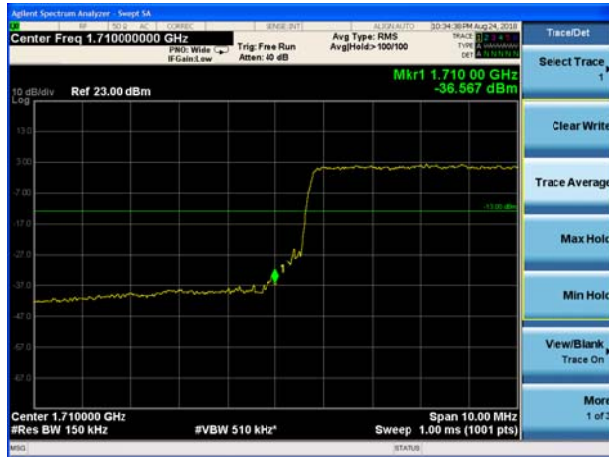


LTE Band 4 16QAM 15MHz CH-High, 100%RB



LTE Band 4 16QAM 20MHz CH-Low, 1 RB

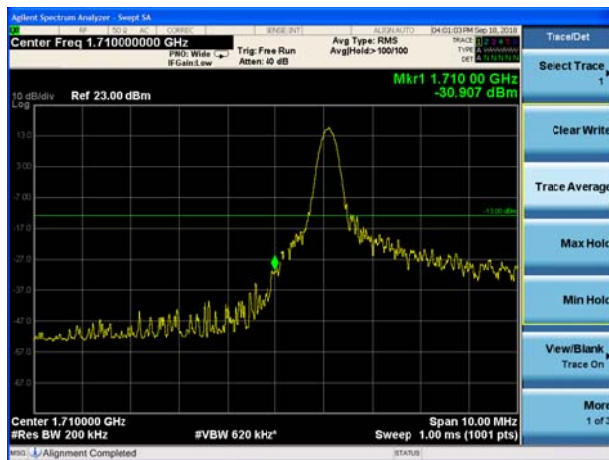

LTE Band 4 16QAM 20MHz CH-High, 1 RB

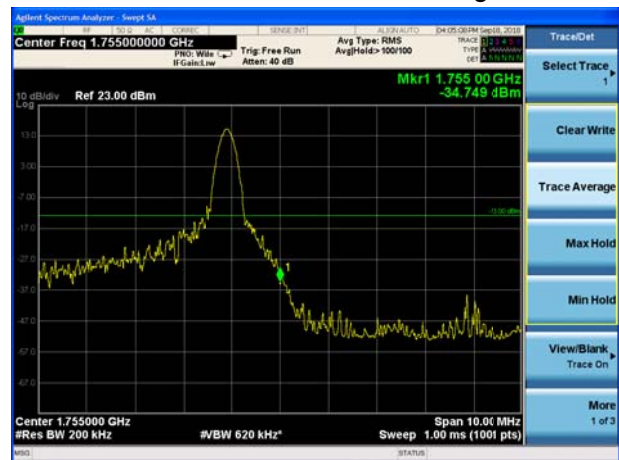

LTE Band 4 16QAM 20MHz CH-Low, 100%RB




LTE Band 4 16QAM 20MHz CH-High, 100%RB






LTE Band 7 QPSK 5MHz CH-Low, 1 RB

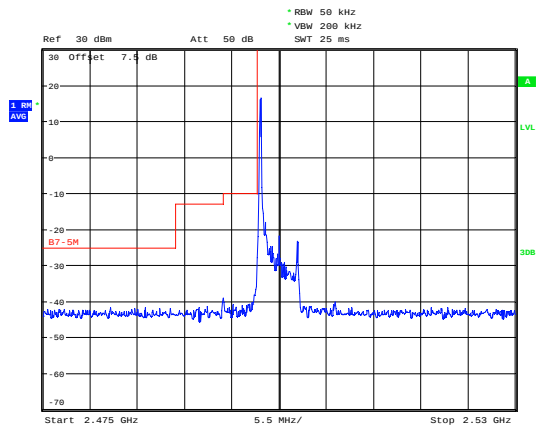


Date: 20.SEP.2018 17:12:22

LTE Band 7 QPSK 5MHz CH-High, 1 RB

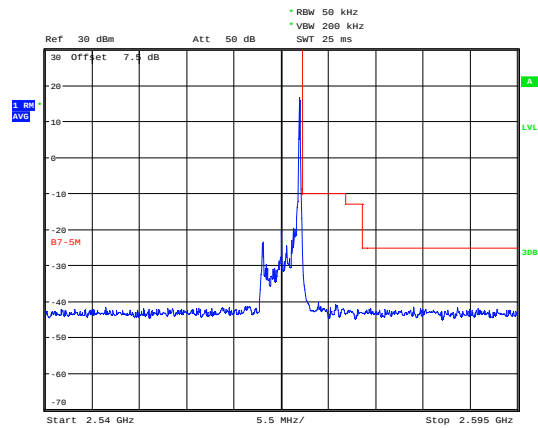


Date: 20.SEP.2018 17:55:01

LTE Band 7 QPSK 5MHz CH-Low, 100%RB

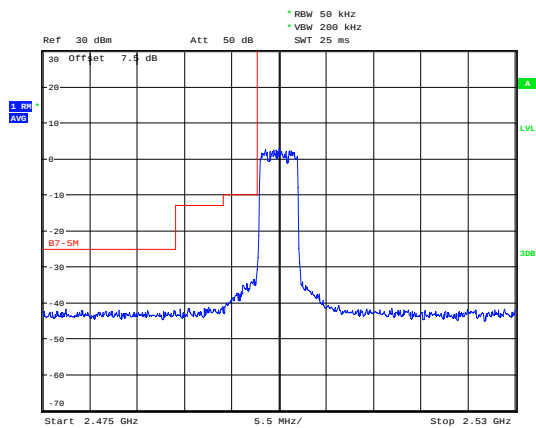


Date: 20.SEP.2018 17:13:02

LTE Band 7 QPSK 5MHz CH-High, 100%RB

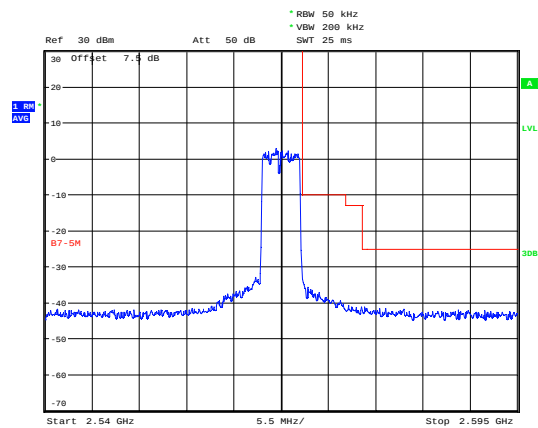


Date: 20.SEP.2018 17:54:09

LTE Band 7 QPSK 10MHz CH-Low, 1 RB

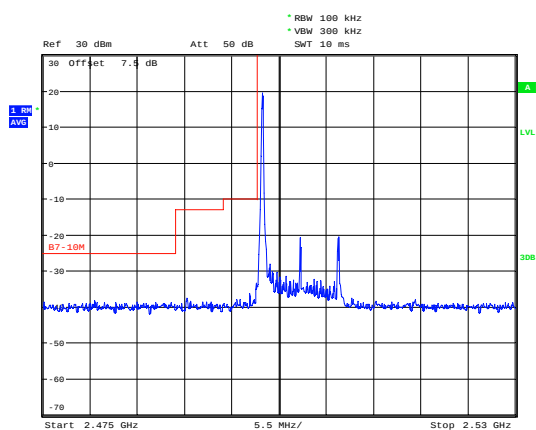

Date: 20.SEP.2018 17:22:57


LTE Band 7 QPSK 10MHz CH-High, 1 RB

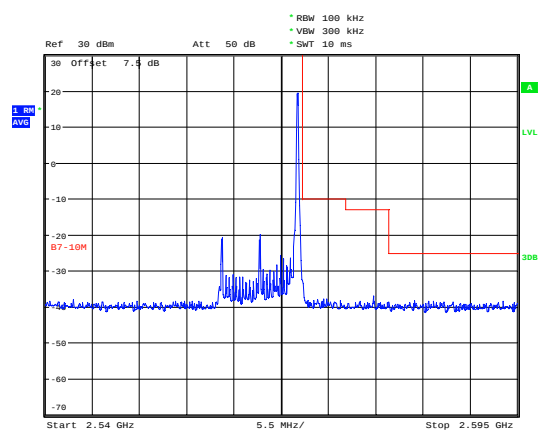

Date: 20.SEP.2018 17:43:06




LTE Band 7 QPSK 10MHz CH-Low, 100%RB

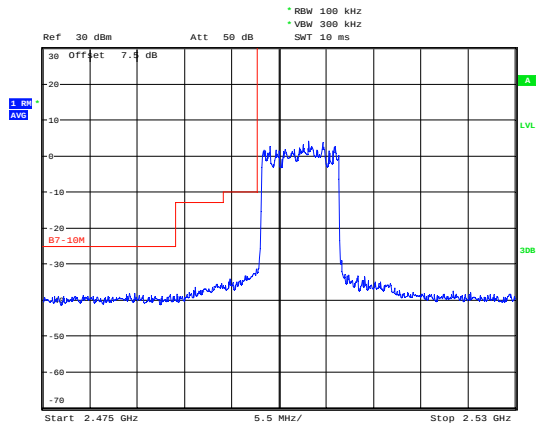


Date: 20.SEP.2018 17:28:57

LTE Band 7 QPSK 10MHz CH-High, 100%RB

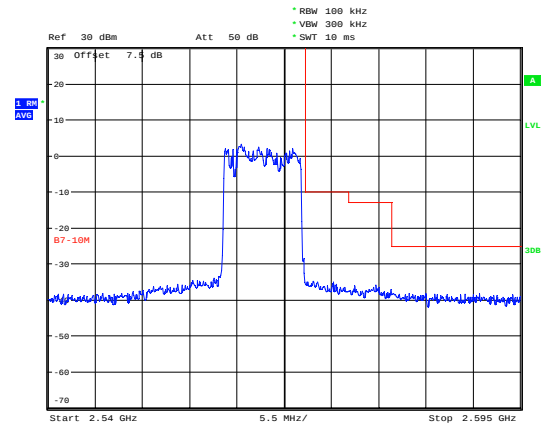


Date: 20.SEP.2018 17:43:50

LTE Band 7 QPSK 15MHz CH-Low, 1 RB

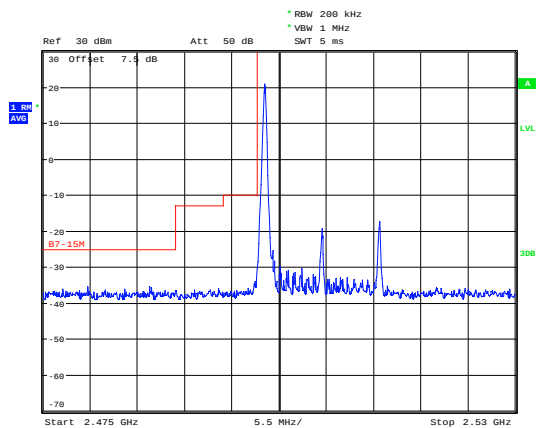


Date: 20.SEP.2018 17:28:57

LTE Band 7 QPSK 15MHz CH-High, 1 RB

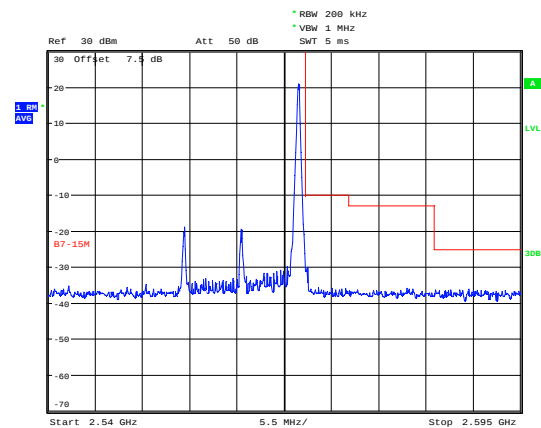


Date: 20.SEP.2018 17:39:53

LTE Band 7 QPSK 15MHz CH-Low, 100%RB

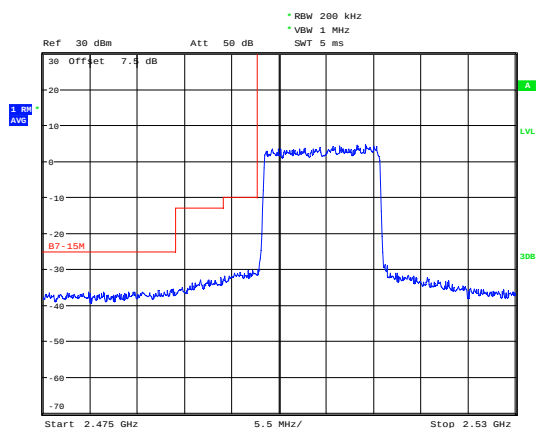

Date: 20.SEP.2018 17:27:09


LTE Band 7 QPSK 15MHz CH-High, 100%RB

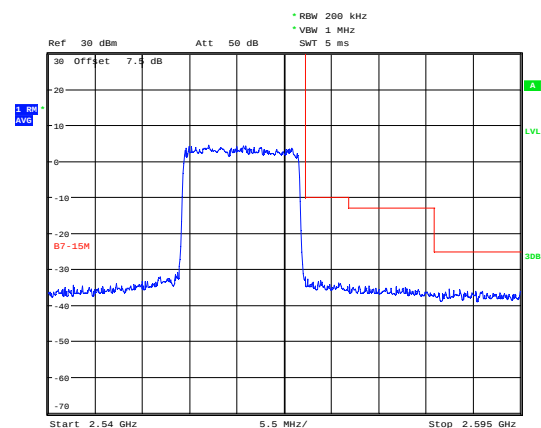

Date: 20.SEP.2018 17:48:16




LTE Band 7 QPSK 20MHz CH-Low, 1 RB

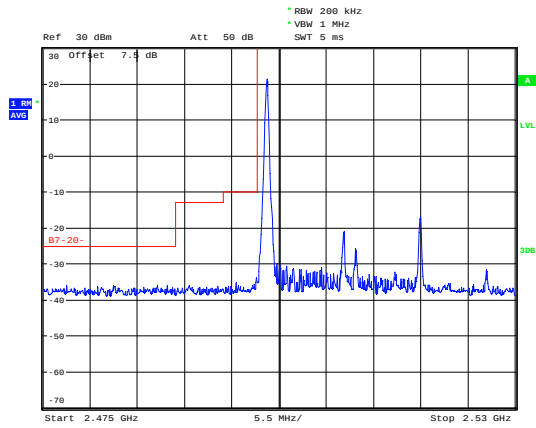


Date: 20.SEP.2018 17:34:34

LTE Band 7 QPSK 20MHz CH-High, 1 RB

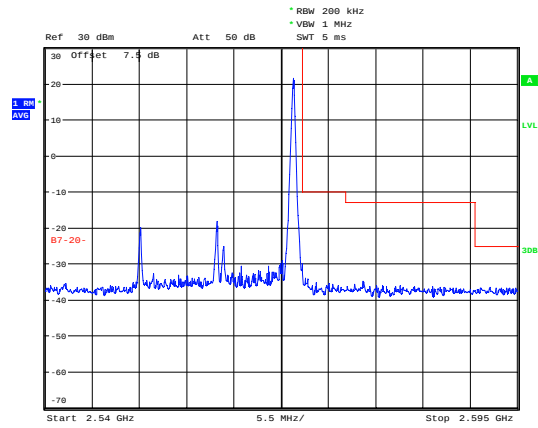


Date: 20.SEP.2018 17:36:51

LTE Band 7 QPSK 20MHz CH-Low, 100%RB

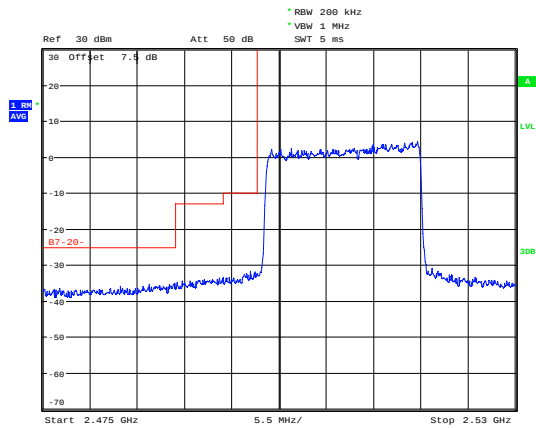


Date: 20.SEP.2018 17:34:08

LTE Band 7 QPSK 20MHz CH-High, 100%RB

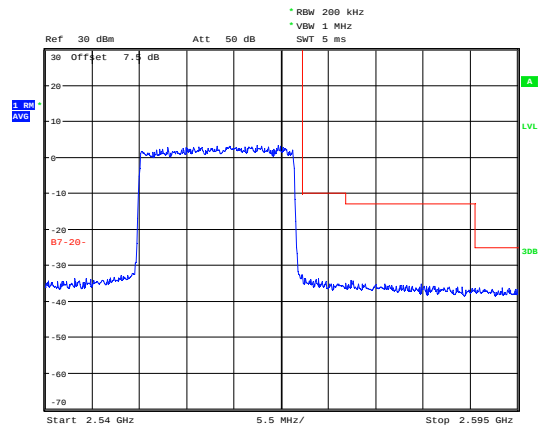


Date: 20.SEP.2018 17:37:17

LTE Band 7 16QAM 5MHz CH-Low, 1 RB

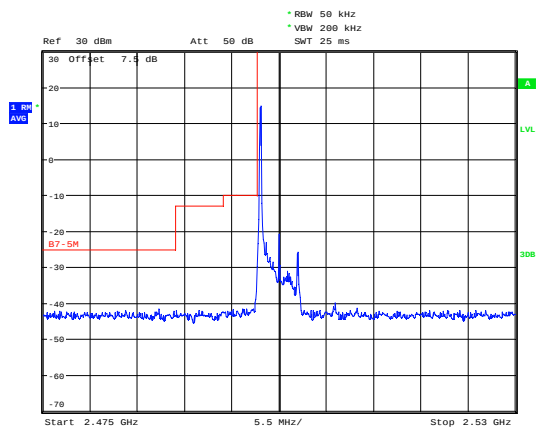

Date: 20.SEP.2018 17:14:38


LTE Band 7 16QAM 5MHz CH-High, 1 RB

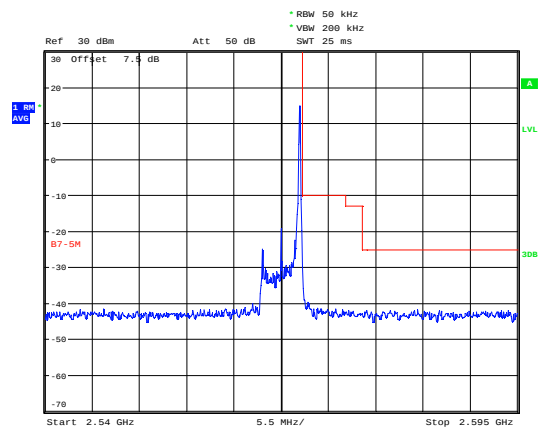

Date: 20.SEP.2018 17:53:17




LTE Band 7 16QAM 5MHz CH-Low, 100%RB

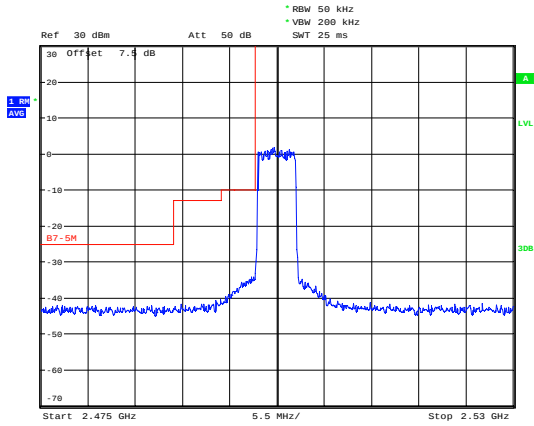


Date: 20.SEP.2018 17:13:28

LTE Band 7 16QAM 5MHz CH-High, 100%RB

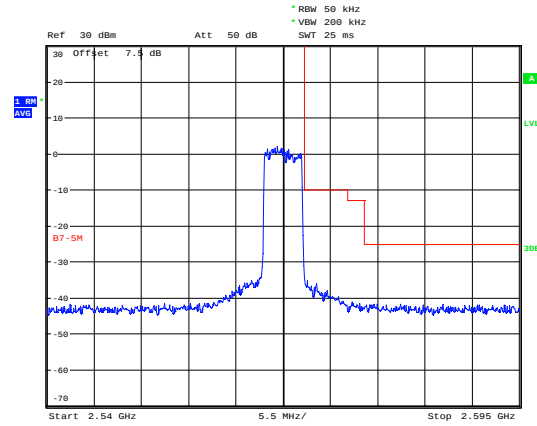


Date: 20.SEP.2018 17:53:48

LTE Band 7 16QAM 10MHz CH-Low, 1 RB

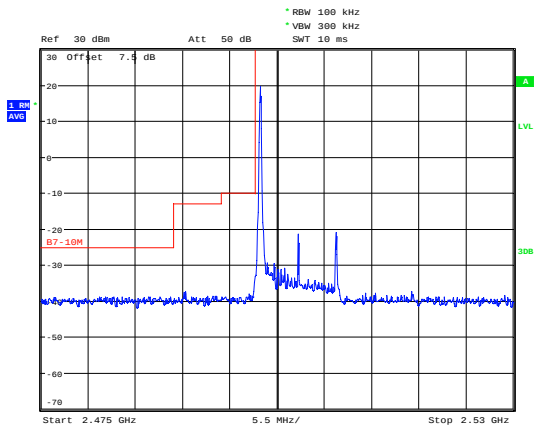


Date: 20.SEP.2018 17:22:10

LTE Band 7 16QAM 10MHz CH-High, 1 RB

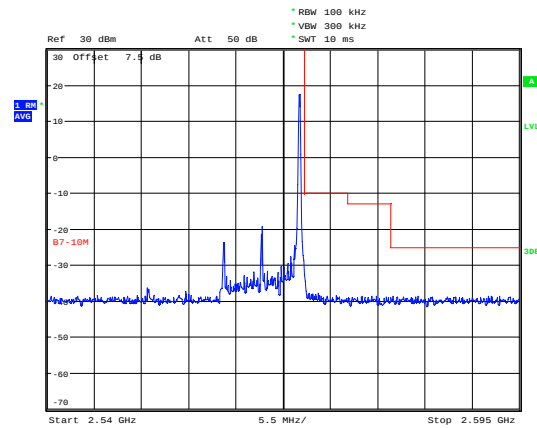


Date: 20.SEP.2018 17:44:49

LTE Band 7 16QAM 10MHz CH-Low, 100%RB

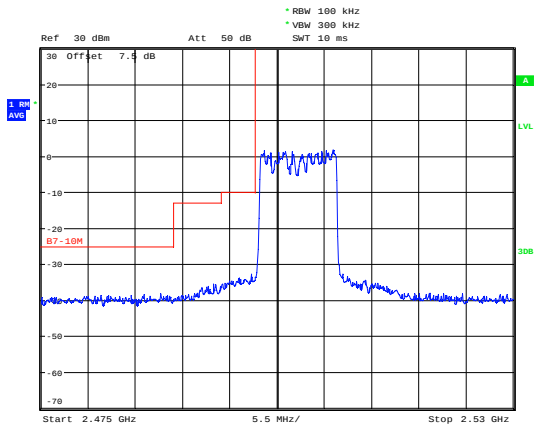

Date: 20.SEP.2018 17:21:29


LTE Band 7 16QAM 10MHz CH-High, 100%RB

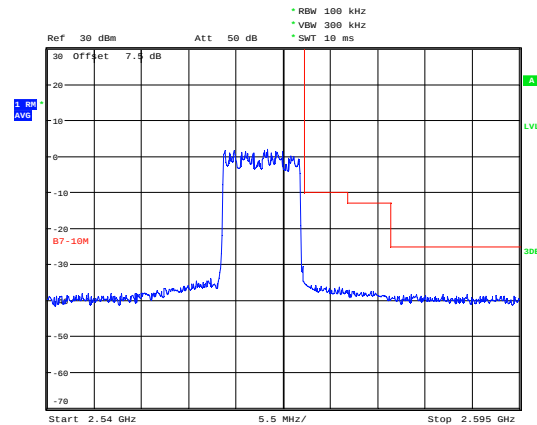

Date: 20.SEP.2018 17:44:07




LTE Band 7 16QAM 15MHz CH-Low, 1 RB

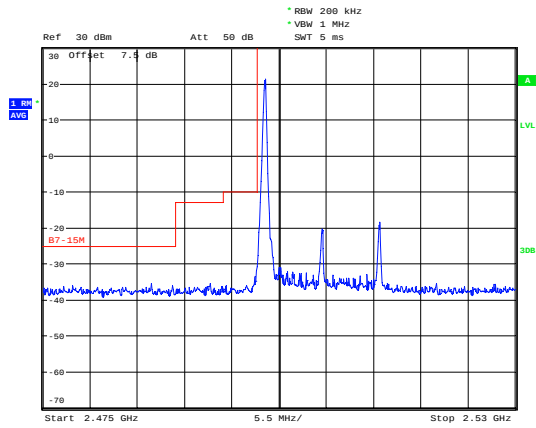


Date: 20.SEP.2018 17:29:33

LTE Band 7 16QAM 15MHz CH-High, 1 RB

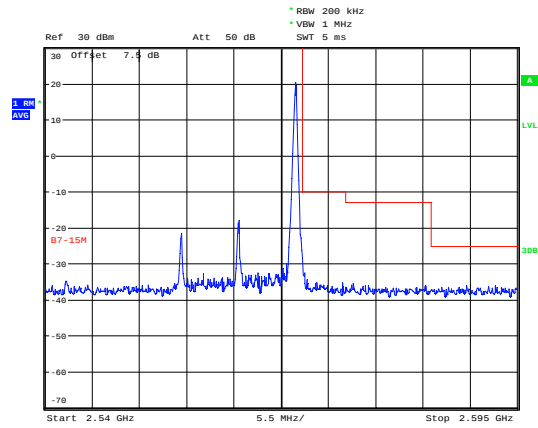


Date: 20.SEP.2018 17:40:53

LTE Band 7 16QAM 15MHz CH-Low, 100%RB

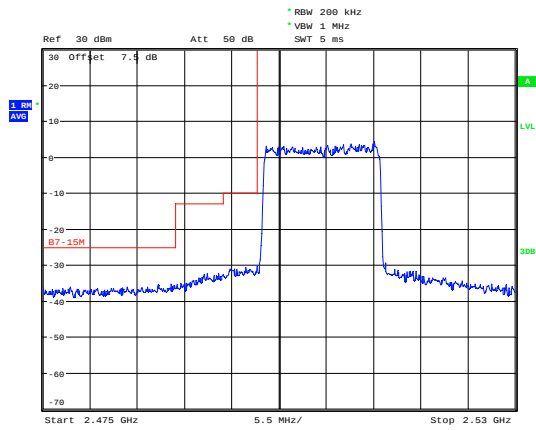


Date: 20.SEP.2018 17:29:58

LTE Band 7 16QAM 15MHz CH-High, 100%RB

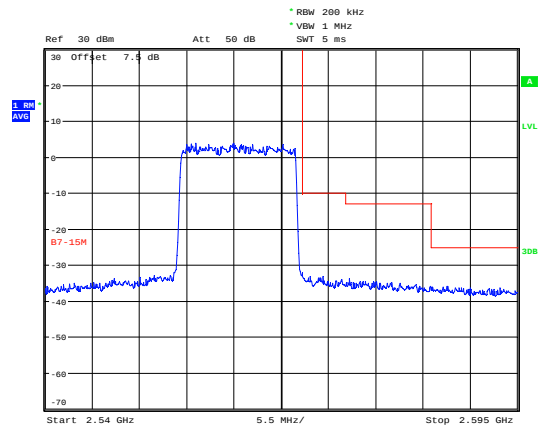


Date: 20.SEP.2018 17:40:34

LTE Band 7 16QAM 20MHz CH-Low, 1 RB

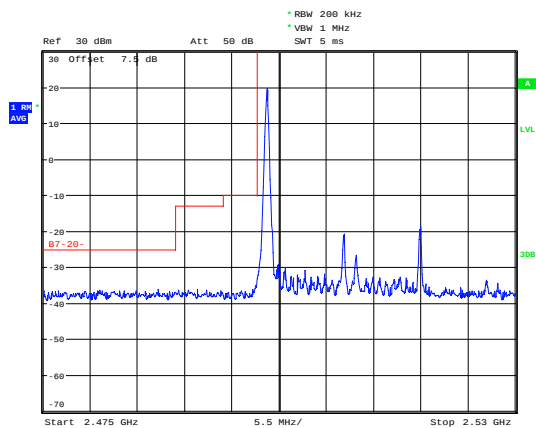

Date: 20.SEP.2018 17:34:58


LTE Band 7 16QAM 20MHz CH-High, 1 RB

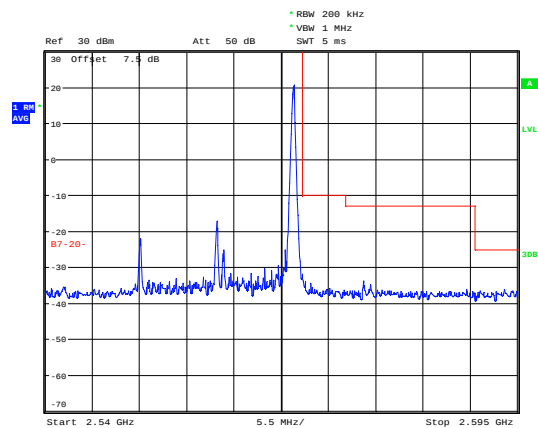

Date: 20.SEP.2018 17:38:07




LTE Band 7 16QAM 20MHz CH-Low, 100%RB

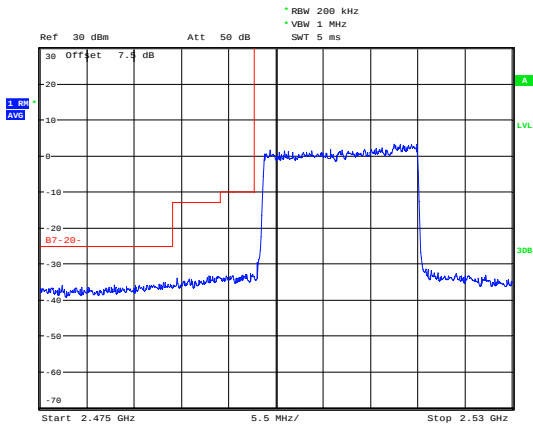

Date: 20.SEP.2018 17:35:19

LTE Band 7 16QAM 20MHz CH-High, 100%RB

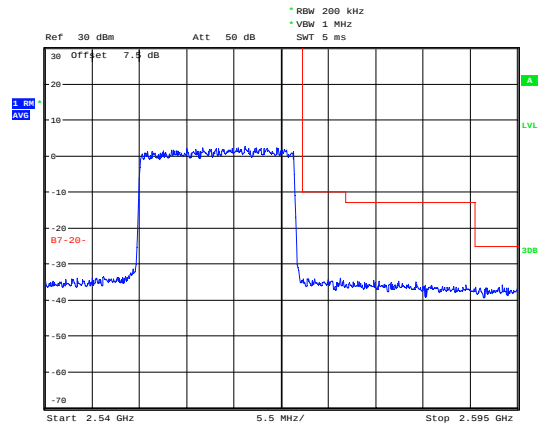

Date: 20.SEP.2018 17:37:42

5.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

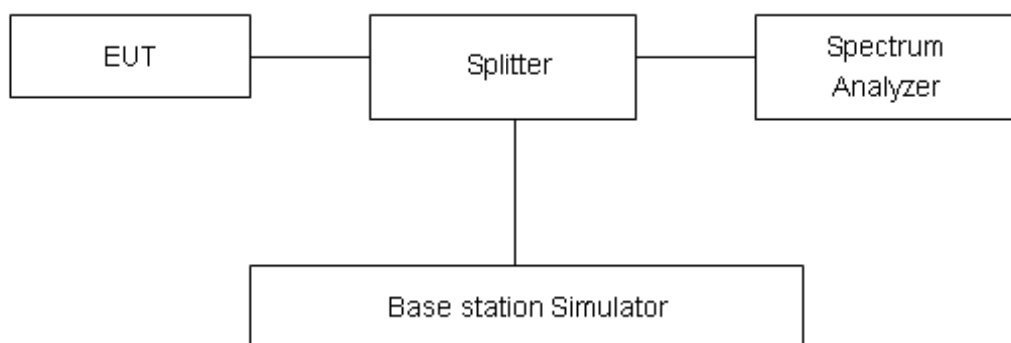

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

WCDMA Band IV	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
RMC	1312	1712.4	25.02	22.07	2.95	≤13	PASS
	1413	1732.6	25.01	22.10	2.91	≤13	PASS
	1513	1752.6	25.02	22.09	2.93	≤13	PASS

LTE Band 4								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	19957	1710.7	27.11	21.73	5.38	≤13	PASS
		20175	1732.5	27.19	21.64	5.55	≤13	PASS
		20393	1754.3	27.38	21.89	5.49	≤13	PASS
	3	19965	1711.5	27.27	21.76	5.51	≤13	PASS
		20175	1732.5	27.25	21.68	5.57	≤13	PASS
		20385	1753.5	27.42	21.92	5.50	≤13	PASS
	5	19975	1712.5	27.27	21.74	5.53	≤13	PASS
		20175	1732.5	27.21	21.67	5.54	≤13	PASS
		20375	1752.5	27.48	21.90	5.58	≤13	PASS
	10	20000	1715	27.35	21.82	5.53	≤13	PASS
		20175	1732.5	27.30	21.69	5.61	≤13	PASS
		20350	1750	27.57	21.94	5.63	≤13	PASS
	15	20025	1717.5	27.58	21.80	5.78	≤13	PASS
		20175	1732.5	27.53	21.65	5.88	≤13	PASS
		20325	1747.5	27.79	21.89	5.90	≤13	PASS
	20	20050	1720	27.32	21.77	5.55	≤13	PASS
		20175	1732.5	27.29	21.60	5.69	≤13	PASS
		20300	1745	27.48	21.85	5.63	≤13	PASS
16QAM	1.4	19957	1710.7	27.14	20.95	6.19	≤13	PASS
		20175	1732.5	27.10	20.88	6.22	≤13	PASS
		20393	1754.3	27.21	21.01	6.20	≤13	PASS
	3	19965	1711.5	27.25	20.98	6.27	≤13	PASS
		20175	1732.5	27.28	20.92	6.36	≤13	PASS
		20385	1753.5	27.40	21.04	6.36	≤13	PASS
	5	19975	1712.5	27.15	20.96	6.19	≤13	PASS
		20175	1732.5	27.17	20.88	6.29	≤13	PASS
		20375	1752.5	27.30	20.99	6.31	≤13	PASS
	10	20000	1715	27.29	20.99	6.30	≤13	PASS
		20175	1732.5	27.28	20.93	6.35	≤13	PASS
		20350	1750	27.40	21.03	6.37	≤13	PASS



	15	20025	1717.5	27.24	20.96	6.28	≤13	PASS
		20175	1732.5	27.23	20.88	6.35	≤13	PASS
		20325	1747.5	27.35	20.99	6.36	≤13	PASS
	20	20050	1720	27.26	20.94	6.32	≤13	PASS
		20175	1732.5	27.20	20.84	6.36	≤13	PASS
		20300	1745	27.33	20.96	6.37	≤13	PASS

LTE Band 7								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	5	20775	2502.5	27.30	22.10	5.20	≤13	PASS
		21100	2535	27.23	22.06	5.17	≤13	PASS
		21425	2567.5	26.88	22.30	4.58	≤13	PASS
	10	20800	2505	28.05	22.18	5.87	≤13	PASS
		21100	2535	27.75	22.08	5.67	≤13	PASS
		21400	2565	27.76	22.34	5.42	≤13	PASS
	15	20825	2507.5	28.33	22.16	6.17	≤13	PASS
		21100	2535	27.92	22.04	5.88	≤13	PASS
		21375	2562.5	27.85	22.29	5.56	≤13	PASS
	20	20850	2510	28.02	22.13	5.89	≤13	PASS
		21100	2535	27.70	21.99	5.71	≤13	PASS
		21350	2560	27.74	22.25	5.49	≤13	PASS
16QAM	5	20775	2502.5	27.31	21.41	5.90	≤13	PASS
		21100	2535	27.44	21.31	6.13	≤13	PASS
		21425	2567.5	26.98	21.56	5.42	≤13	PASS
	10	20800	2505	28.00	21.44	6.56	≤13	PASS
		21100	2535	27.76	21.36	6.40	≤13	PASS
		21400	2565	27.75	21.60	6.15	≤13	PASS
	15	20825	2507.5	28.06	21.41	6.65	≤13	PASS
		21100	2535	27.69	21.31	6.38	≤13	PASS
		21375	2562.5	27.63	21.56	6.07	≤13	PASS
	20	20850	2510	28.01	21.39	6.62	≤13	PASS
		21100	2535	27.67	21.27	6.40	≤13	PASS
		21350	2560	27.70	21.53	6.17	≤13	PASS

5.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size.

(1) With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.0 V and 4.35 V, with a nominal voltage of 3.8V.

Test setup

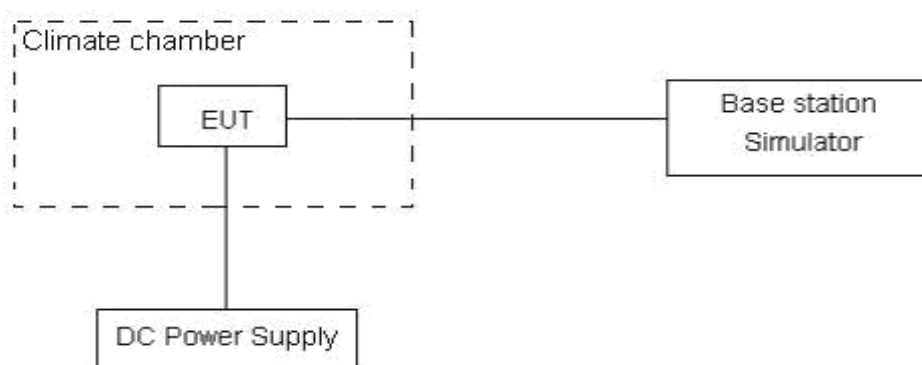

Limits

No specific frequency stability requirements in part 27.54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U = 0.01\text{ppm}$.

Test Result

WCDMA Band IV

WCDMA Band IV					
Condition		1710	1755	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1710.0279	1754.9113	8.17	0.00472
Extreme (55°C)		1710.0272	1754.9122	0.70	0.00040
Extreme (50°C)		1710.0269	1754.9123	3.15	0.00182
Extreme (40°C)		1710.0284	1754.9108	0.99	0.00057
Extreme (30°C)		1710.0273	1754.9119	1.10	0.00063
Extreme (20°C)		1710.0271	1754.9122	-3.06	-0.00177
Extreme (10C)		1710.0286	1754.9106	2.60	0.00150
Extreme (0°C)		1710.0277	1754.9115	-0.92	-0.00053
Extreme (-10°C)		1710.0291	1754.9122	-1.66	-0.00096
Extreme (-20°C)		1710.0323	1754.9153	1.09	0.00063
Extreme (-30°C)		1710.0339	1754.9175	-1.04	-0.00060
25°C	LV	1710.0316	1754.9147	-1.12	-0.00065
	HV	1710.0303	1754.9156	2.40	0.00139

LTE Band 4					
(QPSK, 20MHz BANDWIDTH)					
Condition		1710	1755	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1710.6538	1754.4302	-3.67	-0.00212
Extreme (55°C)		1710.6515	1754.4285	4.21	0.00243
Extreme (50°C)		1710.6521	1754.4286	3.19	0.00184
Extreme (40°C)		1710.6534	1754.4299	4.16	0.00240
Extreme (30°C)		1710.6541	1754.4306	-1.61	-0.00093
Extreme (20°C)		1710.6523	1754.4285	-2.64	-0.00152
Extreme (10C)		1710.6532	1754.4297	3.05	0.00176
Extreme (0°C)		1710.6519	1754.4284	1.04	0.00060
Extreme (-10°C)		1710.6514	1754.4279	-3.16	-0.00182
Extreme (-20°C)		1710.6525	1754.4291	-1.93	-0.00111
Extreme (-30°C)		1710.6558	1754.4323	1.67	0.00096
25°C	LV	1710.6522	1754.4287	4.43	0.00256
	HV	1710.6528	1754.4293	-2.79	-0.00161
(16QAM, 20MHz BANDWIDTH)					
Condition		1710	1755	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1710.6387	1754.5105	5.32	0.00307
Extreme (55°C)		1710.6403	1754.5128	3.84	0.00222
Extreme (50°C)		1710.6397	1754.5122	4.46	0.00257
Extreme (40°C)		1710.6384	1754.5109	-8.77	-0.00506
Extreme (30°C)		1710.6377	1754.5102	-1.87	-0.00108
Extreme (20°C)		1710.6398	1754.5123	-5.99	-0.00346
Extreme (10C)		1710.6386	1754.5111	-2.42	-0.00140
Extreme (0°C)		1710.6399	1754.5124	-5.04	-0.00291
Extreme (-10°C)		1710.6404	1754.5129	3.79	0.00219
Extreme (-20°C)		1710.6393	1754.5118	2.15	0.00124
Extreme (-30°C)		1710.6363	1754.5085	-0.38	-0.00022
25°C	LV	1710.6396	1754.5121	0.39	0.00023
	HV	1710.6391	1754.5115	-2.99	-0.00173

LTE Band 7					
(QPSK, 20MHz BANDWIDTH)					
Condition		2500	2570	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	2500.4380	2569.6782	3.12	0.00123
Extreme (55°C)		2500.4381	2569.6781	-2.88	-0.00114
Extreme (50°C)		2500.4396	2569.6766	0.66	0.00026
Extreme (40°C)		2500.4388	2569.6774	-1.21	-0.00048
Extreme (30°C)		2500.4389	2569.6773	2.52	0.00099
Extreme (20°C)		2500.4382	2569.6780	-3.54	-0.00140
Extreme (10C)		2500.4390	2569.6772	5.65	0.00223
Extreme (0°C)		2500.4393	2569.6769	2.87	0.00113
Extreme (-10°C)		2500.4383	2569.6779	-1.45	-0.00057
Extreme (-20°C)		2500.4391	2569.6771	0.27	0.00011
Extreme (-30°C)		2500.4384	2569.6778	2.56	0.00101
25°C	LV	2500.4385	2569.6777	2.76	0.00109
	HV	2500.4394	2569.6768	4.74	0.00187
(16QAM,20MHz BANDWIDTH)					
Condition		2500	2570	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	2500.3995	2569.6123	5.21	0.00206
Extreme (50°C)		2500.3996	2569.6122	8.12	0.00320
Extreme (55°C)		2500.4011	2569.6107	8.47	0.00334
Extreme (40°C)		2500.4003	2569.6115	3.24	0.00128
Extreme (30°C)		2500.4004	2569.6114	2.21	0.00087
Extreme (20°C)		2500.3997	2569.6121	-2.13	-0.00084
Extreme (10C)		2500.4005	2569.6113	-0.41	-0.00016
Extreme (0°C)		2500.4008	2569.6110	-3.44	-0.00136
Extreme (-10°C)		2500.3998	2569.6120	9.56	0.00377
Extreme (-20°C)		2500.4006	2569.6112	-5.99	-0.00236
Extreme (-30°C)		2500.3999	2569.6119	-1.54	-0.00061
25°C	LV	2500.4000	2569.6118	4.76	0.00188
	HV	2500.4009	2569.6109	2.74	0.00108

5.7 Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.


RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

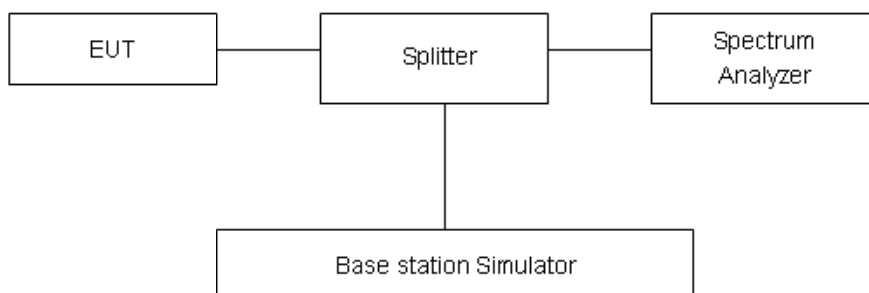

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB..”

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53 (h) Limit	-13 dBm
Part 27.53(m) Limit	-25 dBm



Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-27GHz	1.407 dB

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.


The signal beyond the limit is carrier.

WCDMA Band IV CH-Low 30MHz~1GHz

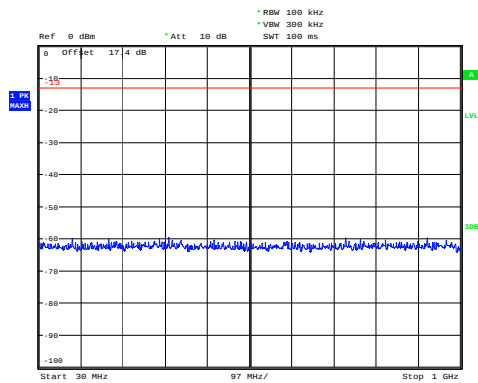


Date: 22.AUG.2018 16:01:42

WCDMA Band IV CH-Middle 30MHz~1GHz

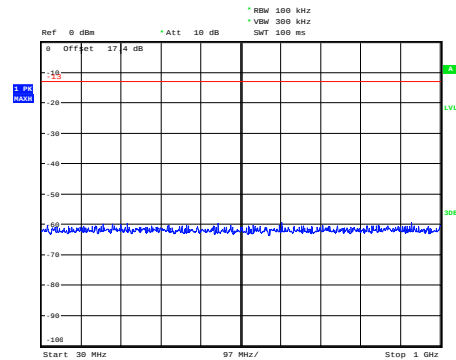


Date: 22.AUG.2018 16:01:24

WCDMA Band IV CH-Low 1GHz~3GHz

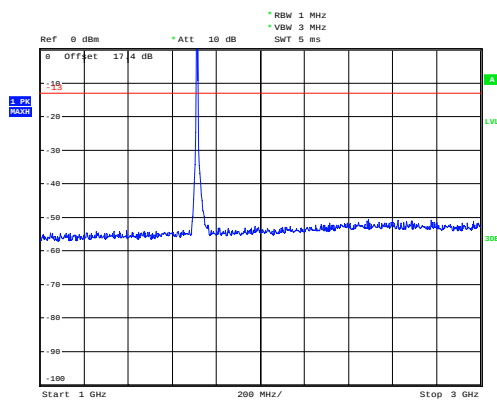


Date: 22.AUG.2018 16:12:36

WCDMA Band IV CH-Middle 1GHz~3GHz

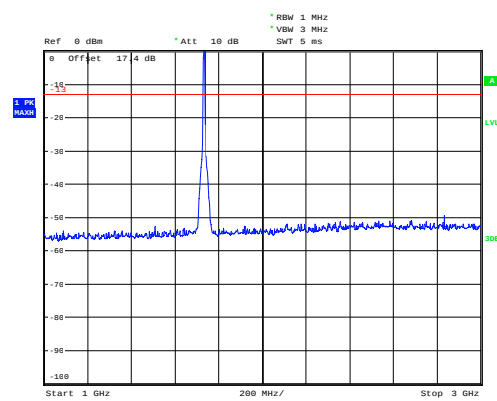


Date: 22.AUG.2018 16:12:19

WCDMA Band IV CH-Low 3GHz~18GHz

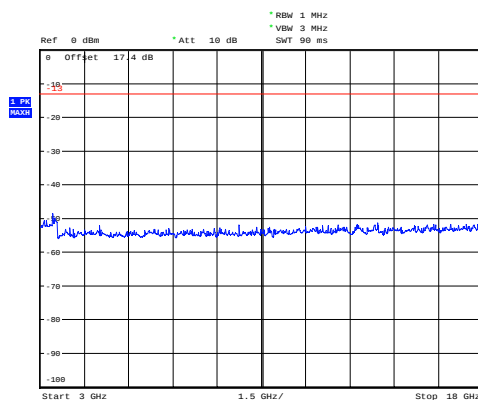

Date: 22.AUG.2018 16:16:04


WCDMA Band IV CH-Middle 3GHz~18GHz

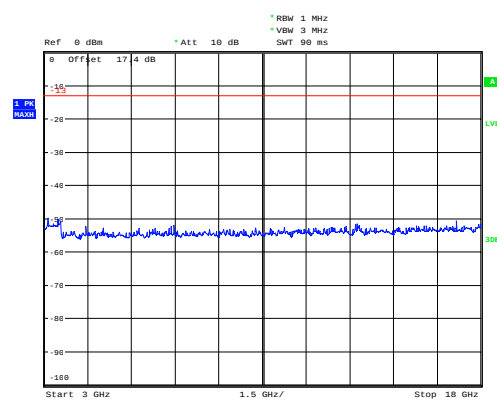

Date: 22.AUG.2018 16:16:32




WCDMA Band IV CH-High 30MHz~1GHz

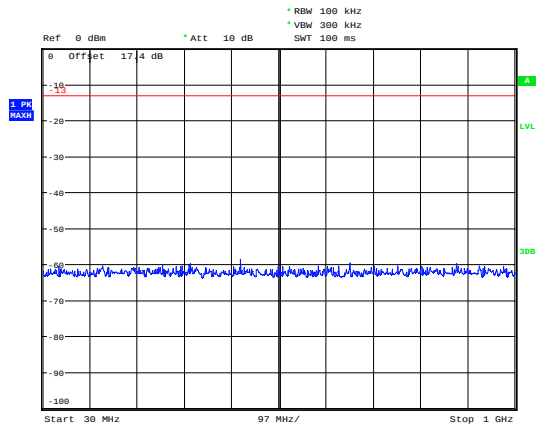


Date: 22.AUG.2018 16:01:53

WCDMA Band IV CH-High 1GHz~3GHz

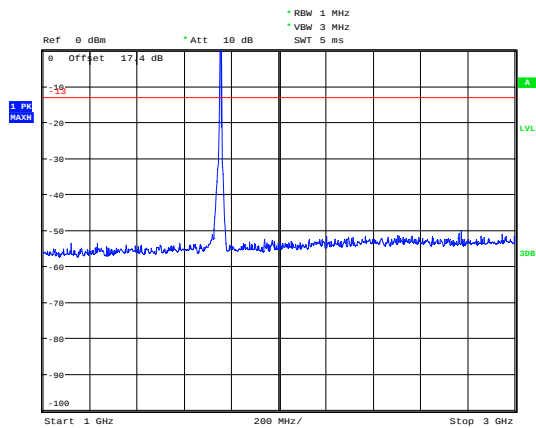

Date: 22.AUG.2018 16:12:49


WCDMA Band IV CH-High 3GHz~18GHz

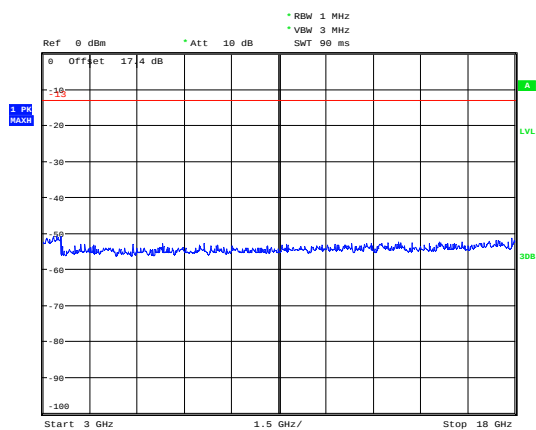


Date: 22.AUG.2018 16:15:58




LTE Band 4 1.4MHz CH-Low 30MHz~1GHz

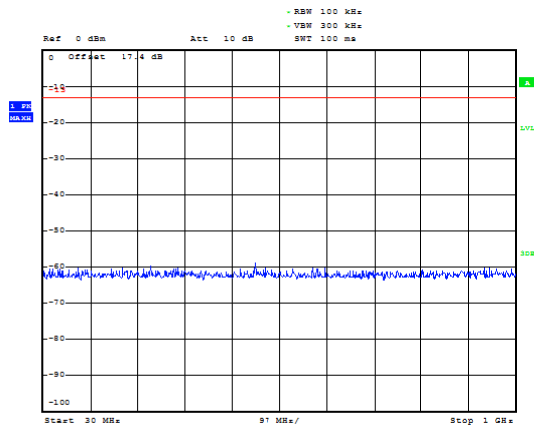


LTE Band 4 1.4MHz CH-Middle 30MHz~1GHz

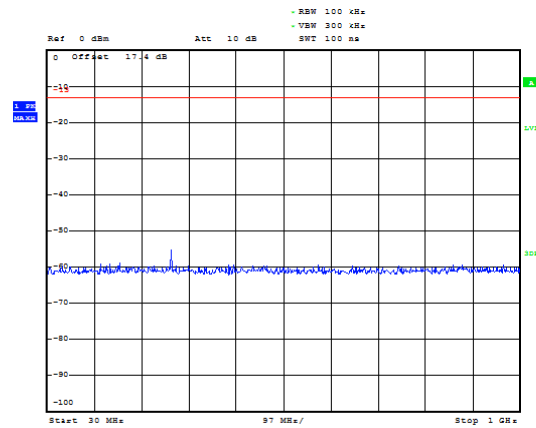


LTE Band 4 1.4MHz CH-Low 1GHz~3GHz

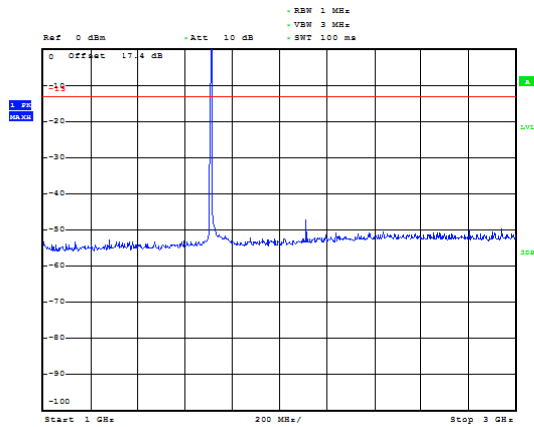


LTE Band 4 1.4MHz CH-Middle 1GHz~3GHz

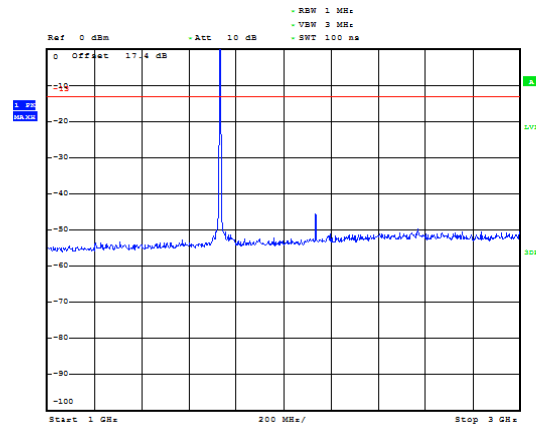

LTE Band 4 1.4MHz CH-Low 3GHz~18GHz

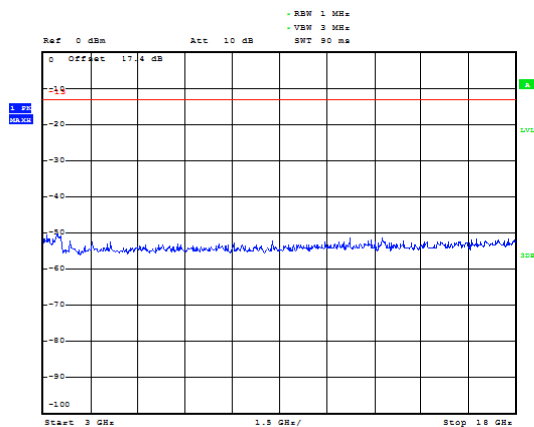


LTE Band 4 1.4MHz CH-Middle 3GHz~18GHz

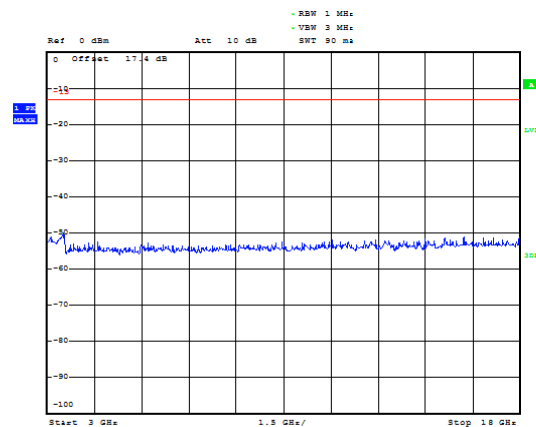





LTE Band 4 1.4MHz CH-High 30MHz~1GHz

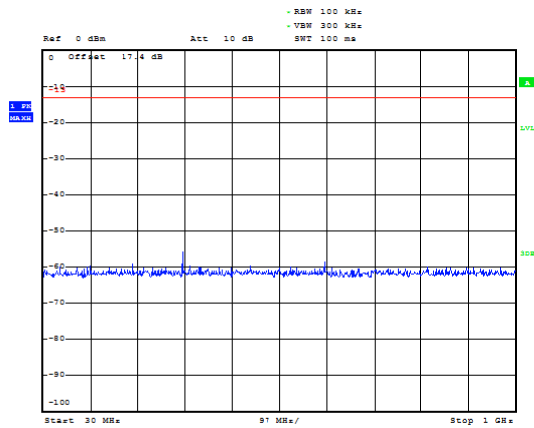


LTE Band 4 3MHz CH-Low 30MHz~1GHz

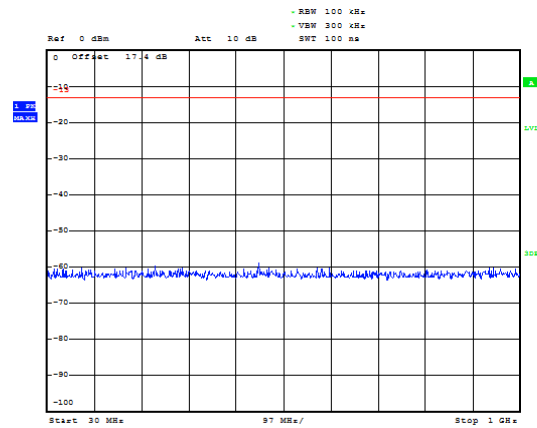


LTE Band 4 1.4MHz CH-High 1GHz~3GHz

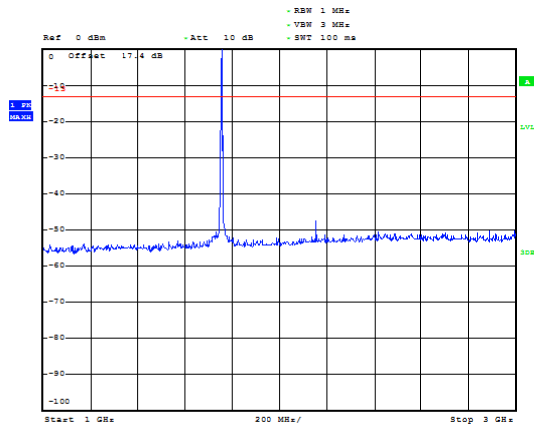


LTE Band 4 3MHz CH-Low 1GHz~3GHz

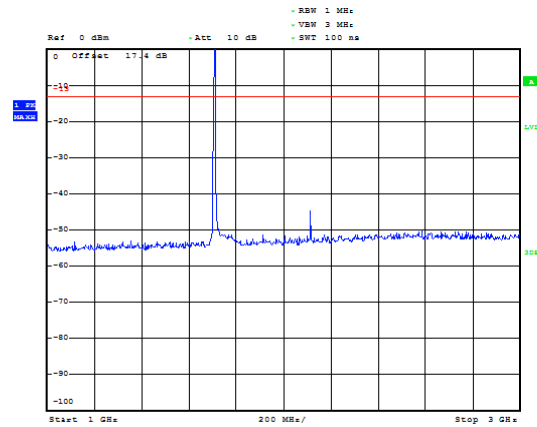

LTE Band 4 1.4MHz CH-High 3GHz~18GHz

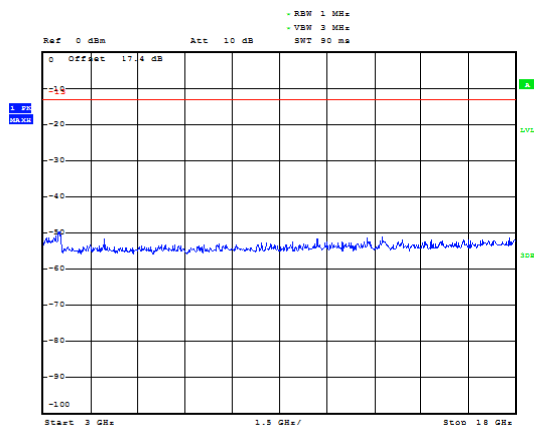


LTE Band 4 3MHz CH-Low 3GHz~18GHz

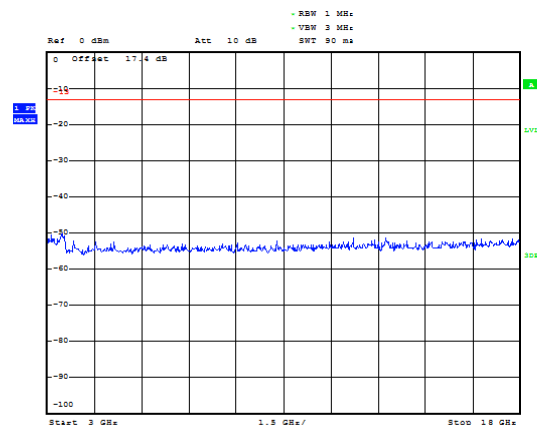





LTE Band 4 3MHz CH-Middle 30MHz~1GHz

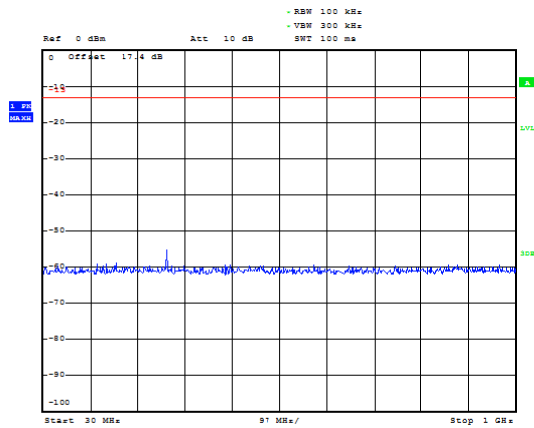


LTE Band 4 3MHz CH-High 30MHz~1GHz

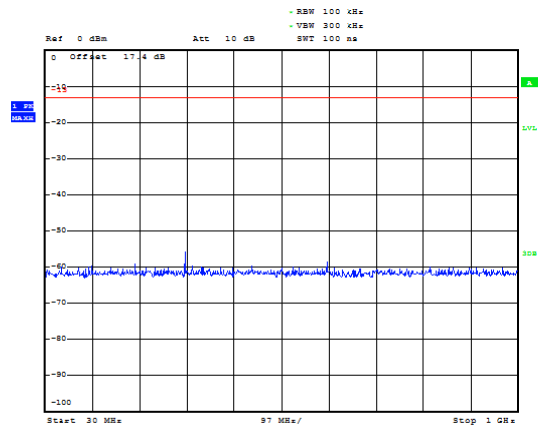


LTE Band 4 3MHz CH-Middle 1GHz~3GHz

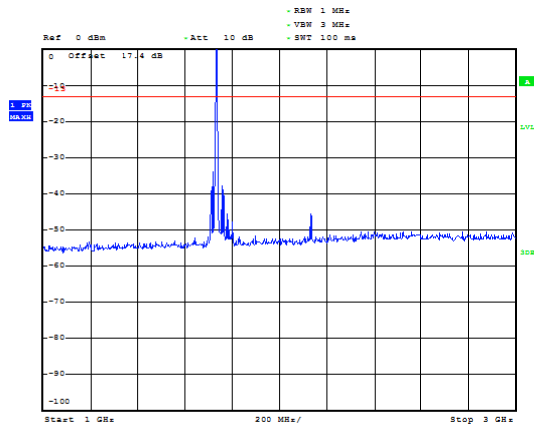


LTE Band 4 3MHz CH-High 1GHz~3GHz

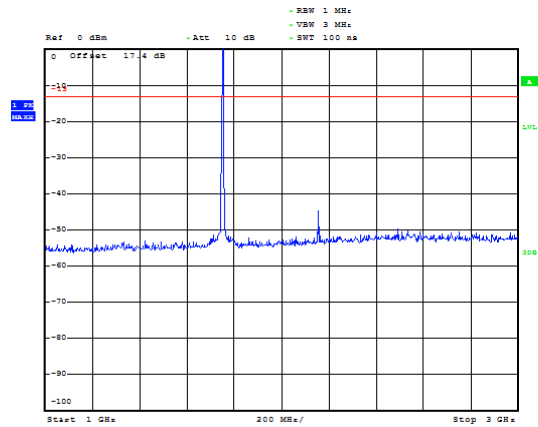

LTE Band 4 3MHz CH-Middle 3GHz~18GHz

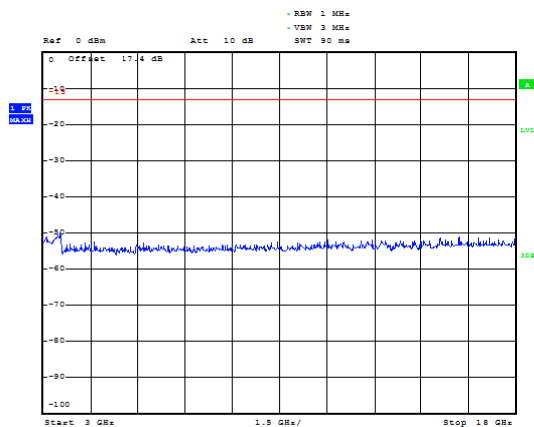


LTE Band 4 3MHz CH-High 3GHz~18GHz

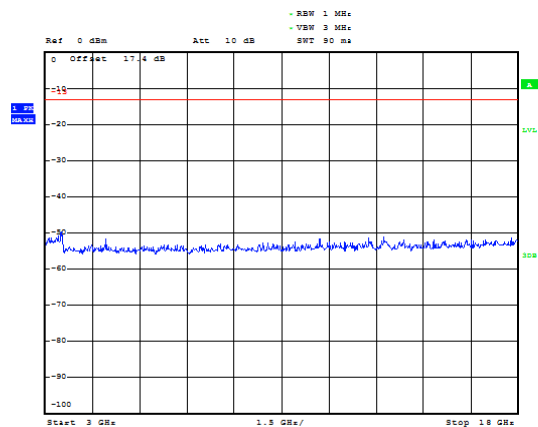





LTE Band 4 5MHz CH-Low 30MHz~1GHz

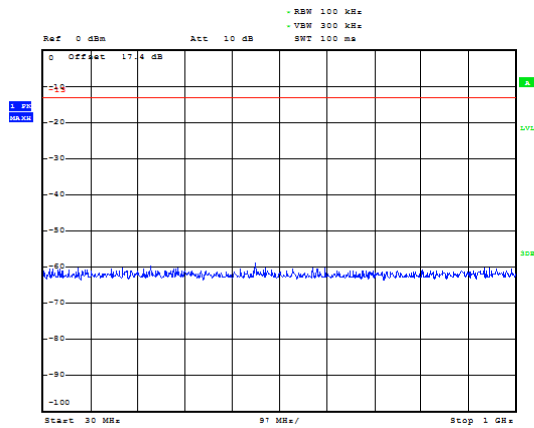


LTE Band 4 5MHz CH-Middle 30MHz~1GHz

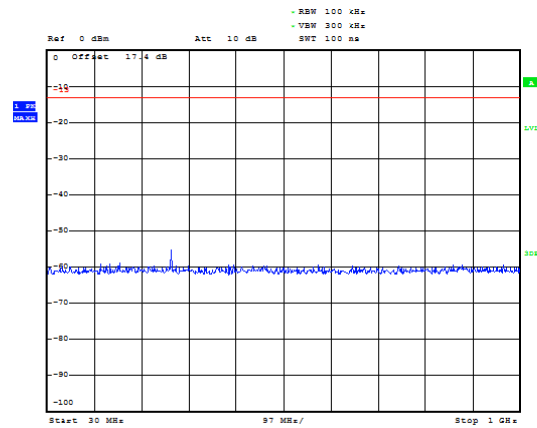


LTE Band 4 5MHz CH-Low 1GHz~3GHz

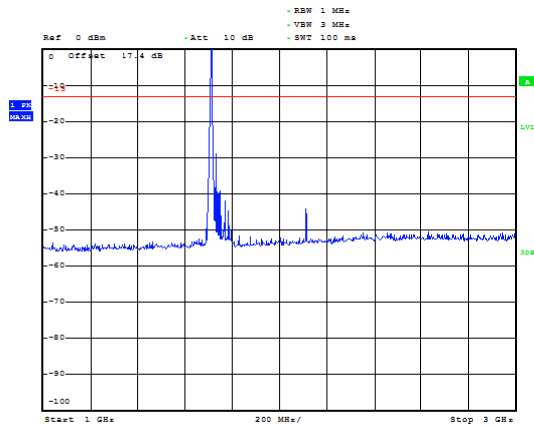


LTE Band 4 5MHz CH-Middle 1GHz~3GHz

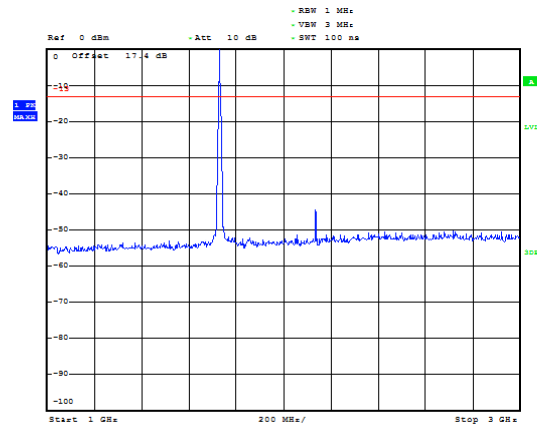

LTE Band 4 5MHz CH-Low 3GHz~18GHz

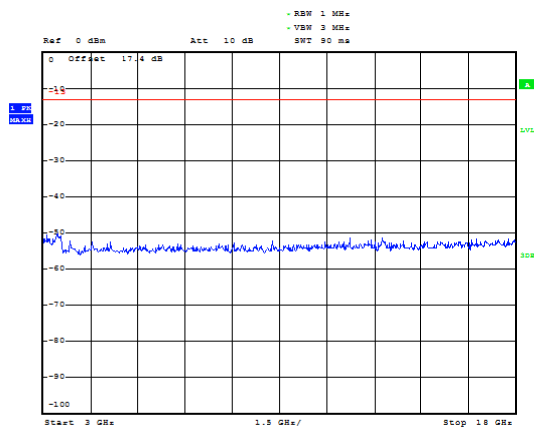


LTE Band 4 5MHz CH-Middle 3GHz~18GHz

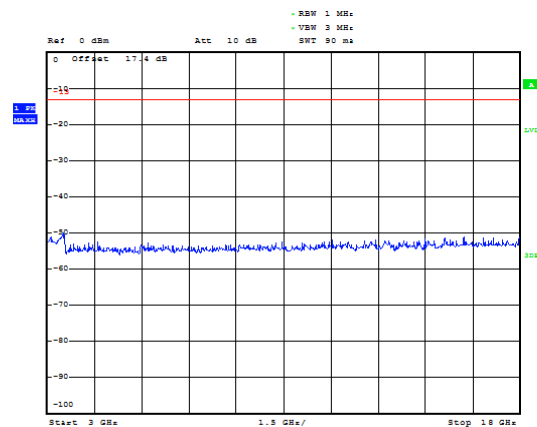





LTE Band 4 5MHz CH-High 30MHz~1GHz

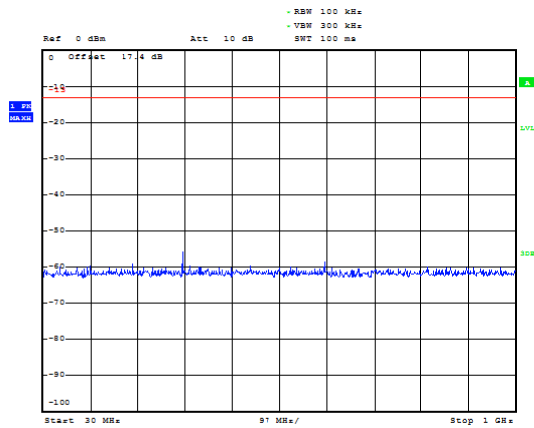


LTE Band 4 10MHz CH-Low 30MHz~1GHz

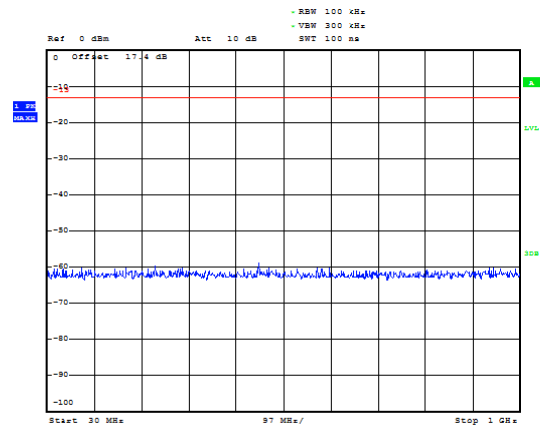


LTE Band 4 5MHz CH-High 1GHz~3GHz

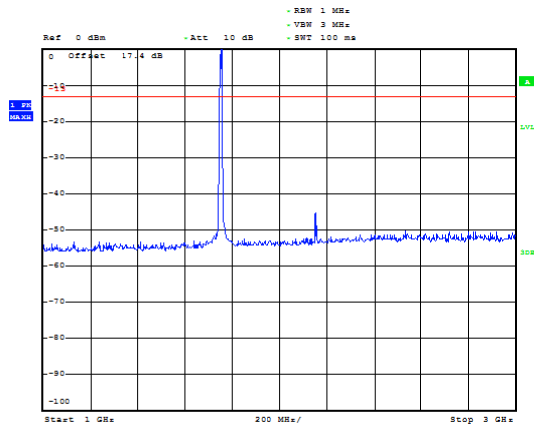


LTE Band 4 10MHz CH-Low 1GHz~3GHz

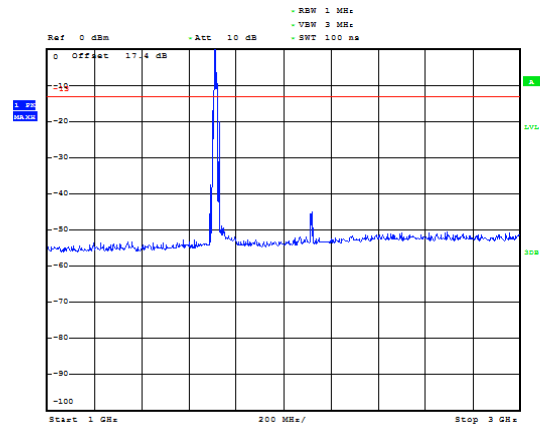

LTE Band 4 5MHz CH-High 3GHz~18GHz

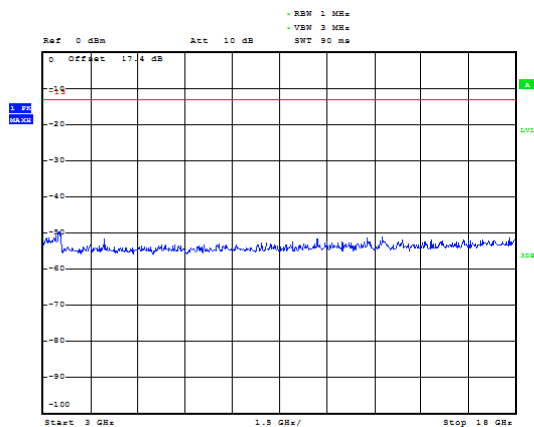


LTE Band 4 10MHz CH-Low 3GHz~18GHz

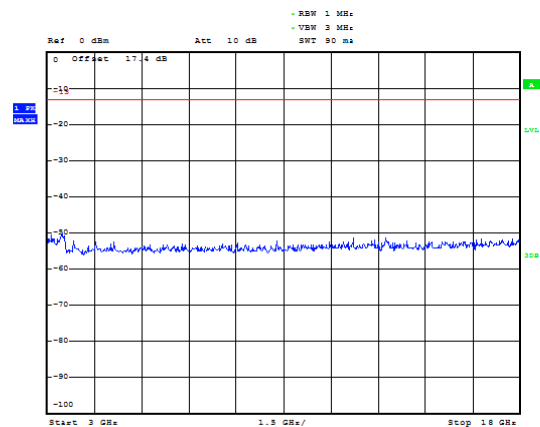





LTE Band 4 10MHz CH-Middle 30MHz~1GHz

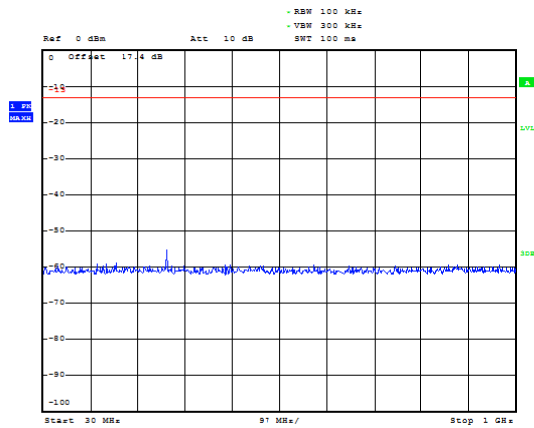


LTE Band 4 10MHz CH-High 30MHz~1GHz

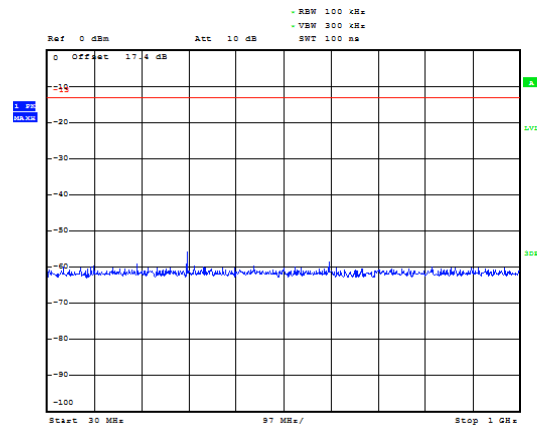


LTE Band 4 10MHz CH-Middle 1GHz~3GHz

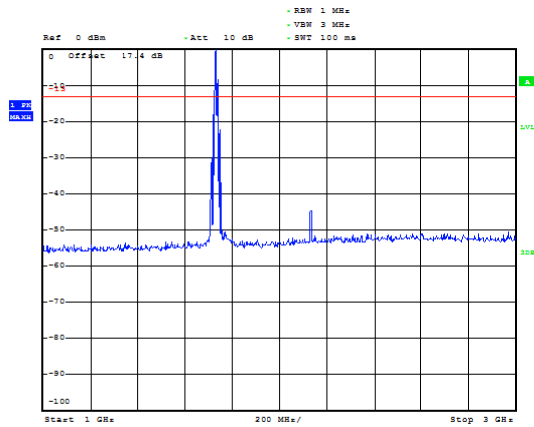


LTE Band 4 10MHz CH-High 1GHz~3GHz

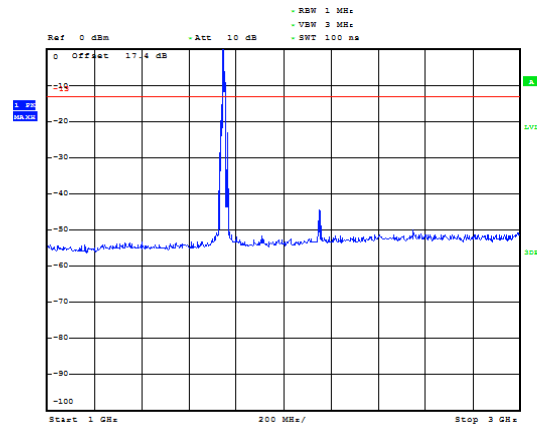

LTE Band 4 10MHz CH-Middle 3GHz~18GHz

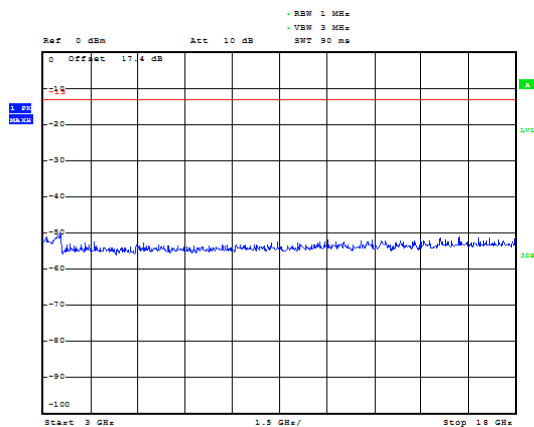


LTE Band 4 10MHz CH-High 3GHz~18GHz

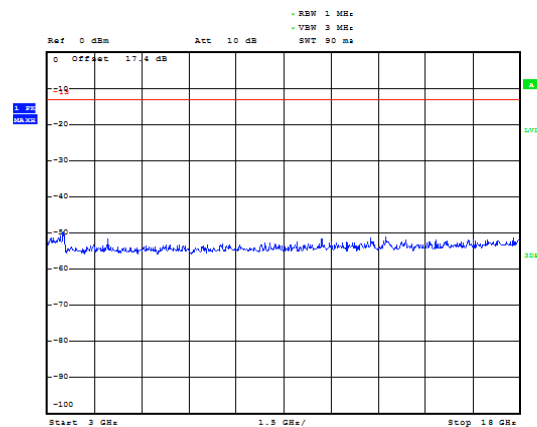





LTE Band 4 15MHz CH-Low 30MHz~1GHz

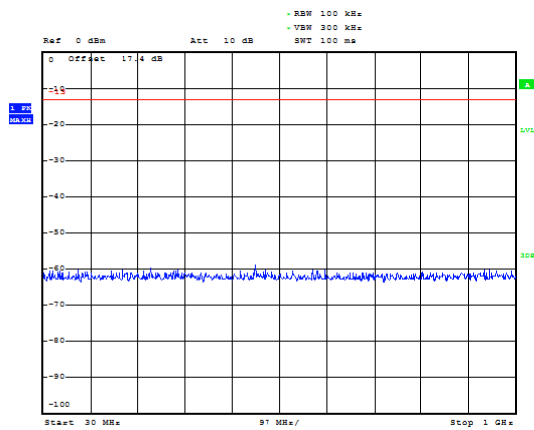


LTE Band 4 15MHz CH-Middle 30MHz~1GHz

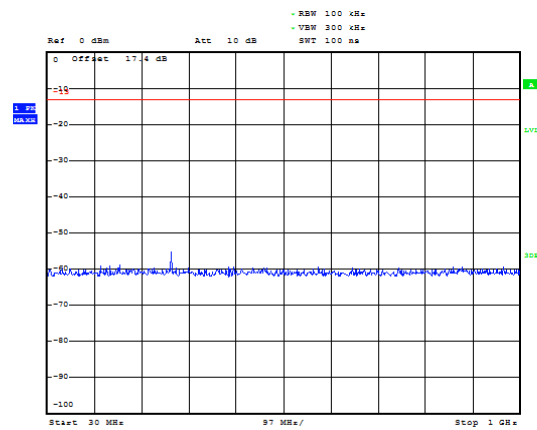


LTE Band 4 15MHz CH-Low 1GHz~3GHz

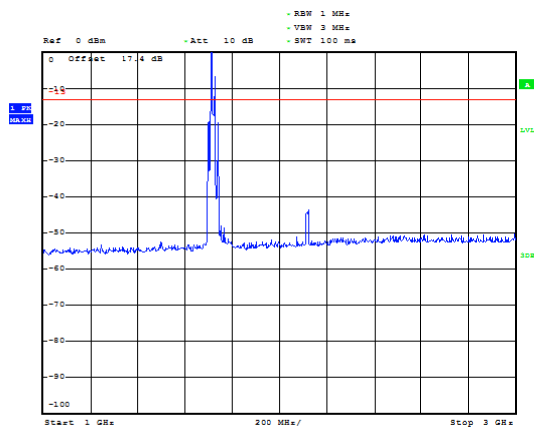


LTE Band 4 15MHz CH-Middle 1GHz~3GHz

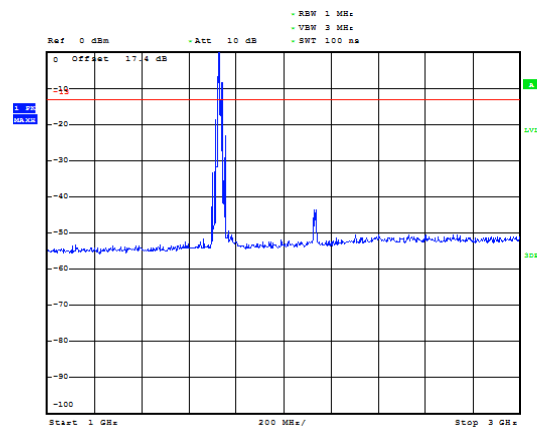

LTE Band 4 15MHz CH-Low 3GHz~18GHz

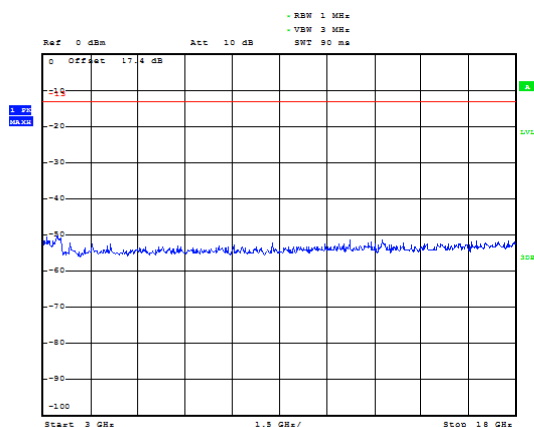


LTE Band 4 15MHz CH-Middle 3GHz~18GHz

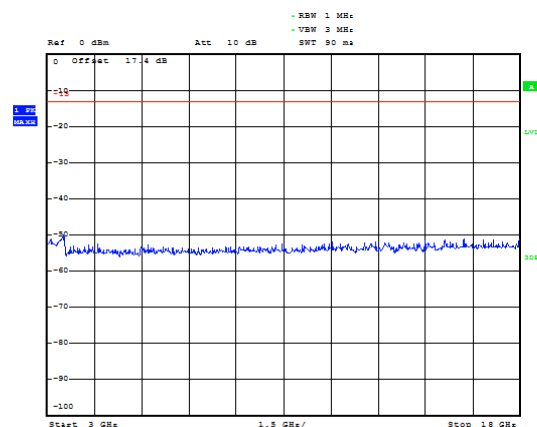





LTE Band 4 15MHz CH-High 30MHz~1GHz

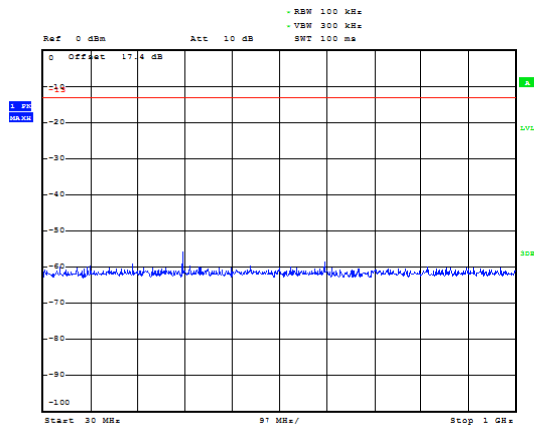


LTE Band 4 20MHz CH-Low 30MHz~1GHz

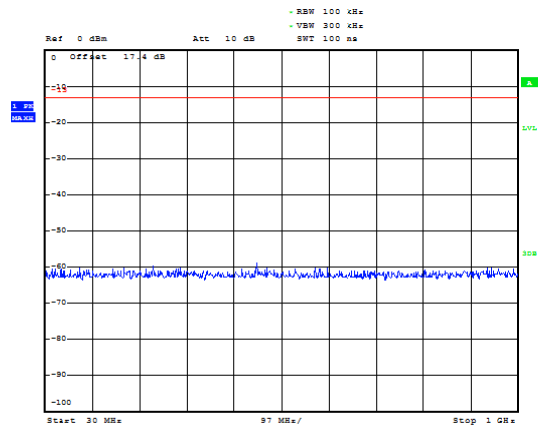


LTE Band 4 15MHz CH-High 1GHz~3GHz

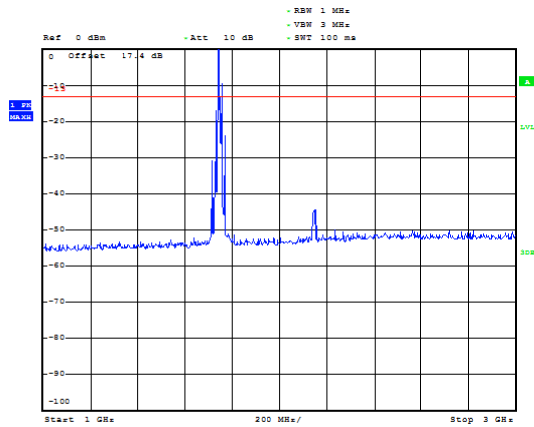


LTE Band 4 20MHz CH-Low 1GHz~3GHz

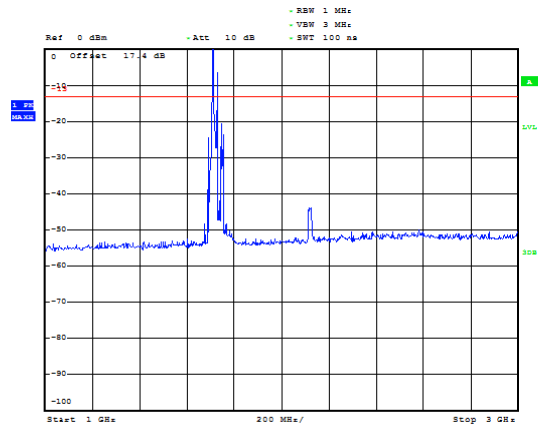

LTE Band 4 15MHz CH-High 3GHz~18GHz

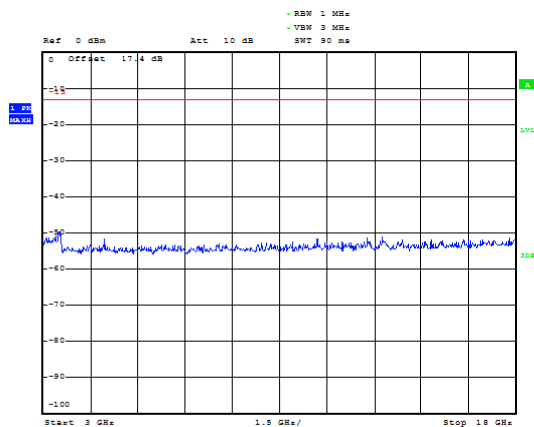


LTE Band 4 20MHz CH-Low 3GHz~18GHz

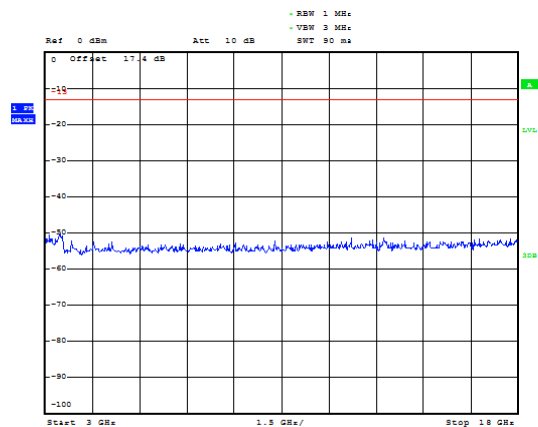





LTE Band 4 20MHz CH-Middle 30MHz~1GHz

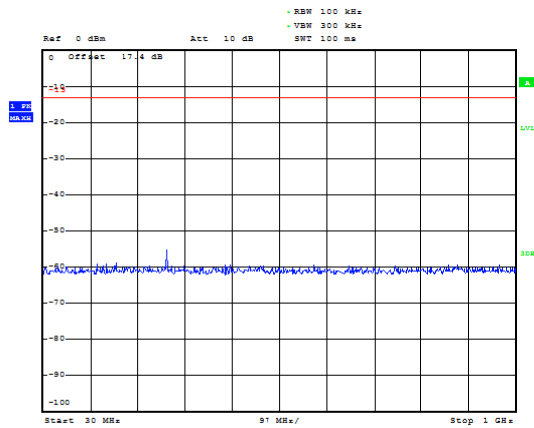


LTE Band 4 20MHz CH-High 30MHz~1GHz

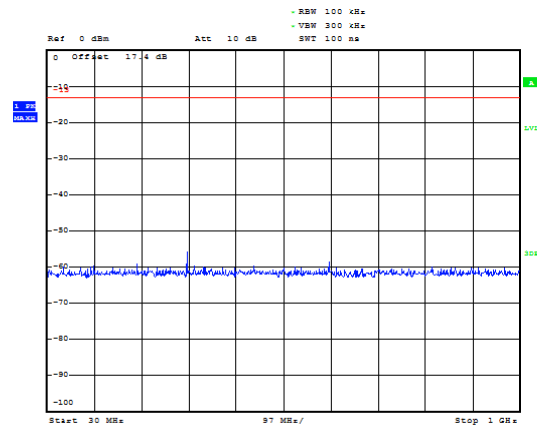


LTE Band 4 20MHz CH-Middle 1GHz~3GHz

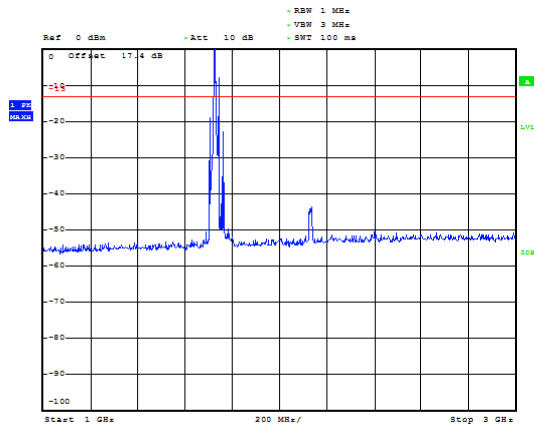


LTE Band 4 20MHz CH-High 1GHz~3GHz

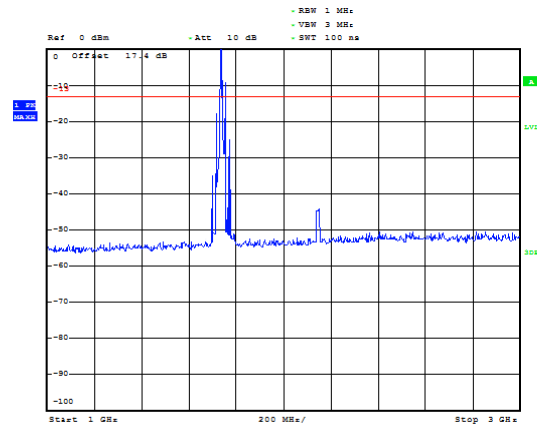

LTE Band 4 20MHz CH-Middle 3GHz~18GHz

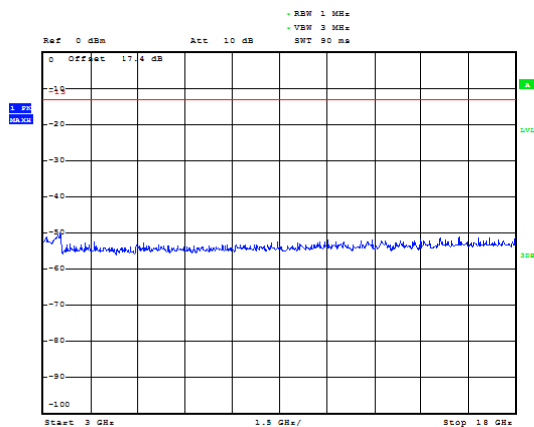


LTE Band 4 20MHz CH-High 3GHz~18GHz

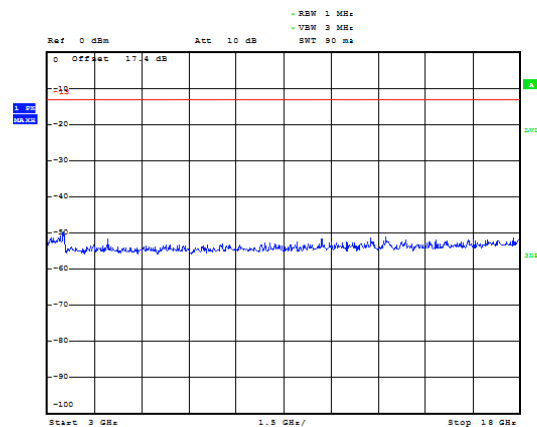





LTE Band 7 5MHz CH-Low 30MHz~1GHz

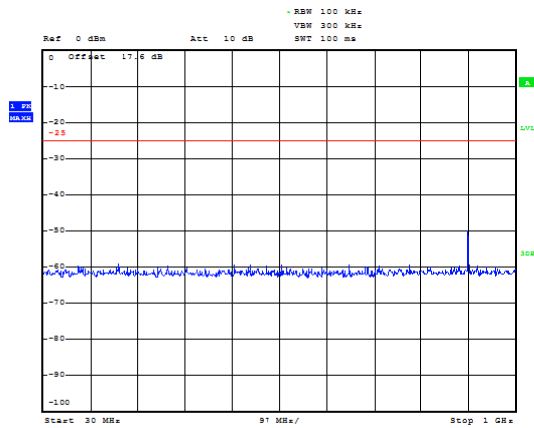


LTE Band 7 5MHz CH-Middle 30MHz~1GHz

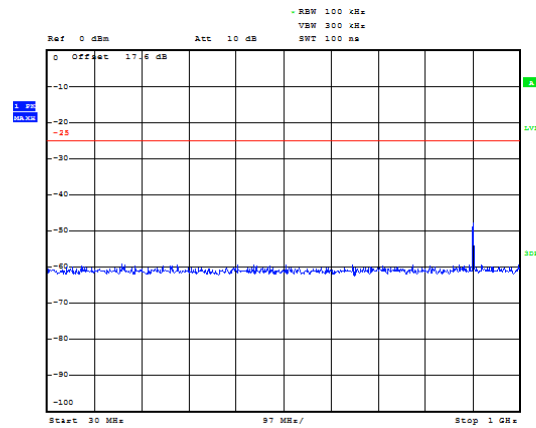


LTE Band 7 5MHz CH-Low 1GHz~3GHz

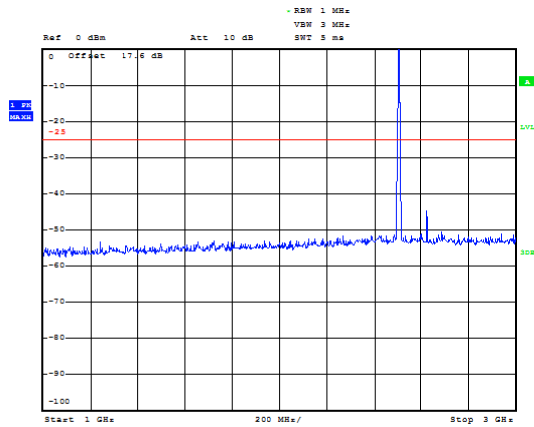


LTE Band 7 5MHz CH-Middle 1GHz~3GHz

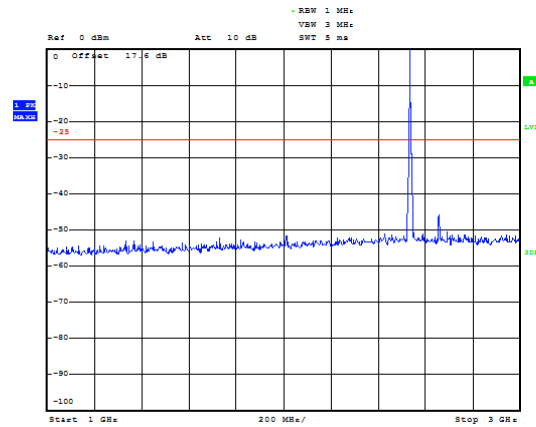

LTE Band 7 5MHz CH-Low 3GHz~18GHz

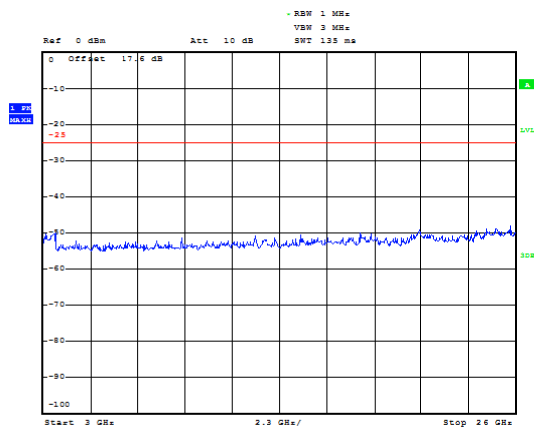


LTE Band 7 5MHz CH-Middle 3GHz~18GHz

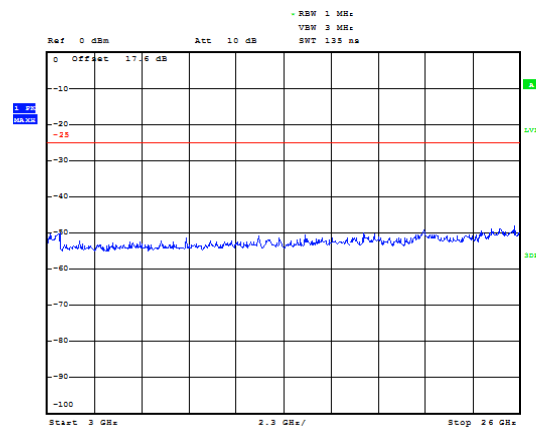





LTE Band 7 5MHz CH-High 30MHz~1GHz

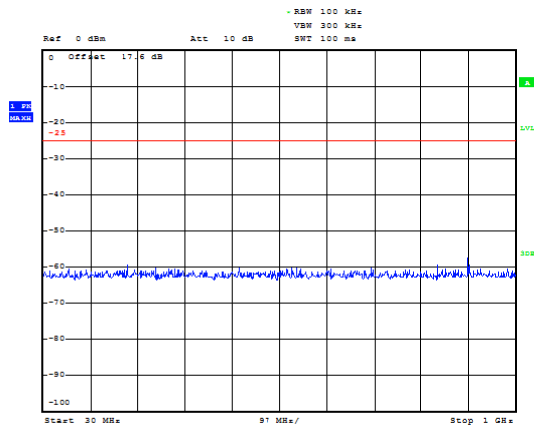


LTE Band 7 10MHz CH-Low 30MHz~1GHz

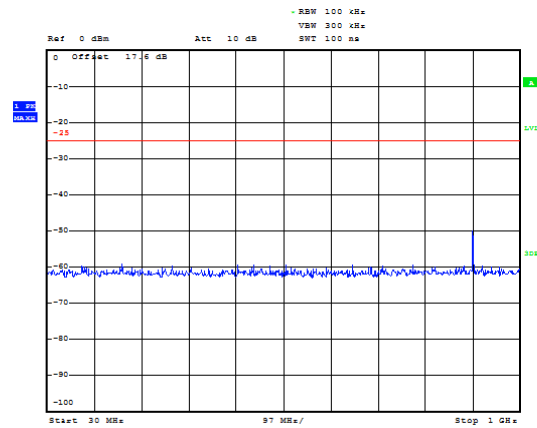


LTE Band 7 5MHz CH-High 1GHz~3GHz

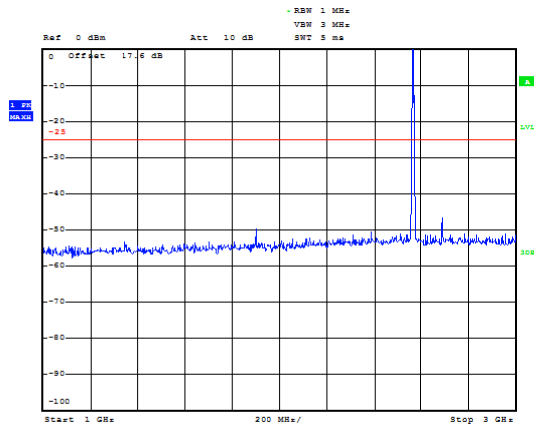


LTE Band 7 10MHz CH-Low 1GHz~3GHz

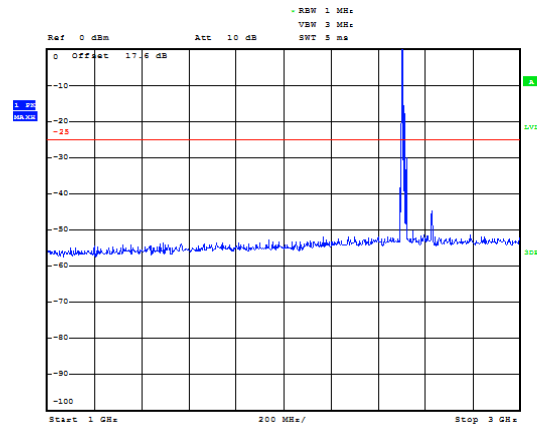

LTE Band 7 5MHz CH-High 3GHz~18GHz

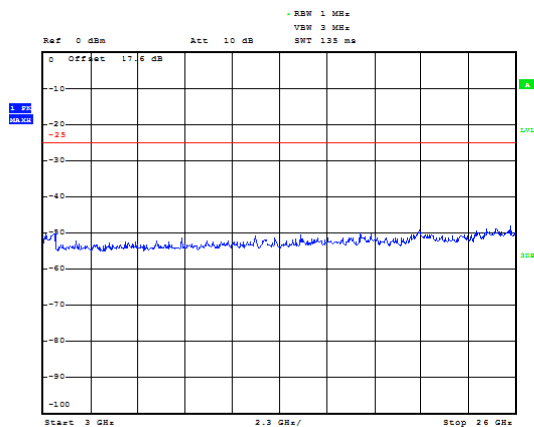


LTE Band 7 10MHz CH-Low 3GHz~18GHz

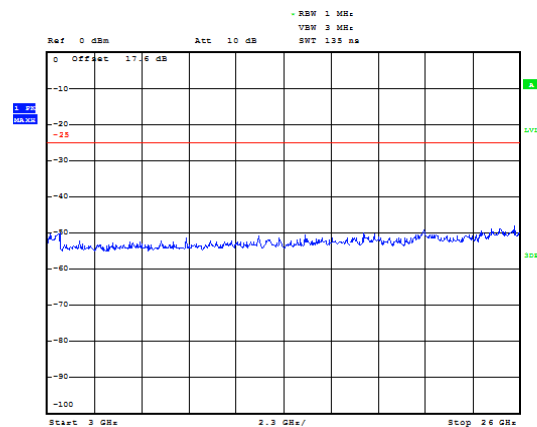





LTE Band 7 10MHz CH-Middle 30MHz~1GHz

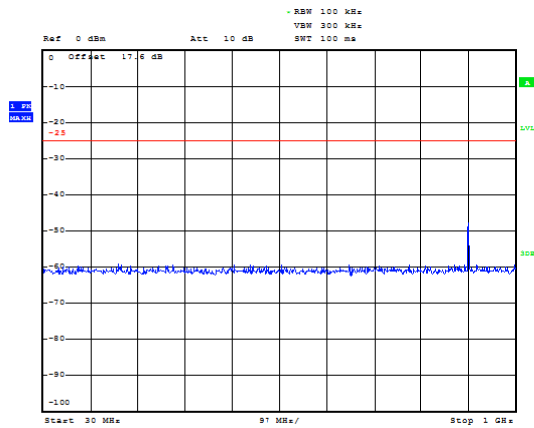


LTE Band 7 10MHz CH-High 30MHz~1GHz

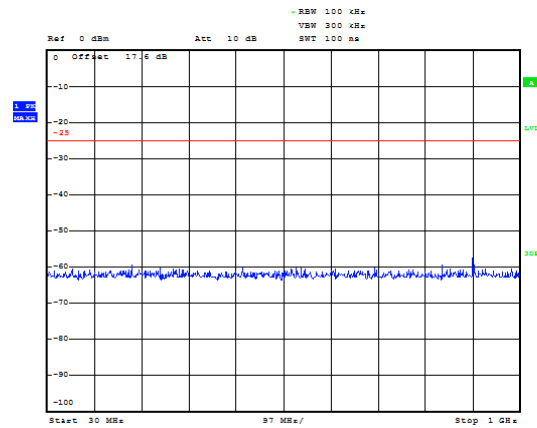


LTE Band 7 10MHz CH-Middle 1GHz~3GHz

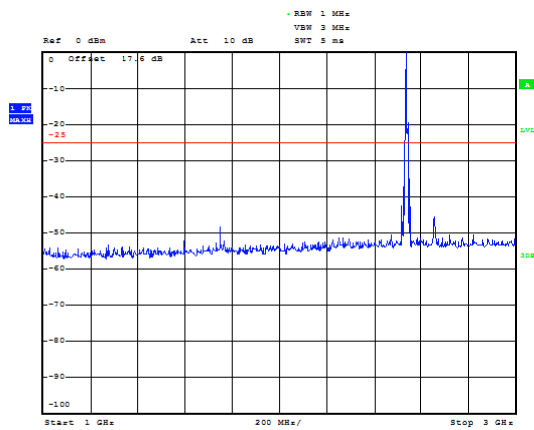


LTE Band 7 10MHz CH-High 1GHz~3GHz

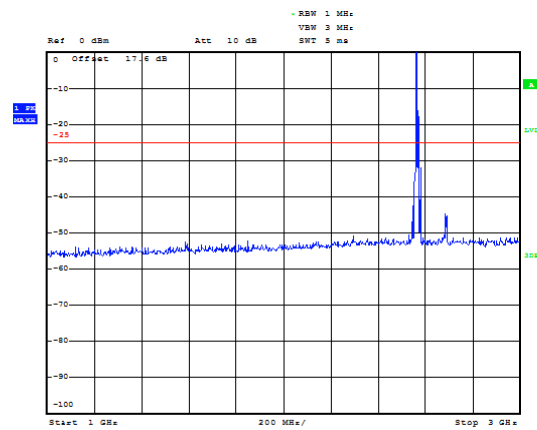

LTE Band 7 10MHz CH-Middle 3GHz~18GHz

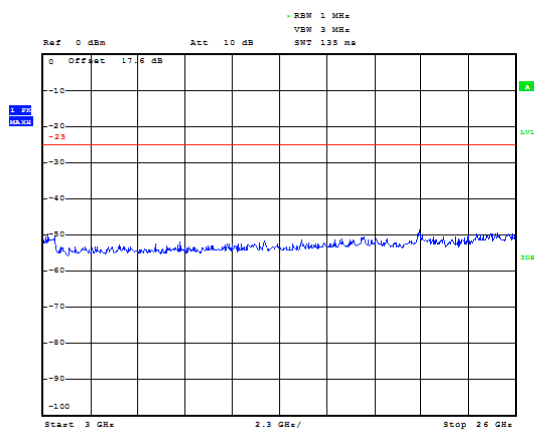


LTE Band 7 10MHz CH-High 3GHz~18GHz

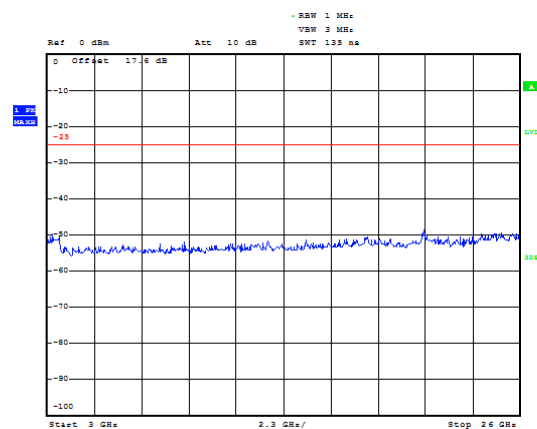





LTE Band 7 15MHz CH-Low 30MHz~1GHz

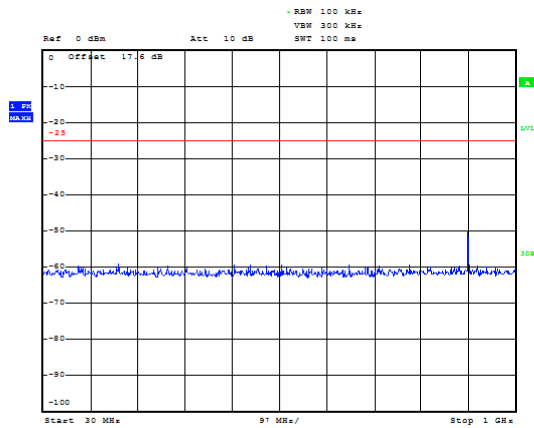


LTE Band 7 15MHz CH-Middle 30MHz~1GHz

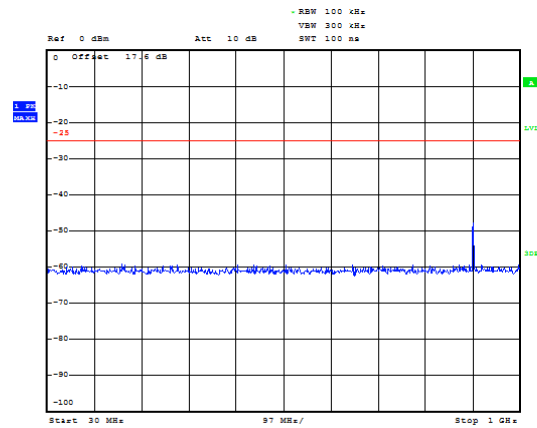


LTE Band 7 15MHz CH-Low 1GHz~3GHz

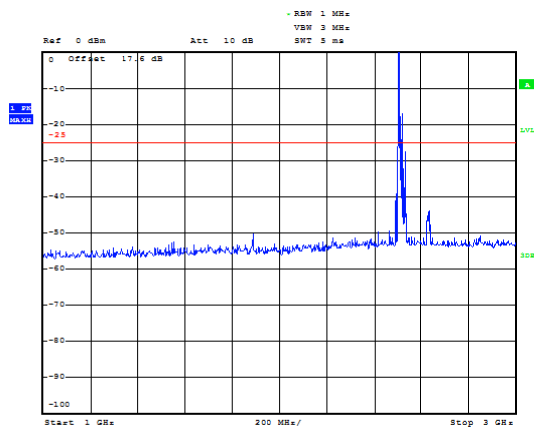


LTE Band 7 15MHz CH-Middle 1GHz~3GHz

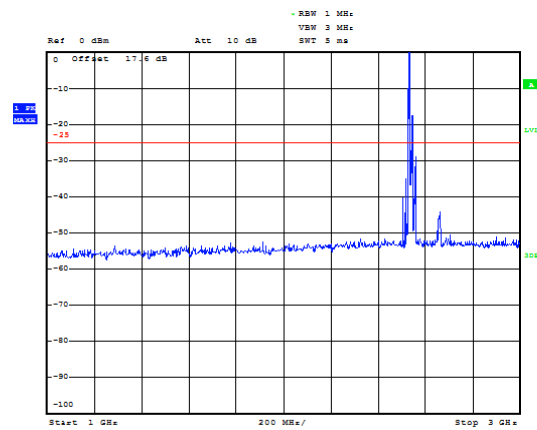

LTE Band 7 15MHz CH-Low 3GHz~18GHz

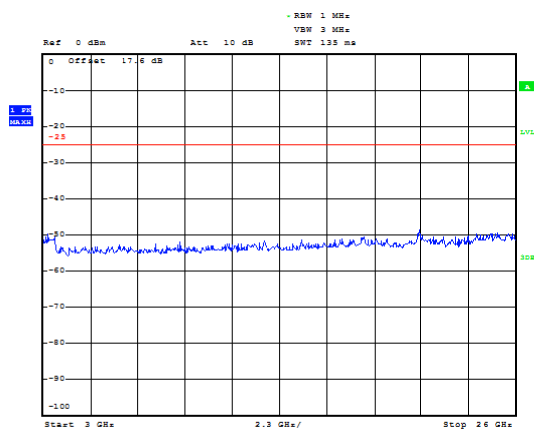


LTE Band 7 15MHz CH-Middle 3GHz~18GHz

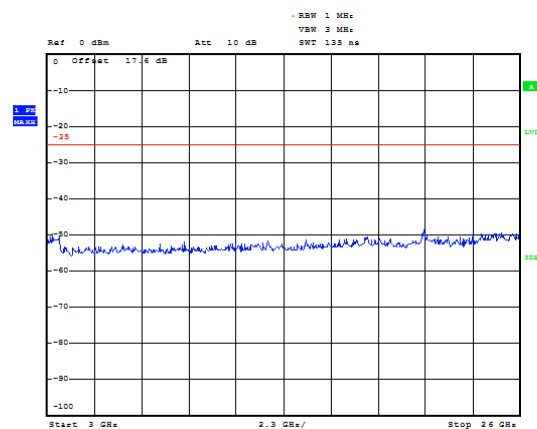





LTE Band 7 15MHz CH-High 30MHz~1GHz

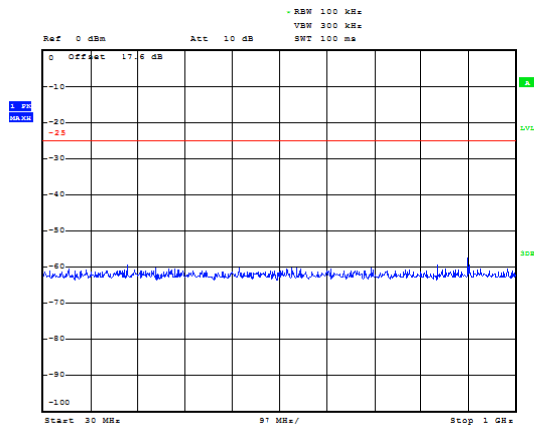


LTE Band 7 20MHz CH-Low 30MHz~1GHz

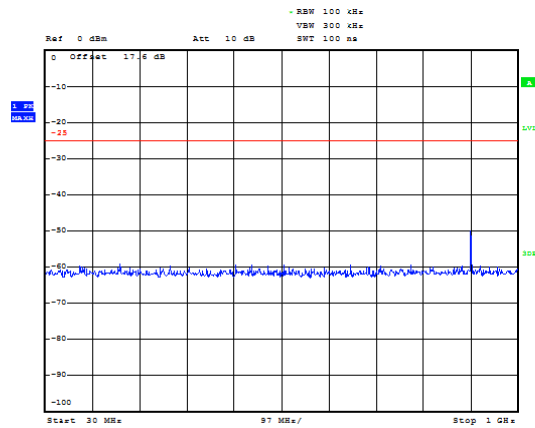


LTE Band 7 15MHz CH-High 1GHz~3GHz

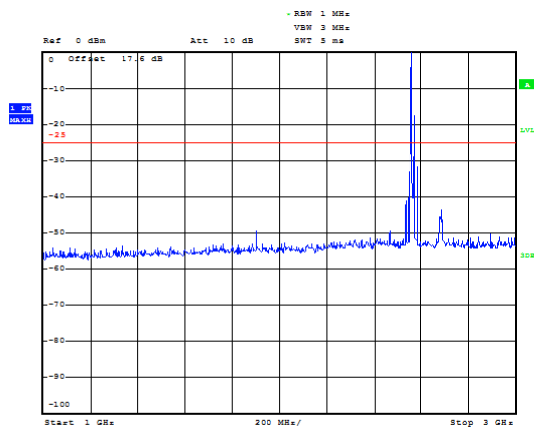


LTE Band 7 20MHz CH-Low 1GHz~3GHz

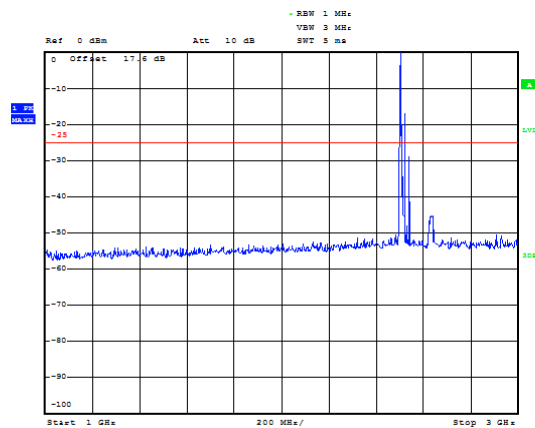

LTE Band 7 15MHz CH-High 3GHz~18GHz


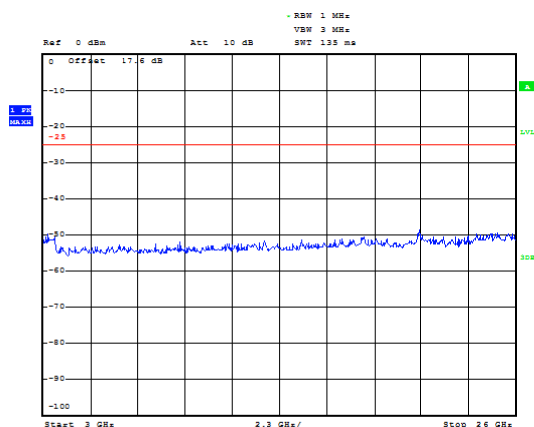


LTE Band 7 20MHz CH-Low 3GHz~18GHz


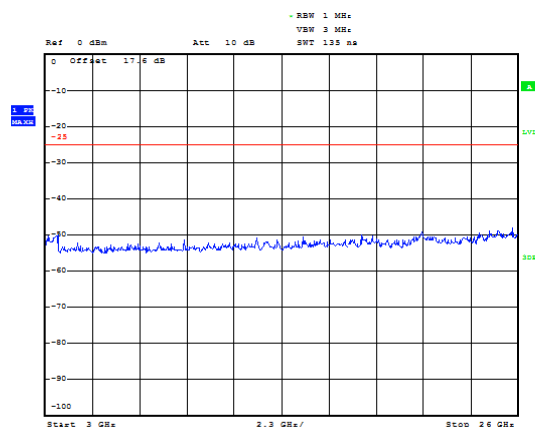


LTE Band 7 20MHz CH-Middle 30MHz~1GHz

LTE Band 7 20MHz CH-High 30MHz~1GHz

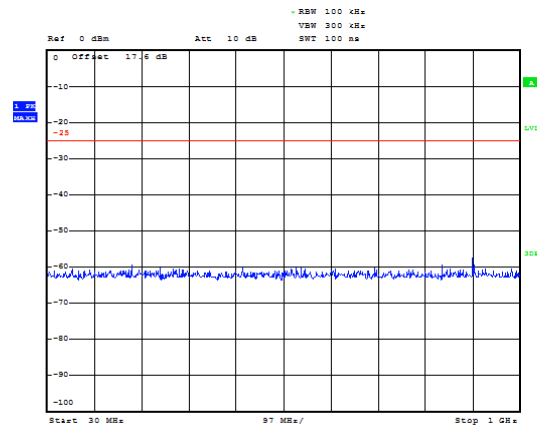
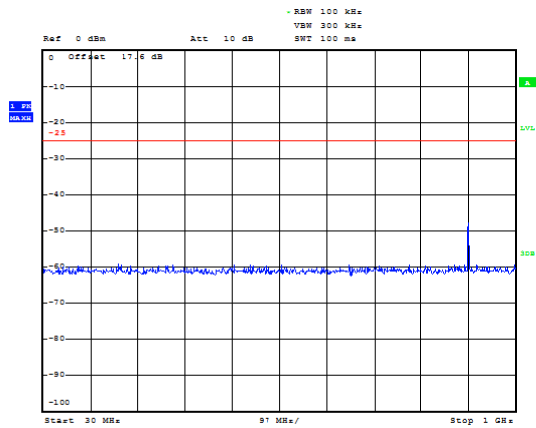


LTE Band 7 20MHz CH-Middle 1GHz~3GHz

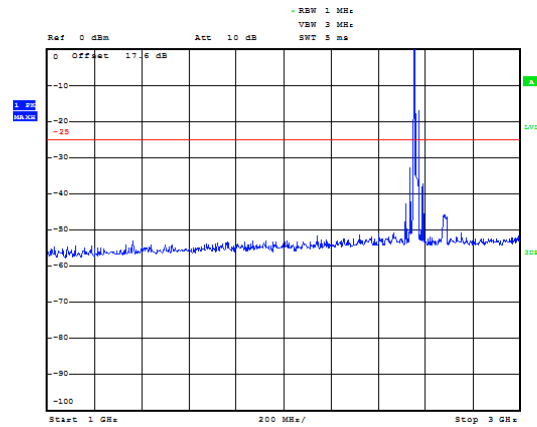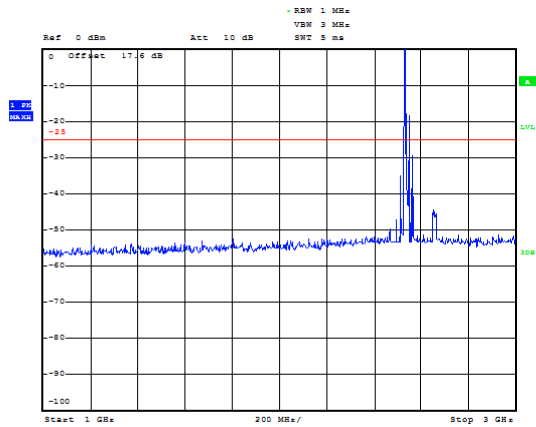

LTE Band 7 20MHz CH-High 1GHz~3GHz

LTE Band 7 20MHz CH-Middle 3GHz~18GHz

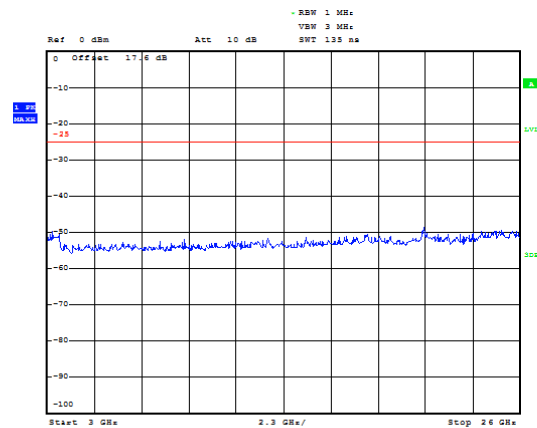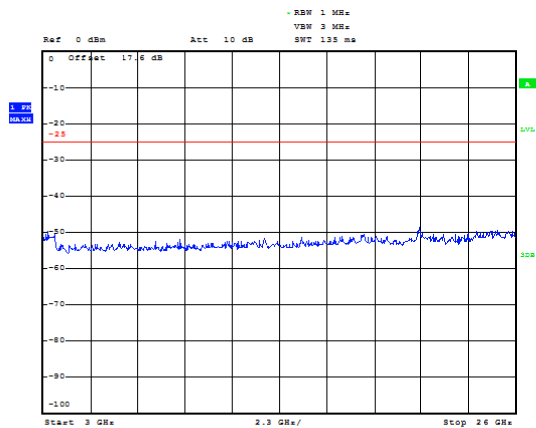

LTE Band 7 20MHz CH-High 3GHz~18GHz

5.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

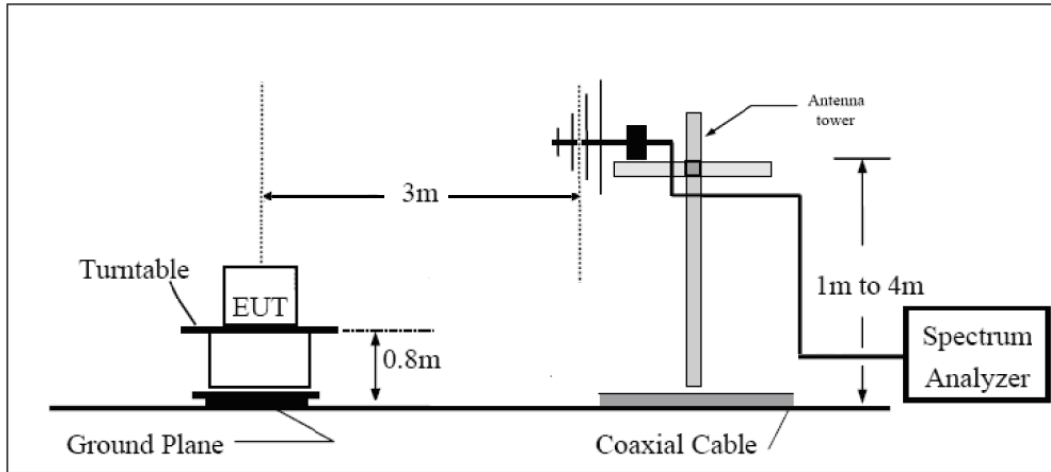

Above 1GHz

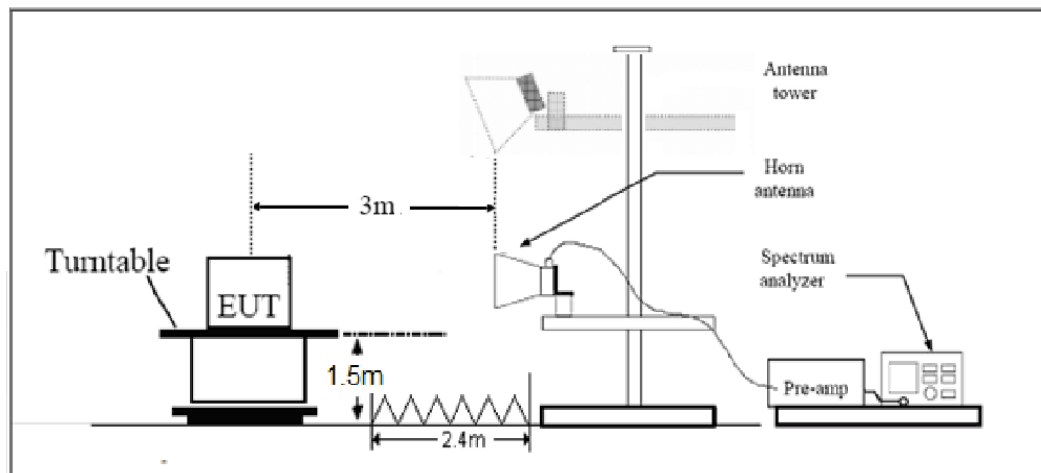

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Limits

Rule Part 27.53(h) specifies that “for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB..”

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53 (h) Limit	-13 dBm
Part 27.53(m) Limit	-25 dBm

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

WCDMA Band IV CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3424.8	-65.71	2.6	10.15	Horizontal	-58.16	-13.00	45.16	180
3	5137.2	-63.05	2.4	11.35	Horizontal	-54.10	-13.00	41.10	180
4	6849.6	-57.05	4.5	10.85	Horizontal	-50.70	-13.00	37.70	90
5	8562.0	-56.44	5.1	11.35	Horizontal	-50.19	-13.00	37.19	45
6	10274.4	-56.49	5.3	11.95	Horizontal	-49.84	-13.00	36.84	45
7	11986.8	-56.99	5.5	13.55	Horizontal	-48.94	-13.00	35.94	135
8	13699.2	-54.47	6.3	13.75	Horizontal	-47.02	-13.00	34.02	45
9	15411.6	-52.29	6.7	13.85	Horizontal	-45.14	-13.00	32.14	135
10	17124.0	-51.30	6.8	14.25	Horizontal	-43.85	-13.00	30.85	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band IV CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.2	-64.95	2.6	10.75	Horizontal	-56.80	-13.00	43.80	90
3	5197.8	-62.27	2.4	11.05	Horizontal	-53.62	-13.00	40.62	225
4	6930.4	-56.76	4.5	11.15	Horizontal	-50.11	-13.00	37.11	225
5	8663.0	-55.80	5.1	11.35	Horizontal	-49.55	-13.00	36.55	135
6	10395.6	-54.58	5.3	11.95	Horizontal	-47.93	-13.00	34.93	135
7	12128.2	-56.06	5.5	13.55	Horizontal	-48.01	-13.00	35.01	90
8	13860.8	-54.13	6.3	13.75	Horizontal	-46.68	-13.00	33.68	0
9	15593.4	-51.98	6.7	13.85	Horizontal	-44.83	-13.00	31.83	45
10	17326.0	-51.30	6.8	14.25	Horizontal	-43.85	-13.00	30.85	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band IV CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3505.2	-64.55	2.6	10.15	Horizontal	-57.00	-13.00	44.00	0
3	5254.1	-61.78	2.4	11.05	Horizontal	-53.13	-13.00	40.13	180
4	7010.4	-56.90	4.5	11.15	Horizontal	-50.25	-13.00	37.25	90
5	8763.0	-55.20	5.1	11.35	Horizontal	-48.95	-13.00	35.95	90
6	10515.6	-55.94	5.3	11.95	Horizontal	-49.29	-13.00	36.29	135
7	12268.2	-56.76	5.5	13.55	Horizontal	-48.71	-13.00	35.71	225
8	14020.8	-53.24	6.3	13.75	Horizontal	-45.79	-13.00	32.79	225
9	15773.4	-51.17	6.7	13.85	Horizontal	-44.02	-13.00	31.02	135
10	17526.0	-51.00	6.8	14.25	Horizontal	-43.55	-13.00	30.55	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 1.4MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3421.4	-61.19	2.6	10.15	Horizontal	-53.64	-13.00	40.64	45
3	5131.1	-62.00	2.4	11.35	Horizontal	-53.05	-13.00	40.05	135
4	6842.8	-56.63	4.5	10.85	Horizontal	-50.28	-13.00	37.28	0
5	8553.5	-54.98	5.1	11.35	Horizontal	-48.73	-13.00	35.73	90
6	10264.2	-55.01	5.3	11.95	Horizontal	-48.36	-13.00	35.36	45
7	11974.9	-58.33	5.5	13.55	Horizontal	-50.28	-13.00	37.28	315
8	13685.6	-54.41	6.3	13.75	Horizontal	-46.96	-13.00	33.96	45
9	15396.3	-53.23	6.7	13.85	Horizontal	-46.08	-13.00	33.08	0
10	17107.0	-53.71	6.8	14.25	Horizontal	-46.26	-13.00	33.26	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 4 QPSK 1.4MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3464.3	-66.84	2.6	10.75	Horizontal	-58.69	-13.00	45.69	45
3	5197.5	-63.19	2.4	11.05	Horizontal	-54.54	-13.00	41.54	0
4	6930.0	-56.25	4.5	11.15	Horizontal	-49.60	-13.00	36.60	90
5	8662.5	-55.34	5.1	11.35	Horizontal	-49.09	-13.00	36.09	135
6	10395.0	-54.92	5.3	11.95	Horizontal	-48.27	-13.00	35.27	45
7	12127.5	-56.53	5.5	13.55	Horizontal	-48.48	-13.00	35.48	90
8	13860.0	-54.64	6.3	13.75	Horizontal	-47.19	-13.00	34.19	180
9	15592.5	-52.73	6.7	13.85	Horizontal	-45.58	-13.00	32.58	135
10	17325.0	-51.87	6.8	14.25	Horizontal	-44.42	-13.00	31.42	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 4 QPSK 1.4MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3507.8	-67.20	2.6	10.15	Horizontal	-59.65	-13.00	46.65	45
3	5261.6	-63.07	2.4	11.05	Horizontal	-54.42	-13.00	41.42	0
4	7017.2	-57.03	4.5	11.15	Horizontal	-50.38	-13.00	37.38	90
5	8771.5	-55.14	5.1	11.35	Horizontal	-48.89	-13.00	35.89	135
6	10525.8	-55.97	5.3	11.95	Horizontal	-49.32	-13.00	36.32	45
7	12280.1	-56.44	5.5	13.55	Horizontal	-48.39	-13.00	35.39	90
8	14034.4	-54.97	6.3	13.75	Horizontal	-47.52	-13.00	34.52	180
9	15788.7	-50.73	6.7	13.85	Horizontal	-43.58	-13.00	30.58	135
10	17543.0	-50.47	6.8	14.25	Horizontal	-43.02	-13.00	30.02	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 4 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3425.0	-65.52	2.6	10.15	Horizontal	-57.97	-13.00	44.97	45
3	5131.1	-61.53	2.4	11.35	Horizontal	-52.58	-13.00	39.58	135
4	6850.0	-56.63	4.5	10.85	Horizontal	-50.28	-13.00	37.28	0
5	8562.5	-56.60	5.1	11.35	Horizontal	-50.35	-13.00	37.35	90
6	10275.0	-55.62	5.3	11.95	Horizontal	-48.97	-13.00	35.97	45
7	11987.5	-57.05	5.5	13.55	Horizontal	-49.00	-13.00	36.00	315
8	13700.0	-54.46	6.3	13.75	Horizontal	-47.01	-13.00	34.01	45
9	15412.5	-52.28	6.7	13.85	Horizontal	-45.13	-13.00	32.13	0
10	17125.0	-52.41	6.8	14.25	Horizontal	-44.96	-13.00	31.96	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 4 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3460.5	-66.14	2.6	10.75	Horizontal	-57.99	-13.00	44.99	45
3	5191.5	-63.01	2.4	11.05	Horizontal	-54.36	-13.00	41.36	135
4	6930.0	-55.85	4.5	11.15	Horizontal	-49.20	-13.00	36.20	0
5	8662.5	-55.24	5.1	11.35	Horizontal	-48.99	-13.00	35.99	90
6	10395.0	-52.25	5.3	11.95	Horizontal	-45.60	-13.00	32.60	45
7	12127.5	-56.81	5.5	13.55	Horizontal	-48.76	-13.00	35.76	315
8	13860.0	-53.70	6.3	13.75	Horizontal	-46.25	-13.00	33.25	45
9	15592.5	-51.08	6.7	13.85	Horizontal	-43.93	-13.00	30.93	0
10	17325.0	-52.15	6.8	14.25	Horizontal	-44.70	-13.00	31.70	315
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 4 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3500.6	-63.68	2.6	10.15	Horizontal	-56.13	-13.00	43.13	45
3	5251.1	-60.32	2.4	11.05	Horizontal	-51.67	-13.00	38.67	135
4	7010.0	-56.20	4.5	11.15	Horizontal	-49.55	-13.00	36.55	0
5	8762.5	-54.88	5.1	11.35	Horizontal	-48.63	-13.00	35.63	90
6	10515.0	-53.60	5.3	11.95	Horizontal	-46.95	-13.00	33.95	180
7	12267.5	-57.73	5.5	13.55	Horizontal	-49.68	-13.00	36.68	315
8	14020.0	-54.38	6.3	13.75	Horizontal	-46.93	-13.00	33.93	45
9	15772.5	-52.45	6.7	13.85	Horizontal	-45.30	-13.00	32.30	0
10	17525.0	-50.94	6.8	14.25	Horizontal	-43.49	-13.00	30.49	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 4 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3440.0	-65.91	2.6	10.15	Horizontal	-58.36	-13.00	45.36	45
3	5133.4	-62.75	2.4	11.35	Horizontal	-53.80	-13.00	40.80	180
4	6880.0	-55.87	4.5	10.85	Horizontal	-49.52	-13.00	36.50	215
5	8600.0	-57.47	5.1	11.35	Horizontal	-51.22	-13.00	38.22	45
6	10320.0	-55.24	5.3	11.95	Horizontal	-48.59	-13.00	35.59	0
7	12040.0	-57.98	5.5	13.55	Horizontal	-49.93	-13.00	36.93	90
8	13760.0	-54.35	6.3	13.75	Horizontal	-46.90	-13.00	33.90	135
9	15480.0	-53.02	6.7	13.85	Horizontal	-45.87	-13.00	32.87	0
10	17200.0	-51.96	6.8	14.25	Horizontal	-44.51	-13.00	31.51	315
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 4 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3465.0	-66.39	2.6	10.75	Horizontal	-58.24	-13.00	45.24	45
3	5170.9	-63.28	2.4	11.05	Horizontal	-54.63	-13.00	41.63	135
4	6930.0	-56.67	4.5	11.15	Horizontal	-50.02	-13.00	37.02	0
5	8662.5	-54.87	5.1	11.35	Horizontal	-48.62	-13.00	35.62	90
6	10395.0	-55.52	5.3	11.95	Horizontal	-48.87	-13.00	35.87	180
7	12127.5	-57.82	5.5	13.55	Horizontal	-49.77	-13.00	36.77	315
8	13860.0	-54.77	6.3	13.75	Horizontal	-47.32	-13.00	34.32	45
9	15592.5	-53.02	6.7	13.85	Horizontal	-45.87	-13.00	32.87	0
10	17325.0	-51.90	6.8	14.25	Horizontal	-44.45	-13.00	31.45	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 4 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3490.0	-65.96	2.6	10.15	Horizontal	-58.41	-13.00	45.41	0
3	5208.4	-58.68	2.4	11.05	Horizontal	-50.03	-13.00	37.03	90
4	6980.0	-56.65	4.5	11.15	Horizontal	-50.00	-13.00	37.00	45
5	8725.0	-55.56	5.1	11.35	Horizontal	-49.31	-13.00	36.31	180
6	10470.0	-55.96	5.3	11.95	Horizontal	-49.31	-13.00	36.31	215
7	12215.0	-56.27	5.5	13.55	Horizontal	-48.22	-13.00	35.22	45
8	13960.0	-54.40	6.3	13.75	Horizontal	-46.95	-13.00	33.95	0
9	15705.0	-53.38	6.7	13.85	Horizontal	-46.23	-13.00	33.23	90
10	17450.0	-53.45	6.8	14.25	Horizontal	-46.00	-13.00	33.00	315
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 7 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5000.6	-61.77	2.00	9.15	Horizontal	-54.62	-25.00	29.62	135
3	7501.1	-58.33	2.50	11.35	Horizontal	-49.48	-25.00	24.48	45
4	10001.3	-51.72	4.20	12.05	Horizontal	-43.87	-25.00	18.87	0
5	12512.5	-51.05	5.20	12.85	Horizontal	-43.40	-25.00	18.40	90
6	15015.0	-54.53	5.50	14.23	Horizontal	-45.80	-25.00	20.80	135
7	17517.5	-52.81	5.70	14.15	Horizontal	-44.36	-25.00	19.36	180
8	20020.0	-	-	-	-	-	-	-	-
9	22522.5	-	-	-	-	-	-	-	-
10	25025.0	-	-	-	-	-	-	-	-
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5065.8	-60.87	2.00	9.15	Horizontal	-53.72	-25.00	28.72	90
3	7598.6	-57.67	2.50	11.35	Horizontal	-48.82	-25.00	23.82	180
4	10130.6	-53.58	4.20	12.05	Horizontal	-45.73	-25.00	20.73	45
5	12675.0	-52.41	5.20	12.85	Horizontal	-44.76	-25.00	19.76	0
6	15210.0	-54.75	5.50	14.23	Horizontal	-46.02	-25.00	21.02	180
7	17745.0	-52.12	5.70	14.15	Horizontal	-43.67	-25.00	18.67	90
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 7 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5130.8	-61.73	2.00	9.15	Horizontal	-54.58	-25.00	29.58	180
3	7696.1	-57.88	2.50	11.35	Horizontal	-49.03	-25.00	24.03	90
4	10261.1	-49.42	4.20	12.05	Horizontal	-41.57	-25.00	16.57	0
5	12837.5	-51.82	5.20	12.85	Horizontal	-44.17	-25.00	19.17	315
6	15405.0	-55.12	5.50	14.23	Horizontal	-46.39	-25.00	21.39	90
7	17972.5	-52.43	5.70	14.15	Horizontal	-43.98	-25.00	18.98	180
8	20540.0	--	--	--	--	--	--	--	--
9	23107.5	--	--	--	--	--	--	--	--
10	25675.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5001.0	-61.71	2.00	9.15	Horizontal	-54.56	-25.00	29.56	90
3	7515.0	-58.17	2.50	11.35	Horizontal	-49.32	-25.00	24.32	45
4	10002.4	-58.57	4.20	12.05	Horizontal	-50.72	-25.00	25.72	0
5	12525.0	-57.22	5.20	12.85	Horizontal	-49.57	-25.00	24.57	180
6	15030.0	-54.23	5.50	14.23	Horizontal	-45.50	-25.00	20.50	315
7	17535.0	-52.32	5.70	14.15	Horizontal	-43.87	-25.00	18.87	0
8	20040.0	--	--	--	--	--	--	--	--
9	22545.0	--	--	--	--	--	--	--	--
10	25050.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5061.9	-61.57	2.00	9.15	Horizontal	-54.42	-25.00	29.42	45
3	7598.6	-57.60	2.50	11.35	Horizontal	-48.75	-25.00	23.75	180
4	10130.6	-50.84	4.20	12.05	Horizontal	-42.99	-25.00	17.99	90
5	12675.0	-46.42	5.20	12.85	Horizontal	-38.77	-25.00	13.77	315
6	15210.0	-54.23	5.50	14.23	Horizontal	-45.50	-25.00	20.50	0
7	17745.0	-52.35	5.70	14.15	Horizontal	-43.90	-25.00	18.90	45
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 7 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5121.4	-62.53	2.00	10.15	Horizontal	-54.38	-25.00	29.38	45
3	7681.9	-57.99	2.50	11.35	Horizontal	-49.14	-25.00	24.14	0
4	10242.0	-49.87	4.20	12.05	Horizontal	-42.02	-25.00	17.02	90
5	12825.0	-49.96	5.20	14.85	Horizontal	-40.31	-25.00	15.31	180
6	15390.0	-54.49	5.50	13.23	Horizontal	-46.76	-25.00	21.76	45
7	17955.0	-52.01	5.70	12.15	Horizontal	-45.56	-25.00	20.56	90
8	20520.0	--	--	--	--	--	--	--	--
9	23085.0	--	--	--	--	--	--	--	--
10	25650.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 7 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5002.1	-62.72	2.00	10.15	Horizontal	-54.57	-25.00	29.57	225
3	7530.0	-56.11	2.50	11.35	Horizontal	-47.26	-25.00	22.26	40
4	10040.0	-50.02	4.20	12.05	Horizontal	-42.17	-25.00	17.17	135
5	12550.0	-46.67	5.20	14.85	Horizontal	-37.02	-25.00	12.02	180
6	15060.0	-52.99	5.50	13.23	Horizontal	-45.26	-25.00	20.26	90
7	17570.0	-50.74	5.70	12.15	Horizontal	-44.29	-25.00	19.29	0
8	20080.0	--	--	--	--	--	--	--	--
9	22590.0	--	--	--	--	--	--	--	--
10	25100.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5052.4	-62.29	2.00	10.15	Horizontal	-54.14	-25.00	29.14	0
3	7605.0	-58.74	2.50	11.35	Horizontal	-49.89	-25.00	24.89	45
4	10140.0	-49.29	4.20	12.05	Horizontal	-41.44	-25.00	16.44	0
5	12675.0	-48.84	5.20	14.85	Horizontal	-39.19	-25.00	14.19	135
6	15210.0	-53.94	5.50	13.23	Horizontal	-46.21	-25.00	21.21	225
7	17745.0	-50.31	5.70	12.15	Horizontal	-43.86	-25.00	18.86	0
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 7 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5102.3	-62.37	2.00	10.15	Horizontal	-54.22	-25.00	29.22	225
3	7680.0	-55.44	2.50	11.35	Horizontal	-46.59	-25.00	21.59	40
4	10240.0	-43.73	4.20	12.05	Horizontal	-35.88	-25.00	10.88	135
5	12800.0	-50.01	5.20	14.85	Horizontal	-40.36	-25.00	15.36	180
6	15360.0	-55.00	5.50	13.23	Horizontal	-47.27	-25.00	22.27	90
7	17920.0	-50.39	5.70	12.15	Horizontal	-43.94	-25.00	18.94	0
8	20480.0	--	--	--	--	--	--	--	--
9	23040.0	--	--	--	--	--	--	--	--
10	25600.0	--	--	--	--	--	--	--	--

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	/	/
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****