



# EMC REPORT

**Report Reference No.** .....: **TRE1612017501** R/C.....: 95076

**FCC ID**.....: **SRQ-ZTEBLADEA602**

**Applicant's name** .....: ZTE CORPORATION

Address .....: ZTE Plaza, Keji Road South, Shenzhen, China

Manufacturer.....: ZTE CORPORATION

Address.....: ZTE Plaza, Keji Road South, Shenzhen, China

**Test item description**.....: LTE/WCDMA/GSM (GPRS) Mutil-Mode Digital Mobile Phone

Trade Mark .....: ZTE

Model/Type reference.....: ZTE BLADE A602、 ZTE Blade A602、 BLADE A602、 Blade A602

Standard .....: 47 CFR Part 15 Subpart B: Radio Frequency Devices

Date of receipt of test sample.....: Nov. 24, 2016

Date of testing.....: Nov. 24, 2016

Date of issue.....: Nov. 24, 2016

**Result** .....: **Pass**

Compiled by  
( position+printed name+signature).....: File administrators Shayne Zhu

Supervised by  
( position+printed name+signature).....: Project Engineer Lion Cai

Approved by  
( position+printed name+signature).....: Manager Hans Hu

**Testing Laboratory Name** .....: **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address .....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely corresponds to the test sample.*

*It is not permitted to copy extracts of these test result without the written permission of the test laboratory* Page 1 of 18



## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>3</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>3</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>4</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>5</b>
1.3.1	Facilities .....	5
1.3.2	Test Environment Conditions .....	5
1.3.3	Measurement Uncertainty .....	5
<b>2.</b>	<b>TEST CONDITIONS SETTING .....</b>	<b>6</b>
<b>2.1</b>	<b>Test Peripherals .....</b>	<b>6</b>
<b>2.2</b>	<b>Test Block .....</b>	<b>6</b>
<b>2.3</b>	<b>Test Mode .....</b>	<b>7</b>
<b>2.4</b>	<b>Test Setup and Equipments List .....</b>	<b>8</b>
2.4.1	Conducted Emission .....	8
2.4.2	Radiated Emission .....	9
<b>3.</b>	<b>47 CFR PART 15B REQUIREMENTS .....</b>	<b>11</b>
<b>3.1</b>	<b>Conducted Emission .....</b>	<b>11</b>
3.1.1	Requirement .....	11
3.1.2	Test Description .....	11
3.1.3	Test Result .....	11
<b>3.2</b>	<b>Radiated Emission .....</b>	<b>14</b>
3.2.1	Requirement .....	14
3.2.2	Test Description .....	15
3.2.3	Test Result .....	15

Change History		
Issue	Date	Reason for change
1.0	2016.11.24	First edition



# 1. GENERAL INFORMATION

## 1.1 EUT Description

EUT Name ..... : LTE/WCDMA/GSM(GPRS) Mutil-Mode Digital Mobile Phone  
FCC ID..... : SRQ-ZTEBLADEA602  
Trade Name.....: ZTE  
Brand Name.....: ZTE  
Hardware Version..... : MB V1.0  
Software Version..... : TEL\_MX\_BLADE\_A602V1.0.0

*Note 1:*The EUT is a LTE/WCDMA/GSM (GPRS) Mutil-Mode Digital Mobile Phone, it supports the following operating frequency band:GSM850/1900;WCDMA850/1700/1900; LTE BAND 2,4,7,12,13,17;WIFI 2.4G(b/g/n20/40); Bluetooth 4.1 EDR+LE;GPS;FM;

*Note 2:*The highest operation frequency or processor operate frequency is 1.3 GHz.

*Note 3:*For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2016	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



### 1.3 Facilities and Accreditations

#### 1.3.1 Facilities

##### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories

(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

##### **FCC-Registration No.: 317478**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

#### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

#### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)



## 2. TEST CONDITIONS SETTING

### 2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:


#### Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

#### Support Cable:

Description	Shield Type	Ferrite Core	Length
USB Cable	shielding	Yes	1.2m
RJ45 Cable	shielding	No	2m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

### 2.2 Test Block

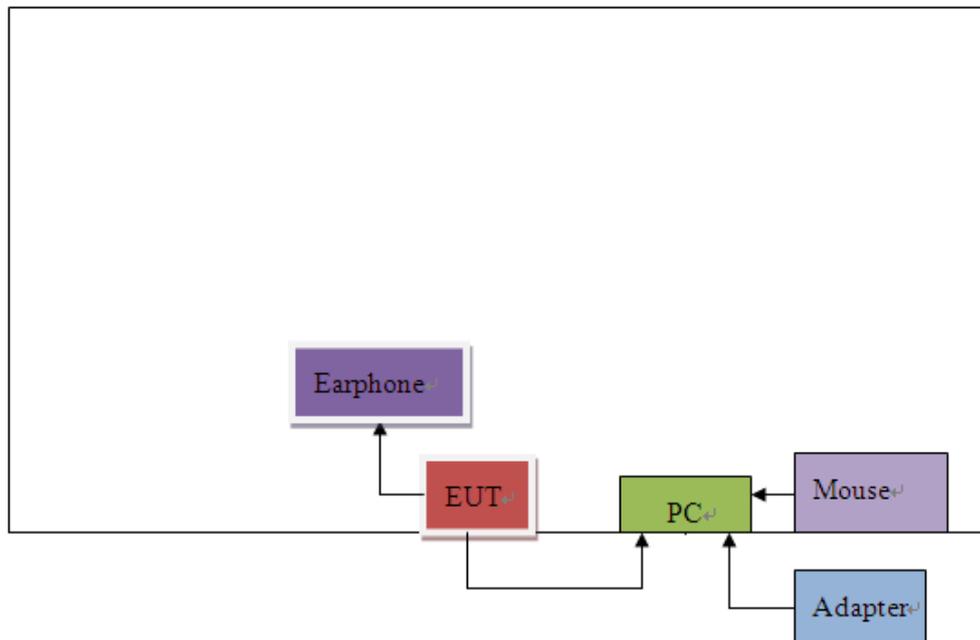



## 2.3 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT+ Mouse + Notebook PC + GSM850 Traffic;

Setup2: EUT+ Mouse + Notebook PC + GSM1900 Traffic;

Setup3: EUT+ Mouse + Notebook PC + WCDMA850 Traffic;

Setup4: EUT+ Mouse + Notebook PC + WCDMA1700 Traffic;

Setup5: EUT+ Mouse + Notebook PC + WCDMA1900 Traffic;

Setup6: EUT+ Mouse + Notebook PC + LTE BAND 2 Traffic;

Setup7: EUT+ Mouse + Notebook PC + LTE BAND 4 Traffic;

Setup8: EUT+ Mouse + Notebook PC + LTE BAND 7 Traffic;

Setup9: EUT+ Mouse + Notebook PC + LTE BAND 12 Traffic;

Setup10: EUT+ Mouse + Notebook PC + LTE BAND 13 Traffic;

Setup11: EUT+ Mouse + Notebook PC + LTE BAND 17 Traffic;

Setup12: EUT+ Mouse + Notebook PC + WIFI Traffic;

Setup13: EUT+ Mouse + Notebook PC + BT Traffic;

Setup14: EUT+ Mouse + Notebook PC + GPS


Setup15: EUT+ Mouse + Notebook PC + FM;;

Setup16: EUT+ Mouse + Notebook PC + Idle;

## 2.4 Test Setup and Equipments List

### 2.4.1 Conducted Emission

#### A. Test Setup:

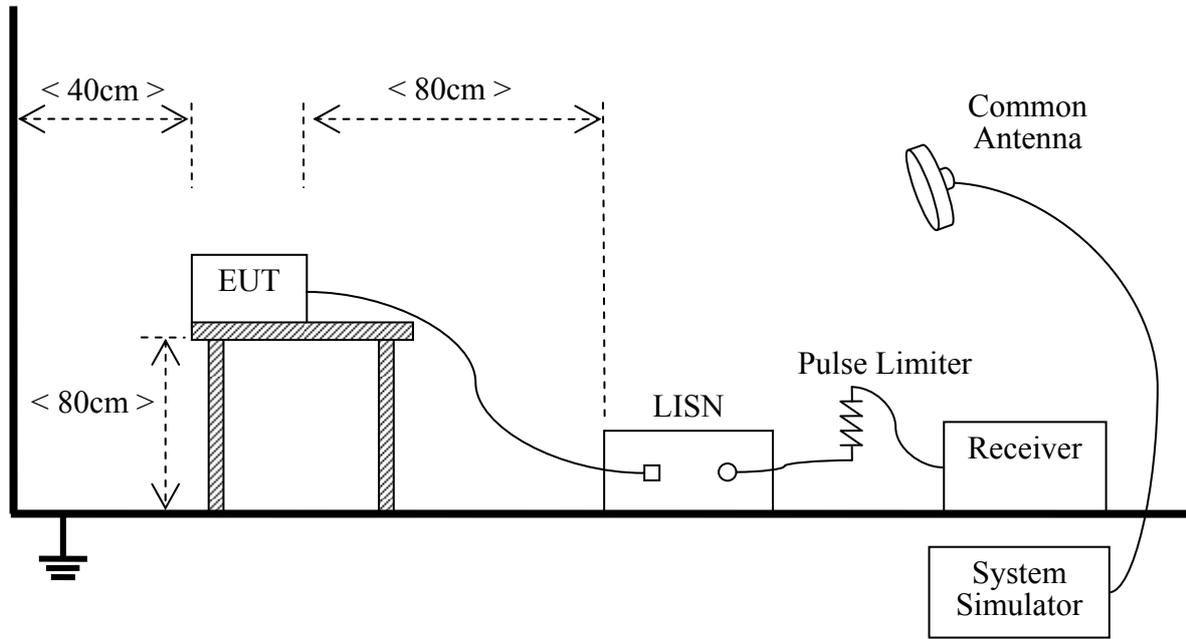

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50Ω/50μH of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


#### B. Equipments List:

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100106	2015/11/2
2	Artificial Mains(LISN)	Rohde & Schwarz	ESH2-Z5	100028	2015/11/2
3	Pulse Limiter	Rohde & Schwarz	ESHSZ2	100044	2015/11/2
4	EMI Test Software	Rohde & Schwarz	ES-K1	N/A	N/A


## 2.4.2 Radiated Emission

### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

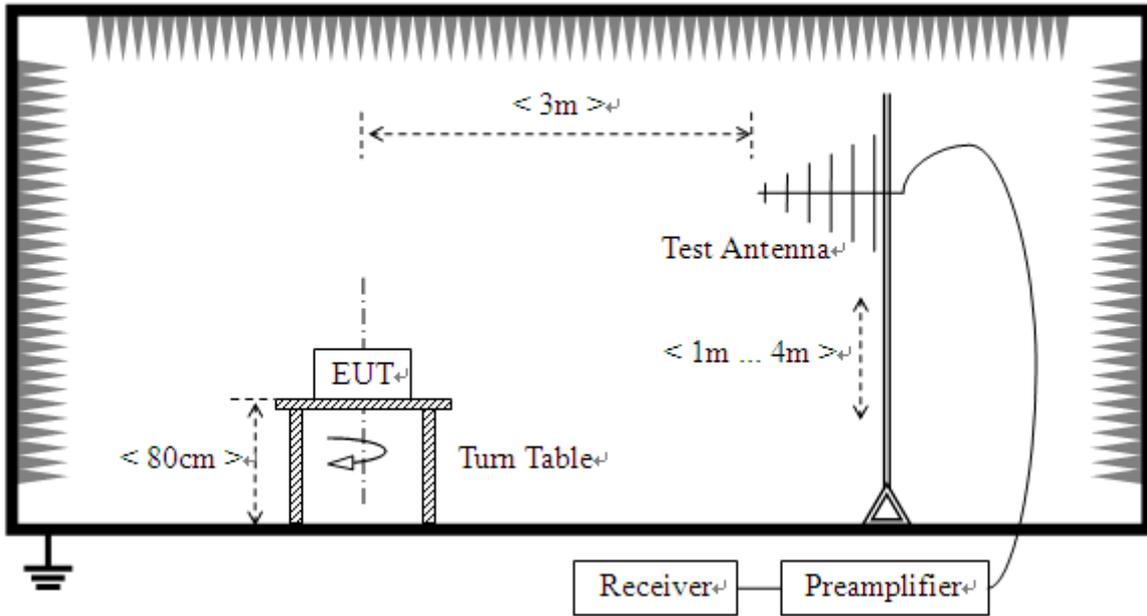

- 2) For radiated emissions above 1GHz

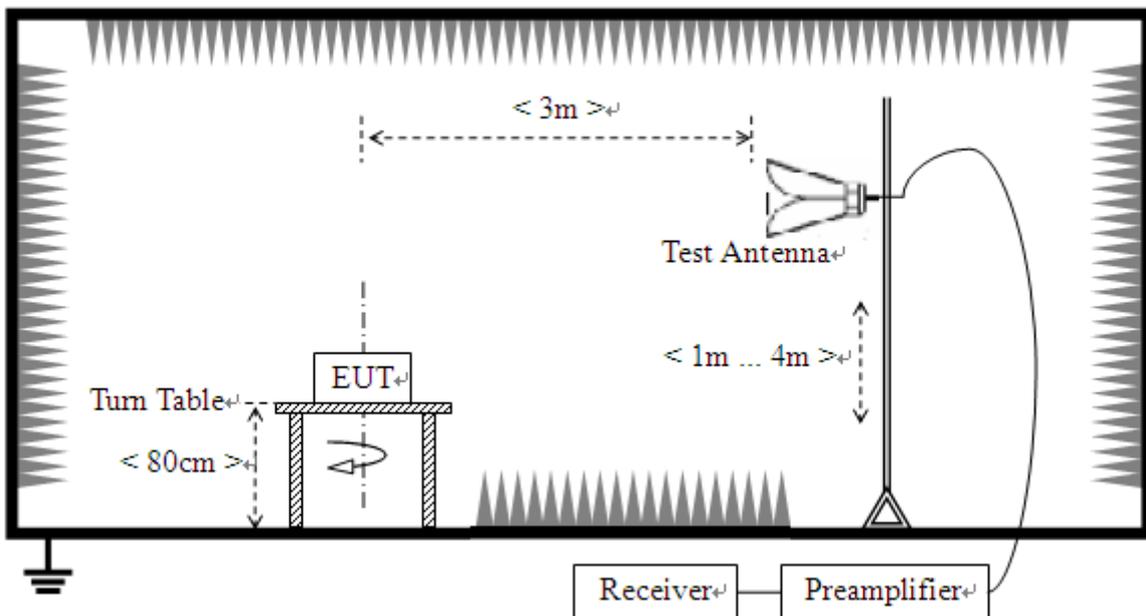



**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**C. Equipments List:**

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ShwarzBeck	VULB9163	538	2015/11/2
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2015/11/2
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	MATURO	TT2.0	N/A	N/A
5	ANTENNA MAST	MATURO	TAM-4.0-P	N/A	N/A
6	EMI TEST Software	Rohde & Schwarz	ESK1	N/A	N/A
7	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/2
8	Amplifer	Sonoma	310N	E009-13	2015/11/2
9	JS amplifer	Rohde & Schwarz	JS4-00101800-28-5A	F201504	2015/11/2
10	TURNTABLE	ETS	2088	2149	N/A
11	ANTENNA MAST	ETS	2075	2346	N/A
12	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2015/11/2



### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**Note:**

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2 Test Description

See section 2.4.1 of this report.

##### 3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**Note:**

1.Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


2.All test modes have been tested, only the worst cases are recorded in this report.



**Test voltage and frequency (120V AC,60Hz)**

**D. Test Plot and Suspicious Points: Mains terminal disturbance voltage, Setup 1**

FCC Part 15 Class B Voltage Test

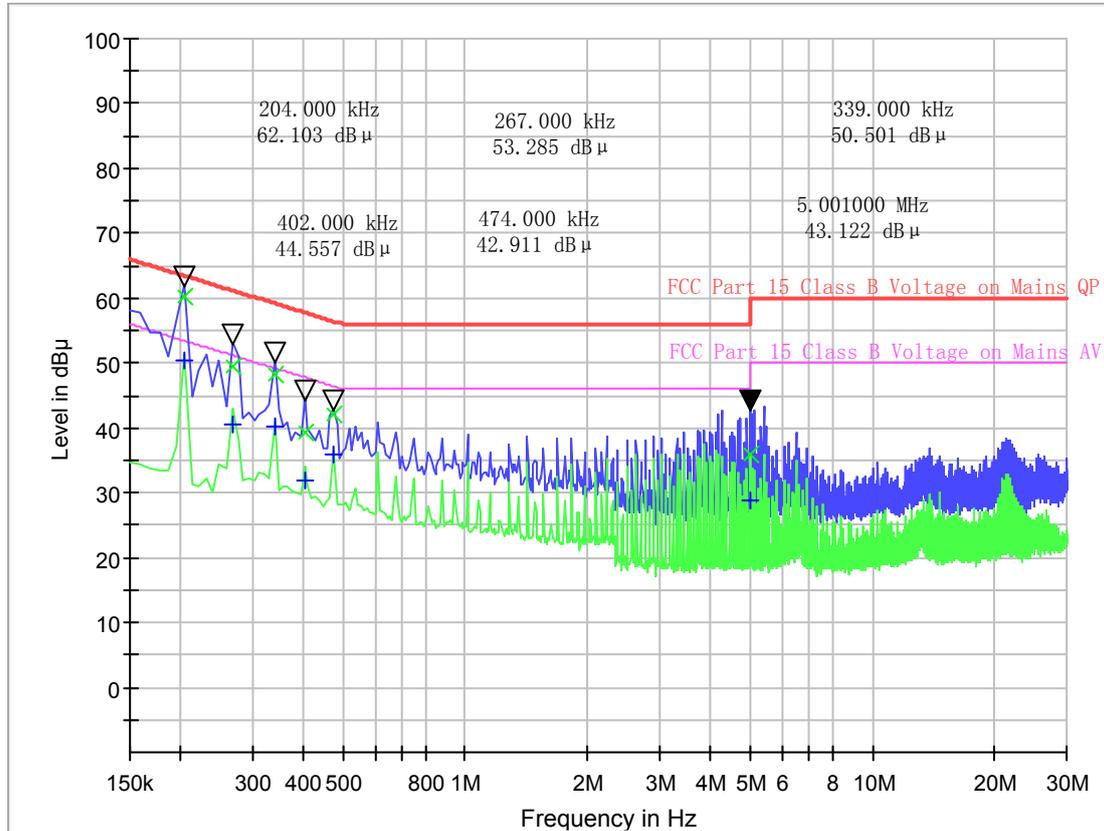


(Plot A: L Phase)

Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.204000	63.4	60.32	3.08	63.4	53.4	50.32	3.08
0.267000	61.2	49.33	11.87	61.2	51.2	40.42	10.78
0.339000	59.2	48.34	10.86	59.2	49.2	40.08	9.12
0.402000	57.8	39.24	18.56	57.8	47.8	31.76	16.04
0.474000	56.4	42.20	14.2	56.4	46.4	35.86	10.54
5.001000	63.4	35.78	27.62	63.4	53.4	28.88	24.52



FCC Part 15 Class B Voltage Test

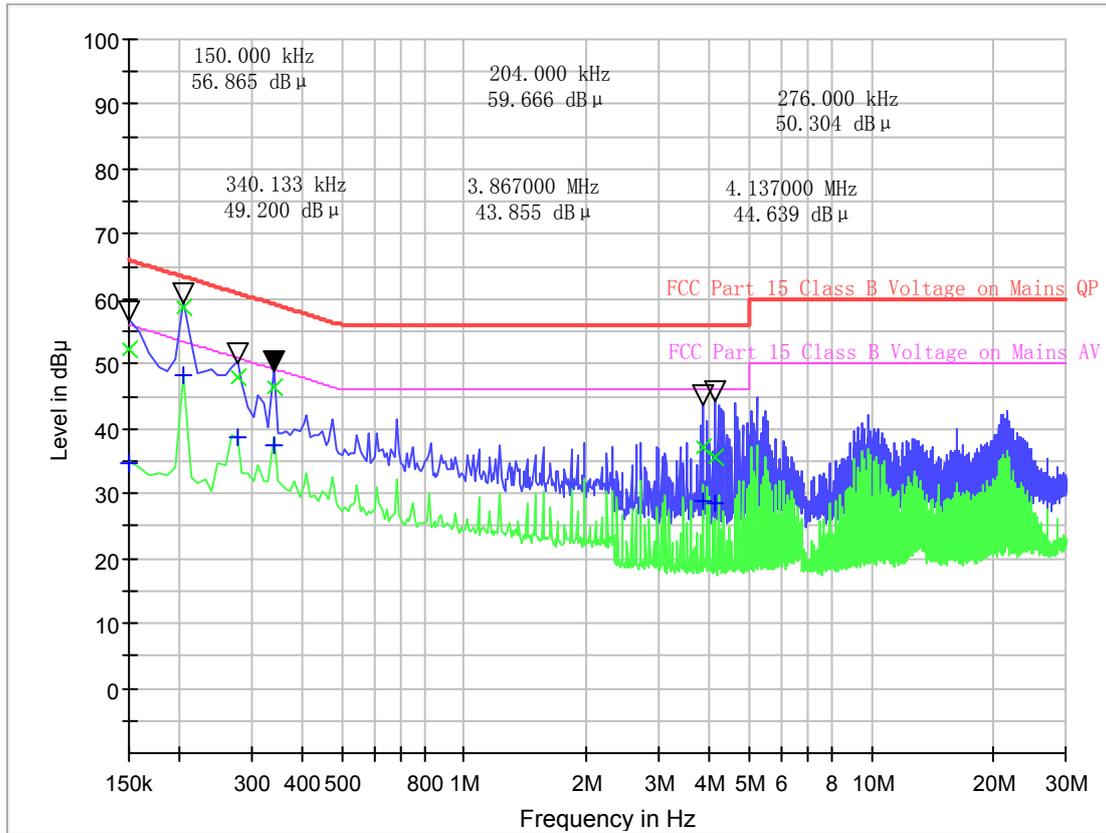

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals

N Test Data

QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.150000	66.0	52.14	13.86	0.150000	56.0	34.73	21.27
0.204000	63.4	58.73	4.67	0.204000	53.4	48.27	5.13
0.276000	60.9	47.84	13.06	0.276000	50.9	38.77	12.13
0.339000	59.2	46.24	12.96	0.339000	49.2	37.55	11.65
3.867000	56.0	37.26	18.74	3.867000	46.0	28.72	17.28
4.137000	66.0	35.45	30.55	4.137000	56.0	28.50	27.5

Test Result: PASS



## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\mu\text{V/m}$ )	( $\text{dBuV/m}$ )
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW=1MHz, VBW=3MHz for PK value; PK detector, RBW =1MHz, VBW=1Hz for AV value.

#### Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in  $\text{dBuV/m}$  is calculated by  $20\log \text{Emission Level}(\mu\text{V/m})$ .
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is  $30\mu\text{V/m}$ , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$



### **3.2.2 Test Description**

See section 2.3.2 of this report.

### **3.2.3 Test Result**

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

#### **Note:**

1. All test modes have been tested, only the worst cases are recorded in this report.




**E. Test Plots and Suspicious Points: Radiation disturbances, antenna polarization: Setup 3**

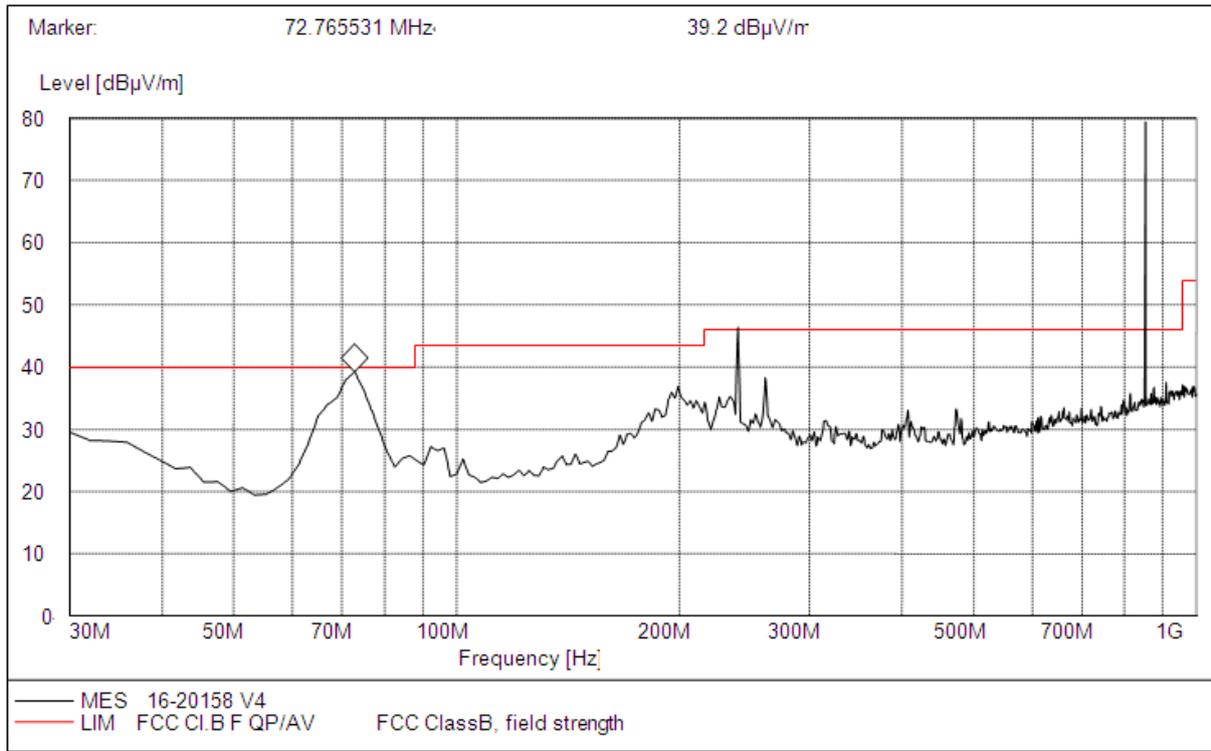

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Verdict
30.00000	28.54	120.000	241.4	40.00	11.46	Vertical	Pass
73.52000	36.89	120.000	185.6	40.00	3.11	Vertical	Pass
261.20000	37.46	120.000	125.4	46.00	8.54	Vertical	Pass

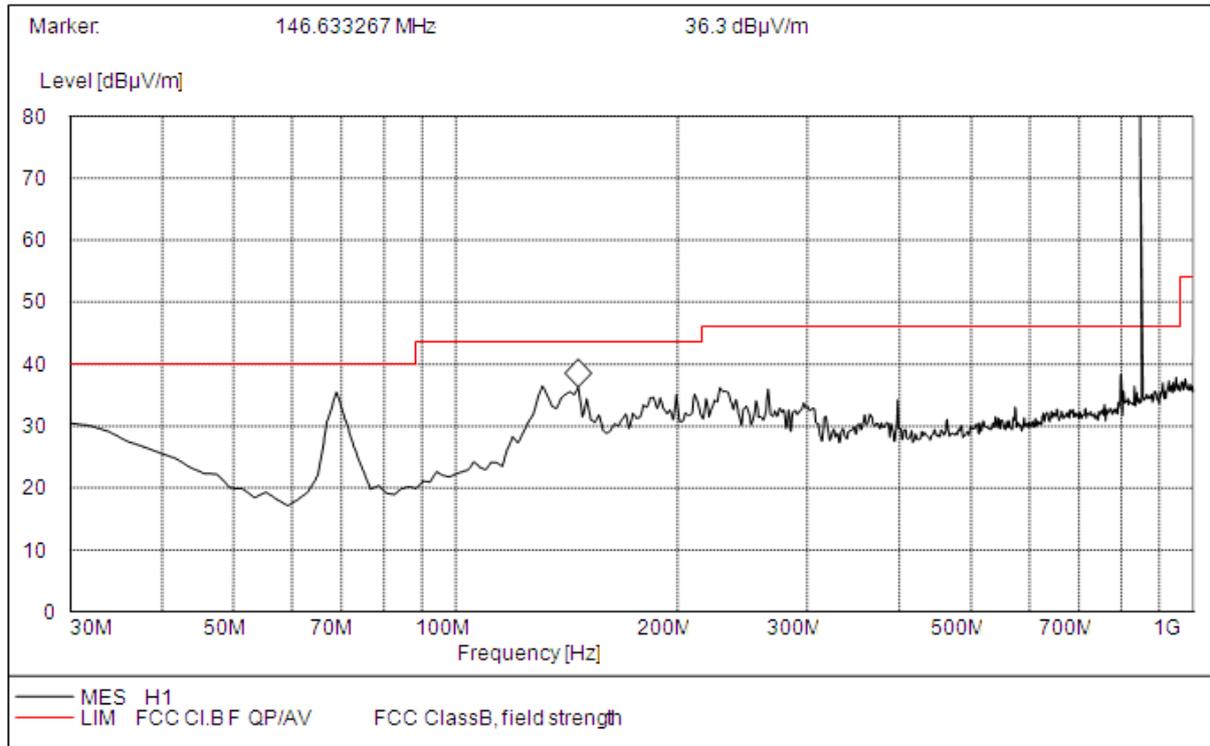


(Plot D: Test Antenna Horizontal 30M - 1G)


Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Verdict
68.88000	34.58	120.000	204.5	40.00	5.42	Horizontal	Pass
131.08000	34.38	120.000	245.7	43.50	9.12	Horizontal	Pass
146.63000	34.54	120.000	129.0	46.00	11.46	Horizontal	Pass



Test Plots and Suspicious Points: Radiation disturbances, antenna polarization: Setup 10

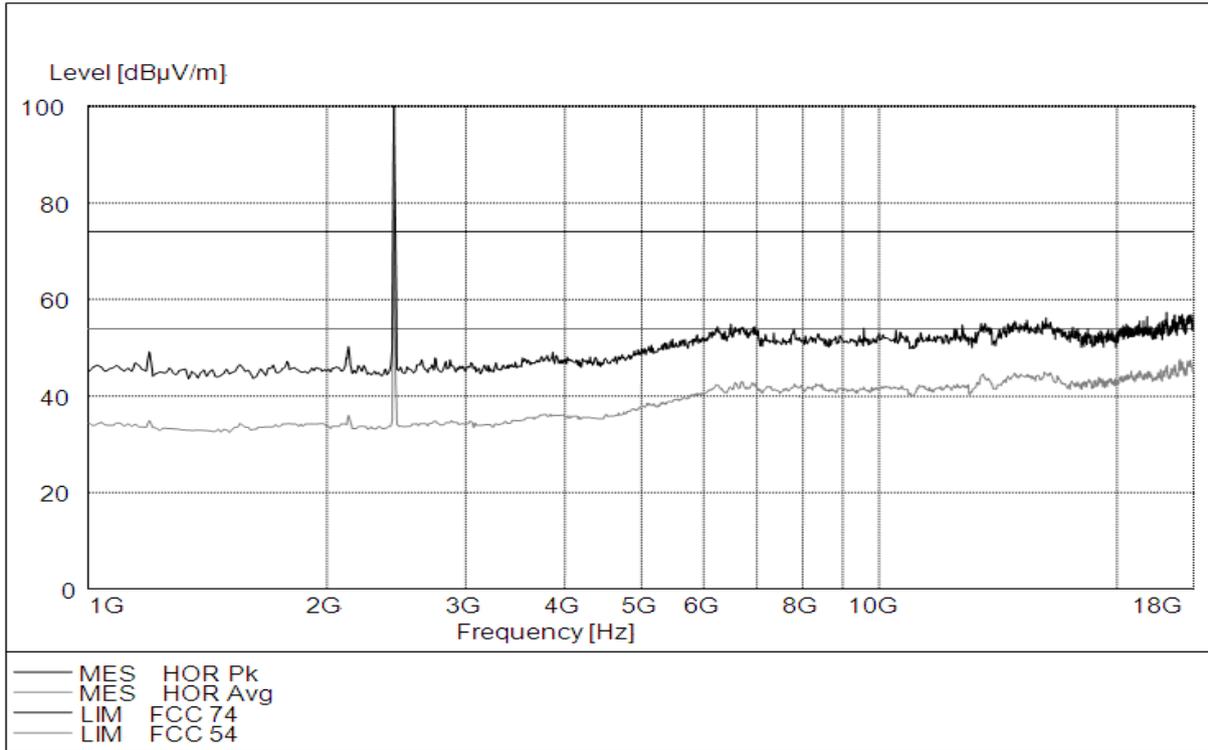

(Plot E: Test Antenna Horizontal 1G – 18G)

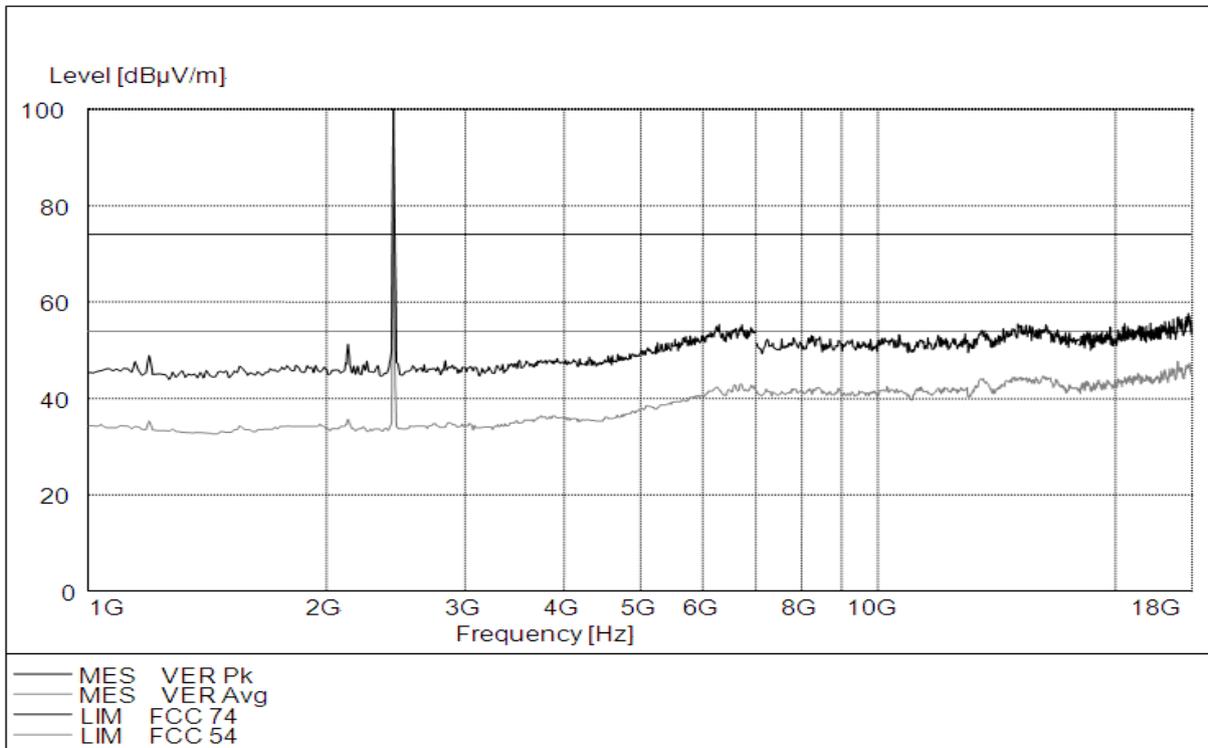

(Plot F: Test Antenna Vertical 1G – 18G)

**Test Result: PASS**