



RF TEST REPORT

Applicant ZTE CORPORATION
FCC ID SRQ-ZTEBLADEV8
Product LTE/WCDMA/GSM(GPRS)
Multi-Mode Digital Mobile Phone
Model ZTE BLADE V8/ZTE BLADE V0800
Report No. RXA1707-0240RF02R2
Issue Date August 18, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR 47 Part 24E (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Jiang peng Lan

Performed by: Jiangpeng Lan

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

- 1. Test Laboratory4
 - 1.1. Notes of the test report.....4
 - 1.2. Test facility.....4
 - 1.3. Testing Location5
- 2. General Description of Equipment under Test.....6
- 3. Applied Standards.....8
- 4. Test Configuration.....9
- 5. Test Case Results.....11
 - 5.1. RF Power Output.....11
 - 5.2. Effective Isotropic Radiated Power16
 - 5.3. Occupied Bandwidth21
 - 5.4. Band Edge Compliance.....32
 - 5.5. Peak-to-Average Power Ratio (PAPR)43
 - 5.6. Frequency Stability.....46
 - 5.7. Spurious Emissions at Antenna Terminals51
 - 5.8. Radiates Spurious Emission63
- 6. Main Test Instruments77
- ANNEX A: EUT Appearance and Test Setup.....78
 - A.1 EUT Appearance78
 - A.2 Test Setup.....80

Summary of measurement results

| No. | Test Case | Clause in FCC rules | Verdict |
|---|---|----------------------------|---------|
| 1 | RF power output | 2.1046 | PASS |
| 2 | Effective Isotropic Radiated power | 24.232(c) | PASS |
| 3 | Occupied Bandwidth | 2.1049 | PASS |
| 4 | Band Edge Compliance | 2.1051 /24.238(a) | PASS |
| 5 | Peak-to-Average Power Ratio | 24.232/KDB 971168 D01(5.7) | PASS |
| 6 | Frequency Stability | 2.1055 / 24.235 | PASS |
| 7 | Spurious Emissions at Antenna Terminals | 2.1051 / 24.238(a) | PASS |
| 8 | Radiates Spurious Emission | 2.1053 / 24.238(a) | PASS |
| Date of Testing: August 4, 2017~ August 9, 2017 | | | |
| Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. | | | |



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2. General Description of Equipment under Test

Client Information

| | |
|----------------------|--|
| Applicant | ZTE CORPORATION |
| Applicant address | ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China |
| Manufacturer | ZTE CORPORATION |
| Manufacturer address | ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China |



General information

| EUT Description | | | |
|---|---|-------------|-------------|
| Model | ZTE BLADE V8/ZTE BLADE V0800 | | |
| IMEI/MEID/SN | SIM1: 862120300072285 SIM2: 862121030073788 | | |
| Hardware Version | us9B | | |
| Software Version | ENT_CL_BLADE_V8V1.0.0B01 | | |
| Power Supply | Battery/AC adapter | | |
| Antenna Type | Internal Antenna | | |
| Test Mode(s) | GSM1900; WCDMA Band II; LTE Band 2 | | |
| Test Modulation | (GSM)GMSK,8PSK; (WCDMA)QPSK; (LTE)QPSK,16QAM | | |
| GPRS Multislot Class | 33 | | |
| EGPRS Multislot Class | 33 | | |
| HSDPA UE Category | 24 | | |
| HSUPA UE Category | 6 | | |
| Maximum E.I.R.P | GSM 1900: | 25.09dBm | |
| | WCDMA Band II: | 19.65dBm | |
| | LTE Band 2: | 21.12dBm | |
| Rated Power Supply Voltage | 3.87V | | |
| Extreme Voltage | Minimum: 3.65V Maximum: 4.40V | | |
| Extreme Temperature | Lowest: -10°C Highest: +55°C | | |
| Operating Frequency Range(s) | Band | Tx (MHz) | Rx (MHz) |
| | GSM1900 | 1850 ~ 1910 | 1930 ~ 1990 |
| | WCDMA Band II | 1850 ~ 1910 | 1930 ~ 1990 |
| | LTE Band 2 | 1850 ~ 1910 | 1930 ~ 1990 |
| EUT Accessory | | | |
| Adapter | Manufacturer: DOKOCOM Model: STC-A515A-Z Input power:100-240 VAC 50-60Hz 300mA Output power:5V DC 1500mA | | |
| Battery | Manufacturer: HARBIN COSLIGHT POWER CO LTD Model: Li3927T44P8h786035 Ratings:3.87Vdc,2730mAh,10.6Wh | | |
| Earphone | Manufacturer: GoerTek Model: HA3-3 | | |
| USB Cable | 100cm Cable, Shielded | | |
| Note: The information of the EUT is declared by the manufacturer. | | | |



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2017)

FCC CFR 47 Part 24E (2017)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v02r02

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

| | Test items | Modes/Modulation | |
|----------------------|---|--|--------------------------------|
| | | GSM 1900 | WCDMA Band II |
| Conducted Test cases | RF power output | GSM GPRS(1Tx slots) EGPRS(1Tx slots) | RMC/ HSDPA/ HSUPA/ DC-HSDPA |
| | Occupied Bandwidth | GSM GPRS(1Tx slots) EGPRS(1Tx slots) | RMC |
| | Band Edge Compliance | GSM GPRS(1Tx slots) EGPRS(1Tx slots) | RMC |
| | Peak-to-Average Power Ratio | GSM GPRS(1Tx slots) EGPRS(1Tx slots) | RMC |
| | Frequency Stability | GSM GPRS(1Tx slots) EGPRS(1Tx slots) | RMC |
| | Spurious Emissions at Antenna Terminals | GSM | RMC |
| Radiated Test cases | Effective Isotropic Radiated power | GPRS(1Tx slots) EGPRS(1Tx slots) | RMC |
| | Radiates Spurious Emission | GSM | RMC |



Test modes are chosen to be reported as the worst case configuration below for LTE Band 2

| Test items | Bandwidth (MHz) | | | | | | Modulation | | RB | | | Test Channel | | |
|------------------------------------|---|---|---|----|----|----|------------|-------|----|-----|------|--------------|---|---|
| | 1.4 | 3 | 5 | 10 | 15 | 20 | QPSK | 16QAM | 1 | 50% | 100% | L | M | H |
| RF power output | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Effective Isotropic Radiated power | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | - | ○ | ○ | ○ | ○ |
| Occupied Bandwidth | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | - | ○ | ○ | ○ | ○ |
| Band Edge Compliance | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | ○ | ○ | - | ○ |
| Peak-to-Average Power Ratio | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | - | ○ | ○ | ○ | ○ |
| Frequency Stability | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | - | ○ | - | ○ | - |
| Conducted Spurious Emissions | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | ○ | - | - | ○ | ○ | ○ |
| Radiates Spurious Emission | ○ | ○ | ○ | ○ | ○ | ○ | ○ | - | ○ | - | - | ○ | ○ | ○ |
| Note | 1. The mark "○" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing. | | | | | | | | | | | | | |

5. Test Case Results

5.1.RF Power Output


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

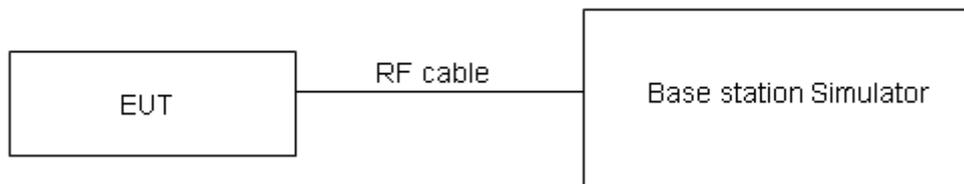

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

| GSM 1900 | | Conducted Power(dBm) | | |
|-----------------|----------|----------------------|-------------|-------------|
| | | Channel 512 | Channel 661 | Channel 810 |
| | | 1850.2(MHz) | 1880(MHz) | 1909.8(MHz) |
| GSM | Results | 29.77 | 29.66 | 29.57 |
| GPRS (GMSK) | 1TXslot | 29.46 | 29.30 | 29.23 |
| | 2TXslots | 27.41 | 27.45 | 27.33 |
| | 3TXslots | 25.73 | 25.64 | 25.80 |
| | 4TXslots | 24.62 | 24.54 | 24.73 |
| EGPRS (8PSK) | 1TXslot | 24.45 | 24.51 | 24.60 |
| | 2TXslots | 22.91 | 22.86 | 22.77 |
| | 3TXslots | 20.73 | 20.90 | 20.82 |
| | 4TXslots | 19.83 | 19.87 | 19.84 |

| WCDMA Band II | | Conducted Power(dBm) | | |
|---------------|--------------|----------------------|--------------|--------------|
| | | Channel 9262 | Channel 9400 | Channel 9538 |
| | | 1852.4(MHz) | 1880(MHz) | 1907.6(MHz) |
| RMC | | 22.65 | 22.70 | 22.64 |
| HSDPA | Sub - Test 1 | 22.48 | 22.53 | 22.47 |
| | Sub - Test 2 | 22.56 | 22.61 | 22.55 |
| | Sub - Test 3 | 22.05 | 22.10 | 22.04 |
| | Sub - Test 4 | 22.04 | 22.09 | 22.03 |
| HSUPA | Sub - Test 1 | 22.53 | 22.58 | 22.52 |
| | Sub - Test 2 | 20.72 | 20.77 | 20.71 |
| | Sub - Test 3 | 21.45 | 21.50 | 21.60 |
| | Sub - Test 4 | 20.67 | 20.72 | 20.69 |
| | Sub - Test 5 | 22.59 | 22.64 | 22.58 |
| DC-HSDPA | Sub - Test 1 | 22.58 | 22.59 | 22.53 |
| | Sub - Test 2 | 22.57 | 22.58 | 22.52 |
| | Sub - Test 3 | 22.06 | 22.07 | 22.01 |
| | Sub - Test 4 | 22.05 | 22.16 | 21.99 |



| LTE Band 2 | | | | Conducted Power(dBm) | | |
|------------|------------|---------|-----------|-------------------------|------------|--------------|
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | |
| | | | | 18607/1850.7 | 18900/1880 | 19193/1909.3 |
| 1.4MHz | QPSK | 1 | 0 | 22.96 | 22.68 | 23.01 |
| | | 1 | 2 | 22.96 | 22.55 | 22.73 |
| | | 1 | 5 | 22.79 | 22.59 | 22.67 |
| | | 3 | 0 | 22.78 | 22.57 | 22.71 |
| | | 3 | 2 | 22.66 | 22.47 | 22.66 |
| | | 3 | 3 | 22.64 | 22.52 | 22.62 |
| | | 6 | 0 | 21.73 | 21.56 | 21.85 |
| | 16QAM | 1 | 0 | 21.58 | 21.53 | 21.48 |
| | | 1 | 2 | 21.49 | 21.29 | 21.60 |
| | | 1 | 5 | 21.48 | 21.31 | 21.48 |
| | | 3 | 0 | 21.69 | 21.46 | 21.64 |
| | | 3 | 2 | 21.64 | 21.52 | 21.50 |
| | | 3 | 3 | 21.37 | 21.53 | 21.56 |
| | | 6 | 0 | 20.74 | 20.47 | 20.60 |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | |
| | | | | 18615/1851.5 | 18900/1880 | 19185/1908.5 |
| 3MHz | QPSK | 1 | 0 | 22.98 | 22.72 | 23.04 |
| | | 1 | 7 | 22.99 | 22.60 | 22.77 |
| | | 1 | 14 | 22.82 | 22.64 | 22.71 |
| | | 8 | 0 | 21.88 | 21.69 | 21.84 |
| | | 8 | 4 | 21.78 | 21.57 | 21.78 |
| | | 8 | 7 | 21.74 | 21.63 | 21.72 |
| | | 15 | 0 | 21.76 | 21.60 | 21.88 |
| | 16QAM | 1 | 0 | 21.61 | 21.55 | 21.51 |
| | | 1 | 7 | 21.52 | 21.34 | 21.64 |
| | | 1 | 14 | 21.50 | 21.35 | 21.51 |
| | | 8 | 0 | 20.80 | 20.59 | 20.76 |
| | | 8 | 4 | 20.75 | 20.65 | 20.62 |
| | | 8 | 7 | 20.47 | 20.65 | 20.69 |
| | | 15 | 0 | 20.77 | 20.51 | 20.63 |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | |
| | | | | 18625/1852.5 | 18900/1880 | 19175/1907.5 |
| 5MHz | QPSK | 1 | 0 | 22.95 | 22.70 | 23.00 |
| | | 1 | 13 | 22.97 | 22.56 | 22.74 |
| | | 1 | 24 | 22.79 | 22.59 | 22.67 |
| | | 12 | 0 | 21.85 | 21.64 | 21.80 |



| | 16QAM | 12 | 6 | 21.76 | 21.53 | 21.73 |
|-----------|------------|---------|-----------|-------------------------|------------|--------------|
| | | 12 | 13 | 21.72 | 21.61 | 21.68 |
| | | 25 | 0 | 21.74 | 21.59 | 21.86 |
| | | 1 | 0 | 21.58 | 21.51 | 21.48 |
| | | 1 | 13 | 21.49 | 21.32 | 21.61 |
| | | 1 | 24 | 21.47 | 21.33 | 21.47 |
| | | 12 | 0 | 20.78 | 20.55 | 20.73 |
| | | 12 | 6 | 20.72 | 20.60 | 20.58 |
| | | 12 | 13 | 20.44 | 20.60 | 20.65 |
| | | 25 | 0 | 20.75 | 20.47 | 20.58 |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | |
| | | | | 18650/1855 | 18900/1880 | 19150/1905 |
| 10MHz | QPSK | 1 | 0 | 22.97 | 22.71 | 23.03 |
| | | 1 | 25 | 23.00 | 22.61 | 22.78 |
| | | 1 | 49 | 22.81 | 22.63 | 22.70 |
| | | 25 | 0 | 21.88 | 21.69 | 21.84 |
| | | 25 | 13 | 21.79 | 21.58 | 21.77 |
| | | 25 | 25 | 21.74 | 21.65 | 21.73 |
| | | 50 | 0 | 21.82 | 21.61 | 21.90 |
| | 16QAM | 1 | 0 | 21.60 | 21.54 | 21.50 |
| | | 1 | 25 | 21.52 | 21.36 | 21.64 |
| | | 1 | 49 | 21.50 | 21.35 | 21.50 |
| | | 25 | 0 | 20.81 | 20.60 | 20.77 |
| | | 25 | 13 | 20.74 | 20.64 | 20.61 |
| | | 25 | 25 | 20.47 | 20.65 | 20.69 |
| | | 50 | 0 | 20.78 | 20.52 | 20.62 |
| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | |
| | | | | 18675/1857.5 | 18900/1880 | 19125/1902.5 |
| 15MHz | QPSK | 1 | 0 | 22.96 | 22.67 | 23.01 |
| | | 1 | 38 | 22.98 | 22.60 | 22.75 |
| | | 1 | 74 | 22.78 | 22.58 | 22.66 |
| | | 36 | 0 | 21.86 | 21.65 | 21.81 |
| | | 36 | 18 | 21.76 | 21.53 | 21.73 |
| | | 36 | 39 | 21.71 | 21.62 | 21.69 |
| | | 75 | 0 | 21.80 | 21.57 | 21.85 |
| | 16QAM | 1 | 0 | 21.55 | 21.52 | 21.48 |
| | | 1 | 38 | 21.50 | 21.33 | 21.62 |
| | | 1 | 74 | 21.47 | 21.31 | 21.47 |
| | | 36 | 0 | 20.78 | 20.58 | 20.74 |
| | | 36 | 18 | 20.71 | 20.59 | 20.57 |



| Bandwidth | Modulation | RB size | RB offset | Channel/Frequency (MHz) | | |
|-----------|------------|---------|-----------|-------------------------|------------|------------|
| | | | | 18700/1860 | 18900/1880 | 19100/1900 |
| | | 36 | 39 | 20.45 | 20.61 | 20.66 |
| | | 75 | 0 | 20.75 | 20.47 | 20.58 |
| 20MHz | QPSK | 1 | 0 | 22.93 | 22.63 | 22.68 |
| | | 1 | 50 | 23.01 | 22.73 | 22.73 |
| | | 1 | 99 | 22.76 | 22.57 | 22.83 |
| | | 50 | 0 | 21.83 | 21.60 | 22.00 |
| | | 50 | 25 | 21.94 | 21.49 | 21.70 |
| | | 50 | 50 | 21.68 | 21.67 | 21.65 |
| | | 100 | 0 | 21.47 | 21.52 | 21.41 |
| | 16QAM | 1 | 0 | 21.53 | 21.48 | 21.43 |
| | | 1 | 50 | 21.46 | 21.31 | 21.58 |
| | | 1 | 99 | 21.45 | 21.28 | 21.45 |
| | | 50 | 0 | 20.75 | 20.54 | 20.71 |
| | | 50 | 25 | 20.68 | 20.57 | 20.54 |
| | | 50 | 50 | 20.42 | 20.56 | 20.62 |
| | | 100 | 0 | 20.73 | 20.43 | 20.55 |

5.2. Effective Isotropic Radiated Power

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |


Methods of Measurement

1. The testing follows ANSI C63.26 (2015) Section 5.5.2.3.
2. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna between 1.0m and 4.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz., And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

Test configuration

Below 1GHz:

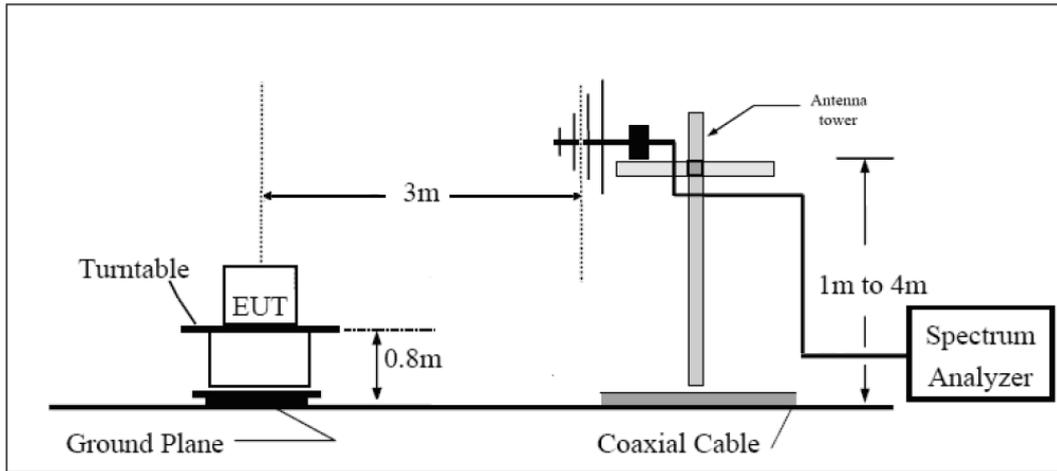

Above 1GHz:

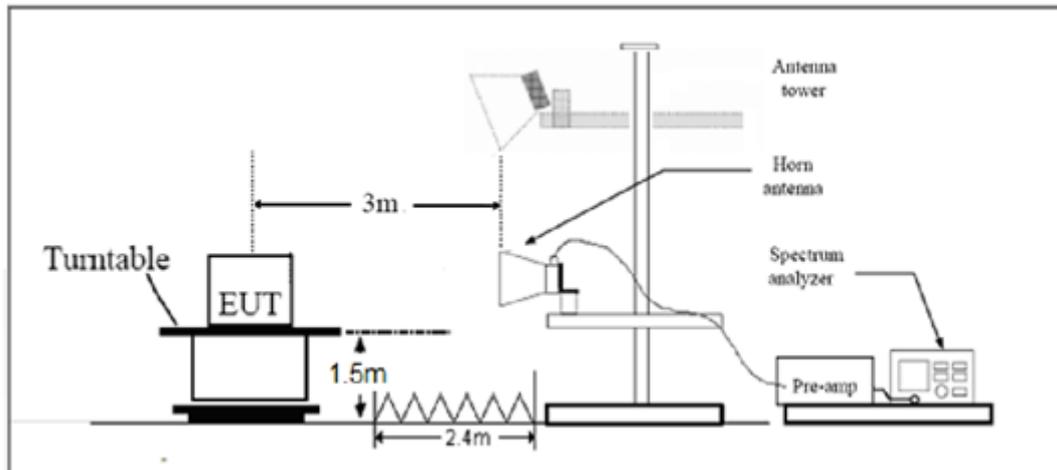

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

| | |
|--------------|----------------------------|
| Limit (EIRP) | $\leq 2\text{ W}$ (33 dBm) |
|--------------|----------------------------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19\text{ dB}$



Test Results:

| Mode | Polarization | Frequency (MHz) | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | Limit (dBm) | Conclusion |
|--------------------------|--------------|-----------------|----------|----------|----------|----------|------------|-------------|------------|
| GSM 1900 | H | 1850.2 | -31.05 | -53.21 | 0.00 | 1.92 | 24.08 | 33 | Pass |
| | H | 1880 | -31.14 | -53.42 | 0.00 | 1.94 | 24.22 | 33 | Pass |
| | H | 1909.8 | -30.48 | -53.67 | 0.00 | 1.90 | 25.09 | 33 | Pass |
| | V | 1850.2 | -31.54 | -53.70 | 0.00 | 1.92 | 24.08 | 33 | Pass |
| | V | 1880 | -31.68 | -53.91 | 0.00 | 1.94 | 24.17 | 33 | Pass |
| | V | 1909.8 | -32.11 | -54.55 | 0.00 | 1.90 | 24.34 | 33 | Pass |
| GPRS 1900 | H | 1850.2 | -35.72 | -53.21 | 0.00 | 1.92 | 19.41 | 33 | Pass |
| | H | 1880 | -35.17 | -53.42 | 0.00 | 1.94 | 20.19 | 33 | Pass |
| | H | 1909.8 | -34.21 | -53.67 | 0.00 | 1.90 | 21.36 | 33 | Pass |
| | V | 1850.2 | -35.52 | -53.70 | 0.00 | 1.92 | 20.10 | 33 | Pass |
| | V | 1880 | -34.35 | -53.91 | 0.00 | 1.94 | 21.50 | 33 | Pass |
| | V | 1909.8 | -34.97 | -54.55 | 0.00 | 1.90 | 21.48 | 33 | Pass |
| EGPRS 1900 | H | 1850.2 | -35.00 | -53.21 | 0.00 | 1.92 | 20.13 | 33 | Pass |
| | H | 1880 | -34.71 | -53.42 | 0.00 | 1.94 | 20.65 | 33 | Pass |
| | H | 1909.8 | -33.78 | -53.67 | 0.00 | 1.90 | 21.79 | 33 | Pass |
| | V | 1850.2 | -35.49 | -53.70 | 0.00 | 1.92 | 20.13 | 33 | Pass |
| | V | 1880 | -35.21 | -53.91 | 0.00 | 1.94 | 20.64 | 33 | Pass |
| | V | 1909.8 | -35.64 | -54.55 | 0.00 | 1.90 | 20.81 | 33 | Pass |
| WCDMA Band II | H | 1852.4 | -37.88 | -53.19 | 0.00 | 1.92 | 17.23 | 33 | Pass |
| | H | 1880 | -37.08 | -53.42 | 0.00 | 1.94 | 18.28 | 33 | Pass |
| | H | 1907.6 | -35.93 | -53.66 | 0.00 | 1.92 | 19.65 | 33 | Pass |
| | V | 1852.4 | -39.35 | -53.69 | 0.00 | 1.92 | 16.26 | 33 | Pass |
| | V | 1880 | -38.26 | -53.91 | 0.00 | 1.94 | 17.59 | 33 | Pass |
| | V | 1907.6 | -38.62 | -54.54 | 0.00 | 1.92 | 17.84 | 33 | Pass |



| LTE Band 2 | | | | | | | | | |
|-----------------|--------------|-----------------|----------|----------|----------|----------|------------|-------------|------------|
| bandwidth | Polarization | Frequency (MHz) | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | Limit (dBm) | Conclusion |
| 1.4 MHz (QPSK) | H | 1850.7 | -56.73 | -54.89 | 0.00 | 1.90 | 17.70 | 33 | Pass |
| | H | 1880 | -58.51 | -56.66 | 0.00 | 1.92 | 18.47 | 33 | Pass |
| | H | 1909.3 | -59.90 | -58.09 | 0.00 | 1.91 | 19.78 | 33 | Pass |
| | V | 1850.7 | -56.89 | -55.05 | 0.00 | 1.90 | 18.08 | 33 | Pass |
| | V | 1880 | -58.24 | -56.41 | 0.00 | 1.92 | 19.69 | 33 | Pass |
| | V | 1909.3 | -59.67 | -57.85 | 0.00 | 1.91 | 19.73 | 33 | Pass |
| 3 MHz (QPSK) | H | 1851.5 | -56.77 | -54.93 | 0.00 | 1.91 | 17.94 | 33 | Pass |
| | H | 1880 | -58.53 | -56.66 | 0.00 | 1.94 | 18.53 | 33 | Pass |
| | H | 1908.5 | -59.89 | -58.08 | 0.00 | 1.91 | 20.10 | 33 | Pass |
| | V | 1851.5 | -56.89 | -55.04 | 0.00 | 1.91 | 18.03 | 33 | Pass |
| | V | 1880 | -58.28 | -56.41 | 0.00 | 1.94 | 18.24 | 33 | Pass |
| | V | 1908.5 | -59.67 | -57.86 | 0.00 | 1.91 | 19.89 | 33 | Pass |
| 5 MHz (QPSK) | H | 1852.5 | -56.84 | -54.98 | 0.00 | 1.92 | 17.42 | 33 | Pass |
| | H | 1880 | -58.54 | -56.66 | 0.00 | 1.94 | 18.19 | 33 | Pass |
| | H | 1907.5 | -59.87 | -58.05 | 0.00 | 1.90 | 19.13 | 33 | Pass |
| | V | 1852.5 | -57.00 | -55.14 | 0.00 | 1.92 | 17.69 | 33 | Pass |
| | V | 1880 | -58.26 | -56.41 | 0.00 | 1.94 | 19.45 | 33 | Pass |
| | V | 1907.5 | -59.78 | -57.97 | 0.00 | 1.90 | 19.55 | 33 | Pass |
| 10 MHz (QPSK) | H | 1855 | -56.94 | -55.09 | 0.00 | 1.91 | 17.76 | 33 | Pass |
| | H | 1880 | -58.53 | -56.66 | 0.00 | 1.94 | 18.48 | 33 | Pass |
| | H | 1905 | -59.80 | -58.01 | 0.00 | 1.92 | 21.12 | 33 | Pass |
| | V | 1855 | -56.92 | -55.08 | 0.00 | 1.91 | 18.21 | 33 | Pass |
| | V | 1880 | -58.26 | -56.41 | 0.00 | 1.94 | 19.51 | 33 | Pass |
| | V | 1905 | -59.62 | -57.81 | 0.00 | 1.92 | 20.26 | 33 | Pass |
| 15 MHz (QPSK) | H | 1857.5 | -57.09 | -55.23 | 0.00 | 1.93 | 18.62 | 33 | Pass |
| | H | 1880 | -58.52 | -56.66 | 0.00 | 1.94 | 19.27 | 33 | Pass |
| | H | 1902.5 | -59.77 | -57.95 | 0.00 | 1.92 | 20.15 | 33 | Pass |
| | V | 1857.5 | -57.10 | -55.24 | 0.00 | 1.93 | 18.53 | 33 | Pass |
| | V | 1880 | -58.26 | -56.41 | 0.00 | 1.94 | 19.70 | 33 | Pass |
| | V | 1902.5 | -59.51 | -57.69 | 0.00 | 1.92 | 20.00 | 33 | Pass |
| 20 MHz (QPSK) | H | 1860 | -57.21 | -55.35 | 0.00 | 1.93 | 18.28 | 33 | Pass |
| | H | 1880 | -58.54 | -56.66 | 0.00 | 1.94 | 18.18 | 33 | Pass |
| | H | 1900 | -59.70 | -57.86 | 0.00 | 1.92 | 19.37 | 33 | Pass |
| | V | 1860 | -57.17 | -55.31 | 0.00 | 1.93 | 18.73 | 33 | Pass |
| | V | 1880 | -58.27 | -56.41 | 0.00 | 1.94 | 19.19 | 33 | Pass |
| | V | 1900 | -59.49 | -57.66 | 0.00 | 1.92 | 19.46 | 33 | Pass |
| 1.4 MHz (16QAM) | H | 1850.7 | -56.73 | -54.89 | 0.00 | 1.90 | 17.48 | 33 | Pass |
| | H | 1880 | -58.52 | -56.66 | 0.00 | 1.92 | 18.15 | 33 | Pass |
| | H | 1909.3 | -59.91 | -58.09 | 0.00 | 1.91 | 19.55 | 33 | Pass |



| LTE Band 2 | | | | | | | | | |
|----------------|--------------|-----------------|----------|----------|----------|----------|------------|-------------|------------|
| bandwidth | Polarization | Frequency (MHz) | Rt (dBm) | Rs (dBm) | Ps (dBm) | Gs (dBi) | EIRP (dBm) | Limit (dBm) | Conclusion |
| | V | 1850.7 | -56.89 | -55.05 | 0.00 | 1.90 | 17.86 | 33 | Pass |
| | V | 1880 | -58.24 | -56.41 | 0.00 | 1.92 | 19.42 | 33 | Pass |
| | V | 1909.3 | -59.67 | -57.85 | 0.00 | 1.91 | 19.50 | 33 | Pass |
| 3 MHz (16QAM) | H | 1851.5 | -56.78 | -54.93 | 0.00 | 1.91 | 17.72 | 33 | Pass |
| | H | 1880 | -58.54 | -56.66 | 0.00 | 1.94 | 18.21 | 33 | Pass |
| | H | 1908.5 | -59.89 | -58.08 | 0.00 | 1.91 | 19.85 | 33 | Pass |
| | V | 1851.5 | -56.89 | -55.04 | 0.00 | 1.91 | 17.75 | 33 | Pass |
| | V | 1880 | -58.29 | -56.41 | 0.00 | 1.94 | 18.01 | 33 | Pass |
| | V | 1908.5 | -59.68 | -57.86 | 0.00 | 1.91 | 19.66 | 33 | Pass |
| 5 MHz (16QAM) | H | 1852.5 | -56.85 | -54.98 | 0.00 | 1.92 | 17.20 | 33 | Pass |
| | H | 1880 | -58.54 | -56.66 | 0.00 | 1.94 | 17.88 | 33 | Pass |
| | H | 1907.5 | -59.88 | -58.05 | 0.00 | 1.90 | 18.85 | 33 | Pass |
| | V | 1852.5 | -57.00 | -55.14 | 0.00 | 1.92 | 17.45 | 33 | Pass |
| | V | 1880 | -58.27 | -56.41 | 0.00 | 1.94 | 19.15 | 33 | Pass |
| | V | 1907.5 | -59.79 | -57.97 | 0.00 | 1.90 | 19.20 | 33 | Pass |
| 10 MHz (16QAM) | H | 1855 | -56.94 | -55.09 | 0.00 | 1.91 | 17.55 | 33 | Pass |
| | H | 1880 | -58.54 | -56.66 | 0.00 | 1.94 | 18.24 | 33 | Pass |
| | H | 1905 | -59.84 | -58.01 | 0.00 | 1.92 | 19.90 | 33 | Pass |
| | V | 1855 | -56.93 | -55.08 | 0.00 | 1.91 | 18.00 | 33 | Pass |
| | V | 1880 | -58.27 | -56.41 | 0.00 | 1.94 | 19.11 | 33 | Pass |
| | V | 1905 | -59.63 | -57.81 | 0.00 | 1.92 | 20.03 | 33 | Pass |
| 15 MHz (16QAM) | H | 1857.5 | -57.09 | -55.23 | 0.00 | 1.93 | 18.32 | 33 | Pass |
| | H | 1880 | -58.52 | -56.66 | 0.00 | 1.94 | 19.07 | 33 | Pass |
| | H | 1902.5 | -59.77 | -57.95 | 0.00 | 1.92 | 20.00 | 33 | Pass |
| | V | 1857.5 | -57.10 | -55.24 | 0.00 | 1.93 | 18.20 | 33 | Pass |
| | V | 1880 | -58.26 | -56.41 | 0.00 | 1.94 | 19.50 | 33 | Pass |
| | V | 1902.5 | -59.51 | -57.69 | 0.00 | 1.92 | 19.80 | 33 | Pass |
| 20 MHz (16QAM) | H | 1860 | -57.22 | -55.35 | 0.00 | 1.93 | 18.00 | 33 | Pass |
| | H | 1880 | -58.50 | -56.66 | 0.00 | 1.94 | 19.95 | 33 | Pass |
| | H | 1900 | -59.71 | -57.86 | 0.00 | 1.92 | 19.00 | 33 | Pass |
| | V | 1860 | -57.17 | -55.31 | 0.00 | 1.93 | 18.50 | 33 | Pass |
| | V | 1880 | -58.27 | -56.41 | 0.00 | 1.94 | 18.96 | 33 | Pass |
| | V | 1900 | -59.50 | -57.66 | 0.00 | 1.92 | 19.16 | 33 | Pass |

5.3.Occupied Bandwidth

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II,


RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2 (1.4MHz),

RBW is set to 100kHz,VBW is set to 300kHz for LTE Band 2 (3MHz/5MHz),

RBW is set to 300kHz,VBW is set to 1MHz for LTE Band 2 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

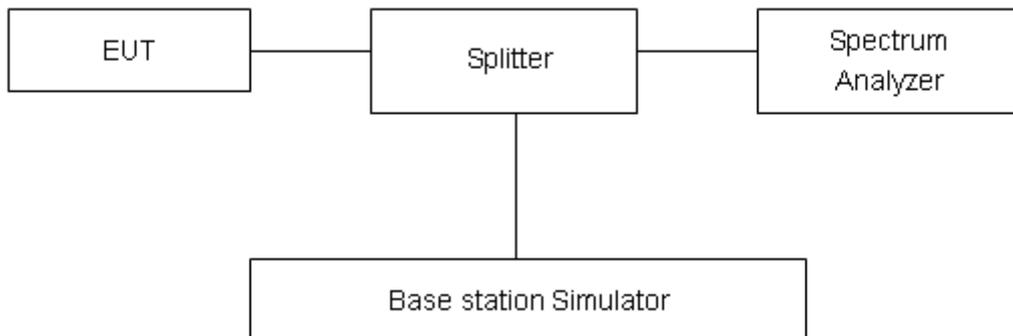

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.







Test Result




| Mode | Channel | Frequency (MHz) | 99% Power Bandwidth (MHz) | -26dBc Bandwidth(MHz) |
|---------------------------|---------|-----------------|---------------------------|-----------------------|
| GSM 1900 (GSM) | 512 | 1850.2 | 0.24322 | 0.3118 |
| | 661 | 1880.0 | 0.24618 | 0.3083 |
| | 810 | 1909.8 | 0.24573 | 0.3086 |
| GPRS 1900 (GMSK) | 512 | 1850.2 | 0.24307 | 0.3135 |
| | 661 | 1880.0 | 0.24428 | 0.3115 |
| | 810 | 1909.8 | 0.24517 | 0.3157 |
| EGPRS 1900 (8-PSK) | 512 | 1850.2 | 0.24721 | 0.3154 |
| | 661 | 1880.0 | 0.24092 | 0.3063 |
| | 810 | 1909.8 | 0.24369 | 0.3101 |
| WCDMA Band II (RMC) | 9662 | 1932.4 | 4.12070 | 4.6900 |
| | 9800 | 1960.0 | 4.10540 | 4.6640 |
| | 9938 | 1987.6 | 4.12110 | 4.7040 |







| LTE Band 2 | | | | | |
|------------|-----------------|---------|-----------------|--------------------------|-----------------------|
| Modulation | Bandwidth (MHz) | Channel | Frequency (MHz) | 99% Power Bandwidth(MHz) | -26dBc Bandwidth(MHz) |
| QPSK | 1.4 | 18607 | 1850.7 | 1.1238 | 1.351 |
| | | 18900 | 1880.0 | 1.1207 | 1.354 |
| | | 19193 | 1909.3 | 1.1381 | 1.365 |
| | 3 | 18615 | 1851.5 | 2.7433 | 3.064 |
| | | 18900 | 1880 | 2.7492 | 3.044 |
| | | 19185 | 1908.5 | 2.7392 | 3.062 |
| | 5 | 18625 | 1852.5 | 4.5121 | 5.014 |
| | | 18900 | 1880 | 4.5134 | 5.028 |
| | | 19175 | 1907.5 | 4.5041 | 4.977 |
| | 10 | 18650 | 1855 | 9.0491 | 10.120 |
| | | 18900 | 1880 | 9.0117 | 10.120 |
| | | 19150 | 1905 | 9.0265 | 9.990 |
| 15 | 18675 | 1857.5 | 13.4460 | 14.730 | |
| | 18900 | 1880 | 13.4020 | 14.670 | |















| | | | | | |
|-------|-----|-------|--------|---------|--------|
| | | 19125 | 1902.5 | 13.4170 | 14.580 |
| | 20 | 18700 | 1860 | 17.8660 | 19.210 |
| | | 18900 | 1880 | 17.8360 | 19.250 |
| | | 19100 | 1900 | 17.8250 | 19.530 |
| 16QAM | 1.4 | 18607 | 1850.7 | 1.1258 | 1.336 |
| | | 18900 | 1880.0 | 1.1202 | 1.337 |
| | | 19193 | 1909.3 | 1.1184 | 1.371 |
| | 3 | 18615 | 1851.5 | 2.7604 | 3.069 |
| | | 18900 | 1880 | 2.7322 | 3.061 |
| | | 19185 | 1908.5 | 2.7353 | 3.052 |
| | 5 | 18625 | 1852.5 | 4.5022 | 4.979 |
| | | 18900 | 1880 | 4.5228 | 4.994 |
| | | 19175 | 1907.5 | 4.5032 | 5.045 |
| | 10 | 18650 | 1855 | 9.0438 | 9.969 |
| | | 18900 | 1880 | 9.0178 | 10.020 |
| | | 19150 | 1905 | 8.9955 | 9.984 |
| | 15 | 18675 | 1857.5 | 13.4380 | 14.670 |
| | | 18900 | 1880 | 13.4360 | 14.640 |
| | | 19125 | 1902.5 | 13.4310 | 14.660 |
| | 20 | 18700 | 1860 | 17.9090 | 19.350 |
| | | 18900 | 1880 | 17.8460 | 19.430 |
| | | 19100 | 1900 | 17.8090 | 19.140 |


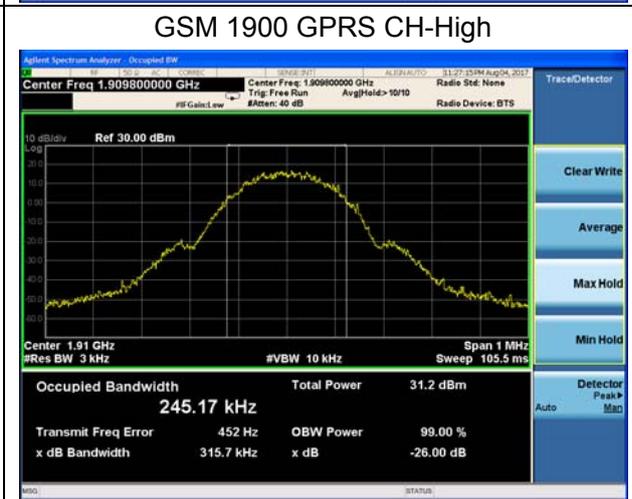
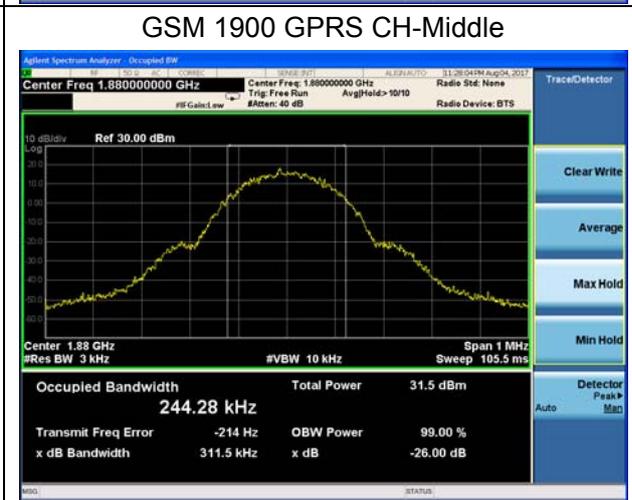
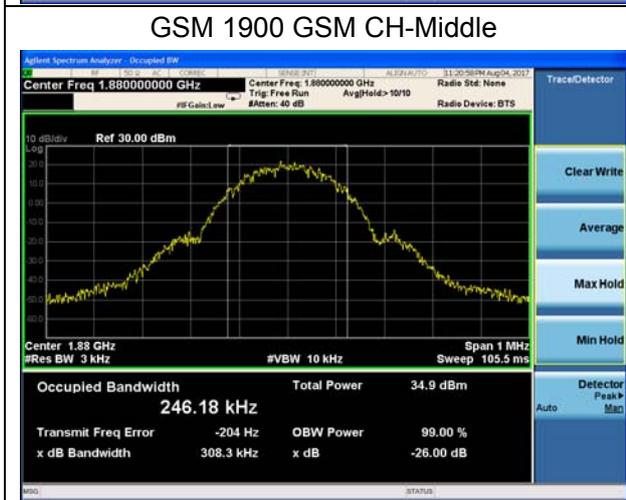
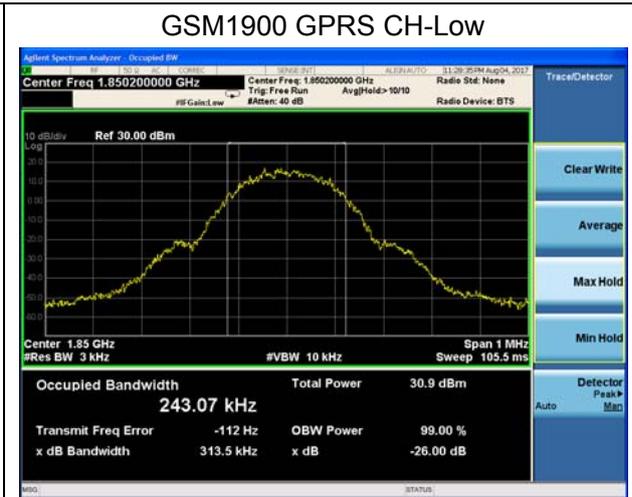





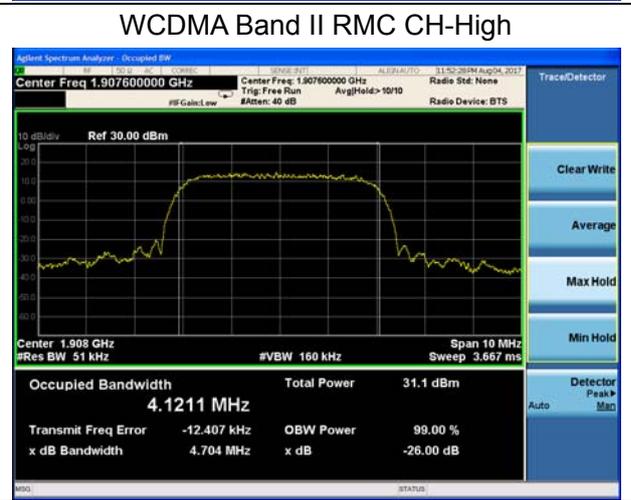
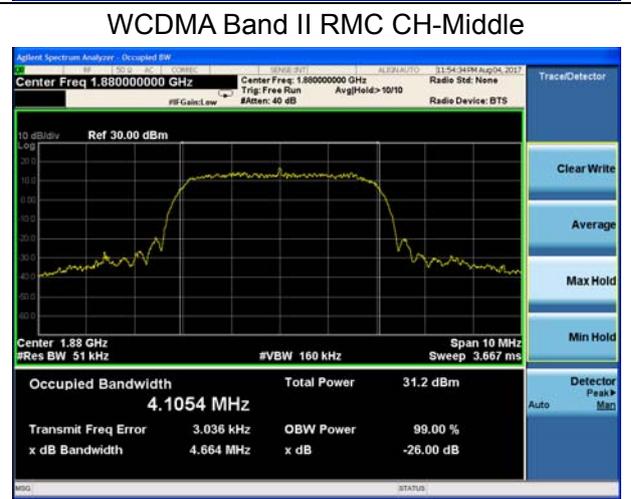
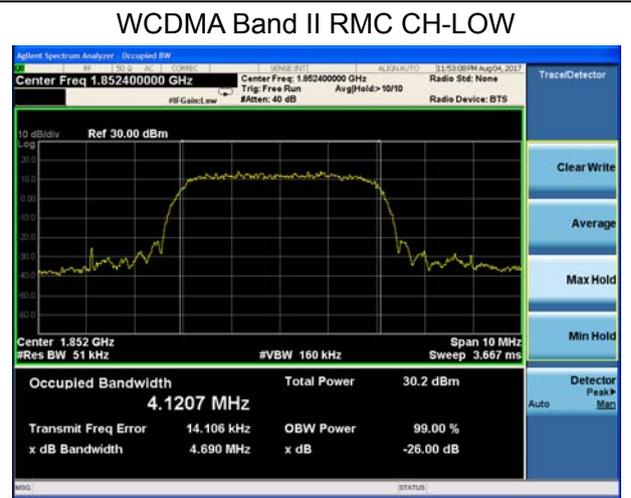


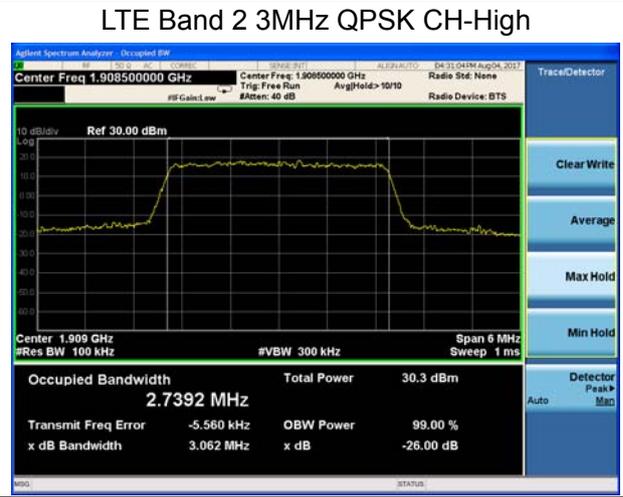
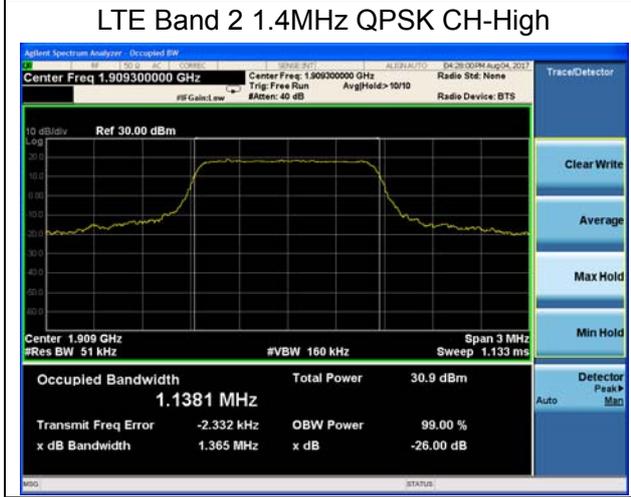
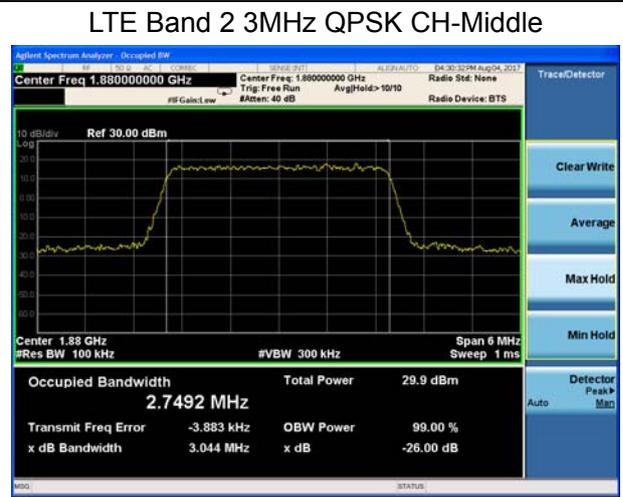
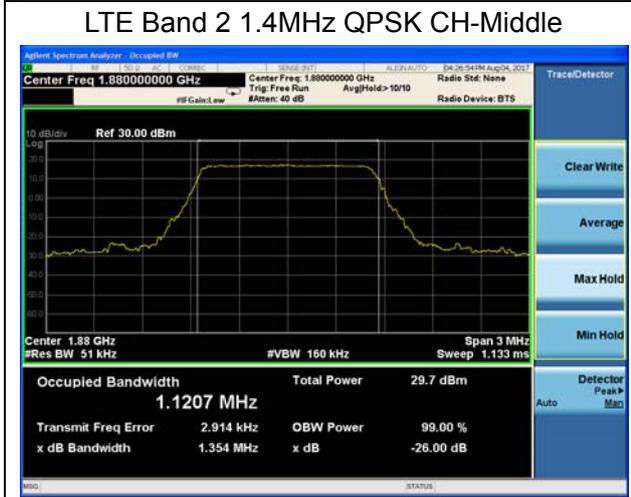
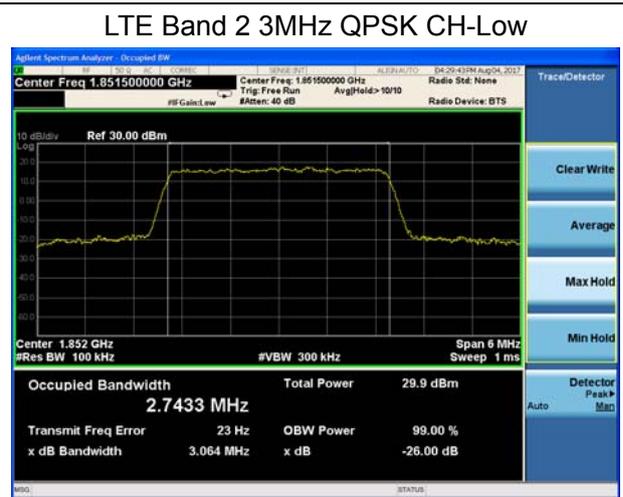
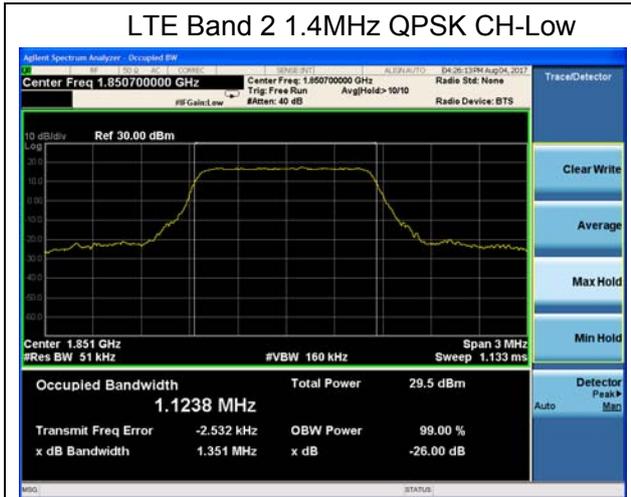


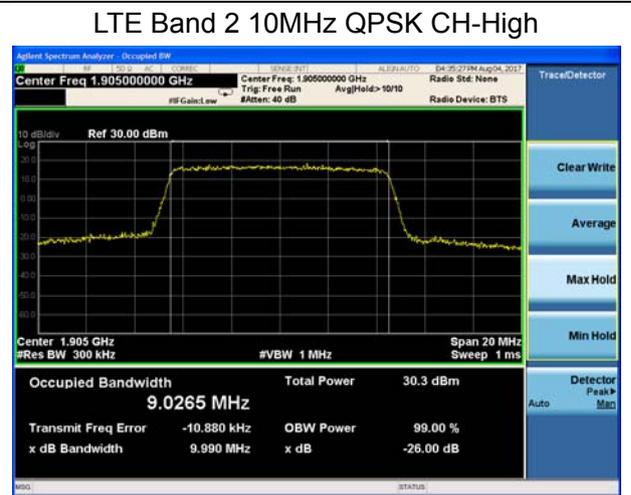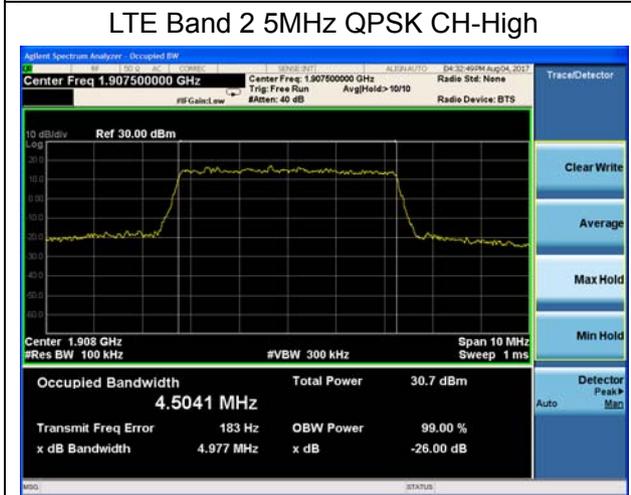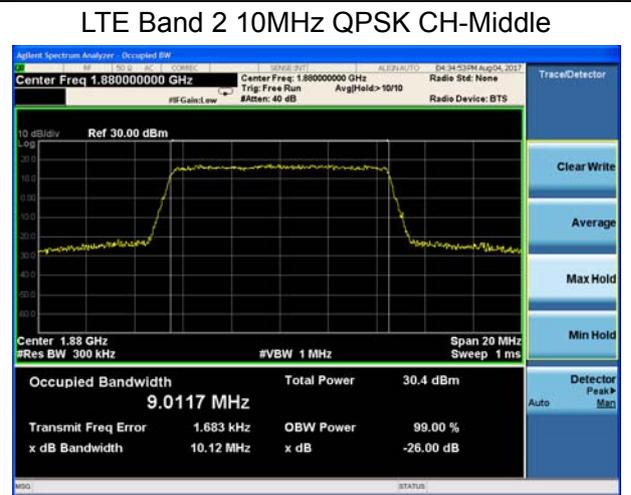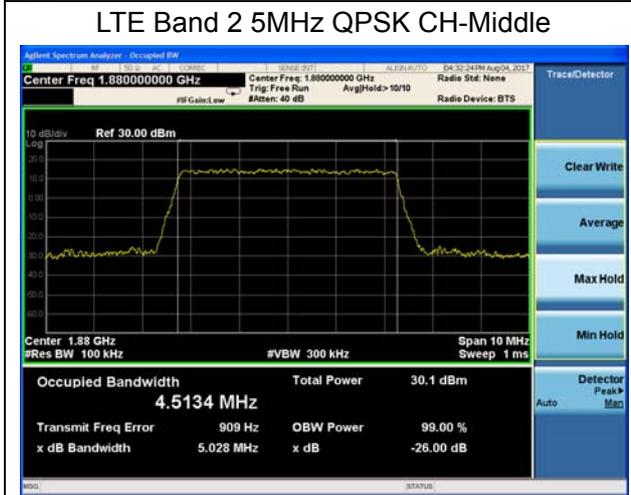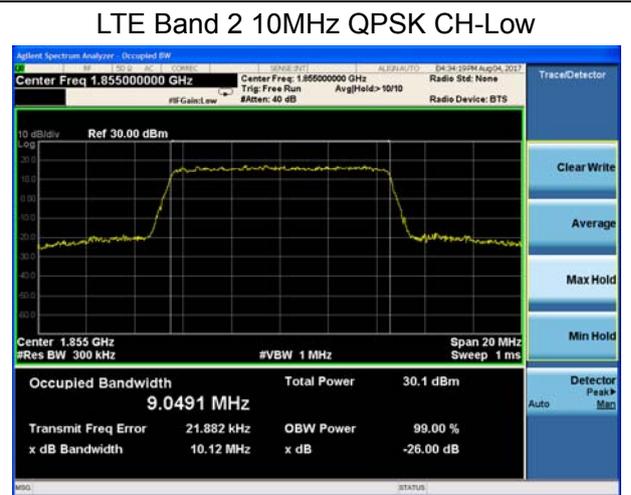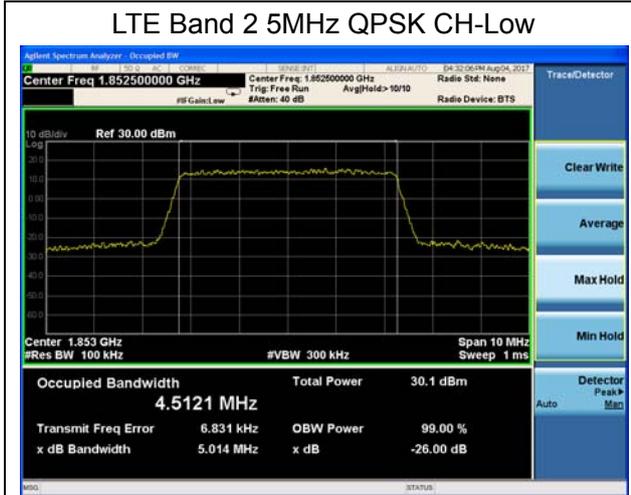

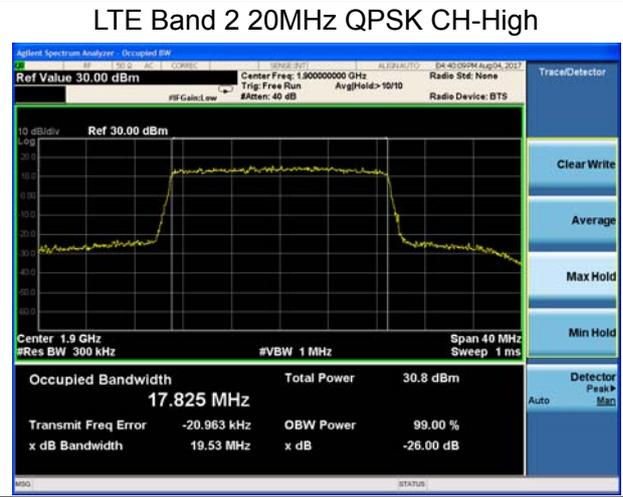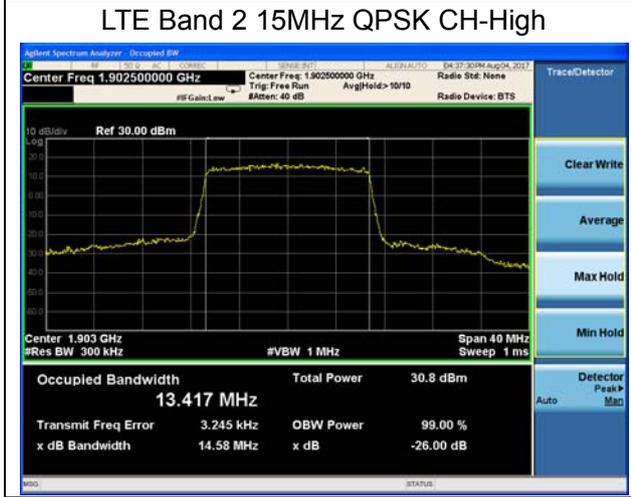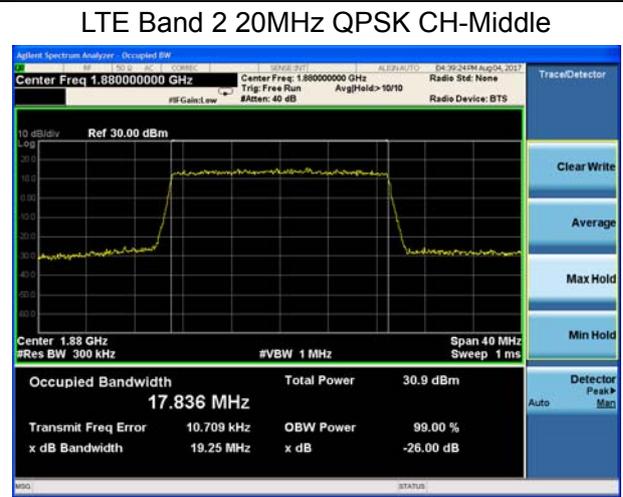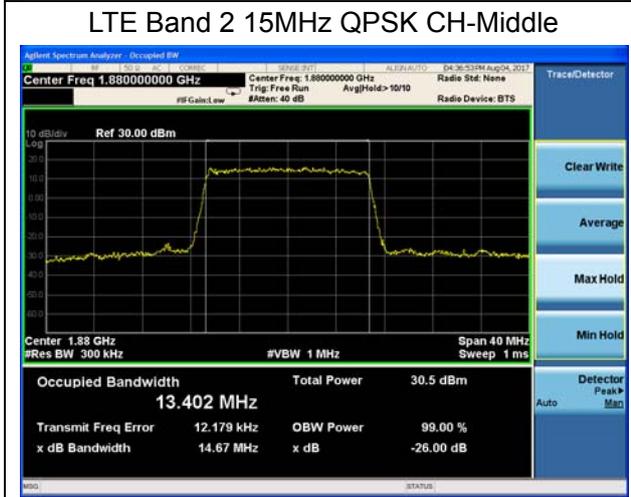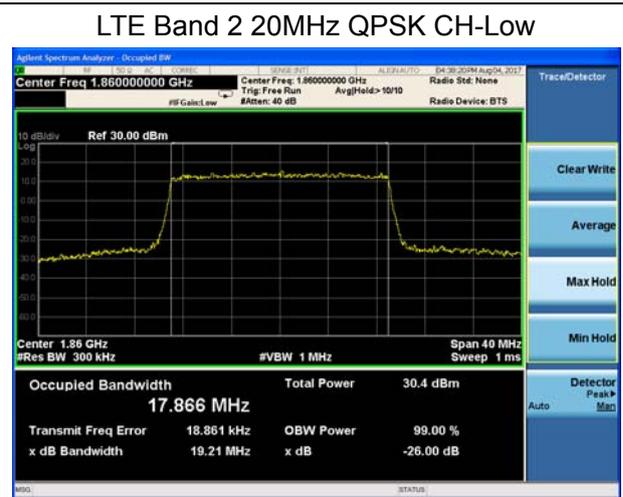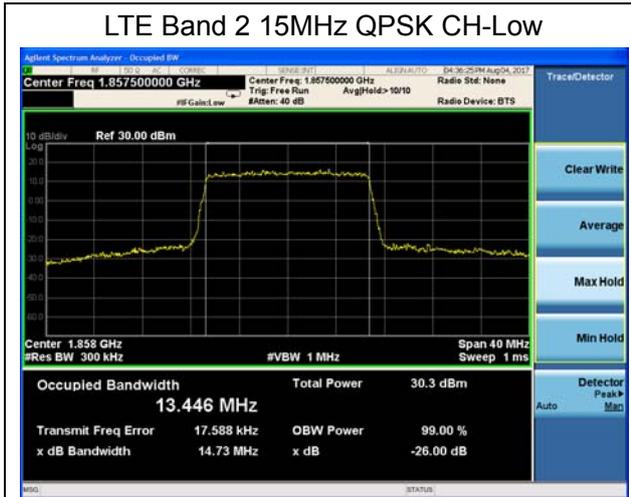

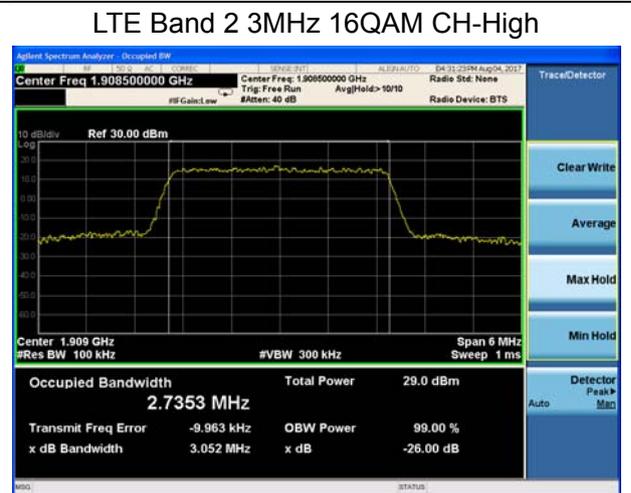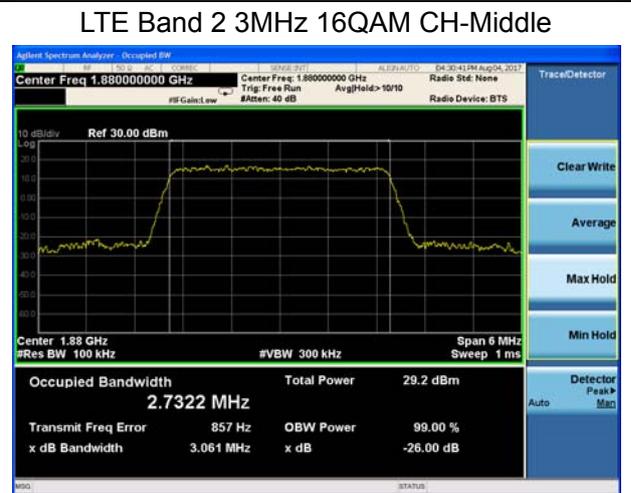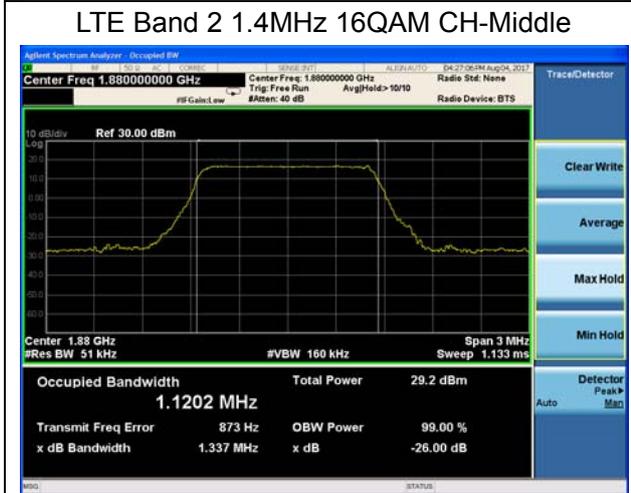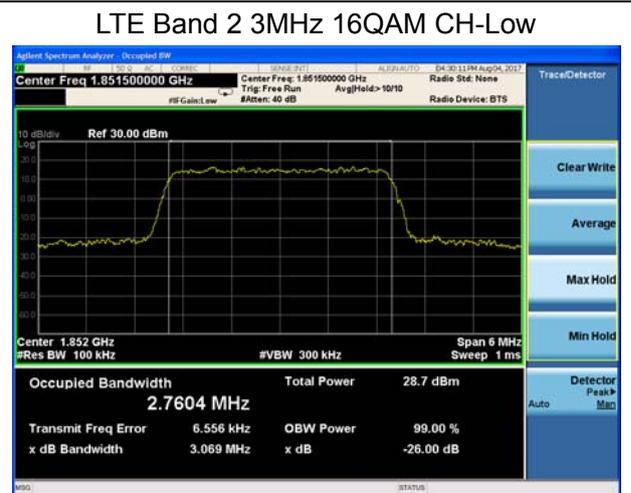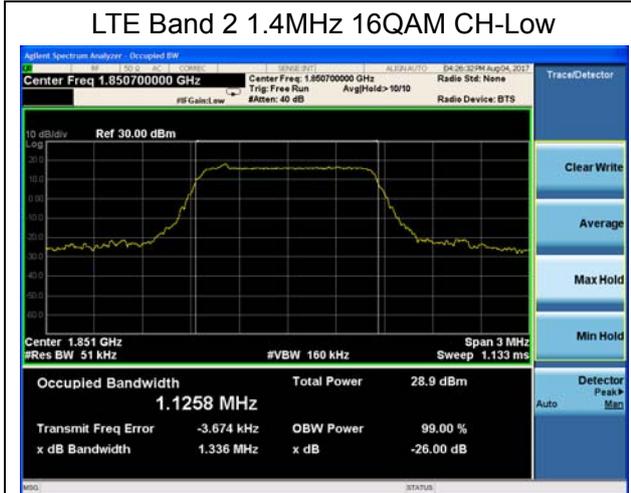

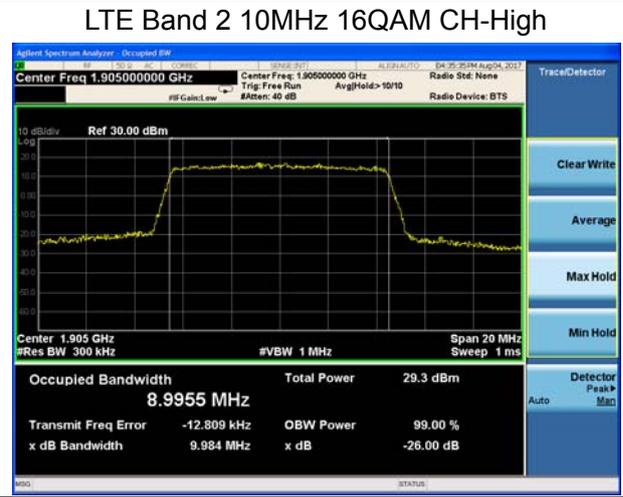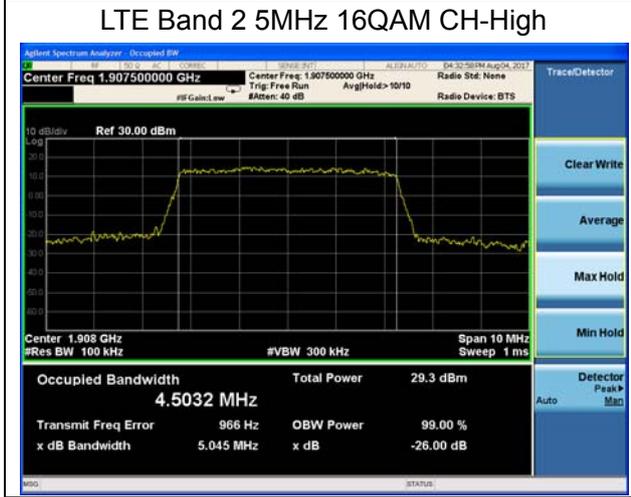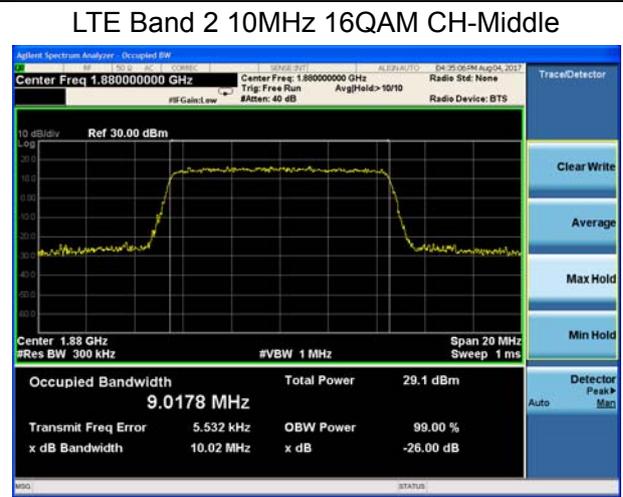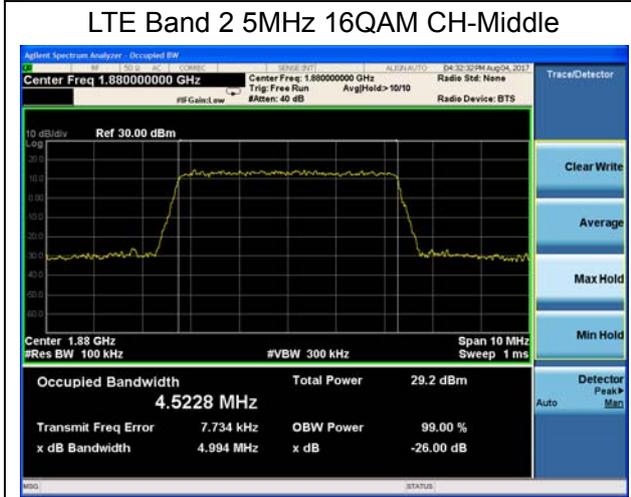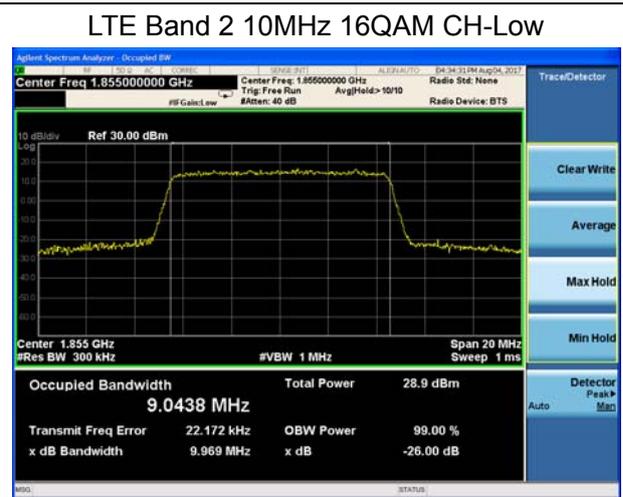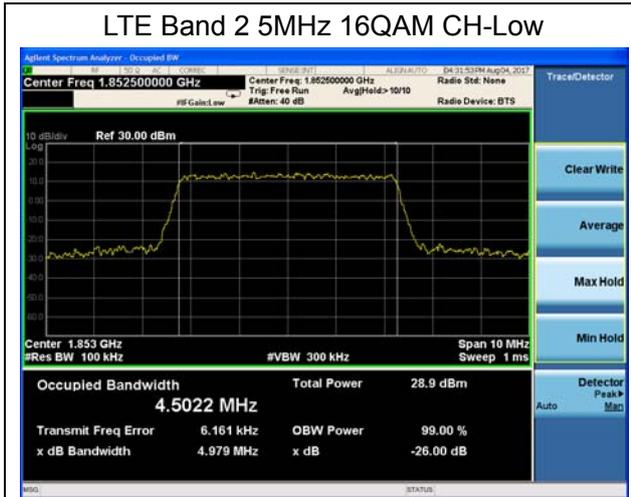

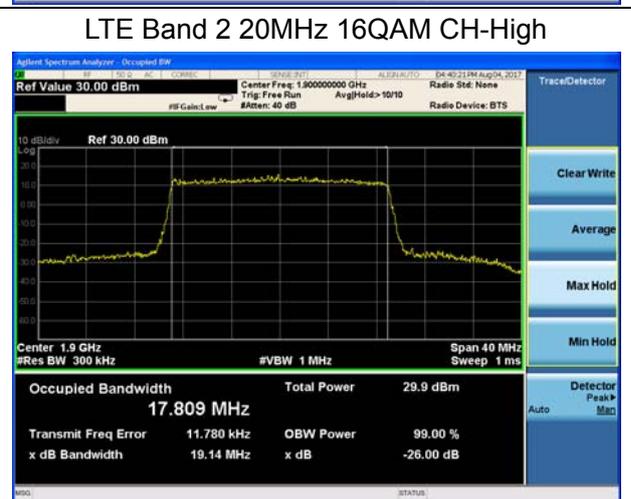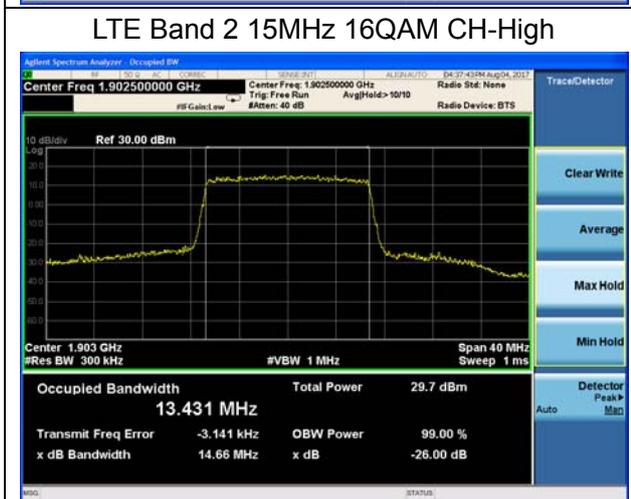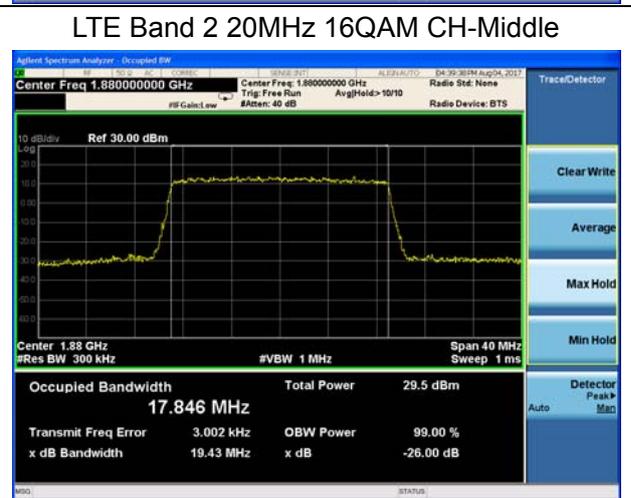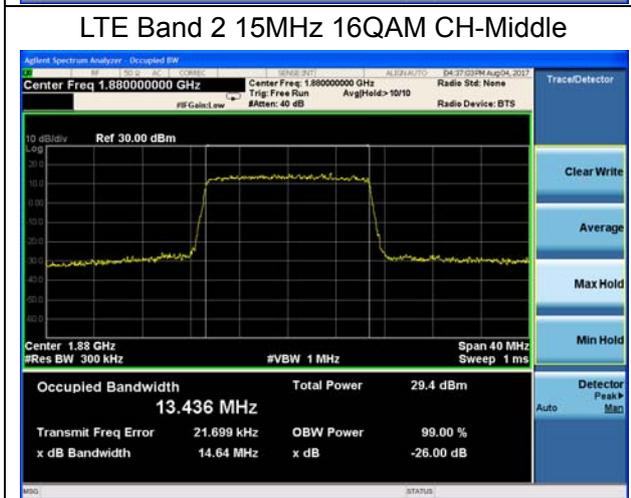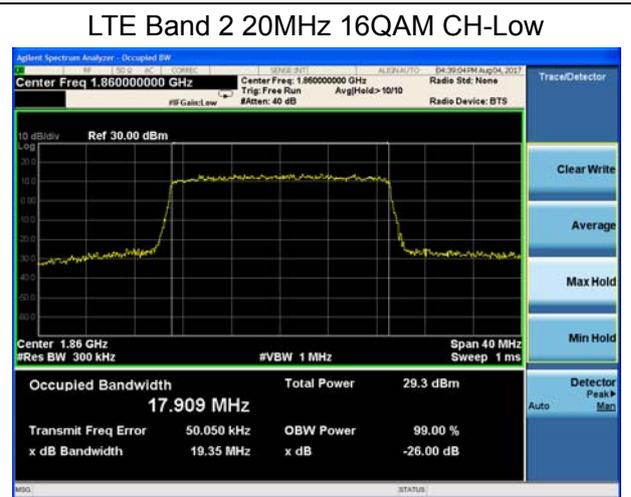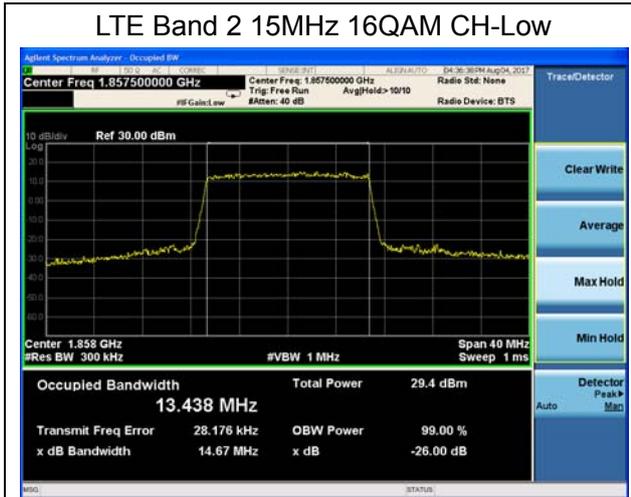

5.4. Band Edge Compliance


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II, RBW is set to 15kHz, VBW is set to 51kHz for LTE Band 2 (1.4MHz), RBW is set to 30kHz, VBW is set to 100kHz for LTE Band 2 (3MHz), RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2 (5MHz), RBW is set to 100kHz, VBW is set to 300kHz for LTE Band 2 (10MHz), RBW is set to 150kHz, VBW is set to 510kHz for LTE Band 2 (15MHz), RBW is set to 200kHz, VBW is set to 620kHz for LTE Band 2 (20MHz). Spectrum analyzer plots are included on the following pages.

Test Setup

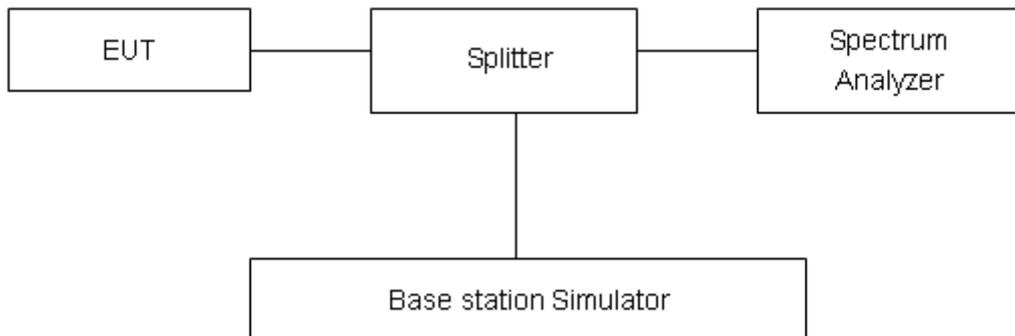

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log10 (P) dB.”


| | |
|-------|---------|
| Limit | -13 dBm |
|-------|---------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

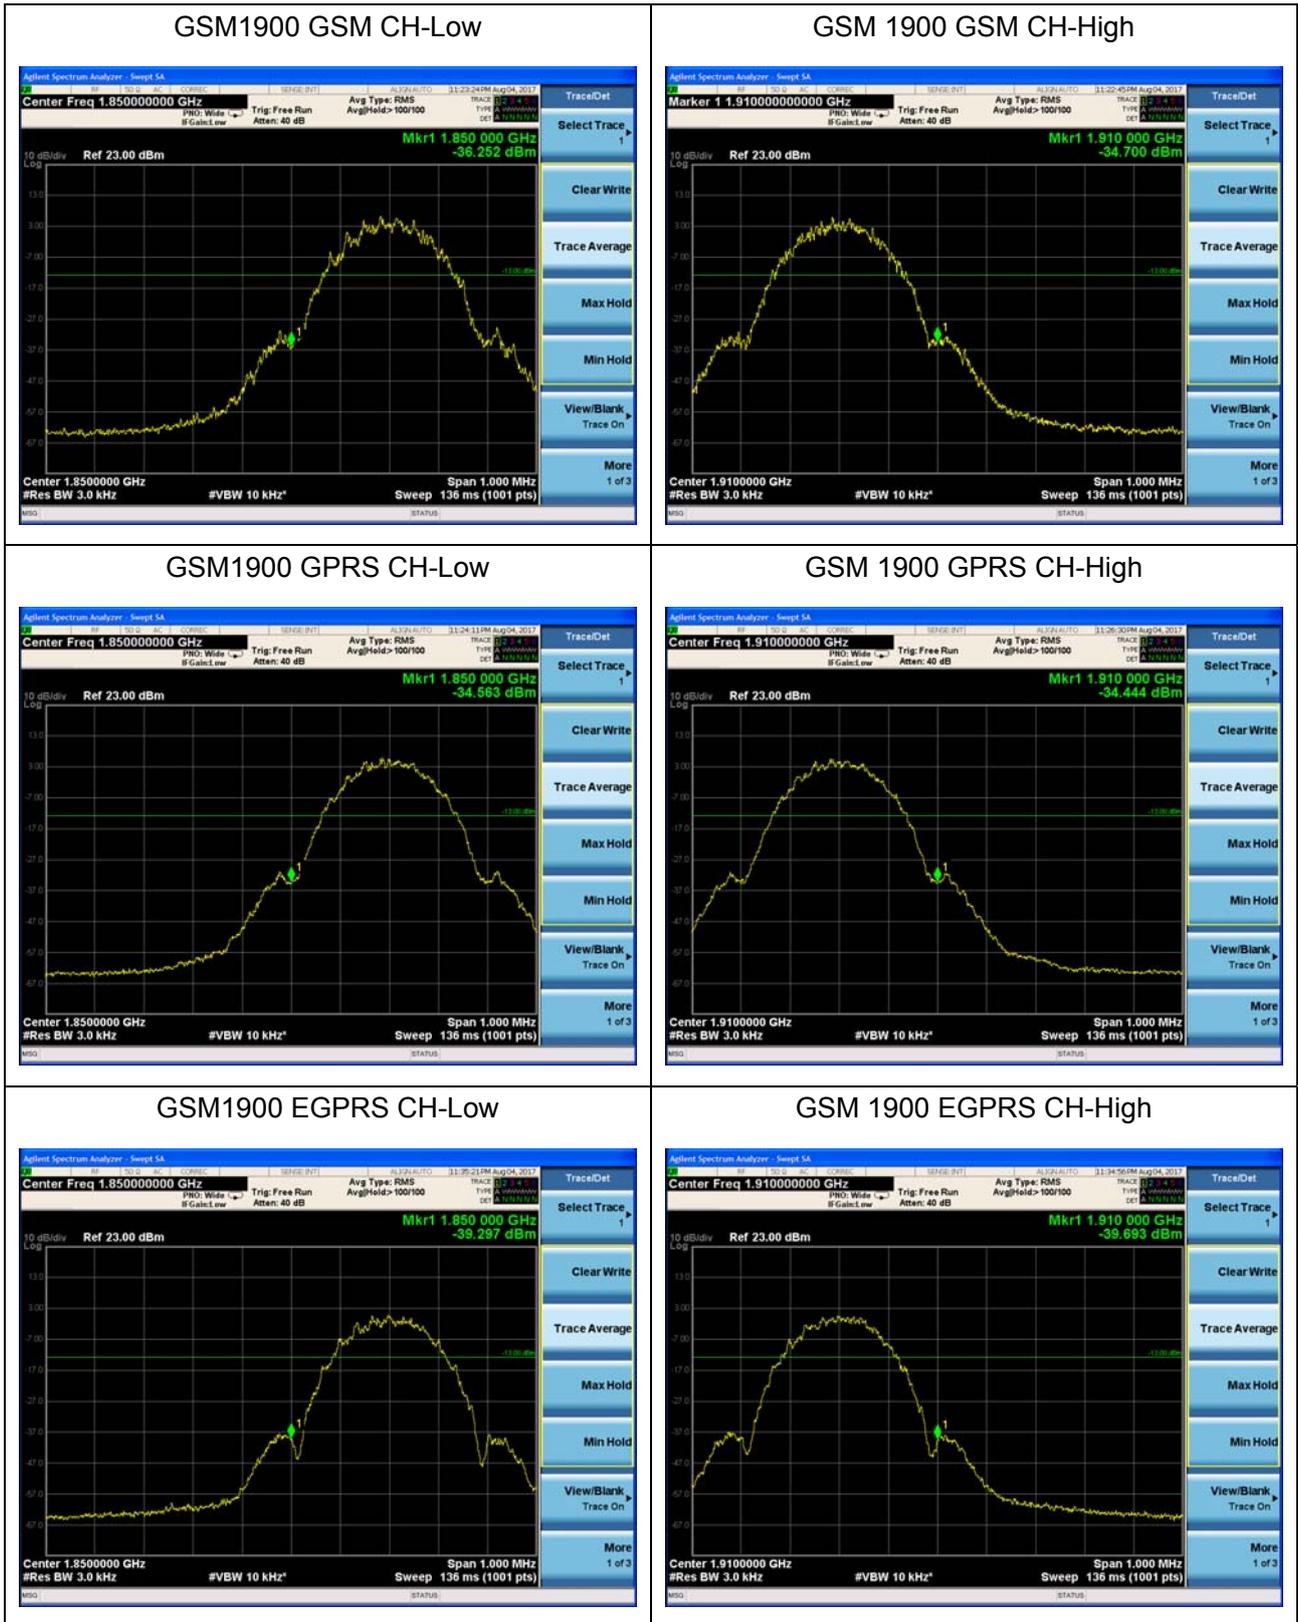



WCDMA Band II RMC CH-Low



WCDMA Band II RMC CH-High




LTE Band 2 1.4MHz QPSK 1RB CH-Low




LTE Band 2 1.4MHz QPSK 1RB CH-High



LTE Band 2 1.4MHz QPSK 100%RB CH-Low

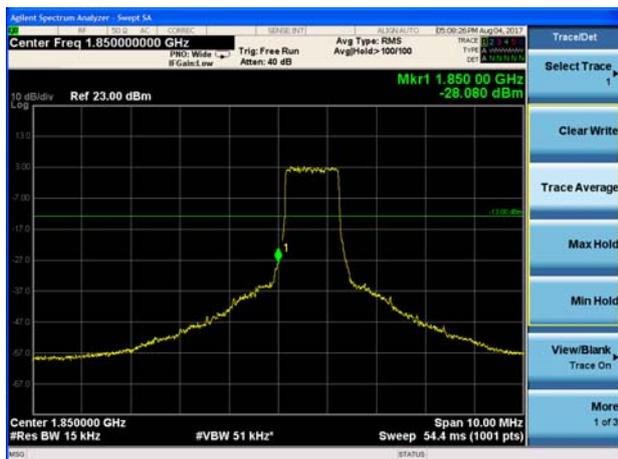


LTE Band 2 1.4MHz QPSK 100%RB CH-High

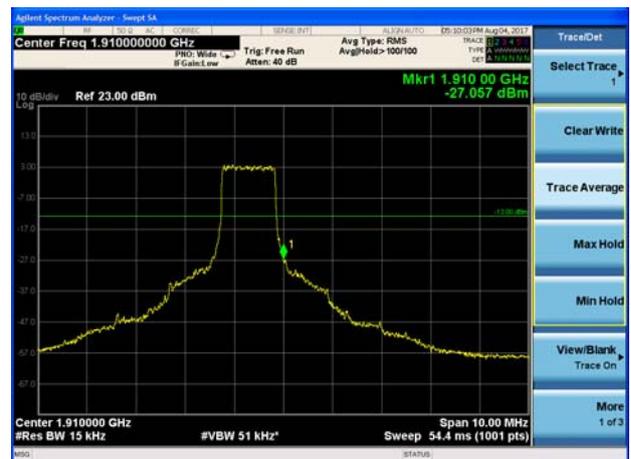




LTE Band 2 3MHz QPSK 1RB CH-Low

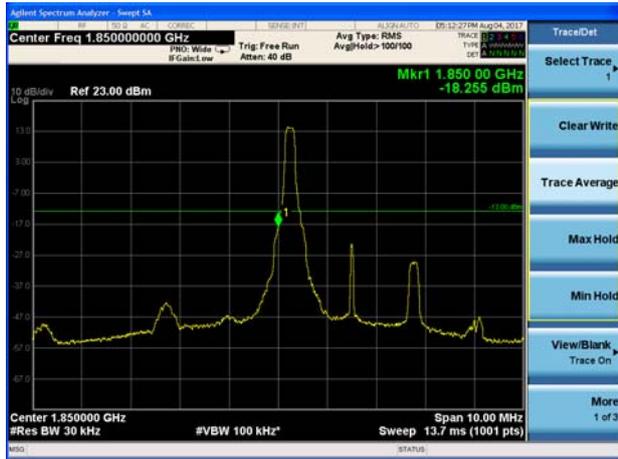

LTE Band 2 3MHz QPSK 1RB CH-High

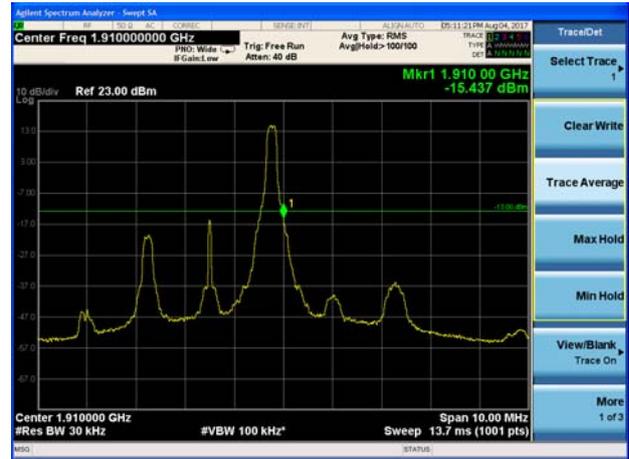


LTE Band 2 3MHz QPSK 100%RB CH-Low




LTE Band 2 3MHz QPSK 100%RB CH-High



LTE Band 2 5MHz QPSK 1RB CH-Low

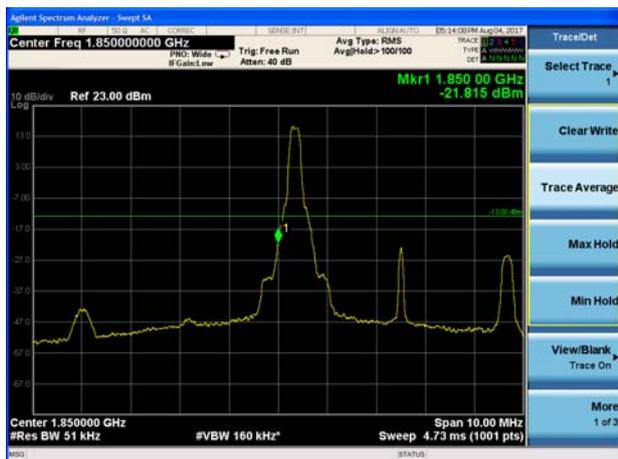

LTE Band 2 5MHz QPSK 1RB CH-High

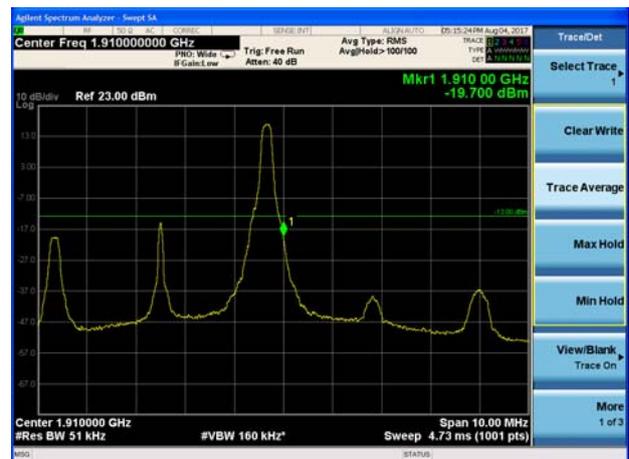




LTE Band 2 5MHz QPSK 100%RB CH-Low




LTE Band 2 5MHz QPSK 100%RB CH-High



LTE Band 2 10MHz QPSK 1RB CH-Low

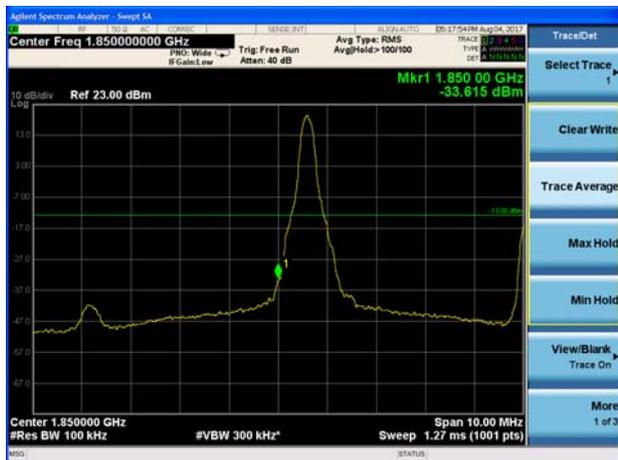

LTE Band 2 10MHz QPSK 1RB CH-High

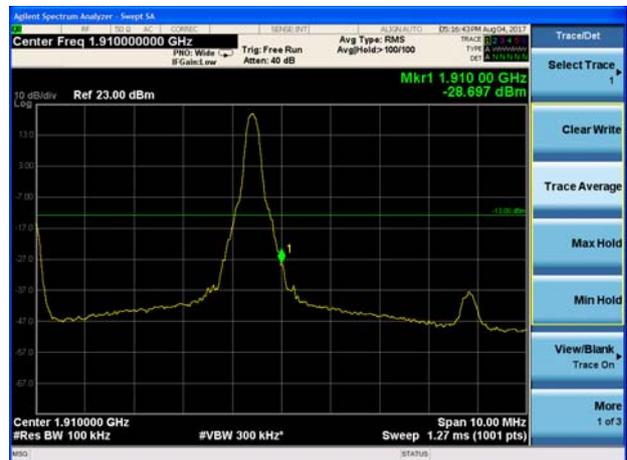

LTE Band 2 10MHz QPSK 100%RB CH-Low




LTE Band 2 10MHz QPSK 100%RB CH-High






LTE Band 2 15MHz QPSK 1RB CH-Low

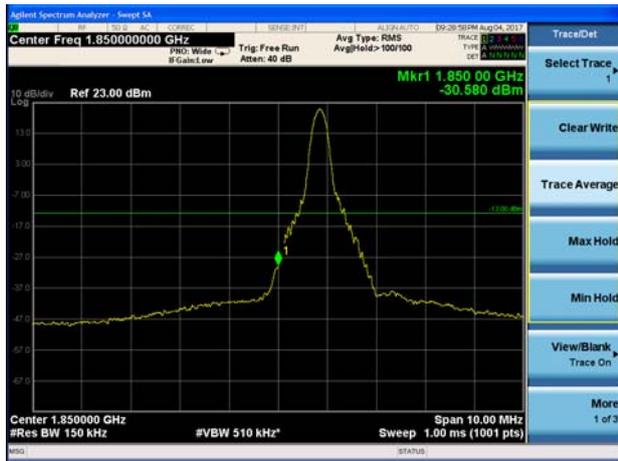

LTE Band 2 15MHz QPSK 1RB CH-High

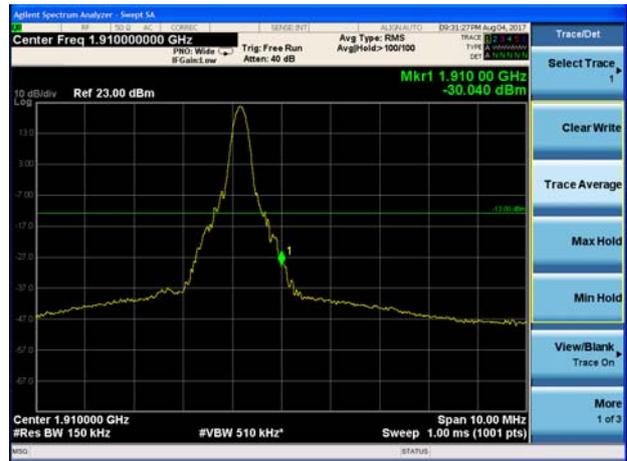


LTE Band 2 15MHz QPSK 100%RB CH-Low




LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low

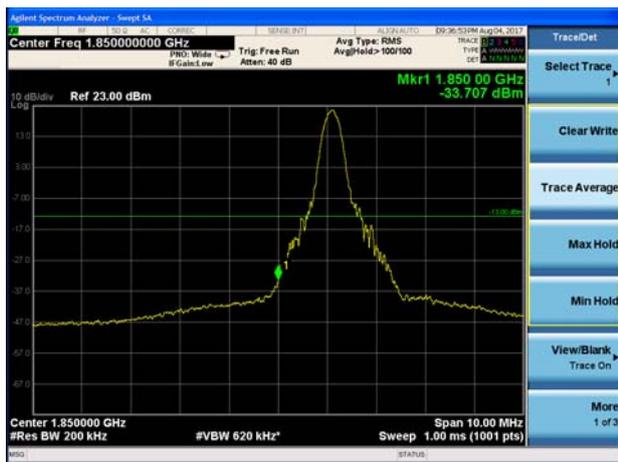

LTE Band 2 20MHz QPSK 1RB CH-High

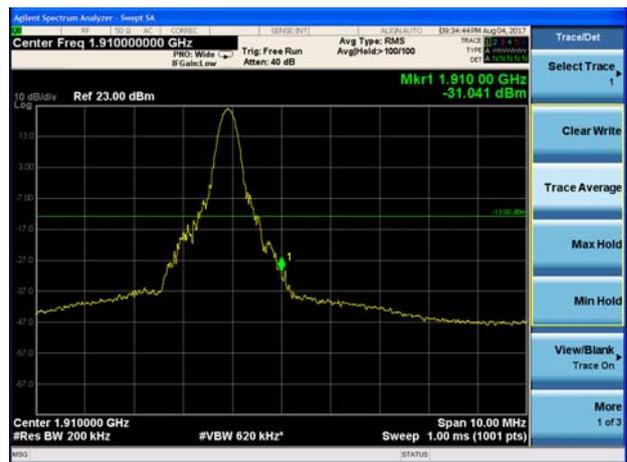




LTE Band 2 20MHz QPSK 100%RB CH-Low




LTE Band 2 20MHz QPSK 100%RB CH-High




LTE Band 2 1.4MHz 16QAM 1RB CH-Low

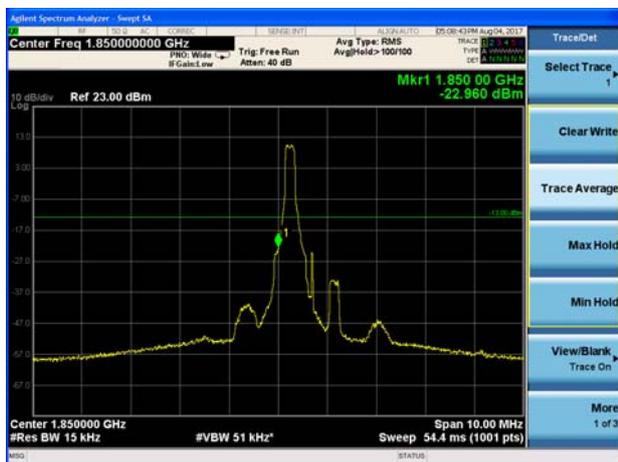


LTE Band 2 1.4MHz 16QAM 1RB CH-High

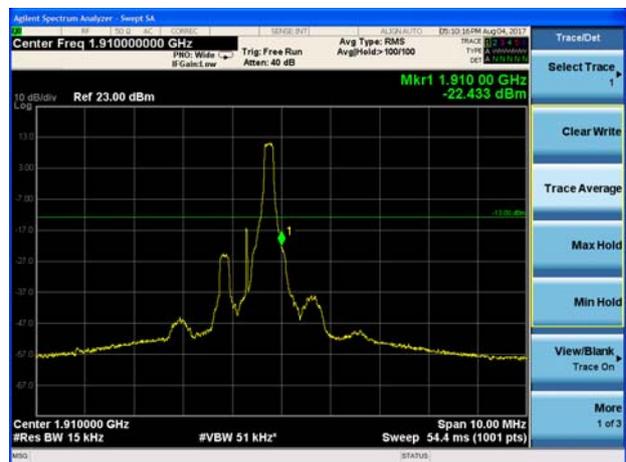

LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

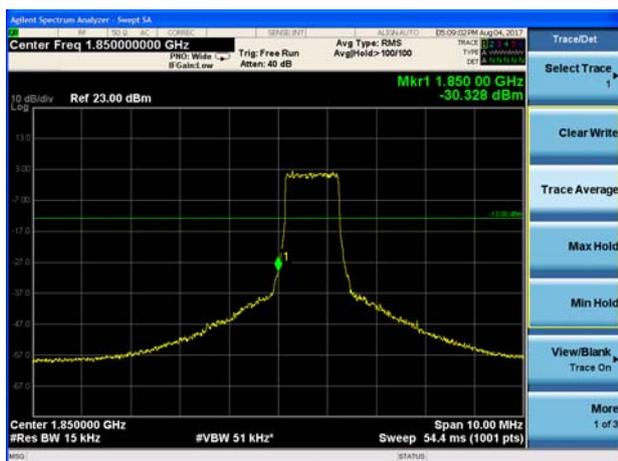


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

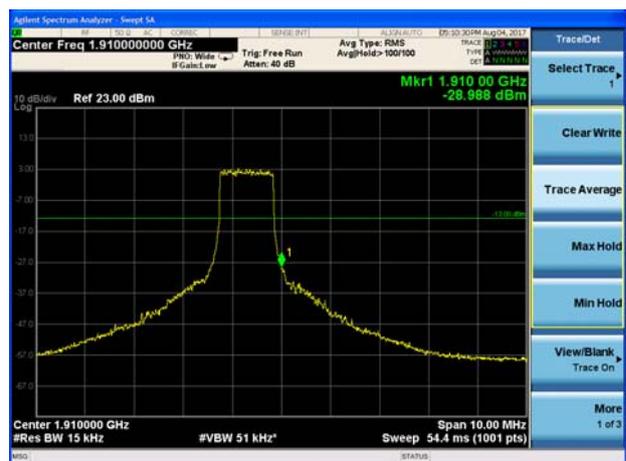





LTE Band 2 3MHz 16QAM 1RB CH-Low

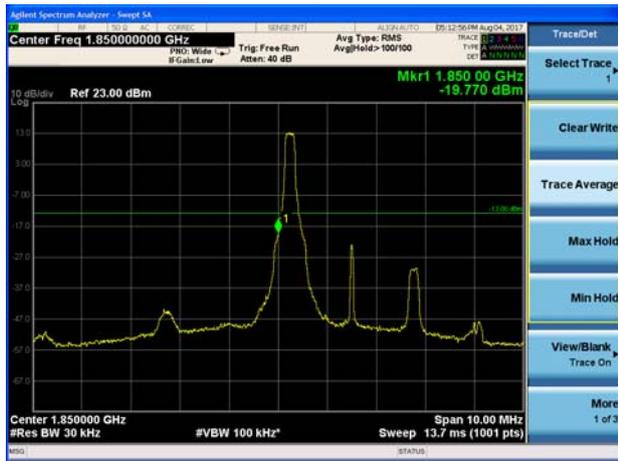

LTE Band 2 3MHz 16QAM 1RB CH-High

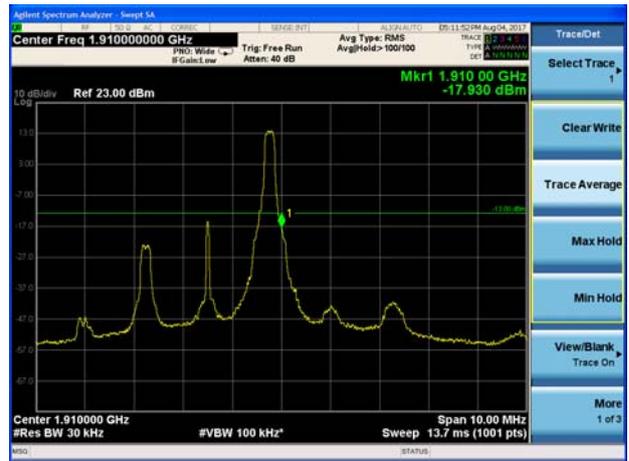


LTE Band 2 3MHz 16QAM 100%RB CH-Low

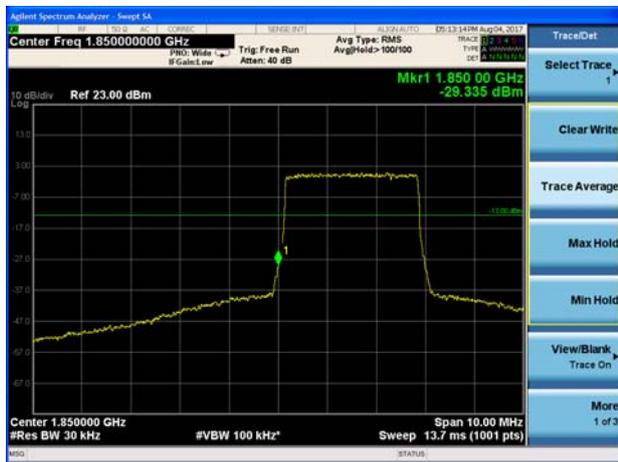


LTE Band 2 3MHz 16QAM 100%RB CH-High



LTE Band 2 5MHz 16QAM 1RB CH-Low

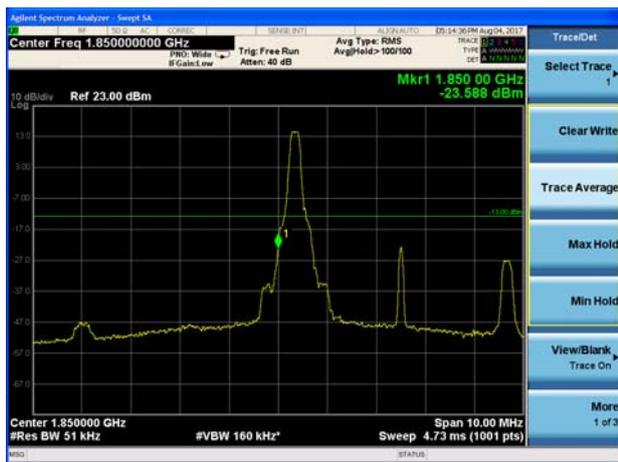

LTE Band 2 5MHz 16QAM 1RB CH-High

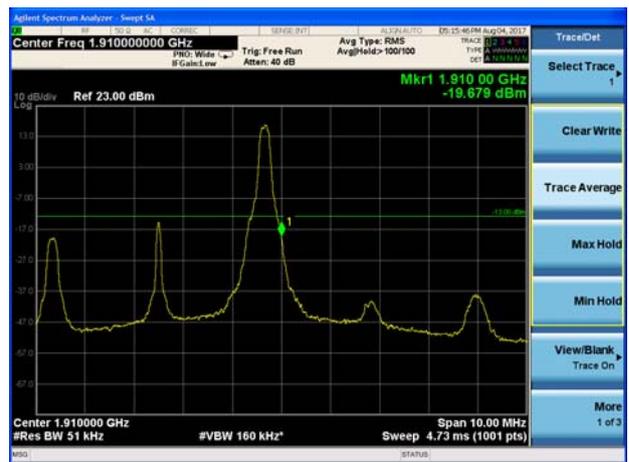




LTE Band 2 5MHz 16QAM 100%RB CH-Low




LTE Band 2 5MHz 16QAM 100%RB CH-High




LTE Band 2 10MHz 16QAM 1RB CH-Low

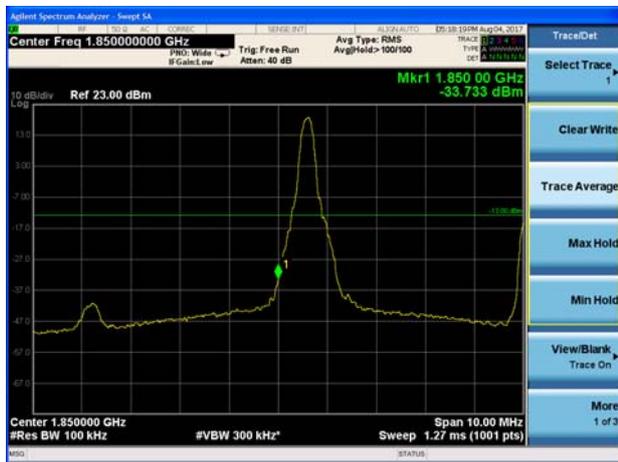

LTE Band 2 10MHz 16QAM 1RB CH-High

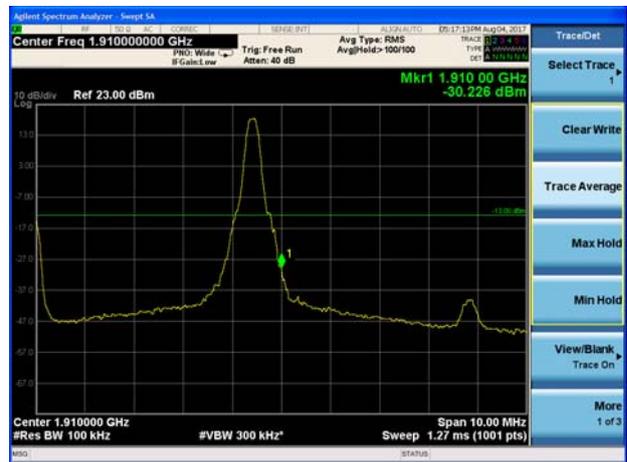

LTE Band 2 10MHz 16QAM 100%RB CH-Low

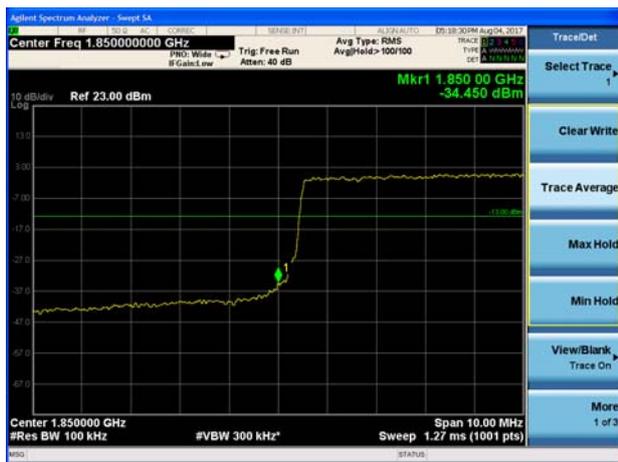


LTE Band 2 10MHz 16QAM 100%RB CH-High






LTE Band 2 15MHz 16QAM 1RB CH-Low

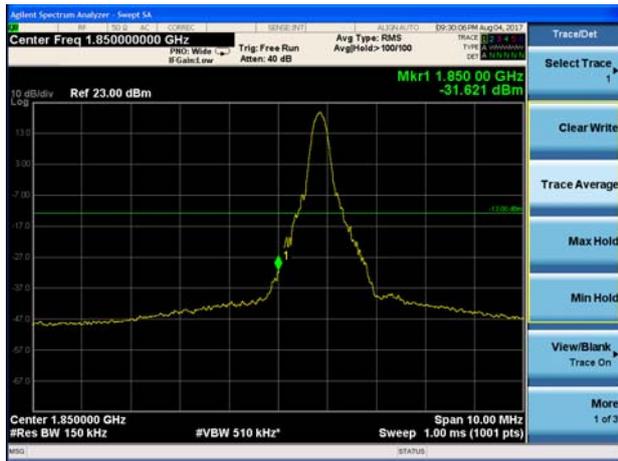

LTE Band 2 15MHz 16QAM 1RB CH-High




LTE Band 2 15MHz 16QAM 100%RB CH-Low

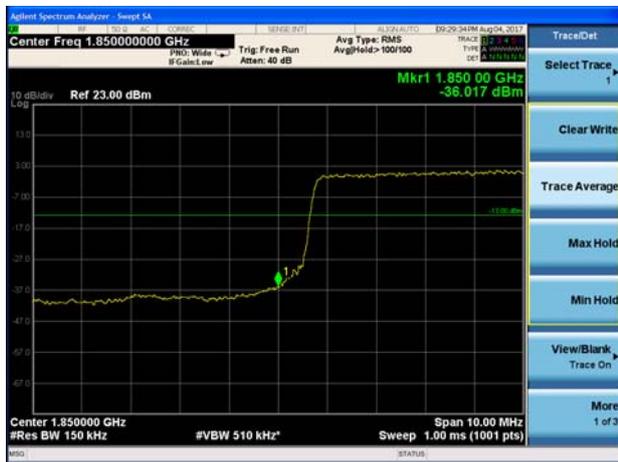


LTE Band 2 15MHz 16QAM 100%RB CH-High



LTE Band 2 20MHz 16QAM 1RB CH-Low

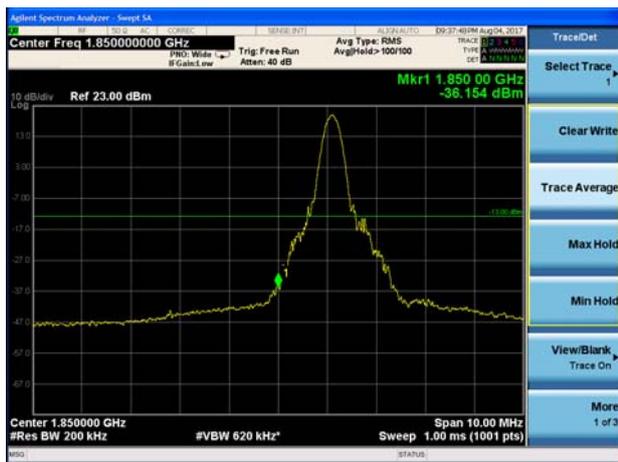

LTE Band 2 20MHz 16QAM 1RB CH-High

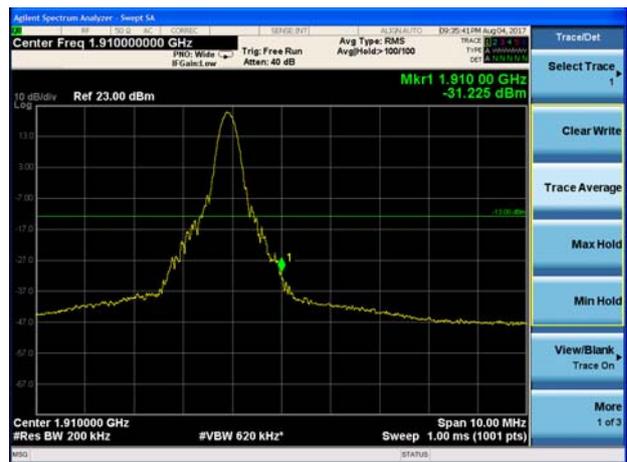



LTE Band 2 20MHz 16QAM 100%RB CH-Low



LTE Band 2 20MHz 16QAM 100%RB CH-High



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

Test Setup

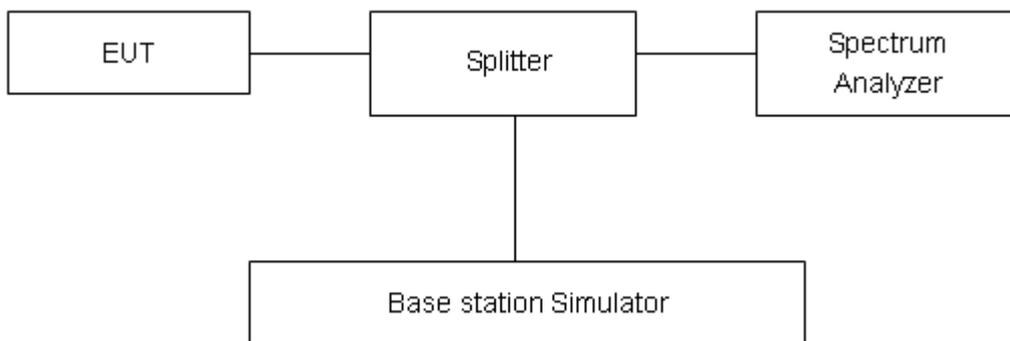

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

| Mode | Channel | Frequency (MHz) | Peak(dBm) | Avg(dBm) | PAPR(dB) | Limit (dB) | Conclusion |
|----------------------------|---------|-----------------|-----------|----------|----------|------------|------------|
| GSM 1900 (GSM) | 512 | 1850.2 | 31.09 | 29.77 | 1.32 | ≤13 | PASS |
| | 661 | 1880 | 31.01 | 29.66 | 1.35 | ≤13 | PASS |
| | 810 | 1909.8 | 30.98 | 29.57 | 1.41 | ≤13 | PASS |
| GPRS 1900 (GMSK) | 512 | 1850.2 | 26.46 | 24.62 | 1.84 | ≤13 | PASS |
| | 661 | 1880 | 26.33 | 24.54 | 1.79 | ≤13 | PASS |
| | 810 | 1909.8 | 26.53 | 24.73 | 1.80 | ≤13 | PASS |
| EGPRS 1900 (8-PSK) | 512 | 1850.2 | 21.54 | 19.83 | 1.71 | ≤13 | PASS |
| | 661 | 1880 | 21.62 | 19.87 | 1.75 | ≤13 | PASS |
| | 810 | 1909.8 | 21.53 | 19.84 | 1.69 | ≤13 | PASS |
| WCDMA Band II (RMC) | 9262 | 1852.4 | 25.73 | 22.65 | 3.08 | ≤13 | PASS |
| | 9400 | 1880 | 25.72 | 22.70 | 3.02 | ≤13 | PASS |
| | 9538 | 1907.6 | 25.28 | 22.64 | 2.64 | ≤13 | PASS |



| LTE Band 2 | | Channel | Frequency (MHz) | Peak (dBm) | Avg (dBm) | PAPR (dB) | Limit (dB) | Conclusion |
|------------|-----------|---------|-----------------|------------|-----------|-----------|------------|------------|
| Modulation | Bandwidth | | | | | | | |
| QPSK | 1.4MHz | 18607 | 1850.7 | 26.40 | 21.73 | 4.67 | ≤13 | PASS |
| | | 18900 | 1880.0 | 26.35 | 21.56 | 4.79 | ≤13 | PASS |
| | | 19193 | 1909.3 | 25.80 | 21.85 | 3.95 | ≤13 | PASS |
| | 3MHz | 18615 | 1851.5 | 26.54 | 21.76 | 4.78 | ≤13 | PASS |
| | | 18900 | 1880 | 26.50 | 21.60 | 4.90 | ≤13 | PASS |
| | | 19185 | 1908.5 | 26.11 | 21.88 | 4.23 | ≤13 | PASS |
| | 5MHz | 18625 | 1852.5 | 26.47 | 21.74 | 4.73 | ≤13 | PASS |
| | | 18900 | 1880 | 26.48 | 21.59 | 4.89 | ≤13 | PASS |
| | | 19175 | 1907.5 | 26.02 | 21.86 | 4.16 | ≤13 | PASS |
| | 10MHz | 18650 | 1855 | 26.59 | 21.82 | 4.77 | ≤13 | PASS |
| | | 18900 | 1880 | 26.50 | 21.61 | 4.89 | ≤13 | PASS |
| | | 19150 | 1905 | 26.31 | 21.90 | 4.41 | ≤13 | PASS |
| | 15MHz | 18675 | 1857.5 | 26.55 | 21.80 | 4.75 | ≤13 | PASS |
| | | 18900 | 1880 | 26.49 | 21.57 | 4.92 | ≤13 | PASS |
| | | 19125 | 1902.5 | 26.34 | 21.85 | 4.49 | ≤13 | PASS |
| 20MHz | 18700 | 1860 | 26.17 | 21.47 | 4.70 | ≤13 | PASS | |
| | 18900 | 1880 | 26.36 | 21.52 | 4.84 | ≤13 | PASS | |
| | 19100 | 1900 | 26.09 | 21.41 | 4.68 | ≤13 | PASS | |
| 16QAM | 1.4MHz | 18607 | 1850.7 | 26.35 | 20.74 | 5.61 | ≤13 | PASS |
| | | 18900 | 1880.0 | 26.11 | 20.47 | 5.64 | ≤13 | PASS |
| | | 19193 | 1909.3 | 25.39 | 20.60 | 4.79 | ≤13 | PASS |
| | 3MHz | 18615 | 1851.5 | 26.37 | 20.77 | 5.60 | ≤13 | PASS |
| | | 18900 | 1880 | 26.28 | 20.51 | 5.77 | ≤13 | PASS |
| | | 19185 | 1908.5 | 25.73 | 20.63 | 5.10 | ≤13 | PASS |
| | 5MHz | 18625 | 1852.5 | 26.35 | 20.75 | 5.60 | ≤13 | PASS |
| | | 18900 | 1880 | 26.24 | 20.47 | 5.77 | ≤13 | PASS |
| | | 19175 | 1907.5 | 25.62 | 20.58 | 5.04 | ≤13 | PASS |
| | 10MHz | 18650 | 1855 | 26.37 | 20.78 | 5.59 | ≤13 | PASS |
| | | 18900 | 1880 | 26.27 | 20.52 | 5.75 | ≤13 | PASS |
| | | 19150 | 1905 | 25.97 | 20.62 | 5.35 | ≤13 | PASS |
| | 15MHz | 18675 | 1857.5 | 26.35 | 20.75 | 5.60 | ≤13 | PASS |
| | | 18900 | 1880 | 26.25 | 20.47 | 5.78 | ≤13 | PASS |
| | | 19125 | 1902.5 | 25.99 | 20.58 | 5.41 | ≤13 | PASS |
| 20MHz | 18700 | 1860 | 26.28 | 20.73 | 5.55 | ≤13 | PASS | |
| | 18900 | 1880 | 26.20 | 20.43 | 5.77 | ≤13 | PASS | |
| | 19100 | 1900 | 26.13 | 20.55 | 5.58 | ≤13 | PASS | |

5.6. Frequency Stability

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

- Frequency Stability (Temperature Variation) The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,


 - With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.
 - Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.
 - Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.
- Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

 - Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.65 V and 4.40 V, with a nominal voltage of 3.87V.

Test setup

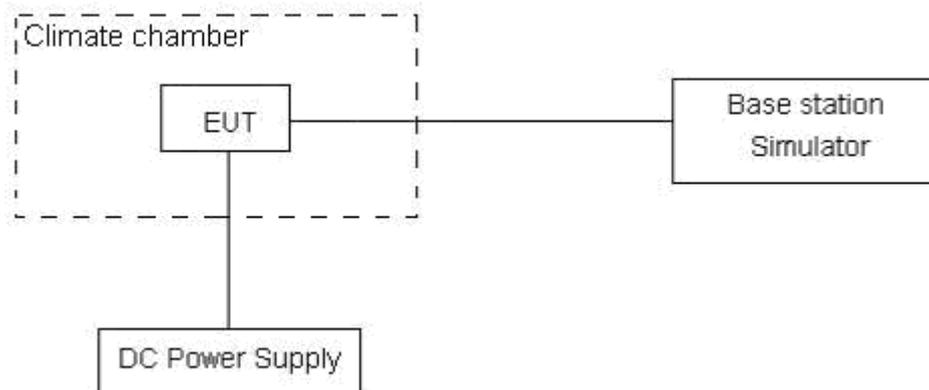



Limits

No specific frequency stability requirements in part 24.235

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.



Test Result

| Mode | Test status | Test Results (ppm) | | |
|---------------------------------|----------------------|--------------------|------------|-------------|
| | | GSM(GMSK) | GPRS(GMSK) | EGPRS(8PSK) |
| GSM 1900 Middle Channel | -30°C/Normal Voltage | 0.00060 | 0.00060 | -0.00218 |
| | -20°C/Normal Voltage | 0.00224 | -0.00014 | -0.00273 |
| | -10°C/Normal Voltage | 0.00065 | 0.00049 | 0.00066 |
| | 0°C/Normal Voltage | -0.00109 | 0.00011 | 0.00242 |
| | 10°C/Normal Voltage | 0.00084 | -0.00138 | 0.00252 |
| | 20°C/Normal Voltage | 0.00074 | -0.00018 | -0.00227 |
| | 30°C/Normal Voltage | -0.00343 | 0.00036 | 0.00277 |
| | 40°C/Normal Voltage | -0.00113 | 0.00044 | 0.00253 |
| | 55°C/Normal Voltage | 0.00079 | -0.00148 | 0.00241 |
| | 20°C/Min Voltage | 0.00069 | 0.00051 | 0.00121 |
| | 20°C/Max Voltage | 0.00166 | 0.00124 | -0.00260 |
| / | / | RMC | | |
| WCDMA Band II Middle Channel | -30°C/Normal Voltage | 0.00145 | | |
| | -20°C/Normal Voltage | 0.00132 | | |
| | -10°C/Normal Voltage | -0.00108 | | |
| | 0°C/Normal Voltage | -0.00224 | | |
| | 10°C/Normal Voltage | -0.00280 | | |
| | 20°C/Normal Voltage | 0.00060 | | |
| | 30°C/Normal Voltage | 0.00236 | | |
| | 40°C/Normal Voltage | 0.00094 | | |
| | 55°C/Normal Voltage | -0.00058 | | |
| | 20°C/Min Voltage | -0.00215 | | |
| | 20°C/Max Voltage | -0.00106 | | |



| Bandwidth | Test status | LTE Band 2 Middle Channel Test Results (ppm) | |
|-----------|----------------------|--|----------|
| | | QPSK | 16QAM |
| 1.4MHz | -30°C/Normal Voltage | -0.00235 | -0.00020 |
| | -20°C/Normal Voltage | -0.00833 | 0.00128 |
| | -10°C/Normal Voltage | -0.00120 | -0.00070 |
| | 0°C/Normal Voltage | -0.00632 | -0.00310 |
| | 10°C/Normal Voltage | 0.00191 | 0.00020 |
| | 20°C/Normal Voltage | -0.00400 | -0.00210 |
| | 30°C/Normal Voltage | -0.00360 | -0.00240 |
| | 40°C/Normal Voltage | -0.00484 | -0.00394 |
| | 55°C/Normal Voltage | 0.00086 | 0.00490 |
| | 20°C/Min Voltage | -0.00196 | 0.00290 |
| | 20°C/Max Voltage | -0.00312 | 0.00424 |
| 3MHz | -30°C/Normal Voltage | 0.00129 | 0.00132 |
| | -20°C/Normal Voltage | 0.00121 | 0.00140 |
| | -10°C/Normal Voltage | 0.00137 | 0.00104 |
| | 0°C/Normal Voltage | 0.00133 | 0.00135 |
| | 10°C/Normal Voltage | 0.00148 | 0.00111 |
| | 20°C/Normal Voltage | 0.00114 | 0.00617 |
| | 30°C/Normal Voltage | 0.00130 | -0.00594 |
| | 40°C/Normal Voltage | 0.00121 | -0.00189 |
| | 55°C/Normal Voltage | 0.00139 | 0.00212 |
| | 20°C/Min Voltage | 0.00135 | 0.00903 |
| | 20°C/Max Voltage | 0.00114 | 0.00177 |
| 5MHz | -30°C/Normal Voltage | -0.00313 | -0.00036 |
| | -20°C/Normal Voltage | -0.00176 | 0.00523 |
| | -10°C/Normal Voltage | -0.00069 | -0.00074 |
| | 0°C/Normal Voltage | -0.00054 | 0.00442 |
| | 10°C/Normal Voltage | -0.00054 | 0.00311 |
| | 20°C/Normal Voltage | 0.00524 | 0.00477 |
| | 30°C/Normal Voltage | 0.00044 | 0.00411 |
| | 40°C/Normal Voltage | 0.00283 | 0.00424 |
| | 55°C/Normal Voltage | -0.00029 | 0.00446 |
| | 20°C/Min Voltage | -0.00154 | 0.00482 |
| | 20°C/Max Voltage | 0.00381 | 0.00064 |
| 10MHz | -30°C/Normal Voltage | 0.00189 | 0.00348 |
| | -20°C/Normal Voltage | 0.00191 | 0.00072 |
| | -10°C/Normal Voltage | 0.00175 | 0.00082 |



| | | | |
|-------|----------------------|----------|----------|
| | 0°C/Normal Voltage | 0.00193 | 0.00332 |
| | 10°C/Normal Voltage | 0.00189 | 0.00139 |
| | 20°C/Normal Voltage | 0.00190 | 0.00409 |
| | 30°C/Normal Voltage | 0.00191 | -0.00006 |
| | 40°C/Normal Voltage | 0.00194 | 0.00156 |
| | 55°C/Normal Voltage | 0.00166 | 0.00310 |
| | 20°C/Min Voltage | 0.00147 | 0.00168 |
| | 20°C/Max Voltage | -0.00589 | 0.00299 |
| 15MHz | -30°C/Normal Voltage | 0.01260 | -0.00043 |
| | -20°C/Normal Voltage | 0.01204 | 0.00134 |
| | -10°C/Normal Voltage | -0.00328 | 0.00064 |
| | 0°C/Normal Voltage | -0.00527 | -0.00190 |
| | 10°C/Normal Voltage | -0.00201 | 0.00136 |
| | 20°C/Normal Voltage | -0.00268 | 0.00012 |
| | 30°C/Normal Voltage | 0.00177 | -0.00036 |
| | 40°C/Normal Voltage | 0.00173 | 0.01203 |
| | 55°C/Normal Voltage | 0.00360 | 0.00114 |
| | 20°C/Min Voltage | 0.00454 | -0.00406 |
| | 20°C/Max Voltage | 0.00185 | -0.00540 |
| 20MHz | -30°C/Normal Voltage | -0.00220 | 0.01335 |
| | -20°C/Normal Voltage | -0.00307 | 0.00730 |
| | -10°C/Normal Voltage | -0.00249 | 0.00254 |
| | 0°C/Normal Voltage | -0.00182 | 0.00317 |
| | 10°C/Normal Voltage | -0.00219 | 0.00114 |
| | 20°C/Normal Voltage | 0.01151 | -0.00024 |
| | 30°C/Normal Voltage | 0.01310 | 0.00010 |
| | 40°C/Normal Voltage | 0.01337 | 0.00000 |
| | 55°C/Normal Voltage | 0.01674 | -0.00175 |
| | 20°C/Min Voltage | 0.01291 | 0.00105 |
| | 20°C/Max Voltage | 0.01388 | 0.00061 |

5.7.Spurious Emissions at Antenna Terminals


Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.set RBW 1MHz and VBW is 3MHz, Sweep is set to ATUO.

Test setup

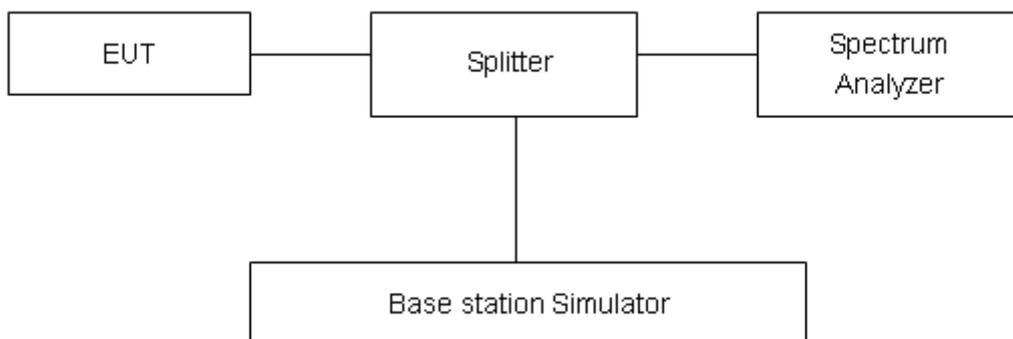

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log₁₀ (P) dB.”

| Limit | -13 dBm |
|-------|---------|
| | |

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


| Frequency | Uncertainty |
|-------------|-------------|
| 100kHz-2GHz | 0.684 dB |
| 2GHz-18GHz | 1.407 dB |

Test Result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

The signal beyond the limit is carrier.

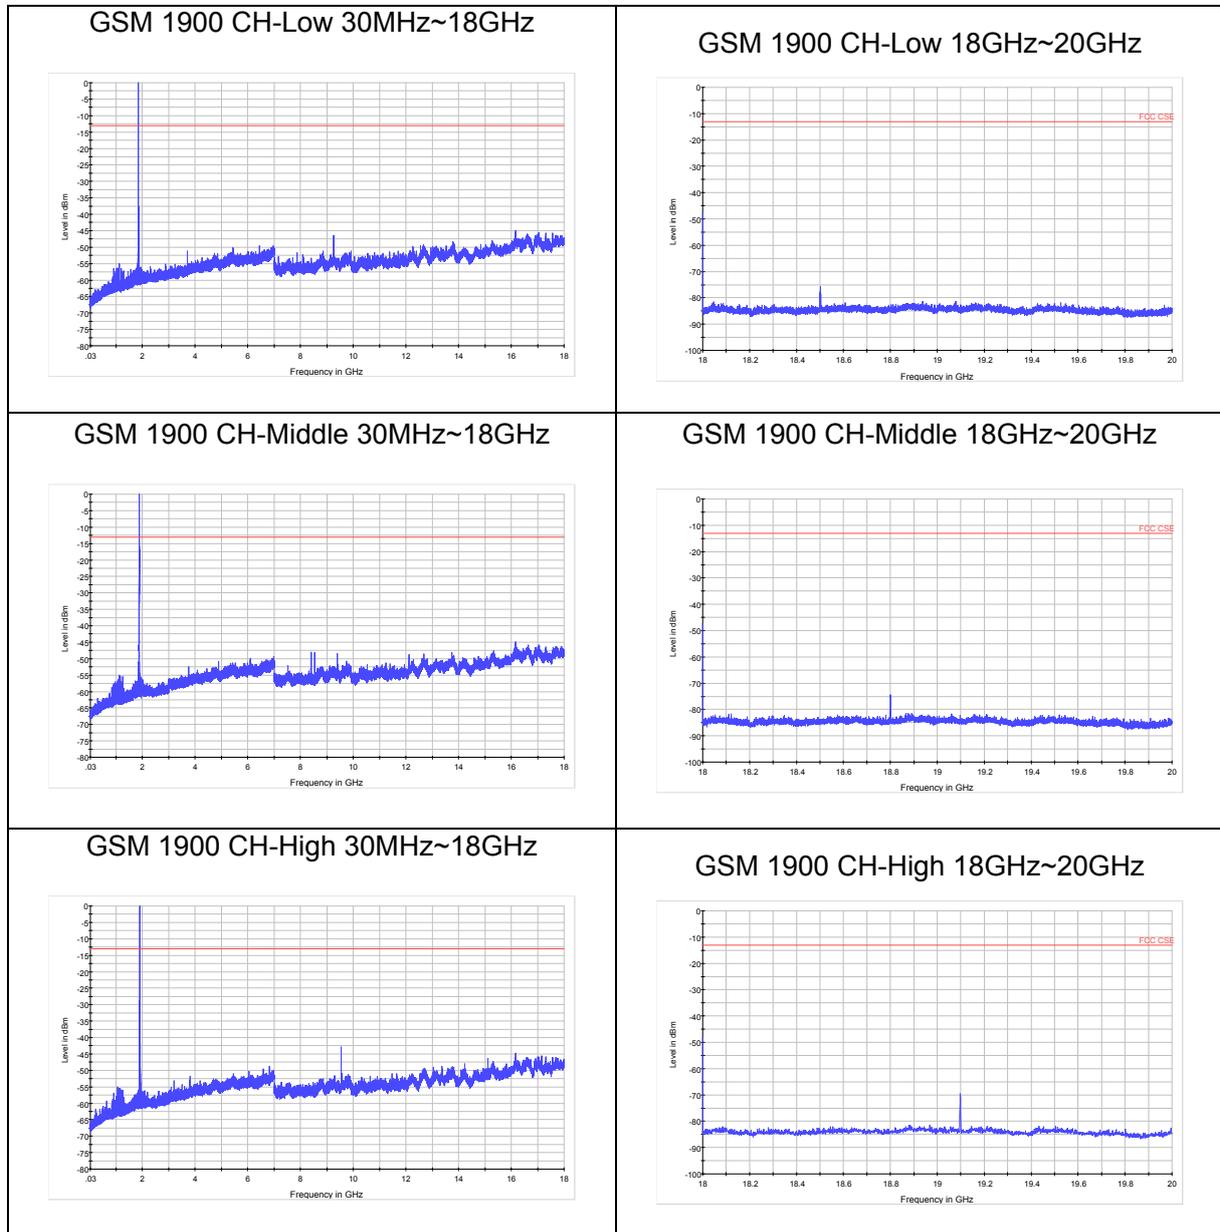





WCDMA Band II CH-Low 30MHz~18GHz

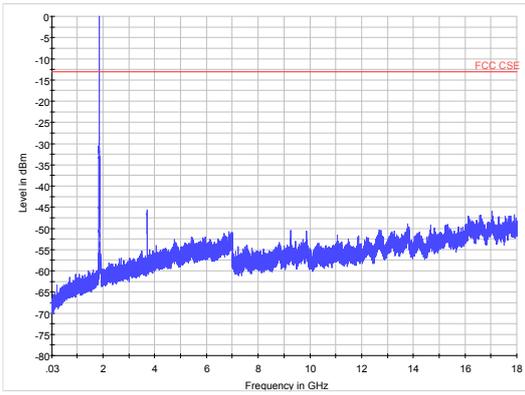


WCDMA Band II CH-Low 18GHz~20GHz

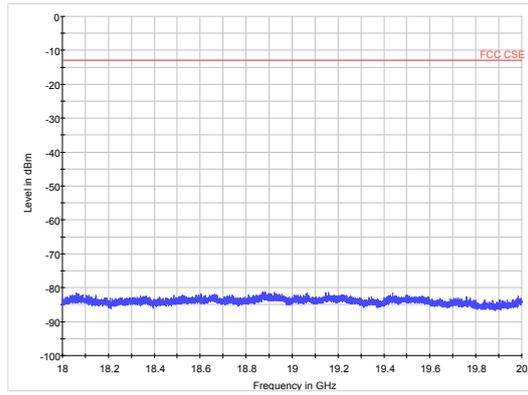


WCDMA Band II CH-Middle 30MHz~18GHz

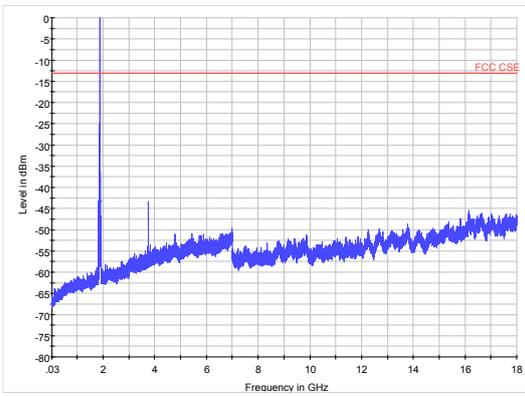


WCDMA Band II CH-Middle 18GHz~20GHz

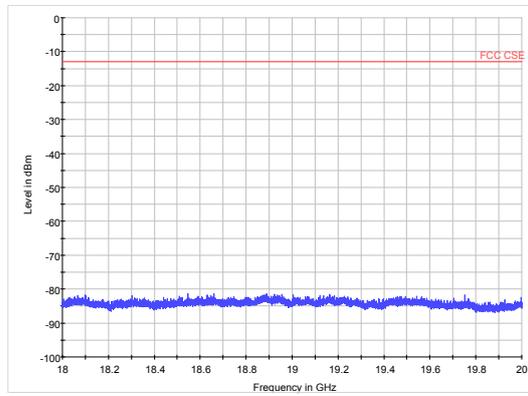

WCDMA Band II CH-High 30MHz~18GHz

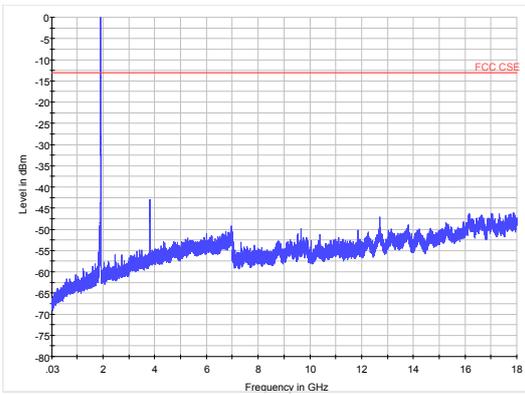


WCDMA Band II CH-High 18GHz~20GHz

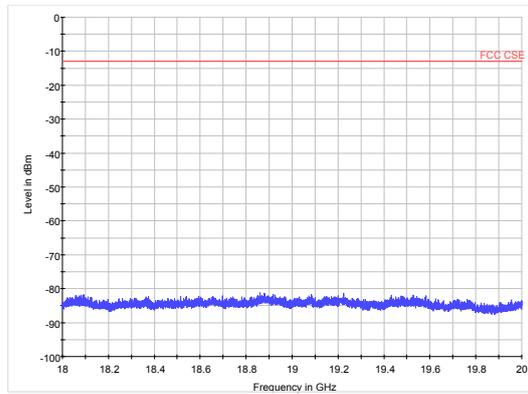





LTE Band 2 1.4MHz CH-Low 30MHz~3GHz

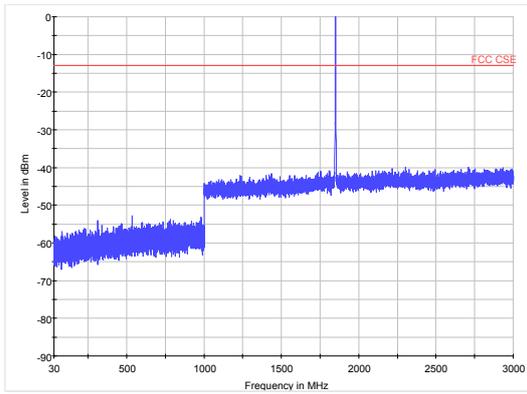


LTE Band 2 1.4MHz CH-Middle 30MHz~3GHz

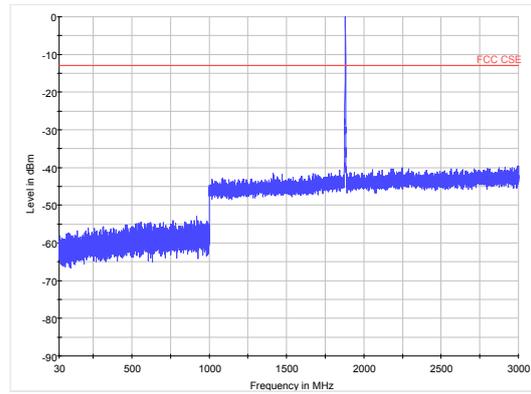


LTE Band 2 1.4MHz CH-Low 3GHz~18GHz

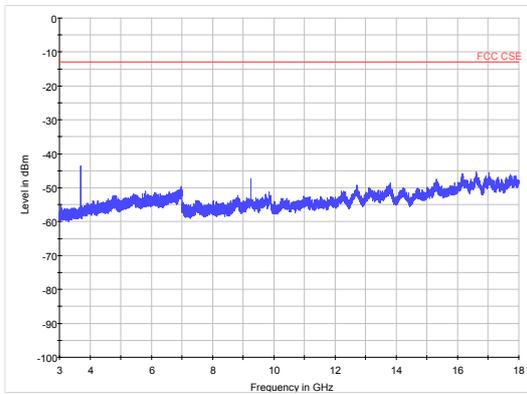


LTE Band 2 1.4MHz CH-Middle 3GHz~18GHz

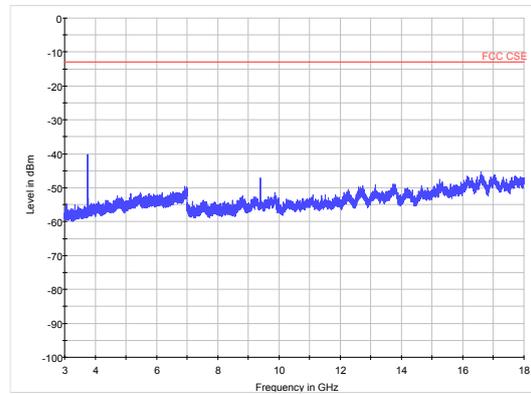

LTE Band 2 1.4MHz CH-Low 18GHz~20GHz

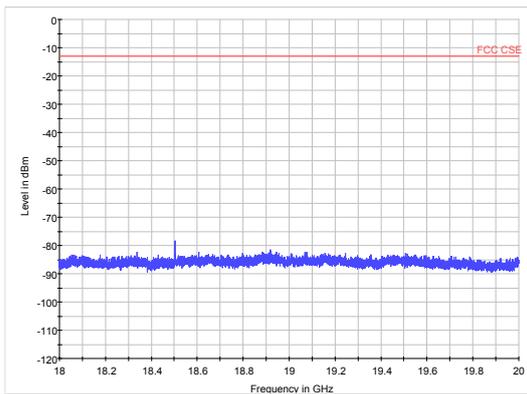


LTE Band 2 1.4MHz CH-Middle 18GHz~20GHz

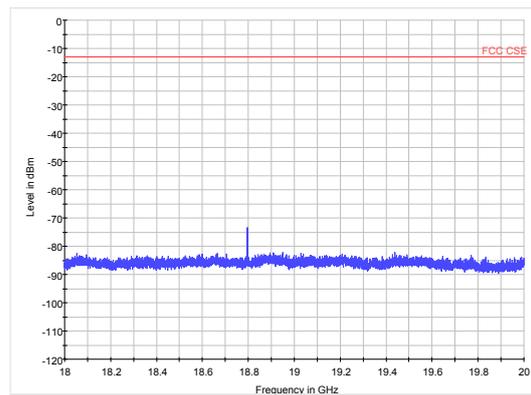





LTE Band 2 1.4MHz CH-High 30MHz~3GHz

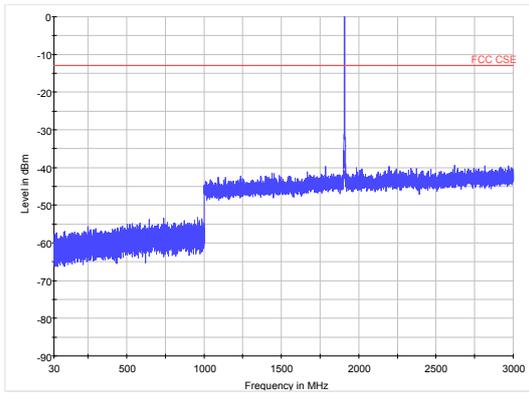


LTE Band 2 3MHz CH-Low 30MHz~3GHz

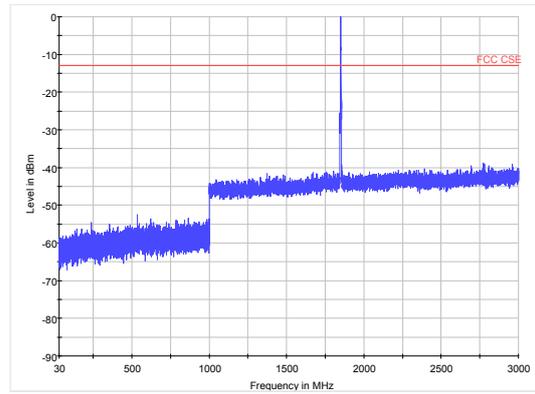


LTE Band 2 1.4MHz CH-High 3GHz~18GHz

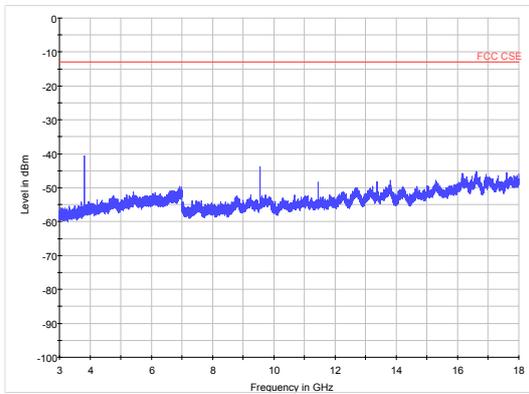


LTE Band 2 3MHz CH-Low 3GHz~18GHz

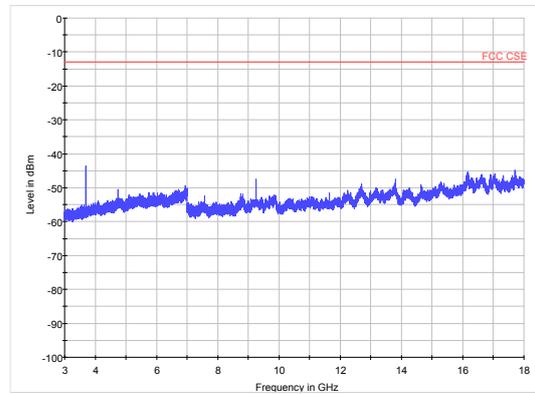

LTE Band 2 1.4MHz CH-High 18GHz~20GHz

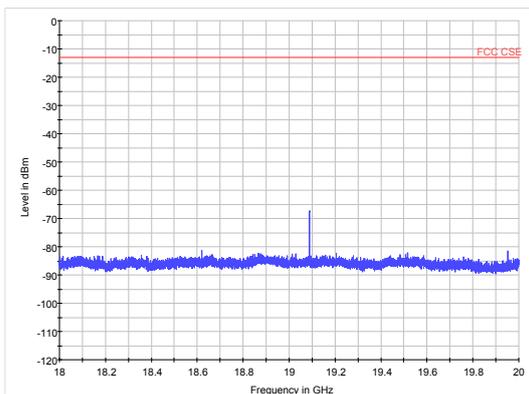


LTE Band 2 3MHz CH-Low 18GHz~20GHz

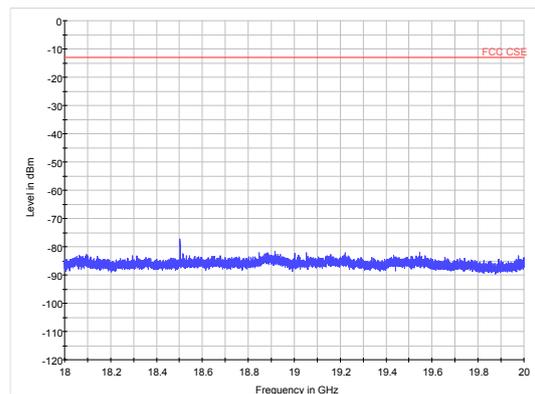





LTE Band 2 3MHz CH-Middle 30MHz~3GHz

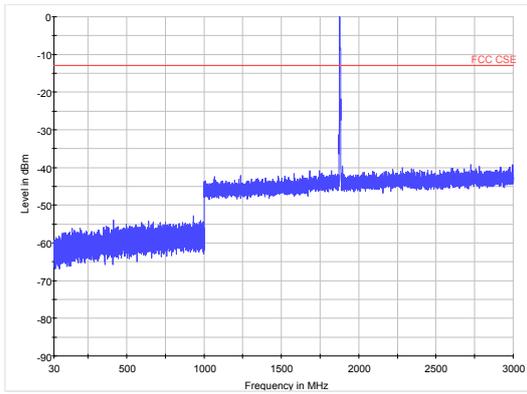


LTE Band 2 3MHz CH-High 30MHz~3GHz

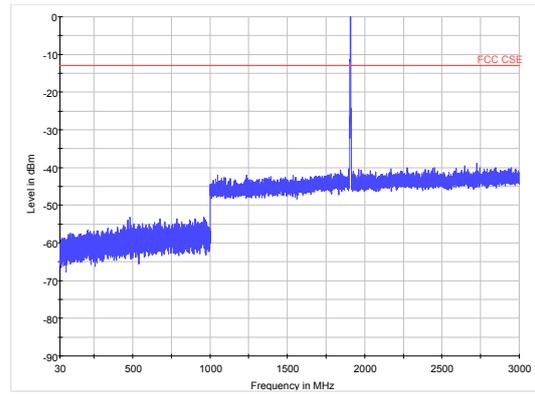


LTE Band 2 3MHz CH-Middle 3GHz~18GHz

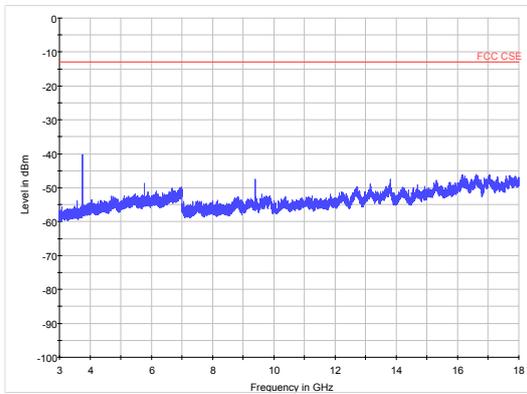


LTE Band 2 3MHz CH-High 3GHz~18GHz

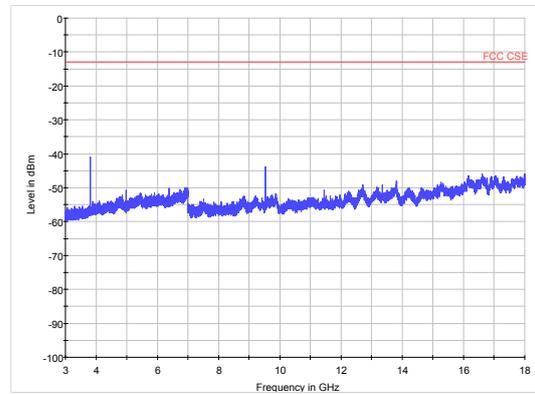

LTE Band 2 3MHz CH-Middle 18GHz~20GHz

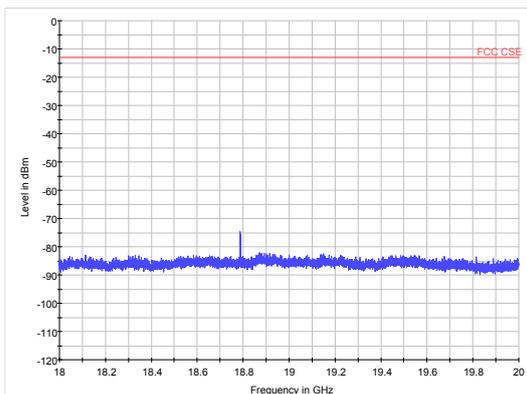


LTE Band 2 3MHz CH-High 18GHz~20GHz

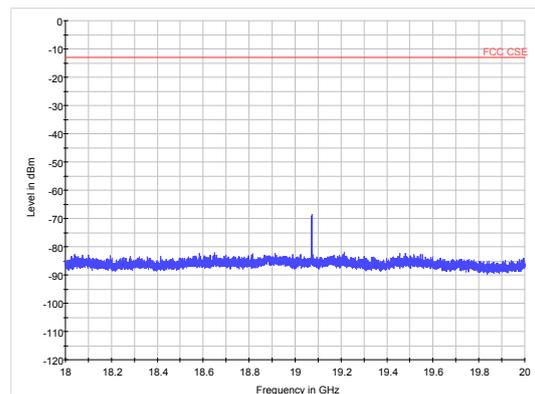





LTE Band 2 5MHz CH-Low 30MHz~3GHz

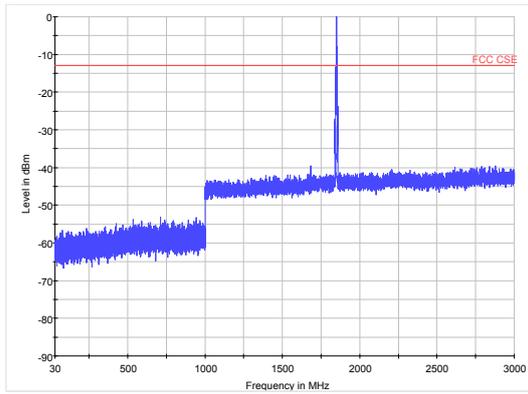


LTE Band 2 5MHz CH-Middle 30MHz~3GHz

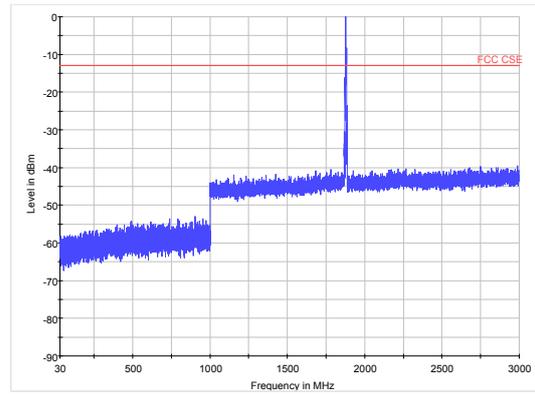


LTE Band 2 5MHz CH-Low 3GHz~18GHz

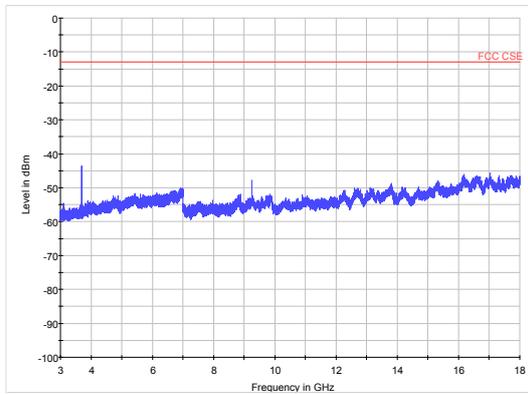


LTE Band 2 5MHz CH-Middle 3GHz~18GHz

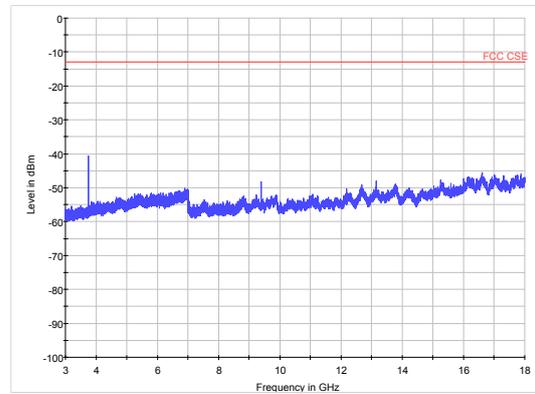

LTE Band 2 5MHz CH-Low 18GHz~20GHz

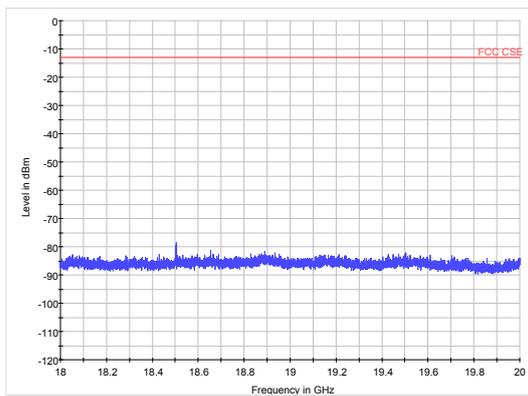


LTE Band 2 5MHz CH-Middle 18GHz~20GHz

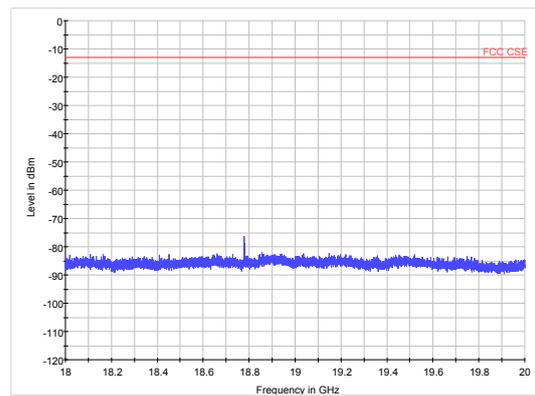





LTE Band 2 5MHz CH-High 30MHz~3GHz

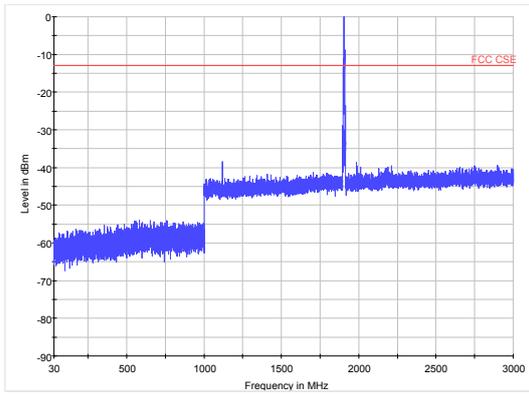


LTE Band 2 10MHz CH-Low 30MHz~3GHz

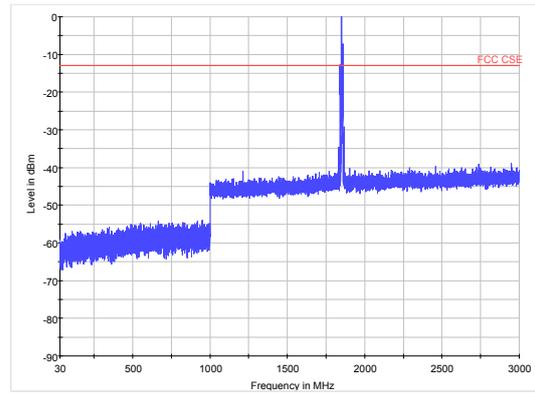


LTE Band 2 5MHz CH-High 3GHz~18GHz

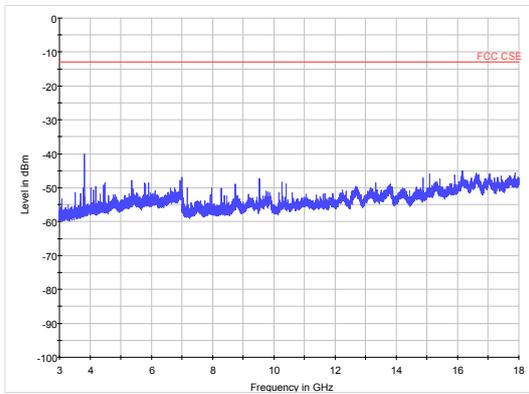


LTE Band 2 10MHz CH-Low 3GHz~18GHz

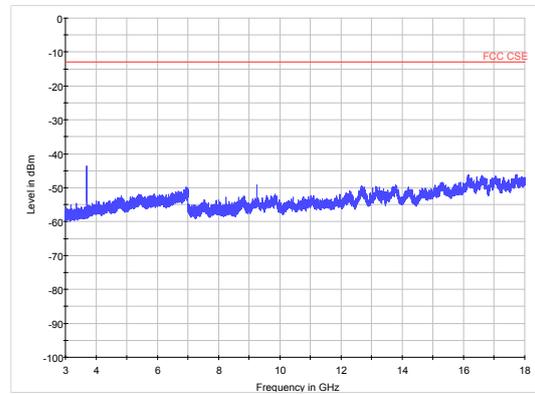

LTE Band 2 5MHz CH-High 18GHz~20GHz

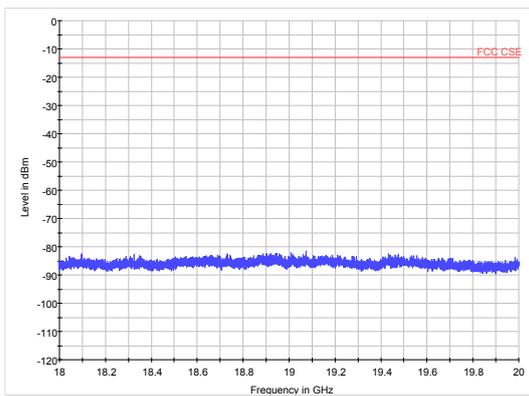


LTE Band 2 10MHz CH-Low 18GHz~20GHz

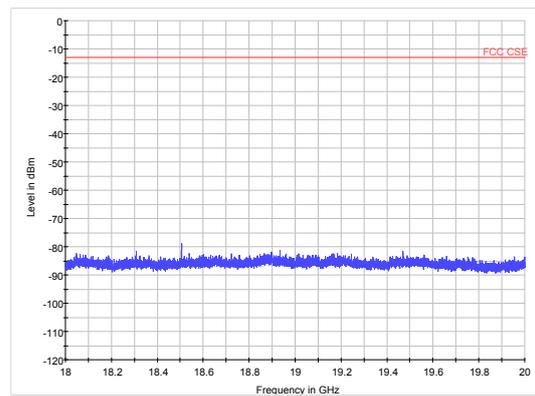





LTE Band 2 10MHz CH-Middle 30MHz~3GHz

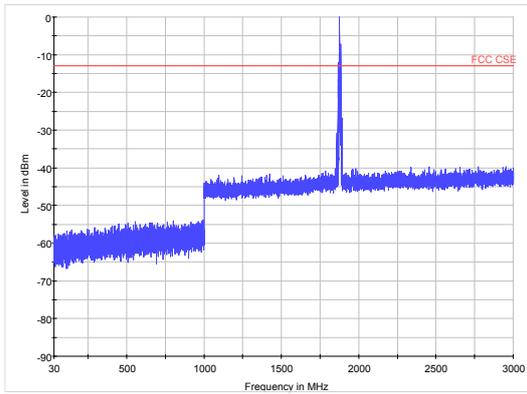


LTE Band 2 10MHz CH-High 30MHz~3GHz

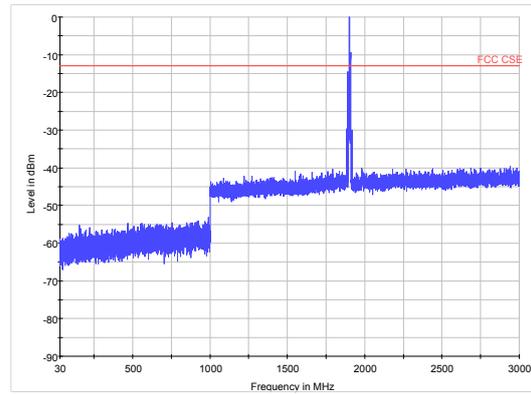


LTE Band 2 10MHz CH-Middle 3GHz~18GHz

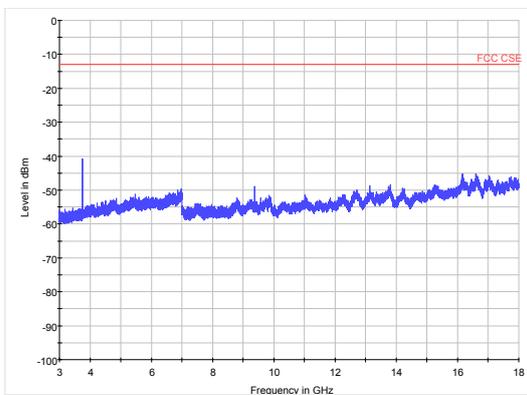


LTE Band 2 10MHz CH-High 3GHz~18GHz

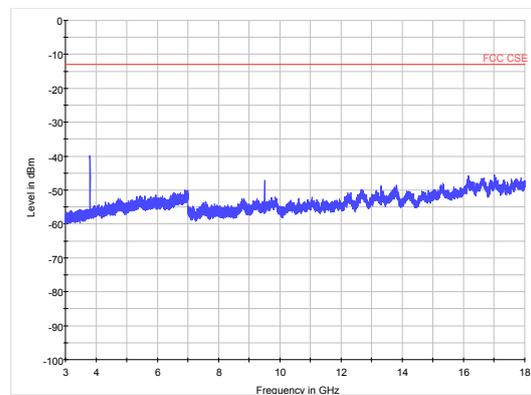

LTE Band 2 10MHz CH-Middle
18GHz~20GHz

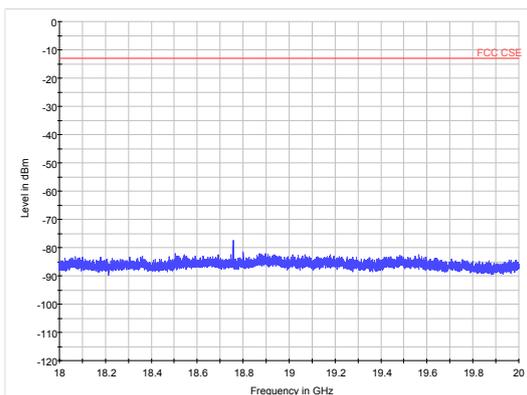


LTE Band 2 10MHz CH-High 18GHz~20GHz

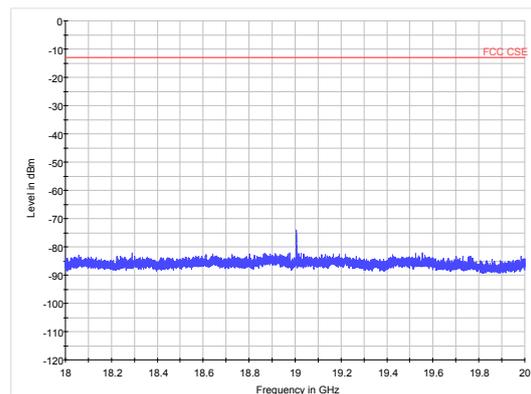





LTE Band 2 15MHz CH-Low 30MHz~3GHz

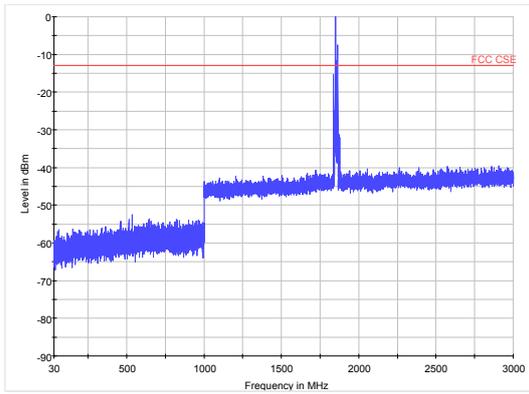


LTE Band 2 15MHz CH-Middle 30MHz~3GHz

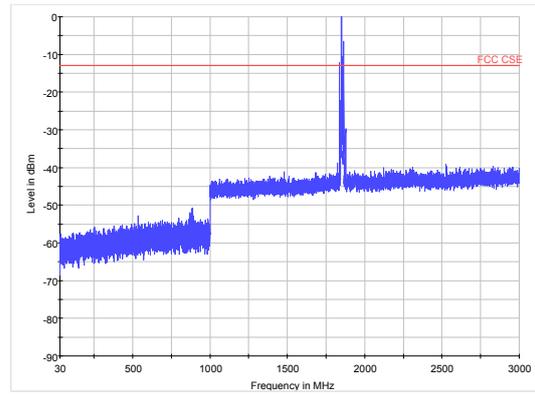


LTE Band 2 15MHz CH-Low 3GHz~18GHz

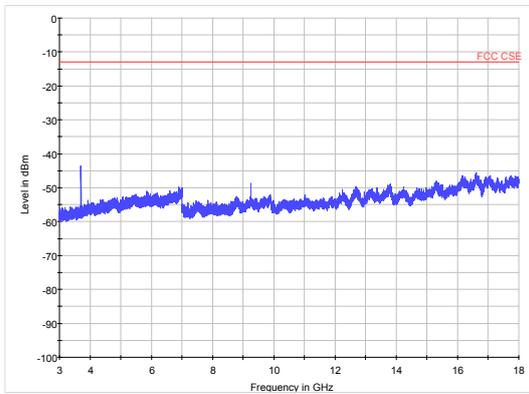


LTE Band 2 15MHz CH-Middle 3GHz~18GHz

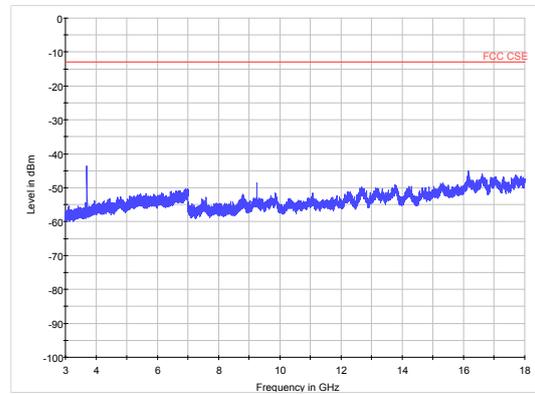

LTE Band 2 15MHz CH-Low 18GHz~20GHz

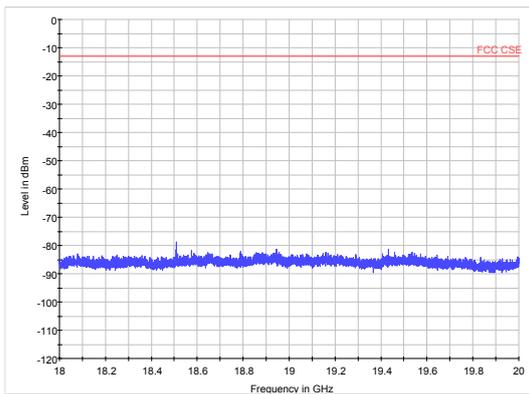


LTE Band 2 15MHz CH-Middle
18GHz~20GHz

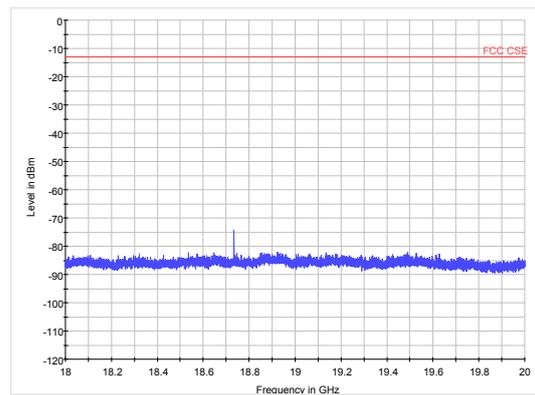





LTE Band 2 15MHz CH-High 30MHz~3GHz

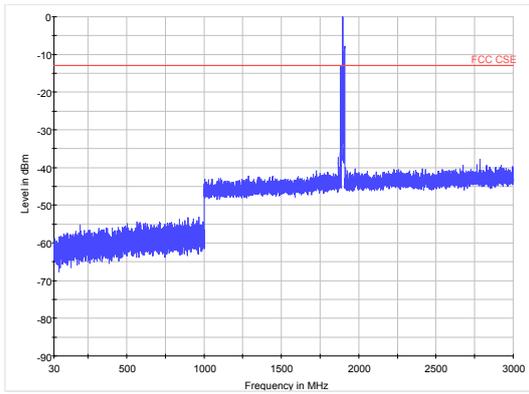


LTE Band 2 20MHz CH-Low 30MHz~3GHz

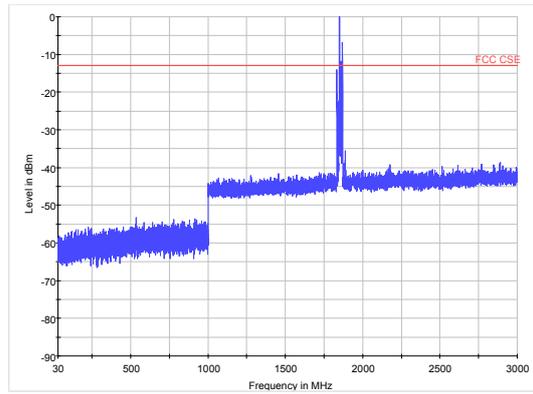


LTE Band 2 15MHz CH-High 3GHz~18GHz

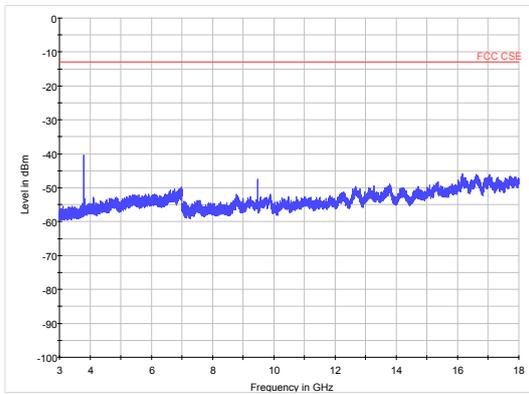


LTE Band 2 20MHz CH-Low 3GHz~18GHz

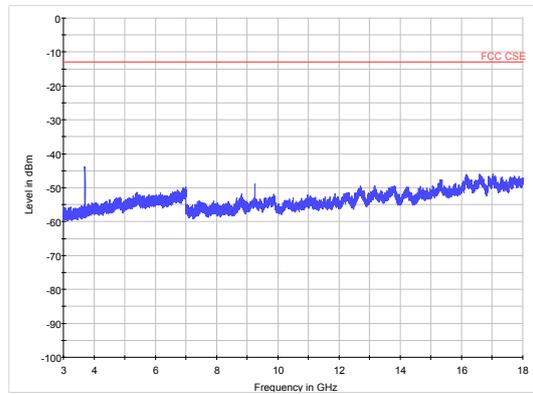

LTE Band 2 15MHz CH-High 18GHz~20GHz

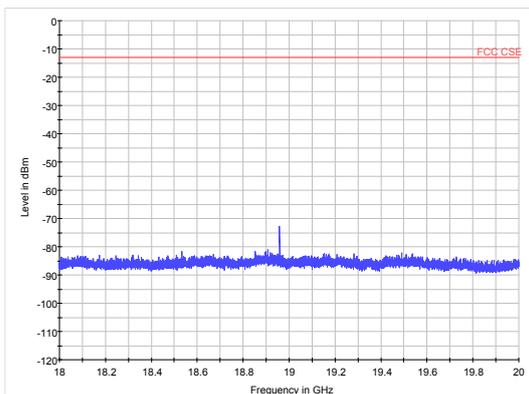


LTE Band 2 20MHz CH-Low 18GHz~20GHz

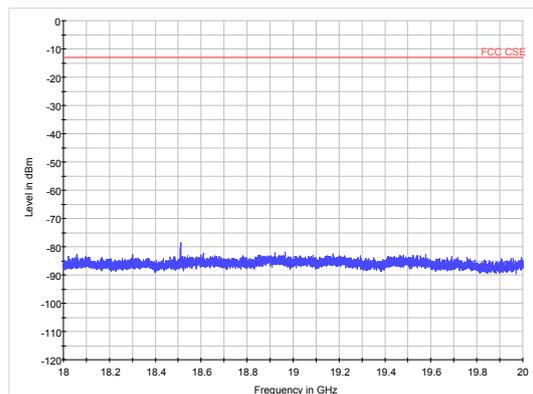





LTE Band 2 20MHz CH-Middle 30MHz~3GHz

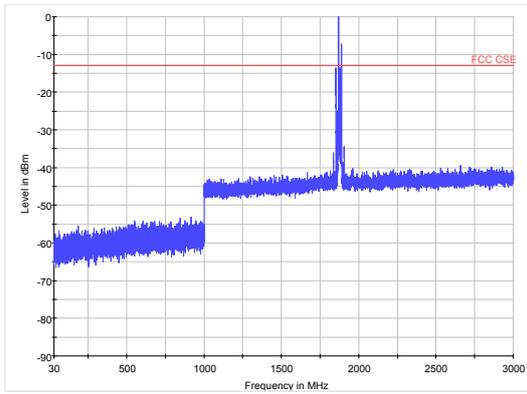


LTE Band 2 20MHz CH-High 30MHz~3GHz

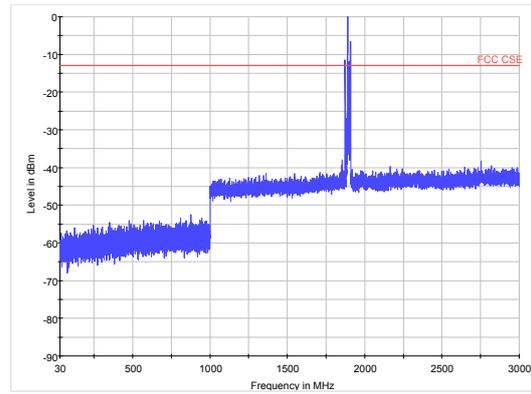


LTE Band 2 20MHz CH-Middle 3GHz~18GHz

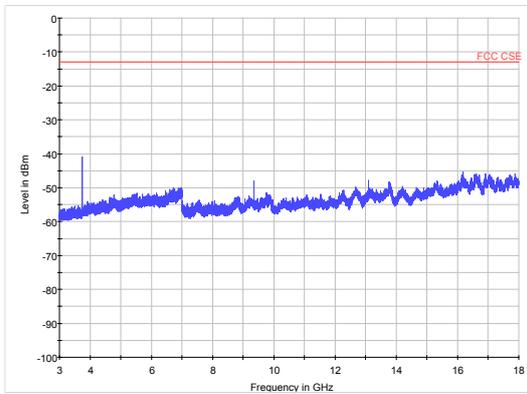


LTE Band 2 20MHz CH-High 3GHz~18GHz

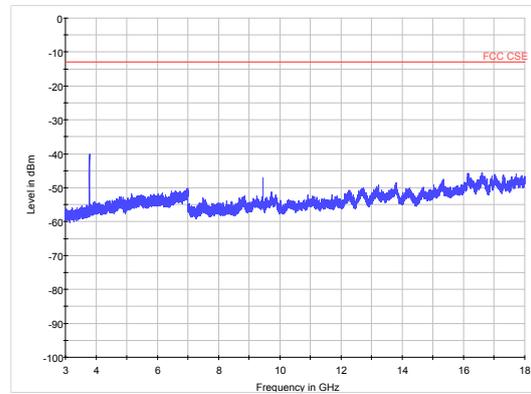

LTE Band 2 20MHz CH-Middle
18GHz~20GHz

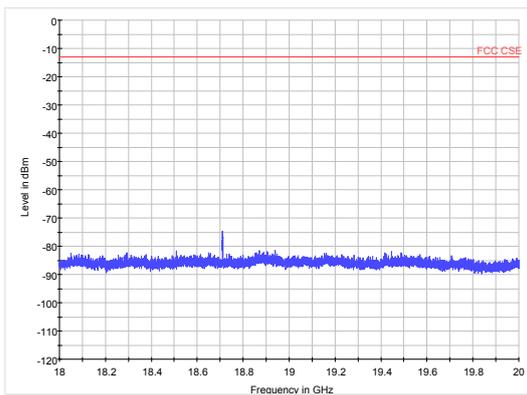

LTE Band 2 20MHz CH-High 18GHz~20GHz

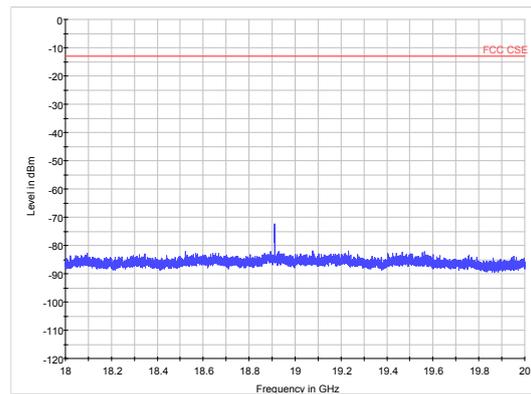

5.8. Radiates Spurious Emission

Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C | 45%~50% | 101.5kPa |

Method of Measurement


1. The testing follows ANSI C63.26 (2015) Section 5.5.2.3.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP


= EIRP-2.15dBi.

Test setup

30MHz~~~ 1GHz

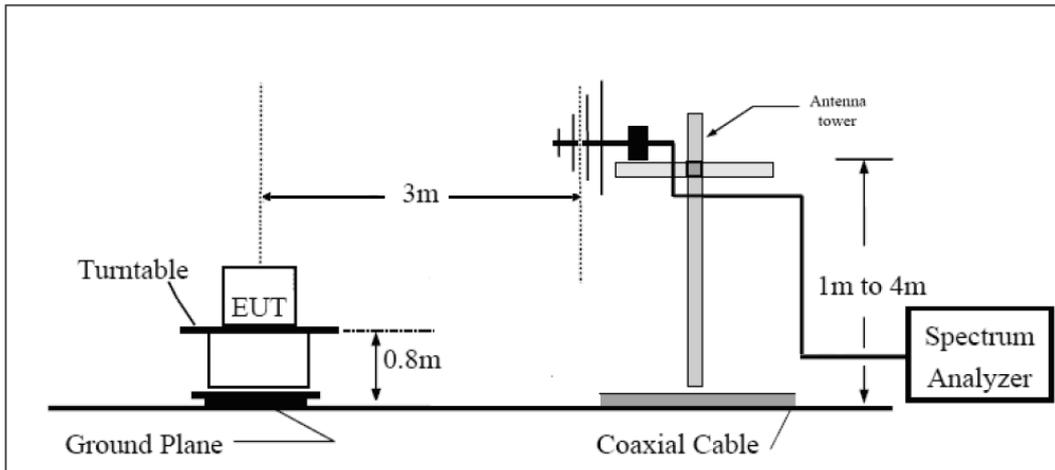

Above 1GHz

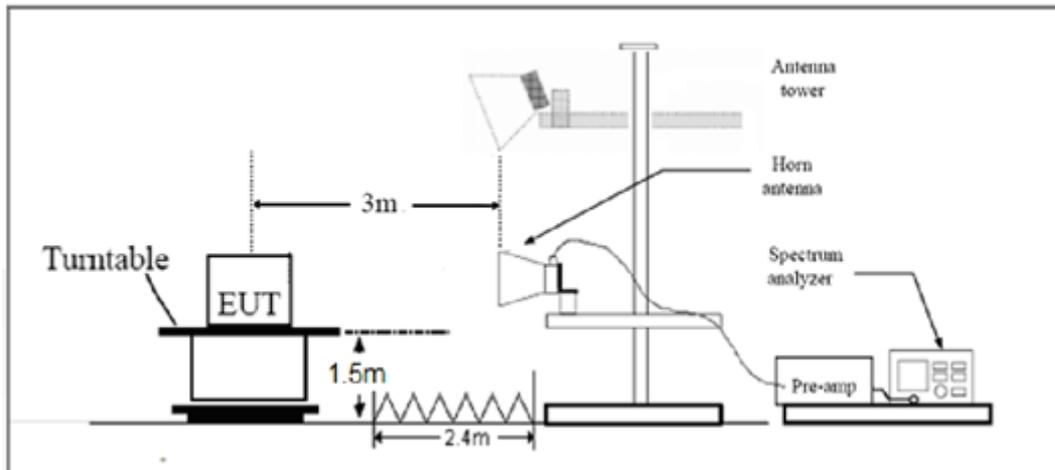

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log₁₀ (P) dB.”

| | |
|-------|---------|
| Limit | -13 dBm |
|-------|---------|

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

GSM 1900 CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3700.4 | -59.35 | 5.1 | 11.05 | vertical | -53.4 | -13.0 | 40.4 | 45 |
| 3 | 5550.6 | -51.43 | 5.42 | 12.65 | vertical | -44.2 | -13.0 | 31.2 | 180 |
| 4 | 7400.8 | -54.95 | 6.7 | 13.85 | vertical | -47.8 | -13.0 | 34.8 | 45 |
| 5 | 9251.0 | -56.94 | 7.01 | 14.75 | vertical | -49.2 | -13.0 | 36.2 | 0 |
| 6 | 11101.2 | -54.57 | 7.48 | 15.95 | vertical | -46.1 | -13.0 | 33.1 | 270 |
| 7 | 12951.4 | -55.34 | 7.51 | 16.55 | vertical | -46.3 | -13.0 | 33.3 | 318 |
| 8 | 14801.6 | -51.81 | 8.24 | 15.35 | vertical | -44.7 | -13.0 | 31.7 | 270 |
| 9 | 16651.8 | -48.24 | 8.41 | 14.95 | vertical | -41.7 | -13.0 | 28.7 | 45 |
| 10 | 18502.0 | -47.51 | 8.54 | 15.45 | vertical | -40.6 | -13.0 | 27.6 | 0 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.

GSM 1900 CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -58.95 | 5.1 | 11.05 | vertical | -53.0 | -13.0 | 40.0 | 90 |
| 3 | 5640.0 | -53.33 | 5.42 | 12.65 | vertical | -46.1 | -13.0 | 33.1 | 90 |
| 4 | 7520.0 | -54.05 | 6.7 | 13.85 | vertical | -46.9 | -13.0 | 33.9 | 45 |
| 5 | 9400.0 | -52.84 | 7.01 | 14.75 | vertical | -45.1 | -13.0 | 32.1 | 180 |
| 6 | 11280.0 | -55.77 | 7.48 | 15.95 | vertical | -47.3 | -13.0 | 34.3 | 270 |
| 7 | 13160.0 | -54.74 | 7.51 | 16.55 | vertical | -45.7 | -13.0 | 32.7 | 45 |
| 8 | 15040.0 | -50.91 | 8.24 | 15.35 | vertical | -43.8 | -13.0 | 30.8 | 225 |
| 9 | 16920.0 | -47.64 | 8.41 | 14.95 | vertical | -41.1 | -13.0 | 28.1 | 90 |
| 10 | 18800.0 | -47.51 | 8.54 | 15.45 | vertical | -40.6 | -13.0 | 27.6 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is vertical position.

GSM 1900 CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -59.75 | 5.1 | 11.05 | vertical | -53.8 | -13.0 | 40.8 | 90 |
| 3 | 5640.0 | -53.73 | 5.42 | 12.65 | vertical | -46.5 | -13.0 | 33.5 | 45 |
| 4 | 7520.0 | -50.95 | 6.7 | 13.85 | vertical | -43.8 | -13.0 | 30.8 | 180 |
| 5 | 9400.0 | -56.54 | 7.01 | 14.75 | vertical | -48.8 | -13.0 | 35.8 | 270 |
| 6 | 11280.0 | -57.17 | 7.48 | 15.95 | vertical | -48.7 | -13.0 | 35.7 | 45 |
| 7 | 13160.0 | -54.94 | 7.51 | 16.55 | vertical | -45.9 | -13.0 | 32.9 | 90 |
| 8 | 15040.0 | -51.41 | 8.24 | 15.35 | vertical | -44.3 | -13.0 | 31.3 | 0 |
| 9 | 16920.0 | -47.34 | 8.41 | 14.95 | vertical | -40.8 | -13.0 | 27.8 | 135 |
| 10 | 18800.0 | -47.01 | 8.54 | 15.45 | vertical | -40.1 | -13.0 | 27.1 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is vertical position.

WCDMA Band II CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3904.8 | -59.65 | 5.1 | 11.05 | vertical | -53.7 | -13.0 | 40.7 | 0 |
| 3 | 5857.2 | -58.83 | 5.42 | 12.65 | vertical | -51.6 | -13.0 | 38.6 | 270 |
| 4 | 7809.6 | -55.35 | 6.7 | 13.85 | vertical | -48.2 | -13.0 | 35.2 | 318 |
| 5 | 9762.0 | -56.34 | 7.01 | 14.75 | vertical | -48.6 | -13.0 | 35.6 | 270 |
| 6 | 11714.4 | -56.07 | 7.48 | 15.95 | vertical | -47.6 | -13.0 | 34.6 | 45 |
| 7 | 13666.8 | -54.94 | 7.51 | 16.55 | vertical | -45.9 | -13.0 | 32.9 | 0 |
| 8 | 15619.2 | -50.51 | 8.24 | 15.35 | vertical | -43.4 | -13.0 | 30.4 | 135 |
| 9 | 17571.6 | -47.64 | 8.41 | 14.95 | vertical | -41.1 | -13.0 | 28.1 | 90 |
| 10 | 19524.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.



WCDMA Band II CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -57.65 | 5.1 | 11.05 | vertical | -51.7 | -13.0 | 38.7 | 180 |
| 3 | 5640.0 | -60.03 | 5.42 | 12.65 | vertical | -52.8 | -13.0 | 39.8 | 270 |
| 4 | 7520.0 | -56.45 | 6.7 | 13.85 | vertical | -49.3 | -13.0 | 36.3 | 45 |
| 5 | 9400.0 | -56.24 | 7.01 | 14.75 | vertical | -48.5 | -13.0 | 35.5 | 225 |
| 6 | 11280.0 | -55.57 | 7.48 | 15.95 | vertical | -47.1 | -13.0 | 34.1 | 90 |
| 7 | 13160.0 | -53.94 | 7.51 | 16.55 | vertical | -44.9 | -13.0 | 31.9 | 45 |
| 8 | 15040.0 | -50.31 | 8.24 | 15.35 | vertical | -43.2 | -13.0 | 30.2 | 180 |
| 9 | 16920.0 | -47.84 | 8.41 | 14.95 | vertical | -41.3 | -13.0 | 28.3 | 45 |
| 10 | 18800.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 0 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

WCDMA Band II CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3815.2 | -55.65 | 5.1 | 11.05 | vertical | -49.7 | -13.0 | 36.7 | 270 |
| 3 | 5722.8 | -57.93 | 5.42 | 12.65 | vertical | -50.7 | -13.0 | 37.7 | 45 |
| 4 | 7630.4 | -56.15 | 6.7 | 13.85 | vertical | -49.0 | -13.0 | 36.0 | 90 |
| 5 | 9538.0 | -56.94 | 7.01 | 14.75 | vertical | -49.2 | -13.0 | 36.2 | 0 |
| 6 | 11445.6 | -57.17 | 7.48 | 15.95 | vertical | -48.7 | -13.0 | 35.7 | 135 |
| 7 | 13353.2 | -55.04 | 7.51 | 16.55 | vertical | -46.0 | -13.0 | 33.0 | 90 |
| 8 | 15260.8 | -50.31 | 8.24 | 15.35 | vertical | -43.2 | -13.0 | 30.2 | 90 |
| 9 | 17168.4 | -47.14 | 8.41 | 14.95 | vertical | -40.6 | -13.0 | 27.6 | 45 |
| 10 | 19076.0 | -47.21 | 8.54 | 15.45 | vertical | -40.3 | -13.0 | 27.3 | 180 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.



LTE Band 2 1.4MHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3701.4 | -60.95 | 5.1 | 11.05 | vertical | -55.0 | -13.0 | 42.0 | 135 |
| 3 | 5552.1 | -57.83 | 5.42 | 12.65 | vertical | -50.6 | -13.0 | 37.6 | 225 |
| 4 | 7402.8 | -47.25 | 6.7 | 13.85 | vertical | -40.1 | -13.0 | 27.1 | 90 |
| 5 | 9253.5 | -54.94 | 7.01 | 14.75 | vertical | -47.2 | -13.0 | 34.2 | 45 |
| 6 | 11104.2 | -56.67 | 7.48 | 15.95 | vertical | -48.2 | -13.0 | 35.2 | 180 |
| 7 | 12954.9 | -54.24 | 7.51 | 16.55 | vertical | -45.2 | -13.0 | 32.2 | 45 |
| 8 | 14805.6 | -51.01 | 8.24 | 15.35 | vertical | -43.9 | -13.0 | 30.9 | 0 |
| 9 | 16656.3 | -48.64 | 8.41 | 14.95 | vertical | -42.1 | -13.0 | 29.1 | 270 |
| 10 | 18507.0 | -47.51 | 8.54 | 15.45 | vertical | -40.6 | -13.0 | 27.6 | 318 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 1.4MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -59.55 | 5.10 | 11.05 | vertical | -53.6 | -13.0 | 40.6 | 90 |
| 3 | 5640.0 | -57.53 | 5.42 | 12.65 | vertical | -50.3 | -13.0 | 37.3 | 0 |
| 4 | 7520.0 | -45.05 | 6.70 | 13.85 | vertical | -37.9 | -13.0 | 24.9 | 135 |
| 5 | 9400.0 | -56.34 | 7.01 | 14.75 | vertical | -48.6 | -13.0 | 35.6 | 90 |
| 6 | 11280.0 | -56.27 | 7.48 | 15.95 | vertical | -47.8 | -13.0 | 34.8 | 45 |
| 7 | 13160.0 | -54.74 | 7.51 | 16.55 | vertical | -45.7 | -13.0 | 32.7 | 180 |
| 8 | 15040.0 | -50.31 | 8.24 | 15.35 | vertical | -43.2 | -13.0 | 30.2 | 270 |
| 9 | 16920.0 | -48.24 | 8.41 | 14.95 | vertical | -41.7 | -13.0 | 28.7 | 45 |
| 10 | 18800.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 1.4MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3818.6 | -56.85 | 5.10 | 11.05 | vertical | -50.9 | -13.0 | 37.9 | 270 |
| 3 | 5727.9 | -53.83 | 5.42 | 12.65 | vertical | -46.6 | -13.0 | 33.6 | 45 |
| 4 | 7637.2 | -42.15 | 6.70 | 13.85 | vertical | -35.0 | -13.0 | 22.0 | 0 |
| 5 | 9546.5 | -55.64 | 7.01 | 14.75 | vertical | -47.9 | -13.0 | 34.9 | 135 |
| 6 | 11455.8 | -56.67 | 7.48 | 15.95 | vertical | -48.2 | -13.0 | 35.2 | 90 |
| 7 | 13365.1 | -54.84 | 7.51 | 16.55 | vertical | -45.8 | -13.0 | 32.8 | 45 |
| 8 | 15274.4 | -50.11 | 8.24 | 15.35 | vertical | -43.0 | -13.0 | 30.0 | 180 |
| 9 | 17183.7 | -47.84 | 8.41 | 14.95 | vertical | -41.3 | -13.0 | 28.3 | 270 |
| 10 | 19093.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.

LTE Band 2 3MHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3703.0 | -60.55 | 5.10 | 11.05 | vertical | -54.6 | -13.0 | 41.6 | 135 |
| 3 | 5554.5 | -47.83 | 5.42 | 12.65 | vertical | -40.6 | -13.0 | 27.6 | 225 |
| 4 | 7406.0 | -46.35 | 6.70 | 13.85 | vertical | -39.2 | -13.0 | 26.2 | 90 |
| 5 | 9257.5 | -55.24 | 7.01 | 14.75 | vertical | -47.5 | -13.0 | 34.5 | 45 |
| 6 | 11109.0 | -56.67 | 7.48 | 15.95 | vertical | -48.2 | -13.0 | 35.2 | 180 |
| 7 | 12960.5 | -54.54 | 7.51 | 16.55 | vertical | -45.5 | -13.0 | 32.5 | 45 |
| 8 | 14812.0 | -51.01 | 8.24 | 15.35 | vertical | -43.9 | -13.0 | 30.9 | 0 |
| 9 | 16663.5 | -47.64 | 8.41 | 14.95 | vertical | -41.1 | -13.0 | 28.1 | 270 |
| 10 | 18515.0 | -47.11 | 8.54 | 15.45 | vertical | -40.2 | -13.0 | 27.2 | 318 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.



LTE Band 2 3MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -59.15 | 5.10 | 11.05 | vertical | -53.2 | -13.0 | 40.2 | 90 |
| 3 | 5640.0 | -57.73 | 5.42 | 12.65 | vertical | -50.5 | -13.0 | 37.5 | 0 |
| 4 | 7520.0 | -47.55 | 6.70 | 13.85 | vertical | -40.4 | -13.0 | 27.4 | 135 |
| 5 | 9400.0 | -53.44 | 7.01 | 14.75 | vertical | -45.7 | -13.0 | 32.7 | 90 |
| 6 | 11280.0 | -56.57 | 7.48 | 15.95 | vertical | -48.1 | -13.0 | 35.1 | 45 |
| 7 | 13160.0 | -54.34 | 7.51 | 16.55 | vertical | -45.3 | -13.0 | 32.3 | 180 |
| 8 | 15040.0 | -51.31 | 8.24 | 15.35 | vertical | -44.2 | -13.0 | 31.2 | 270 |
| 9 | 16920.0 | -48.34 | 8.41 | 14.95 | vertical | -41.8 | -13.0 | 28.8 | 45 |
| 10 | 18800.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is vertical position.

LTE Band 2 3MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3817.0 | -56.95 | 5.10 | 11.05 | vertical | -51.0 | -13.0 | 38.0 | 270 |
| 3 | 5725.5 | -53.53 | 5.42 | 12.65 | vertical | -46.3 | -13.0 | 33.3 | 45 |
| 4 | 7634.0 | -43.25 | 6.70 | 13.85 | vertical | -36.1 | -13.0 | 23.1 | 0 |
| 5 | 9542.5 | -56.84 | 7.01 | 14.75 | vertical | -49.1 | -13.0 | 36.1 | 135 |
| 6 | 11451.0 | -57.27 | 7.48 | 15.95 | vertical | -48.8 | -13.0 | 35.8 | 90 |
| 7 | 13359.5 | -54.64 | 7.51 | 16.55 | vertical | -45.6 | -13.0 | 32.6 | 45 |
| 8 | 15268.0 | -50.91 | 8.24 | 15.35 | vertical | -43.8 | -13.0 | 30.8 | 180 |
| 9 | 17176.5 | -48.44 | 8.41 | 14.95 | vertical | -41.9 | -13.0 | 28.9 | 270 |
| 10 | 19085.0 | -46.51 | 8.54 | 15.45 | vertical | -39.6 | -13.0 | 26.6 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is vertical position.



LTE Band 2 5MHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3705.0 | -60.15 | 5.10 | 11.05 | vertical | -54.2 | -13.0 | 41.2 | 135 |
| 3 | 5557.5 | -57.53 | 5.42 | 12.65 | vertical | -50.3 | -13.0 | 37.3 | 225 |
| 4 | 7410.0 | -46.45 | 6.70 | 13.85 | vertical | -39.3 | -13.0 | 26.3 | 90 |
| 5 | 9262.5 | -54.14 | 7.01 | 14.75 | vertical | -46.4 | -13.0 | 33.4 | 45 |
| 6 | 11115.0 | -55.97 | 7.48 | 15.95 | vertical | -47.5 | -13.0 | 34.5 | 180 |
| 7 | 12967.5 | -54.94 | 7.51 | 16.55 | vertical | -45.9 | -13.0 | 32.9 | 45 |
| 8 | 14820.0 | -50.91 | 8.24 | 15.35 | vertical | -43.8 | -13.0 | 30.8 | 0 |
| 9 | 16672.5 | -48.34 | 8.41 | 14.95 | vertical | -41.8 | -13.0 | 28.8 | 270 |
| 10 | 18525.0 | -47.11 | 8.54 | 15.45 | vertical | -40.2 | -13.0 | 27.2 | 318 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 5MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -58.45 | 5.10 | 11.05 | vertical | -52.5 | -13.0 | 39.5 | 90 |
| 3 | 5640.0 | -56.83 | 5.42 | 12.65 | vertical | -49.6 | -13.0 | 36.6 | 0 |
| 4 | 7520.0 | -46.25 | 6.70 | 13.85 | vertical | -39.1 | -13.0 | 26.1 | 135 |
| 5 | 9400.0 | -56.14 | 7.01 | 14.75 | vertical | -48.4 | -13.0 | 35.4 | 90 |
| 6 | 11280.0 | -57.27 | 7.48 | 15.95 | vertical | -48.8 | -13.0 | 35.8 | 45 |
| 7 | 13160.0 | -54.24 | 7.51 | 16.55 | vertical | -45.2 | -13.0 | 32.2 | 180 |
| 8 | 15040.0 | -51.41 | 8.24 | 15.35 | vertical | -44.3 | -13.0 | 31.3 | 270 |
| 9 | 16920.0 | -48.24 | 8.41 | 14.95 | vertical | -41.7 | -13.0 | 28.7 | 135 |
| 10 | 18800.0 | -47.71 | 8.54 | 15.45 | vertical | -40.8 | -13.0 | 27.8 | 225 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.



LTE Band 2 5MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -56.55 | 5.10 | 11.05 | vertical | -50.6 | -13.0 | 37.6 | 0 |
| 3 | 5640.0 | -52.53 | 5.42 | 12.65 | vertical | -45.3 | -13.0 | 32.3 | 135 |
| 4 | 7520.0 | -42.25 | 6.70 | 13.85 | vertical | -35.1 | -13.0 | 22.1 | 90 |
| 5 | 9400.0 | -55.94 | 7.01 | 14.75 | vertical | -48.2 | -13.0 | 35.2 | 45 |
| 6 | 11280.0 | -57.17 | 7.48 | 15.95 | vertical | -48.7 | -13.0 | 35.7 | 180 |
| 7 | 13160.0 | -55.24 | 7.51 | 16.55 | vertical | -46.2 | -13.0 | 33.2 | 270 |
| 8 | 15040.0 | -51.61 | 8.24 | 15.35 | vertical | -44.5 | -13.0 | 31.5 | 45 |
| 9 | 16920.0 | -48.54 | 8.41 | 14.95 | vertical | -42.0 | -13.0 | 29.0 | 90 |
| 10 | 18800.0 | -47.71 | 8.54 | 15.45 | vertical | -40.8 | -13.0 | 27.8 | 0 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 10MHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3710.0 | -60.15 | 5.10 | 11.05 | vertical | -54.2 | -13.0 | 41.2 | 45 |
| 3 | 5565.0 | -57.13 | 5.42 | 12.65 | vertical | -49.9 | -13.0 | 36.9 | 0 |
| 4 | 7420.0 | -47.25 | 6.70 | 13.85 | vertical | -40.1 | -13.0 | 27.1 | 270 |
| 5 | 9275.0 | -54.34 | 7.01 | 14.75 | vertical | -46.6 | -13.0 | 33.6 | 318 |
| 6 | 11130.0 | -56.07 | 7.48 | 15.95 | vertical | -47.6 | -13.0 | 34.6 | 270 |
| 7 | 12985.0 | -55.64 | 7.51 | 16.55 | vertical | -46.6 | -13.0 | 33.6 | 45 |
| 8 | 14840.0 | -50.71 | 8.24 | 15.35 | vertical | -43.6 | -13.0 | 30.6 | 0 |
| 9 | 16695.0 | -47.84 | 8.41 | 14.95 | vertical | -41.3 | -13.0 | 28.3 | 135 |
| 10 | 18550.0 | -47.51 | 8.54 | 15.45 | vertical | -40.6 | -13.0 | 27.6 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 10MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -58.75 | 5.10 | 11.05 | vertical | -52.8 | -13.0 | 39.8 | 180 |
| 3 | 5640.0 | -56.13 | 5.42 | 12.65 | vertical | -48.9 | -13.0 | 35.9 | 270 |
| 4 | 7520.0 | -40.75 | 6.70 | 13.85 | vertical | -33.6 | -13.0 | 20.6 | 45 |
| 5 | 9400.0 | -55.94 | 7.01 | 14.75 | vertical | -48.2 | -13.0 | 35.2 | 90 |
| 6 | 11280.0 | -56.57 | 7.48 | 15.95 | vertical | -48.1 | -13.0 | 35.1 | 135 |
| 7 | 13160.0 | -54.34 | 7.51 | 16.55 | vertical | -45.3 | -13.0 | 32.3 | 225 |
| 8 | 15040.0 | -49.11 | 8.24 | 15.35 | vertical | -42.0 | -13.0 | 29.0 | 90 |
| 9 | 16920.0 | -49.04 | 8.41 | 14.95 | vertical | -42.5 | -13.0 | 29.5 | 45 |
| 10 | 18800.0 | -48.51 | 8.54 | 15.45 | vertical | -41.6 | -13.0 | 28.6 | 180 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.

LTE Band 2 10MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3810.0 | -54.35 | 5.10 | 11.05 | vertical | -48.4 | -13.0 | 35.4 | 45 |
| 3 | 5715.0 | -53.93 | 5.42 | 12.65 | vertical | -46.7 | -13.0 | 33.7 | 180 |
| 4 | 7620.0 | -44.35 | 6.70 | 13.85 | vertical | -37.2 | -13.0 | 24.2 | 270 |
| 5 | 9525.0 | -55.24 | 7.01 | 14.75 | vertical | -47.5 | -13.0 | 34.5 | 45 |
| 6 | 11430.0 | -56.37 | 7.48 | 15.95 | vertical | -47.9 | -13.0 | 34.9 | 90 |
| 7 | 13335.0 | -54.54 | 7.51 | 16.55 | vertical | -45.5 | -13.0 | 32.5 | 0 |
| 8 | 15240.0 | -49.51 | 8.24 | 15.35 | vertical | -42.4 | -13.0 | 29.4 | 135 |
| 9 | 17145.0 | -47.74 | 8.41 | 14.95 | vertical | -41.2 | -13.0 | 28.2 | 90 |
| 10 | 19050.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.



LTE Band 2 15MHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3715.0 | -60.65 | 5.10 | 11.05 | vertical | -54.7 | -13.0 | 41.7 | 45 |
| 3 | 5572.5 | -55.93 | 5.42 | 12.65 | vertical | -48.7 | -13.0 | 35.7 | 0 |
| 4 | 7430.0 | -46.65 | 6.70 | 13.85 | vertical | -39.5 | -13.0 | 26.5 | 270 |
| 5 | 9287.5 | -56.04 | 7.01 | 14.75 | vertical | -48.3 | -13.0 | 35.3 | 318 |
| 6 | 11145.0 | -55.87 | 7.48 | 15.95 | vertical | -47.4 | -13.0 | 34.4 | 270 |
| 7 | 13002.5 | -55.34 | 7.51 | 16.55 | vertical | -46.3 | -13.0 | 33.3 | 45 |
| 8 | 14860.0 | -52.01 | 8.24 | 15.35 | vertical | -44.9 | -13.0 | 31.9 | 0 |
| 9 | 16717.5 | -48.94 | 8.41 | 14.95 | vertical | -42.4 | -13.0 | 29.4 | 135 |
| 10 | 18575.0 | -48.51 | 8.54 | 15.45 | vertical | -41.6 | -13.0 | 28.6 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 15MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -59.45 | 5.10 | 11.05 | vertical | -53.5 | -13.0 | 40.5 | 180 |
| 3 | 5640.0 | -56.93 | 5.42 | 12.65 | vertical | -49.7 | -13.0 | 36.7 | 270 |
| 4 | 7520.0 | -45.65 | 6.70 | 13.85 | vertical | -38.5 | -13.0 | 25.5 | 45 |
| 5 | 9400.0 | -55.84 | 7.01 | 14.75 | vertical | -48.1 | -13.0 | 35.1 | 90 |
| 6 | 11280.0 | -56.47 | 7.48 | 15.95 | vertical | -48.0 | -13.0 | 35.0 | 135 |
| 7 | 13160.0 | -55.54 | 7.51 | 16.55 | vertical | -46.5 | -13.0 | 33.5 | 225 |
| 8 | 15040.0 | -50.41 | 8.24 | 15.35 | vertical | -43.3 | -13.0 | 30.3 | 90 |
| 9 | 16920.0 | -47.34 | 8.41 | 14.95 | vertical | -40.8 | -13.0 | 27.8 | 45 |
| 10 | 18800.0 | -46.41 | 8.54 | 15.45 | vertical | -39.5 | -13.0 | 26.5 | 180 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.



LTE Band 2 15MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3805.0 | -53.75 | 5.10 | 11.05 | vertical | -47.8 | -13.0 | 34.8 | 45 |
| 3 | 5707.5 | -55.43 | 5.42 | 12.65 | vertical | -48.2 | -13.0 | 35.2 | 180 |
| 4 | 7610.0 | -47.75 | 6.70 | 13.85 | vertical | -40.6 | -13.0 | 27.6 | 270 |
| 5 | 9512.5 | -55.44 | 7.01 | 14.75 | vertical | -47.7 | -13.0 | 34.7 | 45 |
| 6 | 11415.0 | -57.37 | 7.48 | 15.95 | vertical | -48.9 | -13.0 | 35.9 | 90 |
| 7 | 13317.5 | -55.14 | 7.51 | 16.55 | vertical | -46.1 | -13.0 | 33.1 | 0 |
| 8 | 15220.0 | -51.31 | 8.24 | 15.35 | vertical | -44.2 | -13.0 | 31.2 | 135 |
| 9 | 17122.5 | -48.34 | 8.41 | 14.95 | vertical | -41.8 | -13.0 | 28.8 | 90 |
| 10 | 19025.0 | -47.71 | 8.54 | 15.45 | vertical | -40.8 | -13.0 | 27.8 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 20MHz CH-Low

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3720.0 | -59.85 | 5.10 | 11.05 | vertical | -53.9 | -13.0 | 40.9 | 45 |
| 3 | 5580.0 | -56.13 | 5.42 | 12.65 | vertical | -48.9 | -13.0 | 35.9 | 0 |
| 4 | 7440.0 | -46.05 | 6.70 | 13.85 | vertical | -38.9 | -13.0 | 25.9 | 270 |
| 5 | 9300.0 | -55.64 | 7.01 | 14.75 | vertical | -47.9 | -13.0 | 34.9 | 318 |
| 6 | 11160.0 | -57.27 | 7.48 | 15.95 | vertical | -48.8 | -13.0 | 35.8 | 270 |
| 7 | 13020.0 | -55.94 | 7.51 | 16.55 | vertical | -46.9 | -13.0 | 33.9 | 45 |
| 8 | 14880.0 | -52.11 | 8.24 | 15.35 | vertical | -45.0 | -13.0 | 32.0 | 0 |
| 9 | 16740.0 | -48.04 | 8.41 | 14.95 | vertical | -41.5 | -13.0 | 28.5 | 135 |
| 10 | 18600.0 | -47.61 | 8.54 | 15.45 | vertical | -40.7 | -13.0 | 27.7 | 90 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is vertical position.

LTE Band 2 20MHz CH-Middle

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3760.0 | -58.95 | 5.10 | 11.05 | vertical | -53.0 | -13.0 | 40.0 | 180 |
| 3 | 5640.0 | -54.53 | 5.42 | 12.65 | vertical | -47.3 | -13.0 | 34.3 | 270 |
| 4 | 7520.0 | -46.85 | 6.70 | 13.85 | vertical | -39.7 | -13.0 | 26.7 | 45 |
| 5 | 9400.0 | -55.54 | 7.01 | 14.75 | vertical | -47.8 | -13.0 | 34.8 | 90 |
| 6 | 11280.0 | -56.17 | 7.48 | 15.95 | vertical | -47.7 | -13.0 | 34.7 | 135 |
| 7 | 13160.0 | -55.54 | 7.51 | 16.55 | vertical | -46.5 | -13.0 | 33.5 | 225 |
| 8 | 15040.0 | -51.61 | 8.24 | 15.35 | vertical | -44.5 | -13.0 | 31.5 | 90 |
| 9 | 16920.0 | -48.24 | 8.41 | 14.95 | vertical | -41.7 | -13.0 | 28.7 | 45 |
| 10 | 18800.0 | -47.41 | 8.54 | 15.45 | vertical | -40.5 | -13.0 | 27.5 | 180 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.

LTE Band 2 20MHz CH-High

| Harmonic | Frequency (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Antenna Polarization | EIRP Level (dBm) | Limit (dBm) | Margin (dB) | Azimuth (deg) |
|----------|-----------------|----------|-----------------|------------|----------------------|------------------|-------------|-------------|---------------|
| 2 | 3800.0 | -54.15 | 5.10 | 11.05 | vertical | -48.2 | -13.0 | 35.2 | 45 |
| 3 | 5700.0 | -54.63 | 5.42 | 12.65 | vertical | -47.4 | -13.0 | 34.4 | 180 |
| 4 | 7600.0 | -48.35 | 6.70 | 13.85 | vertical | -41.2 | -13.0 | 28.2 | 270 |
| 5 | 9500.0 | -55.54 | 7.01 | 14.75 | vertical | -47.8 | -13.0 | 34.8 | 45 |
| 6 | 11400.0 | -55.97 | 7.48 | 15.95 | vertical | -47.5 | -13.0 | 34.5 | 90 |
| 7 | 13300.0 | -55.54 | 7.51 | 16.55 | vertical | -46.5 | -13.0 | 33.5 | 0 |
| 8 | 15200.0 | -50.61 | 8.24 | 15.35 | vertical | -43.5 | -13.0 | 30.5 | 135 |
| 9 | 17100.0 | -48.14 | 8.41 | 14.95 | vertical | -41.6 | -13.0 | 28.6 | 90 |
| 10 | 19000.0 | -47.21 | 8.54 | 15.45 | vertical | -40.3 | -13.0 | 27.3 | 45 |

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is vertical position.

6. Main Test Instruments

| Name | Manufacturer | Type | Serial Number | Calibration Date | Expiration Time |
|--------------------------------------|--------------|--------------|---------------|------------------|-----------------|
| Base Station Simulator | R&S | CMU200 | 118133 | 2017-05-14 | 2018-05-13 |
| Power Splitter | Hua Xiang | SHX-GF2-2-13 | 10120101 | 2017-05-14 | 2018-05-13 |
| Spectrum Analyzer | Agilent | N9010A | MY47191109 | 2017-05-20 | 2018-05-19 |
| Universal Radio Communication Tester | Agilent | E5515C | MY48367192 | 2017-05-20 | 2018-05-19 |
| Signal Analyzer | R&S | FSV30 | 100815 | 2016-12-16 | 2017-12-15 |
| EMI Test Receiver | R&S | ESCI | 100948 | 2017-05-20 | 2018-05-19 |
| Signal generator | R&S | SMB 100A | 102594 | 2017-05-14 | 2018-05-13 |
| Signal generator | R&S | SMR27 | 100365 | 2017-05-14 | 2018-05-13 |
| Trilog Antenna | SCHWARZBECK | VUBL 9163 | 9163-201 | 2014-12-06 | 2017-12-05 |
| Horn Antenna | R&S | HF907 | 100126 | 2014-12-06 | 2017-12-05 |
| Climatic Chamber | Re Ce | PT-30B | 20101891 | 2015-07-18 | 2018-07-17 |
| Horn Antenna | ETS-Lindgren | 3160-09 | 00102644 | 2015-01-30 | 2018-01-29 |
| RF Cable | Agilent | SMA 15cm | 0001 | 2017-08-04 | 2018-02-03 |
| Preampflier | R&S | SCU18 | 102327 | 2017-06-18 | 2018-06-17 |

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side

a: EUT





b: Adapter



c: USB Cable

Picture 1 EUT and Accessory

A.2 Test Setup

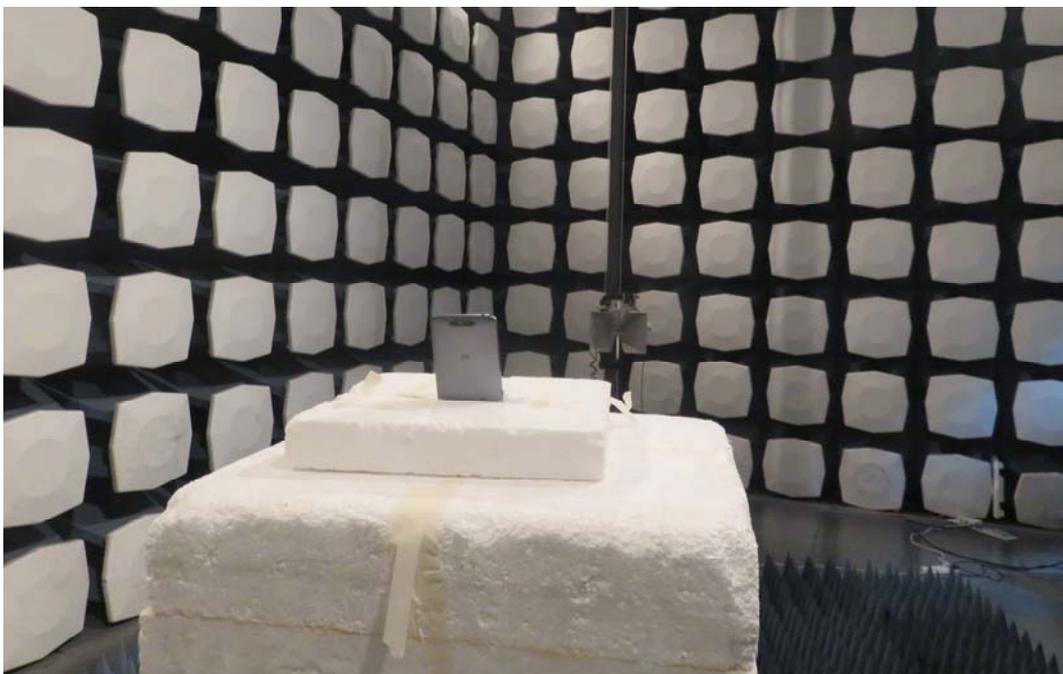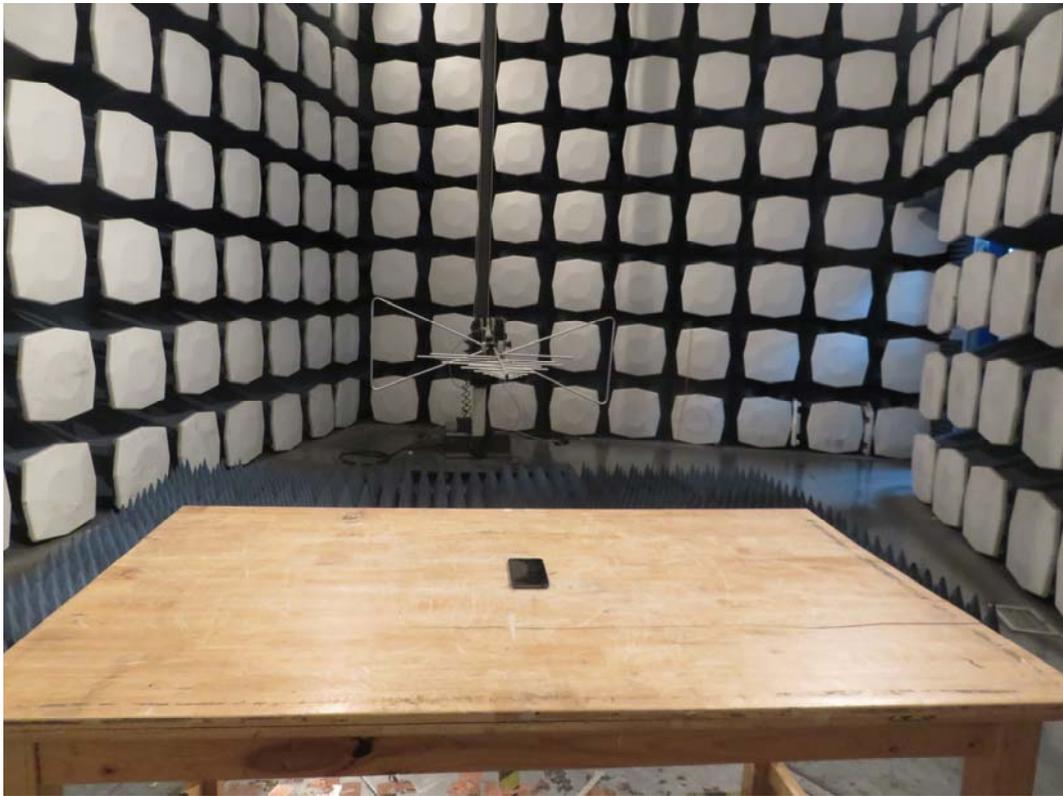

Picture 2: Radiated Spurious Emissions Test setup