


# FCC/IC Test Report


**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE Grand S  
**FCC ID** : SRQ-ZTEGRANDS  
**IC** : 5200E-ZTEGRANDS  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
ICES-003 Issue 5  
**CLASSIFICATION** : Certification

The product was received on Aug. 21, 2013 and completely tested on Sep. 02, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Louis Wu / Manager



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



## TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT ..... 4

1. GENERAL DESCRIPTION ..... 5

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Feature of Equipment Under Test..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT..... 6

    1.6. Test Site ..... 7

    1.7. Applied Standards ..... 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 10

    2.3. Support Unit used in test configuration and system..... 11

    2.4. EUT Operation Test Setup ..... 12

3. TEST RESULT ..... 13

    3.1. Test of AC Conducted Emission Measurement ..... 13

    3.2. Test of Radiated Emission Measurement ..... 19

4. LIST OF MEASURING EQUIPMENT ..... 24

5. UNCERTAINTY OF EVALUATION ..... 25

APPENDIX A. SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	ICES003 Section 6.1	AC Conducted Emission	< 15.107 limits < ICES003 6.1 limits	PASS	Under limit 9.39 dB at 0.570 MHz
3.2	15.109	ICES003 Section 6.2	Radiated Emission	< 15.109 limits < ICES003 6.2 limits	PASS	Under limit 3.82 dB at 111.480 MHz

## 1. General Description

### 1.1. Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### 1.2. Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### 1.3. Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE Grand S
FCC ID	SRQ-ZTEGRANDS
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ HSPA+/DC-HSDPA/ WLAN 2.4GHz 802.11bgn HT20/ Bluetooth v3.0+EDR/ Bluetooth v4.0
HW Version	cz1A
SW Version	ZTE Grand SV1.0.0B02
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4. Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz
<b>Antenna Type</b>	WWAN : IFA Antenna WLAN : IFA Antenna Bluetooth : IFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA/DC-HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM(Uplink) DC-HSDPA: 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth v4.0 - LE : GFSK Bluetooth EDR : GFSK, $\pi/4$ -DQPSK, 8-DPSK GPS : BPSK

### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO01-KS	03CH01-KS	149928/4086E-1

### 1.7. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2003
- ♦ IC ICES-003 Issue 5
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The test results for FCC compliance, indicating that these results are deemed satisfactory evidence of compliance with **Industry Canada Interference-Causing Equipment Standard ICES-003**.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radio communication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	Note 1
2.	Data application transferred mode (EUT with notebook)	☒	☒	☒

**Abbreviations:**

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

**Note 1:** Testing for this mode is not required or not the worst case.


**Remark:** For signal above 1GHz, the worst case was test item 2.

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera<Fig.1> Mode 2: WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx <Fig.2>
Radiated Emissions < 1GHz	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera<Fig.1> Mode 2: WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx<Fig.2>
Radiated Emissions ≥ 1GHz	2	Mode 1: WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx<Fig.2>


**Remark:**

1. The worst case of AC Conducted Emission is mode 1; the test data of this mode is reported.
2. The USB Link mode of AC Conducted Emission is mode 2; the test data of this mode is also reported.
3. The worst case of Radiated Emissions < 1GHz is mode 2; only the test data of this mode is reported.
4. Link with notebook means data application transferred mode between EUT and notebook.

## 2.2. Connection Diagram of Test System

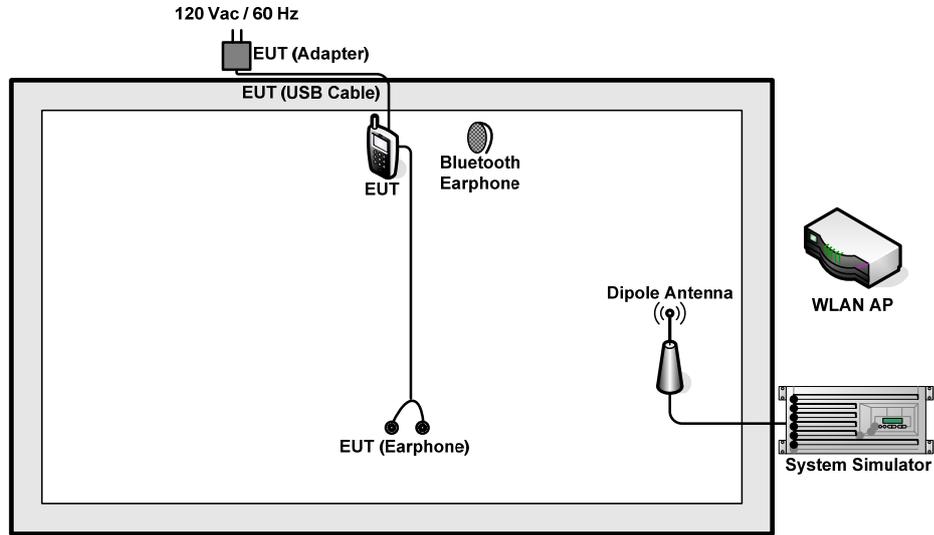

<Fig.1>

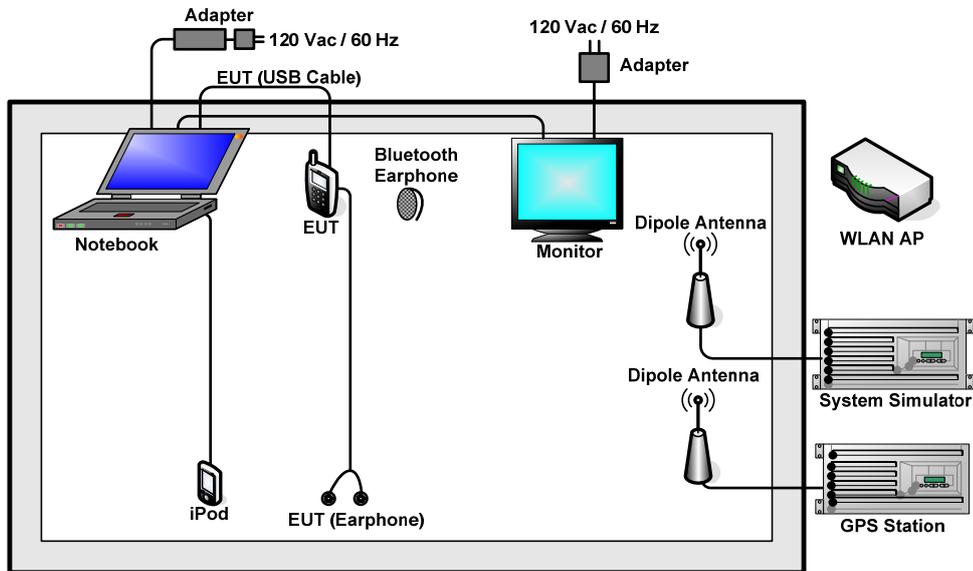

<Fig.2>

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH301	N/A	N/A	N/A
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
6.	Monitor	DELL	E1910Hc	FCC DoC	Shielded, 1.2 m	Unshielded, 1.8 m
7.	Monitor	Lenovo	L197WA	FCC DoC	N/A	Unshielded, 1.8 m
8.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 0.8 m DC O/P: Shielded, 1.8 m
9.	iPod	Apple	A1199	FCC DoC	Shielded, 1.2 m	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Winthrax" under WIN7 installed in notebook for files transfer with EUT via USB cable
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.
3. Turn on camera to capture images.
4. Execute "H Pattern" to show H Pattern via VGA Cable on the Monitor.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.1.4 Test Setup

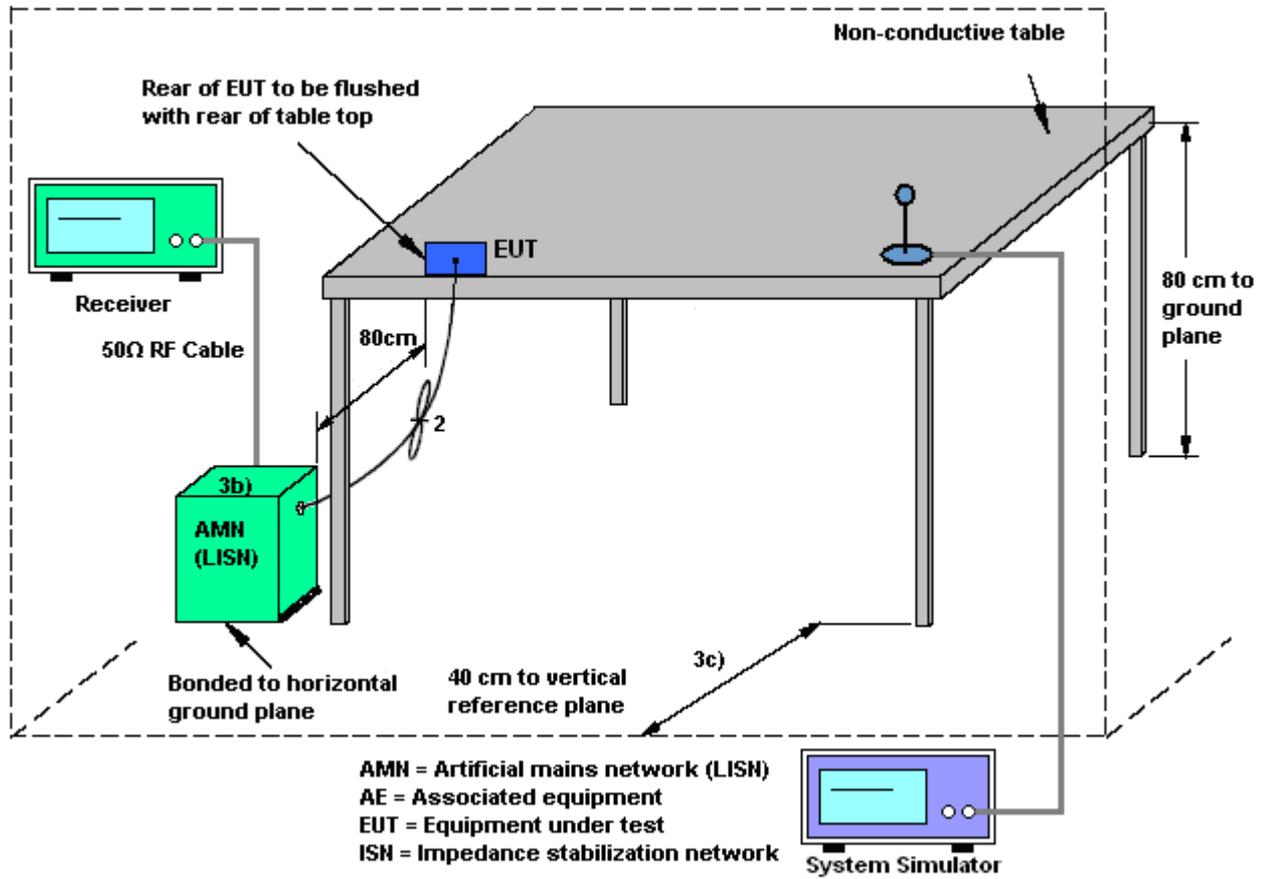

3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Harvey Tang	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera		

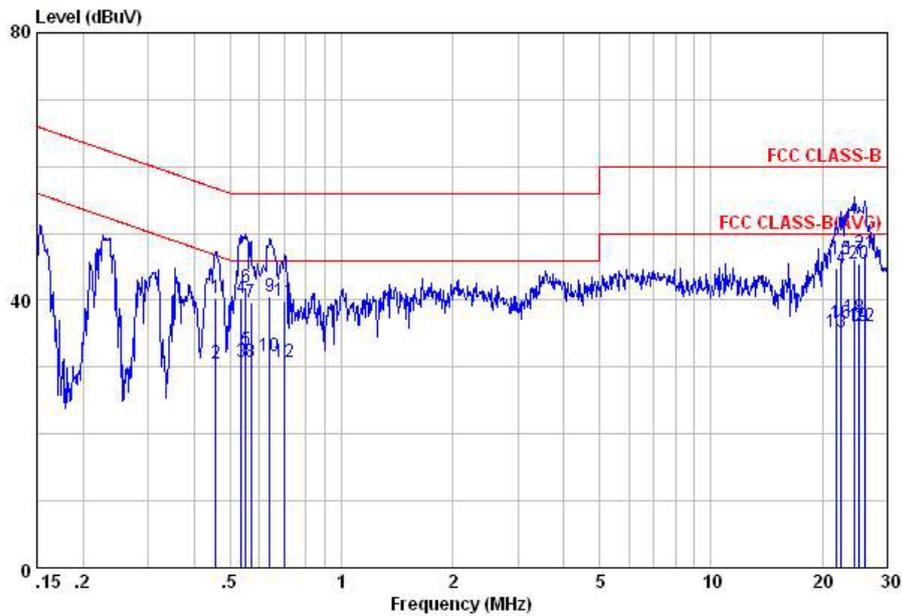


Site : C001-KS  
 Condition: FCC CLASS-B LISN-L20130306 LINE  
 Project : (FC) 382102  
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.46	40.31	-16.45	56.76	29.80	0.24	10.27	QP
2	0.46	30.61	-16.15	46.76	20.10	0.24	10.27	Average
3	0.53	30.76	-15.24	46.00	20.30	0.20	10.26	Average
4	0.53	40.26	-15.74	56.00	29.80	0.20	10.26	QP
5	0.55	32.55	-13.45	46.00	22.10	0.20	10.25	Average
6	0.55	41.95	-14.05	56.00	31.50	0.20	10.25	QP
7	0.57	39.75	-16.25	56.00	29.30	0.20	10.25	QP
8	0.57	30.85	-15.15	46.00	20.40	0.20	10.25	Average
9	0.64	40.53	-15.47	56.00	30.10	0.20	10.23	QP
10	0.64	31.73	-14.27	46.00	21.30	0.20	10.23	Average
11	0.70	39.81	-16.19	56.00	29.40	0.20	10.21	QP
12	0.70	30.71	-15.29	46.00	20.30	0.20	10.21	Average
13	21.83	35.26	-14.74	50.00	24.80	0.10	10.36	Average
14	21.83	44.86	-15.14	60.00	34.40	0.10	10.36	QP
15	22.42	46.20	-13.80	60.00	35.70	0.10	10.40	QP
16	22.42	36.60	-13.40	50.00	26.10	0.10	10.40	Average
17	24.53	46.12	-13.88	60.00	35.50	0.10	10.52	QP
18	24.53	37.52	-12.48	50.00	26.90	0.10	10.52	Average
19	25.19	36.05	-13.95	50.00	25.40	0.10	10.55	Average
20	25.19	45.45	-14.55	60.00	34.80	0.10	10.55	QP
21	26.14	47.05	-12.95	60.00	36.40	0.10	10.55	QP
22	26.14	36.05	-13.95	50.00	25.40	0.10	10.55	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Harvey Tang	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Earphone + Camera		

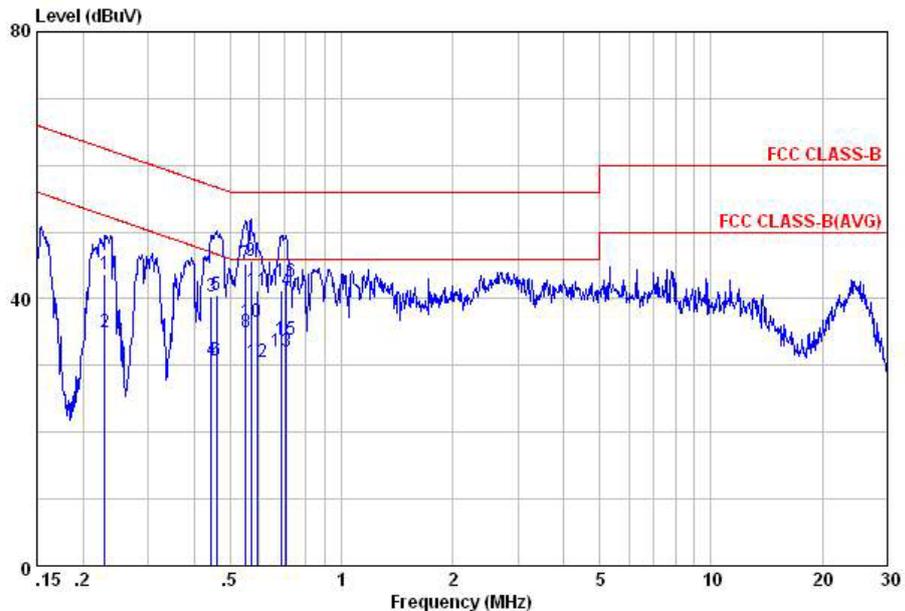


Site : C001-RS  
 Condition: FCC CLASS-B LISN-N20130306 NEUTRAL  
 Project : (FC) 382102  
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.23	43.58	-18.90	62.48	32.10	0.94	10.54	QP
2	0.23	34.88	-17.60	52.48	23.40	0.94	10.54	Average
3	0.44	40.32	-16.66	56.98	29.70	0.35	10.27	QP
4	0.44	30.82	-16.16	46.98	20.20	0.35	10.27	Average
5	0.46	40.50	-16.21	56.71	29.90	0.33	10.27	QP
6	0.46	30.70	-16.01	46.71	20.10	0.33	10.27	Average
7	0.55	45.33	-10.67	56.00	34.80	0.28	10.25	QP
8	0.55	35.03	-10.97	46.00	24.50	0.28	10.25	Average
9	0.57	45.61	-10.39	56.00	35.09	0.27	10.25	QP
10	0.57	36.61	-9.39	46.00	26.09	0.27	10.25	Average
11	0.59	41.29	-14.71	56.00	30.80	0.25	10.24	QP
12	0.59	30.59	-15.41	46.00	20.10	0.25	10.24	Average
13	0.69	32.12	-13.88	46.00	21.71	0.20	10.21	Average
14	0.69	41.32	-14.68	56.00	30.91	0.20	10.21	QP
15	0.71	33.81	-12.19	46.00	23.40	0.20	10.21	Average
16	0.71	42.51	-13.49	56.00	32.10	0.20	10.21	QP



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Harvey Tang	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

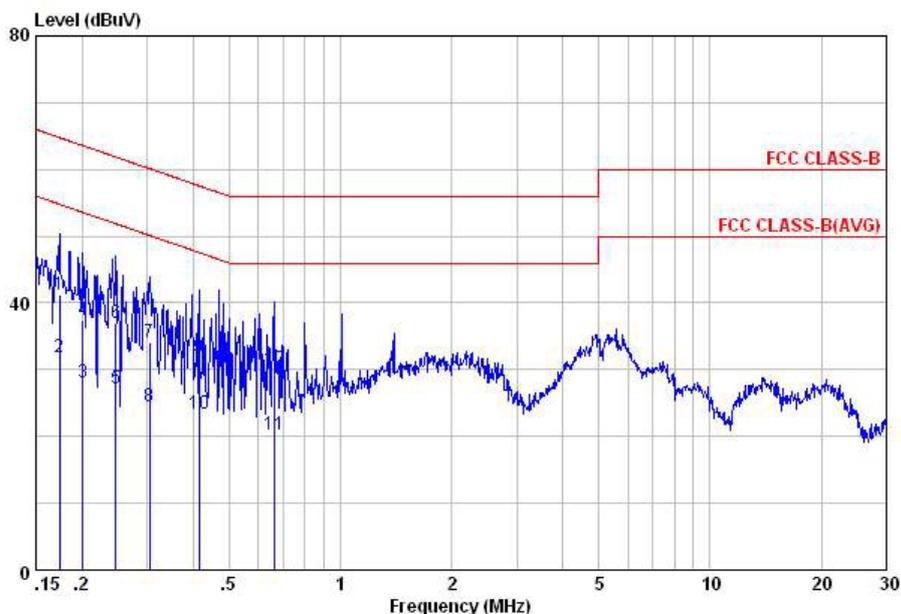


Site : C001-KS  
 Condition: FCC CLASS-B LISN-L20130306 LINE  
 Project : (FC) 382102  
 mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	41.28	-23.49	64.77	29.20	1.45	10.63	QP
2	0.17	31.88	-22.89	54.77	19.80	1.45	10.63	Average
3	0.20	28.08	-25.50	53.58	16.50	1.00	10.58	Average
4	0.20	37.38	-26.20	63.58	25.80	1.00	10.58	QP
5	0.25	27.20	-24.66	51.86	15.80	0.89	10.51	Average
6	0.25	37.00	-24.86	61.86	25.60	0.89	10.51	QP
7	0.31	34.14	-25.96	60.10	23.10	0.66	10.38	QP
8	0.31	24.54	-25.56	50.10	13.50	0.66	10.38	Average
9	0.41	31.87	-25.68	57.55	21.30	0.29	10.28	QP
10	0.41	23.37	-24.18	47.55	12.80	0.29	10.28	Average
11	0.66	20.22	-25.78	46.00	9.80	0.20	10.22	Average
12	0.66	30.12	-25.88	56.00	19.70	0.20	10.22	QP



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Harvey Tang	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		

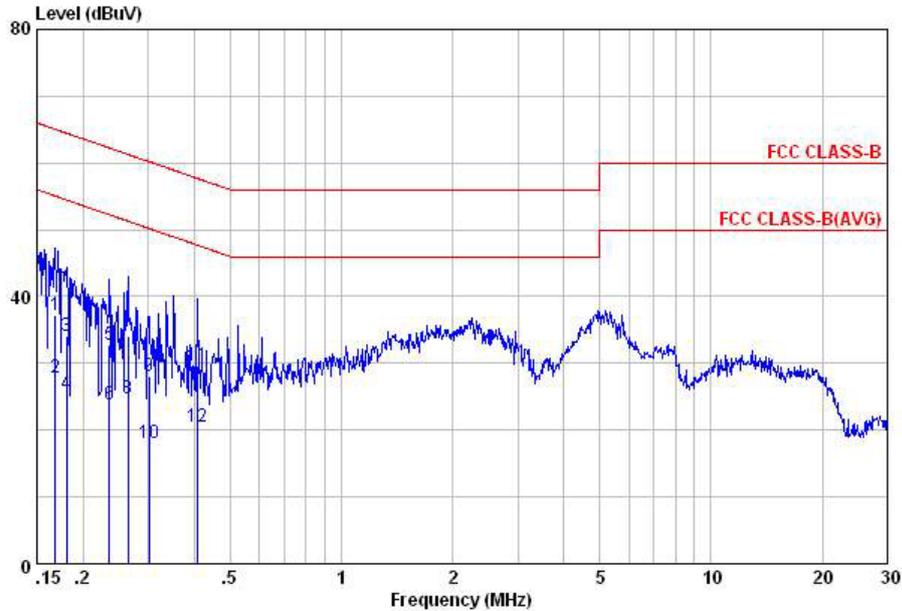

Site : C001-KS  
 Condition: FCC CLASS-B LISN-M20130306 NEUTRAL  
 Project : (FC) 382102  
 mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	37.22	-27.81	65.03	25.00	1.57	10.65	QP
2	0.17	27.82	-27.21	55.03	15.60	1.57	10.65	Average
3	0.18	34.19	-30.27	64.46	22.30	1.27	10.62	QP
4	0.18	25.39	-29.07	54.46	13.50	1.27	10.62	Average
5	0.24	32.66	-29.60	62.26	21.20	0.93	10.53	QP
6	0.24	23.76	-28.50	52.26	12.30	0.93	10.53	Average
7	0.26	34.03	-27.26	61.29	22.71	0.85	10.47	QP
8	0.26	24.73	-26.56	51.29	13.41	0.85	10.47	Average
9	0.30	28.01	-32.18	60.19	16.90	0.72	10.39	QP
10	0.30	18.01	-32.18	50.19	6.90	0.72	10.39	Average
11	0.41	29.57	-28.16	57.73	18.90	0.39	10.28	QP
12	0.41	20.57	-27.16	47.73	9.90	0.39	10.28	Average

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments

See list of measuring instruments of this test report.




### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

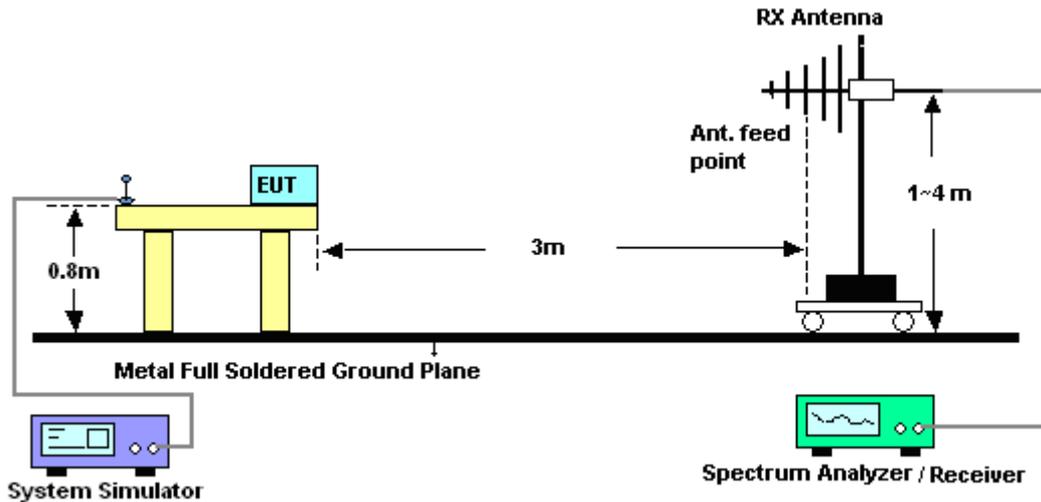


For radiated emissions above 1GHz

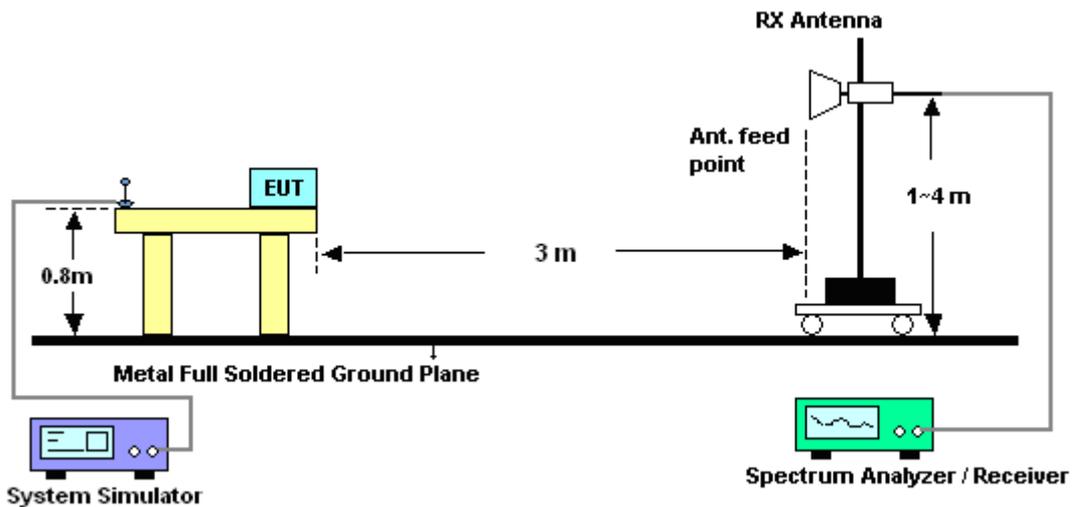



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 2	Temperature :	23~24°C
Test Engineer :	Stone Gu	Relative Humidity :	43~44%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#6 is system simulator signal which can be ignored.		

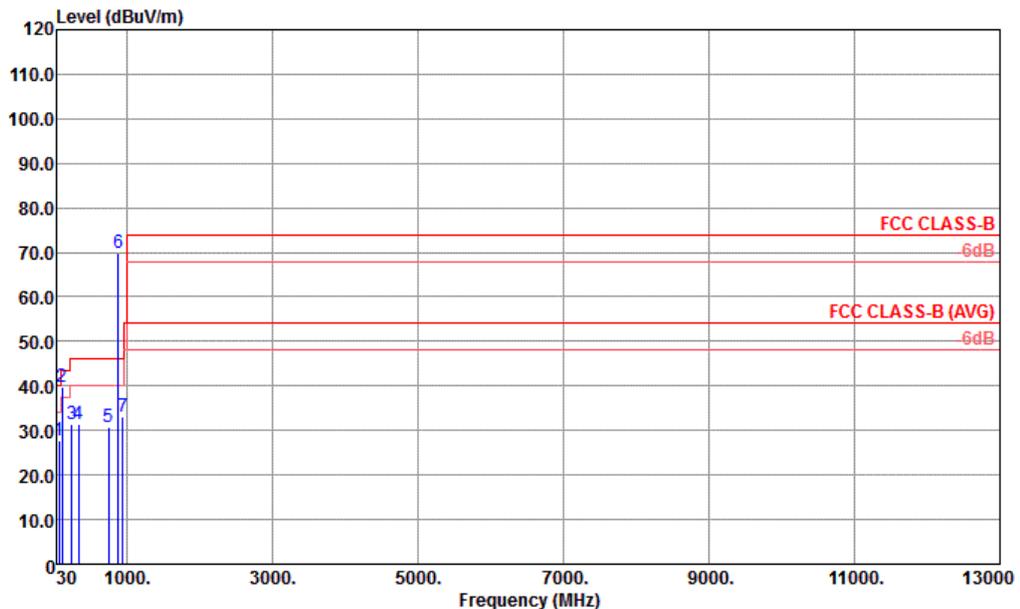


Site : 03CH01-KS  
 Condition : FCC CLASS-B 3m LF\_ANT\_100803 HORIZONTAL  
 Project : (FC) 382102  
 Mode : mode 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	69.77	27.75	-12.25	40.00	55.26	5.30	0.78	33.59	---	---	Peak
2 !	111.48	39.68	-3.82	43.50	60.51	11.80	0.98	33.61	100	0	Peak
3	239.52	31.50	-14.50	46.00	52.01	11.51	1.44	33.46	---	---	Peak
4	332.64	31.34	-14.66	46.00	48.98	14.05	1.67	33.36	---	---	Peak
5	750.71	30.84	-15.16	46.00	41.26	19.90	2.46	32.78	---	---	Peak
6 *	881.40	69.96			79.33	20.47	2.68	32.52	---	---	Peak
7	946.65	33.04	-12.96	46.00	41.95	20.72	2.81	32.44	---	---	Peak



Test Mode :	Mode 2	Temperature :	23~24°C
Test Engineer :	Stone Gu	Relative Humidity :	43~44%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + Earphone + GPS Rx		
Remark :	#6 is system simulator signal which can be ignored.		

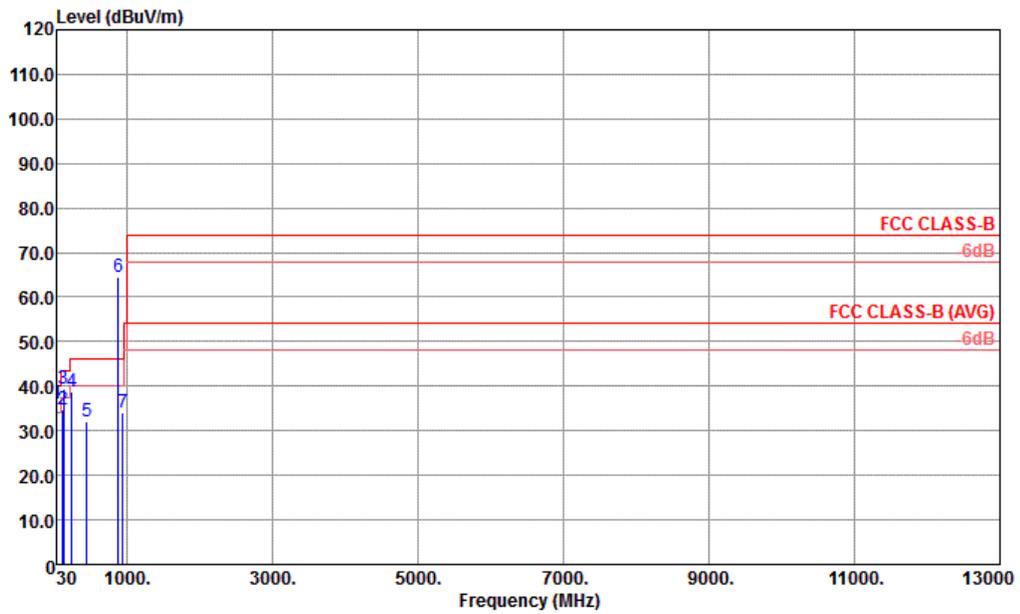

Site : 03CH01-KS  
 Condition : FCC CLASS-B 3m LF\_ANT\_100803 VERTICAL  
 Project : (FC) 382102  
 Mode : mode 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	I/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 !	32.91	36.07	-3.93	40.00	53.79	16.04	-0.17	33.59	100	0 Peak
2	118.27	34.82	-8.68	43.50	55.61	11.80	1.01	33.60	---	---
3 !	125.06	39.28	-4.22	43.50	60.10	11.75	1.03	33.60	---	---
4	239.52	38.77	-7.23	46.00	59.28	11.51	1.44	33.46	---	---
5	451.95	32.18	-13.82	46.00	47.11	16.32	1.95	33.20	---	---
6 *	881.40	64.50		46.00	73.87	20.47	2.68	32.52	---	---
7	946.65	34.22	-11.78	46.00	43.13	20.72	2.81	32.44	---	---

## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	May 23, 2013	Sep. 02, 2013	May 22, 2014	Conduction (CO01-KS)
LISN (for auxiliary equipment)	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Sep. 02, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Sep. 02, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	N/A	Nov. 15, 2012	Sep. 02, 2013	Nov. 14, 2013	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESC1	100534	9kHz~3GHz	Nov. 08, 2012	Aug. 28, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	May 23, 2013	Aug. 28, 2013	May 22, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Aug. 28, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Dec. 07, 2012	Aug. 28, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	May 23, 2013	Aug. 28, 2013	May 22, 2014	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Aug. 28, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	N/A	Aug. 28, 2013	N/A	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	N/A	Aug. 28, 2013	N/A	Radiation (03CH01-KS)



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------