



# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : CDMA/LTE Ufi  
BRAND NAME : ZTE  
MODEL NAME : 306ZT  
FCC ID : SRQ-ZTEMF975S  
STANDARD : FCC Part 15 Subpart E §15.407  
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 18, 2014 and testing was completed on Aug. 22, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 7

    1.6 Testing Location ..... 7

    1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 9

    2.2 Pre-Scanned RF Power ..... 10

    2.3 Test Mode ..... 12

    2.4 Connection Diagram of Test System..... 14

    2.5 Support Unit used in test configuration and system ..... 15

    2.6 EUT Operation Test Setup ..... 15

    2.7 Measurement Results Explanation Example..... 16

**3 TEST RESULT..... 17**

    3.1 99% Occupied Bandwidth Measurement ..... 17

    3.2 Maximum Conducted Output Power Measurement ..... 23

    3.3 Power Spectral Density Measurement ..... 26

    3.4 Unwanted Emissions Measurement..... 31

    3.5 AC Conducted Emission Measurement..... 57

    3.6 Frequency Stability Measurement..... 65

    3.7 Automatically Discontinue Transmission ..... 67

    3.8 Antenna Requirements ..... 68

**4 LIST OF MEASURING EQUIPMENT ..... 70**

**5 UNCERTAINTY OF EVALUATION ..... 71**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm & 15.209(a)	Pass	Under limit 1.89 dB at 5147.700 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.89 dB at 0.580 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	CDMA/LTE Ufi
Brand Name	ZTE
Model Name	306ZT
FCC ID	SRQ-ZTEMF975S
EUT supports Radios application	CDMA/EV-DO/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
HW Version	xw3B
SW Version	306ZTV1.0.0B09
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard							
<b>Tx/Rx Channel Frequency Range</b>	5180 MHz ~ 5240 MHz						
<b>Maximum Output Power</b>	802.11a : 12.80 dBm / 0.0191 W 802.11n HT20 : 12.43 dBm / 0.0175 W 802.11n HT40 : 11.35 dBm / 0.0136 W 802.11n VHT20 : 12.89 dBm / 0.0195 W 802.11n VHT40 : 10.56 dBm / 0.0114 W 802.11n VHT80 : 8.78 dBm / 0.0076 W						
<b>Maximum 99% Occupied Bandwidth</b>	802.11a : 16.90 MHz 802.11n HT20 : 17.90 MHz 802.11n HT40 : 36.18 MHz 802.11n VHT20 : 17.90 MHz 802.11n VHT40 : 36.18 MHz 802.11n VHT80 : 75.12 MHz						
<b>Antenna Type / Gain</b>	Chain Port 0 : Monopole Antenna with gain 2.4 dBi Chain Port 1 : Monopole Antenna with gain 2.5 dBi						
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)						
<b>Antenna Function Description</b>	<table border="1"> <thead> <tr> <th></th> <th>Chain Port 0</th> <th>Chain Port 1</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Chain Port 0	Chain Port 1	802.11 a/n/ac MIMO	V	V
	Chain Port 0	Chain Port 1					
802.11 a/n/ac MIMO	V	V					



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH01-KS	CO01-KS	149928

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## **2 Test Configuration of Equipment Under Test**

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.



## 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	<b>38</b>	<b>5190</b>	<b>46</b>	<b>5230</b>
	40	5200	48	5240
	42	5210		

**Note:** The above Frequency and Channel in boldface were 802.11n HT40 and 802.11ac VHT40.



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency (MHz)	Chain Port	WLAN 5GHz 802.11a Output Power (dBm)								
			Data Rate	Power vs. Data Rate							
			6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	0+1(0)	10.18	CH 44	10.18	10.18	10.42	10.41	10.33	10.32	10.38
CH 44	5220	0+1(0)	10.43								
CH 48	5240	0+1(0)	10.32								
CH 36	5180	0+1(1)	8.92	CH 44	8.64	8.69	8.74	8.85	8.85	8.79	8.89
CH 44	5220	0+1(1)	9.04								
CH 48	5240	0+1(1)	8.69								
CH 36	5180	0+1	12.61	CH 44	12.49	12.51	12.68	12.71	12.66	12.63	12.71
CH 44	5220	0+1	12.80								
CH 48	5240	0+1	12.59								

Channel	Frequency (MHz)	Chain Port	WLAN 5GHz 802.11n-HT20 Output Power (dBm)								
			MCS Index	Power vs. Data Rate							
			MCS8	Channel	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH 36	5180	0+1(0)	9.36	CH 48	9.41	9.64	9.87	9.70	9.81	9.87	9.88
CH 44	5220	0+1(0)	9.40								
CH 48	5240	0+1(0)	9.90								
CH 36	5180	0+1(1)	8.11	CH 48	8.07	8.29	8.76	8.68	8.67	8.63	8.57
CH 44	5220	0+1(1)	8.12								
CH 48	5240	0+1(1)	8.89								
CH 36	5180	0+1	11.79	CH 48	11.80	12.03	12.36	12.23	12.29	12.30	12.28
CH 44	5220	0+1	11.82								
CH 48	5240	0+1	12.43								

Channel	Frequency (MHz)	Chain Port	WLAN 5GHz 802.11n-HT40 Output Power (dBm)								
			MCS Index	Power vs. Data Rate							
			MCS8	Channel	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH 38	5190	0+1(0)	8.92	CH 46	8.84	8.67	8.66	8.59	8.59	8.56	8.58
CH 46	5230	0+1(0)	9.01								
CH 38	5190	0+1(1)	7.50	CH 46	7.35	7.33	7.28	7.28	7.34	7.31	7.22
CH 46	5230	0+1(1)	7.54								
CH 38	5190	0+1	11.28	CH 46	11.17	11.07	11.04	11.00	11.02	10.99	10.97
CH 46	5230	0+1	11.35								



Channel	Frequency (MHz)	Chain Port	WLAN 5GHz 802.11ac-VHT20 Output Power (dBm)										
			MCS Index	Power vs. Data Rate									
			MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	
CH 36	5180	0+1(0)	10.39	CH 36	10.20	10.31	10.35	10.38	10.29	10.21	9.79	9.70	
CH 44	5220	0+1(0)	10.18										
CH 48	5240	0+1(0)	10.12										
CH 36	5180	0+1(1)	9.31	CH 36	9.14	9.09	9.06	9.14	9.05	9.02	7.84	8.74	
CH 44	5220	0+1(1)	8.75										
CH 48	5240	0+1(1)	8.72										
CH 36	5180	0+1	12.89	CH 36	12.71	12.76	12.76	12.81	12.73	12.67	11.93	12.26	
CH 44	5220	0+1	12.53										
CH 48	5240	0+1	12.49										

Channel	Frequency (MHz)	Chain Port	WLAN 5GHz 802.11ac-VHT40 Output Power (dBm)											
			MCS Index	Power vs. Data Rate										
			MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9	
CH 38	5190	0+1(0)	7.44	CH 46	7.68	7.69	7.70	7.83	7.77	7.81	7.71	7.81	7.69	
CH 46	5230	0+1(0)	7.84											
CH 38	5190	0+1(1)	6.87	CH 46	7.08	7.00	6.72	6.76	6.28	6.47	6.43	6.49	6.34	
CH 46	5230	0+1(1)	7.24											
CH 38	5190	0+1	10.17	CH 46	10.40	10.37	10.25	10.34	10.10	10.20	10.13	10.21	10.08	
CH 46	5230	0+1	10.56											

Channel	Frequency (MHz)	Chain Port	WLAN 5GHz 802.11ac-VHT80 Output Power (dBm)										
			MCS Index	Power vs. Data Rate									
			MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 42	5210	0+1(0)	6.66	CH 42	6.09	6.02	5.74	5.85	5.75	5.57	5.26	5.18	5.58
CH 42	5210	0+1(1)	4.66	CH 42	4.24	4.54	4.27	4.35	4.41	4.04	4.02	4.20	4.18
CH 42	5210	0+1	8.78	CH 42	8.27	8.35	8.08	8.18	8.14	7.88	7.70	7.73	7.95

Note: Chain Port 0+1 is a calculated result from sum of the power Chain Port 0+1 (0) and Chain Port 0+1 (1).



### 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

Test Cases				
	Test Items	Mode	Data rate	Test Channel
	Conducted TCs	99% BW Power Spectral Density	802.11a	6 Mbps
802.11n HT20			MCS8	L/M/H
802.11n HT40			MCS8	L/H
802.11ac VHT20			MCS0	L/M/H
802.11ac VHT40			MCS0	L/H
802.11ac VHT80			MCS0	M
20dB Occupied Bandwidth		802.11a	6 Mbps	H
		802.11n HT20	MCS8	H
		802.11n HT40	MCS8	H
		802.11ac VHT20	MCS0	H
		802.11ac VHT40	MCS0	H
		802.11ac VHT80	MCS0	H
Output Power		802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS8	L/M/H
		802.11n HT40	MCS8	L/H
		802.11ac VHT20	MCS0	L/M/H
		802.11ac VHT40	MCS0	L/H
		802.11ac VHT80	MCS0	M
Frequency Stability		802.11a	6 Mbps	L




Test Cases					
Radiated TCs	Test Items		Mode	Data rate	Test Channel
	Radiated Band Edge		802.11a	6 Mbps	L/H
			802.11n HT20	MCS8	L/H
			802.11n HT40	MCS8	L/H
			802.11ac VHT20	MCS0	L/H
			802.11ac VHT40	MCS0	L/H
			802.11ac VHT80	MCS0	M
	Radiated Spurious Emission		802.11a	6 Mbps	L/M/H
			802.11n HT20	MCS8	L/M/H
			802.11n HT40	MCS8	L/H
			802.11ac VHT20	MCS0	L/M/H
			802.11ac VHT40	MCS0	L/H
			802.11ac VHT80	MCS0	M
AC Conducted Emission	Mode 1 : CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)				
<b>Remark:</b> For Radiated, the test cases were performed with adapter and USB cable.					

Ch. #		Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46


Ch. #		Band I : 5150-5250 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	36	38	-
M	Middle	44	-	42
H	High	48	46	-

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

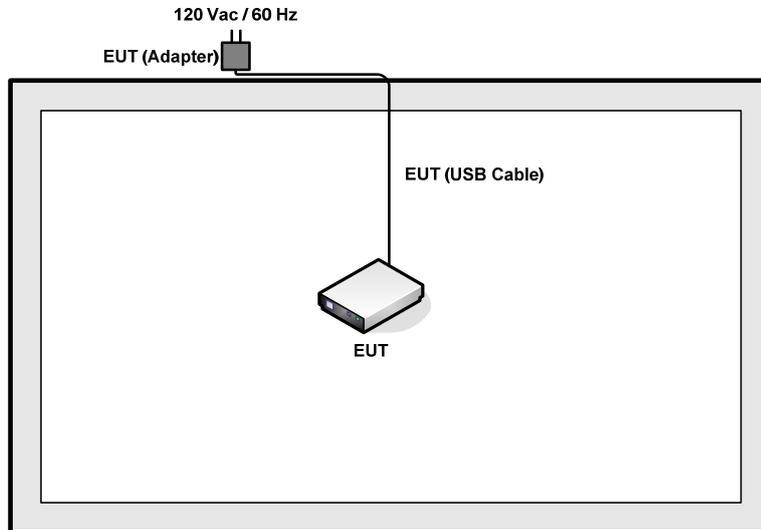

### <AC Conducted Emission Mode>

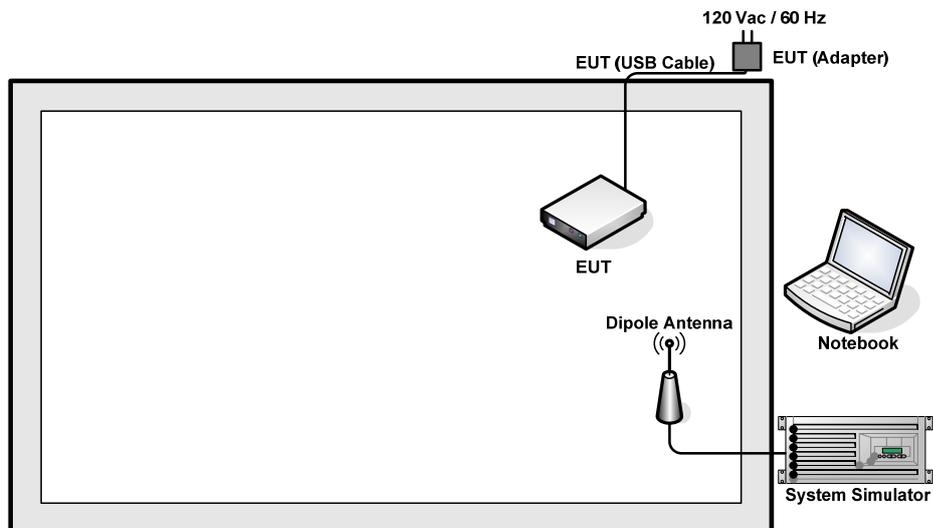



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 7.3 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 7.3 + 10 = 17.3 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

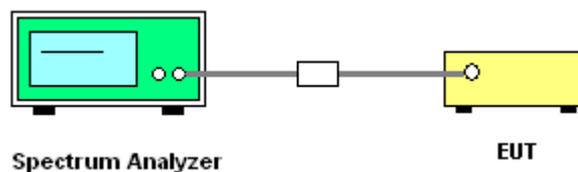




3.1.5 Test Result of 99% Occupied Bandwidth

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	99% Bandwidth (MHz)		99% Bandwidth EIRP Limit (dBm)	
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1
11a	6Mbps	2	36	5180	16.85	16.85	22.27	
11a	6Mbps	2	44	5220	16.90	16.85	22.27	
11a	6Mbps	2	48	5240	16.85	16.90	22.27	
HT20	MCS8	2	36	5180	17.80	17.80	22.50	
HT20	MCS8	2	44	5220	17.85	17.80	22.50	
HT20	MCS8	2	48	5240	17.90	17.85	22.52	
HT40	MCS8	2	38	5190	36.18	36.18	23.01	
HT40	MCS8	2	46	5230	36.09	36.18	23.01	
VHT20	MCS0	2	36	5180	17.80	17.85	22.50	
VHT20	MCS0	2	44	5220	17.80	17.90	22.50	
VHT20	MCS0	2	48	5240	17.85	17.90	22.52	
VHT40	MCS0	2	38	5190	36.18	36.09	23.01	
VHT40	MCS0	2	46	5230	36.09	36.00	23.01	
VHT80	MCS0	2	42	5210	75.12	75.12	23.01	

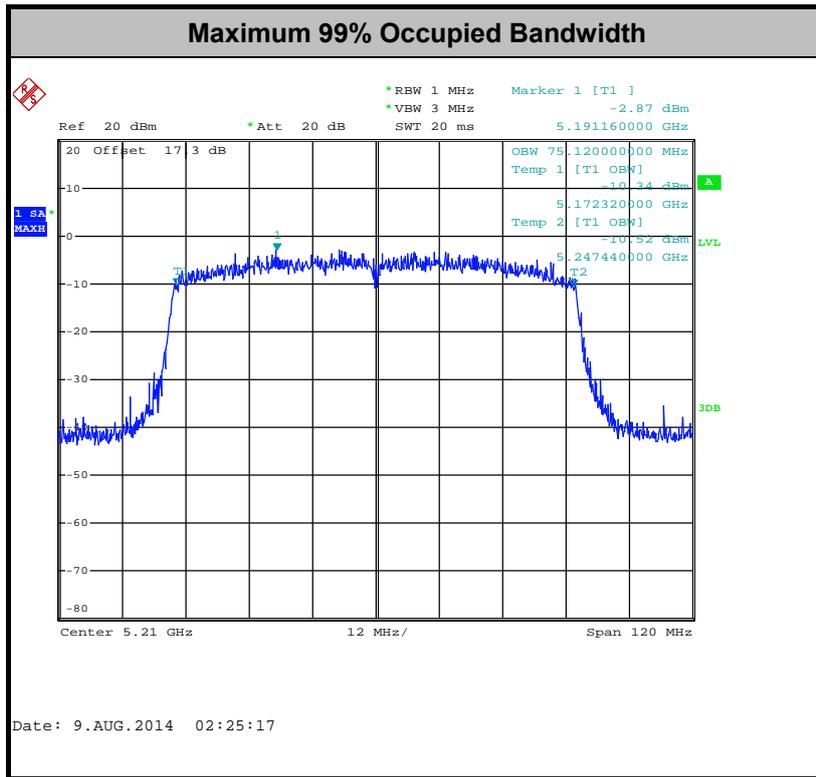

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




3.1.6 Test Result of 20dB Occupied Bandwidth

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	20dB Bandwidth (MHz)		20dB Bandwidth Upper Frequency (FH) (MHz)		Upper Limit Line (MHz)	Pass/Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1		
11a	6Mbps	2	48	5240	17.80		5248.80		5250	Pass
HT20	MCS8	2	48	5240	18.84		5249.32			Pass
HT40	MCS8	2	46	5230	38.07		5248.99			Pass
VHT20	MCS0	2	48	5240	18.88		5249.36			Pass
VHT40	MCS0	2	46	5230	38.16		5248.99			Pass
VHT80	MCS0	2	42	5210	79.36		5249.52			Pass




20dB Occupied Bandwidth

802.11a CH48 5240MHz

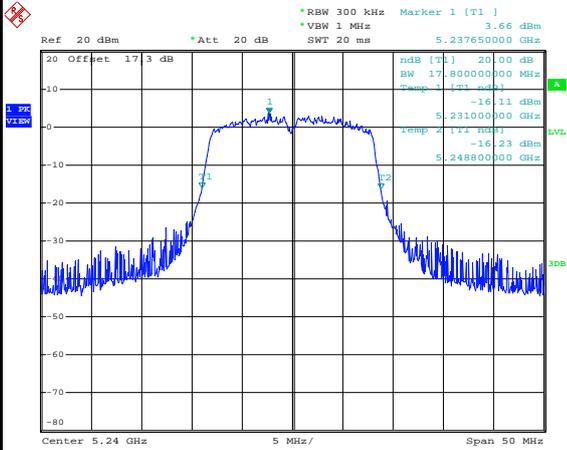


Date: 9.AUG.2014 20:32:10

802.11n HT20 CH48 5240MHz

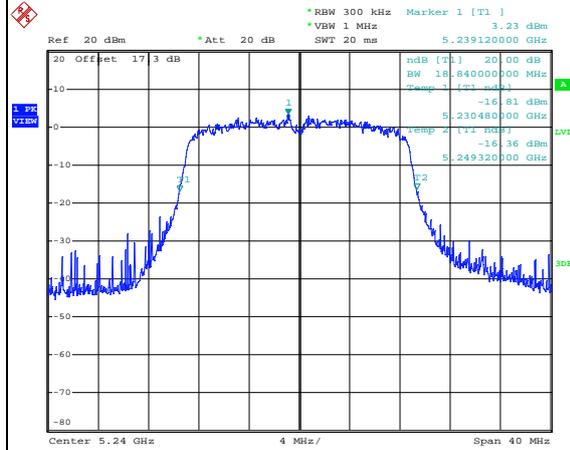


Date: 9.AUG.2014 21:28:13

802.11n HT40 CH46 5230MHz

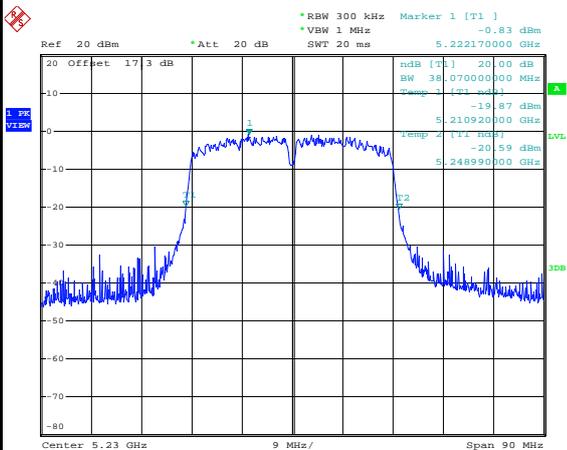

Date: 9.AUG.2014 21:26:19

802.11ac VHT20 CH48 5240MHz

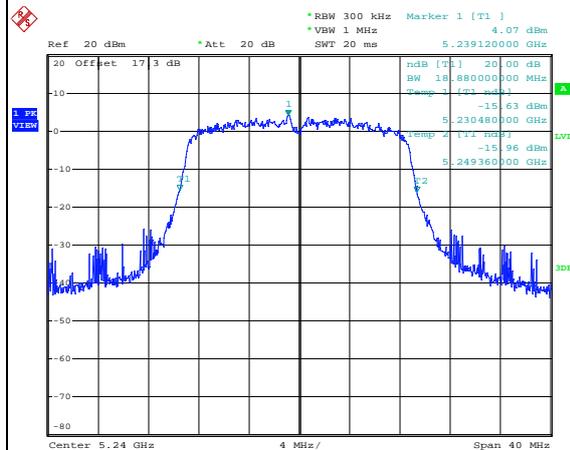


Date: 9.AUG.2014 21:27:11




20dB Occupied Bandwidth

802.11ac VHT40 CH46 5230MHz

802.11ac VHT80 CH42 5210MHz

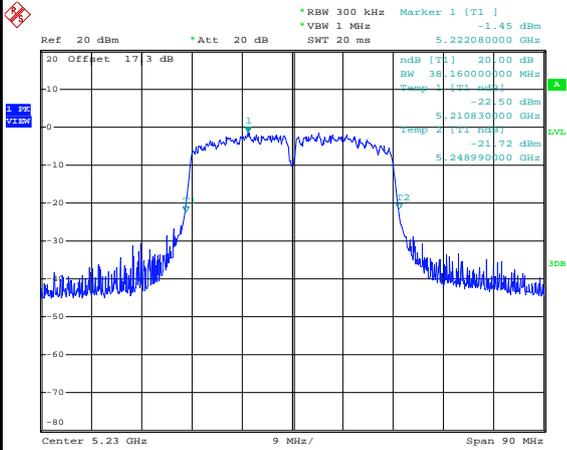

Date: 9.AUG.2014 21:25:13

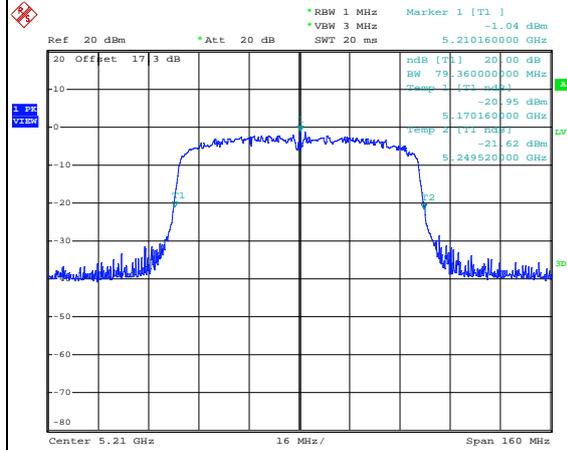

Date: 9.AUG.2014 02:25:00



## **3.2 Maximum Conducted Output Power Measurement**

### **3.2.1 Limit of Maximum Conducted Output Power**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### **3.2.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

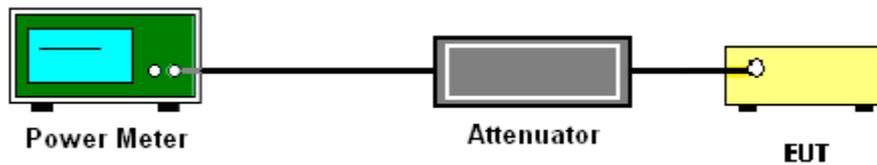



3.2.5 Test Result of Maximum Conducted Output Power

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Power Limit (dBm)		DG (dBi)		-	Pass /Fail
					Chain	Chain	Chain	Chain	Sum	Chain	Chain	Chain	Chain		
					Port 0	Port 1	Port 0	Port 1	Power	Port 0	Port 1	Port 0	Port 1		
11a	6Mbps	2	36	5180	0.18	0.20	10.18	8.92	12.61	24.00	5.46		Pass		
11a	6Mbps	2	44	5220	0.18	0.20	10.43	9.04	12.80	24.00	5.46		Pass		
11a	6Mbps	2	48	5240	0.18	0.20	10.32	8.69	12.59	24.00	5.46		Pass		
HT20	MCS8	2	36	5180	0.22	0.23	9.36	8.11	11.79	24.00	5.46		Pass		
HT20	MCS8	2	44	5220	0.22	0.23	9.40	8.12	11.82	24.00	5.46		Pass		
HT20	MCS8	2	48	5240	0.22	0.23	9.90	8.89	12.43	24.00	5.46		Pass		
HT40	MCS8	2	38	5190	0.38	0.36	8.92	7.50	11.28	24.00	5.46		Pass		
HT40	MCS8	2	46	5230	0.38	0.36	9.01	7.54	11.35	24.00	5.46		Pass		
VHT20	MCS0	2	36	5180	0.17	0.17	10.39	9.31	12.89	24.00	5.46		Pass		
VHT20	MCS0	2	44	5220	0.17	0.17	10.18	8.75	12.53	24.00	5.46		Pass		
VHT20	MCS0	2	48	5240	0.17	0.17	10.12	8.72	12.49	24.00	5.46		Pass		
VHT40	MCS0	2	38	5190	0.40	0.40	7.44	6.87	10.17	24.00	5.46		Pass		
VHT40	MCS0	2	46	5230	0.40	0.40	7.84	7.24	10.56	24.00	5.46		Pass		
VHT80	MCS0	2	42	5210	0.70	0.70	6.66	4.66	8.78	24.00	5.46		Pass		

Note:

1. Final Output Power equals to Measured Output Power adds the duty factor.
2. Sum Power is a calculated result from sum of the Chain Port 0 and Chain Port 1.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.



### **3.3.3 Test Procedures**

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section F) Maximum power spectral density.

#### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### 3.3.4 Test Setup

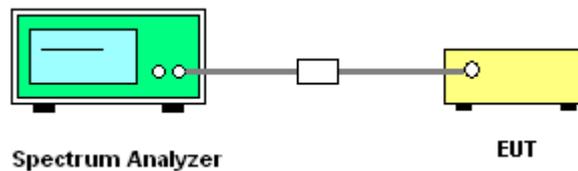




3.3.5 Test Result of Power Spectral Density

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm)		DG (dBi)		Pass /Fail
					Chain	Chain	Chain	Chain	Sum	Chain	Chain	Chain	Chain	
					Port 0	Port 1	Port 0	Port 1	Power	Port 0	Port 1	Port 0	Port 1	
11a	6Mbps	2	36	5180	0.18	0.20			1.92	11.00	5.46		Pass	
11a	6Mbps	2	44	5220	0.18	0.20			2.13	11.00	5.46		Pass	
11a	6Mbps	2	48	5240	0.18	0.20			2.19	11.00	5.46		Pass	
HT20	MCS8	2	36	5180	0.22	0.23			1.60	11.00	5.46		Pass	
HT20	MCS8	2	44	5220	0.22	0.23			1.83	11.00	5.46		Pass	
HT20	MCS8	2	48	5240	0.22	0.23			1.87	11.00	5.46		Pass	
HT40	MCS8	2	38	5190	0.38	0.36			-2.24	11.00	5.46		Pass	
HT40	MCS8	2	46	5230	0.38	0.36			-2.49	11.00	5.46		Pass	
VHT20	MCS0	2	36	5180	0.17	0.17			2.37	11.00	5.46		Pass	
VHT20	MCS0	2	44	5220	0.17	0.17			2.60	11.00	5.46		Pass	
VHT20	MCS0	2	48	5240	0.17	0.17			3.22	11.00	5.46		Pass	
VHT40	MCS0	2	38	5190	0.40	0.40			-2.87	11.00	5.46		Pass	
VHT40	MCS0	2	46	5230	0.40	0.40			-2.92	11.00	5.46		Pass	
VHT80	MCS0	2	42	5210	0.70	0.70			-9.65	11.00	5.46		Pass	

Note: Sum PSD is a bin-by-bin combined result of Chain Port 0 and Chain Port 1.

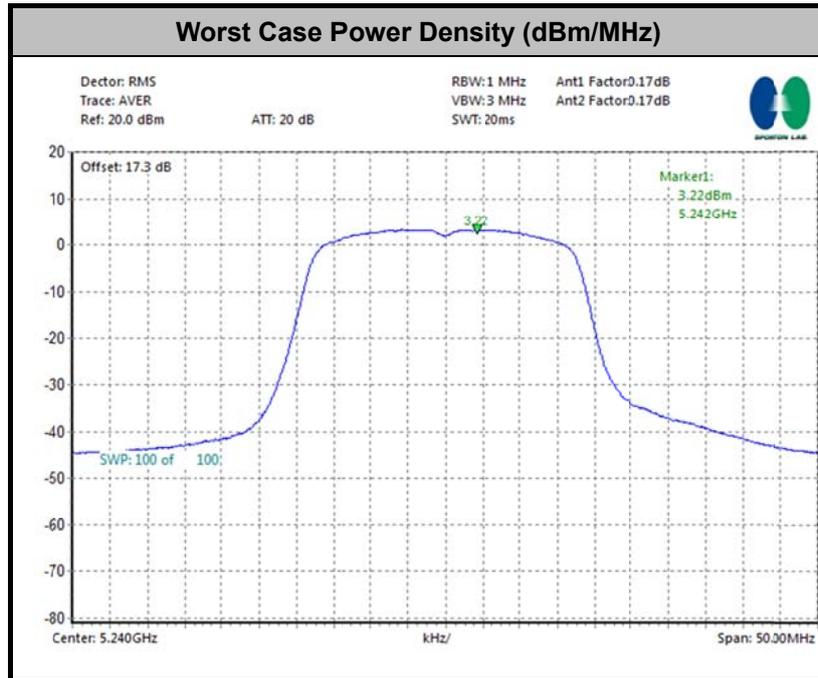



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### **3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold



(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
0+1	802.11a	95.83	2.07	0.48	1kHz
0+1	802.11n HT20	95.16	1.93	0.52	1kHz
0+1	802.11n HT40	92.05	0.95	1.05	3kHz
0+1	802.11ac VHT20	96.23	1.94	0.52	1kHz
0+1	802.11ac VHT40	91.29	0.96	1.04	3kHz
0+1	802.11ac VHT80	85.14	0.47	2.13	3kHz


2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

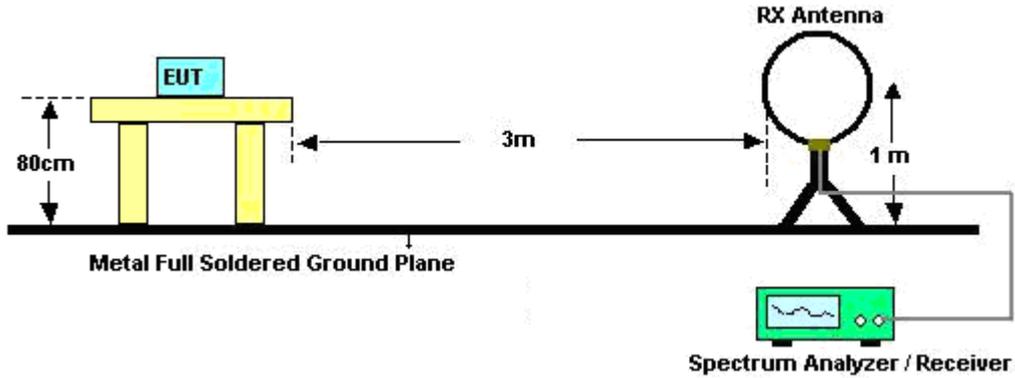

For radiated emissions from 30MHz to 1GHz

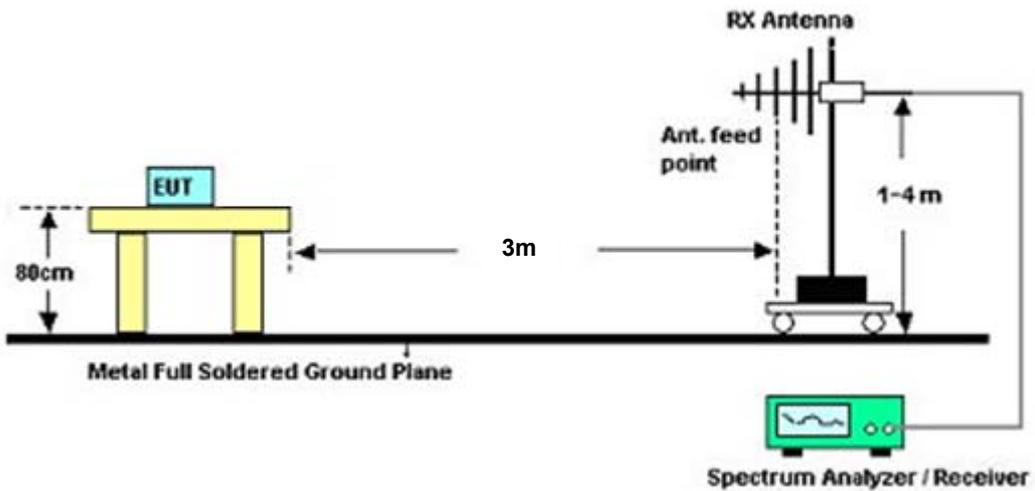

For radiated emissions above 1GHz

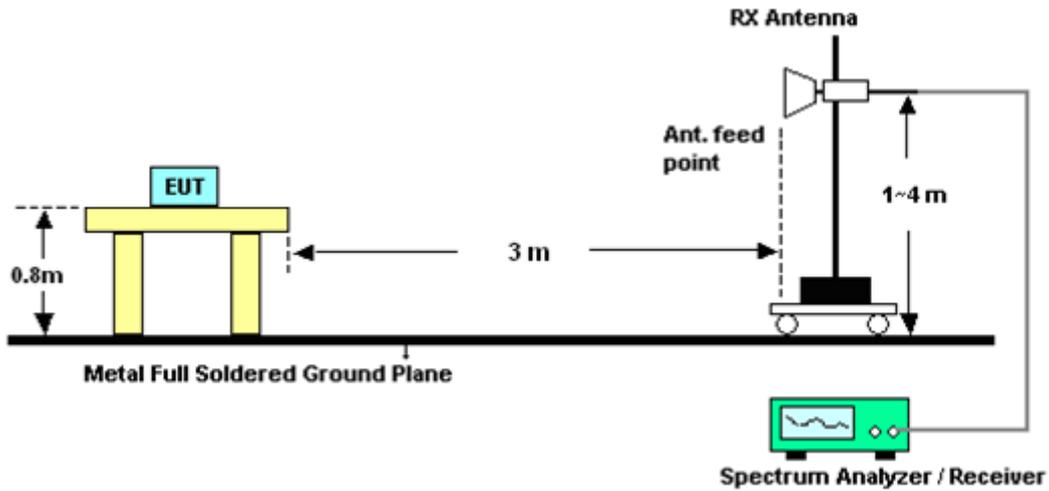

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Radiated Band Edges

Test Mode :	802.11a - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.95	70.07	-3.93	74	69.92	34.11	3.9	37.86	100	319	Peak
5149.95	44.25	-9.75	54	44.1	34.11	3.9	37.86	100	319	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5147.95	60.69	-13.31	74	60.54	34.11	3.9	37.86	113	349	Peak
5149.95	39.44	-14.56	54	39.29	34.11	3.9	37.86	113	349	Average

Test Mode :	802.11a - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5374.75	52.93	-21.07	74	53.71	34.41	4.01	39.2	100	27	Peak
5396.4	38.58	-15.42	54	39.51	34.46	4.03	39.42	100	27	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5361.45	52.01	-21.99	74	52.79	34.41	4.01	39.2	100	348	Peak
5371.9	38.43	-15.57	54	39.21	34.41	4.01	39.2	100	348	Average



Test Mode :	802.11n HT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5147.7	72.11	-1.89	74	71.96	34.11	3.9	37.86	100	320	Peak
5149.95	47.97	-6.03	54	47.82	34.11	3.9	37.86	100	320	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.4	65.85	-8.15	74	65.7	34.11	3.9	37.86	100	350	Peak
5150	42.05	-11.95	54	41.9	34.11	3.9	37.86	100	350	Average

Test Mode :	802.11n HT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5364.15	52.31	-21.69	74	53.09	34.41	4.01	39.2	100	31	Peak
5385.8	38.31	-15.69	54	39.16	34.44	4.02	39.31	100	31	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5399.25	52.44	-21.56	74	53.37	34.46	4.03	39.42	100	60	Peak
5386.25	38.45	-15.55	54	39.3	34.44	4.02	39.31	100	60	Average



Test Mode :	802.11n HT40 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	38	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.7	71.2	-2.8	74	71.05	34.11	3.9	37.86	100	0	Peak
5149.35	44.62	-9.38	54	44.47	34.11	3.9	37.86	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5150	62.53	-11.47	74	62.38	34.11	3.9	37.86	170	160	Peak
5149.6	37.54	-16.46	54	37.39	34.11	3.9	37.86	170	160	Average

Test Mode :	802.11n HT40 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	46	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5363.2	55.26	-18.74	74	56.04	34.41	4.01	39.2	143	0	Peak
5367.4	34.57	-19.43	54	35.35	34.41	4.01	39.2	143	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5399.6	50.49	-23.51	74	51.42	34.46	4.03	39.42	100	227	Peak
5375.8	34.63	-19.37	54	35.41	34.41	4.01	39.2	100	227	Average



Test Mode :	802.11ac VHT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5148.3	71.89	-2.11	74	71.74	34.11	3.9	37.86	100	0	Peak
5150	48.9	-5.1	54	48.75	34.11	3.9	37.86	100	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5150	65.43	-8.57	74	65.28	34.11	3.9	37.86	100	103	Peak
5150	42.29	-11.71	54	42.14	34.11	3.9	37.86	100	103	Average

Test Mode :	802.11ac VHT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5393.25	52.59	-21.41	74	53.44	34.44	4.02	39.31	100	36	Peak
5387	38.39	-15.61	54	39.24	34.44	4.02	39.31	100	36	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5379.5	52.44	-21.56	74	53.29	34.44	4.02	39.31	100	112	Peak
5397.9	38.33	-15.67	54	39.26	34.46	4.03	39.42	100	112	Average



Test Mode :	802.11ac VHT40 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	38	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.45	71.01	-2.99	74	70.86	34.11	3.9	37.86	100	2	Peak
5149.85	43.96	-10.04	54	43.81	34.11	3.9	37.86	100	2	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.85	59.73	-14.27	74	59.58	34.11	3.9	37.86	100	169	Peak
5149.25	36.54	-17.46	54	36.39	34.11	3.9	37.86	100	169	Average

Test Mode :	802.11ac VHT40 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	46	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5350.95	52.84	-21.16	74	53.53	34.39	4	39.08	158	80	Peak
5359.35	34.47	-19.53	54	35.15	34.39	4.01	39.08	158	80	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5372.85	51.01	-22.99	74	51.79	34.41	4.01	39.2	176	295	Peak
5360.7	34.16	-19.84	54	34.94	34.41	4.01	39.2	176	295	Average



Test Mode :	802.11n VHT80 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	42	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.7	61.57	-12.43	74	61.42	34.11	3.9	37.86	100	0	Peak
5149.2	44.6	-9.4	54	44.45	34.11	3.9	37.86	100	0	Average
5350	52.35	-21.65	74	53.04	34.39	4	39.08	104	0	Peak
5362.2	37.43	-16.57	54	38.21	34.41	4.01	39.2	104	0	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5145.95	55.22	-18.78	74	55.07	34.11	3.9	37.86	154	169	Peak
5148.1	38.9	-15.1	54	38.75	34.11	3.9	37.86	154	169	Average
5363.85	48.75	-25.25	74	49.53	34.41	4.01	39.2	100	0	Peak
5361.5	36.56	-17.44	54	37.34	34.41	4.01	39.2	100	0	Average



3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	802.11a - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5180 MHz is fundamental signal which can be ignored.</li> <li>10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	107.99	-	-	107.91	34.16	3.92	38	100	319	Peak
5180	97.11	-	-	97.03	34.16	3.92	38	100	319	Average
10359	30.27	-43.73	74	59.73	1.46	5.85	36.77	152	89	Peak

<b>Test Mode :</b>	802.11a - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5180 MHz is fundamental signal which can be ignored.</li> <li>10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	99.99	-	-	99.91	34.16	3.92	38	113	349	Peak
5180	88.8	-	-	88.72	34.16	3.92	38	113	349	Average
10359	31.3	-42.7	74	60.76	1.46	5.85	36.77	105	11	Peak



<b>Test Mode :</b>	802.11a - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	106.1	-	-	106.13	34.2	3.95	38.18	100	316	Peak
5220	94.73	-	-	94.76	34.2	3.95	38.18	100	316	Average
10440	30.9	-43.1	74	60.3	1.53	5.89	36.82	100	3	Peak

<b>Test Mode :</b>	802.11a - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	104.11	-	-	104.14	34.2	3.95	38.18	100	156	Peak
5220	92.42	-	-	92.45	34.2	3.95	38.18	100	156	Average
10440	30.37	-43.63	74	59.77	1.53	5.89	36.82	100	63	Peak



<b>Test Mode :</b>	802.11a - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	106.29	-	-	106.4	34.23	3.95	38.29	100	27	Peak
5240	94.88	-	-	94.99	34.23	3.95	38.29	100	27	Average
10479	31.28	-42.72	74	60.72	1.56	5.91	36.91	101	23	Peak

<b>Test Mode :</b>	802.11a - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	100.92	-	-	101.03	34.23	3.95	38.29	100	348	Peak
5240	89.82	-	-	89.93	34.23	3.95	38.29	100	348	Average
10479	31.59	-42.41	74	61.03	1.56	5.91	36.91	100	85	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
59.1	26.12	-13.88	40	52.72	5.53	0.47	32.6	124	332	Peak
99.84	26.29	-17.21	43.5	47.89	10.6	0.43	32.63	-	-	Peak
120.21	29.07	-14.43	43.5	49.23	11.9	0.58	32.64	-	-	Peak
298.69	29.38	-16.62	46	47.98	12.98	0.81	32.39	-	-	Peak
901.06	31.58	-14.42	46	41.03	20.45	1.8	31.7	-	-	Peak
960.23	33.17	-20.83	54	42.4	20.76	1.72	31.71	-	-	Peak
5180	108.12	-	-	108.04	34.16	3.92	38	100	320	Peak
5180	96.61	-	-	96.53	34.16	3.92	38	100	320	Average
10359	29.13	-44.87	74	58.59	1.46	5.85	36.77	100	39	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored.. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	29.58	-10.42	40	44.05	18	0.19	32.66	-	-	Peak
54.25	31.64	-8.36	40	57.53	6.4	0.31	32.6	200	0	Peak
71.71	27.7	-12.3	40	54.48	5.4	0.47	32.65	-	-	Peak
95.96	29.22	-14.28	43.5	51.44	9.95	0.43	32.6	-	-	Peak
119.24	26.87	-16.63	43.5	47.05	11.88	0.58	32.64	-	-	Peak
897.18	30.22	-15.78	46	39.73	20.41	1.8	31.72	-	-	Peak
5180	103.01	-	-	102.93	34.16	3.92	38	100	350	Peak
5180	93.14	-	-	93.06	34.16	3.92	38	100	350	Average
10359	26.85	-47.15	74	56.31	1.46	5.85	36.77	169	25	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5220 MHz is fundamental signal which can be ignored.</li> <li>10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	104.63	-	-	104.66	34.2	3.95	38.18	107	320	Peak
5220	92.54	-	-	92.57	34.2	3.95	38.18	107	320	Average
10440	28.55	-45.45	74	57.95	1.53	5.89	36.82	100	85	Peak

<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5220 MHz is fundamental signal which can be ignored.</li> <li>10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	101.94	-	-	101.97	34.2	3.95	38.18	112	51	Peak
5220	90.17	-	-	90.2	34.2	3.95	38.18	112	51	Average
10440	27.97	-46.03	74	57.37	1.53	5.89	36.82	132	125	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	105.9	-	-	106.01	34.23	3.95	38.29	100	31	Peak
5240	95	-	-	95.11	34.23	3.95	38.29	100	31	Average
10479	29.57	-44.43	74	59.01	1.56	5.91	36.91	178	23	Peak

<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	102.35	-	-	102.46	34.23	3.95	38.29	100	60	Peak
5240	89.8	-	-	89.91	34.23	3.95	38.29	100	60	Average
10479	27.53	-46.47	74	56.97	1.56	5.91	36.91	100	34	Peak



<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5190 MHz is fundamental signal which can be ignored.</li> <li>10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	99.27	-	-	99.19	34.16	3.92	38	100	0	Peak
5190	89.02	-	-	88.94	34.16	3.92	38	100	0	Average
10380	31.9	-42.1	74	61.33	1.48	5.86	36.77	108	76	Peak

<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5190 MHz is fundamental signal which can be ignored.</li> <li>10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	93.68	-	-	93.6	34.16	3.92	38	170	160	Peak
5190	83.64	-	-	83.56	34.16	3.92	38	170	160	Average
10380	29.62	-44.38	74	59.05	1.48	5.86	36.77	100	114	Peak



<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10460 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	95.1	-	-	95.21	34.23	3.95	38.29	143	0	Peak
5230	83.24	-	-	83.35	34.23	3.95	38.29	143	0	Average
10460	30.79	-43.21	74	60.2	1.54	5.9	36.85	187	22	Peak

<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10460 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	97.75	-	-	97.86	34.23	3.95	38.29	155	117	Peak
5230	86.56	-	-	86.67	34.23	3.95	38.29	155	117	Average
10460	29.54	-44.46	74	58.95	1.54	5.9	36.85	103	55	Peak



<b>Test Mode :</b>	802.11ac VHT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5180 MHz is fundamental signal which can be ignored.</li> <li>10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	108.24	-	-	108.16	34.16	3.92	38	100	0	Peak
5180	96.37	-	-	96.29	34.16	3.92	38	100	0	Average
10359	30.26	-43.74	74	59.72	1.46	5.85	36.77	135	21	Peak

<b>Test Mode :</b>	802.11ac VHT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5180 MHz is fundamental signal which can be ignored..</li> <li>10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	100.69	-	-	100.61	34.16	3.92	38	100	103	Peak
5180	91.04	-	-	90.96	34.16	3.92	38	100	103	Average
10359	28.66	-45.34	74	58.12	1.46	5.85	36.77	102	83	Peak



<b>Test Mode :</b>	802.11ac VHT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5220 MHz is fundamental signal which can be ignored.</li> <li>10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	106.91	-	-	106.94	34.2	3.95	38.18	100	14	Peak
5220	94.8	-	-	94.83	34.2	3.95	38.18	100	14	Average
10440	29.95	-44.05	74	59.35	1.53	5.89	36.82	136	12	Peak

<b>Test Mode :</b>	802.11ac VHT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	<ol style="list-style-type: none"> <li>5220 MHz is fundamental signal which can be ignored.</li> <li>10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.</li> <li>Average measurement was not performed if peak level went lower than the average limit.</li> </ol>		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	101.69	-	-	101.72	34.2	3.95	38.18	100	100	Peak
5220	90.73	-	-	90.76	34.2	3.95	38.18	100	100	Average
10440	31.39	-42.61	74	60.79	1.53	5.89	36.82	131	16	Peak



<b>Test Mode :</b>	802.11ac VHT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	107.28	-	-	107.39	34.23	3.95	38.29	100	36	Peak
5240	95.85	-	-	95.96	34.23	3.95	38.29	100	36	Average
10479	31.54	-42.46	74	60.98	1.56	5.91	36.91	100	29	Peak

<b>Test Mode :</b>	802.11ac VHT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	101.25	-	-	101.36	34.23	3.95	38.29	100	11	Peak
5240	88.85	-	-	88.96	34.23	3.95	38.29	100	11	Average
10479	29.88	-44.12	74	59.32	1.56	5.91	36.91	165	12	Peak



<b>Test Mode :</b>	802.11ac VHT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	99.94	-	-	99.86	34.16	3.92	38	100	2	Peak
5190	88.93	-	-	88.85	34.16	3.92	38	100	2	Average
10380	29.58	-44.42	74	59.01	1.48	5.86	36.77	125	27	Peak

<b>Test Mode :</b>	802.11ac VHT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	94.56	-	-	94.48	34.16	3.92	38	100	349	Peak
5190	82.86	-	-	82.78	34.16	3.92	38	100	349	Average
10380	30.18	-43.82	74	59.61	1.48	5.86	36.77	116	57	Peak



<b>Test Mode :</b>	802.11ac VHT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10460 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	101.28	-	-	101.39	34.23	3.95	38.29	108	320	Peak
5230	89.97	-	-	90.08	34.23	3.95	38.29	108	320	Average
10461	30.44	-43.56	74	59.87	1.55	5.9	36.88	100	35	Peak

<b>Test Mode :</b>	802.11ac VHT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10460 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	95.28	-	-	95.39	34.23	3.95	38.29	149	121	Peak
5230	84.02	-	-	84.13	34.23	3.95	38.29	149	121	Average
10461	30.22	-43.78	74	59.65	1.55	5.9	36.88	100	2	Peak



<b>Test Mode :</b>	802.11ac VHT80 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	42	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5210 MHz is fundamental signal which can be ignored. 2. 10419 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5210	94.8	-	-	94.84	34.2	3.94	38.18	100	0	Peak
5210	83.74	-	-	83.78	34.2	3.94	38.18	100	0	Average
10419	30.41	-43.59	74	59.81	1.51	5.88	36.79	100	234	Peak

<b>Test Mode :</b>	802.11ac VHT80 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	42	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5210 MHz is fundamental signal which can be ignored. 2. 10419 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5210	87.74	-	-	87.78	34.2	3.94	38.18	187	106	Peak
5210	78.27	-	-	78.31	34.2	3.94	38.18	187	106	Average
10419	30.21	-43.79	74	59.61	1.51	5.88	36.79	109	221	Peak



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

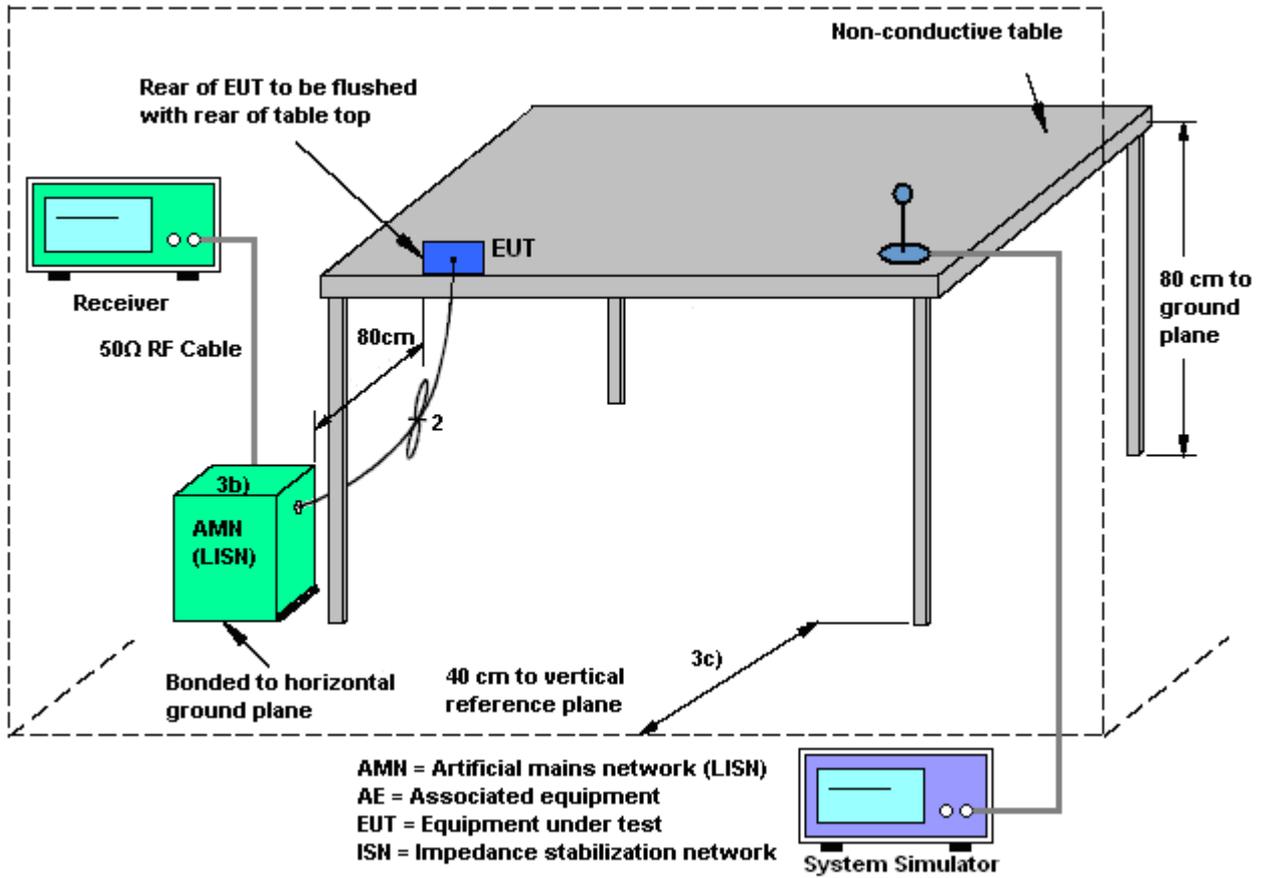



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)		

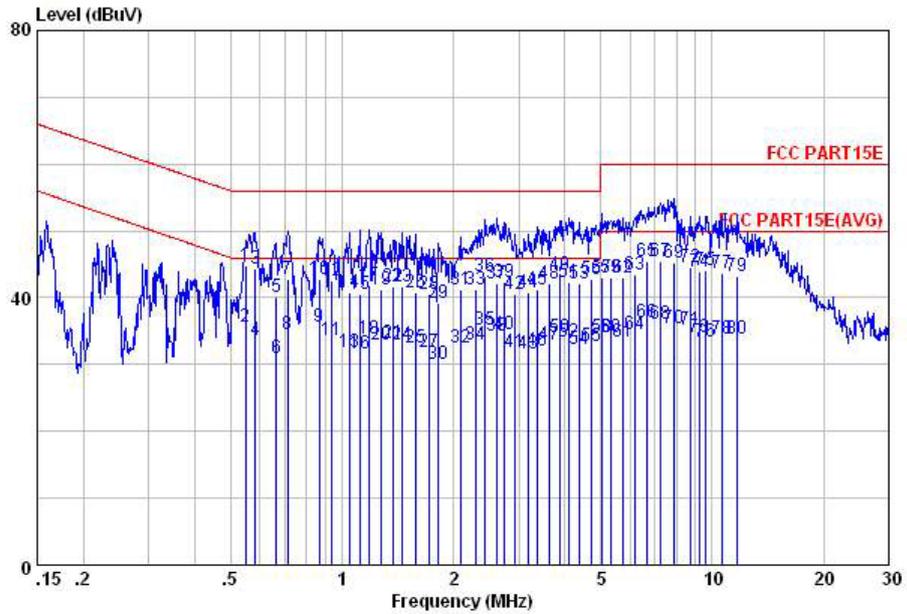


Site : C001-KS  
 Condition: FCC PART15E LISN-L20130306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.55	44.75	-11.25	56.00	34.30	0.20	10.25	QP
2	0.55	35.75	-10.25	46.00	25.30	0.20	10.25	Average
3	0.58	44.25	-11.75	56.00	33.80	0.20	10.25	QP
4	0.58	33.55	-12.45	46.00	23.10	0.20	10.25	Average
5	0.66	40.02	-15.98	56.00	29.60	0.20	10.22	QP
6	0.66	31.02	-14.98	46.00	20.60	0.20	10.22	Average
7	0.71	42.71	-13.29	56.00	32.30	0.20	10.21	QP
8	0.71	34.51	-11.49	46.00	24.10	0.20	10.21	Average
9	0.87	35.62	-10.38	46.00	25.30	0.13	10.19	Average
10	0.87	42.72	-13.28	56.00	32.40	0.13	10.19	QP
11	0.93	33.60	-12.40	46.00	23.31	0.11	10.18	Average
12	0.93	42.60	-13.40	56.00	32.31	0.11	10.18	QP
13	1.04	31.88	-14.12	46.00	21.60	0.10	10.18	Average
14	1.04	40.88	-15.12	56.00	30.60	0.10	10.18	QP
15	1.12	40.58	-15.42	56.00	30.30	0.10	10.18	QP
16	1.12	31.58	-14.42	46.00	21.30	0.10	10.18	Average
17	1.18	41.88	-14.12	56.00	31.60	0.10	10.18	QP
18	1.18	33.88	-12.12	46.00	23.60	0.10	10.18	Average
19	1.27	41.18	-14.82	56.00	30.90	0.10	10.18	QP
20	1.27	32.88	-13.12	46.00	22.60	0.10	10.18	Average
21	1.37	33.18	-12.82	46.00	22.90	0.10	10.18	Average
22	1.37	41.58	-14.42	56.00	31.30	0.10	10.18	QP
23	1.45	41.59	-14.41	56.00	31.30	0.10	10.19	QP
24	1.45	32.89	-13.11	46.00	22.60	0.10	10.19	Average
25	1.58	32.59	-13.41	46.00	22.30	0.10	10.19	Average
26	1.58	40.89	-15.11	56.00	30.60	0.10	10.19	QP
27	1.73	31.89	-14.11	46.00	21.60	0.10	10.19	Average
28	1.73	40.59	-15.41	56.00	30.30	0.10	10.19	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)		

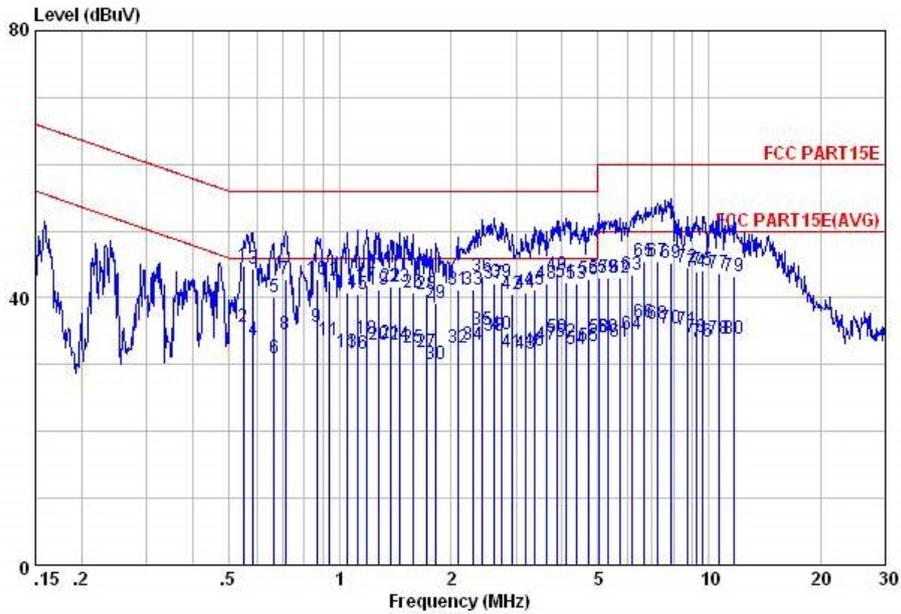


Site : C001-KS  
 Condition: FCC PART15E LISN-L20130306 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
29	1.82	39.19	-16.81	56.00	28.90	0.10	10.19	QP
30	1.82	30.19	-15.81	46.00	19.90	0.10	10.19	Average
31	2.10	41.19	-14.81	56.00	30.90	0.10	10.19	QP
32	2.10	32.59	-13.41	46.00	22.30	0.10	10.19	Average
33	2.30	41.21	-14.79	56.00	30.90	0.11	10.20	QP
34	2.30	32.91	-13.09	46.00	22.60	0.11	10.20	Average
35	2.43	35.21	-10.79	46.00	24.90	0.11	10.20	Average
36	2.43	43.21	-12.79	56.00	32.90	0.11	10.20	QP
37	2.62	42.13	-13.87	56.00	31.80	0.12	10.21	QP
38	2.62	34.23	-11.77	46.00	23.90	0.12	10.21	Average
39	2.75	42.24	-13.76	56.00	31.91	0.12	10.21	QP
40	2.75	34.64	-11.36	46.00	24.31	0.12	10.21	Average
41	2.93	31.95	-14.05	46.00	21.60	0.13	10.22	Average
42	2.93	40.45	-15.55	56.00	30.10	0.13	10.22	QP
43	3.19	31.68	-14.32	46.00	21.30	0.15	10.23	Average
44	3.19	40.68	-15.32	56.00	30.30	0.15	10.23	QP
45	3.38	41.20	-14.80	56.00	30.81	0.16	10.23	QP
46	3.38	32.00	-14.00	46.00	21.61	0.16	10.23	Average
47	3.62	33.01	-12.99	46.00	22.61	0.17	10.23	Average
48	3.62	42.01	-13.99	56.00	31.61	0.17	10.23	QP
49	3.86	43.52	-12.48	56.00	33.10	0.18	10.24	QP
50	3.86	34.02	-11.98	46.00	23.60	0.18	10.24	Average
51	4.11	42.33	-13.67	56.00	31.90	0.19	10.24	QP
52	4.11	33.53	-12.47	46.00	23.10	0.19	10.24	Average
53	4.36	42.04	-13.96	56.00	31.60	0.19	10.25	QP
54	4.36	32.34	-13.66	46.00	21.90	0.19	10.25	Average
55	4.72	32.75	-13.25	46.00	22.30	0.20	10.25	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)		

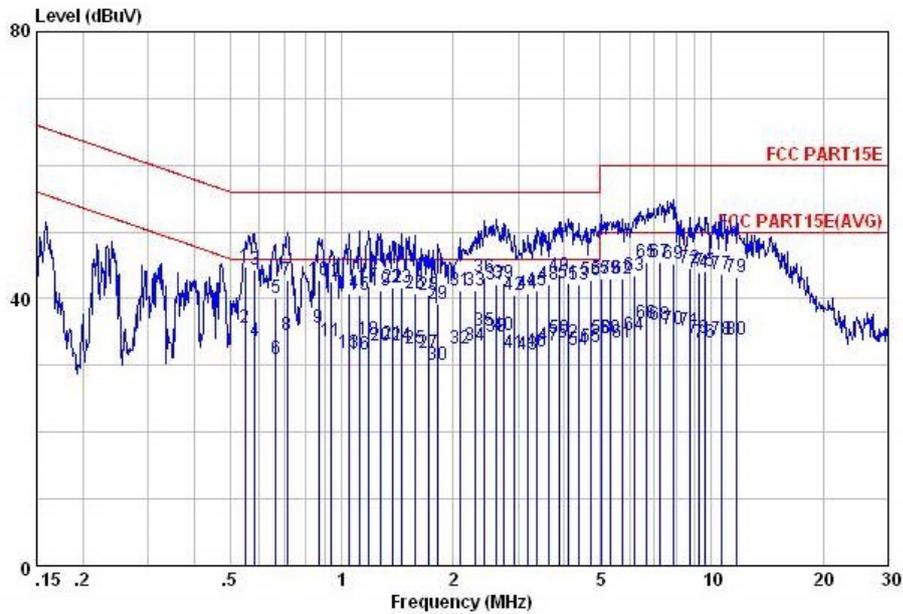


Site : C001-K3  
 Condition: FCC PART15E LISN-L20130306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
56	4.72	42.75	-13.25	56.00	32.30	0.20	10.25	QP
57	5.03	43.06	-16.94	60.00	32.60	0.20	10.26	QP
58	5.03	34.06	-15.94	50.00	23.60	0.20	10.26	Average
59	5.30	43.07	-16.93	60.00	32.60	0.20	10.27	QP
60	5.30	34.07	-15.93	50.00	23.60	0.20	10.27	Average
61	5.74	33.38	-16.62	50.00	22.90	0.20	10.28	Average
62	5.74	43.08	-16.92	60.00	32.60	0.20	10.28	QP
63	6.19	43.39	-16.61	60.00	32.90	0.20	10.29	QP
64	6.19	34.59	-15.41	50.00	24.10	0.20	10.29	Average
65	6.66	45.41	-14.59	60.00	34.90	0.20	10.31	QP
66	6.66	36.41	-13.59	50.00	25.90	0.20	10.31	Average
67	7.25	45.43	-14.57	60.00	34.90	0.20	10.33	QP
68	7.25	36.13	-13.87	50.00	25.60	0.20	10.33	Average
69	7.85	45.14	-14.86	60.00	34.60	0.20	10.34	QP
70	7.85	35.44	-14.56	50.00	24.90	0.20	10.34	Average
71	8.78	35.15	-14.85	50.00	24.60	0.20	10.35	Average
72	8.78	44.65	-15.35	60.00	34.10	0.20	10.35	QP
73	9.20	34.15	-15.85	50.00	23.60	0.20	10.35	Average
74	9.20	43.85	-16.15	60.00	33.30	0.20	10.35	QP
75	9.60	44.16	-15.84	60.00	33.60	0.20	10.36	QP
76	9.60	33.46	-16.54	50.00	22.90	0.20	10.36	Average
77	10.62	43.66	-16.34	60.00	33.10	0.20	10.36	QP
78	10.62	33.86	-16.14	50.00	23.30	0.20	10.36	Average
79	11.68	43.15	-16.85	60.00	32.60	0.20	10.35	QP
80	11.68	33.85	-16.15	50.00	23.30	0.20	10.35	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)		

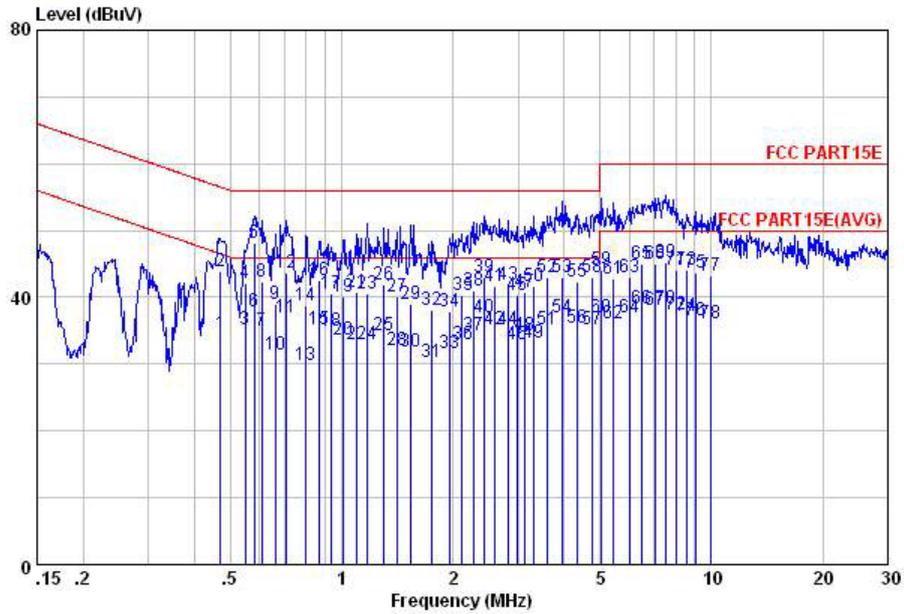


Site : C001-KS  
 Condition: FCC PART15E LISN-N20130306 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.47	34.49	-12.00	46.49	23.90	0.32	10.27	Average
2	0.47	43.89	-12.60	56.49	33.30	0.32	10.27	QP
3	0.55	35.13	-10.87	46.00	24.60	0.28	10.25	Average
4	0.55	42.13	-13.87	56.00	31.60	0.28	10.25	QP
5	0.58	48.11	-7.89	56.00	37.60	0.26	10.25	QP
6	0.58	37.81	-8.19	46.00	27.30	0.26	10.25	Average
7	0.61	35.08	-10.92	46.00	24.60	0.24	10.24	Average
8	0.61	42.38	-13.62	56.00	31.90	0.24	10.24	QP
9	0.66	39.03	-16.97	56.00	28.60	0.21	10.22	QP
10	0.66	31.33	-14.67	46.00	20.90	0.21	10.22	Average
11	0.71	37.01	-8.99	46.00	26.60	0.20	10.21	Average
12	0.71	43.71	-12.29	56.00	33.30	0.20	10.21	QP
13	0.80	29.96	-16.04	46.00	19.59	0.17	10.20	Average
14	0.80	38.66	-17.34	56.00	28.29	0.17	10.20	QP
15	0.87	35.22	-10.78	46.00	24.90	0.13	10.19	Average
16	0.87	42.62	-13.38	56.00	32.30	0.13	10.19	QP
17	0.93	40.60	-15.40	56.00	30.31	0.11	10.18	QP
18	0.93	34.90	-11.10	46.00	24.61	0.11	10.18	Average
19	1.01	40.18	-15.82	56.00	29.90	0.10	10.18	QP
20	1.01	33.68	-12.32	46.00	23.40	0.10	10.18	Average
21	1.09	40.88	-15.12	56.00	30.60	0.10	10.18	QP
22	1.09	32.88	-13.12	46.00	22.60	0.10	10.18	Average
23	1.17	40.58	-15.42	56.00	30.30	0.10	10.18	QP
24	1.17	32.88	-13.12	46.00	22.60	0.10	10.18	Average
25	1.30	34.38	-11.62	46.00	24.10	0.10	10.18	Average
26	1.30	41.88	-14.12	56.00	31.60	0.10	10.18	QP
27	1.42	40.19	-15.81	56.00	29.91	0.10	10.18	QP
28	1.42	32.19	-13.81	46.00	21.91	0.10	10.18	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)		

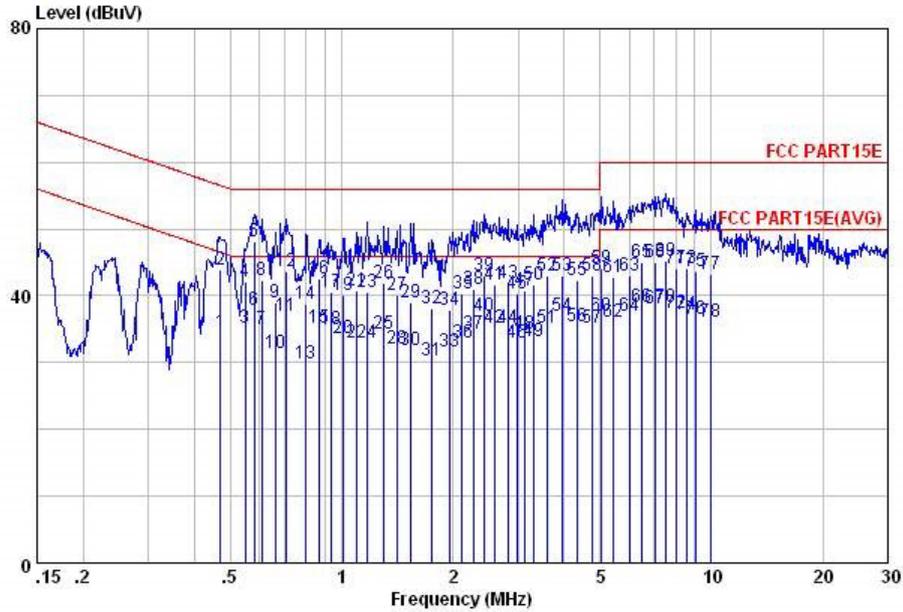


Site : C001-KS  
 Condition: FCC PART15E LISN-N20130306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
29	1.54	38.89	-17.11	56.00	28.60	0.10	10.19	QP
30	1.54	31.89	-14.11	46.00	21.60	0.10	10.19	Average
31	1.74	30.39	-15.61	46.00	20.10	0.10	10.19	Average
32	1.74	38.19	-17.81	56.00	27.90	0.10	10.19	QP
33	1.96	31.59	-14.41	46.00	21.30	0.10	10.19	Average
34	1.96	37.89	-18.11	56.00	27.60	0.10	10.19	QP
35	2.12	40.40	-15.60	56.00	30.11	0.10	10.19	QP
36	2.12	32.90	-13.10	46.00	22.61	0.10	10.19	Average
37	2.27	34.40	-11.60	46.00	24.09	0.11	10.20	Average
38	2.27	40.90	-15.10	56.00	30.59	0.11	10.20	QP
39	2.42	42.91	-13.09	56.00	32.60	0.11	10.20	QP
40	2.42	36.91	-9.09	46.00	26.60	0.11	10.20	Average
41	2.59	41.62	-14.38	56.00	31.29	0.12	10.21	QP
42	2.59	35.22	-10.78	46.00	24.89	0.12	10.21	Average
43	2.81	41.94	-14.06	56.00	31.60	0.13	10.21	QP
44	2.81	35.24	-10.76	46.00	24.90	0.13	10.21	Average
45	2.98	40.26	-15.74	56.00	29.90	0.14	10.22	QP
46	2.98	32.96	-13.04	46.00	22.60	0.14	10.22	Average
47	3.14	40.67	-15.33	56.00	30.29	0.15	10.23	QP
48	3.14	34.27	-11.73	46.00	23.89	0.15	10.23	Average
49	3.29	33.29	-12.71	46.00	22.90	0.16	10.23	Average
50	3.29	41.69	-14.31	56.00	31.30	0.16	10.23	QP
51	3.60	35.31	-10.69	46.00	24.91	0.17	10.23	Average
52	3.60	43.01	-12.99	56.00	32.61	0.17	10.23	QP
53	3.96	43.02	-12.98	56.00	32.60	0.18	10.24	QP
54	3.96	37.02	-8.98	46.00	26.60	0.18	10.24	Average
55	4.34	42.24	-13.76	56.00	31.80	0.19	10.25	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC1 + WLAN Link (5G) + USB Cable (Charging from Adapter)		

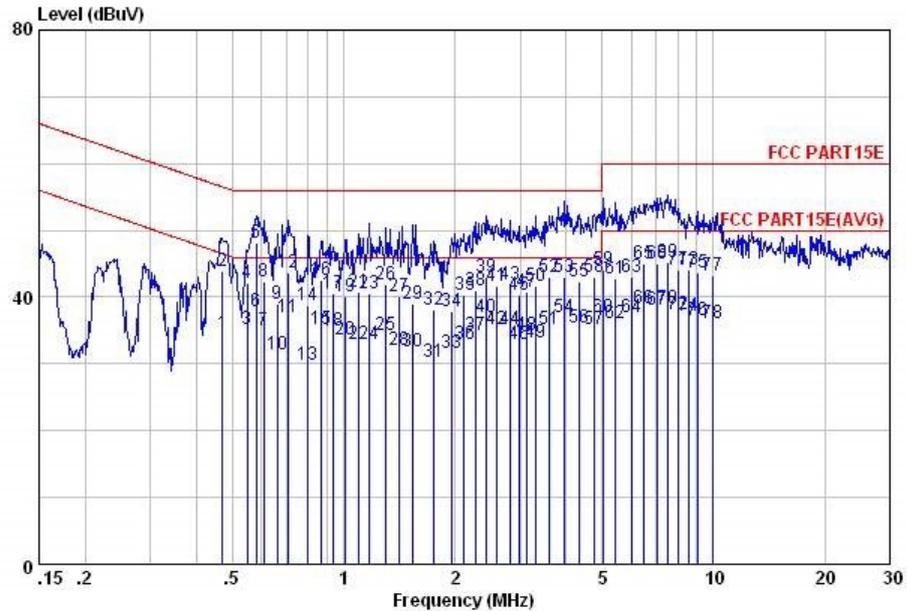

Site : C001-KS  
 Condition: FCC PART15E LISN-N20130306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
56	4.34	35.34	-10.66	46.00	24.90	0.19	10.25	Average
57	4.75	35.25	-10.75	46.00	24.80	0.20	10.25	Average
58	4.75	43.05	-12.95	56.00	32.60	0.20	10.25	QP
59	5.06	44.06	-15.94	60.00	33.60	0.20	10.26	QP
60	5.06	37.06	-12.94	50.00	26.60	0.20	10.26	Average
61	5.45	42.77	-17.23	60.00	32.30	0.20	10.27	QP
62	5.45	36.07	-13.93	50.00	25.60	0.20	10.27	Average
63	5.99	43.09	-16.91	60.00	32.60	0.20	10.29	QP
64	5.99	37.09	-12.91	50.00	26.60	0.20	10.29	Average
65	6.49	45.11	-14.89	60.00	34.60	0.20	10.31	QP
66	6.49	38.41	-11.59	50.00	27.90	0.20	10.31	Average
67	7.02	38.12	-11.88	50.00	27.60	0.20	10.32	Average
68	7.02	45.12	-14.88	60.00	34.60	0.20	10.32	QP
69	7.53	45.13	-14.87	60.00	34.60	0.20	10.33	QP
70	7.53	38.43	-11.57	50.00	27.90	0.20	10.33	Average
71	8.02	44.14	-15.86	60.00	33.60	0.20	10.34	QP
72	8.02	37.44	-12.56	50.00	26.90	0.20	10.34	Average
73	8.59	44.15	-15.85	60.00	33.60	0.20	10.35	QP
74	8.59	37.15	-12.85	50.00	26.60	0.20	10.35	Average
75	9.11	43.65	-16.35	60.00	33.10	0.20	10.35	QP
76	9.11	36.65	-13.35	50.00	26.10	0.20	10.35	Average
77	9.97	43.16	-16.84	60.00	32.60	0.20	10.36	QP
78	9.97	36.16	-13.84	50.00	25.60	0.20	10.36	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

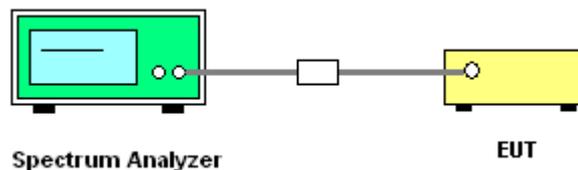



### 3.6.5 Test Result of Frequency Stability

Test Band :	5GHz band 1	Test Engineer :	Issac Song
-------------	-------------	-----------------	------------

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	20	3.5
11a	6Mbps	1	36	5180	5179.925	-0.075	-14.48	20	4.2
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	20	3.7
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	-30	3.7
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	55	3.7

**Note:** Center Frequency = (Low Frequency + High Frequency) / 2.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

### 3.8 Antenna Requirements

#### 3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.



The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant 1 (dBi)	Ant 2 (dBi)				
Band I	2.40	2.50	5.46	5.46	0.00	0.00

$$\text{Power Limit Reduction} = DG(\text{Power}) - 6\text{dBi}, (\text{min} = 0)$$

$$\text{PSD Limit Reduction} = DG(\text{PSD}) - 6\text{dBi}, (\text{min} = 0)$$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Aug. 09, 2014~ Aug. 22, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Aug. 09, 2014~ Aug. 22, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Aug. 09, 2014~ Aug. 22, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-9605 02	-40~+150°C	Dec. 10, 2013	Aug. 09, 2014~ Aug. 22, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Aug. 01, 2014~ Aug. 14, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Aug. 01, 2014~ Aug. 14, 2014	Dec. 27, 2014	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Aug. 01, 2014~ Aug. 14, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Aug. 01, 2014~ Aug. 14, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Aug. 01, 2014~ Aug. 14, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Aug. 01, 2014~ Aug. 14, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Mar. 10, 2014	Aug. 01, 2014~ Aug. 14, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Aug. 01, 2014~ Aug. 14, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Dec. 10, 2013	Aug. 01, 2014~ Aug. 14, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Aug. 01, 2014~ Aug. 14, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 01, 2014~ Aug. 14, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 01, 2014~ Aug. 14, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jul. 31, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jul. 31, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jul. 31, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Jul. 31, 2014	Nov. 11, 2014	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----