


FCC SAR Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : CDMA/EVDO/LTE Multi-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE N9130
FCC ID : SRQ-ZTEN9130
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



Table of Contents

1. Statement of Compliance4
2. Administration Data5
3. Guidance Standard5
4. Equipment Under Test (EUT)6
4.1 General Information6
4.2 Maximum Tune-up Limit.....7
4.3 General LTE SAR Test and Reporting Considerations10
5. RF Exposure Limits11
5.1 Uncontrolled Environment.....11
5.2 Controlled Environment.....11
6. Specific Absorption Rate (SAR).....12
6.1 Introduction12
6.2 SAR Definition.....12
7. System Description and Setup13
8. Measurement Procedures14
8.1 Spatial Peak SAR Evaluation.....14
8.2 Power Reference Measurement.....15
8.3 Area Scan15
8.4 Zoom Scan.....16
8.5 Volume Scan Procedures.....16
8.6 Power Drift Monitoring.....16
9. Test Equipment List17
10. System Verification18
10.1 Tissue Verification18
10.2 System Performance Check Results.....19
11. RF Exposure Positions20
11.1 Ear and handset reference point20
11.2 Definition of the cheek position.....21
11.3 Definition of the tilt position.....22
11.4 Body Worn Accessory23
11.5 Wireless Router.....23
12. Conducted RF Output Power (Unit: dBm).....24
13. Bluetooth Exclusions Applied35
14. Antenna Location36
15. SAR Test Results37
15.1 Head SAR38
15.2 Hotspot SAR40
15.3 Body Worn Accessory SAR.....43
15.4 Repeated SAR Measurement44
16. Simultaneous Transmission Analysis.....45
16.1 Head Exposure Conditions46
16.2 Hotspot Exposure Conditions.....48
16.3 Body-Worn Accessory Exposure Conditions50
17. Uncertainty Assessment51
18. References53
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Test Setup Photos



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ZTE CORPORATION, CDMA/EVDO/LTE Multi-Mode Digital Mobile Phone, ZTE N9130, are as follows.

Table with columns: Equipment Class, Frequency Band, Operating Mode, and Highest SAR Summary (Head 1g SAR, Body-worn 1g SAR, Wireless Router 1g SAR, Simultaneous Transmission SAR). Rows include PCE, DTS, and DSS categories with various frequency bands and operating modes.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



2. Administration Data

| Testing Laboratory | |
|--------------------|--|
| Test Site | SPORTON INTERNATIONAL (KUNSHAN) INC. |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958 |

| Applicant | |
|--------------|---|
| Company Name | ZTE CORPORATION |
| Address | ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China |

| Manufacturer | |
|--------------|---|
| Company Name | ZTE CORPORATION |
| Address | ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China |

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

4. Equipment Under Test (EUT)

4.1 General Information

| Product Feature & Specification | |
|---|---|
| Equipment Name | CDMA/EVDO/LTE Multi-Mode Digital Mobile Phone |
| Brand Name | ZTE |
| Model Name | ZTE N9130 |
| FCC ID | SRQ-ZTEN9130 |
| IMEI Code | 990002229728496 |
| Wireless Technology and Frequency Range | CDMA2000 BC0: 824.7 MHz ~ 848.31 MHz CDMA 2000 BC10: 817.9 MHz ~ 823.1 MHz CDMA 2000 BC1: 1851.25 MHz ~ 1908.75 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz |
| Mode | <ul style="list-style-type: none"> • CDMA2000 : 1xRTT/1xEv-Do(Rev.0)/1xEv-Do(Rev.A) • LTE: QPSK, 16QAM • 802.11b/g/n HT20 • Bluetooth v3.0+EDR , Bluetooth v4.0 LE |
| HW Version | cwfB |
| SW Version | N9130V1.0.0B01C |
| EUT Stage | Identical Prototype |
| Remark: 1. This device 2.4GHz WLAN supports Hotspot operation. 2. This device supported VoIP in Ev-Do Rev A (RETAP 4096 bits)/LTE (e.g. 3rd party VoIP). 3. 802.11n-HT40 is not supported in 2.4GHz WLAN. | |

4.2 Maximum Tune-up Limit

| Average Power (dBm) | | | |
|--------------------------------|--------------|--------------|---------------|
| Band | CDMA2000 BC0 | CDMA2000 BC1 | CDMA2000 BC10 |
| 1xRTT RC1 SO55 | 25 | 25 | 25 |
| 1xRTT RC3 SO55 | 25 | 25 | 25 |
| 1xRTT RC3 SO32 (+ F-SCH) | 25 | 25 | 25 |
| 1xRTT RC3 SO32 (+SCH) | 25 | 25 | 25 |
| 1xEV-DO Rev 0 (RTAP 153.6kbps) | 25 | 25 | 25 |
| 1xEV-DO Rev A (RETAP 4096bits) | 25 | 25 | 25 |

| LTE Band 25 | | | | |
|-------------|----------|---------|------------|--------------------|
| Modulation | BW (MHz) | RB size | Target MPR | Target Power (dBm) |
| QPSK | 20 | ≤ 18 | 0 | 24 |
| QPSK | 20 | > 18 | 1 | 23 |
| 16QAM | 20 | ≤ 18 | 1 | 23 |
| 16QAM | 20 | > 18 | 2 | 22 |
| QPSK | 15 | ≤ 16 | 0 | 24 |
| QPSK | 15 | > 16 | 1 | 23 |
| 16QAM | 15 | ≤ 16 | 1 | 23 |
| 16QAM | 15 | > 16 | 2 | 22 |
| QPSK | 10 | ≤ 12 | 0 | 24 |
| QPSK | 10 | > 12 | 1 | 23 |
| 16QAM | 10 | ≤ 12 | 1 | 23 |
| 16QAM | 10 | > 12 | 2 | 22 |
| QPSK | 5 | ≤ 8 | 0 | 24 |
| QPSK | 5 | > 8 | 1 | 23 |
| 16QAM | 5 | ≤ 8 | 1 | 23 |
| 16QAM | 5 | > 8 | 2 | 22 |
| QPSK | 3 | ≤ 4 | 0 | 24 |
| QPSK | 3 | > 4 | 1 | 23 |
| 16QAM | 3 | ≤ 4 | 1 | 23 |
| 16QAM | 3 | > 4 | 2 | 22 |
| QPSK | 1.4 | ≤ 5 | 0 | 24 |
| QPSK | 1.4 | > 5 | 1 | 23 |
| 16QAM | 1.4 | ≤ 5 | 1 | 23 |
| 16QAM | 1.4 | > 5 | 2 | 22 |

| LTE Band 26 | | | | |
|-------------|----------|---------|------------|--------------------|
| Modulation | BW (MHz) | RB size | Target MPR | Target Power (dBm) |
| QPSK | 15 | ≤ 16 | 0 | 24.5 |
| QPSK | 15 | > 16 | 1 | 23.5 |
| 16QAM | 15 | ≤ 16 | 1 | 23.5 |
| 16QAM | 15 | > 16 | 2 | 22.5 |
| QPSK | 10 | ≤ 12 | 0 | 24.5 |
| QPSK | 10 | > 12 | 1 | 23.5 |
| 16QAM | 10 | ≤ 12 | 1 | 23.5 |
| 16QAM | 10 | > 12 | 2 | 22.5 |
| QPSK | 5 | ≤ 8 | 0 | 24.5 |
| QPSK | 5 | > 8 | 1 | 23.5 |
| 16QAM | 5 | ≤ 8 | 1 | 23.5 |
| 16QAM | 5 | > 8 | 2 | 22.5 |
| QPSK | 3 | ≤ 4 | 0 | 24.5 |
| QPSK | 3 | > 4 | 1 | 23.5 |
| 16QAM | 3 | ≤ 4 | 1 | 23.5 |
| 16QAM | 3 | > 4 | 2 | 22.5 |
| QPSK | 1.4 | ≤ 5 | 0 | 24.5 |
| QPSK | 1.4 | > 5 | 1 | 23.5 |
| 16QAM | 1.4 | ≤ 5 | 1 | 23.5 |
| 16QAM | 1.4 | > 5 | 2 | 22.5 |

| LTE Band 41 | | | | |
|-------------|----------|---------|------------|--------------------|
| Modulation | BW (MHz) | RB size | Target MPR | Target Power (dBm) |
| QPSK | 20 | ≤ 18 | 0 | 24.3 |
| QPSK | 20 | > 18 | 1 | 23.3 |
| 16QAM | 20 | ≤ 18 | 1 | 23.3 |
| 16QAM | 20 | > 18 | 2 | 22.3 |
| QPSK | 15 | ≤ 16 | 0 | 24.3 |
| QPSK | 15 | > 16 | 1 | 23.3 |
| 16QAM | 15 | ≤ 16 | 1 | 23.3 |
| 16QAM | 15 | > 16 | 2 | 22.3 |
| QPSK | 10 | ≤ 12 | 0 | 24.3 |
| QPSK | 10 | > 12 | 1 | 23.3 |
| 16QAM | 10 | ≤ 12 | 1 | 23.3 |
| 16QAM | 10 | > 12 | 2 | 22.3 |
| QPSK | 5 | ≤ 8 | 0 | 24.3 |
| QPSK | 5 | > 8 | 1 | 23.3 |
| 16QAM | 5 | ≤ 8 | 1 | 23.3 |
| 16QAM | 5 | > 8 | 2 | 22.3 |

| Mode | | Maximum Average Power (dBm) |
|----------------------|--------------|-----------------------------|
| 2.4GHz | 802.11b | 15.5 |
| | 802.11g | 12 |
| | 802.11n HT20 | 12 |
| Bluetooth v3.0 + EDR | | 1 |
| Bluetooth v4.0 LE | | 0 |



4.3 General LTE SAR Test and Reporting Considerations

| Summarized necessary items addressed in KDB 941225 D05 v02r03 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|------------|---|--------|--------|--------|----------|--|----------|---------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|
| FCC ID | SRQ-ZTEN9130 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Equipment Name | CDMA/EVDO/LTE Multi-Mode Digital Mobile Phone | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Frequency Range of each LTE transmission band | LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Channel Bandwidth | 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz (LTE Band 25) 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz (LTE Band 26) 5MHz, 10MHz, 15MHz, 20MHz (LTE Band 41) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| uplink modulations used | QPSK, and 16QAM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE Voice / Data requirements | Data only | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE MPR permanently built-in by design | <p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> | Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |
| Modulation | Channel bandwidth / Transmission bandwidth (RB) | | | | | | MPR (dB) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LTE A-MPR | In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spectrum plots for RB configuration | A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Transmission (H, M, L) channel numbers and frequencies in each LTE band | | | | | | | | | | | | |
|---|-------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|------------------|-------------|
| LTE Band 25 | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) |
| L | 26047 | 1850.7 | 26055 | 1851.5 | 26065 | 1852.5 | 26090 | 1855 | 26115 | 1857.5 | 26140 | 1860 |
| M | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 | 26340 | 1880 |
| H | 26683 | 1914.3 | 26675 | 1913.5 | 26665 | 1912.5 | 26640 | 1910 | 26615 | 1907.5 | 26590 | 1905 |
| LTE Band 26 | | | | | | | | | | | | |
| | Bandwidth 1.4 MHz | | Bandwidth 3 MHz | | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) |
| L | 26697 | 814.7 | 26705 | 815.5 | 26715 | 816.5 | 26740 | 819 | 26765 | 821.5 | | |
| M | 26865 | 831.5 | 26865 | 831.5 | 26865 | 831.5 | 26865 | 831.5 | 26865 | 831.5 | | |
| H | 27033 | 848.3 | 27025 | 847.5 | 27015 | 846.5 | 26990 | 844 | 26965 | 841.5 | | |
| LTE Band 41 | | | | | | | | | | | | |
| | Bandwidth 5 MHz | | Bandwidth 10 MHz | | Bandwidth 15 MHz | | Bandwidth 20 MHz | | | | | |
| | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | Ch. # | Freq. (MHz) | | |
| L | 39675 | 2498.5 | 39700 | 2501 | 39725 | 2503.5 | 39750 | 2506 | | | | |
| L | 40148 | 2545.8 | 40160 | 2547 | 40173 | 2548.3 | 40185 | 2549.5 | | | | |
| M | 40620 | 2593 | 40620 | 2593 | 40620 | 2593 | 40620 | 2593 | | | | |
| M | 41093 | 2640.3 | 41080 | 2639 | 41068 | 2637.8 | 41055 | 2636.5 | | | | |
| H | 41565 | 2687.5 | 41540 | 2685 | 41515 | 2682.5 | 41490 | 2680 | | | | |

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.4 | 8.0 | 20.0 |

Limits for General Population/Uncontrolled Exposure (W/kg)

| Whole-Body | Partial-Body | Hands, Wrists, Feet and Ankles |
|------------|--------------|--------------------------------|
| 0.08 | 1.6 | 4.0 |

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

| | ≤ 3 GHz | > 3 GHz |
|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$ | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

| | | ≤ 3 GHz | > 3 GHz | |
|--|------------------------------------|--|---|--|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$ | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* | |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm | |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm | 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ | |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm | |
| Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. | | | | |

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

| Manufacturer | Name of Equipment | Type/Model | Serial Number | Calibration | |
|---------------|---------------------------------|---------------|---------------|---------------|---------------|
| | | | | Last Cal. | Due Date |
| SPEAG | 835MHz System Validation Kit | D835V2 | 4d091 | Nov. 18, 2011 | Nov. 14, 2014 |
| SPEAG | 1900MHz System Validation Kit | D1900V2 | 5d118 | Nov. 21, 2011 | Nov. 14, 2014 |
| SPEAG | 2450MHz System Validation Kit | D2450V2 | 924 | Nov. 13, 2013 | Nov. 12, 2014 |
| SPEAG | 2600MHz System Validation Kit | D2600V2 | 1070 | Nov. 13, 2013 | Nov. 12, 2014 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1210 | May 19, 2014 | May 18, 2015 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3857 | May 23, 2014 | May 22, 2015 |
| SPEAG | SAM Twin Phantom | QD 000 P40 CB | TP-1477 | NCR | NCR |
| SPEAG | SAM Twin Phantom | QD 000 P40 CB | TP-1479 | NCR | NCR |
| SPEAG | Phone Positioner | N/A | N/A | NCR | NCR |
| Anritsu | Radio communication analyzer | MT8820C | 6201091028 | Jul. 10, 2014 | Jul. 09, 2015 |
| Agilent | Wireless Communication Test Set | E5515C | MY52102706 | May 03, 2014 | May 02, 2015 |
| Agilent | ENA Series Network Analyzer | E5071C | MY46111157 | May 04, 2014 | May 03, 2015 |
| Agilent | Dielectric Probe Kit | 85070E | MY44300475 | NCR | NCR |
| Agilent | Signal Generator | N5181A | MY50145381 | Jan. 04, 2014 | Jan. 03, 2015 |
| Anritsu | Power Sensor | MA2411B | 0917070 | Feb. 27, 2014 | Feb. 26, 2015 |
| Anritsu | Power Meter | ML2495A | 1005002 | Feb. 27, 2014 | Feb. 26, 2015 |
| R&S | Spectrum Analyzer | FSP7 | 101045 | Dec. 30, 2013 | Dec. 29, 2014 |
| Agilent | Dual Directional Coupler | 778D | 50422 | Note1 | |
| Woken | Attenuator 1 | WK0602-XX | N/A | Note1 | |
| PE | Attenuator 2 | PE7005-10 | N/A | Note1 | |
| PE | Attenuator 3 | PE7005- 3 | N/A | Note1 | |
| AR | Power Amplifier | 5S1G4M2 | 0328767 | Note1 | |
| Mini-Circuits | Power Amplifier | ZVE-3W | 162601250 | Note1 | |
| Mini-Circuits | Power Amplifier | ZHL-42W+ | 13440021344 | Note1 | |

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. Referring to KDB 865664 D01v01r03, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity (σ) | Permittivity (ϵ_r) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|---------------------------|-------------------------------|
| For Head | | | | | | | | |
| 835 | 40.3 | 57.9 | 0.2 | 1.4 | 0.2 | 0 | 0.90 | 41.5 |
| 1800, 1900, 2000 | 55.2 | 0 | 0 | 0.3 | 0 | 44.5 | 1.40 | 40.0 |
| 2450 | 55.0 | 0 | 0 | 0 | 0 | 45.0 | 1.80 | 39.2 |
| 2600 | 54.8 | 0 | 0 | 0.1 | 0 | 45.1 | 1.96 | 39.0 |
| For Body | | | | | | | | |
| 835 | 50.8 | 48.2 | 0 | 0.9 | 0.1 | 0 | 0.97 | 55.2 |
| 1800, 1900, 2000 | 70.2 | 0 | 0 | 0.4 | 0 | 29.4 | 1.52 | 53.3 |
| 2450 | 68.6 | 0 | 0 | 0 | 0 | 31.4 | 1.95 | 52.7 |
| 2600 | 68.1 | 0 | 0 | 0.1 | 0 | 31.8 | 2.16 | 52.5 |

<Tissue Dielectric Parameter Check Results>

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity (σ) | Permittivity (ϵ_r) | Conductivity Target (σ) | Permittivity Target (ϵ_r) | Delta (σ) (%) | Delta (ϵ_r) (%) | Limit (%) | Date |
|-----------------|-------------|-------------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|------------|
| 835 | Head | 22.7 | 0.885 | 41.086 | 0.90 | 41.50 | -1.67 | -1.00 | ±5 | 2014/10/23 |
| 1900 | Head | 22.9 | 1.425 | 38.906 | 1.40 | 40.00 | 1.79 | -2.74 | ±5 | 2014/10/22 |
| 2450 | Head | 22.5 | 1.831 | 39.169 | 1.80 | 39.20 | 1.72 | -0.08 | ±5 | 2014/10/25 |
| 2600 | Head | 22.5 | 1.981 | 38.254 | 1.96 | 39.00 | 1.07 | -1.91 | ±5 | 2014/10/25 |
| 835 | Body | 22.9 | 0.983 | 54.868 | 0.97 | 55.20 | 1.34 | -0.60 | ±5 | 2014/10/22 |
| 1900 | Body | 22.8 | 1.552 | 53.373 | 1.52 | 53.30 | 2.11 | 0.14 | ±5 | 2014/10/21 |
| 2450 | Body | 22.7 | 1.949 | 51.497 | 1.95 | 52.70 | -0.05 | -2.28 | ±5 | 2014/10/21 |
| 2600 | Body | 22.8 | 2.209 | 51.123 | 2.16 | 52.50 | 2.27 | -2.62 | ±5 | 2014/10/18 |

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Date | Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured SAR (W/kg) | Targeted SAR (W/kg) | Normalized SAR (W/kg) | Deviation (%) |
|------------|-----------------|-------------|------------------|------------|-----------|---------|---------------------|---------------------|-----------------------|---------------|
| 2014/10/23 | 835 | Head | 250 | 4d091 | 3857 | 1210 | 2.35 | 9.40 | 9.4 | 0.00 |
| 2014/10/22 | 1900 | Head | 250 | 5d118 | 3857 | 1210 | 9.86 | 40.30 | 39.44 | -2.13 |
| 2014/10/25 | 2450 | Head | 250 | 924 | 3857 | 1210 | 12.80 | 52.40 | 51.2 | -2.29 |
| 2014/10/25 | 2600 | Head | 250 | 1070 | 3857 | 1210 | 15.10 | 56.60 | 60.4 | 6.71 |
| 2014/10/22 | 835 | Body | 250 | 4d091 | 3857 | 1210 | 2.27 | 9.42 | 9.08 | -3.61 |
| 2014/10/21 | 1900 | Body | 250 | 5d118 | 3857 | 1210 | 10.40 | 41.80 | 41.6 | -0.48 |
| 2014/10/21 | 2450 | Body | 250 | 924 | 3857 | 1210 | 12.90 | 50.20 | 51.6 | 2.79 |
| 2014/10/18 | 2600 | Body | 250 | 1070 | 3857 | 1210 | 13.40 | 55.70 | 53.6 | -3.77 |

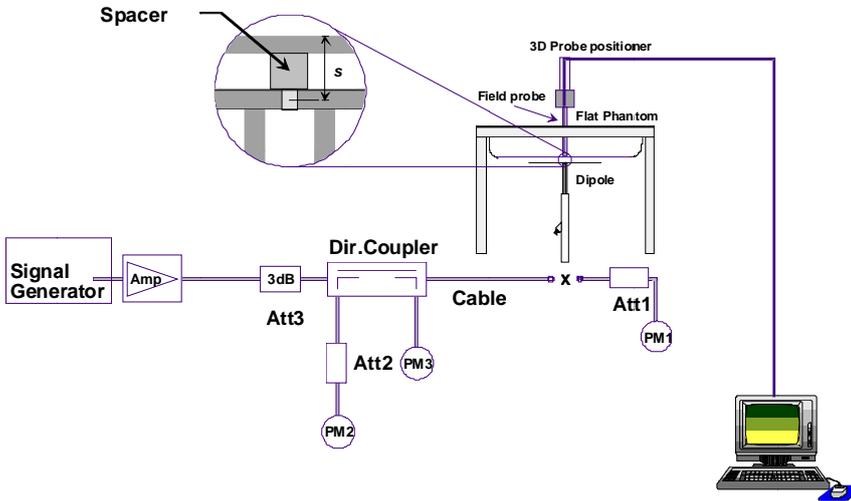


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

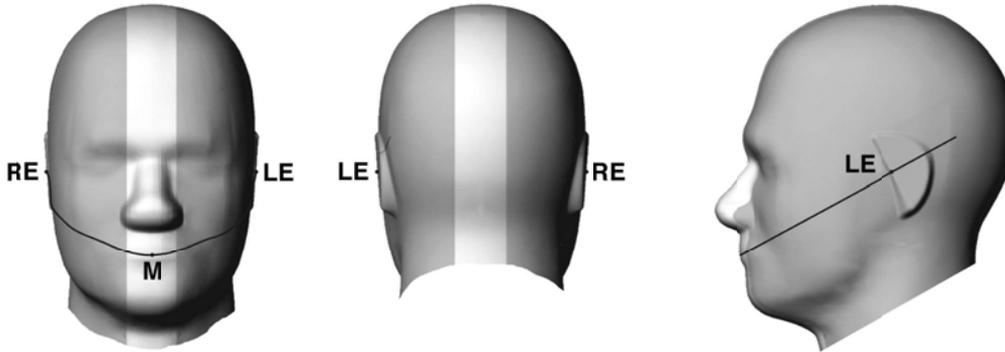


Fig 9.1.1 Front, back, and side views of SAM twin phantom

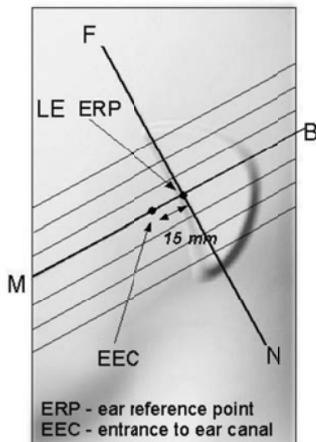


Fig 9.1.2 Close-up side view of phantom showing the ear region.

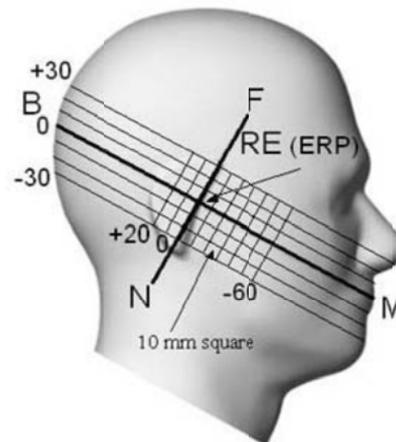


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

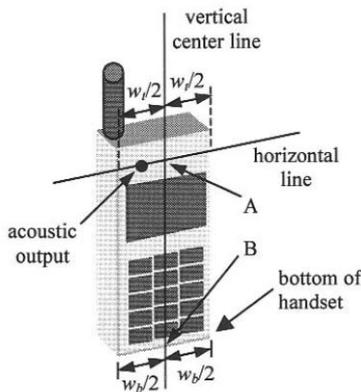


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

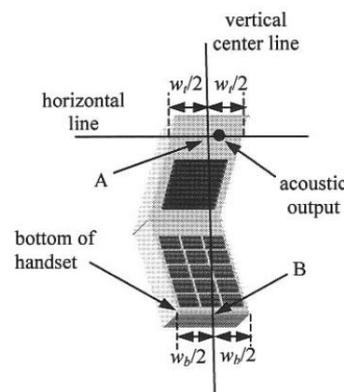


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

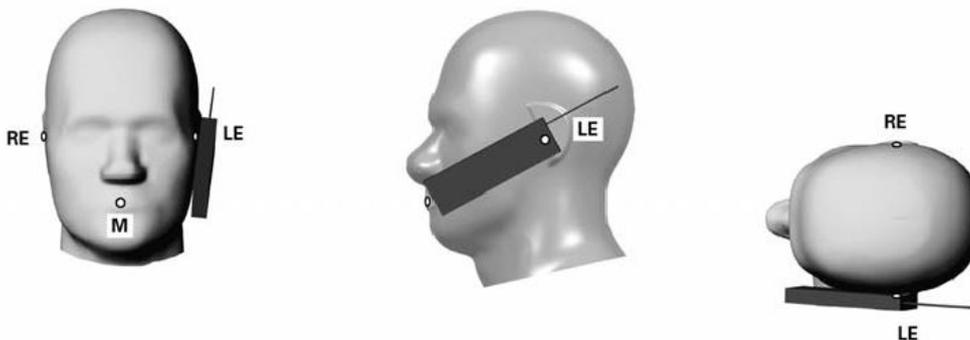


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

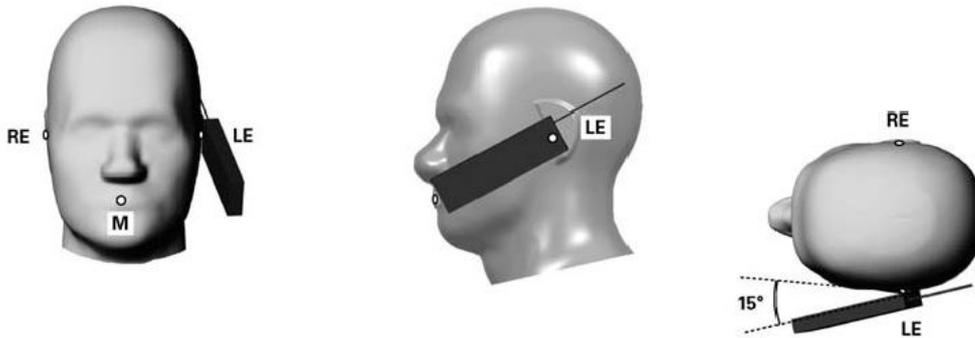


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

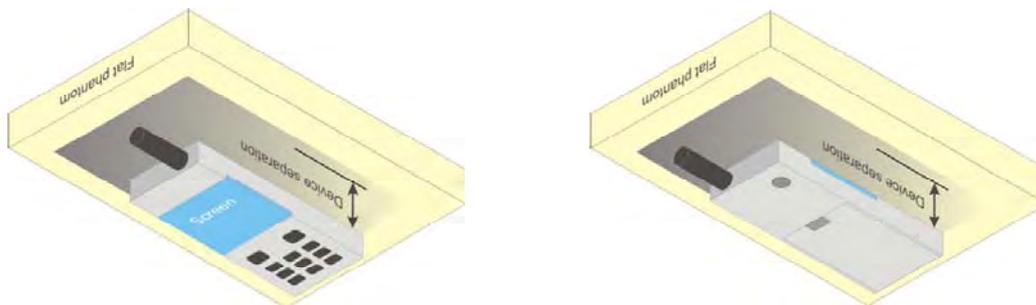


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06v01r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. Conducted RF Output Power (Unit: dBm)

<CDMA2000 Conducted Power>

General Note:

- 1. Per KDB 941225 D01v03, SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55.
2. Per KDB 941225 D01v03, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps) as the primary mode.
3. Per KDB 941225 D01v03, for Body-worn accessory SAR is measured in RC3 with the handset configured in TDSO/SO32 to transmit at full rate on FCH only with all other code channels disabled. The body-worn accessory procedures in KDB Publication 447498 are applied. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH), with FCH only as the primary mode.

Table with 10 columns: Band, TX Channel, Frequency (MHz), and SAR values for CDMA2000 BC10, BC0, and BC1 across various modes like 1xRTT RC1 SO55, 1xRTT RC3 SO55, 1xRTT RC3 SO32(+ F-SCH), 1xRTT RC3 SO32(+SCH), 1xEVDO RTAP 153.6Kbps, and 1xEVDO RETAP 4096Bits.

**<LTE Conducted Power>****General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



<LTE Band 26>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune up Limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 26765 | 26865 | 26965 | | |
| Frequency (MHz) | | | | 821.5 | 831.5 | 841.5 | | |
| 15 | QPSK | 1 | 0 | 23.69 | 23.53 | 23.53 | 24.5 | 0 |
| 15 | QPSK | 1 | 37 | 23.77 | 23.91 | 23.55 | | |
| 15 | QPSK | 1 | 74 | 23.62 | 23.47 | 23.53 | | |
| 15 | QPSK | 36 | 0 | 22.59 | 22.70 | 22.64 | 23.5 | 0-1 |
| 15 | QPSK | 36 | 18 | 22.55 | 22.51 | 22.55 | | |
| 15 | QPSK | 36 | 37 | 22.52 | 22.48 | 22.54 | | |
| 15 | QPSK | 75 | 0 | 22.57 | 22.46 | 22.62 | | |
| 15 | 16QAM | 1 | 0 | 23.14 | 23.04 | 22.96 | 23.5 | 0-1 |
| 15 | 16QAM | 1 | 37 | 23.15 | 23.22 | 23.02 | | |
| 15 | 16QAM | 1 | 74 | 23.37 | 22.32 | 22.93 | | |
| 15 | 16QAM | 36 | 0 | 21.48 | 21.54 | 21.51 | 22.5 | 0-2 |
| 15 | 16QAM | 36 | 18 | 21.65 | 21.55 | 21.50 | | |
| 15 | 16QAM | 36 | 37 | 21.57 | 21.53 | 21.40 | | |
| 15 | 16QAM | 75 | 0 | 21.54 | 21.50 | 21.58 | | |
| Channel | | | | 26740 | 26865 | 26990 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 819 | 831.5 | 844 | | |
| 10 | QPSK | 1 | 0 | 23.32 | 23.63 | 23.60 | 24.5 | 0 |
| 10 | QPSK | 1 | 24 | 23.15 | 23.46 | 23.66 | | |
| 10 | QPSK | 1 | 49 | 23.16 | 23.06 | 23.39 | | |
| 10 | QPSK | 25 | 0 | 22.60 | 22.45 | 22.61 | 23.5 | 0-1 |
| 10 | QPSK | 25 | 12 | 22.46 | 22.50 | 22.57 | | |
| 10 | QPSK | 25 | 24 | 22.55 | 22.42 | 22.56 | | |
| 10 | QPSK | 50 | 0 | 22.58 | 22.44 | 22.59 | | |
| 10 | 16QAM | 1 | 0 | 23.13 | 22.73 | 22.70 | 23.5 | 0-1 |
| 10 | 16QAM | 1 | 24 | 23.12 | 22.68 | 22.69 | | |
| 10 | 16QAM | 1 | 49 | 23.12 | 22.57 | 22.68 | | |
| 10 | 16QAM | 25 | 0 | 21.56 | 21.50 | 21.61 | 22.5 | 0-2 |
| 10 | 16QAM | 25 | 12 | 21.45 | 21.47 | 21.53 | | |
| 10 | 16QAM | 25 | 24 | 21.52 | 21.37 | 21.43 | | |
| 10 | 16QAM | 50 | 0 | 21.49 | 21.49 | 21.55 | | |
| Channel | | | | 26715 | 26865 | 27015 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 816.5 | 831.5 | 846.5 | | |
| 5 | QPSK | 1 | 0 | 23.54 | 23.35 | 23.60 | 24.5 | 0 |
| 5 | QPSK | 1 | 12 | 23.42 | 23.90 | 23.72 | | |
| 5 | QPSK | 1 | 24 | 23.20 | 23.41 | 23.48 | | |
| 5 | QPSK | 12 | 0 | 22.68 | 22.57 | 22.54 | 23.5 | 0-1 |
| 5 | QPSK | 12 | 6 | 22.66 | 22.57 | 22.49 | | |
| 5 | QPSK | 12 | 11 | 22.56 | 22.51 | 22.47 | | |
| 5 | QPSK | 25 | 0 | 22.61 | 22.54 | 22.51 | | |
| 5 | 16QAM | 1 | 0 | 22.76 | 22.79 | 22.40 | 23.5 | 0-1 |
| 5 | 16QAM | 1 | 12 | 22.85 | 22.31 | 22.44 | | |
| 5 | 16QAM | 1 | 24 | 22.78 | 22.20 | 22.50 | | |
| 5 | 16QAM | 12 | 0 | 21.54 | 21.68 | 21.76 | 22.5 | 0-2 |
| 5 | 16QAM | 12 | 6 | 21.46 | 21.68 | 21.73 | | |
| 5 | 16QAM | 12 | 11 | 21.46 | 21.82 | 21.62 | | |
| 5 | 16QAM | 25 | 0 | 21.42 | 21.28 | 21.66 | | |



| Channel | | | | 26705 | 26865 | 27025 | Tune up Limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|-------|-------|-------|---------------------|----------|
| Frequency (MHz) | | | | 815.5 | 831.5 | 847.5 | | |
| 3 | QPSK | 1 | 0 | 23.56 | 23.54 | 23.68 | 24.5 | 0 |
| 3 | QPSK | 1 | 7 | 23.71 | 23.55 | 23.49 | | |
| 3 | QPSK | 1 | 14 | 23.34 | 23.59 | 23.56 | | |
| 3 | QPSK | 8 | 0 | 22.65 | 22.61 | 22.70 | 23.5 | 0-1 |
| 3 | QPSK | 8 | 4 | 22.72 | 22.55 | 22.56 | | |
| 3 | QPSK | 8 | 7 | 22.61 | 22.64 | 22.59 | | |
| 3 | QPSK | 15 | 0 | 22.68 | 22.58 | 22.56 | | |
| 3 | 16QAM | 1 | 0 | 22.99 | 22.75 | 22.84 | 23.5 | 0-1 |
| 3 | 16QAM | 1 | 7 | 23.15 | 22.72 | 22.89 | | |
| 3 | 16QAM | 1 | 14 | 22.81 | 22.71 | 22.75 | | |
| 3 | 16QAM | 8 | 0 | 21.65 | 21.36 | 21.41 | 22.5 | 0-2 |
| 3 | 16QAM | 8 | 4 | 21.62 | 21.36 | 21.40 | | |
| 3 | 16QAM | 8 | 7 | 21.62 | 21.28 | 21.34 | | |
| 3 | 16QAM | 15 | 0 | 21.56 | 21.10 | 21.17 | | |
| Channel | | | | 26697 | 26865 | 27033 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 814.7 | 831.5 | 848.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.18 | 23.30 | 23.55 | 24.5 | 0 |
| 1.4 | QPSK | 1 | 2 | 23.35 | 23.54 | 23.60 | | |
| 1.4 | QPSK | 1 | 5 | 23.32 | 23.37 | 23.44 | | |
| 1.4 | QPSK | 3 | 0 | 23.43 | 23.56 | 23.57 | | |
| 1.4 | QPSK | 3 | 1 | 23.61 | 23.75 | 23.55 | | |
| 1.4 | QPSK | 3 | 2 | 23.48 | 23.56 | 23.52 | | |
| 1.4 | QPSK | 6 | 0 | 22.55 | 22.60 | 22.44 | 23.5 | 0-1 |
| 1.4 | 16QAM | 1 | 0 | 22.17 | 22.69 | 22.65 | 23.5 | 0-1 |
| 1.4 | 16QAM | 1 | 2 | 22.52 | 22.71 | 22.74 | | |
| 1.4 | 16QAM | 1 | 5 | 22.26 | 22.59 | 22.46 | | |
| 1.4 | 16QAM | 3 | 0 | 22.48 | 22.35 | 22.98 | | |
| 1.4 | 16QAM | 3 | 1 | 22.53 | 22.48 | 22.98 | | |
| 1.4 | 16QAM | 3 | 2 | 22.52 | 22.44 | 23.05 | | |
| 1.4 | 16QAM | 6 | 0 | 21.03 | 21.26 | 21.49 | 22.5 | 0-2 |



<LTE Band 25>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | Tune up Limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|---------------------|----------|
| Channel | | | | 26140 | 26340 | 26590 | | |
| Frequency (MHz) | | | | 1860 | 1880 | 1905 | | |
| 20 | QPSK | 1 | 0 | 23.05 | 23.43 | 23.22 | 24 | 0 |
| 20 | QPSK | 1 | 49 | 23.34 | 23.65 | 23.39 | | |
| 20 | QPSK | 1 | 99 | 22.81 | 23.14 | 23.08 | | |
| 20 | QPSK | 50 | 0 | 22.05 | 22.39 | 22.29 | 23 | 0-1 |
| 20 | QPSK | 50 | 24 | 22.00 | 22.16 | 22.26 | | |
| 20 | QPSK | 50 | 49 | 22.00 | 22.27 | 22.21 | | |
| 20 | QPSK | 100 | 0 | 22.02 | 22.21 | 22.25 | 23 | 0-1 |
| 20 | 16QAM | 1 | 0 | 22.68 | 22.18 | 22.94 | | |
| 20 | 16QAM | 1 | 49 | 22.65 | 21.97 | 22.67 | | |
| 20 | 16QAM | 1 | 99 | 22.50 | 21.95 | 22.42 | 22 | 0-2 |
| 20 | 16QAM | 50 | 0 | 20.96 | 21.07 | 21.27 | | |
| 20 | 16QAM | 50 | 24 | 20.91 | 20.98 | 21.28 | | |
| 20 | 16QAM | 50 | 49 | 20.83 | 21.12 | 21.19 | 22 | 0-2 |
| 20 | 16QAM | 100 | 0 | 20.98 | 21.15 | 21.22 | | |
| Channel | | | | 26115 | 26340 | 26615 | | |
| Frequency (MHz) | | | | 1857.5 | 1880 | 1907.5 | | |
| 15 | QPSK | 1 | 0 | 23.10 | 23.36 | 23.38 | 24 | 0 |
| 15 | QPSK | 1 | 37 | 23.07 | 23.16 | 23.29 | | |
| 15 | QPSK | 1 | 74 | 23.04 | 23.18 | 23.23 | | |
| 15 | QPSK | 36 | 0 | 21.96 | 22.28 | 22.36 | 23 | 0-1 |
| 15 | QPSK | 36 | 18 | 22.04 | 22.25 | 22.20 | | |
| 15 | QPSK | 36 | 37 | 21.98 | 22.23 | 22.18 | | |
| 15 | QPSK | 75 | 0 | 22.00 | 22.21 | 22.27 | 23 | 0-1 |
| 15 | 16QAM | 1 | 0 | 22.70 | 22.98 | 22.90 | | |
| 15 | 16QAM | 1 | 37 | 22.48 | 22.90 | 22.88 | | |
| 15 | 16QAM | 1 | 74 | 22.34 | 22.13 | 22.82 | 22 | 0-2 |
| 15 | 16QAM | 36 | 0 | 20.87 | 21.30 | 21.20 | | |
| 15 | 16QAM | 36 | 18 | 20.84 | 21.23 | 21.09 | | |
| 15 | 16QAM | 36 | 37 | 20.87 | 21.05 | 21.14 | 22 | 0-2 |
| 15 | 16QAM | 75 | 0 | 20.91 | 21.23 | 21.19 | | |
| Channel | | | | 26090 | 26340 | 26640 | | |
| Frequency (MHz) | | | | 1855 | 1880 | 1910 | | |
| 10 | QPSK | 1 | 0 | 23.38 | 23.42 | 23.64 | 24 | 0 |
| 10 | QPSK | 1 | 24 | 23.18 | 23.22 | 23.62 | | |
| 10 | QPSK | 1 | 49 | 23.21 | 23.32 | 23.23 | | |
| 10 | QPSK | 25 | 0 | 21.95 | 22.21 | 22.30 | 23 | 0-1 |
| 10 | QPSK | 25 | 12 | 21.91 | 22.23 | 22.21 | | |
| 10 | QPSK | 25 | 24 | 21.98 | 22.29 | 22.22 | | |
| 10 | QPSK | 50 | 0 | 21.98 | 22.21 | 22.28 | 23 | 0-1 |
| 10 | 16QAM | 1 | 0 | 22.22 | 22.78 | 22.26 | | |
| 10 | 16QAM | 1 | 24 | 21.73 | 22.31 | 22.16 | | |
| 10 | 16QAM | 1 | 49 | 22.03 | 22.25 | 22.13 | 22 | 0-2 |
| 10 | 16QAM | 25 | 0 | 20.97 | 21.19 | 21.27 | | |
| 10 | 16QAM | 25 | 12 | 20.91 | 21.19 | 21.13 | | |
| 10 | 16QAM | 25 | 24 | 20.96 | 21.23 | 21.22 | 22 | 0-2 |
| 10 | 16QAM | 50 | 0 | 20.84 | 21.14 | 21.15 | | |



| Channel | | | | 26065 | 26340 | 26665 | Tune up Limit (dBm) | MPR (dB) |
|-----------------|-------|----|----|--------|-------|--------|---------------------|----------|
| Frequency (MHz) | | | | 1852.5 | 1880 | 1912.5 | | |
| 5 | QPSK | 1 | 0 | 23.02 | 23.24 | 23.44 | 24 | 0 |
| 5 | QPSK | 1 | 12 | 22.94 | 23.18 | 23.36 | | |
| 5 | QPSK | 1 | 24 | 22.86 | 23.21 | 23.34 | | |
| 5 | QPSK | 12 | 0 | 22.07 | 22.12 | 22.25 | 23 | 0-1 |
| 5 | QPSK | 12 | 6 | 22.07 | 22.21 | 22.32 | | |
| 5 | QPSK | 12 | 11 | 22.03 | 22.25 | 22.33 | | |
| 5 | QPSK | 25 | 0 | 22.01 | 22.19 | 22.32 | | |
| 5 | 16QAM | 1 | 0 | 22.13 | 22.69 | 22.30 | 23 | 0-1 |
| 5 | 16QAM | 1 | 12 | 22.26 | 22.73 | 22.90 | | |
| 5 | 16QAM | 1 | 24 | 21.98 | 22.68 | 22.58 | | |
| 5 | 16QAM | 12 | 0 | 21.04 | 21.10 | 21.13 | 22 | 0-2 |
| 5 | 16QAM | 12 | 6 | 21.05 | 21.09 | 21.09 | | |
| 5 | 16QAM | 12 | 11 | 20.81 | 20.99 | 21.09 | | |
| 5 | 16QAM | 25 | 0 | 20.91 | 21.22 | 21.27 | | |
| 5 | 16QAM | 25 | 0 | 20.91 | 21.22 | 21.27 | | |
| Channel | | | | 26055 | 26340 | 26675 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1851.5 | 1880 | 1913.5 | | |
| 3 | QPSK | 1 | 0 | 23.03 | 23.15 | 23.21 | 24 | 0 |
| 3 | QPSK | 1 | 7 | 22.92 | 23.18 | 23.19 | | |
| 3 | QPSK | 1 | 14 | 23.25 | 23.32 | 23.25 | | |
| 3 | QPSK | 8 | 0 | 22.15 | 22.20 | 22.45 | 23 | 0-1 |
| 3 | QPSK | 8 | 4 | 22.18 | 22.28 | 22.38 | | |
| 3 | QPSK | 8 | 7 | 22.11 | 22.28 | 22.42 | | |
| 3 | QPSK | 15 | 0 | 22.04 | 22.25 | 22.44 | | |
| 3 | QPSK | 15 | 0 | 22.04 | 22.25 | 22.44 | | |
| 3 | 16QAM | 1 | 0 | 22.23 | 22.95 | 22.54 | 23 | 0-1 |
| 3 | 16QAM | 1 | 7 | 22.48 | 22.96 | 22.86 | | |
| 3 | 16QAM | 1 | 14 | 22.46 | 22.94 | 22.75 | | |
| 3 | 16QAM | 8 | 0 | 21.34 | 21.46 | 21.15 | 22 | 0-2 |
| 3 | 16QAM | 8 | 4 | 21.14 | 21.45 | 21.02 | | |
| 3 | 16QAM | 8 | 7 | 21.08 | 21.37 | 21.25 | | |
| 3 | 16QAM | 15 | 0 | 20.79 | 21.15 | 20.91 | | |
| 3 | 16QAM | 15 | 0 | 20.79 | 21.15 | 20.91 | | |
| Channel | | | | 26047 | 26340 | 26683 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 1850.7 | 1880 | 1914.3 | | |
| 1.4 | QPSK | 1 | 0 | 23.15 | 23.11 | 23.30 | 24 | 0 |
| 1.4 | QPSK | 1 | 2 | 23.28 | 23.31 | 23.37 | | |
| 1.4 | QPSK | 1 | 5 | 23.12 | 23.15 | 23.28 | | |
| 1.4 | QPSK | 3 | 0 | 23.04 | 23.16 | 23.27 | | |
| 1.4 | QPSK | 3 | 1 | 23.11 | 23.27 | 23.29 | | |
| 1.4 | QPSK | 3 | 2 | 23.07 | 23.26 | 23.30 | | |
| 1.4 | QPSK | 6 | 0 | 22.14 | 22.15 | 22.38 | 23 | 0-1 |
| 1.4 | 16QAM | 1 | 0 | 21.75 | 22.34 | 22.21 | 23 | 0-1 |
| 1.4 | 16QAM | 1 | 2 | 21.65 | 21.98 | 22.05 | | |
| 1.4 | 16QAM | 1 | 5 | 21.99 | 22.63 | 22.30 | | |
| 1.4 | 16QAM | 3 | 0 | 21.61 | 22.02 | 22.28 | | |
| 1.4 | 16QAM | 3 | 1 | 21.94 | 22.11 | 22.27 | | |
| 1.4 | 16QAM | 3 | 2 | 21.76 | 22.08 | 22.28 | | |
| 1.4 | 16QAM | 6 | 0 | 20.84 | 21.00 | 21.21 | | |

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a) 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations.
- b) "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS.
- c) Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

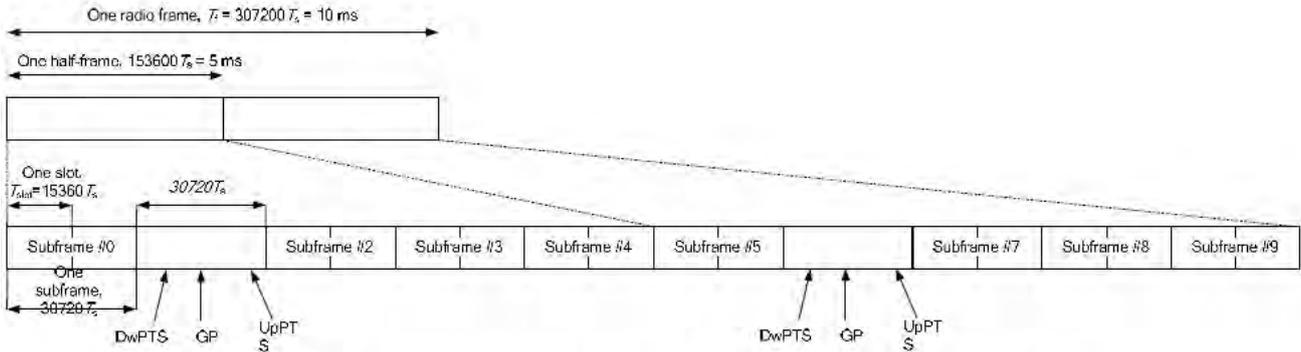


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-2: Uplink-downlink configurations.

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number | | | | | | | | | |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0 | 5 ms | D | S | U | U | U | D | S | U | U | U |
| 1 | 5 ms | D | S | U | U | D | D | S | U | U | D |
| 2 | 5 ms | D | S | U | D | D | D | S | U | D | D |
| 3 | 10 ms | D | S | U | U | U | D | D | D | D | D |
| 4 | 10 ms | D | S | U | U | D | D | D | D | D | D |
| 5 | 10 ms | D | S | U | D | D | D | D | D | D | D |
| 6 | 5 ms | D | S | U | U | U | D | S | U | U | D |

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

| Special subframe configuration | Normal cyclic prefix in downlink | | | Extended cyclic prefix in downlink | | |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
| | DwPTS | UpPTS | | DwPTS | UpPTS | |
| | | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink | | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0 | 6592 · Ts | 2192 · Ts | 2560 · Ts | 7680 · Ts | 2192 · Ts | 2560 · Ts |
| 1 | 19760 · Ts | | | 20480 · Ts | | |
| 2 | 21952 · Ts | | | 23040 · Ts | | |
| 3 | 24144 · Ts | | | 25600 · Ts | | |
| 4 | 26336 · Ts | 4384 · Ts | 5120 · Ts | 7680 · Ts | 4384 · Ts | 5120 · Ts |
| 5 | 6592 · Ts | | | 20480 · Ts | | |
| 6 | 19760 · Ts | | | 23040 · Ts | | |
| 7 | 21952 · Ts | | | 12800 · Ts | | |
| 8 | 24144 · Ts | | | - | | |
| 9 | 13168 · Ts | - | - | - | - | - |

| Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS) | | | |
|--|--------------------------------|--------------------------------|----------------------------------|
| | Special subframe configuration | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| Uplink duty factor in one special subframe | 0~4 | 7.13% | 8.33% |
| | 5~9 | 14.3% | 16.7% |

| Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS) | | | |
|---|--------------------------------|--------------------------------|----------------------------------|
| | Special subframe configuration | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| Uplink duty factor in one special subframe | 0~3 | 7.13% | 8.33% |
| | 4~7 | 14.3% | 16.7% |

The highest duty factor is resulted from:

- i. uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- v. Considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = (measured SAR) * (scaling factor for extended cyclic prefix).



<LTE Band 41>

| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Low Middle Ch. / Freq. | Power Middle Ch. / Freq. | Power Middle High Ch. / Freq. | Power High Ch. / Freq. | Tune up Limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|--------------------------|-------------------------------|------------------------|---------------------|----------|
| Channel | | | | 39750 | 40185 | 40620 | 41055 | 41490 | | |
| Frequency (MHz) | | | | 2506 | 2549.5 | 2593 | 2636.5 | 2680 | | |
| 20 | QPSK | 1 | 0 | 23.25 | 23.29 | 23.40 | 23.08 | 23.29 | 24.3 | 0 |
| 20 | QPSK | 1 | 49 | 23.02 | 23.01 | 23.16 | 22.90 | 23.12 | | |
| 20 | QPSK | 1 | 99 | 23.11 | 22.96 | 22.97 | 22.95 | 23.02 | | |
| 20 | QPSK | 50 | 0 | 22.27 | 22.33 | 22.55 | 22.32 | 22.51 | 23.3 | 0-1 |
| 20 | QPSK | 50 | 24 | 22.13 | 22.22 | 22.38 | 22.26 | 22.50 | | |
| 20 | QPSK | 50 | 49 | 22.12 | 22.16 | 22.26 | 22.19 | 22.37 | | |
| 20 | QPSK | 100 | 0 | 22.25 | 22.17 | 22.26 | 22.24 | 22.24 | | |
| 20 | 16QAM | 1 | 0 | 22.32 | 22.28 | 22.71 | 22.78 | 22.92 | 23.3 | 0-1 |
| 20 | 16QAM | 1 | 49 | 22.17 | 22.08 | 22.68 | 22.56 | 22.76 | | |
| 20 | 16QAM | 1 | 99 | 21.90 | 21.88 | 22.59 | 22.62 | 22.50 | | |
| 20 | 16QAM | 50 | 0 | 21.22 | 21.15 | 21.29 | 21.43 | 21.58 | 22.3 | 0-2 |
| 20 | 16QAM | 50 | 24 | 21.06 | 21.04 | 21.11 | 21.20 | 21.50 | | |
| 20 | 16QAM | 50 | 49 | 21.05 | 21.08 | 21.06 | 21.21 | 21.26 | | |
| 20 | 16QAM | 100 | 0 | 21.18 | 21.10 | 21.24 | 21.34 | 21.45 | | |
| Channel | | | | 39725 | 40173 | 40620 | 41068 | 41515 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2503.5 | 2548.3 | 2593 | 2637.8 | 2682.5 | | |
| 15 | QPSK | 1 | 0 | 23.28 | 23.30 | 23.18 | 23.15 | 23.26 | 24.3 | 0 |
| 15 | QPSK | 1 | 37 | 23.12 | 23.10 | 23.15 | 23.14 | 23.22 | | |
| 15 | QPSK | 1 | 74 | 23.17 | 23.18 | 23.13 | 22.92 | 23.18 | | |
| 15 | QPSK | 36 | 0 | 22.26 | 22.32 | 22.23 | 22.32 | 22.42 | 23.3 | 0-1 |
| 15 | QPSK | 36 | 18 | 22.12 | 22.23 | 22.21 | 22.24 | 22.39 | | |
| 15 | QPSK | 36 | 37 | 22.05 | 22.16 | 22.17 | 22.22 | 22.31 | | |
| 15 | QPSK | 75 | 0 | 22.10 | 22.30 | 22.20 | 22.32 | 22.41 | | |
| 15 | 16QAM | 1 | 0 | 22.39 | 22.27 | 22.14 | 22.78 | 22.56 | 23.3 | 0-1 |
| 15 | 16QAM | 1 | 37 | 22.08 | 22.02 | 22.10 | 22.56 | 22.46 | | |
| 15 | 16QAM | 1 | 74 | 22.01 | 22.11 | 21.68 | 22.63 | 22.55 | | |
| 15 | 16QAM | 36 | 0 | 21.31 | 21.28 | 21.21 | 21.28 | 21.52 | 22.3 | 0-2 |
| 15 | 16QAM | 36 | 18 | 21.17 | 21.29 | 21.19 | 21.10 | 21.41 | | |
| 15 | 16QAM | 36 | 37 | 21.11 | 21.13 | 21.15 | 21.07 | 21.37 | | |
| 15 | 16QAM | 75 | 0 | 21.01 | 21.11 | 21.05 | 21.35 | 21.38 | | |



| BW [MHz] | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Low Middle Ch. / Freq. | Power Middle Ch. / Freq. | Power Middle High Ch. / Freq. | Power High Ch. / Freq. | Tune up Limit (dBm) | MPR (dB) |
|-----------------|------------|---------|-----------|-----------------------|------------------------------|--------------------------|-------------------------------|------------------------|---------------------|----------|
| Channel | | | | 39700 | 40160 | 40620 | 41080 | 41540 | | |
| Frequency (MHz) | | | | 2501 | 2547 | 2593 | 2639 | 2685 | | |
| 10 | QPSK | 1 | 0 | 23.32 | 23.31 | 23.31 | 23.20 | 23.11 | 24.3 | 0 |
| 10 | QPSK | 1 | 24 | 23.11 | 23.14 | 23.28 | 23.15 | 22.96 | | |
| 10 | QPSK | 1 | 49 | 23.22 | 23.23 | 23.24 | 23.06 | 23.03 | | |
| 10 | QPSK | 25 | 0 | 22.27 | 22.37 | 22.20 | 22.30 | 22.41 | 23.3 | 0-1 |
| 10 | QPSK | 25 | 12 | 22.16 | 22.19 | 22.22 | 22.22 | 22.39 | | |
| 10 | QPSK | 25 | 24 | 22.11 | 22.31 | 22.25 | 22.23 | 22.24 | | |
| 10 | QPSK | 50 | 0 | 22.15 | 22.29 | 22.32 | 22.32 | 22.53 | | |
| 10 | 16QAM | 1 | 0 | 22.30 | 22.39 | 22.59 | 22.80 | 22.35 | 23.3 | 0-1 |
| 10 | 16QAM | 1 | 24 | 22.04 | 22.11 | 22.58 | 22.75 | 22.32 | | |
| 10 | 16QAM | 1 | 49 | 21.99 | 22.01 | 22.49 | 22.67 | 22.28 | 22.3 | 0-2 |
| 10 | 16QAM | 25 | 0 | 21.30 | 21.30 | 21.02 | 21.45 | 21.60 | | |
| 10 | 16QAM | 25 | 12 | 21.30 | 21.21 | 20.93 | 21.63 | 21.53 | | |
| 10 | 16QAM | 25 | 24 | 21.22 | 21.21 | 21.03 | 21.63 | 21.50 | | |
| 10 | 16QAM | 50 | 0 | 21.05 | 21.22 | 21.05 | 21.29 | 21.39 | | |
| Channel | | | | 39675 | 40148 | 40620 | 41093 | 41565 | Tune up Limit (dBm) | MPR (dB) |
| Frequency (MHz) | | | | 2498.5 | 2545.8 | 2593 | 2640.3 | 2687.5 | | |
| 5 | QPSK | 1 | 0 | 23.22 | 23.21 | 23.20 | 23.22 | 23.24 | 24.3 | 0 |
| 5 | QPSK | 1 | 12 | 23.18 | 23.18 | 23.15 | 23.12 | 23.12 | | |
| 5 | QPSK | 1 | 24 | 23.15 | 23.05 | 23.18 | 23.19 | 23.15 | | |
| 5 | QPSK | 12 | 0 | 22.29 | 22.31 | 22.17 | 22.28 | 22.45 | 23.3 | 0-1 |
| 5 | QPSK | 12 | 6 | 22.23 | 22.29 | 22.25 | 22.26 | 22.36 | | |
| 5 | QPSK | 12 | 11 | 22.22 | 22.26 | 22.21 | 22.22 | 22.34 | | |
| 5 | QPSK | 25 | 0 | 22.19 | 22.29 | 22.34 | 22.35 | 22.43 | | |
| 5 | 16QAM | 1 | 0 | 22.99 | 22.52 | 22.12 | 22.22 | 22.59 | 23.3 | 0-1 |
| 5 | 16QAM | 1 | 12 | 22.98 | 22.43 | 22.10 | 22.16 | 22.51 | | |
| 5 | 16QAM | 1 | 24 | 22.34 | 22.38 | 22.10 | 22.21 | 22.40 | | |
| 5 | 16QAM | 12 | 0 | 21.47 | 21.15 | 21.30 | 21.60 | 21.62 | 22.3 | 0-2 |
| 5 | 16QAM | 12 | 6 | 21.40 | 21.15 | 21.36 | 21.15 | 21.52 | | |
| 5 | 16QAM | 12 | 11 | 21.39 | 21.10 | 21.45 | 21.10 | 21.54 | | |
| 5 | 16QAM | 25 | 0 | 21.32 | 21.30 | 21.54 | 21.41 | 21.55 | | |

Note:

TDD LTE Band41 has 5 required test channels was according to KDB 447498 D01v05r02.

<WLAN Conducted Power>

General Note:

For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g/n HT20 were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.

<2.4GHz WLAN>

| WLAN 2.4GHz 802.11b Average Power (dBm) | | | | | | | Tune up Limit (dBm) |
|---|-----------------|-----------------|---------------------|-------|---------|--------|---------------------|
| Power vs. Channel | | | Power vs. Data Rate | | | | |
| Channel | Frequency (MHz) | Data Rate 1Mbps | Channel | 2Mbps | 5.5Mbps | 11Mbps | |
| CH 01 | 2412 | 14.84 | CH 11 | 15.07 | 15.15 | 15.14 | 15.5 |
| CH 06 | 2437 | 14.80 | | | | | |
| CH 11 | 2462 | 15.18 | | | | | |

| WLAN 2.4GHz 802.11g Average Power (dBm) | | | | | | | | | | | Tune up Limit (dBm) |
|---|-----------------|-----------------|---------------------|-------|--------|--------|--------|--------|--------|--------|---------------------|
| Power vs. Channel | | | Power vs. Data Rate | | | | | | | | |
| Channel | Frequency (MHz) | Data Rate 6Mbps | Channel | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps | |
| CH 01 | 2412 | 11.52 | CH 06 | 11.75 | 11.72 | 11.68 | 11.77 | 11.83 | 11.79 | 11.88 | 12 |
| CH 06 | 2437 | 11.89 | | | | | | | | | |
| CH 11 | 2462 | 11.35 | | | | | | | | | |

| WLAN 2.4GHz 802.11n HT20 Average Power (dBm) | | | | | | | | | | | Tune up Limit (dBm) |
|--|-----------------|----------------|---------------------|-------|-------|-------|-------|-------|-------|-------|---------------------|
| Power vs. Channel | | | Power vs. MCS Index | | | | | | | | |
| Channel | Frequency (MHz) | MCS Index MCS0 | Channel | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 | |
| CH 01 | 2412 | 11.70 | CH 01 | 11.66 | 11.60 | 11.62 | 11.58 | 11.64 | 11.61 | 11.68 | 12 |
| CH 06 | 2437 | 11.36 | | | | | | | | | |
| CH 11 | 2462 | 11.26 | | | | | | | | | |

13. Bluetooth Exclusions Applied

| Mode Band | Average power(dBm) | |
|------------------|--------------------|-------------------|
| | Bluetooth v3.0+EDR | Bluetooth v4.0 LE |
| 2.4GHz Bluetooth | 1 | 0 |

Note:

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR


- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

| Bluetooth Max Power (dBm) | Separation Distance (mm) | Frequency (GHz) | exclusion thresholds |
|---------------------------|--------------------------|-----------------|----------------------|
| 1 | < 5 | 2.48 | 0.3 |

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.3 which is ≤ 3, SAR testing is not required.

14. Antenna Location

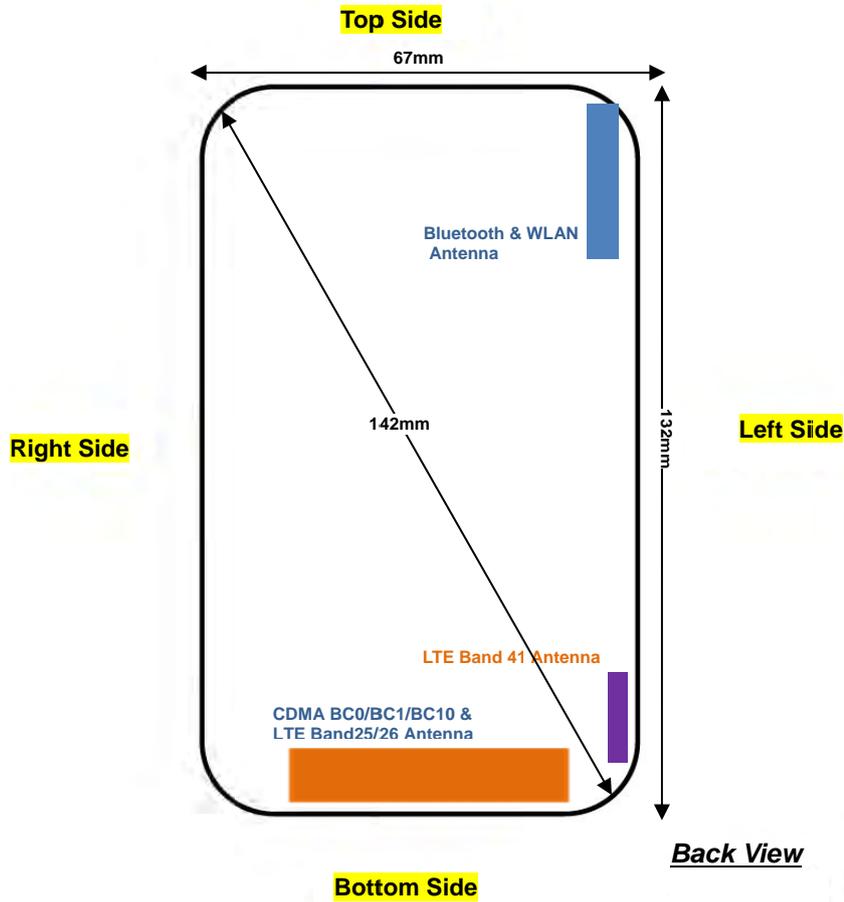

| Distance of the Antenna to the EUT surface/edge | | | | | | |
|---|--------|--------|----------|-------------|------------|-----------|
| Antennas | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| LTE Band 41 | ≤ 25mm | ≤ 25mm | 111mm | ≤ 25mm | 59mm | ≤ 25mm |
| CDMA BC0/BC1/BC10& LTE Band25/26 | ≤ 25mm | ≤ 25mm | 119mm | ≤ 25mm | ≤ 25mm | ≤ 25mm |
| BT&WLAN | ≤ 25mm | ≤ 25mm | ≤ 25mm | 104mm | 60mm | ≤ 25mm |

| Positions for SAR tests; Hotspot mode | | | | | | |
|---------------------------------------|------|-------|----------|-------------|------------|-----------|
| Antennas | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| LTE Band 41 | Yes | Yes | No | No | No | No |
| CDMA BC0/BC1/BC10& LTE Band25/26 | Yes | Yes | No | Yes | Yes | Yes |
| BT&WLAN | Yes | Yes | Yes | No | No | Yes |

General Note: Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. Duty cycle of TDD was fixed, therefore not require scaled to 100% of duty cycle. For SAR system, the crest factor 1:1.59 (62.9%) was used perform testing. Considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result.
 - d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - e. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - f. For TDD LTE Band: Reported SAR(W/kg)= Measured SAR(W/kg)* scaling factor for extended cyclic prefix * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 941225 D01v03, Head SAR for RC1+SO55 is not required because the maximum average output power of RC1 is less than 1/4 dB higher than RC3+SO55. Considering VOIP function at RETAP 4096 bits, Head SAR was performed at the worst position identified by RC3+SO55 SAR test results.
4. Per KDB 941225 D01v03, in Hotspot mode EUT is treated as data device and SAR is tested with Ev-Do Rev 0 (RTAP 153.6kbps). If 1xRTT and Ev-Do Rev A (RETAP 4096 bits) power is not high than 1/4dB higher than Re v0, SAR tests with those settings are not necessary.
5. Per KDB 941225 D01v03, SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than 1/4 dB higher than that measured with FCH only. To account for VOIP operation, Ev-Do Rev. A (RETAP 4096 bits) SAR testing was performed at the worst position identified by 1xRTT SAR test results, for both head and body-worn accessory exposure conditions.
6. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
7. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
8. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
9. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
10. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
11. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
12. This device 2.4GHz WLAN supports Hotspot operation.

15.1 Head SAR

<CDMA SAR>

| Plot No. | Band | Mode | Test Position | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|----------------------|-------------------|--------------------|------------|---------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | CDMA2000 BC10 | RC3 SO55 | Right Cheek | 476 | 817.9 | 24.67 | 25.00 | 1.079 | -0.18 | 0.277 | 0.299 |
| | CDMA2000 BC10 | RC3 SO55 | Right Tilted | 476 | 817.9 | 24.67 | 25.00 | 1.079 | -0.09 | 0.227 | 0.245 |
| 01 | CDMA2000 BC10 | RC3 SO55 | Left Cheek | 476 | 817.9 | 24.67 | 25.00 | 1.079 | 0.1 | 0.303 | 0.327 |
| | CDMA2000 BC10 | RC3 SO55 | Left Tilted | 476 | 817.9 | 24.67 | 25.00 | 1.079 | 0.06 | 0.235 | 0.254 |
| | CDMA2000 BC10 | RETAP 4096 | Left Cheek | 476 | 817.9 | 24.68 | 25.00 | 1.076 | 0.18 | 0.302 | 0.325 |
| | CDMA2000 BC0 | RC3 SO55 | Right Cheek | 777 | 848.31 | 24.48 | 25.00 | 1.127 | 0.05 | 0.383 | 0.432 |
| | CDMA2000 BC0 | RC3 SO55 | Right Tilted | 777 | 848.31 | 24.48 | 25.00 | 1.127 | -0.03 | 0.241 | 0.272 |
| | CDMA2000 BC0 | RC3 SO55 | Left Cheek | 777 | 848.31 | 24.48 | 25.00 | 1.127 | -0.0053 | 0.419 | 0.472 |
| | CDMA2000 BC0 | RC3 SO55 | Left Tilted | 777 | 848.31 | 24.48 | 25.00 | 1.127 | -0.05 | 0.219 | 0.247 |
| 02 | CDMA2000 BC0 | RETAP 4096 | Left Cheek | 777 | 848.31 | 24.48 | 25.00 | 1.127 | 0.1 | 0.420 | 0.473 |
| | CDMA2000 BC1 | RC3 SO55 | Right Cheek | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.09 | 0.473 | 0.515 |
| | CDMA2000 BC1 | RC3 SO55 | Right Tilted | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.0045 | 0.153 | 0.167 |
| | CDMA2000 BC1 | RC3 SO55 | Left Cheek | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.1 | 0.406 | 0.442 |
| | CDMA2000 BC1 | RC3 SO55 | Left Tilted | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.06 | 0.175 | 0.191 |
| 03 | CDMA2000 BC1 | RETAP 4096 | Right Cheek | 600 | 1880 | 24.62 | 25.00 | 1.091 | -0.04 | 0.488 | 0.533 |

<LTE SAR>

| Plot No. | Band | BW (MHz) | Mode | RB Size | RB offset | Test Position | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|--------------------|-----------|-------------|----------|-----------|--------------------|--------------|--------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Right Cheek | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | -0.14 | 0.287 | 0.329 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Right Cheek | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | -0.02 | 0.211 | 0.254 |
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Right Tilted | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | 0.11 | 0.214 | 0.245 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Right Tilted | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | -0.14 | 0.159 | 0.191 |
| 04 | LTE Band 26 | 15 | QPSK | 1 | 37 | Left Cheek | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | 0.15 | 0.304 | 0.348 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Left Cheek | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.1 | 0.220 | 0.264 |
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Left Tilted | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | 0.17 | 0.204 | 0.234 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Left Tilted | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.07 | 0.160 | 0.192 |
| 05 | LTE Band 25 | 20 | QPSK | 1 | 49 | Right Cheek | 26340 | 1880 | 23.65 | 24.00 | 1.084 | -0.06 | 0.387 | 0.419 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Right Cheek | 26340 | 1880 | 22.39 | 23.00 | 1.151 | 0.11 | 0.317 | 0.365 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Right Tilted | 26340 | 1880 | 23.65 | 24.00 | 1.084 | 0.09 | 0.134 | 0.145 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Right Tilted | 26340 | 1880 | 22.39 | 23.00 | 1.151 | 0.12 | 0.107 | 0.123 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Left Cheek | 26340 | 1880 | 23.65 | 24.00 | 1.084 | 0.03 | 0.281 | 0.305 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Left Cheek | 26340 | 1880 | 22.39 | 23.00 | 1.151 | 0.17 | 0.226 | 0.260 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Left Tilted | 26340 | 1880 | 23.65 | 24.00 | 1.084 | 0.04 | 0.152 | 0.165 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Left Tilted | 26340 | 1880 | 22.39 | 23.00 | 1.151 | 0.08 | 0.123 | 0.142 |



| Plot No. | Band | BW (MHz) | Mode | RB Size | RB offset | Test Position | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|--------------------|-----------|-------------|----------|-----------|-------------------|--------------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Right Cheek | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | 0.08 | 0.389 | 0.481 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Right Cheek | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | 0.02 | 0.313 | 0.374 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Right Tilted | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | -0.0051 | 0.251 | 0.311 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Right Tilted | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | -0.06 | 0.207 | 0.247 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Cheek | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | 0.04 | 0.668 | 0.827 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Cheek | 39750 | 2506 | 23.25 | 24.30 | 1.274 | 62.9 | 1.006 | 0.15 | 0.663 | 0.849 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Cheek | 40185 | 2549.5 | 23.29 | 24.30 | 1.262 | 62.9 | 1.006 | 0.044 | 0.687 | 0.872 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Cheek | 41055 | 2636.5 | 23.08 | 24.30 | 1.324 | 62.9 | 1.006 | 0.03 | 0.704 | 0.938 |
| 06 | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Cheek | 41490 | 2680 | 23.29 | 24.30 | 1.262 | 62.9 | 1.006 | 0.059 | 0.741 | 0.941 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Cheek | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | 0.01 | 0.531 | 0.635 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Cheek | 39750 | 2506 | 22.27 | 23.30 | 1.268 | 62.9 | 1.006 | 0.05 | 0.500 | 0.638 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Cheek | 40185 | 2549.5 | 22.33 | 23.30 | 1.250 | 62.9 | 1.006 | 0.06 | 0.520 | 0.654 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Cheek | 41055 | 2636.5 | 22.32 | 23.30 | 1.253 | 62.9 | 1.006 | 0.03 | 0.558 | 0.703 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Cheek | 41490 | 2680 | 22.51 | 23.30 | 1.199 | 62.9 | 1.006 | 0.07 | 0.577 | 0.696 |
| | LTE Band 41 | 20 | QPSK | 100 | 0 | Left Cheek | 40620 | 2593 | 22.26 | 23.30 | 1.271 | 62.9 | 1.006 | -0.06 | 0.437 | 0.559 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Tilted | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | -0.05 | 0.150 | 0.186 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Tilted | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | 0.15 | 0.134 | 0.160 |

<DTS WLAN SAR>

| Plot No. | Band | Mode | Test Position | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|--------------------|----------------------|--------------------|-----------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 07 | WLAN 2.4GHz | 802.11b 1Mbps | Right Cheek | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | 0.13 | 0.248 | 0.273 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Right Tilted | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | 0.04 | 0.199 | 0.219 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Left Cheek | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | 0.05 | 0.099 | 0.109 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Left Tilted | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | 0.17 | 0.120 | 0.132 |

15.2 Hotspot SAR

| Distance of the Antenna to the EUT surface/edge | | | | | | |
|---|--------|--------|----------|-------------|------------|-----------|
| Antennas | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| LTE Band 41 | ≤ 25mm | ≤ 25mm | 111mm | ≤ 25mm | 59mm | ≤ 25mm |
| CDMA BC0/BC1/BC10& LTE Band25/26 | ≤ 25mm | ≤ 25mm | 119mm | ≤ 25mm | ≤ 25mm | ≤ 25mm |
| BT&WLAN | ≤ 25mm | ≤ 25mm | ≤ 25mm | 104mm | 60mm | ≤ 25mm |

| Positions for SAR tests; Hotspot mode | | | | | | |
|---------------------------------------|------|-------|----------|-------------|------------|-----------|
| Antennas | Back | Front | Top Side | Bottom Side | Right Side | Left Side |
| LTE Band 41 | Yes | Yes | No | No | No | No |
| CDMA BC0/BC1/BC10& LTE Band25/26 | Yes | Yes | No | Yes | Yes | Yes |
| BT&WLAN | Yes | Yes | Yes | No | No | Yes |

General Note: Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

<CDMA SAR>

| Plot No. | Band | Mode | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|----------------------|-------------------|--------------------|----------|-------------|----------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | CDMA2000 BC10 | RTAP 153.6 | Front | 1 | 476 | 817.9 | 24.73 | 25.00 | 1.064 | -0.1 | 0.443 | 0.471 |
| 08 | CDMA2000 BC10 | RTAP 153.6 | Back | 1 | 476 | 817.9 | 24.73 | 25.00 | 1.064 | -0.02 | 0.711 | 0.757 |
| | CDMA2000 BC10 | RTAP 153.6 | Left Side | 1 | 476 | 817.9 | 24.73 | 25.00 | 1.064 | 0.02 | 0.601 | 0.640 |
| | CDMA2000 BC10 | RTAP 153.6 | Right Side | 1 | 476 | 817.9 | 24.73 | 25.00 | 1.064 | 0.02 | 0.512 | 0.545 |
| | CDMA2000 BC10 | RTAP 153.6 | Bottom Side | 1 | 476 | 817.9 | 24.73 | 25.00 | 1.064 | 0.08 | 0.086 | 0.092 |
| | CDMA2000 BC0 | RTAP 153.6 | Front | 1 | 777 | 848.31 | 24.52 | 25.00 | 1.117 | -0.02 | 0.448 | 0.500 |
| 09 | CDMA2000 BC0 | RTAP 153.6 | Back | 1 | 777 | 848.31 | 24.52 | 25.00 | 1.117 | 0.001 | 0.712 | 0.795 |
| | CDMA2000 BC0 | RTAP 153.6 | Left Side | 1 | 777 | 848.31 | 24.52 | 25.00 | 1.117 | 0.04 | 0.538 | 0.601 |
| | CDMA2000 BC0 | RTAP 153.6 | Right Side | 1 | 777 | 848.31 | 24.52 | 25.00 | 1.117 | 0.05 | 0.352 | 0.393 |
| | CDMA2000 BC0 | RTAP 153.6 | Bottom Side | 1 | 777 | 848.31 | 24.52 | 25.00 | 1.117 | 0.03 | 0.154 | 0.172 |
| | CDMA2000 BC1 | RTAP 153.6 | Front | 1 | 600 | 1880 | 24.63 | 25.00 | 1.089 | -0.07 | 0.679 | 0.739 |
| | CDMA2000 BC1 | RTAP 153.6 | Back | 1 | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.01 | 0.631 | 0.687 |
| | CDMA2000 BC1 | RTAP 153.6 | Left Side | 1 | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.07 | 0.201 | 0.219 |
| | CDMA2000 BC1 | RTAP 153.6 | Right Side | 1 | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.02 | 0.333 | 0.363 |
| | CDMA2000 BC1 | RTAP 153.6 | Bottom Side | 1 | 600 | 1880 | 24.63 | 25.00 | 1.089 | 0.08 | 0.745 | 0.811 |
| | CDMA2000 BC1 | RTAP 153.6 | Bottom Side | 1 | 25 | 1851.25 | 24.49 | 25.00 | 1.125 | 0.07 | 0.606 | 0.682 |
| 10 | CDMA2000 BC1 | RTAP 153.6 | Bottom Side | 1 | 1175 | 1908.75 | 24.62 | 25.00 | 1.091 | 0.14 | 1.060 | 1.157 |



<LTE SAR>

| Plot No. | Band | BW (MHz) | Mode | RB Size | RB offset | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|--------------------|-----------|-------------|----------|-----------|--------------------|----------|--------------|--------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Front | 1 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | 0.0089 | 0.435 | 0.498 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Front | 1 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.0012 | 0.320 | 0.385 |
| 11 | LTE Band 26 | 15 | QPSK | 1 | 37 | Back | 1 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | -0.08 | 0.630 | 0.722 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Back | 1 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.0048 | 0.487 | 0.586 |
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Left Side | 1 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | -0.1 | 0.520 | 0.596 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Left Side | 1 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | -0.05 | 0.420 | 0.505 |
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Right Side | 1 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | 0.14 | 0.372 | 0.426 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Right Side | 1 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | -0.05 | 0.332 | 0.399 |
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Bottom Side | 1 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | 0.17 | 0.105 | 0.120 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Bottom Side | 1 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.02 | 0.078 | 0.094 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Front | 1 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | -0.13 | 0.502 | 0.544 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Front | 1 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | 0.05 | 0.384 | 0.442 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Back | 1 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | -0.03 | 0.449 | 0.487 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Back | 1 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | 0.08 | 0.390 | 0.449 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Left Side | 1 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | 0.01 | 0.171 | 0.185 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Left Side | 1 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | -0.07 | 0.134 | 0.154 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Right Side | 1 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | -0.12 | 0.318 | 0.345 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Right Side | 1 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | -0.07 | 0.251 | 0.289 |
| 12 | LTE Band 25 | 20 | QPSK | 1 | 49 | Bottom Side | 1 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | -0.04 | 0.622 | 0.674 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Bottom Side | 1 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | -0.07 | 0.482 | 0.555 |

| Plot No. | Band | BW (MHz) | Mode | RB Size | RB offset | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|-----------|--------------------|-----------|-------------|----------|-----------|--------------------|----------|--------------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Front | 1 | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | -0.14 | 0.461 | 0.571 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Front | 1 | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | -0.06 | 0.374 | 0.447 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Back | 1 | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | -0.02 | 0.522 | 0.646 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Back | 1 | 39750 | 2506 | 23.25 | 24.30 | 1.274 | 62.9 | 1.006 | -0.045 | 0.658 | 0.843 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Back | 1 | 40185 | 2549.5 | 23.29 | 24.30 | 1.262 | 62.9 | 1.006 | -0.0015 | 0.619 | 0.786 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Back | 1 | 41055 | 2636.5 | 23.08 | 24.30 | 1.324 | 62.9 | 1.006 | -0.11 | 0.487 | 0.649 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Back | 1 | 41490 | 2680 | 23.29 | 24.30 | 1.262 | 62.9 | 1.006 | -0.048 | 0.506 | 0.642 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Back | 1 | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | -0.09 | 0.421 | 0.503 |
| | LTE Band 41 | 20 | QPSK | 100 | 0 | Back | 1 | 40620 | 2593 | 22.26 | 23.30 | 1.271 | 62.9 | 1.006 | 0.05 | 0.309 | 0.395 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Left Side | 1 | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | 0.029 | 0.459 | 0.568 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Left Side | 1 | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | 0.03 | 0.435 | 0.520 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Bottom Side | 1 | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | -0.19 | 0.598 | 0.740 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Bottom Side | 1 | 39750 | 2506 | 23.25 | 24.30 | 1.274 | 62.9 | 1.006 | 0.028 | 0.507 | 0.650 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Bottom Side | 1 | 40185 | 2549.5 | 23.29 | 24.30 | 1.262 | 62.9 | 1.006 | -0.02 | 0.592 | 0.751 |
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Bottom Side | 1 | 41055 | 2636.5 | 23.08 | 24.30 | 1.324 | 62.9 | 1.006 | 0.11 | 0.611 | 0.814 |
| 13 | LTE Band 41 | 20 | QPSK | 1 | 0 | Bottom Side | 1 | 41490 | 2680 | 23.29 | 24.30 | 1.262 | 62.9 | 1.006 | 0.022 | 0.685 | 0.870 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Bottom Side | 1 | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | 0.19 | 0.476 | 0.569 |
| | LTE Band 41 | 20 | QPSK | 100 | 0 | Bottom Side | 1 | 40620 | 2593 | 22.26 | 23.30 | 1.271 | 62.9 | 1.006 | 0.1 | 0.511 | 0.653 |



<DTS WLAN SAR>

| Plot No. | Band | Mode | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | WLAN 2.4GHz | 802.11b 1Mbps | Front | 1 | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | -0.09 | 0.075 | 0.083 |
| 14 | WLAN 2.4GHz | 802.11b 1Mbps | Back | 1 | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | -0.051 | 0.083 | 0.091 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Left Side | 1 | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | -0.035 | 0.069 | 0.076 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Top Side | 1 | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | 0.07 | 0.074 | 0.082 |

15.3 Body Worn Accessory SAR

<CDMA SAR>

| Plot No. | Band | Mode | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|---------------|------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | CDMA2000 BC10 | RC3 SO32 | Front | 1.5 | 476 | 817.9 | 24.75 | 25.00 | 1.059 | 0.04 | 0.445 | 0.471 |
| 15 | CDMA2000 BC10 | RC3 SO32 | Back | 1.5 | 476 | 817.9 | 24.75 | 25.00 | 1.059 | 0.04 | 0.599 | 0.634 |
| | CDMA2000 BC10 | RETAP 4096 | Back | 1.5 | 476 | 817.9 | 24.68 | 25.00 | 1.076 | 0.02 | 0.580 | 0.624 |
| | CDMA2000 BC0 | RC3 SO32 | Front | 1.5 | 777 | 848.31 | 24.56 | 25.00 | 1.107 | -0.03 | 0.319 | 0.353 |
| 16 | CDMA2000 BC0 | RC3 SO32 | Back | 1.5 | 777 | 848.31 | 24.56 | 25.00 | 1.107 | -0.05 | 0.454 | 0.502 |
| | CDMA2000 BC0 | RETAP 4096 | Back | 1.5 | 777 | 848.31 | 24.48 | 25.00 | 1.127 | 0.03 | 0.401 | 0.452 |
| 17 | CDMA2000 BC1 | RC3 SO32 | Front | 1.5 | 600 | 1880 | 24.70 | 25.00 | 1.072 | -0.07 | 0.358 | 0.384 |
| | CDMA2000 BC1 | RC3 SO32 | Back | 1.5 | 600 | 1880 | 24.70 | 25.00 | 1.072 | -0.07 | 0.307 | 0.329 |
| | CDMA2000 BC1 | RETAP 4096 | Front | 1.5 | 600 | 1880 | 24.62 | 25.00 | 1.091 | -0.07 | 0.331 | 0.361 |

<LTE SAR>

| Plot No. | Band | BW (MHz) | Mode | RB Size | RB offset | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|------------------------|
| | LTE Band 26 | 15 | QPSK | 1 | 37 | Front | 1.5 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | -0.0011 | 0.414 | 0.474 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Front | 1.5 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.01 | 0.309 | 0.371 |
| 18 | LTE Band 26 | 15 | QPSK | 1 | 37 | Back | 1.5 | 26865 | 831.5 | 23.91 | 24.50 | 1.146 | -0.1 | 0.548 | 0.628 |
| | LTE Band 26 | 15 | QPSK | 36 | 0 | Back | 1.5 | 26865 | 831.5 | 22.70 | 23.50 | 1.202 | 0.0012 | 0.422 | 0.507 |
| 19 | LTE Band 25 | 20 | QPSK | 1 | 49 | Front | 1.5 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | -0.14 | 0.269 | 0.292 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Front | 1.5 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | -0.12 | 0.202 | 0.232 |
| | LTE Band 25 | 20 | QPSK | 1 | 49 | Back | 1.5 | 26340 | 1880 | 23.65 | 24.00 | 1.084 | 0.12 | 0.223 | 0.242 |
| | LTE Band 25 | 20 | QPSK | 50 | 0 | Back | 1.5 | 26340 | 1880 | 22.39 | 23.00 | 1.151 | -0.04 | 0.175 | 0.201 |

| Plot No. | Band | BW (MHz) | Mode | RB Size | RB offset | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|----------|------|---------|-----------|---------------|----------|-------|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| | LTE Band 41 | 20 | QPSK | 1 | 0 | Front | 1.5 | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | 0.06 | 0.308 | 0.381 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Front | 1.5 | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | -0.03 | 0.249 | 0.298 |
| 20 | LTE Band 41 | 20 | QPSK | 1 | 0 | Back | 1.5 | 40620 | 2593 | 23.40 | 24.30 | 1.230 | 62.9 | 1.006 | -0.1 | 0.375 | 0.464 |
| | LTE Band 41 | 20 | QPSK | 50 | 0 | Back | 1.5 | 40620 | 2593 | 22.55 | 23.30 | 1.189 | 62.9 | 1.006 | -0.13 | 0.298 | 0.356 |

<DTS WLAN SAR>

| Plot No. | Band | Mode | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Duty Cycle % | Duty Cycle Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Reported 1g SAR (W/kg) |
|----------|-------------|---------------|---------------|----------|-----|-------------|---------------------|---------------------|------------------------|--------------|---------------------------|------------------|------------------------|------------------------|
| 21 | WLAN 2.4GHz | 802.11b 1Mbps | Front | 1.5 | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | 0.021 | 0.045 | 0.050 |
| | WLAN 2.4GHz | 802.11b 1Mbps | Back | 1.5 | 11 | 2462 | 15.18 | 15.50 | 1.076 | 97.62 | 1.024 | -0.026 | 0.034 | 0.037 |

15.4 Repeated SAR Measurement

| Plot No. | Band | Mode | Test Position | Gap (cm) | Ch. | Freq. (MHz) | Average Power (dBm) | Tune-Up Limit (dBm) | Tune-up Scaling Factor | Power Drift (dB) | Measured 1g SAR (W/kg) | Ratio | Reported 1g SAR (W/kg) |
|----------|--------------|------------|---------------|----------|------|-------------|---------------------|---------------------|------------------------|------------------|------------------------|-------|------------------------|
| 1st | CDMA2000 BC1 | RTAP 153.6 | Bottom Side | 1 | 1175 | 1908.75 | 24.62 | 25.00 | 1.091 | 0.14 | 1.060 | 1 | 1.157 |
| 2nd | CDMA2000 BC1 | RTAP 153.6 | Bottom Side | 1 | 1175 | 1908.75 | 24.62 | 25.00 | 1.091 | 0.09 | 1.010 | 1.048 | 1.102 |

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

| NO. | Simultaneous Transmission Configurations | Portable Handset | | | Note |
|-----|--|------------------|-----------|---------|---------------------|
| | | Head | Body-worn | Hotspot | |
| 1. | CDMA(Voice) + WLAN2.4GHz(data) | Yes | Yes | | |
| 2. | CDMA(Voice) + Bluetooth(data) | Yes | Yes | | |
| 3. | CDMA(Data) + WLAN2.4GHz(data) | Yes | Yes | Yes | 2.4GHz Hotspot |
| 4. | LTE(Data) + WLAN2.4GHz(data) | Yes | Yes | Yes | 2.4GHz Hotspot |
| 5. | CDMA(Data) + Bluetooth(data) | Yes | Yes | Yes | Bluetooth Tethering |
| 6. | LTE(Data) + Bluetooth(data) | Yes | Yes | Yes | Bluetooth Tethering |

General Note:

1. This device supported VoIP in CDMA, (e.g. 3rd party VoIP)/LTE.
2. This device 2.4GHz WLAN supports Hotspot operation.
3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
4. CDMA2000 or LTE Band 25/26 share the same antenna ,EUT will choose either CDMA2000 or LTE Band 25/26 according to the network signal condition; therefore, they will not transmit simultaneously.
5. CDMA2000 and LTE Band 41 share the same transmission module and they can't transmit simultaneously.
6. The reported SAR summation is calculated based on the same configuration and test position.
7. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
8. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

| Bluetooth Max Power | Exposure Position | Head | Hotspot | Body worn |
|---------------------|----------------------|------------|------------|------------|
| | Test separation | 0 mm | 10 mm | 15 mm |
| 1 dBm | Estimated SAR (W/kg) | 0.042 W/kg | 0.021 W/kg | 0.014 W/kg |

16.1 Head Exposure Conditions

<WWAN + WLAN>

| WWAN Band | | Exposure Position | WWAN PCE | WLAN DTS | Summed SAR (W/kg) |
|-----------|---------|-------------------|----------------------|----------------------|-------------------|
| | | | Max. WWAN SAR (W/kg) | Max. WLAN SAR (W/kg) | |
| CDMA | BC10 | Right Cheek | 0.299 | 0.273 | 0.57 |
| | | Right Tilted | 0.245 | 0.219 | 0.46 |
| | | Left Cheek | 0.327 | 0.109 | 0.44 |
| | | Left Tilted | 0.254 | 0.132 | 0.39 |
| | BC0 | Right Cheek | 0.432 | 0.273 | 0.71 |
| | | Right Tilted | 0.272 | 0.219 | 0.49 |
| | | Left Cheek | 0.473 | 0.109 | 0.58 |
| | | Left Tilted | 0.247 | 0.132 | 0.38 |
| | BC1 | Right Cheek | 0.533 | 0.273 | 0.81 |
| | | Right Tilted | 0.167 | 0.219 | 0.39 |
| | | Left Cheek | 0.442 | 0.109 | 0.55 |
| | | Left Tilted | 0.191 | 0.132 | 0.32 |
| LTE | Band 26 | Right Cheek | 0.329 | 0.273 | 0.60 |
| | | Right Tilted | 0.245 | 0.219 | 0.46 |
| | | Left Cheek | 0.348 | 0.109 | 0.46 |
| | | Left Tilted | 0.234 | 0.132 | 0.37 |
| | Band 25 | Right Cheek | 0.419 | 0.273 | 0.69 |
| | | Right Tilted | 0.145 | 0.219 | 0.36 |
| | | Left Cheek | 0.305 | 0.109 | 0.41 |
| | | Left Tilted | 0.165 | 0.132 | 0.30 |
| | Band 41 | Right Cheek | 0.481 | 0.273 | 0.75 |
| | | Right Tilted | 0.311 | 0.219 | 0.53 |
| | | Left Cheek | 0.941 | 0.109 | 1.05 |
| | | Left Tilted | 0.186 | 0.132 | 0.32 |

<WWAN + Bluetooth>

| WWAN Band | | Exposure Position | WWAN PCE | Bluetooth DSS | Summed SAR (W/kg) |
|-----------|---------|-------------------|----------------------|---------------------------|-------------------|
| | | | Max. WWAN SAR (W/kg) | Max. Bluetooth SAR (W/kg) | |
| CDMA | BC10 | Right Cheek | 0.299 | 0.042 | 0.34 |
| | | Right Tilted | 0.245 | 0.042 | 0.29 |
| | | Left Cheek | 0.327 | 0.042 | 0.37 |
| | | Left Tilted | 0.254 | 0.042 | 0.30 |
| | BC0 | Right Cheek | 0.432 | 0.042 | 0.47 |
| | | Right Tilted | 0.272 | 0.042 | 0.31 |
| | | Left Cheek | 0.473 | 0.042 | 0.52 |
| | | Left Tilted | 0.247 | 0.042 | 0.29 |
| | BC1 | Right Cheek | 0.533 | 0.042 | 0.58 |
| | | Right Tilted | 0.167 | 0.042 | 0.21 |
| | | Left Cheek | 0.442 | 0.042 | 0.48 |
| | | Left Tilted | 0.191 | 0.042 | 0.23 |
| LTE | Band 26 | Right Cheek | 0.329 | 0.042 | 0.37 |
| | | Right Tilted | 0.245 | 0.042 | 0.29 |
| | | Left Cheek | 0.348 | 0.042 | 0.39 |
| | | Left Tilted | 0.234 | 0.042 | 0.28 |
| | Band 25 | Right Cheek | 0.419 | 0.042 | 0.46 |
| | | Right Tilted | 0.145 | 0.042 | 0.19 |
| | | Left Cheek | 0.305 | 0.042 | 0.35 |
| | | Left Tilted | 0.165 | 0.042 | 0.21 |
| | Band 41 | Right Cheek | 0.481 | 0.042 | 0.52 |
| | | Right Tilted | 0.311 | 0.042 | 0.35 |
| | | Left Cheek | 0.941 | 0.042 | 0.98 |
| | | Left Tilted | 0.186 | 0.042 | 0.23 |



16.2 Hotspot Exposure Conditions

<WWAN + WLAN>

| WWAN Band | | Exposure Position | WWAN PCE | WLAN DTS | Summed SAR (W/kg) |
|-----------|---------|-------------------|----------------------|----------------------|-------------------|
| | | | Max. WWAN SAR (W/kg) | Max. WLAN SAR (W/kg) | |
| CDMA | BC10 | Front | 0.471 | 0.083 | 0.55 |
| | | Back | 0.757 | 0.091 | 0.85 |
| | | Left side | 0.640 | 0.076 | 0.72 |
| | | Right side | 0.545 | | 0.55 |
| | | Top side | | 0.082 | 0.08 |
| | | Bottom side | 0.092 | | 0.09 |
| | BC0 | Front | 0.500 | 0.083 | 0.58 |
| | | Back | 0.795 | 0.091 | 0.89 |
| | | Left side | 0.601 | 0.076 | 0.68 |
| | | Right side | 0.393 | | 0.39 |
| | | Top side | | 0.082 | 0.08 |
| | | Bottom side | 0.172 | | 0.17 |
| | BC1 | Front | 0.739 | 0.083 | 0.82 |
| | | Back | 0.687 | 0.091 | 0.78 |
| | | Left side | 0.219 | 0.076 | 0.30 |
| | | Right side | 0.363 | | 0.36 |
| | | Top side | | 0.082 | 0.08 |
| | | Bottom side | 1.157 | | 1.16 |
| LTE | Band 26 | Front | 0.498 | 0.083 | 0.58 |
| | | Back | 0.722 | 0.091 | 0.81 |
| | | Left side | 0.596 | 0.076 | 0.67 |
| | | Right side | 0.426 | | 0.43 |
| | | Top side | | 0.082 | 0.08 |
| | | Bottom side | 0.120 | | 0.12 |
| | Band 25 | Front | 0.544 | 0.083 | 0.63 |
| | | Back | 0.487 | 0.091 | 0.58 |
| | | Left side | 0.185 | 0.076 | 0.26 |
| | | Right side | 0.345 | | 0.35 |
| | | Top side | | 0.082 | 0.08 |
| | | Bottom side | 0.674 | | 0.67 |
| | Band 41 | Front | 0.571 | 0.083 | 0.65 |
| | | Back | 0.843 | 0.091 | 0.93 |
| | | Left side | 0.568 | 0.076 | 0.64 |
| | | Top side | | 0.082 | 0.08 |
| | | Bottom side | 0.870 | | 0.87 |

<WWAN + Bluetooth>

| WWAN Band | | Exposure Position | WWAN PCE | Bluetooth DSS | Summed SAR (W/kg) |
|-----------|-------------|-------------------|----------------------|---------------------------|-------------------|
| | | | Max. WWAN SAR (W/kg) | Max. Bluetooth SAR (W/kg) | |
| CDMA | BC10 | Front | 0.471 | 0.021 | 0.49 |
| | | Back | 0.757 | 0.021 | 0.78 |
| | | Left side | 0.640 | 0.021 | 0.66 |
| | | Right side | 0.545 | | 0.55 |
| | | Top side | | 0.021 | 0.02 |
| | | Bottom side | 0.092 | | 0.09 |
| | BC0 | Front | 0.500 | 0.021 | 0.52 |
| | | Back | 0.795 | 0.021 | 0.82 |
| | | Left side | 0.601 | 0.021 | 0.62 |
| | | Right side | 0.393 | | 0.39 |
| | | Top side | | 0.021 | 0.02 |
| | BC1 | Bottom side | 0.172 | | 0.17 |
| | | Front | 0.739 | 0.021 | 0.76 |
| | | Back | 0.687 | 0.021 | 0.71 |
| | | Left side | 0.219 | 0.021 | 0.24 |
| | | Right side | 0.363 | | 0.36 |
| | | Top side | | 0.021 | 0.02 |
| | | Bottom side | 1.157 | | 1.16 |
| LTE | Band 26 | Front | 0.498 | 0.021 | 0.52 |
| | | Back | 0.722 | 0.021 | 0.74 |
| | | Left side | 0.596 | 0.021 | 0.62 |
| | | Right side | 0.426 | | 0.43 |
| | | Top side | | 0.021 | 0.02 |
| | | Bottom side | 0.120 | | 0.12 |
| | Band 25 | Front | 0.544 | 0.021 | 0.57 |
| | | Back | 0.487 | 0.021 | 0.51 |
| | | Left side | 0.185 | 0.021 | 0.21 |
| | | Right side | 0.345 | | 0.35 |
| | | Top side | | 0.021 | 0.02 |
| | Band 41 | Bottom side | 0.674 | | 0.67 |
| | | Front | 0.571 | 0.021 | 0.59 |
| | | Back | 0.843 | 0.021 | 0.86 |
| | | Left side | 0.568 | 0.021 | 0.59 |
| | Top side | | 0.021 | 0.02 | |
| | Bottom side | 0.870 | | 0.87 | |



16.3 Body-Worn Accessory Exposure Conditions

<WWAN + WLAN>

| WWAN Band | | Exposure Position | WWAN PCE | WLAN DTS | Summed SAR (W/kg) |
|-----------|---------|-------------------|----------------------|----------------------|-------------------|
| | | | Max. WWAN SAR (W/kg) | Max. WLAN SAR (W/kg) | |
| CDMA | BC10 | Front | 0.471 | 0.050 | 0.52 |
| | | Back | 0.634 | 0.037 | 0.67 |
| | BC0 | Front | 0.353 | 0.050 | 0.40 |
| | | Back | 0.502 | 0.037 | 0.54 |
| | BC1 | Front | 0.384 | 0.050 | 0.43 |
| | | Back | 0.329 | 0.037 | 0.37 |
| LTE | Band 26 | Front | 0.474 | 0.050 | 0.52 |
| | | Back | 0.628 | 0.037 | 0.67 |
| | Band 25 | Front | 0.292 | 0.050 | 0.34 |
| | | Back | 0.242 | 0.037 | 0.28 |
| | Band 41 | Front | 0.381 | 0.050 | 0.43 |
| | | Back | 0.464 | 0.037 | 0.50 |

<WWAN + Bluetooth>

| WWAN Band | | Exposure Position | WWAN PCE | Bluetooth DSS | Summed SAR (W/kg) |
|-----------|---------|-------------------|----------------------|---------------------------|-------------------|
| | | | Max. WWAN SAR (W/kg) | Max. Bluetooth SAR (W/kg) | |
| CDMA | BC10 | Front | 0.471 | 0.014 | 0.49 |
| | | Back | 0.634 | 0.014 | 0.65 |
| | BC0 | Front | 0.353 | 0.014 | 0.37 |
| | | Back | 0.502 | 0.014 | 0.52 |
| | BC1 | Front | 0.384 | 0.014 | 0.40 |
| | | Back | 0.329 | 0.014 | 0.34 |
| LTE | Band 26 | Front | 0.474 | 0.014 | 0.49 |
| | | Back | 0.628 | 0.014 | 0.64 |
| | Band 25 | Front | 0.292 | 0.014 | 0.31 |
| | | Back | 0.242 | 0.014 | 0.26 |
| | Band 41 | Front | 0.381 | 0.014 | 0.40 |
| | | Back | 0.464 | 0.014 | 0.48 |

Test Engineer : Fulu Hu

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

| Uncertainty Distributions | Normal | Rectangular | Triangular | U-Shape |
|------------------------------------|--------------------|-------------|------------|---------|
| Multi-plying Factor ^(a) | 1/k ^(b) | 1/√3 | 1/√6 | 1/√2 |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

| Error Description | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (1g) | Ci (10g) | Standard Uncertainty (1g) | Standard Uncertainty (10g) |
|--------------------------------------|------------------------|--------------------------|---------|---------|----------|---------------------------|----------------------------|
| Measurement System | | | | | | | |
| Probe Calibration | 6.0 | Normal | 1 | 1 | 1 | ± 6.0 % | ± 6.0 % |
| Axial Isotropy | 4.7 | Rectangular | √3 | 0.7 | 0.7 | ± 1.9 % | ± 1.9 % |
| Hemispherical Isotropy | 9.6 | Rectangular | √3 | 0.7 | 0.7 | ± 3.9 % | ± 3.9 % |
| Boundary Effects | 1.0 | Rectangular | √3 | 1 | 1 | ± 0.6 % | ± 0.6 % |
| Linearity | 4.7 | Rectangular | √3 | 1 | 1 | ± 2.7 % | ± 2.7 % |
| System Detection Limits | 1.0 | Rectangular | √3 | 1 | 1 | ± 0.6 % | ± 0.6 % |
| Readout Electronics | 0.3 | Normal | 1 | 1 | 1 | ± 0.3 % | ± 0.3 % |
| Response Time | 0.8 | Rectangular | √3 | 1 | 1 | ± 0.5 % | ± 0.5 % |
| Integration Time | 2.6 | Rectangular | √3 | 1 | 1 | ± 1.5 % | ± 1.5 % |
| RF Ambient Noise | 3.0 | Rectangular | √3 | 1 | 1 | ± 1.7 % | ± 1.7 % |
| RF Ambient Reflections | 3.0 | Rectangular | √3 | 1 | 1 | ± 1.7 % | ± 1.7 % |
| Probe Positioner | 0.4 | Rectangular | √3 | 1 | 1 | ± 0.2 % | ± 0.2 % |
| Probe Positioning | 2.9 | Rectangular | √3 | 1 | 1 | ± 1.7 % | ± 1.7 % |
| Max. SAR Eval. | 1.0 | Rectangular | √3 | 1 | 1 | ± 0.6 % | ± 0.6 % |
| Test Sample Related | | | | | | | |
| Device Positioning | 2.9 | Normal | 1 | 1 | 1 | ± 2.9 % | ± 2.9 % |
| Device Holder | 3.6 | Normal | 1 | 1 | 1 | ± 3.6 % | ± 3.6 % |
| Power Drift | 5.0 | Rectangular | √3 | 1 | 1 | ± 2.9 % | ± 2.9 % |
| Phantom and Setup | | | | | | | |
| Phantom Uncertainty | 4.0 | Rectangular | √3 | 1 | 1 | ± 2.3 % | ± 2.3 % |
| Liquid Conductivity (Target) | 5.0 | Rectangular | √3 | 0.64 | 0.43 | ± 1.8 % | ± 1.2 % |
| Liquid Conductivity (Meas.) | 2.5 | Normal | 1 | 0.64 | 0.43 | ± 1.6 % | ± 1.1 % |
| Liquid Permittivity (Target) | 5.0 | Rectangular | √3 | 0.6 | 0.49 | ± 1.7 % | ± 1.4 % |
| Liquid Permittivity (Meas.) | 2.5 | Normal | 1 | 0.6 | 0.49 | ± 1.5 % | ± 1.2 % |
| Combined Standard Uncertainty | | | | | | ± 11.0 % | ± 10.8 % |
| Coverage Factor for 95 % | | | | | | K=2 | |
| Expanded Uncertainty | | | | | | ± 22.0 % | ± 21.5 % |

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [10] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [11] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [12] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz_141023

DUT: D835V2 - SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_141023 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.885 \text{ mho/m}$; $\epsilon_r = 41.086$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.41, 9.41, 9.41); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.849 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.265 V/m ; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.480 W/kg

SAR(1 g) = 2.35 mW/g ; SAR(10 g) = 1.54 mW/g

Maximum value of SAR (measured) = 2.969 mW/g

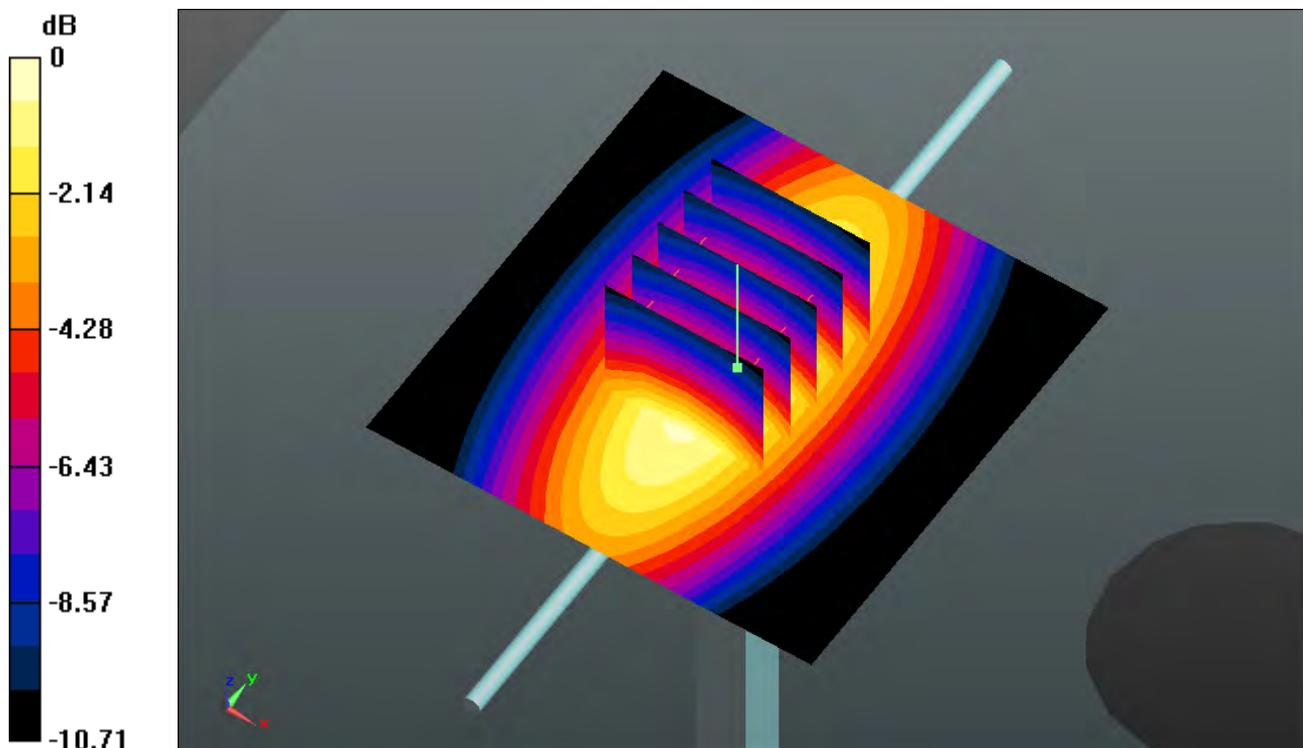

0 dB = 2.970mW/g

System Check_Head_1900MHz_141022

DUT: D1900V2 - SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_141022 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.425 \text{ mho/m}$; $\epsilon_r =$

38.906 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.4, 8.4, 8.4); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 14.226 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 87.652 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 18.122 W/kg

SAR(1 g) = 9.86 mW/g ; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 14.254 mW/g

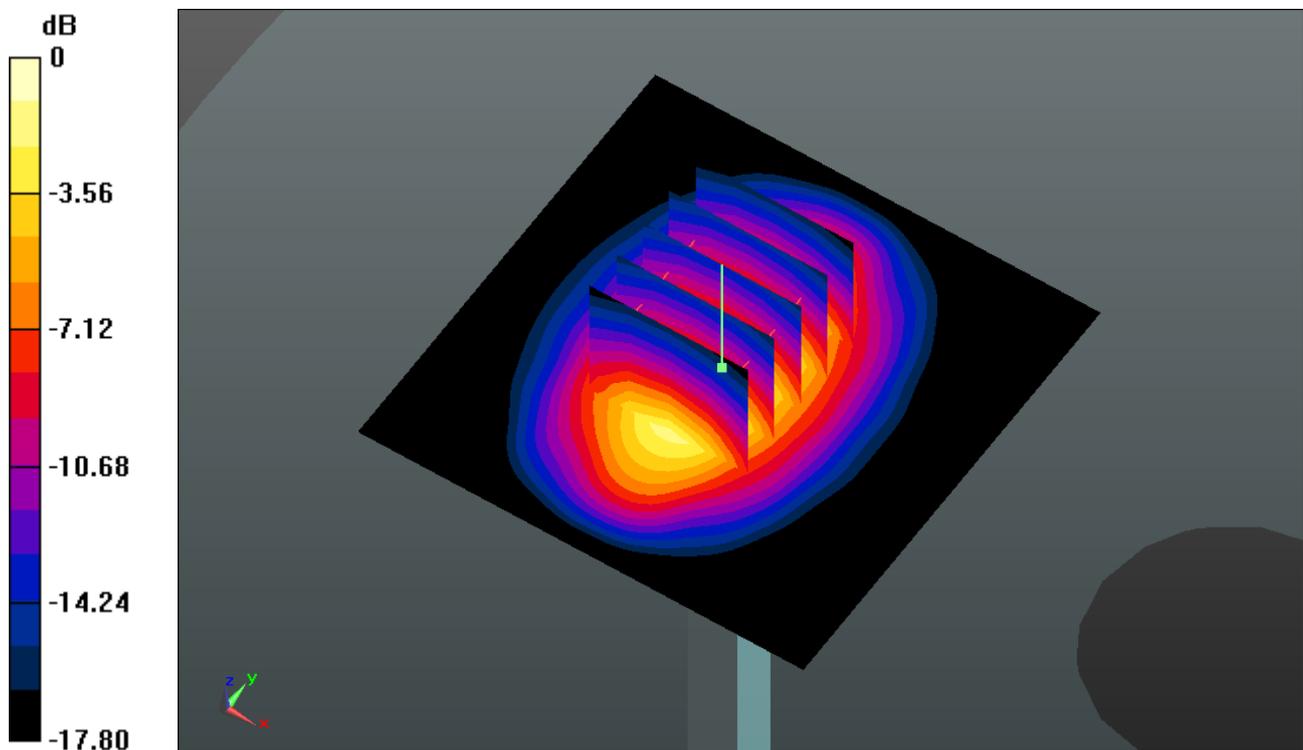

0 dB = 14.250mW/g

System Check_Head_2450MHz_141025

DUT: D2450V2 - SN:924

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_141025 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.831$ mho/m; $\epsilon_r =$

39.169 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.48, 7.48, 7.48); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (71x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.244 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.914 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 27.758 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.8 mW/g

Maximum value of SAR (measured) = 20.093 mW/g

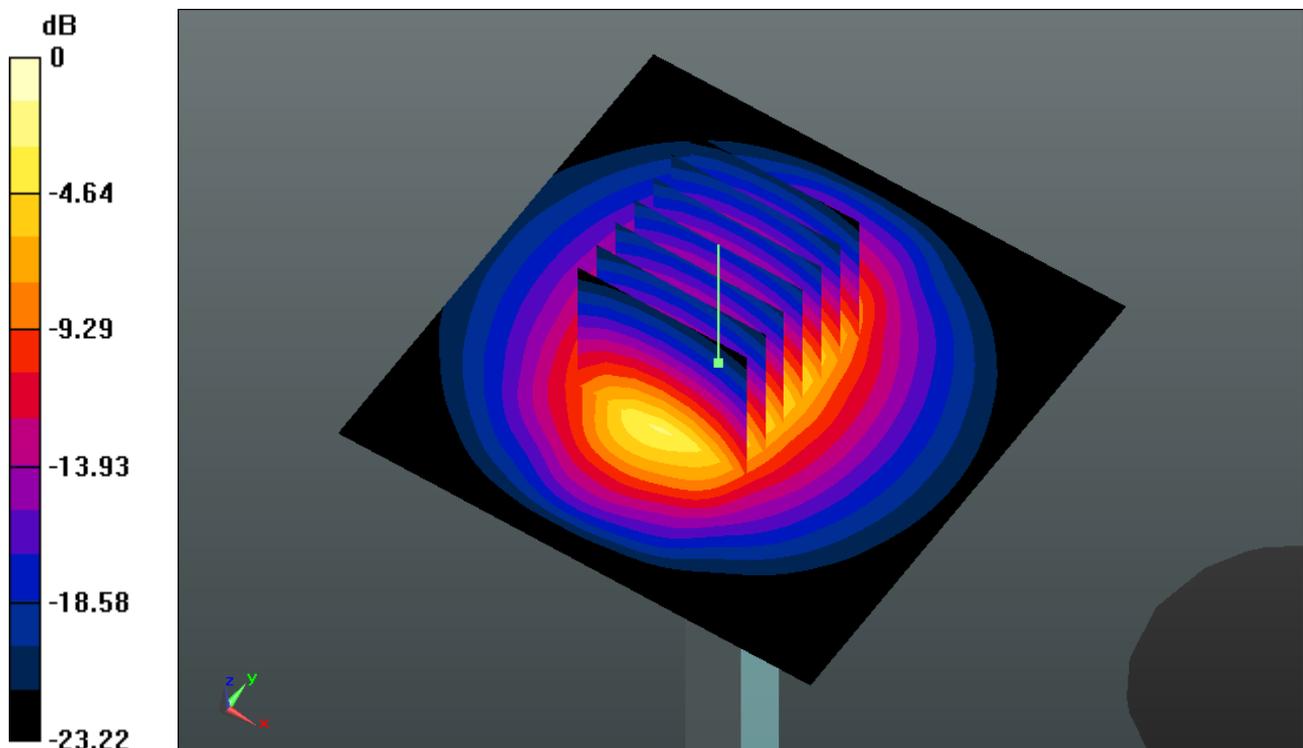

0 dB = 20.090mW/g

System Check_Head_2600MHz_141025

DUT: D2600V2 - SN:1070

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600_141025 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 38.254$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.3, 7.3, 7.3); Calibrated: 2014.05.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 24.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.7 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 15.1 W/kg; SAR(10 g) = 6.89 W/kg

Maximum value of SAR (measured) = 24.5 W/kg

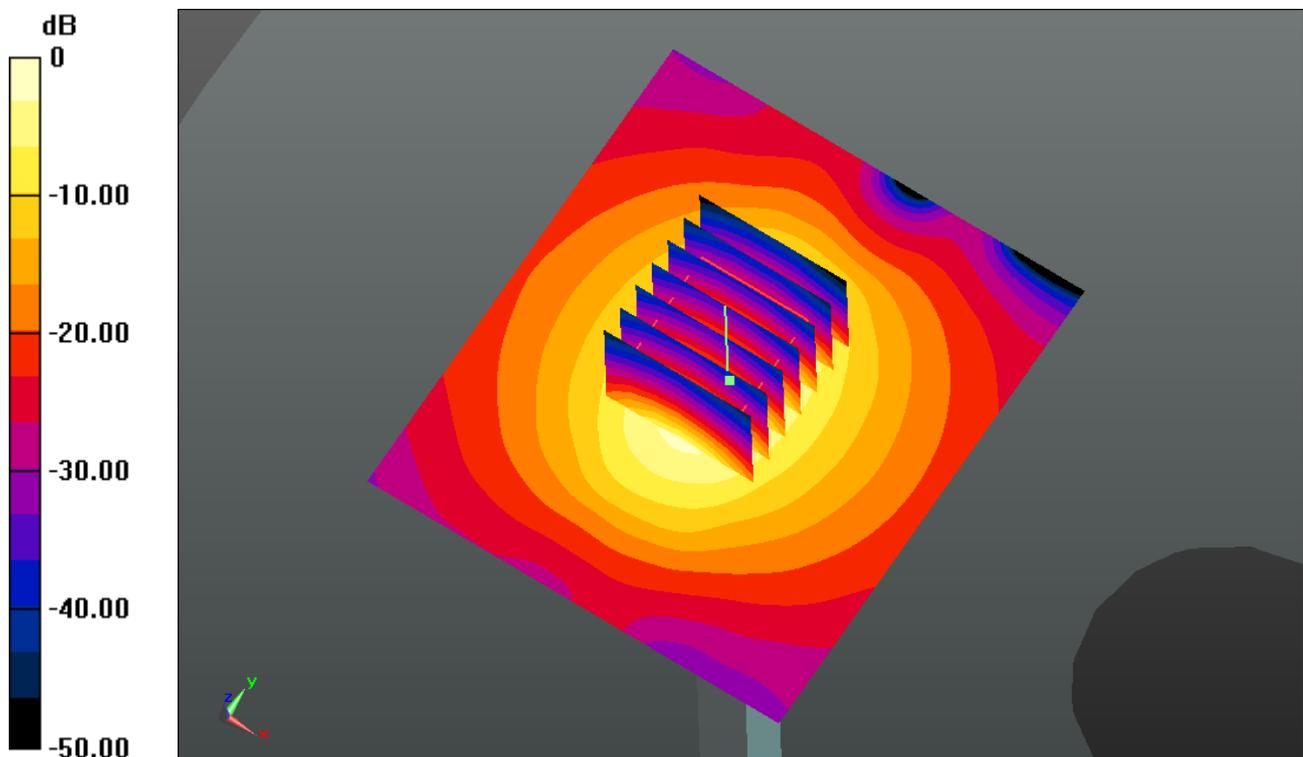

0 dB = 24.7 W/kg = 13.93 dBW/kg

System Check_Body_835MHz_141022

DUT: D835V2 - SN:4d091

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: MSL_835_141022 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.983 \text{ mho/m}$; $\epsilon_r = 54.868$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.857 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.056 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.330 W/kg

SAR(1 g) = 2.27 mW/g ; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.861 mW/g

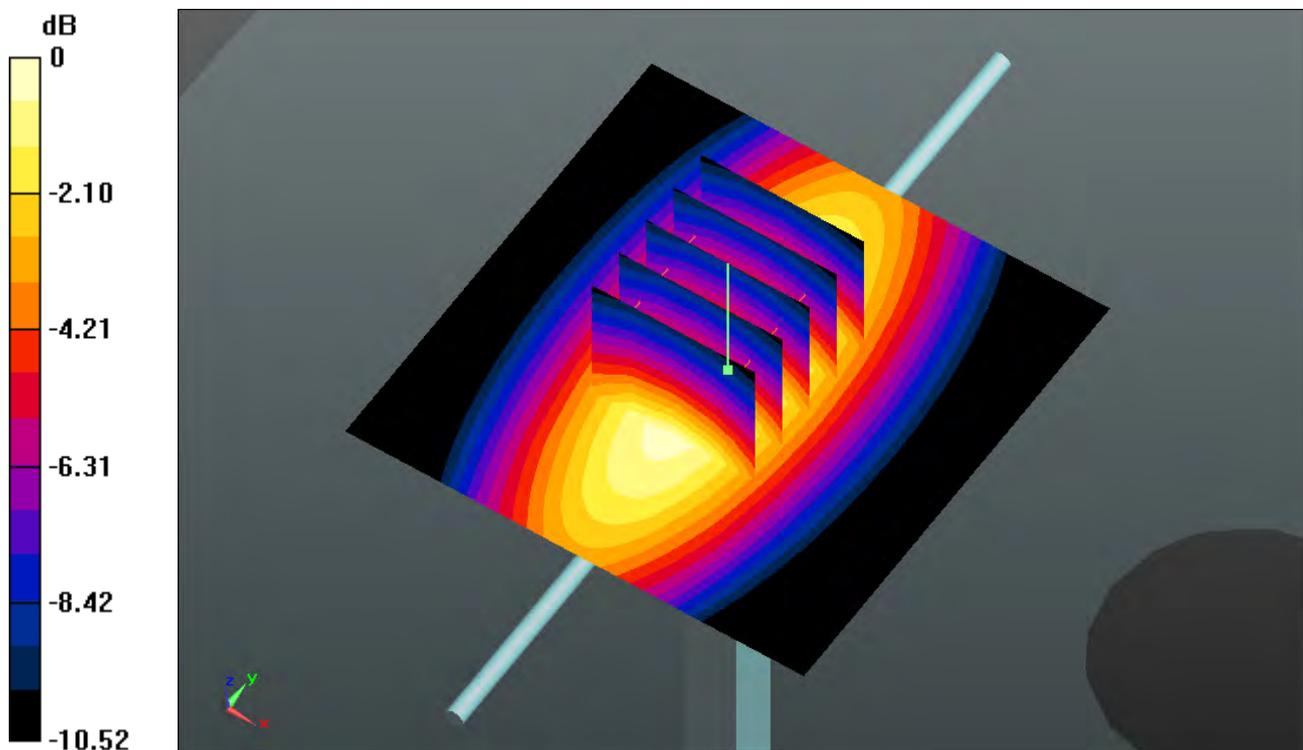

0 dB = 2.860mW/g

System Check_Body_1900MHz_141021

DUT: D1900V2 - SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_141021 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.552 \text{ mho/m}$; $\epsilon_r =$

53.373 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 15.200 mW/g


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 87.679 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 19.045 W/kg

SAR(1 g) = 10.4 mW/g ; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 15.105 mW/g

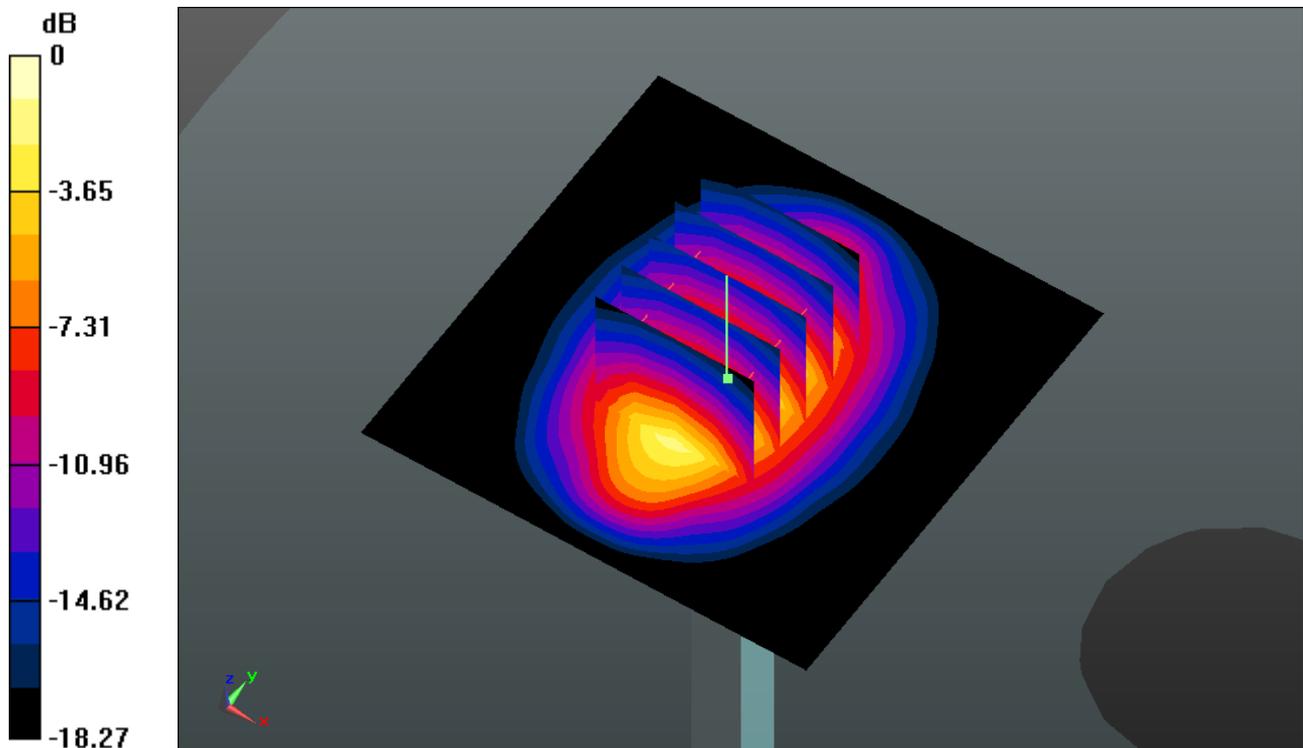

0 dB = 15.110mW/g

System Check_Body_2450MHz_141021

DUT: D2450V2 - SN:924

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_141021 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.949$ mho/m; $\epsilon_r =$

51.497 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.14, 7.14, 7.14); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (81x81x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 19.706 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.416 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 26.677 W/kg

SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.96 mW/g

Maximum value of SAR (measured) = 19.770 mW/g

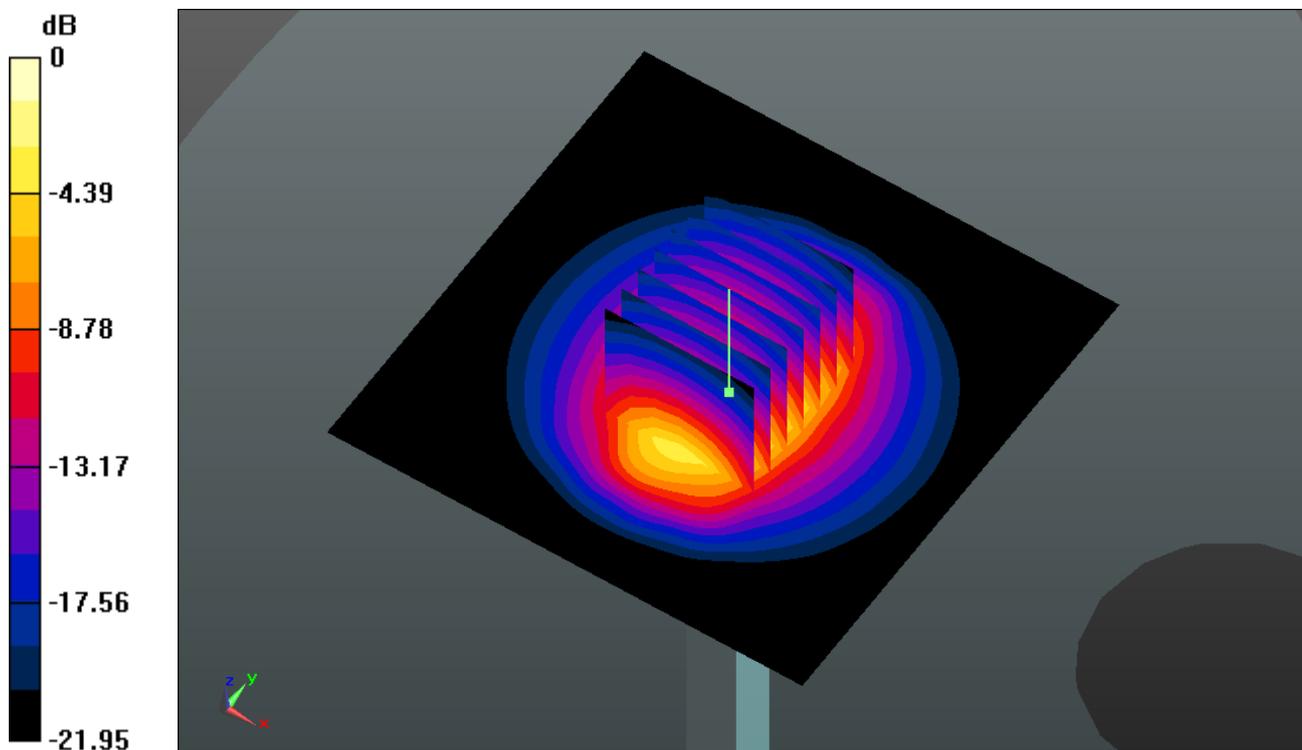

0 dB = 19.770mW/g

System Check_Body_2600MHz_141018

DUT: D2600V2 - SN:1070

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL_2600_141018 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.209$ mho/m; $\epsilon_r =$

51.123 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.82, 6.82, 6.82); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (81x81x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.890 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.706 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 29.017 W/kg

SAR(1 g) = 13.4 mW/g; SAR(10 g) = 6.04 mW/g

Maximum value of SAR (measured) = 20.856 mW/g

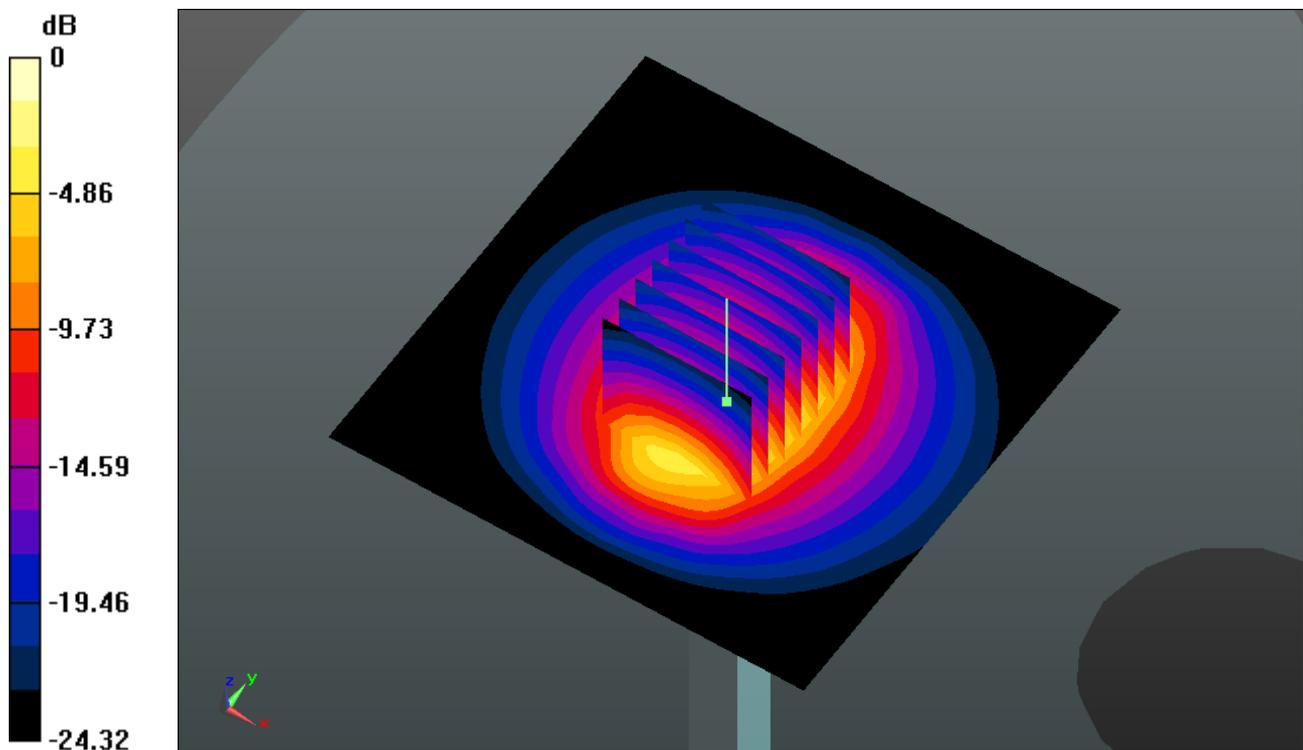

0 dB = 20.860mW/g



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

01_CDMA2000 BC10_RC3 SO55_Left Cheek_Ch476


Communication System: CDMA2000 (0); Frequency: 817.9 MHz; Duty Cycle: 1:1
 Medium: HSL_835_141023 Medium parameters used: $f = 817.9$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 41.289$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.41, 9.41, 9.41); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch476/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.344 mW/g

Ch476/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 7.695 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.373 W/kg
SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.232 mW/g
 Maximum value of SAR (measured) = 0.340 mW/g

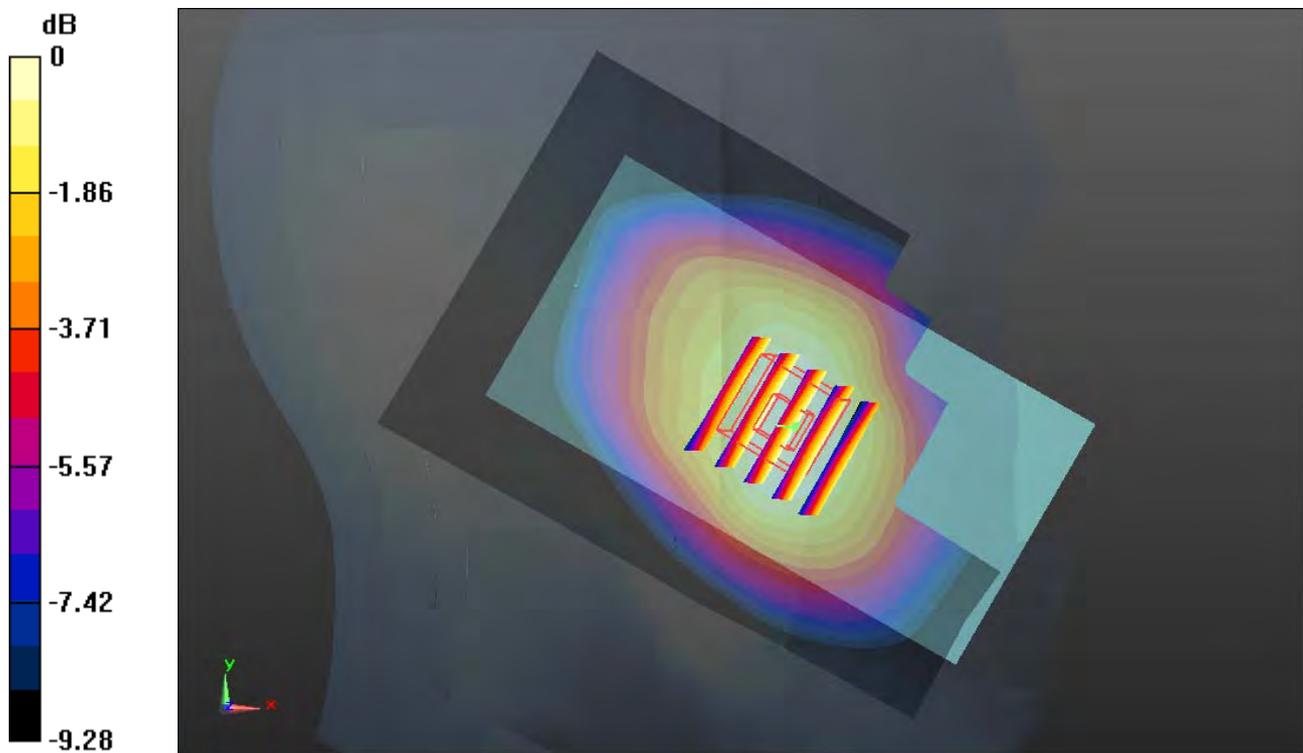

0 dB = 0.340mW/g

02_CDMA2000 BC0_RTEAP 4096_Left Cheek_Ch777


Communication System: CDMA2000 (0); Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium: HSL_835_141023 Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.897 \text{ mho/m}$; $\epsilon_r = 40.908$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.41, 9.41, 9.41); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch777/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.479 mW/g

Ch777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.256 V/m ; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.526 W/kg
SAR(1 g) = 0.420 mW/g ; SAR(10 g) = 0.317 mW/g
 Maximum value of SAR (measured) = 0.474 mW/g

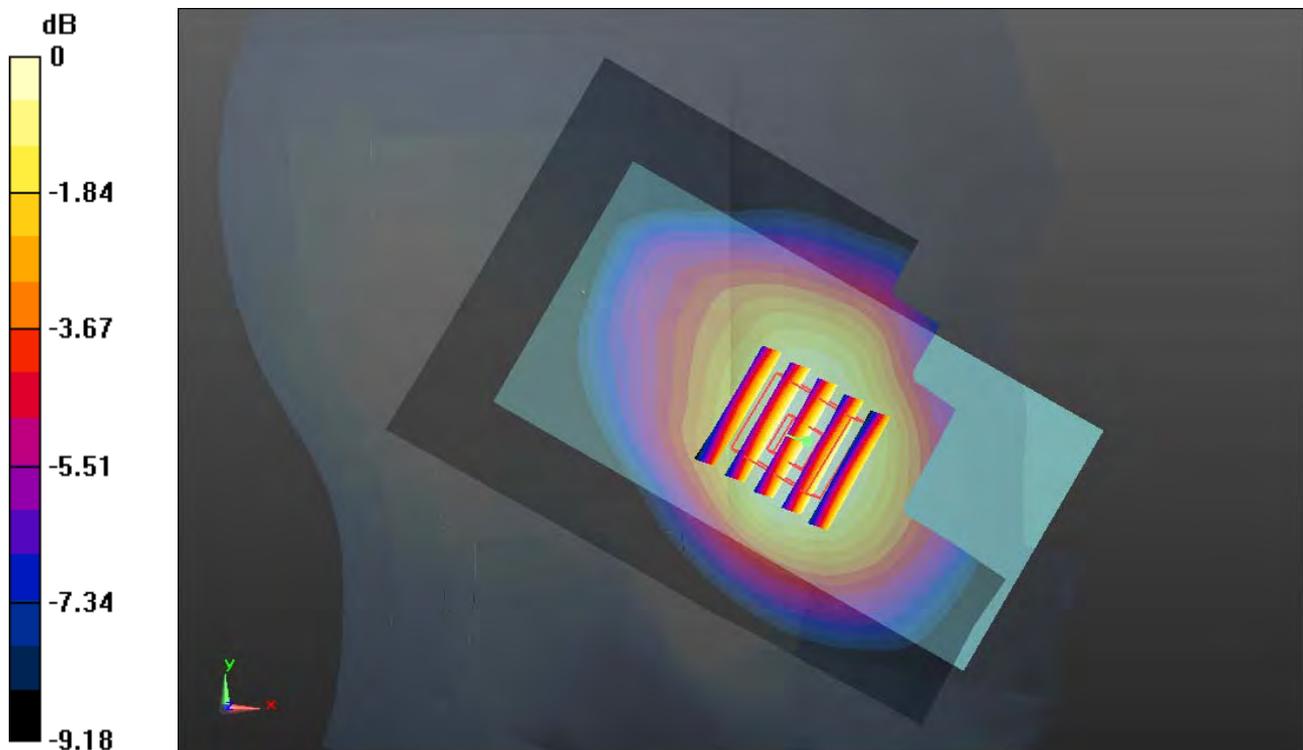

0 dB = 0.470mW/g

03_CDMA2000 BC1_RETAP 4096_Right Cheek_Ch600


Communication System: CDMA2000 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_141022 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.404 \text{ mho/m}$; $\epsilon_r = 38.992$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.4, 8.4, 8.4); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch600/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.650 mW/g

Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.512 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.751 W/kg
SAR(1 g) = 0.488 mW/g ; SAR(10 g) = 0.300 mW/g
 Maximum value of SAR (measured) = 0.610 mW/g

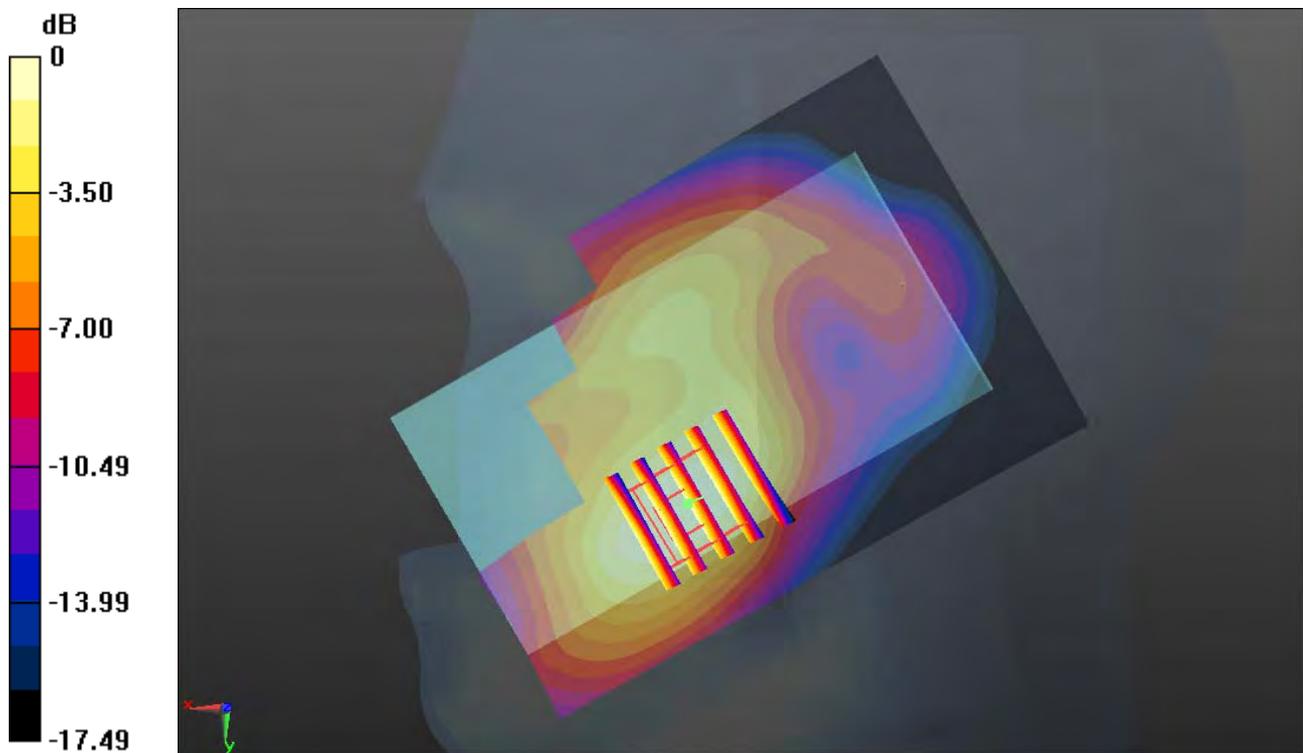

0 dB = 0.610 mW/g

04_LTE Band26_15M_QPSK(1,37)_Left Cheek 1cm_Ch26865


Communication System: FDD_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL_835_141023 Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 0.882 \text{ mho/m}$; $\epsilon_r = 41.125$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.41, 9.41, 9.41); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch26865/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.338 mW/g

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.856 V/m ; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.381 W/kg
SAR(1 g) = 0.304 mW/g ; SAR(10 g) = 0.229 mW/g
 Maximum value of SAR (measured) = 0.346 mW/g

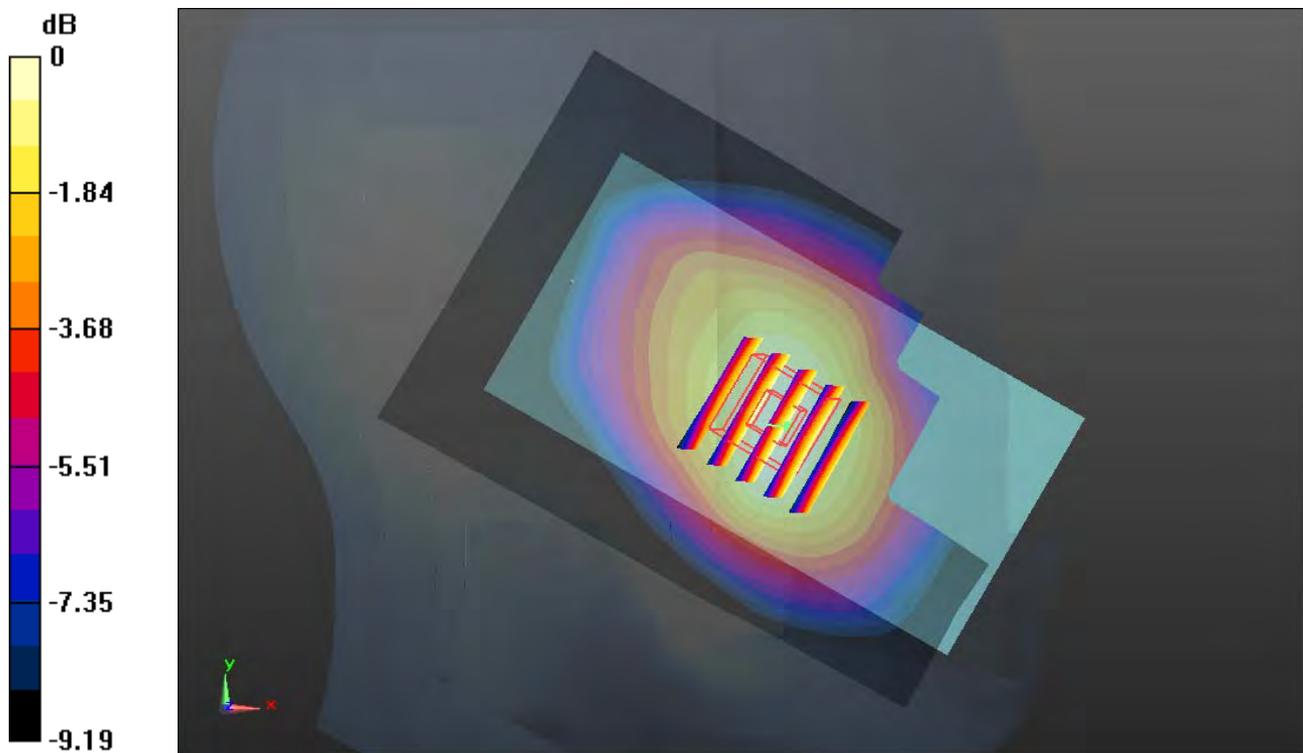

0 dB = 0.350 mW/g

05_LTE Band25_20M_QPSK(1,49)_Right Cheek_Ch26340


Communication System: FDD_LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium: HSL_1900_141022 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.404$ mho/m; $\epsilon_r = 38.992$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.4, 8.4, 8.4); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch26340/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.531 mW/g

Ch26340/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 7.588 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.594 W/kg
SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.239 mW/g
 Maximum value of SAR (measured) = 0.490 mW/g

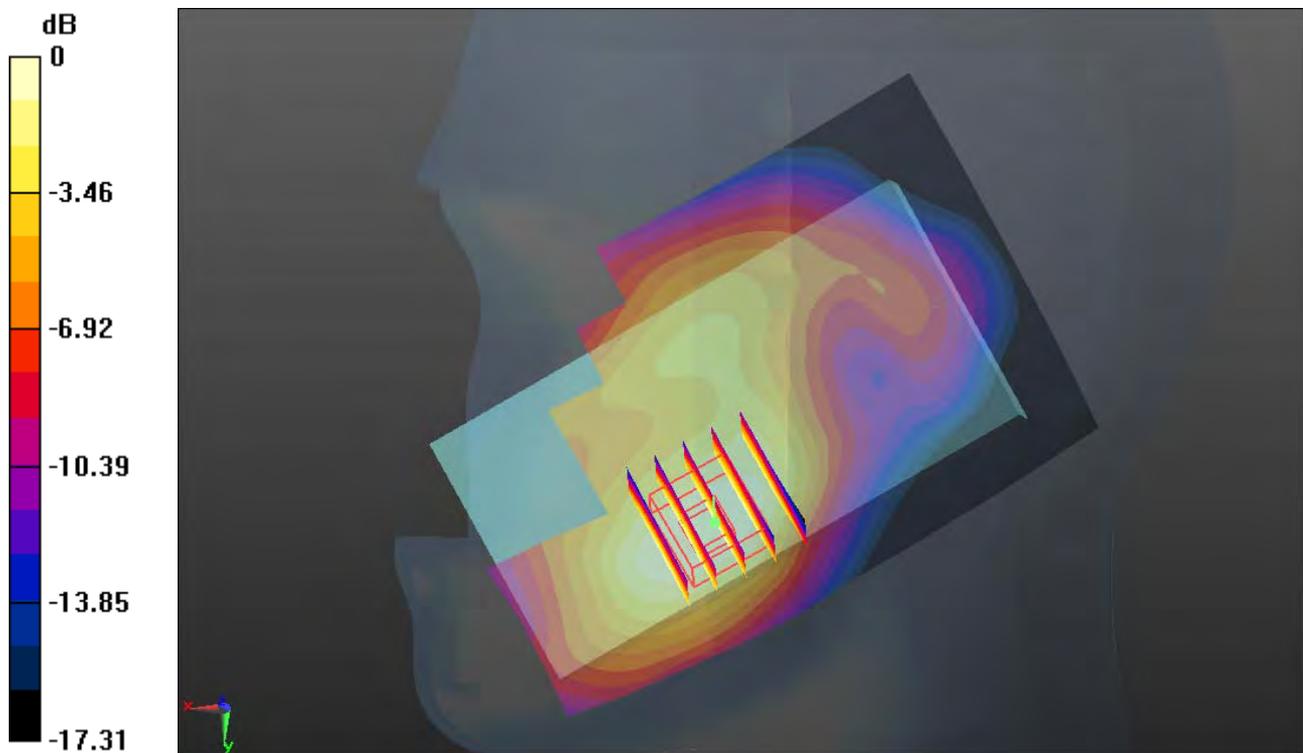

0 dB = 0.490mW/g

06_LTE TDD Band41_20M_QPSK(1,0)_Left Cheek_Ch41490


Communication System: TDD_LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:1.59
 Medium: HSL_2600_141025 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.056$ mho/m; $\epsilon_r = 37.972$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.3, 7.3, 7.3); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch41490/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 1.143 mW/g

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.830 V/m; Power Drift = 0.059 dB
 Peak SAR (extrapolated) = 1.476 W/kg
SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.374 mW/g
 Maximum value of SAR (measured) = 1.078 mW/g

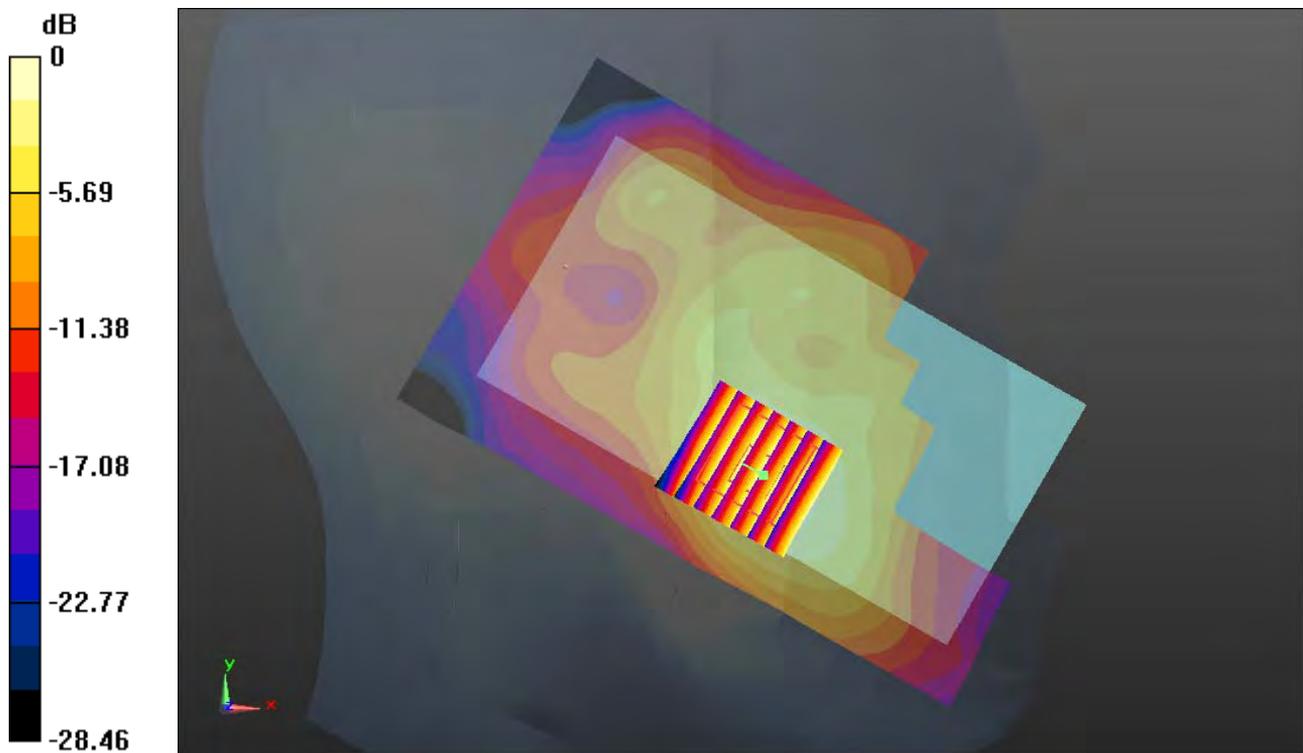

0 dB = 1.080mW/g

07_WLAN2.4G_802.11b_1M_Right Cheek_Ch11


Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.024
 Medium: HSL_2450_141025 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.845$ mho/m; $\epsilon_r = 39.124$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.48, 7.48, 7.48); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.367 mW/g

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.848 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.539 W/kg
SAR(1 g) = 0.248 mW/g; SAR(10 g) = 0.119 mW/g
 Maximum value of SAR (measured) = 0.380 mW/g

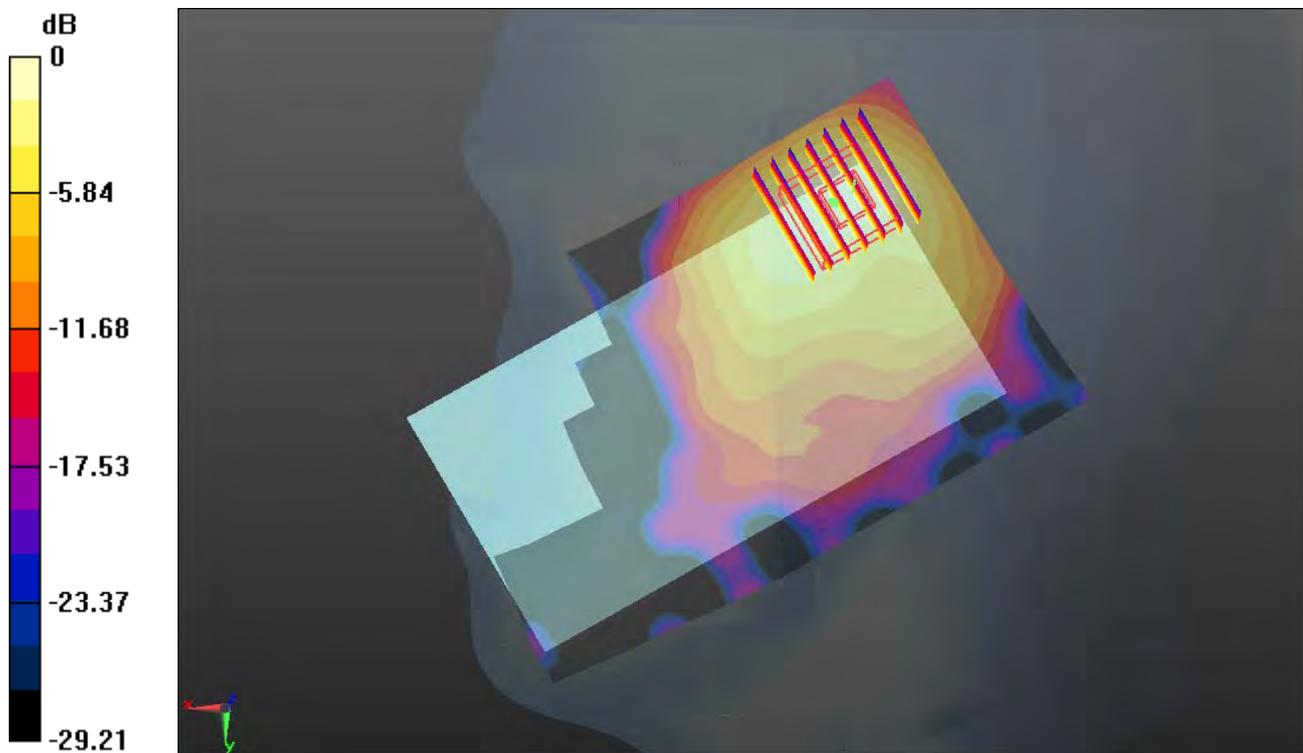

0 dB = 0.380mW/g

08_CDMA2000 BC10_RTAP 153.6_Back 1cm_Ch476


Communication System: CDMA2000 (0); Frequency: 817.9 MHz; Duty Cycle: 1:1
 Medium: MSL_835_141022 Medium parameters used: $f = 817.9$ MHz; $\sigma = 0.965$ mho/m; $\epsilon_r = 55.031$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch476/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.812 mW/g

Ch476/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 27.818 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.887 W/kg
SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.549 mW/g
 Maximum value of SAR (measured) = 0.813 mW/g

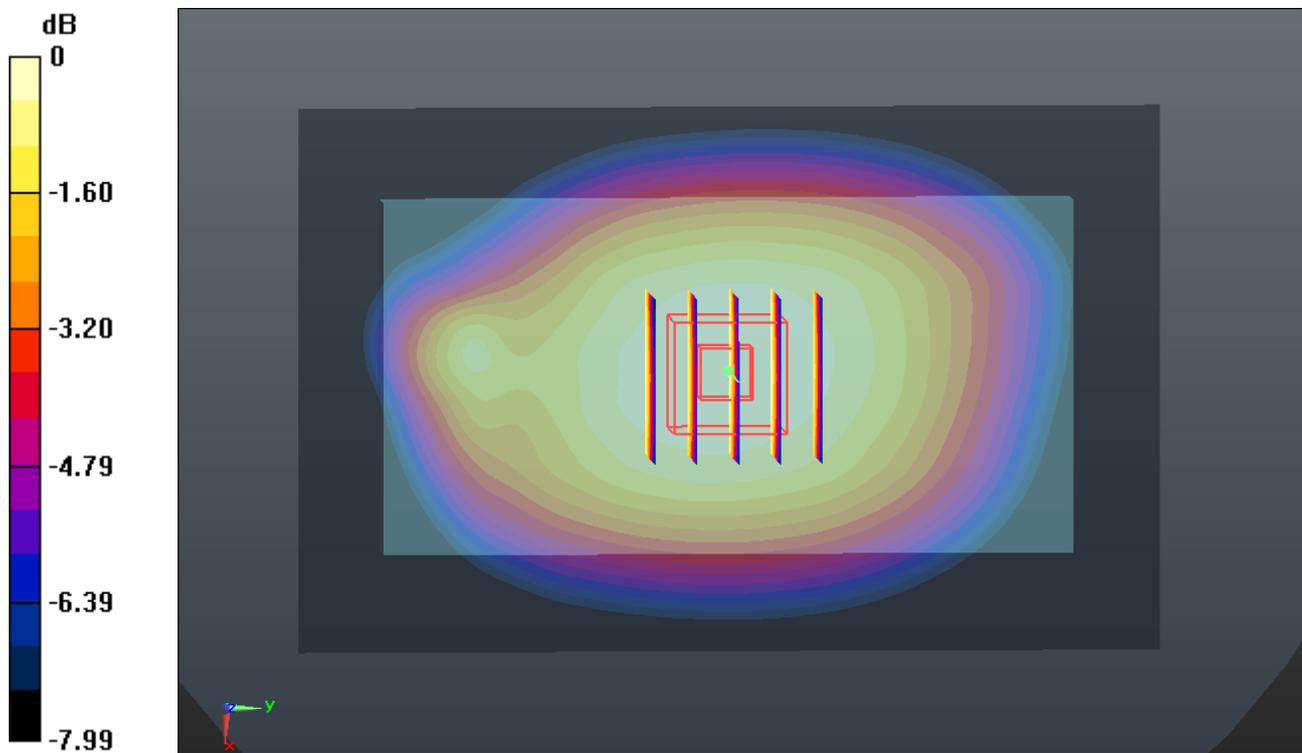

0 dB = 0.810mW/g

09_CDMA2000 BC0_RTAP 153.6_Back 1cm_Ch777


Communication System: CDMA2000 (0); Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium: MSL_835_141022 Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.996 \text{ mho/m}$; $\epsilon_r = 54.728$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch777/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.808 mW/g

Ch777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 27.411 V/m ; Power Drift = 0.001 dB
 Peak SAR (extrapolated) = 0.890 W/kg
SAR(1 g) = 0.712 mW/g ; SAR(10 g) = 0.548 mW/g
 Maximum value of SAR (measured) = 0.814 mW/g

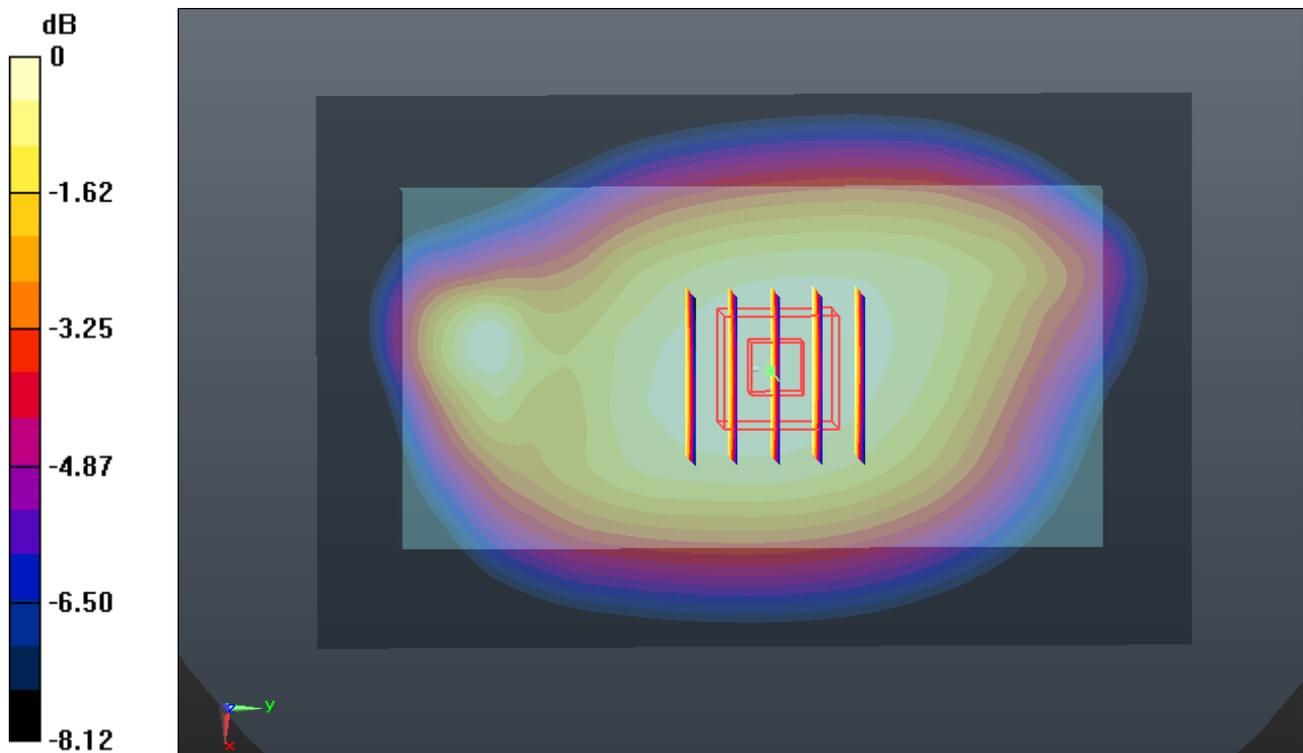

0 dB = 0.810 mW/g

10_CDMA2000 BC1_RTAP 153.6_Bottom Side 1cm_Ch1175


Communication System: CDMA2000 (0); Frequency: 1908.75 MHz; Duty Cycle: 1:1
 Medium: MSL_1900_141021 Medium parameters used: $f = 190.097$ MHz; $\sigma = 1.561$ mho/m; $\epsilon_r = 53.346$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch1175/Area Scan (31x71x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.197 mW/g

Ch1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 25.561 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 1.857 W/kg
SAR(1 g) = 1.060 mW/g; SAR(10 g) = 0.547 mW/g
 Maximum value of SAR (measured) = 1.513 mW/g

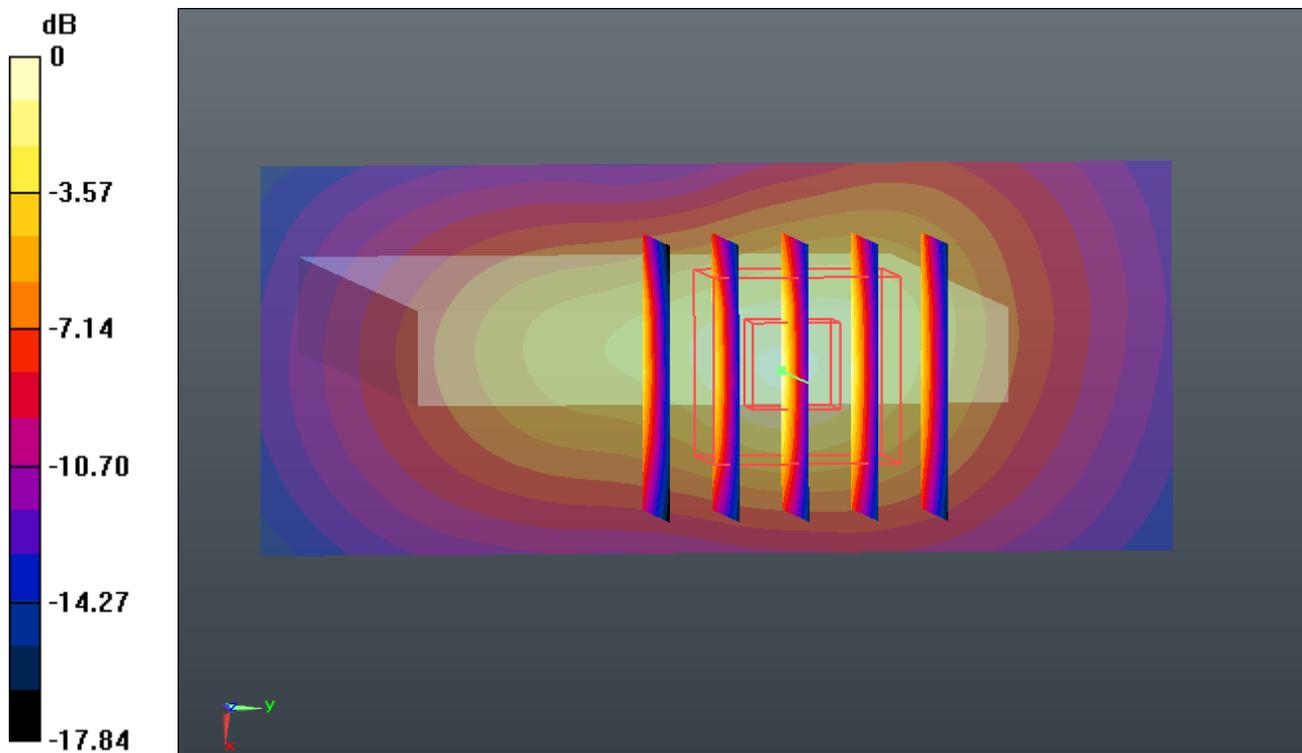

0 dB = 1.510mW/g

11_LTE Band26_15M_QPSK(1,37)_Back 1cm_Ch26865


Communication System: FDD_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: MSL_835_141022 Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 0.979 \text{ mho/m}$; $\epsilon_r = 54.903$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch26865/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.756 mW/g

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 25.930 V/m ; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.796 W/kg
SAR(1 g) = 0.630 mW/g ; SAR(10 g) = 0.487 mW/g
 Maximum value of SAR (measured) = 0.717 mW/g

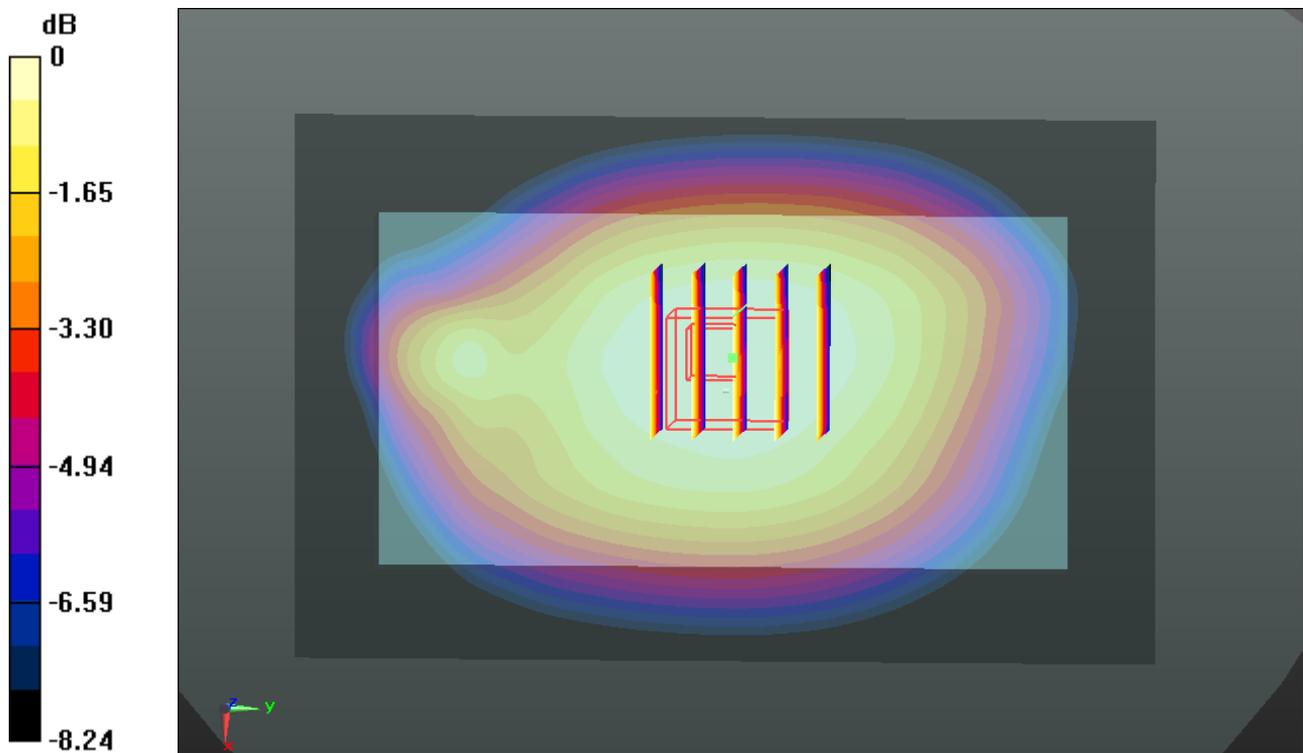

0 dB = 0.720 mW/g

12_LTE Band25_20M_QPSK(1,49)_Bottom Side 1cm_Ch26340


Communication System: FDD_LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: MSL_1900_141021 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.528$ mho/m; $\epsilon_r = 53.426$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch26340/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.907 mW/g

Ch26340/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.870 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 1.076 W/kg
SAR(1 g) = 0.622 mW/g; SAR(10 g) = 0.324 mW/g
 Maximum value of SAR (measured) = 0.882 mW/g

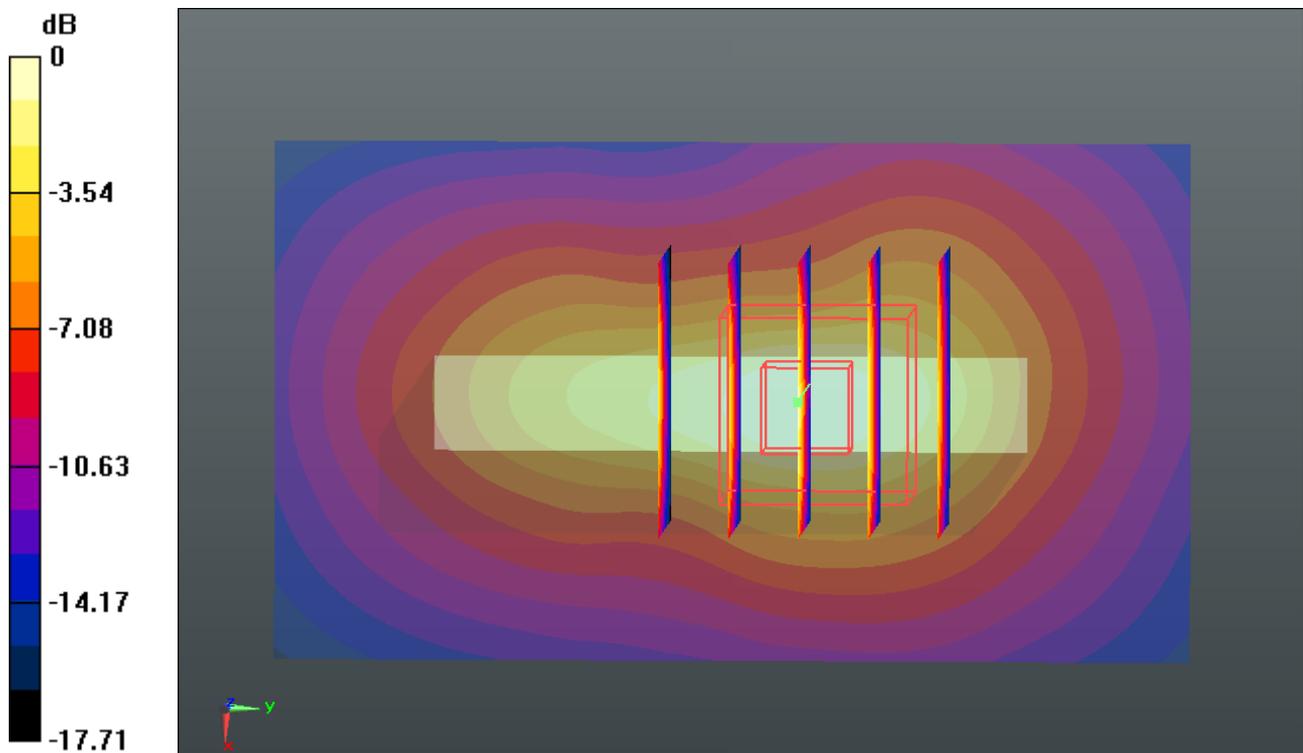

0 dB = 0.880mW/g

13_TDD LTE Band 41_20M_QPSK(1,0)_Bottom Side 1cm_41490


Communication System: TDD_LTE (0); Frequency: 2680 MHz;Duty Cycle: 1:1.59
 Medium: MSL_2600_141018 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.246$ mho/m; $\epsilon_r = 50.872$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.82, 6.82, 6.82); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch41490/Area Scan (41x81x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 1.063 mW/g

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 18.134 V/m; Power Drift = 0.022 dB
 Peak SAR (extrapolated) = 1.396 W/kg
SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.336 mW/g
 Maximum value of SAR (measured) = 1.025 mW/g

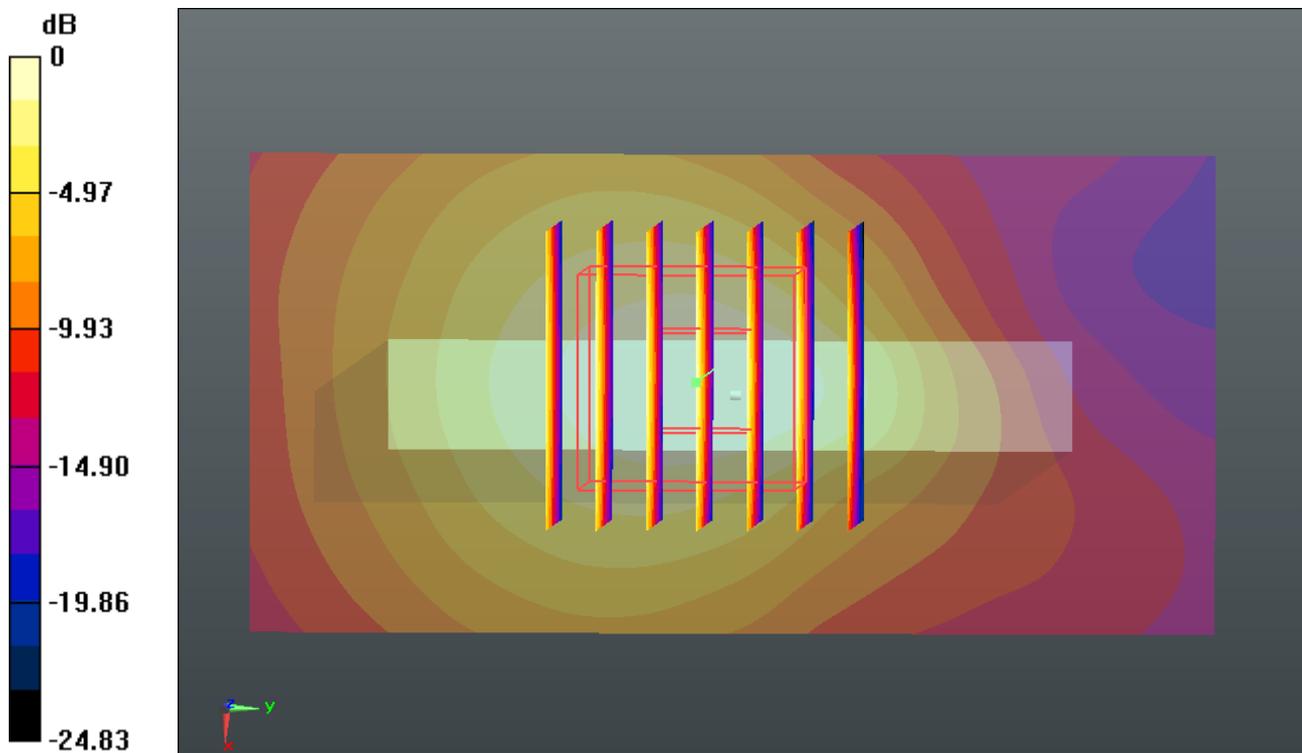

0 dB = 1.020mW/g

14_WLAN2.4G_802.11b_1M_Back 1cm_Ch11


Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.024
 Medium: MSL_2450_141021 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.966$ mho/m; $\epsilon_r = 51.444$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.14, 7.14, 7.14); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.119 mW/g

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.209 V/m; Power Drift = -0.051 dB
 Peak SAR (extrapolated) = 0.180 W/kg
SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.042 mW/g
 Maximum value of SAR (measured) = 0.122 mW/g

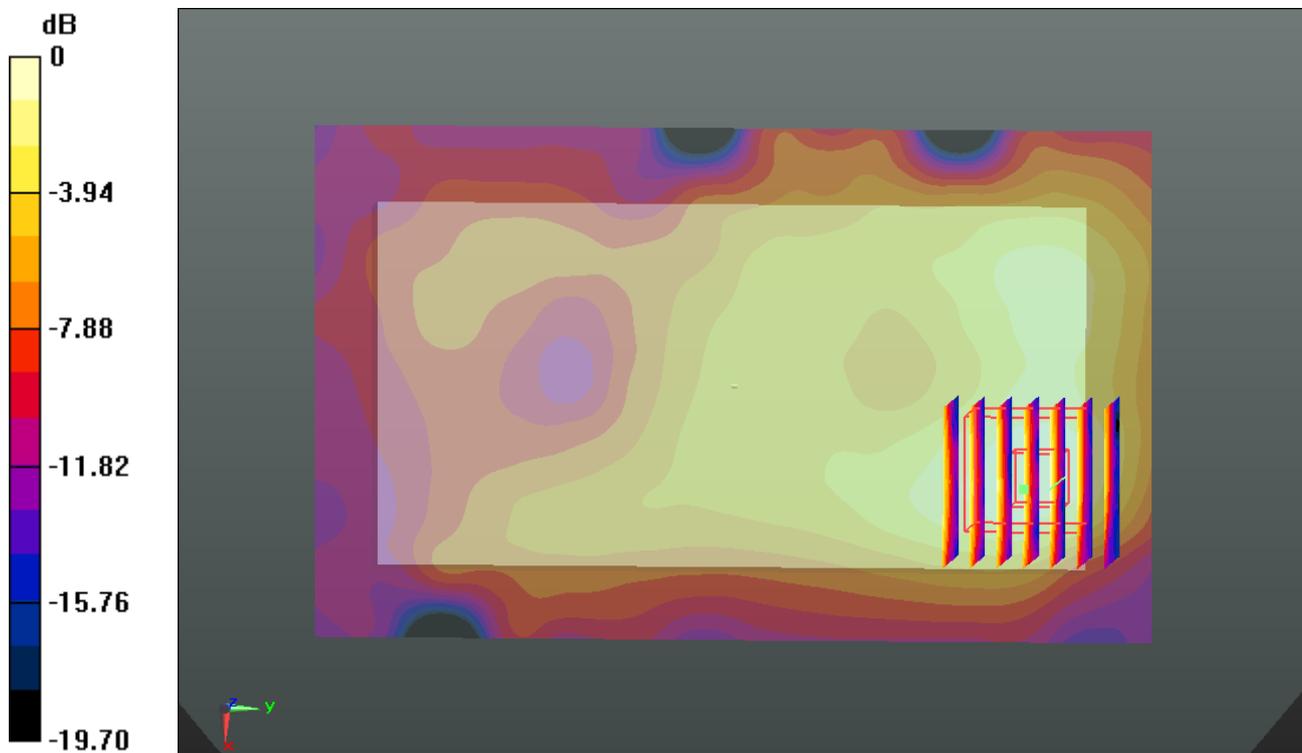

0 dB = 0.120mW/g

15_CDMA2000 BC10_RC3 SO32_Back 1.5cm_Ch476


Communication System: CDMA2000 (0); Frequency: 817.9 MHz; Duty Cycle: 1:1
Medium: MSL_835_141022 Medium parameters used: $f = 817.9 \text{ MHz}$; $\sigma = 0.965 \text{ mho/m}$; $\epsilon_r = 55.031$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch476/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.684 mW/g

Ch476/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 25.438 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.753 W/kg
SAR(1 g) = 0.599 mW/g ; SAR(10 g) = 0.458 mW/g
Maximum value of SAR (measured) = 0.689 mW/g

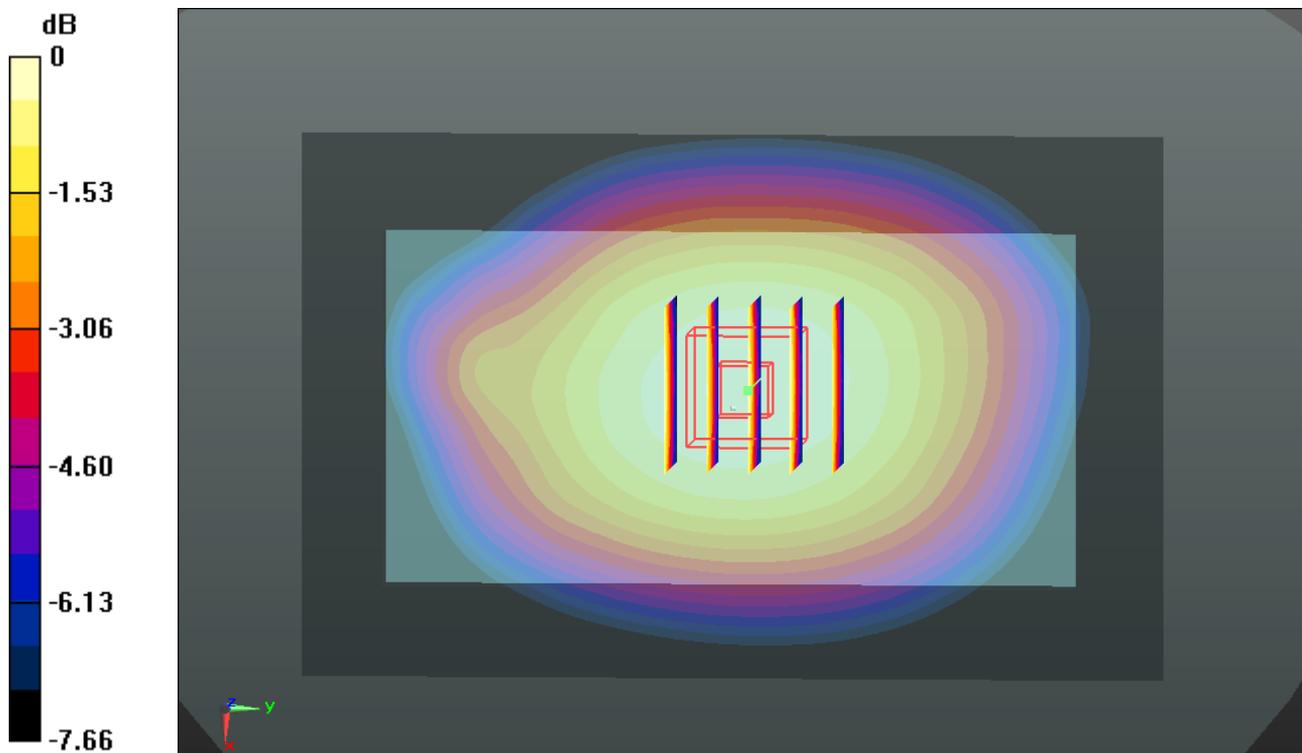

0 dB = 0.690 mW/g

16_CDMA2000 BC0_RC3 SO32_Back 1.5cm_Ch777


Communication System: CDMA2000 (0); Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium: MSL_835_141022 Medium parameters used: $f = 848.31 \text{ MHz}$; $\sigma = 0.996 \text{ mho/m}$; $\epsilon_r = 54.728$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch777/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.477 mW/g

Ch777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.867 V/m ; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.580 W/kg
SAR(1 g) = 0.454 mW/g ; SAR(10 g) = 0.347 mW/g
Maximum value of SAR (measured) = 0.523 mW/g

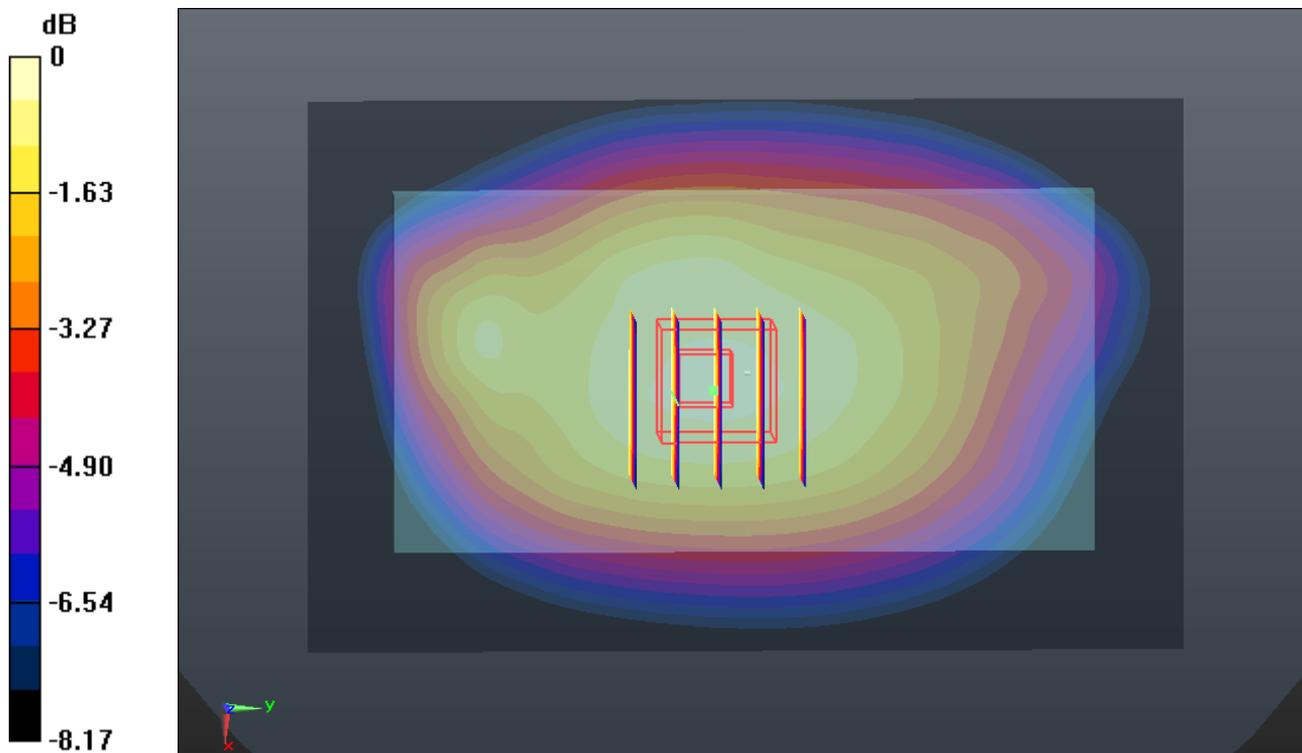

0 dB = 0.520 mW/g

17_CDMA2000 BC1_RC1 SO32_Front 1.5cm_Ch600


Communication System: CDMA2000 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium: MSL_1900_141021 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.528$ mho/m; $\epsilon_r = 53.426$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch600/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.478 mW/g

Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 6.283 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.549 W/kg
SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.223 mW/g
 Maximum value of SAR (measured) = 0.456 mW/g

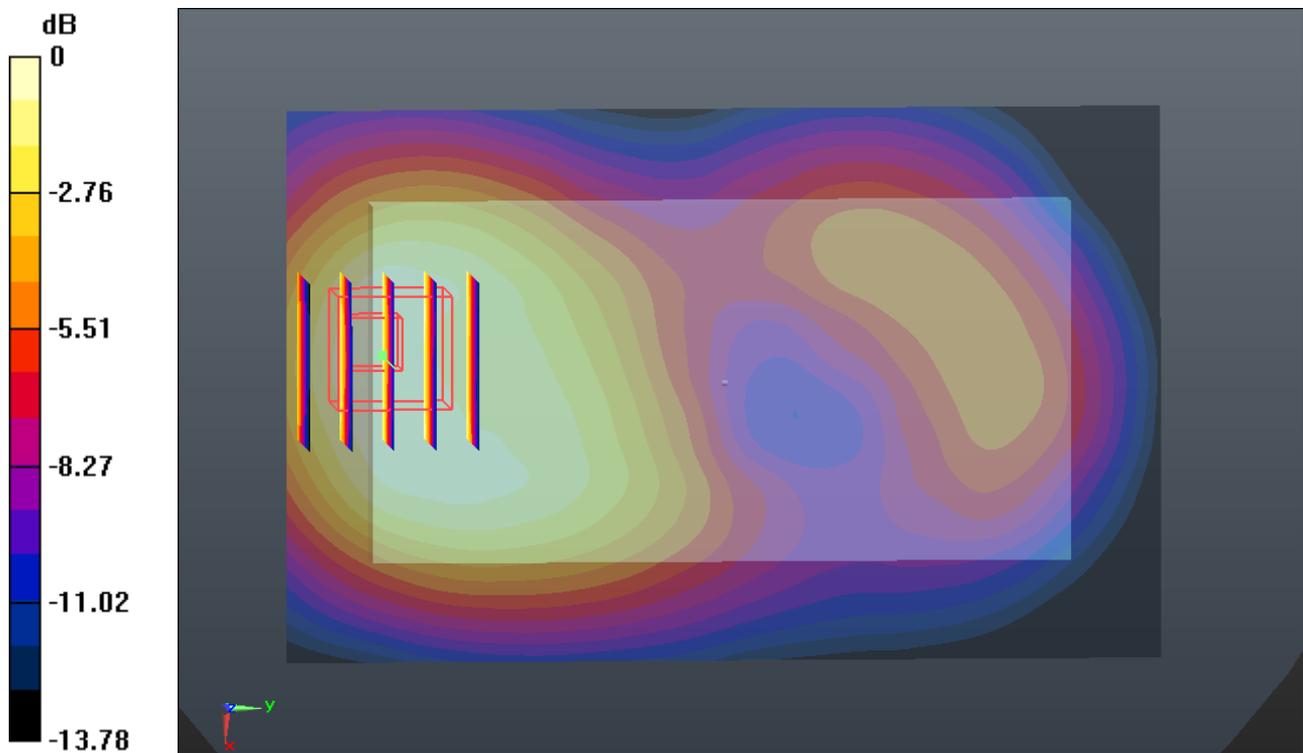

0 dB = 0.460mW/g

18_LTE Band26_15M_QPSK(1,37)_Back 1.5cm_Ch26865


Communication System: FDD_LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: MSL_835_141022 Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 0.979 \text{ mho/m}$; $\epsilon_r = 54.903$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.31, 9.31, 9.31); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch26865/Area Scan (71x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.616 mW/g

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 24.244 V/m ; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.692 W/kg
SAR(1 g) = 0.548 mW/g ; SAR(10 g) = 0.417 mW/g
 Maximum value of SAR (measured) = 0.631 mW/g

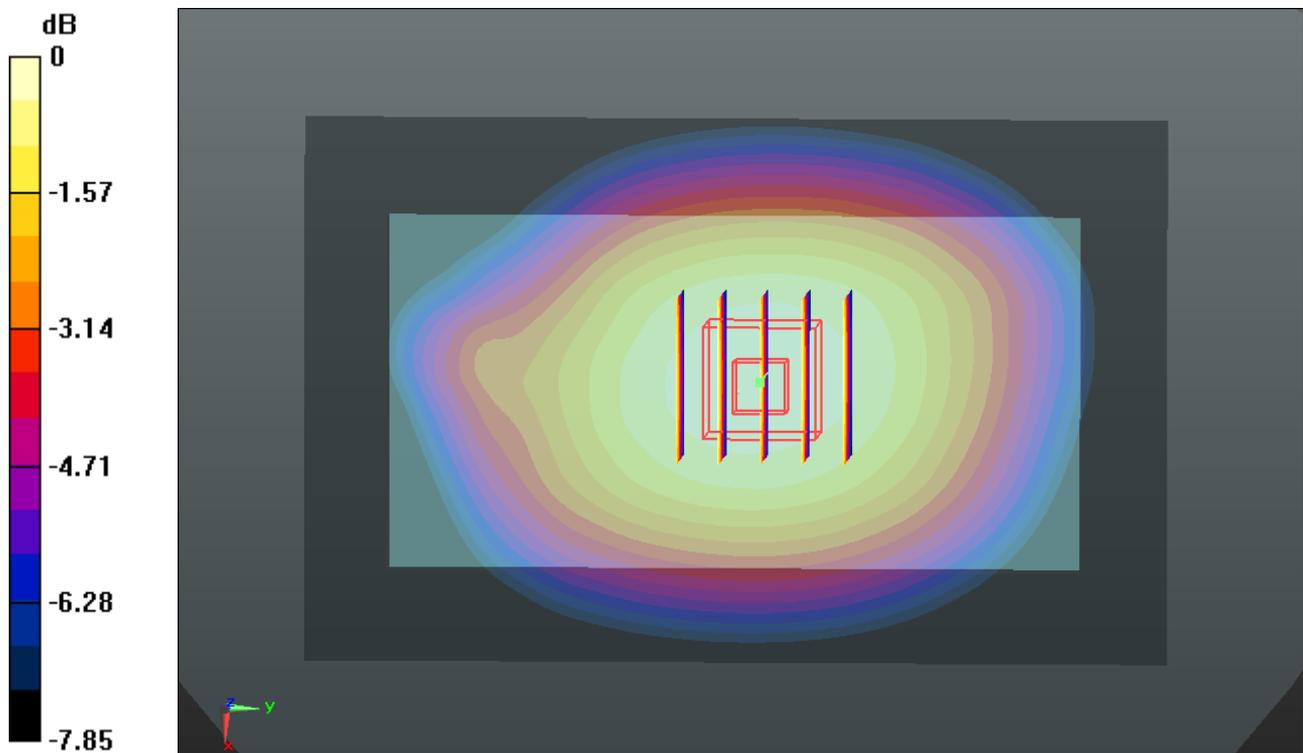

0 dB = 0.630 mW/g

19_LTE Band25_20M_QPSK(1,49)_Front 1.5cm_Ch26340


Communication System: FDD_LTE (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium: MSL_1900_141021 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.528$ mho/m; $\epsilon_T = 53.426$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.56, 7.56, 7.56); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch26340/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.361 mW/g

Ch26340/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 5.275 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.414 W/kg
SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.166 mW/g
 Maximum value of SAR (measured) = 0.338 mW/g

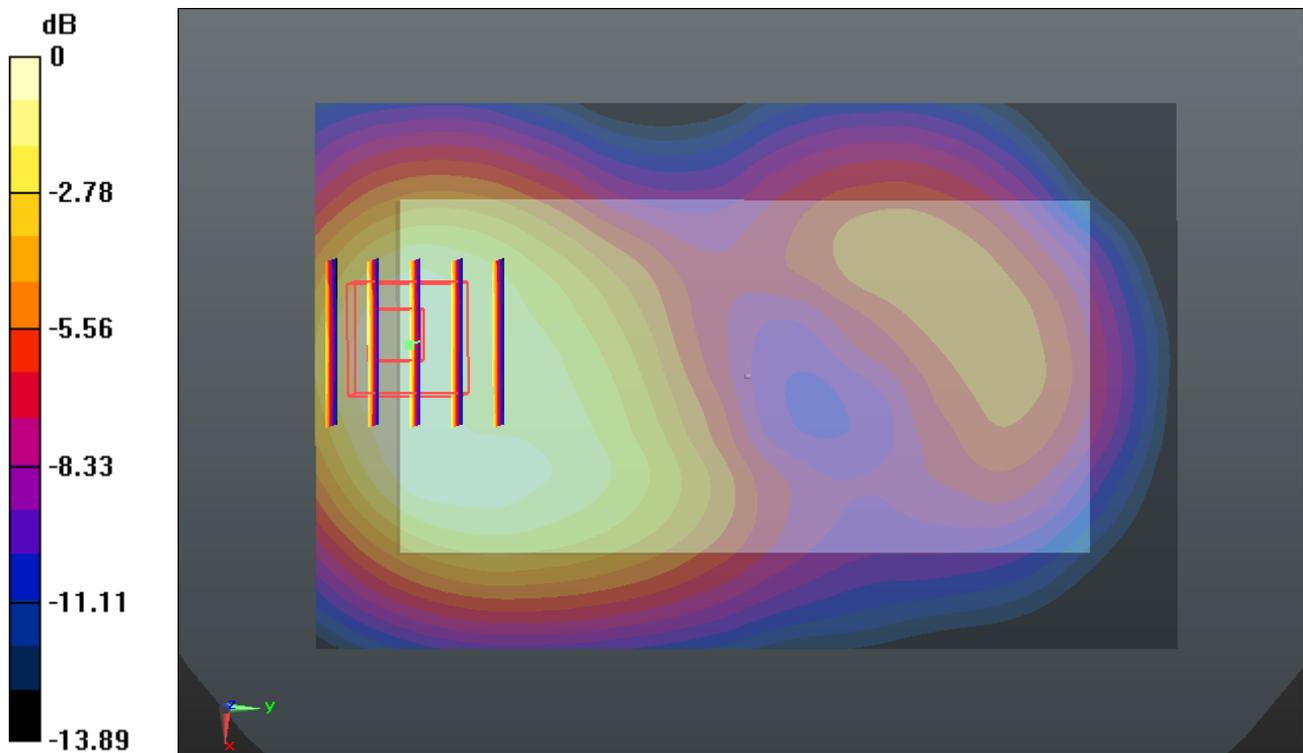

0 dB = 0.340mW/g

20_TDD LTE Band 41_20M_QPSK(1,0)_Back 1.5cm_40620

Communication System: TDD_LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: MSL_2600_141018 Medium parameters used: $f = 2593$ MHz; $\sigma = 2.2$ mho/m; $\epsilon_r = 51.105$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.82, 6.82, 6.82); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch40620/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.534 mW/g


Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.222 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.533 mW/g

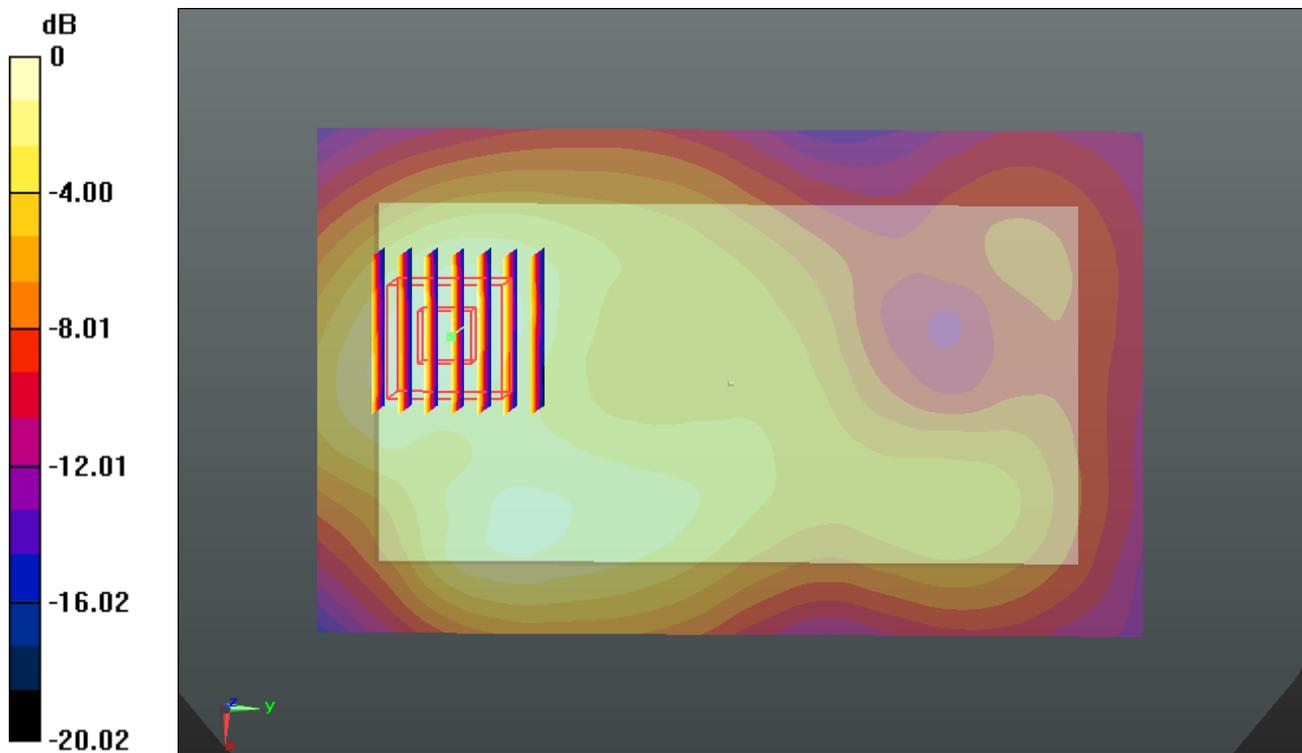

0 dB = 0.530mW/g

21_WLAN2.4G_802.11b_1M_Front 1.5cm_Ch11


Communication System: WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.024
 Medium: MSL_2450_141021 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.966$ mho/m; $\epsilon_r = 51.444$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.14, 7.14, 7.14); Calibrated: 2014.05.23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2014.05.19
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.063 mW/g

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.253 V/m; Power Drift = 0.021 dB
 Peak SAR (extrapolated) = 0.085 W/kg
SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.025 mW/g
 Maximum value of SAR (measured) = 0.064 mW/g

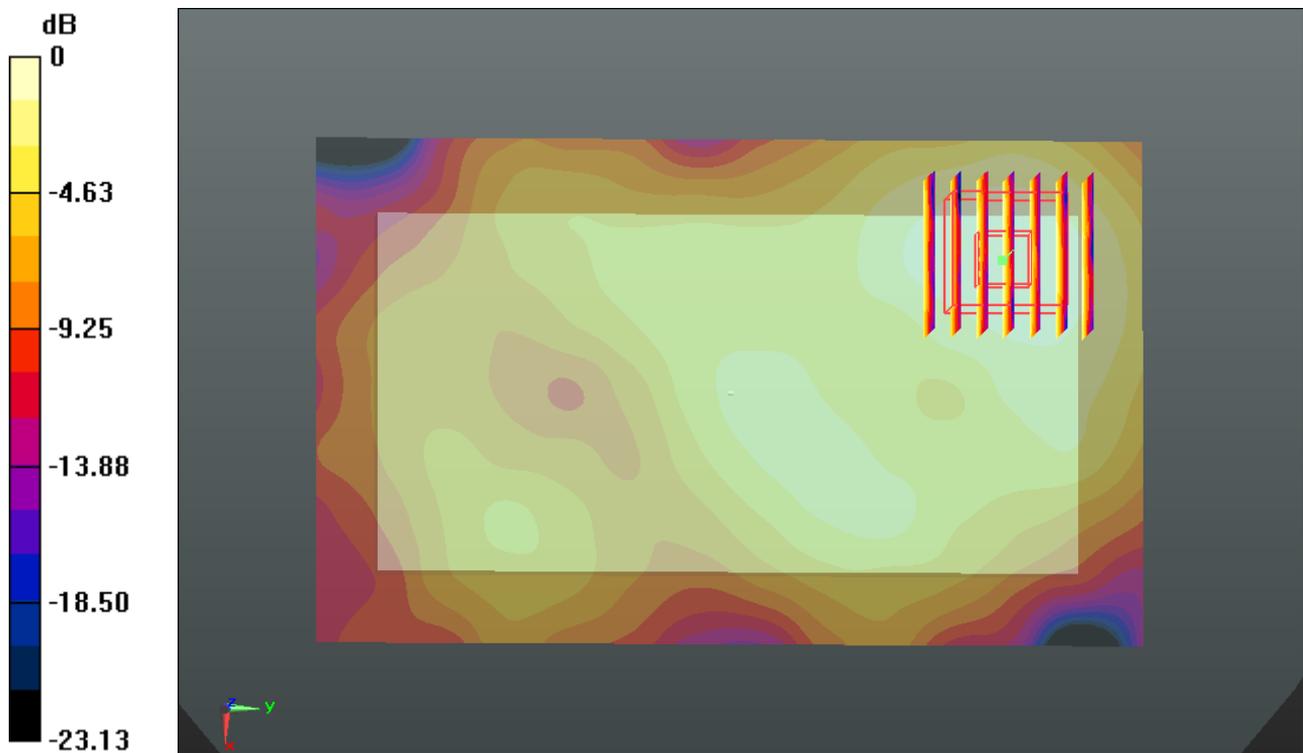

0 dB = 0.060mW/g



Appendix C. DASYS Calibration Certificate

The DASYS calibration certificates are shown as follows.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton-CN (Auden)**

Certificate No: **D835V2-4d091_Nov11**

CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 4d091**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **November 18, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Power sensor HP 8481A | US37292783 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 29-Mar-11 (No. 217-01368) | Apr-12 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 29-Mar-11 (No. 217-01371) | Apr-12 |
| Reference Probe ES3DV3 | SN: 3205 | 29-Apr-11 (No. ES3-3205_Apr11) | Apr-12 |
| DAE4 | SN: 601 | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

Calibrated by: **Dimce Iliev** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: November 18, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.6.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 15 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 835 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 41.5 | 0.90 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 41.4 \pm 6 % | 0.90 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.35 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 9.40 mW / g \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.54 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 6.16 mW / g \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 55.2 | 0.97 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 53.3 \pm 6 % | 0.99 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 2.41 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 9.42 mW / g \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 1.58 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 6.21 mW / g \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.9 Ω - 5.1 j Ω |
| Return Loss | - 25.7 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.1 Ω - 6.9 j Ω |
| Return Loss | - 22.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|-----------|
| Electrical Delay (one direction) | 1.396 ns. |
|----------------------------------|-----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|--------------------|
| Manufactured by | SPEAG |
| Manufactured on | September 15, 2009 |

DASY5 Validation Report for Head TSL

Date: 18.11.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d091

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.950 V/m; Power Drift = -0.0036 dB

Peak SAR (extrapolated) = 3.473 W/kg

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.54 mW/g


Maximum value of SAR (measured) = 2.740 mW/g

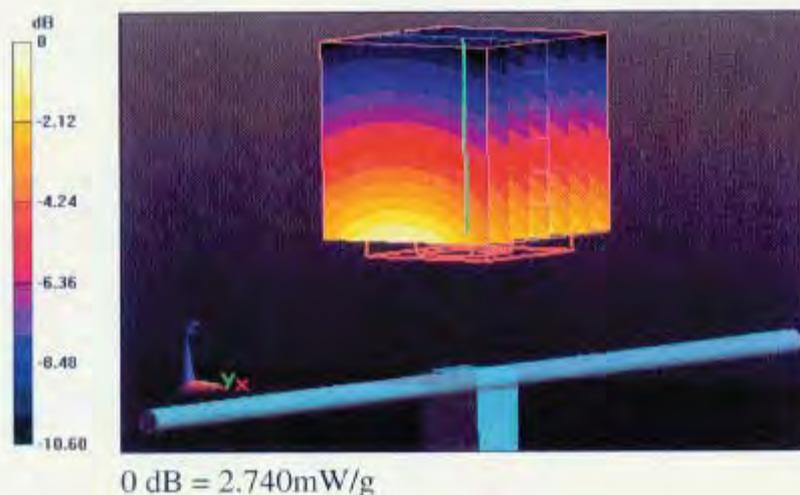

Impedance Measurement Plot for Head TSL

18 Nov 2011 15:39:43
[CH1] S11 1 U FS 1: 50.867 Ω -5.1504 Ω 37.009 pF 835.000 000 MHz

De1
Cor

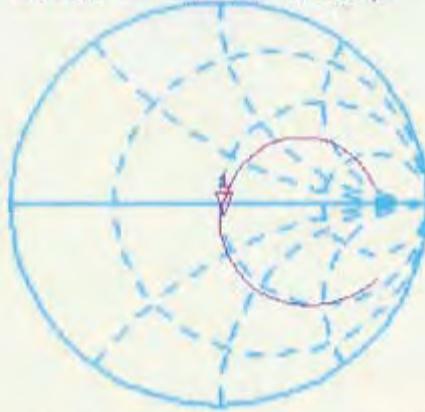

Avg
16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.734 dB 835.000 000 MHz

Cor

Avg
16

H1 d

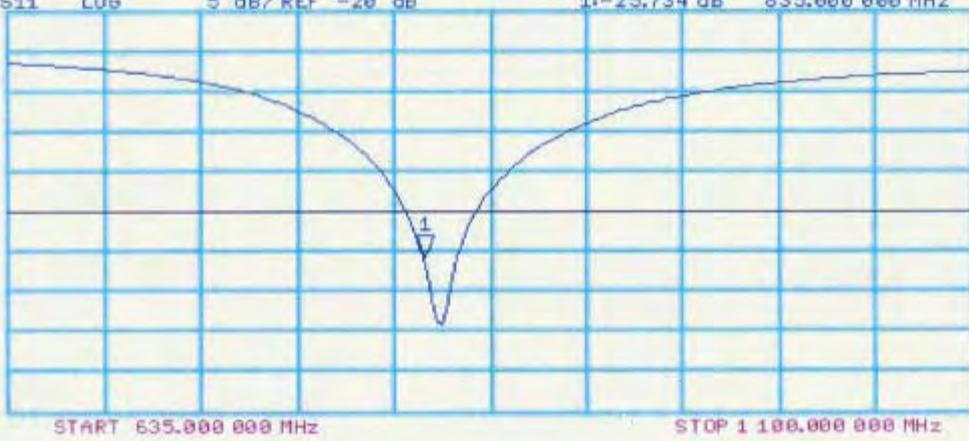

DASY5 Validation Report for Body TSL

Date: 18.11.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d091

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.082 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.502 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.809 mW/g




0 dB = 2.810mW/g

Impedance Measurement Plot for Body TSL

18 Nov 2011 10:16:18
[CHI] S11 1 U FS 1: 47.082 Ω -6.8594 Ω 27.787 pF 835.000 000 MHz

*
De1
Cor

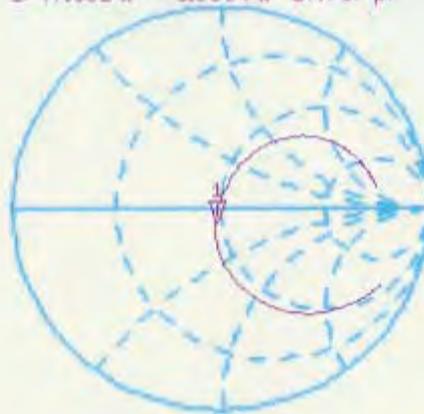

avg
16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1: -22.318 dB 835.000 000 MHz

Cor

avg
16

H1 d

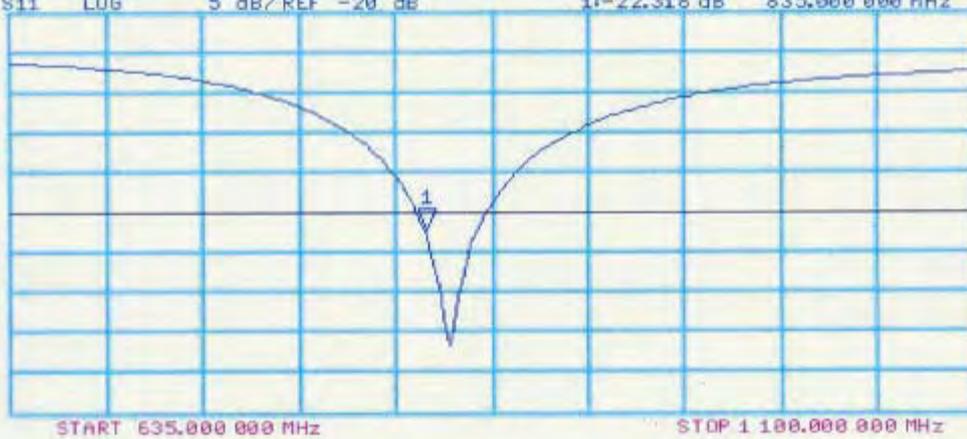



D835V2, serial No. 4d091 Extended Dipole Calibrations

Referring to KDB 865664 D01v01r01, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


<Justification of the extended calibration>

| D835V2 – serial no. 4d091 | | | | | | | | | | | | |
|---------------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| | 835 Head | | | | | | 835 Body | | | | | |
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 11.18.2011 | -25.734 | | 50.867 | | -5.1504 | | -22.318 | | 47.082 | | -6.8594 | |
| 11.17.2012 | -25.917 | 0.71 | 49.773 | 1.09 | -5.1329 | 0.02 | -22.466 | 0.66 | 48.683 | 1.60 | -6.3598 | 0.50 |


The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data> - D835V2, serial no. 4d091

835MHz - Head

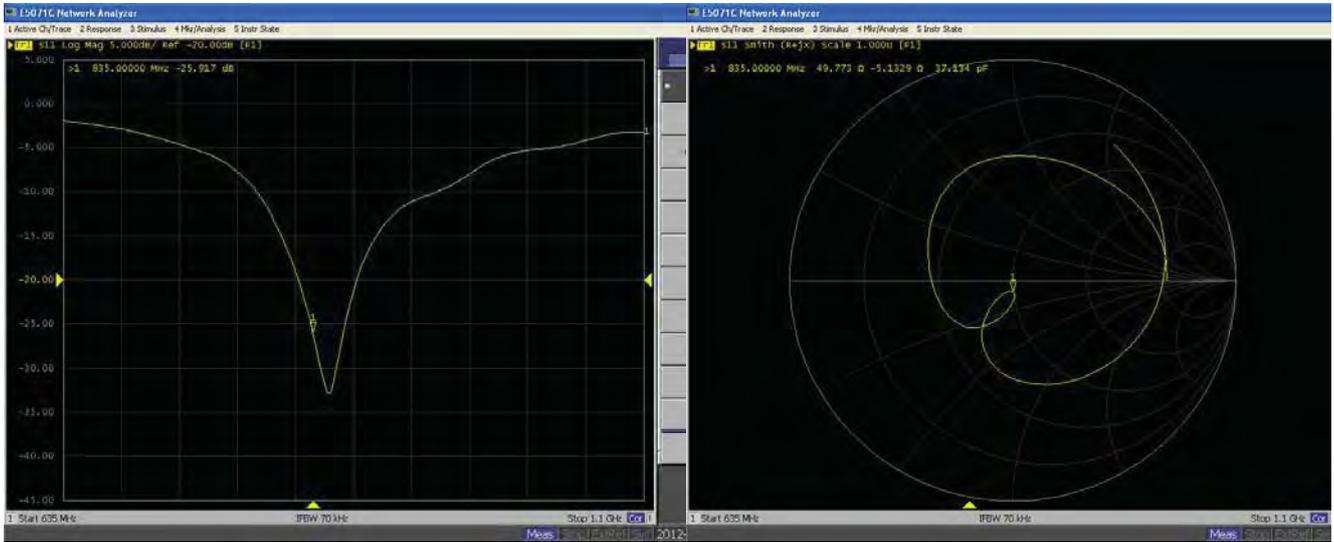

835MHz – Body

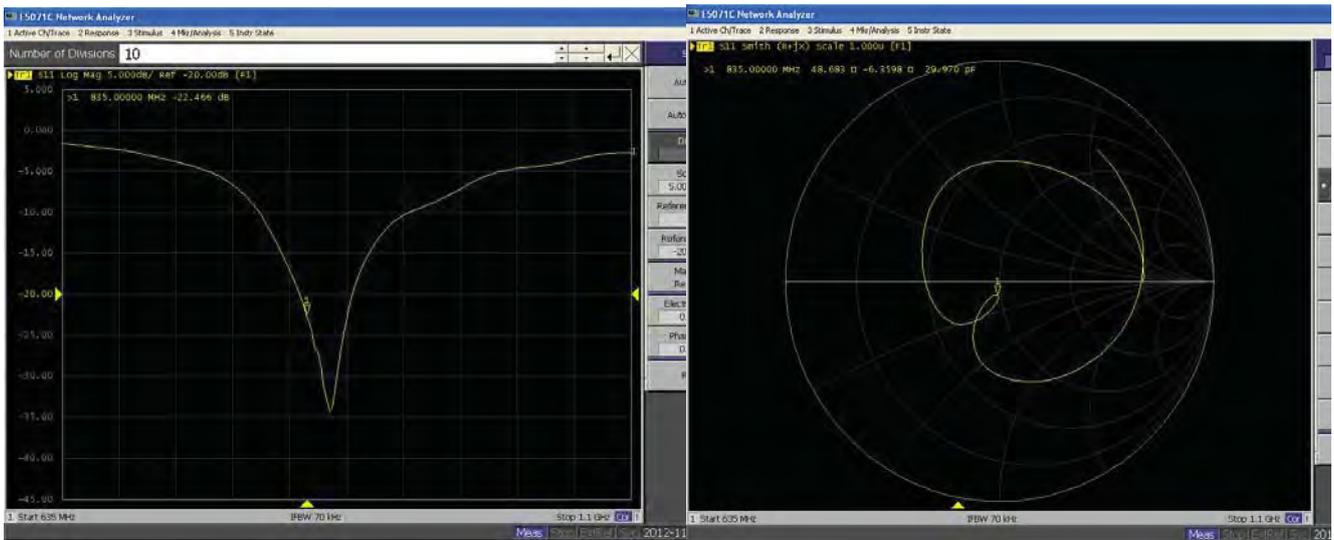



D835V2, Serial No. 4d091 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.



<Justification of the extended calibration>

| D835V2 – serial no. 4d091 | | | | | | | | | | | | |
|---------------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| | 835 Head | | | | | | 835 Body | | | | | |
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 11.18.2011 | -25.734 | | 50.867 | | -5.1504 | | -22.318 | | 47.082 | | -6.8594 | |
| 11.17.2012 | -25.917 | 0.71 | 49.773 | 1.09 | -5.1329 | -0.02 | -22.466 | 0.66 | 48.683 | -1.60 | -6.3598 | -0.50 |
| 11.15.2013 | -25.840 | 0.30 | 49.905 | -0.13 | -5.0780 | -0.05 | -22.324 | 0.63 | 47.532 | 1.15 | -6.8833 | 0.52 |


The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

<Dipole Verification Data> - D835V2, serial no. 4d091

835MHz - Head

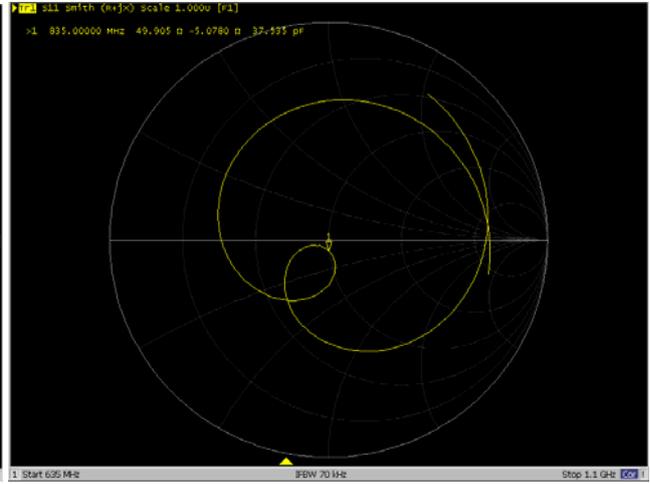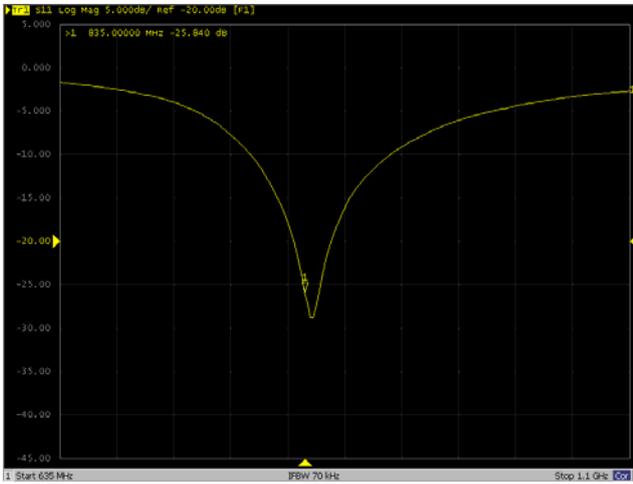

835MHz - Body

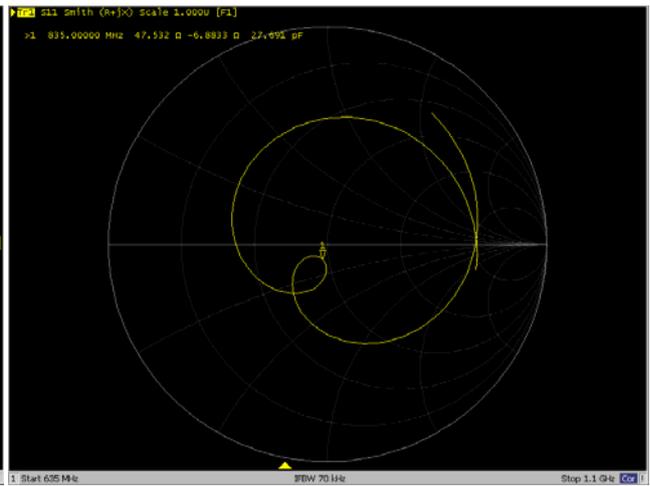



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Spartan-CH (Auden)**

Certificate No: **D1900V2-5d118_Nov11**

CALIBRATION CERTIFICATE

Object: **D1900V2 - SN: 5d118**

Calibration procedure(s): **QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **November 21, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Power sensor HP 8481A | US37292783 | 05-Oct-11 (No. 217-01451) | Oct-12 |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 29-Mai-11 (No. 217-01368) | Apr-12 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 29-Mar-11 (No. 217-01371) | Apr-12 |
| Reference Probe ES3DV3 | SN: 3205 | 29-Apr-11 (No. ES3-3205_Apr11) | Apr-12 |
| DAE4 | SN: 601 | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

| | Name | Function | Signature |
|----------------|----------------------|------------------------------|-----------|
| Calibrated by: | Dimos Iliev | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: November 21, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.6.2 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.5 \pm 6 % | 1.42 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 10.2 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 40.3 mW / g \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.29 mW / g |
| SAR for nominal Head TSL parameters | normalized to 1W | 21.0 mW / g \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 54.2 \pm 6 % | 1.59 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 10.7 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 41.8 mW / g \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.59 mW / g |
| SAR for nominal Body TSL parameters | normalized to 1W | 22.0 mW / g \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $53.4 \Omega + 6.9 j\Omega$ |
| Return Loss | -22.5 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $47.8 \Omega + 7.1 j\Omega$ |
| Return Loss | -22.4 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.200 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-----------------|
| Manufactured by | SPEAG |
| Manufactured on | August 21, 2009 |

DASY5 Validation Report for Head TSL

Date: 21.11.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d118

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.01, 5.01, 5.01); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.061 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.620 W/kg


SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.29 mW/g

Maximum value of SAR (measured) = 12.702 mW/g

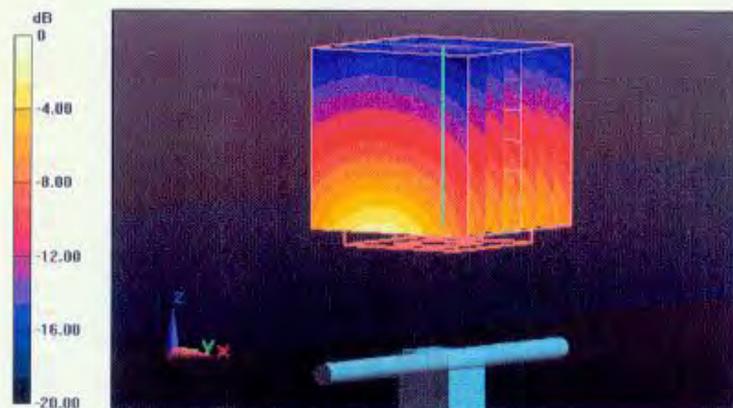

0 dB = 12.700mW/g

Impedance Measurement Plot for Head TSL

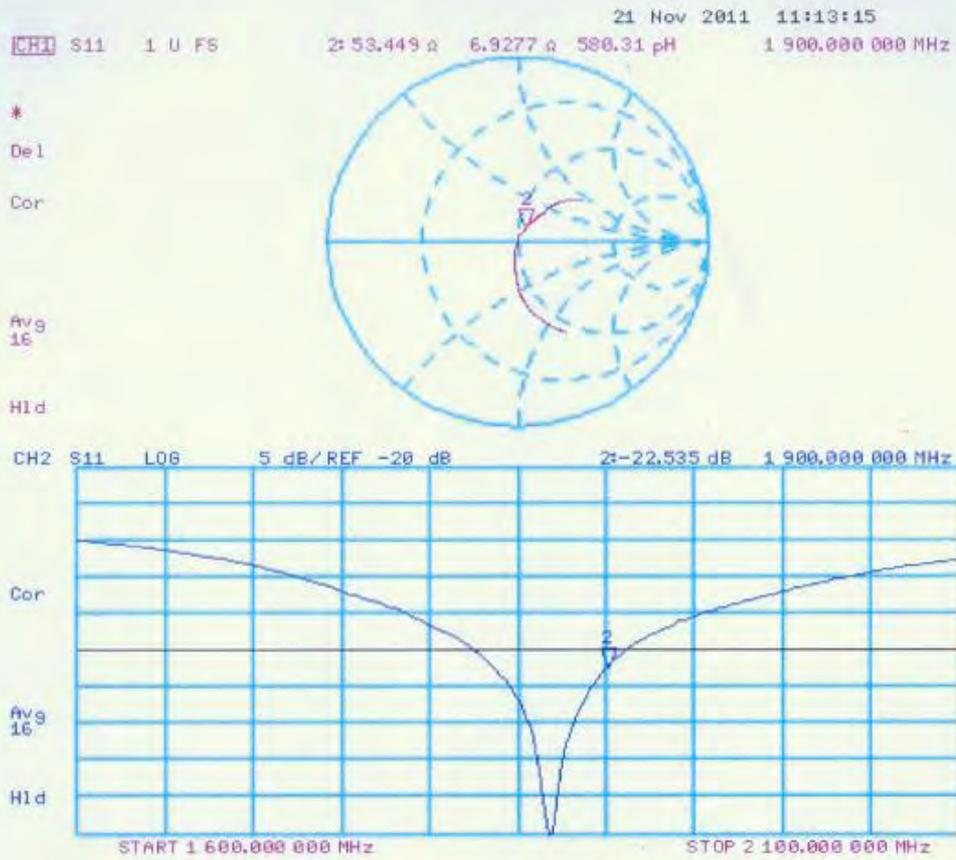

DASY5 Validation Report for Body TSL

Date: 21.11.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d118

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.62, 4.62, 4.62); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.110 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.910 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.59 mW/g


Maximum value of SAR (measured) = 13.549 mW/g

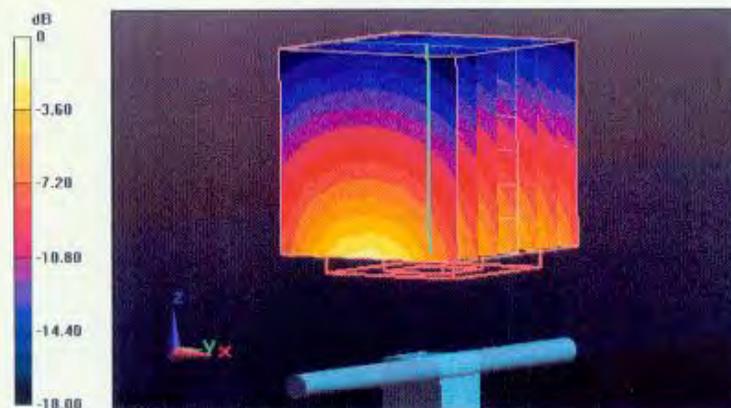

Impedance Measurement Plot for Body TSL

21 Nov 2011 11:14:07
 CH1 S11 1 U FS 2: 47.820 α 7.1133 α 595.85 μ H 1 900.000 000 MHz

*
 Del
 Cor

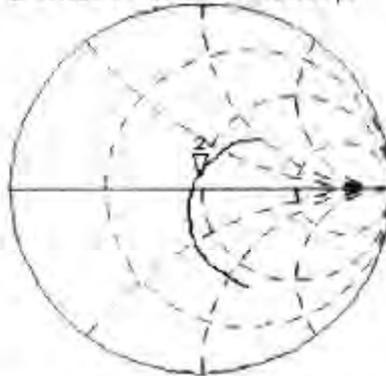

Avg
 16


H1d

CH2 S11 L00 5 dB/REF -20 dB 2:-22.401 dB 1 900.000 000 MHz

Cor

Avg
 16

H1d

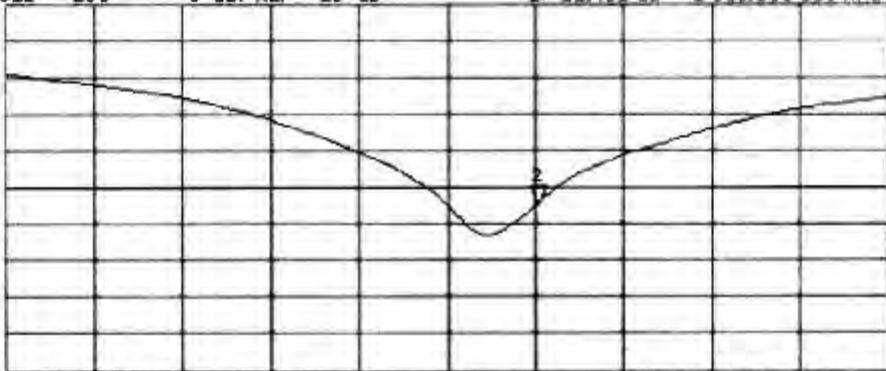

START 1 600.000 000 MHz

STOP 2 100.000 000 MHz



D1900V2, serial no. 5d118 Extended Dipole Calibrations

Referring to KDB 865664D01V01r01, if dipoles are verified in return loss (<-20dB, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

<Justification of the extended calibration>


| D1900V2 – serial no. 5d118 | | | | | | | | | | | | |
|----------------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| | 1900 Head | | | | | | 1900 Body | | | | | |
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 11.21.2011 | -22.535 | | 53.449 | | 6.9277 | | -22.401 | | 47.82 | | 7.1133 | |
| 11.17.2012 | -22.603 | 0.30 | 53.491 | -0.04 | 7.1009 | 0.17 | -22.45 | 0.22 | 46.14 | -1.68 | 6.7234 | -0.39 |

The return loss is < -20dB, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.




<Dipole Verification Data>- D1900V2, serial no. 5d118

1900MHz – Head

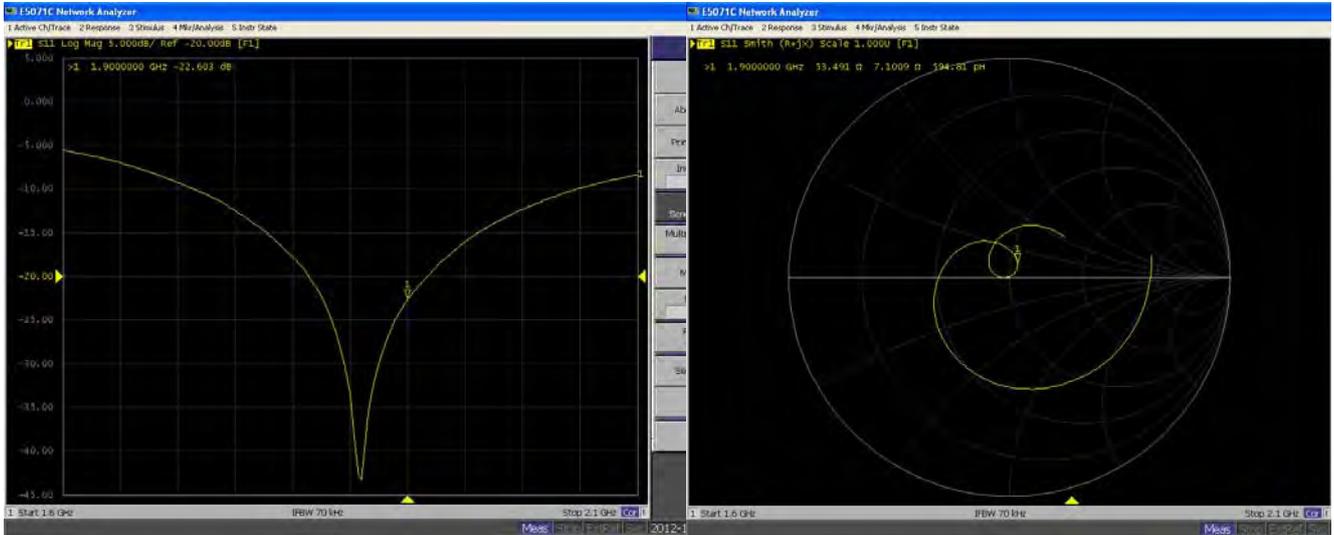

1900MHz - Body

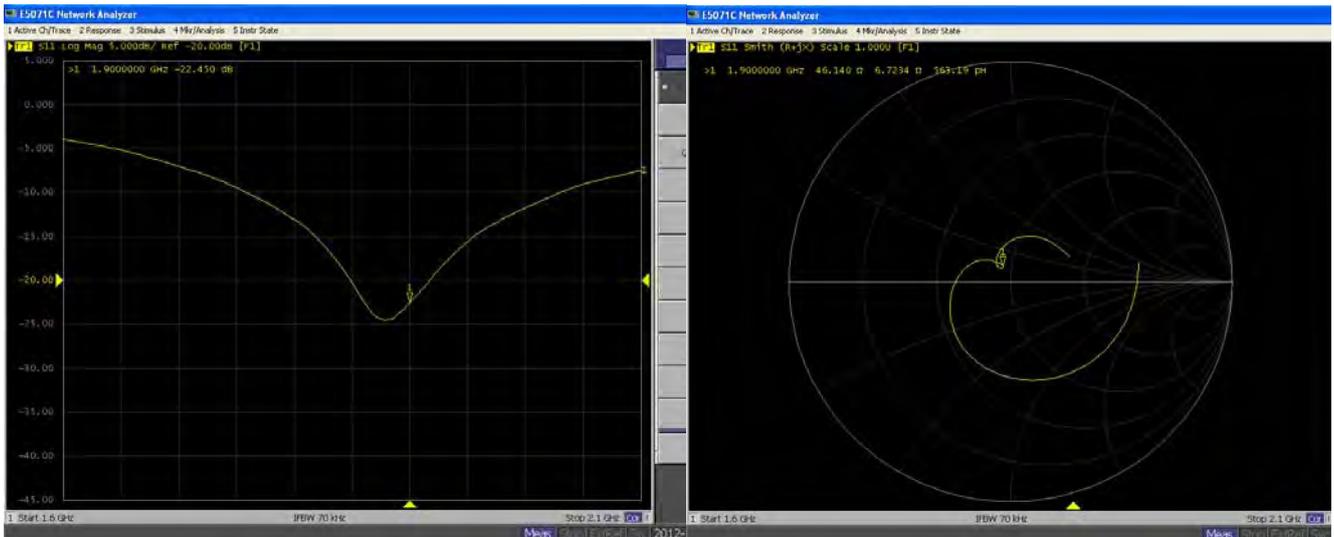

D1900V2, Serial No. 5d118 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

<Justification of the extended calibration>



| D1900V2 – serial no. 5d118 | | | | | | | | | | | | |
|----------------------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|------------------|-----------|----------------------|-------------|---------------------------|-------------|
| | 1900 Head | | | | | | 1900 Body | | | | | |
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (ohm) | Delta (ohm) |
| 11.21.2011 | -22.535 | | 53.449 | | 6.9277 | | -22.401 | | 47.82 | | 7.1133 | |
| 11.17.2012 | -22.603 | 0.30 | 53.491 | -0.04 | 7.1009 | -0.17 | -22.450 | 0.22 | 46.14 | -1.68 | 6.7234 | -0.39 |
| 11.15.2013 | -22.551 | 0.23 | 53.192 | 0.30 | 6.9641 | 0.14 | -22.412 | 0.17 | 47.419 | -1.28 | 7.1127 | -0.39 |

The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration.



Therefore the verification result should support extended calibration.

<Dipole Verification Data>- D1900V2, serial no. 5d118

1900MHz – Head

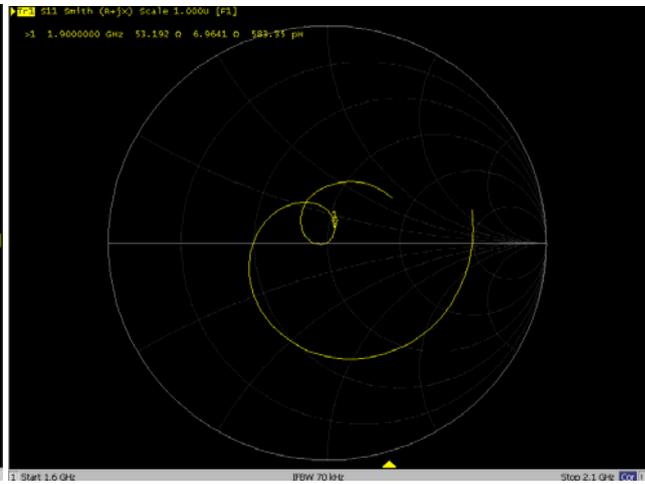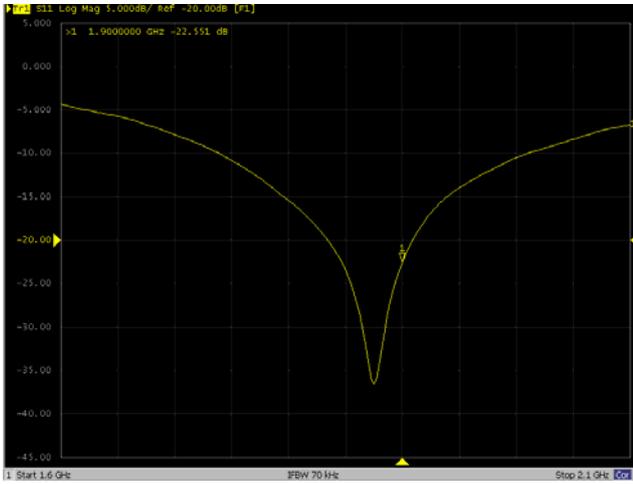

1900MHz - Body

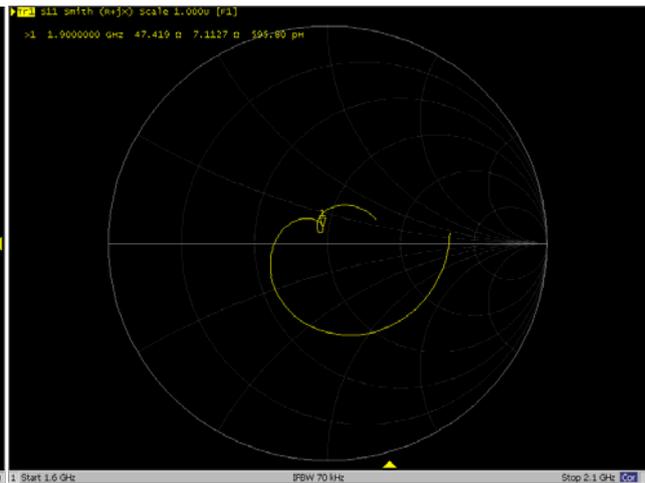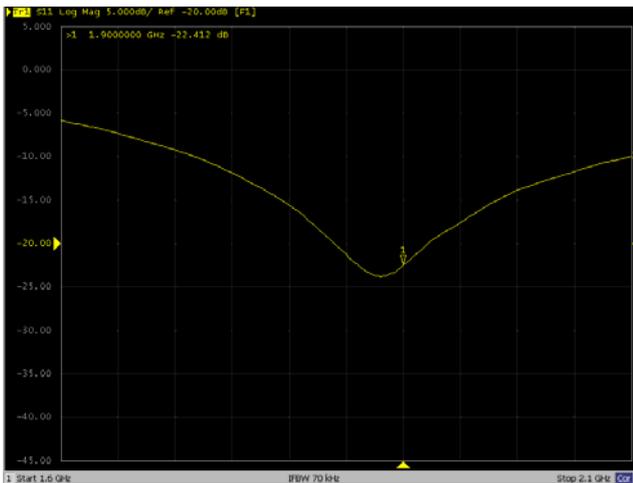



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton-TW (Auden)**

Certificate No: **D2450V2-924_Nov13**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 924**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **November 13, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A | GB37480704 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | US37292783 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | MY41092317 | 09-Oct-13 (No. 217-01828) | Oct-14 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-13 (No. 217-01736) | Apr-14 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739) | Apr-14 |
| Reference Probe ES3DV3 | SN: 3205 | 28-Dec-12 (No. ES3-3205_Dec12) | Dec-13 |
| DAE4 | SN: 601 | 25-Apr-13 (No. DAE4-601_Apr13) | Apr-14 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-15 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|-----------|
| Calibrated by: | Israe El-Naouq | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: November 13, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.7 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.7 \pm 6 % | 1.84 mho/m \pm 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 13.2 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 52.4 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 6.08 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 24.2 W/kg \pm 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|---------------------|----------------|----------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.7 | 1.95 mho/m |
| Measured Body TSL parameters | (22.0 \pm 0.2) °C | 52.1 \pm 6 % | 2.02 mho/m \pm 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 12.8 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 50.2 W/kg \pm 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.92 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 23.4 W/kg \pm 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.1 Ω + 2.6 j Ω |
| Return Loss | - 28.2 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.6 Ω + 4.3 j Ω |
| Return Loss | - 27.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.154 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|--------------------|
| Manufactured by | SPEAG |
| Manufactured on | September 26, 2013 |

DASY5 Validation Report for Head TSL

Date: 13.11.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 924

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.52, 4.52, 4.52); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.75 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.5 W/kg


SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.08 W/kg

Maximum value of SAR (measured) = 16.7 W/kg



0 dB = 16.7 W/kg = 12.23 dBW/kg

Impedance Measurement Plot for Head TSL

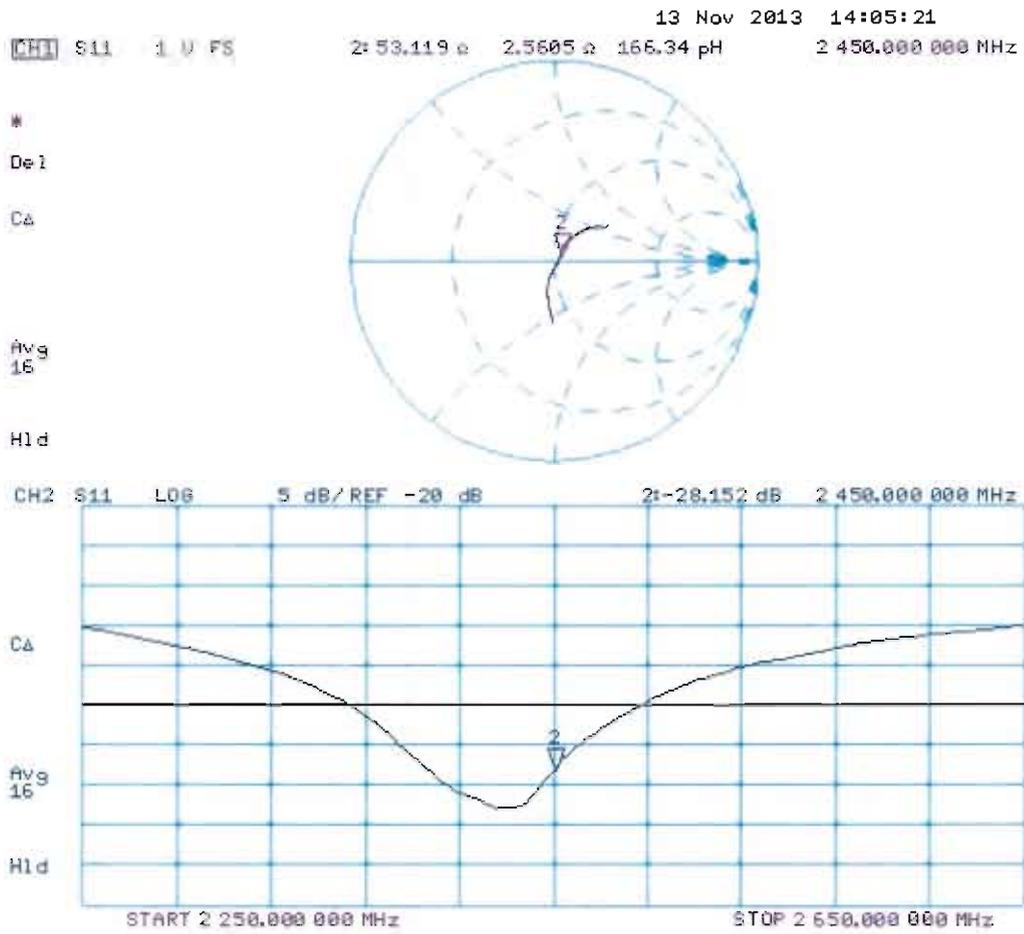

DASY5 Validation Report for Body TSL

Date: 13.11.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 924

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.42, 4.42, 4.42); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.726 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 26.8 W/kg


SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.92 W/kg

Maximum value of SAR (measured) = 16.8 W/kg



0 dB = 16.8 W/kg = 12.25 dBW/kg

Impedance Measurement Plot for Body TSL

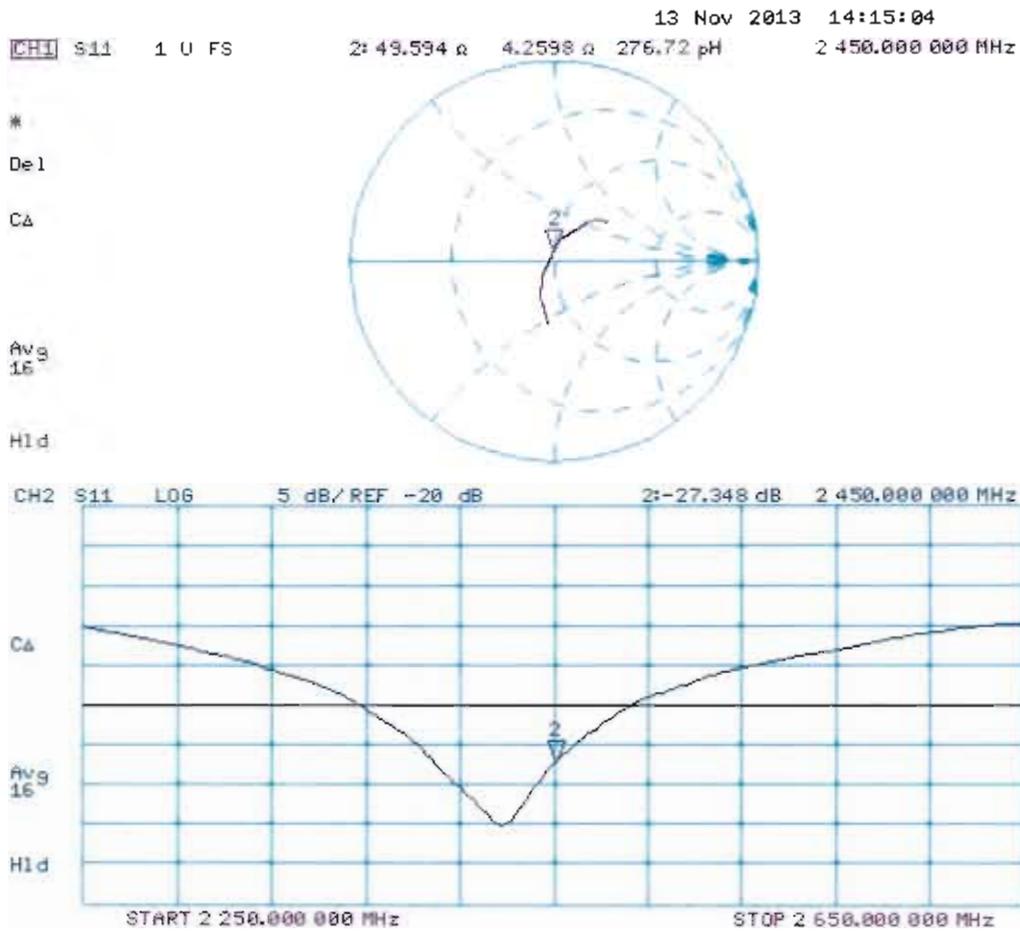



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton-TW (Auden)**

Certificate No: **D2600V2-1070_Nov13**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN: 1070**

Calibration procedure(s) **QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **November 13, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|--------------------------------|-----------------------|
| Power meter EPM-442A | GB37480704 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | US37292783 | 09-Oct-13 (No. 217-01827) | Oct-14 |
| Power sensor HP 8481A | MY41092317 | 09-Oct-13 (No. 217-01828) | Oct-14 |
| Reference 20 dB Attenuator | SN: 5058 (20k) | 04-Apr-13 (No. 217-01736) | Apr-14 |
| Type-N mismatch combination | SN: 5047.3 / 06327 | 04-Apr-13 (No. 217-01739) | Apr-14 |
| Reference Probe ES3DV3 | SN: 3205 | 28-Dec-12 (No. ES3-3205_Dec12) | Dec-13 |
| DAE4 | SN: 601 | 25-Apr-13 (No. DAE4-601_Apr13) | Apr-14 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------|------------------|-----------------------------------|------------------------|
| RF generator R&S SMT-06 | 100005 | 04-Aug-99 (in house check Oct-13) | In house check: Oct-15 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-13) | in house check: Oct-14 |

Calibrated by: **Israe El-Naouq** Name: **Israe El-Naouq** Function: **Laboratory Technician**

Signature:

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature:

Issued: November 13, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|-------------------------------------|------------------------|-------------|
| DASY Version | DASY5 | V52.8.7 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2600 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.0 | 1.96 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 39.1 ± 6 % | 2.01 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 14.3 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 56.6 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 6.33 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 25.2 W/kg ± 16.5 % (k=2) |

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|--|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 52.5 | 2.16 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 51.7 ± 6 % | 2.20 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm³ (1 g) of Body TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 14.1 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 55.7 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm³ (10 g) of Body TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 250 mW input power | 6.22 W/kg |
| SAR for nominal Body TSL parameters | normalized to 1W | 24.7 W/kg ± 16.5 % (k=2) |

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.3 Ω - 5.0 j Ω |
| Return Loss | - 25.4 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 44.5 Ω - 4.0 j Ω |
| Return Loss | - 22.9 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.147 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 17, 2013 |

DASY5 Validation Report for Head TSL

Date: 13.11.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1070

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.45, 4.45, 4.45); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.401 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.33 W/kg

Maximum value of SAR (measured) = 18.4 W/kg




0 dB = 18.4 W/kg = 12.65 dBW/kg

Impedance Measurement Plot for Head TSL

13 Nov 2013 14:09:34
 CH1 S11 1 U FS 3: 48.303 Ω -5.0234 Ω 12.186 pF 2 600.000 000 MHz

*
 De1
 CA
 Avg
 16
 H1d

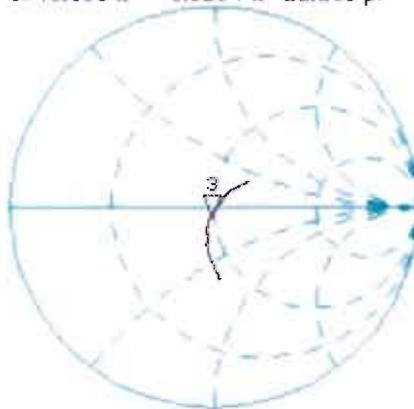

CH2 S11 L06 5 dB/REF -20 dB 3:-25.372 dB 2 600.000 000 MHz

CA
 Avg
 16
 H1d



DASY5 Validation Report for Body TSL

Date: 13.11.2013

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1070

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.2$ S/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.32, 4.32, 4.32); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.096 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 30.7 W/kg


SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.22 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

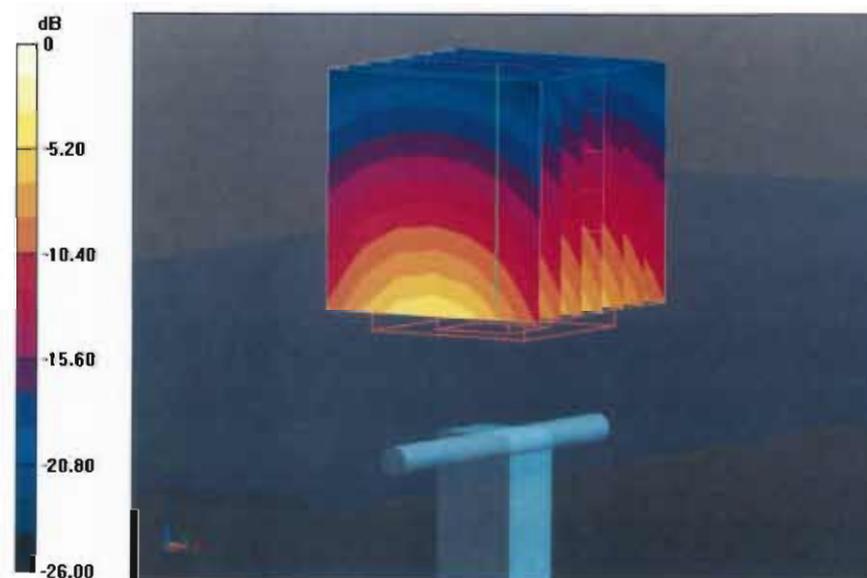

0 dB = 18.7 W/kg = 12.72 dBW/kg

Impedance Measurement Plot for Body TSL

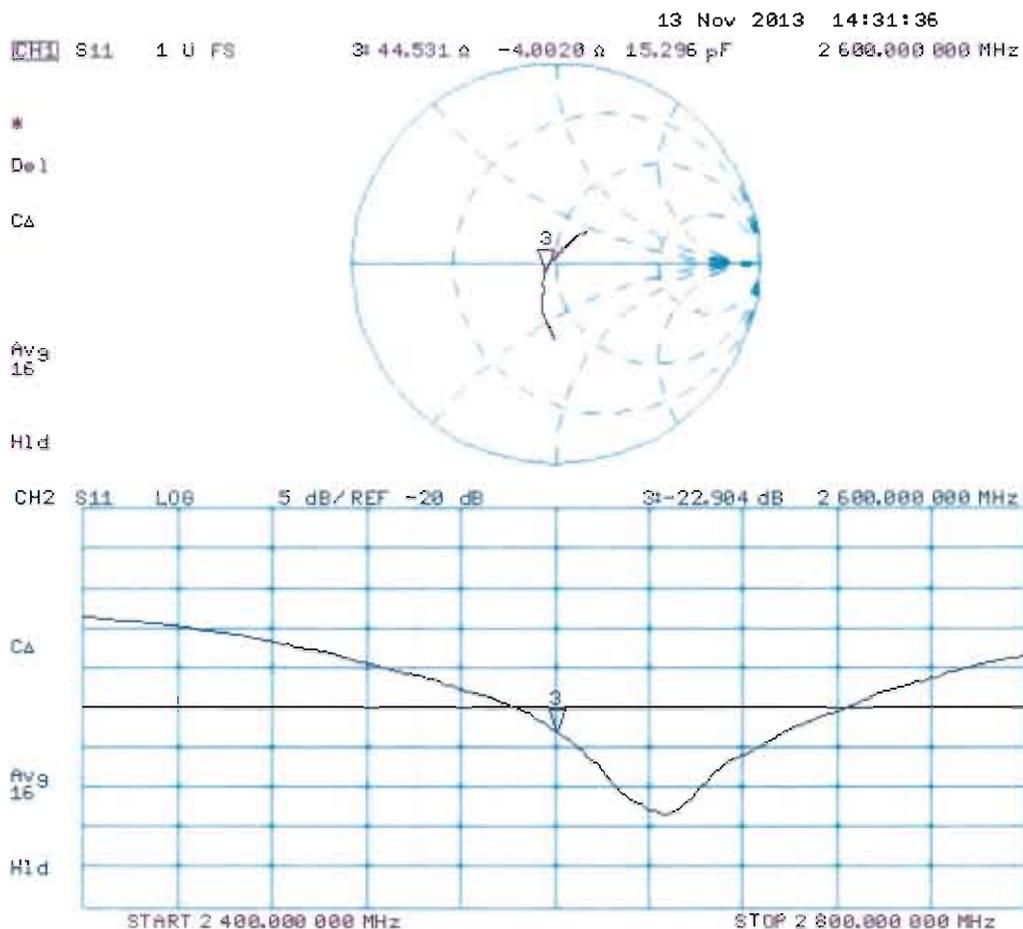

IMPORTANT NOTICE

USAGE OF THE DAE 4

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE4 unit is closed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 M Ω is given in the corresponding configuration file.

Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton-CN (Auden)**

Certificate No: **DAE4-1210_May14**

CALIBRATION CERTIFICATE

Object: **DAE4 - SD 000 D04 BM - SN: 1210**

Calibration procedure(s): **QA CAL-06.v26
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **May 19, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-------------------------------|--------------------|----------------------------|------------------------|
| Keithley Multimeter Type 2001 | SN: 0610278 | 01-Oct-13 (No-13976) | Oct-14 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Auto DAE Calibration Unit | SE LWS 053 AA 1001 | 07-Jan-14 (in house check) | In house check: Jan-15 |
| Calibrator Box V2.1 | SE UMS 006 AA 1002 | 07-Jan-14 (in house check) | In house check: Jan-15 |

| | | | |
|----------------|----------------------------|---------------------------------------|----------------|
| Calibrated by: | Name: Dominique Steffen | Function: Technician | Signature: |
| Approved by: | Name: Fin Bomholt | Function: Deputy Technical Manager | Signature: |

Issued: May 20, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1...+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X | Y | Z |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range | 404.126 \pm 0.02% (k=2) | 404.956 \pm 0.02% (k=2) | 405.065 \pm 0.02% (k=2) |
| Low Range | 4.00002 \pm 1.50% (k=2) | 3.98327 \pm 1.50% (k=2) | 4.00021 \pm 1.50% (k=2) |

Connector Angle

| | |
|---|-------------------------------------|
| Connector Angle to be used in DASY system | 123.5 $^{\circ}$ \pm 1 $^{\circ}$ |
|---|-------------------------------------|

Appendix

1. DC Voltage Linearity

| High Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 199993.16 | -3.08 | -0.00 |
| Channel X + Input | 20001.58 | 0.86 | 0.00 |
| Channel X - Input | -19997.88 | 2.96 | -0.01 |
| Channel Y + Input | 199997.46 | 1.25 | 0.00 |
| Channel Y + Input | 20001.02 | 0.31 | 0.00 |
| Channel Y - Input | -20000.67 | 0.41 | -0.00 |
| Channel Z + Input | 199997.96 | 1.16 | 0.00 |
| Channel Z + Input | 20000.22 | -0.47 | -0.00 |
| Channel Z - Input | -20000.31 | 0.71 | -0.00 |

| Low Range | Reading (μV) | Difference (μV) | Error (%) |
|-------------------|---------------------------|------------------------------|-----------|
| Channel X + Input | 2001.44 | 0.40 | 0.02 |
| Channel X + Input | 201.65 | 0.25 | 0.12 |
| Channel X - Input | -198.86 | -0.60 | 0.30 |
| Channel Y + Input | 2001.05 | 0.10 | 0.01 |
| Channel Y + Input | 200.89 | -0.51 | -0.25 |
| Channel Y - Input | -198.70 | -0.35 | 0.18 |
| Channel Z + Input | 2001.15 | 0.23 | 0.01 |
| Channel Z + Input | 200.32 | -1.08 | -0.54 |
| Channel Z - Input | -199.61 | -1.14 | 0.57 |

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Common mode Input Voltage (mV) | High Range Average Reading (μV) | Low Range Average Reading (μV) |
|-----------|--------------------------------|--|---|
| Channel X | 200 | -5.19 | -7.07 |
| | -200 | 7.82 | 6.50 |
| Channel Y | 200 | -3.56 | -3.90 |
| | -200 | 4.19 | 4.35 |
| Channel Z | 200 | 12.21 | 11.95 |
| | -200 | -14.51 | -14.28 |

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | Input Voltage (mV) | Channel X (μV) | Channel Y (μV) | Channel Z (μV) |
|-----------|--------------------|-----------------------------|-----------------------------|-----------------------------|
| Channel X | 200 | - | 1.78 | -3.94 |
| Channel Y | 200 | 8.13 | - | 2.67 |
| Channel Z | 200 | 9.14 | 6.43 | - |

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15954 | 15797 |
| Channel Y | 15962 | 16451 |
| Channel Z | 15874 | 16936 |

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

| | Average (μ V) | min. Offset (μ V) | max. Offset (μ V) | Std. Deviation (μ V) |
|-----------|--------------------|------------------------|------------------------|---------------------------|
| Channel X | -0.85 | -1.82 | -0.15 | 0.34 |
| Channel Y | -0.27 | -1.81 | 0.54 | 0.39 |
| Channel Z | -0.30 | -1.29 | 0.94 | 0.43 |

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

| | Zeroing (kOhm) | Measuring (MOhm) |
|-----------|----------------|------------------|
| Channel X | 200 | 200 |
| Channel Y | 200 | 200 |
| Channel Z | 200 | 200 |

8. Low Battery Alarm Voltage (Typical values for information)

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9 |
| Supply (- Vcc) | -7.6 |

9. Power Consumption (Typical values for information)

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01 | +6 | +14 |
| Supply (- Vcc) | -0.01 | -8 | -9 |

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



SCS Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sporton-CN (Auden)**

Certificate No: **EX3-3857_May14**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3857**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **May 23, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

A) calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Power sensor E4412A | MY41498087 | 03-Apr-14 (No. 217-01911) | Apr-15 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 03-Apr-14 (No. 217-01915) | Apr-15 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 03-Apr-14 (No. 217-01919) | Apr-15 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 03-Apr-14 (No. 217-01920) | Apr-15 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-13 (No. ES3-3013 Dec13) | Dec-14 |
| DAE4 | SN: 660 | 13-Dec-13 (No. DAE4-660 Dec13) | Dec-14 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Apr-13) | In house check: Apr-16 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-13) | In house check: Oct-14 |

| | | | |
|----------------|-------------------------|-----------------------------------|---------------|
| Calibrated by: | Name Claudio Leubler | Function Laboratory Technician | Signature |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature |

Issued: May 28, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCF | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- **NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- **A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- **Spherical isotropy (3D deviation from isotropy)**: In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3857

Manufactured: January 23, 2012
Calibrated: May 23, 2014

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3857

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.18 | 0.44 | 0.46 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 94.2 | 98.6 | 99.4 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 132.0 | $\pm 3.8 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 149.4 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 149.1 | |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3857

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth (mm) ^G | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 9.92 | 9.92 | 9.92 | 0.44 | 0.82 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.41 | 9.41 | 9.41 | 0.30 | 1.01 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.20 | 9.20 | 9.20 | 0.80 | 0.50 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.55 | 8.55 | 8.55 | 0.80 | 0.59 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.40 | 8.40 | 8.40 | 0.69 | 0.65 | ± 12.0 % |
| 2000 | 40.0 | 1.40 | 8.31 | 8.31 | 8.31 | 0.77 | 0.56 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.48 | 7.48 | 7.48 | 0.78 | 0.58 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.30 | 7.30 | 7.30 | 0.42 | 0.87 | ± 12.0 % |
| 5200 | 36.0 | 4.66 | 5.35 | 5.35 | 5.35 | 0.30 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 5.12 | 5.12 | 5.12 | 0.30 | 1.80 | ± 13.1 % |
| 5500 | 35.6 | 4.96 | 4.99 | 4.99 | 4.99 | 0.35 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.56 | 4.56 | 4.56 | 0.45 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 4.79 | 4.79 | 4.79 | 0.40 | 1.80 | ± 13.1 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2%, for frequencies between 3-5 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3857

Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 55.5 | 0.96 | 9.46 | 9.46 | 9.46 | 0.47 | 0.84 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.31 | 9.31 | 9.31 | 0.31 | 1.06 | ± 12.0 % |
| 900 | 55.0 | 1.05 | 9.13 | 9.13 | 9.13 | 0.80 | 0.61 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 7.89 | 7.89 | 7.89 | 0.80 | 0.80 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.56 | 7.56 | 7.56 | 0.59 | 0.71 | ± 12.0 % |
| 2000 | 53.3 | 1.52 | 7.73 | 7.73 | 7.73 | 0.29 | 1.00 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.14 | 7.14 | 7.14 | 0.76 | 0.57 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 6.82 | 6.82 | 6.82 | 0.73 | 0.81 | ± 12.0 % |
| 5200 | 49.0 | 5.30 | 4.54 | 4.54 | 4.54 | 0.40 | 1.90 | ± 13.1 % |
| 5300 | 48.9 | 5.42 | 4.37 | 4.37 | 4.37 | 0.40 | 1.90 | ± 13.1 % |
| 5500 | 48.6 | 5.65 | 4.15 | 4.15 | 4.15 | 0.40 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 3.98 | 3.98 | 3.98 | 0.40 | 1.90 | ± 13.1 % |
| 5800 | 48.2 | 6.00 | 4.21 | 4.21 | 4.21 | 0.50 | 1.90 | ± 13.1 % |

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-8 GHz at any distance larger than half the probe tip diameter from the boundary.


Frequency Response of E-Field (TEM-Cell: Ifi110 EXX, Waveguide: R22)

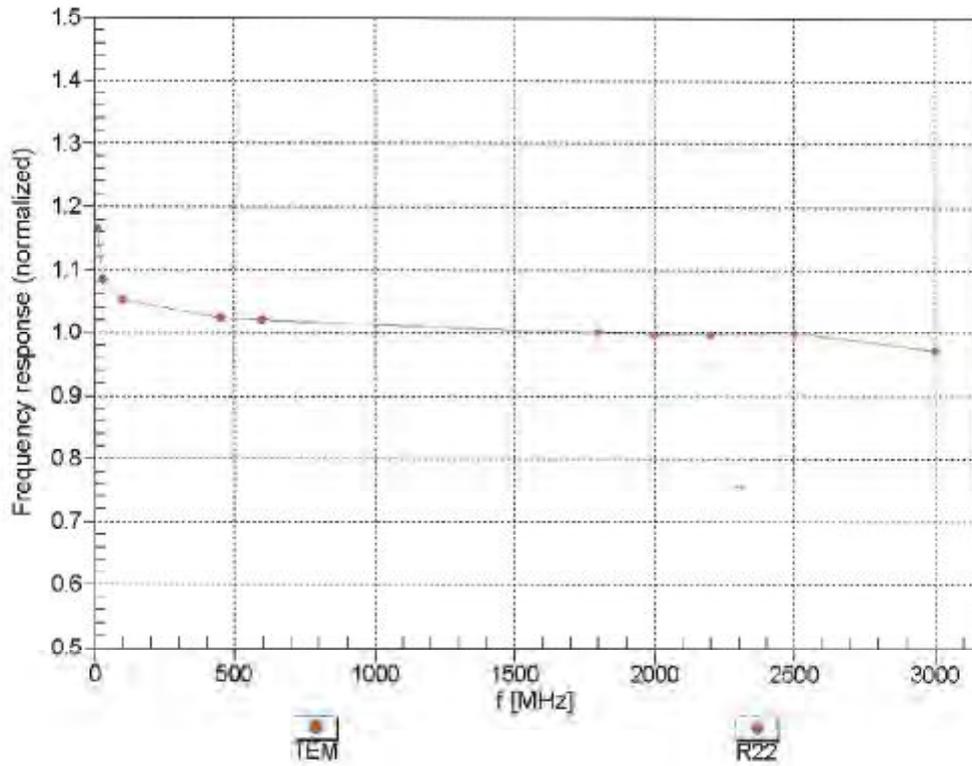



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM


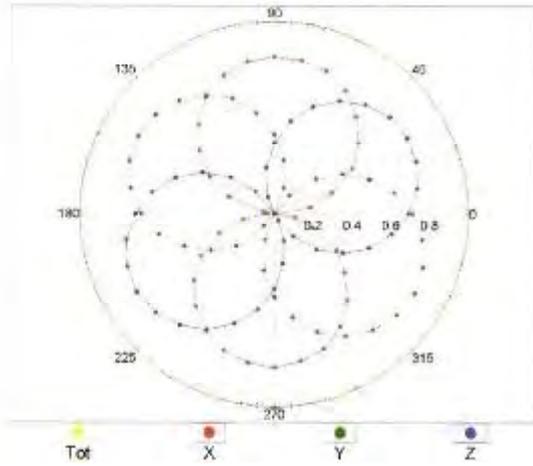


f=1800 MHz, R22

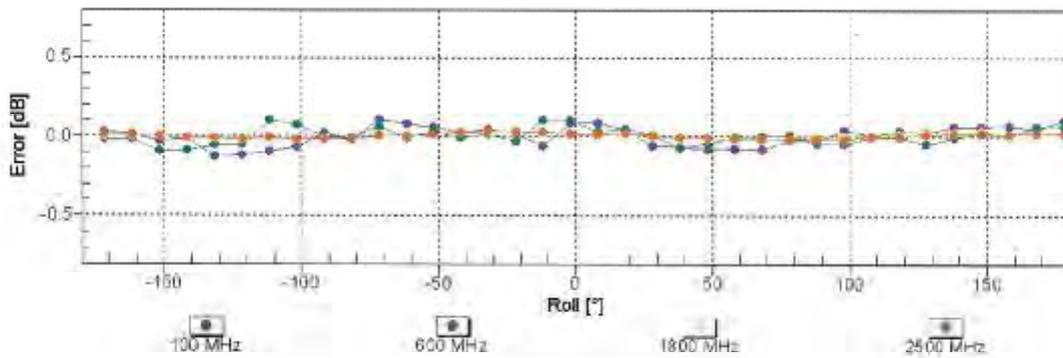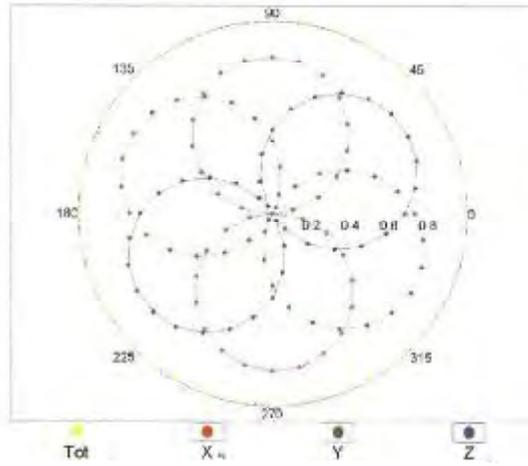


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

Dynamic Range f(SAR_{head}) (TEM cell, f_{eval} = 1900 MHz)

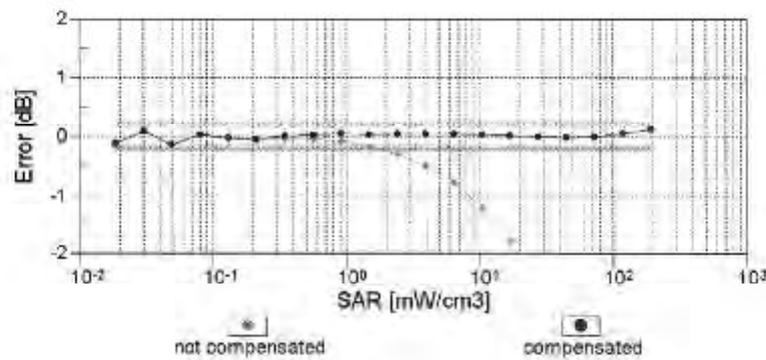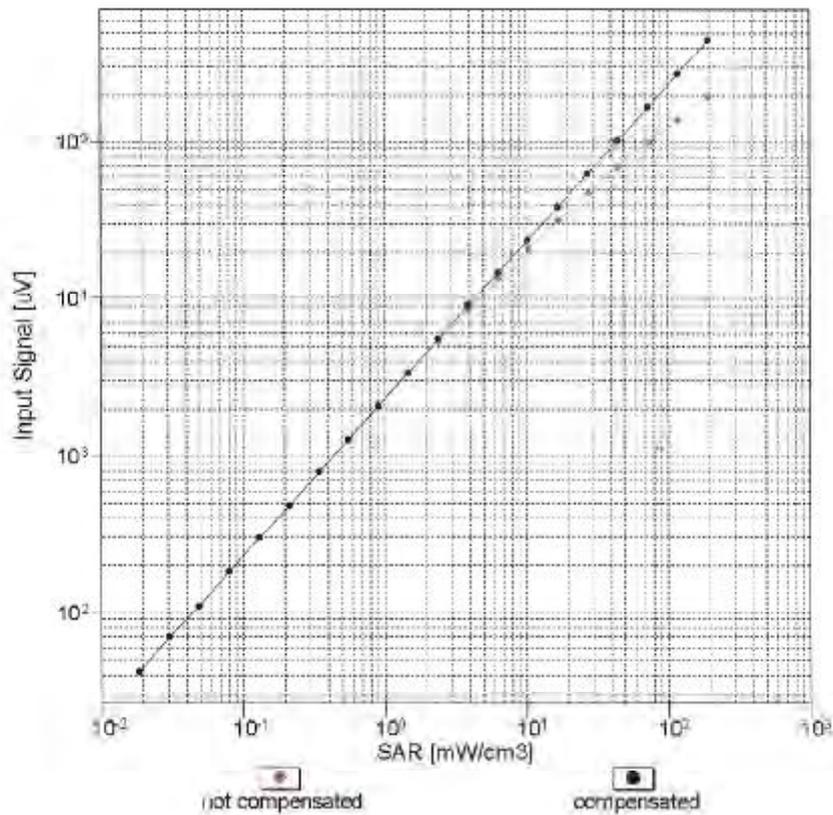


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

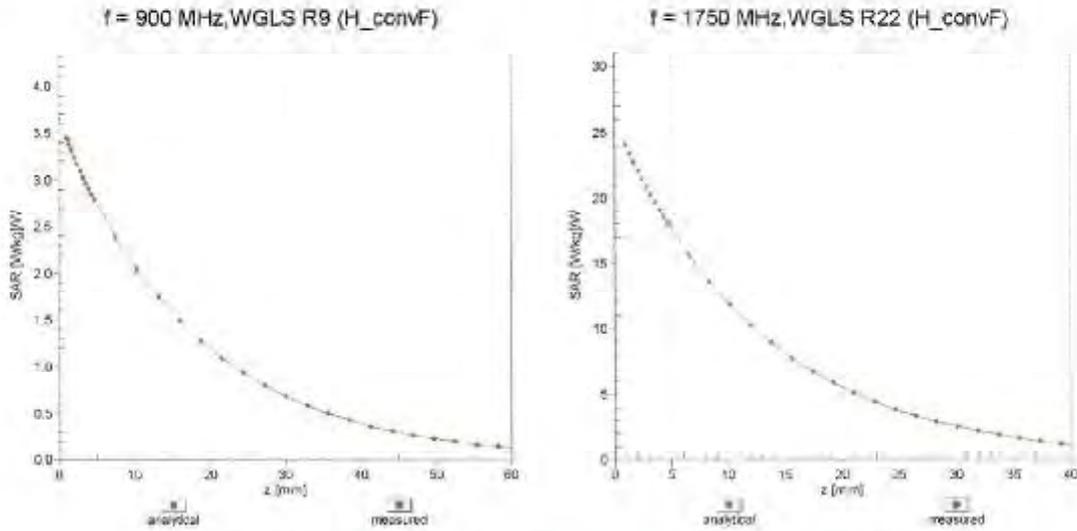

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

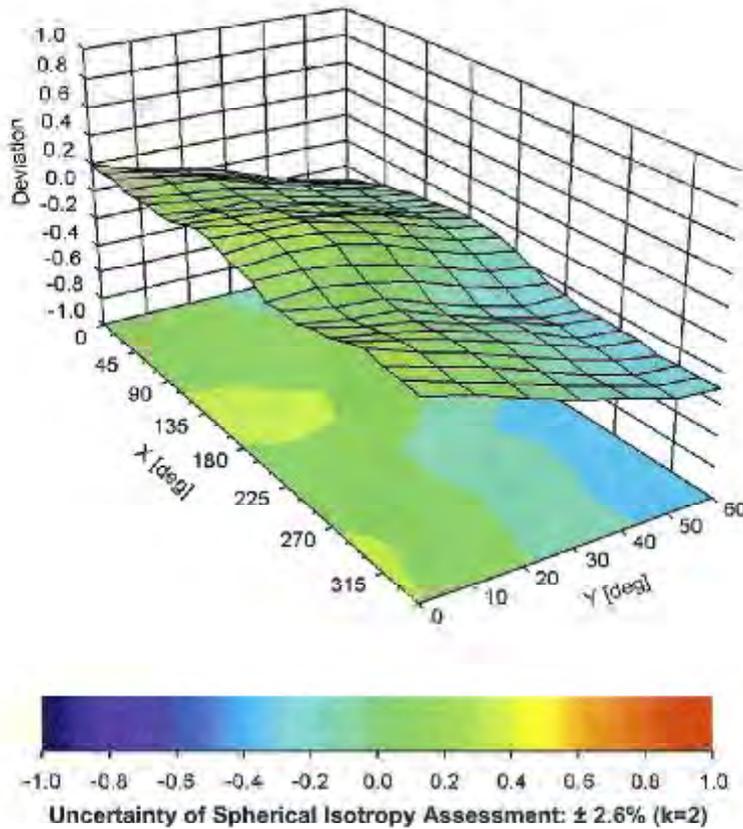

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3857**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | -41.9 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 2 mm |