



# FCC RF Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : CDMA/EVDO/LTE Multi-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE N9130  
**FCC ID** : SRQ-ZTEN9130  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Sep. 10, 2014 and testing was completed on Oct. 15, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer ..... 5

1.3 Product Feature of Equipment Under Test ..... 5

1.4 Product Specification subjective to this standard ..... 5

1.5 Modification of EUT ..... 6

1.6 Testing Location ..... 6

1.7 Applicable Standards ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

2.1 Carrier Frequency Channel ..... 7

2.2 Pre-Scanned RF Power ..... 8

2.3 Test Mode ..... 9

2.4 Connection Diagram of Test System ..... 10

2.5 Support Unit used in test configuration and system ..... 11

2.6 EUT Operation Test Setup ..... 11

2.7 Measurement Results Explanation Example ..... 12

**3 TEST RESULT ..... 13**

3.1 6dB Bandwidth Measurement ..... 13

3.2 Output Power Measurement ..... 15

3.3 Power Spectral Density Measurement ..... 18

3.4 Conducted Band Edges and Spurious Emission Measurement ..... 20

3.5 Radiated Band Edges and Spurious Emission Measurement ..... 30

3.6 AC Conducted Emission Measurement ..... 47

3.7 Antenna Requirements ..... 51

**4 LIST OF MEASURING EQUIPMENT ..... 52**

**5 UNCERTAINTY OF EVALUATION ..... 53**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.35 dB at 2483.77 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.94 dB at 0.540 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	CDMA/EVDO/LTE Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE N9130
FCC ID	SRQ-ZTEN9130
EUT supports Radios application	CDMA/EV-DO/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	cwfB
SW Version	N9130V1.0.0B01C
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 17.96 dBm (0.0625 W) 802.11g : 19.57 dBm (0.0906 W) 802.11n HT20 : 20.03 dBm (0.1007 W)
Antenna Type / Gain	PIFA Antenna with gain -2.60 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.			
	TEL: +86-0512-5790-0158			
	FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH01-KS	CO01-KS	149928

**Note:** The test site complies with ANSI C63.4 2003 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Pre-Scanned RF Power

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	17.52	CH 11	17.94	17.91	17.89
CH 06	2437 MHz	17.86				
CH 11	2462 MHz	17.96				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	19.22	CH 06	19.54	19.49	19.39	19.51	19.47	19.45	19.53
CH 06	2437 MHz	19.57								
CH 11	2462 MHz	19.41								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	20.03	CH 01	20.01	19.96	19.93	19.95	19.91	19.89	19.98
CH 06	2437 MHz	19.97								
CH 11	2462 MHz	19.92								



### 2.3 Test Mode


Final results of test modes, data rates and test channels are shown as following table.

Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps
802.11g			6 Mbps	1/6/11
802.11n HT20			MCS0	1/6/11
Output Power		802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Conducted Band Edge		802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
Conducted Spurious Emission	802.11b	1 Mbps	1/6/11	
	802.11g	6 Mbps	1/6/11	
	802.11n HT20	MCS0	1/6/11	
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11


Test Cases	
AC Conducted Emission	Mode 1 : CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + USB Cable (Charging from Adapter)
<b>Remark:</b> For radiated test cases, the tests were performance with adapter and USB cable.	

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

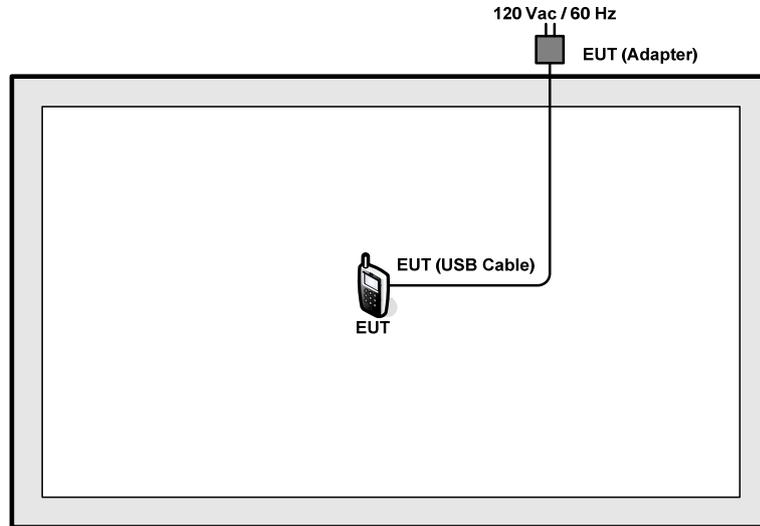

### <AC Conducted Emission Mode>

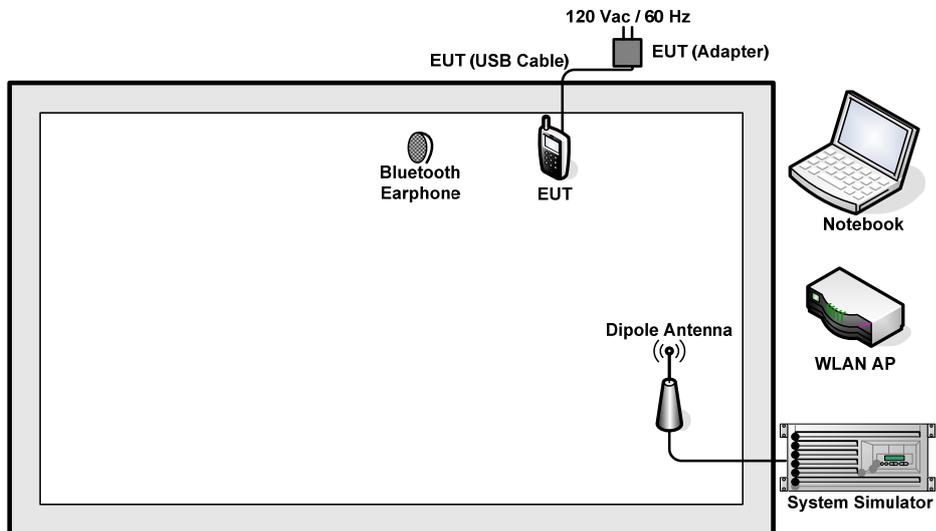



## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss*

Following shows an offset computation example with cable loss 6.0 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.0 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	7.08	0.5	Pass
11b	1Mbps	1	6	2437	7.08	0.5	Pass
11b	1Mbps	1	11	2462	7.56	0.5	Pass
11g	6Mbps	1	1	2412	16.34	0.5	Pass
11g	6Mbps	1	6	2437	16.32	0.5	Pass
11g	6Mbps	1	11	2462	16.32	0.5	Pass
HT20	MCS0	1	1	2412	17.56	0.5	Pass
HT20	MCS0	1	6	2437	17.60	0.5	Pass
HT20	MCS0	1	11	2462	17.56	0.5	Pass

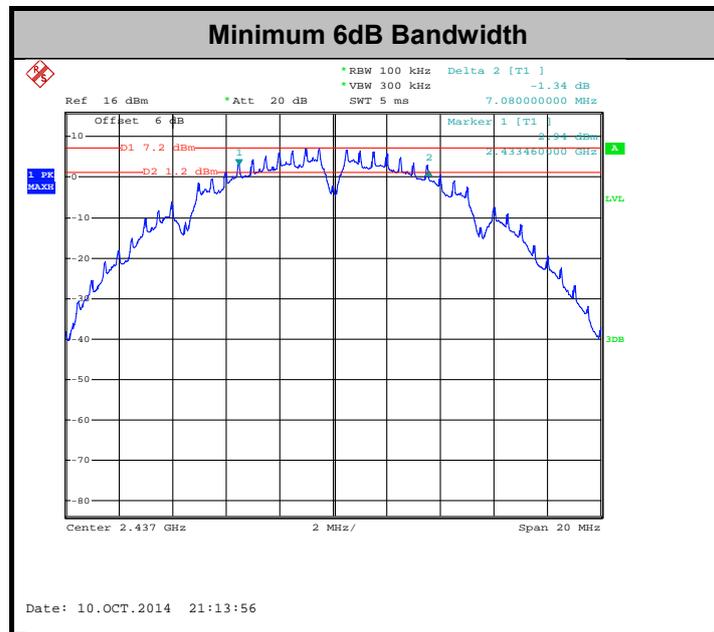

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

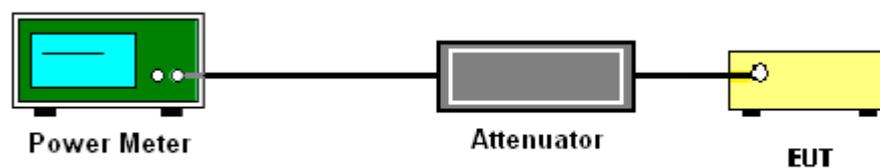



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	17.52	30	-2.60	Pass
11b	1Mbps	1	6	2437	17.86	30	-2.60	Pass
11b	1Mbps	1	11	2462	17.96	30	-2.60	Pass
11g	6Mbps	1	1	2412	19.22	30	-2.60	Pass
11g	6Mbps	1	6	2437	19.57	30	-2.60	Pass
11g	6Mbps	1	11	2462	19.41	30	-2.60	Pass
HT20	MCS0	1	1	2412	20.03	30	-2.60	Pass
HT20	MCS0	1	6	2437	19.97	30	-2.60	Pass
HT20	MCS0	1	11	2462	19.92	30	-2.60	Pass

Note: Measured power (dBm) has offset with cable loss.

**3.2.6 Test Result of Average output Power (Reporting Only)**

Test Mode :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.10	14.84	30	-2.60	Pass
11b	1Mbps	1	6	2437	0.10	14.80	30	-2.60	Pass
11b	1Mbps	1	11	2462	0.10	15.18	30	-2.60	Pass
11g	6Mbps	1	1	2412	0.57	11.52	30	-2.60	Pass
11g	6Mbps	1	6	2437	0.57	11.89	30	-2.60	Pass
11g	6Mbps	1	11	2462	0.57	11.35	30	-2.60	Pass
HT20	MCS0	1	1	2412	0.64	11.70	30	-2.60	Pass
HT20	MCS0	1	6	2437	0.64	11.36	30	-2.60	Pass
HT20	MCS0	1	11	2462	0.64	11.26	30	-2.60	Pass

**Note:** Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

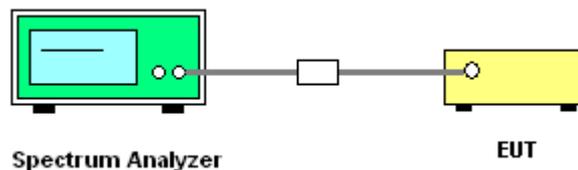




### 3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-5.54	8	-2.60	Pass
11b	1Mbps	1	6	2437	-7.00	8	-2.60	Pass
11b	1Mbps	1	11	2462	-6.82	8	-2.60	Pass
11g	6Mbps	1	1	2412	-11.83	8	-2.60	Pass
11g	6Mbps	1	6	2437	-12.06	8	-2.60	Pass
11g	6Mbps	1	11	2462	-11.52	8	-2.60	Pass
HT20	MCS0	1	1	2412	-12.95	8	-2.60	Pass
HT20	MCS0	1	6	2437	-13.46	8	-2.60	Pass
HT20	MCS0	1	11	2462	-12.36	8	-2.60	Pass

Note: Measured power density (dBm) has offset with cable loss.

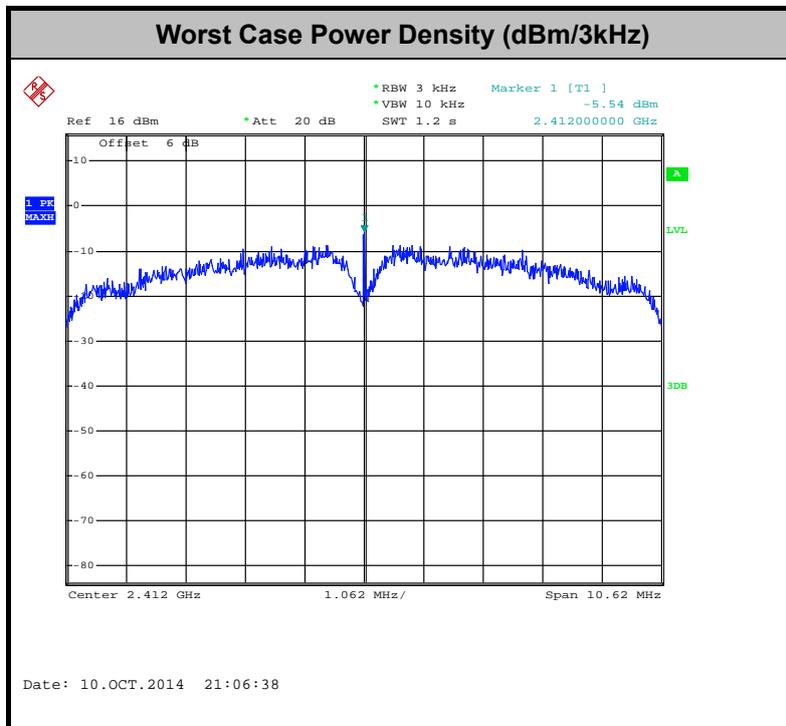

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

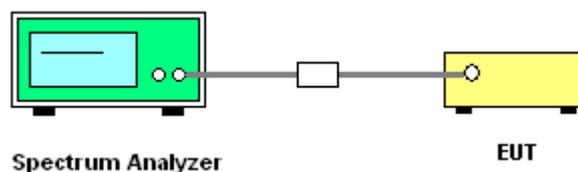




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

#### WLAN 802.11b Channel 01

<b>100kHz PSD reference Level</b>	<b>Low Channel Plot</b>
-----------------------------------	-------------------------

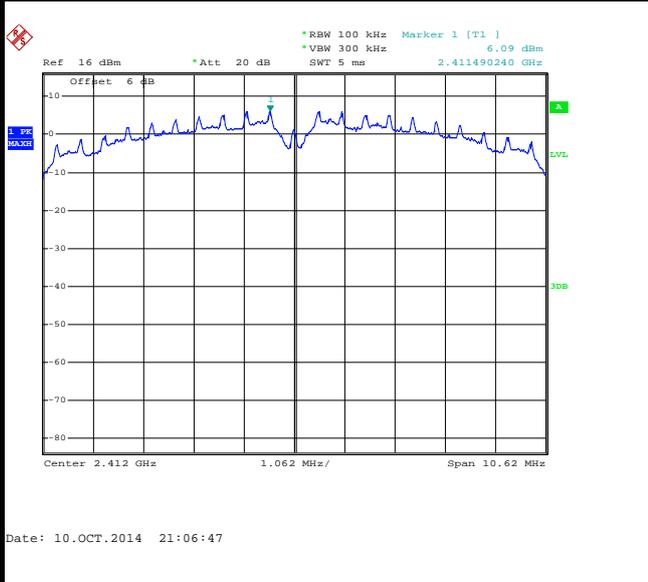


Date: 10.OCT.2014 21:06:47

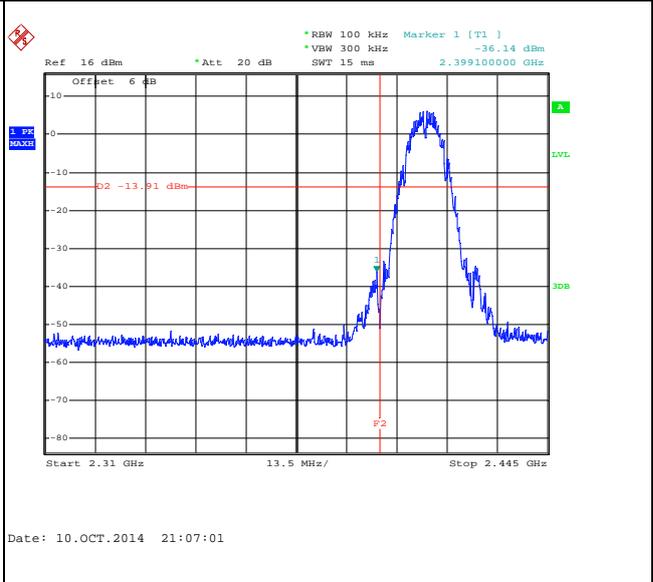


Date: 10.OCT.2014 21:07:01

#### Spurious Emission 30MHz~3GHz

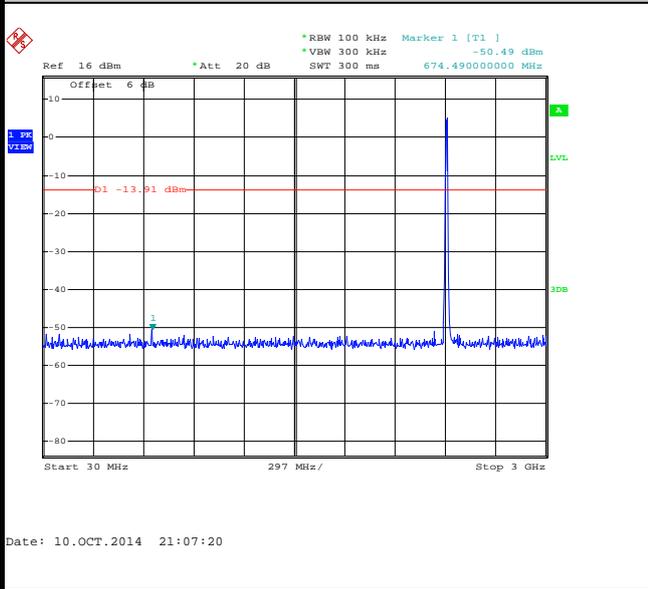

Date: 10.OCT.2014 21:07:20

#### Spurious Emission 2GHz~25GHz

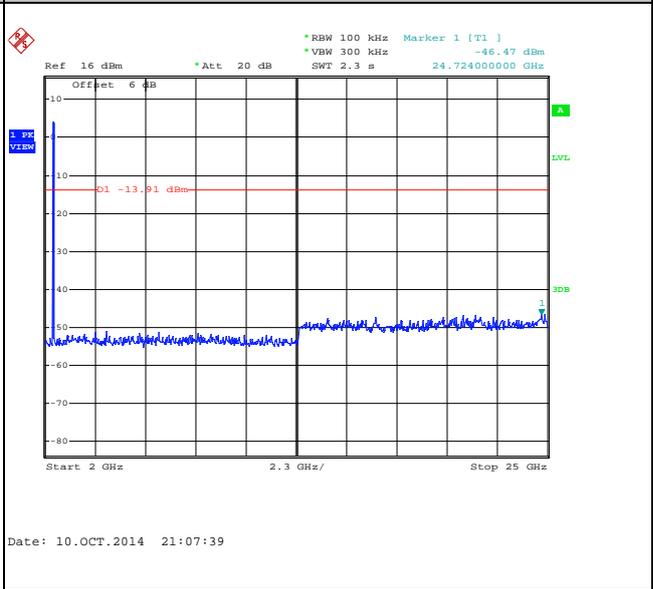


Date: 10.OCT.2014 21:07:39



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

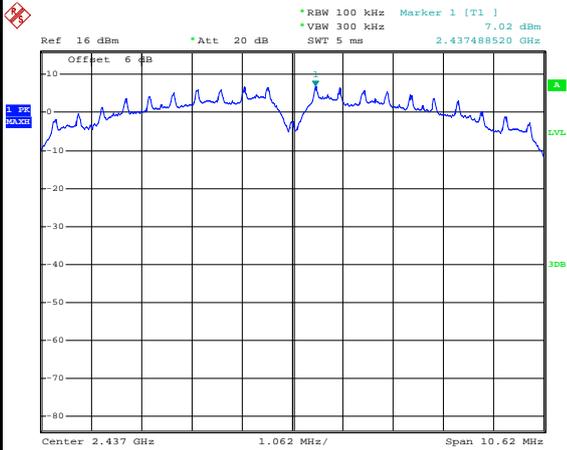


Date: 10.OCT.2014 21:14:26

Spurious Emission 30MHz~3GHz

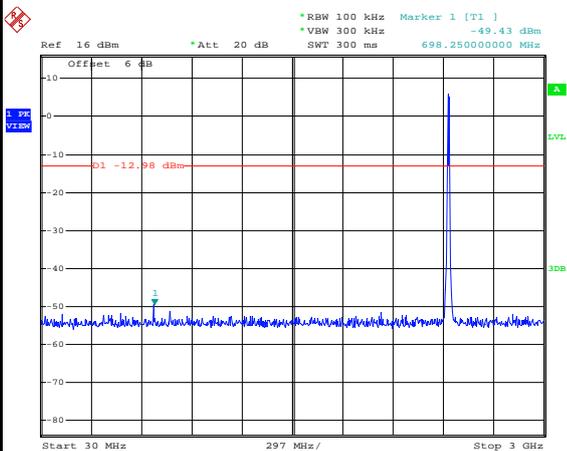

Date: 10.OCT.2014 21:14:46

Spurious Emission 2GHz~25GHz

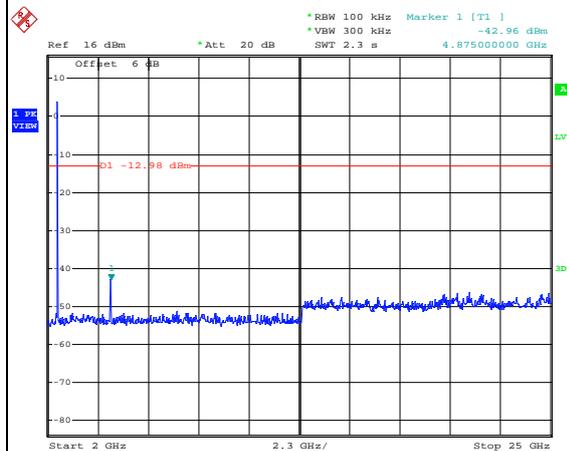


Date: 10.OCT.2014 21:15:05




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11b Channel 11


100kHz PSD reference Level

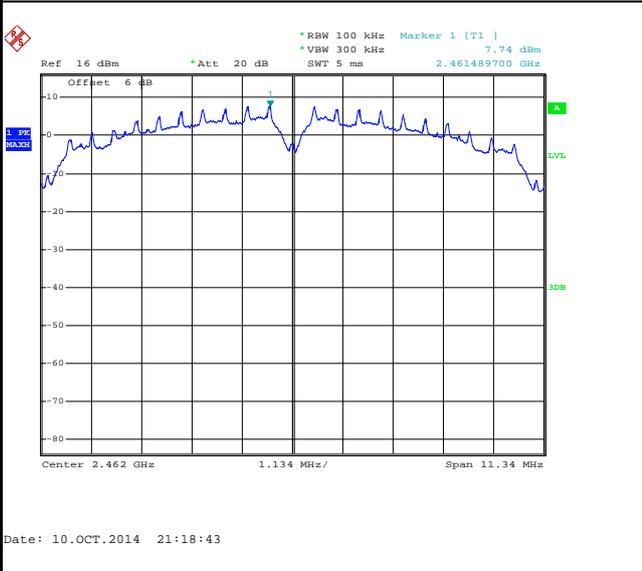


High Channel Plot

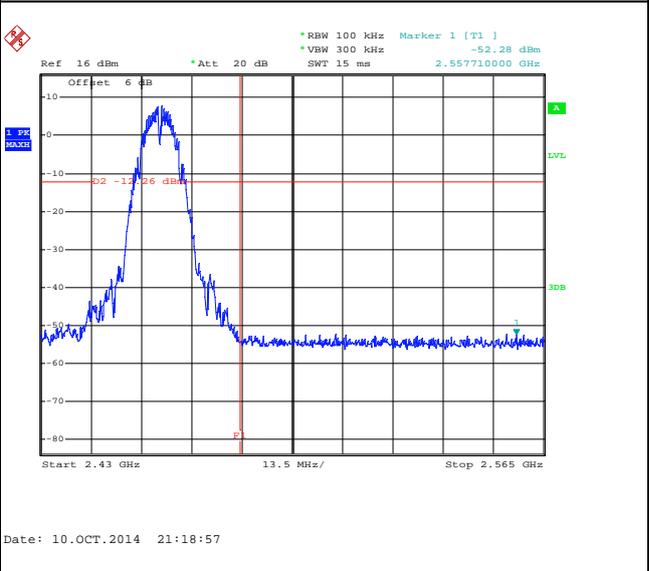

Spurious Emission 30MHz~3GHz

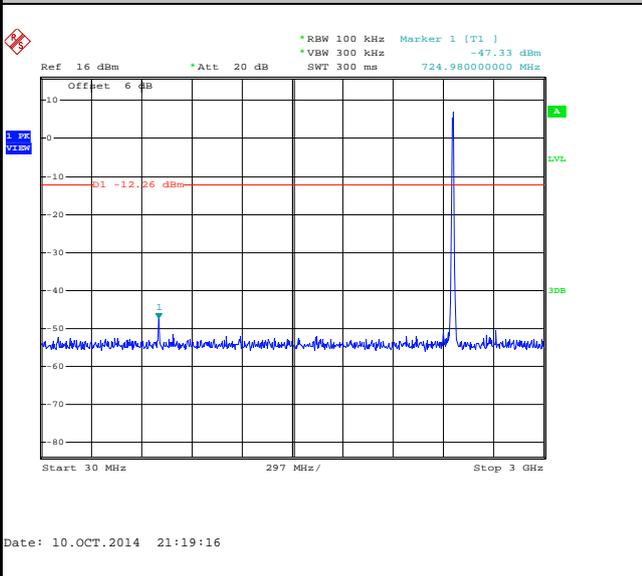

Spurious Emission 2GHz~25GHz

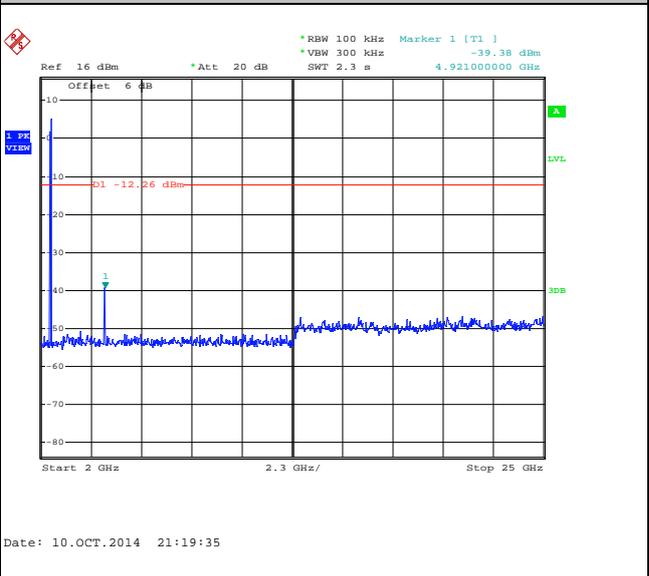





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11g Channel 01


100kHz PSD reference Level

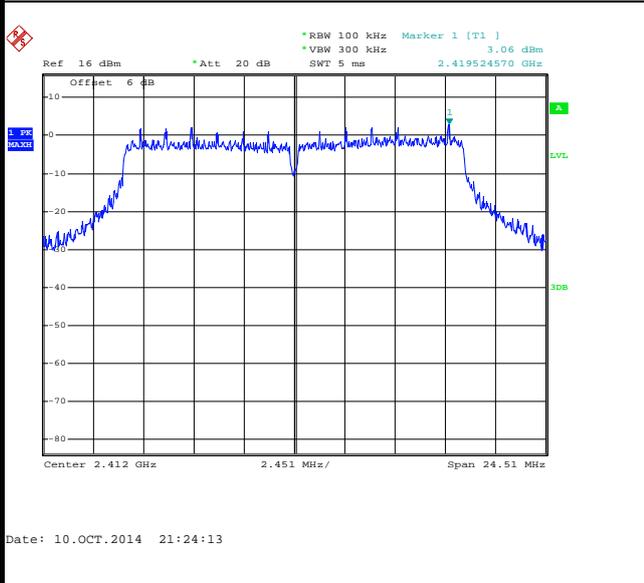


Low Channel Plot

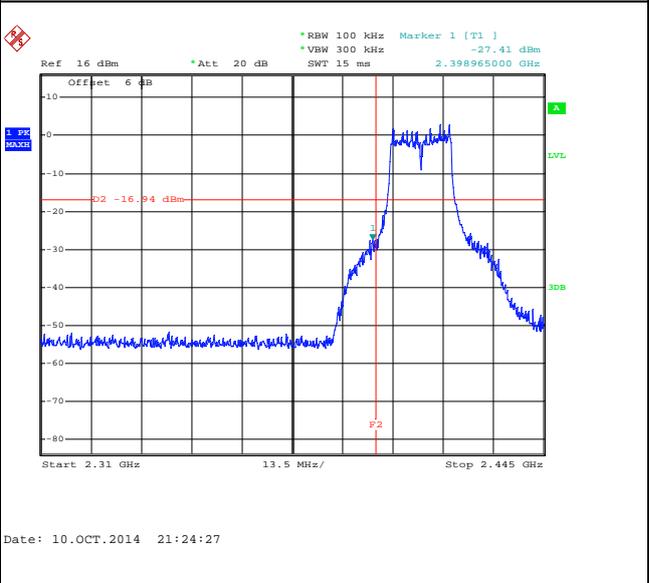

Spurious Emission 30MHz~3GHz

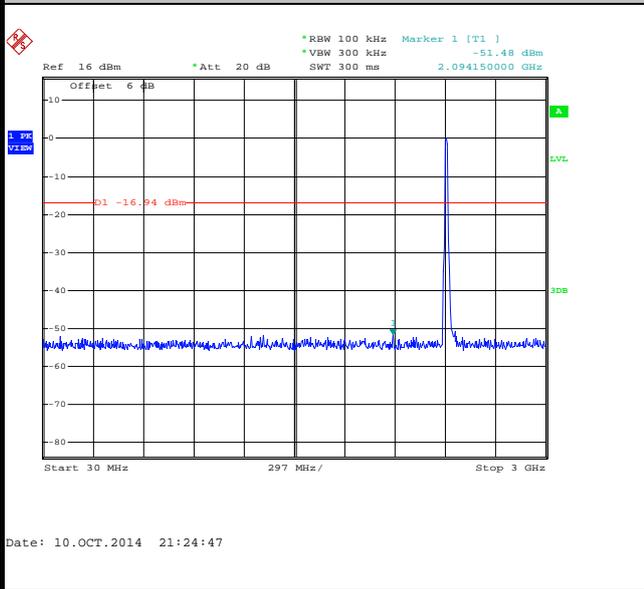

Spurious Emission 2GHz~25GHz

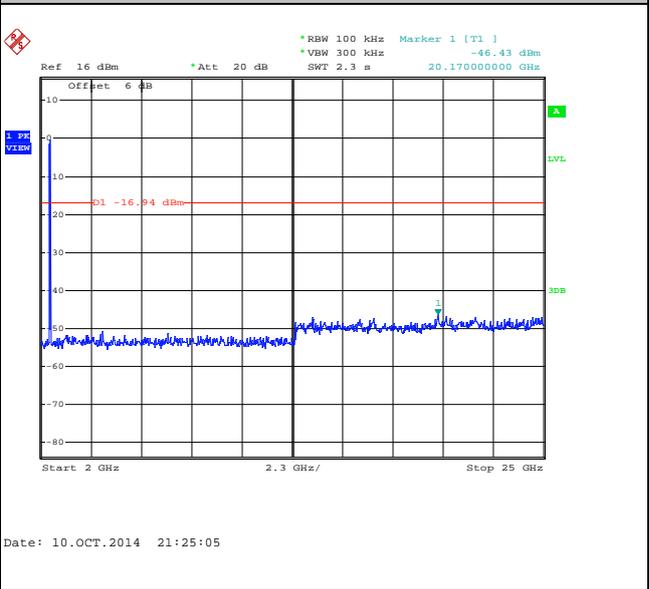





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11g Channel 06


100kHz PSD reference Level

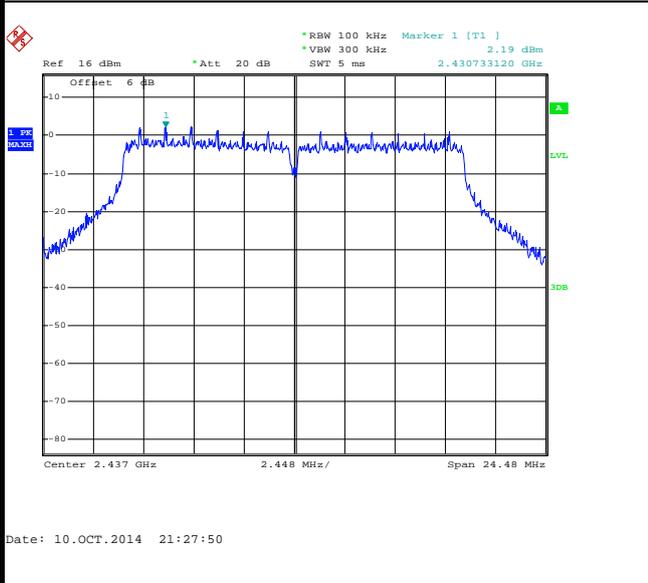

Spurious Emission 30MHz~3GHz

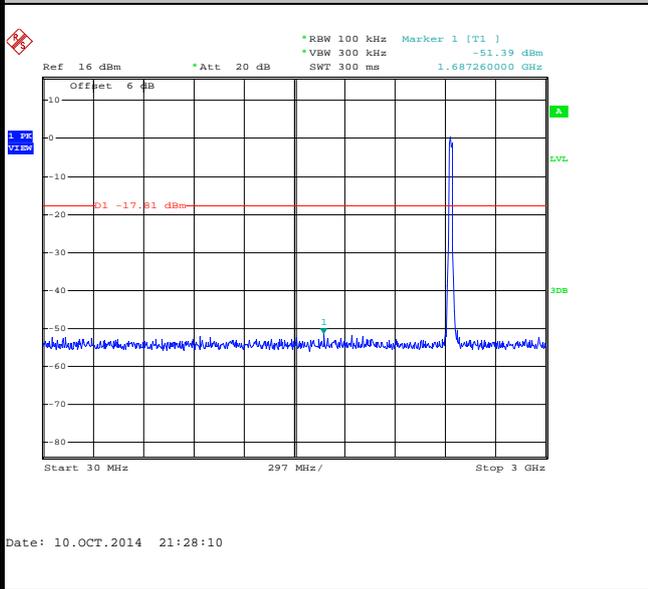

Spurious Emission 2GHz~25GHz

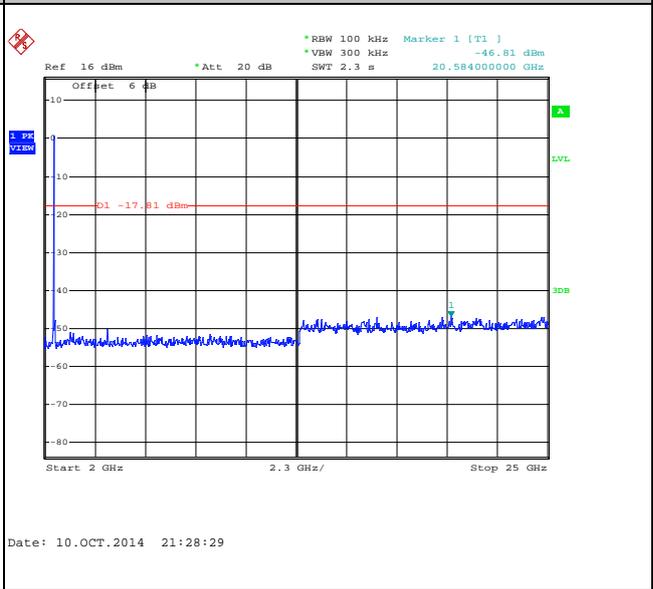




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11g Channel 11

100kHz PSD reference Level

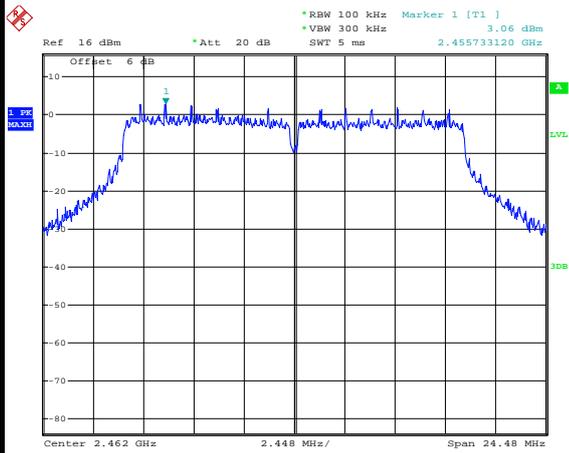


Date: 10.OCT.2014 21:31:06

High Channel Plot

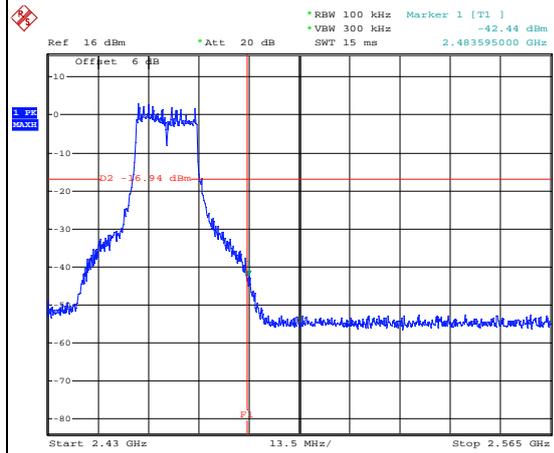


Date: 10.OCT.2014 21:31:20

Spurious Emission 30MHz~3GHz

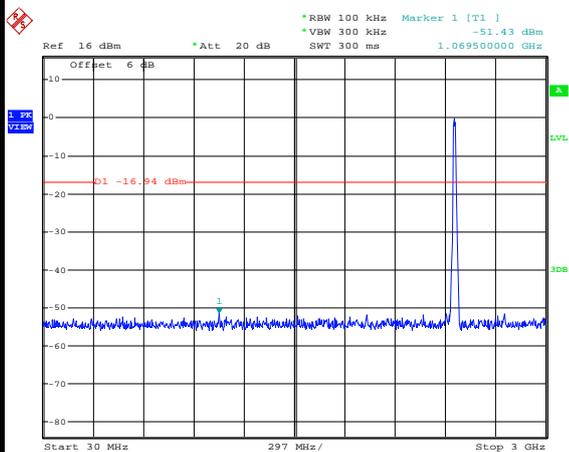

Date: 10.OCT.2014 21:31:39

Spurious Emission 2GHz~25GHz

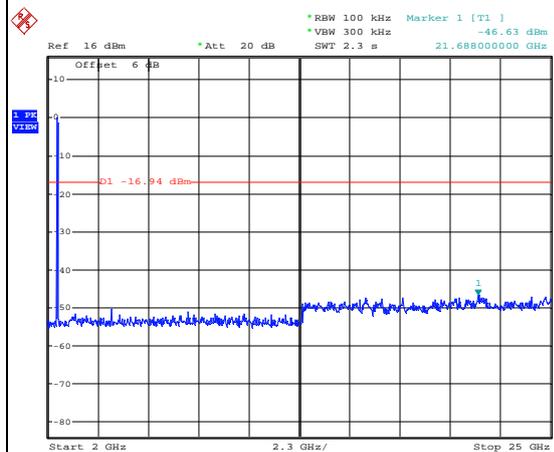


Date: 10.OCT.2014 21:31:58




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

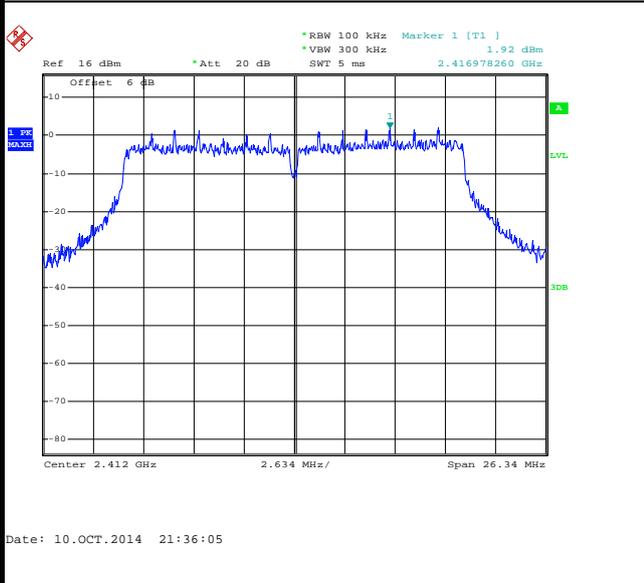


Low Channel Plot

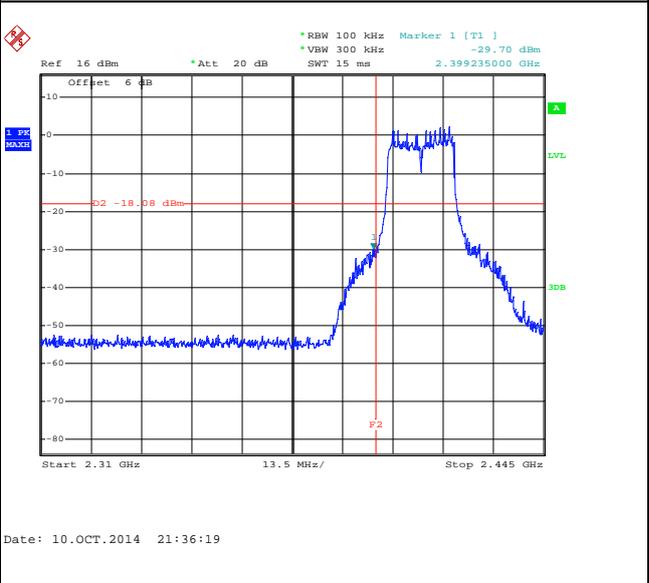

Spurious Emission 30MHz~3GHz

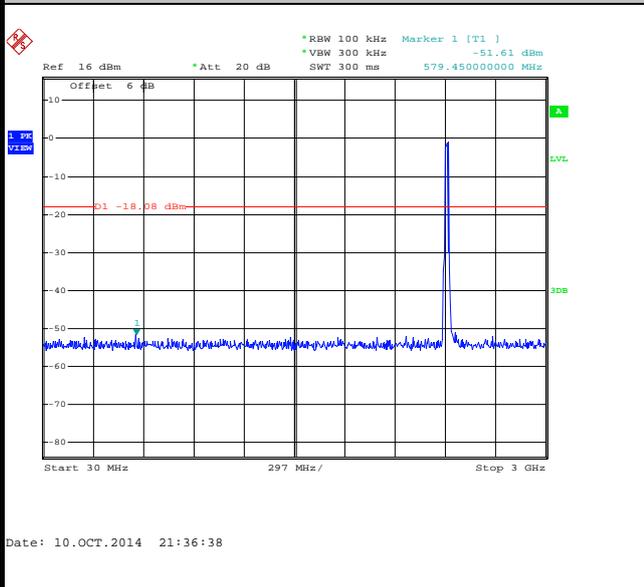

Spurious Emission 2GHz~25GHz

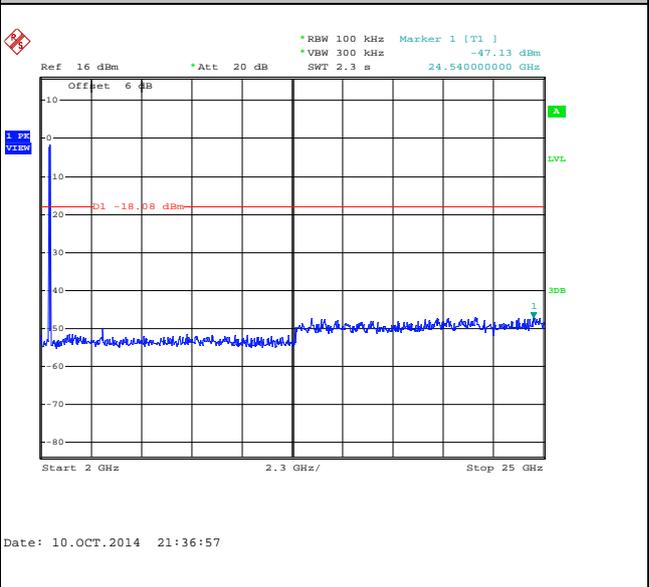




Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

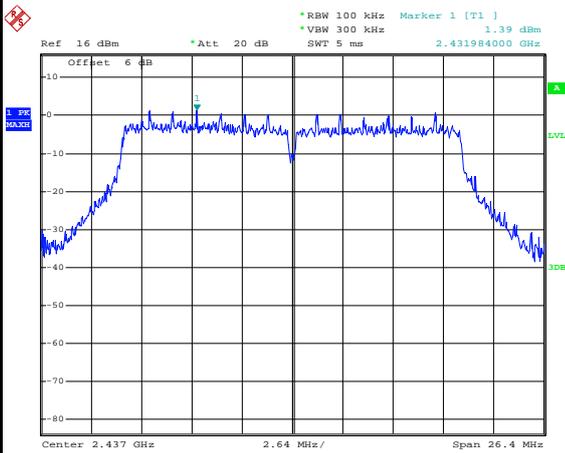


Date: 10.OCT.2014 21:39:29

Spurious Emission 30MHz~3GHz

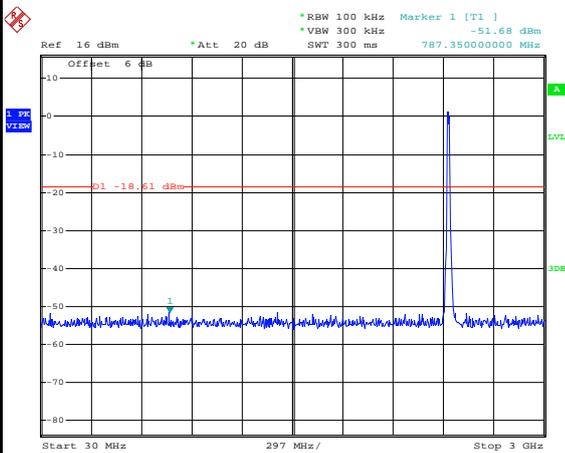

Date: 10.OCT.2014 21:39:49

Spurious Emission 2GHz~25GHz

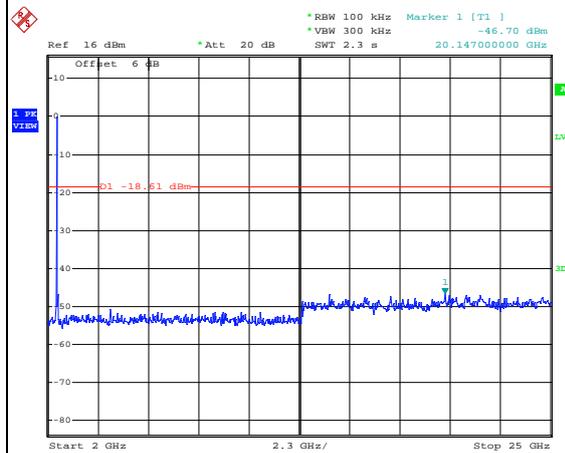


Date: 10.OCT.2014 21:40:08



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

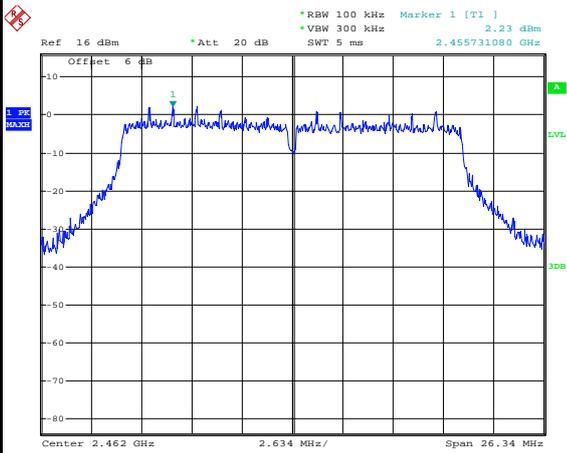


Date: 10.OCT.2014 21:42:58

High Channel Plot

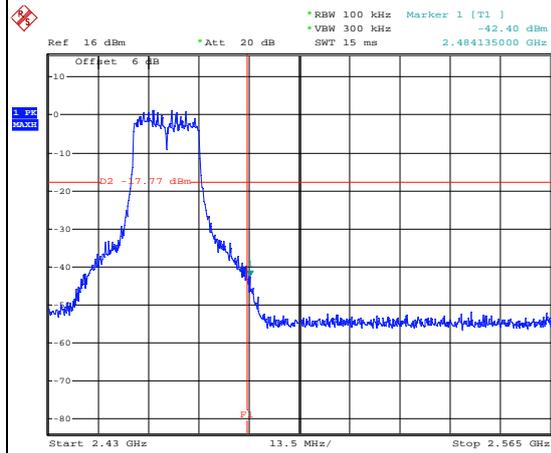


Date: 10.OCT.2014 21:43:12

Spurious Emission 30MHz~3GHz

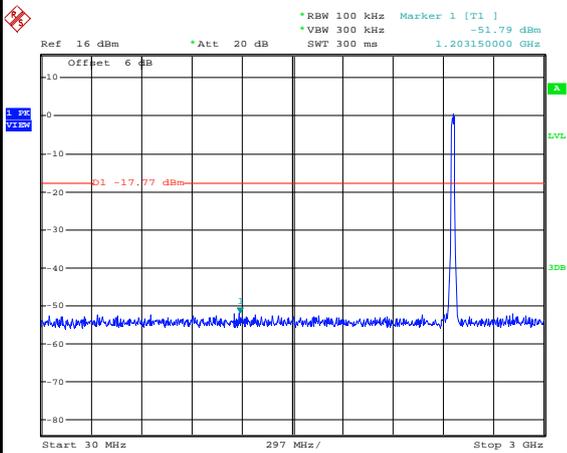

Date: 10.OCT.2014 21:43:32

Spurious Emission 2GHz~25GHz

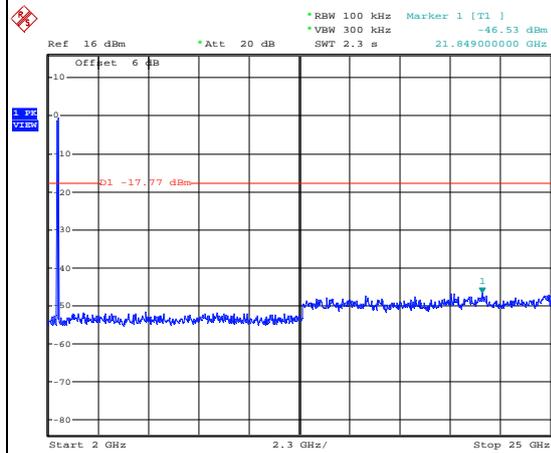

Date: 10.OCT.2014 21:43:50



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.


For average measurement:

  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.71	8.21	0.12	300Hz
802.11g	87.63	1.36	0.73	1kHz
2.4GHz 802.11n HT20	86.48	1.27	0.79	1kHz

### 3.5.4 Test Setup


For radiated emissions below 30MHz

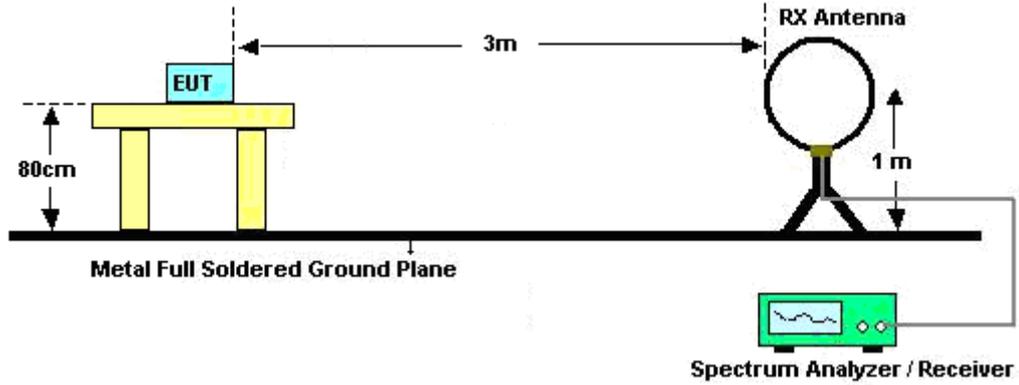

For radiated emissions from 30MHz to 1GHz

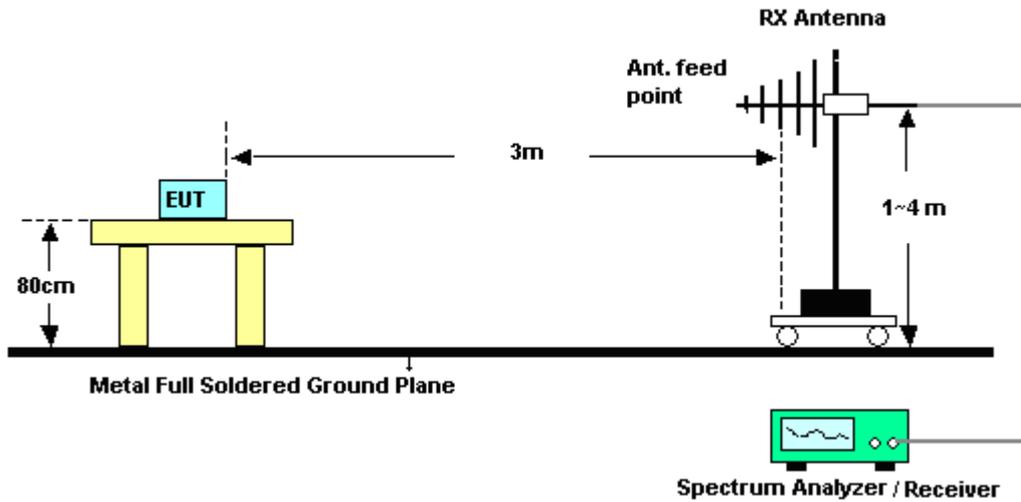

For radiated emissions above 1GHz

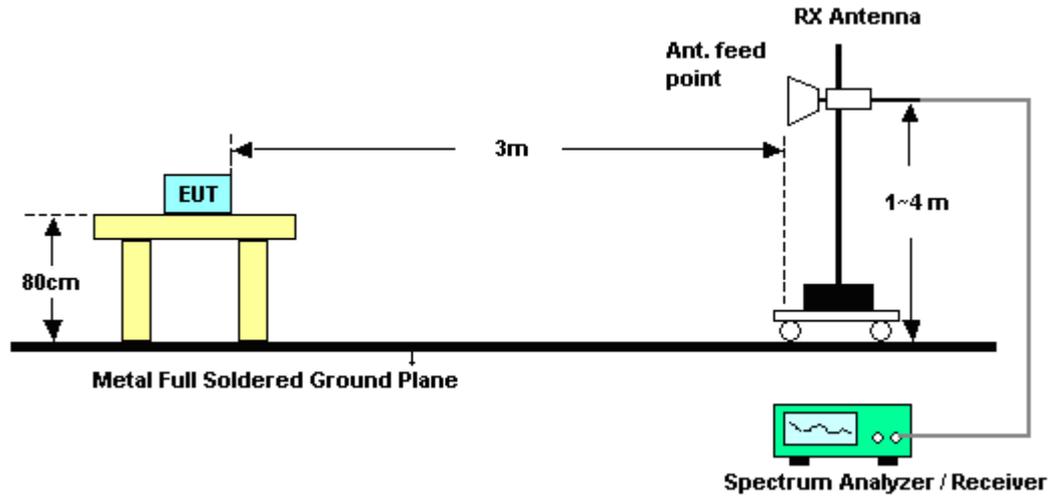

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	40~42%
Test Channel :	01	Test Engineer :	Simon Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.68	47.13	-26.87	74	48.56	32.01	2.64	36.08	100	326	Peak
2389.47	35.57	-18.43	54	37	32.01	2.64	36.08	100	326	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2376.33	46.25	-27.75	74	47.82	31.95	2.64	36.16	107	312	Peak
2389.74	34.93	-19.07	54	36.36	32.01	2.64	36.08	107	312	Average

Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	40~42%
Test Channel :	11	Test Engineer :	Simon Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.76	51.36	-22.64	74	52.13	32.34	2.68	35.79	100	325	Peak
2483.5	39.56	-14.44	54	40.33	32.34	2.68	35.79	100	325	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.65	49.41	-24.59	74	50.18	32.34	2.68	35.79	107	237	Peak
2483.5	37.22	-16.78	54	37.99	32.34	2.68	35.79	107	237	Average



Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	40~42%
Test Channel :	01	Test Engineer :	Simon Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.92	64.29	-9.71	74	65.72	32.01	2.64	36.08	100	326	Peak
2390	43.11	-10.89	54	44.54	32.01	2.64	36.08	100	326	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.92	58.21	-15.79	74	59.64	32.01	2.64	36.08	196	318	Peak
2390	37.38	-16.62	54	38.81	32.01	2.64	36.08	196	318	Average

Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	40~42%
Test Channel :	11	Test Engineer :	Simon Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.77	72.65	-1.35	74	73.42	32.34	2.68	35.79	100	324	Peak
2483.5	47.69	-6.31	54	48.46	32.34	2.68	35.79	100	324	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.68	65.17	-8.83	74	65.94	32.34	2.68	35.79	109	245	Peak
2483.5	42.19	-11.81	54	42.96	32.34	2.68	35.79	109	245	Average



Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	Low	Relative Humidity :	40~42%
Test Channel :	01	Test Engineer :	Simon Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.83	64.31	-9.69	74	65.74	32.01	2.64	36.08	100	330	Peak
2390	43.37	-10.63	54	44.8	32.01	2.64	36.08	100	330	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.74	57.33	-16.67	74	58.76	32.01	2.64	36.08	100	338	Peak
2389.92	37.51	-16.49	54	38.94	32.01	2.64	36.08	100	338	Average

Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	High	Relative Humidity :	40~42%
Test Channel :	11	Test Engineer :	Simon Lu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.59	72.44	-1.56	74	73.21	32.34	2.68	35.79	100	196	Peak
2483.5	46.83	-7.17	54	47.6	32.34	2.68	35.79	100	196	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.89	63.57	-10.43	74	64.34	32.34	2.68	35.79	109	234	Peak
2483.5	42.11	-11.89	54	42.88	32.34	2.68	35.79	109	234	Average



**3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	107.96	-	-	109.24	32.08	2.66	36.02	100	326	Peak
2412	102.95	-	-	104.23	32.08	2.66	36.02	100	326	Average
4824	45.69	-28.31	74	44.36	34.2	3.78	36.65	126	30	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	100.55	-	-	101.83	32.08	2.66	36.02	107	312	Peak
2412	95.73	-	-	97.01	32.08	2.66	36.02	107	312	Average
4824	44.08	-29.92	74	42.75	34.2	3.78	36.65	194	337	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	107.43	-	-	108.47	32.21	2.66	35.91	103	193	Peak
2437	102.59	-	-	103.63	32.21	2.66	35.91	103	193	Average
4874	49.3	-24.7	74	48.16	34.2	3.78	36.84	126	321	Peak
7312	47.86	-26.14	74	46.27	35.72	4.73	38.86	105	39	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	103.69	-	-	104.73	32.21	2.66	35.91	110	241	Peak
2437	98.94	-	-	99.98	32.21	2.66	35.91	110	241	Average
4874	44.44	-29.56	74	43.3	34.2	3.78	36.84	100	148	Peak
7312	46.29	-27.71	74	44.7	35.72	4.73	38.86	168	251	Peak



<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	109.09	-	-	110	32.27	2.67	35.85	100	325	Peak
2462	103.94	-	-	104.85	32.27	2.67	35.85	100	325	Average
4924	45.27	-28.73	74	44.32	34.2	3.78	37.03	133	256	Peak
7386	45.65	-28.35	74	44.31	35.76	4.77	39.19	108	253	Peak

<b>Test Mode :</b>	802.11b	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	106.53	-	-	107.44	32.27	2.67	35.85	107	237	Peak
2462	101.63	-	-	102.54	32.27	2.67	35.85	107	237	Average
4924	43.51	-30.49	74	42.56	34.2	3.78	37.03	113	214	Peak
7386	47.27	-26.73	74	45.93	35.76	4.77	39.19	100	86	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	108.78	-	-	110.06	32.08	2.66	36.02	100	326	Peak
2412	96.3	-	-	97.58	32.08	2.66	36.02	100	326	Average
4824	45.59	-28.41	74	44.26	34.2	3.78	36.65	106	27	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	98.23	-	-	99.51	32.08	2.66	36.02	196	318	Peak
2412	85.89	-	-	87.17	32.08	2.66	36.02	196	318	Average
4824	45.13	-28.87	74	43.8	34.2	3.78	36.65	113	352	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	107.1	-	-	108.14	32.21	2.66	35.91	100	332	Peak
2437	95.36	-	-	96.4	32.21	2.66	35.91	100	332	Average
4874	45.73	-28.27	74	44.59	34.2	3.78	36.84	129	301	Peak
7312	49.51	-24.49	74	47.92	35.72	4.73	38.86	108	0	Peak

<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	103.19	-	-	104.23	32.21	2.66	35.91	161	257	Peak
2437	92.68	-	-	93.72	32.21	2.66	35.91	161	257	Average
4874	43.8	-30.2	74	42.66	34.2	3.78	36.84	118	304	Peak
7312	48.64	-25.36	74	47.05	35.72	4.73	38.86	134	348	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
83.35	28.26	-11.74	40	50.87	9.43	0.6	32.64	-	-	Peak
95.96	29.87	-13.63	43.5	51.18	10.86	0.43	32.6	-	-	Peak
161.92	29.96	-13.54	43.5	50.44	11.25	0.82	32.55	-	-	Peak
246.31	30.83	-15.17	46	50.53	11.92	0.84	32.46	-	-	Peak
354.95	34.94	-11.06	46	51.24	15.15	0.9	32.35	-	-	Peak
711.91	40.85	-5.15	46	51.42	20.05	1.35	31.97	100	0	Peak
2462	109.52	-	-	110.43	32.27	2.67	35.85	100	324	Peak
2462	98.02	-	-	98.93	32.27	2.67	35.85	100	324	Average
4924	43.73	-30.27	74	42.78	34.2	3.78	37.03	100	258	Peak
7386	47.18	-26.82	74	45.84	35.76	4.77	39.19	102	53	Peak



<b>Test Mode :</b>	802.11g	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
71.71	29.72	-10.28	40	53.54	8.36	0.47	32.65	-	-	Peak
83.35	35.71	-4.29	40	58.32	9.43	0.6	32.64	200	0	Peak
95.96	29.23	-14.27	43.5	50.54	10.86	0.43	32.6	-	-	Peak
533.43	27.87	-18.13	46	40.46	18.3	1.27	32.16	-	-	Peak
711.91	34.96	-11.04	46	45.53	20.05	1.35	31.97	-	-	Peak
961.2	35.21	-18.79	54	43.67	21.53	1.72	31.71	-	-	Peak
2462	105.24	-	-	106.15	32.27	2.67	35.85	109	245	Peak
2462	93.39	-	-	94.3	32.27	2.67	35.85	109	245	Average
4924	43.65	-30.35	74	42.7	34.2	3.78	37.03	164	138	Peak
7386	47.26	-26.74	74	45.92	35.76	4.77	39.19	194	317	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	106.35	-	-	107.63	32.08	2.66	36.02	100	330	Peak
2412	94.87	-	-	96.15	32.08	2.66	36.02	100	330	Average
4824	44.39	-29.61	74	43.06	34.2	3.78	36.65	103	351	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2412	100.25	-	-	101.53	32.08	2.66	36.02	100	338	Peak
2412	87.93	-	-	89.21	32.08	2.66	36.02	100	338	Average
4824	43.9	-30.1	74	42.57	34.2	3.78	36.65	167	336	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	105.52	-	-	106.56	32.21	2.66	35.91	100	0	Peak
2437	94.24	-	-	95.28	32.21	2.66	35.91	100	0	Average
4874	44.84	-29.16	74	43.7	34.2	3.78	36.84	116	339	Peak
7312	46.03	-27.97	74	44.44	35.72	4.73	38.86	138	56	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2437	98.64	-	-	99.68	32.21	2.66	35.91	104	306	Peak
2437	87.24	-	-	88.28	32.21	2.66	35.91	104	306	Average
4874	44.07	-29.93	74	42.93	34.2	3.78	36.84	108	241	Peak
7312	46.28	-27.72	74	44.69	35.72	4.73	38.86	124	31	Peak



<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	107.27	-	-	108.18	32.27	2.67	35.85	100	196	Peak
2462	96.56	-	-	97.47	32.27	2.67	35.85	100	196	Average
4924	43.33	-30.67	74	42.38	34.2	3.78	37.03	113	58	Peak
7386	46.52	-27.48	74	45.18	35.76	4.77	39.19	108	247	Peak

<b>Test Mode :</b>	2.4GHz 802.11n HT20	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	40~42%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2462	103.15	-	-	104.06	32.27	2.67	35.85	109	234	Peak
2462	91.9	-	-	92.81	32.27	2.67	35.85	109	234	Average
4924	44.42	-29.58	74	43.47	34.2	3.78	37.03	159	342	Peak
7386	46.08	-27.92	74	44.74	35.76	4.77	39.19	107	62	Peak

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

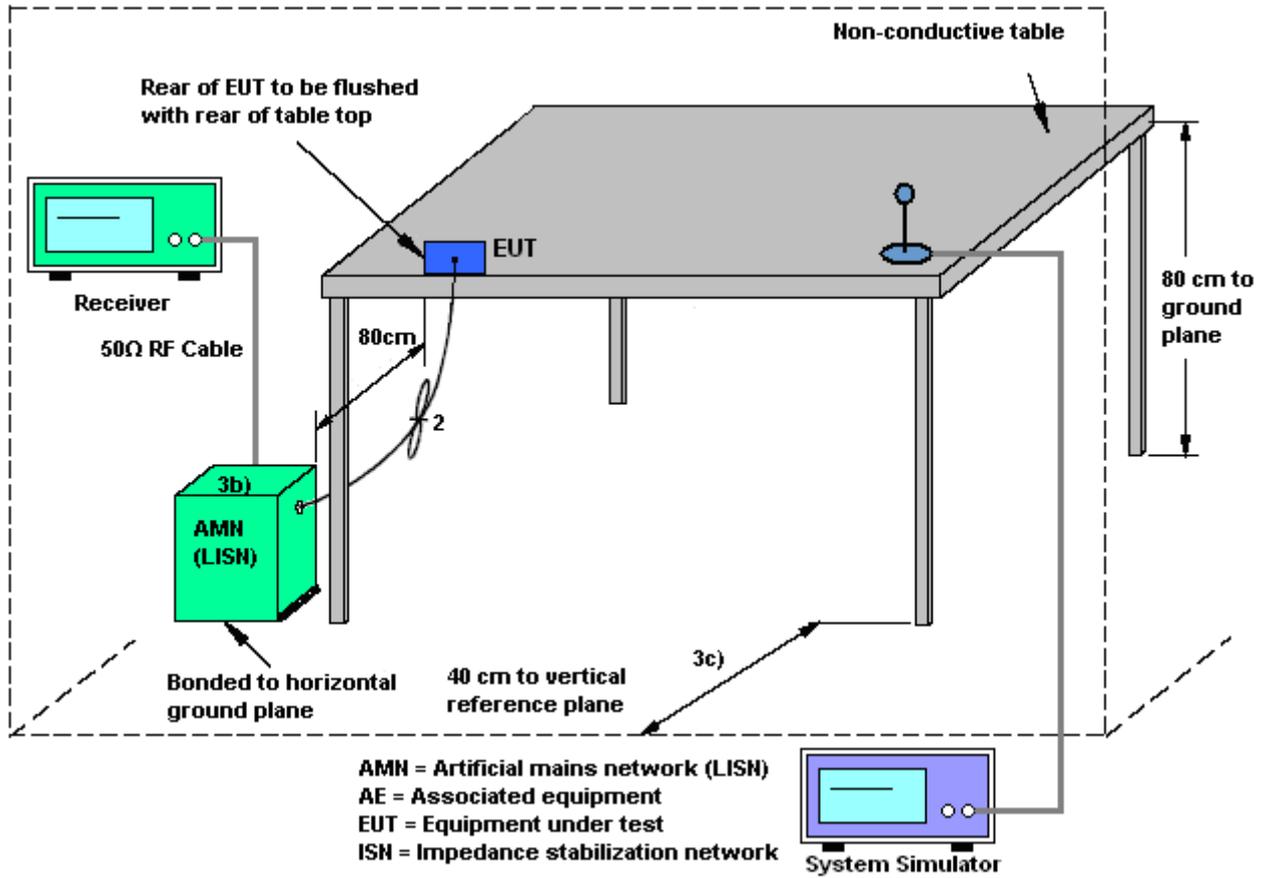



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligan Wang	Relative Humidity :	55~58%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + USB Cable (Charging from Adapter)		

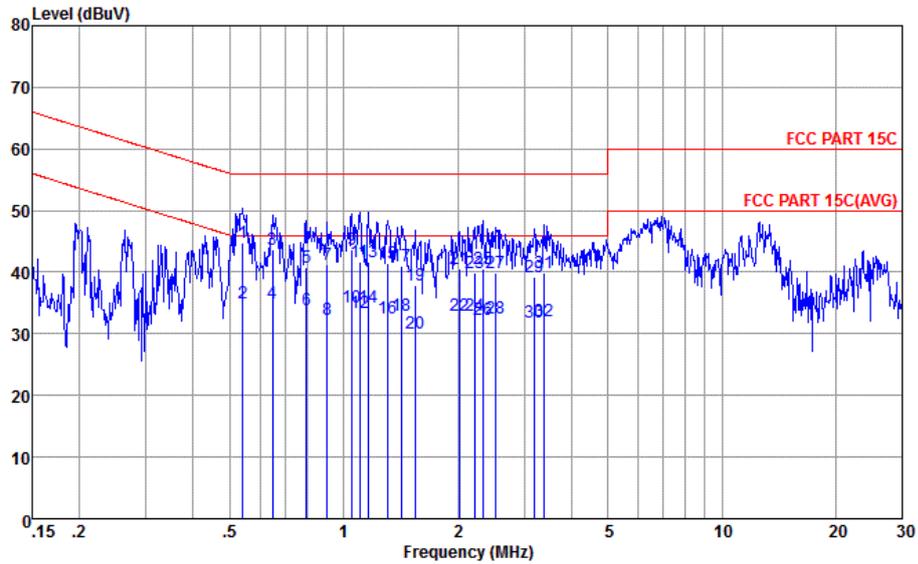


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L20140306 LINE  
 Project : (FR) 491004

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.54	44.76	-11.24	56.00	34.30	0.20	10.26	QP
2	0.54	35.06	-10.94	46.00	24.60	0.20	10.26	Average
3	0.65	43.62	-12.38	56.00	33.20	0.20	10.22	QP
4	0.65	35.02	-10.98	46.00	24.60	0.20	10.22	Average
5	0.80	40.87	-15.13	56.00	30.50	0.17	10.20	QP
6	0.80	33.87	-12.13	46.00	23.50	0.17	10.20	Average
7	0.90	41.21	-14.79	56.00	30.90	0.12	10.19	QP
8	0.90	32.41	-13.59	46.00	22.10	0.12	10.19	Average
9	1.05	43.68	-12.42	56.00	33.30	0.10	10.18	QP
10	1.05	34.38	-11.62	46.00	24.10	0.10	10.18	Average
11	1.10	41.68	-14.42	56.00	31.30	0.10	10.18	QP
12	1.10	33.38	-12.62	46.00	23.10	0.10	10.18	Average
13	1.16	41.68	-14.32	56.00	31.40	0.10	10.18	QP
14	1.16	34.38	-11.62	46.00	24.10	0.10	10.18	Average
15	1.30	41.48	-14.52	56.00	31.20	0.10	10.18	QP
16	1.30	32.58	-13.42	46.00	22.30	0.10	10.18	Average
17	1.42	41.08	-14.92	56.00	30.80	0.10	10.18	QP
18	1.42	32.88	-13.12	46.00	22.60	0.10	10.18	Average
19	1.55	37.89	-18.11	56.00	27.60	0.10	10.19	QP
20	1.55	30.19	-15.81	46.00	19.90	0.10	10.19	Average
21	2.02	40.59	-15.41	56.00	30.30	0.10	10.19	QP
22	2.02	32.89	-13.11	46.00	22.60	0.10	10.19	Average
23	2.21	39.90	-16.10	56.00	29.59	0.11	10.20	QP
24	2.21	32.90	-13.10	46.00	22.59	0.11	10.20	Average
25	2.33	40.61	-15.39	56.00	30.30	0.11	10.20	QP
26	2.33	32.21	-13.79	46.00	21.90	0.11	10.20	Average
27	2.53	39.92	-16.08	56.00	29.60	0.12	10.20	QP
28	2.53	32.62	-13.38	46.00	22.30	0.12	10.20	Average
29	3.19	39.28	-16.72	56.00	28.90	0.15	10.23	QP
30	3.19	31.88	-14.12	46.00	21.50	0.15	10.23	Average
31	3.40	40.00	-16.00	56.00	29.60	0.17	10.23	QP
32	3.40	32.00	-14.00	46.00	21.60	0.17	10.23	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligan Wang	Relative Humidity :	55~58%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN (2.4G) Link + USB Cable (Charging from Adapter)		

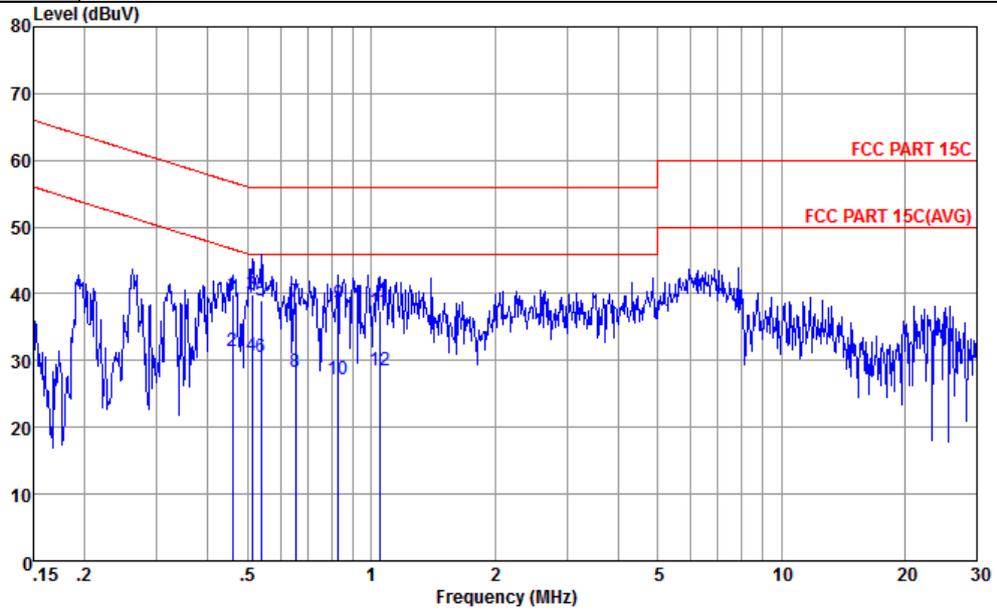

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.46	39.90	-16.81	56.71	29.30	0.33	10.27	QP
2	0.46	31.40	-15.31	46.71	20.80	0.33	10.27	Average
3	0.51	39.86	-16.14	56.00	29.31	0.29	10.26	QP
4	0.51	30.86	-15.14	46.00	20.31	0.29	10.26	Average
5	0.54	38.94	-17.06	56.00	28.40	0.28	10.26	QP
6	0.54	30.44	-15.56	46.00	19.90	0.28	10.26	Average
7	0.65	38.84	-17.16	56.00	28.40	0.22	10.22	QP
8	0.65	28.34	-17.66	46.00	17.90	0.22	10.22	Average
9	0.83	38.45	-17.55	56.00	28.11	0.15	10.19	QP
10	0.83	27.25	-18.75	46.00	16.91	0.15	10.19	Average
11	1.05	37.38	-18.62	56.00	27.10	0.10	10.18	QP
12	1.05	28.58	-17.42	46.00	18.30	0.10	10.18	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Oct. 10, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Oct. 10, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Oct. 10, 2014	Feb. 26, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Oct. 15, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Oct. 15, 2014	May 03, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 08, 2014	Oct. 15, 2014	Oct. 07, 2015	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Oct. 15, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Oct. 15, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Oct. 15, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Oct. 15, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Oct. 15, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Oct. 15, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 15, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 15, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 15, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Oct. 09, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Oct. 09, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Oct. 09, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Oct. 09, 2014	Nov. 11, 2014	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----