



**FCC PART 15C
TEST REPORT
No. I14N01011-WLAN**

For

ZTE Corporation

GSM (GPRS) Dual-Mode Digital Mobile Phone

Model Name: ZTE R259

Marketing Name: ZTE R259

With

Hardware Version: GMBG

Software Version: ZTE-EN-HQD-P153A50V0.0.1B02

FCC ID: SRQ-ZTER259

Issued Date: Sep 26th, 2014

Test Laboratory:

FCC 2.948 Listed: No.310359

IC O.A.T.S listed: No.6629C-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1.	TEST LABORATORY	7
1.1.	TESTING LOCATION	7
1.2.	TESTING ENVIRONMENT.....	7
1.3.	PROJECT DATA	7
1.4.	SIGNATURE.....	7
2.	CLIENT INFORMATION.....	8
2.1.	APPLICANT INFORMATION.....	8
2.2.	MANUFACTURER INFORMATION.....	8
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
3.1.	ABOUT EUT	9
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	9
4.	REFERENCE DOCUMENTS.....	10
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	10
4.2.	REFERENCE DOCUMENTS FOR TESTING.....	10
5.	LABORATORY ENVIRONMENT.....	11
6.	SUMMARY OF TEST RESULTS	12
6.1.	SUMMARY OF TEST RESULTS.....	12
6.2.	STATEMENTS.....	12
6.3.	TERMS USED IN THE RESULT TABLE	12
7.	TEST EQUIPMENTS UTILIZED	13
	ANNEX A: EUT PHOTOGRAPH	14
	ANNEX B: MEASUREMENT RESULTS.....	16
	B.0 ANTENNA REQUIREMENT	16
	B.1 MAXIMUM AVERAGE OUTPUT POWER	17
	B.2 PEAK POWER SPECTRAL DENSITY	18
	B.3 OCCUPIED 6DB BANDWIDTH	19
	B.4 BAND EDGES COMPLIANCE	20
	B.5 TRANSMITTER SPURIOUS EMISSION.....	21
	B.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	21
	B.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	23
	B.6 AC POWERLINE CONDUCTED EMISSION.....	32
	ANNEX C: TEST FIGURE LIST	33
FIG. 1	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,1MBPS)	33
FIG. 2	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,1MBPS)	33
FIG. 3	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,1MBPS).....	34

FIG. 4	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,2MBPS)	34
FIG. 5	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,2MBPS)	35
FIG. 6	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,2MBPS).....	35
FIG. 7	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,5.5MBPS)	36
FIG. 8	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,5.5MBPS)	36
FIG. 9	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,5.5MBPS).....	37
FIG. 10	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,11MBPS).....	37
FIG. 11	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,11MBPS).....	38
FIG. 12	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,11MBPS).....	38
FIG. 13	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,6MBPS).....	39
FIG. 14	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,6MBPS).....	39
FIG. 15	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,6MBPS).....	40
FIG. 16	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,9MBPS).....	40
FIG. 17	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,9MBPS).....	41
FIG. 18	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,9MBPS).....	41
FIG. 19	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,12MBPS).....	42
FIG. 20	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,12MBPS).....	42
FIG. 21	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,12MBPS).....	43
FIG. 22	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,18MBPS).....	43
FIG. 23	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,18MBPS).....	44
FIG. 24	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,18MBPS).....	44
FIG. 25	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,24MBPS).....	45
FIG. 26	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,24MBPS).....	45
FIG. 27	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,24MBPS).....	46
FIG. 28	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,36MBPS).....	46
FIG. 29	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,36MBPS).....	47
FIG. 30	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,36MBPS).....	47
FIG. 31	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,48MBPS).....	48
FIG. 32	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,48MBPS).....	48
FIG. 33	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,48MBPS).....	49
FIG. 34	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,54MBPS).....	49
FIG. 35	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,54MBPS).....	50
FIG. 36	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,54MBPS).....	50
FIG. 37	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS0)	51
FIG. 38	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS0)	51
FIG. 39	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS0).....	52
FIG. 40	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS1)	52
FIG. 41	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS1)	53
FIG. 42	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS1).....	53
FIG. 43	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS2)	54
FIG. 44	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS2)).....	54
FIG. 45	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS2).....	55
FIG. 46	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS3)	55
FIG. 47	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS3)	56

FIG. 48	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS3).....	56
FIG. 49	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS4)	57
FIG. 50	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS4)	57
FIG. 51	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS4).....	58
FIG. 52	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS5)	58
FIG. 53	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS5)	59
FIG. 54	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS5).....	59
FIG. 55	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS6)	60
FIG. 56	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS6)	60
FIG. 57	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS6).....	61
FIG. 58	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS7)	61
FIG. 59	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS7)	62
FIG. 60	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS7).....	62
FIG. 61	POWER SPECTRAL DENSITY (802.11B, CH 1).....	63
FIG. 62	POWER SPECTRAL DENSITY (802.11B, CH 6).....	63
FIG. 63	POWER SPECTRAL DENSITY (802.11B, CH 11).....	64
FIG. 64	POWER SPECTRAL DENSITY (802.11G, CH 1).....	64
FIG. 65	POWER SPECTRAL DENSITY (802.11G, CH 6).....	65
FIG. 66	POWER SPECTRAL DENSITY (802.11G, CH 11).....	65
FIG. 67	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1).....	66
FIG. 68	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6).....	66
FIG. 69	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11).....	67
FIG. 70	OCCUPIED 6dB BANDWIDTH (802.11B, CH 1).....	67
FIG. 71	OCCUPIED 6dB BANDWIDTH (802.11B, CH 6).....	68
FIG. 72	OCCUPIED 6dB BANDWIDTH (802.11B, CH 11).....	68
FIG. 73	OCCUPIED 6dB BANDWIDTH (802.11G, CH 1).....	69
FIG. 74	OCCUPIED 6dB BANDWIDTH (802.11G, CH 6).....	69
FIG. 75	OCCUPIED 6dB BANDWIDTH (802.11G, CH 11).....	70
FIG. 76	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHZ, CH 1).....	70
FIG. 77	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHZ, CH 6).....	71
FIG. 78	OCCUPIED 6dB BANDWIDTH (802.11N-20MHZ, CH 11).....	71
FIG. 79	BAND EDGES (802.11B, CH 1).....	72
FIG. 80	BAND EDGES (802.11B, CH 11).....	72
FIG. 81	BAND EDGES (802.11G, CH 1).....	73
FIG. 82	BAND EDGES (802.11G, CH 11).....	73
FIG. 83	BAND EDGES (802.11 N-20MHZ, CH 1).....	74
FIG. 84	BAND EDGES (802.11 N-20MHZ, CH 11).....	74
FIG. 85	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	75
FIG. 86	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-3 GHZ).....	75
FIG. 87	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 3 GHZ-18 GHZ).....	76
FIG. 88	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	76
FIG. 89	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-3 GHZ).....	77
FIG. 90	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 3 GHZ-18 GHZ).....	77
FIG. 91	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	78

FIG. 92	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-3 GHz).....	78
FIG. 93	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz).....	79
FIG. 94	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	79
FIG. 95	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-3 GHz).....	80
FIG. 96	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz).....	80
FIG. 97	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	81
FIG. 98	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-3 GHz).....	81
FIG. 99	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz).....	82
FIG. 100	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY).....	82
FIG. 101	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-3 GHz)	83
FIG. 102	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz).....	83
FIG. 103	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, CENTER FREQUENCY)	84
FIG. 104	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 30 MHz-3 GHz).....	84
FIG. 105	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 3 GHz-18 GHz)	85
FIG. 106	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, CENTER FREQUENCY)	85
FIG. 107	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 30 MHz-3 GHz).....	86
FIG. 108	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 3 GHz-18 GHz)	86
FIG. 109	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, CENTER FREQUENCY)	87
FIG. 110	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 30 MHz-3 GHz).....	87
FIG. 111	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 3 GHz-18 GHz).....	88
FIG. 112	CONDUCTED SPURIOUS EMISSION (ALL CHANNELS, 18 GHz-26 GHz).....	88
FIG. 113	RADIATED SPURIOUS EMISSION (802.11B, CH1, 30MHz-1 GHz)	89
FIG. 114	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-18 GHz)	89
FIG. 115	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz)	90
FIG. 116	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-18 GHz)	91
FIG. 117	RADIATED SPURIOUS EMISSION (802.11B, CH11, 30MHz-1 GHz).....	91
FIG. 118	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-18 GHz)	92
FIG. 119	RADIATED EMISSION POWER (802.11B, CH1, 2380GHz~2450GHz)	92
FIG. 120	RADIATED EMISSION POWER (802.11B, CH11, 2450GHz~2500GHz).....	92
FIG. 121	RADIATED SPURIOUS EMISSION (802.11G, CH1,30MHz-1 GHz)	93
FIG. 122	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-18 GHz)	93
FIG. 123	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30MHz-1 GHz).....	94
FIG. 124	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-18 GHz)	94
FIG. 125	RADIATED SPURIOUS EMISSION (802.11G, CH11, 30MHz-1 GHz).....	95
FIG. 126	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-18 GHz).....	95
FIG. 127	RADIATED EMISSION POWER (802.11G, CH1, 2380GHz~2450GHz).....	96
FIG. 128	RADIATED EMISSION POWER (802.11G, CH11, 2450GHz~2500GHz).....	96
FIG. 129	RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 30MHz-1 GHz)	97
FIG. 130	RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 1 GHz-18 GHz)	97
FIG. 131	RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 30MHz-1 GHz)	98
FIG. 132	RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 1 GHz-18 GHz)	98
FIG. 133	RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 30MHz-1 GHz).....	99
FIG. 134	RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 1 GHz-18 GHz)	99
FIG. 135	RADIATED EMISSION POWER (802.11N-20M, CH1, 2380GHz~2450GHz)	100

FIG. 136	RADIATED EMISSION POWER (802.11N-20M, CH11, 2450GHZ~2500GHZ).....	100
FIG. 137	RADIATED EMISSION: 18 GHZ - 26 GHZ.....	101
FIG. 138	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE2)	102
FIG. 139	AC POWERLINE CONDUCTED EMISSION (IDLE, AE2)	103

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Shenzhen, Telecommunication Metrology Center of MIIT
Address: No. 12 Building, Shangsha Innovation and Technology Park, Futian District, Shenzhen, P. R. China
Postal Code: 518048
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001

1.2. Testing Environment

Normal Temperature: 15°C-30°C
Extreme Temperature: -20°C/+55°C
Relative Humidity: 30%-60%


1.3. Project data

Project Leader: Zhang Bojun
Test Engineer: Tang Weisheng
Testing Start Date: Aug 29th, 2014
Testing End Date: Sep 25th, 2014

1.4. Signature



Tang Weisheng
(Prepared this test report)



Zhang Bojun
(Reviewed this test report)



Lu Minniu
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE Corporation
Address /Post: ZTE R&D Center(Nanjing), No.6 Huasheng Avenue, Yuhua District,
Nanjing, China
City: Nanjing
Country: China
E-mail: huang.yiqing@zte.com.cn
Telephone: +86 13770556735
Fax: /

2.2. Manufacturer Information

Company Name: ZTE Corporation
Address /Post: ZTE R&D Center(Nanjing), No.6 Huasheng Avenue, Yuhua District,
Nanjing, China
City: Nanjing
Country: China
E-mail: huang.yiqing@zte.com.cn
Telephone: +86 13770556735
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM (GPRS) Dual-Mode Digital Mobile Phone
Model Name	ZTE R259
Market Name	ZTE R259
RF Protocol	IEEE 802.11b/g/n20
Operating Frequency	2412MHz~2462MHz
FCC ID	SRQ-ZTER259#

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	GMBG	ZTE-EN-HQD-P153A50V0.0.1B02

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Charger	STC-A22O50I400M5-C	/

*AE ID: is used to identify the test accessory in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2013 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	Jun, 2014

5. Laboratory Environment

Half-anechoic chamber (11.20 meters×6.10 meters×5.60 meters) did not exceed following limits:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω
Normalized Site Attenuation (NSA)	< ±3.5dB, with 3m of Measuring distance, 30MHz 1000MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber (11.20 meters×6.10 meters×6.60 meters) did not exceed following limits:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 30MHz to 18 000 MHz

Conduction Lab did not exceed following limits:

Temperature	Min.=15 °C, Max.=30 °C
Relative humidity	Min.=30 %, Max.= 60 %
Shielding effectiveness	> 80 dB
Electrical insulation	> 2M Ω
Ground system resistance	< 0.5 Ω

6. Summary of Test Results

6.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	Occupied 6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Transmitter Spurious Emission - Conducted	15.247 (d)	P
6	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P
7	AC Powerline Conducted Emission	15.107, 15.207	P

6.2. Statements

TMC has evaluated the test cases requested by the applicant/manufacture as listed in section 6.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

6.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropical radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2015-04-22	1 year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Chamber	FACT5-2.0	4166	ETS-Lindgren	2016-05-29	3 years
2	Test Receiver	ESCI	100701	Rohde & Schwarz	2015-07-30	1 year
3	Spectrum Analyzer	FSP40	100378	Rohde & Schwarz	2014-12-20	1 year
4	BiLog Antenna	VULB9163	9163-329	Schwarzbeck	2017-01-20	3 years
5	Test Receiver	ESCI	100702	Rohde & Schwarz	2015-07-30	1 year
6	LISN	ESH2-Z5	100196	Rohde & Schwarz	2015-01-14	1 year
7	Signal Generator	SMR40	100541	Rohde & Schwarz	2014-12-26	1 year
8	Dual-Ridge Waveguide Horn Antenna	3117	00066577	ETS-Lindgren	2016-04-01	3 years
9	Loop Antenna	HLA6120	35779	TESEQ	2016-02-25	3 years
10	EMI Antenna	3160-09	00118383	ETS-Lindgren	2015-09-05	3 years

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

ANNEX A: EUT photograph



Pic A-1 Mobile phone



Pic A-2 Mobile phone



Pic A-3 Charger



Pic A-4 Charger

ANNEX B: MEASUREMENT RESULTS

B.0 Antenna requirement

Measurement Limit:

Standard	Requirement
<p>FCC CRF Part 15.203</p>	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>

**Conclusion: The Directional gains of antenna used for transmitting is 1.72 dBi.
The RF transmitter uses an integrate antenna without connector.**

B.1 Maximum Average Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1)	< 30

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11b	1	Fig.1	11.63	Fig.2	12.24	Fig.3	12.92
	2	Fig.4	11.55	Fig.5	12.23	Fig.6	12.91
	5.5	Fig.7	11.51	Fig.8	12.30	Fig.9	12.88
	11	Fig.10	11.45	Fig.11	12.47	Fig.12	13.01
802.11g	6	Fig.13	10.83	Fig.14	12.01	Fig.15	12.68
	9	Fig.16	10.83	Fig.17	12.00	Fig.18	12.66
	12	Fig.19	10.81	Fig.20	11.94	Fig.21	12.75
	18	Fig.22	10.82	Fig.23	11.99	Fig.24	12.93
	24	Fig.25	10.72	Fig.26	11.90	Fig.27	12.62
	36	Fig.28	10.71	Fig.29	11.78	Fig.30	12.61
	48	Fig.31	10.75	Fig.32	11.92	Fig.33	12.87
54	Fig.34	10.72	Fig.35	12.05	Fig.36	12.94	

802.11n mode

Mode	Data Rate (MCS Index)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11n (20MHz)	MCS0	Fig.37	11.54	Fig.38	12.72	Fig.39	13.48
	MCS1	Fig.40	11.45	Fig.41	12.63	Fig.42	13.43
	MCS2	Fig.43	11.55	Fig.44	12.71	Fig.45	13.53
	MCS3	Fig.46	11.52	Fig.47	12.69	Fig.48	13.53
	MCS4	Fig.49	11.50	Fig.50	12.65	Fig.51	13.50
	MCS5	Fig.52	11.49	Fig.53	12.64	Fig.54	13.50
	MCS6	Fig.55	11.71	Fig.56	12.86	Fig.57	13.71
	MCS7	Fig.58	11.67	Fig.59	12.81	Fig.60	13.67

See ANNEX C for test graphs.

Conclusion: Pass

B.2 Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Peak Power Spectral Density (dBm)		Conclusion
802.11b	1	Fig.61	-15.29	P
	6	Fig.62	-14.42	P
	11	Fig.63	-13.82	P
802.11g	1	Fig.64	-15.81	P
	6	Fig.65	-15.26	P
	11	Fig.66	-14.27	P

802.11n mode

Mode	Channel	Peak Power Spectral Density(dBm)		Conclusion
802.11n (20MHz)	1	Fig.67	-14.75	P
	6	Fig.68	-14.48	P
	11	Fig.69	-13.08	P

See ANNEX C for test graphs.

Conclusion: Pass

B.3 Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results (kHz)		conclusion
802.11b	1	Fig.70	9161	P
	6	Fig.71	9161	P
	11	Fig.72	9161	P
802.11g	1	Fig.73	16628	P
	6	Fig.74	16672	P
	11	Fig.75	16672	P

802.11n mode

Mode	Channel	Test Results (kHz)		conclusion
802.11n (20MHz)	1	Fig.76	17843	P
	6	Fig.77	17844	P
	11	Fig.78	17844	P

See ANNEX C for test graphs.

Conclusion: Pass

B.4 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.79	P
	11	Fig.80	P
802.11g	1	Fig.81	P
	11	Fig.82	P

802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.83	P
	11	Fig.84	P

See ANNEX C for test graphs.

Conclusion: Pass

B.5 Transmitter Spurious Emission

B.5.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.85	P
		30 MHz-3 GHz	Fig.86	P
		3GHz-18GHz	Fig.87	P
	6	2.437 GHz	Fig.88	P
		30 MHz-3 GHz	Fig.89	P
		3GHz-18GHz	Fig.90	P
	11	2.462 GHz	Fig.91	P
		30 MHz-3 GHz	Fig.92	P
		3GHz-18GHz	Fig.93	P
802.11g	1	2.412 GHz	Fig.94	P
		30 MHz-3 GHz	Fig.95	P
		3GHz-18GHz	Fig.96	P
	6	2.437 GHz	Fig.97	P
		30 MHz-3 GHz	Fig.98	P
		3GHz-18GHz	Fig.99	P
	11	2.462 GHz	Fig.100	P
		30 MHz-3 GHz	Fig.101	P
		3GHz-18GHz	Fig.102	P

802.11n mode

802.11n (20MHz)	1	2.412 GHz	Fig.103	P
		30 MHz-3 GHz	Fig.104	P
		3GHz-18GHz	Fig.105	P
	6	2.437 GHz	Fig.106	P
		30 MHz-3 GHz	Fig.107	P
		3GHz-18GHz	Fig.108	P
	11	2.462 GHz	Fig.109	P
		30 MHz-3 GHz	Fig.110	P
		3GHz-18GHz	Fig.111	P
/	All channels	18GHz-26GHz	Fig.112	P

See ANNEX C for test graphs.

Conclusion: Pass

B.5.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	30 MHz ~1 GHz	Fig.113	P
		1 GHz ~ 18 GHz	Fig.114	P
	6	30 MHz ~1 GHz	Fig.115	P
		1 GHz ~ 18 GHz	Fig.116	P
	11	30 MHz ~1 GHz	Fig.117	P
		1 GHz ~ 18 GHz	Fig.118	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.119	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.120	P
802.11g	1	30 MHz ~1 GHz	Fig.121	P
		1 GHz ~ 18 GHz	Fig.122	P
	6	30 MHz ~1 GHz	Fig.123	P
		1 GHz ~ 18 GHz	Fig.124	P
	11	30 MHz ~1 GHz	Fig.125	P
		1 GHz ~ 18 GHz	Fig.126	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.127	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.128	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	1	30 MHz ~1 GHz	Fig.129	P
		1 GHz ~ 18 GHz	Fig.130	P
	6	30 MHz ~1 GHz	Fig.131	P
		1 GHz ~ 18 GHz	Fig.132	P
	11	30 MHz ~1 GHz	Fig.133	P
		1 GHz ~ 18 GHz	Fig.134	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.135	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.136	P
/	All channels	18 GHz~ 26.5 GHz	Fig.137	P

802.11b CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14008.000	57.5	H	12.0	16.5	74.0
14603.000	57.3	H	12.7	16.7	74.0
15783.000	59.1	V	14.2	14.9	74.0
16240.000	60.6	V	14.5	13.4	74.0
16850.000	60.7	H	15.6	13.3	74.0
17384.000	59.9	H	15.5	14.1	74.0

Frequency (MHz)	Average (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14187.000	45.0	V	12.6	9.0	54.0
15182.000	45.6	V	13.1	8.4	54.0
15678.000	47.7	V	13.8	6.3	54.0
16192.000	48.2	V	14.4	5.8	54.0
16789.000	48.9	V	15.3	5.1	54.0
17278.000	48.4	V	15.4	5.6	54.0

802.11b CH 6(1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14400.000	57.1	V	13.4	16.9	74.0
14627.000	58.0	H	12.7	16.0	74.0
15605.000	59.3	V	13.6	14.7	74.0
16227.000	59.6	V	14.4	14.4	74.0
16732.000	60.7	V	15.0	13.3	74.0
17310.000	60.6	H	15.4	13.4	74.0

Frequency (MHz)	Average (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14548.000	45.0	V	12.6	9.0	54.0
15182.000	45.8	V	13.1	8.2	54.0
15690.000	47.6	H	13.9	6.4	54.0
16197.000	48.1	V	14.4	5.9	54.0
16826.000	48.8	V	15.5	5.2	54.0
17371.000	48.4	V	15.5	5.6	54.0

802.11b CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14185.000	57.5	V	12.6	16.5	74.0
15064.000	58.2	V	13.2	15.8	74.0
15758.000	59.8	V	14.1	14.2	74.0
16254.000	59.7	H	14.6	14.3	74.0
16705.000	60.2	H	14.8	13.8	74.0
17658.000	60.2	H	15.7	13.8	74.0

Frequency (MHz)	Average (dBμV/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
14500.000	45.1	V	12.8	8.9	54.0
15144.000	45.8	V	12.9	8.2	54.0
15776.000	47.5	V	14.2	6.5	54.0
16204.000	47.8	V	14.4	6.2	54.0
16790.000	48.5	V	15.3	5.5	54.0
17316.000	48.2	V	15.4	5.8	54.0

802.11g CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14516.000	57.0	H	12.7	17.0	74.0
14878.000	57.6	V	13.6	16.4	74.0
15788.000	59.4	V	14.2	14.6	74.0
16226.000	60.0	V	14.4	14.0	74.0
16754.000	60.9	V	15.1	13.1	74.0
17845.000	60.5	V	15.8	13.5	74.0

Frequency (MHz)	Average (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14530.000	45.1	V	12.6	8.9	54.0
15175.000	45.7	V	13.1	8.3	54.0
15744.000	47.7	V	14.0	6.3	54.0
16205.000	48.2	V	14.4	5.8	54.0
16780.000	48.8	V	15.2	5.2	54.0
17274.000	48.6	V	15.4	5.4	54.0

802.11g CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14462.000	56.9	V	13.0	17.1	74.0
15005.000	57.9	V	13.6	16.1	74.0
15834.000	59.4	H	14.4	14.6	74.0
16317.000	59.5	H	15.0	14.5	74.0
16698.000	60.1	V	14.9	13.9	74.0
17257.000	60.2	H	15.3	13.8	74.0

Frequency (MHz)	Average (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14486.000	45.1	V	12.9	8.9	54.0
15077.000	45.6	V	13.1	8.4	54.0
15747.000	47.4	V	14.0	6.6	54.0
16333.000	47.6	V	15.1	6.4	54.0
16821.000	48.4	V	15.5	5.6	54.0
17319.000	48.0	V	15.4	6.0	54.0

802.11g CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14452.000	56.8	V	13.1	17.2	74.0
14999.000	57.8	H	13.6	16.2	74.0
15793.000	59.1	V	14.2	14.9	74.0
16365.000	59.7	V	15.2	14.3	74.0
16824.000	59.7	V	15.5	14.3	74.0
17424.000	60.4	V	15.6	13.6	74.0

Frequency (MHz)	Average (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14396.000	45.0	V	13.4	9.0	54.0
15048.000	45.6	V	13.3	8.4	54.0
15777.000	47.2	V	14.2	6.8	54.0
16227.000	47.4	V	14.4	6.6	54.0
16827.000	48.2	V	15.5	5.8	54.0
17329.000	47.7	V	15.5	6.3	54.0

802.11n-20MHz CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14229.000	57.0	V	12.8	17.0	74.0
14988.000	58.2	V	13.7	15.8	74.0
15781.000	58.7	H	14.2	15.3	74.0
16375.000	60.0	V	15.3	14.0	74.0
16751.000	60.4	V	15.1	13.6	74.0
17792.000	60.2	V	15.7	13.8	74.0

Frequency (MHz)	Average (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14219.000	44.9	V	12.8	9.1	54.0
15185.000	45.4	H	13.1	8.6	54.0
15770.000	47.3	V	14.1	6.7	54.0
16197.000	47.7	H	14.4	6.3	54.0
16775.000	48.7	V	15.2	5.3	54.0
17313.000	48.2	H	15.4	5.8	54.0

802.11n-20MHz CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14033.000	57.0	H	12.0	17.0	74.0
15049.000	57.2	H	13.3	16.8	74.0
15782.000	59.3	V	14.2	14.7	74.0
16332.000	59.8	V	15.0	14.2	74.0
16824.000	60.7	H	15.5	13.3	74.0
17422.000	60.2	V	15.6	13.8	74.0

Frequency (MHz)	Average (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14526.000	45.0	V	12.7	9.0	54.0
15175.000	45.5	H	13.1	8.5	54.0
15685.000	47.3	V	13.9	6.7	54.0
16225.000	47.7	H	14.4	6.3	54.0
16821.000	48.6	H	15.5	5.4	54.0
17364.000	48.3	H	15.5	5.7	54.0

802.11n-20MHz CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14553.000	56.9	H	12.6	17.1	74.0
15074.000	57.3	V	13.1	16.7	74.0
15764.000	58.9	H	14.1	15.1	74.0
16227.000	59.5	V	14.4	14.5	74.0
16861.000	60.5	H	15.7	13.5	74.0
17471.000	59.9	H	15.6	14.1	74.0

Frequency (MHz)	Average (dB μ V/m)	Polarization	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
14551.000	44.7	V	12.6	9.3	54.0
15050.000	45.4	V	13.3	8.6	54.0
15781.000	47.2	H	14.2	6.8	54.0
16324.000	47.4	H	15.0	6.6	54.0
16829.000	48.2	H	15.5	5.8	54.0
17270.000	48.0	H	15.4	6.0	54.0

See ANNEX C for test graphs.

Conclusion: Pass

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result= $P_{Mea}+A_{Rpl}= P_{Mea}+Cable Loss+Antenna Factor$

B.6 AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	66 to 56	Fig.138	Fig.139	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		Traffic	Idle	
0.15 to 0.5	56 to 46	Fig.138	Fig.139	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

See ANNEX C for test graphs.

Conclusion: Pass

ANNEX C: TEST FIGURE LIST

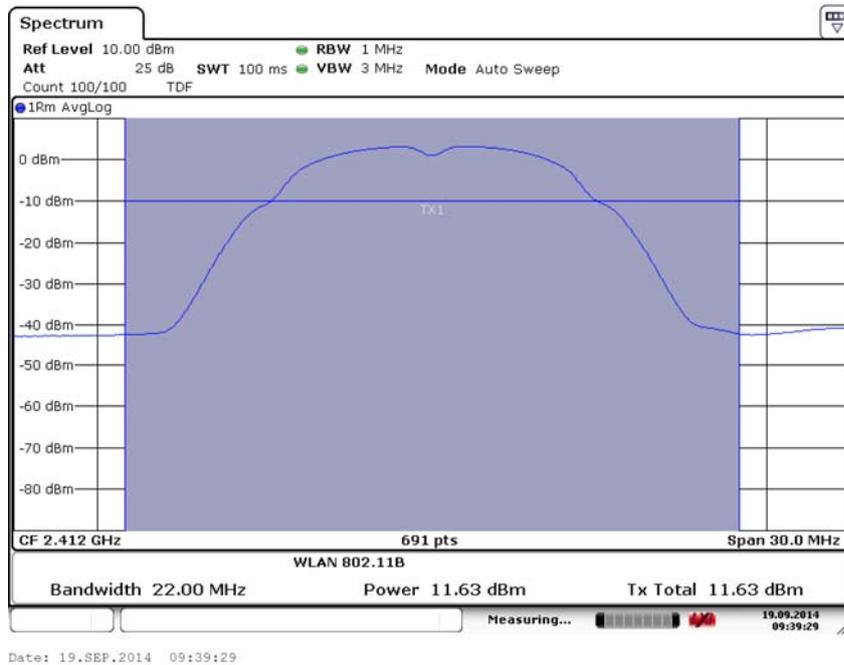


Fig. 1 Maximum Average Output Power (802.11b, Ch 1,1Mbps)

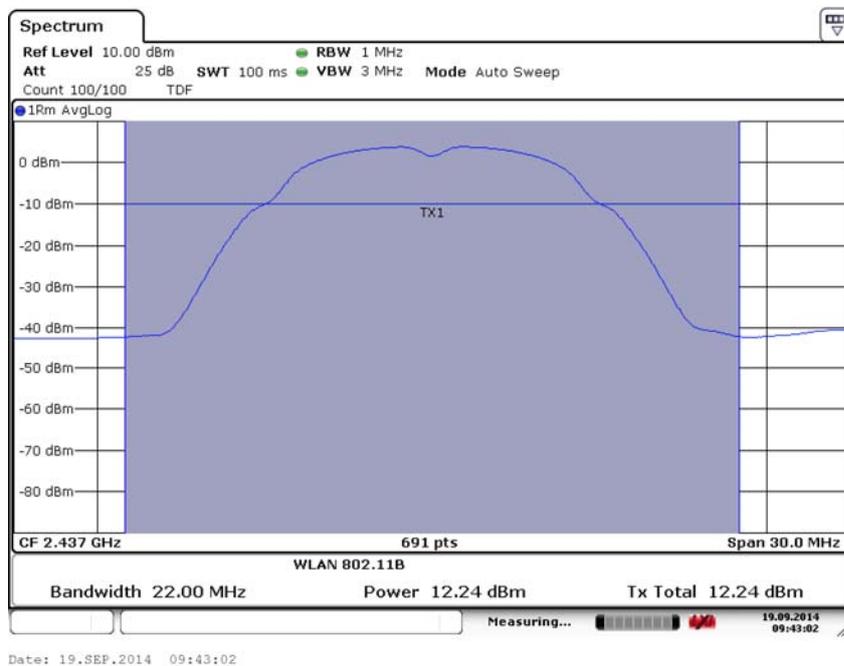


Fig. 2 Maximum Average Output Power (802.11b, Ch 6,1Mbps)

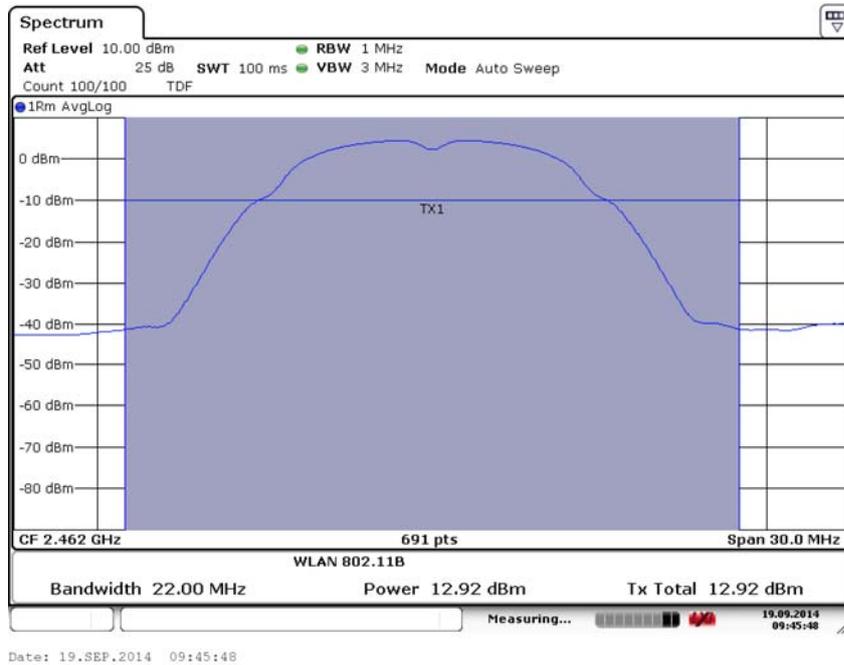


Fig. 3 Maximum Average Output Power (802.11b, Ch 11,1Mbps)

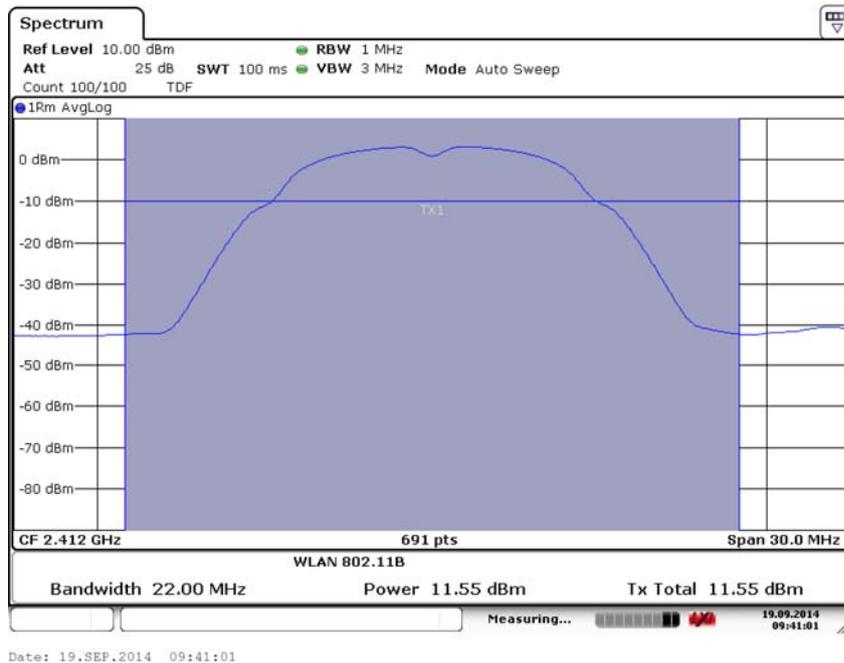


Fig. 4 Maximum Average Output Power (802.11b, Ch 1,2Mbps)

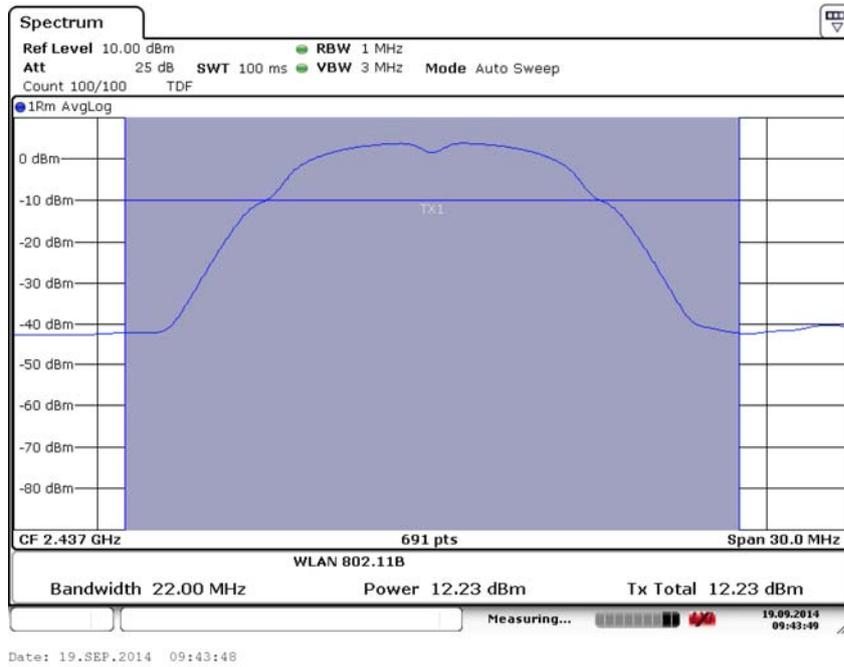


Fig. 5 Maximum Average Output Power (802.11b, Ch 6,2Mbps)

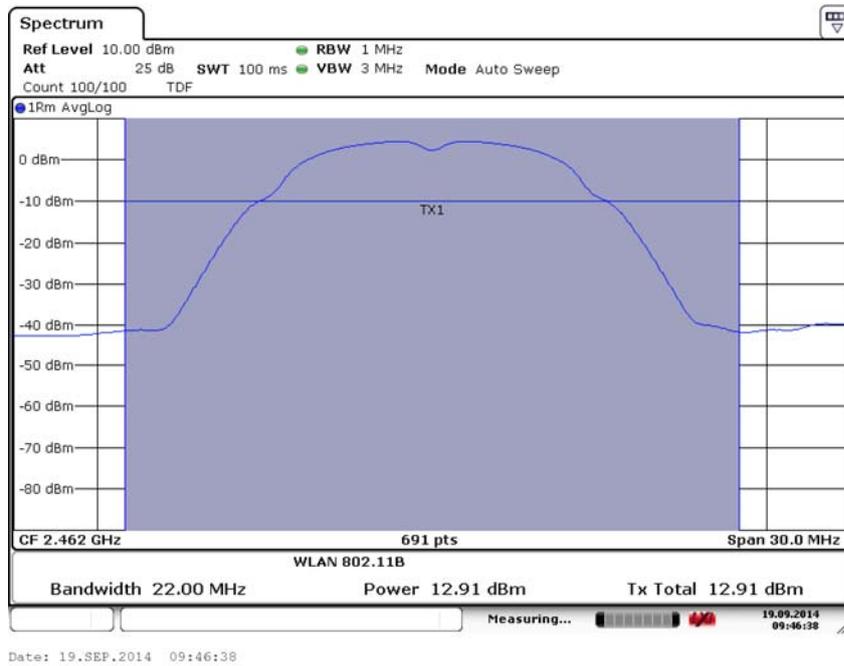


Fig. 6 Maximum Average Output Power (802.11b, Ch 11,2Mbps)

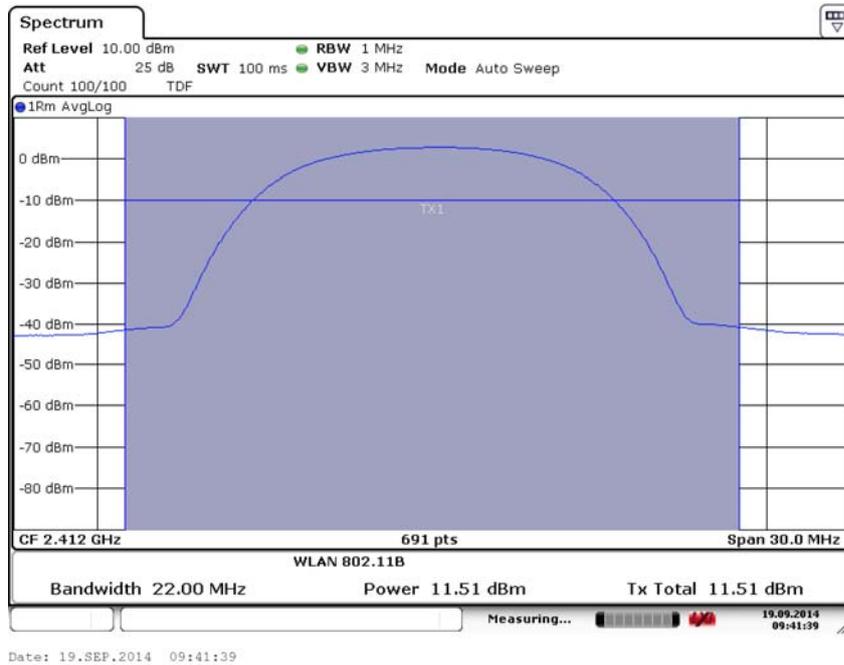


Fig. 7 Maximum Average Output Power (802.11b, Ch 1,5Mbps)

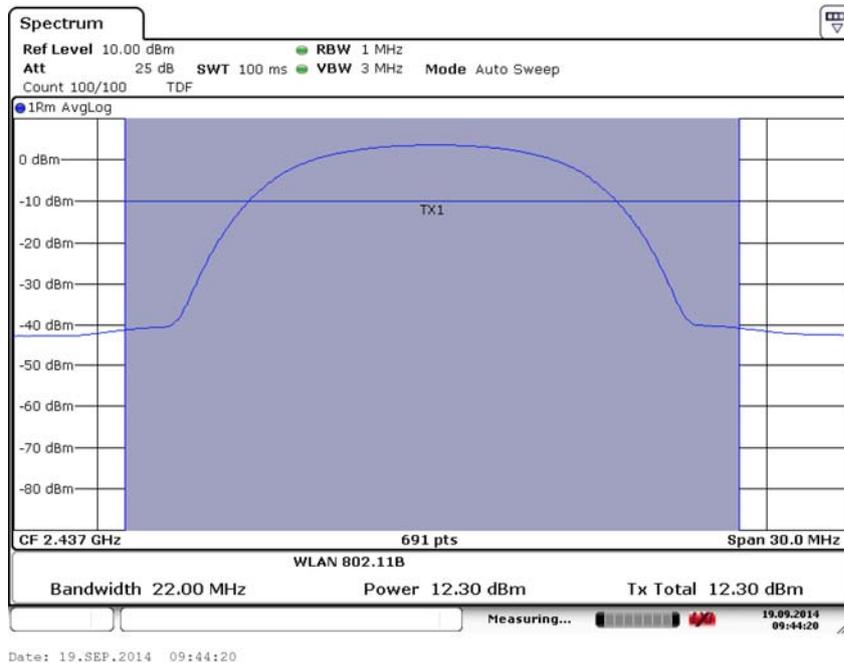


Fig. 8 Maximum Average Output Power (802.11b, Ch 6,5Mbps)

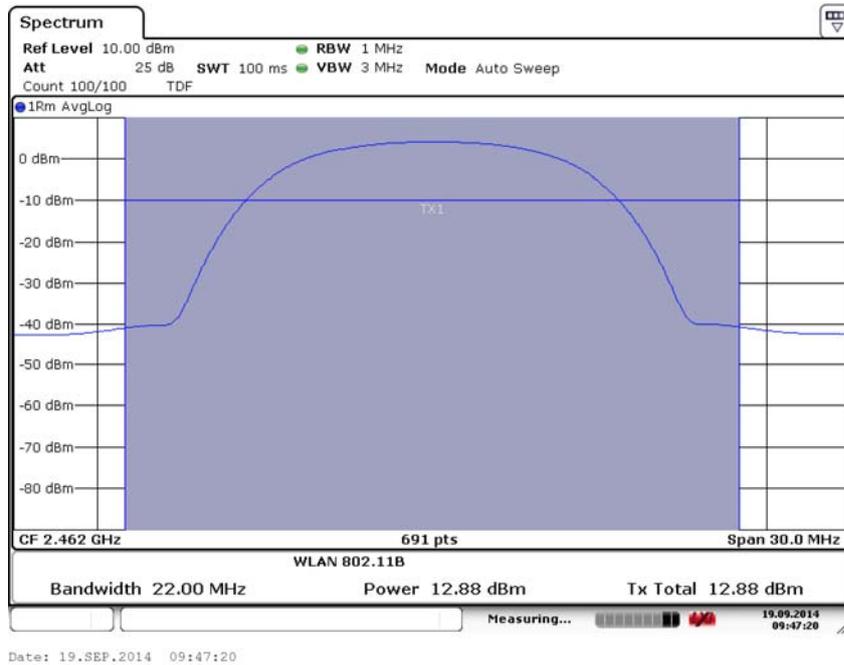


Fig. 9 Maximum Average Output Power (802.11b, Ch 11,5.5Mbps)

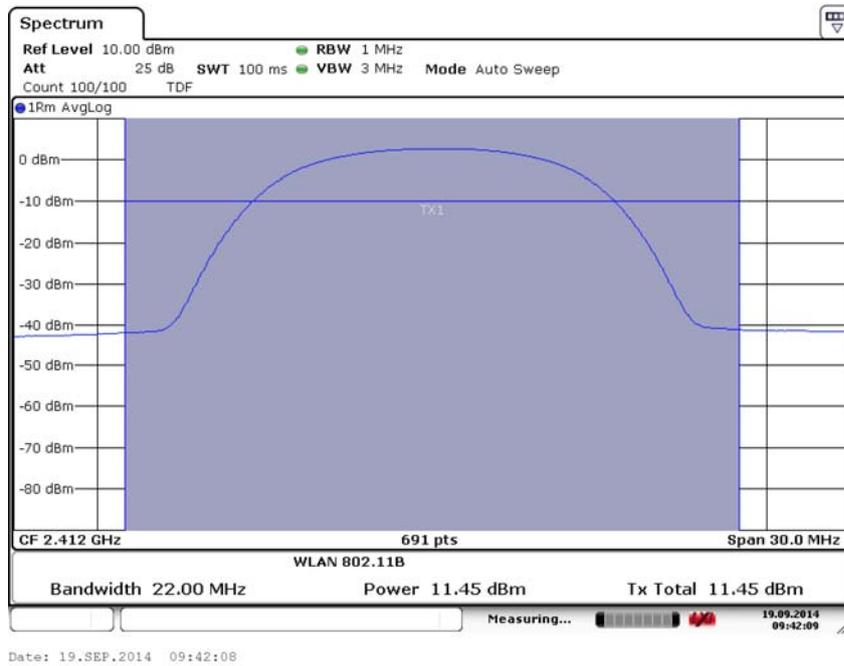


Fig. 10 Maximum Average Output Power (802.11b, Ch 1,11Mbps)

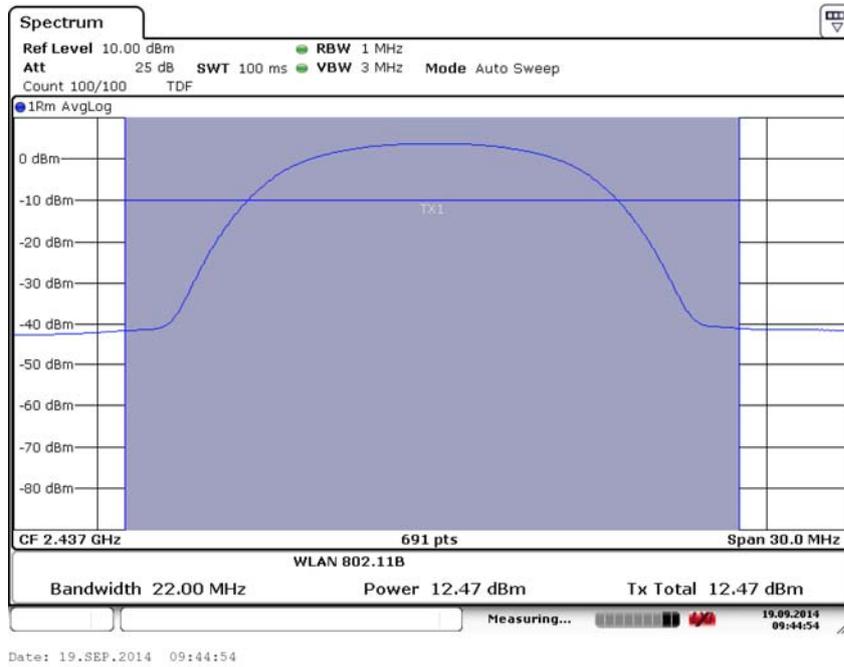


Fig. 11 Maximum Average Output Power (802.11b, Ch 6,11Mbps)

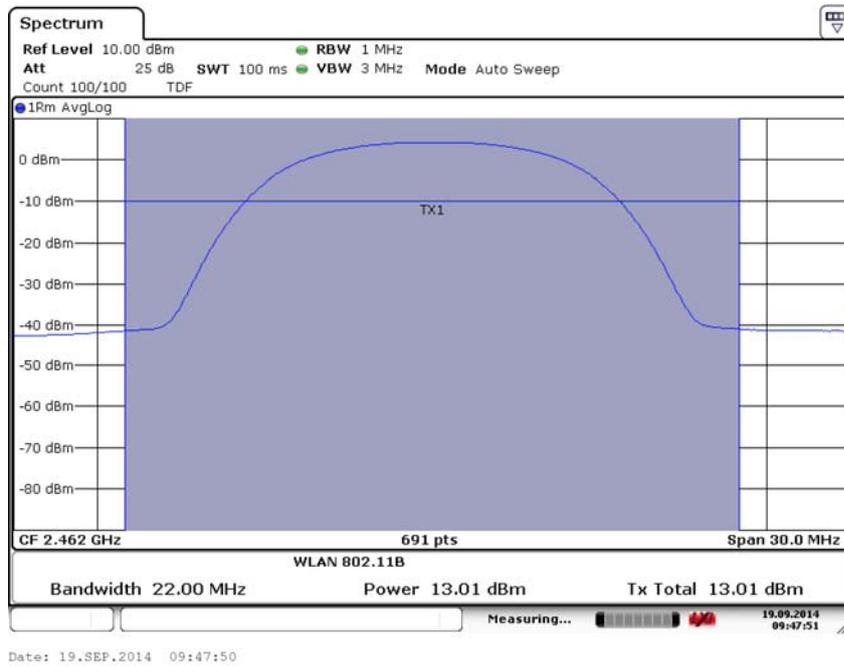


Fig. 12 Maximum Average Output Power (802.11b, Ch 11,11Mbps)

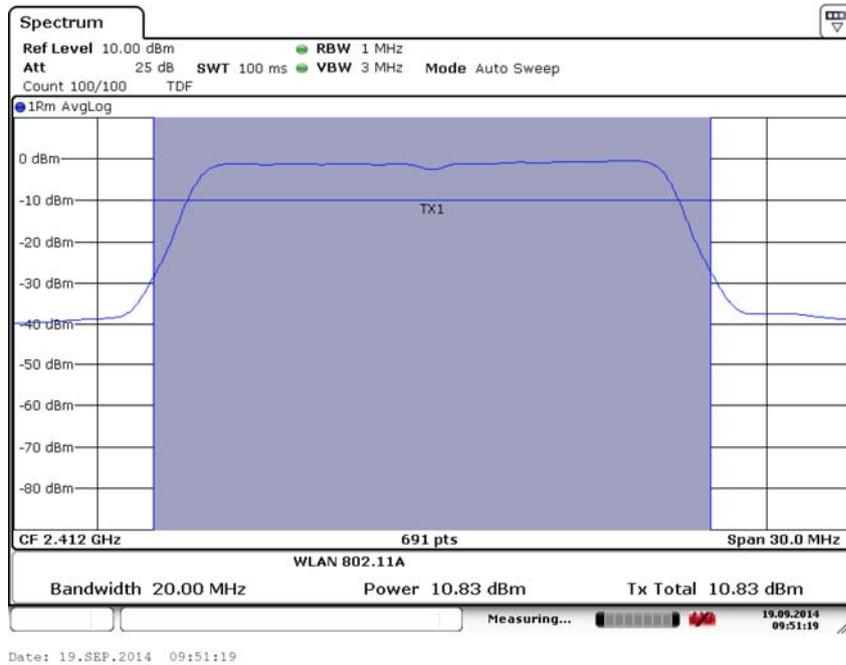


Fig. 13 Maximum Average Output Power (802.11g, Ch 1,6Mbps)

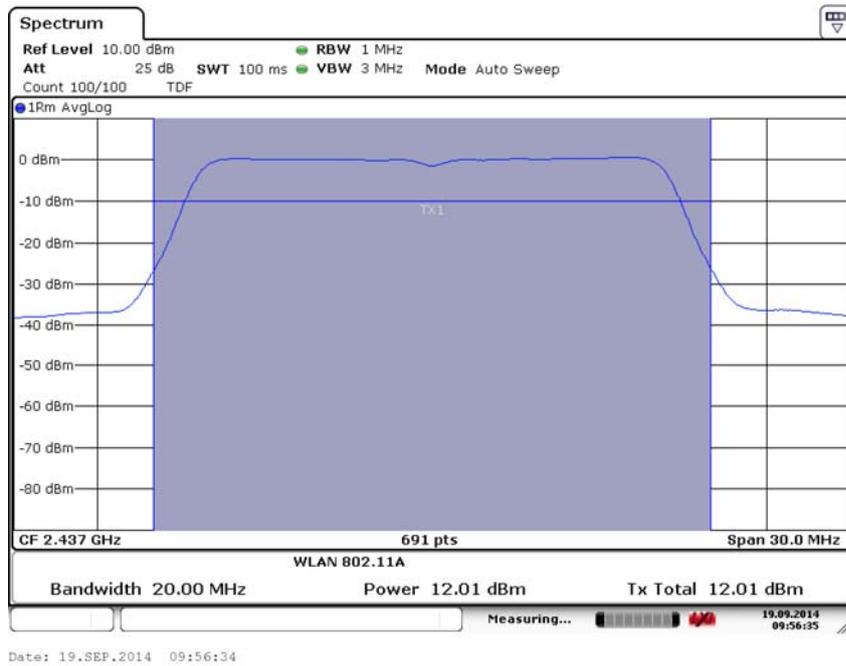


Fig. 14 Maximum Average Output Power (802.11g, Ch 6,6Mbps)

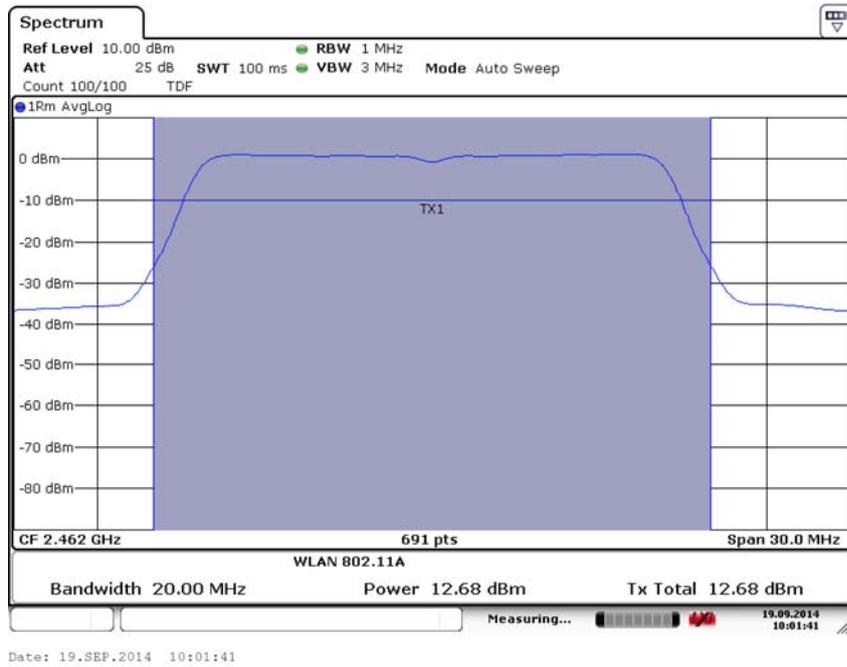


Fig. 15 Maximum Average Output Power (802.11g, Ch 11,6Mbps)

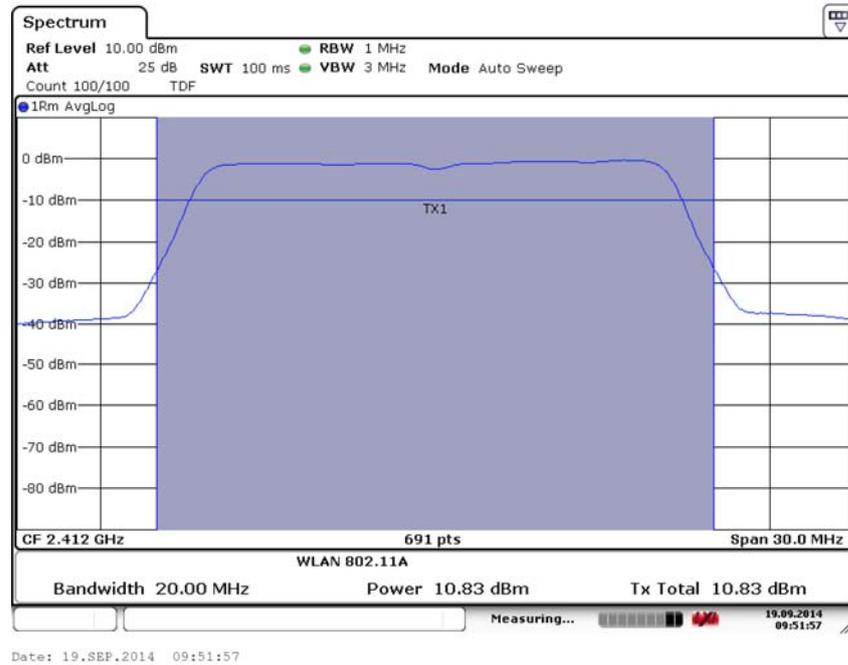


Fig. 16 Maximum Average Output Power (802.11g, Ch 1,9Mbps)

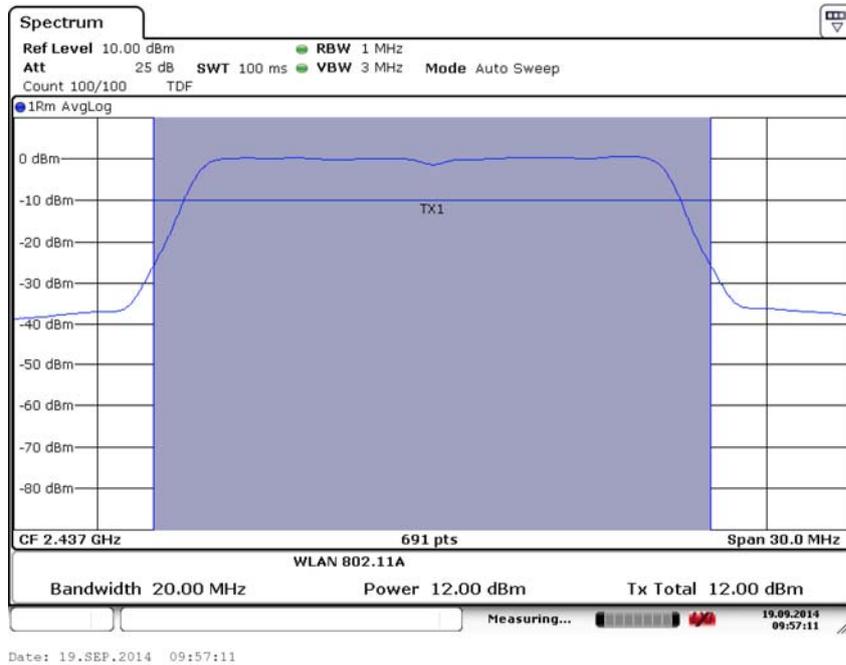


Fig. 17 Maximum Average Output Power (802.11g, Ch 6,9Mbps)

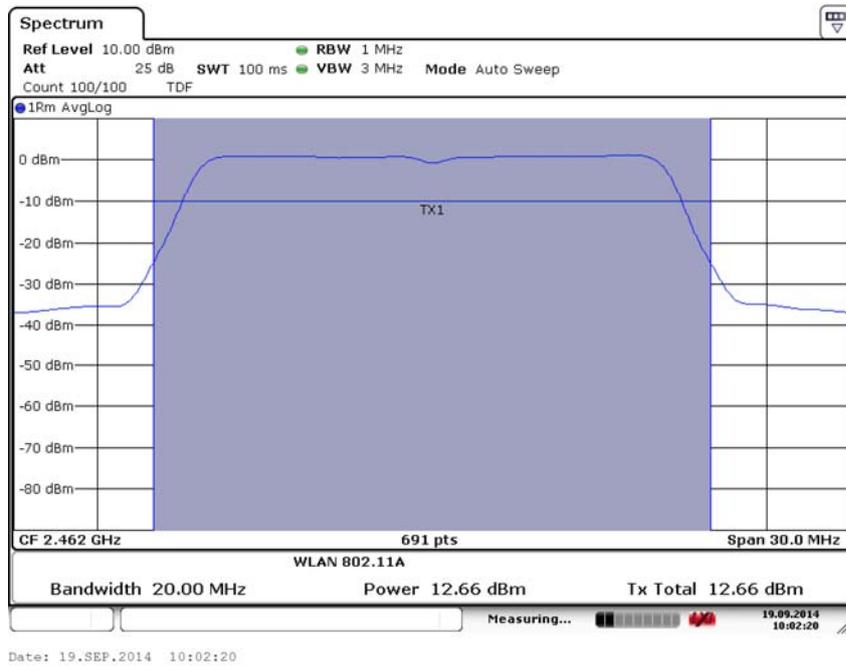


Fig. 18 Maximum Average Output Power (802.11g, Ch 11,9Mbps)

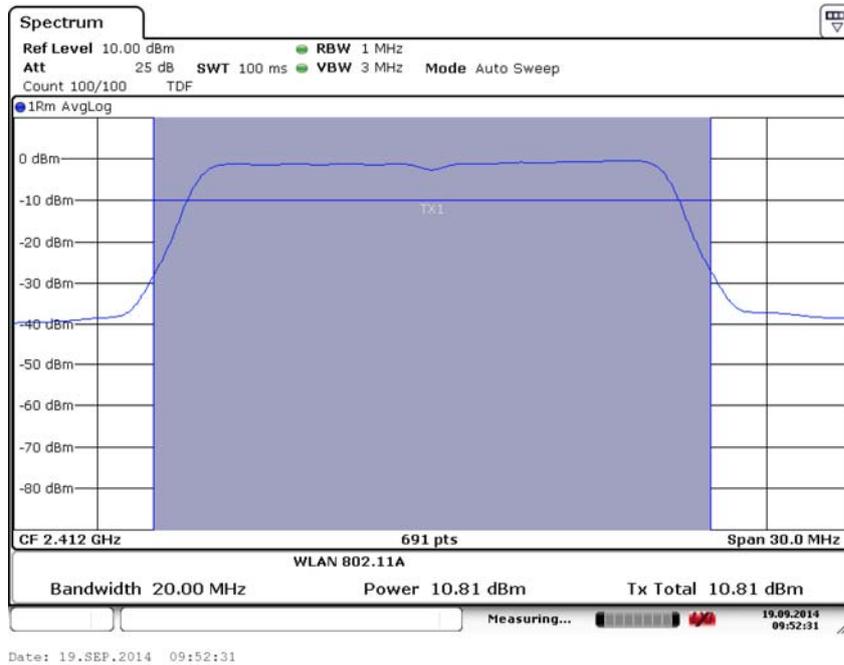


Fig. 19 Maximum Average Output Power (802.11g, Ch 1,12Mbps)

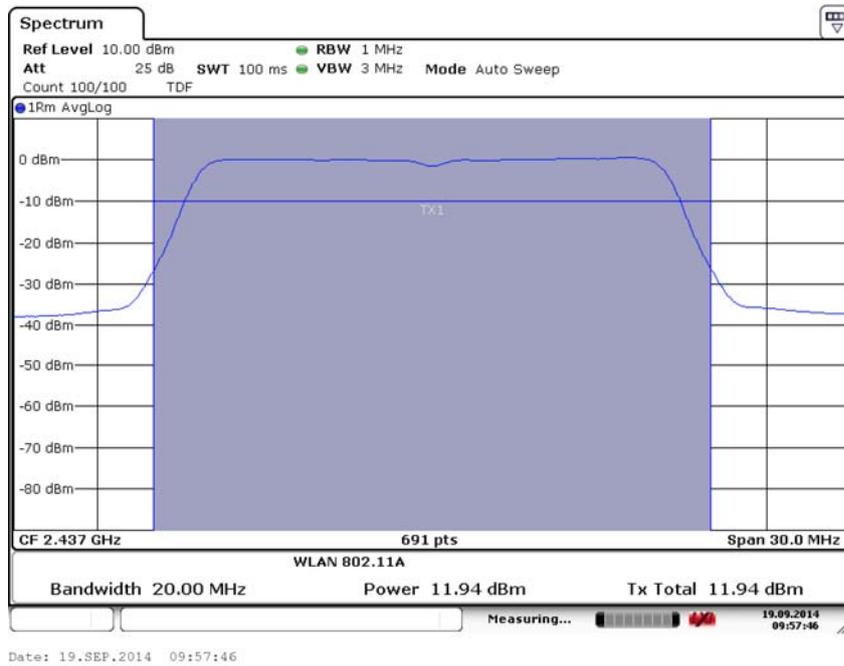


Fig. 20 Maximum Average Output Power (802.11g, Ch 6,12Mbps)

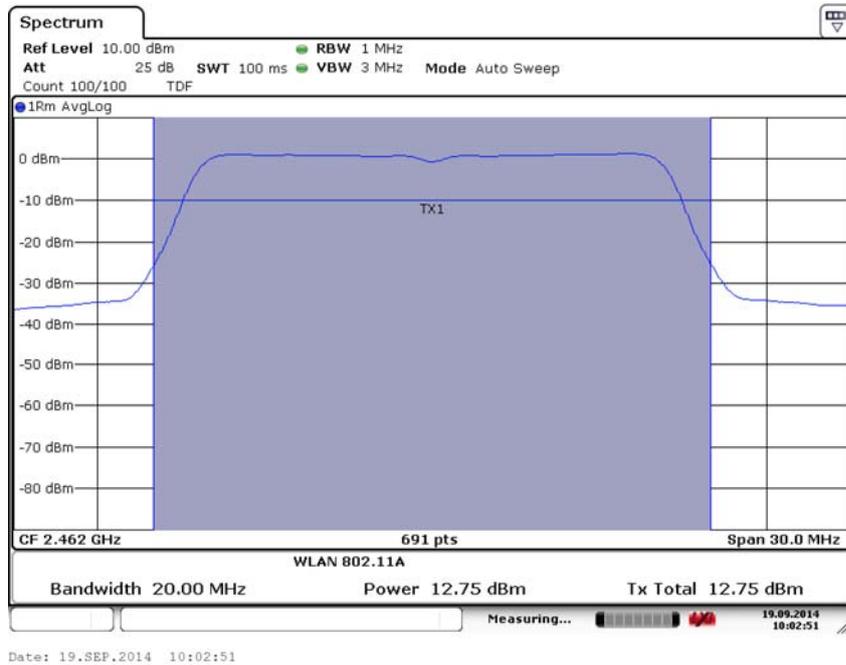


Fig. 21 Maximum Average Output Power (802.11g, Ch 11,12Mbps)

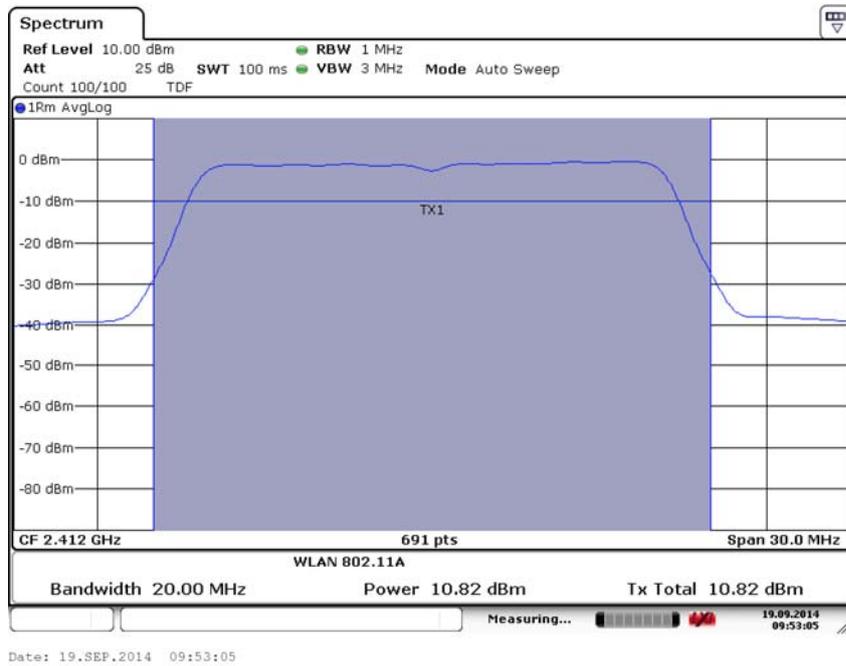


Fig. 22 Maximum Average Output Power (802.11g, Ch 1,18Mbps)

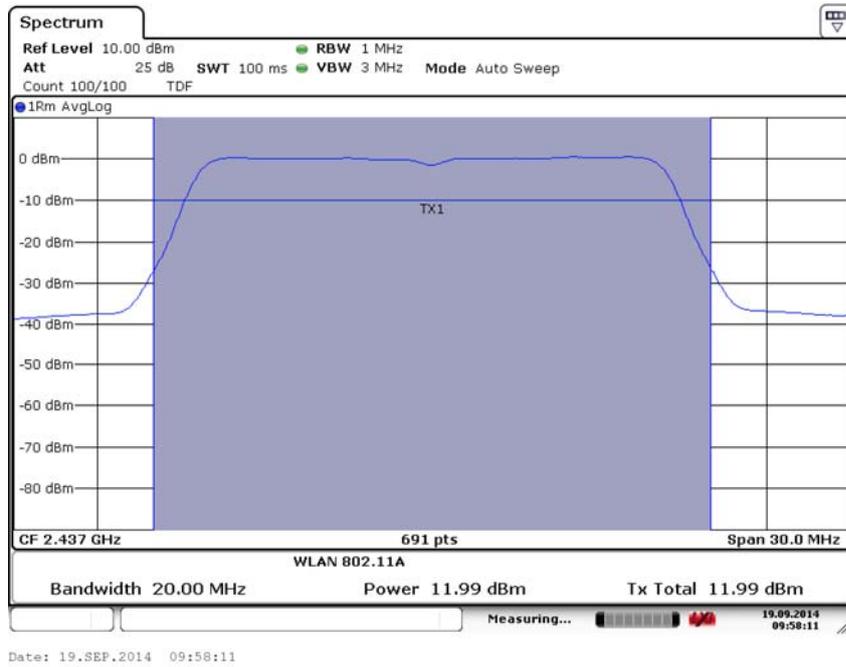


Fig. 23 Maximum Average Output Power (802.11g, Ch 6,18Mbps)

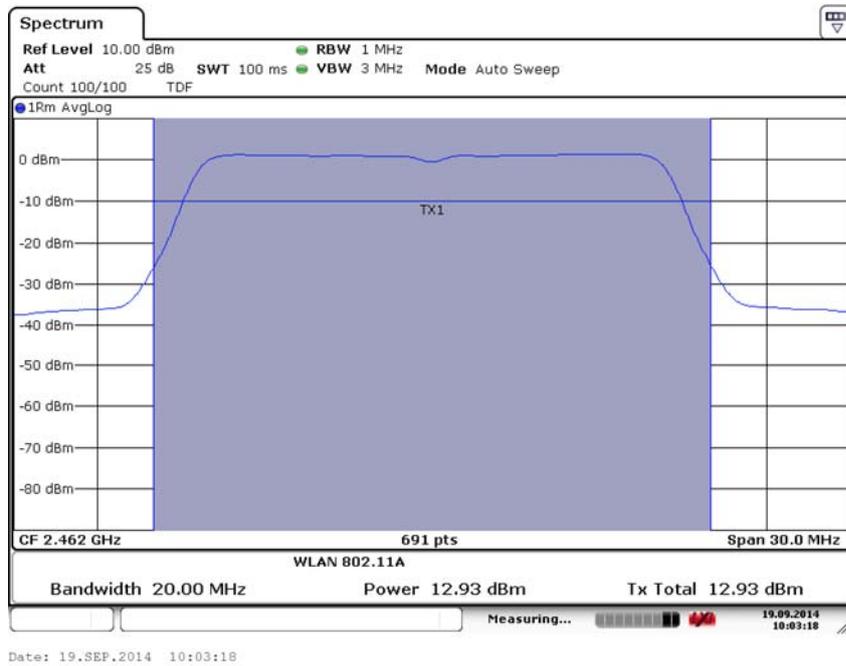


Fig. 24 Maximum Average Output Power (802.11g, Ch 11,18Mbps)

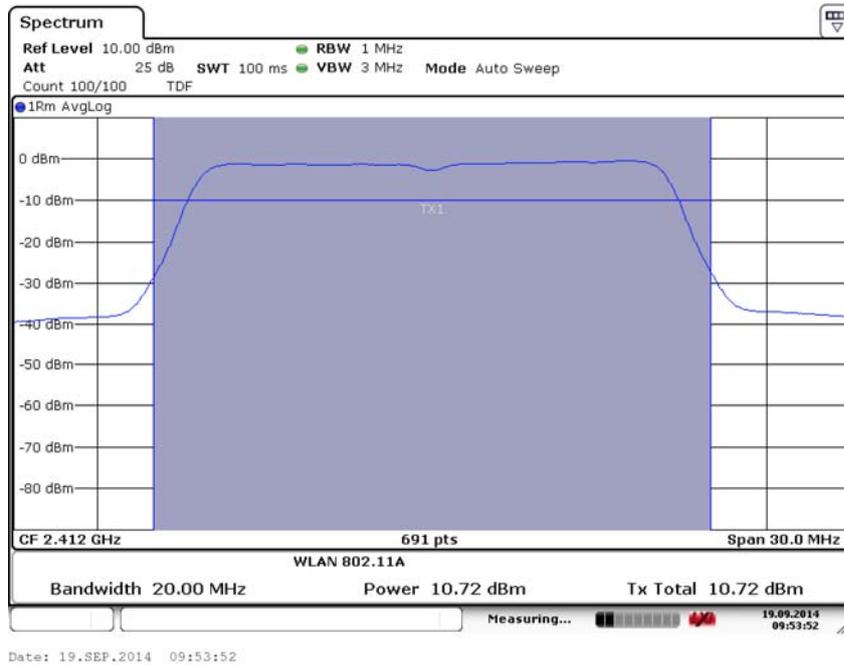


Fig. 25 Maximum Average Output Power (802.11g, Ch 1,24Mbps)

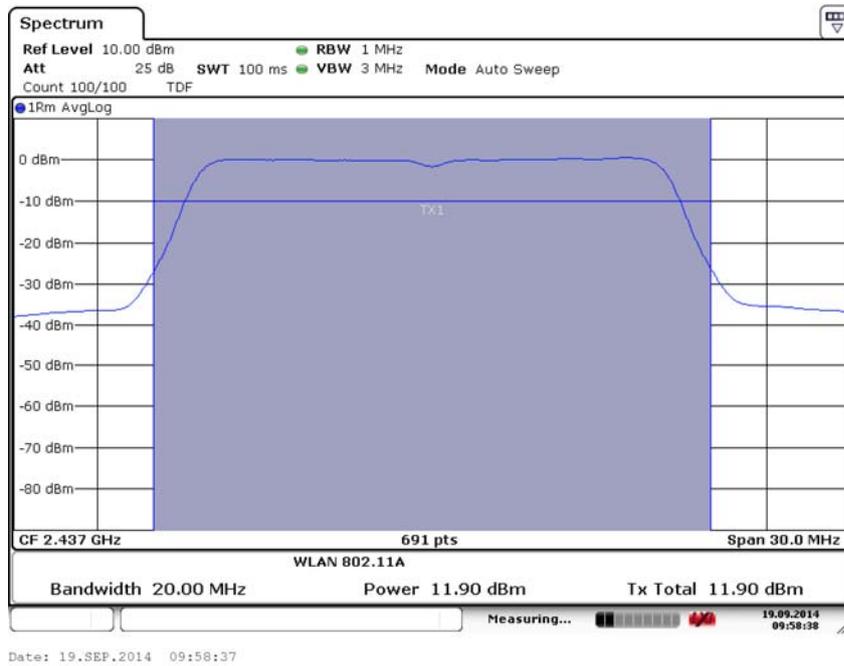


Fig. 26 Maximum Average Output Power (802.11g, Ch 6,24Mbps)

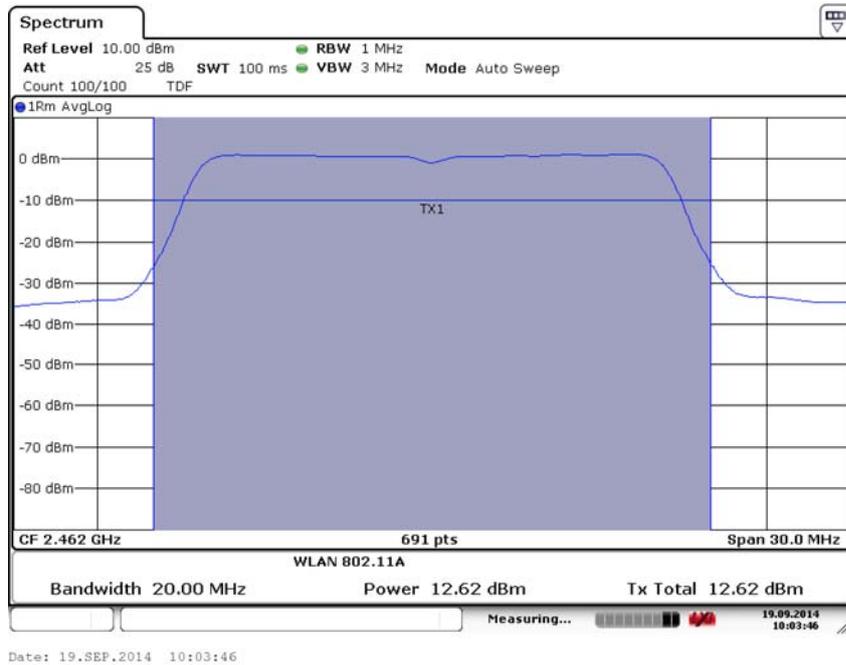


Fig. 27 Maximum Average Output Power (802.11g, Ch 11,24Mbps)

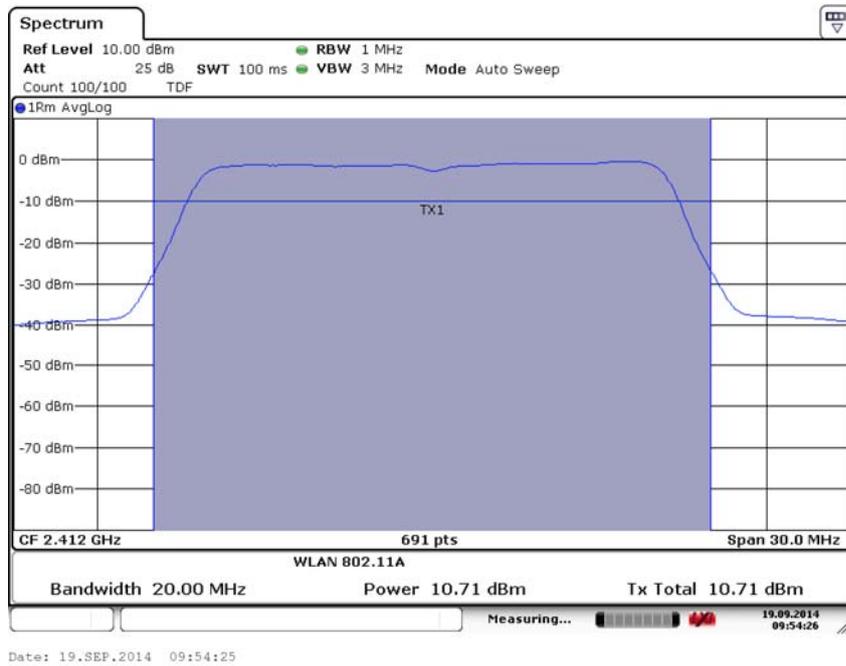


Fig. 28 Maximum Average Output Power (802.11g, Ch 1,36Mbps)

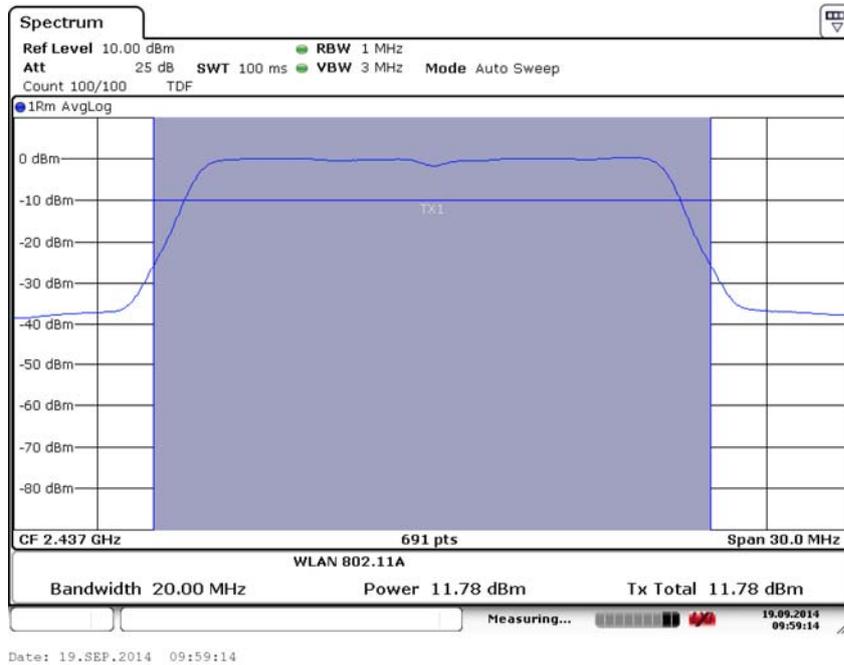


Fig. 29 Maximum Average Output Power (802.11g, Ch 6,36Mbps)

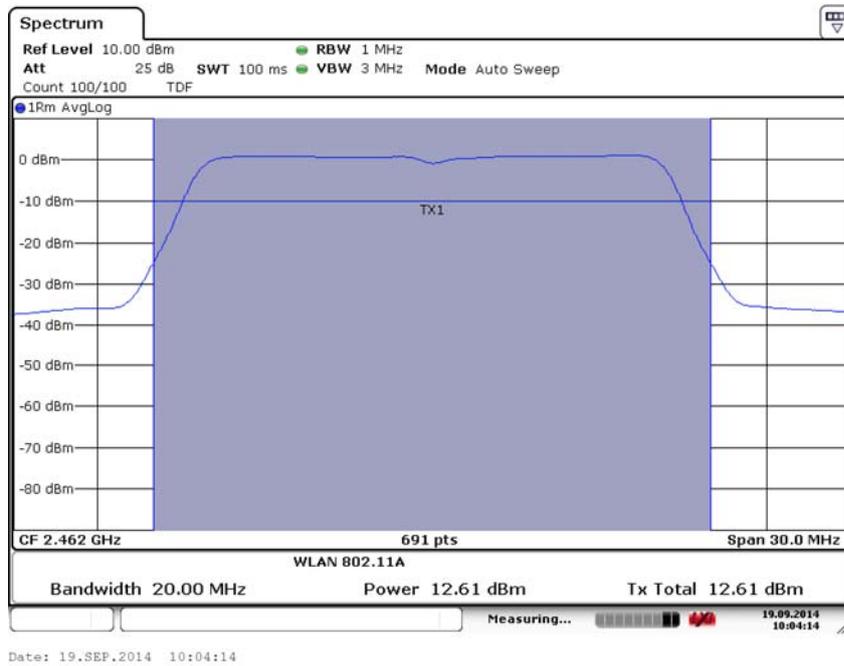


Fig. 30 Maximum Average Output Power (802.11g, Ch 11,36Mbps)

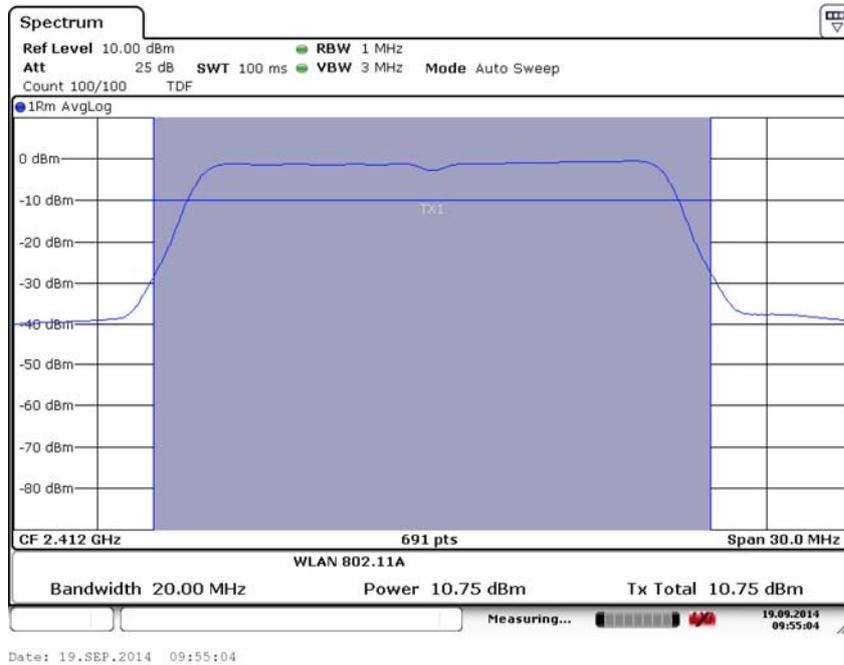


Fig. 31 Maximum Average Output Power (802.11g, Ch 1,48Mbps)

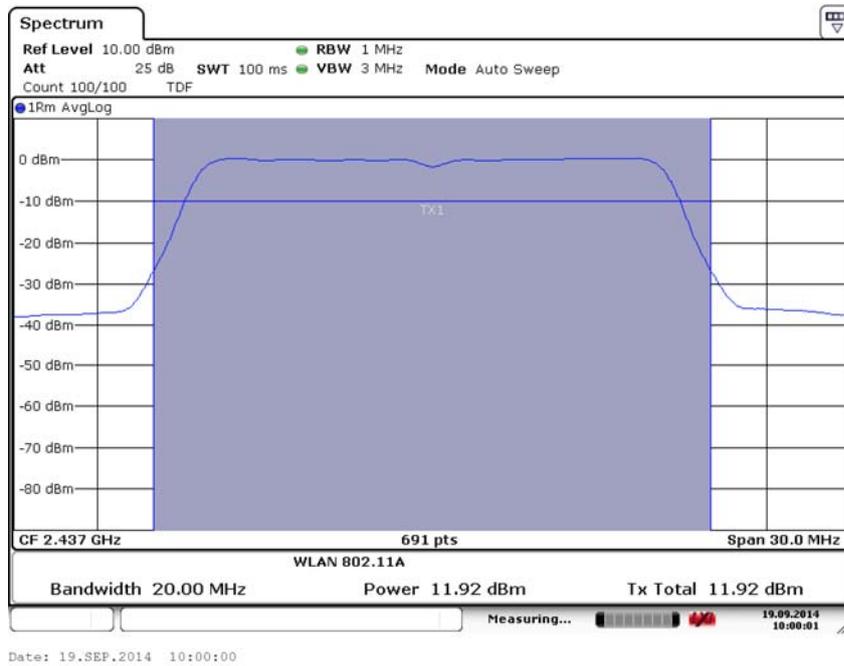


Fig. 32 Maximum Average Output Power (802.11g, Ch 6,48Mbps)

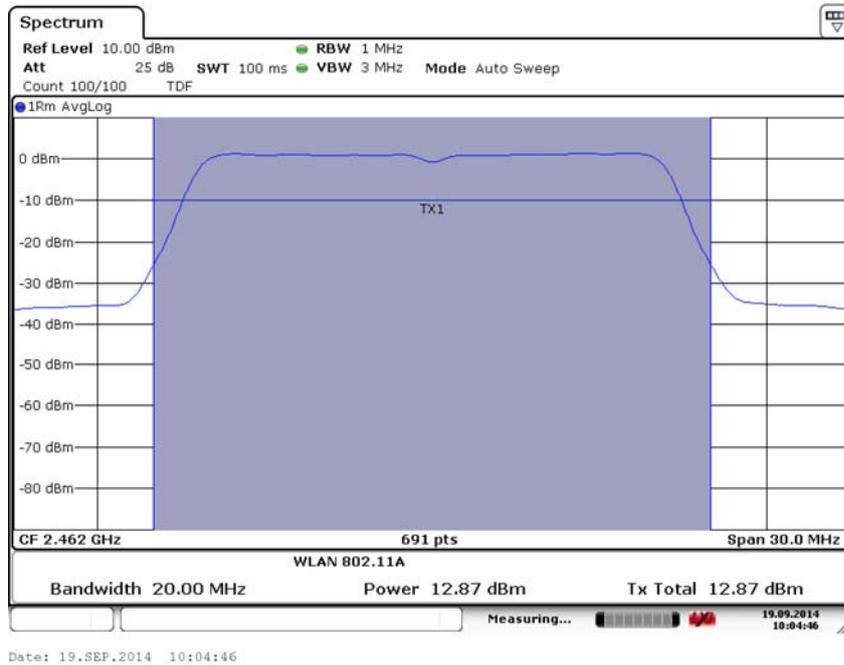


Fig. 33 Maximum Average Output Power (802.11g, Ch 11,48Mbps)

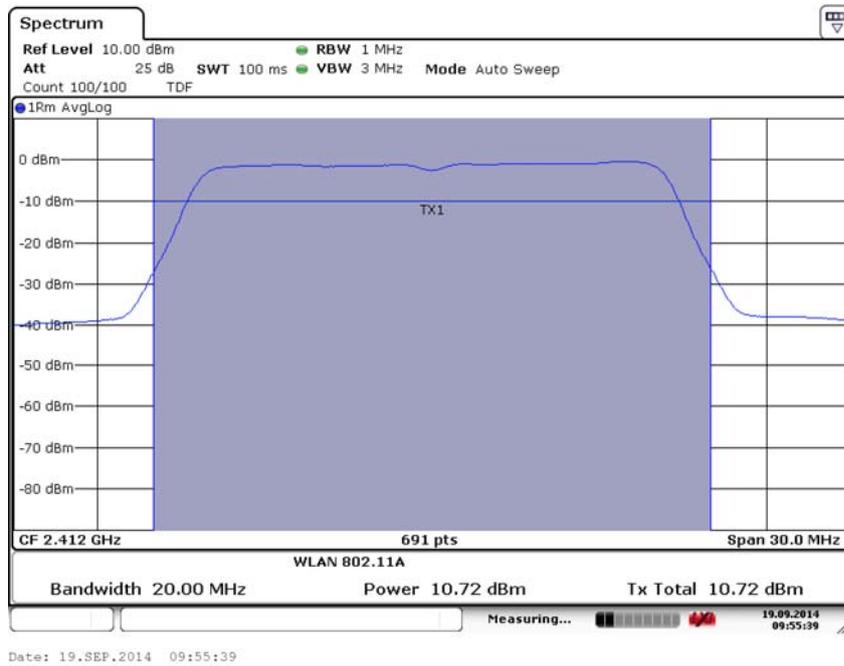


Fig. 34 Maximum Average Output Power (802.11g, Ch 1,54Mbps)

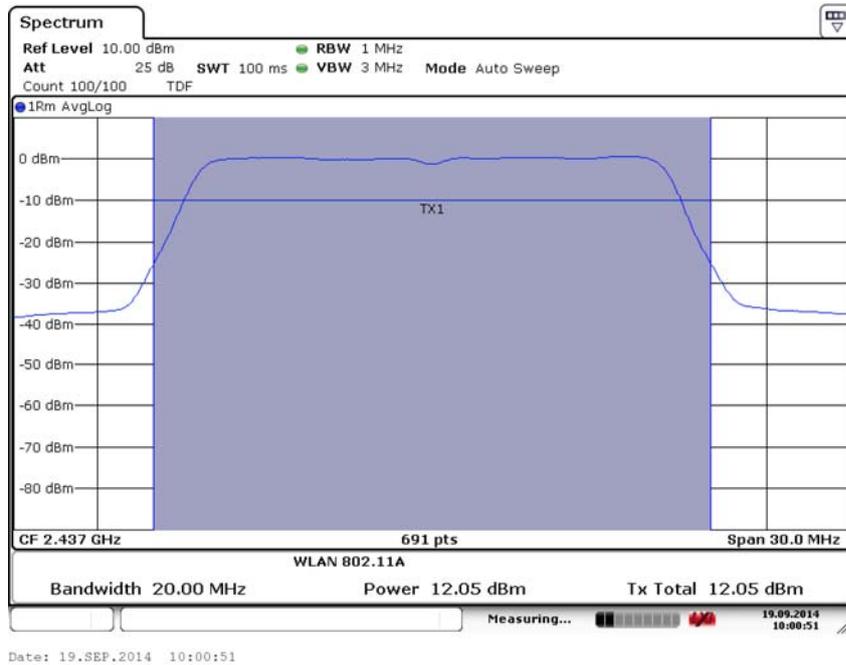


Fig. 35 Maximum Average Output Power (802.11g, Ch 6,54Mbps)

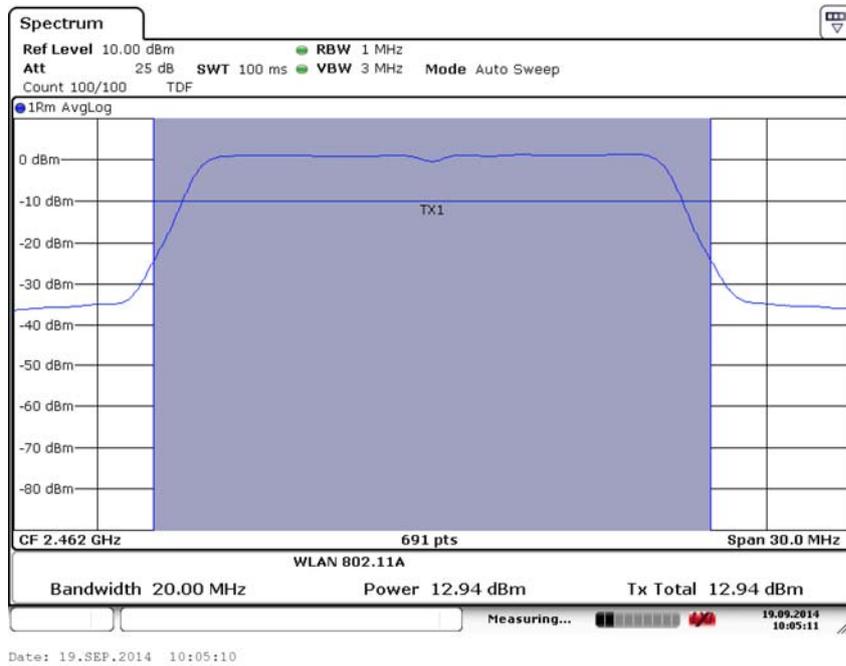


Fig. 36 Maximum Average Output Power (802.11g, Ch 11,54Mbps)

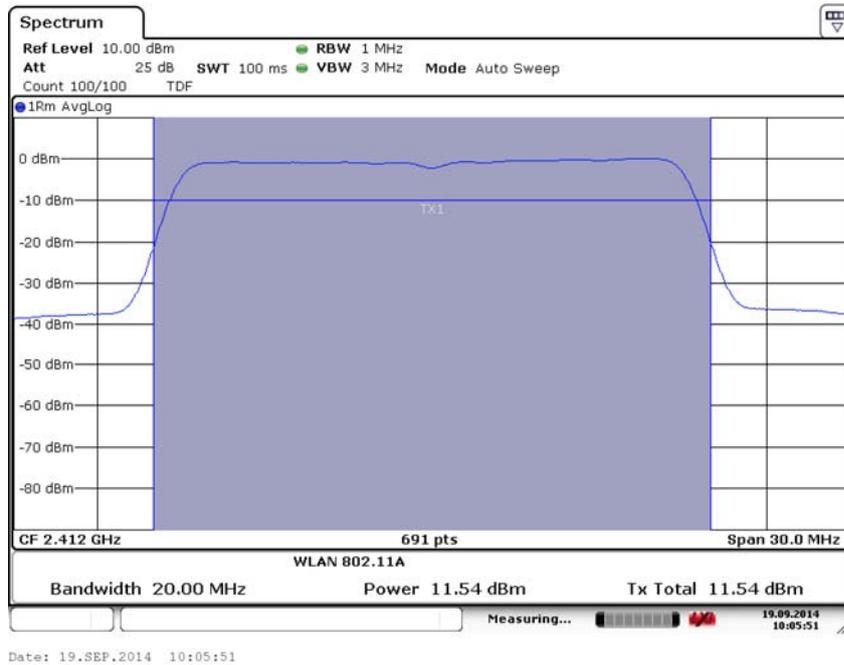


Fig. 37 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS0)

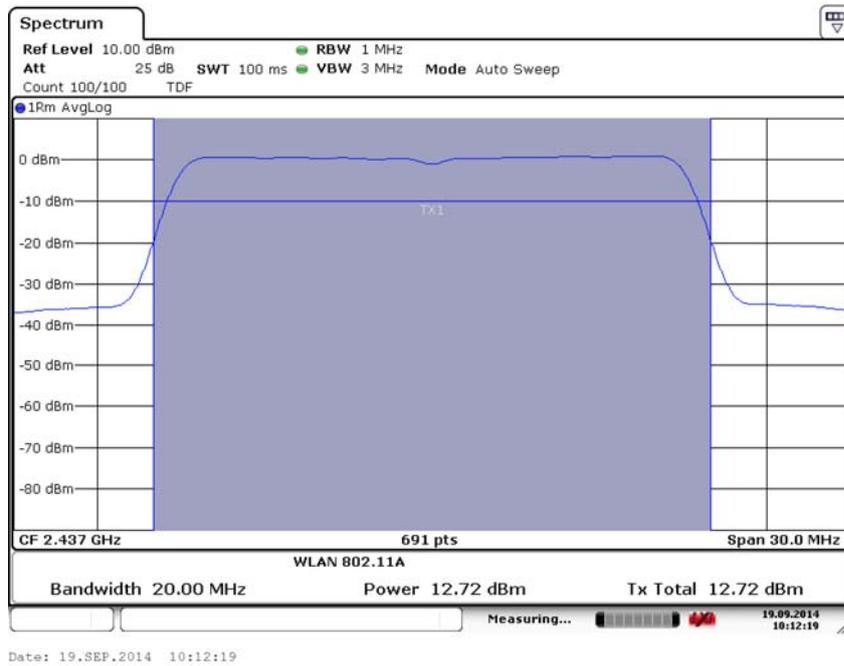


Fig. 38 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS0)

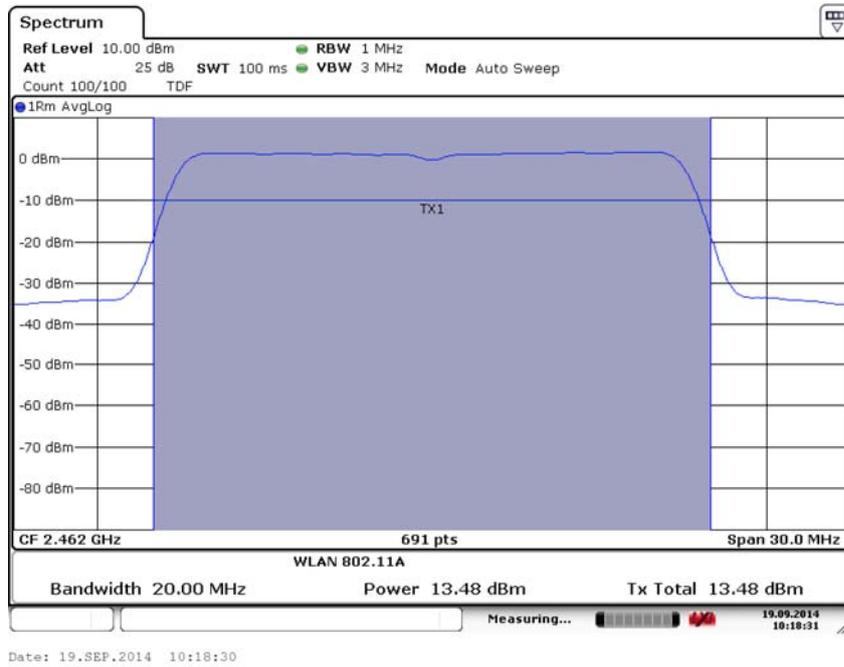


Fig. 39 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS0)

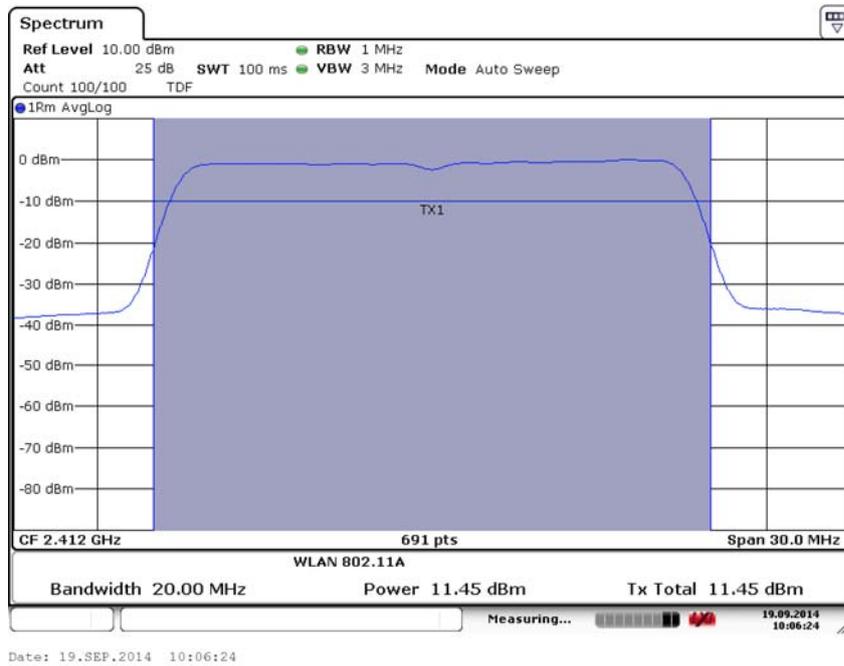


Fig. 40 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS1)

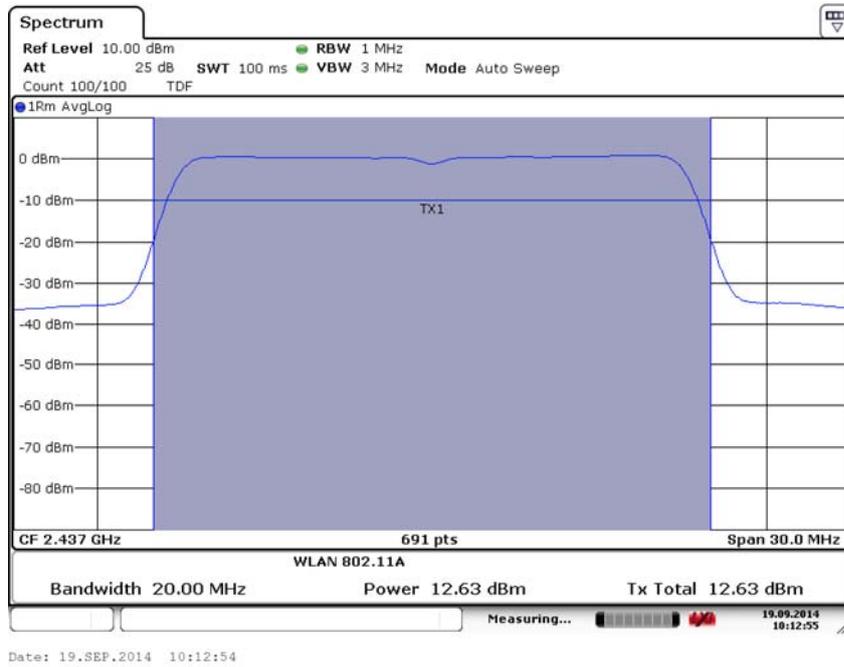


Fig. 41 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS1)

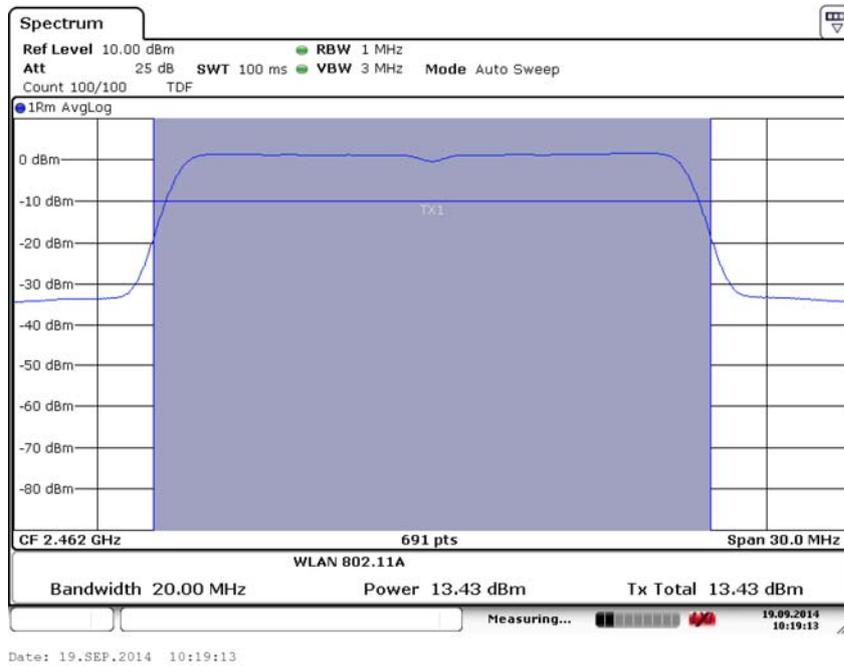


Fig. 42 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS1)

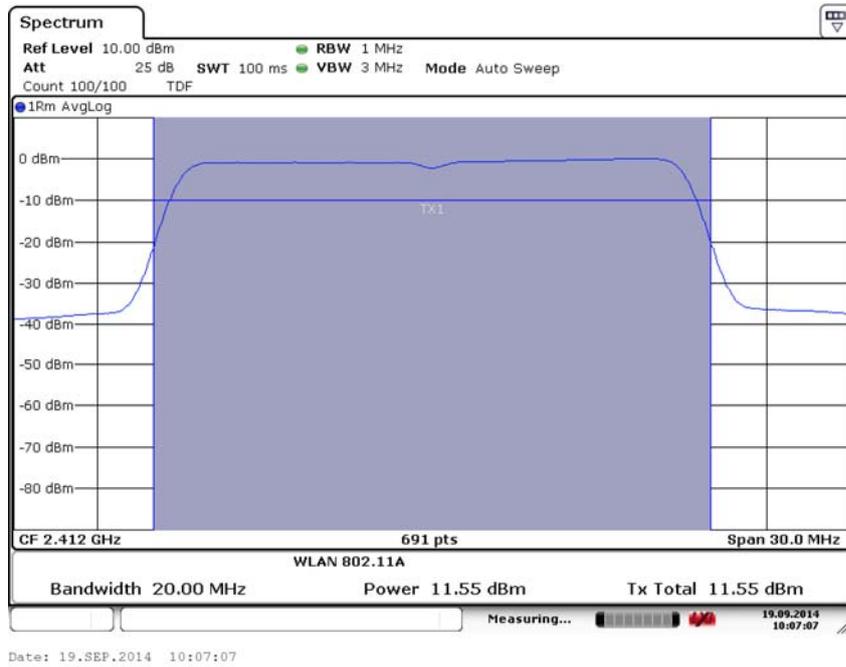


Fig. 43 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS2)

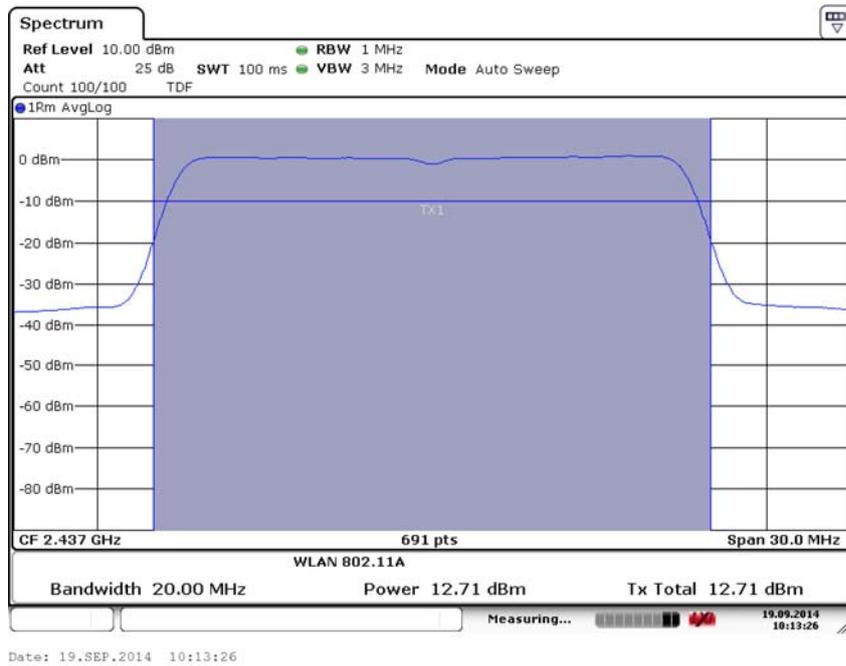


Fig. 44 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS2)

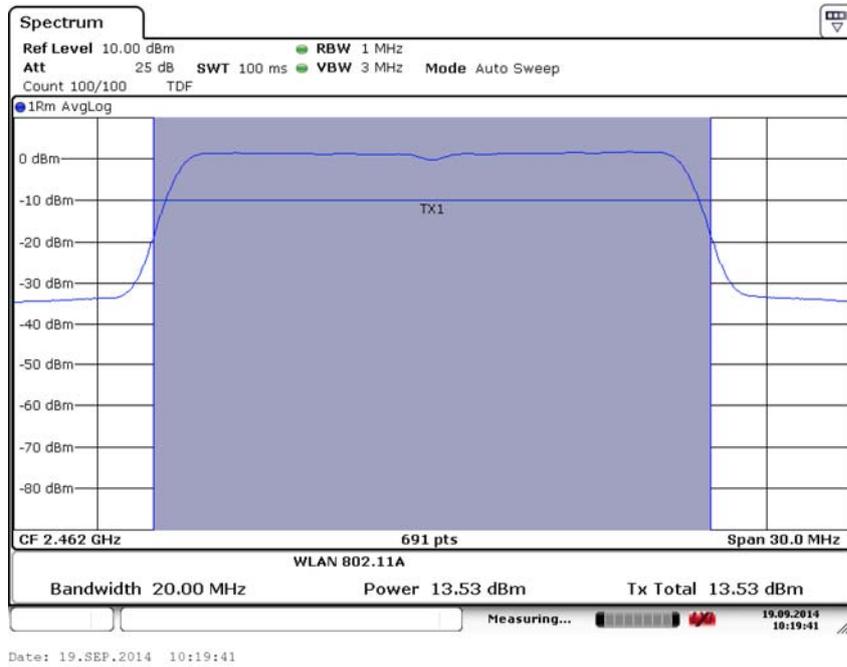


Fig. 45 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS2)

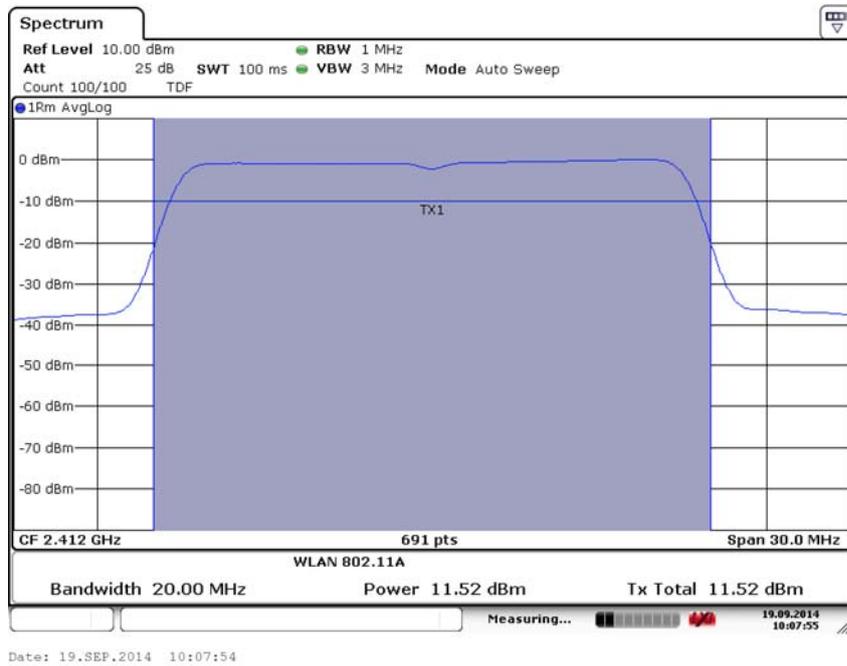


Fig. 46 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS3)

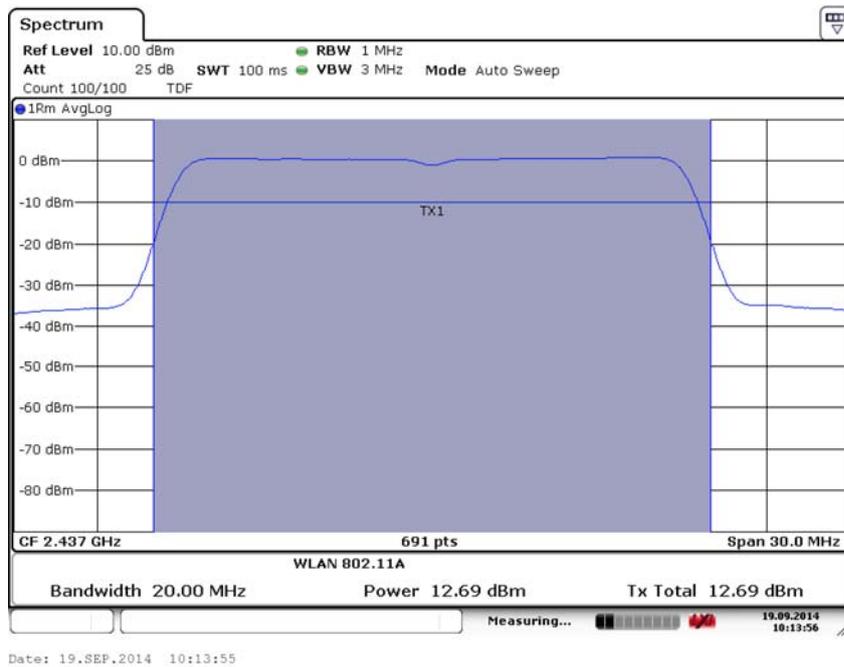


Fig. 47 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS3)

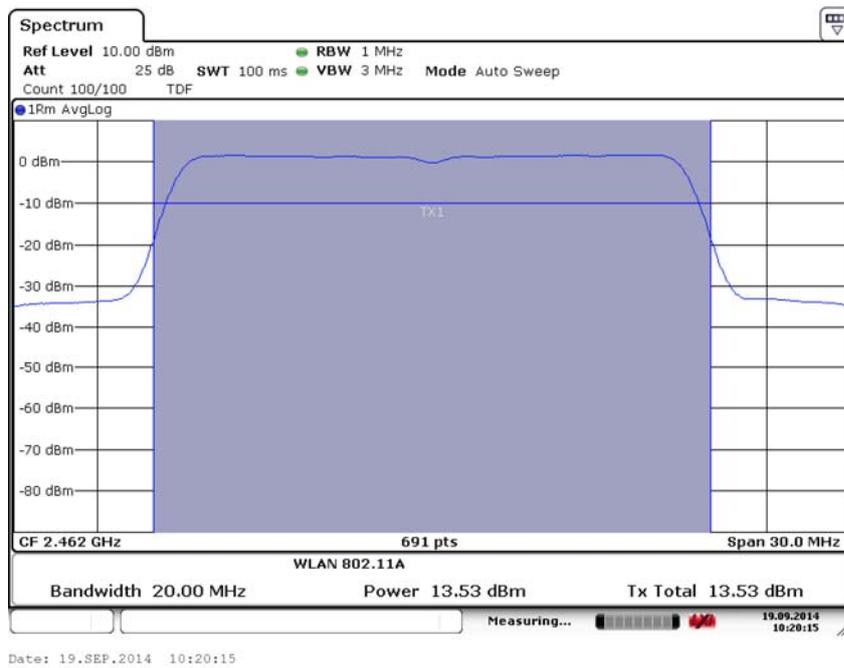


Fig. 48 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS3)

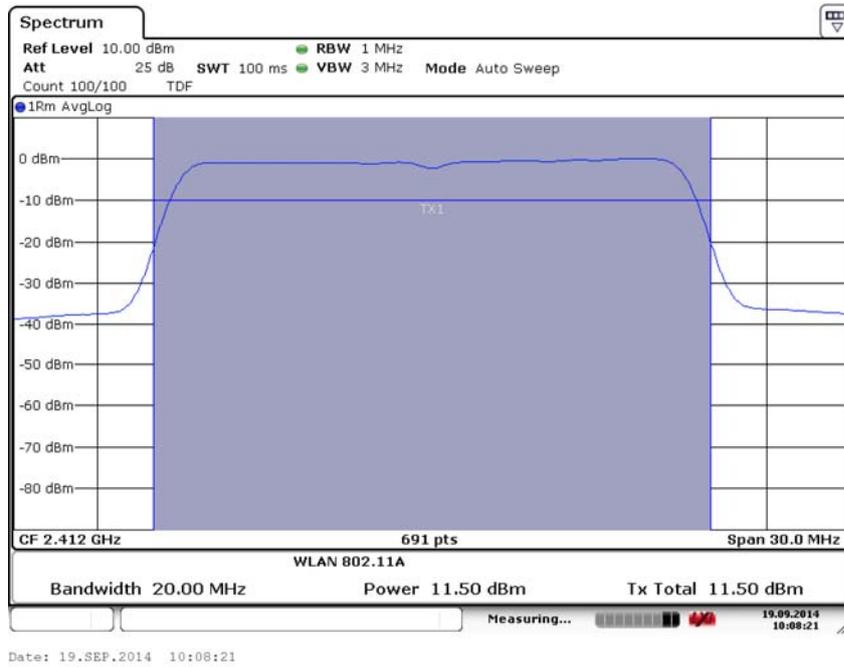


Fig. 49 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS4)

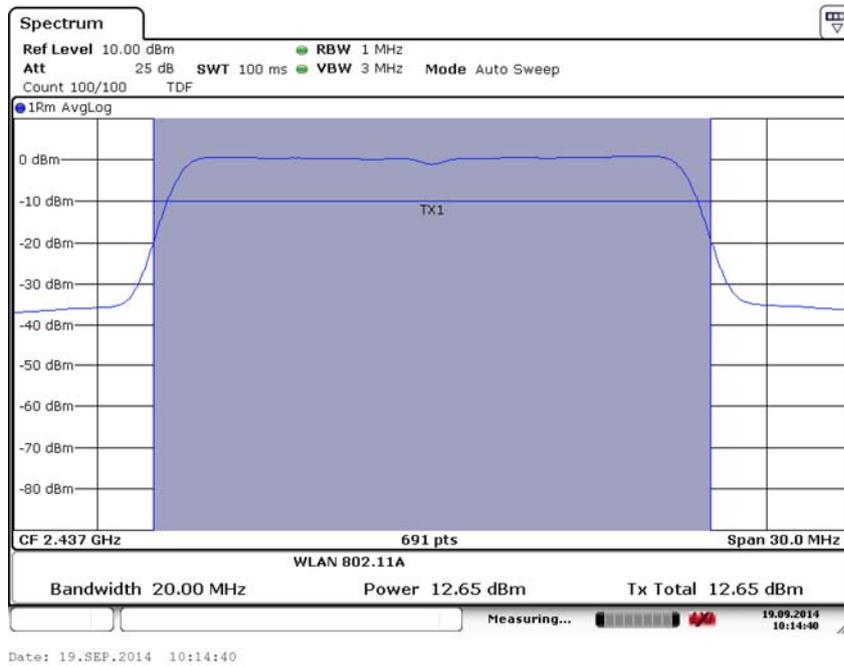


Fig. 50 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS4)

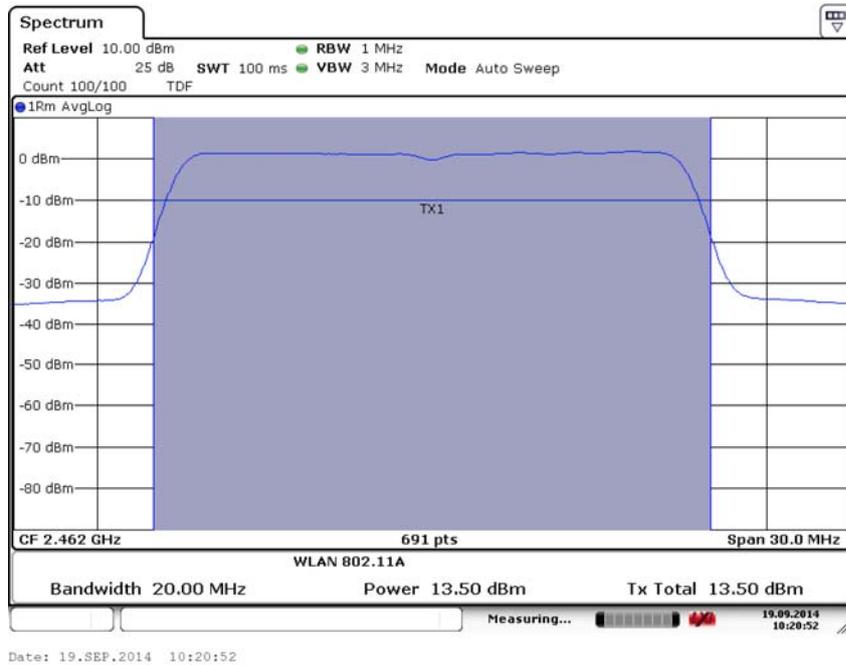


Fig. 51 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS4)

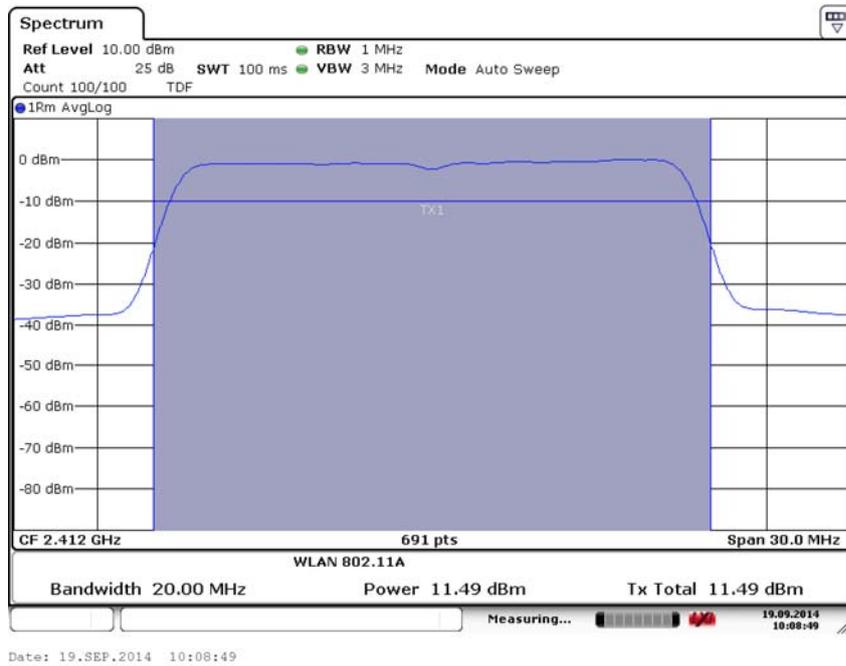


Fig. 52 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS5)

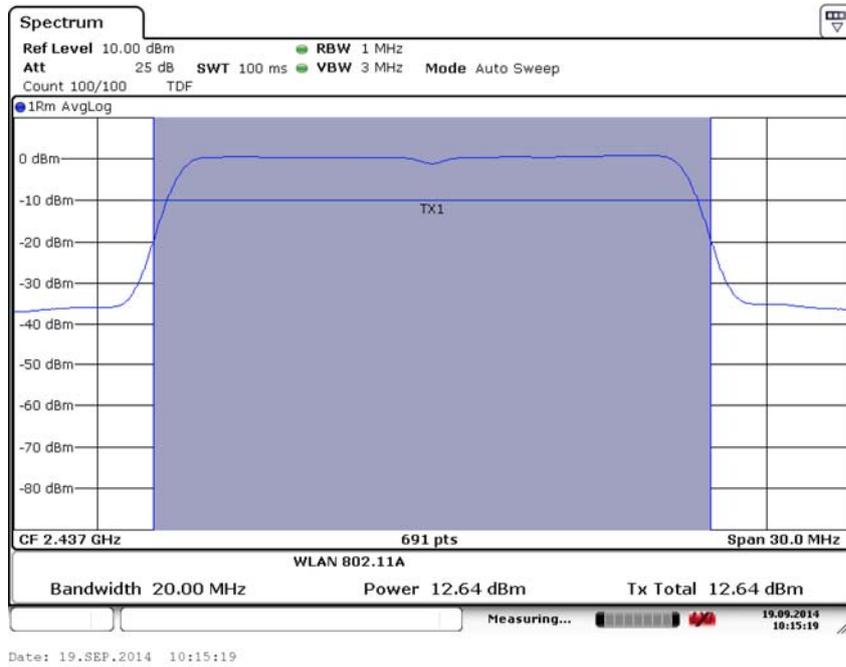


Fig. 53 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS5)

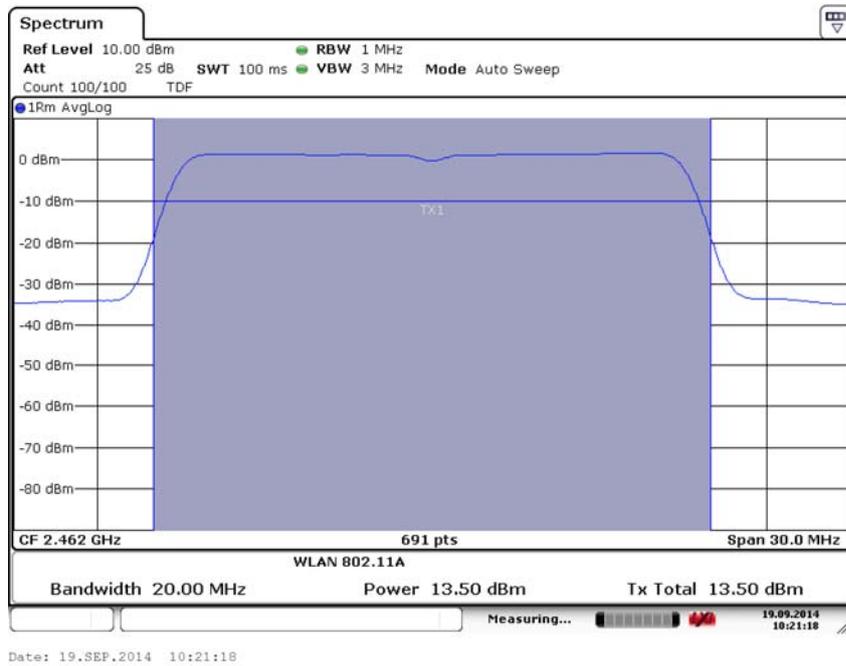


Fig. 54 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS5)

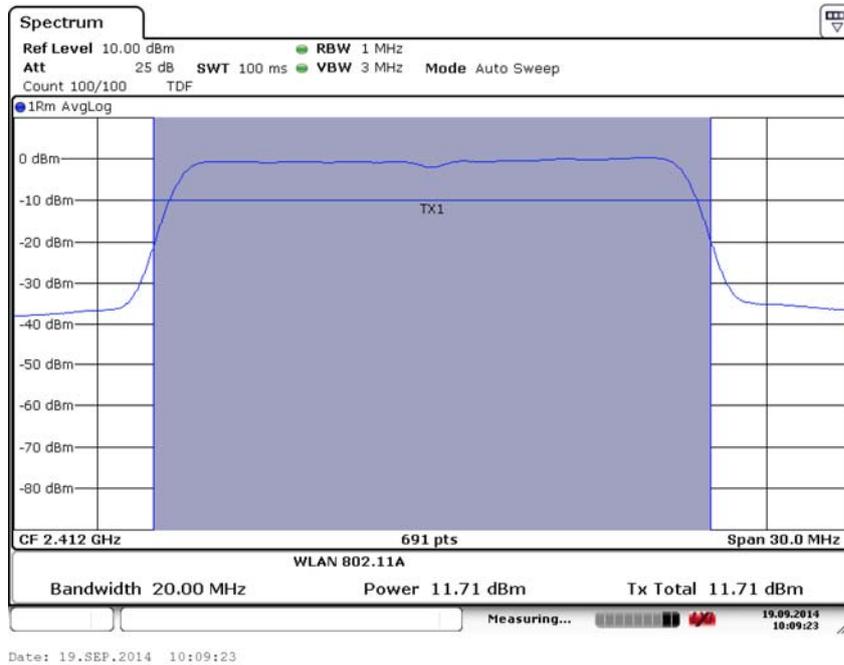


Fig. 55 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS6)

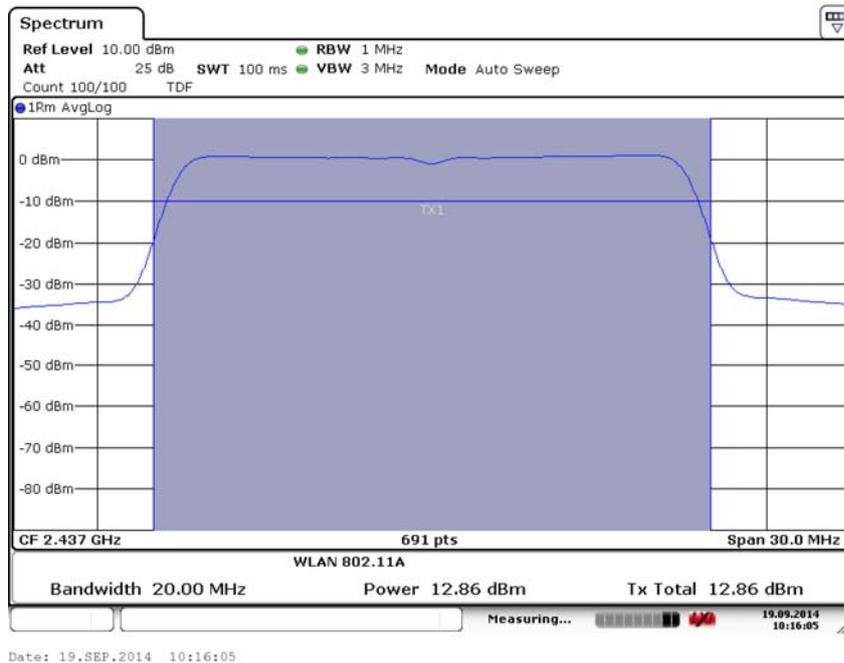


Fig. 56 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS6)

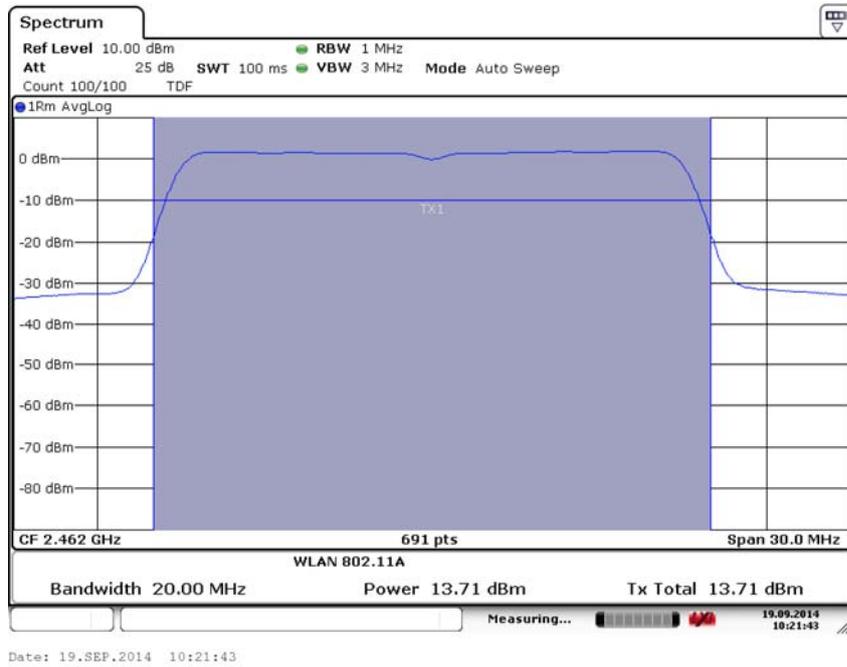


Fig. 57 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS6)

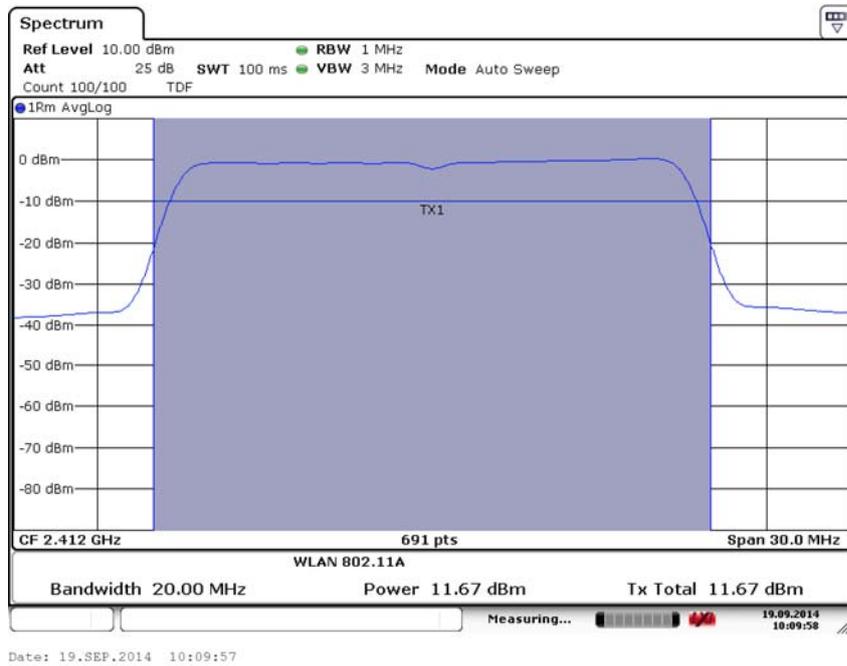


Fig. 58 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS7)

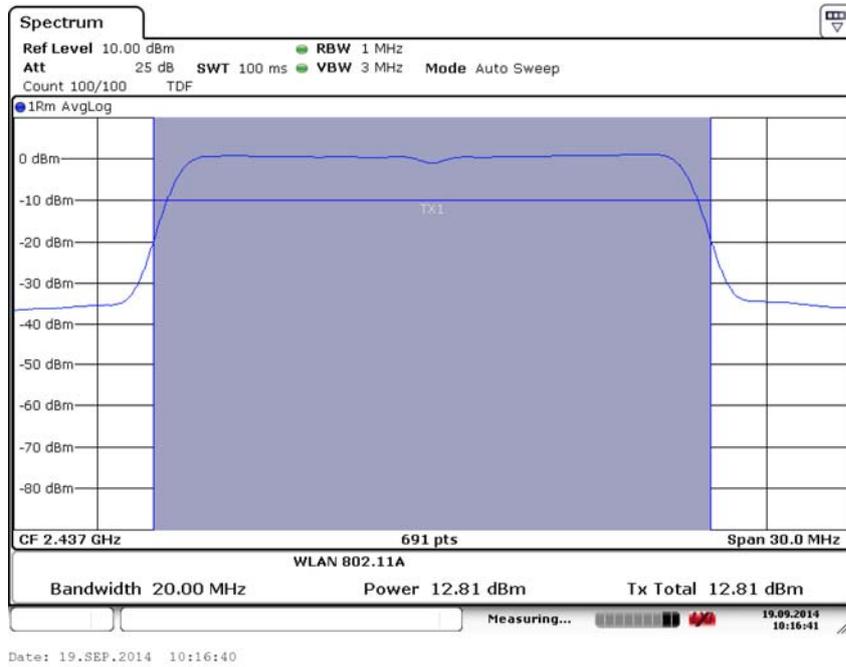


Fig. 59 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS7)

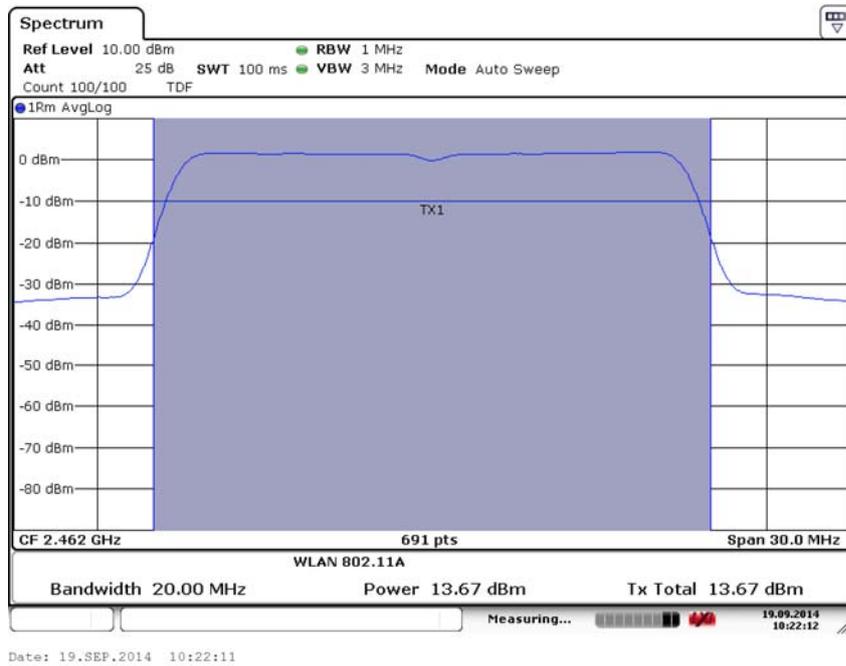


Fig. 60 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS7)

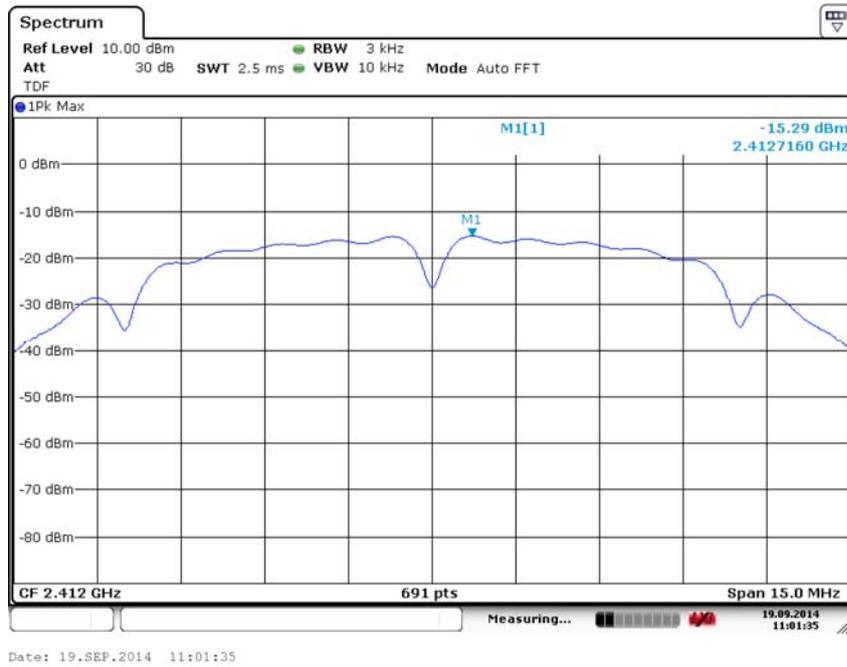


Fig. 61 Power Spectral Density (802.11b, Ch 1)

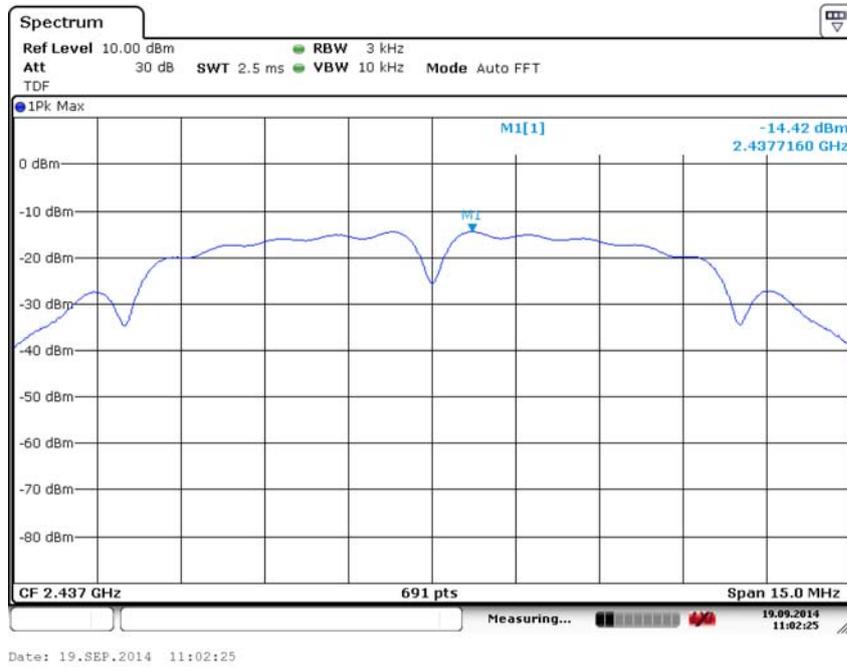


Fig. 62 Power Spectral Density (802.11b, Ch 6)

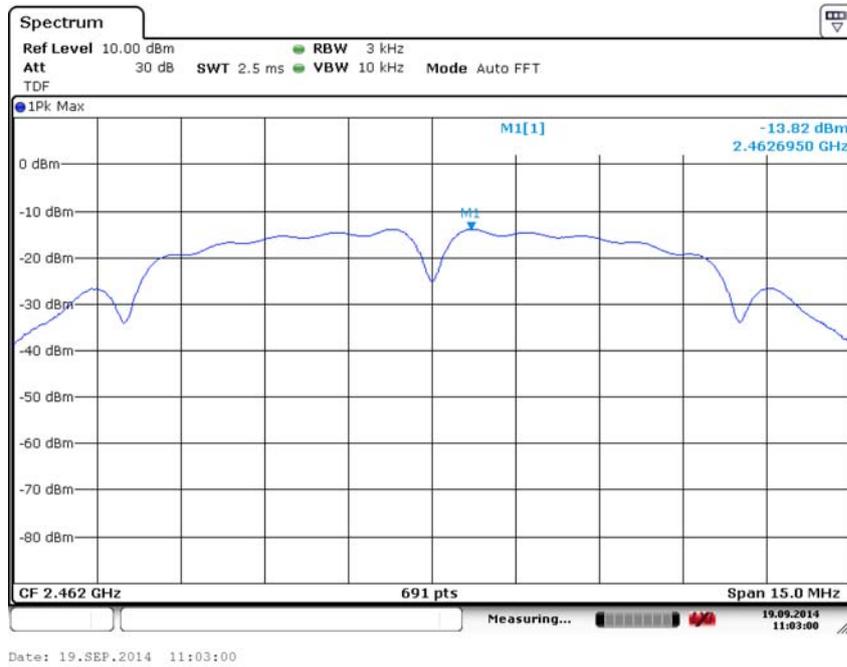


Fig. 63 Power Spectral Density (802.11b, Ch 11)

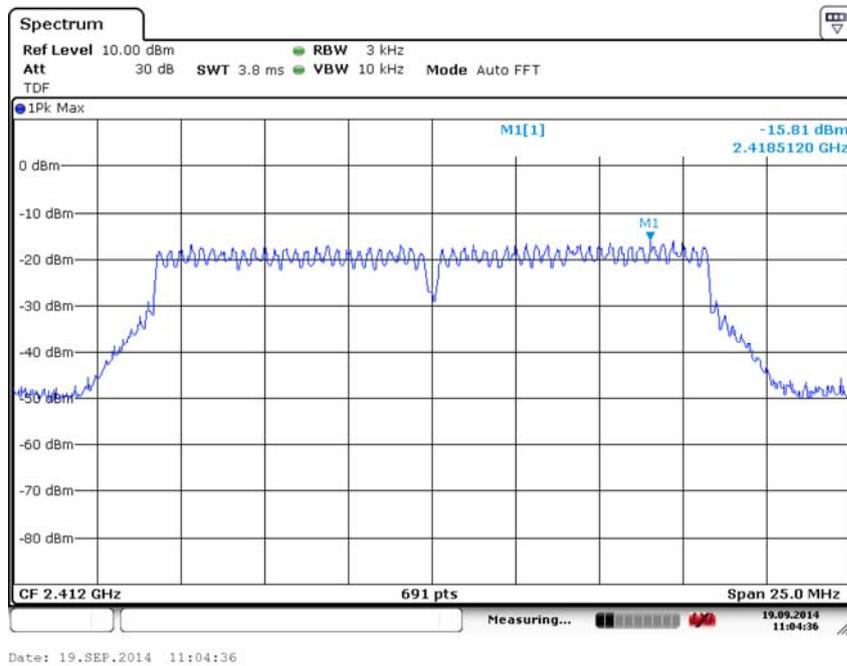


Fig. 64 Power Spectral Density (802.11g, Ch 1)

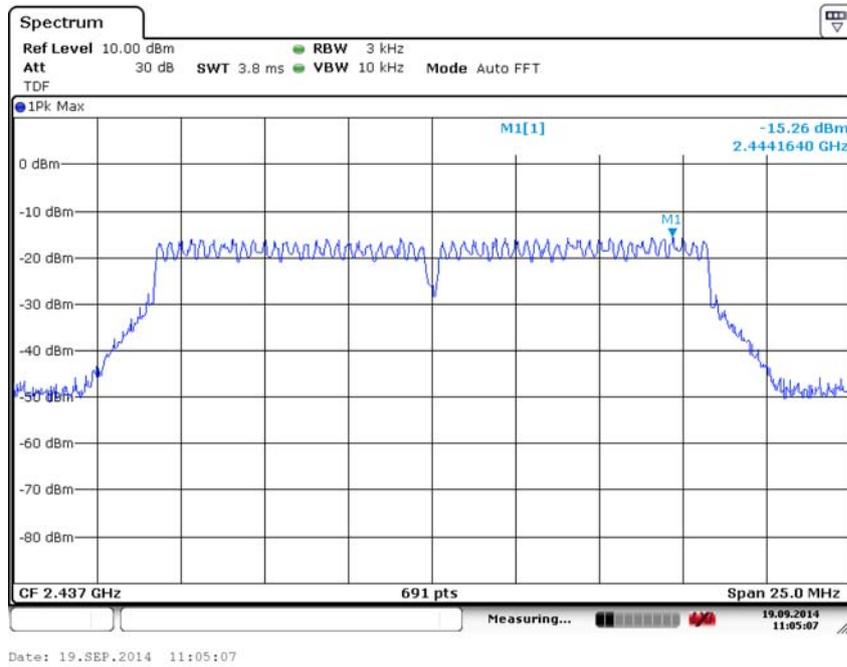


Fig. 65 Power Spectral Density (802.11g, Ch 6)

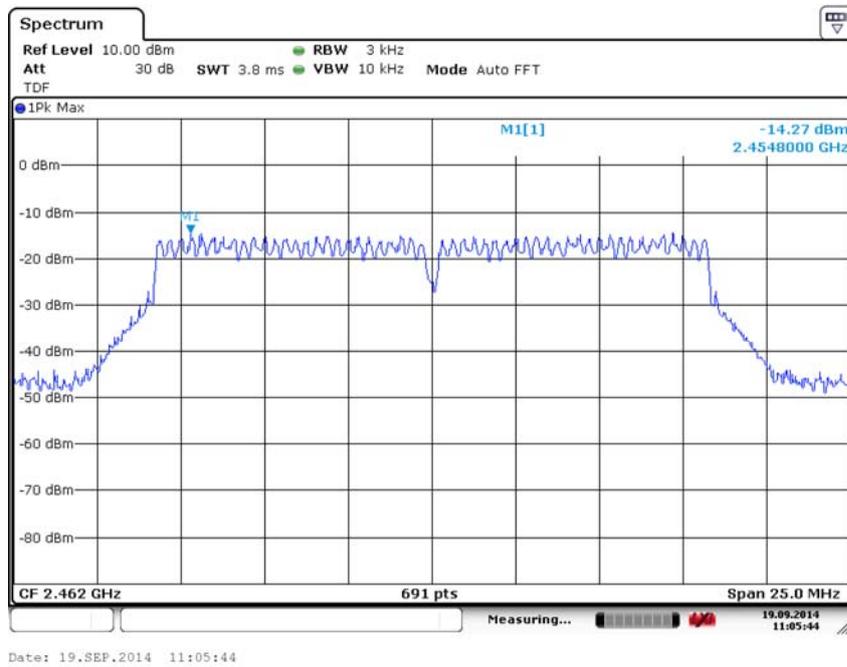


Fig. 66 Power Spectral Density (802.11g, Ch 11)

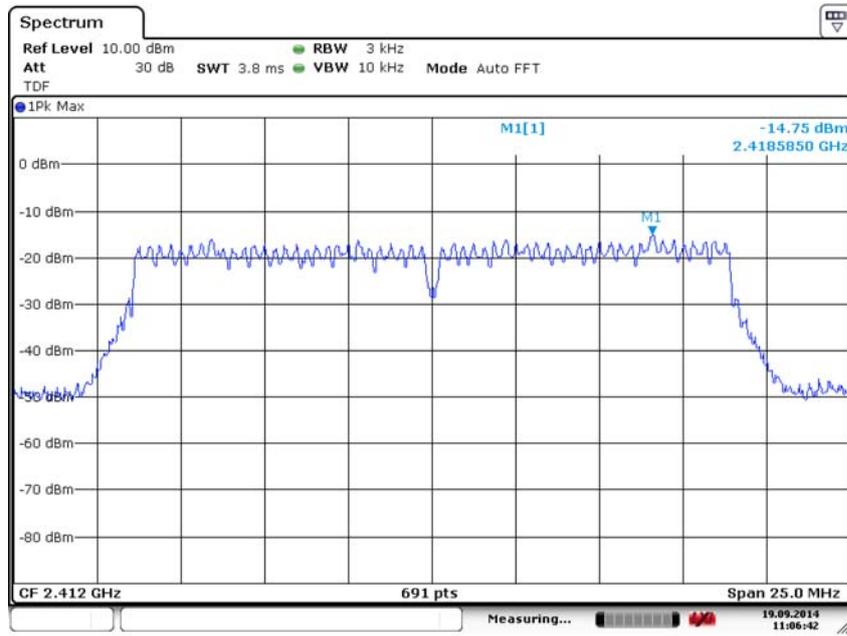


Fig. 67 Power Spectral Density (802.11n-20MHz, Ch 1)

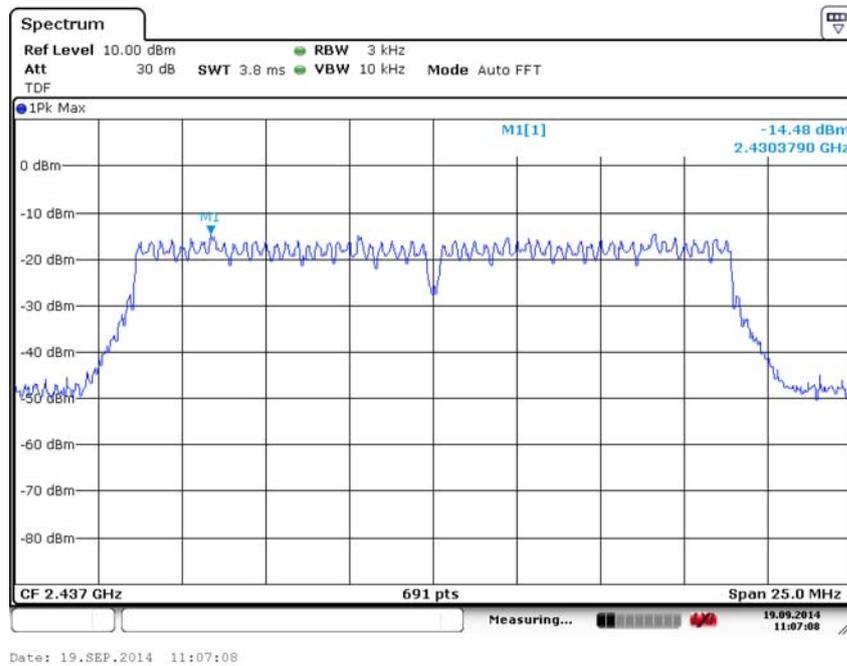


Fig. 68 Power Spectral Density (802.11n-20MHz, Ch 6)

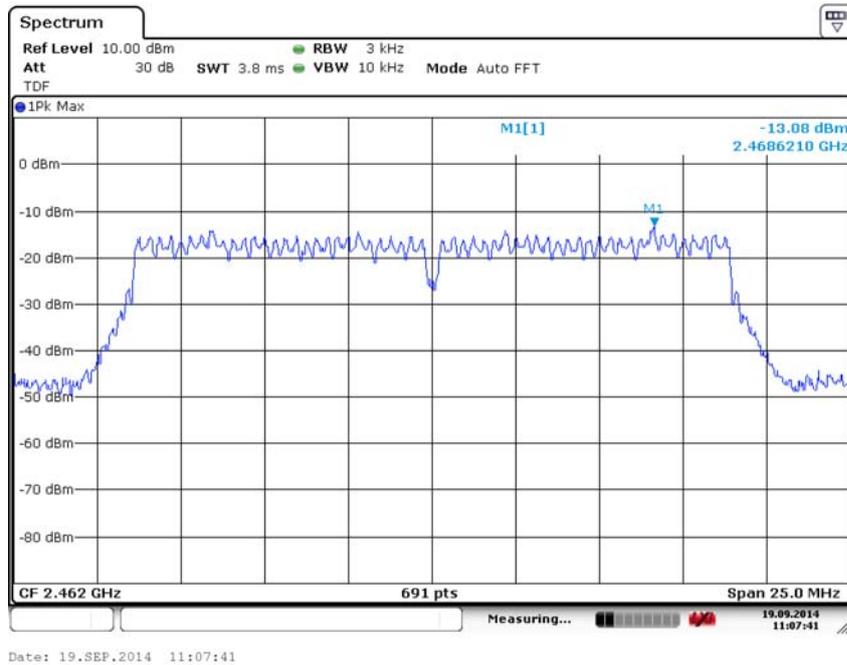


Fig. 69 Power Spectral Density (802.11n-20MHz, Ch 11)

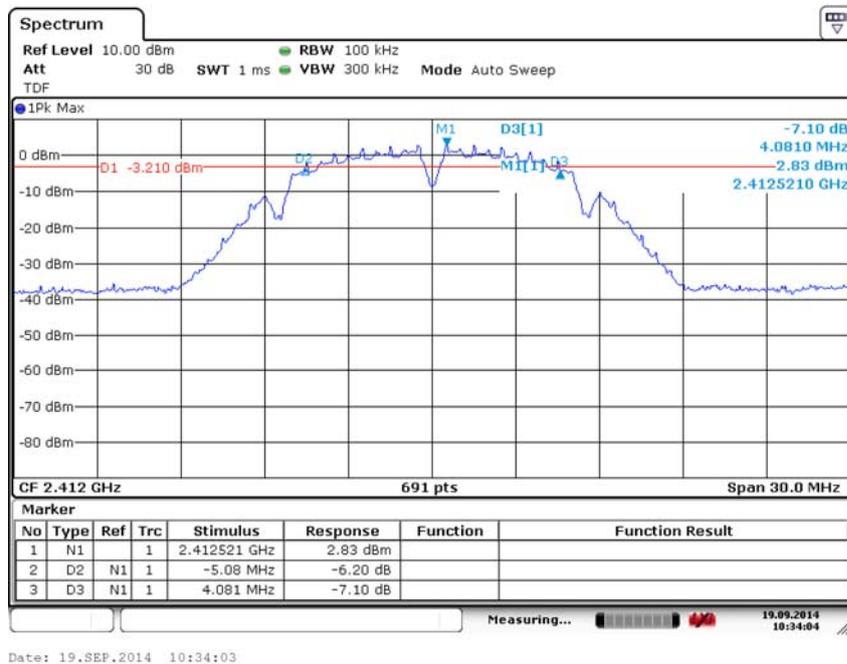


Fig. 70 Occupied 6dB Bandwidth (802.11b, Ch 1)

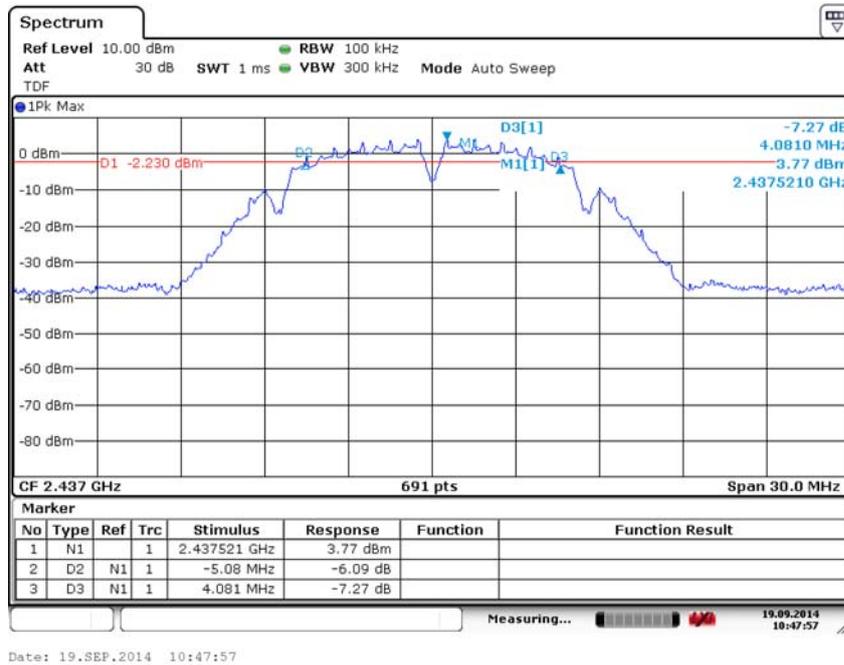


Fig. 71 Occupied 6dB Bandwidth (802.11b, Ch 6)

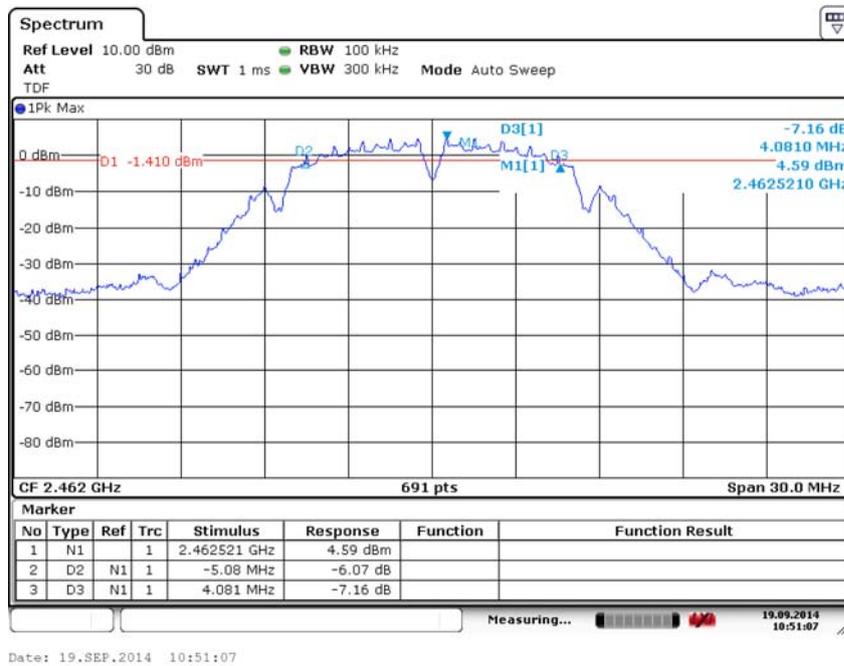


Fig. 72 Occupied 6dB Bandwidth (802.11b, Ch 11)

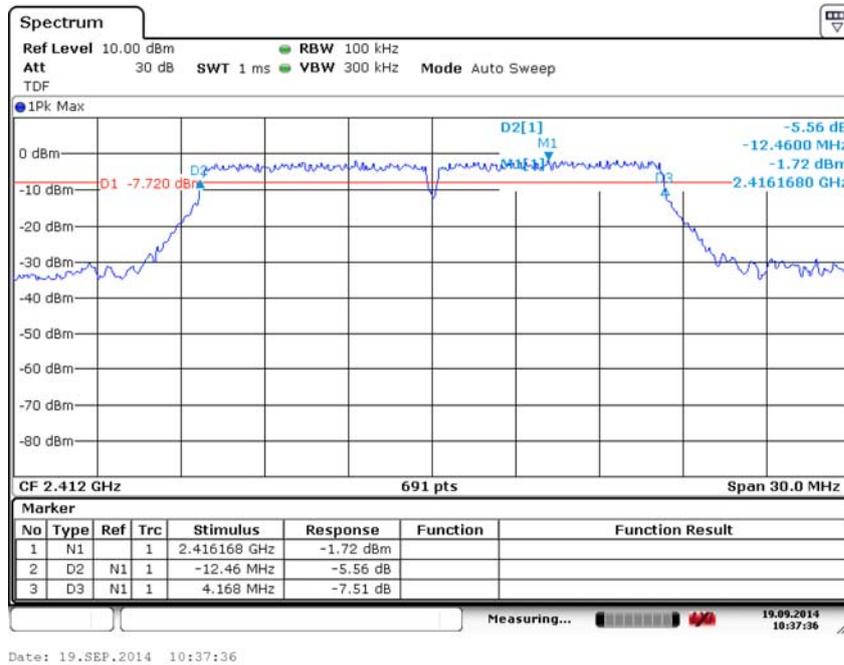


Fig. 73 Occupied 6dB Bandwidth (802.11g, Ch 1)

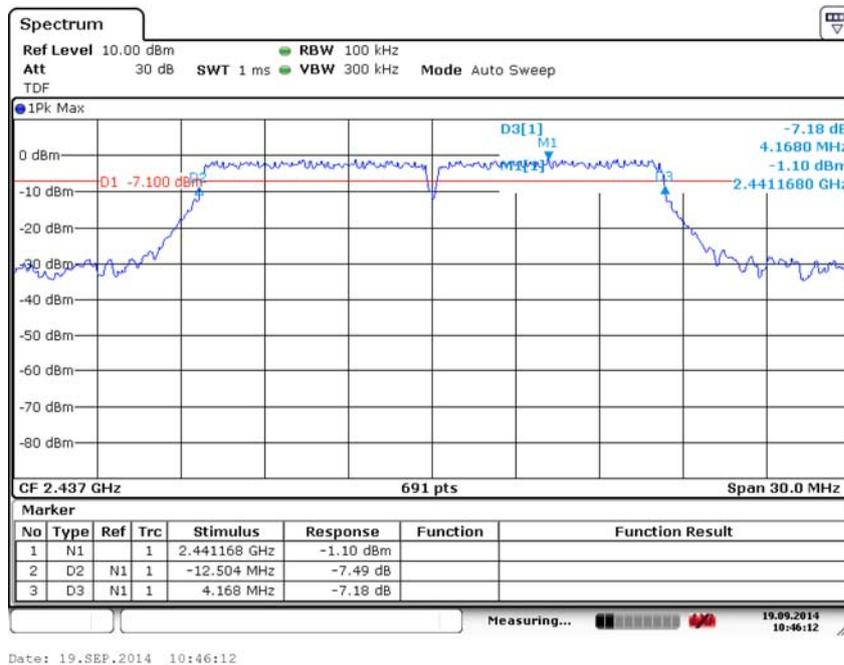


Fig. 74 Occupied 6dB Bandwidth (802.11g, Ch 6)

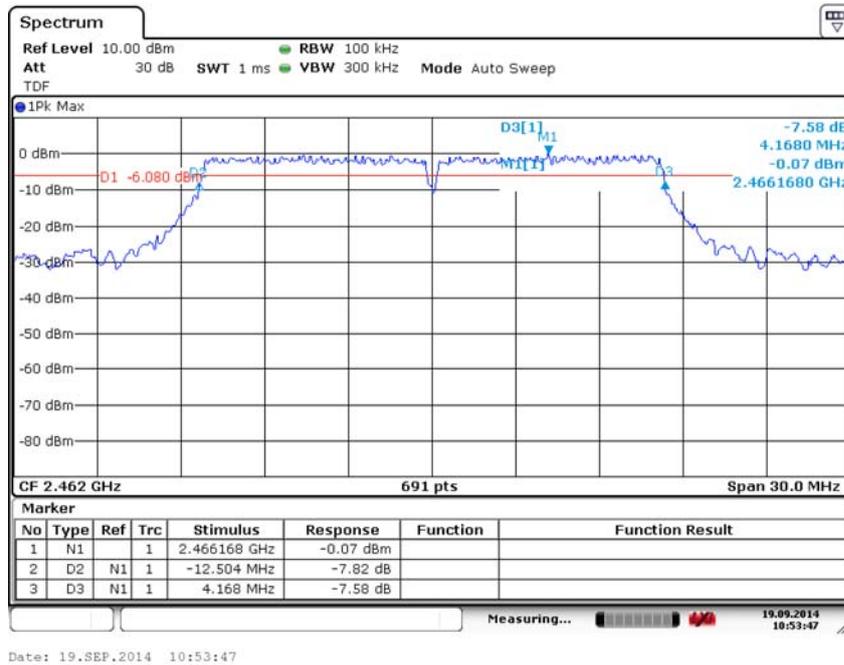


Fig. 75 Occupied 6dB Bandwidth (802.11g, Ch 11)

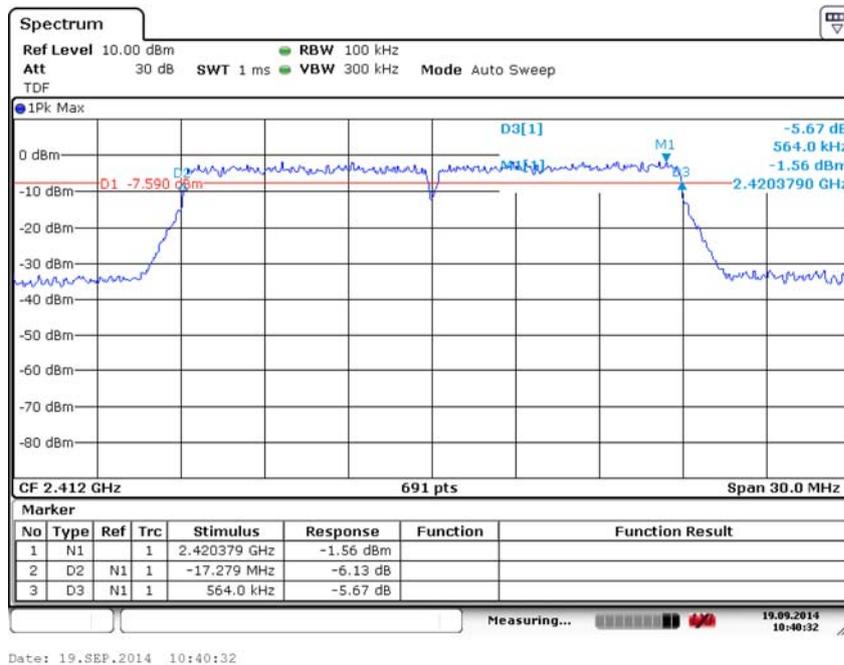


Fig. 76 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 1)

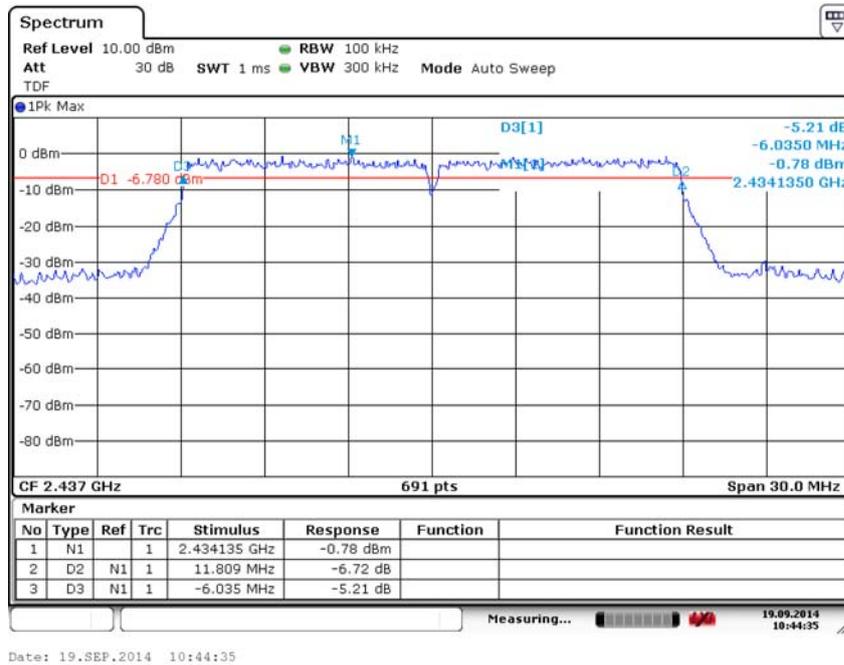


Fig. 77 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 6)

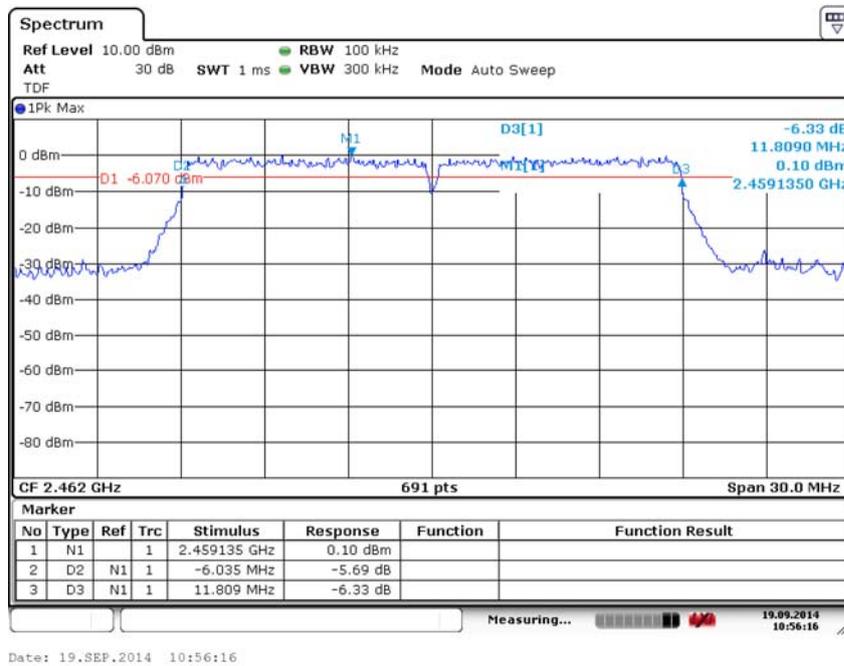


Fig. 78 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 11)

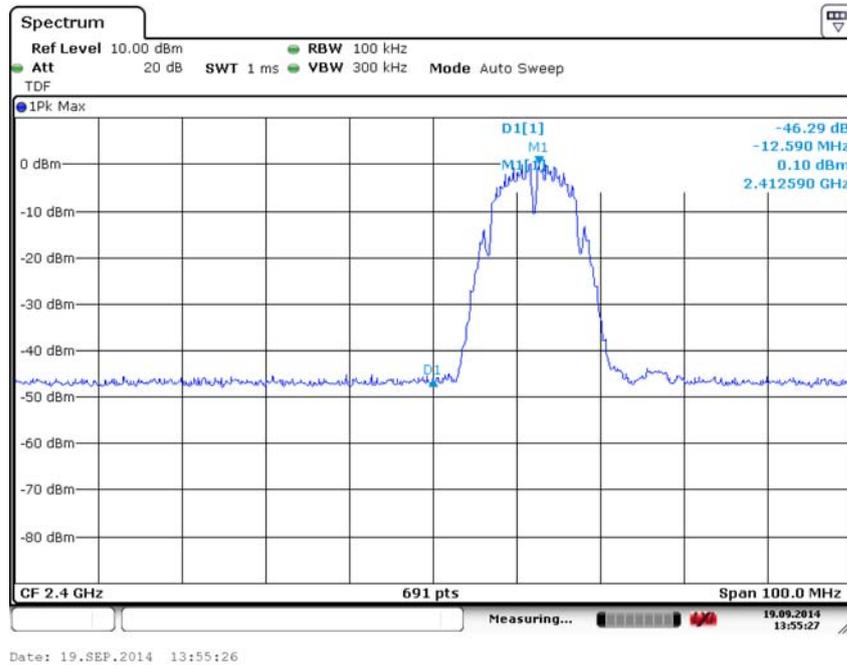


Fig. 79 Band Edges (802.11b, Ch 1)

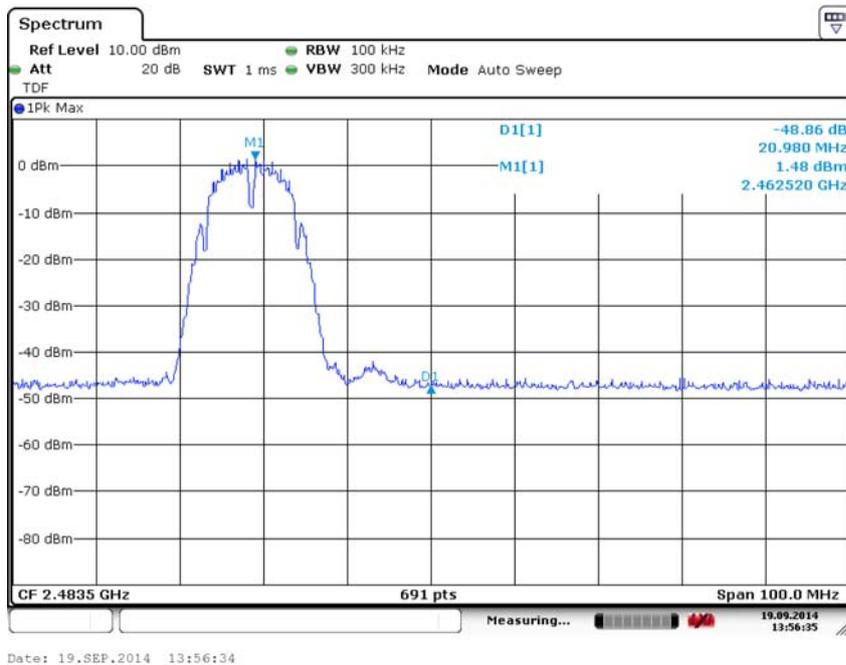


Fig. 80 Band Edges (802.11b, Ch 11)

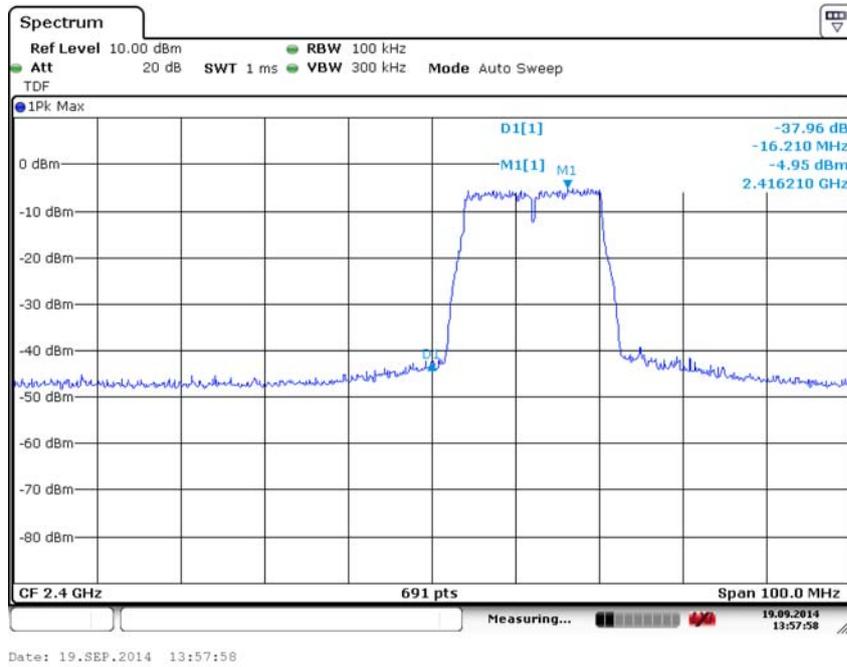


Fig. 81 Band Edges (802.11g, Ch 1)

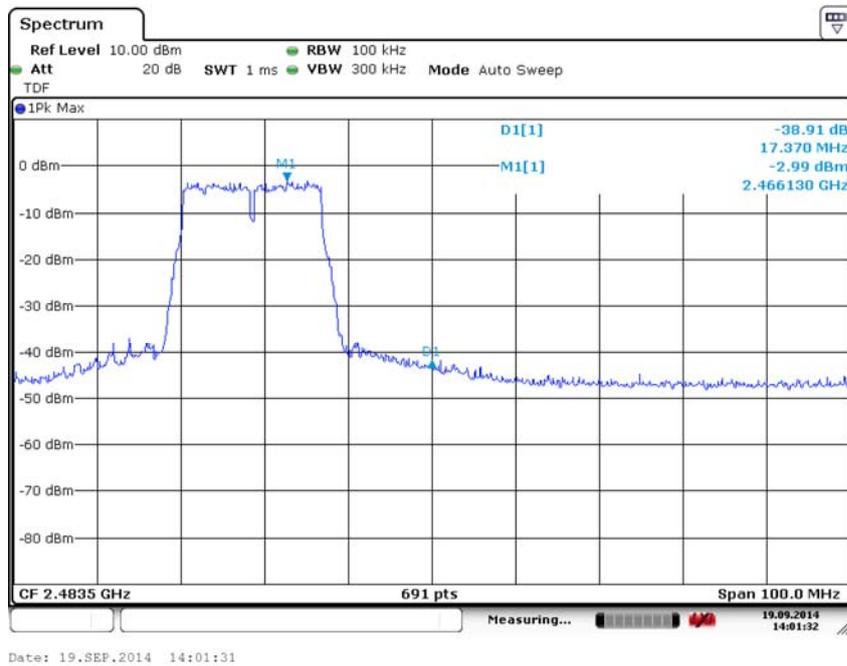


Fig. 82 Band Edges (802.11g, Ch 11)

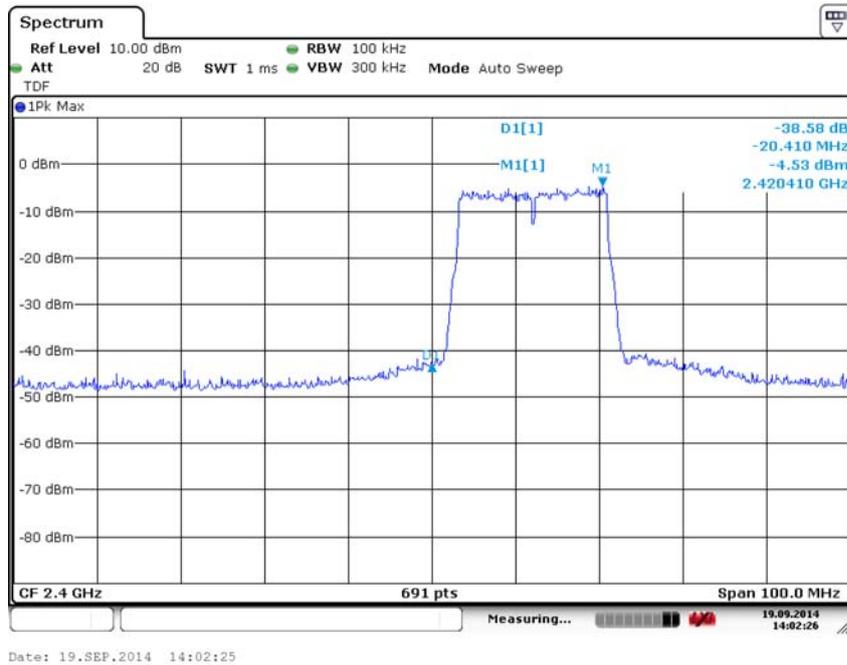


Fig. 83 Band Edges (802.11 n-20MHz, Ch 1)

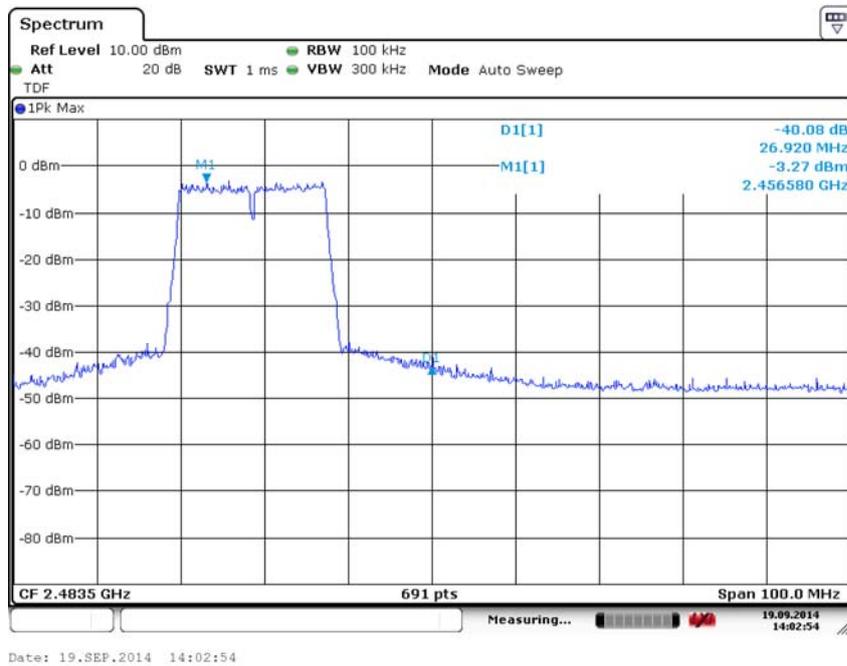


Fig. 84 Band Edges (802.11 n-20MHz, Ch 11)

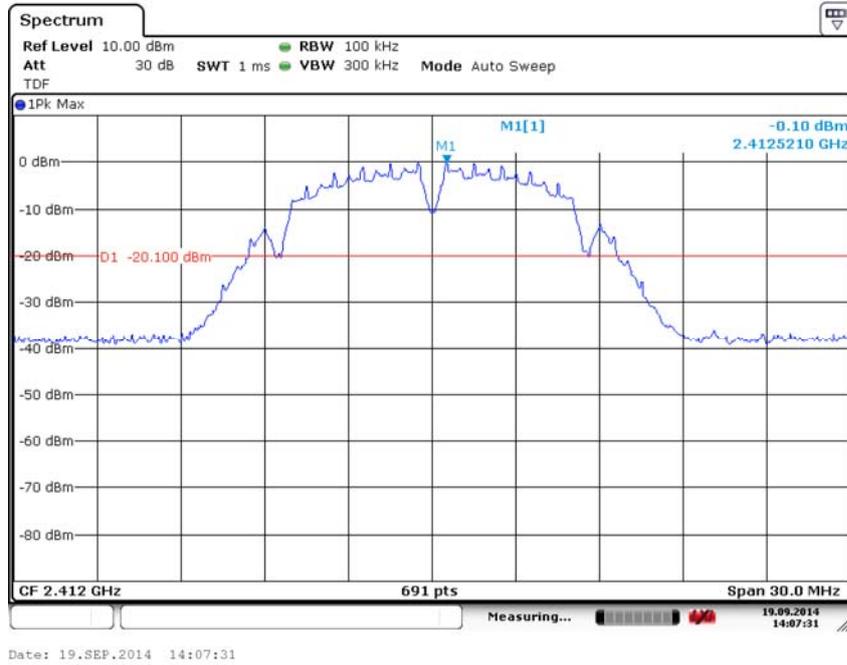


Fig. 85 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)

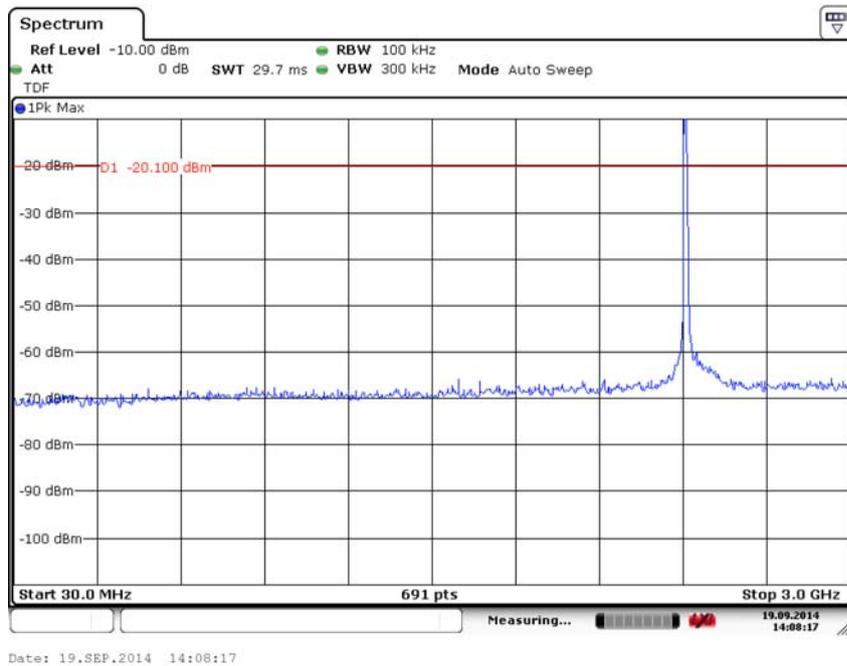


Fig. 86 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-3 GHz)

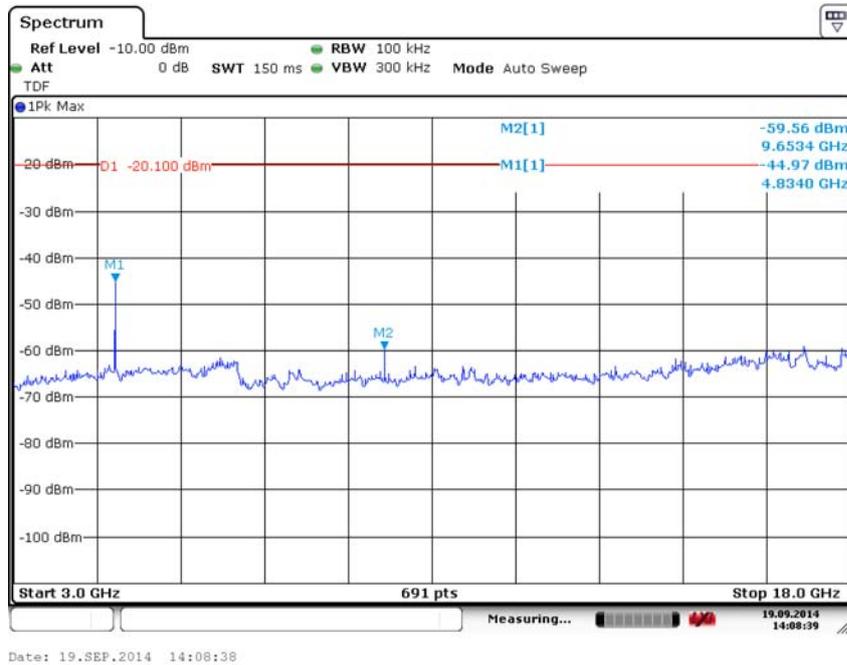


Fig. 87 Conducted Spurious Emission (802.11b, Ch1, 3 GHz-18 GHz)

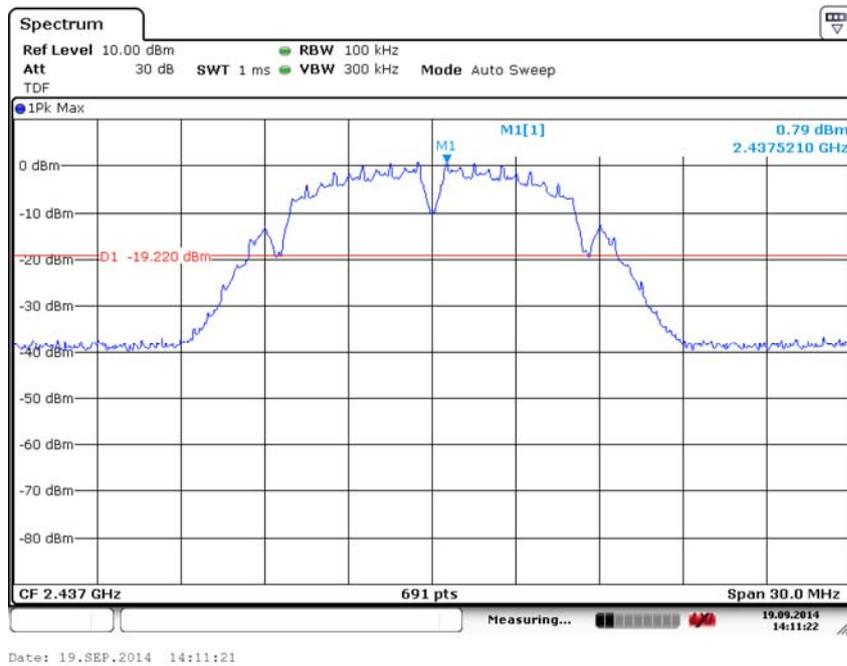


Fig. 88 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)

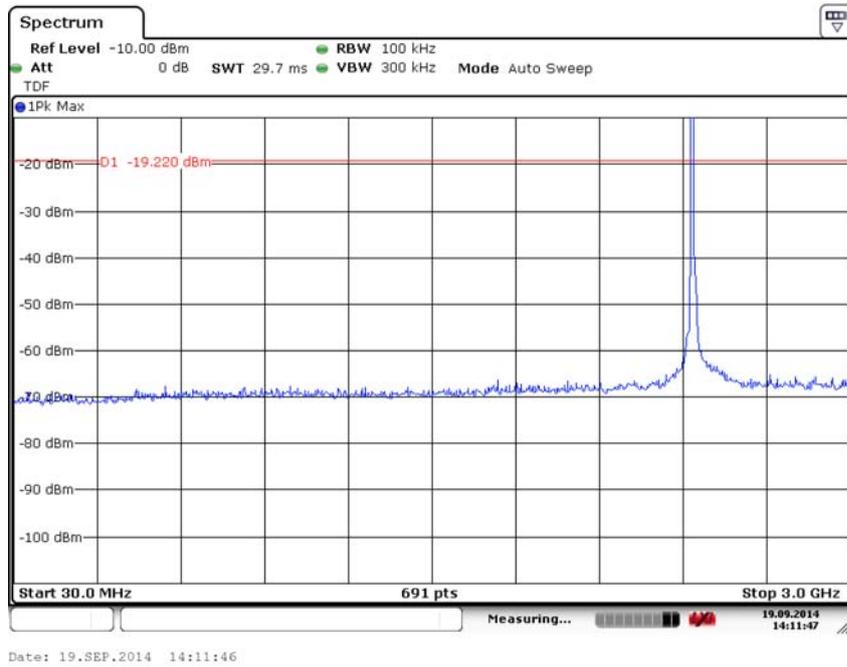


Fig. 89 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-3 GHz)

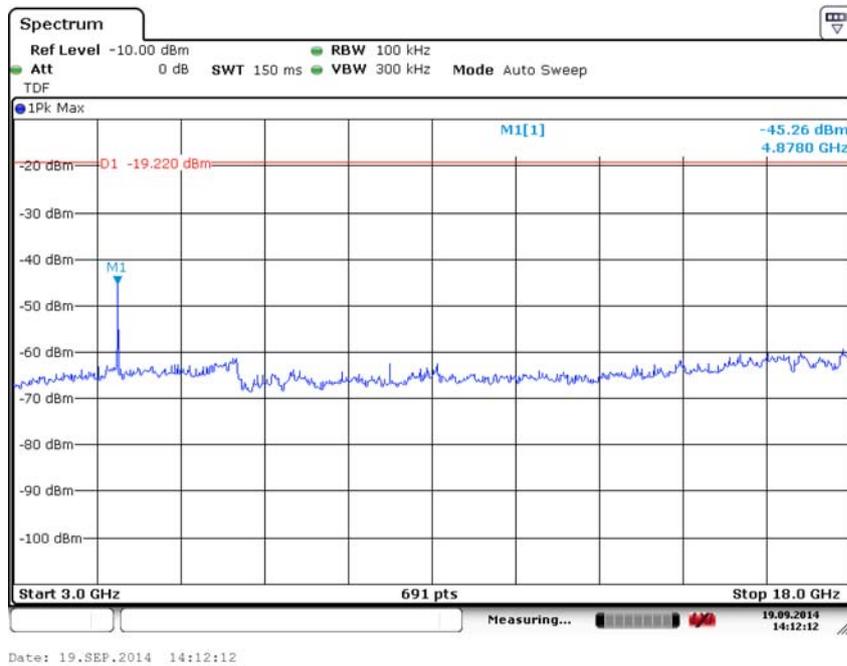


Fig. 90 Conducted Spurious Emission (802.11b, Ch6, 3 GHz-18 GHz)

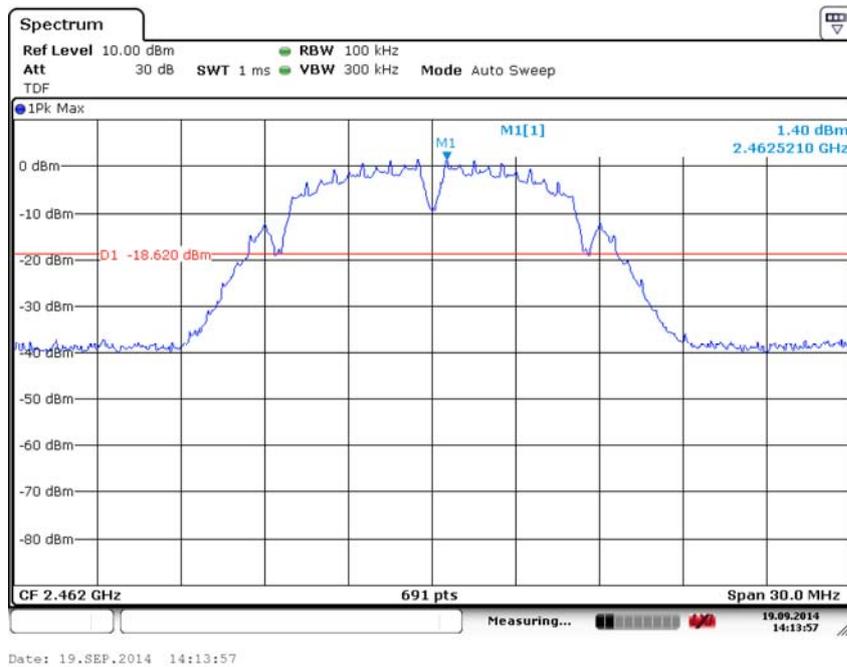


Fig. 91 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)

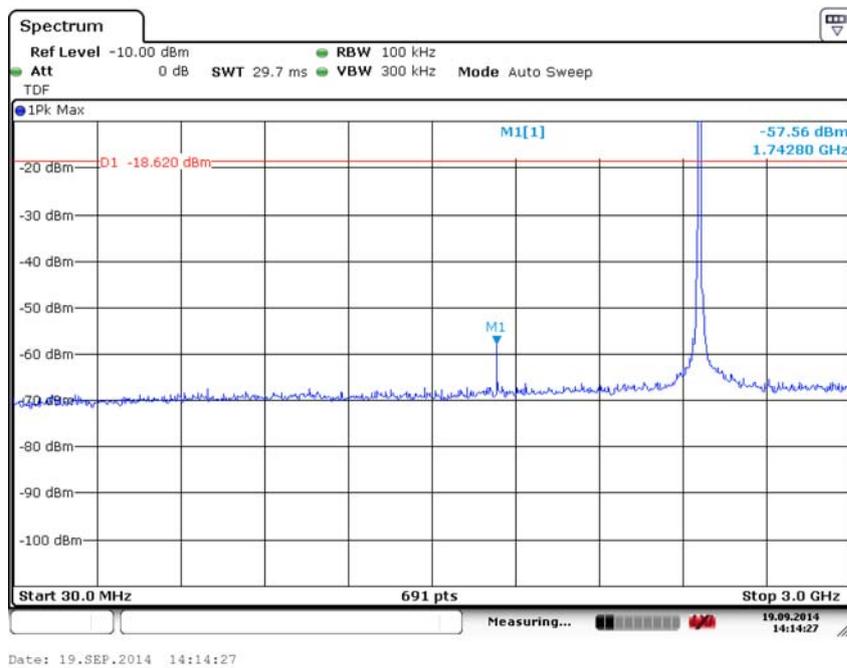


Fig. 92 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-3 GHz)

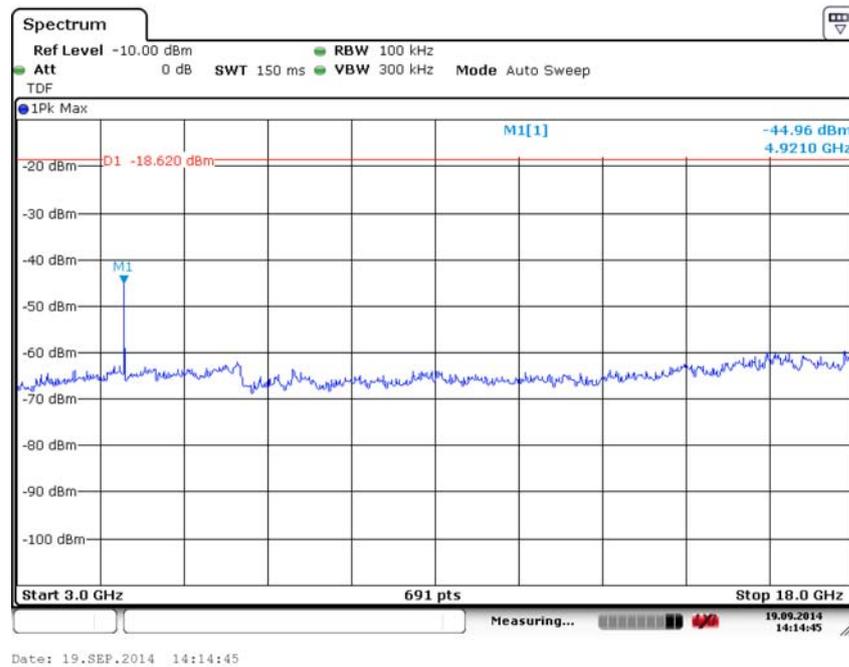


Fig. 93 Conducted Spurious Emission (802.11b, Ch11, 3 GHz-18 GHz)

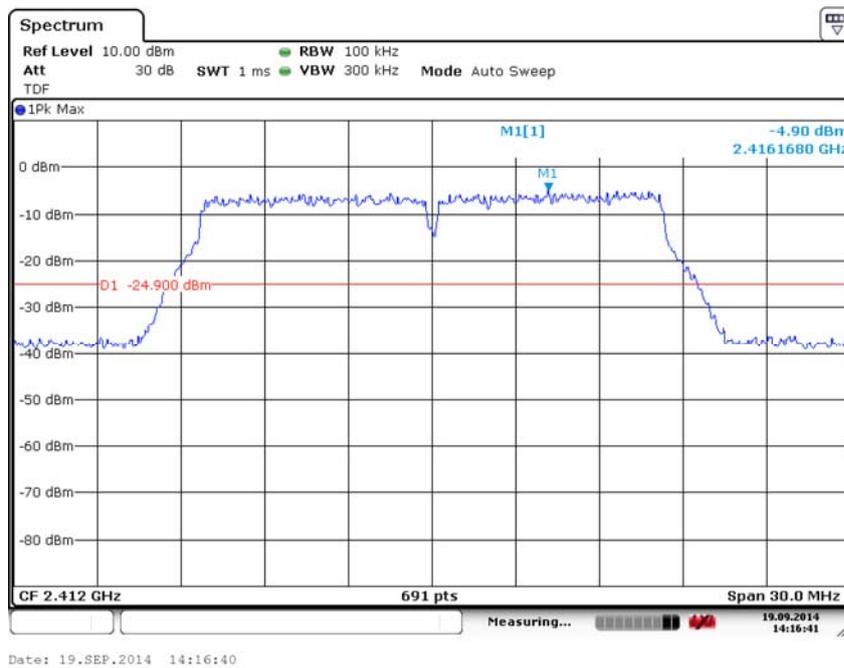


Fig. 94 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)

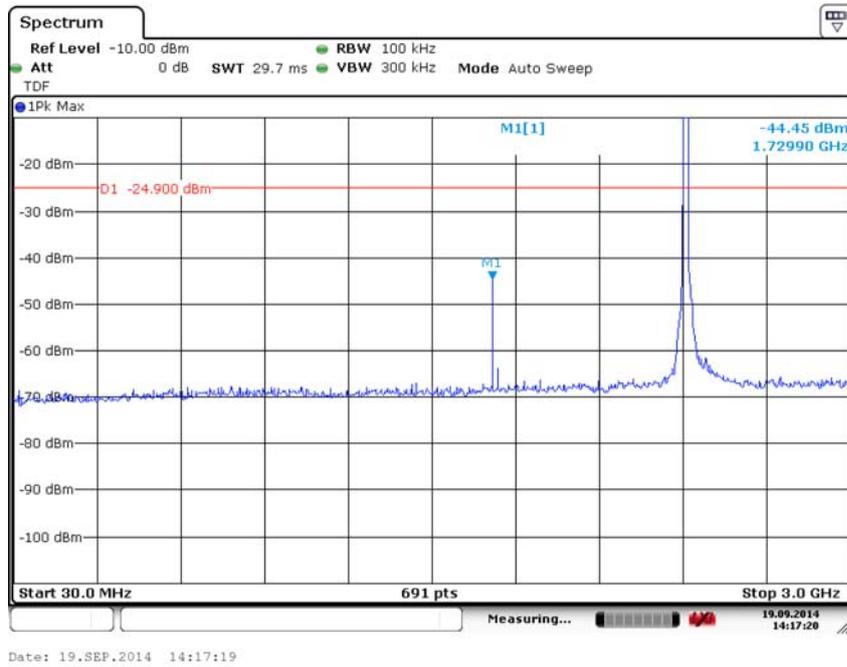


Fig. 95 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-3 GHz)

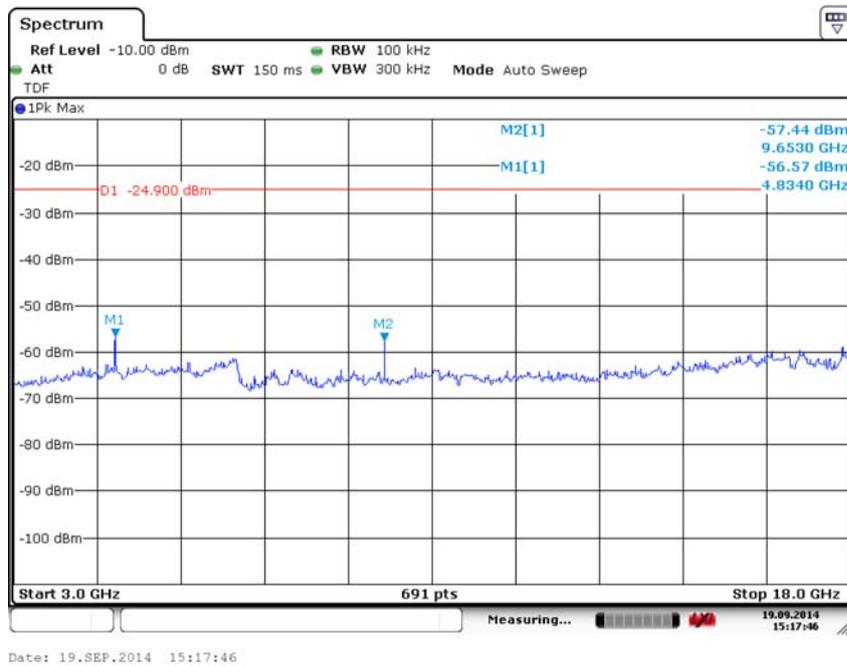


Fig. 96 Conducted Spurious Emission (802.11g, Ch1, 3 GHz-18 GHz)

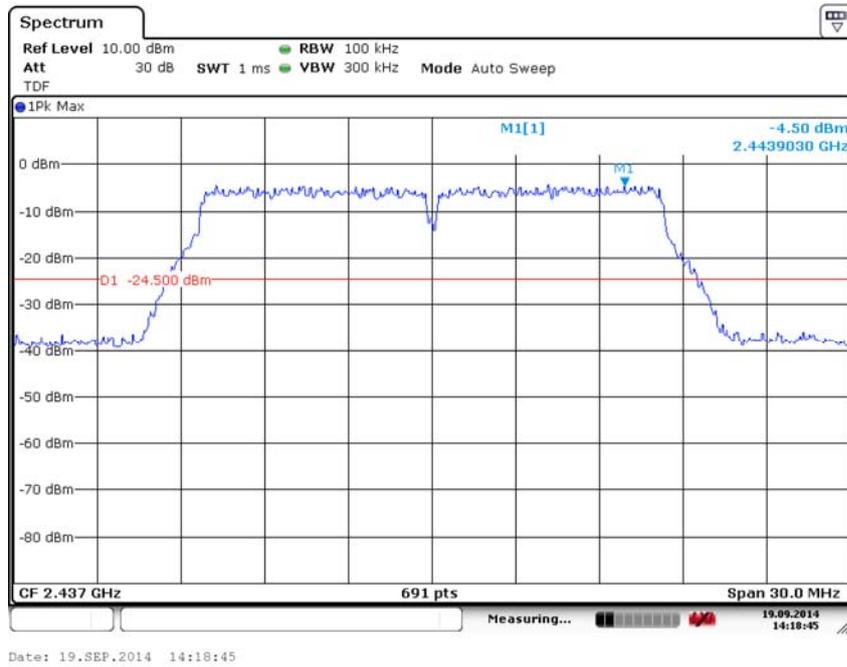


Fig. 97 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)

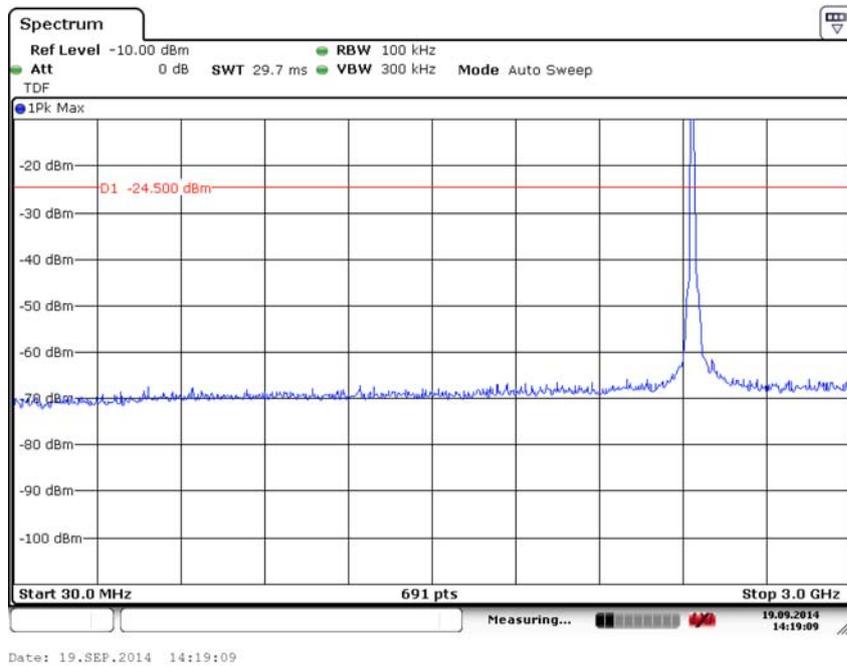


Fig. 98 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-3 GHz)

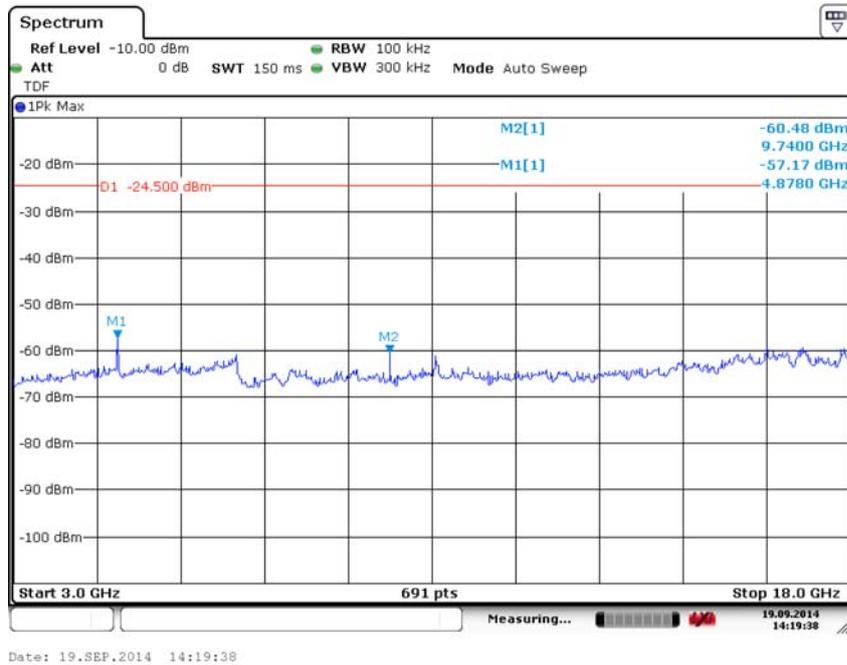


Fig. 99 Conducted Spurious Emission (802.11g, Ch6, 3 GHz-18 GHz)

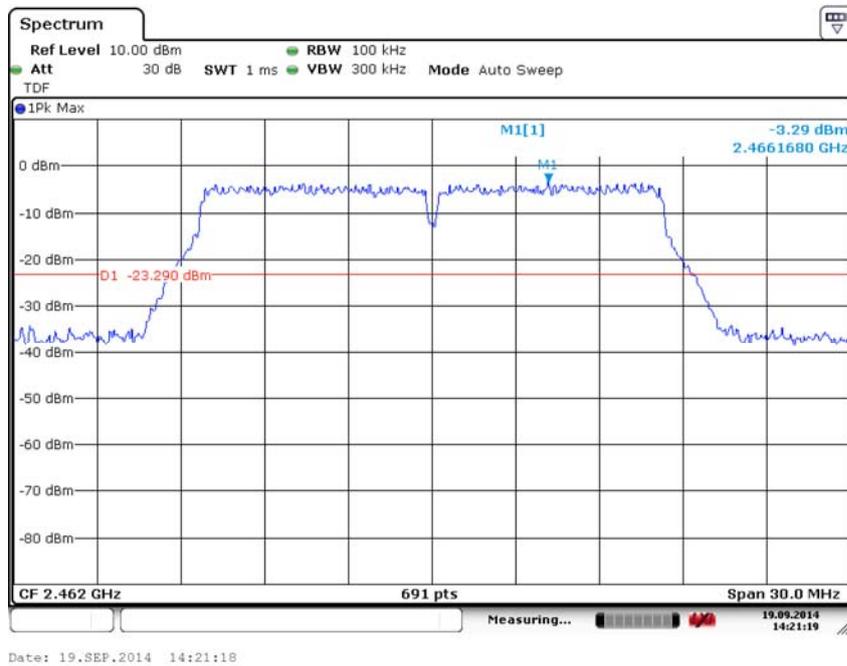


Fig. 100 Conducted Spurious Emission (802.11g, Ch11, Center Frequency)

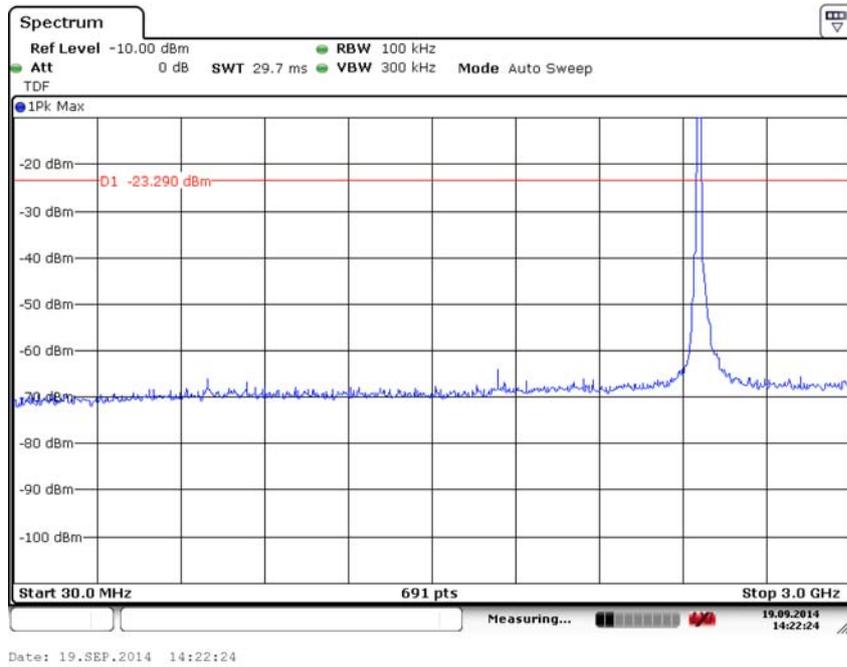


Fig. 101 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-3 GHz)

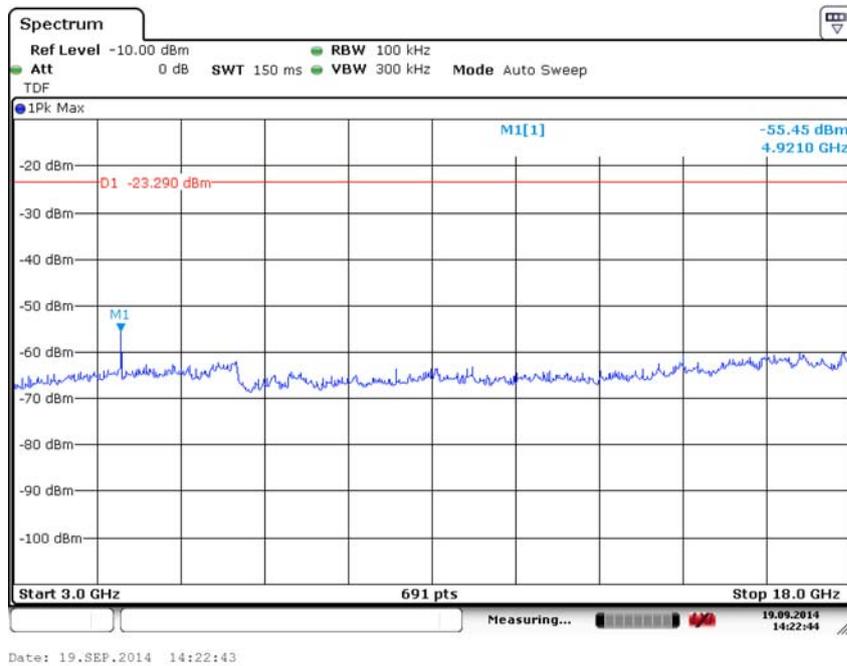


Fig. 102 Conducted Spurious Emission (802.11g, Ch11, 3 GHz-18 GHz)

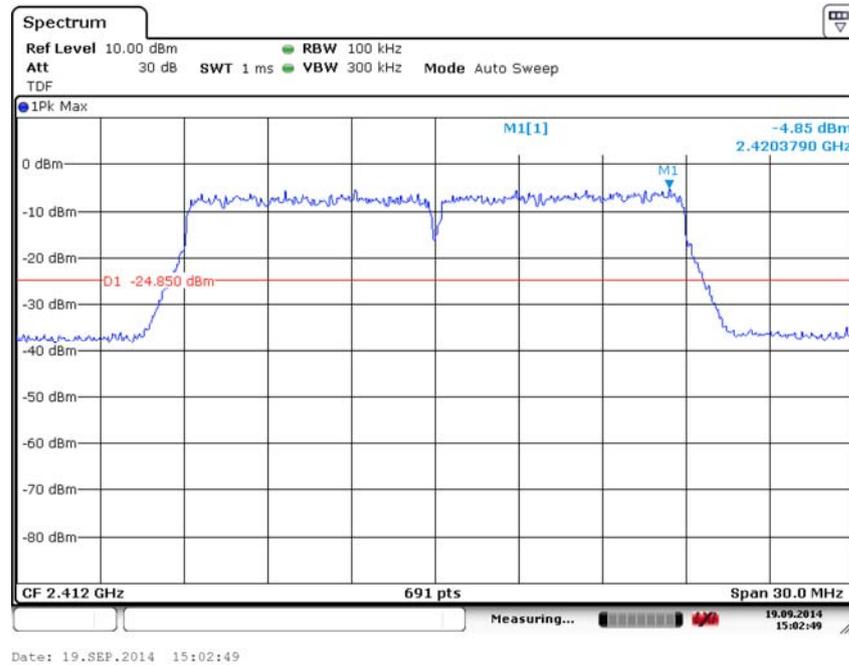


Fig. 103 Conducted Spurious Emission (802.11n-20M, Ch1, Center Frequency)

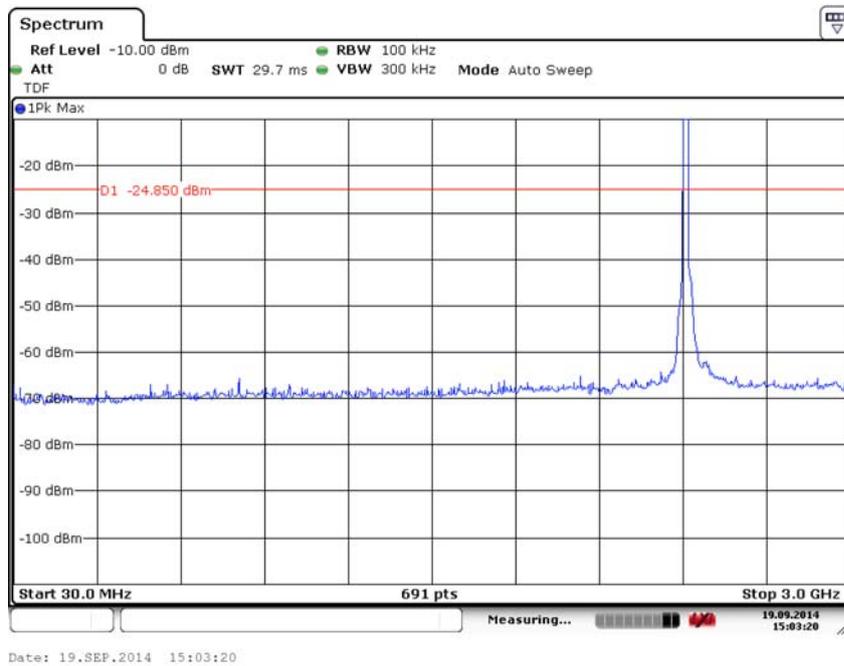


Fig. 104 Conducted Spurious Emission (802.11n-20M, Ch1, 30 MHz-3 GHz)

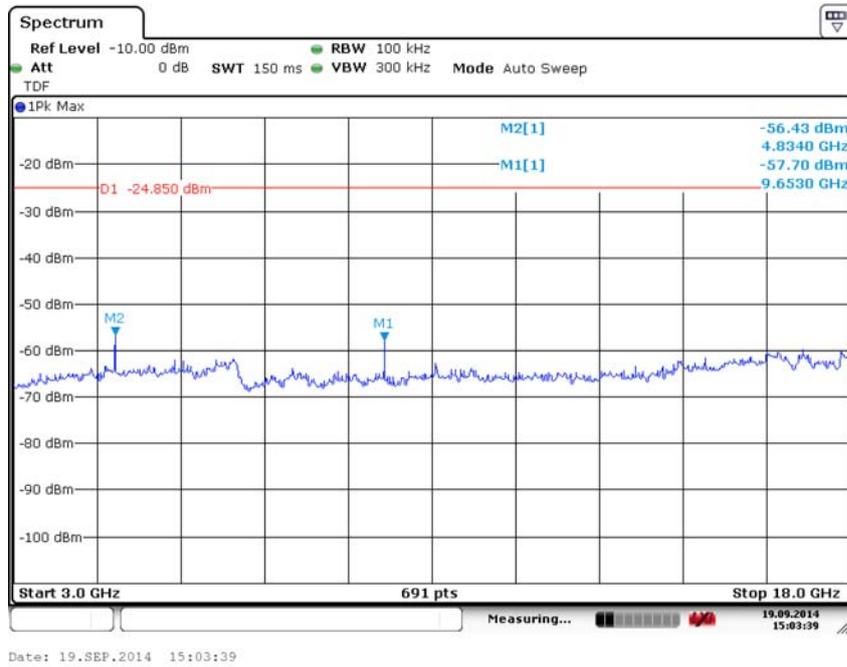


Fig. 105 Conducted Spurious Emission (802.11n-20M, Ch1, 3 GHz-18 GHz)

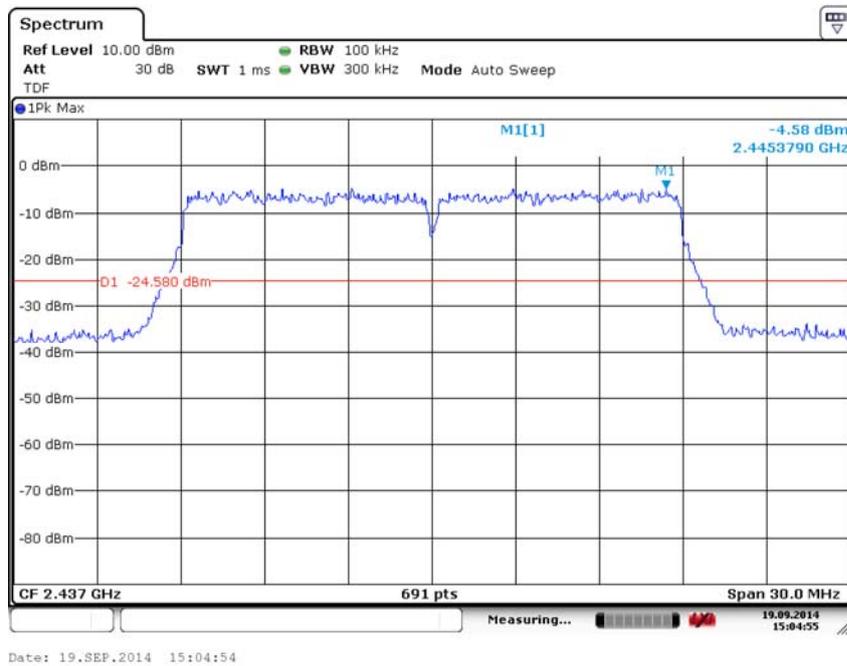


Fig. 106 Conducted Spurious Emission (802.11n-20M, Ch6, Center Frequency)

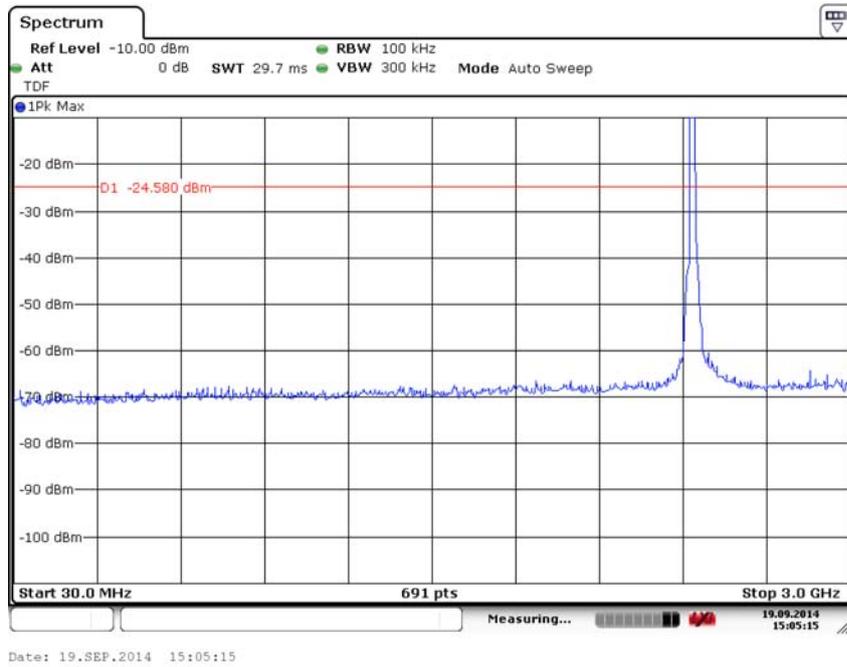


Fig. 107 Conducted Spurious Emission (802.11n-20M, Ch6, 30 MHz-3 GHz)

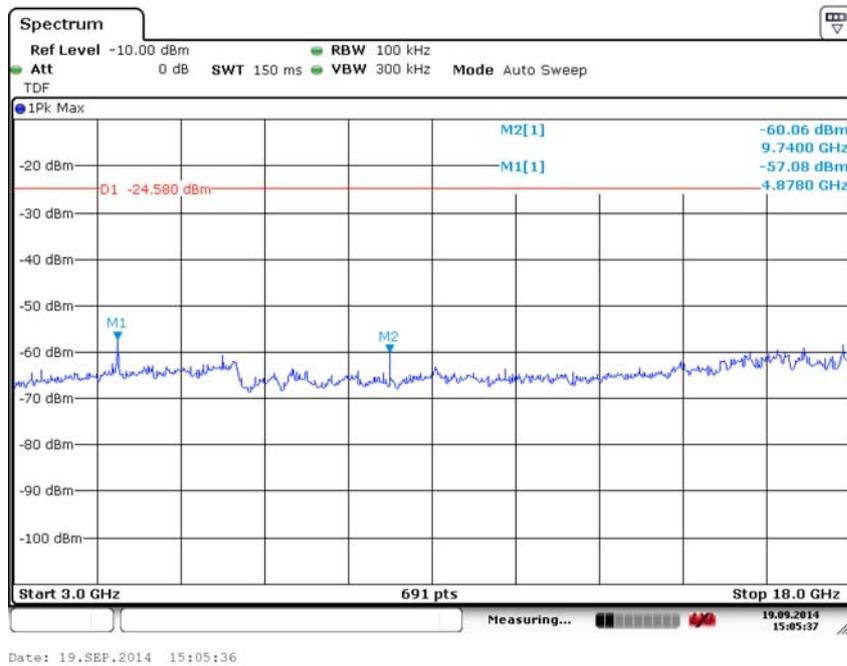


Fig. 108 Conducted Spurious Emission (802.11n-20M, Ch6, 3 GHz-18 GHz)

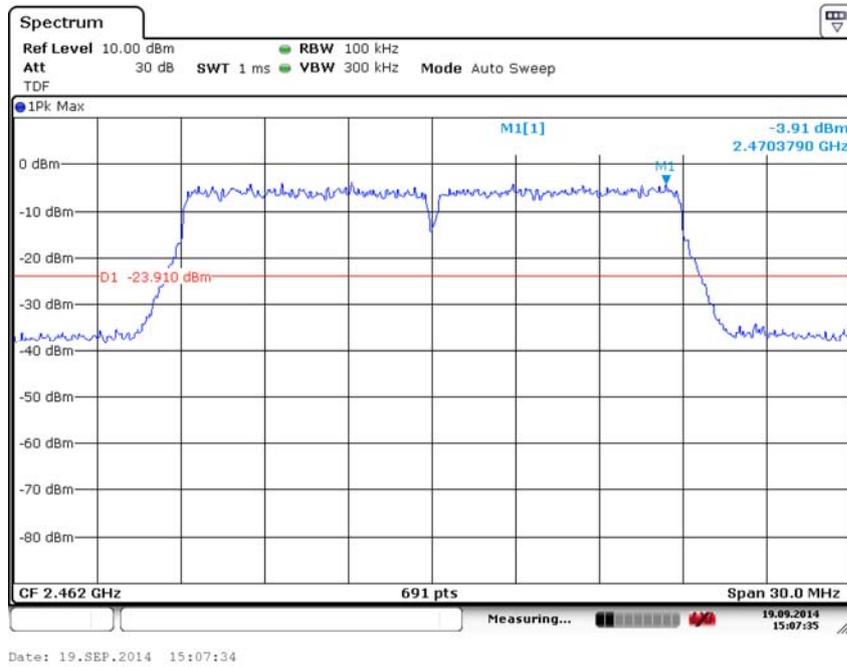


Fig. 109 Conducted Spurious Emission (802.11n-20M, Ch11, Center Frequency)

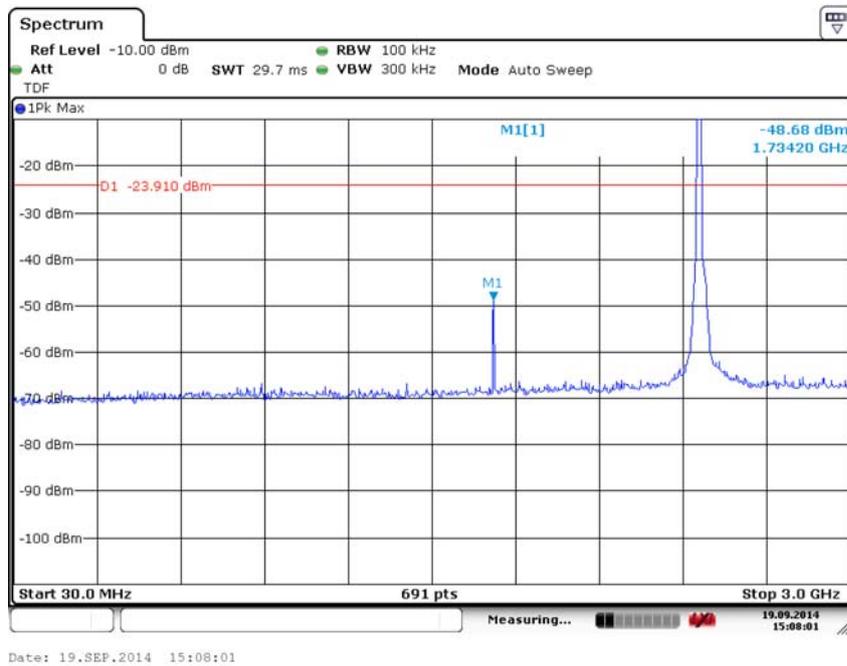


Fig. 110 Conducted Spurious Emission (802.11n-20M, Ch11, 30 MHz-3 GHz)

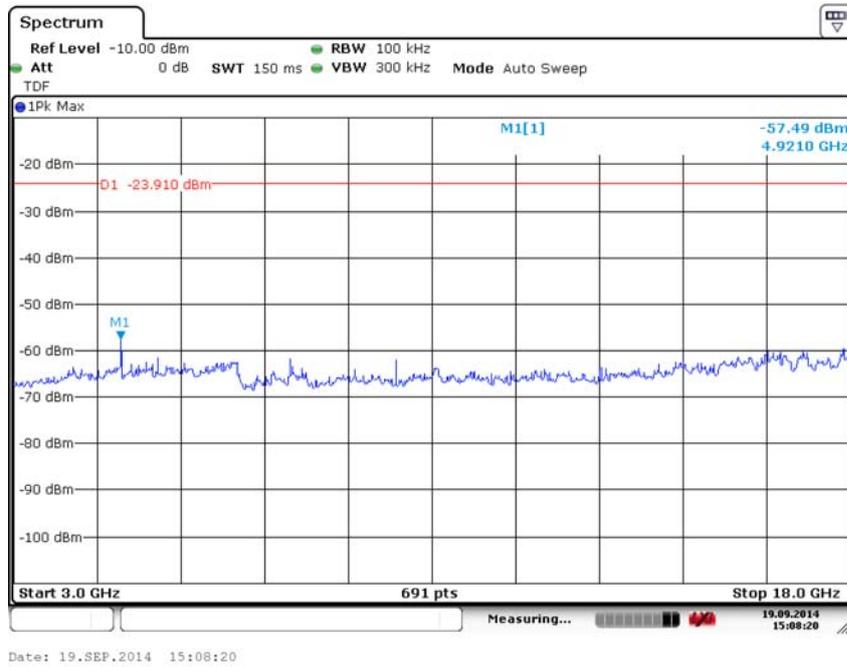


Fig. 111 Conducted Spurious Emission (802.11n-20M, Ch11, 3 GHz-18 GHz)

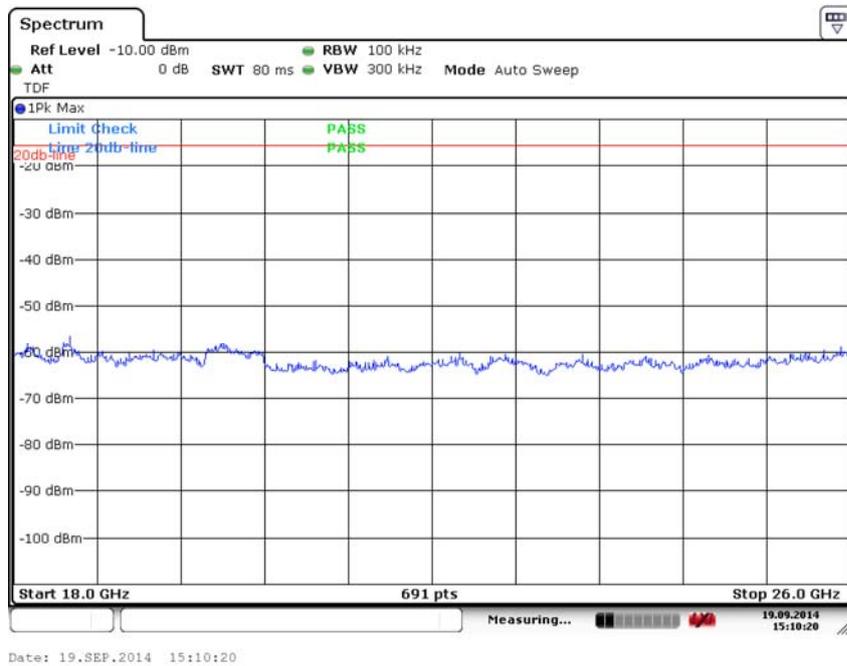


Fig. 112 Conducted Spurious Emission (All channels, 18 GHz-26 GHz)

FCC-RE1-Part 15-30M-1G

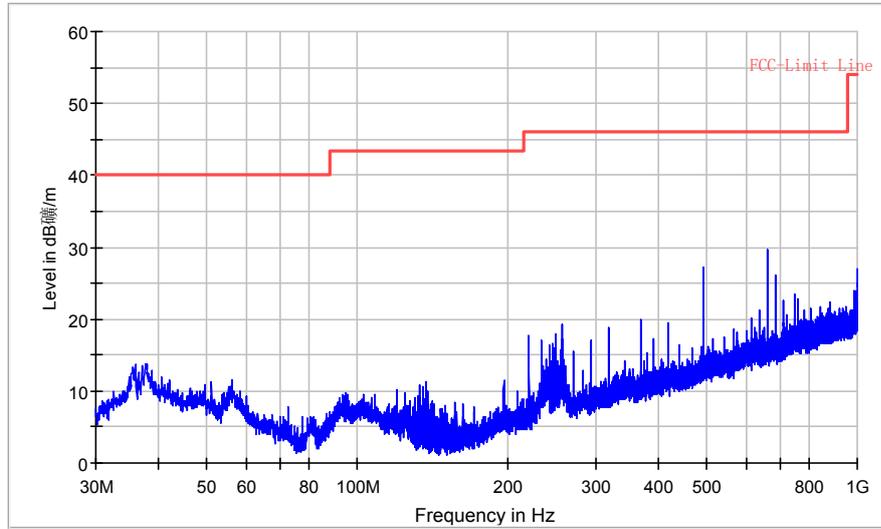


Fig. 113 Radiated Spurious Emission (802.11b, Ch1, 30MHz-1 GHz)

FCC-RE2-1-18G-PEAK+AV

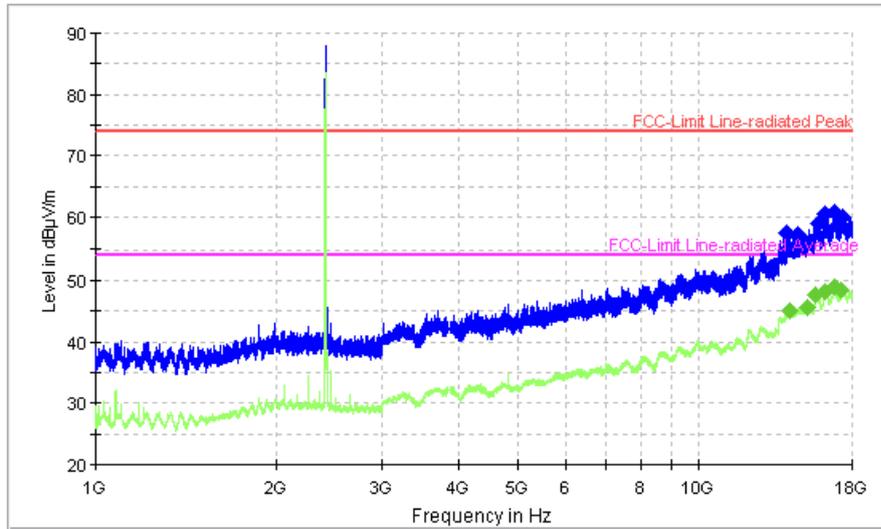


Fig. 114 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-18 GHz)

FCC-RE1-Part 15-30M-1G

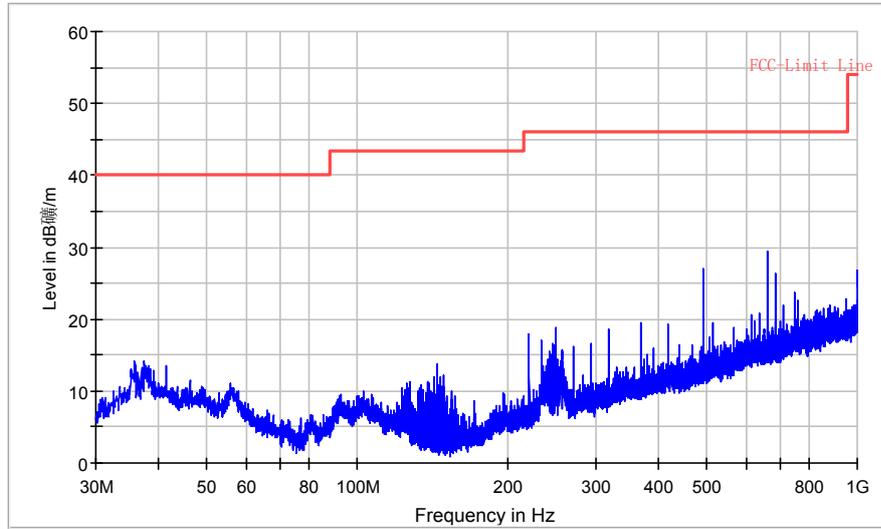


Fig. 115 Radiated Spurious Emission (802.11b, Ch6, 30MHz-1 GHz)

FCC-RE2-1-18G-PEAK+AV

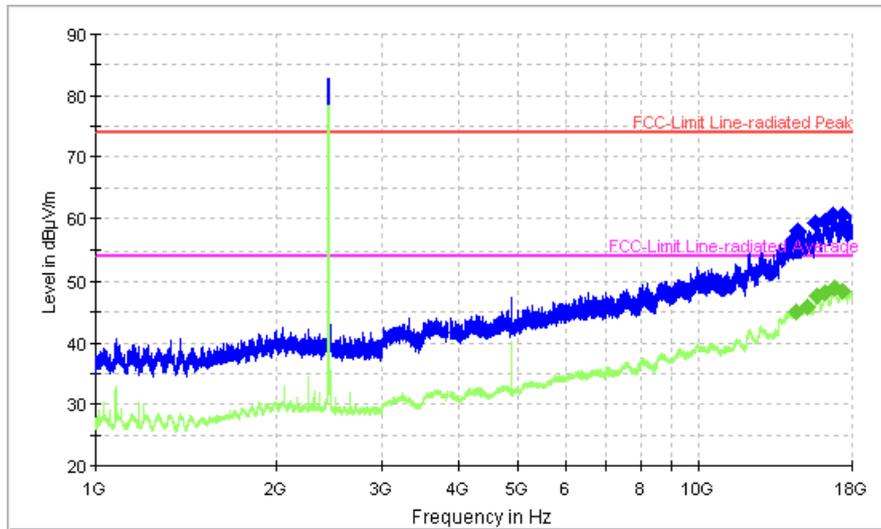


Fig. 116 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-18 GHz)

FCC-RE1-Part 15-30M-1G

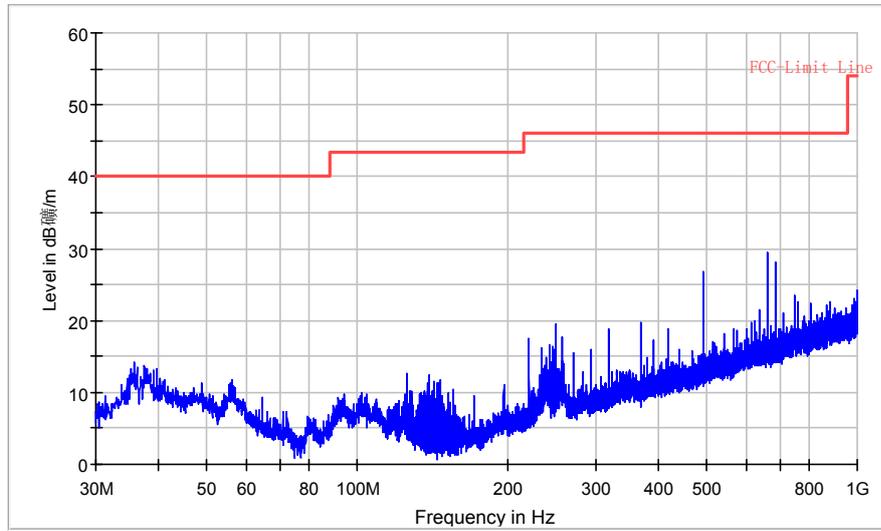


Fig. 117 Radiated Spurious Emission (802.11b, Ch11, 30MHz-1 GHz)

FCC-RE2-1-18G-PEAK+AV

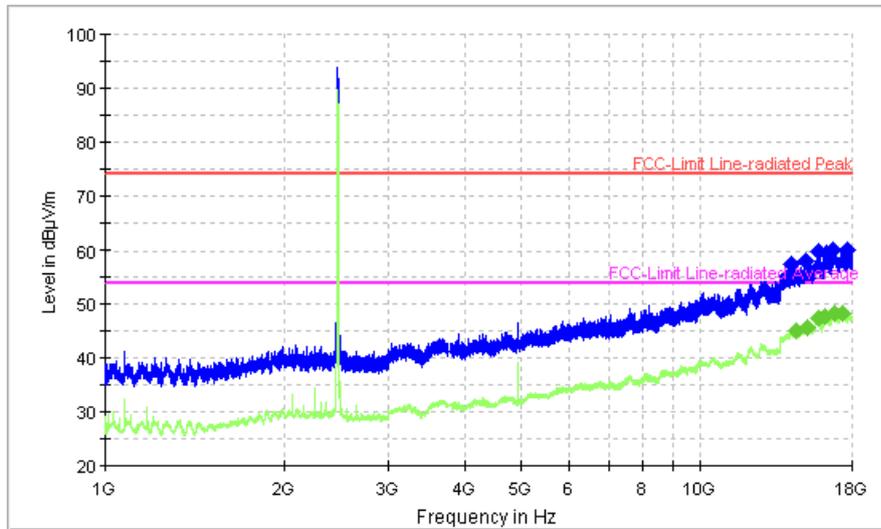


Fig. 118 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-18 GHz)

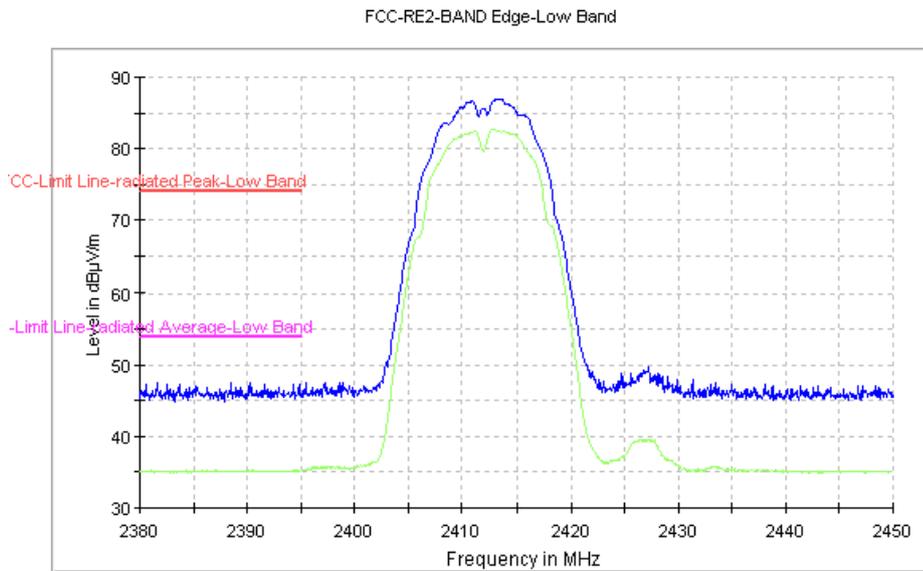


Fig. 119 Radiated Emission Power (802.11b, Ch1, 2380GHz~2450GHz)

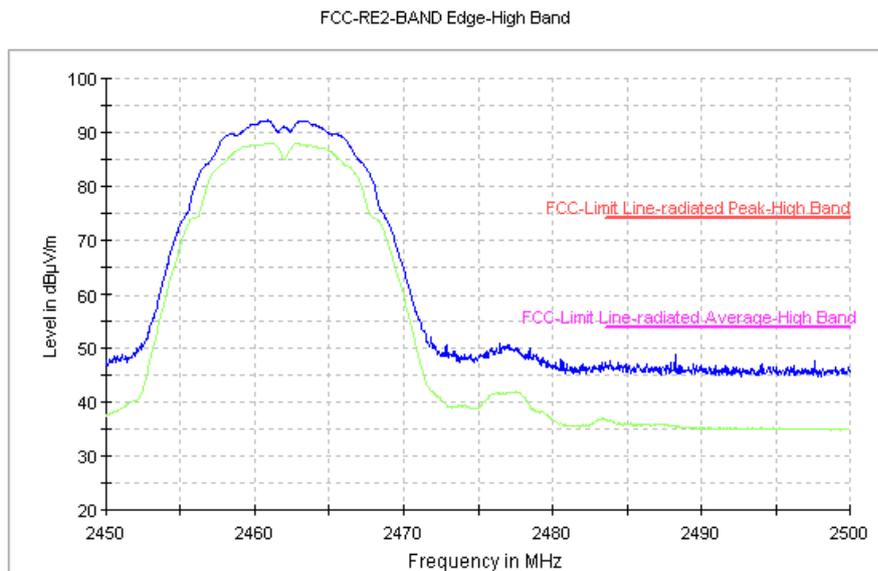


Fig. 120 Radiated Emission Power (802.11b, Ch11, 2450GHz~2500GHz)

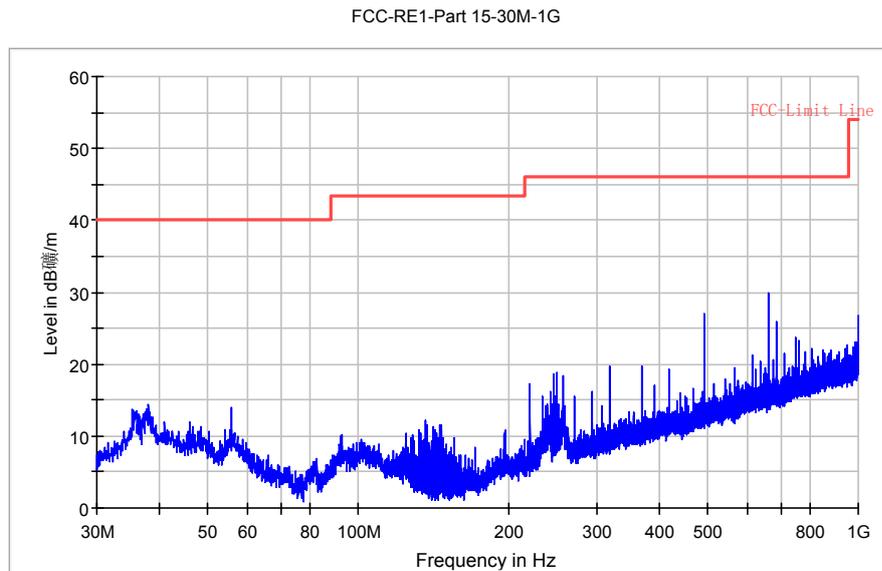


Fig. 121 Radiated Spurious Emission (802.11g, Ch1,30MHz-1 GHz)

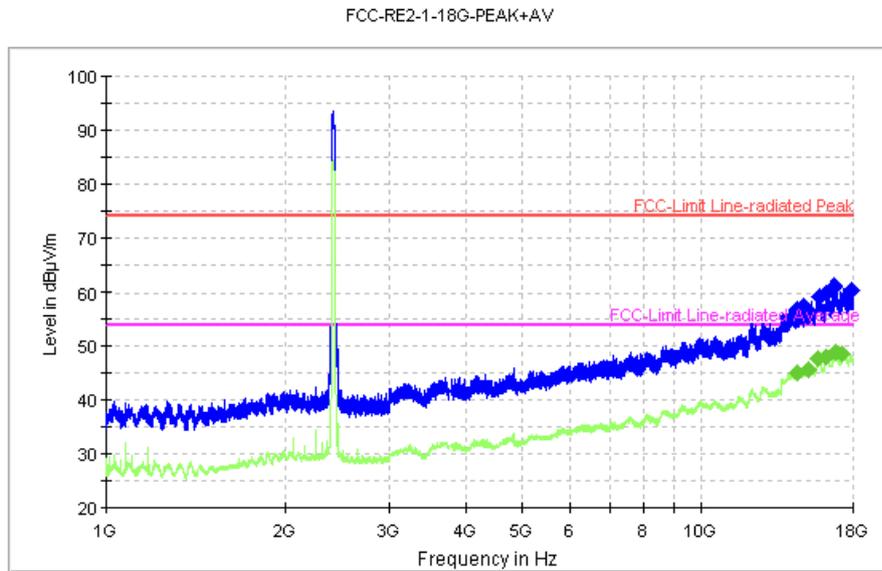


Fig. 122 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-18 GHz)

FCC-RE1-Part 15-30M-1G

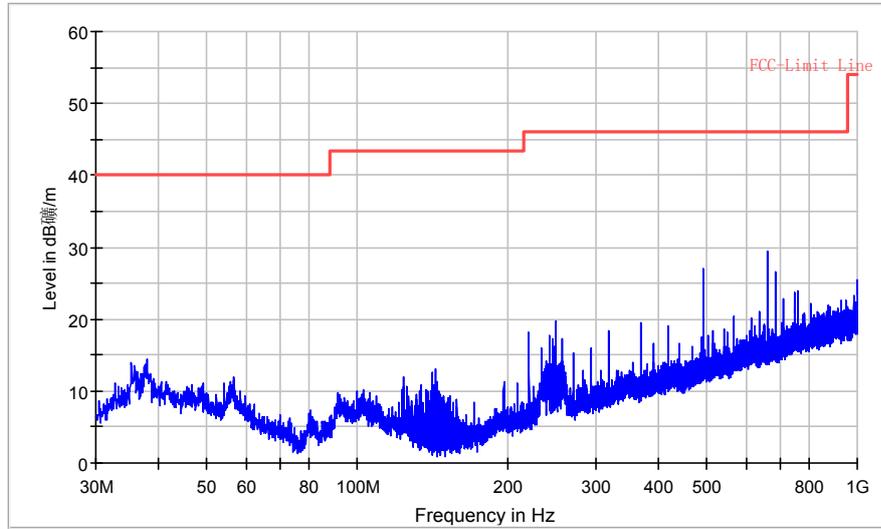


Fig. 123 Radiated Spurious Emission (802.11g, Ch6, 30MHz-1 GHz)

FCC-RE2-1-18G-PEAK+AV

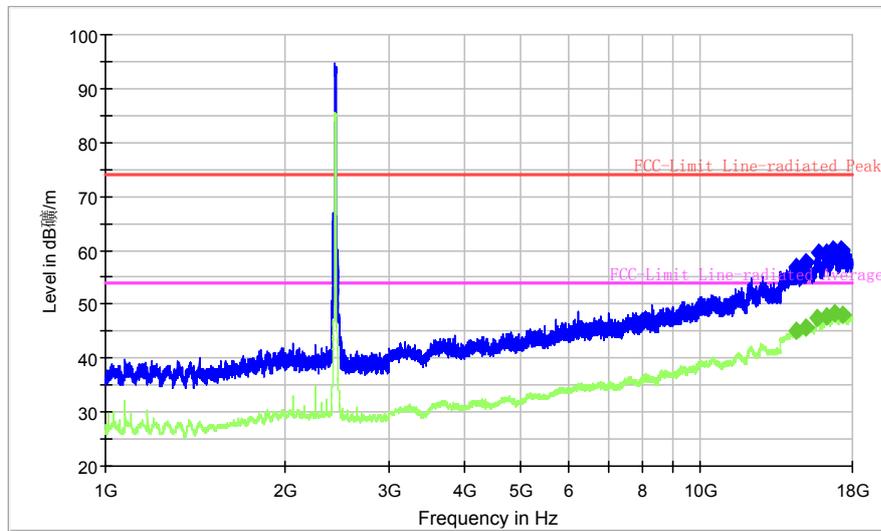


Fig. 124 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-18 GHz)

FCC-RE1-Part 15-30M-1G

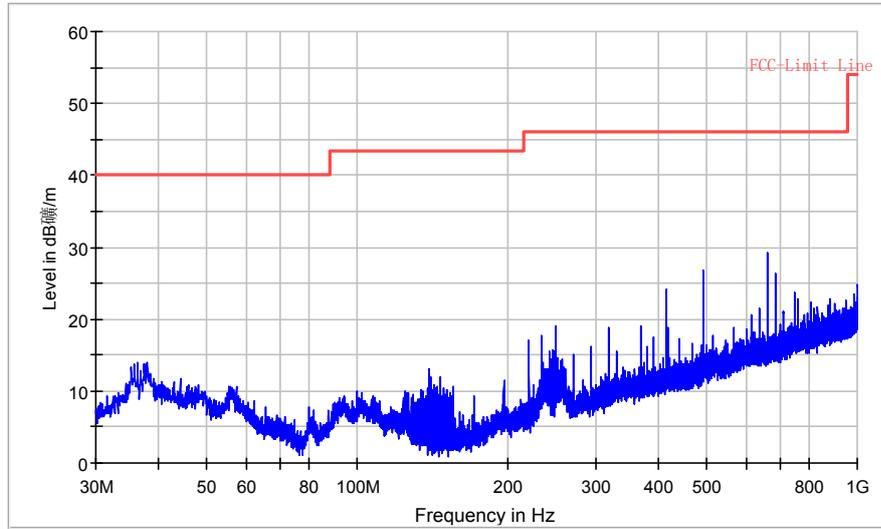


Fig. 125 Radiated Spurious Emission (802.11g, Ch11, 30MHz-1 GHz)

FCC-RE2-1-18G-PEAK+AV

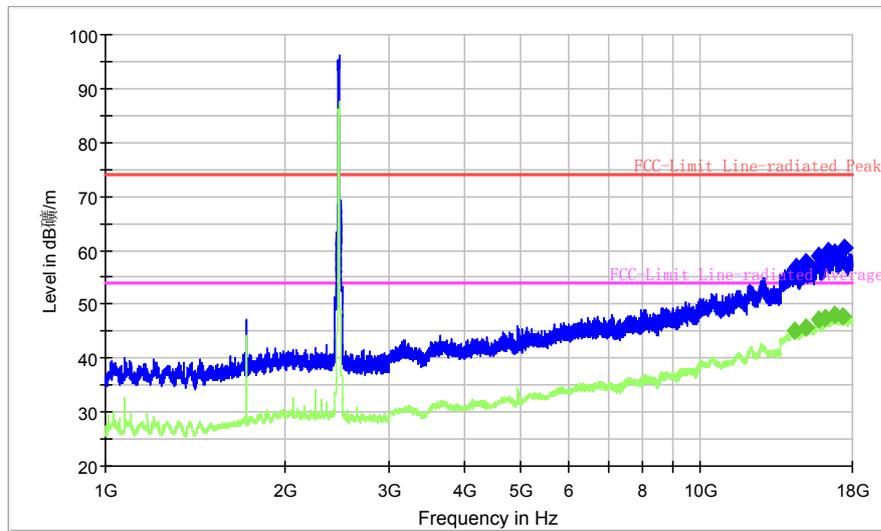


Fig. 126 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-18 GHz)

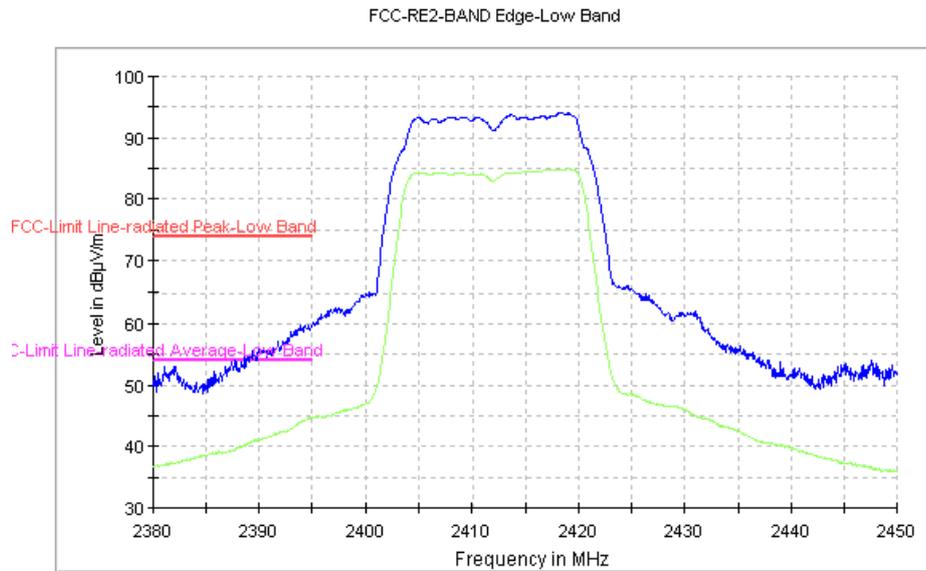


Fig. 127 Radiated Emission Power (802.11g, Ch1, 2380GHz~2450GHz)

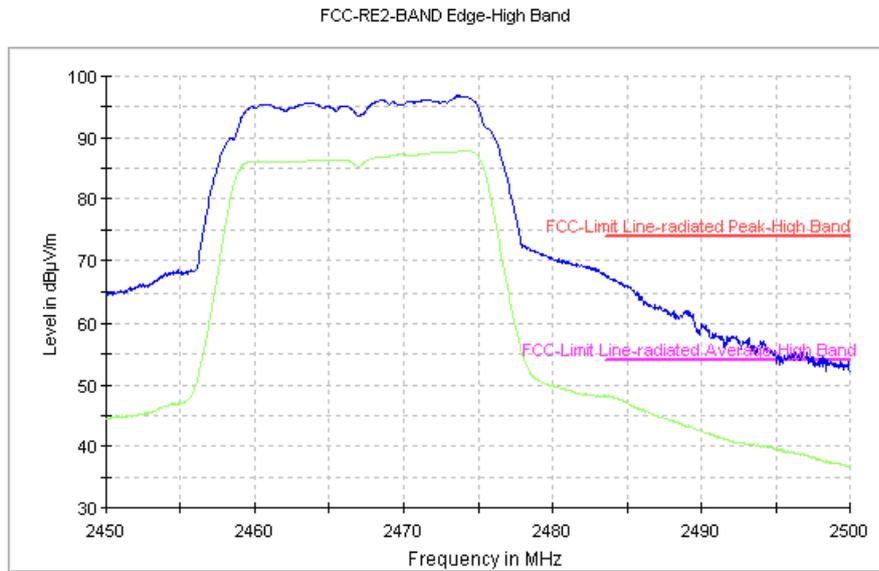


Fig. 128 Radiated Emission Power (802.11g, Ch11, 2450GHz~2500GHz)

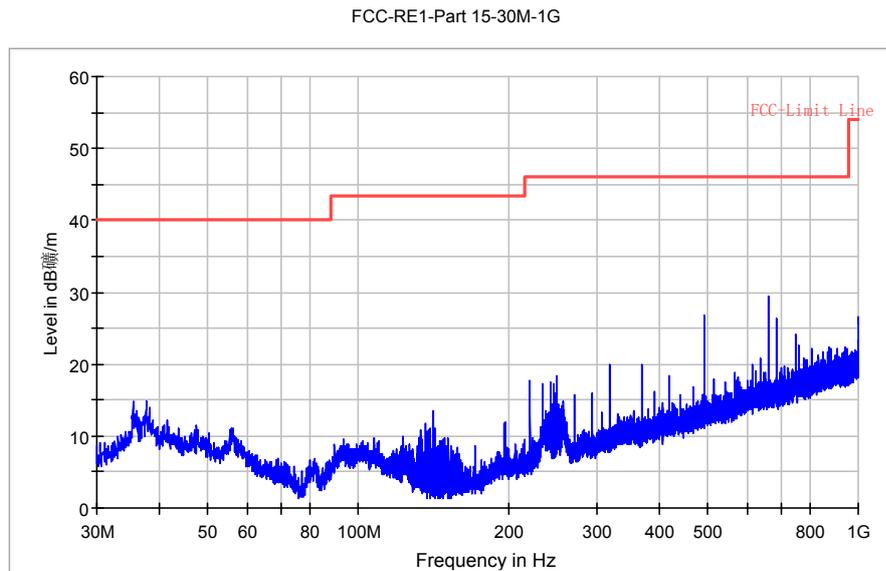


Fig. 129 Radiated Spurious Emission (802.11n-20M, Ch1, 30MHz-1 GHz)

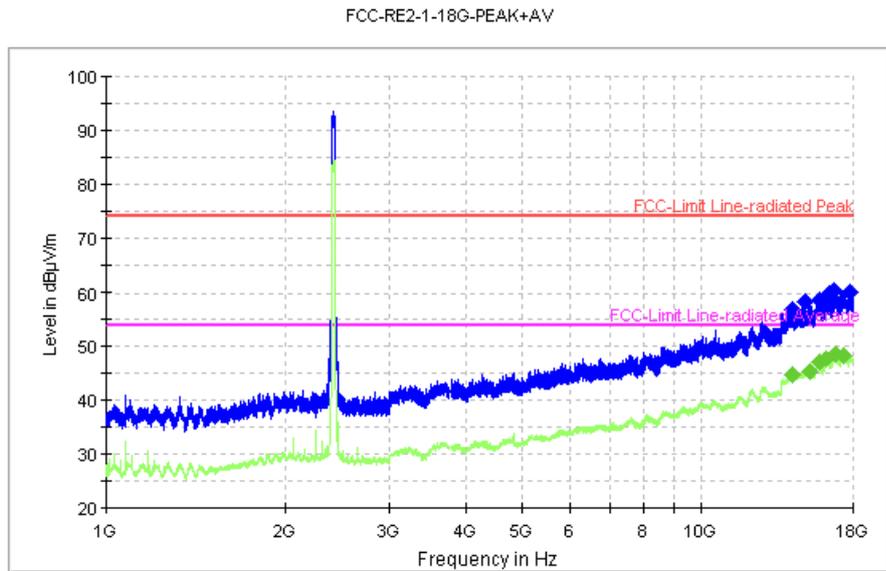


Fig. 130 Radiated Spurious Emission (802.11n-20M, Ch1, 1 GHz-18 GHz)

FCC-RE1-Part 15-30M-1G

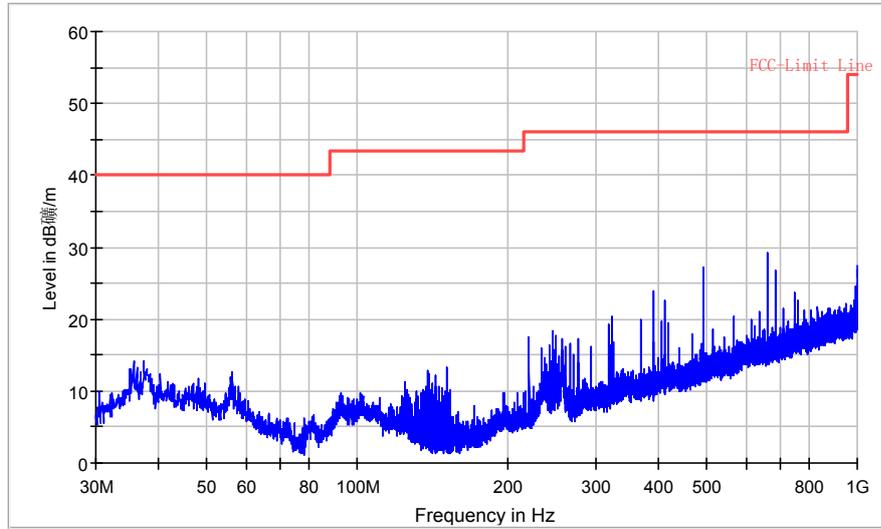


Fig. 131 Radiated Spurious Emission (802.11n-20M, Ch6, 30MHz-1 GHz)

FCC-RE2-1-18G-PEAK+AV

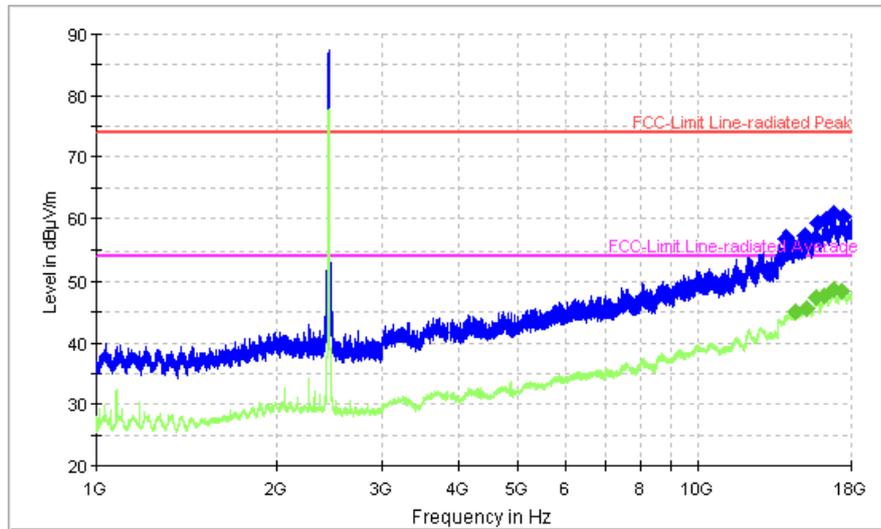


Fig. 132 Radiated Spurious Emission (802.11n-20M, Ch6, 1 GHz-18 GHz)

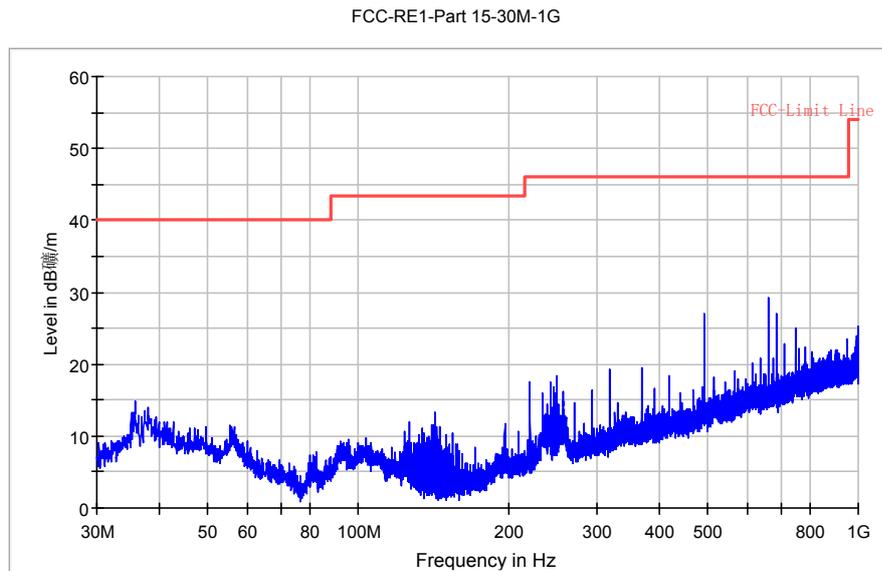


Fig. 133 Radiated Spurious Emission (802.11n-20M, Ch11, 30MHz-1 GHz)

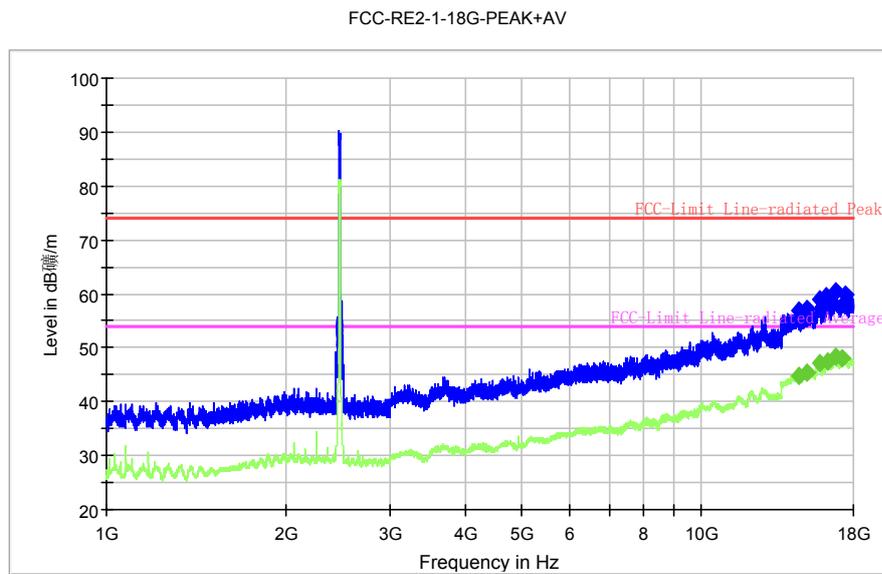


Fig. 134 Radiated Spurious Emission (802.11n-20M, Ch11, 1 GHz-18 GHz)

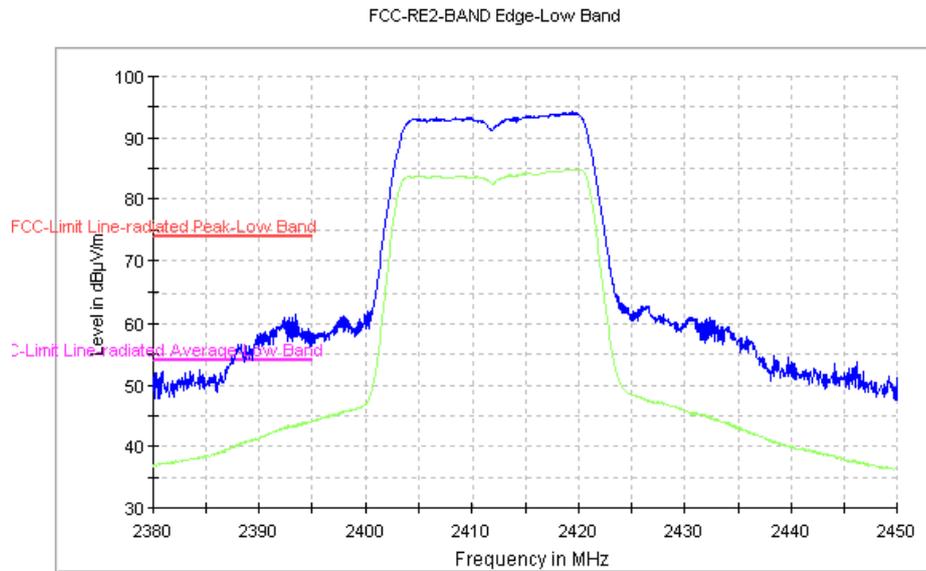


Fig. 135 Radiated Emission Power (802.11n-20M, Ch1, 2380GHz~2450GHz)

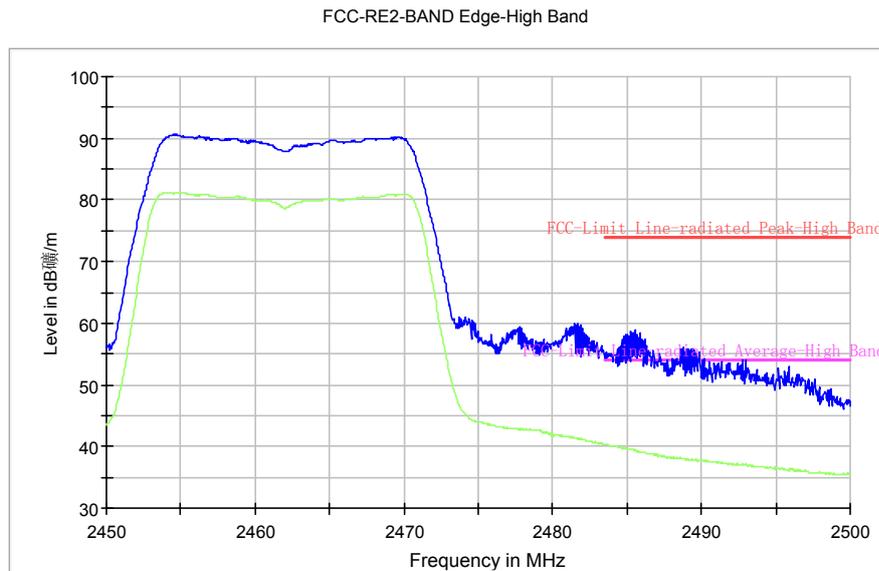


Fig. 136 Radiated Emission Power (802.11n-20M, Ch11, 2450GHz~2500GHz)

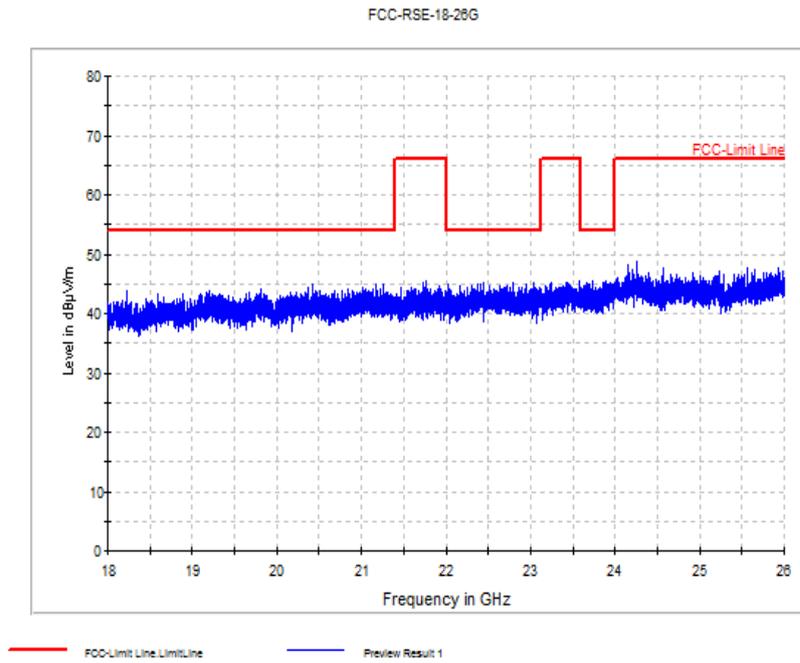


Fig. 137 Radiated emission: 18 GHz - 26 GHz

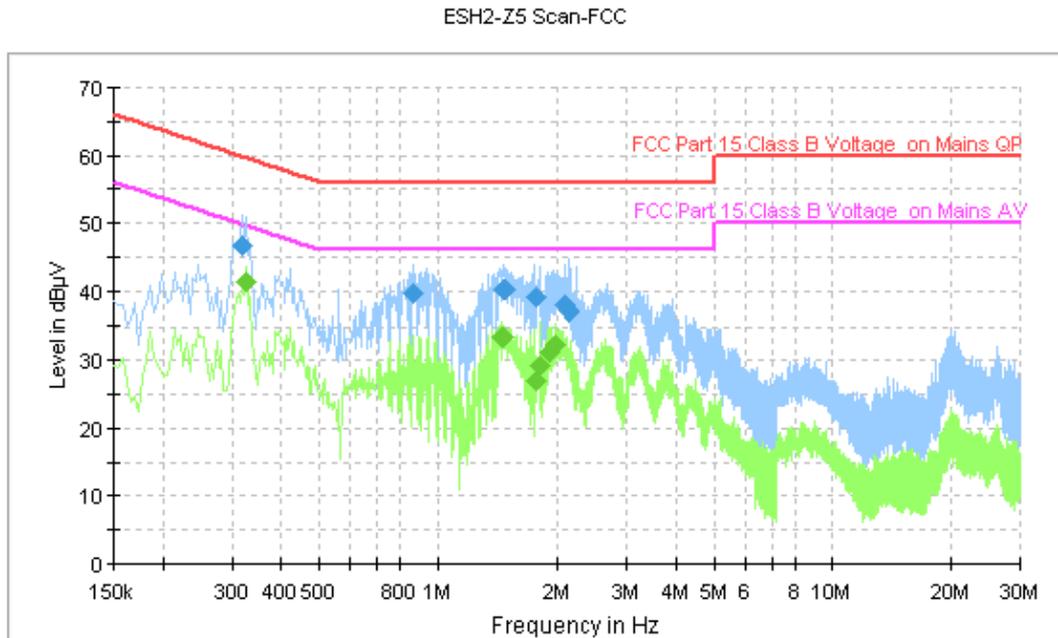


Fig. 138 AC Powerline Conducted Emission (Traffic, AE2)

MEASUREMENT RESULT: " QuasiPeak "

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.318000	46.8	FLO	L1	10.0	13.0	59.8
0.866000	39.6	FLO	L1	10.1	16.4	56.0
1.466000	40.2	FLO	L1	10.1	15.8	56.0
1.766000	39.2	FLO	L1	10.1	16.8	56.0
2.082000	38.0	FLO	N	10.2	18.0	56.0
2.138000	37.2	FLO	N	10.2	18.8	56.0

MEASUREMENT RESULT: " Average "

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.326000	41.5	FLO	N	10.0	8.1	49.6
1.458000	33.4	FLO	N	10.1	12.6	46.0
1.766000	27.0	FLO	L1	10.1	19.0	46.0
1.810000	29.1	FLO	L1	10.1	16.9	46.0
1.906000	31.2	FLO	N	10.1	14.8	46.0
1.978000	32.5	FLO	N	10.1	13.5	46.0

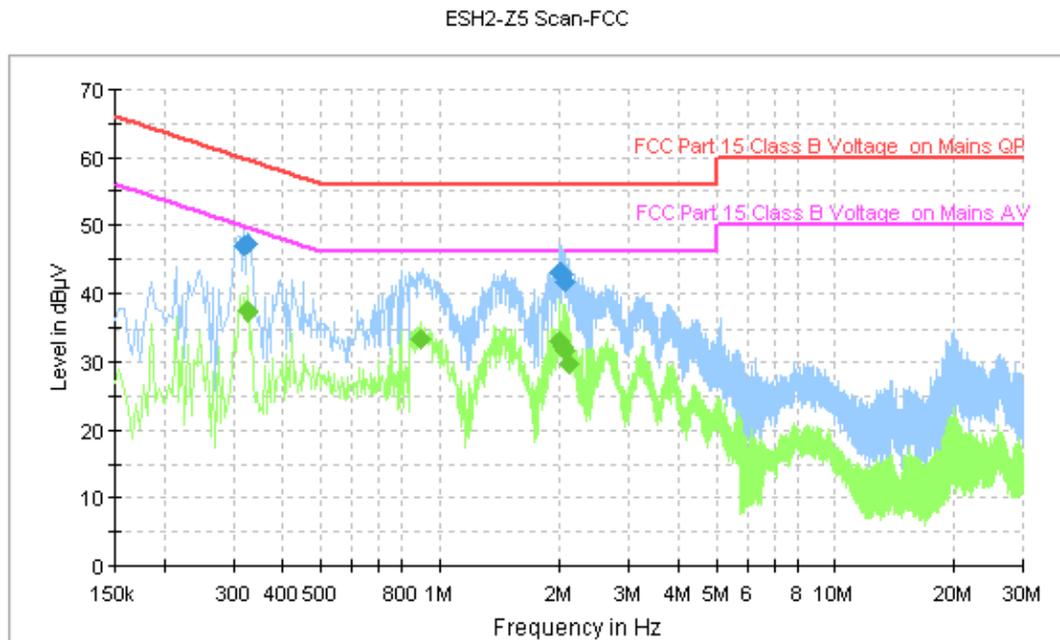


Fig. 139 AC Powerline Conducted Emission (Idle, AE2)

MEASUREMENT RESULT: " QuasiPeak "

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.318000	46.9	FLO	L1	10.0	12.9	59.8
0.326000	47.2	FLO	L1	10.0	12.4	59.6
2.002000	43.1	FLO	L1	10.1	12.9	56.0
2.014000	43.0	FLO	L1	10.1	13.0	56.0
2.030000	42.7	FLO	L1	10.1	13.3	56.0
2.070000	41.6	FLO	L1	10.1	14.4	56.0

MEASUREMENT RESULT: " Average "

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.326000	37.4	FLO	L1	10.0	12.2	49.6
0.898000	33.4	FLO	N	10.1	12.6	46.0
2.002000	33.0	FLO	L1	10.1	13.0	46.0
2.030000	32.3	FLO	L1	10.1	13.7	46.0
2.058000	31.7	FLO	L1	10.1	14.3	46.0
2.114000	29.7	FLO	L1	10.1	16.3	46.0

*** END OF REPORT BODY ***