



EMC TEST REPORT

Report No.: SET2016-16404

Product Name: FEATURE PHONE

FCC ID: SRQ-ZTER550

Model No. : ZTE R550、R550

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Received Date: 2016-08-29

Tested Date: 2016-08-29—2016-09-08

Issued by: Shenzhen Huatongwei International Inspection Co., Ltd.

Lab Location: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **18** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Shenzhen Huatongwei International Inspection Co., Ltd. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Shenzhen Huatongwei International Inspection Co., Ltd within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : FEATURE PHONE

Model No. : ZTE R550、R550

Applicant..... : ZTE Corporation

Applicant Address..... : ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Shenzhen,Guangdong,P.R.China

Manufacturer..... : ZTE Corporation

Manufacturer Address : ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,Nanshan District,Shenzhen,Guangdong,P.R.China

Test Standards..... : 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result : PASS

Tested by : Candy Liu
Candy Liu Test Engineer 2016.09.08

Reviewed by..... : Zhu Qi
Zhu Qi Senior Engineer 2016.09.08

Approved by : Wu Lian
Wu Li'an, Manager 2016.09.08



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List.....7**
- 2.3.1 Conducted Emission.....7
- 2.3.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Conducted Emission 11**
- 3.1.1 Requirement 11
- 3.1.2 Test Description 11
- 3.1.3 Test Result 11
- 3.2 Radiated Emission14**
- 3.2.1 Requirement14
- 3.2.2 Test Description 15
- 3.2.3 Test Result 15

Change History		
Issue	Date	Reason for change
1.0	2016.09.08	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : FEATURE PHONE

FCC ID..... : SRQ-ZTER550

Trade Name..... : ZTE

Brand Name..... : ZTE

Hardware Version..... :

Software Version :

*Note 1:*The EUT is a FEATURE PHONE, it supports the following operating frequency band:

GSM850 /GSM1900; Bluetooth 2.1;FM;

*Note 2:*The highest operation frequency or processor operate frequency is 1.3 GHz.

*Note 3:*For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2016	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories

(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Micro SD card	SanDisk	N/A	N/A	N/A
Mouse	Logitech	M100r	25011051	DOC

Support Cable:


Description	Shield Type	Ferrite Core	Length
USB Cable	shielding	Yes	1.2m
RJ45 Cable	shielding	No	2m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT configuration of the emission tests is EUT + Earphone + PC+Mouse.

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

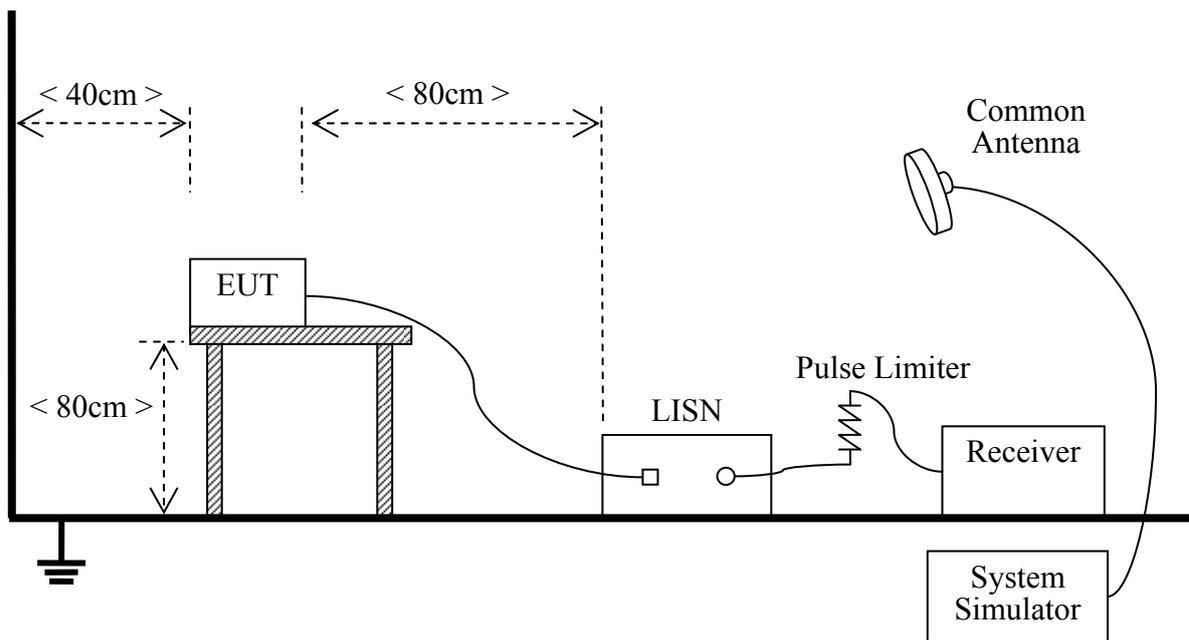A. Test Setup:


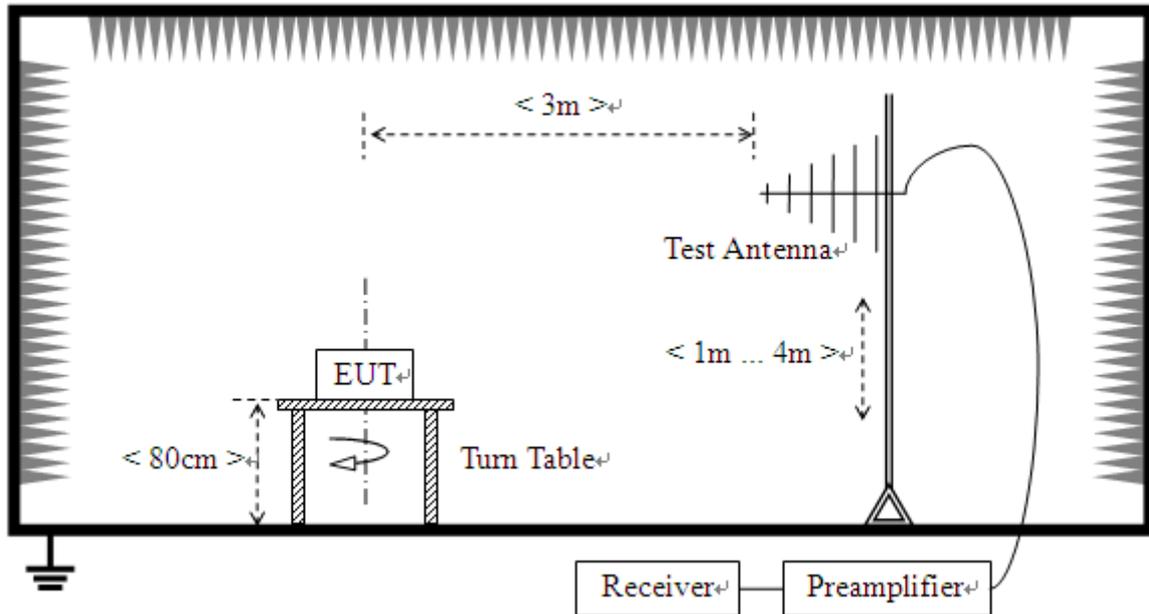
The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESCI	A130901475	2016.09.09	2017.09.08
LISN	ROHDE&SCHWARZ	ENV216	/	2016.01.04	2017.01.03
Cable	MATCHING PAD	W7	/	2016.06.03	2017.06.02

2.3.2 Radiated Emission
A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz



2) For radiated emissions above 1GHz

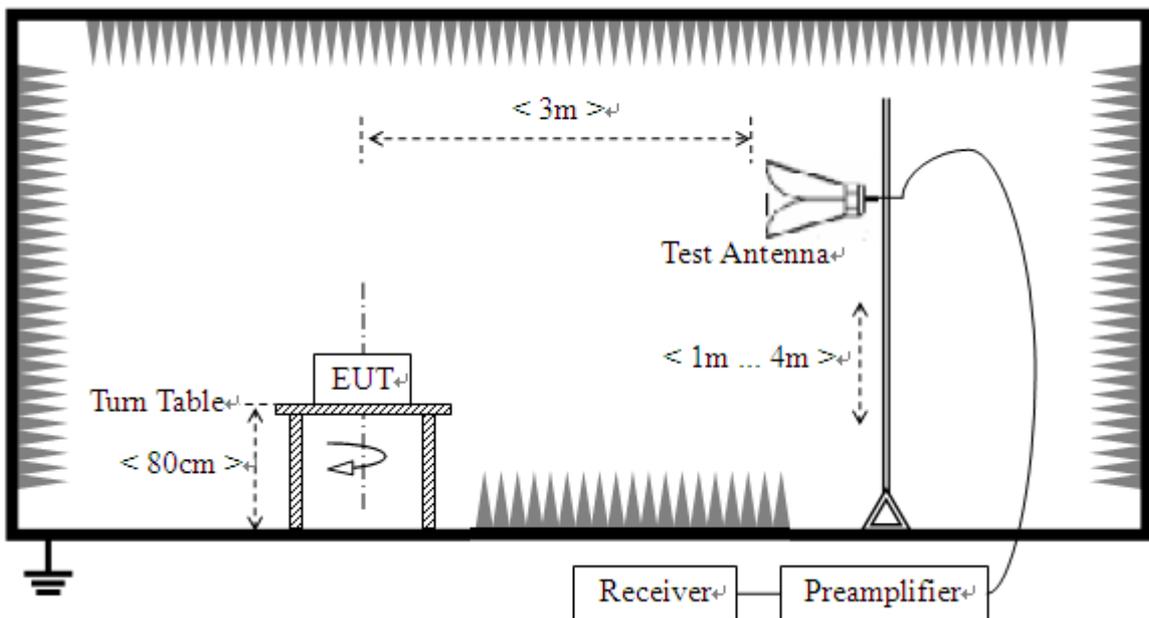

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.



For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100106	2015/11/2
2	Artificial Mains	Rohde & Schwarz	ESH2-Z5	100028	2015/11/2
3	Pulse Limiter	Rohde & Schwarz	ESHSZ2	100044	2015/11/2
4	EMI Test Software	Rohde & Schwarz	ES-K1	N/A	N/A

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ShwarzBeck	VULB9163	538	2015/11/2
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2015/11/2
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	MATURO	TT2.0	N/A	N/A
5	ANTENNA MAST	MATURO	TAM-4.0-P	N/A	N/A
6	EMI TEST Software	Rohde & Schwarz	ESK1	N/A	N/A
7	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/2
8	Amplifer	Sonoma	310N	E009-13	2015/11/2
9	JS amplifer	Rohde & Schwarz	JS4-00101800-28-5A	F201504	2015/11/2
10	TURNTABLE	ETS	2088	2149	N/A
11	ANTENNA MAST	ETS	2075	2346	N/A
12	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2015/11/2



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


Test voltage and frequency (120V AC,60Hz)

A. Test Plot and Suspicious Points:

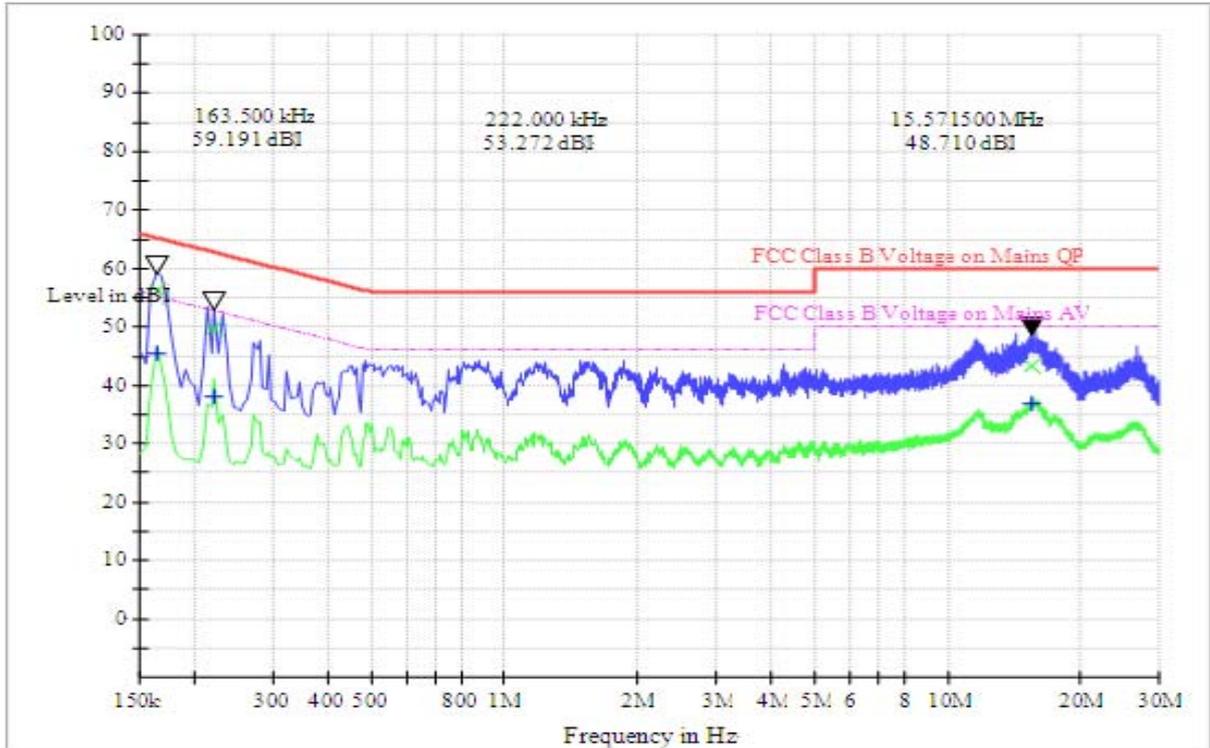

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals							
L Test Data							
QP				AV			
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Margin (dB)
0.1635	65.30	56.34	8.96	0.1635	55.30	45.39	9.91
0.2220	62.70	49.65	13.05	0.2220	52.70	38.20	14.50
15.5715	60.00	43.19	16.81	15.5715	50.00	36.94	13.06

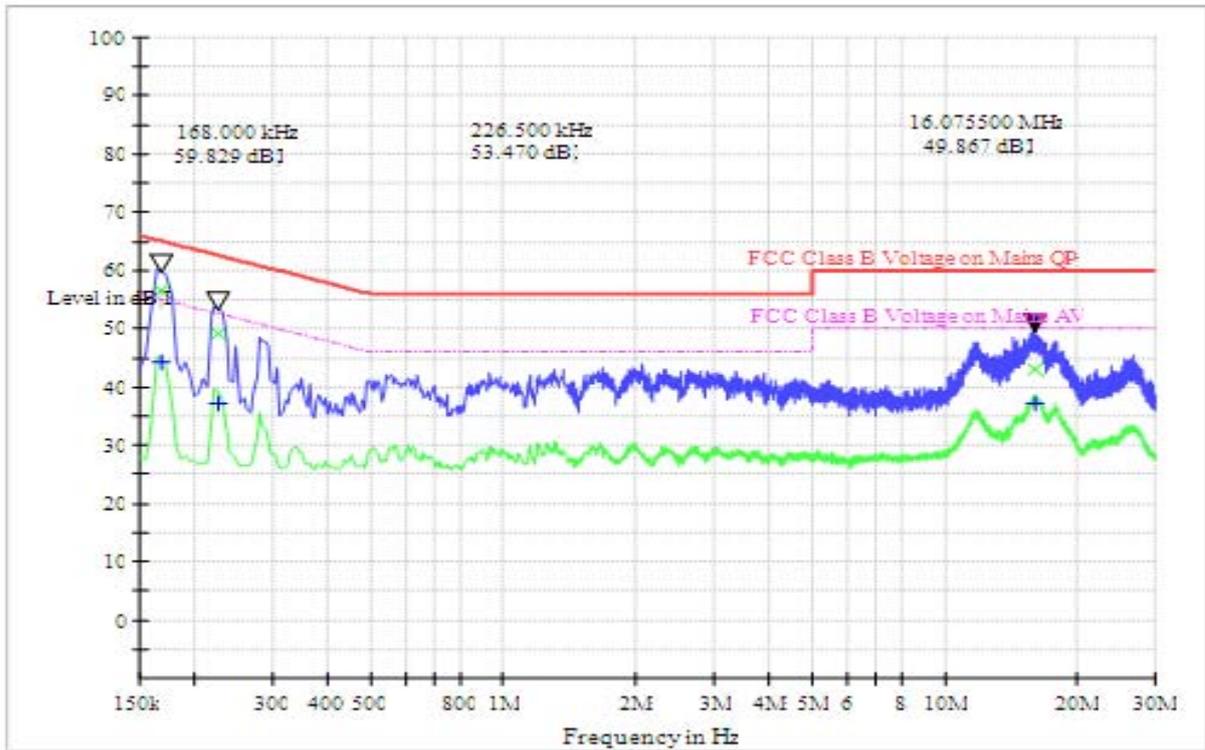

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals							
N Test Data							
QP				AV			
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Margin (dB)
0.1680	65.10	56.69	8.41	0.1680	55.10	44.08	11.02
0.2265	62.60	49.18	13.42	0.2265	52.60	37.10	15.50
16.0755	60.00	42.88	17.12	16.0755	50.00	37.09	12.91

Test Result: PASS



3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	(uV/m)	(dBuV/m)
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\text{uV/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.




B. Test Plots and Suspicious Points:

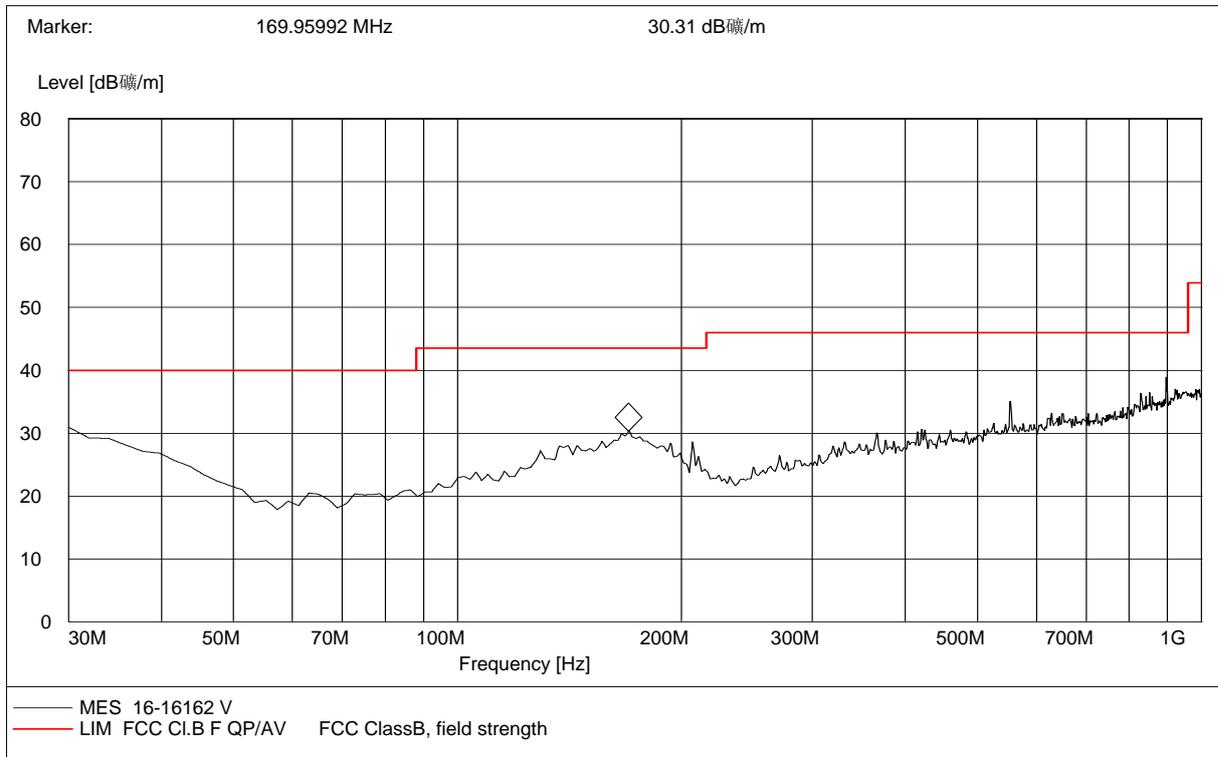


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBμV/m)	Margin (dB)	Antenna	Verdict
30.00000	28.69	120.000	156.1	40.00	11.31	Vertical	Pass
153.68000	25.64	120.000	236.0	43.50	17.86	Vertical	Pass
170.58000	27.64	120.000	187.0	43.50	15.86	Vertical	Pass

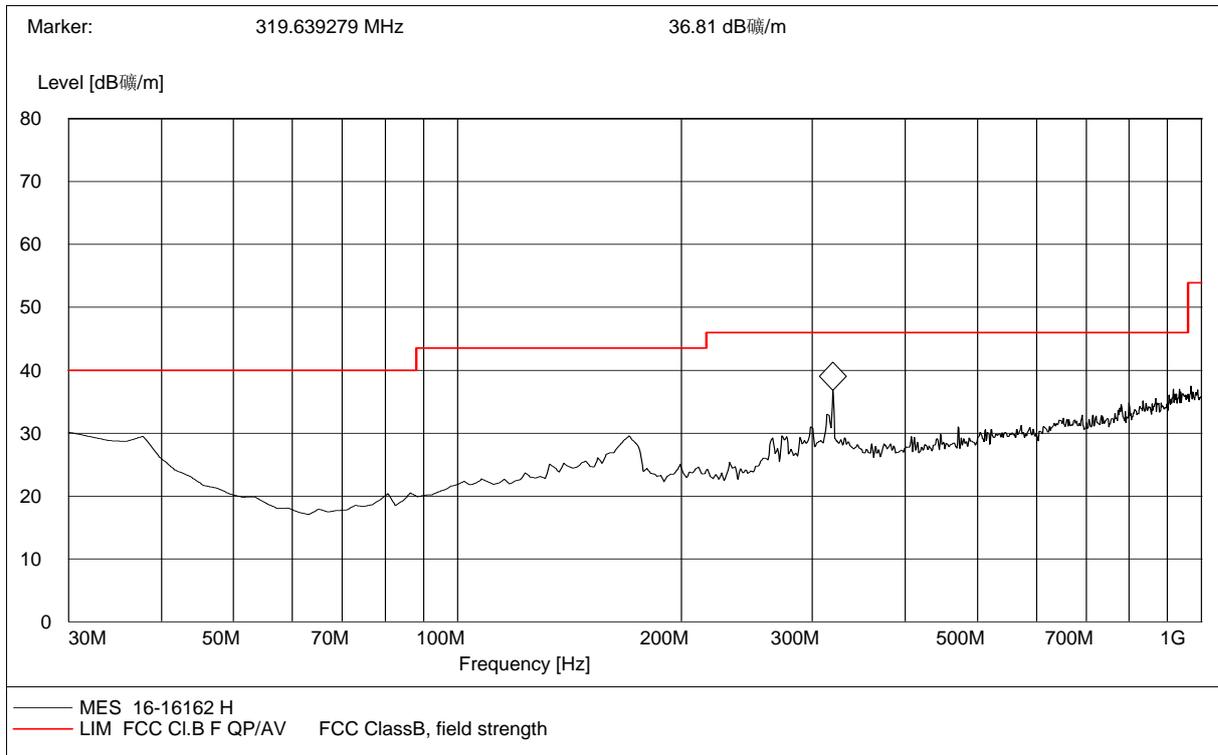


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBμV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBμV/m)	Margin (dB)	Antenna	Verdict
30.00000	28.46	120.000	213.0	40.00	11.54	Horizontal	Pass
170.50000	26.94	120.000	148.0	43.50	16.56	Horizontal	Pass
318.28000	35.96	120.000	237.0	46.00	10.04	Horizontal	Pass

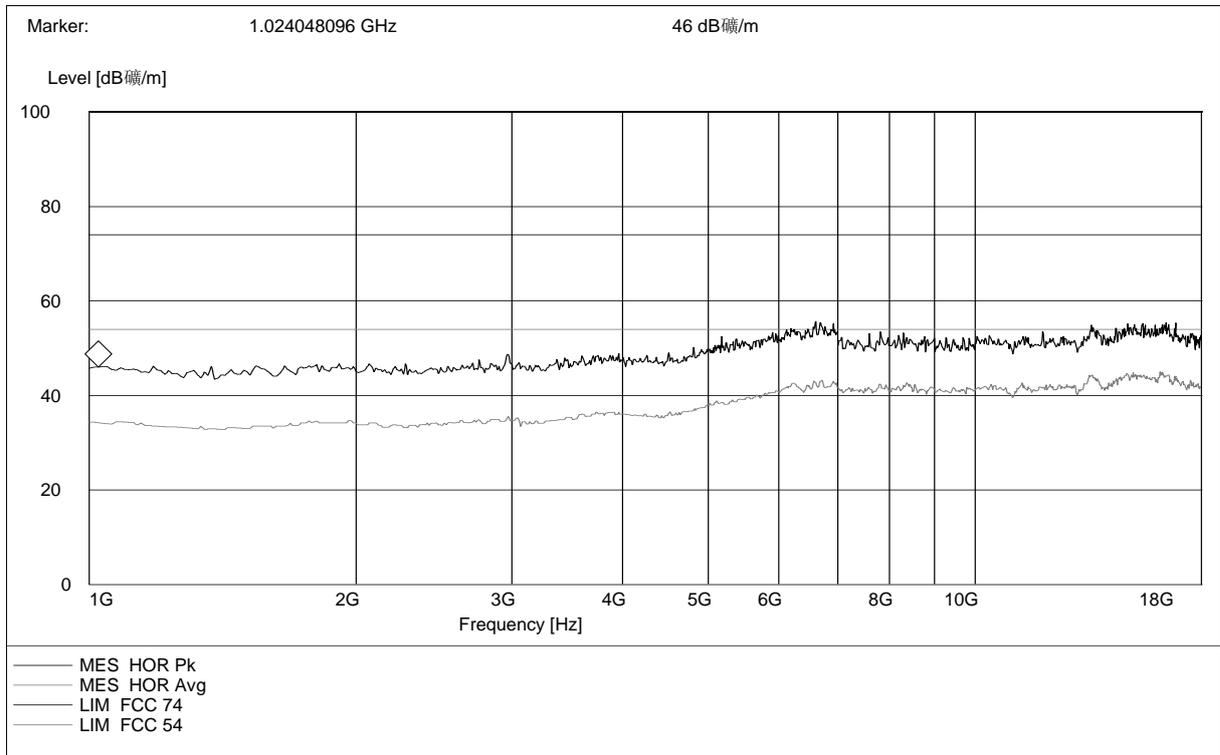

(Plot E: Test Antenna Horizontal 1G – 18G)

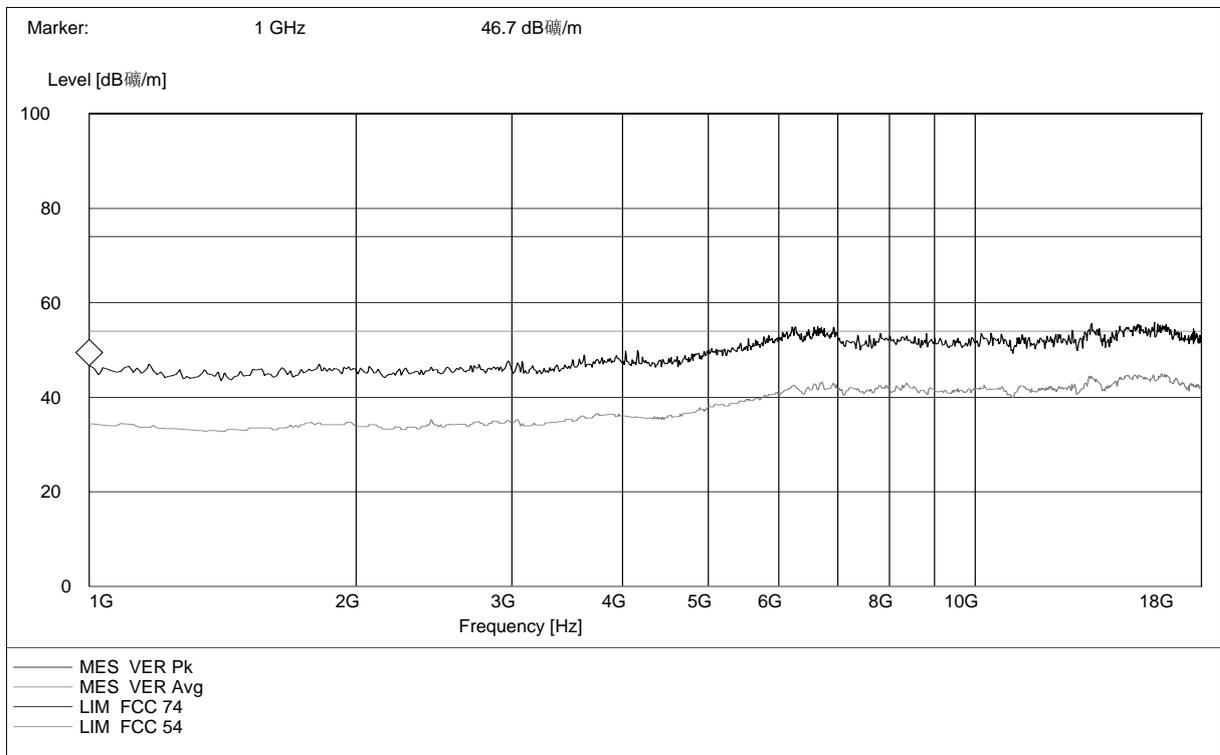

(Plot F: Test Antenna Vertical 1G – 18G)

Test Result: PASS