



*Full*

# **SAR TEST REPORT**

**No. ECIT-2013-0141-FCC-SAR**

*For*

**Client : ZTE Corporation**

**Production : WCDMA/GSM (GPRS)**

**Dual-Mode Digital Mobile Phone**

**Model Name : ZTE V795/ZTE Kis Q/ZTE Kis II**

**Hardware Version: TMAK**

**Software Version: ZTE-LQB25SK-P172D01V0.0.0**

**Issued date: 2013-09-11**

**FCC ID: SRQ-ZTEV795**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)

### Revision Version

<b>Report Number</b>	<b>Revision</b>	<b>Date</b>	<b>Memo</b>
ECIT-2013-0141-FCC-SAR	00	2013/09/11	Initial creation of test report



## CONTENTS

1 Test Laboratory.....	6
1.1 Testing Location.....	6
1.2 Testing Environment.....	6
1.3 Project Data.....	6
1.4 Signature.....	6
2 Statement of Compliance.....	7
3 Client Information.....	9
3.1 Applicant Information.....	9
3.2 Manufacturer Information.....	9
4 Equipment Under Test (EUT) and Ancillary Equipment (AE).....	10
4.1 About EUT.....	10
4.2 Internal Identification of EUT used during the test.....	11
4.3 Internal Identification of AE used during the test.....	11
5 TEST METHODOLOGY.....	12
5.1 Applicable Limit Regulations.....	12
5.2 Applicable Measurement Standards.....	12
6 Specific Absorption Rate (SAR).....	13
6.1 Introduction.....	13
6.2 SAR Definition.....	13
7 Tissue Simulating Liquids.....	14
7.1 Targets for tissue simulating liquid.....	14
7.2 Dielectric Performance.....	14
8 System verification.....	18
8.1 System Setup.....	18
8.2 System Verification.....	19
9 Measurement Procedures.....	20
9.1 Tests to be performed.....	20
9.2 General Measurement Procedure.....	21
9.3 WCDMA Measurement Procedures for SAR.....	22
9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR.....	23
9.5 Power Drift.....	24
11 Conducted Output Power.....	25



11.1 Manufacturing tolerance..... 25

11.2 GSM Measurement result ..... 29

11.3 WCDMA Measurement result ..... 30

11.4 Wi-Fi and BT Measurement result ..... 31

12 Simultaneous TX SAR Considerations ..... 33

12.1 Introduction..... 33

12.2 Transmit Antenna Separation Distances..... 33

12.3 Standalone SAR Test Exclusion Considerations ..... 34

13 Evaluation of Simultaneous ..... 35

14 SAR Test Result..... 38

15 SAR Measurement Variability ..... 43

16 Measurement Uncertainty ..... 45

17 Main Test Instrument..... 47

ANNEX A GRAPH RESULTS ..... 48

ANNEX B SYSTEM VALIDATION RESULTS..... 133

ANNEX C SAR Measurement Setup..... 139

C.1 Measurement Set-up ..... 139

C.2 DASY5 E-field Probe System..... 140

C.3 E-field Probe Calibration..... 140

C.4 Other Test Equipment ..... 141

C.4.1 Data Acquisition Electronics(DAE)..... 141

C.4.2 Robot..... 142

C.4.3 Measurement Server ..... 143

C.4.4 Device Holder for Phantom..... 143

C.4.5 Phantom..... 144

ANNEX D Position of the wireless device in relation to the phantom ..... 145

D.1 General considerations..... 145

D.2 Body-worn device..... 146

D.3 Desktop device ..... 146

D.4 DUT Setup Photos ..... 148

ANNEX E Equivalent Media Recipes ..... 149

ANNEX F System Validation ..... 150

ANNEX G Probe and DAE Calibration Certificate..... 151



**ANNEX H Dipole Calibration Certificate ..... 176**



## 1 Test Laboratory

### 1.1 Testing Location

Company Name: ECIT Shanghai, East China Institute of Telecommunications  
Address: 7F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai,  
P. R. China  
Postal Code: 200001  
Telephone: 00862163843300  
Fax: 00862163843301

### 1.2 Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%  
Ambient noise & Reflection: < 0.012 W/kg

### 1.3 Project Data

Project Leader: Liu Jianquan  
Testing Start Date: Aug 21, 2013  
Testing End Date: Aug 30, 2013

### 1.4 Signature

Hu Jiajing  
(Testing engineer)

Yu Naiping  
(Reviewed this test report)

Zheng Zhongbin  
Director of the laboratory  
(Approved this test report)

## 2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for ZTE V795/ZTE Kis Q/ZTE Kis II are as follows ( with expanded uncertainty 22.4%)

**Table 2.1: Max. Reported SAR (1g)**

Band	Position	Reported SAR 1g (W/Kg)
GSM 850	Head	0.785
	Body	1.414
GSM 1900	Head	0.598
	Body	1.256
WCDMA 850	Head	0.719
	Body	0.823
WCDMA 1900	Head	1.144
	Body	1.048
Wi-Fi	Head	0.619
	Body	0.228

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The measurement together with the test system set-up is described in chapter 7 of this test report. A detailed description of the equipment under test can be found in chapter 3 of this test report. The maximum reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.414 W/kg (1g)**.

The sample has three antennas. One is main antenna for GSM/WCDMA, and the other two is for WiFi/BT and GPS. So simultaneous transmission is GSM/WCDMA and WiFi/BT.

**Table 2.2: Simultaneous SAR (1g)**

Simultaneous Transmission SAR(W/Kg)									
Test Position			GSM 850	GSM 1900	WCDMA B V	WCDMA B II	WIFI	BT <small>note</small>	SUM
Head	Left	Cheek	<b>0.723</b>	0.564	0.719	1.144	<b>0.619</b>	0.16	1.342
		Tilt 15°	0.399	0.182	0.393	<b>0.550</b>	<b>0.483</b>	0.16	1.033
	Right	Cheek	0.785	0.598	0.714	<b>1.102</b>	<b>0.406</b>	0.16	1.508
		Tilt 15°	<b>0.406</b>	0.242	0.376	0.366	<b>0.311</b>	0.16	0.717
Body	Phantom Side		<b>1.206</b>	0.831	0.681	0.695	<b>0.117</b>	0.08	1.323
	Ground Side		<b>1.414</b>	1.256	0.823	1.048	<b>0.228</b>	0.08	<b>1.642</b>
	Left Side		<b>0.938</b>	0.228	0.482	0.265	0.046	<b>0.08</b>	1.018
	Right Side		<b>0.796</b>	0.261	0.418	0.301	<b>0.114</b>	0.08	0.910
	Top Side		N/A	N/A	N/A	N/A	0.098	0.08	N/A
	Bottom Side		0.102	0.900	0.081	<b>0.957</b>	0.022	<b>0.08</b>	1.037

According to the above table, the maximum sum of reported SAR values for GSM and WiFi is **1.642 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



### 3 Client Information

#### 3.1 Applicant Information

Company Name: ZTE Corporation  
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
City: Shenzhen  
Country: China

#### 3.2 Manufacturer Information

Company Name: ZTE Corporation  
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
City: Shenzhen  
Country: China



## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

Description:	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Model name:	ZTE V795/ZTE Kis Q/ZTE Kis II
Operation Model(s):	GSM850/1900,WCDMA1900/850,Wifi2450
Tx Frequency:	824.2-848.8, 1850.2-1909.8MHz (GSM) 1852.4-1907.6 MHz, 826.4-846.6MHz (WCDMA) 2412-2462 MHz (Wi-Fi) 2402 - 2480 MHz (BT)
Test device Production information:	Production unit
GPRS Class Mode:	B
GPRS Multislot Class:	12
Device type:	Portable device
UE category:	3
Antenna type:	Inner antenna
Accessories/Body-worn configurations:	Headset
Form factor:	12.4cm×6.2cm
Hotspot Mode:	Support simultaneous transmission of hotspot and voice ( or data)
FCC ID:	SRQ-ZTEV795



#### 4.2 Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version:
N01	IMEI: 862025020006627	TMAK	ZTE-LQB25SK-P172D01V0.0.0

\*EUT ID: is used to identify the test sample in the lab internally.

#### 4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
B03	Battery	Li3712T42P3h484952	329931648916	ZTE Corporation
A02	Headset	N/A	N/A	N/A

\*AE ID: is used to identify the test sample in the lab internally.



## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1–1992:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IC RSS-102 ISSUE4:** Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**KDB648474 D04 SAR Handsets Multi Xmitter and Ant v01:** SAR Evaluation Considerations for Wireless Handsets.

**KDB248227 SAR meas for 802.11abg v01r02:** SAR measurement procedures for 802.112abg transmitters.

**KDB447498 D01 General RF Exposure Guidance v05:** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB865664 D01:** SAR Measurement Requirements for 100 MHz to 6 GHz

**KDB941225 D01 SAR test for 3G devides v02:** Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE.

**KDB941225 D03 SAR test Redution GSM GPRS EDGE v01:** Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE.

**KDB941225 D06 hotspot SAR v01:** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities.

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $c$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 Tissue Simulating Liquids

### 7.1 Targets for tissue simulating liquid


**Table 7.1: Targets for tissue simulating liquid**

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3


### 7.2 Dielectric Performance

**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**

Measurement Date : 835 MHz Head <u>Aug 20, 2013</u> 1900 MHz Head <u>Aug 27, 2013</u> 2450 MHz Head <u>Aug 29, 2013</u> 2450 MHz Body <u>Aug 30, 2013</u> 835 MHz Body <u>Aug 21, 2013</u> 1900 MHz Body <u>Aug 28, 2013</u>						
/	Type	Frequency	Permittivity $\epsilon$	Drift (%)	Conductivity $\sigma$ (S/m)	Drift (%)
<b>Measurement value</b>	Head	835 MHz	41.04	-1.10%	0.917	1.88%
	Body	835 MHz	55.15	0.09%	0.9989	2.97%
	Head	1900 MHz	39.64	-0.90%	1.385	-1.07%
	Body	1900 MHz	53.24	0.11%	1.524	0.26%
	Head	2450 MHz	38.87	0.84%	1.824	1.33%
	Body	2450 MHz	53.95	2.37%	1.918	1.64%

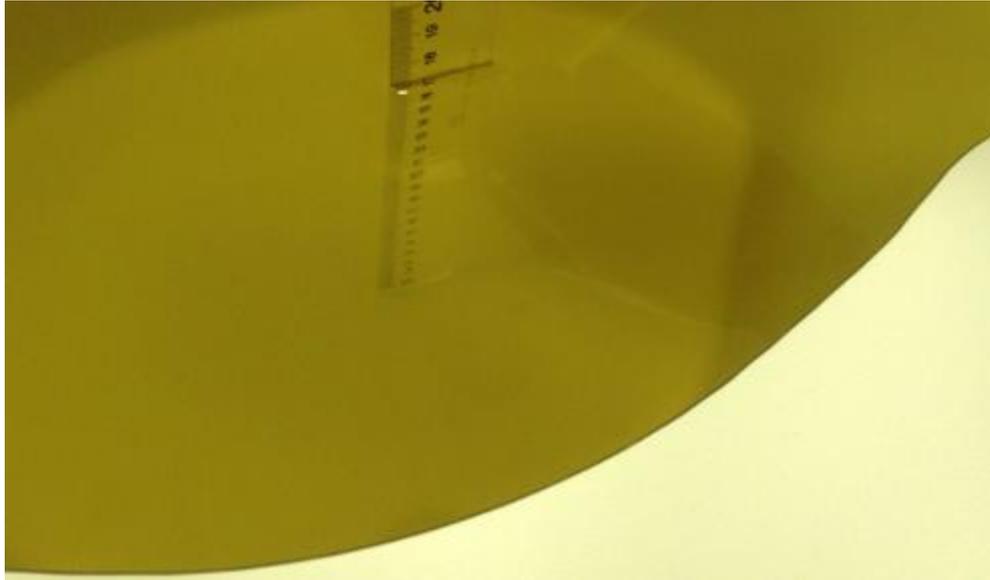


Picture 7-1: Liquid depth in the Flat Phantom (835 MHz Head)

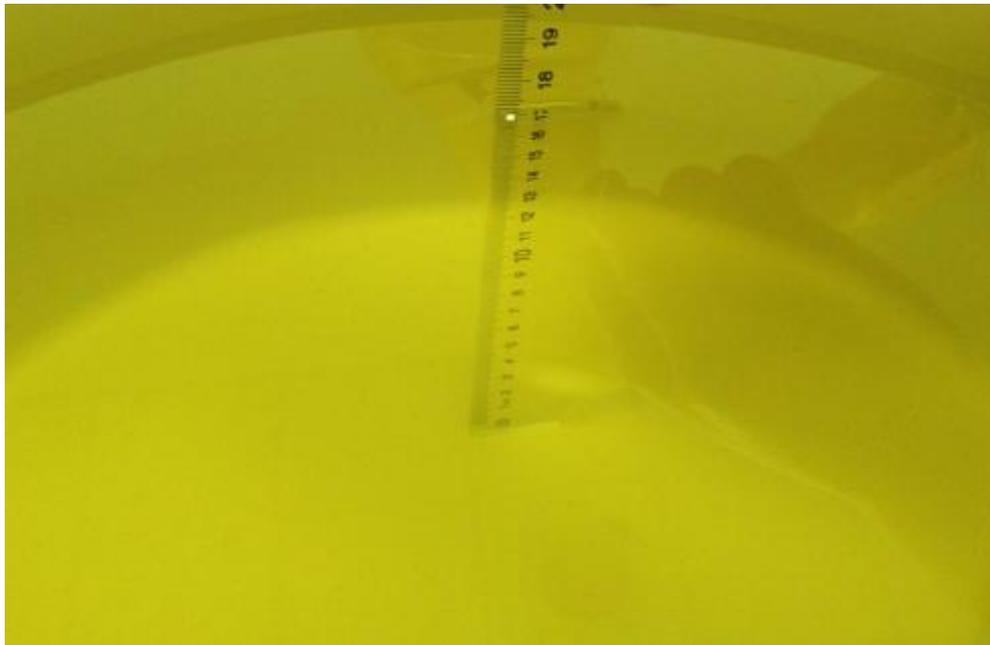


Picture 7-2: Liquid depth in the Flat Phantom (1900 MHz Head)




Picture 7-3: Liquid depth in the Flat Phantom (835 MHz Body)

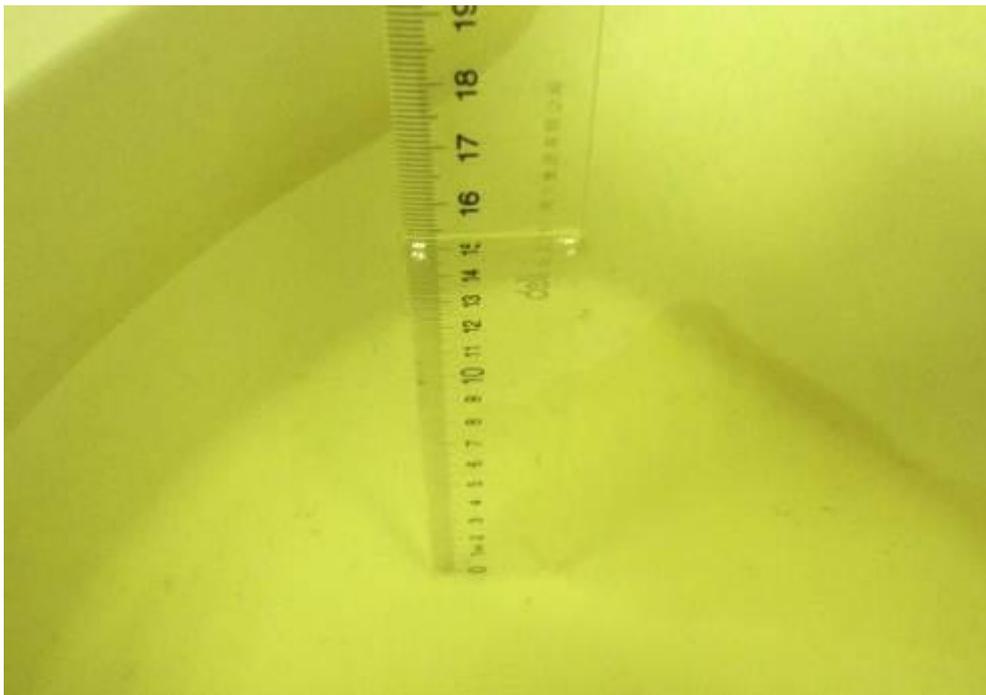

Picture 7-4: Liquid depth in the Flat Phantom (1900 MHz Body)

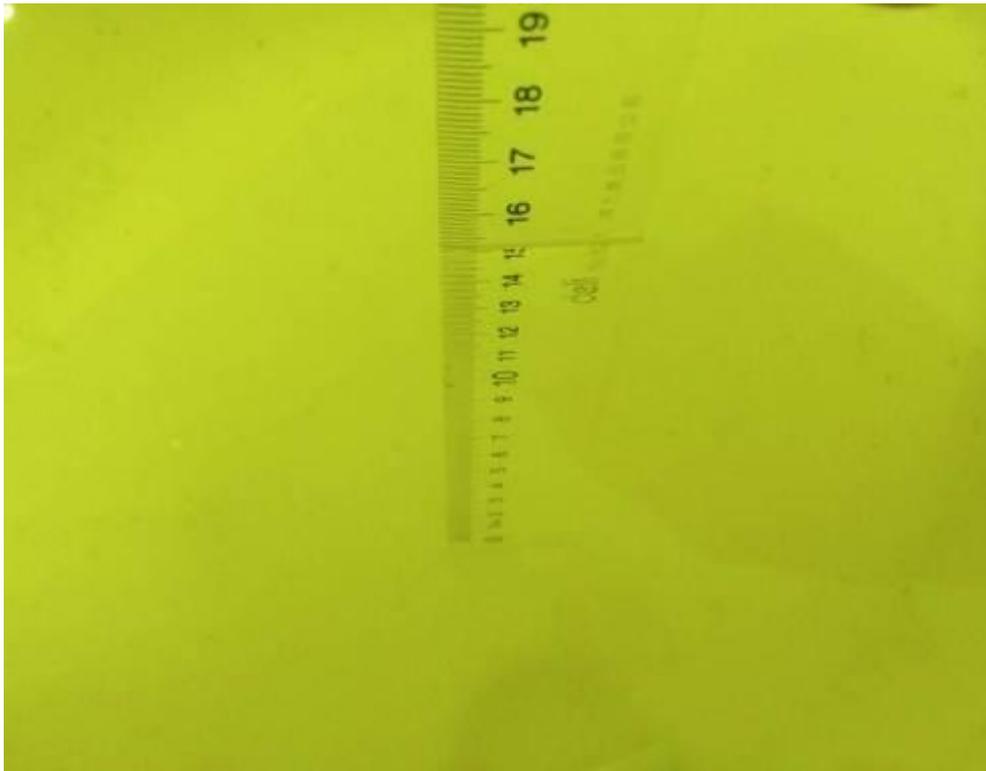

Picture 7-5: Liquid depth in the Flat Phantom (2450 MHz Head)

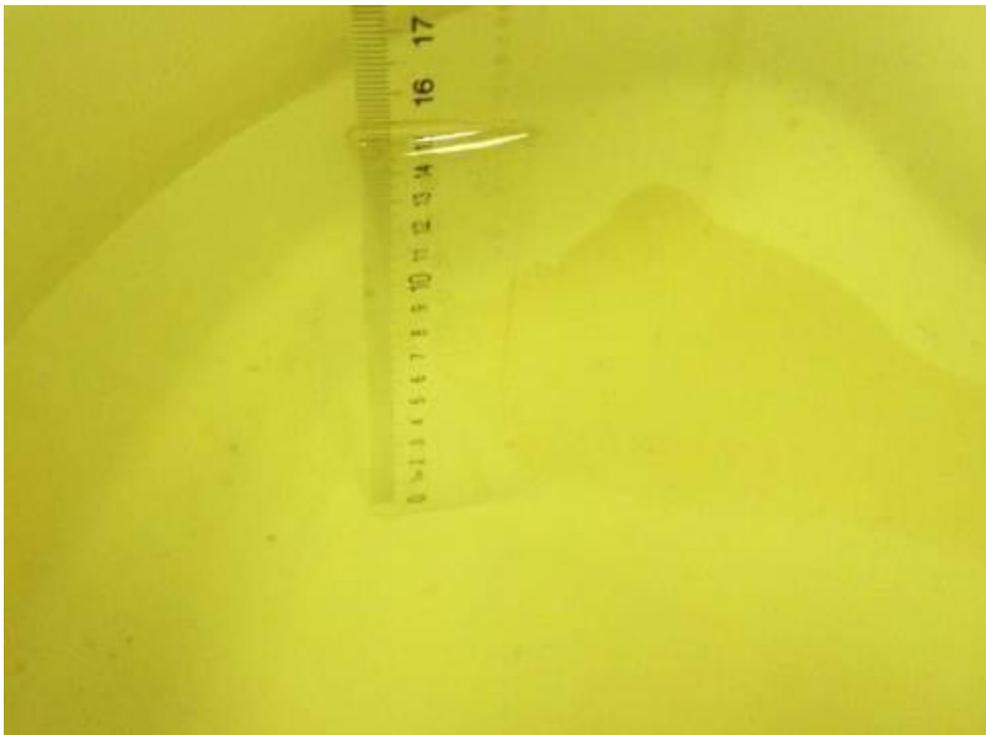


Picture 7-6: Liquid depth in the Flat Phantom (2450 MHz Body)

## 8 System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

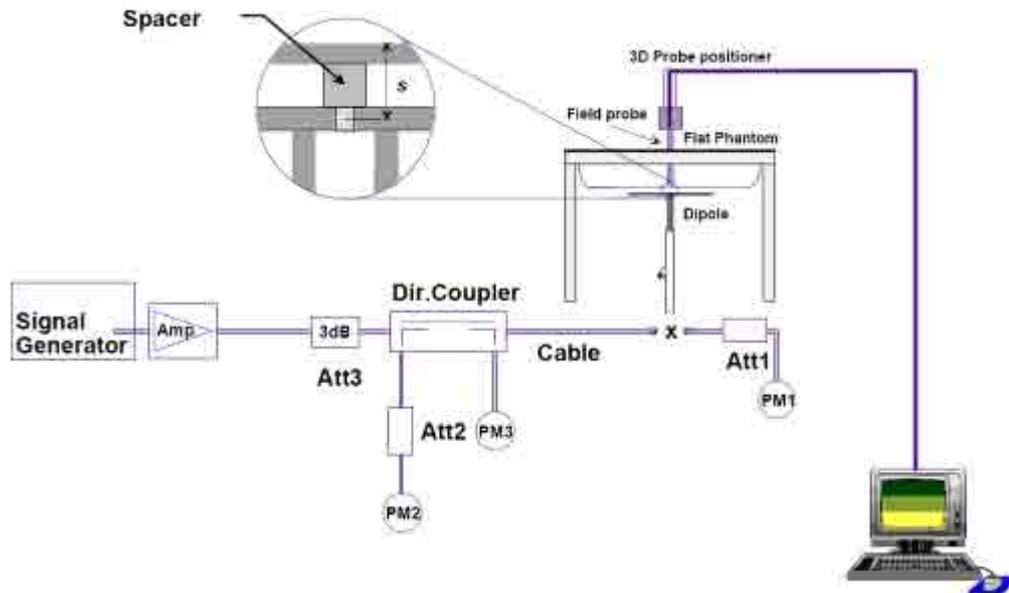

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

## 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

**Table 8.1: System Verification of Head**

Measurement Date : 835 MHz Head <u>Aug 20, 2013</u> 1900 MHz Head <u>Aug 27, 2013</u> 2450 MHz Head <u>Aug 29, 2013</u>							
Input power level: 250mW							
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	6.10	9.35	6.20	9.40	1.63%	0.53%
	1900 MHz	20.6	39.2	19.48	38.08	-5.43%	-2.85%
2450 MHz	25.0	53.6	23.72	51.04	-5.12%	-4.77%	

**Table 8.2: System Verification of Body**

Measurement Date : 835 MHz Body <u>Aug 21, 2013</u> 1900 MHz Body <u>Aug 28, 2013</u> 2450 MHz Body <u>Aug 30, 2013</u>							
Input power level: 250mW							
Verification results	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	6.29	9.50	6.60	10.12	4.93%	6.53%
	1900 MHz	21.2	40.3	21.88	41.6	3.20%	3.22%
2450 MHz	24.1	51.4	24.64	53.2	2.24%	3.50%	

## 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in Picture 11.1.


**Step 1:** The tests described in 11.2 shall be performed at the channel that is closest to the centre of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in Chapter 8),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 11.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

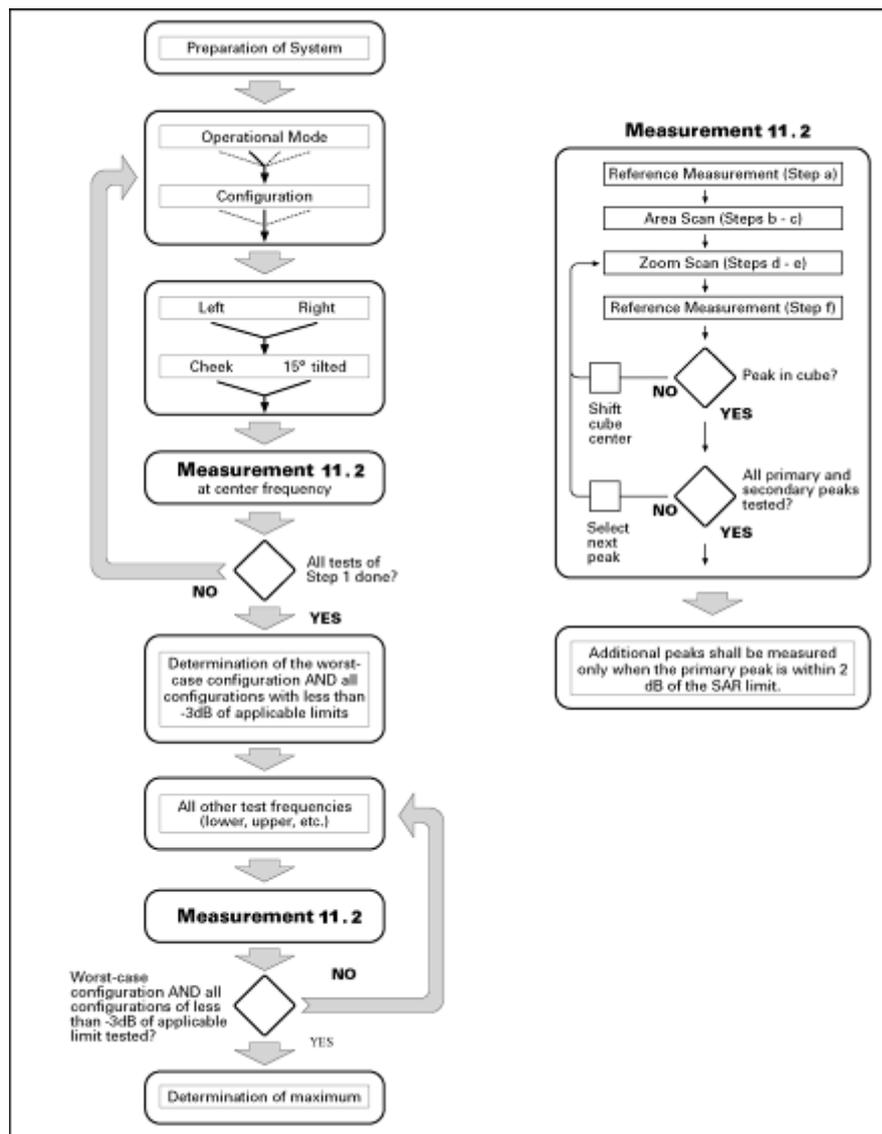

Picture 9.1 Block diagram of the tests to be performed

## 9.2 General Measurement Procedure

The following procedure shall be performed for each of the test conditions (see Picture 11.1) described in 11.1:

- a) Measure the local SAR at a test point within 8 mm or less in the normal direction from the inner surface of the phantom.
- b) Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall not be closer than 20 mm from the phantom side walls. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. A maximum grip spacing of 20 mm for frequencies below 3 GHz and  $(60/f \text{ [GHz]})$  mm for frequencies of 3GHz and greater is recommended. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for

frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. The maximum variation of the sensor-phantom surface shall be  $\pm 1$  mm for frequencies below 3 GHz and  $\pm 0.5$  mm for frequencies of 3 GHz and greater. At all measurement points the angle of the probe with respect to the line normal to the surface should be less than  $5^\circ$ . If this cannot be achieved for a measurement distance to the phantom inner surface shorter than the probe diameter, additional uncertainty evaluation is needed.

c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that are not within the zoom-scan volume; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR limit. This is consistent with the 2 dB threshold already stated;

d) Measure the three-dimensional SAR distribution at the local maxima locations identified in step c). The horizontal grid step shall be  $(24/f[\text{GHz}])$  mm or less but not more than 8 mm. The minimum zoom size of 30 mm by 30 mm and 30 mm for frequencies below 3 GHz. For higher frequencies, the minimum zoom size of 22 mm by 22 mm and 22 mm. The grid step in the vertical direction shall be  $(8-f[\text{GHz}])$  mm or less but not more than 5 mm, if uniform spacing is used. If variable spacing is used in the vertical direction, the maximum spacing between the two closest measured points to the phantom shell shall be  $(12 / f[\text{GHz}])$  mm or less but not more than 4 mm, and the spacing between farther points shall increase by an incremental factor not exceeding 1.5. When variable spacing is used, extrapolation routines shall be tested with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies below 3 GHz and  $\delta \ln(2)/2$  mm for frequencies of 3 GHz and greater, where  $\delta$  is the plane wave skin depth and  $\ln(x)$  is the natural logarithm. Separate grids shall be centered on each of the local SAR maxima found in step c). Uncertainties due to field distortion between the media boundary and the dielectric enclosure of the probe should also be minimized, which is achieved if the distance between the phantom surface and physical tip of the probe is larger than probe tip diameter. Other methods may utilize correction procedures for these boundary effects that enable high precision measurements closer than half the probe diameter. For all measurement points, the angle of the probe with respect to the flat phantom surface shall be less than  $5^\circ$ . If this cannot be achieved an additional uncertainty evaluation is needed.

e) Use post processing( e.g. interpolation and extrapolation ) procedures to determine the local SAR values at the spatial resolution needed for mass averaging.

### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for

Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

**For Release 5 HSDPA Data Devices:**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

**For Release 6 HSUPA Data Devices**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

**9.4 Bluetooth & Wi-Fi Measurement Procedures for SAR**

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.



## 9.5 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 14.2 to Table 14.11 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## 11 Conducted Output Power

### 11.1 Manufacturing tolerance

**Table 11.1: GSM Speech**

GSM 835			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	31.0	31.0	31.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	30.0	30.0	30.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

**Table 11.2: GPRS (GMSK Modulation)**

GSM 850 GPRS				
Channel		251	190	128
1 Txslots	Target (dBm)	31.0	31.0	31.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2 Txslots	Target (dBm)	30.0	30.0	30.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3 Txslots	Target (dBm)	28.0	28.0	28.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4 Txslots	Target (dBm)	27.0	27.0	27.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
GSM 1900 GPRS				
Channel		810	661	512
1 Txslots	Target (dBm)	28.5	28.5	28.5
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2 Txslots	Target (dBm)	27.0	27.0	27.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3 Txslots	Target (dBm)	25.0	25.0	25.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4 Txslots	Target (dBm)	24.0	24.0	24.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0

**Table 11.3: WCDMA**

WCDMA 850 CS			
Channel	Channel 4132	Channel 4182	Channel 4233
Target (dBm)	22.0	22.0	22.0
Tolerance ±(dB)	1.0	1.0	1.0
WCDMA 1900 CS			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	22.0	22.0	22.0
Tolerance ±(dB)	1.0	1.0	1.0

**Table 11.4: HSDPA**

WCDMA 850				
Channel		4132	4182	4233
1	Target (dBm)	22.0	22.0	22.0
	Tolerance ±(dB)	1.0	1.0	1.0
2	Target (dBm)	21.0	21.0	21.0
	Tolerance ±(dB)	1.0	1.0	1.0
3	Target (dBm)	21.0	21.0	21.0
	Tolerance ±(dB)	1.0	1.0	1.0
4	Target (dBm)	22.0	22.0	22.0
	Tolerance ±(dB)	1.0	1.0	1.0
WCDMA 1900				
Channel		9262	9400	9538
1	Target (dBm)	22.0	22.0	22.0
	Tolerance ±(dB)	1.0	1.0	1.0
2	Target (dBm)	21.0	21.0	21.0
	Tolerance ±(dB)	1.0	1.0	1.0
3	Target (dBm)	21.0	21.0	21.0
	Tolerance ±(dB)	1.0	1.0	1.0
4	Target (dBm)	21.0	21.0	21.0
	Tolerance ±(dB)	1.0	1.0	1.0

**Table 11.5: HSUPA**

WCDMA 850				
Channel		4132	4182	4233
1	Target (dBm)	22.0	22.0	22.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3	Target (dBm)	22.0	22.0	22.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
5	Target (dBm)	22.0	22.0	22.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
WCDMA 1900				
Channel		9262	9400	9538
1	Target (dBm)	22.0	22.0	22.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
2	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
3	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
4	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0
5	Target (dBm)	21.0	21.0	21.0
	Tolerance $\pm$ (dB)	1.0	1.0	1.0

**Table 11.6: DC-HSDPA**

WCDMA 850			
Channel	Channel 4132	Channel 4182	Channel 4233
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
WCDMA 1900			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

**Table 11.7: HSPA+**

WCDMA 850			
Channel	Channel 4132	Channel 4182	Channel 4233
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
WCDMA 1900			
Channel	Channel 9262	Channel 9400	Channel 9538
Target (dBm)	20.0	20.0	20.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

**Table 11.9: WiFi**

WiFi 802.11b			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	13.0	13.0	13.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
WiFi 802.11g			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	9.0	9.0	9.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0
WiFi 802.11n			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	8.0	8.0	8.0
Tolerance $\pm$ (dB)	1.0	1.0	1.0

For BT, power of tune up tolerance is  $5 \pm 1$  dBm.

### 11.2 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

**Table 11.5: The conducted power measurement results for GSM850/1900**

GSM 835MHZ	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	<b>31.0</b>	<b>30.8</b>	<b>31.2</b>
GSM 1900MHZ	Conducted Power (dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	<b>29.3</b>	<b>29.6</b>	<b>28.9</b>

**Table 11.6: The conducted power measurement results for GPRS**

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	<b>251</b>	<b>190</b>	<b>128</b>		<b>251</b>	<b>190</b>	<b>128</b>
1 Txslot	31.61	31.30	31.70	-9.03dB	22.58	22.27	22.67
2 Txslots	30.66	30.68	30.71	-6.02dB	23.74	23.66	23.69
3Txslots	28.52	28.31	28.36	-4.26dB	24.26	24.05	24.10
<b>4 Txslots</b>	<b>27.65</b>	<b>27.52</b>	<b>27.60</b>	<b>-3.01dB</b>	<b>24.64</b>	<b>24.51</b>	<b>24.59</b>
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	<b>810</b>	<b>661</b>	<b>512</b>		<b>810</b>	<b>661</b>	<b>512</b>
1 Txslot	29.41	29.70	28.90	-9.03dB	20.38	20.67	19.87
2 Txslots	27.12	27.17	27.03	-6.02dB	21.10	21.15	21.01
3Txslots	25.65	25.69	25.58	-4.26dB	21.39	21.43	21.32
<b>4 Txslots</b>	<b>24.81</b>	<b>24.85</b>	<b>24.73</b>	<b>-3.01dB</b>	<b>21.80</b>	<b>21.84</b>	<b>21.72</b>

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with GPRS 4Txslots for GSM850 and GSM1900.**

11.3 WCDMA Measurement result

Table 11.7: The conducted power for WCDMA850/1900

Item	band	FDDV result(dBm)		
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	RMC	22.38	22.86	22.31
HSDPA	1	22.18	22.51	22.92
	2	21.17	21.60	21.71
	3	21.16	21.10	21.12
	4	22.08	22.02	22.79
HSUPA	1	22.15	22.21	22.32
	2	21.62	21.59	21.60
	3	22.05	22.34	22.16
	4	21.61	21.52	21.54
	5	22.22	22.11	22.13
DC-HSDPA	1	20.36	20.72	20.35
HSPA+	1	20.41	20.65	20.38
Item	band	FDDII result(dBm)		
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	RMC	22.21	22.83	22.18
HSDPA	1	22.01	22.21	22.18
	2	21.48	21.22	21.01
	3	22.19	21.89	21.02
	4	21.50	21.19	21.02
HSUPA	1	21.99	22.17	22.11
	2	21.41	21.22	21.14
	3	21.93	21.99	21.76
	4	21.47	21.26	21.17
	5	21.41	21.31	21.09
DC-HSDPA	1	20.29	20.55	20.34
HSPA+	1	20.32	20.53	20.22

**Note:** HSDPA/HSUPA/HSPA+/DC-HSDPA body SAR are not required, because maximum average output power of each RF channel with HSDPA/HSUPA/HSPA+/DC-HSDPA active is not 1/4 dB higher than that measured without HSDPA/HSUPA/HSPA+/DC-HSDPA and the maximum SAR for WCDMA850 and WCDMA1900 are not above 75% of the SAR limit.

#### 11.4 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

For GFSK

Channel	Ch0 (2402 MHz)	Ch39 (2441MHz)	CH78 (2480MHz)
Conducted Output Power (dBm)	5.54	5.75	5.62

For  $\pi/4$  DQPSK

Channel	Ch0 (2402 MHz)	Ch39 (2441MHz)	CH78 (2480MHz)
Conducted Output Power (dBm)	4.92	5.06	4.82

For 8DPSK

Channel	Ch0 (2402 MHz)	Ch39 (2441MHz)	CH78 (2480MHz)
Conducted Output Power (dBm)	4.98	5.14	5.01

**NOTE:**BT standalone SAR are not required, because maximum average output power is less than 10mW.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)  $\cdot$  [ $\sqrt{f(\text{GHz})/x}$ ] W/kg for test separation distances  $\leq 50$  mm;  
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

So,

SAR head value of BT is 0.16W/Kg. SAR body value of BT is 0.08W/Kg.



The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	12.86	12.01	12.15	13.72
6	13.19	12.78	12.65	13.47
11	12.48	12.12	12.15	12.59

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	8.96	9.12	8.24	8.56	9.54	8.52	8.46	7.44
6	8.18	9.32	8.85	8.92	9.26	8.26	8.15	7.08
11	8.90	9.12	8.05	8.84	9.11	8.59	8.35	7.48

20M 802.11n (dBm)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	7.02	7.15	7.11	7.05	8.28	8.67	8.51	7.72
6	7.12	7.38	7.24	7.31	8.15	8.33	7.89	7.95
11	7.96	7.12	7.75	7.65	7.72	8.50	7.59	7.45

The peak conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	16.75	16.66	16.73	18.08
6	17.12	16.98	16.85	18.10
11	16.84	16.81	16.79	17.35

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	15.73	16.05	15.38	15.18	16.06	15.85	15.87	15.56
6	15.35	15.26	15.15	15.51	16.89	15.52	15.15	15.32
11	15.14	15.08	15.07	15.10	16.20	15.92	15.58	15.64

802.11n (dBm)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	14.54	14.41	14.21	15.77	15.97	16.47	15.23	15.73
6	14.24	14.36	14.13	15.08	15.75	17.07	15.92	15.98
11	14.10	14.17	14.08	15.12	15.09	16.05	15.83	15.54

SAR is not required for 802.11g/n channels if the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should be tested for "802.11b, 11Mbps, channel 1".

## 12 Simultaneous TX SAR Considerations

### 12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

### 12.2 Transmit Antenna Separation Distances



Picture 12.1 Antenna Locations



### 12.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \cdot \sqrt{f(\text{GHz})} \right] \leq 3.0$$
 for 1-g SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 D01, the SAR test exclusion threshold for distance  $< 5$  mm is defined by the following equation:

$$\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \cdot \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the above equation, Bluetooth SAR was not required:

Evaluation = 1.177 < 3.0

Based on the above equation, WiFi SAR was required:

Evaluation = 7.37 > 3.0

### 13 Evaluation of Simultaneous

Table 13.1: Summary of Transmitters

Band/Mode	F(GHz)	SAR test exclusion threshold (mW)	RF output power (mW)
Bluetooth	2.441	10	3.76
2.4GHz WLAN 802.11 b/g	2.45	10	23.55

Table 13.2 Simultaneous transmission SAR

Simultaneous Transmission SAR(W/Kg)									
Test Position			GSM 850	GSM 1900	WCDMA B V	WCDMA B II	WIFI	BT note	SUM
Head	Left	Cheek	<b>0.723</b>	0.564	0.719	1.144	<b>0.619</b>	0.16	1.342
		Tilt 15°	0.399	0.182	0.393	<b>0.550</b>	<b>0.483</b>	0.16	1.033
	Right	Cheek	0.785	0.598	0.714	<b>1.102</b>	<b>0.406</b>	0.16	1.508
		Tilt 15°	<b>0.406</b>	0.242	0.376	0.366	<b>0.311</b>	0.16	0.717
Body	Phantom Side		<b>1.206</b>	0.831	0.681	0.695	<b>0.117</b>	0.08	1.323
	Ground Side		<b>1.414</b>	1.256	0.823	1.048	<b>0.228</b>	0.08	<b>1.642</b>
	Left Side		<b>0.938</b>	0.228	0.482	0.265	0.046	<b>0.08</b>	1.018
	Right Side		<b>0.796</b>	0.261	0.418	0.301	<b>0.114</b>	0.08	0.910
	Top Side		N/A	N/A	N/A	N/A	0.098	0.08	N/A
	Bottom Side		0.102	0.900	0.081	<b>0.957</b>	0.022	<b>0.08</b>	1.037

According to the conducted power measurement result, we can draw the conclusion that: stand-alone SAR for WiFi should be performed. Then, simultaneous transmission SAR for WiFi/BT is considered with measurement results of GSM/WCDMA and WiFi/BT. According to the above table, the sum of reported SAR values for GSM and WiFi > 1.6W/kg. So the simultaneous transmission SAR is required for WiFi/BT transmitter.

Per FCC KDB 447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test Configuration is  $\leq 1.6$  W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

Where:


$SAR_1$  is the highest measured or estimates SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.

$SAR_2$  is the highest measured or estimates SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first.

$R_i$  is the separation distance between the pair of simultaneous antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x,y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2+(y_1-y_2)^2+(z_1-z_2)^2]$

**SAR to Peak Location Separation Ratio(SPLSR)**

Simultaneous transmission SAR measurement(Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/Kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

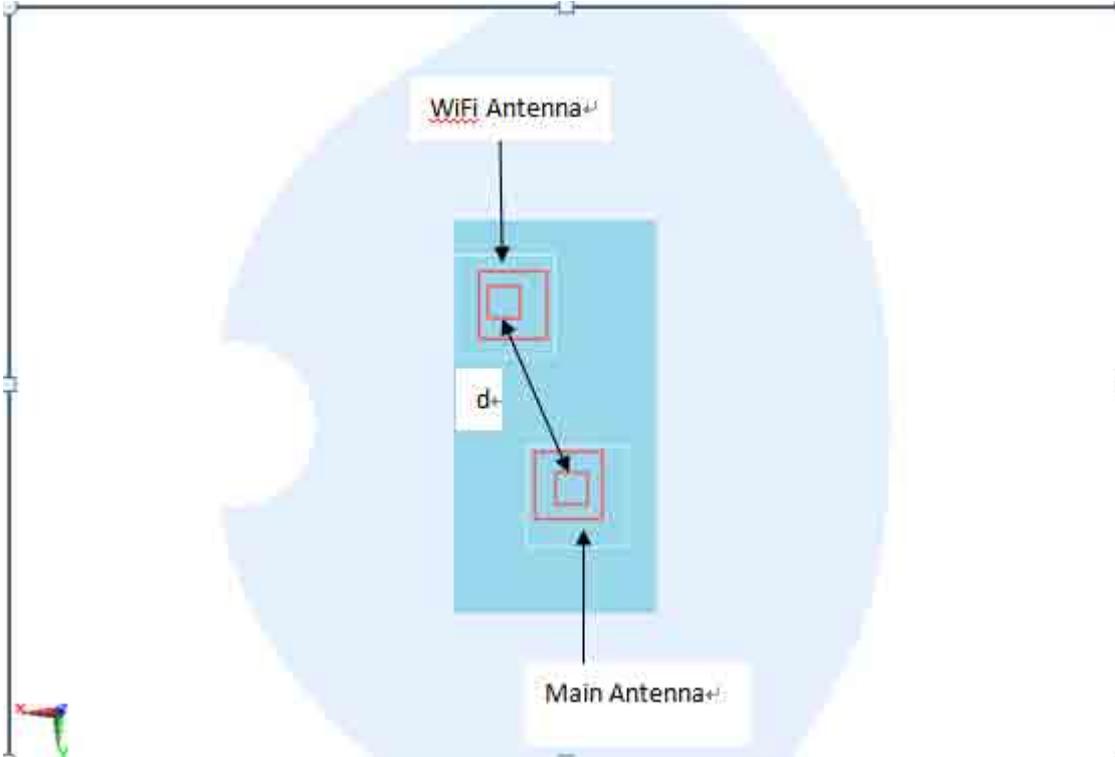

Mode	Peak SAR (mW/g)	X	Y	Z
		cm	cm	cm
GSM 850	1.414	-2.56	2.30	-20.74
WiFi 2.4GHz	0.228	-0.1	-4.12	-20.71

Case	Test Position	Worst-case Combination		Σ 1-g SAR (W/Kg)	Calculated distance (mm)	SPLSR
		GSM 850	WiFi 2.4GHz			
1	Toward Ground	1.414	0.228	1.642	69.08	0.03

## 14 SAR Test Result

**Table 14.1: Duty Cycle**

	Duty Cycle
Speech for GSM835/1900	1:8.3
GPRS for GSM835/1900	1:2
WCDMA850/1900 and WiFi	1:1

**Table 14.2: SAR Values (GSM 835 MHz Band - Head)**

Frequency		Side	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.6	190	Left	Touch	32.0	31.1	1.23	0.588	0.723	0.16
836.6	190	Left	Tilt	32.0	31.1	1.23	0.324	0.399	0.07
836.6	190	Right	Touch	32.0	31.1	1.23	0.637	0.784	-0.19
836.6	190	Right	Tilt	32.0	31.1	1.23	0.330	0.406	-0.03
824.2	128	Right	Touch	32.0	31.2	1.202	0.555	0.667	-0.04
848.8	251	Right	Touch	32.0	31.5	1.122	0.700	0.785	0.01

**Table 14.3: SAR Values (GSM 835 MHz Band - Body)**

Frequency		Mode (number of timeslots)	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.6	190	GPRS (4)	Phantom	28.0	27.52	1.117	1.08	1.206	-0.00
836.6	190	GPRS (4)	Ground	28.0	27.52	1.117	1.19	1.329	0.05
836.6	190	GPRS (4)	Left	28.0	27.52	1.117	0.840	0.938	0.19
836.6	190	GPRS (4)	Right	28.0	27.52	1.117	0.713	0.796	-0.16
836.6	190	GPRS (4)	Bottom	28.0	27.52	1.117	0.091	0.102	-0.19
848.8	251	GPRS (4)	Ground	28.0	27.65	1.084	1.06	1.149	0.07
824.2	128	GPRS (4)	Ground	28.0	27.60	1.096	1.29	1.414	-0.12
824.2	128	Speech	Ground (Headset)	32.0	31.2	1.202	0.595	0.715	-0.18

Note:

1. The distance between the EUT and the phantom bottom is 10mm.

**Table 14.4: SAR Values (GSM 1900 MHz Band - Head)**

Frequency		Side	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1880	661	Left	Touch	30.0	29.6	1.096	0.514	0.564	-0.13
1880	661	Left	Tilt	30.0	29.6	1.096	0.166	0.182	0.05
1880	661	Right	Touch	30.0	29.6	1.096	0.525	0.576	0.11
1880	661	Right	Tilt	30.0	29.6	1.096	0.221	0.242	-0.06
1909.8	810	Right	Touch	30.0	29.3	1.175	0.500	0.587	-0.09
1850.2	512	Right	Touch	30.0	29.6	1.096	0.545	0.598	0.15

**Table 14.5: SAR Values (GSM 1900 MHz Band - Body)**

Frequency		Mode (number of timeslots)	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1880	661	GPRS (4)	Phantom	25.0	24.85	1.035	0.803	0.831	-0.02
1880	661	GPRS (4)	Ground	25.0	24.85	1.035	1.19	1.232	0.16
1880	661	GPRS (4)	Left	25.0	24.85	1.035	0.220	0.228	0.01
1880	661	GPRS (4)	Right	25.0	24.85	1.035	0.252	0.261	-0.08
1880	661	GPRS (4)	Bottom	25.0	24.85	1.035	0.869	0.900	-0.10
1909.8	810	GPRS (4)	Ground	25.0	24.81	1.045	1.14	1.191	0.15
1850.2	512	GPRS (4)	Ground	25.0	24.73	1.064	1.18	1.256	0.01
1850.2	512	Speech	Ground (Headset)	30.0	29.6	1.096	0.686	0.752	0.10

Note: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.6: SAR Values (WCDMA 850 MHz Band - Head)**

Frequency		Side	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
836.4	4182	Left	Touch	23.0	22.86	1.033	0.696	0.719	0.15
836.4	4182	Left	Tilt	23.0	22.86	1.033	0.381	0.393	0.04
836.4	4182	Right	Touch	23.0	22.86	1.033	0.677	0.699	-0.01
836.4	4182	Right	Tilt	23.0	22.86	1.033	0.364	0.376	0.04
846.6	4233	Left	Touch	23.0	22.38	1.153	0.619	0.714	0.15
826.4	4132	Left	Touch	23.0	22.31	1.172	0.536	0.628	0.14

**Table 14.7: SAR Values (WCDMA 850 MHz Band - Body)**

Frequency		Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
836.4	4182	Phantom	23.0	22.86	1.033	0.659	0.681	-0.12
836.4	4182	Ground	23.0	22.86	1.033	0.797	0.823	-0.00
836.4	4182	Left	23.0	22.86	1.033	0.467	0.482	0.08
836.4	4182	Right	23.0	22.86	1.033	0.405	0.418	0.04
836.4	4182	Bottom	23.0	22.86	1.033	0.078	0.081	0.08
846.6	4233	Ground	23.0	22.38	1.153	0.656	0.757	0.02
826.4	4132	Ground	23.0	22.31	1.172	0.695	0.815	-0.06
826.4	4132	Ground (Headset)	23.0	22.31	1.172	0.498	0.584	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.8: SAR Values (WCDMA 1900 MHz Band - Head)**

Frequency		Side	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
1880	9400	Left	Touch	23.0	22.83	1.04	1.10	1.144	0.13
1880	9400	Left	Tilt	23.0	22.83	1.04	0.529	0.550	0.18
1880	9400	Right	Touch	23.0	22.83	1.04	1.06	1.102	-0.06
1880	9400	Right	Tilt	23.0	22.83	1.04	0.352	0.366	0.08
1907.6	9538	Left	Touch	23.0	22.21	1.199	0.874	1.048	0.13
1852.4	9262	Left	Touch	23.0	22.75	1.059	1.08	1.144	0.06

**Table 14.9: SAR Values (WCDMA 1900 MHz Band - Body)**

Frequency		Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
1880	9400	Phantom	23.0	22.83	1.04	0.668	0.695	0.11
1880	9400	Ground	23.0	22.83	1.04	0.941	0.979	-0.07
1880	9400	Left	23.0	22.83	1.04	0.255	0.265	-0.01
1880	9400	Right	23.0	22.83	1.04	0.289	0.301	0.08
1880	9400	Bottom	23.0	22.83	1.04	0.920	0.957	0.02
1907.6	9538	Ground	23.0	22.21	1.199	0.723	0.867	0.07
1852.4	9262	Ground	23.0	22.75	1.059	0.989	1.048	-0.00
1852.4	9262	Ground (Headset)	23.0	22.75	1.059	0.737	0.781	0.00

Note1: The distance between the EUT and the phantom bottom is 10mm.

**Table 14.10: SAR Values (Wi-Fi 802.11b - Head)**

Frequency		Side	Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.								
2412	1	Left	Touch	14.0	13.72	1.067	0.580	0.619	0.14
2412	1	Left	Tilt	14.0	13.72	1.067	0.453	0.483	0.07
2412	1	Right	Touch	14.0	13.72	1.067	0.381	0.406	-0.04
2412	1	Right	Tilt	14.0	13.72	1.067	0.292	0.311	0.04

**Table 14.11: SAR Values (Wi-Fi 802.11b - Body)**

Frequency		Test Position	Maximum allowed Power (dBm)	Measured average power (dBm)	Scaling factor	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.							
2412	1	Phantom	14.0	13.72	1.067	0.110	0.117	0.11
2412	1	Bottom	14.0	13.72	1.067	0.021	0.022	0.10
2412	1	Top	14.0	13.72	1.067	0.092	0.098	0.02
2412	1	Right	14.0	13.72	1.067	0.107	0.114	-0.07
2412	1	Ground	14.0	13.72	1.067	0.214	0.228	0.17
2412	1	Left	14.0	13.72	1.067	0.043	0.046	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

## 15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 15.1: SAR Measurement Variability for Head Value (1g)**

Frequency		Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio
MHz	Ch.					
N/A	N/A	N/A	N/A	N/A	N/A	N/A

**Table 15.2: SAR Measurement Variability for Head Value (1g)**

Frequency		Mode	Side	Test Position	Original SAR(1g) (W/kg)	First Reported SAR(1g) (W/kg)	The Ratio
MHz	Ch.						
1880	9400	Band II	Left	Touch	1.10	1.08	1.02
1880	9400	Band II	Right	Touch	1.06	1.08	1.02
1907.6	9538	Band II	Left	Touch	0.874	0.874	1.00
1852.4	9262	Band II	Left	Touch	1.08	1.07	1.01

**Table 15.3: SAR Measurement Variability for Body Value (1g)**

Frequency		Mode(number of timeslots)	Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio
MHz	Ch.						
836.6	190	GPRS (4)	Phantom	10	1.08	1.07	1.01
836.6	190	GPRS (4)	Ground	10	1.19	1.18	1.01
836.6	190	GPRS (4)	Left	10	0.840	0.832	1.01
848.8	251	GPRS (4)	Ground	10	1.06	1.08	1.02
824.2	128	GPRS (4)	Ground	10	1.29	1.28	1.01
1880	661	GPRS (4)	Phantom	10	0.803	0.802	1.01
1880	661	GPRS (4)	Ground	10	1.19	1.19	1.00
1880	661	GPRS (4)	Bottom	10	0.869	0.854	1.02
1850.2	512	GPRS (4)	Ground	10	1.18	1.13	1.04
1909.8	810	GPRS (4)	Ground	10	1.14	1.14	1.00
836.4	4182	Band V	Ground	10	0.797	0.791	1.01
826.4	4132	Band V	Ground	10	0.695	0.693	1.00
1880	9400	Band II	Ground	10	0.941	0.942	1.00
1880	9400	Band II	Bottom	10	0.920	0.916	1.00
1907.6	9538	Band II	Ground	10	0.723	0.725	1.00
1852.4	9262	Band II	Ground	10	0.989	0.977	1.01

### 16 Measurement Uncertainty

Error Description	Unc. value, ±%	Prob. Dist.	Div.	c <sub>i</sub> 1g	c <sub>i</sub> 10g	Std. Unc. ±%, 1g	Std. Unc. ±%, 10g	V <sub>i</sub> V <sub>eff</sub>
<b>Measurement System</b>								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	0.5	R	√3	0.7	0.7	0.2	0.2	∞
Hemispherical Isotropy	2.6	R	√3	0.7	0.7	1.1	1.1	∞
Boundary Effects	0.8	R	√3	1	1	0.5	0.5	∞
Linearity	0.6	R	√3	1	1	0.3	0.3	∞
System Detection Limits	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	0.7	N	1	1	1	0.7	0.7	∞
Response Time	0	R	√3	1	1	0	0	∞
Integration Time	2.6	R	√3	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	√3	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner	1.5	R	√3	1	1	0.9	0.9	∞
Probe Positioning	2.9	R	√3	1	1	1.7	1.7	∞
Max. SAR Eval.	1.0	R	√3	1	1	0.6	0.6	∞
<b>Test Sample Related</b>								
Device Positioning	2.9	N	1	1	1	2.9	2.9	145
Device Holder	3.6	N	1	1	1	3.6	3.6	5
<b>Dipole</b>								
Power Drift	5.0	R	√3	1	1	2.9	2.9	∞
Dipole Positioning	2.0	N	1	1	1	2.0	2.0	∞
Dipole Input Power	5.0	N	1	1	1	5.0	5.0	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity	2.5	N	1	0.6	0.49	1.5	1.2	∞



(meas.)								
<b>Combined Std Uncertainty</b>						±11.2%	±10.9%	387
<b>Expanded Std Uncertainty</b>						<b>±22.4%</b>	<b>±21.8%</b>	



## 17 Main Test Instrument

Table 16.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	N5242A	MY51221755	May 21, 2013	One year
02	Power meter	NRVD	102257	Aug 31, 2013	One year
03	Power sensor	NRV-Z5	100644,100241		
04	Signal Generator	E4438C	MY49072044	May 21, 2013	One Year
05	Amplifier	NTWPA-0086010F	12023024	No Calibration Requested	
06	Coupler	778D	MY48220551	Aug 23, 2013	One year
07	BTS	E5515C	MY50266468	May 21, 2013	One year
08	E-field Probe	ES3DV3	3252	Aug 5, 2013	One year
09	E-field Probe	EX3DV4	3754	Aug 8, 2013	One year
10	DAE	SPEAG DAE4	1244	Jul 9, 2013	One year
11	Dipole Validation Kit	SPEAG D835V2	4d092	Jun 17, 2013	One year
12	Dipole Validation Kit	SPEAG D1900V2	5d134	Jul 13, 2013	One year
13	Dipole Validation Kit	SPEAG D2450V2	858	Jul 13, 2013	One year

## ANNEX A GRAPH RESULTS

### GSM850MHz Left Cheek Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: UID 0, GSM 850MHz;      Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

#### Middle Cheek Left GSM850MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.617 W/kg

#### Middle Cheek Left GSM850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.489 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 0.625 W/kg

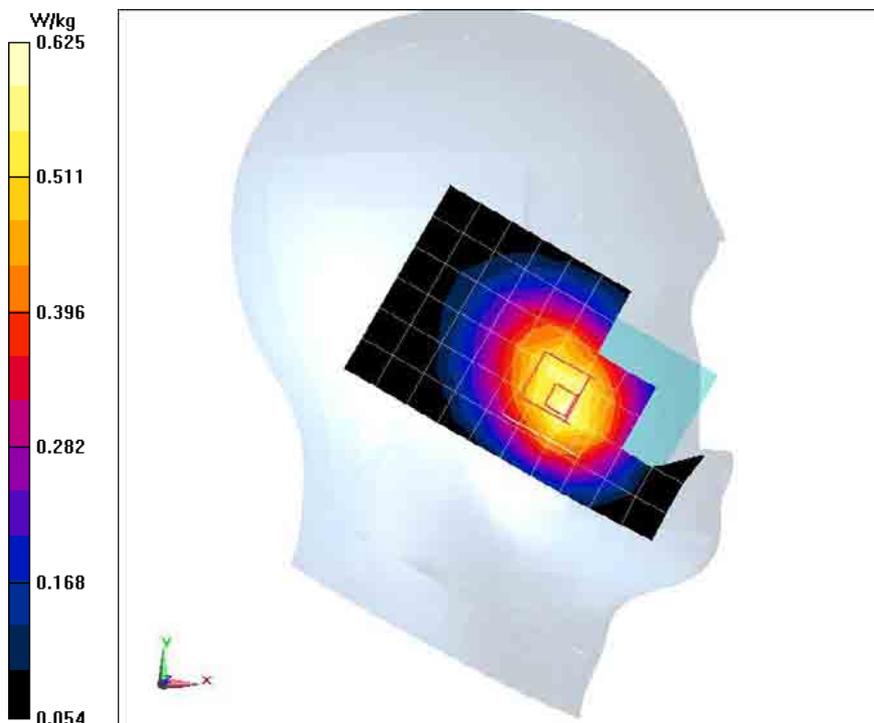

## GSM850MHz Left Tilt Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz;    Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### Middle Tilt Left GSM850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.336 W/kg

### Middle Tilt Left GSM850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.943 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.341 W/kg

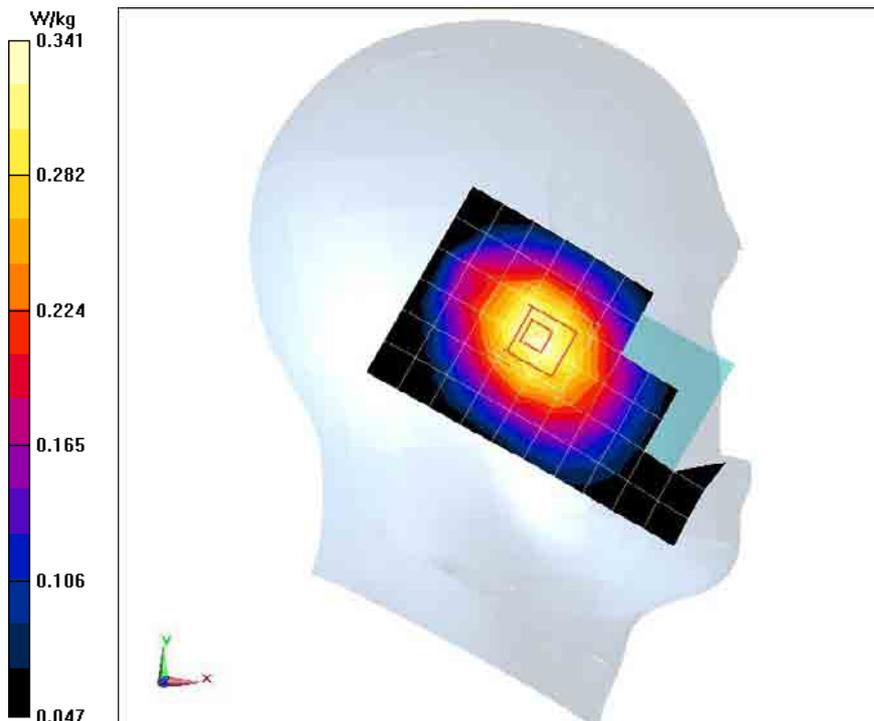

## GSM850MHz Right Cheek Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz;    Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### Middle Cheek Right GSM850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.657 W/kg

### Middle Cheek Right GSM850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.214 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.759 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.484 W/kg

Maximum value of SAR (measured) = 0.670 W/kg

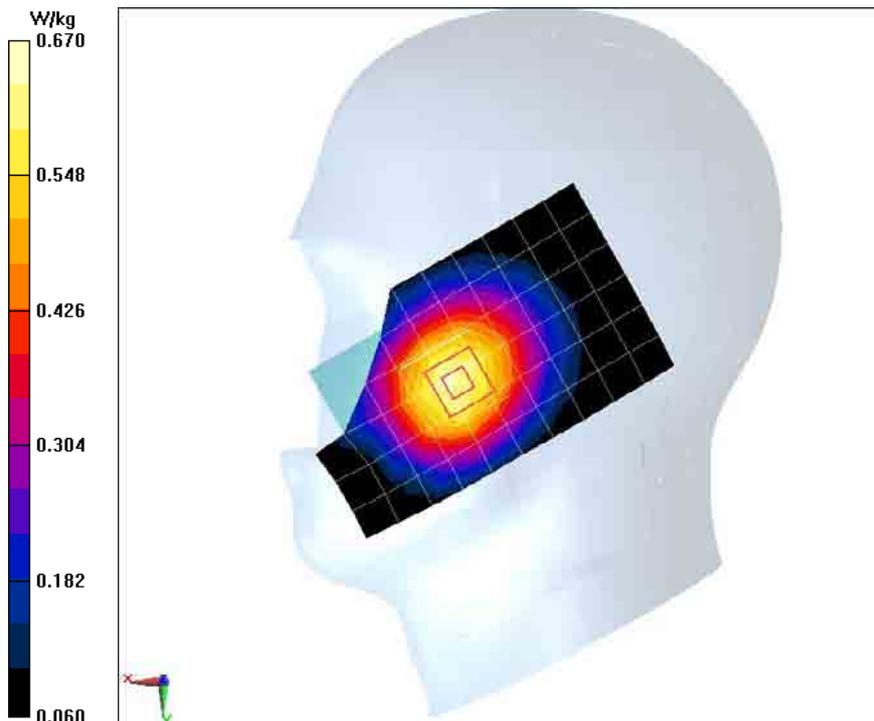

## GSM850MHz Right Tilt Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz;    Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### Middle Tilt Right GSM850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.347 W/kg

### Middle Tilt Right GSM850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.081 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.251 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

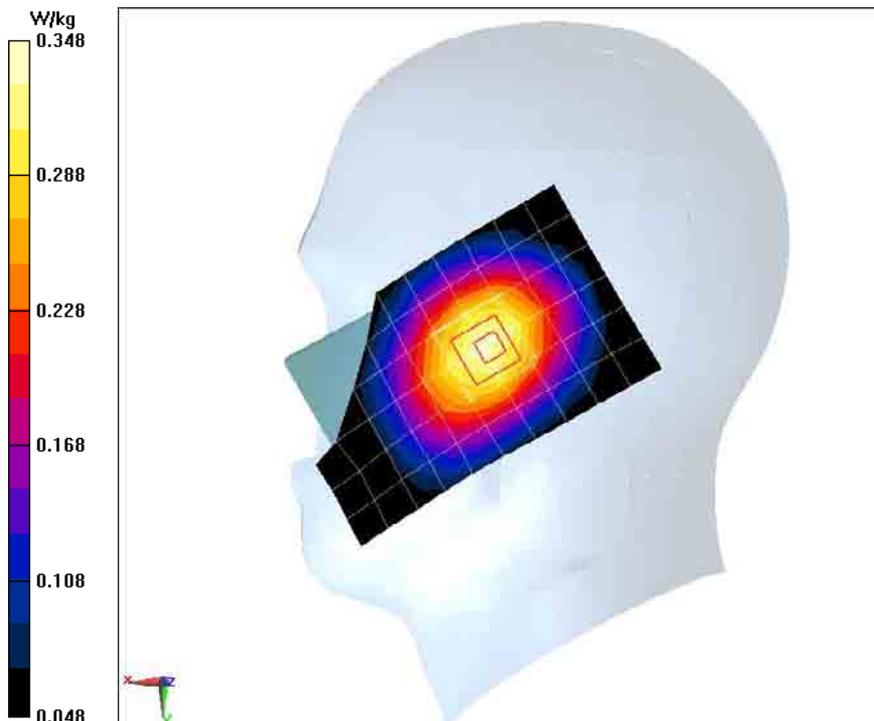

## GSM850MHz Right Cheek Low

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.32$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz;    Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### Low Cheek Right GSM850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.577 W/kg

### Low Cheek Right GSM850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.532 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.585 W/kg

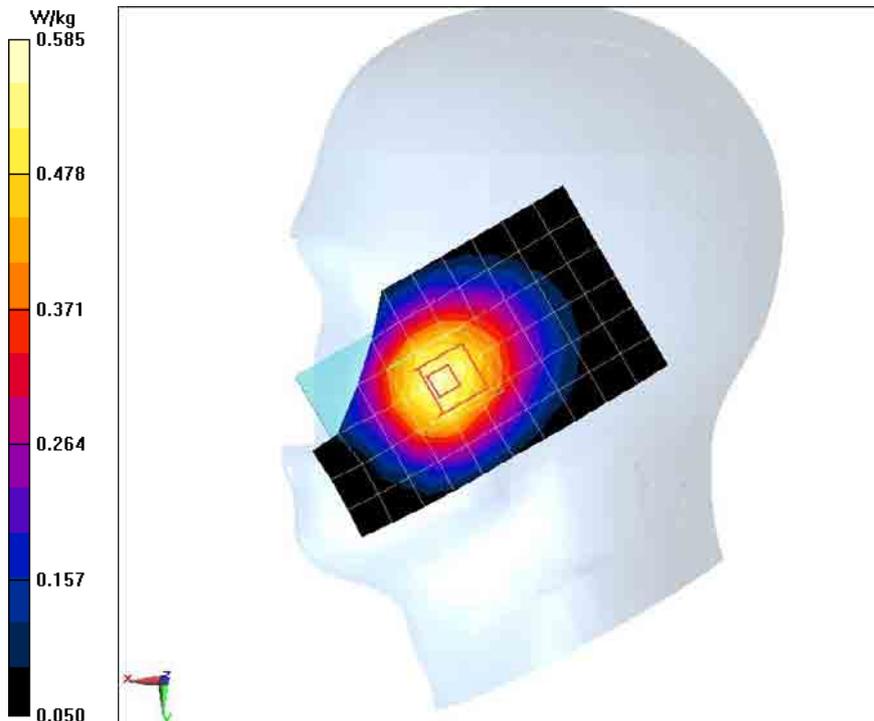

## GSM850MHz Right Cheek High

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.929$  S/m;  $\epsilon_r = 40.788$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz;      Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### High Cheek Right GSM850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.725 W/kg

### High Cheek Right GSM850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.497 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.529 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

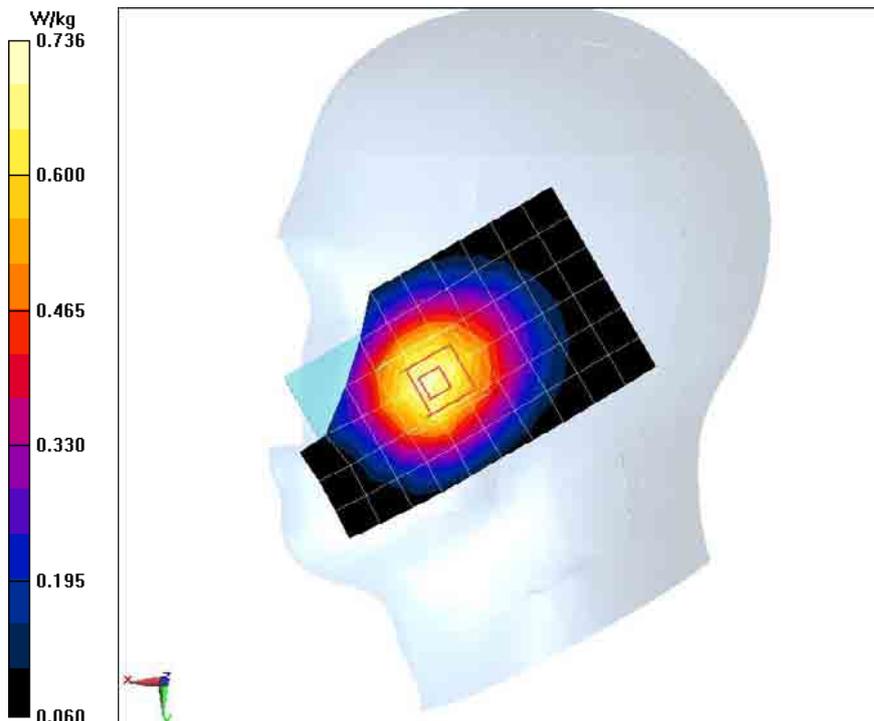

### GSM 850MHz GPRS 4TS Body Toward Phantom Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 55.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 850MHz GPRS 4TS;    Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Middle Toward Phantom GPRS 4TS 850MHz/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $1.14 \text{ W/kg}$

#### Middle Toward Phantom GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $32.593 \text{ V/m}$ ; Power Drift =  $-0.00 \text{ dB}$

Peak SAR (extrapolated) =  $1.35 \text{ W/kg}$

SAR(1 g) =  $1.08 \text{ W/kg}$ ; SAR(10 g) =  $0.825 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.136 \text{ W/kg}$

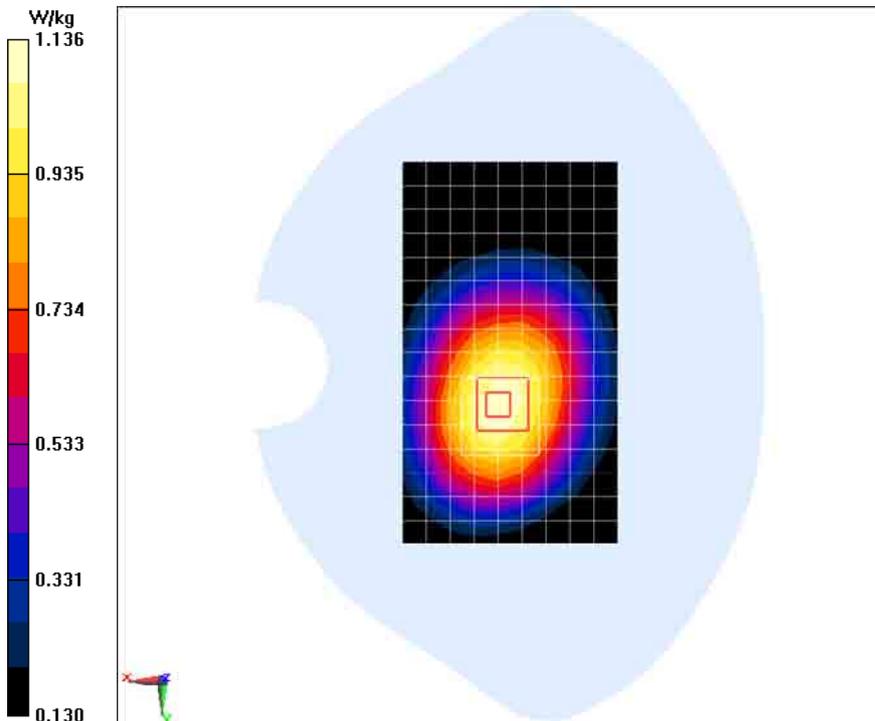

## GSM 850MHz GPRS 4TS Body Toward Ground Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS;    Frequency: 836.6 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Toward Ground GPRS 4TS 850MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.26 W/kg

### Middle Toward Ground GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.640 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.886 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

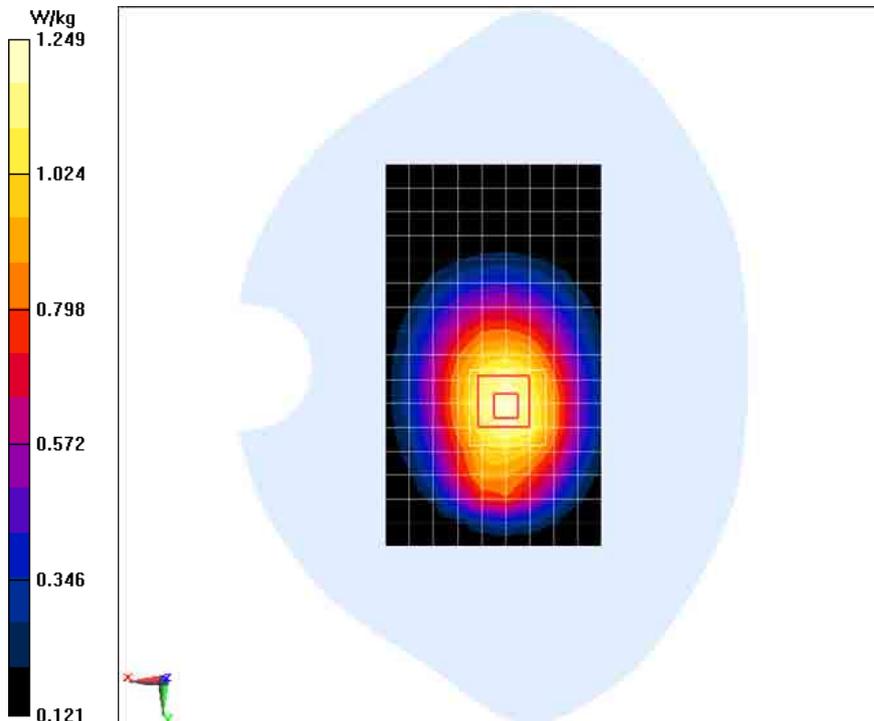

### GSM 850MHz GPRS 4TS Body Left Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 55.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 850MHz GPRS 4TS;    Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Middle Left GPRS 4TS 850MHz/Area Scan (6x18x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.874 \text{ W/kg}$

#### Middle Left GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $28.593 \text{ V/m}$ ; Power Drift =  $0.19 \text{ dB}$

Peak SAR (extrapolated) =  $1.15 \text{ W/kg}$

SAR(1 g) =  $0.840 \text{ W/kg}$ ; SAR(10 g) =  $0.584 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.896 \text{ W/kg}$

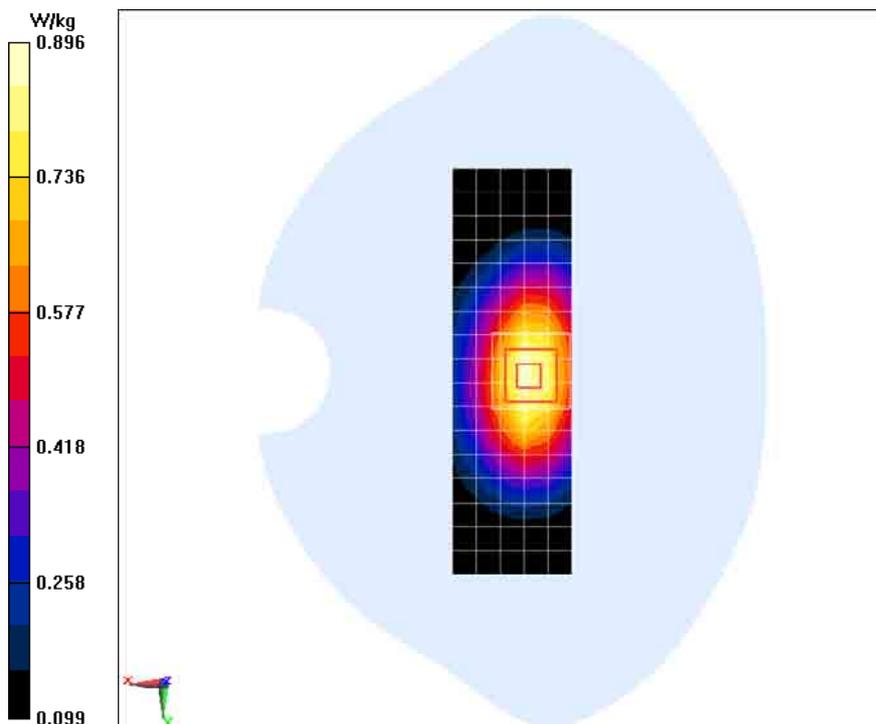

## GSM 850MHz GPRS 4TS Body Right Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS;    Frequency: 836.6 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Right GPRS 4TS 850MHz/Area Scan (6x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.759 W/kg

### Middle Right GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.742 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 0.764 W/kg

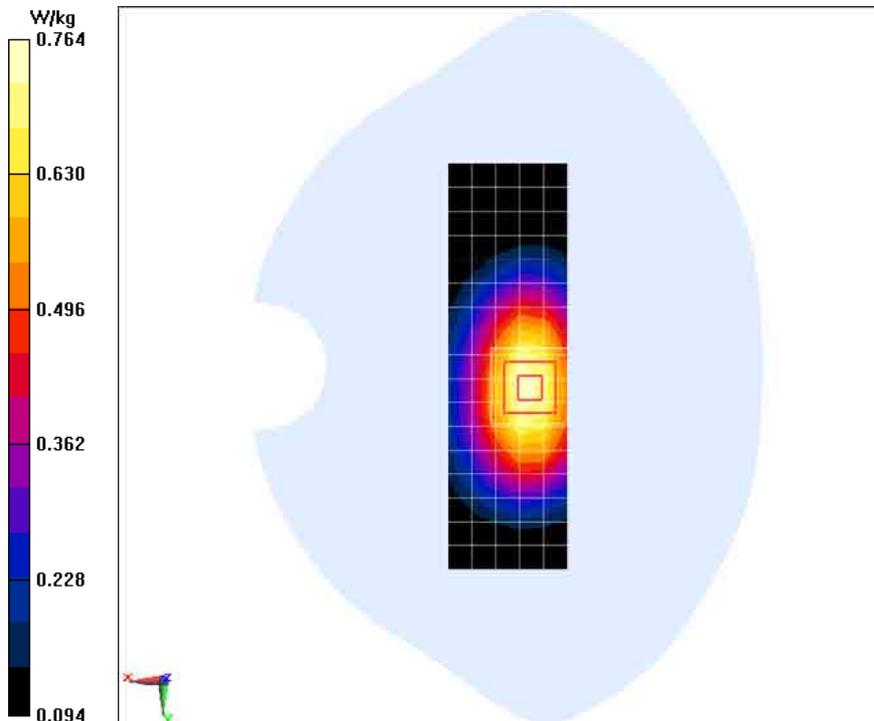

### GSM 850MHz GPRS 4TS Body Bottom Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 55.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 850MHz GPRS 4TS;    Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Middle Bottom GPRS 4TS 850MHz/Area Scan (7x11x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.0970 \text{ W/kg}$

#### Middle Bottom GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $9.866 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$

Peak SAR (extrapolated) =  $0.164 \text{ W/kg}$

SAR(1 g) =  $0.091 \text{ W/kg}$ ; SAR(10 g) =  $0.055 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.0979 \text{ W/kg}$

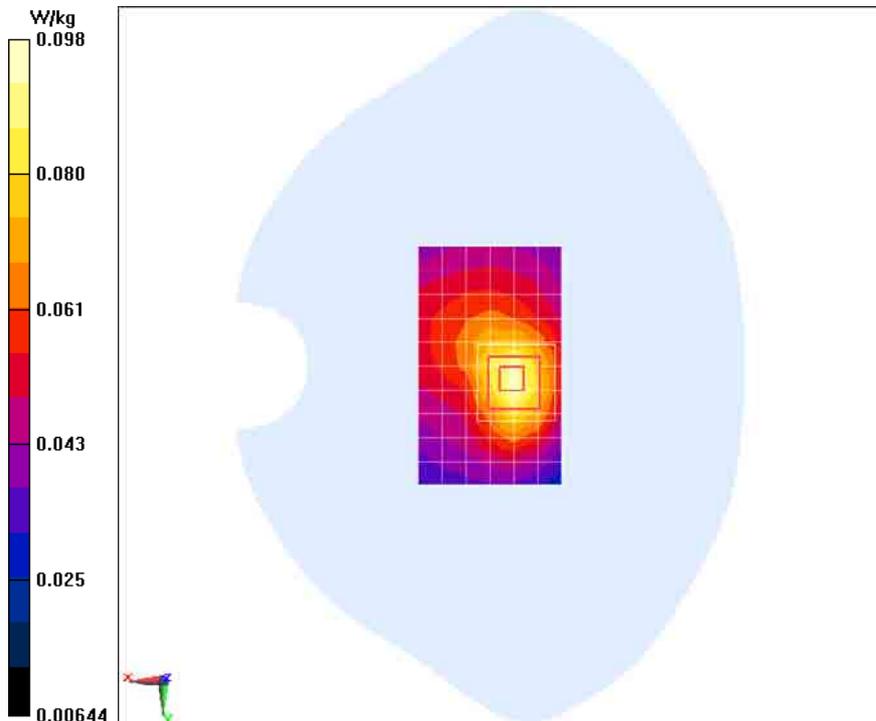

### GSM 850MHz GPRS 4TS Body Toward Ground Low

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 55.149$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS;    Frequency: 824.2 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Low Toward Ground GPRS 4TS 850MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.35 W/kg

#### Low Toward Ground GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.960 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.961 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

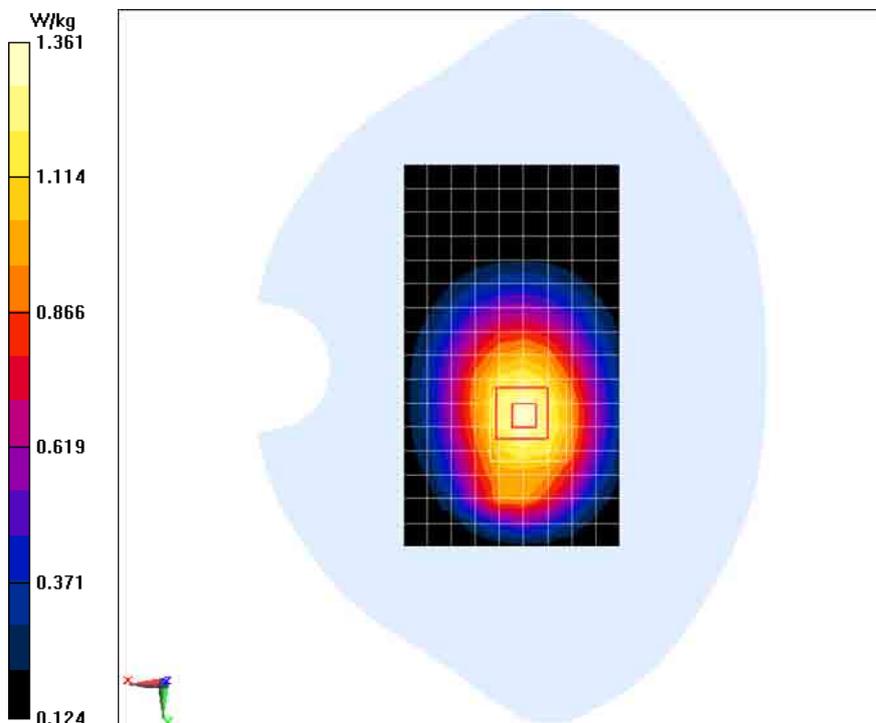

### GSM 850MHz GPRS 4TS Body Toward Ground High

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 1.015 \text{ S/m}$ ;  $\epsilon_r = 55.205$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 850MHz GPRS 4TS;    Frequency:  $848.8 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### High Toward Ground GPRS 4TS 850MHz/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $1.11 \text{ W/kg}$

#### High Toward Ground GPRS 4TS 850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $31.499 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$

Peak SAR (extrapolated) =  $1.32 \text{ W/kg}$

SAR(1 g) =  $1.06 \text{ W/kg}$ ; SAR(10 g) =  $0.792 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.12 \text{ W/kg}$

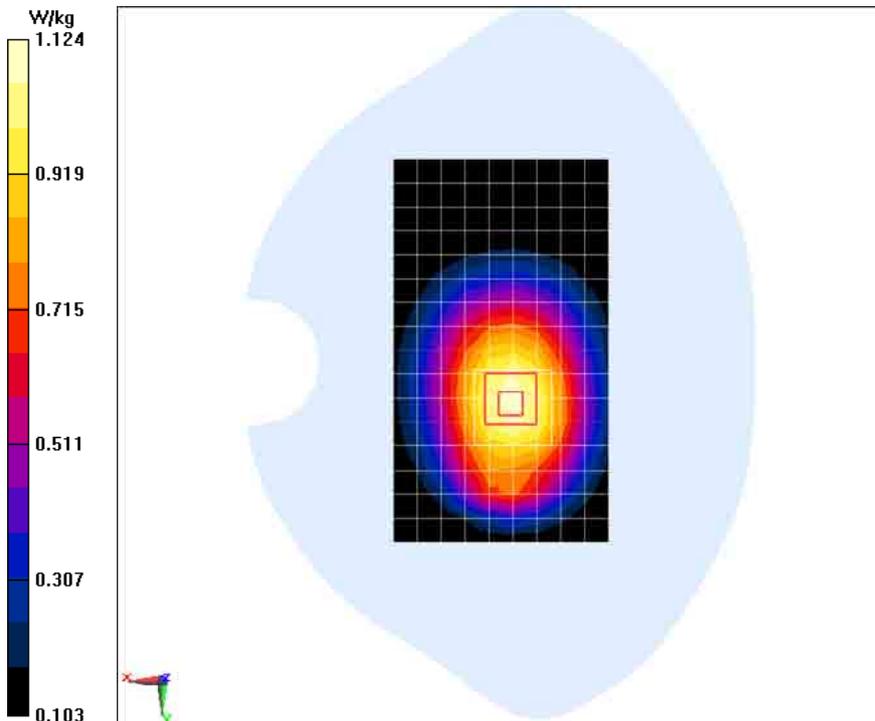

## GSM850MHz With Headset Body Toward Ground Low

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 55.149$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: UID 0, GSM Professional 850MHz;    Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Low Toward Ground GSM850MHz With Headset/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.631 W/kg

### Low Toward Ground GSM850MHz With Headset/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.664 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.448 W/kg

Maximum value of SAR (measured) = 0.625 W/kg

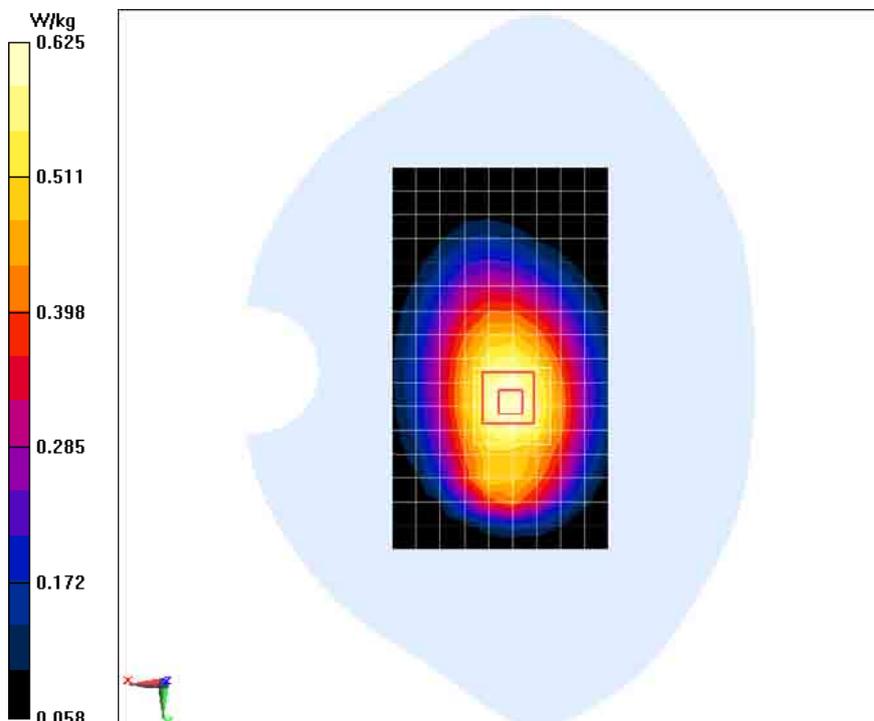

## GSM 850MHz 2 GPRS 4TS Body Toward Phantom Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS;      Frequency: 836.6 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Toward Phantom GPRS 4TS 850MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.12 W/kg

### Middle Toward Phantom GPRS 4TS 850MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.063 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.823 W/kg

Maximum value of SAR (measured) = 1.121 W/kg

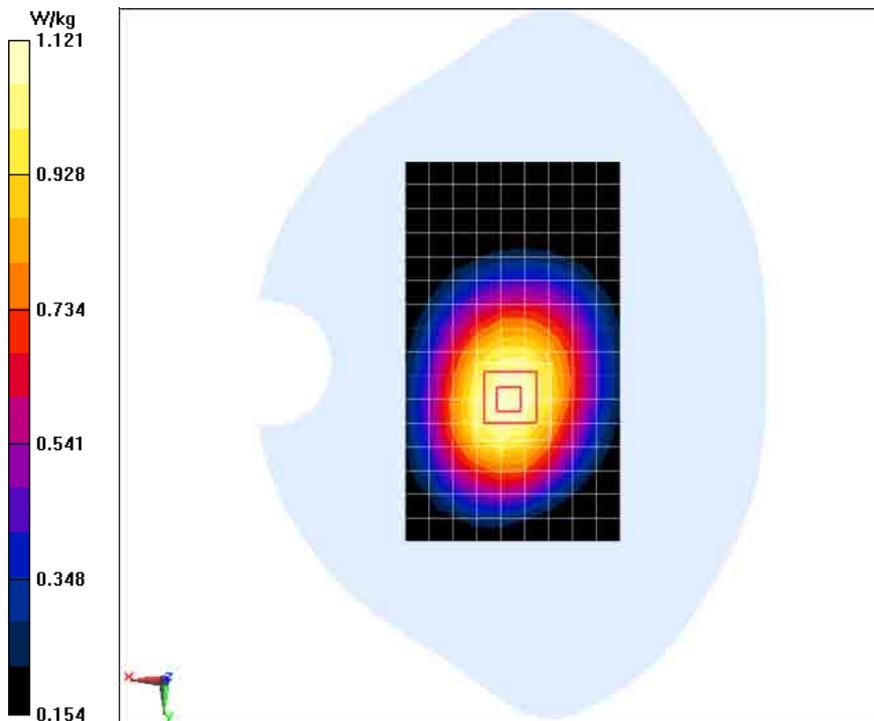

## GSM 850MHz 2 GPRS 4TS Body Toward Ground Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS;    Frequency: 836.6 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Toward Ground GPRS 4TS 850MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.25 W/kg

### Middle Toward Ground GPRS 4TS 850MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.767 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.890 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

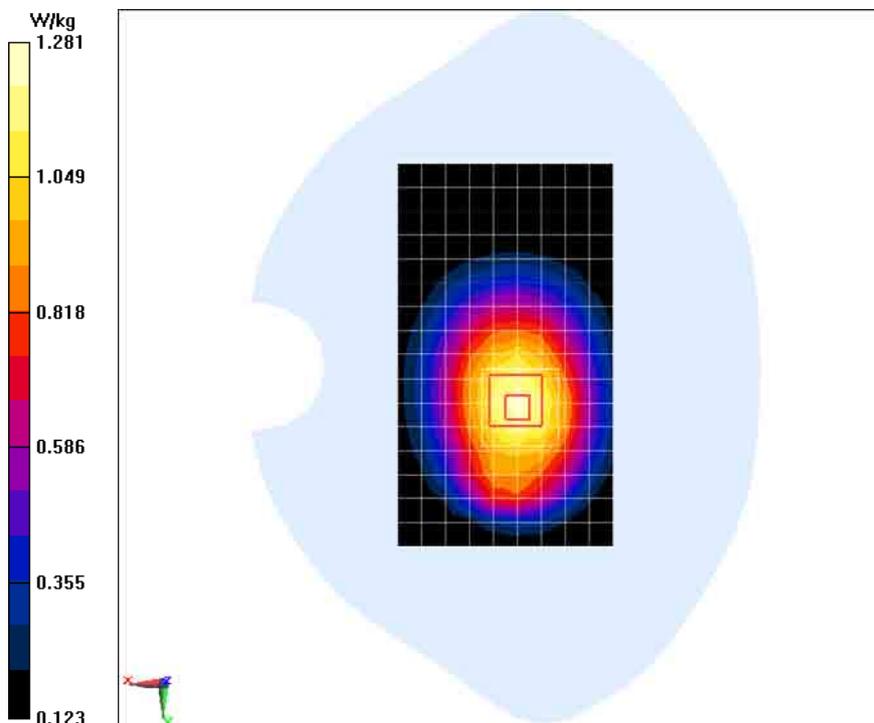

### GSM 850MHz 2 GPRS 4TS Body Toward Ground Low

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 55.149$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 850MHz GPRS 4TS;    Frequency: 824.2 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Low Toward Ground GPRS 4TS 850MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.33 W/kg

#### Low Toward Ground GPRS 4TS 850MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.030 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.955 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

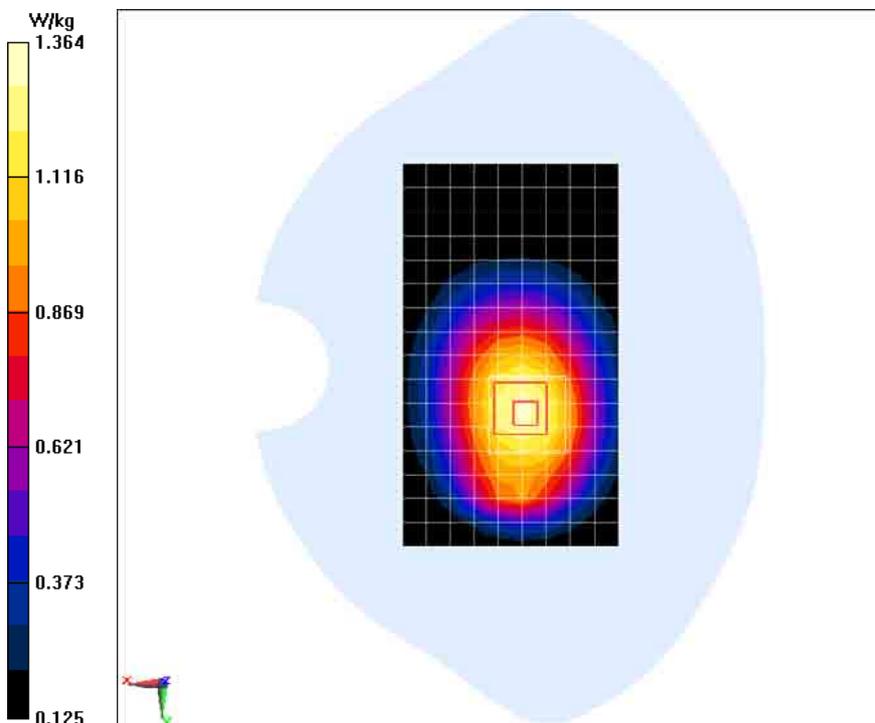

### GSM 850MHz 2 GPRS 4TS Body Toward Ground High

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 1.015 \text{ S/m}$ ;  $\epsilon_r = 55.205$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 850MHz GPRS 4TS;    Frequency:  $848.8 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### High Toward Ground GPRS 4TS 850MHz 2/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $1.12 \text{ W/kg}$

#### High Toward Ground GPRS 4TS 850MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $31.671 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $1.38 \text{ W/kg}$

SAR(1 g) =  $1.08 \text{ W/kg}$ ; SAR(10 g) =  $0.799 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.14 \text{ W/kg}$

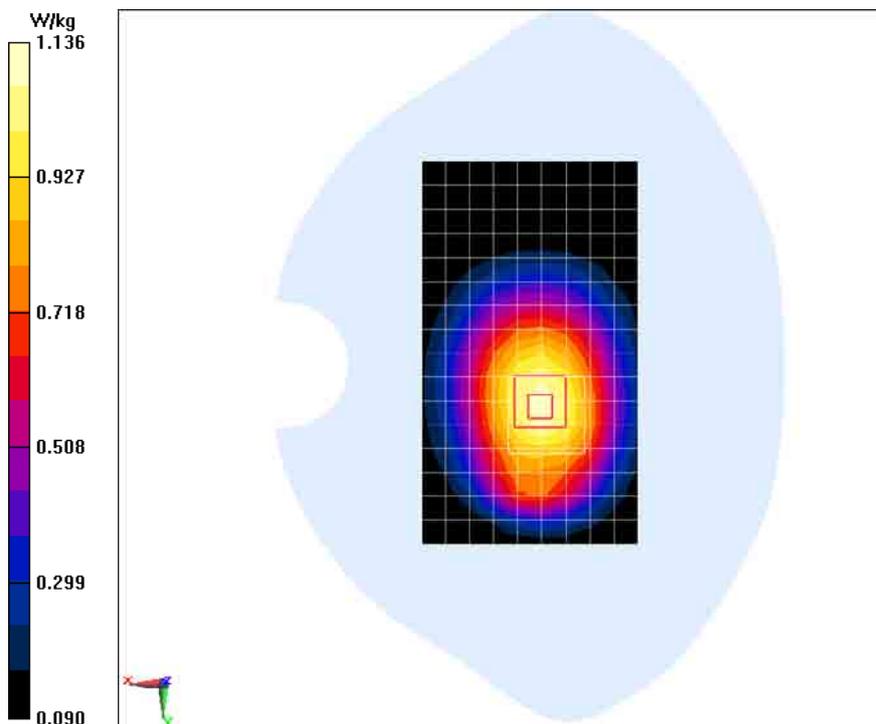

### GSM 850MHz 2 GPRS 4TS Body Left Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 55.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 850MHz GPRS 4TS;    Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Middle Left GPRS 4TS 850MHz 2/Area Scan (6x18x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.882 \text{ W/kg}$

#### Middle Left GPRS 4TS 850MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $28.993 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$

Peak SAR (extrapolated) =  $1.12 \text{ W/kg}$

SAR(1 g) =  $0.832 \text{ W/kg}$ ; SAR(10 g) =  $0.581 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.891 \text{ W/kg}$

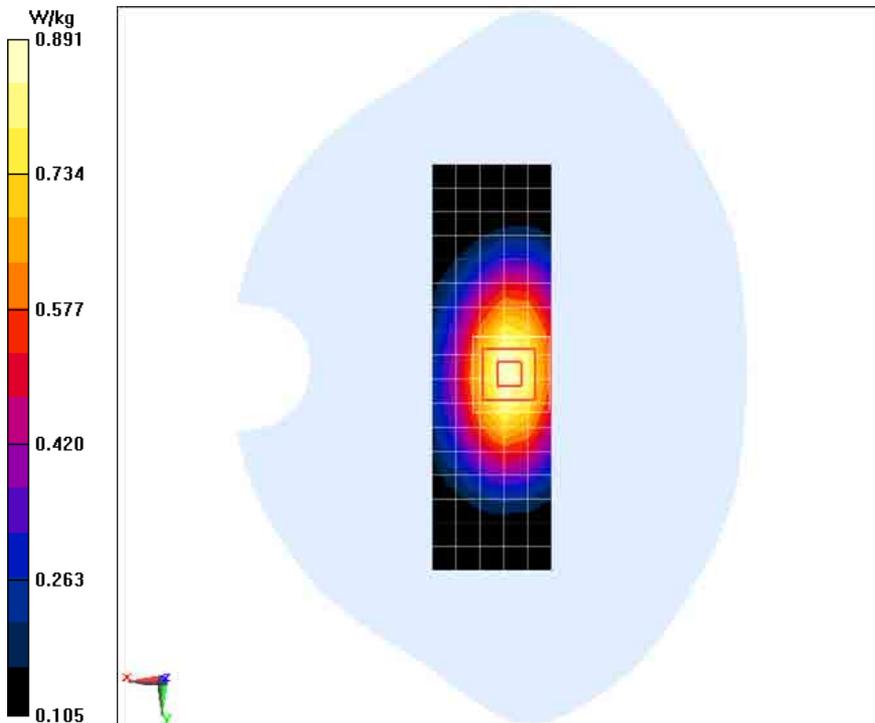

## GSM1900MHz Left Cheek Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz;    Frequency: 1880 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Cheek Left GSM1900MHz/Area Scan (12x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.508 W/kg

### Middle Cheek Left GSM1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.415 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

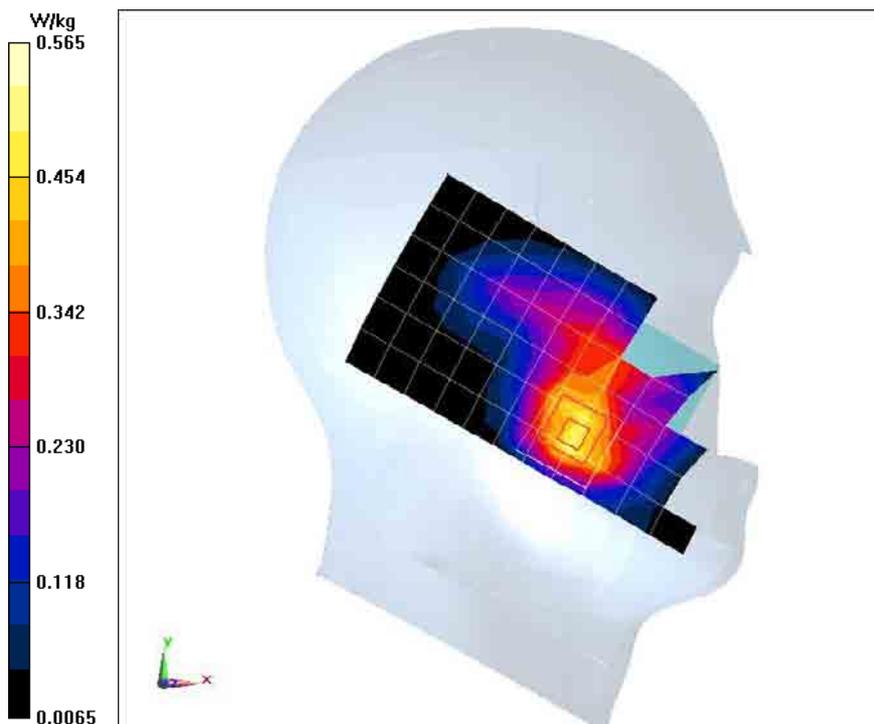

### GSM1900MHz Left Tilt Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.442 \text{ S/m}$ ;  $\epsilon_r = 40.614$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 1900MHz;    Frequency: 1880 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### Middle Tilt Left GSM1900MHz/Area Scan (12x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.165 \text{ W/kg}$

#### Middle Tilt Left GSM1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $9.669 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $0.254 \text{ W/kg}$

SAR(1 g) =  $0.166 \text{ W/kg}$ ; SAR(10 g) =  $0.098 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.183 \text{ W/kg}$

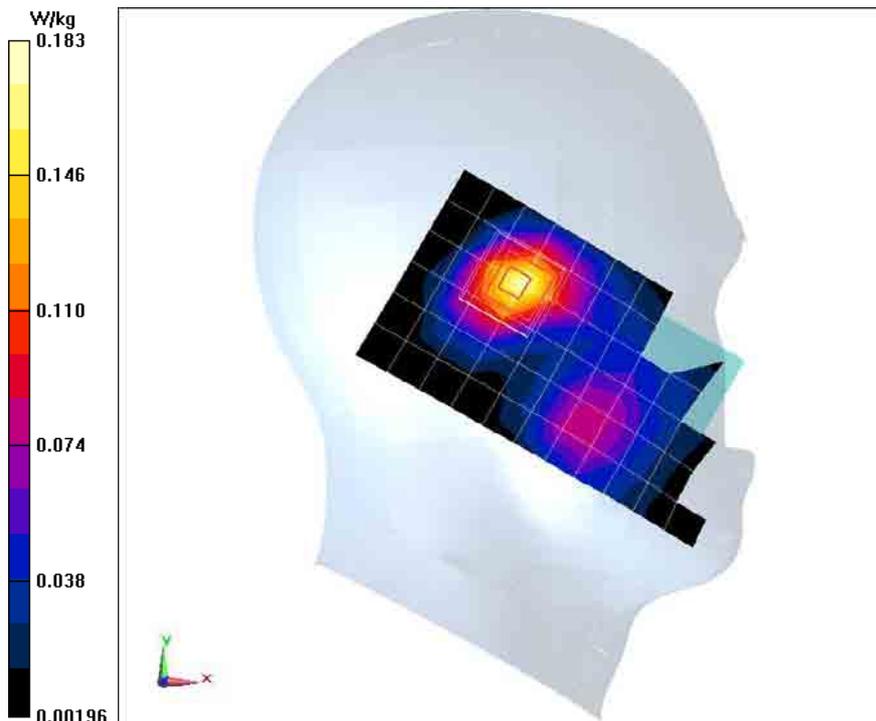

### GSM1900MHz Right Cheek Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz;    Frequency: 1880 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### Middle Cheek Right GSM1900MHz/Area Scan (12x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 W/kg

#### Middle Cheek Right GSM1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.547 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.767 W/kg

SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.323 W/kg

Maximum value of SAR (measured) = 0.575 W/kg

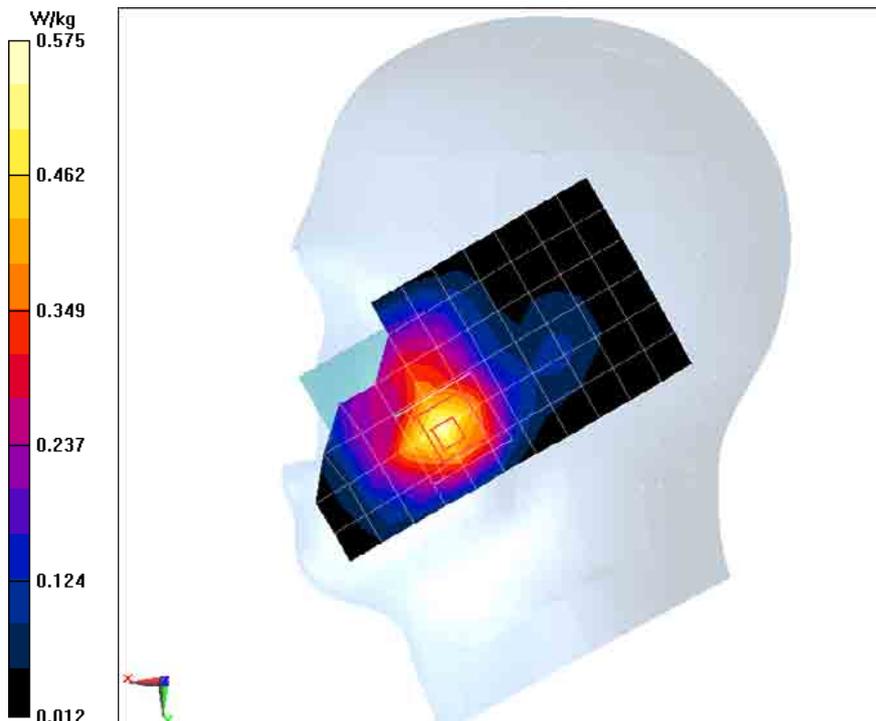

## GSM1900MHz Right Tilt Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz;    Frequency: 1880 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Tilt Right GSM1900MHz/Area Scan (12x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.240 W/kg

### Middle Tilt Right GSM1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.709 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

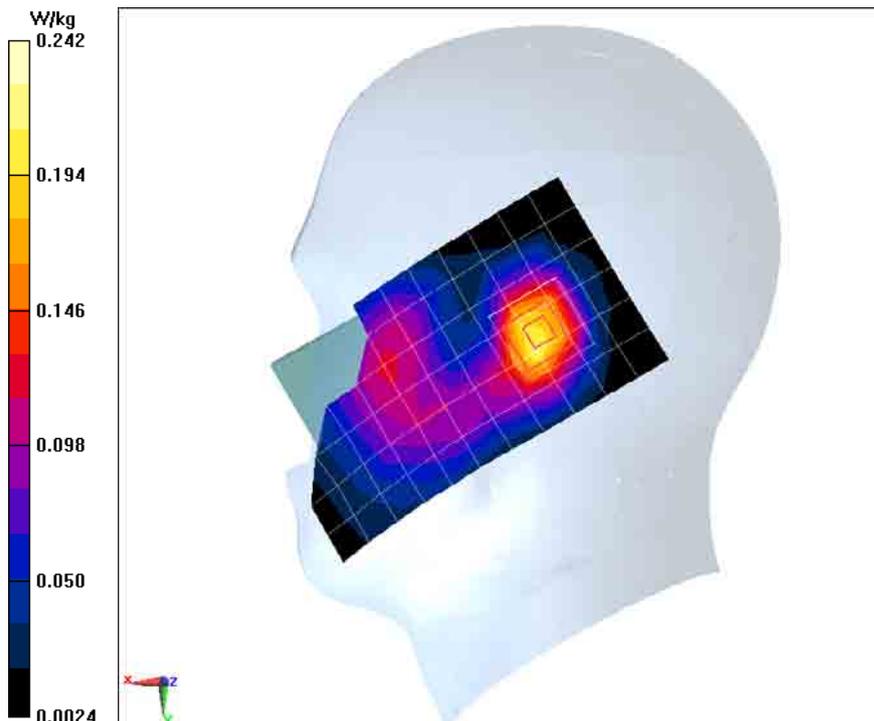

### GSM1900MHz Right Cheek Low

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.415$  S/m;  $\epsilon_r = 40.792$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz;    Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### Low Cheek Right GSM1900MHz/Area Scan (12x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.580 W/kg

#### Low Cheek Right GSM1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.535 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.336 W/kg

Maximum value of SAR (measured) = 0.597 W/kg

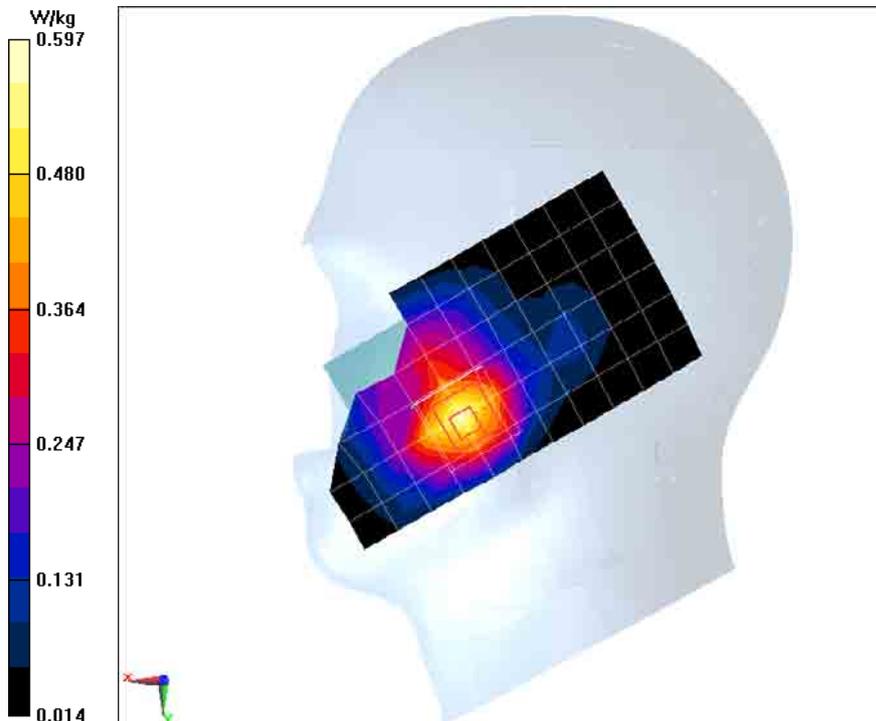

### GSM1900MHz Right Cheek High

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1910 \text{ MHz}$ ;  $\sigma = 1.468 \text{ S/m}$ ;  $\epsilon_r = 40.494$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 1900MHz;    Frequency:  $1909.8 \text{ MHz}$ ; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### High Cheek Right GSM1900MHz/Area Scan (12x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.542 \text{ W/kg}$

#### High Cheek Right GSM1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.941 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.734 \text{ W/kg}$

SAR(1 g) =  $0.500 \text{ W/kg}$ ; SAR(10 g) =  $0.307 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.539 \text{ W/kg}$

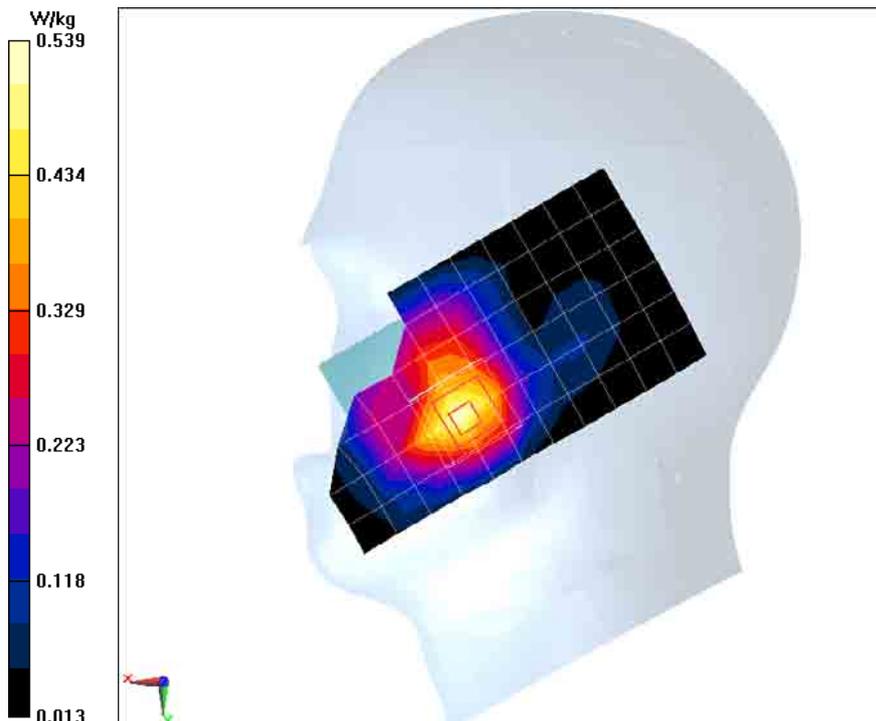

## GSM 1900MHz GPRS 4TS Body Toward Phantom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;      Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Middle Toward Phantom GPRS 4TS 1900MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.895 W/kg

### Middle Toward Phantom GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.643 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.803 W/kg; SAR(10 g) = 0.484 W/kg

Maximum value of SAR (measured) = 0.895 W/kg

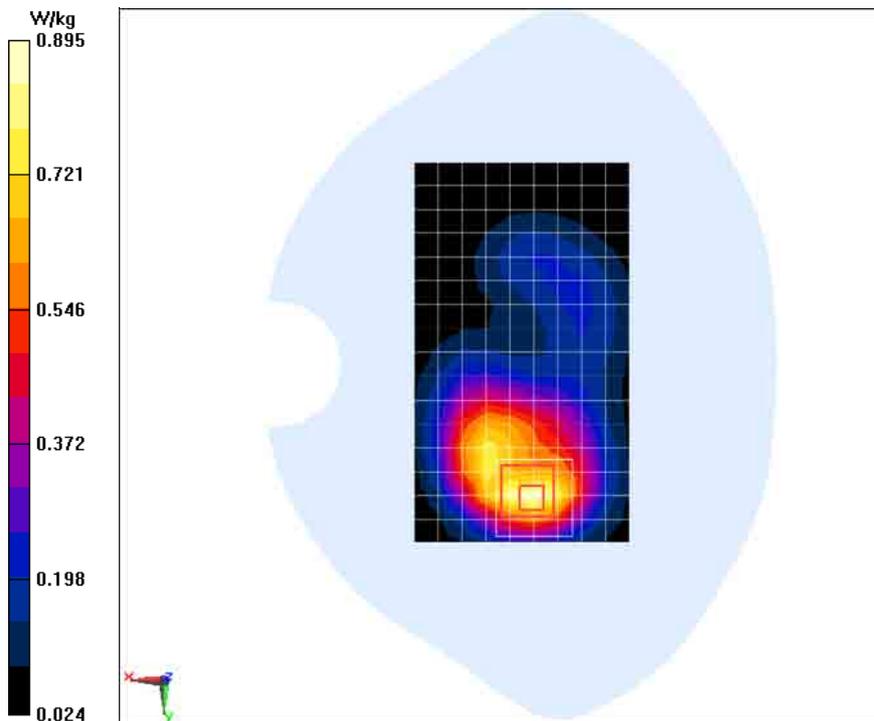

### GSM 1900MHz GPRS 4TS Body Toward Ground Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Toward Ground GPRS 4TS 1900MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.22 W/kg

#### Middle Toward Ground GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.847 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.696 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

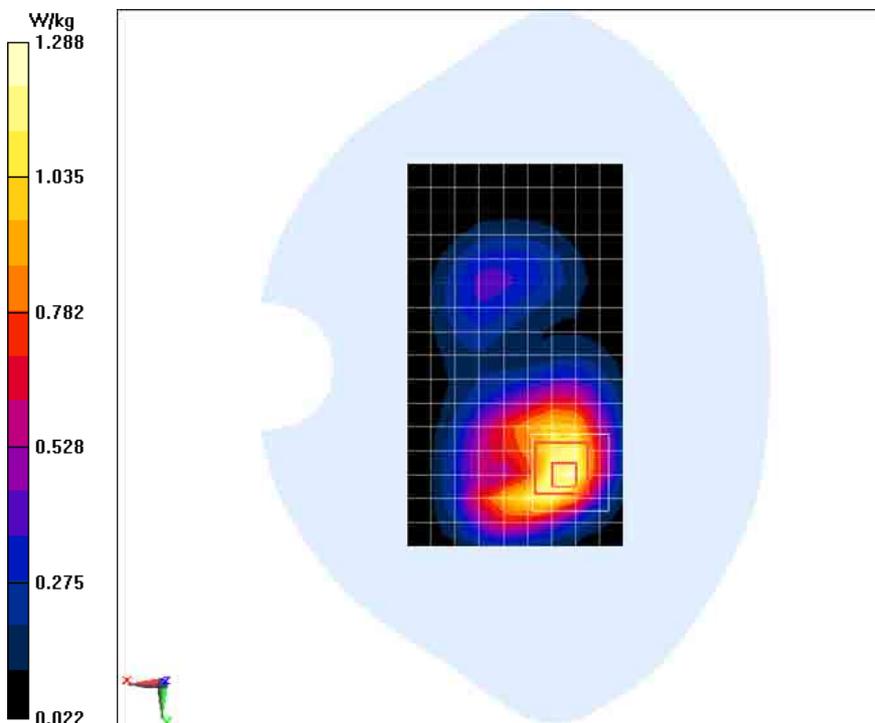

### GSM 1900MHz GPRS 4TS Body Left Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Left GPRS 4TS 1900MHz/Area Scan (5x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.236 W/kg

#### Middle Left GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.451 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

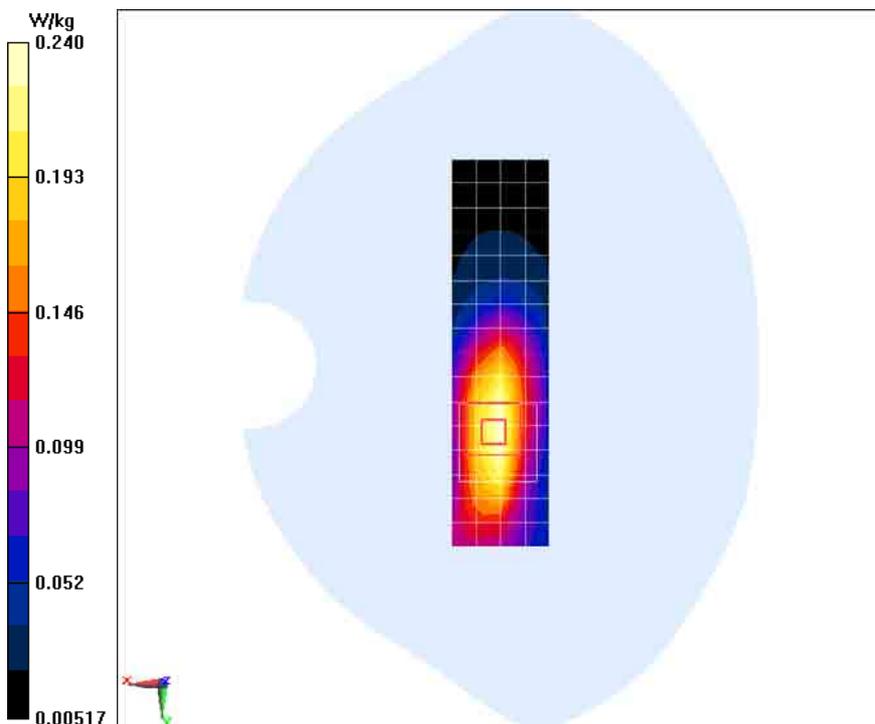

## GSM 1900MHz GPRS 4TS Body Right Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;      Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Middle Right GPRS 4TS 1900MHz/Area Scan (5x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.271 W/kg

### Middle Right GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.868 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.399 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.155 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

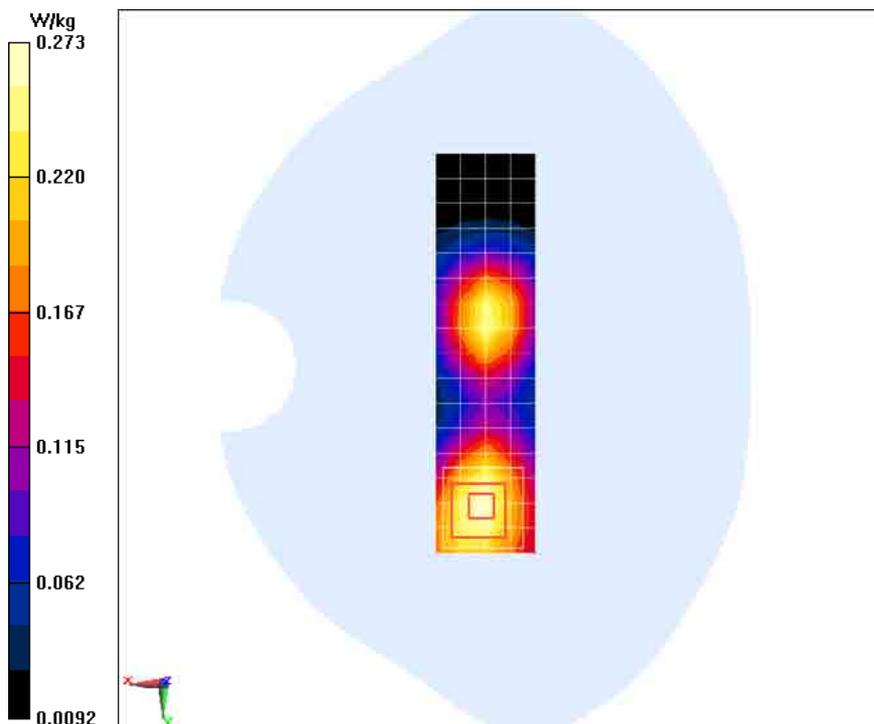

## GSM 1900MHz GPRS 4TS Body Bottom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Middle Bottom GPRS 4TS 1900MHz/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.942 W/kg

### Middle Bottom GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.049 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 0.968 W/kg

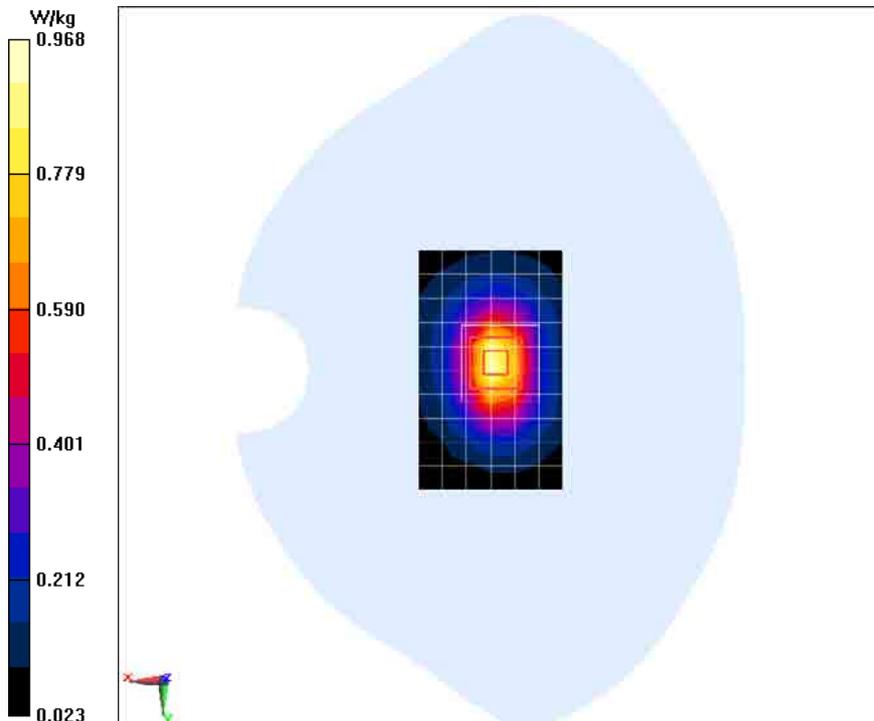

## GSM 1900MHz GPRS 4TS Body Toward Ground Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 53.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1850.2 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Low Toward Ground    GPRS 4TS 1900MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR    (measured) = 1.24 W/kg

### Low Toward Ground    GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.413 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.695 W/kg

Maximum value of SAR    (measured) = 1.28 W/kg

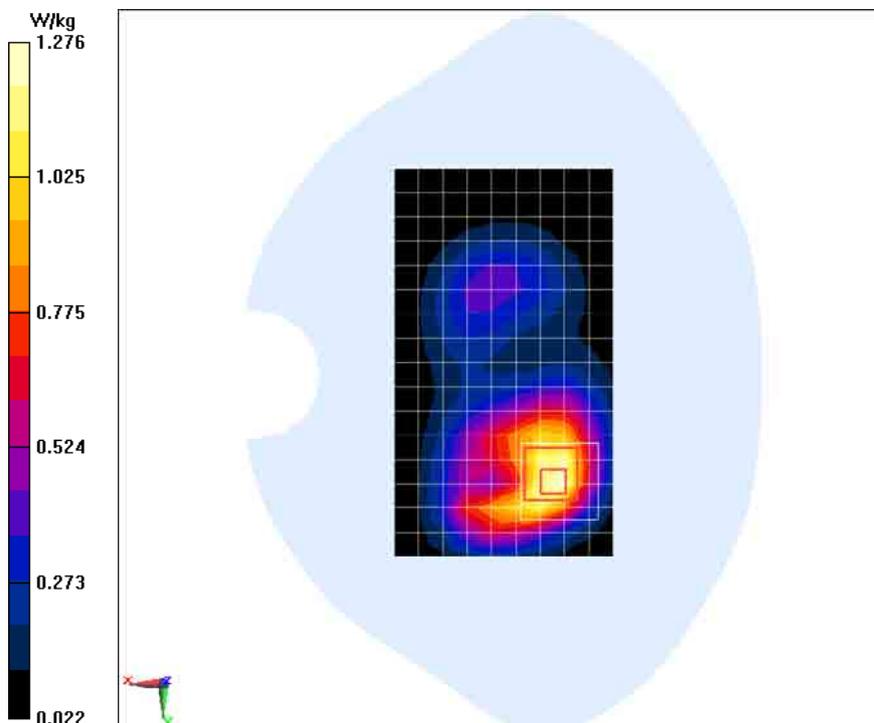

### GSM 1900MHz GPRS 4TS Body Toward Ground High

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.534$  S/m;  $\epsilon_r = 53.187$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### High Toward Ground    GPRS 4TS 1900MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR    (measured) = 1.25 W/kg

#### High Toward Ground    GPRS 4TS 1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.377 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.650 W/kg

Maximum value of SAR    (measured) = 1.26 W/kg

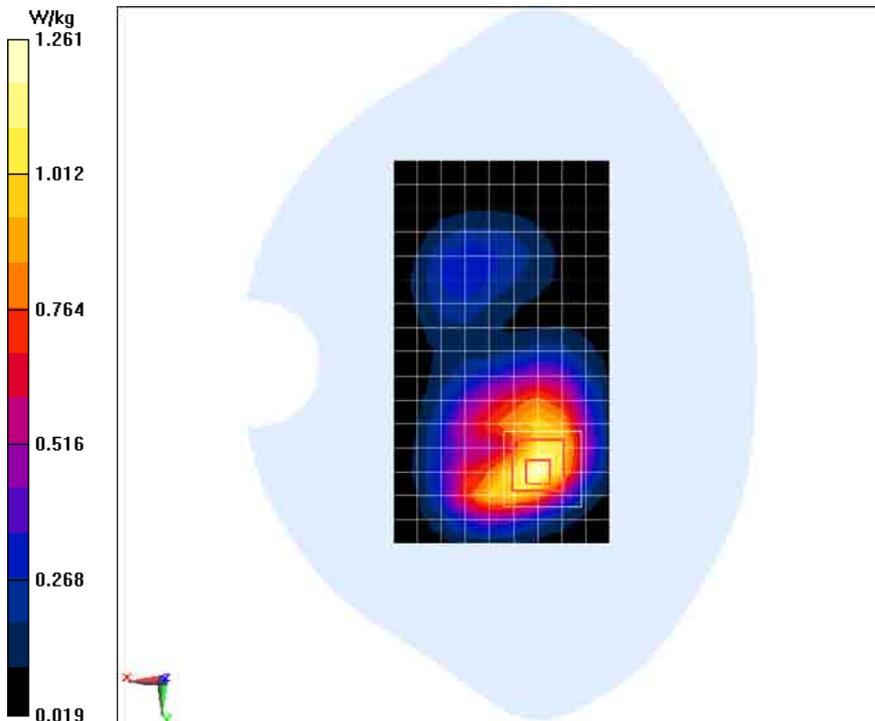

## GSM1900MHz With Headset Body Toward Ground Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 53.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Low Toward Ground GSM1900MHz With Headset/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.744 W/kg

### Low Toward Ground GSM1900MHz With Headset/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.481 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.392 W/kg

Maximum value of SAR (measured) = 0.741 W/kg

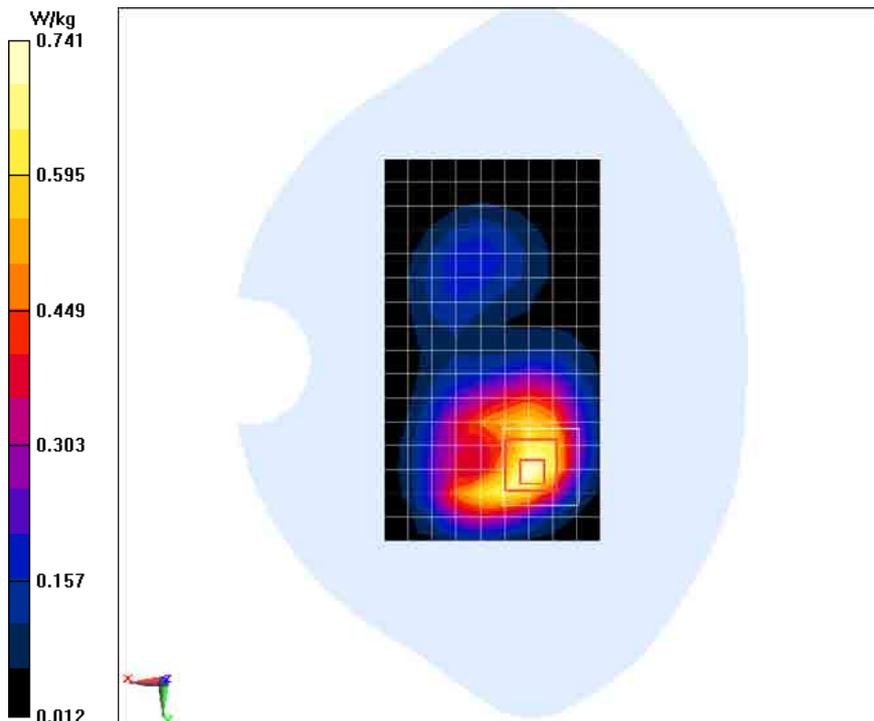

### GSM 1900MHz 2 GPRS 4TS Body Toward Ground Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Toward Ground GPRS 4TS 1900MHz 2/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.24 W/kg

#### Middle Toward Ground GPRS 4TS 1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.866 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.697 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

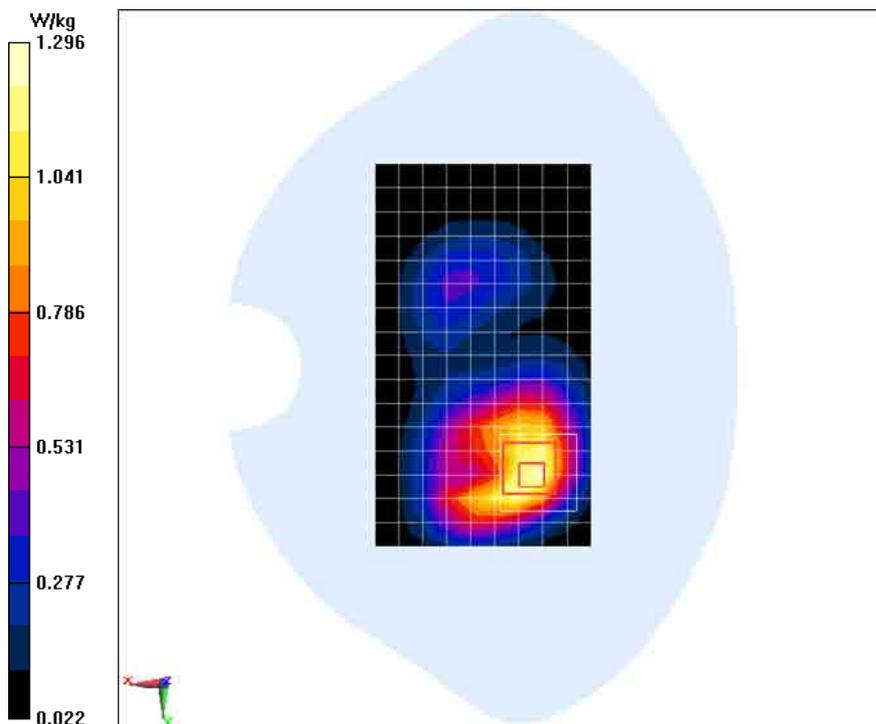

### GSM 1900MHz 2 GPRS 4TS Body Toward Phantom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Toward Phantom GPRS 4TS 1900MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.926 W/kg

#### Middle Toward Phantom GPRS 4TS 1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.382 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.491 W/kg

Maximum value of SAR (measured) = 0.936 W/kg

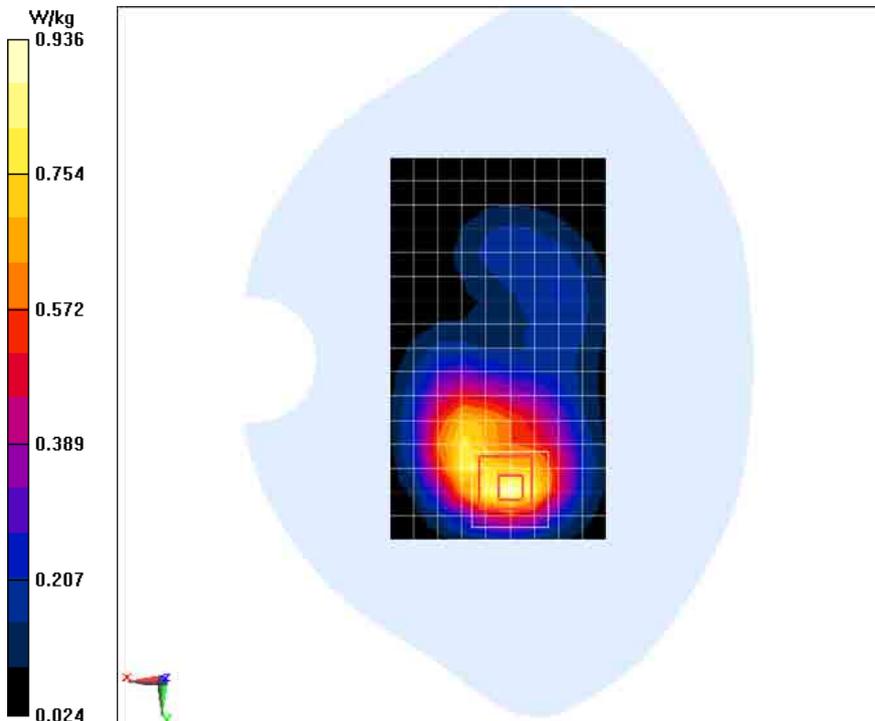

### GSM 1900MHz 2 GPRS 4TS Body Toward Ground Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.475$  S/m;  $\epsilon_r = 53.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1850.2 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Low Toward Ground    GPRS 4TS 1900MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.19 W/kg

#### Low Toward Ground    GPRS 4TS 1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.380 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.654 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

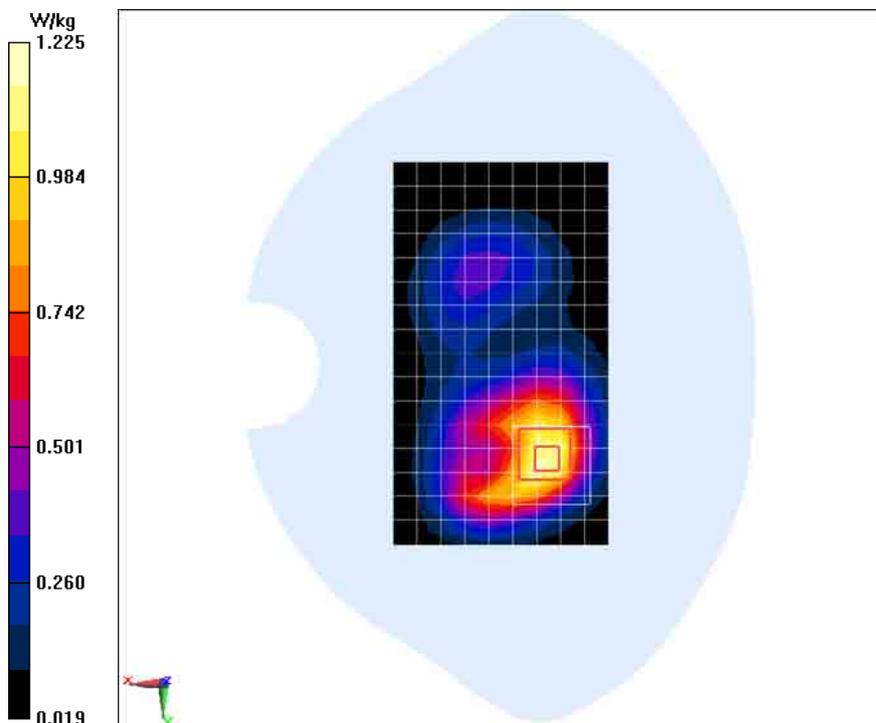

### GSM 1900MHz 2 GPRS 4TS Body Toward Ground High

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.534$  S/m;  $\epsilon_r = 53.187$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1909.8 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### High Toward Ground    GPRS 4TS 1900MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR    (measured) = 1.26 W/kg

#### High Toward Ground    GPRS 4TS 1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.401 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.651 W/kg

Maximum value of SAR    (measured) = 1.27 W/kg

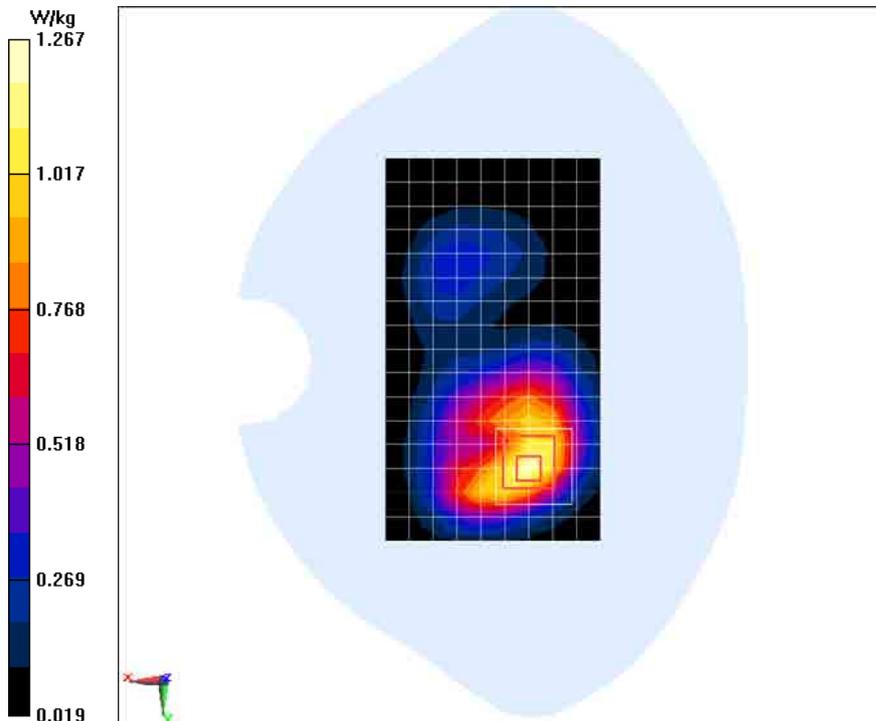

### GSM 1900MHz 2 GPRS 4TS Body Bottom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: GSM 1900MHz GPRS 4TS;    Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Bottom GPRS 4TS 1900MHz 2/Area Scan (7x11x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.929 W/kg

#### Middle Bottom GPRS 4TS 1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.664 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.854 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 0.947 W/kg

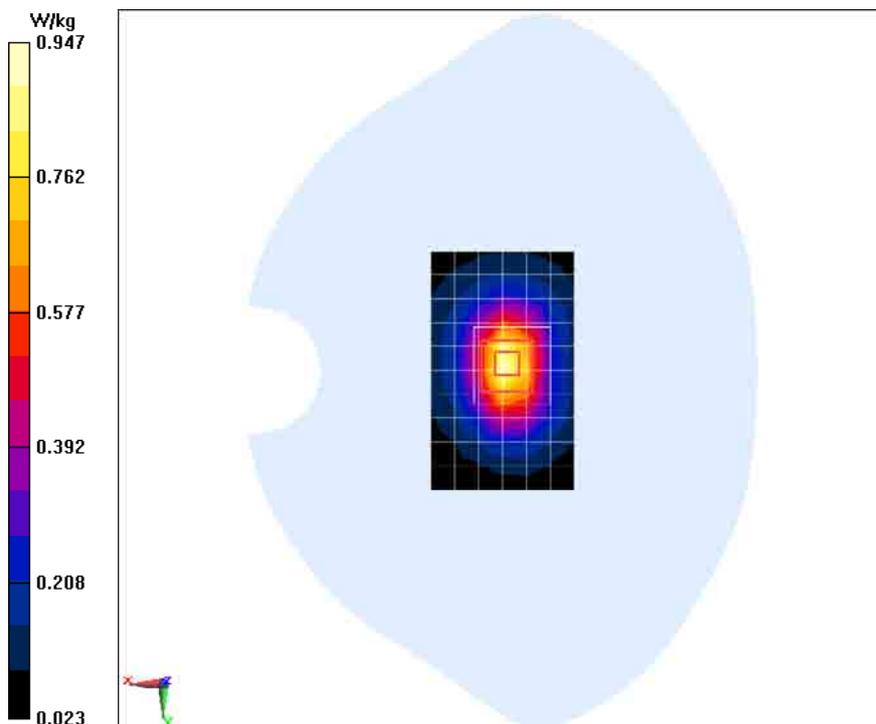

### WCDMA850MHz Left Cheek Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.919 \text{ S/m}$ ;  $\epsilon_r = 40.986$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band V; Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

#### Middle Cheek Left WCDMA850MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.721 \text{ W/kg}$

#### Middle Cheek Left WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.897 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$

Peak SAR (extrapolated) =  $0.940 \text{ W/kg}$

SAR(1 g) =  $0.696 \text{ W/kg}$ ; SAR(10 g) =  $0.505 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.734 \text{ W/kg}$

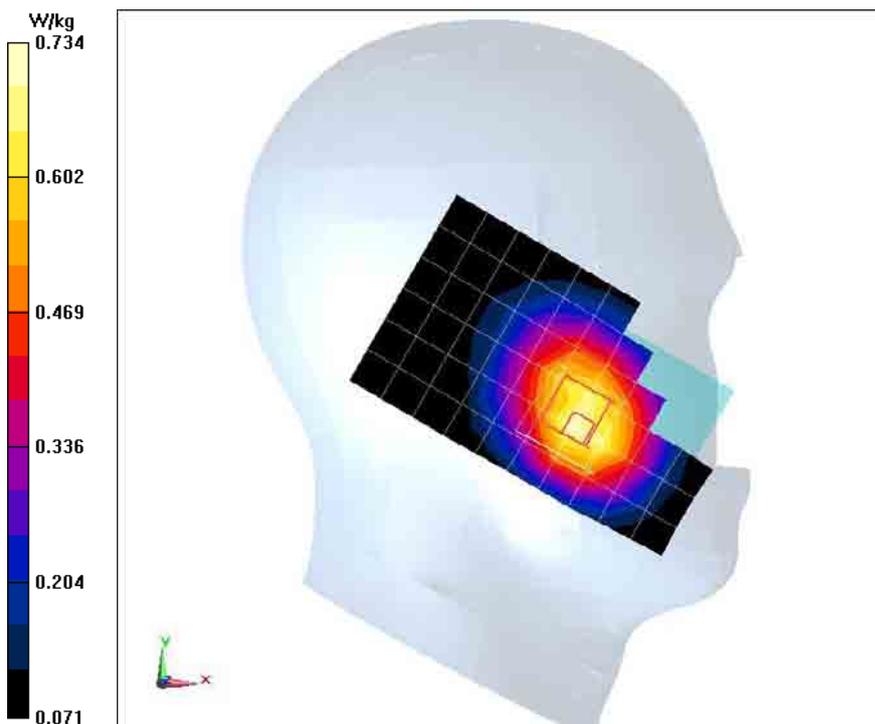

## WCDMA850MHz Left Tilt Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### Middle Tilt Left WCDMA850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.398 W/kg

### Middle Tilt Left WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.661 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

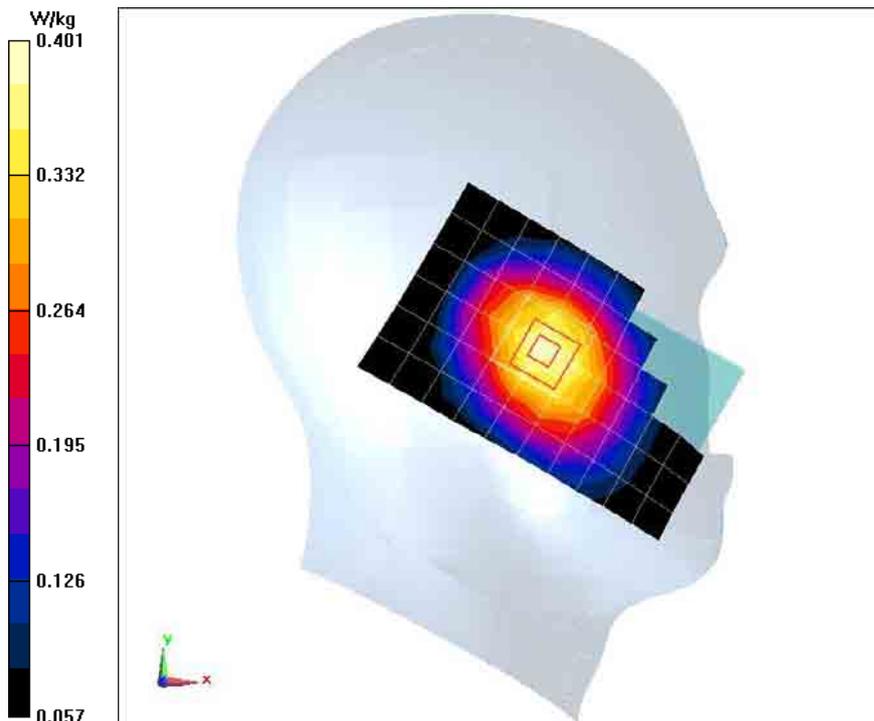

## WCDMA850MHz Right Cheek Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.919$  S/m;  $\epsilon_r = 40.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

### Middle Cheek Right WCDMA850MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.713 W/kg

### Middle Cheek Right WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.764 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 0.713 W/kg

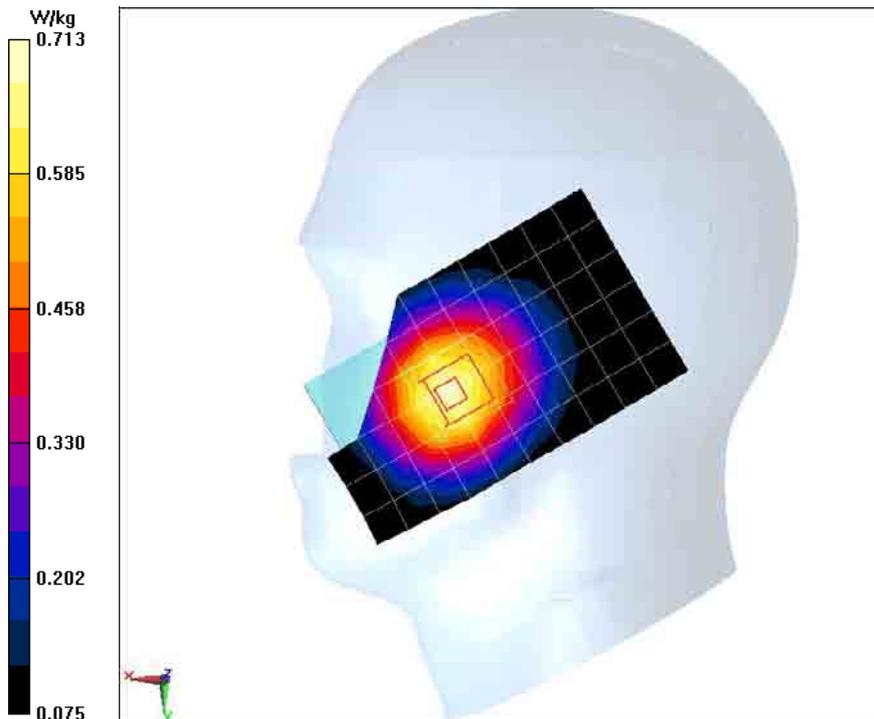

### WCDMA850MHz Right Tilt Middle

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.919 \text{ S/m}$ ;  $\epsilon_r = 40.986$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band V; Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

#### Middle Tilt Right WCDMA850MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.382 \text{ W/kg}$

#### Middle Tilt Right WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $14.612 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $0.439 \text{ W/kg}$

SAR(1 g) =  $0.364 \text{ W/kg}$ ; SAR(10 g) =  $0.278 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.383 \text{ W/kg}$

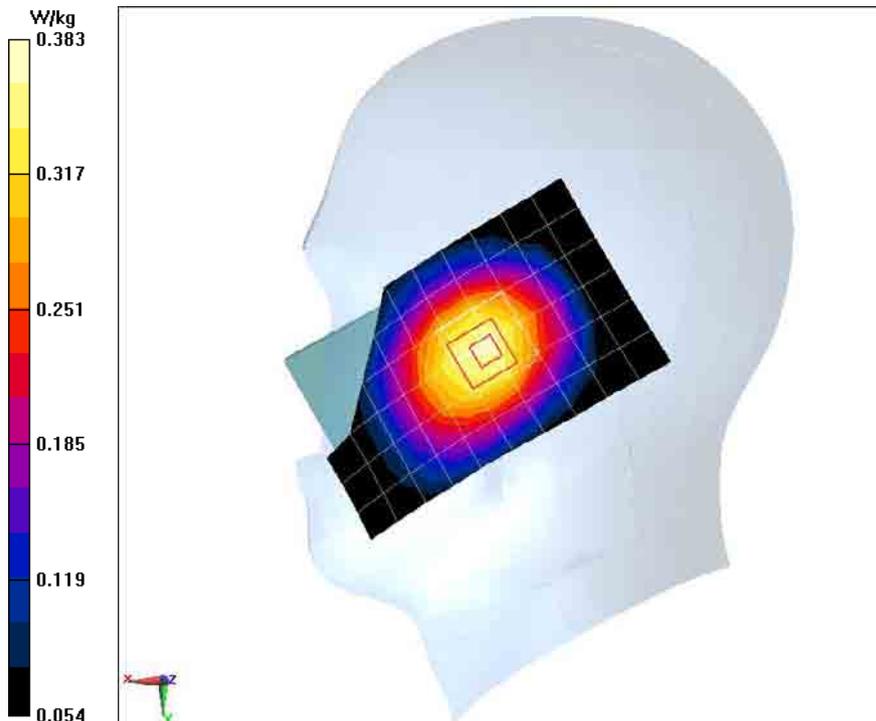

### WCDMA850MHz Left Cheek Low

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 41.264$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V ; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

#### Low Cheek Left WCDMA850MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.552 W/kg

#### Low Cheek Left WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.968 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

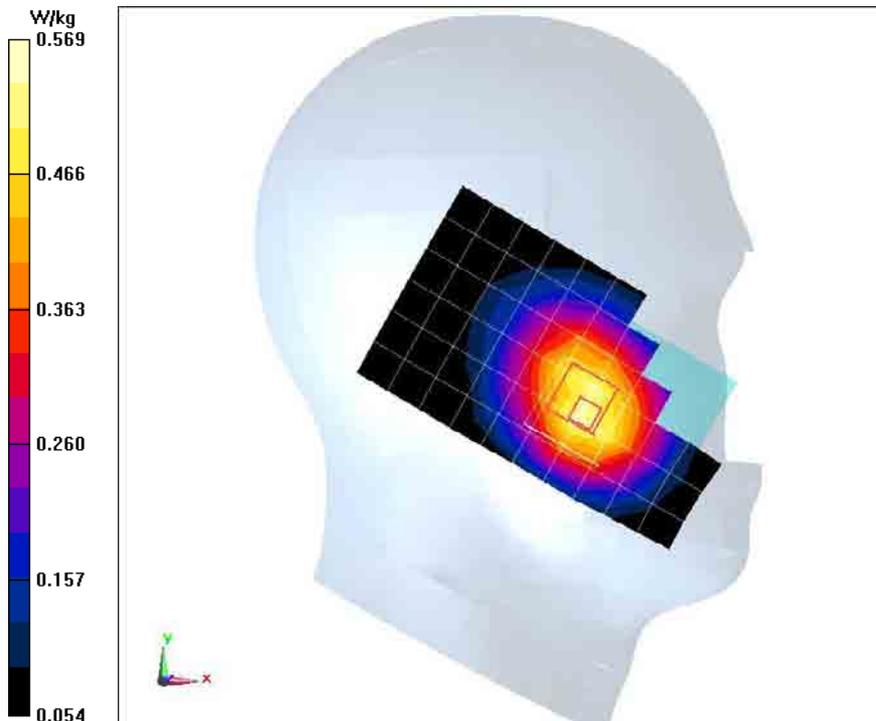

### WCDMA850MHz Left Cheek High

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 850MHz

Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 0.927 \text{ S/m}$ ;  $\epsilon_r = 40.809$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band V; Frequency:  $846.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

#### High Cheek Left WCDMA850MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.642 \text{ W/kg}$

#### High Cheek Left WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $9.283 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$

Peak SAR (extrapolated) =  $0.823 \text{ W/kg}$

SAR(1 g) =  $0.619 \text{ W/kg}$ ; SAR(10 g) =  $0.453 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.657 \text{ W/kg}$

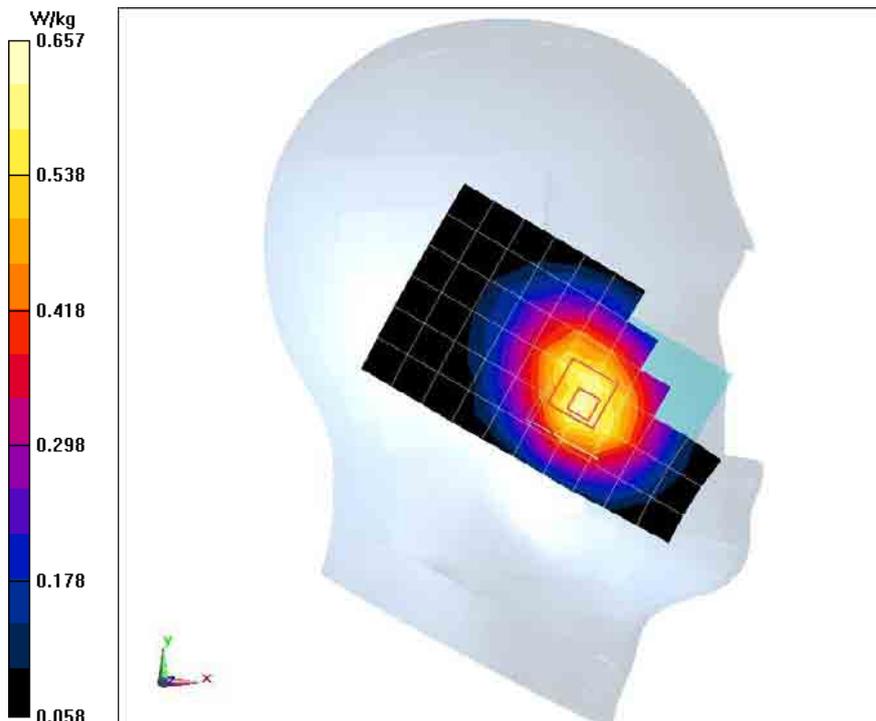

### WCDMA850MHz Body Toward Phantom Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 55.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band V; Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Middle Toward Phantom WCDMA850MHz/Area Scan (10x18x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.684 \text{ W/kg}$

#### Middle Toward Phantom WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $24.986 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$

Peak SAR (extrapolated) =  $0.822 \text{ W/kg}$

SAR(1 g) =  $0.659 \text{ W/kg}$ ; SAR(10 g) =  $0.497 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.693 \text{ W/kg}$

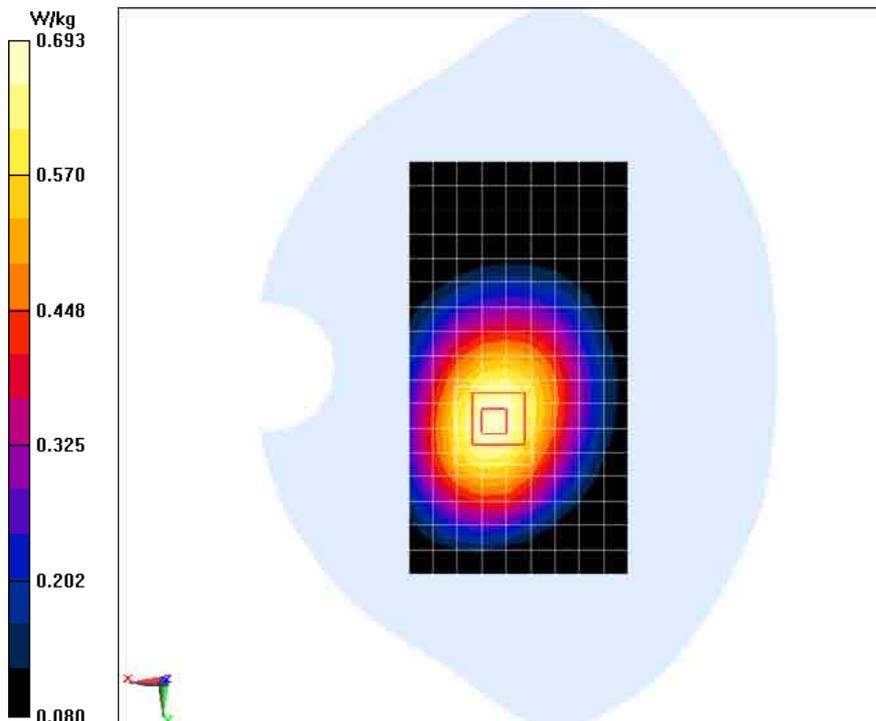

## WCDMA850MHz Body Toward Ground Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V;      Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Toward Ground WCDMA850MHz/Area Scan (10x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.846 W/kg

### Middle Toward Ground WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.643 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.592 W/kg

Maximum value of SAR (measured) = 0.845 W/kg

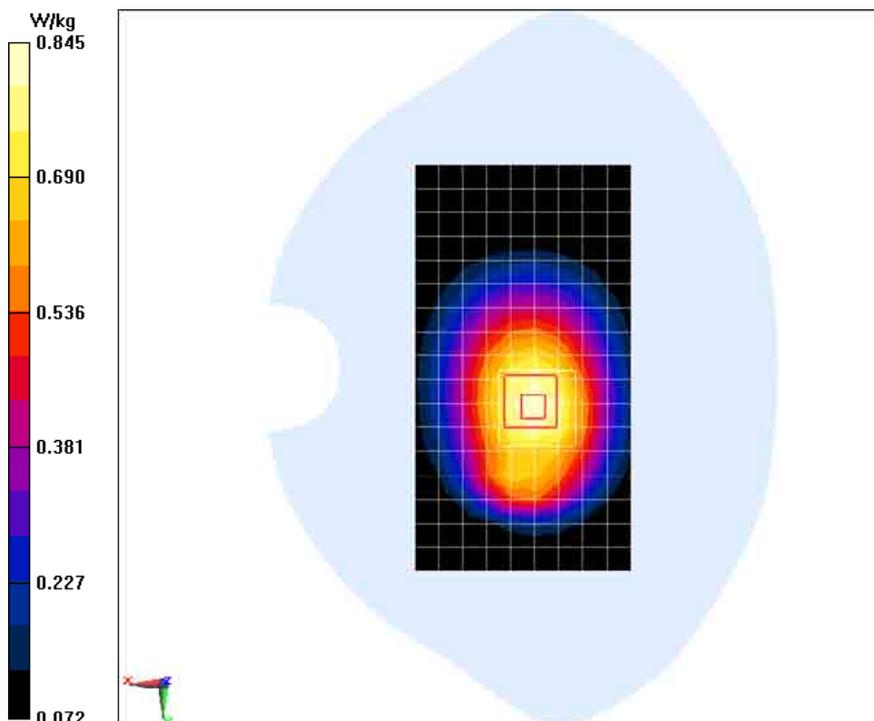

## WCDMA850MHz Body Right Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Right WCDMA850MHz/Area Scan (6x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.425 W/kg

### Middle Right WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.643 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

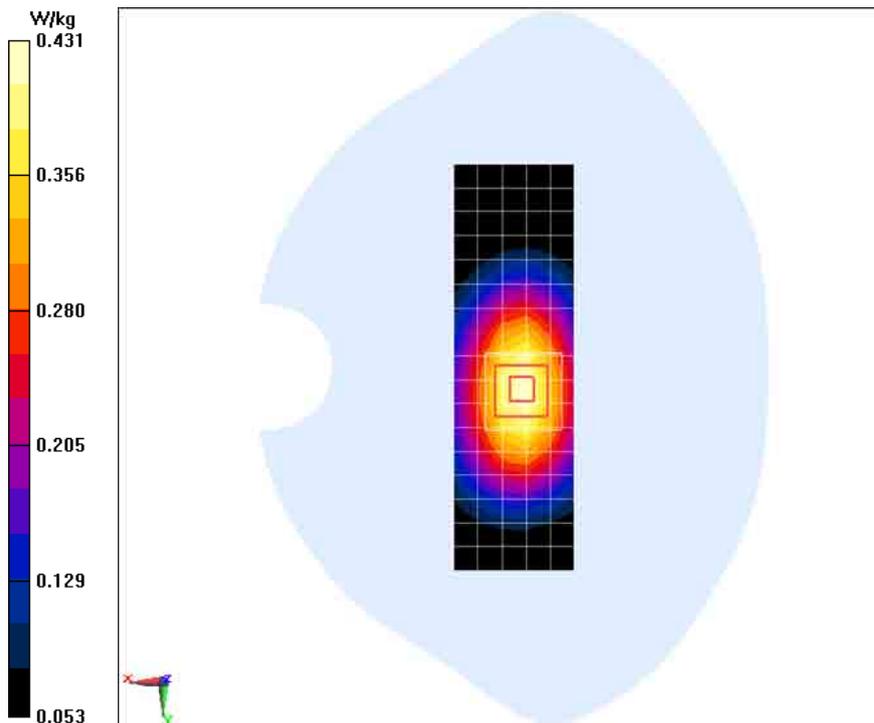

## WCDMA850MHz Body Left Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Left WCDMA850MHz/Area Scan (6x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.500 W/kg

### Middle Left WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.261 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.324 W/kg

Maximum value of SAR (measured) = 0.498 W/kg

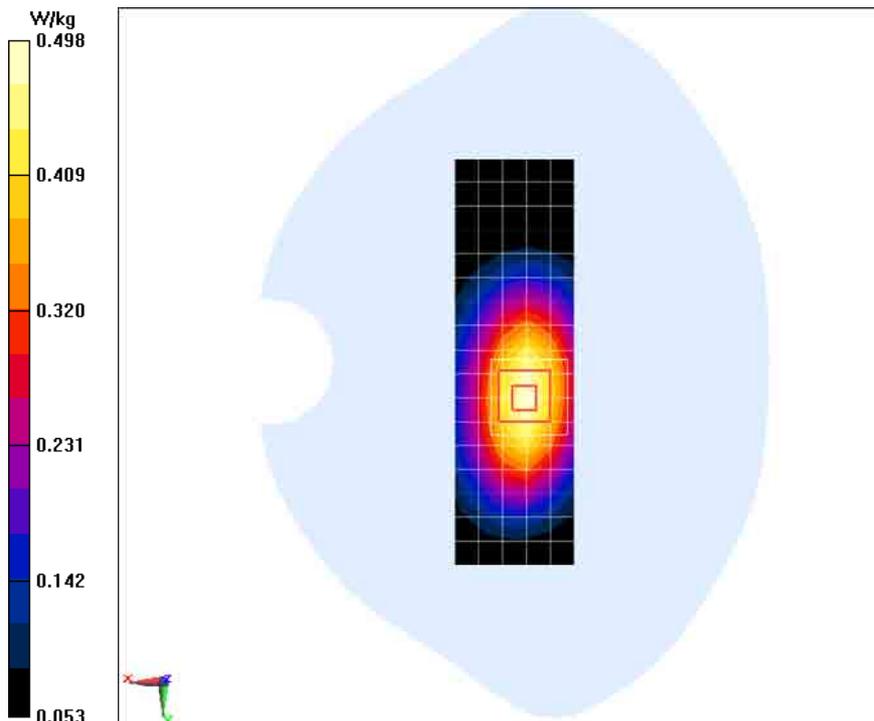

## WCDMA850MHz Body Bottom Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1.001$  S/m;  $\epsilon_r = 55.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Middle Bottom WCDMA850MHz/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0839 W/kg

### Middle Bottom WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.458 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0841 W/kg

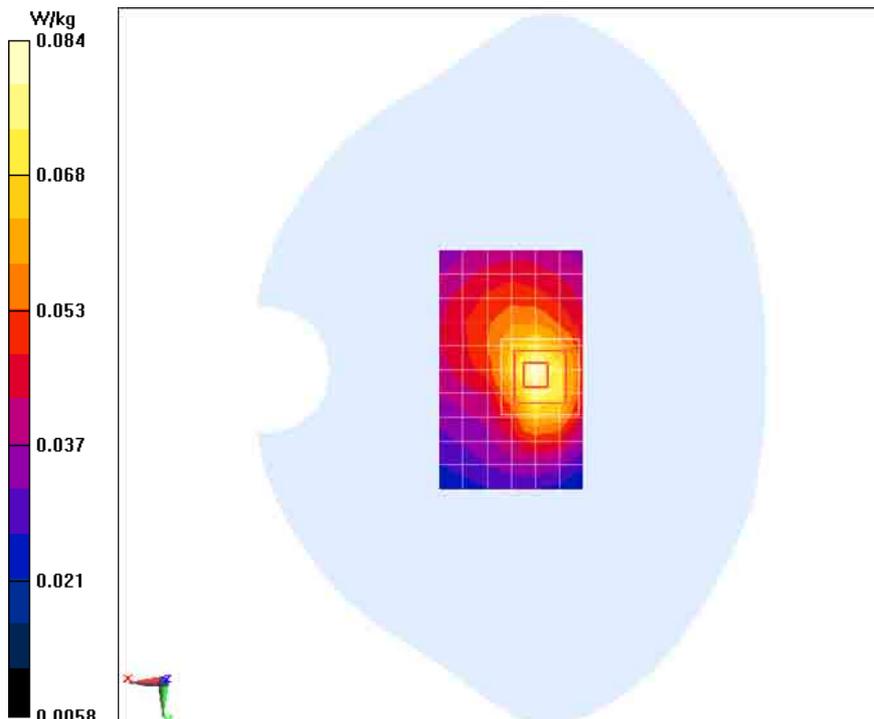

### WCDMA850MHz Body Toward Ground Low

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 55.147$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Low Toward Ground WCDMA850MHz/Area Scan (10x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.735 W/kg

#### Low Toward Ground WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.940 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.882 W/kg

SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.516 W/kg

Maximum value of SAR (measured) = 0.735 W/kg

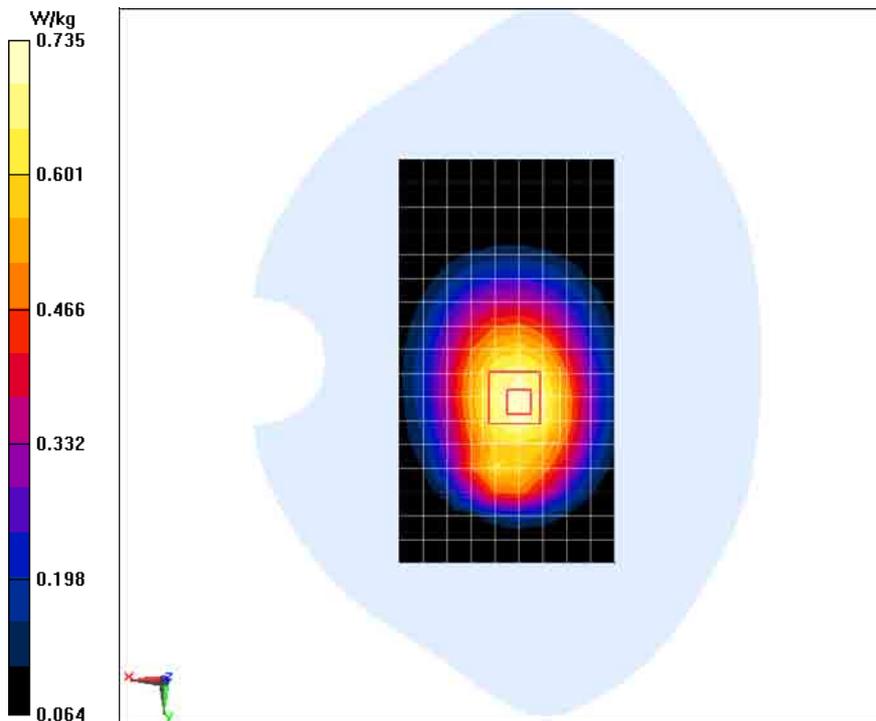

### WCDMA850MHz Body Toward Ground High

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 847 \text{ MHz}$ ;  $\sigma = 1.012 \text{ S/m}$ ;  $\epsilon_r = 55.214$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band V; Frequency:  $846.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### High Toward Ground WCDMA850MHz/Area Scan (10x18x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.691 \text{ W/kg}$

#### High Toward Ground WCDMA850MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $25.052 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.832 \text{ W/kg}$

SAR(1 g) =  $0.656 \text{ W/kg}$ ; SAR(10 g) =  $0.486 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.694 \text{ W/kg}$

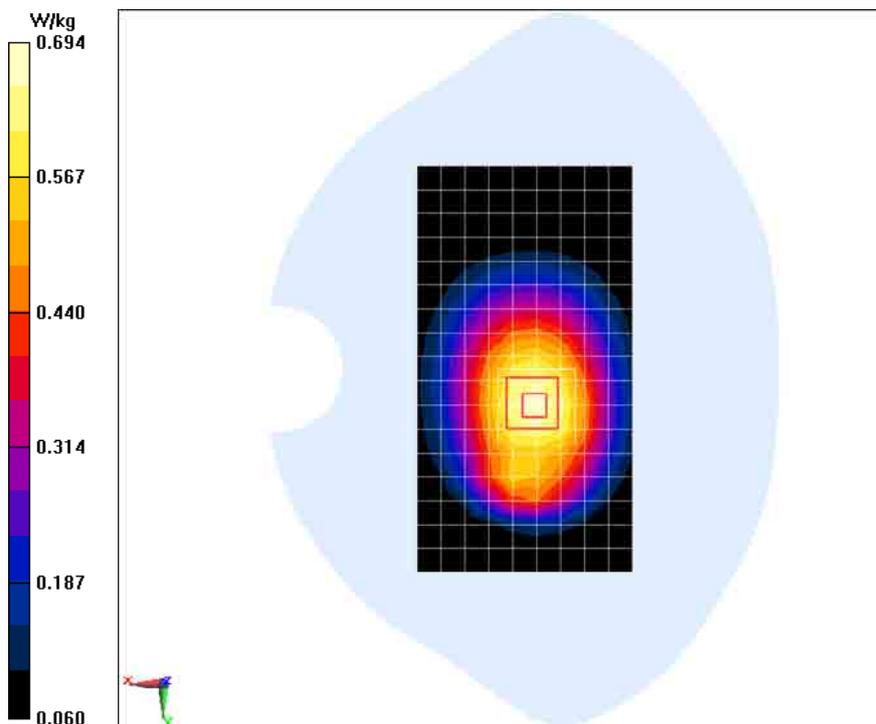

## WCDMA850MHz With Headset Body Toward Ground Low

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 55.147$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

### Low Toward Ground WCDMA850MHz With Headset/Area Scan (10x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.516 W/kg

### Low Toward Ground WCDMA850MHz With Headset/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.245 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.374 W/kg

Maximum value of SAR (measured) = 0.524 W/kg

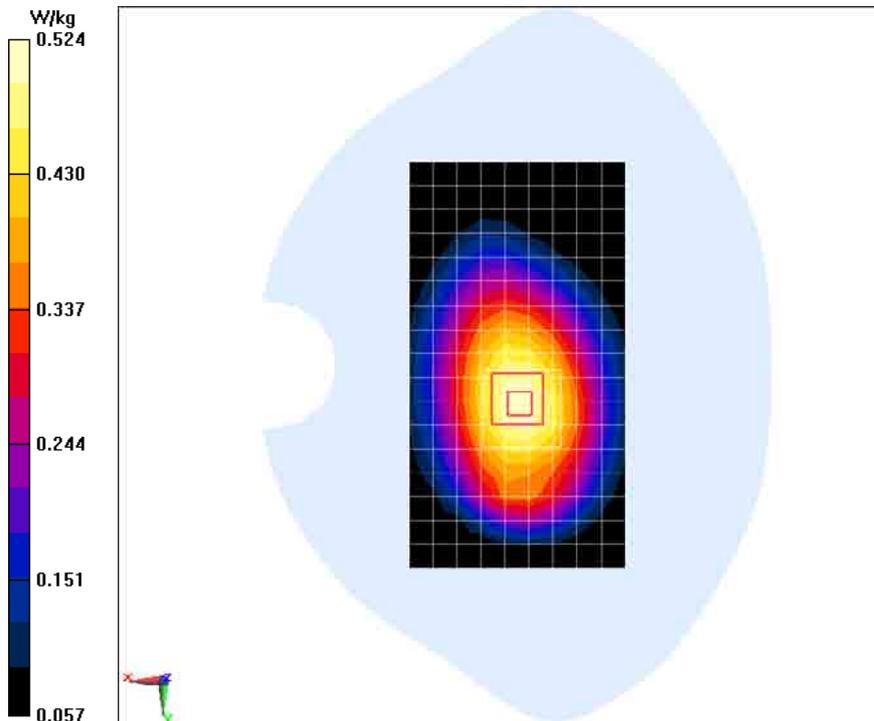

### WCDMA850MHz 2 Body Toward Ground Middle

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850MHz

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1.001 \text{ S/m}$ ;  $\epsilon_r = 55.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band V; Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

#### Middle Toward Ground WCDMA850MHz 2/Area Scan (10x18x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.839 \text{ W/kg}$

#### Middle Toward Ground WCDMA850MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $27.594 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $1.01 \text{ W/kg}$

SAR(1 g) =  $0.791 \text{ W/kg}$ ; SAR(10 g) =  $0.585 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.841 \text{ W/kg}$

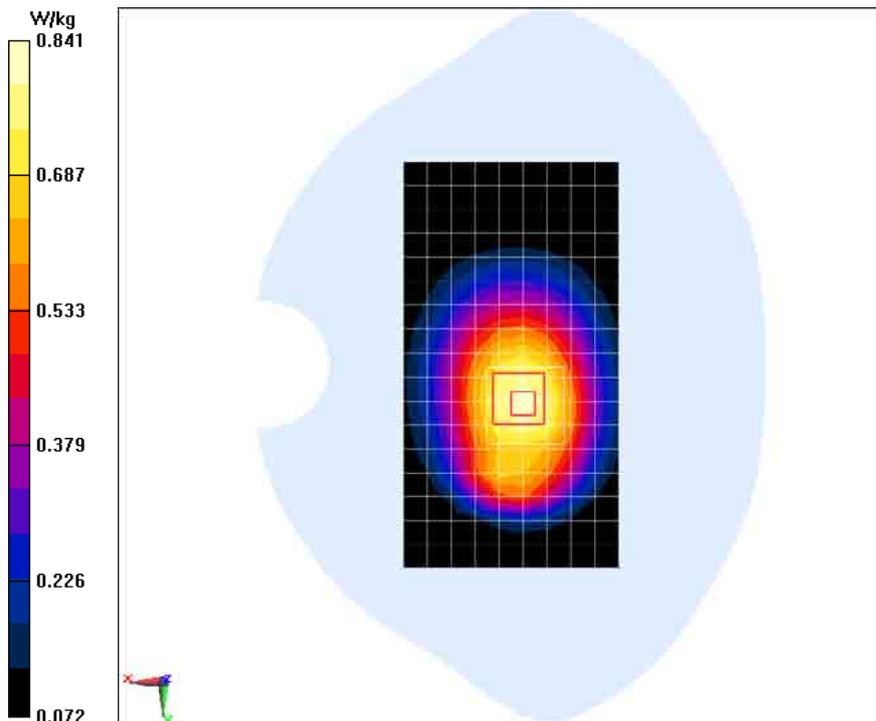

### WCDMA1900MHz Left Cheek Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.442 \text{ S/m}$ ;  $\epsilon_r = 40.614$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### Middle Cheek Left WCDMA1900MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.12 \text{ W/kg}$

#### Middle Cheek Left WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.818 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$

Peak SAR (extrapolated) =  $2.00 \text{ W/kg}$

SAR(1 g) =  $1.10 \text{ W/kg}$ ; SAR(10 g) =  $0.719 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.37 \text{ W/kg}$

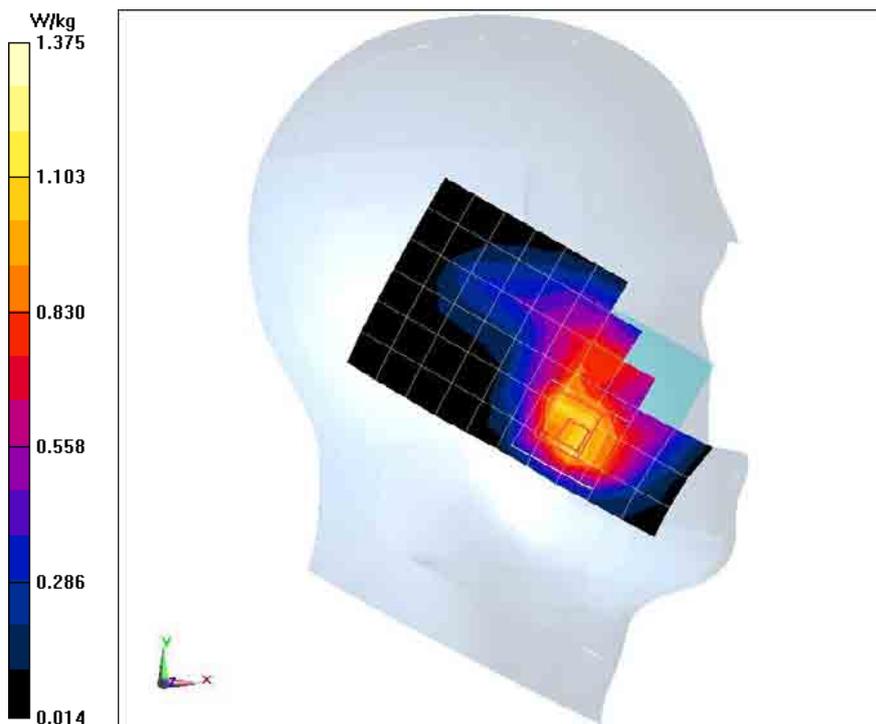

## WCDMA1900MHz Left Tilt Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Tilt Left WCDMA1900MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.526 W/kg

### Middle Tilt Left WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.431 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.820 W/kg

SAR(1 g) = 0.529 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 0.575 W/kg

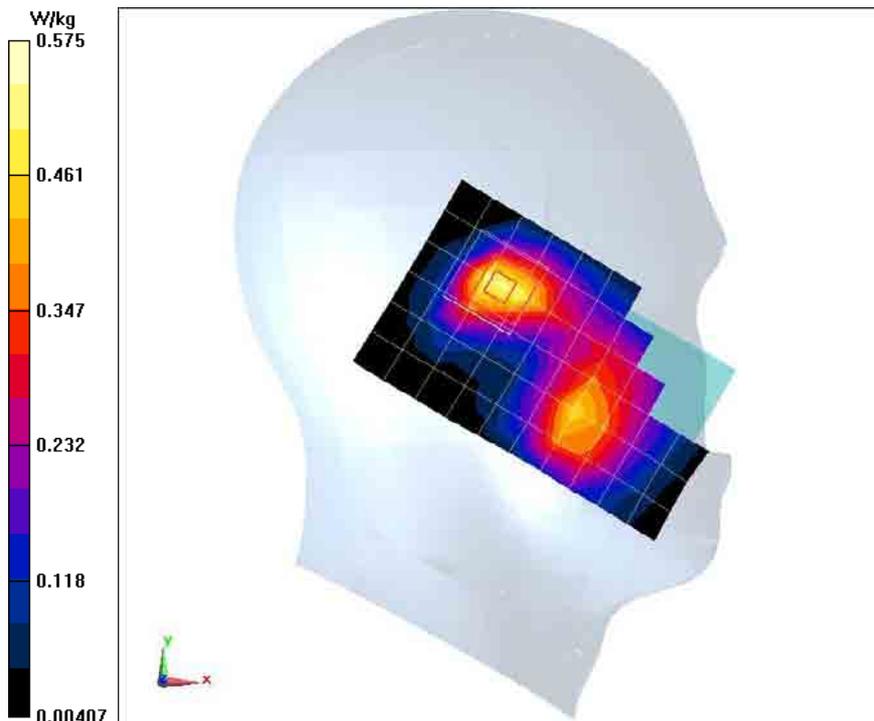

## WCDMA1900MHz Right Cheek Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Cheek Right WCDMA1900MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.10 W/kg

### Middle Cheek Right WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.529 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.654 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

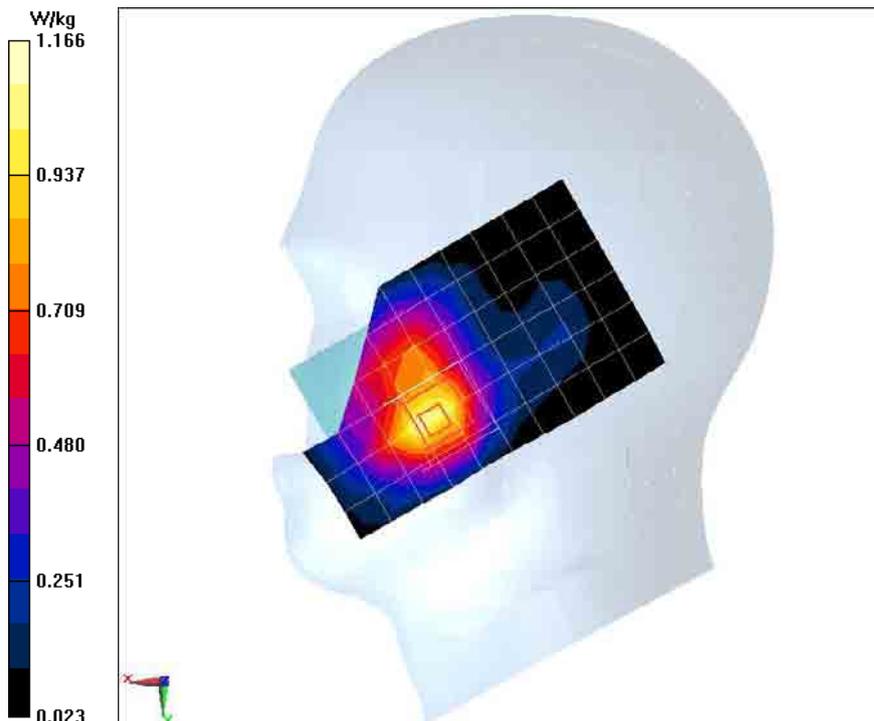

## WCDMA1900MHz Right Tilt Middle

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Tilt Right WCDMA1900MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 W/kg

### Middle Tilt Right WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.355 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.391 W/kg

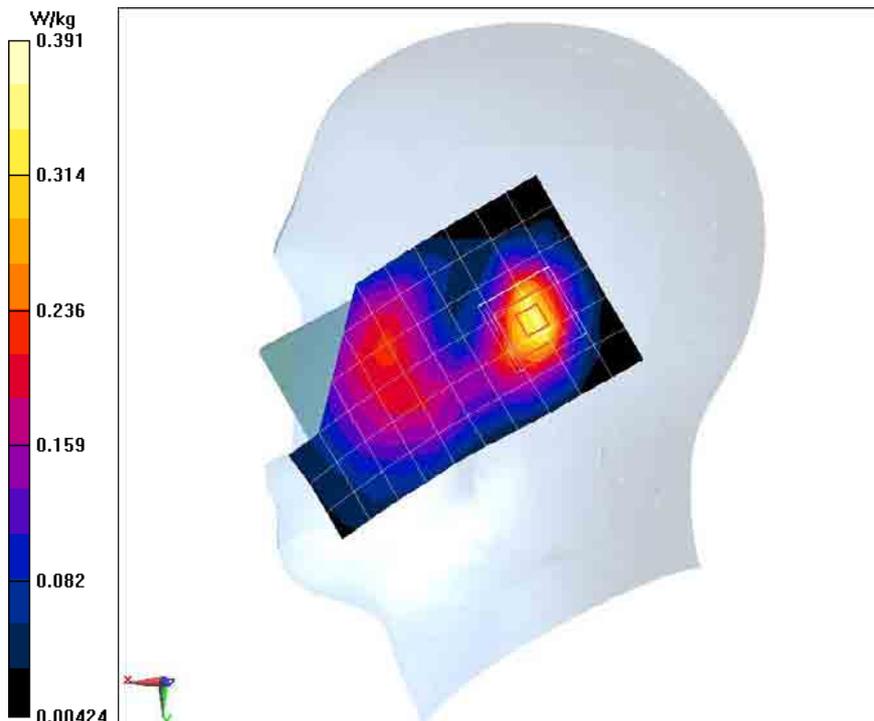

### WCDMA1900MHz Left Cheek Low

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.415$  S/m;  $\epsilon_r = 40.792$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:22.5 °C      Liquid Temperature:22.5 °C

Communication System: WCDMA Band II ; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### Low Cheek Left WCDMA1900MHz/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg

#### Low Cheek Left WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.959 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.687 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

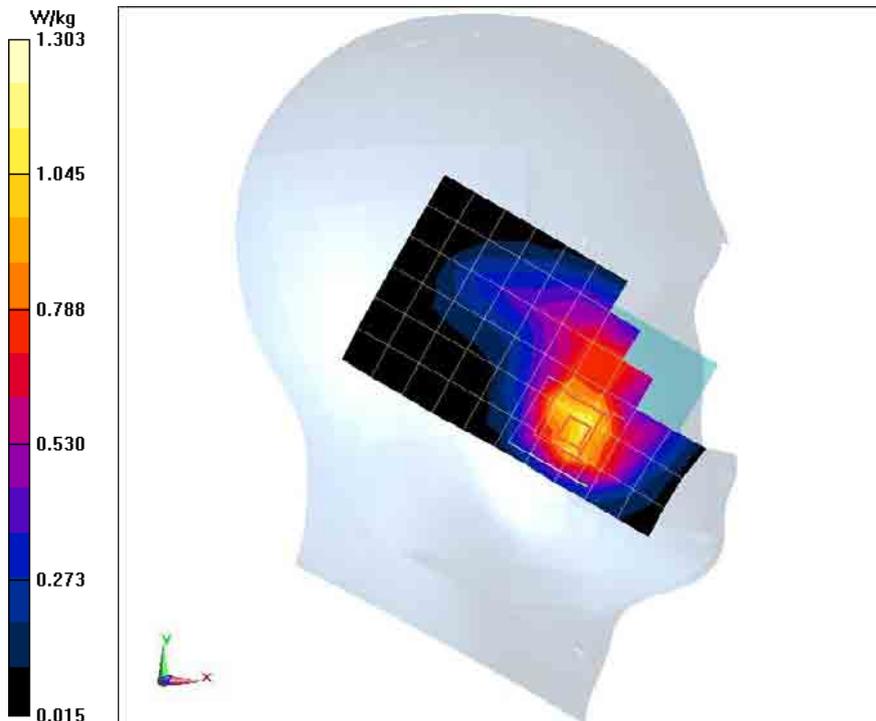

### WCDMA1900MHz Left Cheek High

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.532 \text{ S/m}$ ;  $\epsilon_r = 53.199$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1907.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

#### High Cheek Left WCDMA1900MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.792 \text{ W/kg}$

#### High Cheek Left WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.222 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$

Peak SAR (extrapolated) =  $1.41 \text{ W/kg}$

SAR(1 g) =  $0.874 \text{ W/kg}$ ; SAR(10 g) =  $0.510 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.967 \text{ W/kg}$

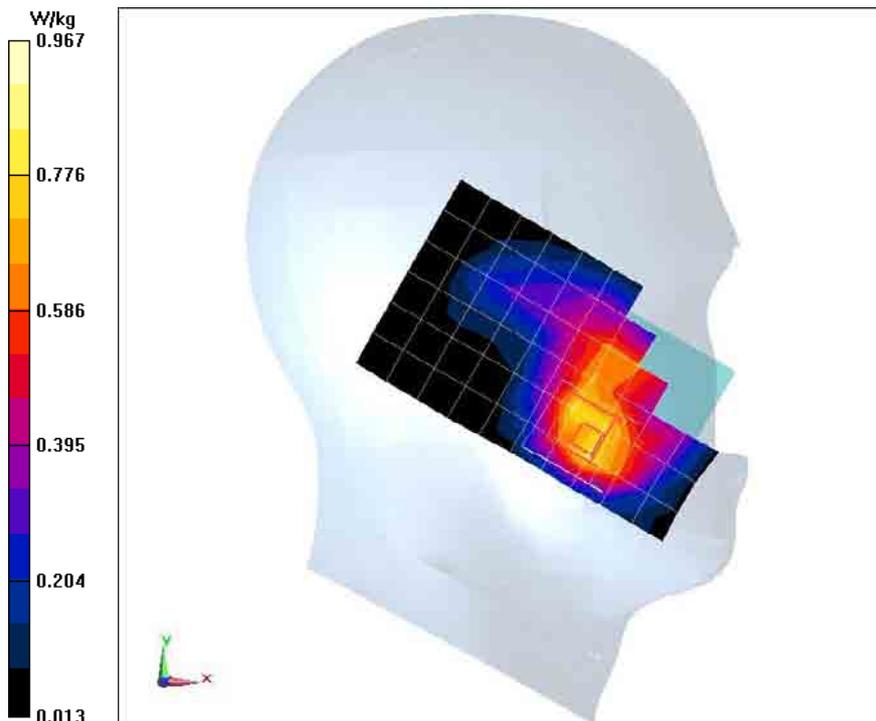

## WCDMA1900MHz Body Toward Phantom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Middle Toward Phantom WCDMA1900MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.736 W/kg

### Middle Toward Phantom WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.400 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.408 W/kg

Maximum value of SAR (measured) = 0.739 W/kg

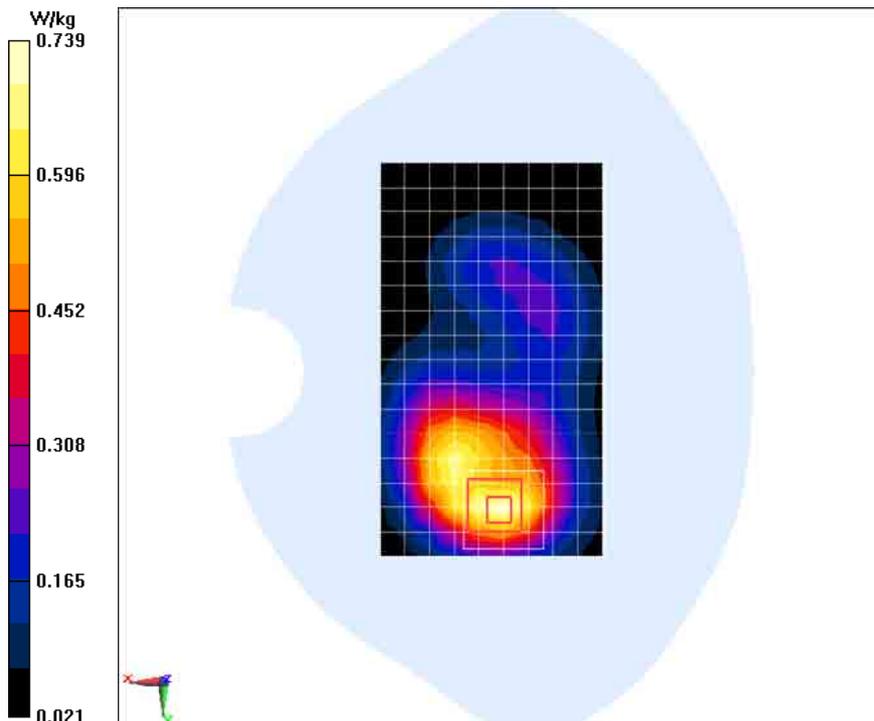

### WCDMA1900MHz Body Toward Ground Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Toward Ground WCDMA1900MHz/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $1.02 \text{ W/kg}$

#### Middle Toward Ground WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.301 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$

Peak SAR (extrapolated) =  $1.54 \text{ W/kg}$

SAR(1 g) =  $0.941 \text{ W/kg}$ ; SAR(10 g) =  $0.569 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.023 \text{ W/kg}$

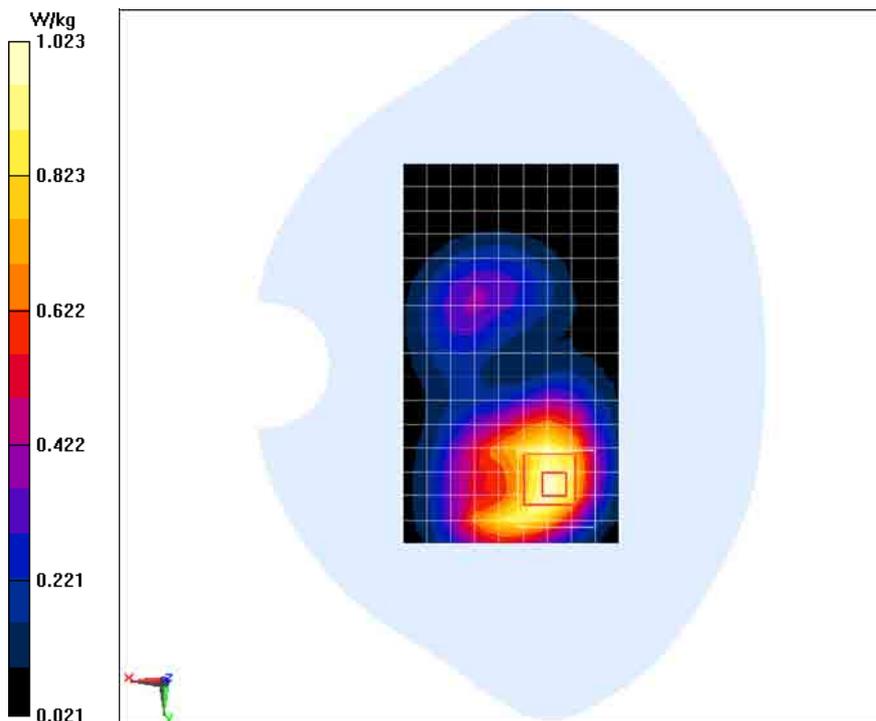

## WCDMA1900MHz Body Left Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Middle Left WCDMA1900MHz/Area Scan (5x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.283 W/kg

### Middle Left WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.620 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.280 W/kg

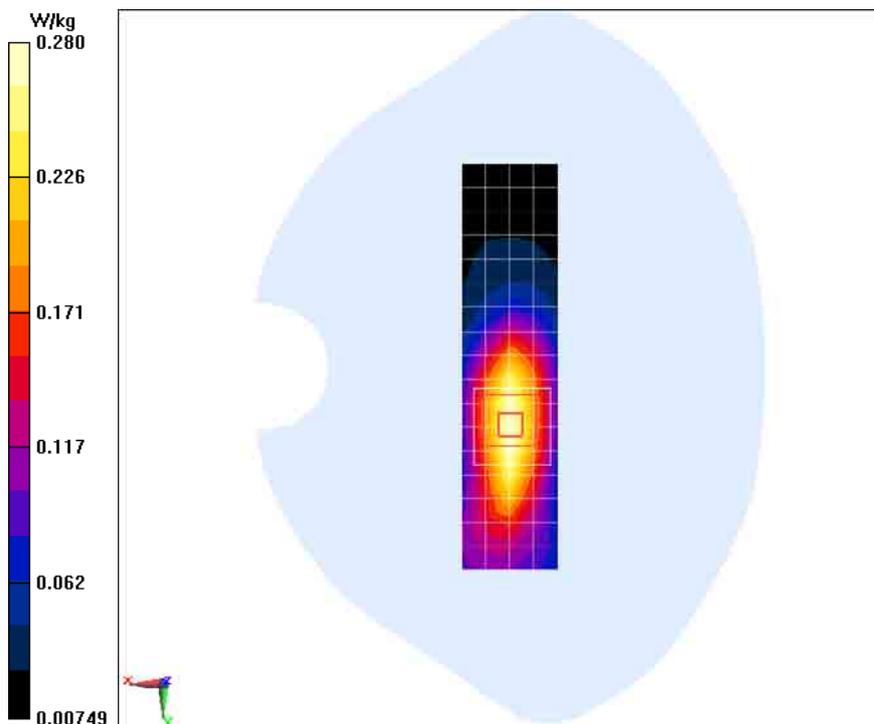

### WCDMA1900MHz Body Right Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Right WCDMA1900MHz/Area Scan (5x18x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.301 \text{ W/kg}$

#### Middle Right WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.273 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$

Peak SAR (extrapolated) =  $0.457 \text{ W/kg}$

SAR(1 g) =  $0.289 \text{ W/kg}$ ; SAR(10 g) =  $0.171 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.318 \text{ W/kg}$

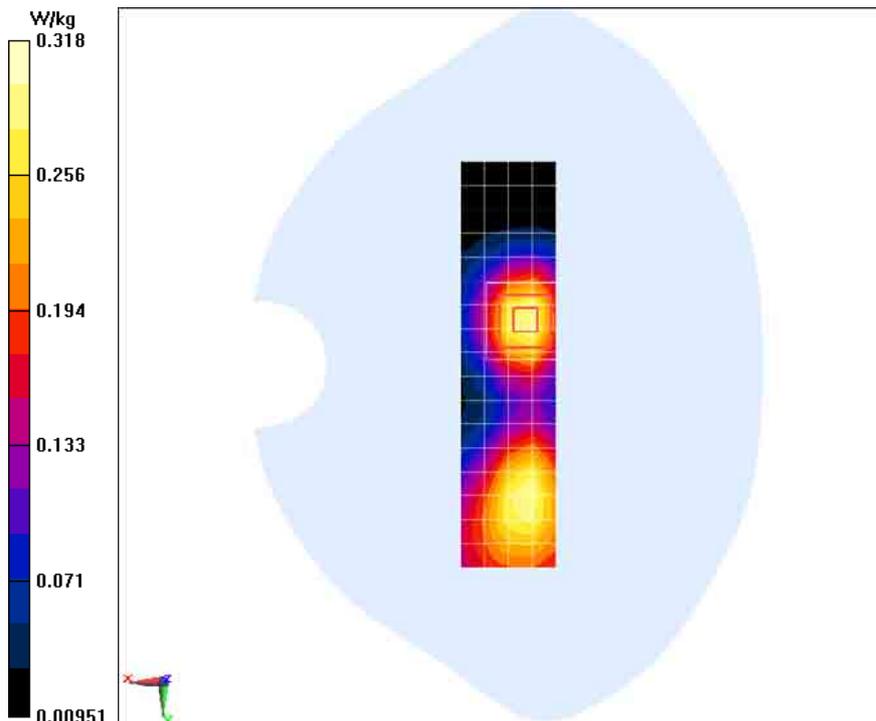

### WCDMA1900MHz Body Bottom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Bottom WCDMA1900MHz/Area Scan (7x11x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.966 \text{ W/kg}$

#### Middle Bottom WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $26.156 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $1.52 \text{ W/kg}$

SAR(1 g) =  $0.920 \text{ W/kg}$ ; SAR(10 g) =  $0.510 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.03 \text{ W/kg}$

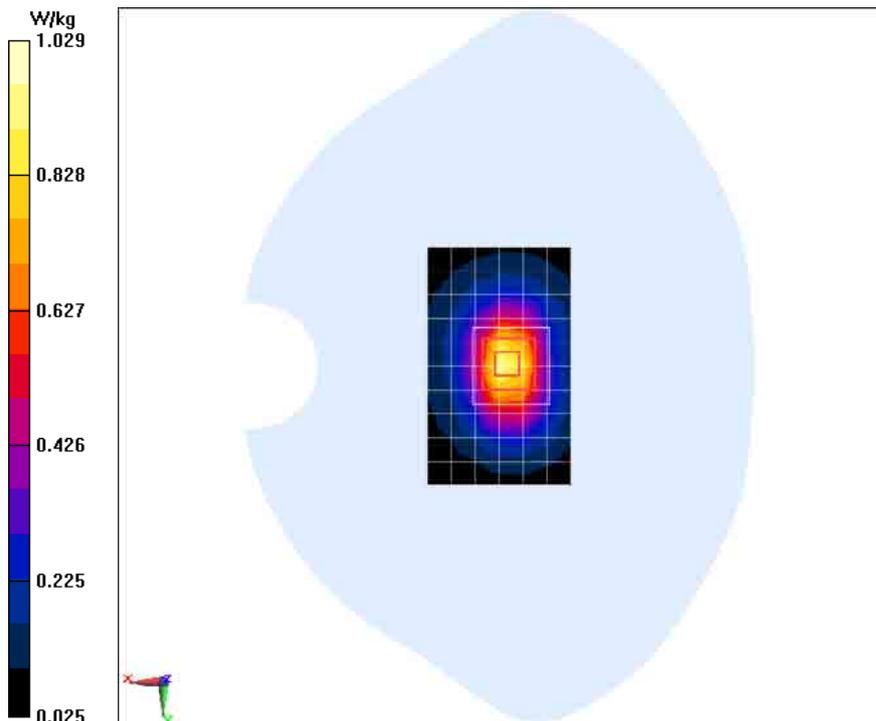

### WCDMA1900MHz Body Toward Ground Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.431$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Low Toward Ground WCDMA1900MHz/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.05 W/kg

#### Low Toward Ground WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.578 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.594 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

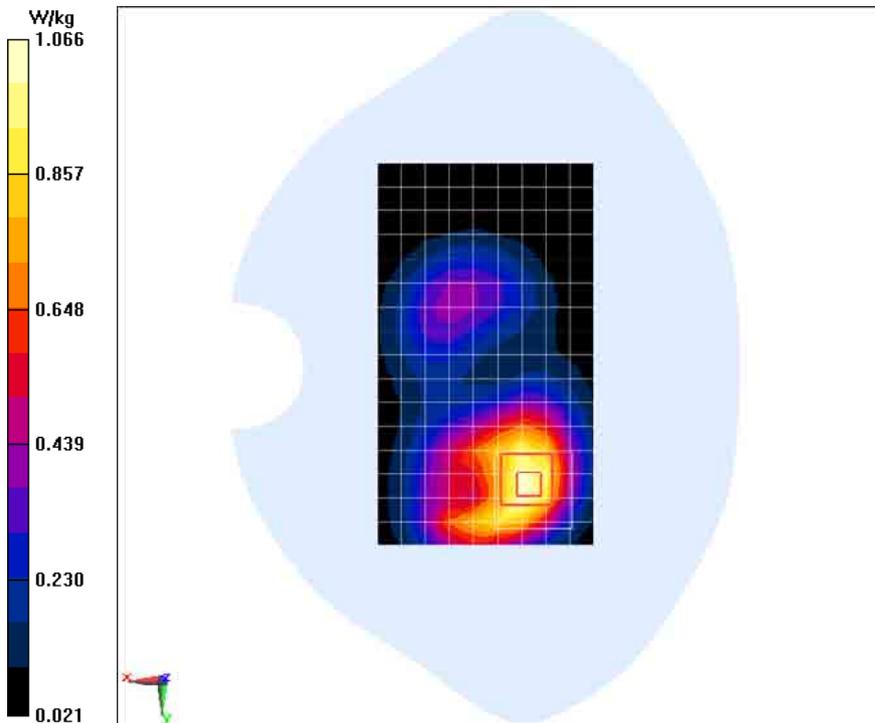

### WCDMA1900MHz Body Toward Ground High

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.532 \text{ S/m}$ ;  $\epsilon_r = 53.199$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1907.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### High Toward Ground WCDMA1900MHz/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.787 \text{ W/kg}$

#### High Toward Ground WCDMA1900MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.337 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$

Peak SAR (extrapolated) =  $1.17 \text{ W/kg}$

SAR(1 g) =  $0.723 \text{ W/kg}$ ; SAR(10 g) =  $0.440 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.788 \text{ W/kg}$

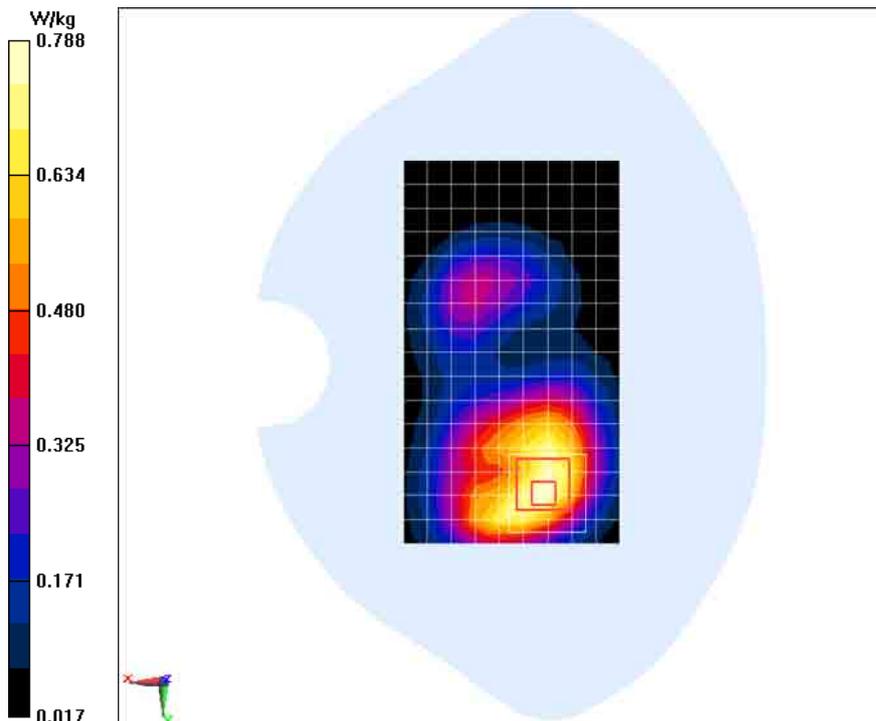

## WCDMA1900MHz With Headset Body Toward Ground Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.431$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Low Toward Ground WCDMA1900MHz With Headset/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.771 W/kg

### Low Toward Ground WCDMA1900MHz With Headset/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.479 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.449 W/kg

Maximum value of SAR (measured) = 0.788 W/kg

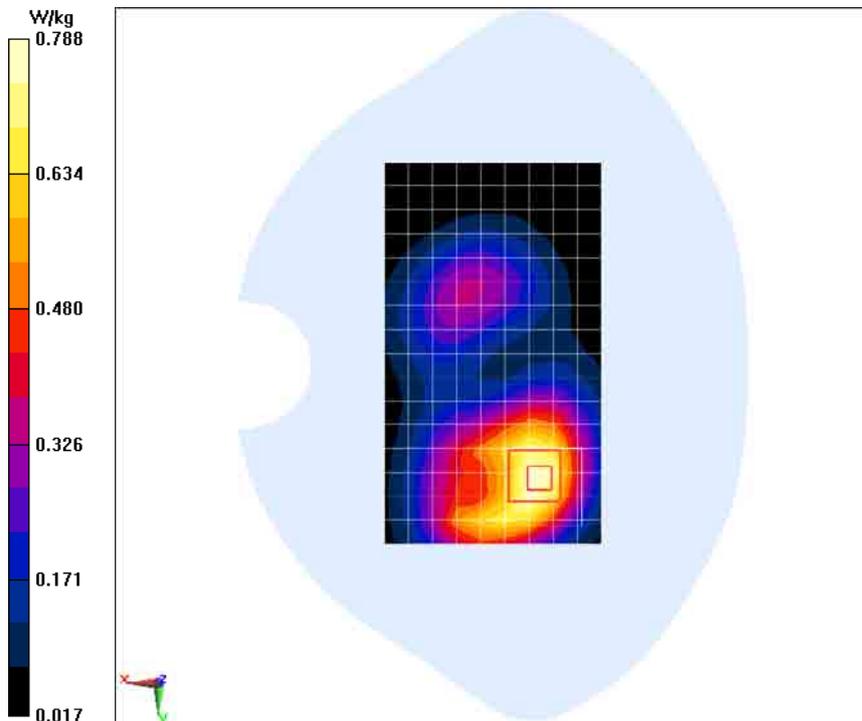

## WCDMA1900MHz 2 Left Cheek Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Cheek Left WCDMA1900MHz 2/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 W/kg

### Middle Cheek Left WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.192 V/m; Power Drift = 0.36 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.684 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

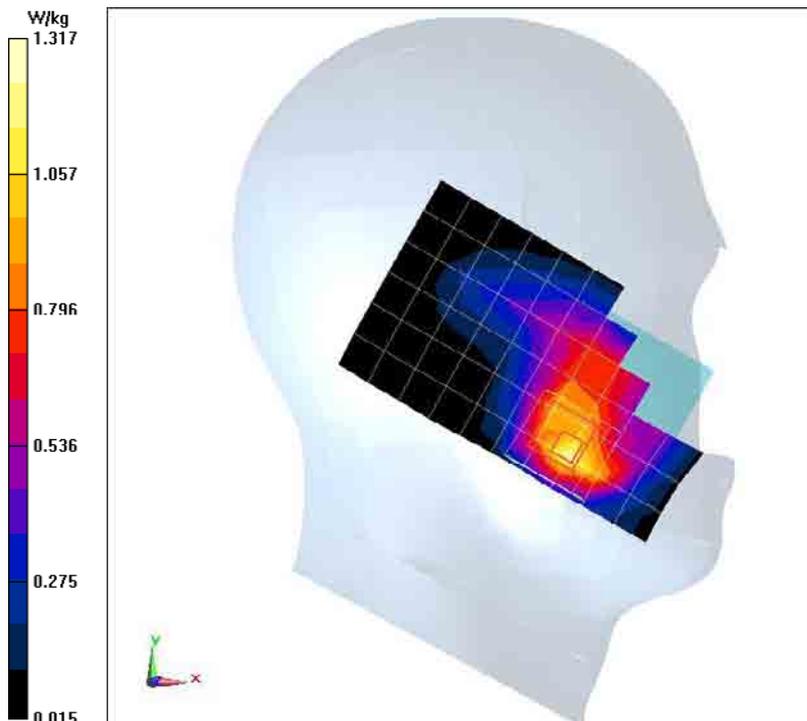

## WCDMA1900MHz 2 Right Cheek Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.442$  S/m;  $\epsilon_r = 40.614$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Middle Cheek Right WCDMA1900MHz 2/Area Scan (11x7x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.12 W/kg

### Middle Cheek Right WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 10.038 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.665 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

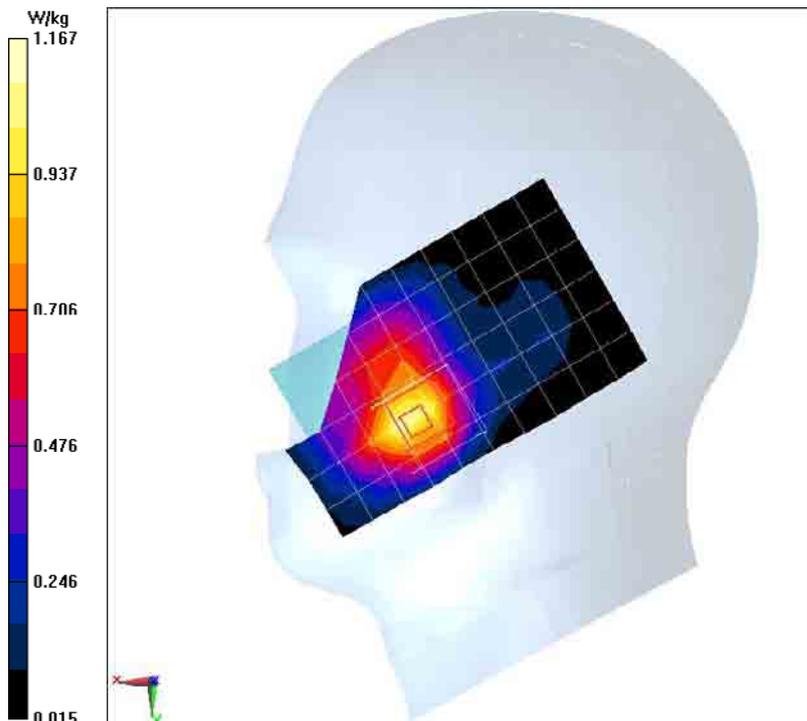

## WCDMA1900MHz 2 Left Cheek Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.415$  S/m;  $\epsilon_r = 40.792$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### Low Cheek Left WCDMA1900MHz 2/Area Scan (11x7x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.11 W/kg

### Low Cheek Left WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.941 V/m; Power Drift = 0.22 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.692 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

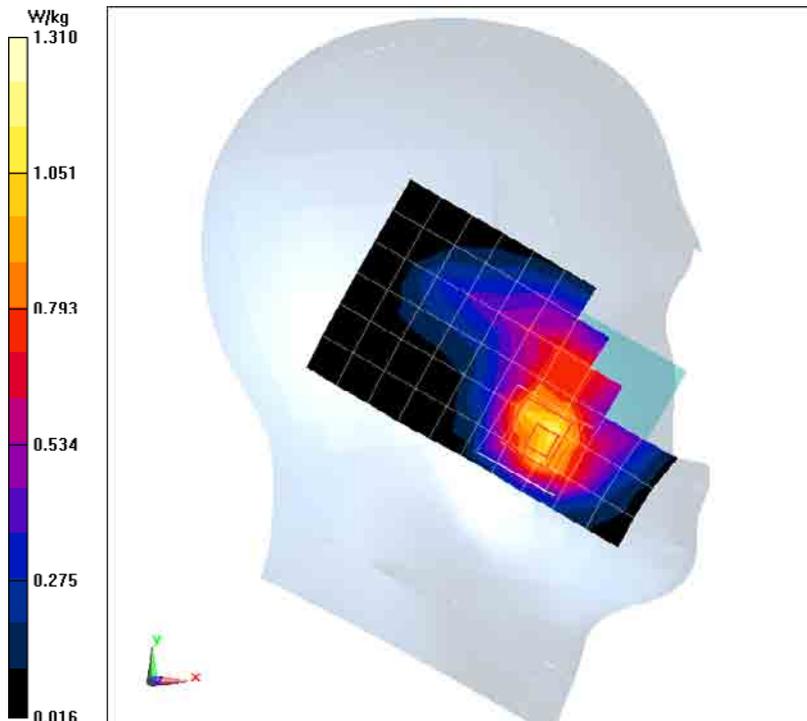

## WCDMA1900MHz 2 Left Cheek High

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.468$  S/m;  $\epsilon_r = 40.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

### High Cheek Left WCDMA1900MHz 2/Area Scan (11x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.791 W/kg

### High Cheek Left WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.199 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.874 W/kg; SAR(10 g) = 0.510 W/kg

Maximum value of SAR (measured) = 0.968 W/kg

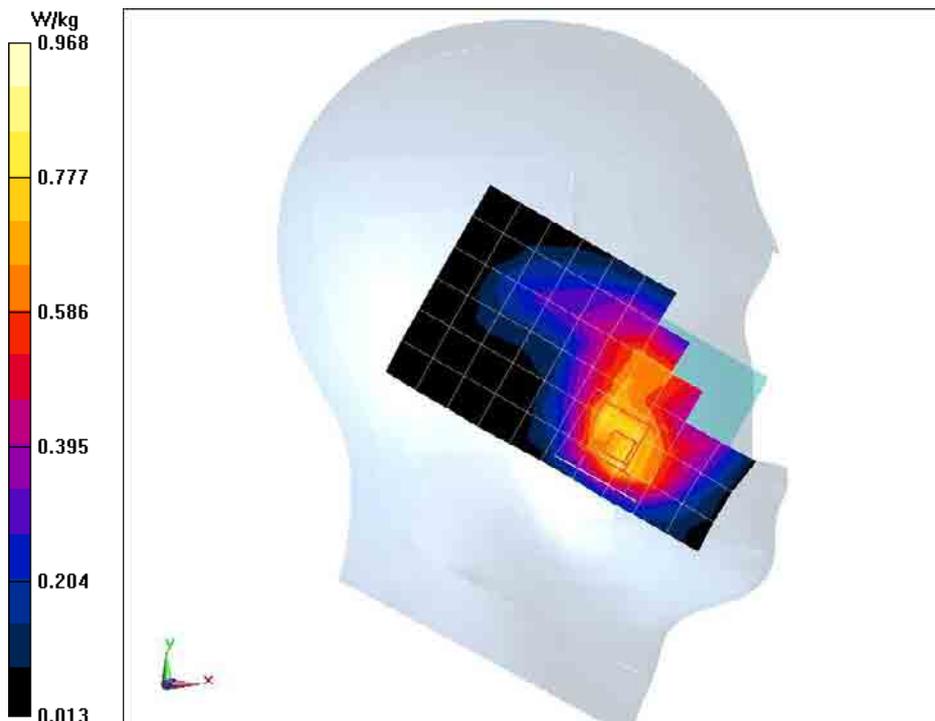

### WCDMA1900MHz 2 Body Toward Ground Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.504 \text{ S/m}$ ;  $\epsilon_r = 53.319$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### Middle Toward Ground WCDMA1900MHz 2/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $1.02 \text{ W/kg}$

#### Middle Toward Ground WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.230 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $1.54 \text{ W/kg}$

SAR(1 g) =  $0.942 \text{ W/kg}$ ; SAR(10 g) =  $0.568 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.03 \text{ W/kg}$

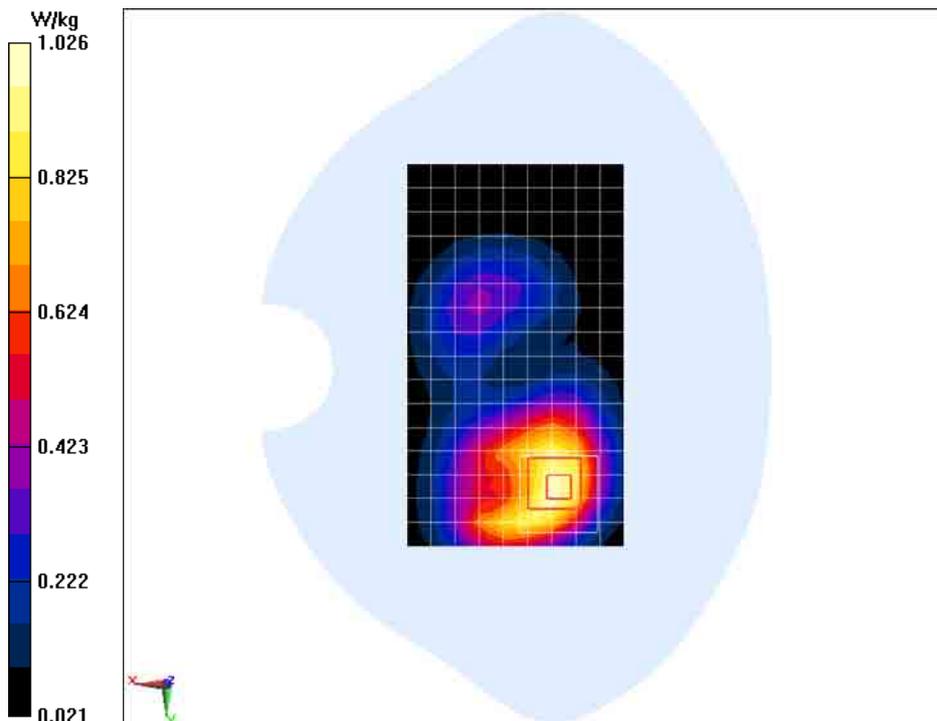

## WCDMA1900MHz 2 Body Bottom Middle

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 53.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Middle Bottom WCDMA1900MHz 2/Area Scan (7x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.956 W/kg

### Middle Bottom WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.981 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.916 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

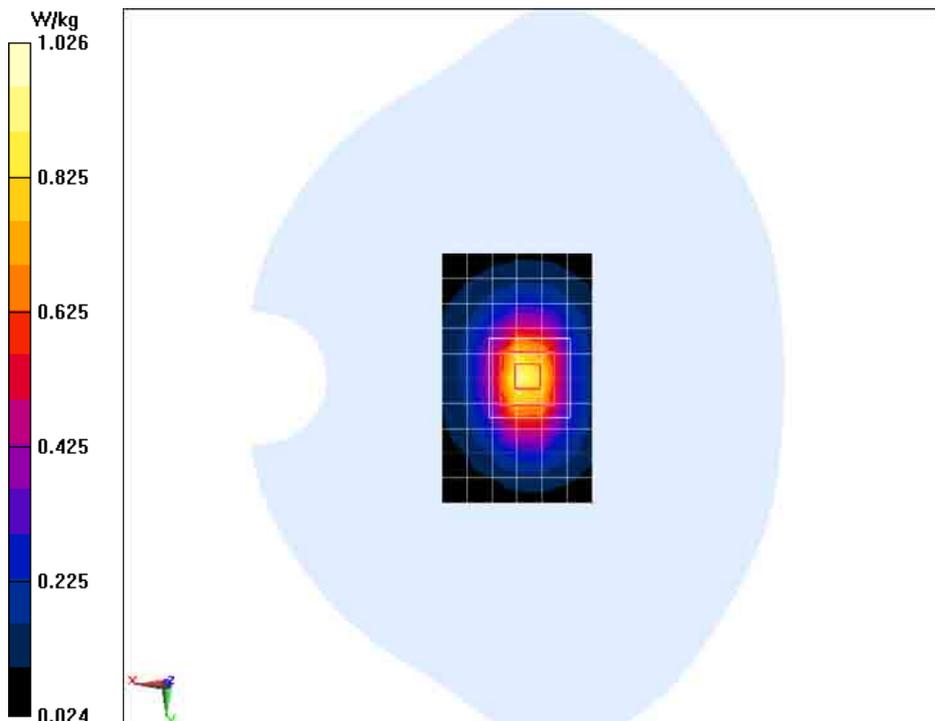

## WCDMA1900MHz 2 Body Toward Ground Low

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.477$  S/m;  $\epsilon_r = 53.431$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

### Low Toward Ground WCDMA1900MHz 2/Area Scan (10x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.04 W/kg

### Low Toward Ground WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.592 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.977 W/kg; SAR(10 g) = 0.587 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

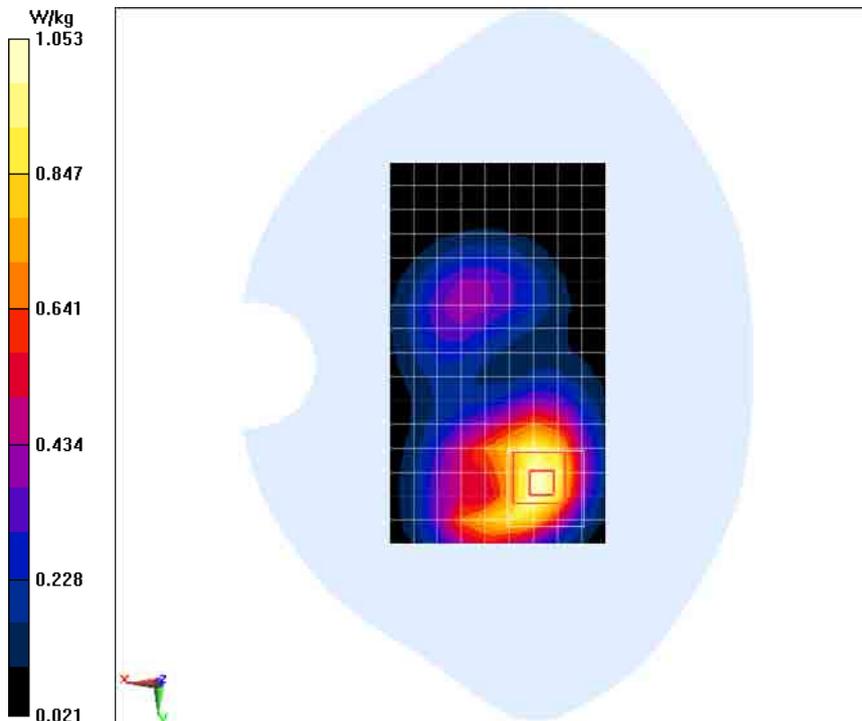

### WCDMA1900MHz 2 Body Toward Ground High

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900MHz

Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.532 \text{ S/m}$ ;  $\epsilon_r = 53.199$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WCDMA Band II; Frequency:  $1907.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

#### High Toward Ground WCDMA1900MHz 2/Area Scan (10x17x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.787 \text{ W/kg}$

#### High Toward Ground WCDMA1900MHz 2/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.304 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$

Peak SAR (extrapolated) =  $1.17 \text{ W/kg}$

SAR(1 g) =  $0.725 \text{ W/kg}$ ; SAR(10 g) =  $0.441 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.790 \text{ W/kg}$

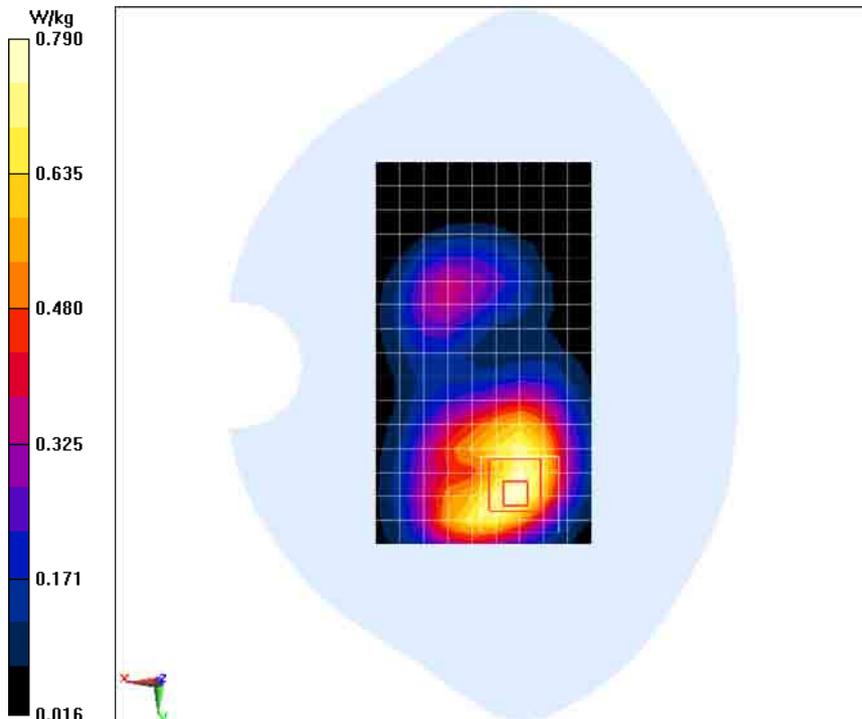

### WiFi2450MHz Left Cheek Low

Date/Time: 8/29/2013

Electronics: DAE4 Sn1244

Medium: Head 2450MHz

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.787 \text{ S/m}$ ;  $\epsilon_r = 39.095$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(7.09, 7.09, 7.09); Calibrated: 7/20/2013

#### Low Cheek Left WiFi2450MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.606 W/kg

#### Low Cheek Left WiFi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.625 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.661 W/kg

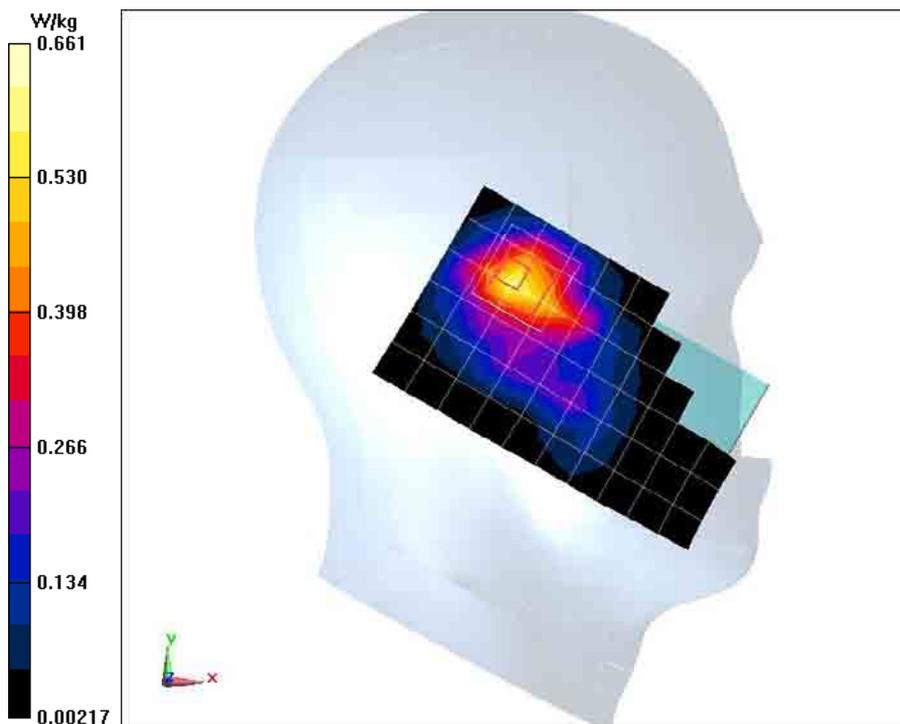

### WiFi2450MHz Left Tilt Low

Date/Time: 8/29/2013

Electronics: DAE4 Sn1244

Medium: Head 2450MHz

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.787 \text{ S/m}$ ;  $\epsilon_r = 39.095$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(7.09, 7.09, 7.09); Calibrated: 7/20/2013

#### Low Tilt Left WiFi2450MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.432 \text{ W/kg}$

#### Low Tilt Left WiFi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.340 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$

Peak SAR (extrapolated) =  $1.02 \text{ W/kg}$

SAR(1 g) =  $0.453 \text{ W/kg}$ ; SAR(10 g) =  $0.210 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.495 \text{ W/kg}$

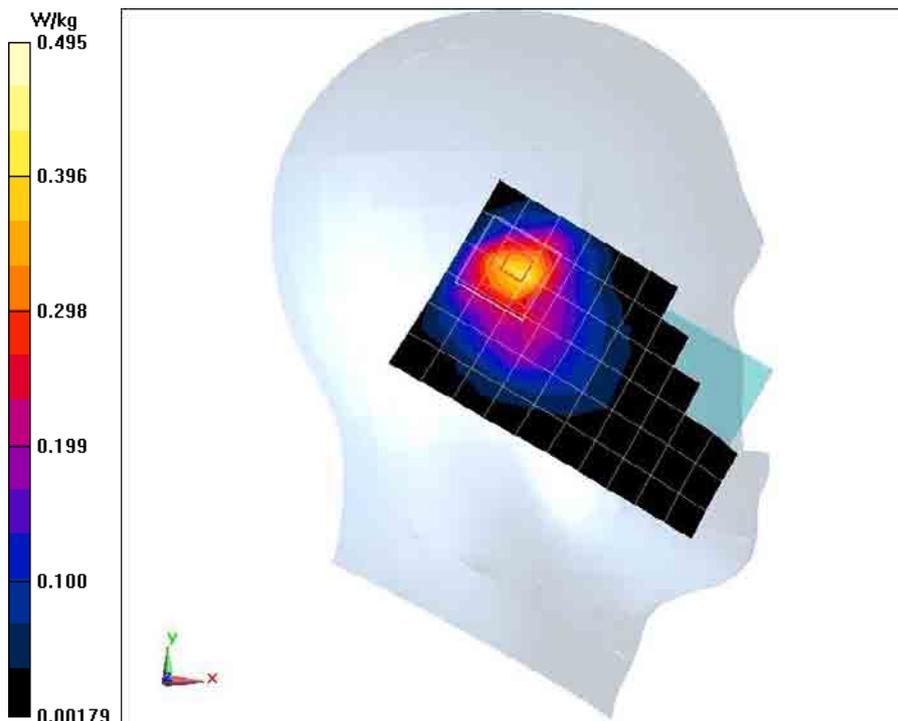

## WiFi2450MHz Right Cheek Low

Date/Time: 8/29/2013

Electronics: DAE4 Sn1244

Medium: Head 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.787$  S/m;  $\epsilon_r = 39.095$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(7.09, 7.09, 7.09); Calibrated: 7/20/2013

### Low Cheek Right WiFi2450MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.415 W/kg

### Low Cheek Right WiFi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 13.342 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.430 W/kg

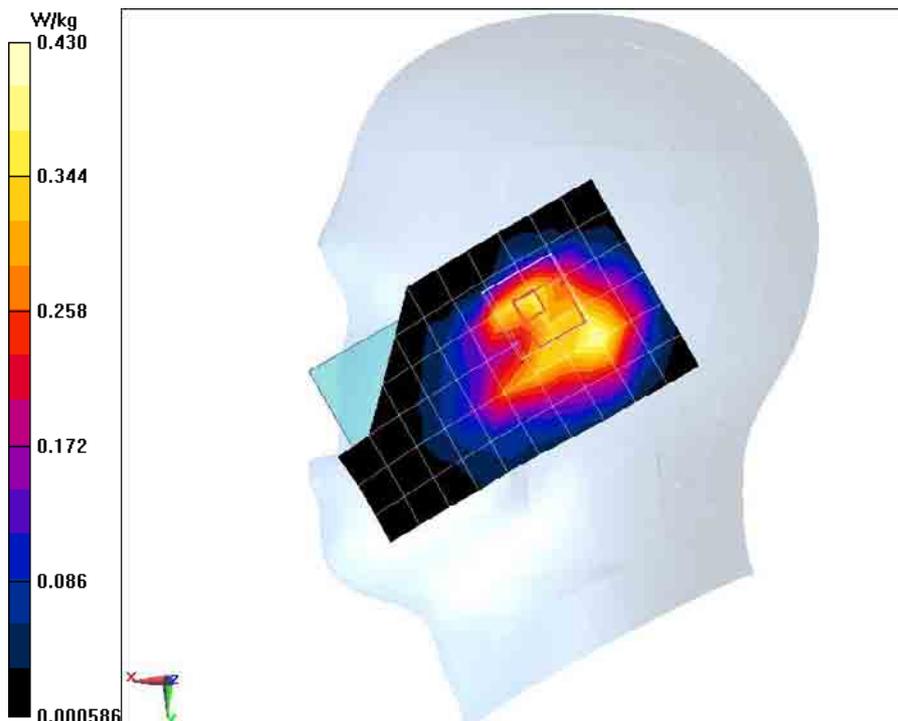

### WiFi2450MHz Right Tilt Low

Date/Time: 8/29/2013

Electronics: DAE4 Sn1244

Medium: Head 2450MHz

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.787 \text{ S/m}$ ;  $\epsilon_r = 39.095$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(7.09, 7.09, 7.09); Calibrated: 7/20/2013

#### Low Tilt Right WiFi2450MHz/Area Scan (11x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.286 \text{ W/kg}$

#### Low Tilt Right WiFi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.934 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $0.507 \text{ W/kg}$

SAR(1 g) =  $0.292 \text{ W/kg}$ ; SAR(10 g) =  $0.162 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.324 \text{ W/kg}$

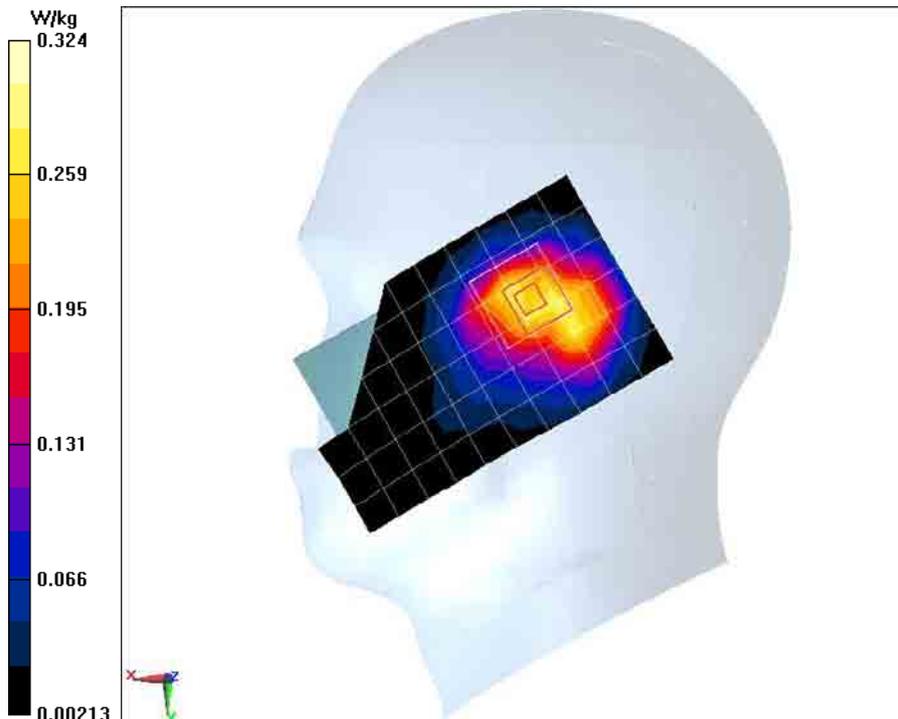

### Wifi2450MHz Body Phantom Low

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

#### Low Phantom    Wifi2450MHz/Area Scan (9x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR    (measured) = 0.114 W/kg

#### Low Phantom    Wifi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.344 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR    (measured) = 0.122 W/kg

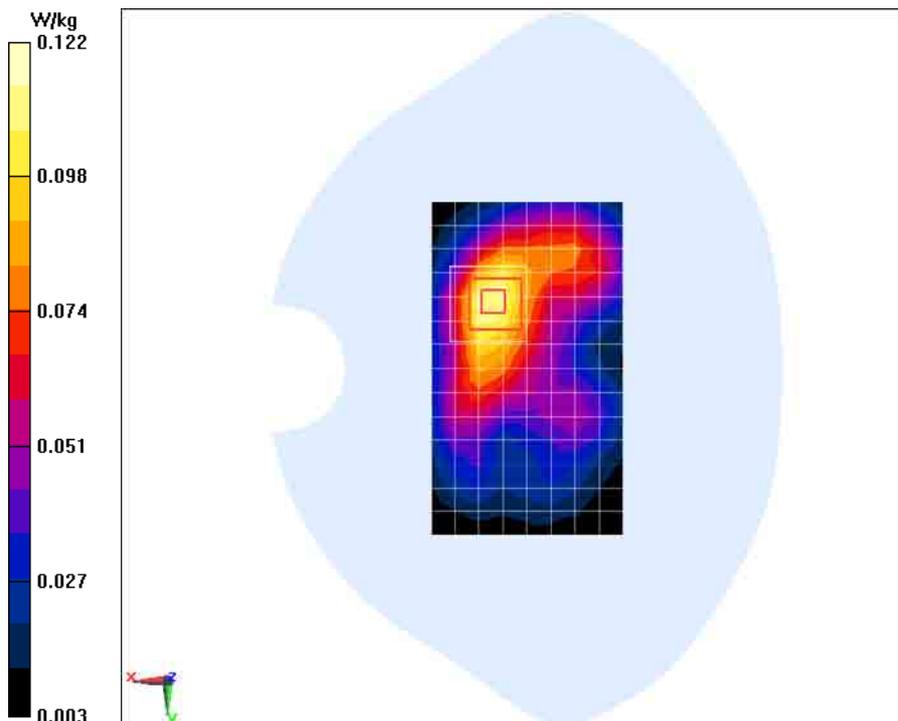

## Wifi2450MHz Body Toward Ground Low

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WiFi 2450MHz;      Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

### Low Toward Ground Wifi2450MHz/Area Scan (9x15x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.223 W/kg

### Low Toward Ground Wifi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.315 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

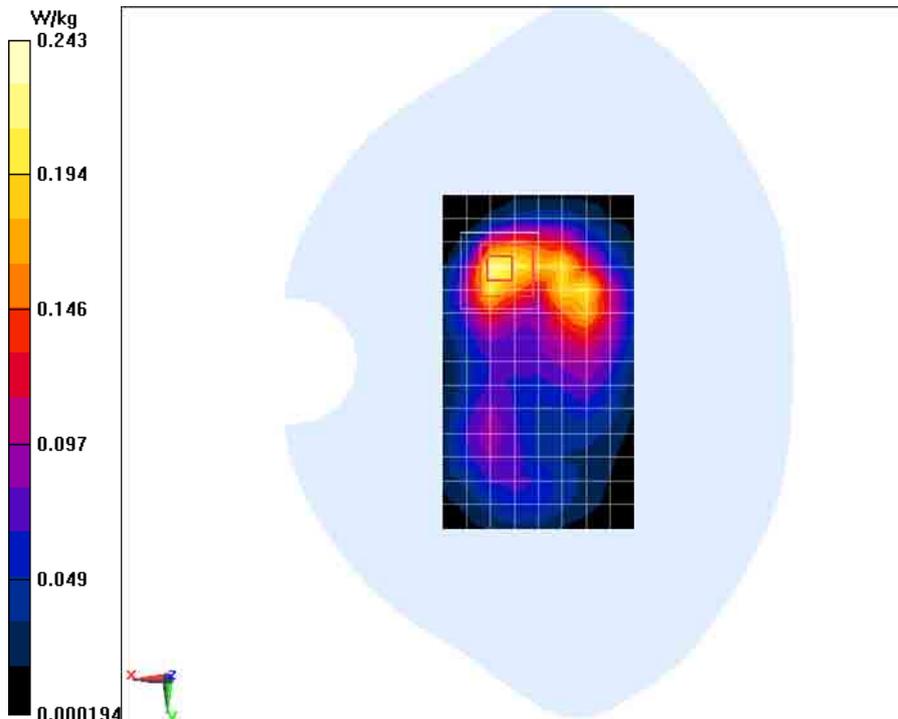

### Wifi2450MHz Body Top Low

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.869 \text{ S/m}$ ;  $\epsilon_r = 53.925$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5 \text{ }^\circ\text{C}$       Liquid Temperature:  $22.5 \text{ }^\circ\text{C}$

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

#### Low Top Wifi2450MHz/Area Scan (6x11x1):

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.101 \text{ W/kg}$

#### Low Top Wifi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.757 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.151 \text{ W/kg}$

SAR(1 g) =  $0.092 \text{ W/kg}$ ; SAR(10 g) =  $0.050 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.103 \text{ W/kg}$

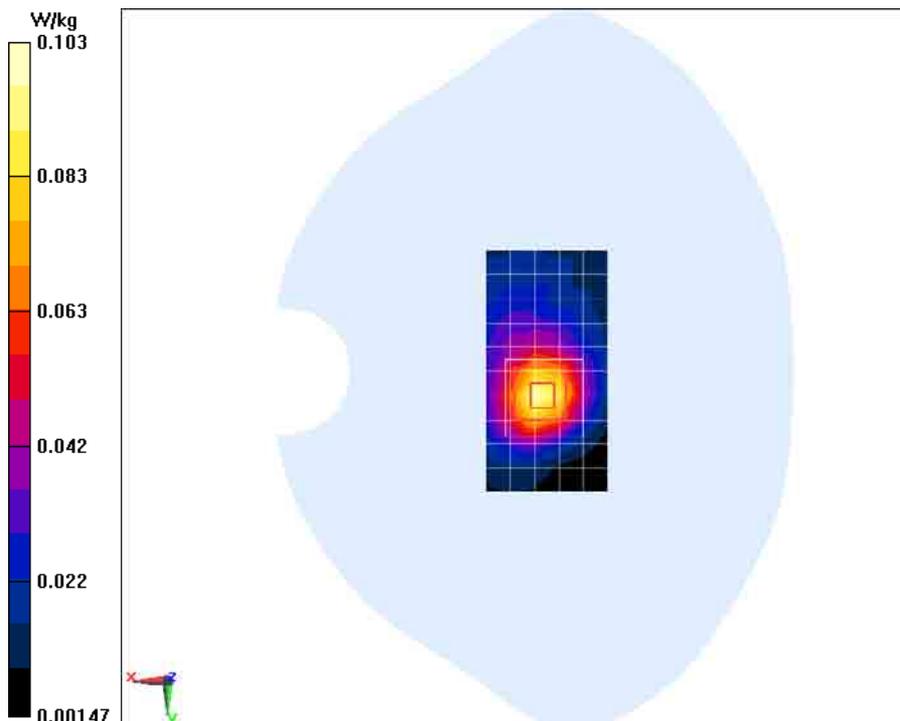

### Wifi2450MHz Body Bottom Low

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

#### Low Bottom Wifi2450MHz/Area Scan (6x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0226 W/kg

#### Low Bottom Wifi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.471 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0231 W/kg

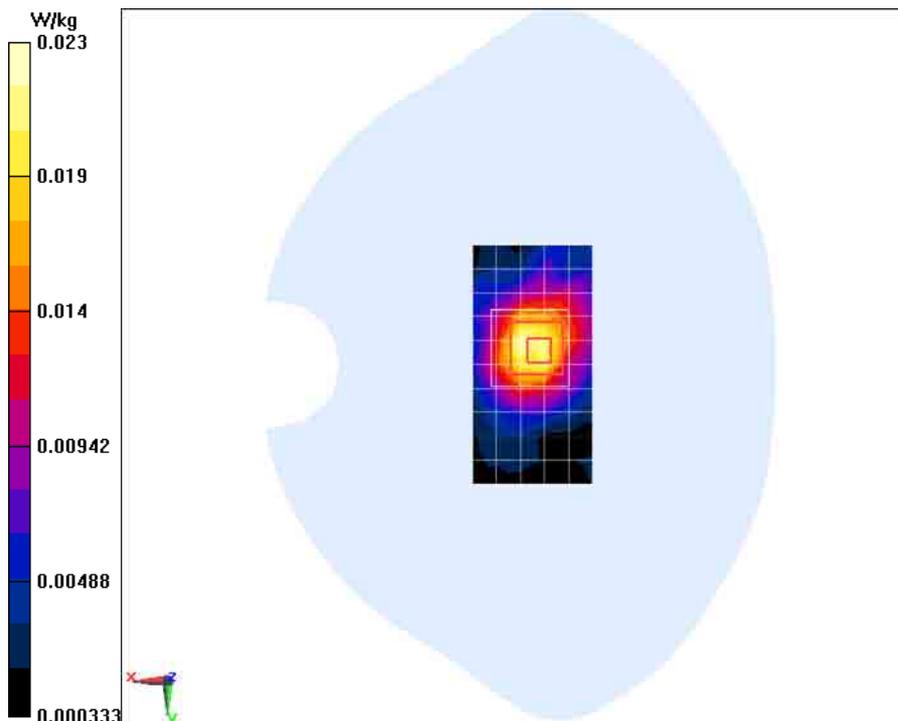

### Wifi2450MHz Body Left Low

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

#### Low Left Wifi2450MHz/Area Scan (6x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0457 W/kg

#### Low Left Wifi2450MHz/Zoom Scan 2 (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.132 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0477 W/kg

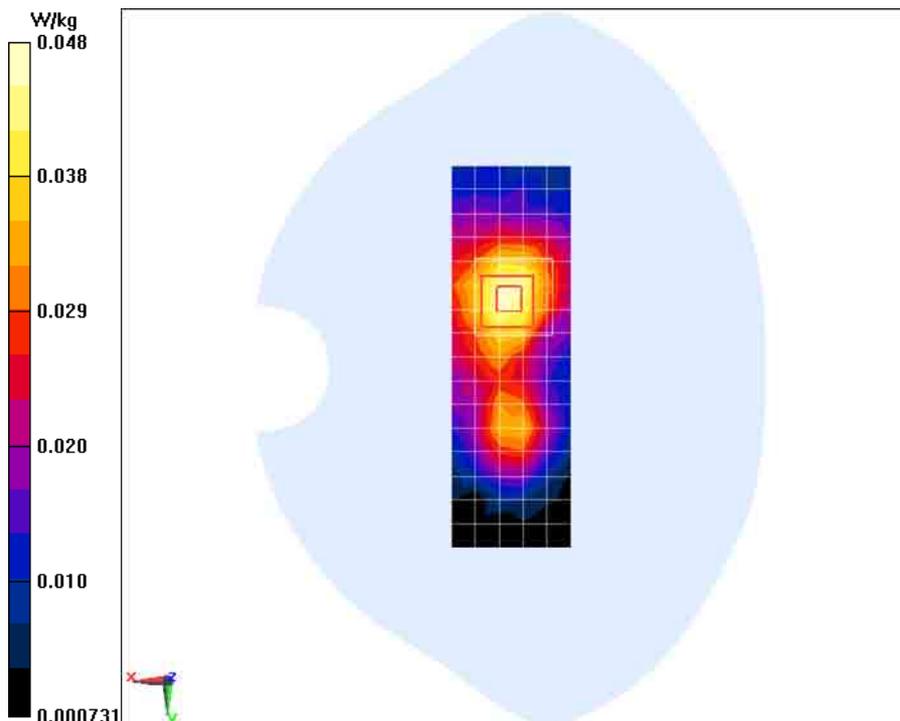

## Wifi2450MHz Body Right Low

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450MHz

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.869$  S/m;  $\epsilon_r = 53.925$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5 °C      Liquid Temperature: 22.5 °C

Communication System: WiFi 2450MHz;    Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

### Low Right Wifi2450MHz/Area Scan (6x17x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.118 W/kg

### Low Right Wifi2450MHz/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.114 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.119 W/kg

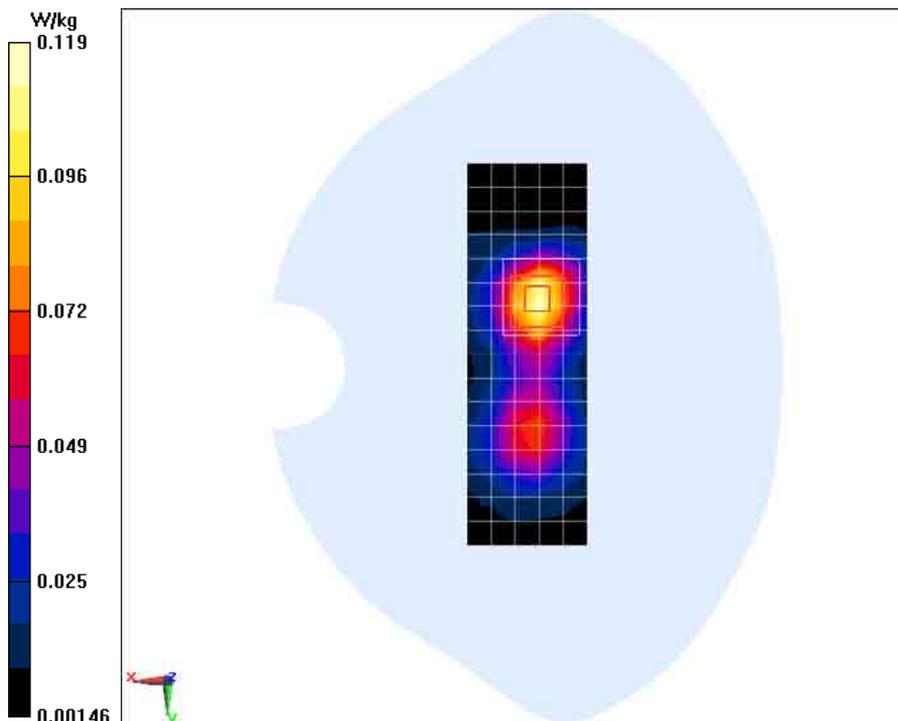

## ANNEX B SYSTEM VALIDATION RESULTS

### 835MHz-Head

Date/Time: 8/20/2013

Electronics: DAE4 Sn1244

Medium: Head 835MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.917 \text{ mho/m}$ ;  $\epsilon_r = 41.04$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ \text{ C}$       Liquid Temperature:  $22.5^\circ \text{ C}$

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.1, 6.1, 6.1); Calibrated: 8/5/2013

**System Validation/Area Scan(101x101x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 3.153 mW/g


**System Validation/Zoom Scan(7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 50.235 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.857 mW/g

SAR(1 g) = 2.35 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 3.254 mW/g

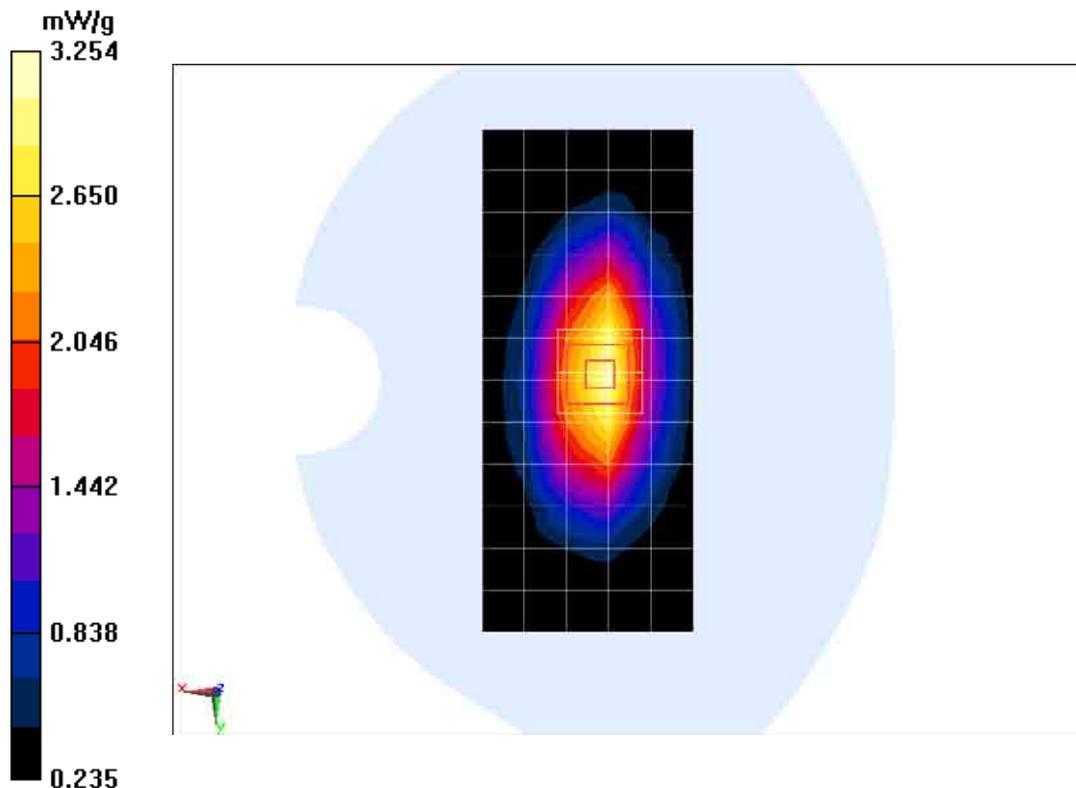

### 835MHz-Body

Date/Time: 8/21/2013

Electronics: DAE4 Sn1244

Medium: Body 850 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.999 \text{ mho/m}$ ;  $\epsilon_r = 55.15$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ \text{ C}$       Liquid Temperature:  $22.5^\circ \text{ C}$

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(6.14, 6.14, 6.14); Calibrated: 8/5/2013

**System Validation/Area Scan(101x101x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 2.849 mW/g


**System Validation/Zoom Scan(7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 58.728 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.871 mW/g

SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 3.302 mW/g

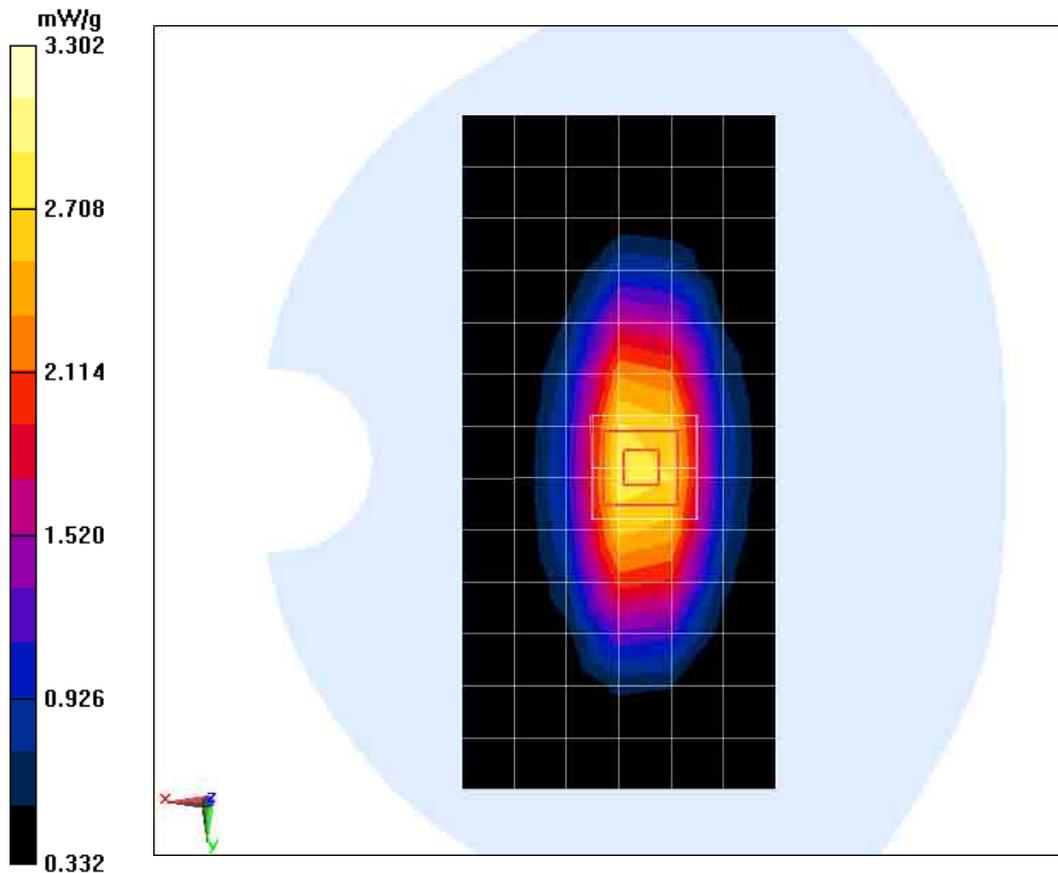

### 1900MHz-Head

Date/Time: 8/27/2013

Electronics: DAE4 Sn1244

Medium: Head 1900MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.385 \text{ mho/m}$ ;  $\epsilon_r = 39.64$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.5^\circ \text{ C}$       Liquid Temperature:  $22.5^\circ \text{ C}$

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.24, 5.24, 5.24); Calibrated: 7/26/2013

**System Validation/Area Scan(101x101x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 12.141 mW/g


**System Validation/Zoom Scan(7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 93.766 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 17.602 mW/g

SAR(1 g) = 9.52 mW/g; SAR(10 g) = 4.87 mW/g

Maximum value of SAR (measured) = 13.479 mW/g

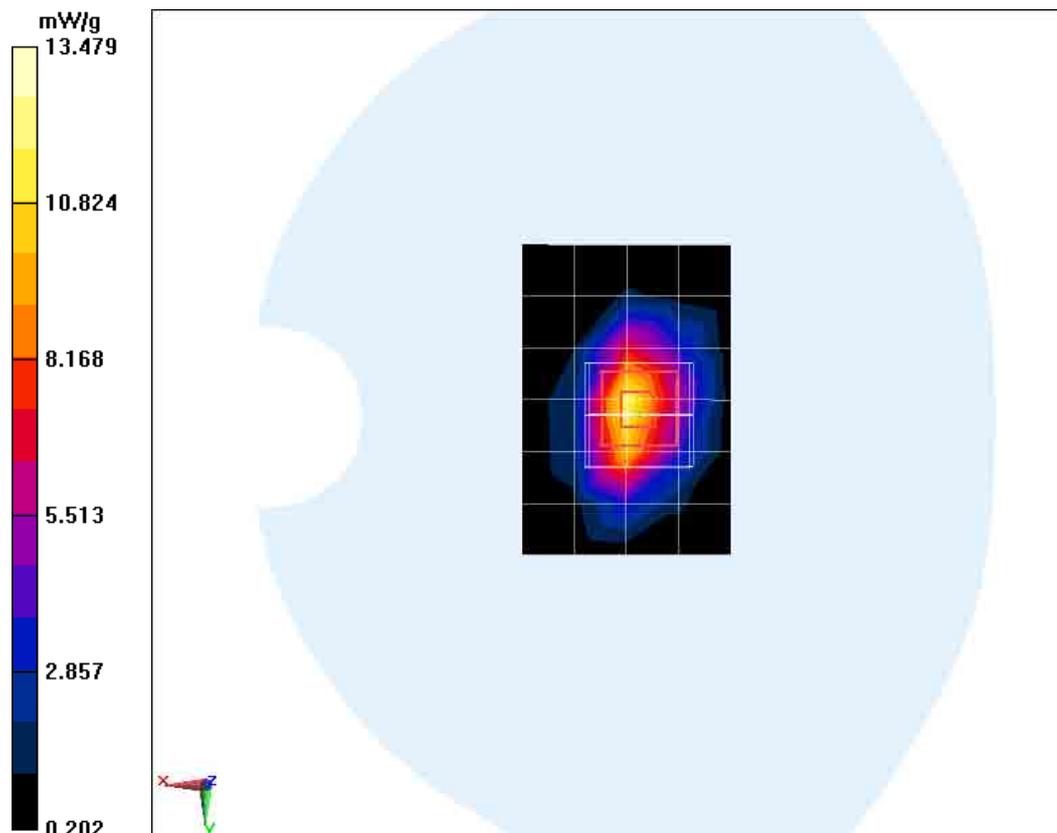

### 1900MHz-Body

Date/Time: 8/28/2013

Electronics: DAE4 Sn1244

Medium: Body 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.524$  mho/m;  $\epsilon_r = 53.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5° C      Liquid Temperature: 22.5° C

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: ES3DV3 - SN3252ConvF(5.03, 5.03, 5.03); Calibrated: 7/26/2013

**System Validation/Area Scan(101x101x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.585 mW/g


**System Validation/Zoom Scan(7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.021 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 18.419 mW/g

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.47 mW/g

Maximum value of SAR (measured) = 14.687 mW/g

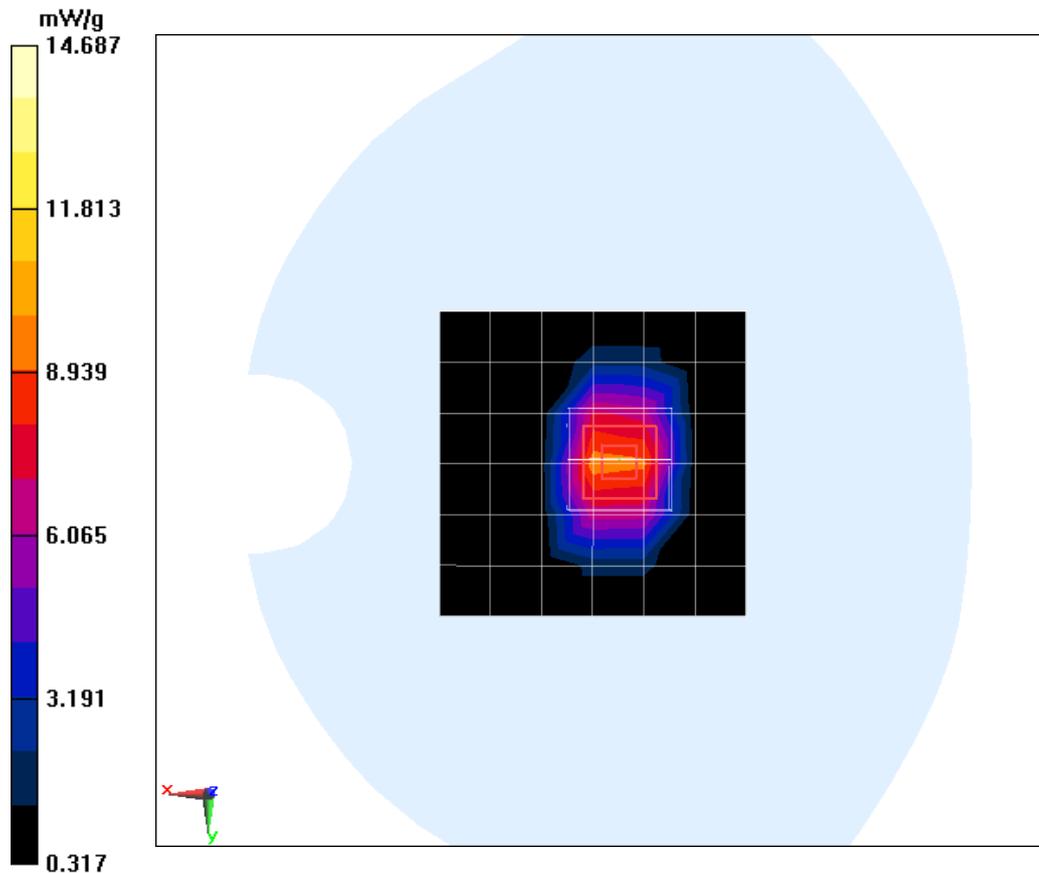

### 2450MHz-Head

Date/Time: 8/29/2013

Electronics: DAE4 Sn1244

Medium: Head 2450MHz

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.824 \text{ mho/m}$ ;  $\epsilon_r = 38.87$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambien Temperature:  $22.5^\circ \text{ C}$       Liquid Temperature:  $22.5^\circ \text{ C}$

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(7.09, 7.09, 7.09); Calibrated: 7/20/2013

**System Validation/ Area Scan (101x101x1):**Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 12.79 mW/g


**System Validation/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 99.872 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 17.651 mW/g

SAR(1 g) = 12.76 mW/g; SAR(10 g) = 5.93 mW/g

Maximum value of SAR (measured) = 13.563 mW/g

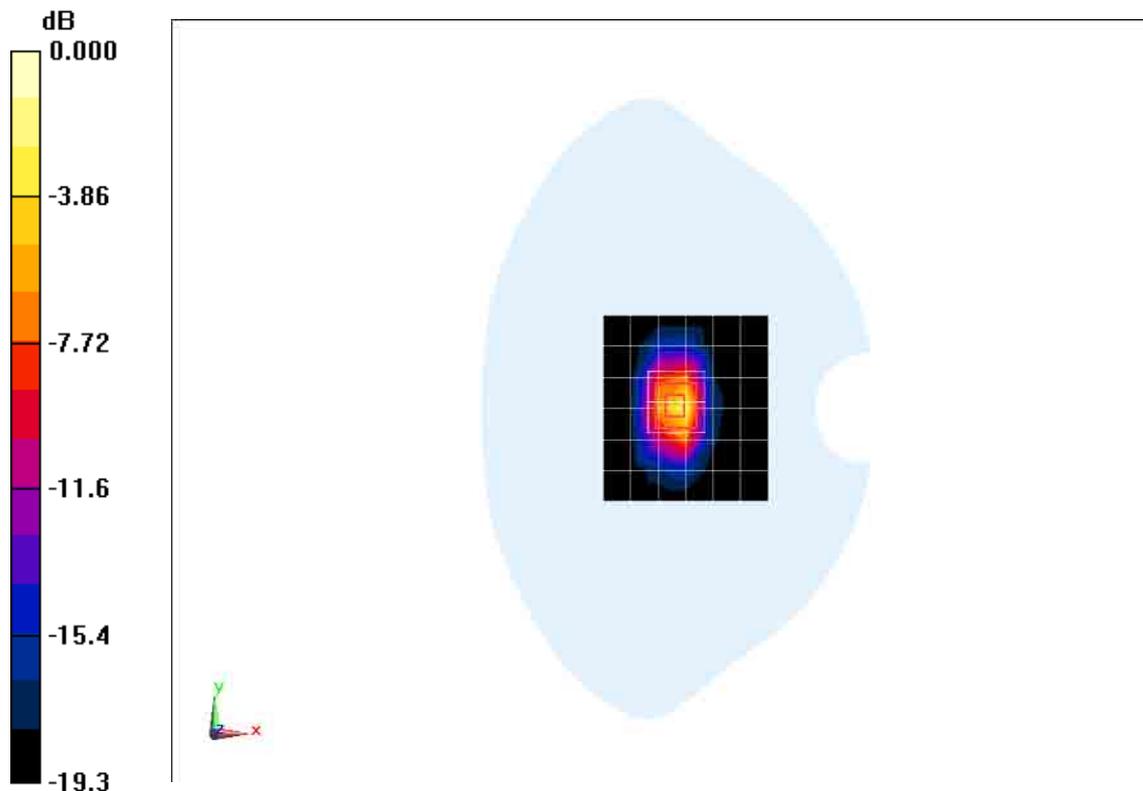

### 2450MHz-Body

Date/Time: 8/30/2013

Electronics: DAE4 Sn1244

Medium: Body 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.918$  mho/m;  $\epsilon_r = 53.946$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambien Temperature: 22.5° C      Liquid Temperature: 22.5° C

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN3754ConvF(6.66, 6.66, 6.66); Calibrated: 7/22/2013

**System Validation/ Area Scan (101x101x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.758 mW/g


**System Validation/Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.005 V/m; Power Drift = 0.26 dB

Peak SAR (extrapolated) = 26.396 mW/g

SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.16 mW/g


Maximum value of SAR (measured) = 19.808 mW/g

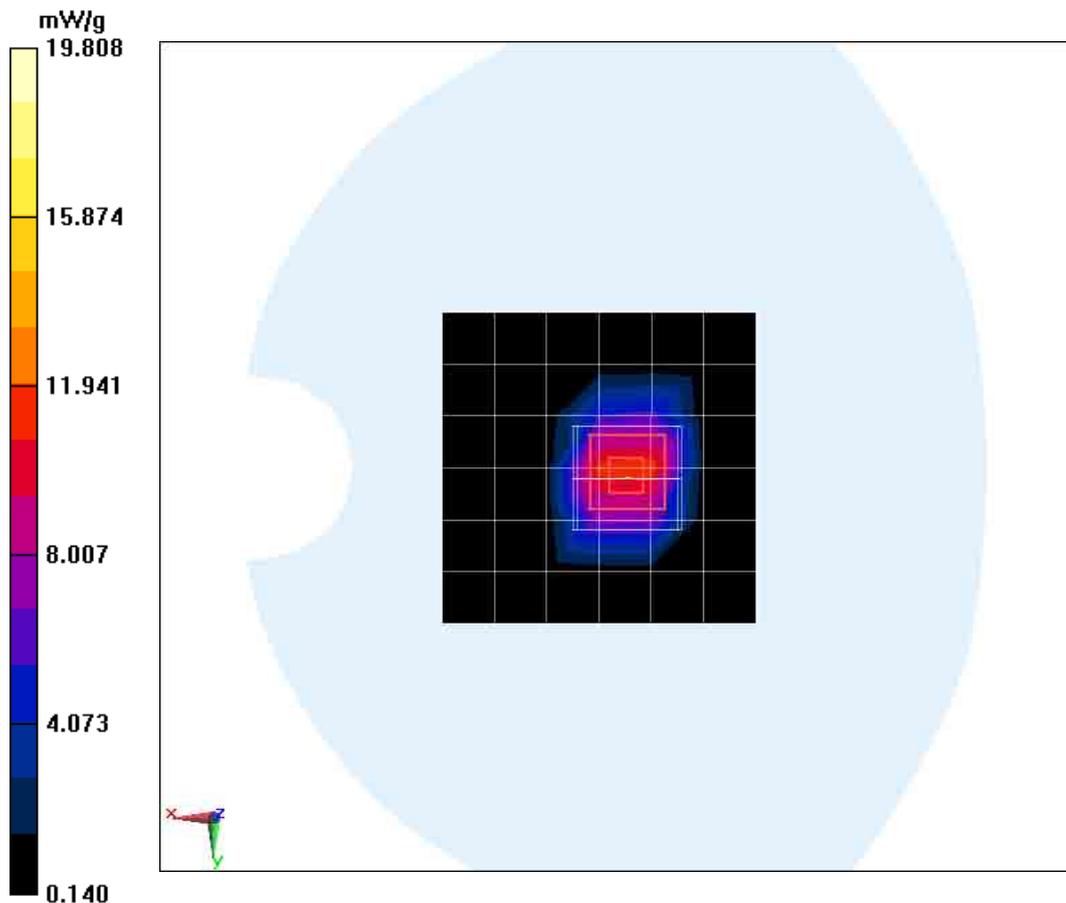

## ANNEX C SAR Measurement Setup

### C.1 Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

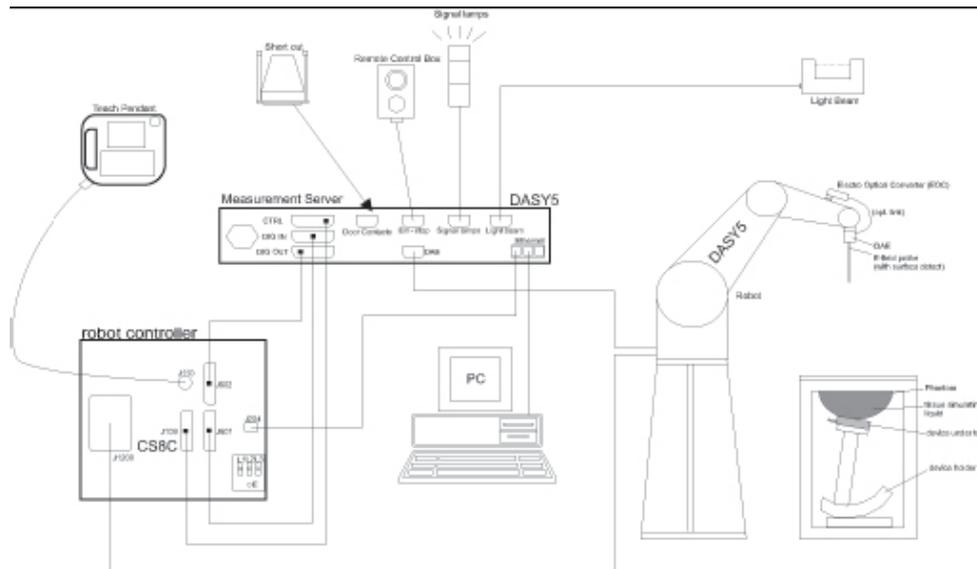

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## C.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using 2<sup>nd</sup> order curve fitting. The approach is stopped at reaching the maximum.

### Probe Specifications:

<b>Model:</b>	<b>ES3DV3, EX3DV4</b>
<b>Frequency</b>	<b>2.0GHz — 3.0GHz(EX3DV4)</b>
<b>Range:</b>	<b>700MHz — 2.0GHz(ES3DV3)</b>
<b>Calibration:</b>	<b>In head and body simulating tissue at Frequencies from 835 up to 2450MHz</b>
<b>Linearity:</b>	<b>± 0.2 dB(2.0GHz — 3.0GHz) for EX3DV4 ± 0.2 dB(700MHz — 2.0GHz) for ES3DV3</b>
<b>Dynamic Range:</b>	<b>10 mW/kg — 100W/kg</b>
<b>Probe Length:</b>	<b>330 mm</b>
<b>Probe Tip</b>	
<b>Length:</b>	<b>20 mm</b>
<b>Body Diameter:</b>	<b>12 mm</b>
<b>Tip Diameter:</b>	<b>2.5 mm (3.9 mm for ES3DV3)</b>
<b>Tip-Center:</b>	<b>1 mm (2.0mm for ES3DV3)</b>
<b>Application:</b>	<b>SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields</b>



Picture C.2 Near-field Probe



Picture C.3 E-field Probe

## C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density ( $1 \text{ mW/cm}^2$ ) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/cm<sup>2</sup>.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).


## C.4 Other Test Equipment

### C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

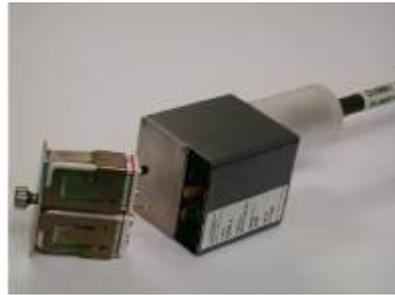

PictureC.4: DAE

### C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX90L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 5

### C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128MB), RAM (DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.6 Server for DASY 5

### C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss

POM material having the following dielectric


parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



**Picture C.7: Device Holder**

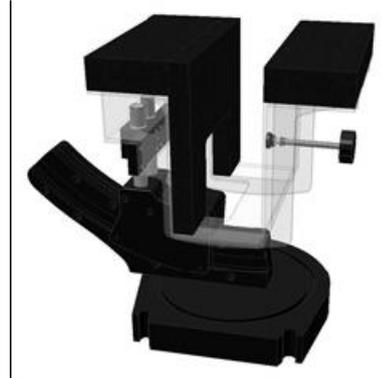

**Picture C.8: Laptop Extension Kit**

### **C.4.5 Phantom**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90<sup>th</sup> percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness:  $2 \pm 0.2$  mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




**Picture C.9: SAM Twin Phantom**

## ANNEX D Position of the wireless device in relation to the phantom


### D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

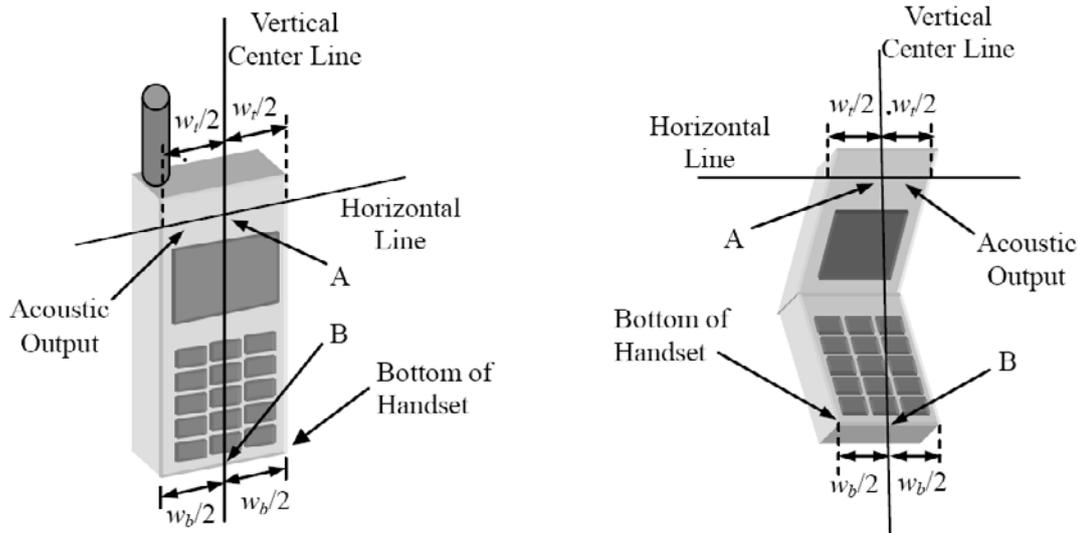


- $w_t$  Width of the handset at the level of the acoustic
- $w_b$  Width of the bottom of the handset
- A Midpoint of the width  $w_t$  of the handset at the level of the acoustic output
- B Midpoint of the width  $w_b$  of the bottom of the handset

Picture D.1-a Typical “fixed” case handset      Picture D.1-b Typical “clam-shell” case handset

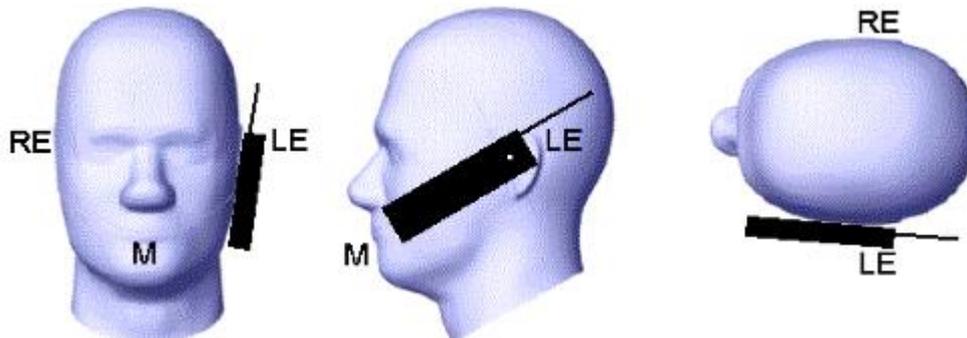


Picture D.2 Cheek position of the wireless device on the left side of SAM

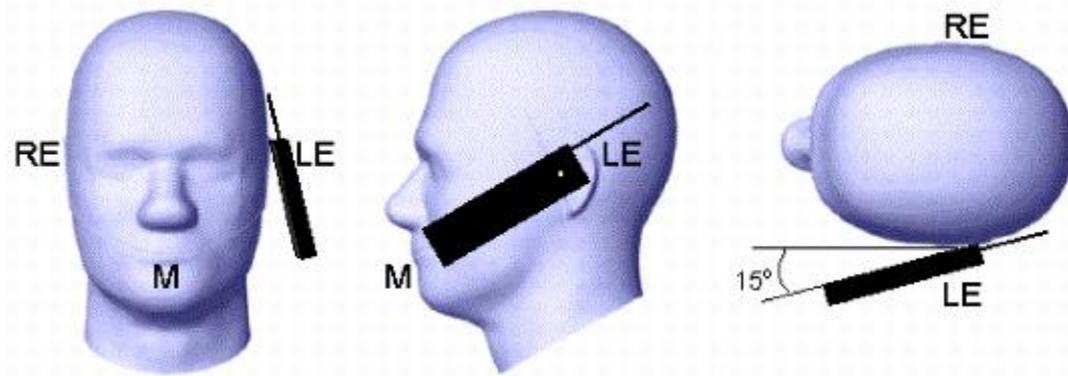

Picture D.3 Tilt position of the wireless device on the left side of SAM

### D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

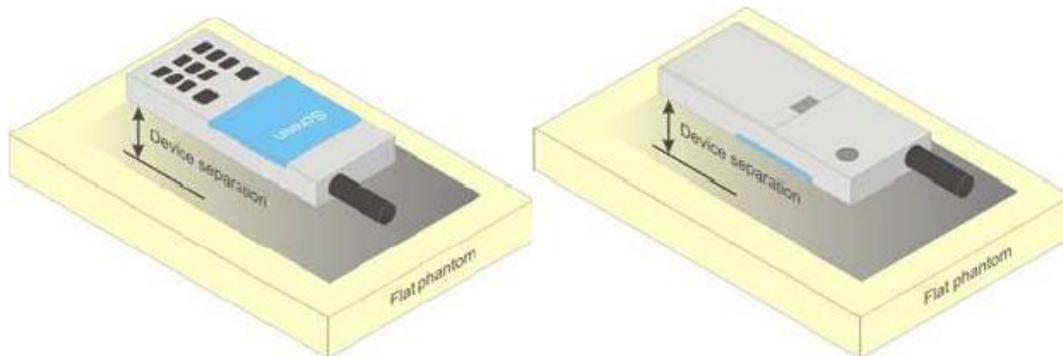


Picture D.4 Test positions for body-worn devices

### D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

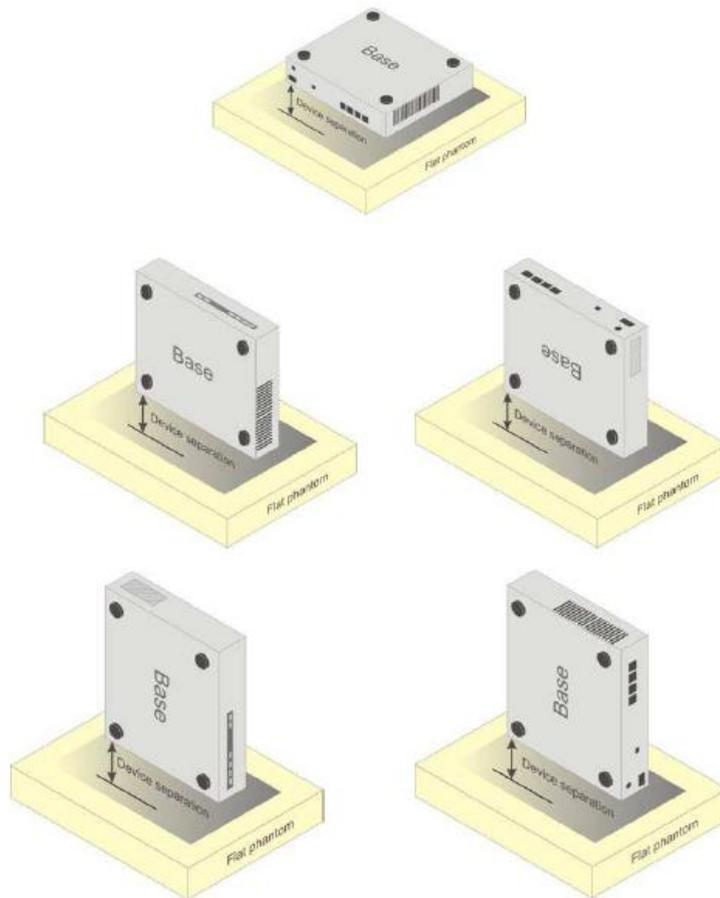

Picture D.5 Test positions for desktop devices

#### D.4 DUT Setup Photos



Picture D.6 DSY5 system Set-up

**Note:**

The photos of test sample and test positions show in additional document.

## ANNEX E Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

**Table E.1: Composition of the Tissue Equivalent Matter**

Frequency (MHz)	835 Head	835 Body	1900 Head	1900 Body	2450 Head	2450 Body
Ingredients (% by weight)						
Water	41.45	52.5	55.242	69.91	58.79	72.60
Sugar	56.0	45.0	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18
Preventol	0.1	0.1	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$

## ANNEX F System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

**Table F.1: System Validation**

System No.	Probe SN.	Liquid name	Validation date	Frequency point	Status (OK or Not)
	3252	Head 835MHz	Aug 1,2013	835MHz	OK
	3252	Head 1900MHz	Aug 1,2013	1900MHz	OK
	3754	Head 2450MHz	Aug 1,2013	2450MHz	OK
	3252	Body 835MHz	Aug 1,2013	835MHz	OK
	3252	Body 1900MHz	Aug 1,2013	1900MHz	OK
	3754	Body 2450MHz	Aug 1,2013	2450MHz	OK

NOTE: The parameters of tissue simulating liquids can be found in chapter 7 of this test report.



### ANNEX G Probe and DAE Calibration Certificate



Address: No.52 Hengyuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-4204611-3079  
E-mail: [lab@tmc.com](mailto:lab@tmc.com)

In Collaboration with



SPeAG  
CALIBRATION LABORATORY

Website: <http://www.spag.com>




ILAC-MEA  
CNAS L0442

Client : **CATR-SH**      Certificate No: **JZ13-2-2040**

**CALIBRATION CERTIFICATE**

Object: **DAE4 - SN: T244**

Calibration Procedure(s): **TMC-OS-E-01-198  
Calibration Procedure for the Data Acquisition Electronics (DAE)**

Calibration date: **July 9, 2013**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature(23±0.5) °C and humidity<70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Documenting Process Calibrator 753	1971018	01-July-13 (TMC, No.:W13-049)	July-14

	Name	Function	Signature
Calibrated by:	Jiao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyan	SAR Project Leader	
Approved by:	Xiao Li	Deputy Director of the laboratory	

Issued: July 24, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: JZ13-2-2040

Page 1 of 1



44C No.32 Hengshuofei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62308673-2019 Fax: +86-10-62301633-2504  
E-mail: [info@tmc.com](mailto:info@tmc.com) Http://www.tmc.com

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required
- The report provide only calibration results for DAE, it does not contain other performance test results.



In Collaboration with:
SPeAQ CALIBRATION LABORATORY
Add: No.52 Huiyuanhua Road, Haidian District, Beijing, 100190, China.
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2154
E-mail: info@spaq.com.cn http://www.spaq.com

DC Voltage Measurement

ADC Converter Resolution: nominal
High Range: 1LSB = 6.1uV full range = -100 ~ +300 mV
Low Range: 1LSB = 6.1uV full range = -1 ~ +3mV
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Table with 4 columns: Calibration Factors, X, Y, Z. Rows include High Range and Low Range with numerical values and error percentages.

Connector Angle

Table with 2 columns: Connector Angle to be used in DASY system, 48° ± 1°



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Addr: No.52 Hanyuabei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@ecite.com Http://www.ecite.com



Client **CATR-SH** Certificate No: **J13-2-2042**

**CALIBRATION CERTIFICATE**

Object **ES3DV3 - SN:3252**

Calibration Procedure(s) **TMC-OS-E-02-195  
Calibration Procedures for Dosimetric E-field Probes**

Calibration date: **August 5, 2013**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	01-Jul-13 (TMC, No.JW13-044)	Jun-14
Power sensor NRP-Z91	101547	01-Jul-13 (TMC, No.JW13-044)	Jun-14
Power sensor NRP-Z91	101548	01-Jul-13 (TMC, No.JW13-044)	Jun-14
Reference10dBAttenuator	BT0520	12-Dec-12(TMC, No.JZ12-887)	Dec-14
Reference20dBAttenuator	BT0267	12-Dec-12(TMC, No.JZ12-888)	Dec-14
Reference Probe EX3DV4	SN 3848	20-Dec-12(SPEAG, No.EX3-3848_Dec12)	Dec-13
DAE4	SN 777	22-Feb-13 (SPEAG, DAE4-777_Feb13)	Feb -14
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	01-Jul-13 (TMC, No.JW13-045)	Jun-14
Network Analyzer E5071C	MY46110673	15-Feb-13 (TMC, No.JZ13-781)	Feb-14

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Xiao Li	Deputy Director of the laboratory	

Issued: August 7, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/fifty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization $\Phi$	$\Phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center). $\theta=0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std. 1528-2003: "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques" December 2003
- IEC 62209-1: "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)" February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>: Assessed for E-field polarization  $\theta=0$  (fs900MHz in TEM-cell,  $f>1800$ MHz: waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> / frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>, B<sub>x,y,z</sub>, C<sub>x,y,z</sub>, VR<sub>x,y,z</sub>: A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for fs800MHz) and inside waveguide using analytical field distributions based on power measurements for  $f>800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> / ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$ MHz to  $\pm 100$ MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@ecitc.com Http://www.ecitc.com

# Probe ES3DV3

SN: 3252

Calibrated: August 5, 2013

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



**DASY – Parameters of Probe: ES3DV3 - SN: 3252**

**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm( $\mu\text{V}/(\text{Vm})^2$ ) <sup>a</sup>	1.28	1.34	1.52	±10.8%
DCP(mV) <sup>b</sup>	103.4	104.6	102.4	

**Modulation Calibration Parameters**

UID	Communication System Name		A dB	B dB ( $\mu\text{V}$ )	C	D dB	VR mV	Unc <sup>c</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	207.8	±3.3%
		Y	0.0	0.0	1.0		209.7	
		Z	0.0	0.0	1.0		209.5	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>a</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5 and Page 6).  
<sup>b</sup> Numerical linearization parameter: uncertainty not required.  
<sup>c</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



**DASY – Parameters of Probe: ES3DV3 - SN: 3252**

**Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) <sup>1</sup>	Relative Permittivity <sup>2</sup>	Conductivity (S/m) <sup>3</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
850	41.5	0.92	5.10	5.10	5.10	0.27	1.88	±12%
900	41.5	0.92	5.19	5.19	5.19	0.31	1.70	±12%
1750	40.1	1.37	5.58	5.58	5.58	0.37	1.87	±12%
1900	40.0	1.40	5.24	5.24	5.24	0.43	1.82	±12%

<sup>1</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>2</sup> At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



ADD: No. 31 Hanyuanli Road, Nantong District, Suzhou, 215009, China  
 Tel: +86-0512-89903128 Fax: +86-0512-89903128  
 E-mail: info@tmc-lab.com http://www.tmc-lab.com

**DASY – Parameters of Probe: ES3DV3 - SN: 3252**

**Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz]	Relative Permittivity <sup>1</sup>	Conductivity (S/m) <sup>2</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unc. (k=2)
850	55.2	0.89	6.14	6.14	6.14	0.40	1.65	±12%
900	55.0	1.05	6.11	6.11	6.11	0.39	1.60	±12%
1750	53.4	1.49	5.20	5.20	5.20	0.43	1.94	±12%
1800	53.3	1.52	5.03	5.03	5.03	0.40	1.85	±12%


<sup>1</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>2</sup> At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Add: No. 22 Daxuyuanlu Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304652-2978 Fax: +86-10-62304653-2104  
 E-mail: tmc@tmc.com.cn Http://www.tmc.com.cn

**Frequency Response of E-Field  
 (TEM-Cell: ifi110 EXX, Waveguide: R22)**

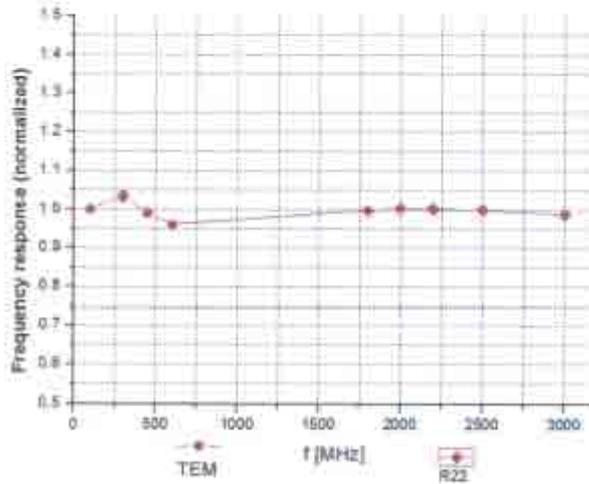

Uncertainty of Frequency Response of E-field:  $\pm 7.5\%$  (k=2)






Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: info@emete.com http://www.emete.com

Receiving Pattern ( $\Phi$ ),  $\theta=0^\circ$

f=600 MHz, TEM

f=1800 MHz, R22

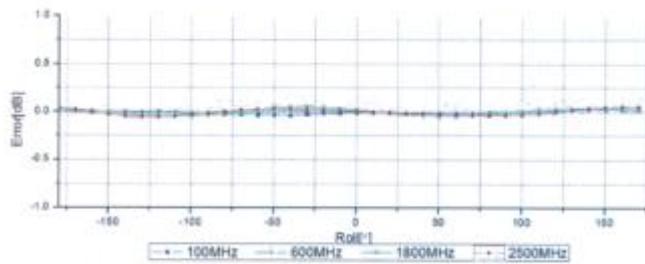



Uncertainty of Axial Isotropy Assessment:  $\pm 0.9\%$  (k=2)



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504  
 E-mail: info@emcic.com Http://www.emcic.com

**Dynamic Range f(SAR<sub>head</sub>)  
 (TEM cell, f = 900 MHz)**

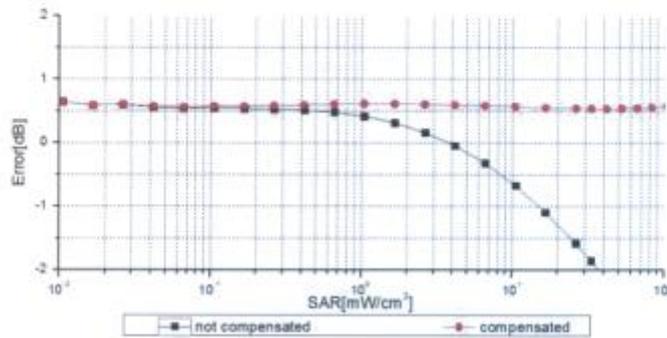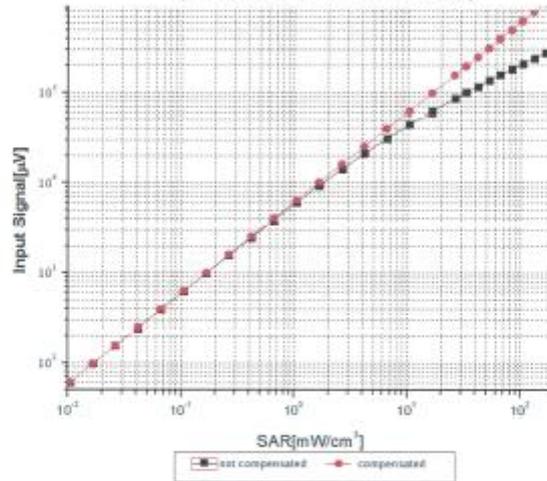

Uncertainty of Linearity Assessment: ±0.9% (k=2)





Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@emultc.com http://www.emultc.com


### Conversion Factor Assessment

f=900 MHz, WGLS R9(H\_convF)

f=1750 MHz, WGLS R22(H\_convF)

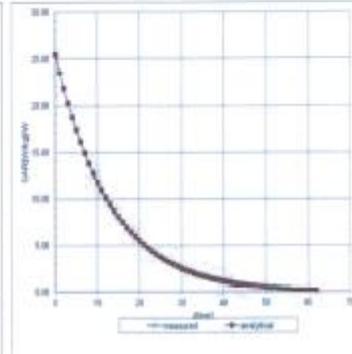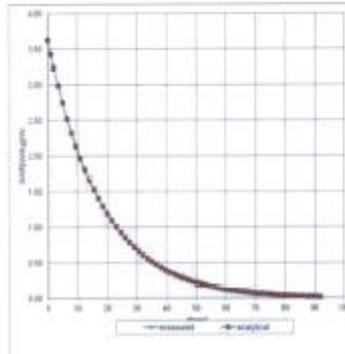

### Deviation from Isotropy in Liquid

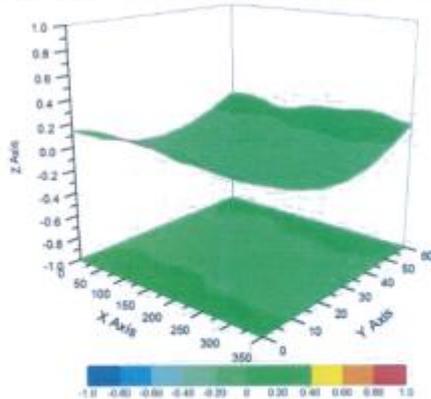

Uncertainty of Spherical Isotropy Assessment: ±2.8% (K=2)



ADD: No.51 Haoyanbei Road, Maotian District, Beijing, 100101, China  
Tel: +86-10-62104633-2579 Fax: +86-10-62104633-2104  
E-mail: info@tmc.com.cn Http://www.tmc.com.cn

**DASY - Parameters of Probe: ES3DV3 - SN: 3252**

**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	120.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	10mm
Tip Diameter	4mm
Probe Tip to Sensor X Calibration Point	2mm
Probe Tip to Sensor Y Calibration Point	2mm
Probe Tip to Sensor Z Calibration Point	2mm
Recommended Measurement Distance from Surface	3mm



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

AAE No.12 Huayuanbei Road, Huaihai District, Beijing 100191, China  
Tel: +86-10-62204613-2075 Fax: +86-10-62204613-2304  
E-mail: tmc@tmcchina.com Web: www.tmcchina.com



Client: **CATR-SH**

Certificate No: **J13-2-2041**

**CALIBRATION CERTIFICATE**

Object: **EX3DV4 - SN 3754**

Calibration Procedure(s): **TMC-OS-E-02-188**  
Calibration Procedures for Low-power E-field Probe

Calibration date: **August 9, 2013**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature(23±3)°C and humidity<75%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date/Calibrated by, Certificate No.	Scheduled Calibration
Power Meter NRP2	101915	01-Jul-13 (TMC, No. JW13-044)	Jun-14
Power sensor NRP-Z91	101547	01-Jul-13 (TMC, No. JW13-044)	Jun-14
Power sensor NRP-Z91	101548	01-Jul-13 (TMC, No. JW13-044)	Jun-14
Reference 10dB Attenuator	BT0520	12-Dec-12 (TMC, No. JZ12-857)	Dec-14
Reference 20dB Attenuator	BT0297	12-Dec-12 (TMC, No. JZ12-868)	Dec-14
Reference Probe EX3DV4	SN 3846	25-Dec-12 (SPEAG, No. EK3-3846_Dec12)	Dec-13
DAE4	SN 177	22-Feb-13 (SPEAG, DAE4-771_Feb13)	Feb-14
Secondary Standards	ID #	Cal Date/Calibrated by, Certificate No.	Scheduled Calibration
Signal Generator MG3700A	6201052605	01-Jul-13 (TMC, No. JW13-045)	Jun-14
Network Analyzer E5071C	MY48110673	15-Feb-13 (TMC, No. JZ13-781)	Feb-14

	Name	Function	Signature
Calibrated by	Zhao Jing	SAR Test Engineer	
Reviewed by	Qi Jianqun	SAR Project Leader	
Approved by	Xiao Li	Deputy Director of the laboratory	

Issued: August 9, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization $\Phi$	$\Phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std. 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub> Assessed for E-field polarization  $\theta=0$  ( $f \leq 900\text{MHz}$  in TEM-cell;  $f > 1800\text{MHz}$ : waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>: DCP<sub>z</sub> are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>, B<sub>x,y,z</sub>, C<sub>x,y,z</sub>, VR<sub>x,y,z</sub>, A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 900\text{MHz}$ ) and inside waveguide using analytical field distributions based on power measurements for  $f > 900\text{MHz}$ . The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50\text{MHz}$  to  $\pm 100\text{MHz}$ .
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



Add: No.52 Huaxiang Road, Haimen Street, Beijing, 100191, China  
Tel: +86-10-4209833-2079 Fax: +86-10-82304633-2504  
E-mail: info@tmc.com.cn Http://www.tmc.com.cn

# Probe EX3DV4

SN: 3754

Calibrated: August 8, 2013

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



ADD: No.22 Huzhouhai Road, Haidian District, Beijing, 100081, China  
 TEL: +86-10-62104031-2079 Fax: +86-10-62104031-2504  
 Email: Tmc@tmc.com.cn Http://www.tmc.com.cn

**DASY – Parameters of Probe: EX3DV4 - SN: 3754**

**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm( $\mu V/(V/m)^2$ ) <sup>a</sup>	0.40	0.45	0.45	$\pm 10.6\%$
DCP(mV) <sup>d</sup>	104.0	104.0	103.1	

**Modulation Calibration Parameters**

UID	Communication System Name		A $\Delta 0$	B $\Delta 0$ $\mu V$	C	D $\Delta 0$	VR mV	U <sub>int</sub> <sup>e</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	108.0	$\pm 3.2\%$
		Y	0.0	0.0	1.0		115.1	
		Z	0.0	0.0	1.0		115.7	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>a</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSE (see Page 5 and Page 6).  
<sup>b</sup> Numerical linearization parameter, uncertainty not required.  
<sup>c</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.31 Huayuan Rd, Haidian District, Beijing, 100191, China  
 Tel: +86-10-42104633-2979 Fax: +86-10-42104633-2984  
 E-mail: hdi@ecit.com.cn Http://www.ecit.com.cn

**DASY – Parameters of Probe: EX3DV4 - SN: 3754**

**Calibration Parameter Determined in Head Tissue Simulating Media**

f (MHz) <sup>1</sup>	Relative Permittivity <sup>2</sup>	Conductivity (S/m) <sup>3</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Uncl. (k=2)
2000	40.0	1.40	7.57	7.57	7.57	0.13	3.89	±12%
2300	39.5	1.67	7.53	7.33	7.33	0.17	2.17	±12%
2450	39.2	1.80	7.09	7.09	7.09	0.14	2.92	±12%
2800	38.0	1.96	6.72	6.72	6.72	0.14	2.89	±12%

<sup>1</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>2</sup> At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Addr: No.52 (Huananhe) Road, Huafan Street, Beijing, 100191, China  
 Tel: +86-10-62386033/079 Fax: +86-10-62386033/3294  
 E-mail: info@tmc.com.cn Http://www.tmc.com.cn

**DASY – Parameters of Probe: EX3DV4 - SN: 3754**

**Calibration Parameter Determined in Body Tissue Simulating Media**

f [MHz] <sup>a</sup>	Relative Permittivity <sup>b</sup>	Conductivity (S/m) <sup>b</sup>	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Uncl. (k=2)
2000	53.3	1.52	7.61	7.61	7.61	0.17	2.67	±12%
2300	52.9	1.81	7.20	7.20	7.20	0.19	2.05	±12%
2450	52.7	1.85	6.66	6.66	6.66	0.17	3.22	±12%
2600	52.5	2.16	6.29	6.29	6.29	0.14	3.23	±12%


<sup>a</sup> Frequency validity of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>b</sup> At frequency below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.



Add. No.53 Hanyuan Road, Heiliao District, Beijing, 100191, China  
 Tel: +86-10-62204632-2079 Fax: +86-10-62204632-2081  
 Email: Jia@tmc.com.cn Http://www.tmc.com.cn

**Frequency Response of E-Field**  
 (TEM-Cell: ifi110 EXX, Waveguide: R22)

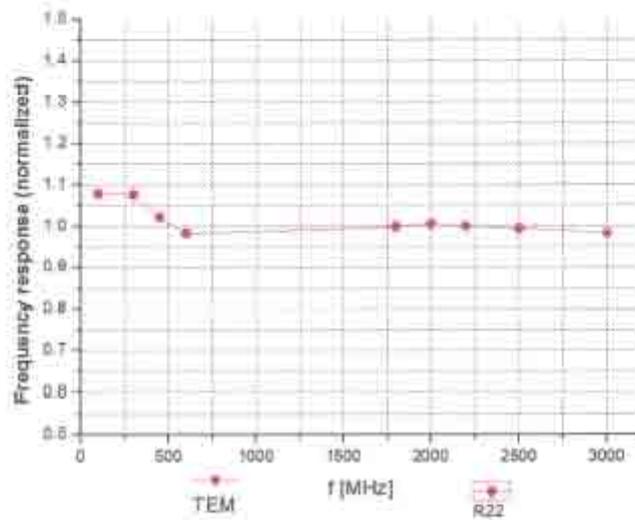

Uncertainty of Frequency Response of E-field:  $\pm 7.5\%$  (k=2)






Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: info@emtc.com Http://www.emtc.com

Receiving Pattern ( $\Phi$ ),  $\theta=0^\circ$

f=600 MHz, TEM

f=1800 MHz, R22

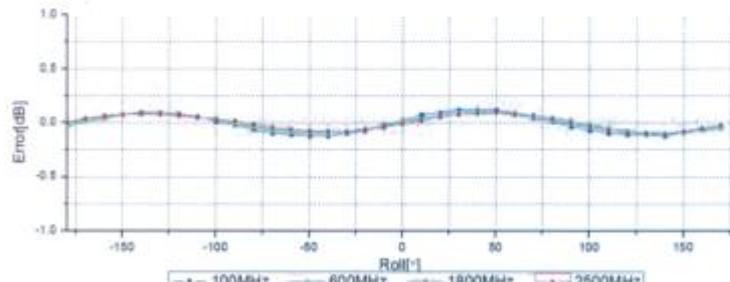



Uncertainty of Axial Isotropy Assessment:  $\pm 0.9\%$  (k=2)



ADD: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: info@emctc.com Http://www.emctc.com

**Dynamic Range f(SAR<sub>head</sub>)  
 (TEM cell, f = 900 MHz)**

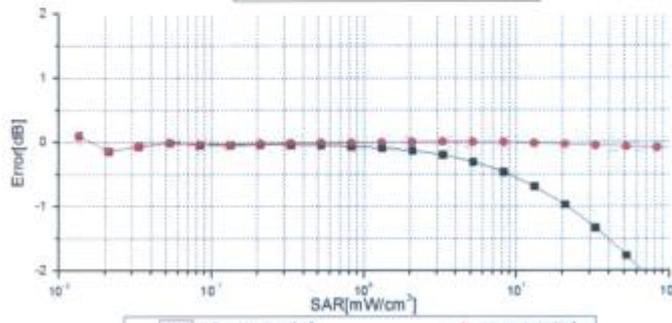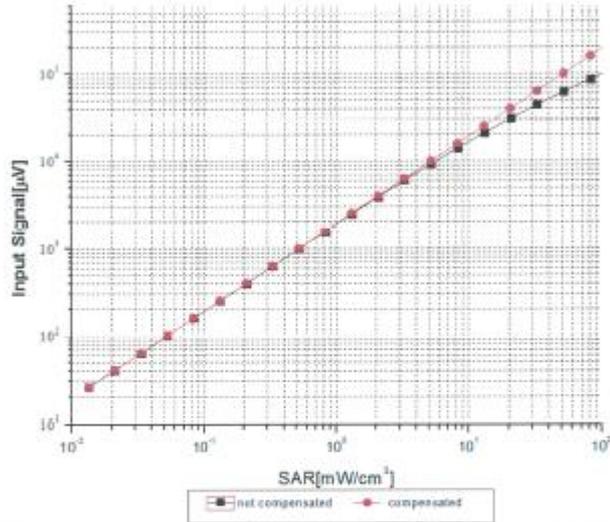

Uncertainty of Linearity Assessment: ±0.9% (k=2)




Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
 E-mail: info@emete.com http://www.emete.com


### Conversion Factor Assessment

f=2000 MHz, WGLS R22(H\_convF)

f=2450 MHz, WGLS R26(H\_convF)

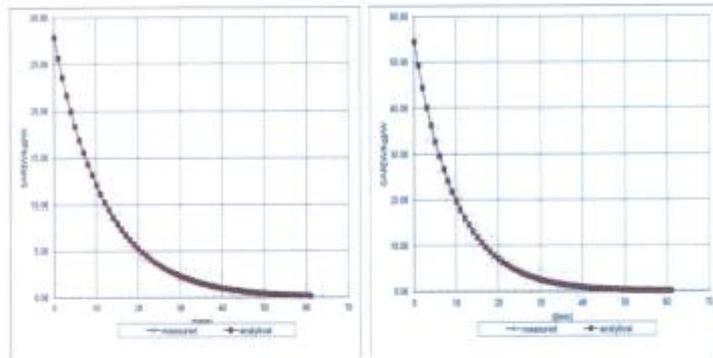

### Deviation from Isotropy in Liquid

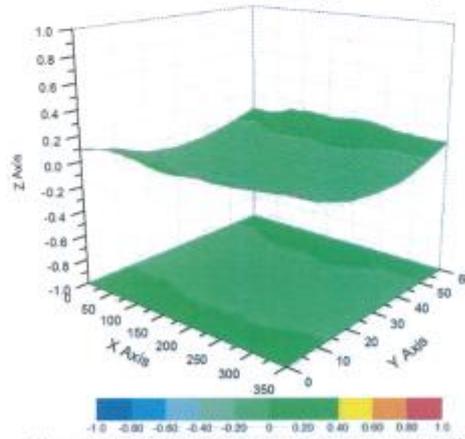

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.8\%$  (K=2)



Address: 36123 Shuangqing Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62104633-3077 Fax: +86-10-62100354-2594  
E-mail: hdl@tmc.com.cn http://www.tmc.com.cn

DASY - Parameters of Probe: EX3DV4 - SN: 3754

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	15.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	5mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	2mm

## ANNEX H Dipole Calibration Certificate

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client: Auden

Certificate No: D835V2-4d092\_Jun13

### CALIBRATION CERTIFICATE

Object: D835V2 - SN: 4d092

Calibration procedure(s): QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: June 17, 2013

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	01-Nov-12 (No. 217-01640)	Oct-13
Power sensor HP 8481A	US37282783	01-Nov-12 (No. 217-01640)	Oct-13
Reference 20 dB Attenuator	SN: 5058 (20K)	04-Apr-13 (No. 217-01736)	Apr-14
Type-N mismatch combination	SN: 5047.3 / 05327	04-Apr-13 (No. 217-01738)	Apr-14
Reference Probe ES3DV3	SN: 3205	28-Dec-12 (No. ES3-3205_Dec12)	Dec-13
DAE4	SN: 601	25-Apr-13 (No. DAE4-601_Apr13)	Apr-14
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-11)	In house check: Oct-13
RF generator R&S SMT-06	100005	04-Aug-89 (in house check Oct-11)	In house check: Oct-13
Network Analyzer HP 8753E	US37390585 54206	18-Oct-01 (in house check Oct-12)	In house check: Oct-13

	Name	Function	Signature
Calibrated by:	Jason Kastner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 17, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zaughausstrasse 43, 8004 Zurich, Switzerland



SCS Schweizerischer Kalibrierdienst  
SCS Service suisse d'étalonnage  
SCS Servizio svizzero di taratura  
SCS Swiss Calibration Service

Accredited by the Swiss Accreditation Service (BAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

**Glossary:**

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 82209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	635 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.5 ± 6 %	0.94 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.51 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.18 W/kg ± 18.5 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	55.6 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.37 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.27 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.56 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.14 W/kg ± 16.5 % (k=2)

**Appendix**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	52.4 $\Omega$ - 1.1 j $\Omega$
Return Loss	-31.8 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	47.8 $\Omega$ - 3.1 j $\Omega$
Return Loss	-28.3 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.365 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semi-rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited by DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	September 15, 2008

**DASY5 Validation Report for Head TSL**

Date: 13.06.2013

Test Laboratory: Industry Canada - Certification & Engineering Bureau

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092**

Communication System: UID 0 - CW ; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 40.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.05, 6.05, 6.05); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Head Tissue/Pin=250 mW,  $d=15\text{mm}$ /Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.874 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.75 W/kg


**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 2.89 W/kg

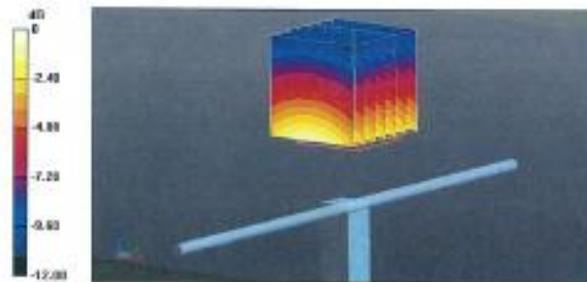

0 dB = 2.89 W/kg = 4.61 dBW/kg

Impedance Measurement Plot for Head TSL

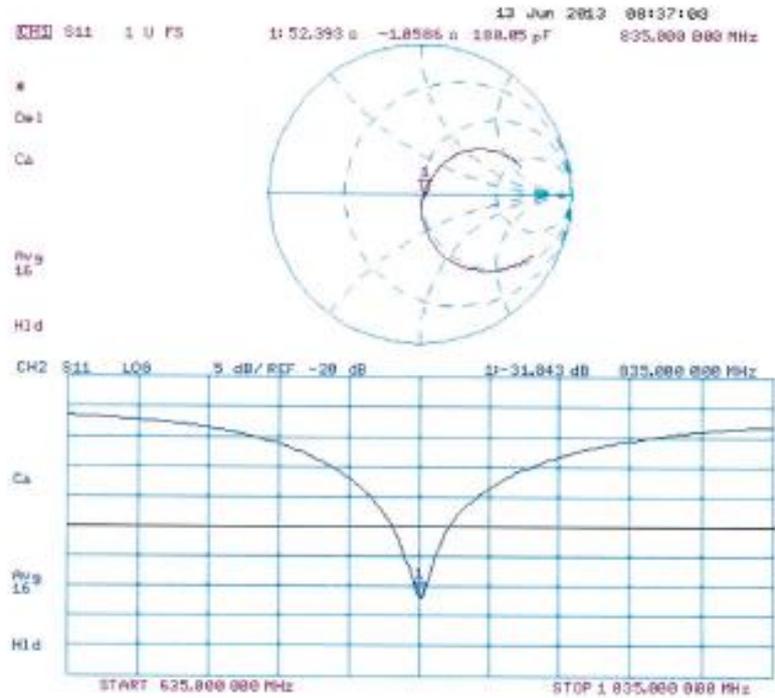

**DASY5 Validation Report for Body TSL**

Date: 17.06.2013

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d092**

Communication System: UID 0 - CW ; Frequency: 835 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 28.12.2012;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 25.04.2013
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm 2/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54,483 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.47 W/kg

**SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.56 W/kg**


Maximum value of SAR (measured) = 2.76 W/kg

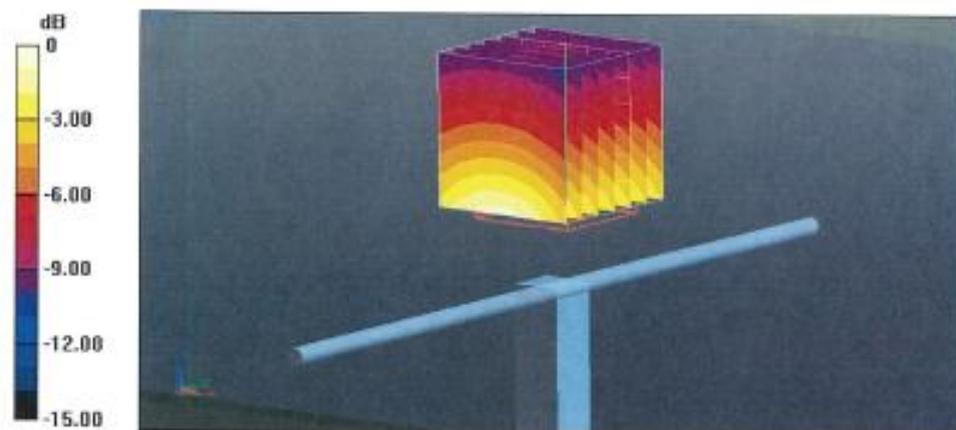

0 dB = 2.76 W/kg = 4.41 dBW/kg



Impedance Measurement Plot for Body TSL

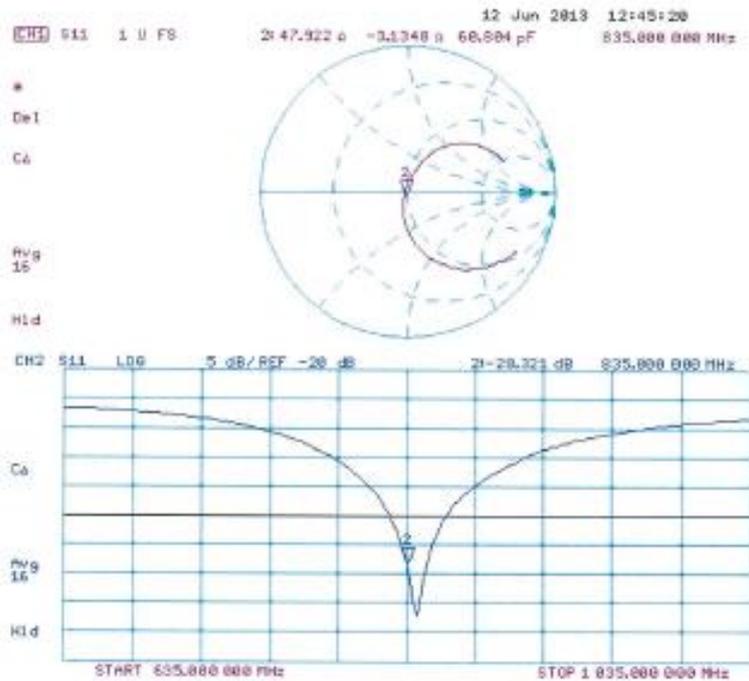



In Collaboration with  
**S P E A G**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Heilong District, Beijing, 100191, China  
Tel: +86-10-82304033-3078 Fax: +86-10-82304633-2504  
E-mail: info@tmc.com.cn URL: www.tmc.com.cn



Client **CATR-SH** Certificate No: **J13-2-2035**

**CALIBRATION CERTIFICATE**

Object: **D1900VZ-SM: 561.54**  
Calibration Procedure(s): **TMC-OS-E-02.104  
Calibration procedure for device validation #16**  
Calibration date: **July 12, 2013**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurement(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3°C and humidity<70%).

Calibration Equipment used (M&TE critical for calibration)

Primary Standards:	ID #	Cal Date/Calibrated by, Certificate No.	Scheduled Calibration
Power Meter: NRVD	102083	11-Sep-12 (TMC, No. JZ12-443)	Sep-13
Power sensor: NRV-ZE	102585	11-Sep-12 (TMC, No. JZ12-443)	Sep-13
Reference Probe EX30VM DAE4	SN 3846	20-Dec-12 (SPEAG, No. EX3-3846_Dec12)	Dec-13
	SN 777	22-Feb-13 (SPEAG, DAE4-777_Feb13)	Feb-14
Signal Generator: E4438C	MY49070393	13-Nov-12 (TMC, No. JZ12-394)	Nov-13
Network Analyzer E8362B	MY4302113E	19-Oct-12 (TMC, No. JZ12-278)	Oct-13

	Name	Function	Signature
Calibrated by	Zhao Jing	SAR Test Engineer	
Reviewed by	Qi Danyuan	SAR Project Leader	
Approved by	Xiao Li	Deputy Director of the laboratory	

Issued: July 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Glossary:**

TSL	Issue simulating liquid
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- KJR006566A, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



Add: No.52 Huananbe Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-82304833-2079 Fax: +86-10-82304833-2604  
 Email: info@emcib.com http://www.emcib.com

**Measurement Conditions**

DASY system configuration, as far as not given on page 1

DASY Version	DASY52	52.87.1137
Extrapolation	Advanced Extrapolation	
Phantom	Twin Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5mm	
Frequency	1900 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.6 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	<0.5 °C	—	—

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	42.7 mW / g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.52 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	22.2 mW / g ± 20.4 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.6 ± 6 %	1.50 mho/m ± 6 %
Body TSL temperature change during test	<0.5 °C	—	—

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	43.4 mW / g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.7 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	22.7 mW / g ± 20.4 % (k=2)

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	51.50+0.78jΩ
Return Loss	-26.8dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	46.80+3.49jΩ
Return Loss	-24.3dB

After long term use with 100W (rated power), only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded; according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	April 14, 2013



Add: No.52 Huiyuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@emcrite.com <http://www.emcrite.com>

**DASY5 Validation Report for Head TSL**

Date: 12.07.2013

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d134**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.365 \text{ mho/m}$ ;  $\epsilon_r = 38.576$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3846; ConvF(8.01,8.01,8.01); Calibrated:20.12.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: Flat Phantom; Type: QD000P40CC;
- Measurement SW: DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

**Dipole Calibration for Head Tissue/Pin=250mW, d=10mm/Zoom Scan**


(7x7x7)Cube 0: Measurement grid:  $d_x=6\text{mm}$ ,  $d_y=6\text{mm}$ ,  $d_z=6\text{mm}$

Reference Value = 92.229 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 19.8 W/kg

**SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.52 W/kg**

Maximum value of SAR (measured) = 12.0 W/kg

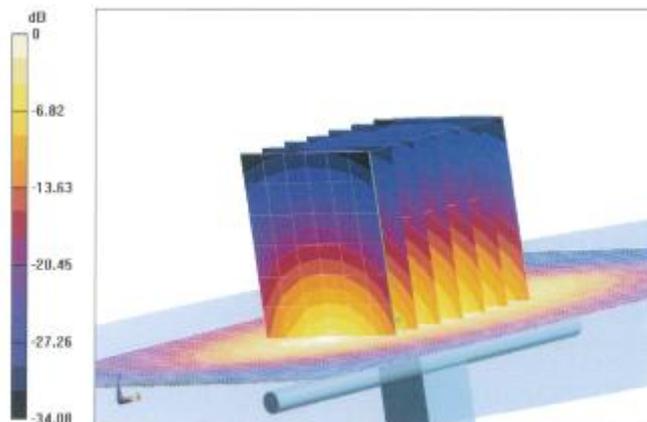


0 dB = 12.3 W/kg = 10.91 dBW/kg



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304533-2079 Fax: +86-10-62304533-2504  
E-mail: info@emcnc.com <http://www.rctscn.com>

Impedance Measurement Plot for Head TSL

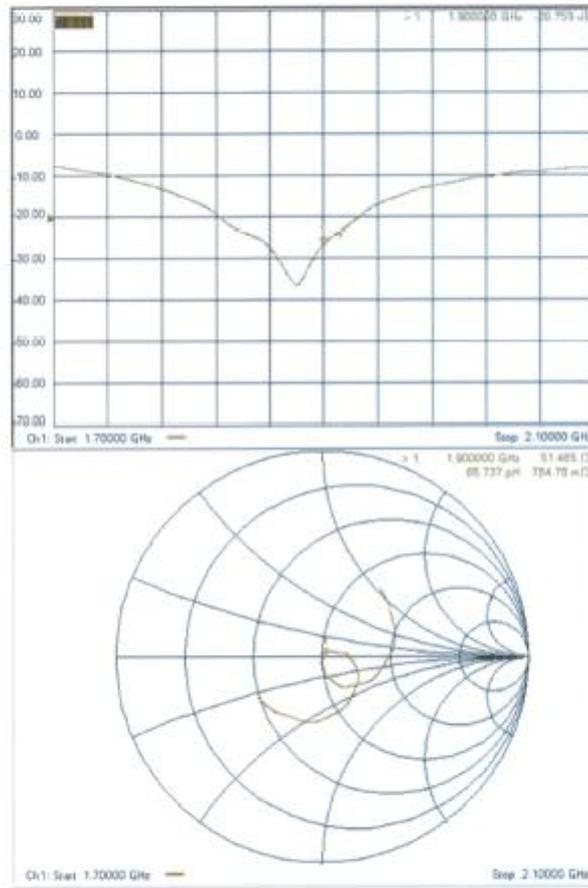



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@emcibe.com <http://www.emcibe.com>

**DASY5 Validation Report for Body TSL**

Date: 12.07.2013

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d1134**

Communication System: CW; Frequency: 1900 MHz;

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.502 \text{ mho/m}$ ;  $\epsilon_r = 50.787$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Phantom

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3846; ConvF(7.37,7.37,7.37) ; Calibrated:20.12.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: Flat Phantom; Type: QD000P40CC
- Measurement SW: DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

**Dipole Calibration for Body Tissue/Pin=250mW, d=10mm/Zoom Scan**


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 74.485 W/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 19.8 W/kg

SAR(1 g) = 10.9 W/kg; SAR(10 g) = 5.7 W/kg

Maximum value of SAR (measured) = 12.3 W/kg

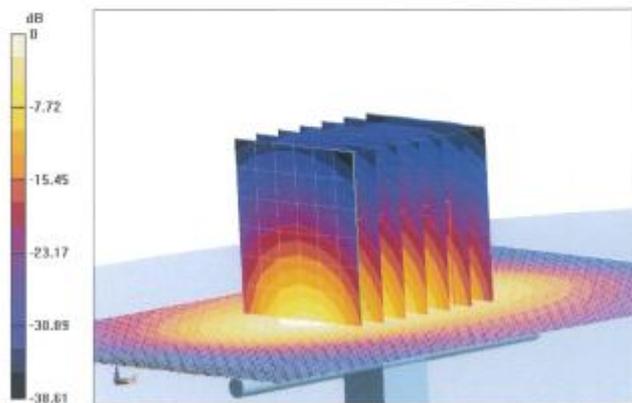


0 dB = 12.4 W/kg = 10.95 dBW/kg



**TMC** In Collaboration with **s p e a g**  
CALIBRATION LABORATORY

Add: No. 52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@emcila.com <http://www.emcila.com>

Impedance Measurement Plot for Body TSL

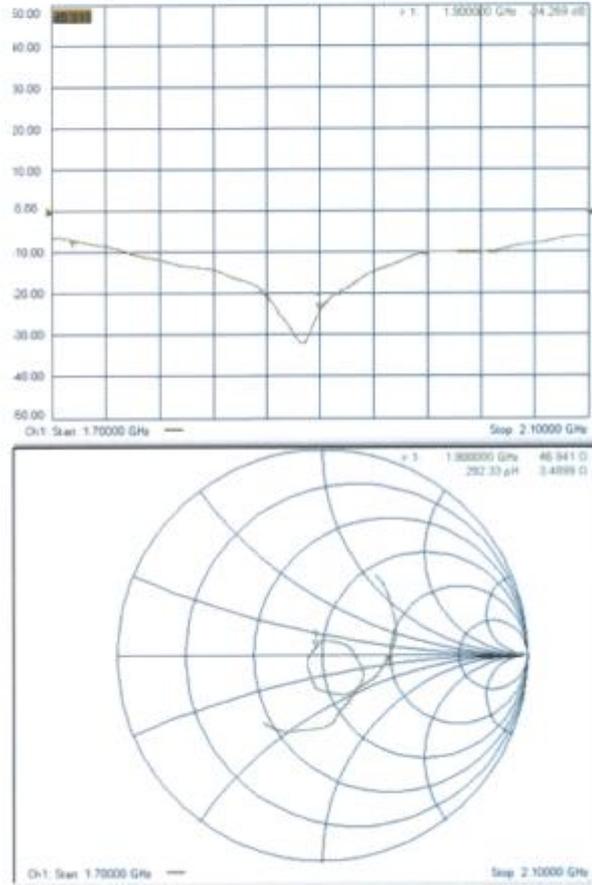



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: info@emc3e.com Http://www.emc3e.com



Client **CATR-SH** Certificate No: **J13-2-2038**

**CALIBRATION CERTIFICATE**

Object: **D2450V2 - SN: 858**  
Calibration Procedure(s): **TMC-OS-E-02-194**  
**Calibration procedure for dipole validation kits**  
Calibration date: **July 13, 2013**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRVD	102083	11-Sep-12 (TMC, No.JZ12-443)	Sep-13
Power sensor NRV-Z5	100595	11-Sep-12 (TMC, No. JZ12-443)	Sep -13
Reference Probe EX3DV4	SN 3846	20- Dec-12 (SPEAG, No.EX3-3846_Dec12)	Dec-13
DAE4	SN 777	22-Feb-13 (SPEAG, DAE4-777_Feb13)	Feb -14
Signal Generator E4438C	MY49070393	13-Nov-12 (TMC, No.JZ12-394)	Nov-13
Network Analyzer E8362B	MY43021135	19-Oct-12 (TMC, No.JZ13-278)	Oct-13

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Qi Dianyuan	SAR Project Leader	
Approved by:	Xiao Li	Deputy Director of the laboratory	

Issued: July 26, 2013

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.02 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-3079 | Fax: +86-10-62304633-2504  
E-mail: info@emrite.com | <http://www.emrite.com>

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



Address: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62904633-2079 Fax: +86-10-62904633-2504  
 E-mail: info@emobc.com http://www.emobc.com

**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.8.7.1137
Extrapolation	Advanced Extrapolation	
Phantom	Twin Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.9	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.6 ± 6 %	1.78 mho/m ± 0 %
Head TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Head TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	49.6 mW / g ± 20.6 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.76 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.0 mW / g ± 20.4 % (k=2)

**Body TSL parameters**

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.9 ± 6 %	1.93 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	11.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	47.7 mW / g ± 20.8 % (k=2)
SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.55 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	22.2 mW / g ± 20.4 % (k=2)



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-3079 Fax: +86-10-62304633-2808  
E-mail: info@ecitc.com [Http://www.ecitc.com](http://www.ecitc.com)

**Appendix****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	54.90+4.60jΩ
Return Loss	> 24.0dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	50.90+ 5.86jΩ
Return Loss	> 24.6dB

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	April 23, 2010



Addr: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2604  
E-mail: info@emcste.com [Http://www.emcste.com](http://www.emcste.com)

**DASY5 Validation Report for Head TSL**

Date: 13.07.2013

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 858**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.777$  mho/m;  $\epsilon_r = 37.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3846; ConvF(7.13,7.13,7.13); Calibrated:20,12,2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: Flat Phantom; Type: QD000P40CC;
- Measurement SW: DASY5 52.8.7(113.7); SEMCAD X Version 14.6.10 (7164)

**Dipole Calibration for Head Tissue/Pin=250mW, d=10mm/Zoom Scan**


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.927 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 26.0 W/kg

**SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.76 W/kg**


Maximum value of SAR (measured) = 14.2 W/kg

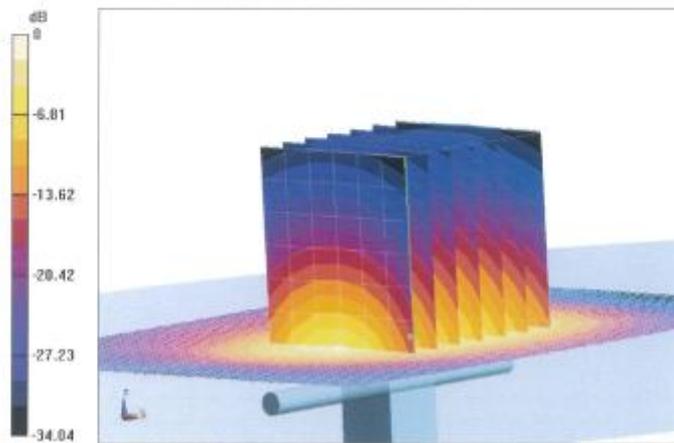



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504  
E-mail: Info@emcrite.com <http://www.emcrite.com>

Impedance Measurement Plot for Head TSL

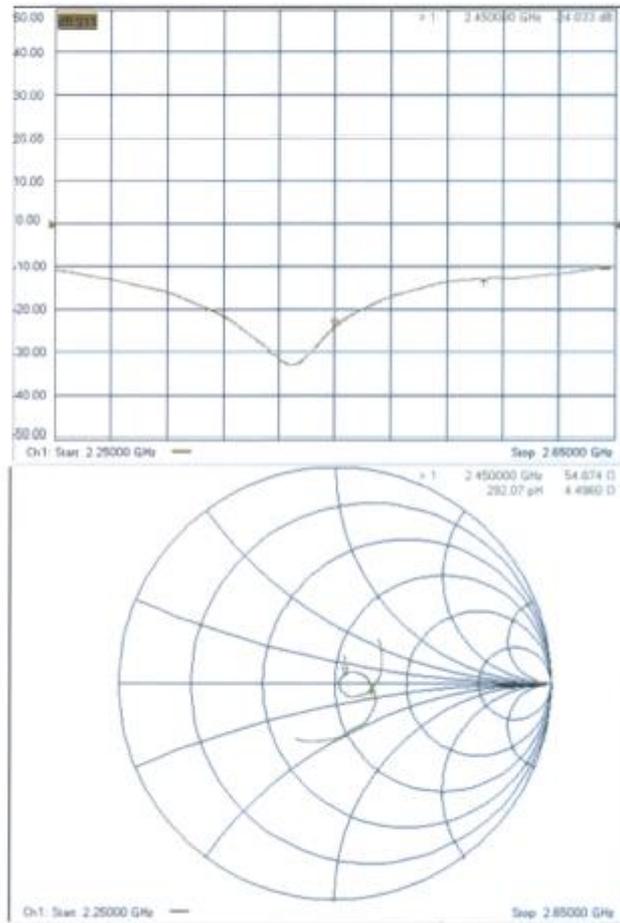



Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-82304633-2079 Fax: +86-10-82304633-2504  
E-mail: Info@emctle.com <http://www.emctle.com>

**DASY5 Validation Report for Body TSL**

Date: 11.07.2013

Test Laboratory: TMC, Beijing, China

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 858**

Communication System: CVV; Frequency: 2450 MHz;

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.927$  mho/m;  $\epsilon_r = 51.858$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Phantom

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3846; ConvF(7,7,7) ; Calibrated:20.12.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn777; Calibrated: 22/2/2013
- Phantom: Flat Phantom; Type: QD000P40CC
- Measurement SW: DASY52 52.8.7(1137); SEMCAD X Version 14.6.10 (7164)

**Dipole Calibration for Body Tissue/Pin=250mW, d=10mm/Zoom Scan**


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 83.465 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 24.1 W/kg

**SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.55 W/kg**

Maximum value of SAR (measured) = 13.7 W/kg

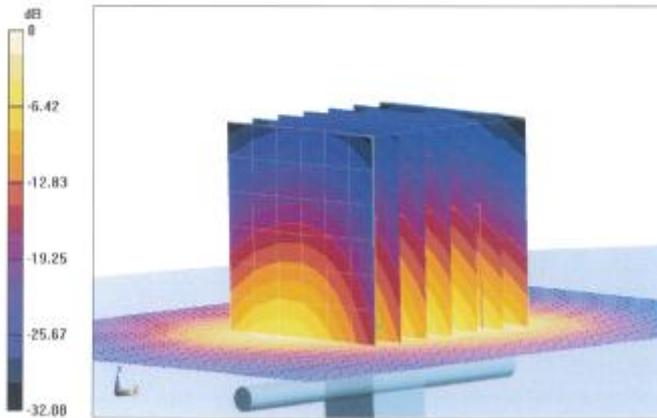


0 dB = 13.6 W/kg = 11.32 dBW/kg



Address: No.52 Huiyuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-82304633-2079 Fax: +86-10-82304633-2504  
E-mail: info@emsobe.com <http://www.emsobe.com>

Impedance Measurement Plot for Body TSL

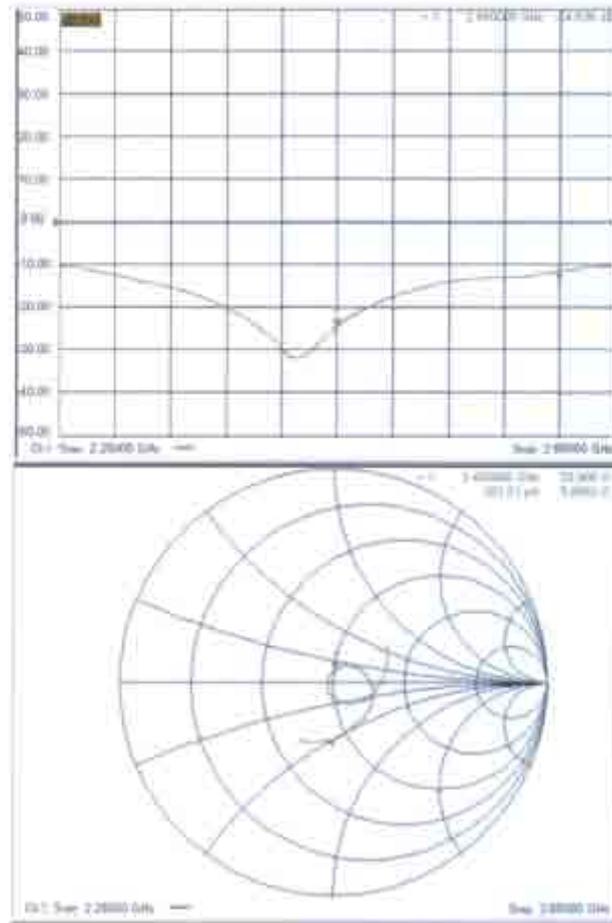



**Acceptable Conditions for SAR Measurements Using Probes and Dipoles  
Calibrated under the SPEAG-TMC Dual-Logo Calibration Program to  
Support FCC Equipment Certification**

The acceptable conditions for SAR measurements using probes, dipoles and DAES calibrated by TMC (*Telecommunication Metrology Center of MITT in Beijing, China*), under the Dual-Logo Calibration Certificate program and quality assurance (QA) protocols established between SPEAG (*Schmid & Partner Engineering AG, Switzerland*) and TMC, to support FCC (*U.S. Federal Communications Commission*) equipment certification are defined and described in the following.

- 1) The agreement established between SPEAG and TMC is only applicable to calibration services performed by TMC where its clients (companies and divisions of such companies) are headquartered in the Greater China Region, including Taiwan and Hong Kong. This agreement is subject to renewal at the end of each calendar year between SPEAG and TMC. TMC shall inform the FCC of any changes or early termination to the agreement.
- 2) Only a subset of the calibration services specified in the SPEAG-TMC agreement, while it remains valid, are applicable to SAR measurements performed using such equipment for supporting FCC equipment certification. These are identified in the following.
  - a) Calibration of dosimetric (SAR) probes EX3DVx, ET3DVx and ES3DVx.
    - i) Free-space E-field and H-field probes, including those used for HAC (hearing aid compatibility) evaluation, temperature probes, other probes or equipment not identified in this document, when calibrated by TMC, are excluded and cannot be used for measurements to support FCC equipment certification.
    - ii) Signal specific and bundled probe calibrations based on PMR (probe modulation response) characteristics are handled according to the requirements of KDB 865664; that is, "Until standardized procedures are available to make such determination, the applicability of a signal specific probe calibration for testing specific wireless modes and technologies is determined on a case-by-case basis through KDB inquiries, including SAR system verification requirements."
  - b) Calibration of SAR system validation dipoles, excluding HAC dipoles.
  - c) Calibration of data acquisition electronics DAE3Vx, DAE4Vx and DAEasyVx.
  - d) For FCC equipment certification purposes, the frequency range of SAR probe and dipole calibrations is limited to 700 MHz - 6 GHz and provided it is supported by the equipment identified in the TMC QA protocol (a separate attachment to this document).
  - e) The identical system and equipment setup, measurement configurations, hardware, evaluation algorithms, calibration and QA protocols, including the format of calibration certificates and reports used by SPEAG shall be applied by TMC.
  - f) The calibrated items are only applicable to SPEAG DASY 4 and DASY 5 or higher version systems.



- 3) The SPEAG-TMC agreement includes specific protocols identified in the following to ensure the quality of calibration services provided by TMC under this SPEAG-TMC Dual-Logo calibration agreement are equivalent to the calibration services provided by SPEAG. TMC shall, upon request, provide copies of documentation to the FCC to substantiate program implementation.
  - a) The Inter-laboratory Calibration Evaluation (ILCE) stated in the TMC QA protocol shall be performed between SPEAG and TMC at least once every 12 months. The ILCE acceptance criteria defined in the TMC QA protocol shall be satisfied for the TMC, SPEAG and FCC agreements to remain valid.
  - b) Check of Calibration Certificate (CCC) shall be performed by SPEAG for all calibrations performed by TMC. Written confirmation from SPEAG is required for TMC to issue calibration certificates under the SPEAG-TMC Dual-Logo calibration program. Quarterly reports for all calibrations performed by TMC under the program are also issued by SPEAG.
  - c) The calibration equipment and measurement system used by TMC shall be verified before each calibration service according to the specific reference SAR probes, dipoles, and DAE calibrated by SPEAG. The results shall be reproducible and within the defined acceptance criteria specified in the TMC QA protocol before each actual calibration can commence. TMC shall maintain records of the measurement and calibration system verification results for all calibrations.
  - d) Quality Check of Calibration (QCC) certificates shall be performed by SPEAG at least once every 12 months. SPEAG shall visit TMC facilities to verify the laboratory, equipment, applied procedures and plausibility of randomly selected certificates.
- 4) A copy of this document, to be updated annually, shall be provided to TMC clients that accept calibration services according to the SPEAG-TMC Dual-Logo calibration program, which should be presented to a TCB (*Telecommunication Certification Body*), to facilitate FCC equipment approval.
- 5) TMC shall address any questions raised by its clients or TCBs relating to the SPEAG-TMC Dual-Logo calibration program and inform the FCC and SPEAG of any critical issues.

Change Note: Revised on June 26 to clarify the applicability of PMR and Bundled probe calibrations according to the requirements of KDB 865664.