

# FCC RF Test Report


**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE Z730  
**FCC ID** : SRQ-ZTEZ730  
**STANDARD** : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Nov. 13, 2013 and testing was completed on Jan. 14, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test ..... 6

    1.5 Modification of EUT ..... 7

    1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ..... 7

    1.7 Testing Site ..... 8

    1.8 Applied Standards ..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 11

    2.3 Support Unit used in test configuration and system..... 11

    2.4 Measurement Results Explanation Example ..... 12

**3 TEST RESULT..... 13**

    3.1 Conducted Output Power Measurement..... 13

    3.2 Peak-to-Average Ratio ..... 15

    3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... 25

    3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 31

    3.5 Band Edge Measurement..... 55

    3.6 Conducted Spurious Emission Measurement ..... 70

    3.7 Field Strength of Spurious Radiation Measurement ..... 89

    3.8 Frequency Stability Measurement..... 105

**4 LIST OF MEASURING EQUIPMENT ..... 111**

**5 UNCERTAINTY OF EVALUATION ..... 113**

**APPENDIX A. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.2	§24.232(d) §27.50(d)(5)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(g)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 26.43 dB at 3760.000 MHz
3.8	§2.1055 §22.355 §24.235 §27.54	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE Z730
FCC ID	SRQ-ZTEZ730
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ WLAN2.4GHz 802.11bgn HT20/Bluetooth v3.0 + EDR/ Bluetooth v4.0 LE
HW Version	wyuA
SW Version	P821T02V1.0.0B01
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 33.30 dBm GSM1900 : 30.88 dBm WCDMA Band V : 23.46 dBm WCDMA Band IV : 23.24 dBm WCDMA Band II : 23.55 dBm
<b>Antenna Type</b>	PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only)

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	1.0992	0.04 ppm	246KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.2738	0.05 ppm	246KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1202	0.05 ppm	4M20F9W
Part 24	GSM1900 GSM	GMSK	1.5931	0.02 ppm	248KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.6139	0.02 ppm	244KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.3011	0.02 ppm	4M18F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.2974	0.02 ppm	4M22F9W



### 1.7 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH01-KS	OTA01-KS	149928

### 1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was rotated on three test planes to find out the worst emission. (Z Plane for 22H and 27L and X Plane for 24E)

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE class 8 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band IV	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:** The maximum power levels are GSM mode for GSM link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band IV, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.




The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.30	33.12	33.19	30.68	30.61	30.88
GPRS class 8	33.26	33.16	33.17	30.67	30.60	30.87
GPRS class 10	30.27	30.21	30.23	27.24	27.53	27.69
GPRS class 11	29.26	29.19	29.20	26.42	26.39	26.70
GPRS class 12	27.33	27.24	27.20	24.30	24.19	24.45
EGPRS class 8	27.65	27.57	27.50	26.06	26.13	26.27
EGPRS class 10	24.58	24.55	24.56	23.03	23.01	23.15
EGPRS class 11	23.52	23.49	23.44	21.89	21.91	22.02
EGPRS class 12	21.54	21.39	21.47	20.49	20.44	20.66

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	23.38	23.34	23.46	23.17	23.55	23.36	23.12	23.24	23.16
HSDPA Subtest-1	21.90	21.75	22.11	21.64	21.87	21.81	21.80	21.81	21.72
HSDPA Subtest-2	21.69	21.70	22.01	21.67	21.85	21.83	21.78	21.79	21.70
HSDPA Subtest-3	21.66	21.68	22.06	21.66	21.77	21.72	21.62	21.78	21.63
HSDPA Subtest-4	21.70	21.72	21.95	21.63	21.74	21.79	21.58	21.66	21.68
HSUPA Subtest-1	21.69	21.19	21.43	21.43	21.36	21.13	21.38	21.71	21.69
HSUPA Subtest-2	19.82	19.36	19.45	19.92	19.86	19.58	19.69	19.85	19.72
HSUPA Subtest-3	20.53	20.31	20.44	20.36	20.42	20.10	20.54	20.48	20.49
HSUPA Subtest-4	19.79	19.62	19.33	19.85	19.76	19.66	19.68	19.78	19.77
HSUPA Subtest-5	21.59	21.14	21.30	21.38	21.43	21.16	21.49	21.65	21.55

## 2.2 Connection Diagram of Test System

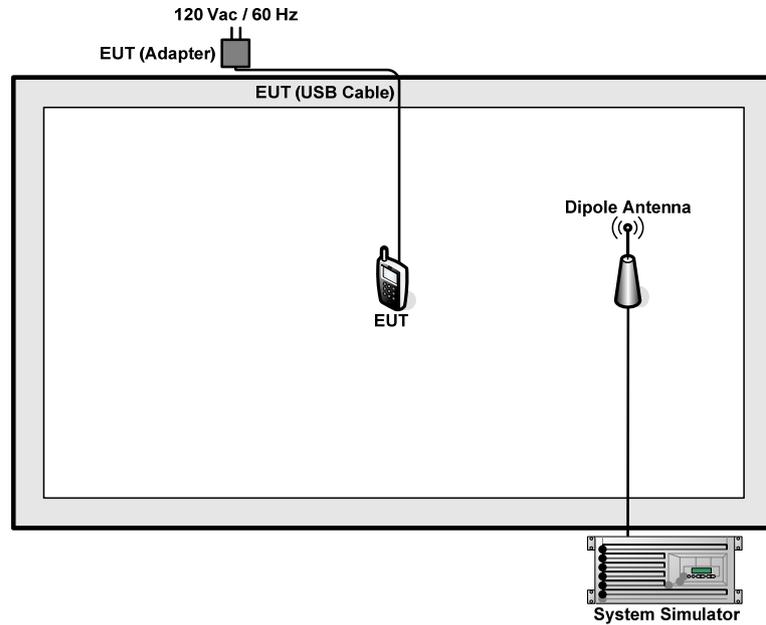

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.2 + 10 = 15.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for GSM and WCDMA modes.

##### 3.1.4 Test Setup

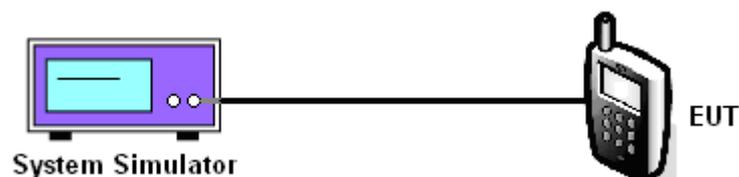

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	33.30	33.12	33.19	27.65	27.57	27.50	23.38	23.34	23.46
Conducted Power (Watts)	2.14	2.05	2.08	0.58	0.57	0.56	0.22	0.22	0.22

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	30.68	30.61	30.88	26.06	26.13	26.27	23.17	23.55	23.36
Conducted Power (Watts)	1.17	1.15	1.22	0.40	0.41	0.42	0.21	0.23	0.22

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	23.12	23.24	23.16
Conducted Power (Watts)	0.21	0.21	0.21

Note: Maximum burst average power for GSM, and maximum average power for WCDMA.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

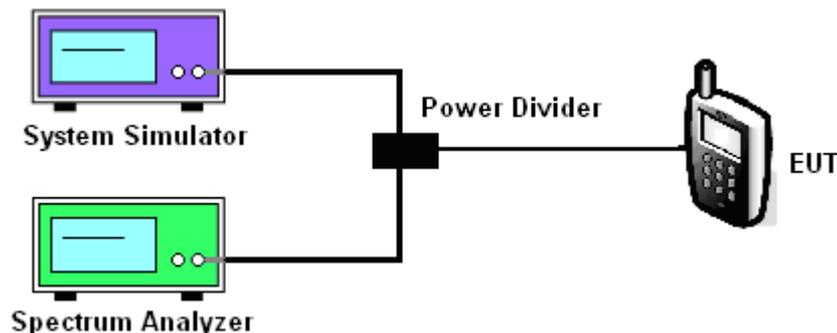

3.2.5 Test Result of Peak-to-Average Ratio

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.44	0.44	0.45	3.12	3.07	2.99	2.96	3.04	3.04


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	3.08	3.00	3.08



### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

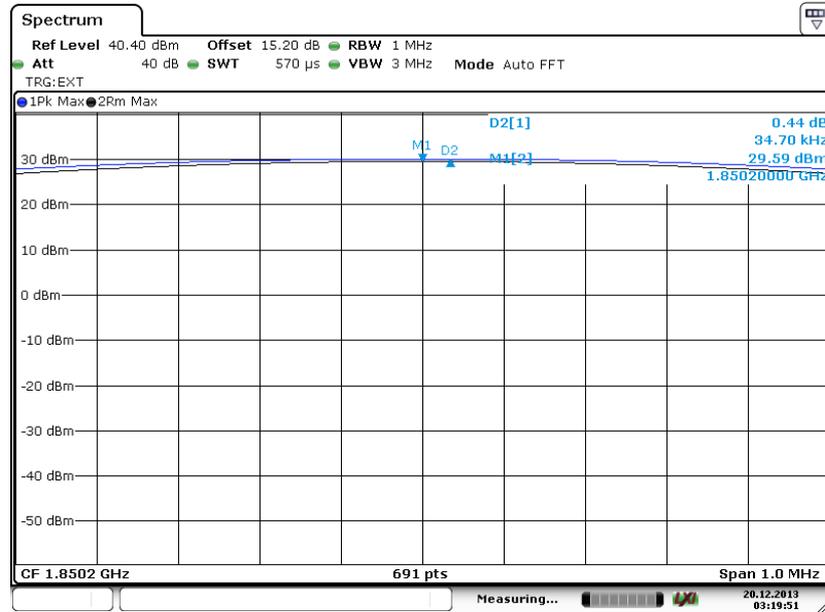

Date: 20 DEC 2013 03:19:51


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

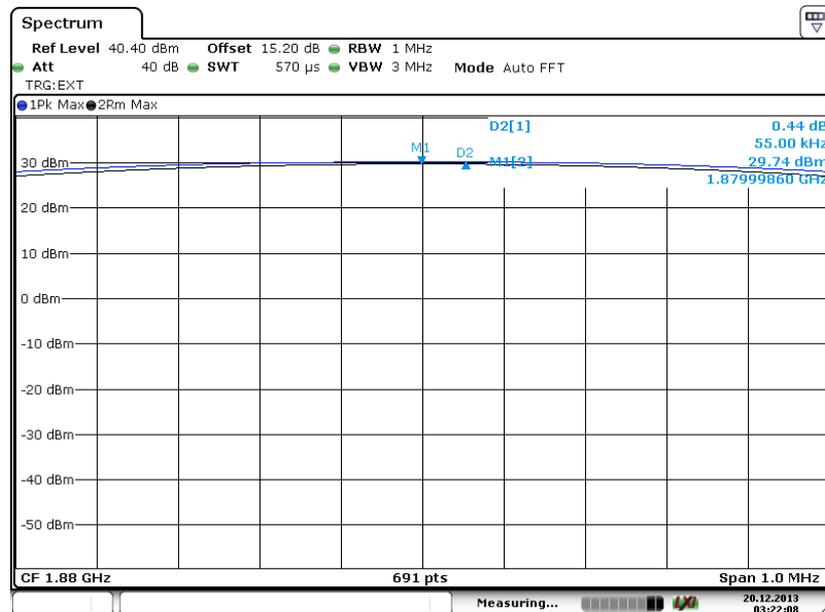

Date: 20 DEC 2013 03:22:08



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

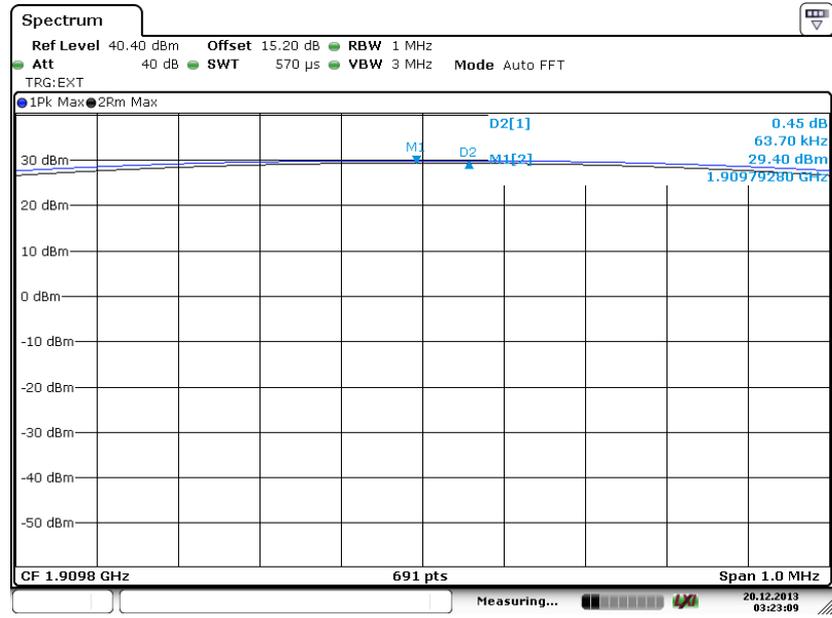


Date : 20 DEC 2013 03:23:09




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

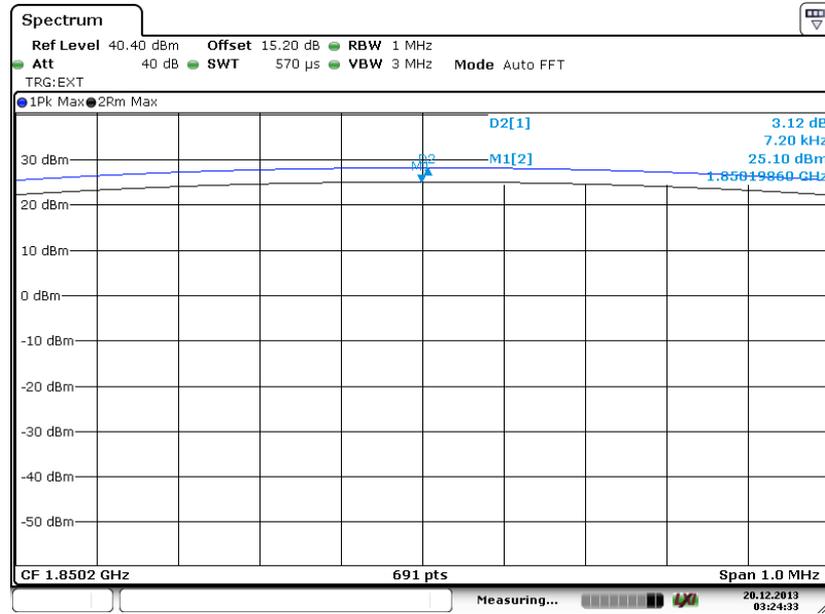

Date: 20 DEC. 2013 03:24:33


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

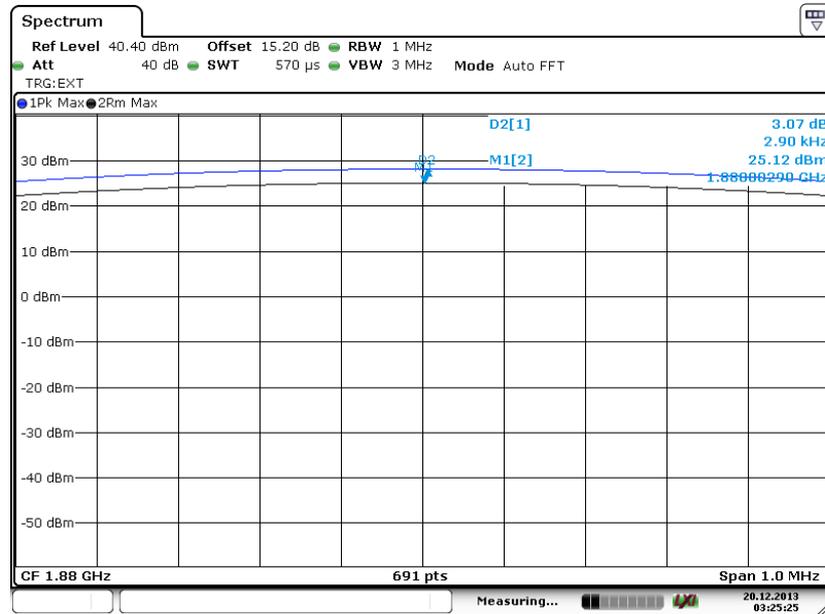

Date: 20 DEC. 2013 03:25:25



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

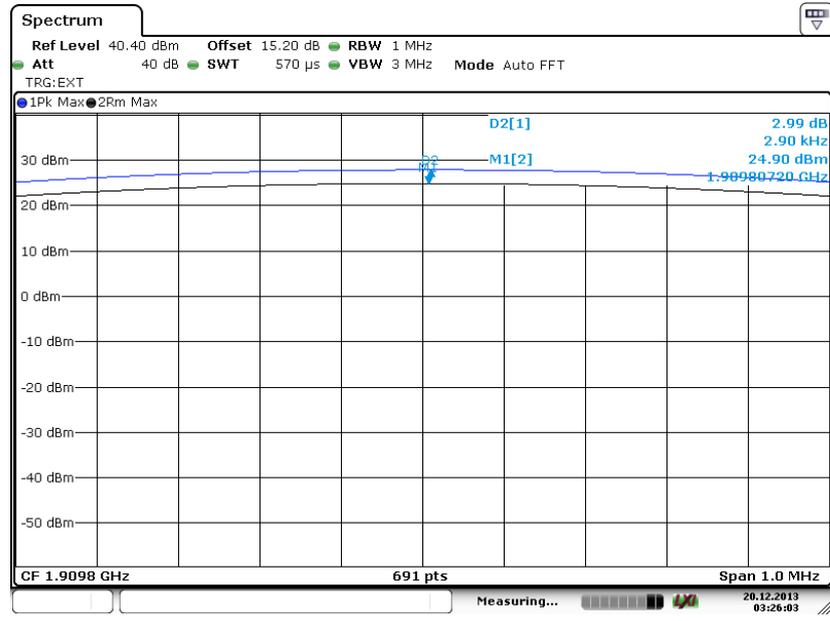


Date : 20 DEC 2013 03:26:04



<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)**

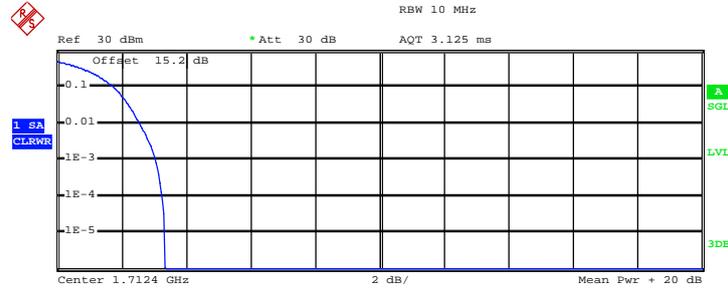


Complementary Cumulative Distribution Function (100000 samples)  
 Trace 1  
 Mean 21.08 dBm  
 Peak 24.42 dBm  
 Crest 3.35 dB

10 %	1.76 dB
1 %	2.56 dB
.1 %	3.08 dB
.01 %	3.28 dB

Date: 20.DEC.2013 18:38:08

**Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)**

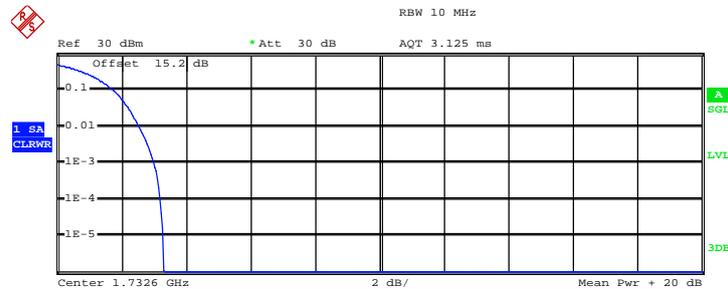


Complementary Cumulative Distribution Function (100000 samples)  
 Trace 1  
 Mean 21.32 dBm  
 Peak 24.63 dBm  
 Crest 3.31 dB

10 %	1.76 dB
1 %	2.56 dB
.1 %	3.00 dB
.01 %	3.20 dB

Date: 20.DEC.2013 18:37:44



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

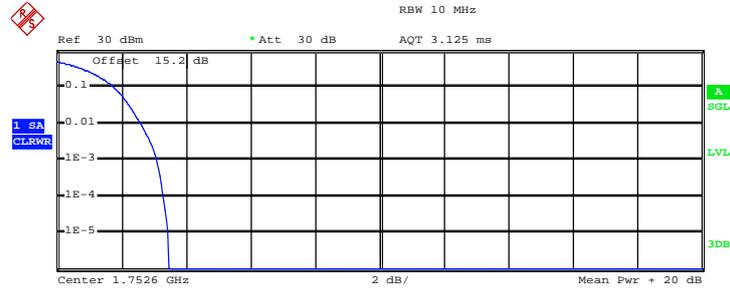

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean    21.51 dBm  
 Peak    24.99 dBm  
 Crest    3.48 dB


10 %    1.76 dB  
 1 %    2.60 dB  
 .1 %    3.08 dB  
 .01 %    3.28 dB

Date: 20.DEC.2013 18:37:13



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)**

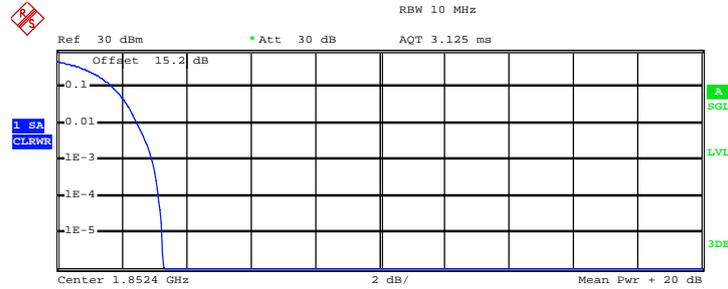


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	22.54 dBm
Peak	25.82 dBm
Crest	3.28 dB
10 %	1.72 dB
1 %	2.48 dB
.1 %	2.96 dB
.01 %	3.16 dB

Date: 20.DEC.2013 01:22:28

**Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

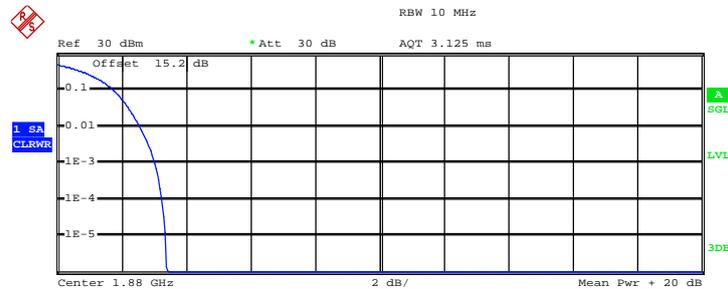

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	22.49 dBm
Peak	25.89 dBm
Crest	3.40 dB
10 %	1.76 dB
1 %	2.56 dB
.1 %	3.04 dB
.01 %	3.24 dB

Date: 20.DEC.2013 01:22:03



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

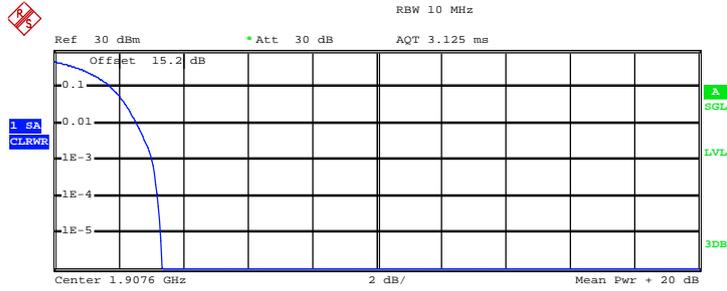

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	22.18 dBm
Peak	25.54 dBm
Crest	3.36 dB
10 %	1.76 dB
1 %	2.56 dB
.1 %	3.04 dB
.01 %	3.20 dB

Date: 20.DEC.2013 01:21:45

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;  
UMTS operating modes: Set RBW= 100 kHz, VBW= 300 kHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per section 4.0 of KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.3.4 Test Setup

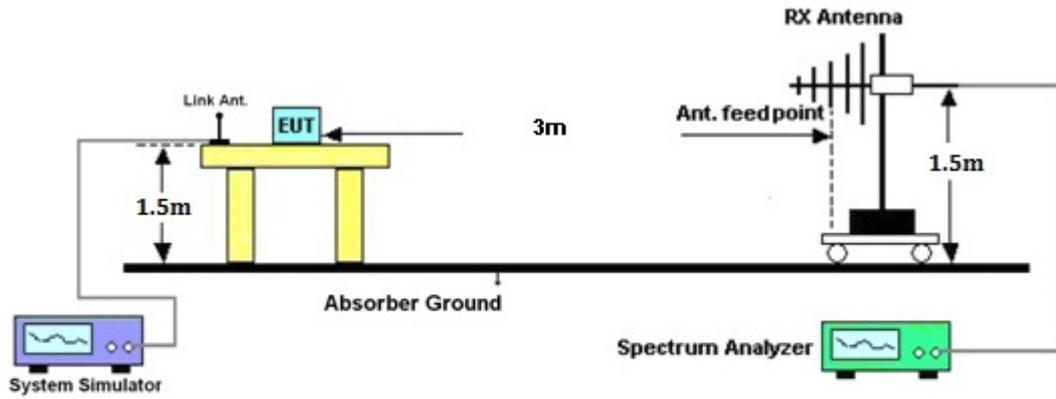

3.3.5 Test Result of ERP

GSM850 (GSM) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-17.06	-48.12	0.00	-1.08	29.98	0.9957
836.40	-16.94	-48.28	0.00	-0.93	30.41	1.0992
848.80	-17.66	-48.35	0.00	-0.76	29.93	0.9832
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-37.10	-47.97	0.00	-1.08	9.79	0.0095
836.40	-37.81	-48.01	0.00	-0.93	9.27	0.0085
848.80	-37.30	-48.05	0.00	-0.76	9.99	0.0100

GSM850 (EDGE class 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-23.22	-48.12	0.00	-1.08	23.82	0.2411
836.40	-22.98	-48.28	0.00	-0.93	24.37	0.2738
848.80	-23.39	-48.35	0.00	-0.76	24.20	0.2630
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-43.82	-47.97	0.00	-1.08	3.07	0.0020
836.40	-41.54	-48.01	0.00	-0.93	5.54	0.0036
848.80	-41.42	-48.05	0.00	-0.76	5.87	0.0039



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-26.85	-48.12	0.00	-1.08	20.19	0.1044
836.40	-26.55	-48.28	0.00	-0.93	20.80	0.1202
846.60	-26.81	-48.35	0.00	-0.76	20.78	0.1197
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-46.24	-47.97	0.00	-1.08	0.65	0.0012
836.40	-46.02	-48.01	0.00	-0.93	1.06	0.0013
846.60	-46.03	-48.05	0.00	-0.76	1.26	0.0013



3.3.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.64	-51.88	0.00	1.96	31.20	1.3197
1880.00	-24.14	-52.99	0.00	2.00	30.85	1.2169
1909.80	-25.28	-54.28	0.00	1.98	30.98	1.2537
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-22.07	-52.13	0.00	1.96	32.02	1.5931
1880.00	-23.59	-53.17	0.00	2.00	31.58	1.4403
1909.80	-24.55	-54.13	0.00	1.98	31.56	1.4335

GSM1900 (EDGE class 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-27.17	-51.88	0.00	1.96	26.67	0.4647
1880.00	-28.23	-52.99	0.00	2.00	26.76	0.4737
1909.80	-28.85	-54.28	0.00	1.98	27.41	0.5508
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-26.59	-52.13	0.00	1.96	27.50	0.5622
1880.00	-27.60	-53.17	0.00	2.00	27.57	0.5715
1909.80	-28.23	-54.13	0.00	1.98	27.88	0.6139



WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1712.40	-29.47	-51.88	0.00	1.96	24.37	0.2735
1732.60	-30.36	-52.99	0.00	2.00	24.63	0.2903
1752.60	-31.53	-54.28	0.00	1.98	24.73	0.2974
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1712.40	-29.88	-52.13	0.00	1.96	24.21	0.2634
1732.60	-30.84	-53.17	0.00	2.00	24.33	0.2711
1752.60	-31.62	-54.13	0.00	1.98	24.49	0.2811

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-30.50	-51.88	0.00	1.96	23.34	0.2160
1880.00	-30.84	-52.99	0.00	2.00	24.15	0.2597
1907.60	-32.66	-54.28	0.00	1.98	23.60	0.2293
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-29.89	-52.13	0.00	1.96	24.20	0.2631
1880.00	-30.38	-53.17	0.00	2.00	24.79	0.3011
1907.60	-31.92	-54.13	0.00	1.98	24.19	0.2626

## 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

### 3.4.4 Test Setup

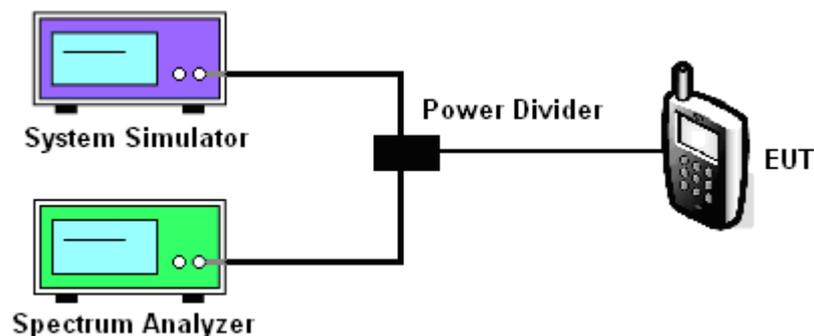

**3.4.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth**

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	244.00	246.00	242.00	246.00	244.00	246.00
26dB BW (kHz)	314.00	318.00	318.00	306.00	308.00	310.00

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	246.00	248.00	246.00	242.00	240.00	244.00
26dB BW (kHz)	312.00	312.00	314.00	310.00	310.00	302.00



<b>Cellular Band</b>			
<b>Modes</b>	<b>WCDMA Band V (RMC 12.2Kbps)</b>		
<b>Channel</b>	<b>4132 (Low)</b>	<b>4182 (Mid)</b>	<b>4233 (High)</b>
<b>Frequency (MHz)</b>	<b>826.4</b>	<b>836.4</b>	<b>846.6</b>
<b>99% OBW (MHz)</b>	4.20	4.16	4.18
<b>26dB BW (MHz)</b>	4.76	4.76	4.76

<b>AWS Band</b>			
<b>Modes</b>	<b>WCDMA Band IV (RMC 12.2Kbps)</b>		
<b>Channel</b>	<b>1312(Low)</b>	<b>1413 (Mid)</b>	<b>1513 (High)</b>
<b>Frequency (MHz)</b>	<b>1712.4</b>	<b>1732.6</b>	<b>1752.6</b>
<b>99% OBW (MHz)</b>	4.22	4.18	4.18
<b>26dB BW (MHz)</b>	4.76	4.76	4.76


<b>PCS Band</b>			
<b>Modes</b>	<b>WCDMA Band II (RMC 12.2Kbps)</b>		
<b>Channel</b>	<b>9262 (Low)</b>	<b>9400 (Mid)</b>	<b>9538 (High)</b>
<b>Frequency (MHz)</b>	<b>1852.4</b>	<b>1880</b>	<b>1907.6</b>
<b>99% OBW (MHz)</b>	4.18	4.18	4.18
<b>26dB BW (MHz)</b>	4.76	4.76	4.76



3.4.6 Test Result (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

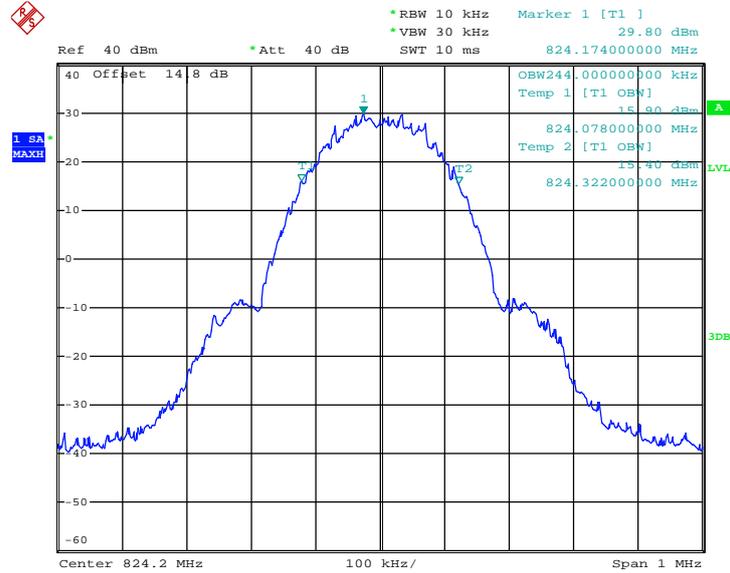

Date: 19.DEC.2013 13:15:33


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

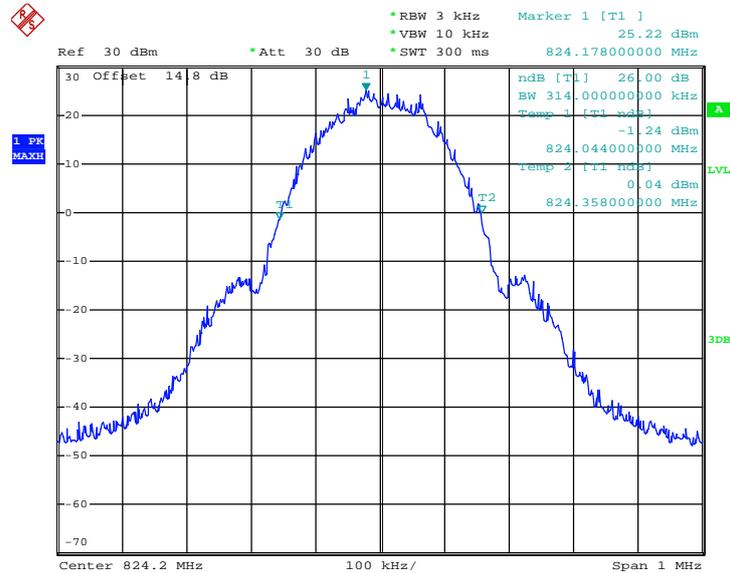

Date: 19.DEC.2013 13:11:00




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

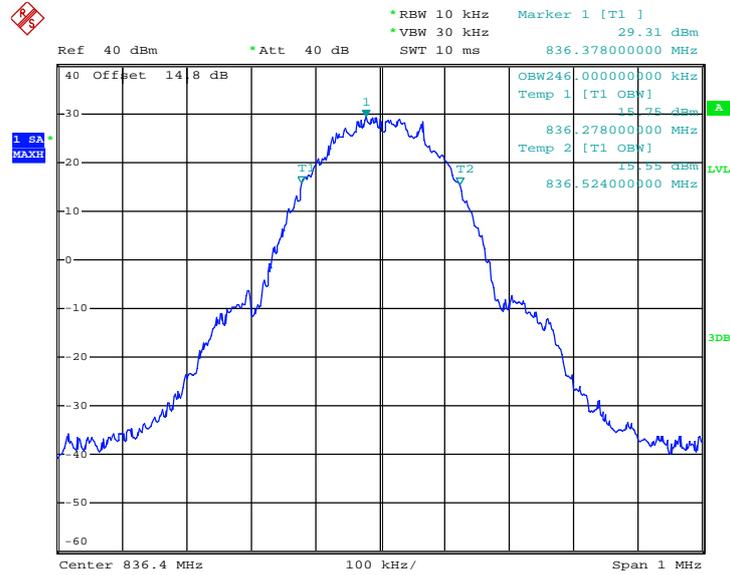

Date: 19.DEC.2013 13:16:13


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

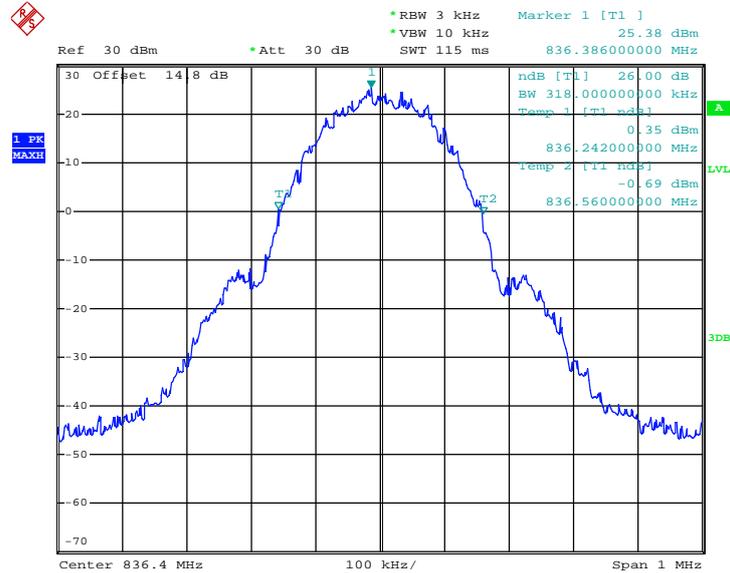

Date: 19.DEC.2013 13:12:19




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

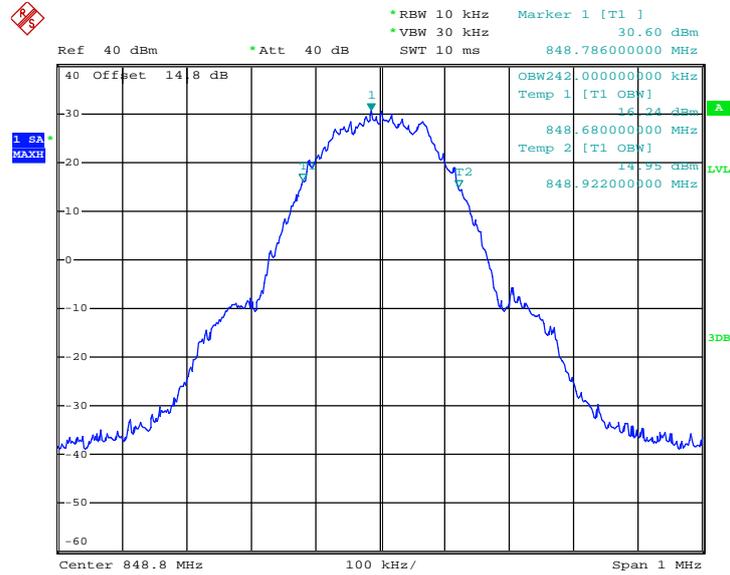

Date: 19.DEC.2013 13:17:17

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

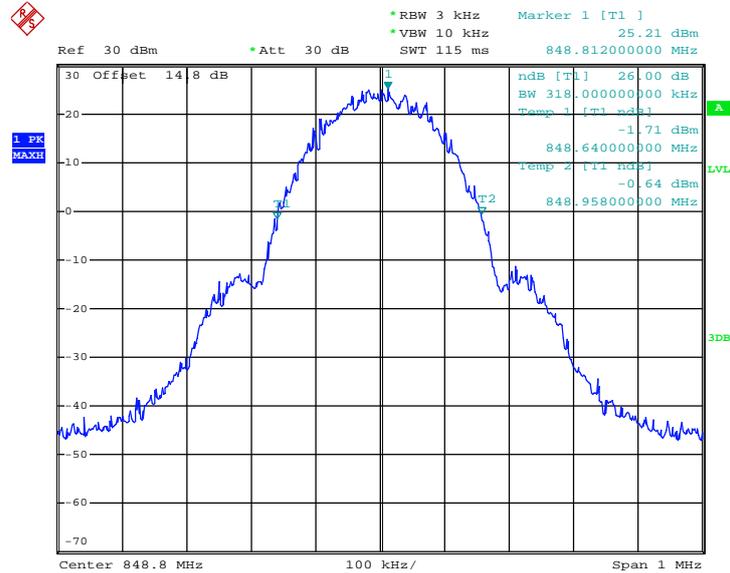


Date: 19.DEC.2013 13:13:45




<b>Band :</b>	GSM 850	<b>Test Mode :</b>	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

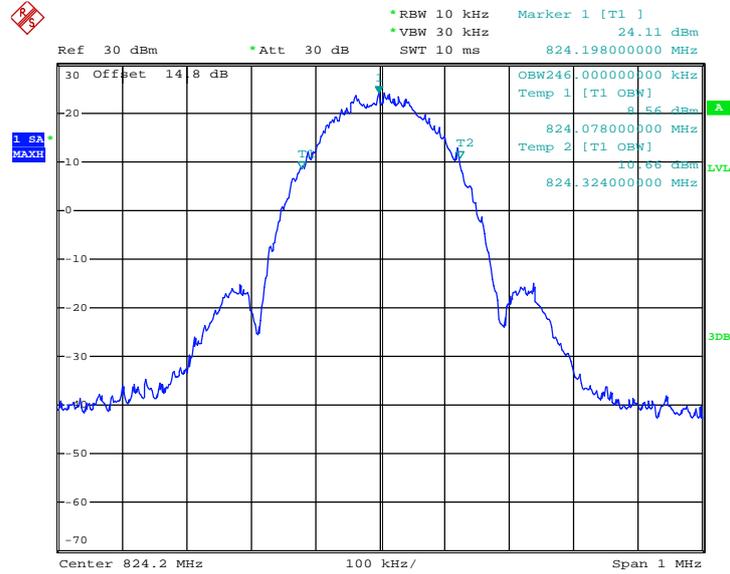

Date: 19.DEC.2013 13:59:23


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

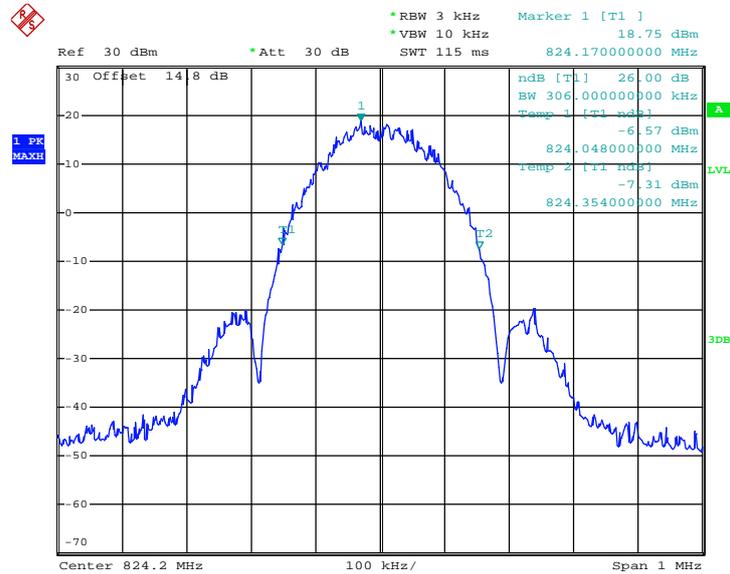

Date: 19.DEC.2013 13:51:33




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

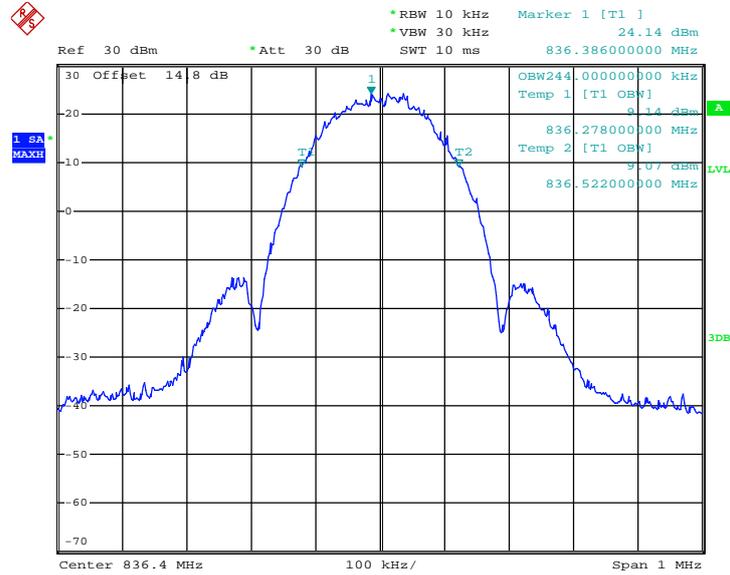

Date: 19.DEC.2013 13:58:17


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

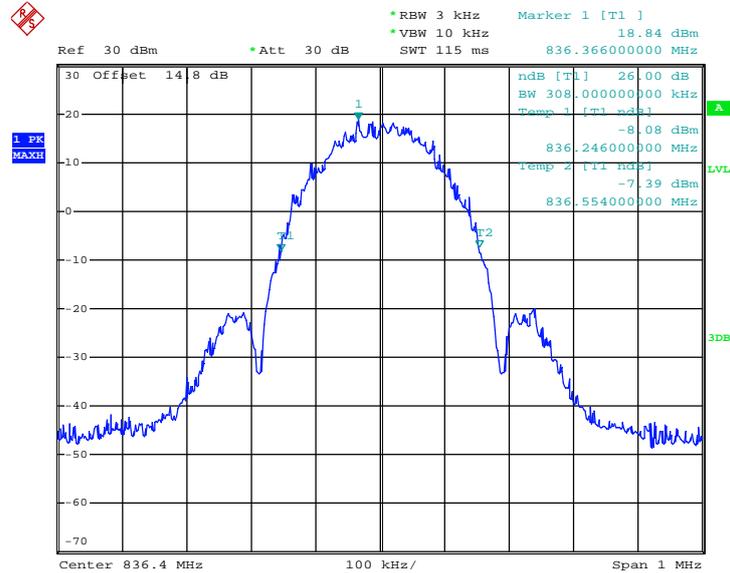

Date: 19.DEC.2013 13:52:37




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

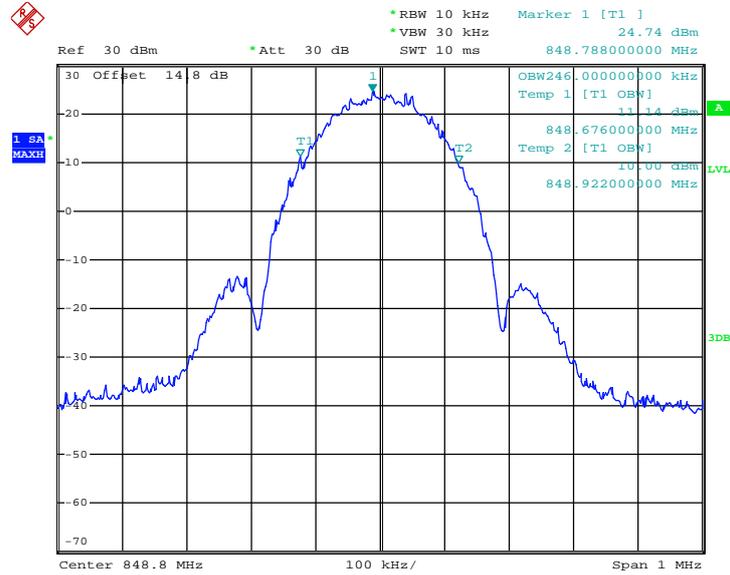

Date: 19.DEC.2013 13:56:20

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

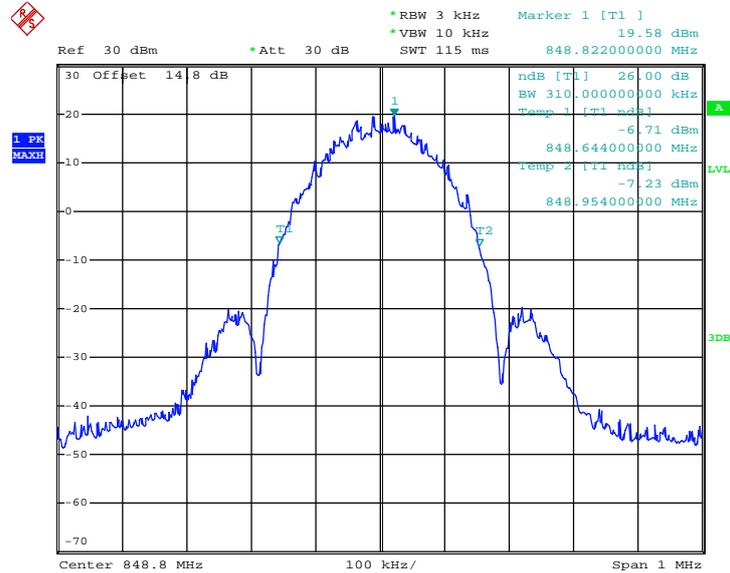


Date: 19.DEC.2013 13:53:45




Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

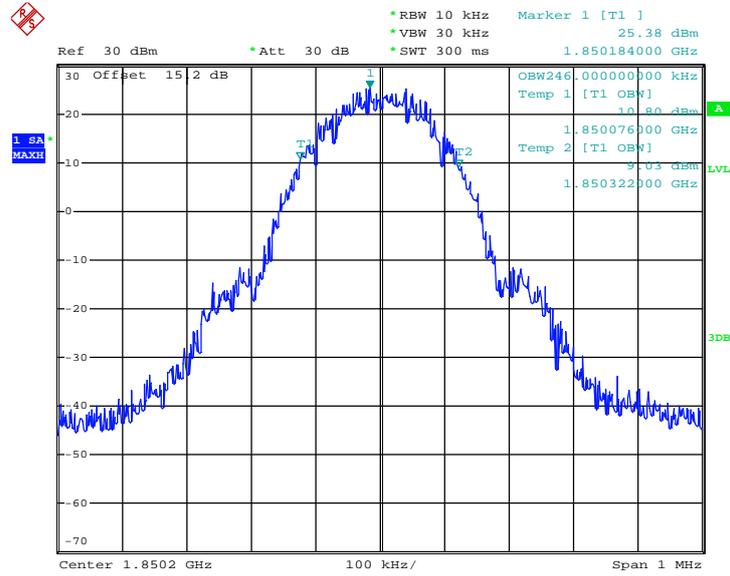

Date: 19.DEC.2013 23:59:00


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

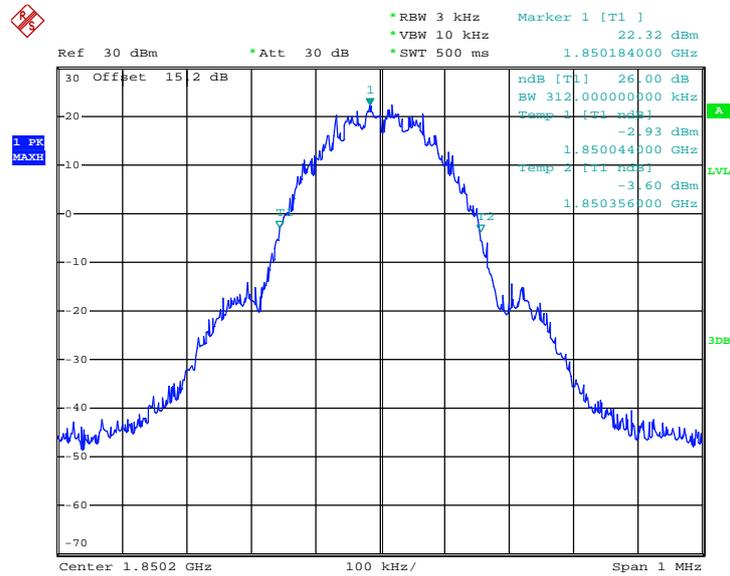

Date: 20.DEC.2013 00:11:53




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

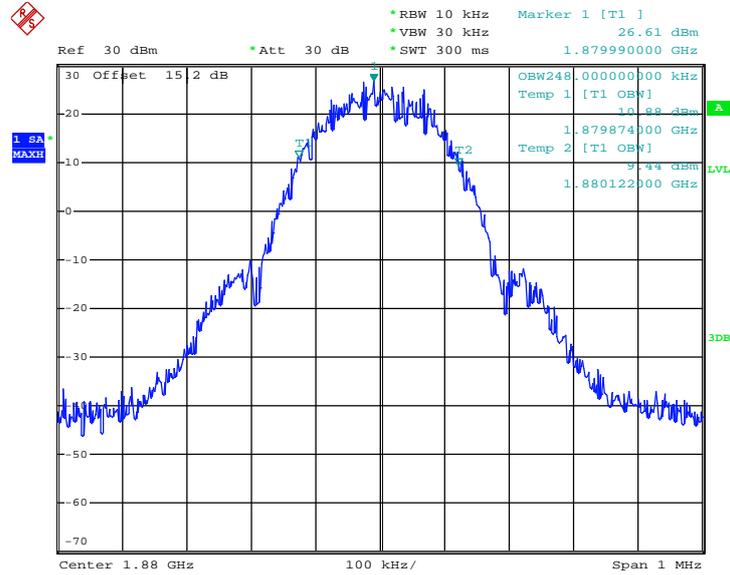

Date: 19.DEC.2013 23:58:06


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

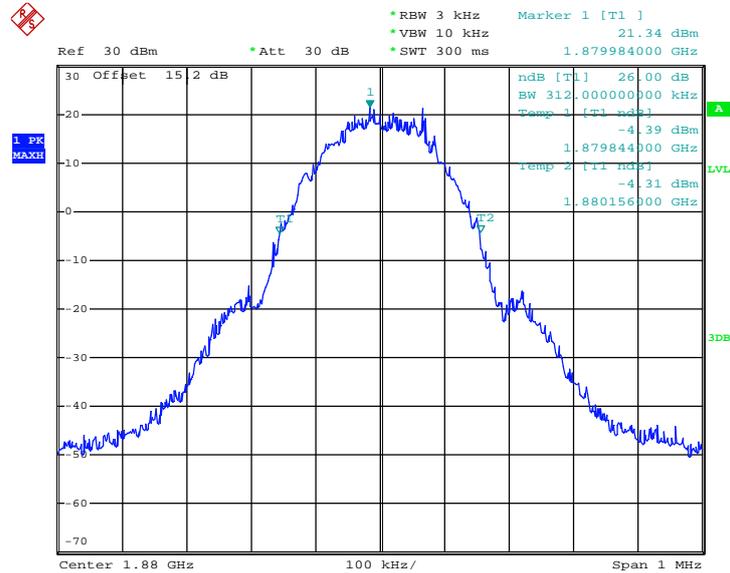

Date: 14.JAN.2014 18:48:36




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

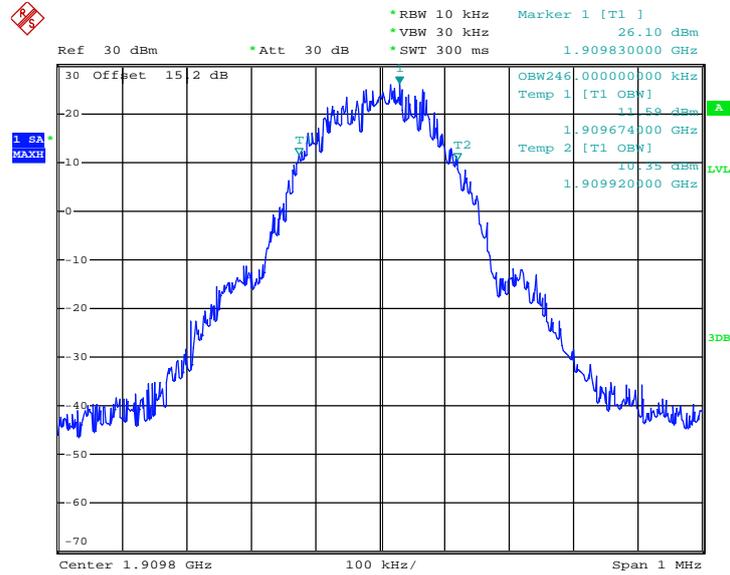

Date: 19.DEC.2013 23:57:16

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

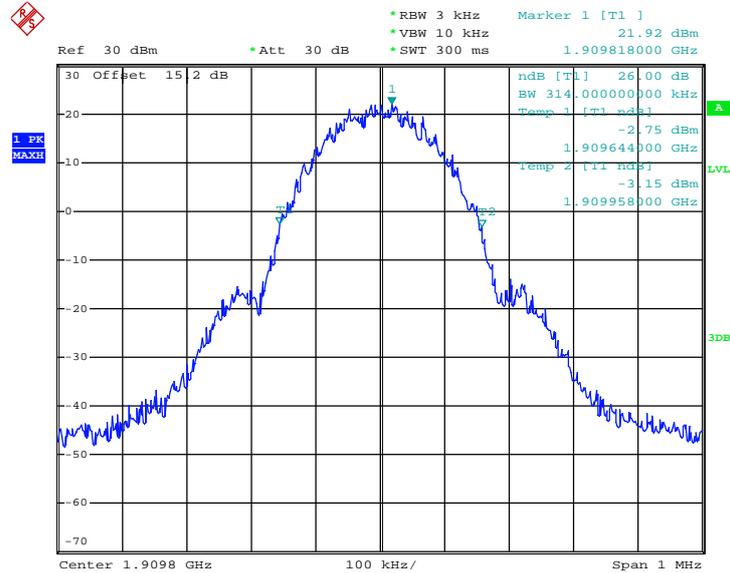


Date: 19.DEC.2013 23:45:16




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

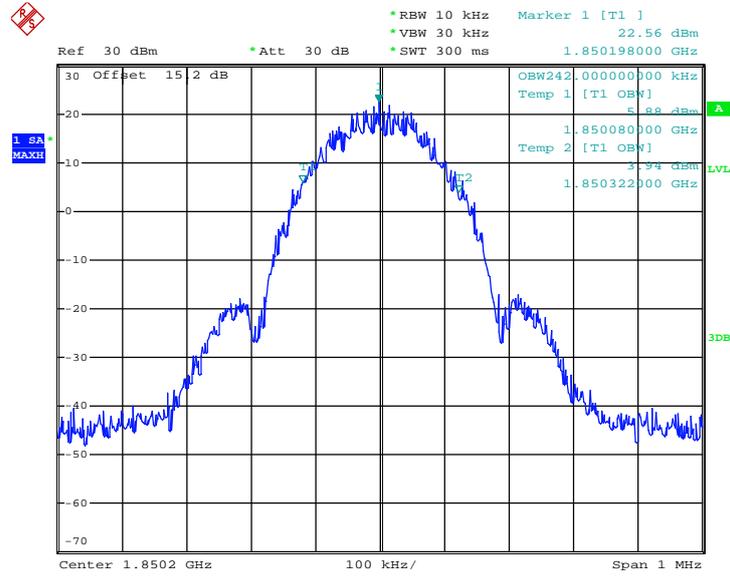

Date: 20.DEC.2013 00:40:52


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

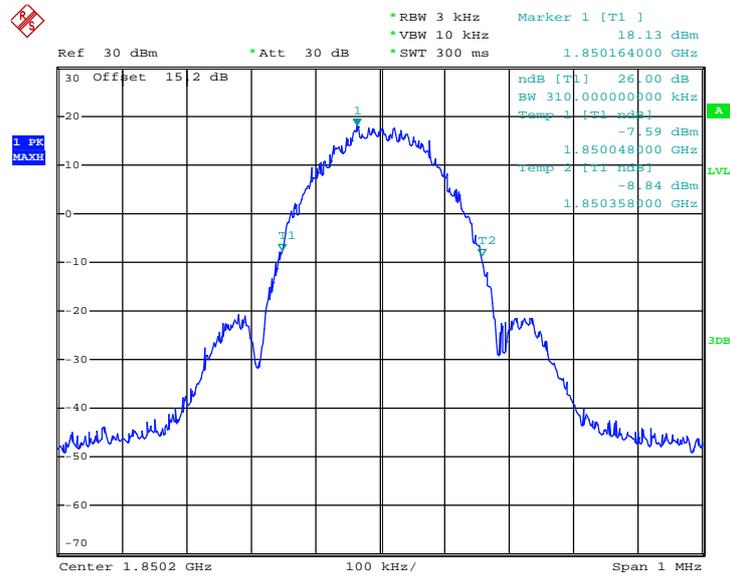

Date: 20.DEC.2013 00:50:12




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

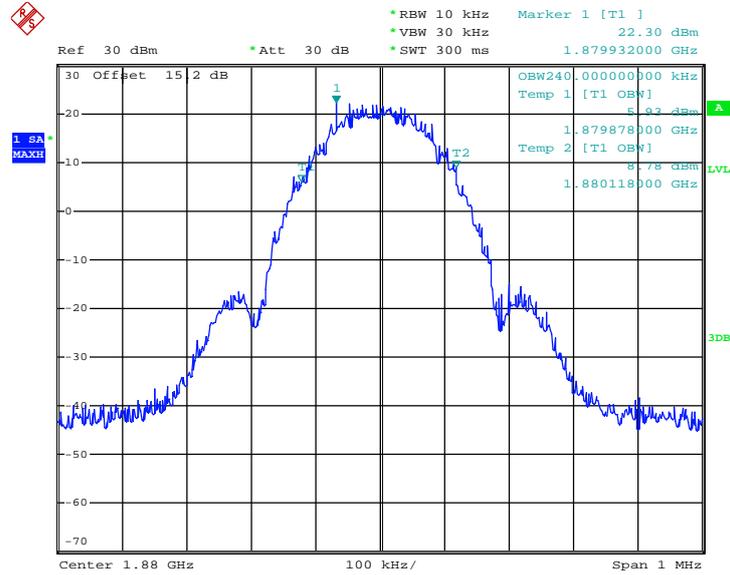

Date: 20.DEC.2013 00:39:03


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

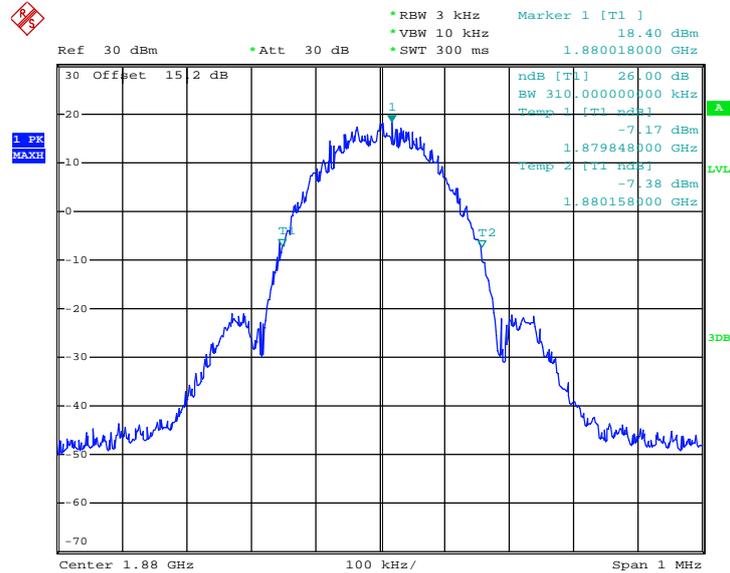

Date: 20.DEC.2013 00:48:23




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

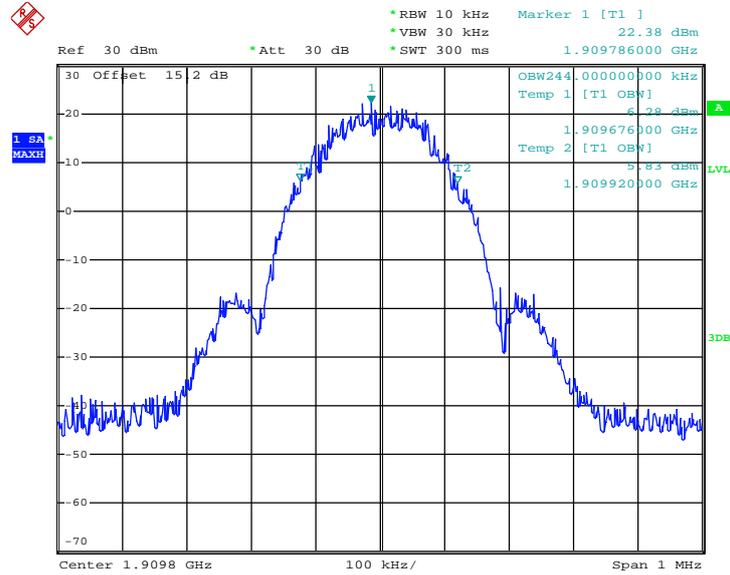

Date: 20.DEC.2013 00:37:06

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

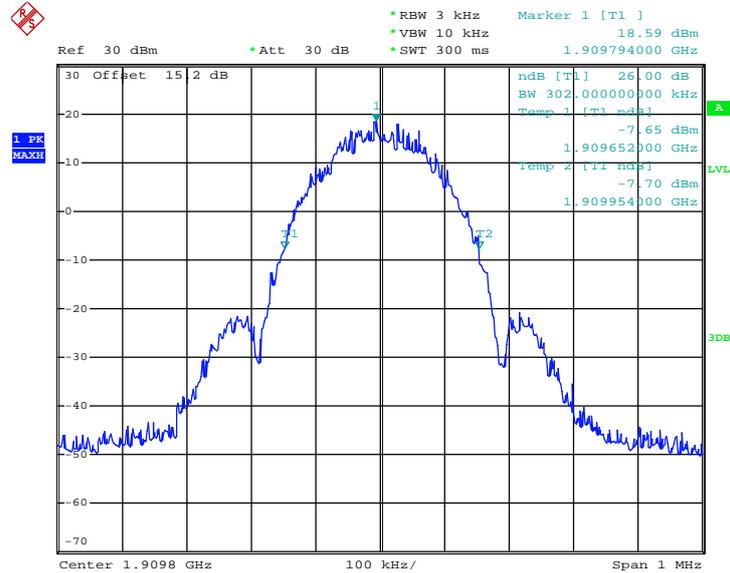


Date: 20.DEC.2013 00:47:36




<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

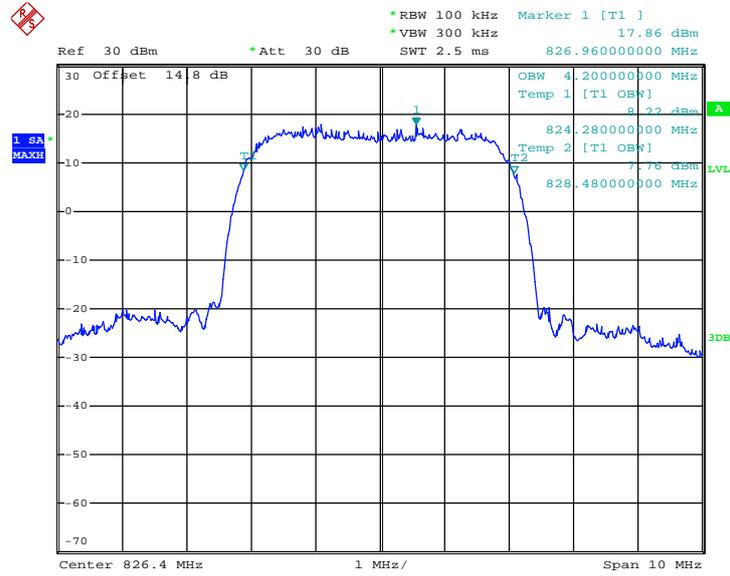

Date: 19.DEC.2013 14:20:07


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

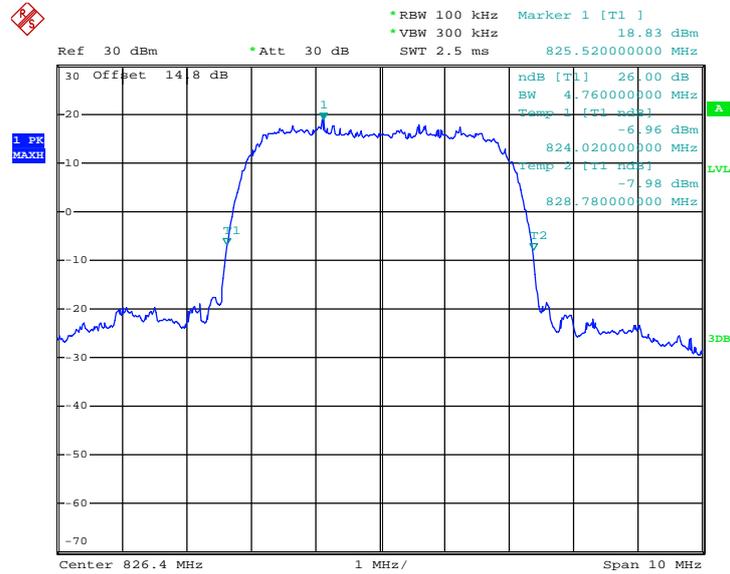

Date: 19.DEC.2013 14:16:01




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

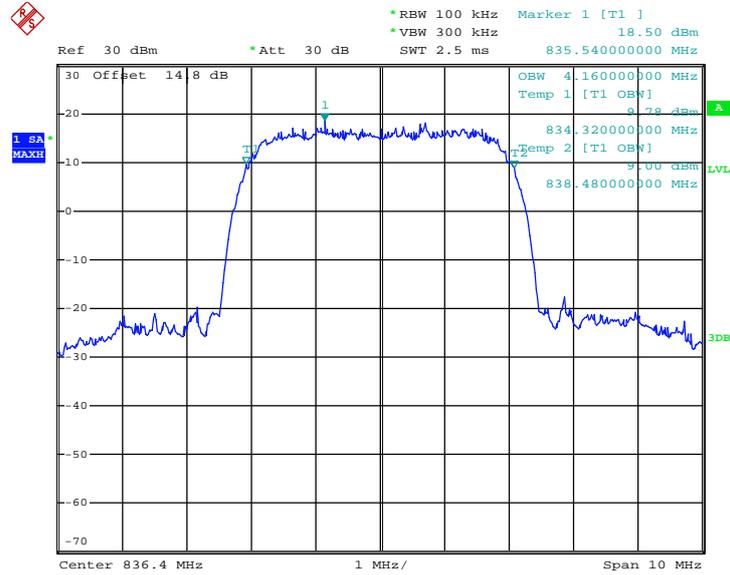

Date: 19.DEC.2013 14:19:15


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

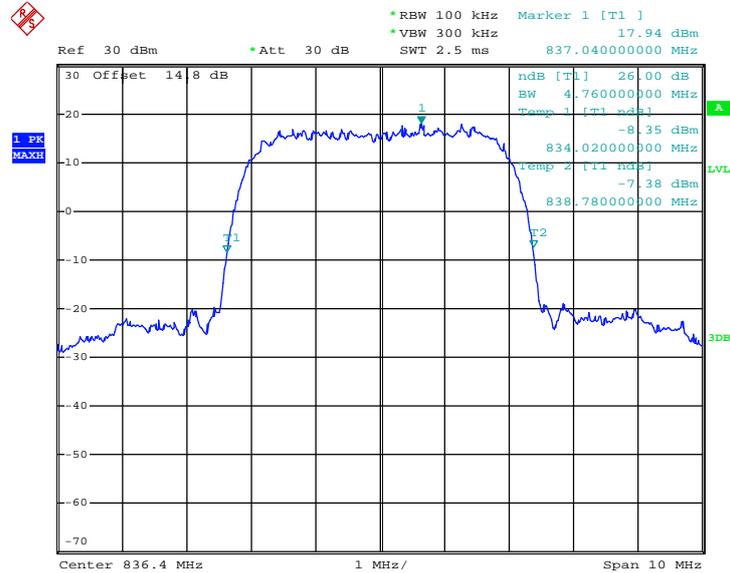

Date: 19.DEC.2013 14:16:38




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

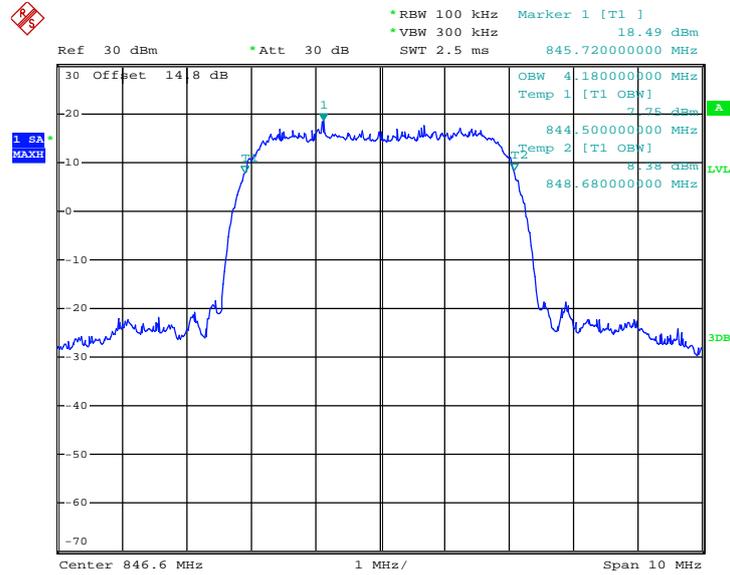

Date: 19.DEC.2013 14:18:31

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

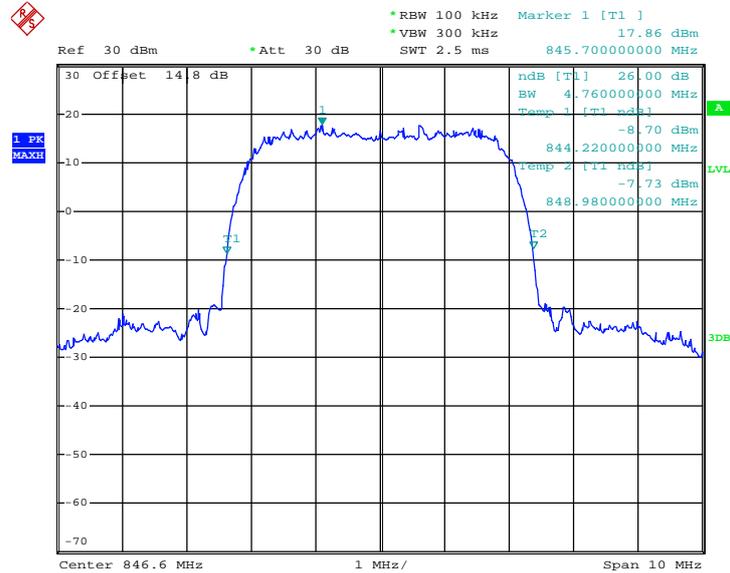


Date: 19.DEC.2013 14:17:23




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)

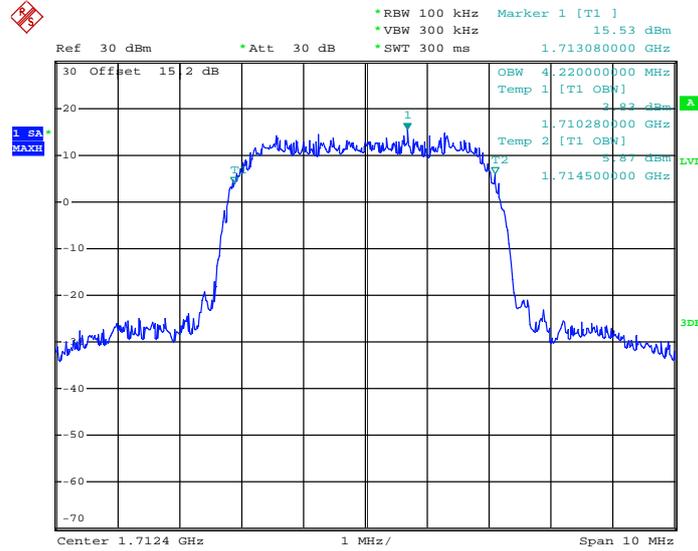

Date: 20.DEC.2013 18:28:14


26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)

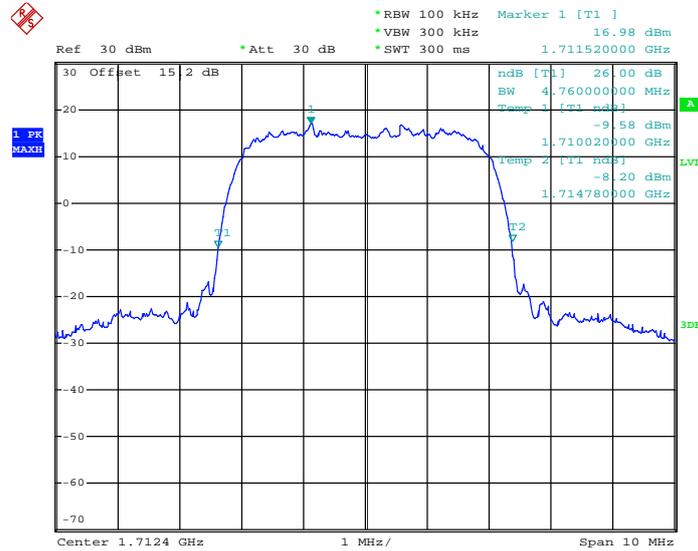

Date: 20.DEC.2013 18:26:55




99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

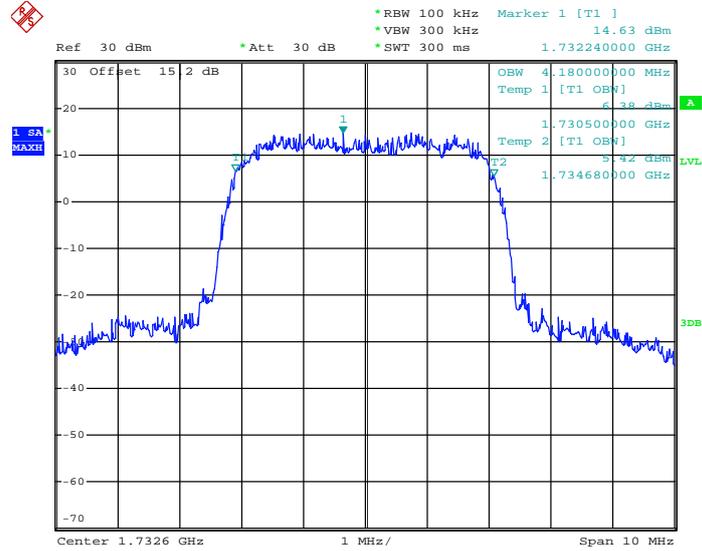

Date: 20.DEC.2013 18:28:40


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)

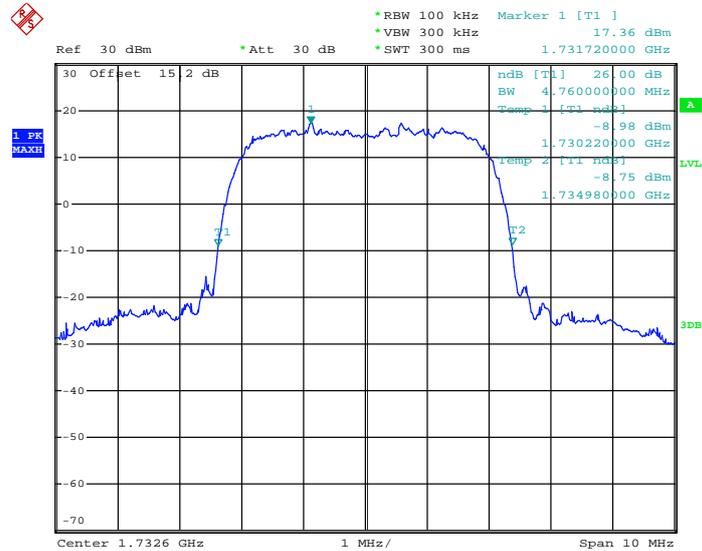

Date: 20.DEC.2013 18:27:22




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

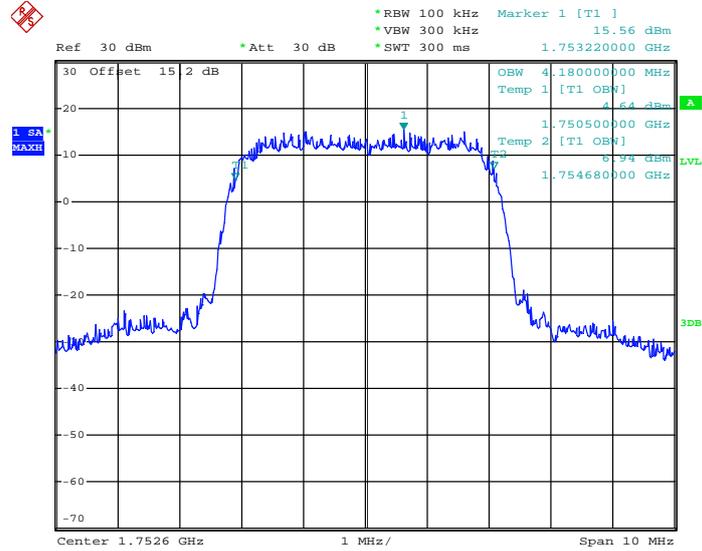

Date: 20.DEC.2013 18:29:07

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

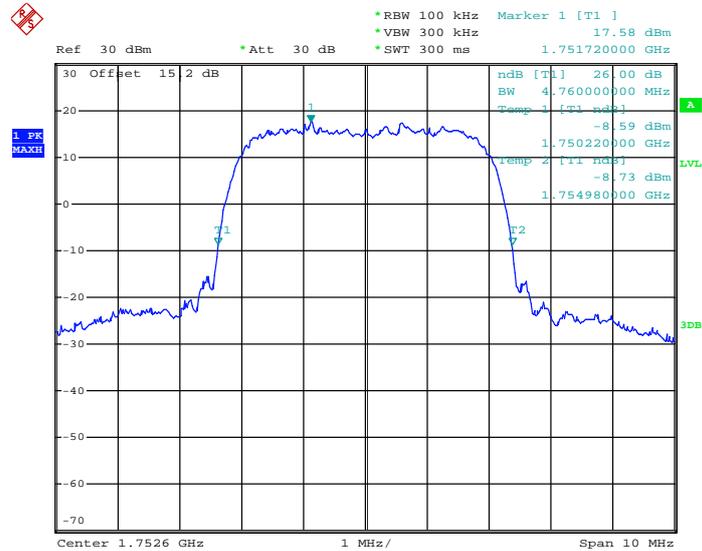


Date: 20.DEC.2013 18:27:48




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

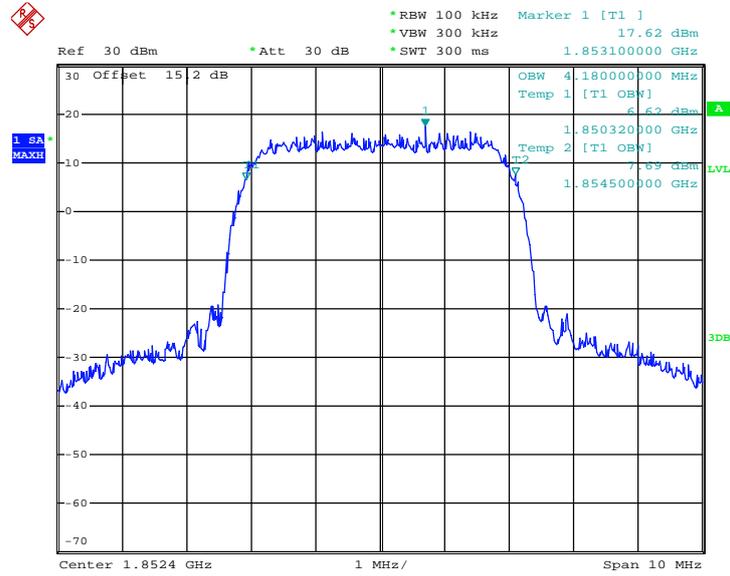

Date: 20.DEC.2013 01:14:20


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

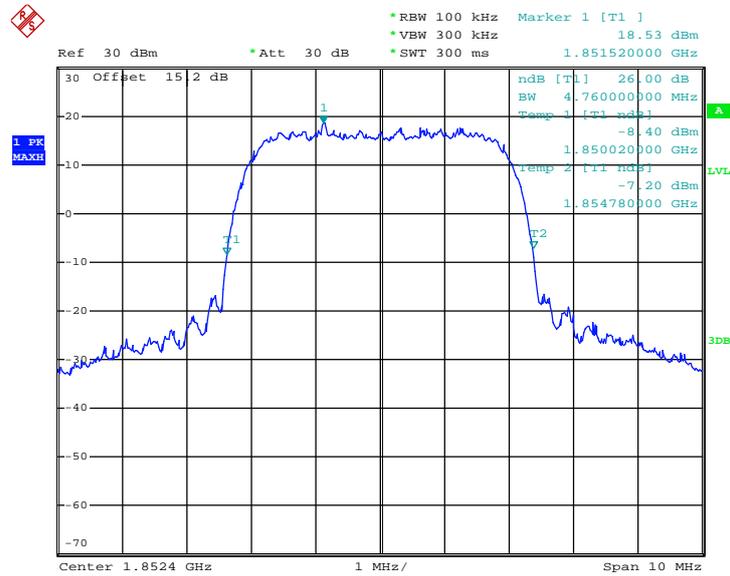

Date: 20.DEC.2013 01:11:36




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

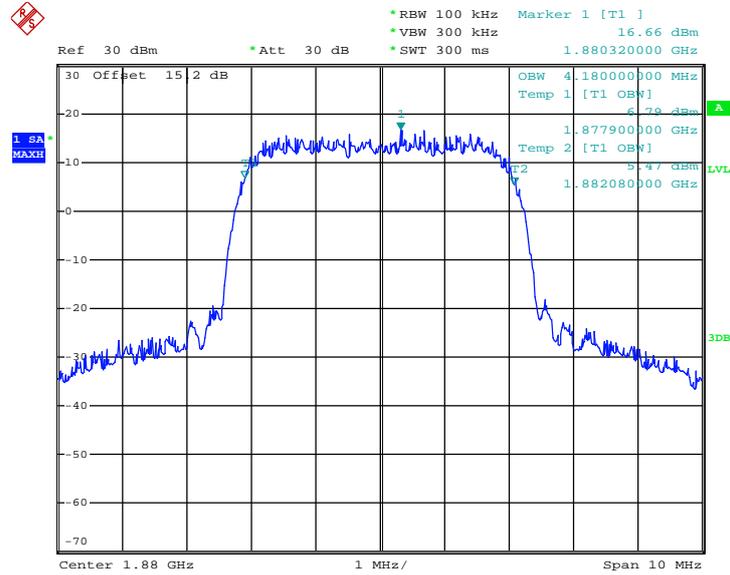

Date: 20.DEC.2013 01:13:29


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

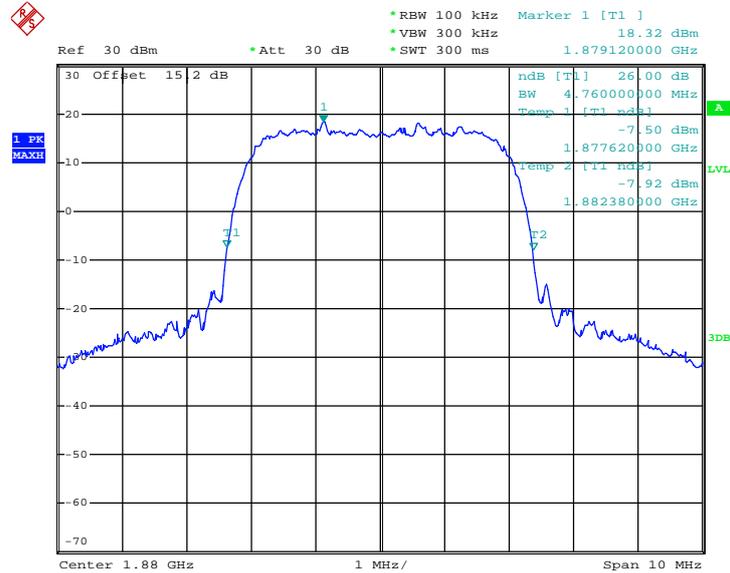

Date: 20.DEC.2013 01:11:07




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

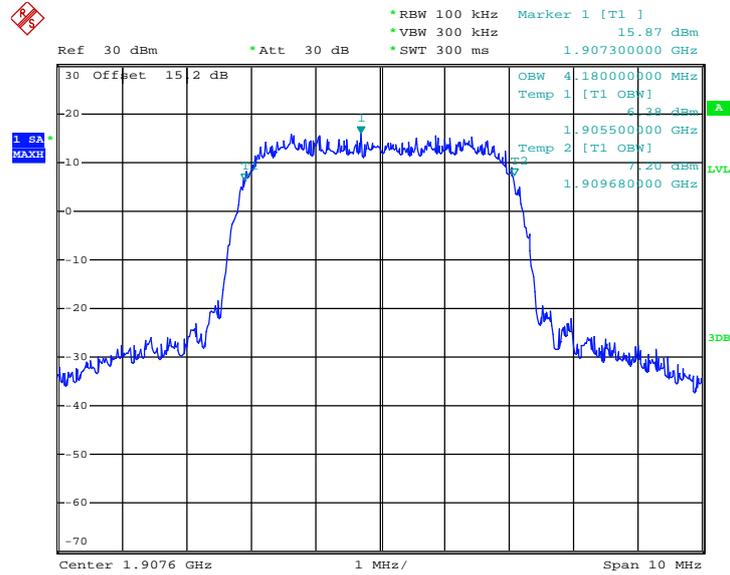

Date: 20.DEC.2013 01:12:52

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

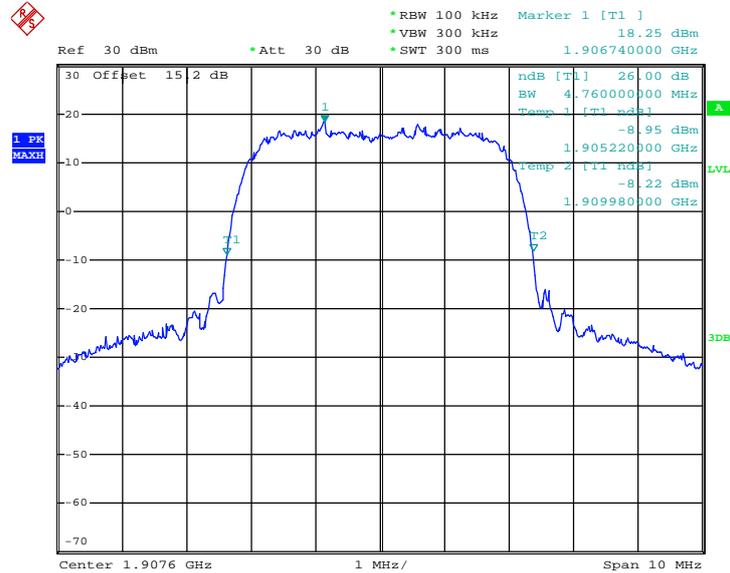

Date: 20.DEC.2013 01:12:00

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly  $BW/100$ .
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
  - =  $P(W) - [43 + 10\log(P)]$  (dB)
  - =  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)
  - = -13dBm.


#### 3.5.4 Test Setup

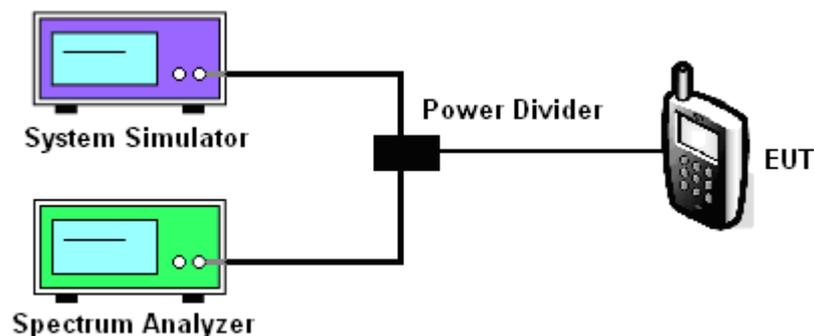

### 3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-16.12dBm	Measurement Value :	-16.37dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

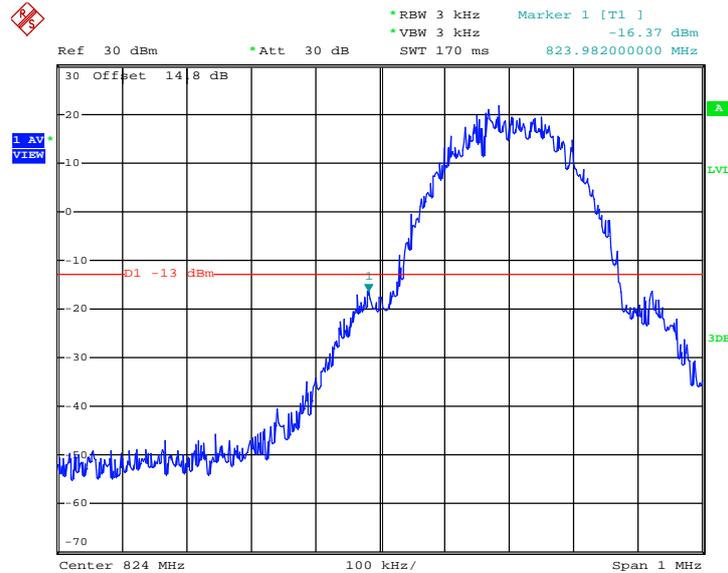


Date: 19.DEC.2013 13:22:21

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-15.69dBm	Measurement Value :	-15.94dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

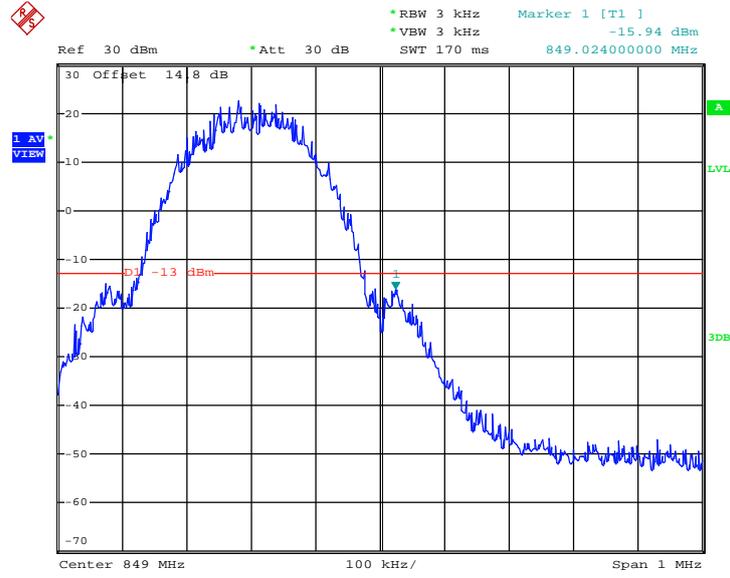


Date: 19.DEC.2013 13:23:36

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-20.64dBm	Measurement Value :	-20.78dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

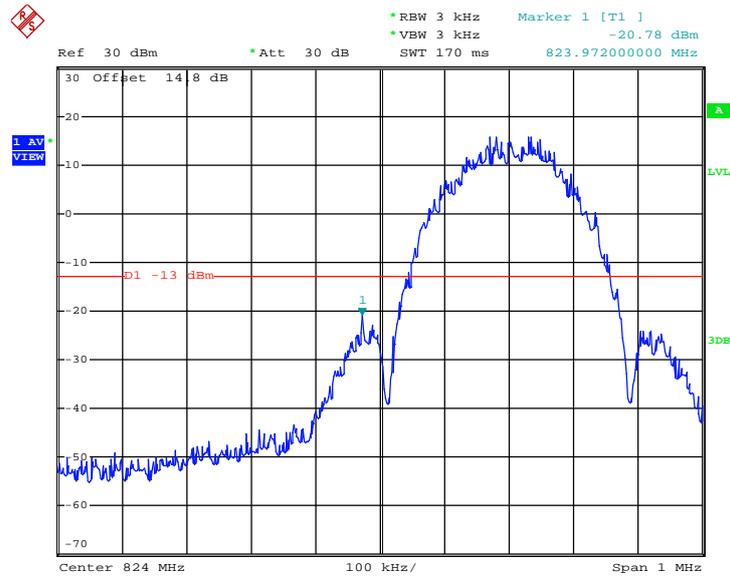


Date: 19.DEC.2013 14:04:41

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-22.45dBm	Measurement Value :	-22.59dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

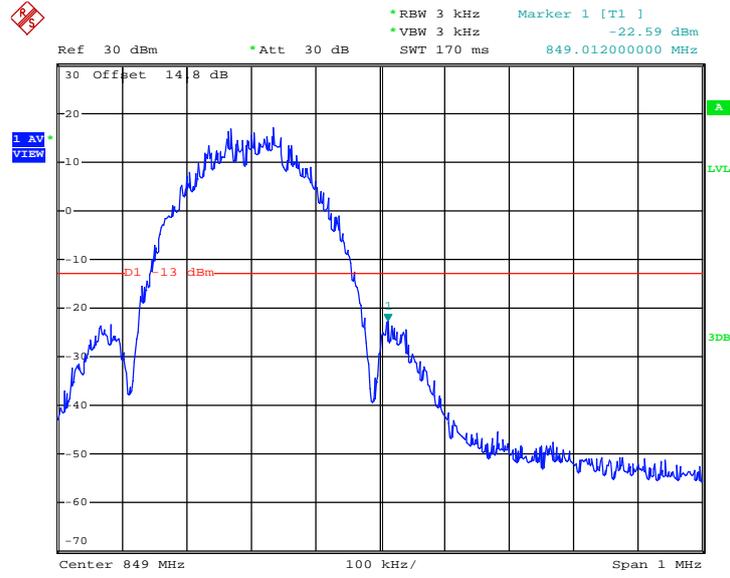


Date: 19.DEC.2013 14:05:50

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.20dB	Maximum 26dB Bandwidth :	0.314MHz
Band Edge :	-18.62dBm	Measurement Value :	-18.82dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

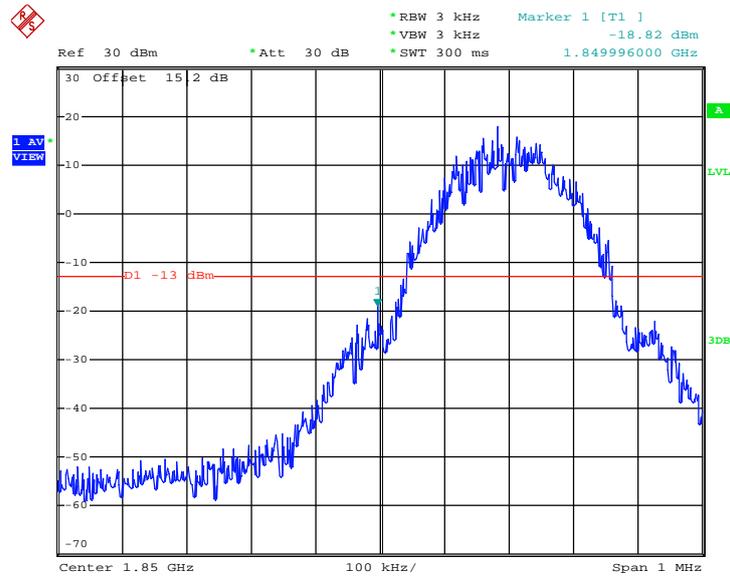


Date: 19.DEC.2013 23:48:53

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
Correction Factor :	0.20dB	Maximum 26dB Bandwidth :	0.314MHz
Band Edge :	-19.31dBm	Measurement Value :	-19.51dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

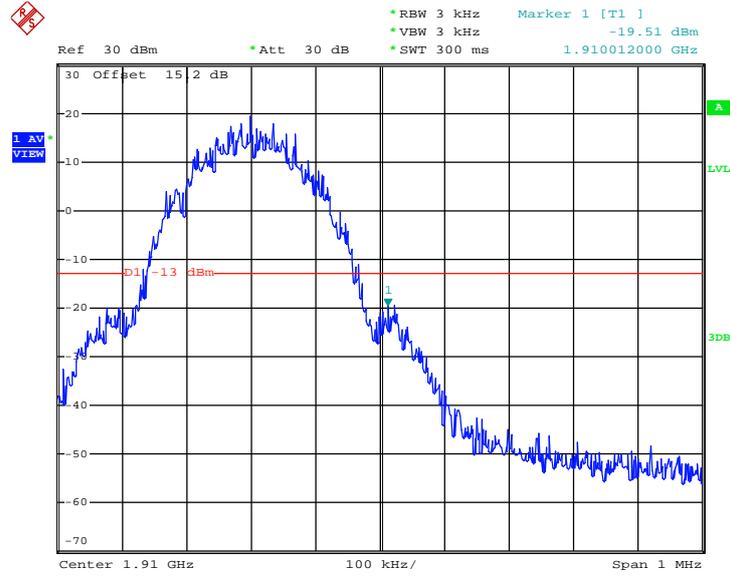


Date: 19.DEC.2013 23:47:53

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-26.37dBm	Measurement Value :	-26.51dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

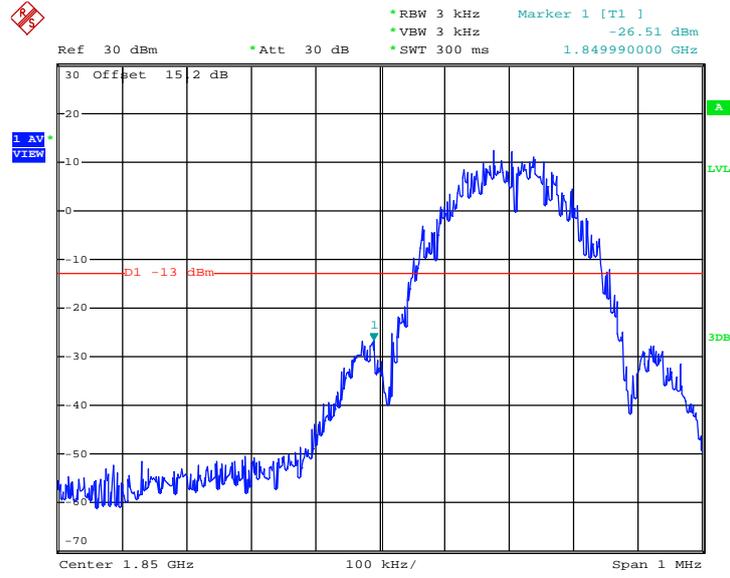


Date: 20.DEC.2013 00:51:06

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-28.70dBm	Measurement Value :	-28.84dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

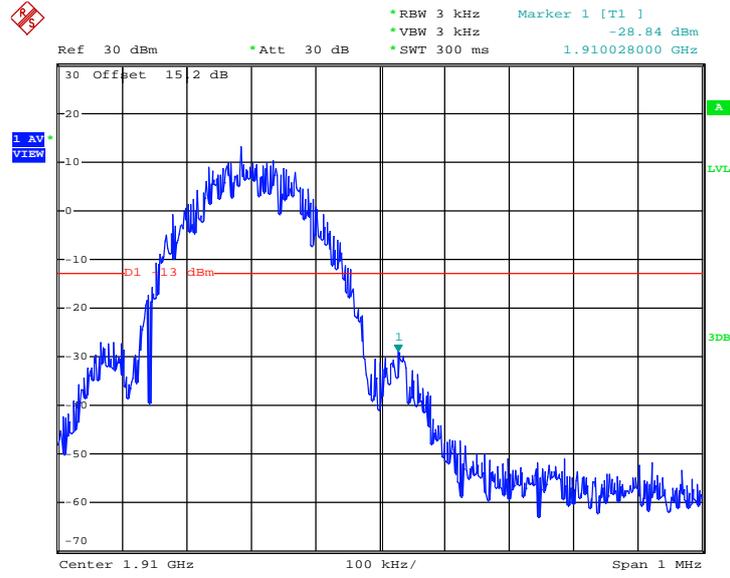


Date: 20.DEC.2013 00:51:40

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.22dB	Maximum 26dB Bandwidth :	4.760MHz
Band Edge :	-23.54dBm	Measurement Value :	-20.32dBm

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

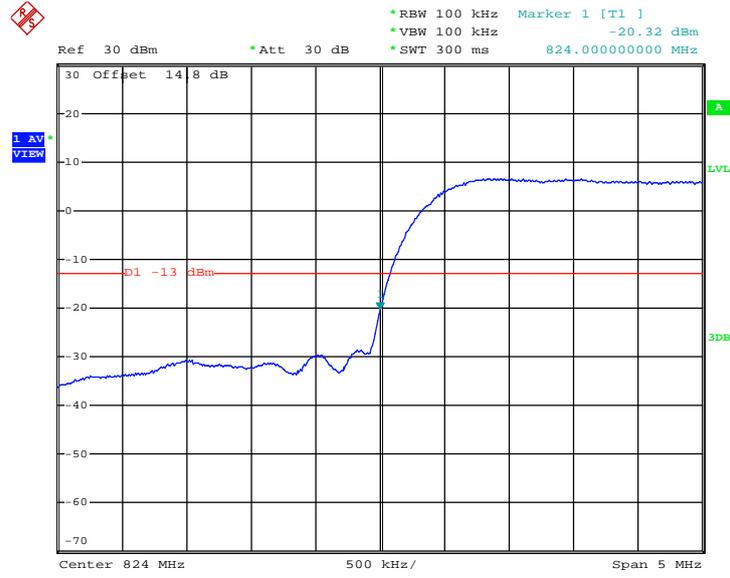


Date: 19.DEC.2013 14:39:21

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.22dB	Maximum 26dB Bandwidth :	4.760MHz
Band Edge :	-23.33dBm	Measurement Value :	-20.11dBm

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

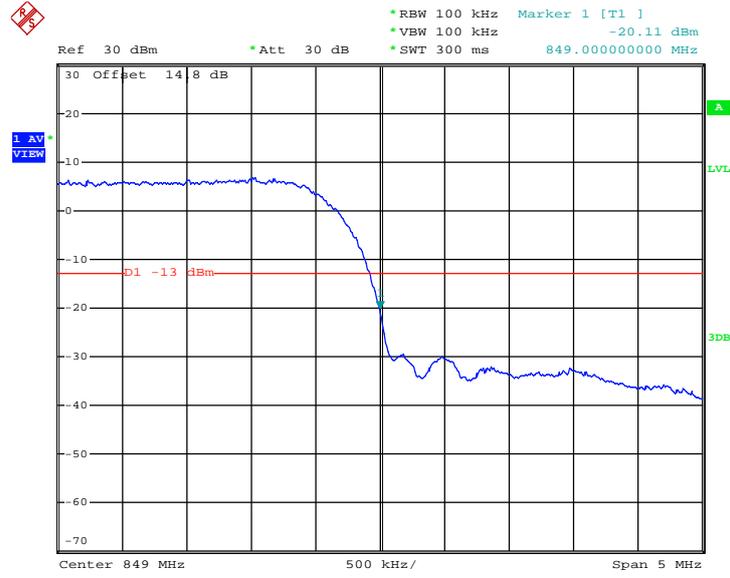


Date: 19.DEC.2013 14:38:50

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
<b>Correction Factor :</b>	-3.22dB	<b>Maximum 26dB Bandwidth :</b>	4.760MHz
<b>Band Edge :</b>	-25.33dBm	<b>Measurement Value :</b>	-22.11dBm

Lower Band Edge Plot on Channel 1312 (1712.4 MHz)

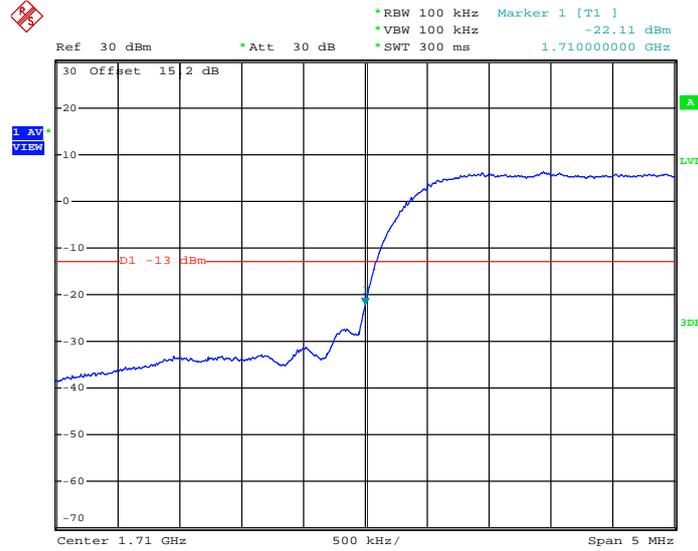


Date: 20.DEC.2013 18:30:35

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band IV	<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)
<b>Correction Factor :</b>	-3.22dB	<b>Maximum 26dB Bandwidth :</b>	4.760MHz
<b>Band Edge :</b>	-24.84dBm	<b>Measurement Value :</b>	-21.62dBm

Higher Band Edge Plot on Channel 1513 (1752.6 MHz)

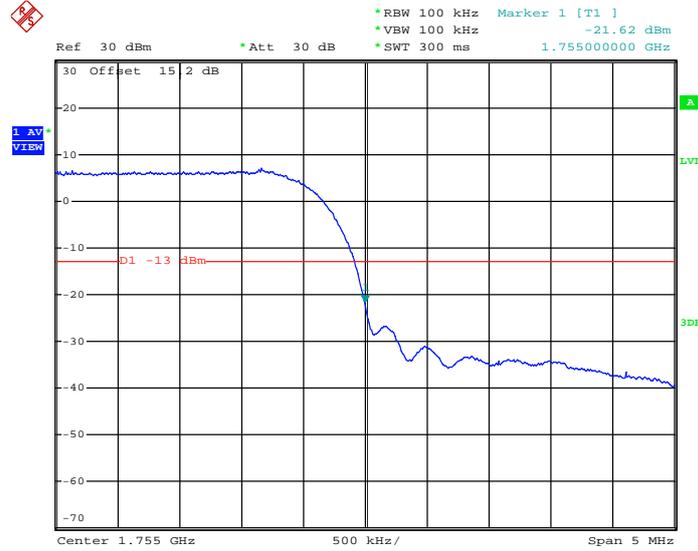


Date: 20.DEC.2013 18:31:01

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.22dB	Maximum 26dB Bandwidth :	4.760MHz
Band Edge :	-24.59dBm	Measurement Value :	-21.37dBm

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

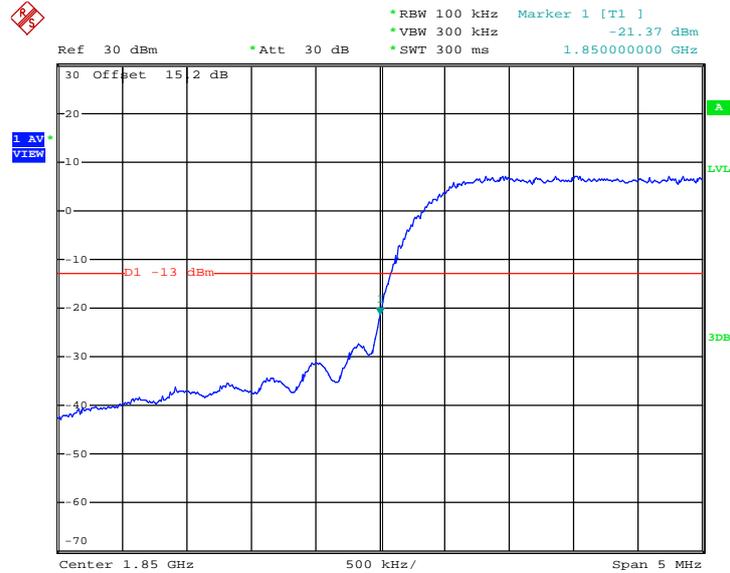


Date: 20.DEC.2013 01:19:48

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.22dB	Maximum 26dB Bandwidth :	4.760MHz
Band Edge :	-24.49dBm	Measurement Value :	-21.27dBm

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

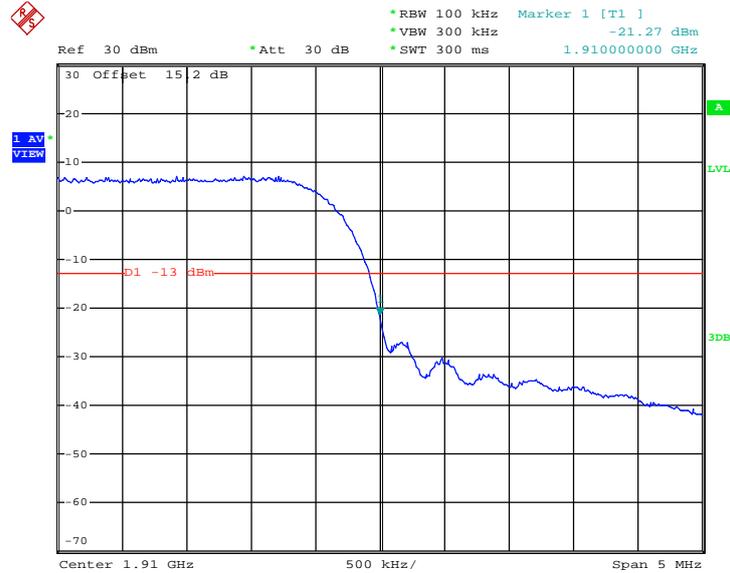

Date: 20.DEC.2013 01:20:20

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

### 3.6 Conducted Spurious Emission Measurement

#### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)
 
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

#### 3.6.4 Test Setup

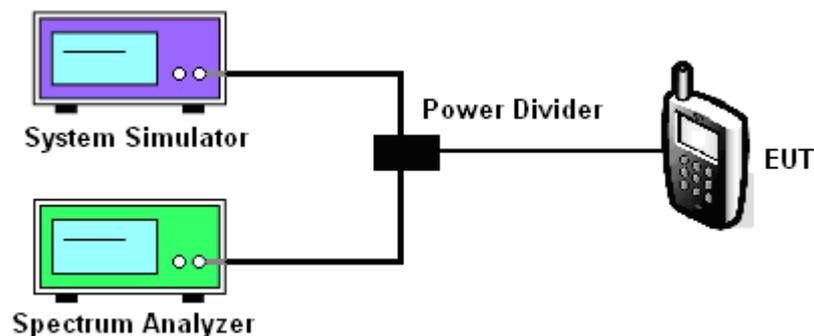




3.6.5 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

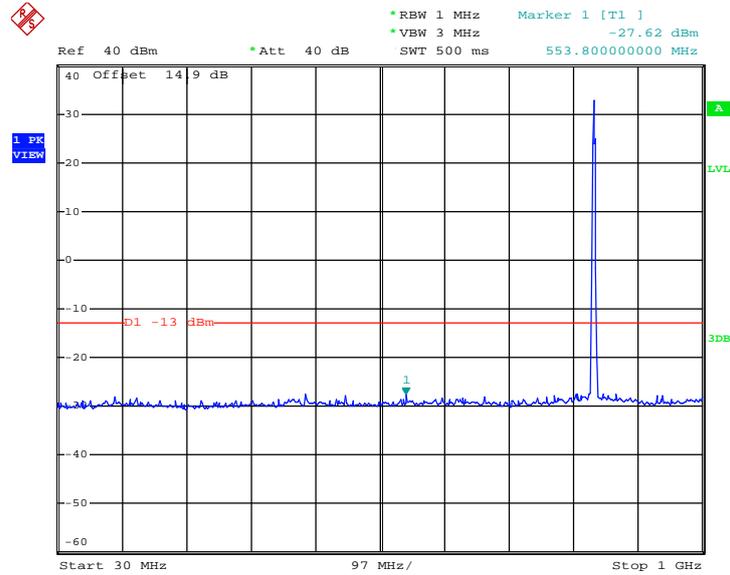

Date: 19.DEC.2013 13:39:54


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

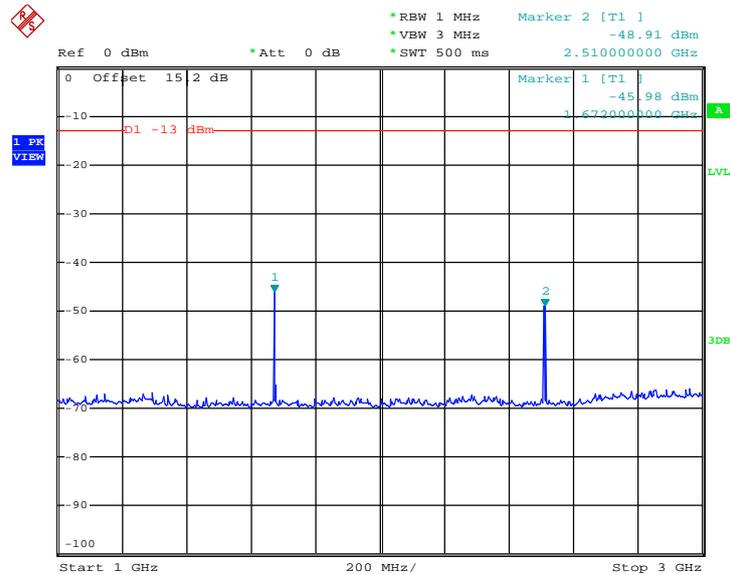

Date: 19.DEC.2013 13:34:03




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

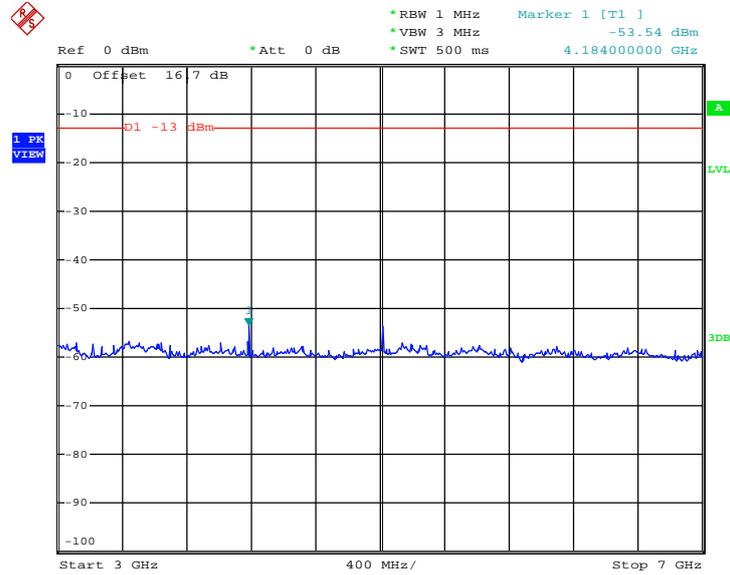

Date: 19.DEC.2013 13:34:53

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

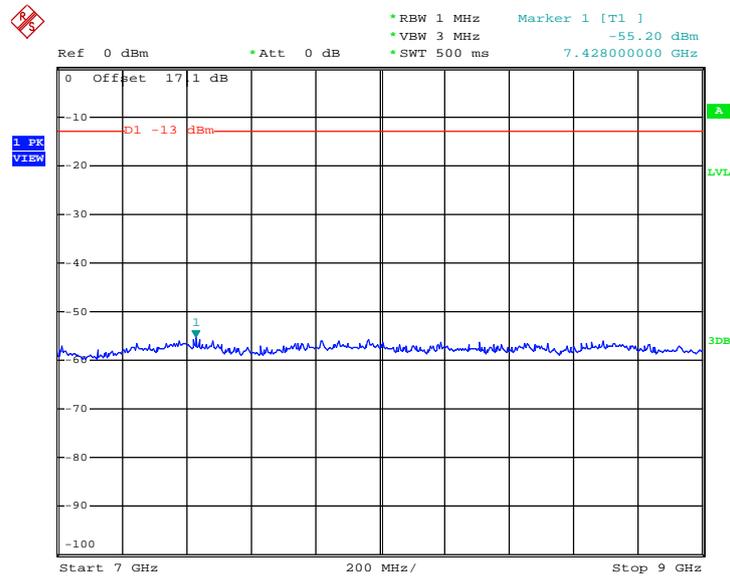


Date: 19.DEC.2013 13:35:42




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

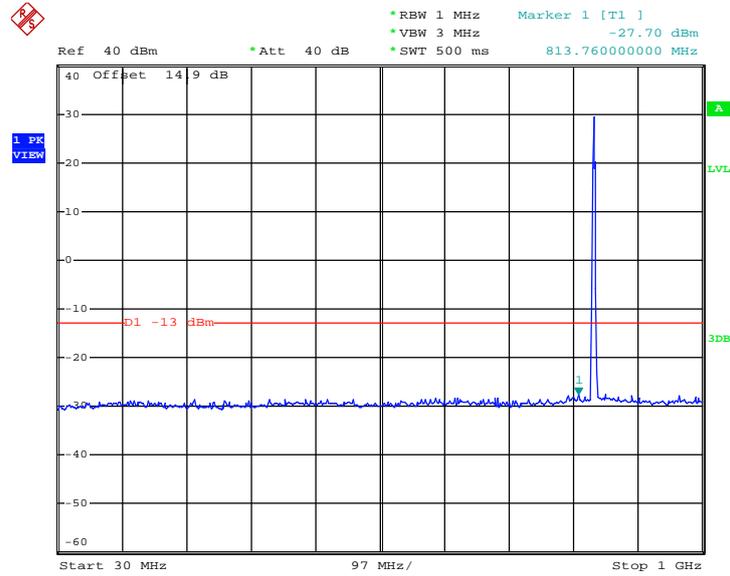

Date: 19.DEC.2013 13:45:14


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

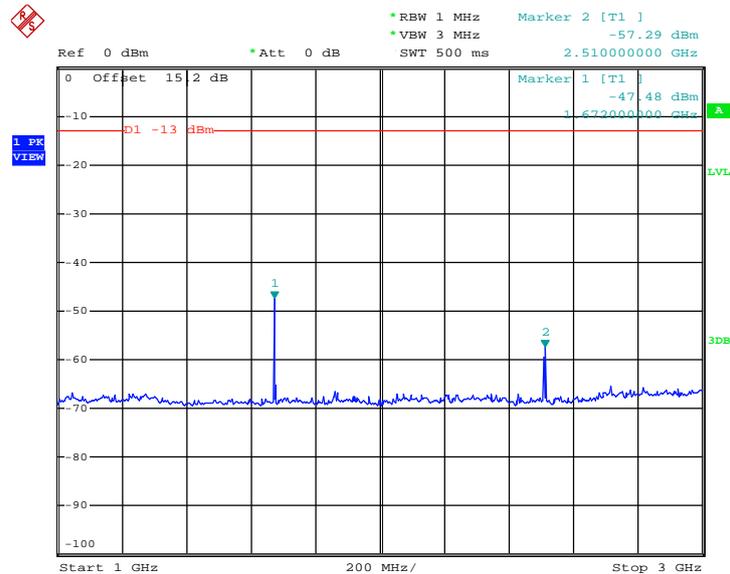

Date: 19.DEC.2013 13:46:56




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

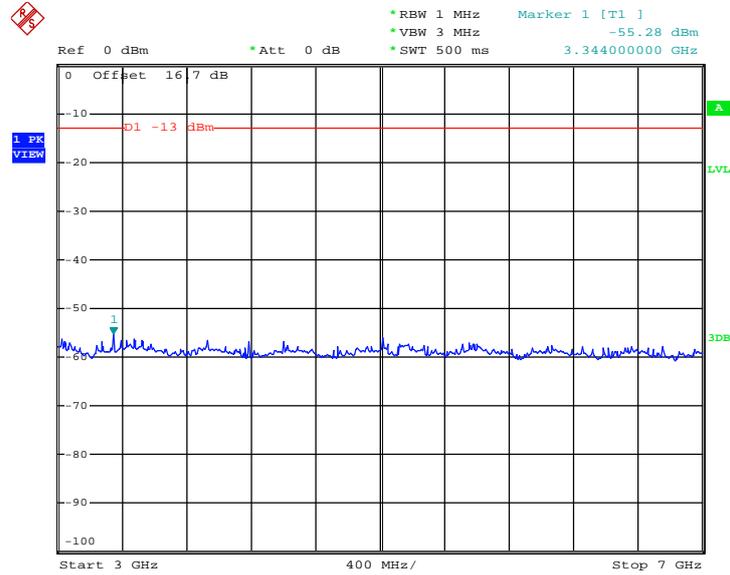

Date: 19.DEC.2013 13:47:47

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

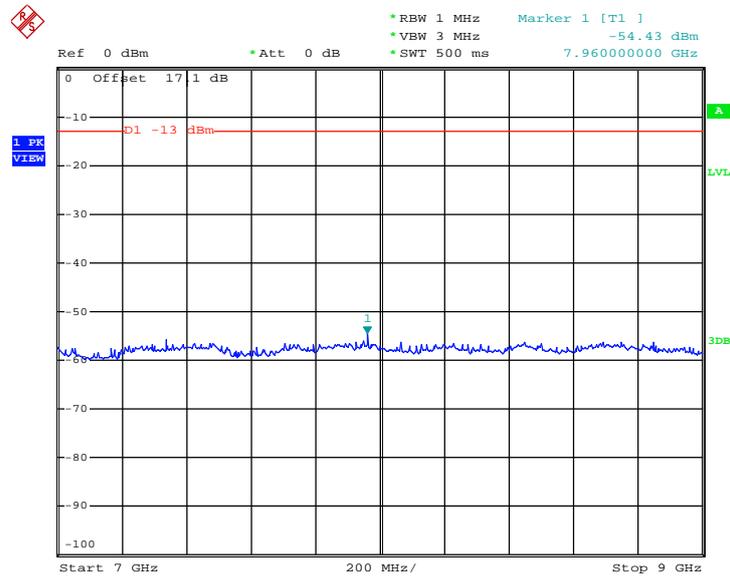


Date: 19.DEC.2013 13:48:42




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

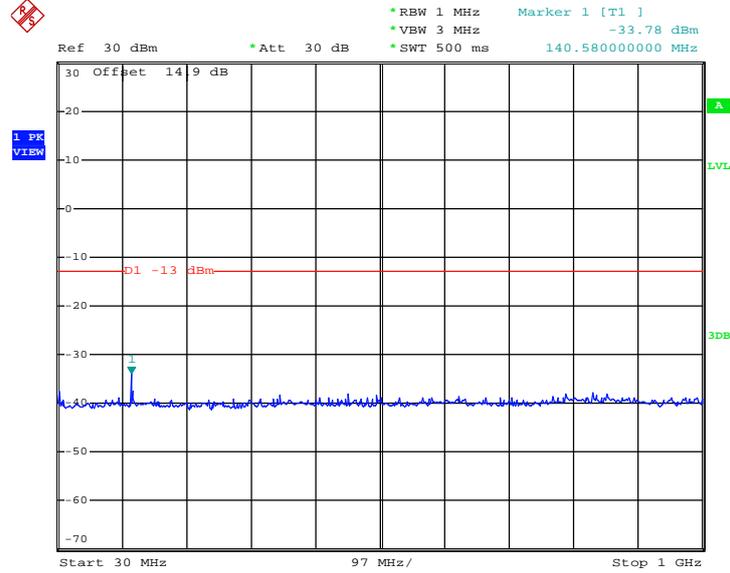

Date: 20.DEC.2013 00:01:22


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

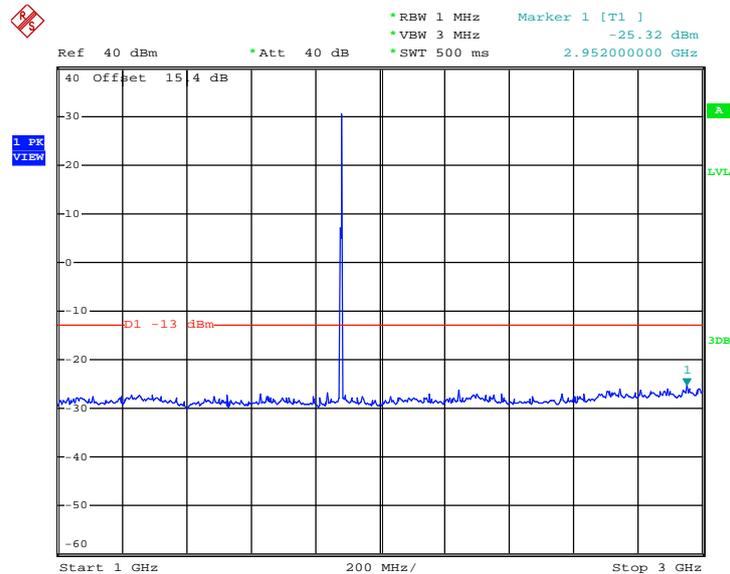

Date: 20.DEC.2013 00:02:23




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

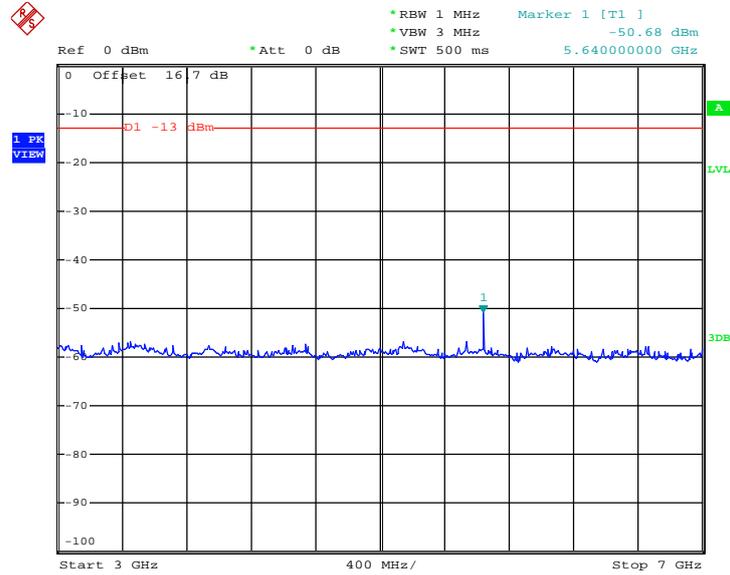

Date: 20.DEC.2013 00:03:12


Conducted Spurious Emission Plot between 7GHz ~ 13.6G

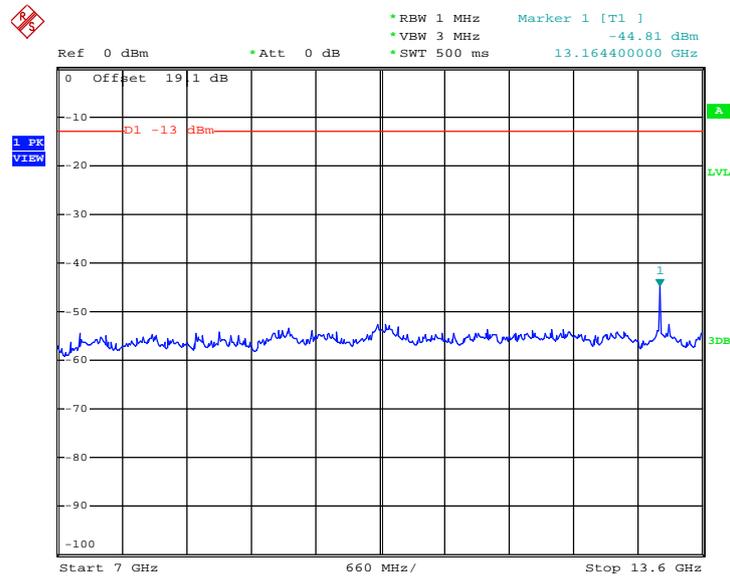

Date: 20.DEC.2013 00:06:49



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

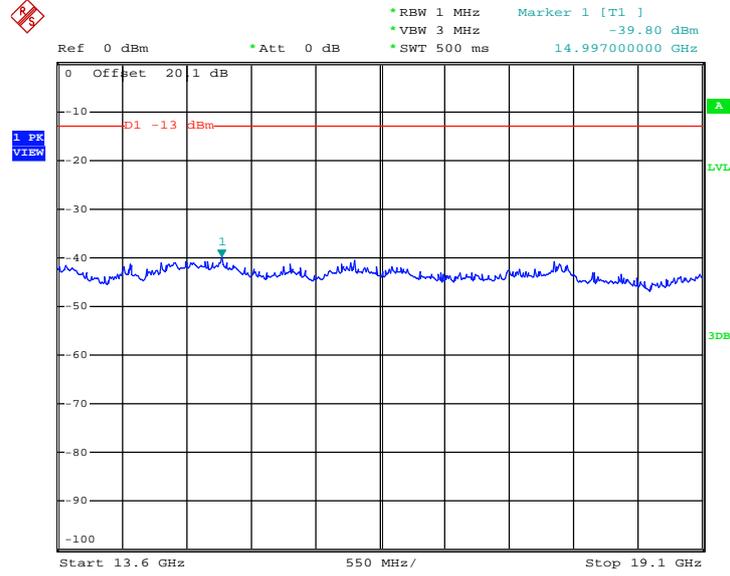


Date: 20.DEC.2013 00:09:47




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

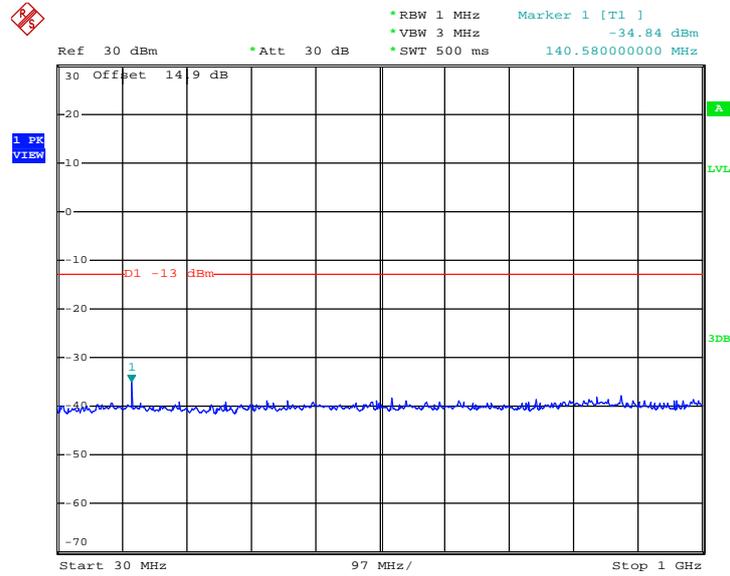

Date: 20.DEC.2013 00:55:52


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

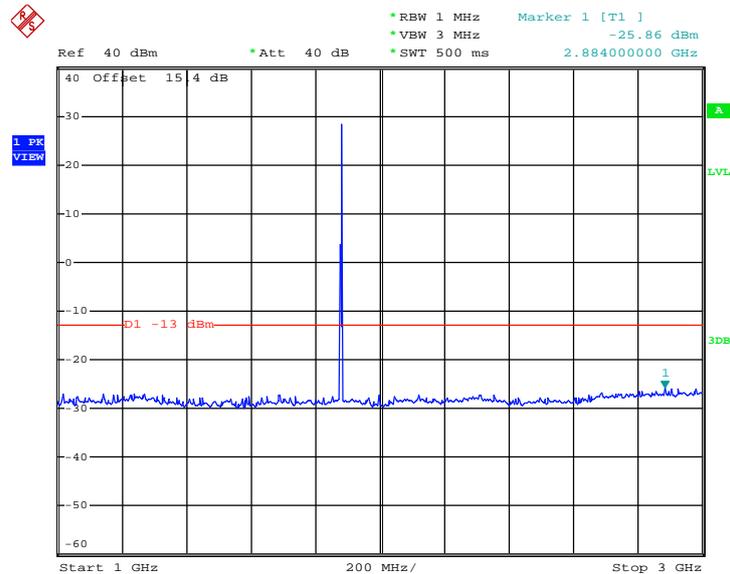

Date: 20.DEC.2013 00:56:33




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

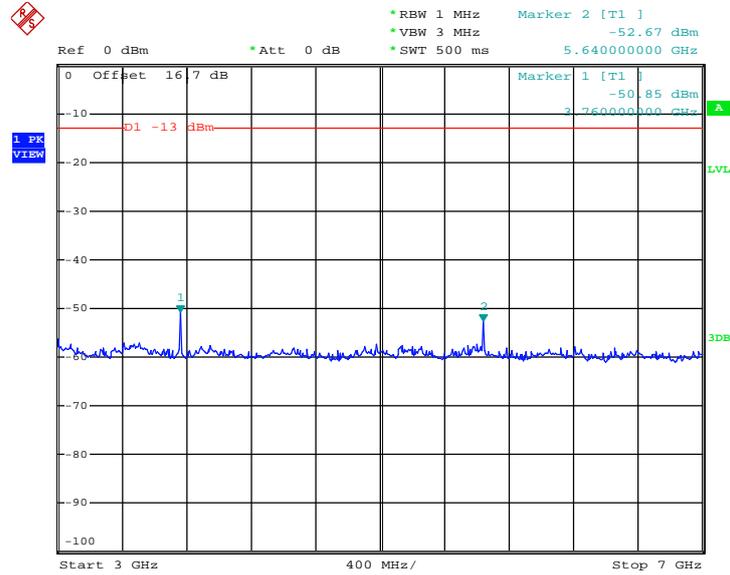

Date: 20.DEC.2013 00:58:03


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

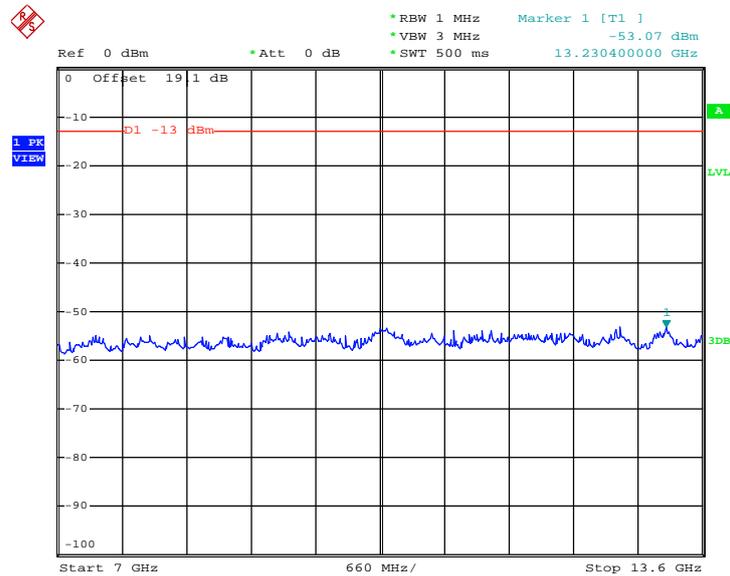

Date: 20.DEC.2013 00:58:43



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

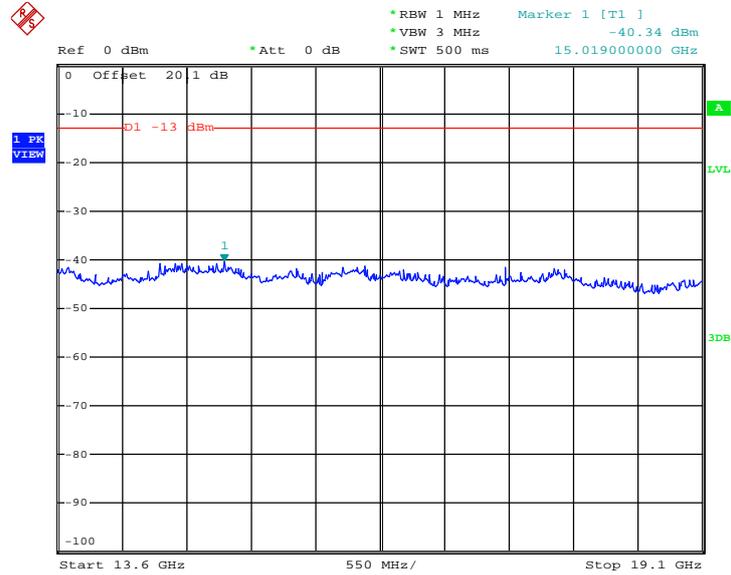


Date: 20.DEC.2013 00:59:16




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

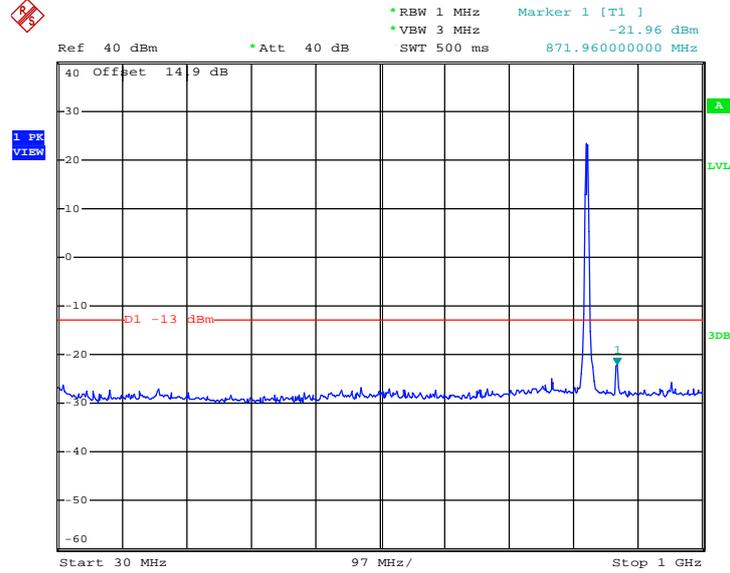

Date: 20.DEC.2013 09:20:21


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

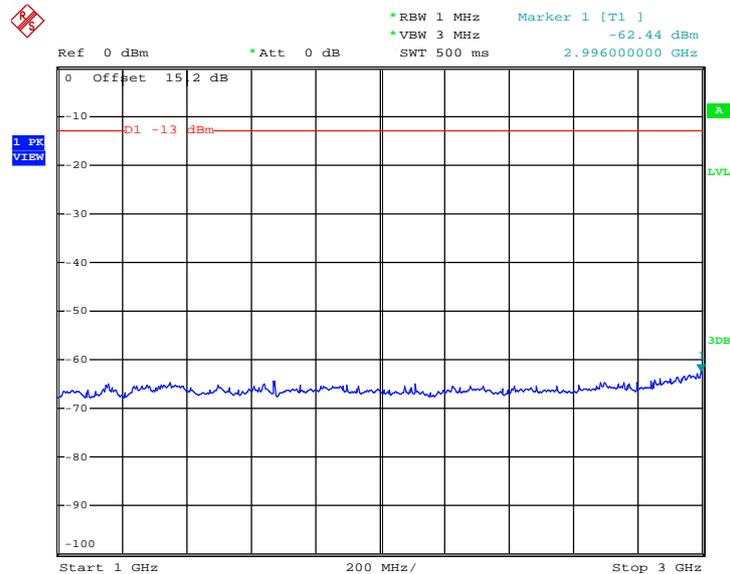

Date: 20.DEC.2013 09:36:58




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

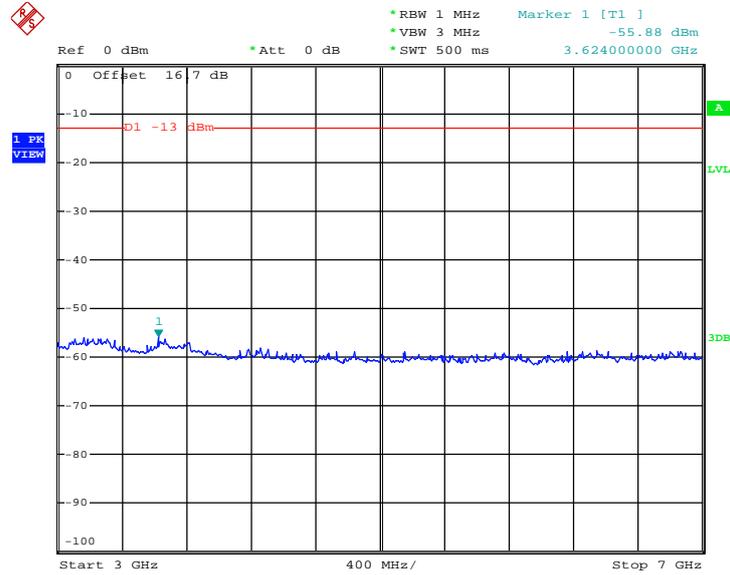

Date: 20.DEC.2013 09:37:54

### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

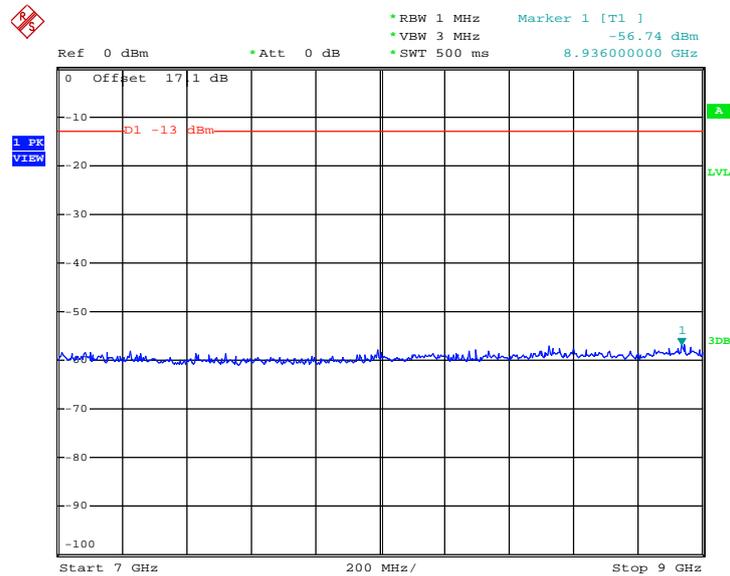


Date: 20.DEC.2013 09:38:27




Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

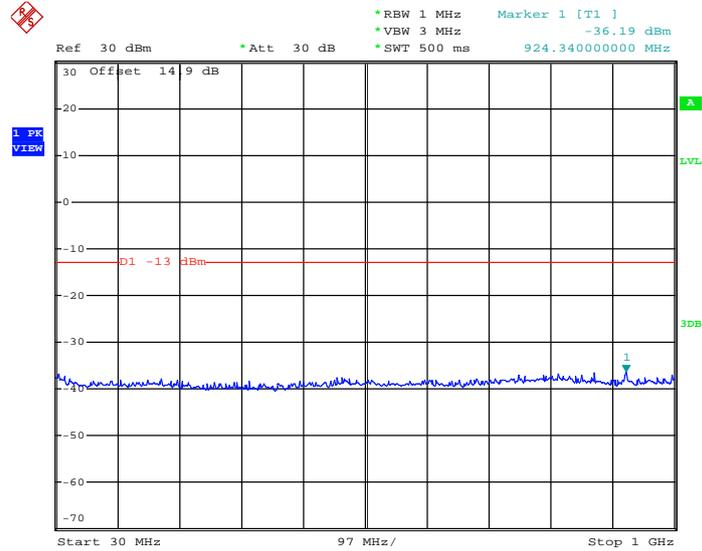

Date: 20.DEC.2013 18:40:14


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

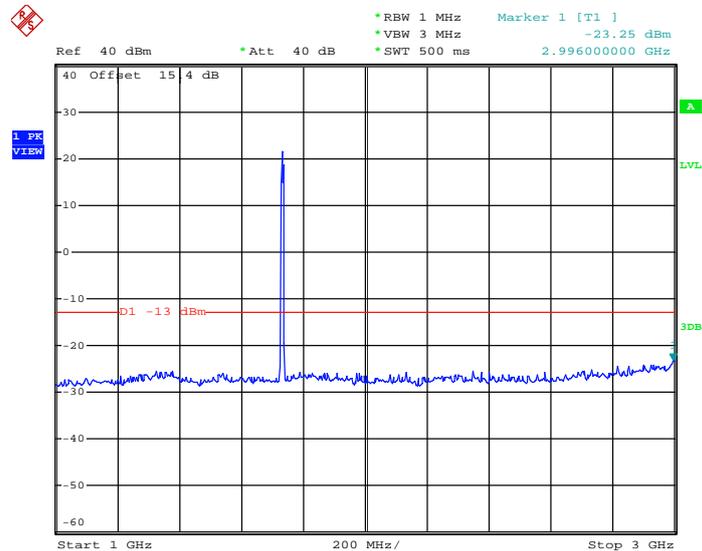

Date: 20.DEC.2013 18:40:48




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

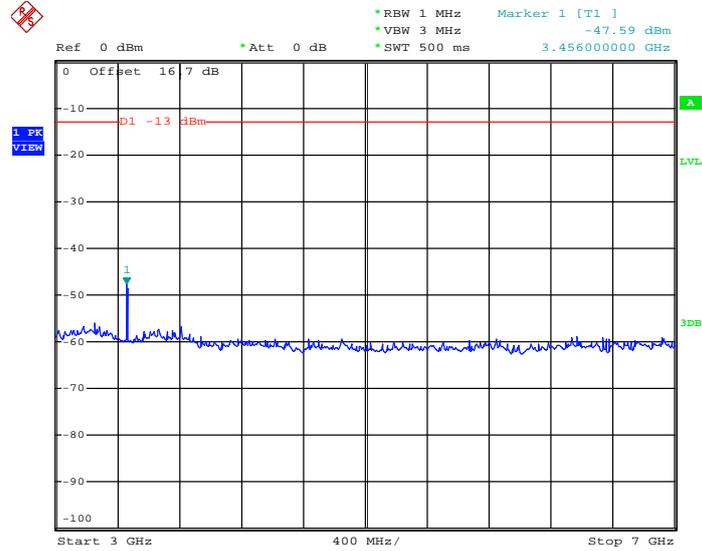

Date: 20.DEC.2013 18:42:05


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

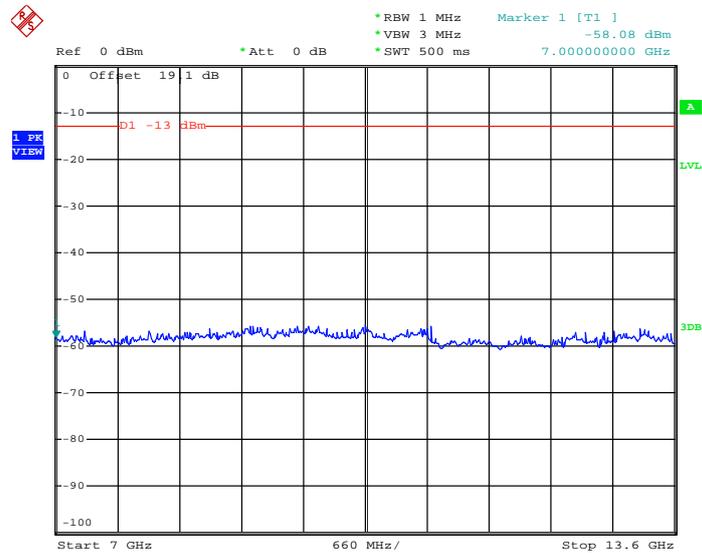

Date: 20.DEC.2013 18:42:46



Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

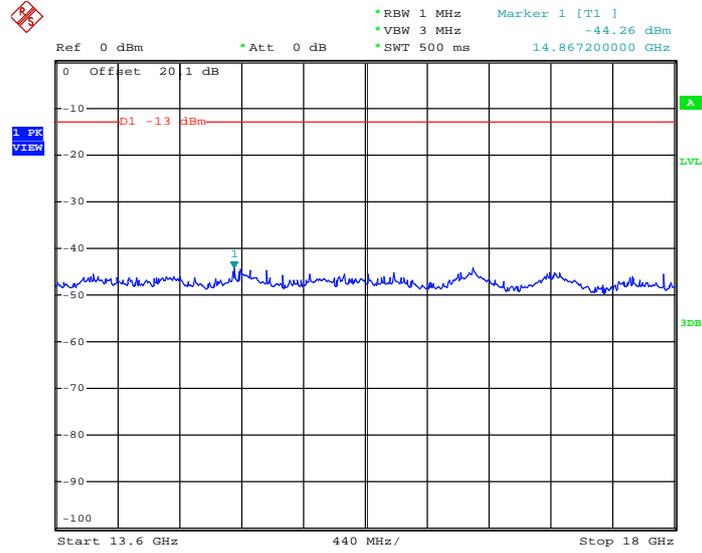


Date: 20.DEC.2013 18:43:24




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

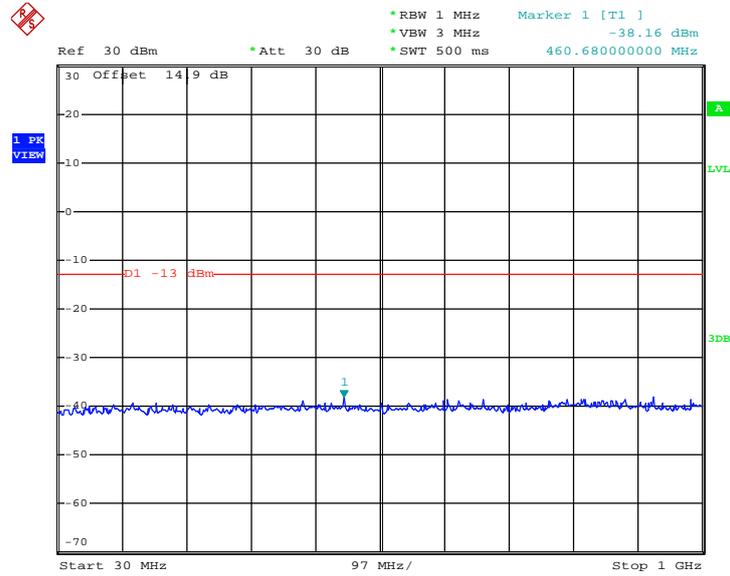

Date: 20.DEC.2013 01:09:04


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

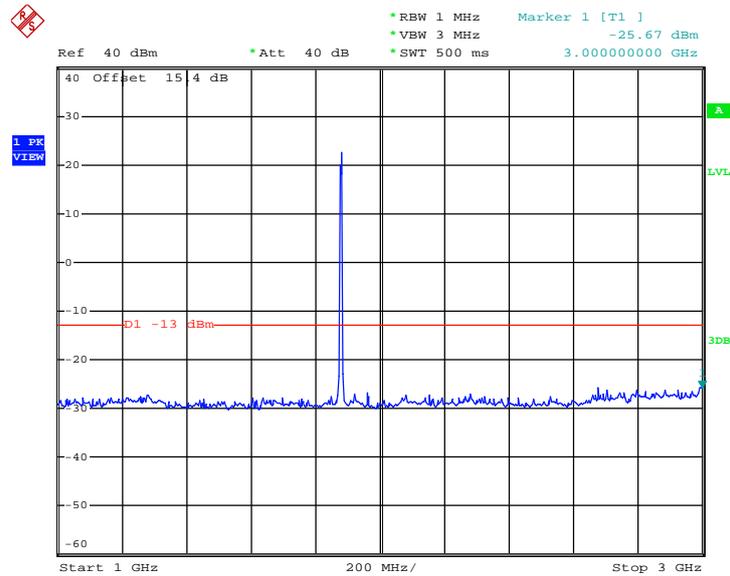

Date: 20.DEC.2013 01:08:30




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

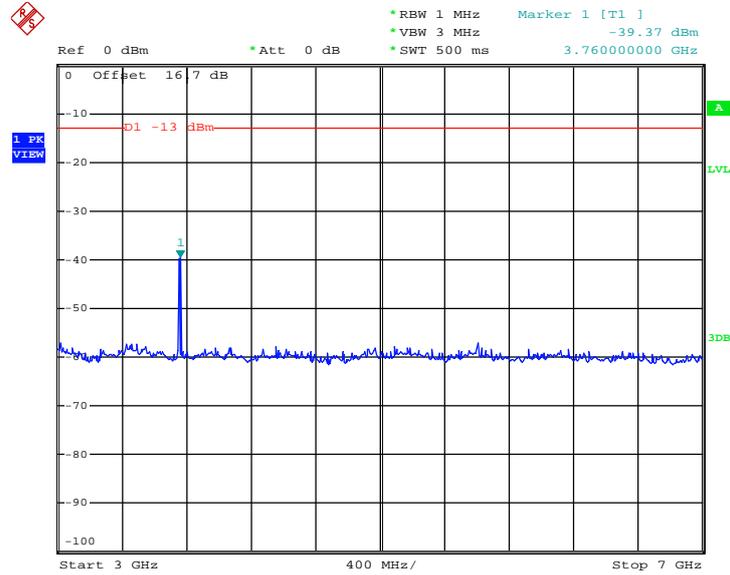

Date: 20.DEC.2013 01:07:56


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

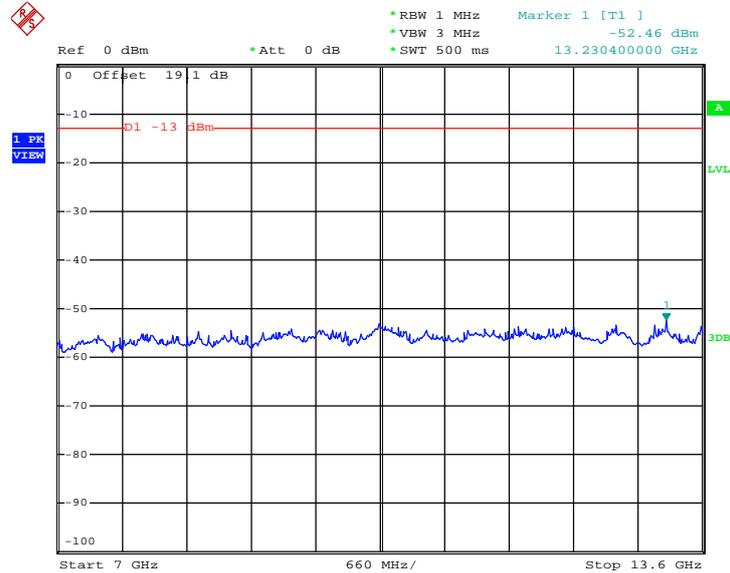

Date: 20.DEC.2013 01:07:11



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

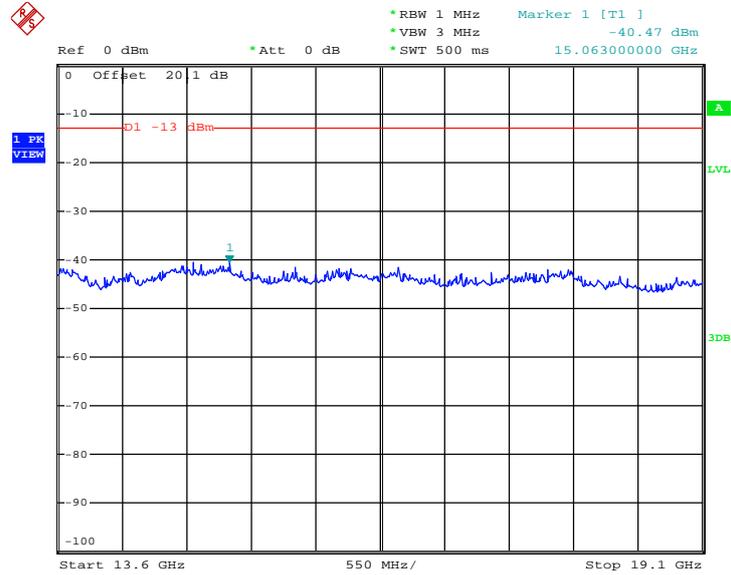

Date: 20.DEC.2013 01:06:28

## 3.7 Field Strength of Spurious Radiation Measurement

### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$
12.  $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
13.  $\text{ERP (dBm)} = \text{EIRP} - 2.15$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

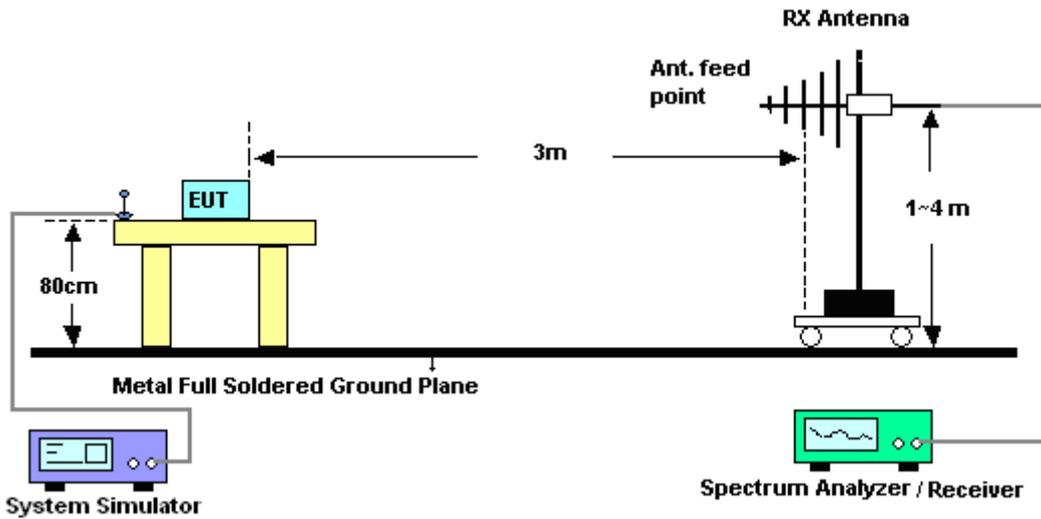


For radiated emissions above 1GHz

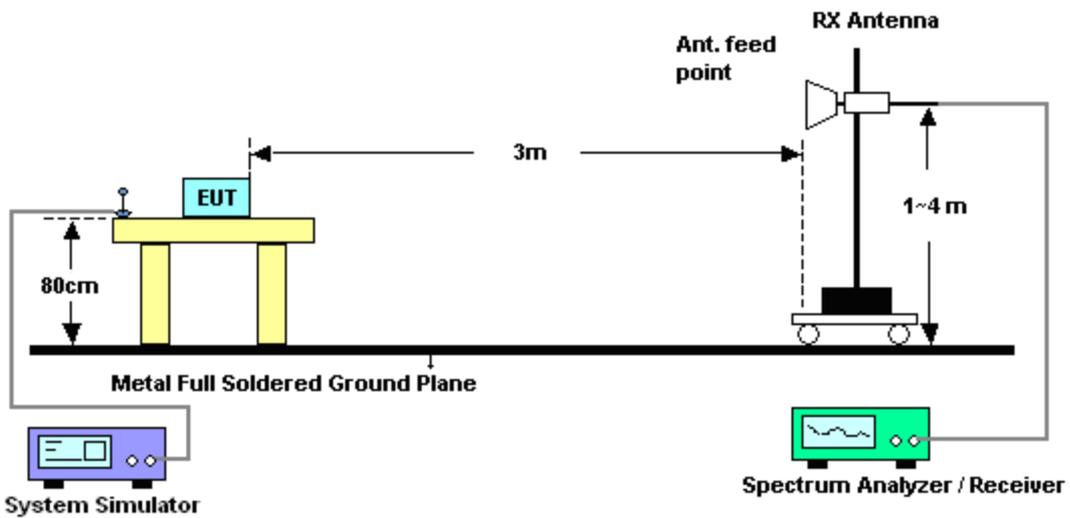



3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	22~23°C
Test Mode :	GSM Link (GMSK)	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

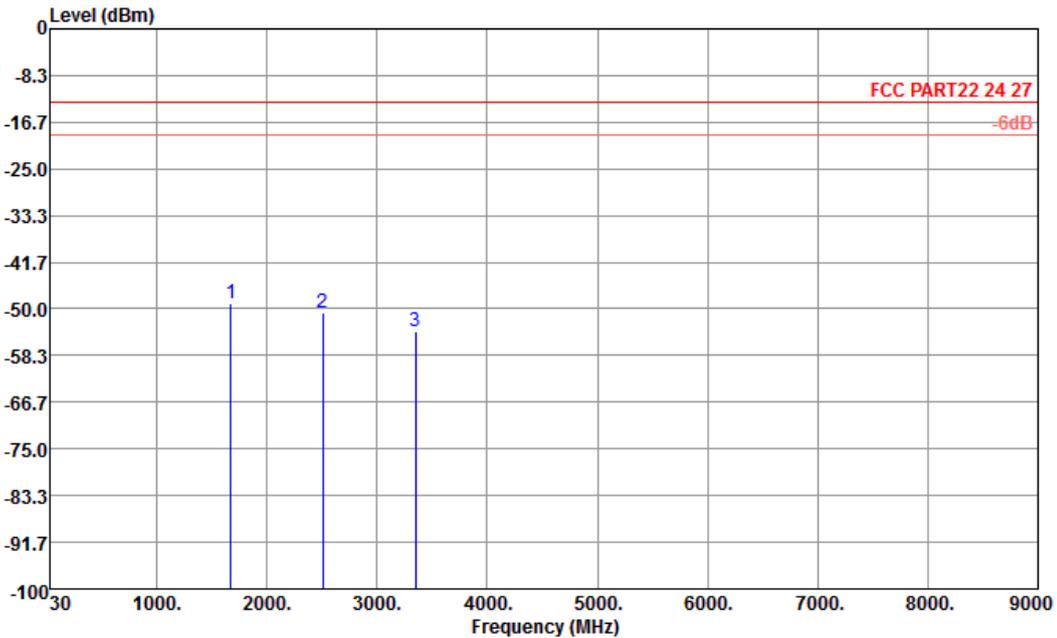


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-49.08	-13	-36.08	-51.06	-49.73	0.57	3.37	H	Pass
2510	-50.60	-13	-37.60	-59.11	-52.83	0.78	5.16	H	Pass
3346	-53.90	-13	-40.90	-63.26	-57.54	0.87	6.66	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	GSM Link (GMSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

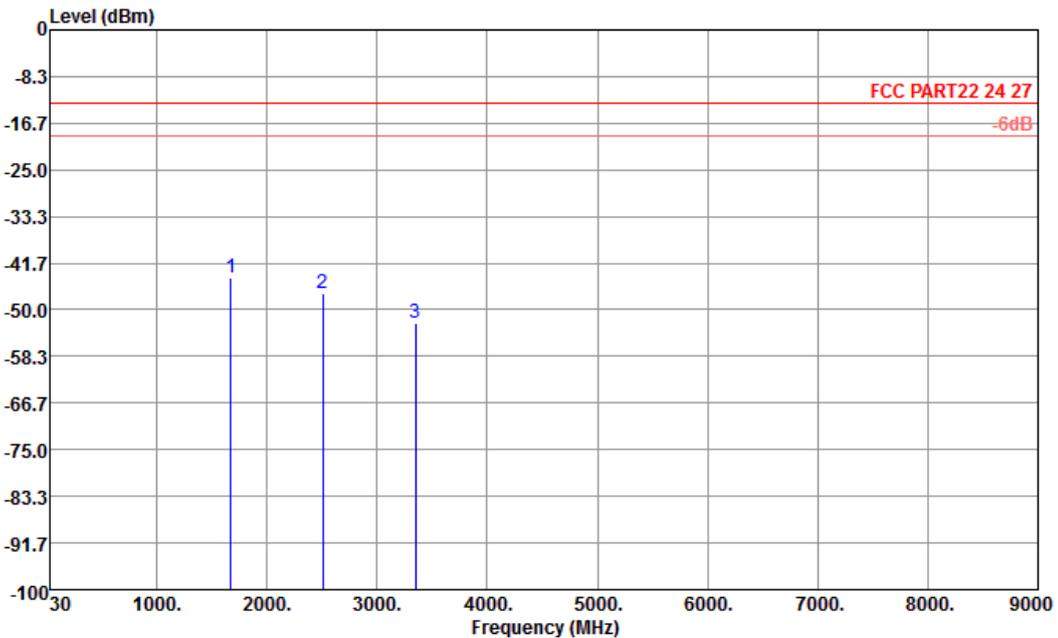


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-44.38	-13	-31.38	-48.97	-45.03	0.57	3.37	V	Pass
2510	-47.00	-13	-34.00	-57.02	-49.23	0.78	5.16	V	Pass
3346	-52.48	-13	-39.48	-62.76	-56.12	0.87	6.66	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

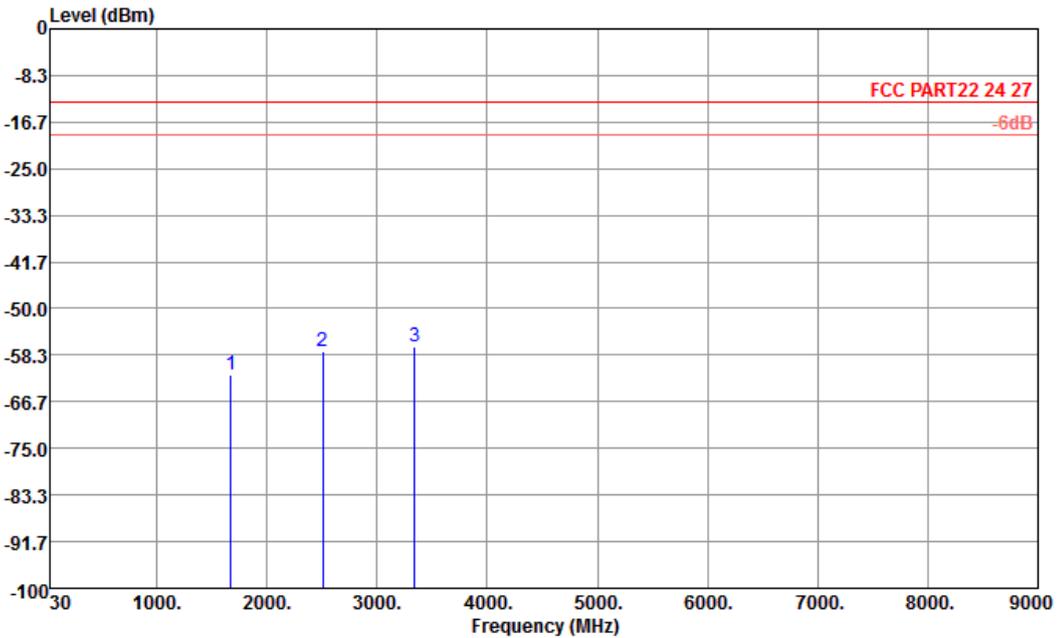


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-61.72	-13	-48.72	-62.76	-62.37	0.57	3.37	H	Pass
2510	-57.62	-13	-44.62	-65.43	-59.85	0.78	5.16	H	Pass
3344	-56.94	-13	-43.94	-66.30	-60.58	0.87	6.66	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

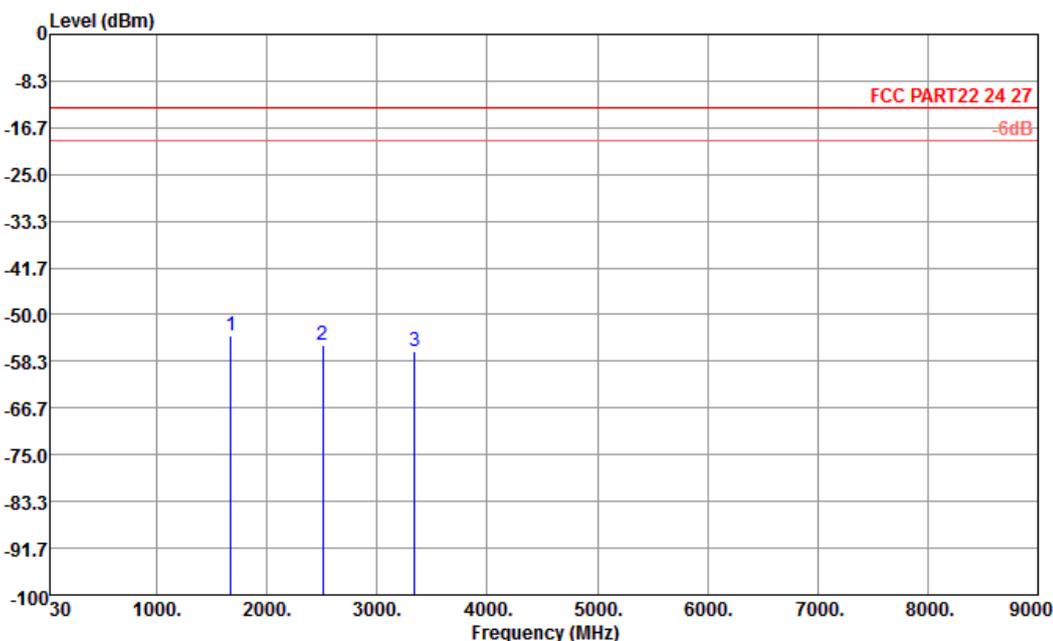


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-53.85	-13	-40.85	-58.21	-54.50	0.57	3.37	V	Pass
2510	-55.37	-13	-42.37	-64.50	-57.60	0.78	5.16	V	Pass
3344	-56.68	-13	-43.68	-66.46	-60.32	0.87	6.66	V	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	GSM Link (GMSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

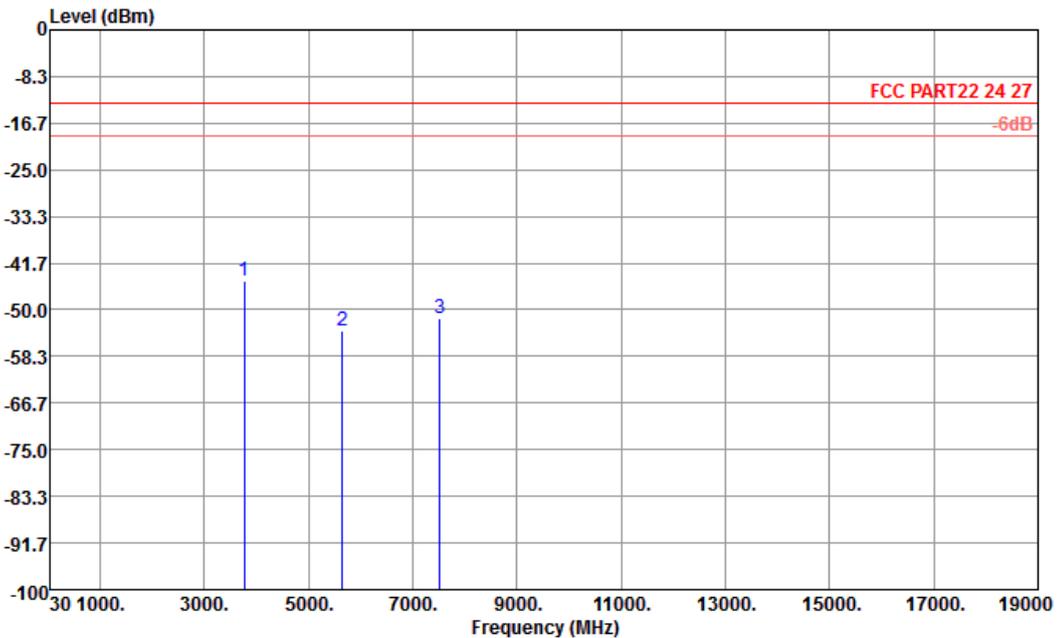


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : X

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-44.90	-13	-31.90	-56.70	-51.28	0.78	7.16	H	Pass
5640	-53.65	-13	-40.65	-66.36	-62.19	1.04	9.58	H	Pass
7520	-51.57	-13	-38.57	-65.39	-61.68	1.35	11.46	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	GSM Link (GMSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

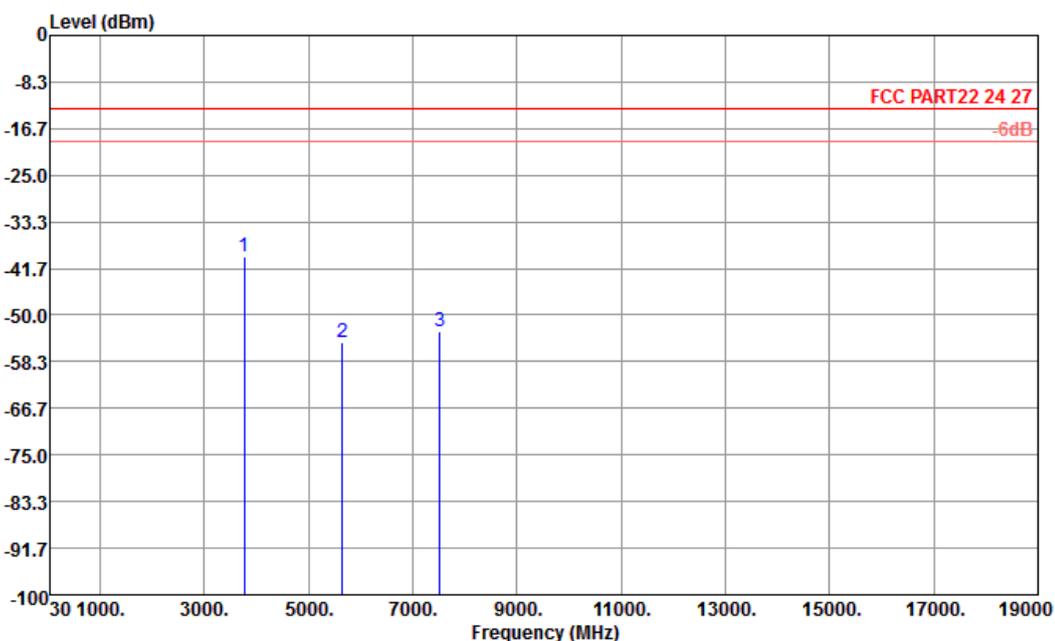


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : X

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-39.43	-13	-26.43	-51.82	-45.81	0.78	7.16	V	Pass
5640	-54.94	-13	-41.94	-66.22	-63.48	1.04	9.58	V	Pass
7520	-52.97	-13	-39.97	-65.48	-63.08	1.35	11.46	V	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

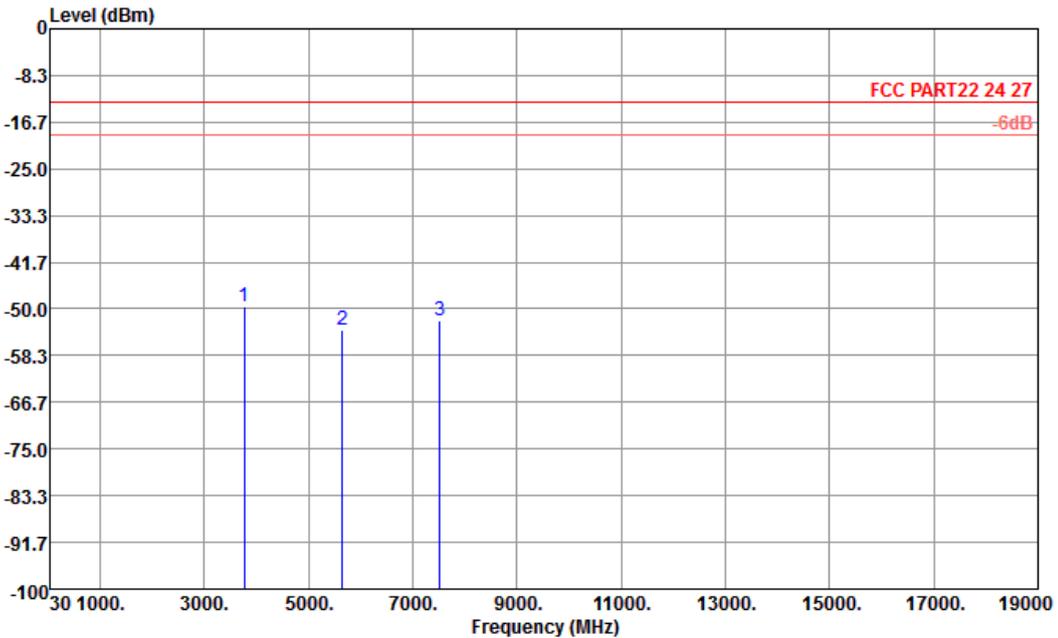


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : X

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-49.50	-13	-36.50	-60.91	-55.88	0.78	7.16	H	Pass
5640	-53.73	-13	-40.73	-66.45	-62.27	1.04	9.58	H	Pass
7520	-52.00	-13	-39.00	-65.73	-62.11	1.35	11.46	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	EDGE class 8 Link (8PSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

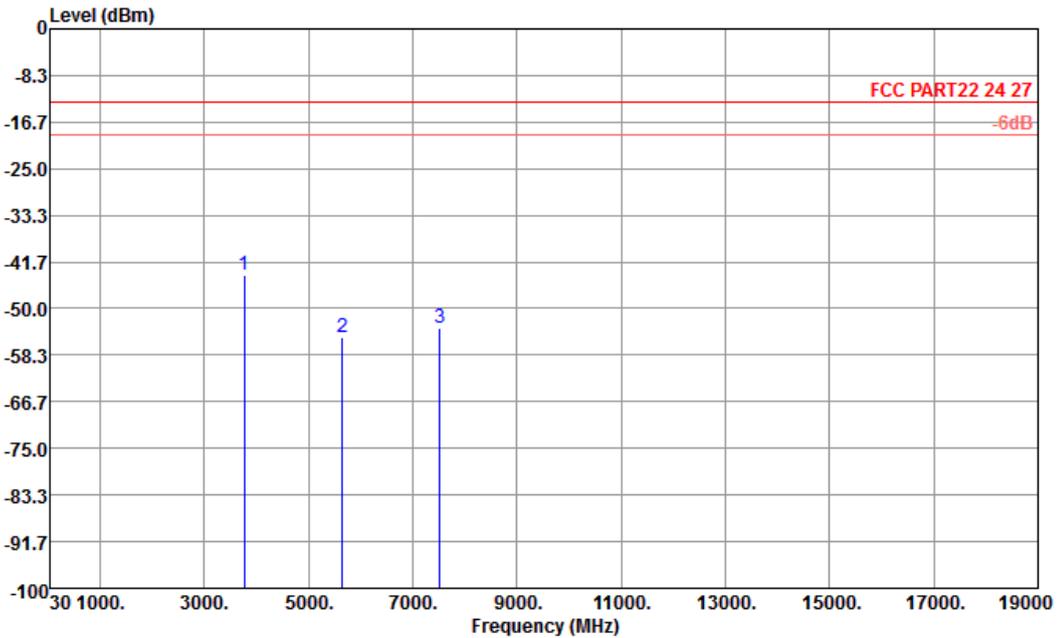


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : X

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-44.13	-13	-31.13	-56.39	-50.51	0.78	7.16	V	Pass
5640	-55.11	-13	-42.11	-66.32	-63.65	1.04	9.58	V	Pass
7520	-53.60	-13	-40.60	-66.04	-63.71	1.35	11.46	V	Pass



Band :	WCDMA Band V	Temperature :	22~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

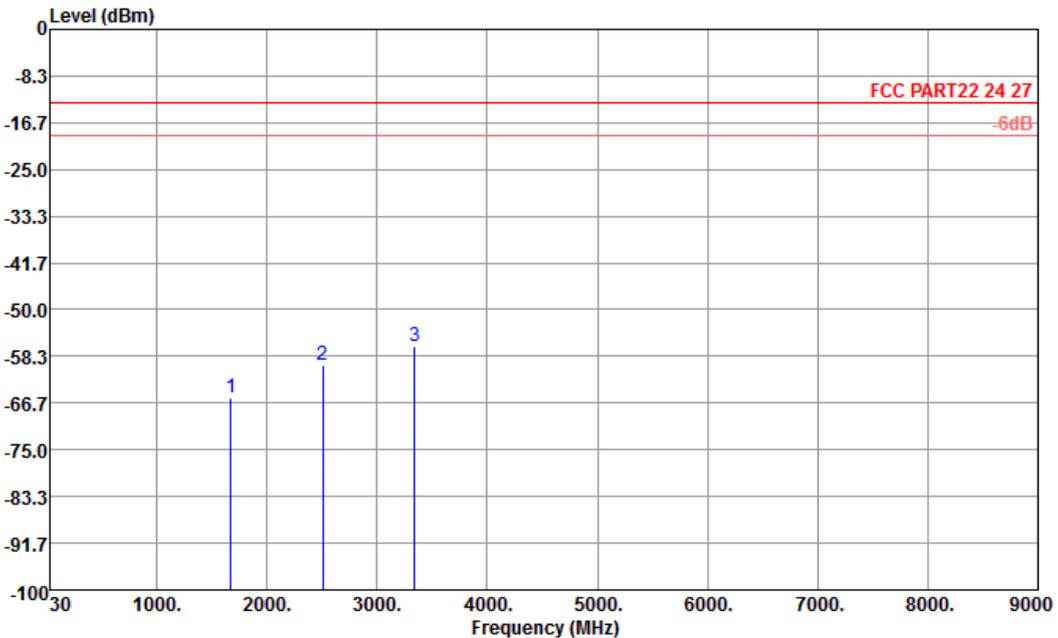


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-65.70	-13	-52.70	-66.13	-66.35	0.57	3.37	H	Pass
2508	-59.77	-13	-46.77	-67.58	-62.00	0.78	5.16	H	Pass
3344	-56.63	-13	-43.63	-65.99	-60.27	0.87	6.66	H	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

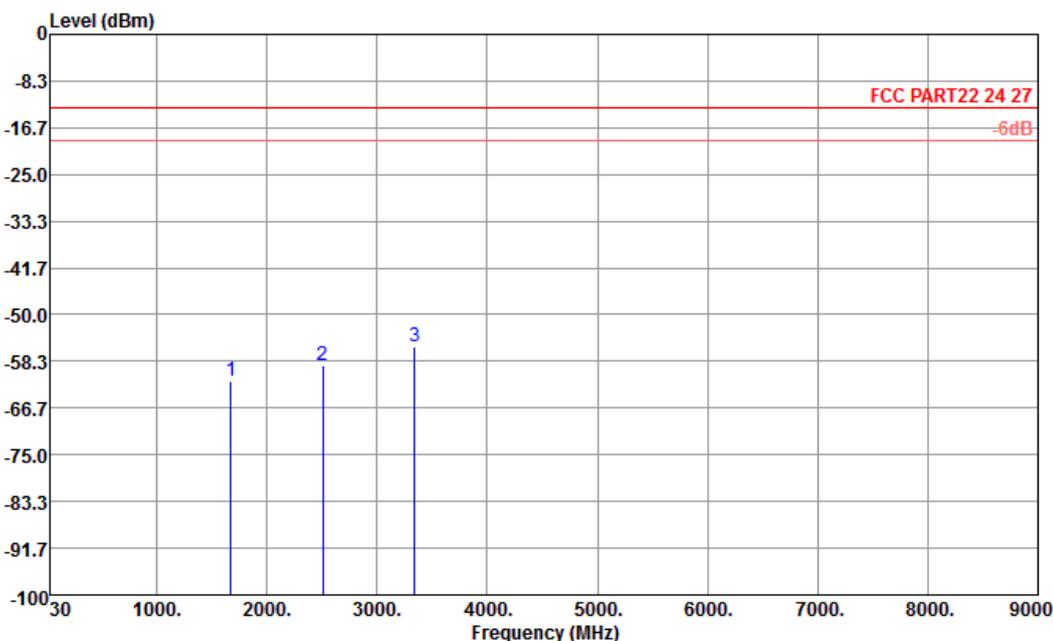


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-61.89	-13	-48.89	-65.37	-62.54	0.57	3.37	V	Pass
2508	-59.16	-13	-46.16	-67.20	-61.39	0.78	5.16	V	Pass
3344	-55.78	-13	-42.78	-65.67	-59.42	0.87	6.66	V	Pass



<b>Band :</b>	WCDMA Band IV	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

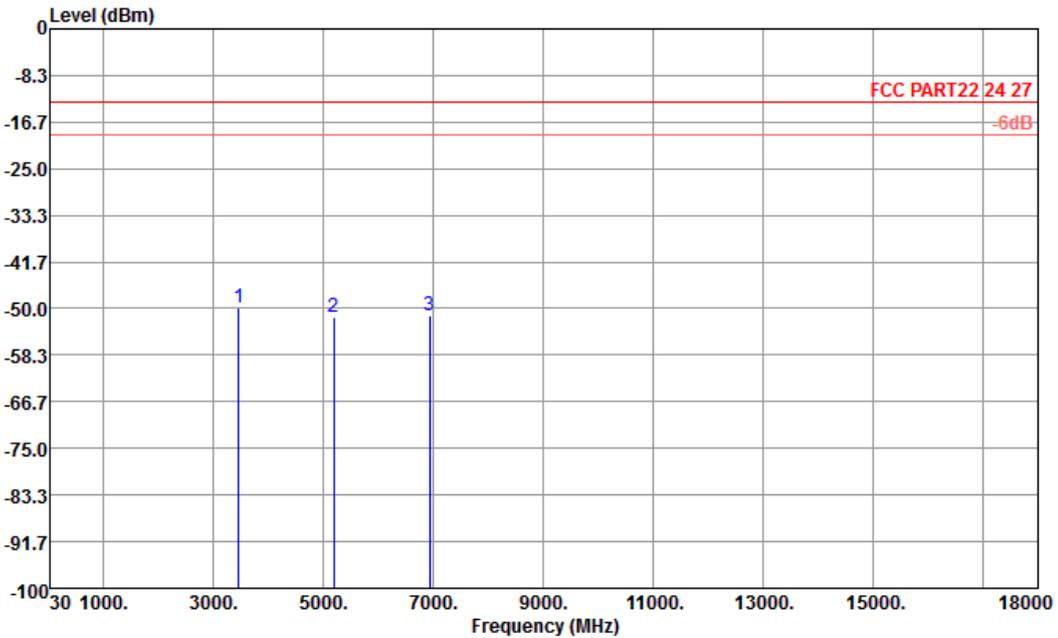


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3468	-49.98	-13	-36.98	-61.31	-55.38	2.2	7.60	H	Pass
5198	-51.60	-13	-38.60	-64.83	-58.38	3.12	9.90	H	Pass
6930	-51.17	-13	-38.17	-65.08	-59.06	2.98	10.87	H	Pass



<b>Band :</b>	WCDMA Band IV	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

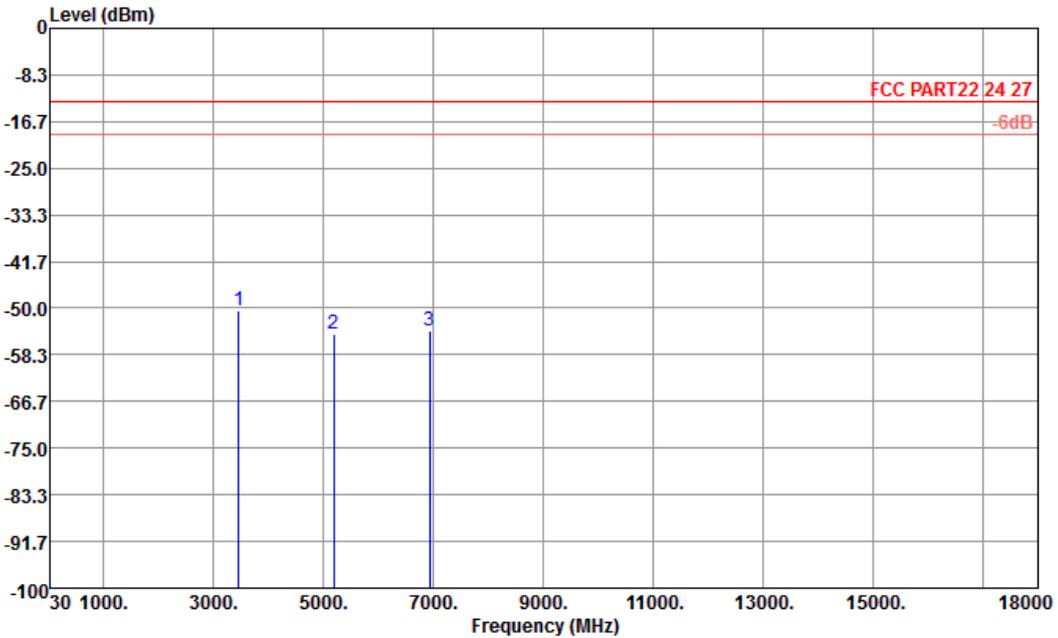


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : Z

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3466	-50.47	-13	-37.47	-62.04	-55.87	2.2	7.6	V	Pass
5198	-54.60	-13	-41.60	-66.05	-61.38	3.12	9.9	V	Pass
6930	-53.94	-13	-40.94	-66.34	-61.83	2.98	10.87	V	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

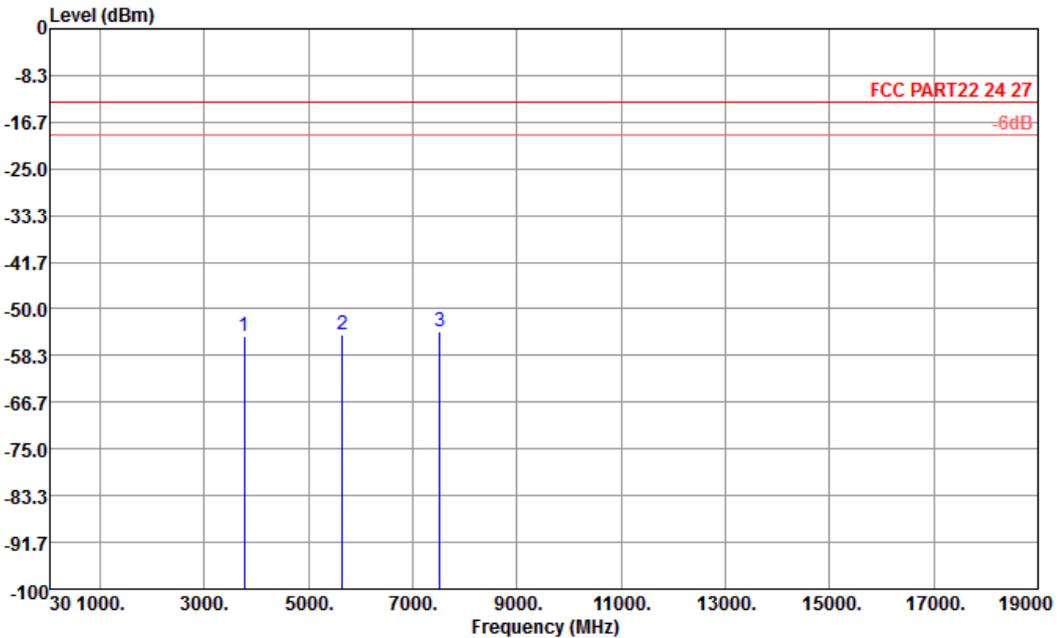


Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 HORIZONTAL  
 EUT : (FG) 3N1313  
 Plane : X

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-54.86	-13	-41.86	-65.52	-61.24	0.78	7.16	H	Pass
5640	-54.46	-13	-41.46	-67.22	-63.00	1.04	9.58	H	Pass
7520	-54.12	-13	-41.12	-66.64	-64.23	1.35	11.46	H	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	22~23°C
<b>Test Mode :</b>	RMC 12.2Kbps Link (QPSK)	<b>Relative Humidity :</b>	40~41%
<b>Test Engineer :</b>	Jun Liu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

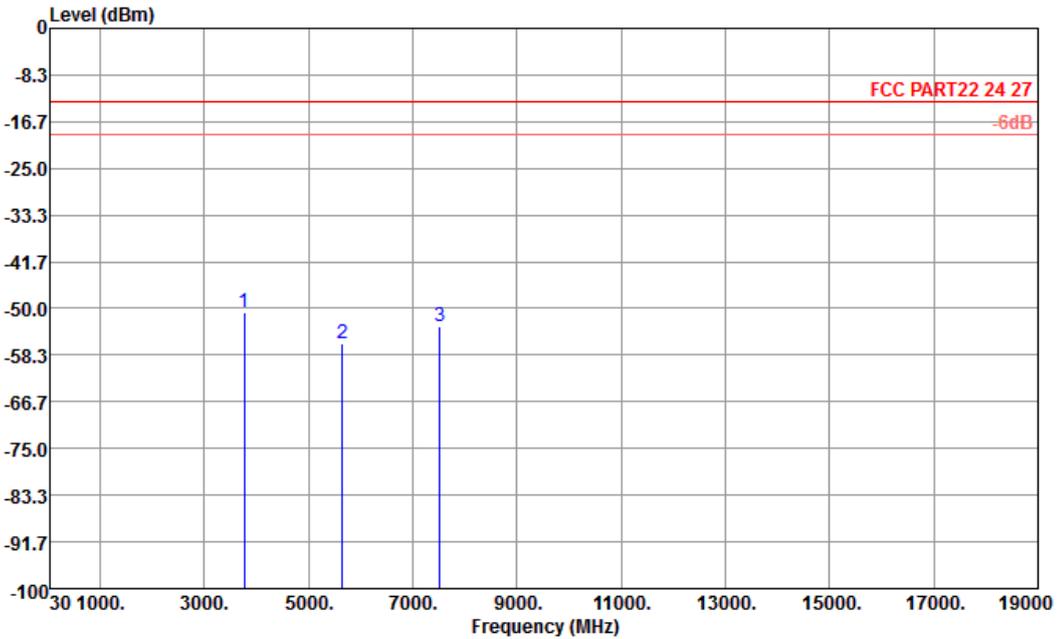

Site : 03CH01-KS  
 Condition : FCC PART22 24 27 HF\_EIRP\_FACTOR130726 VERTICAL  
 EUT : (FG) 3N1313  
 Plane : X

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3762	-50.62	-13	-37.62	-62.18	-57.00	0.78	7.16	V	Pass
5640	-56.28	-13	-43.28	-67.19	-64.82	1.04	9.58	V	Pass
7520	-53.21	-13	-40.21	-65.69	-63.32	1.35	11.46	V	Pass

## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

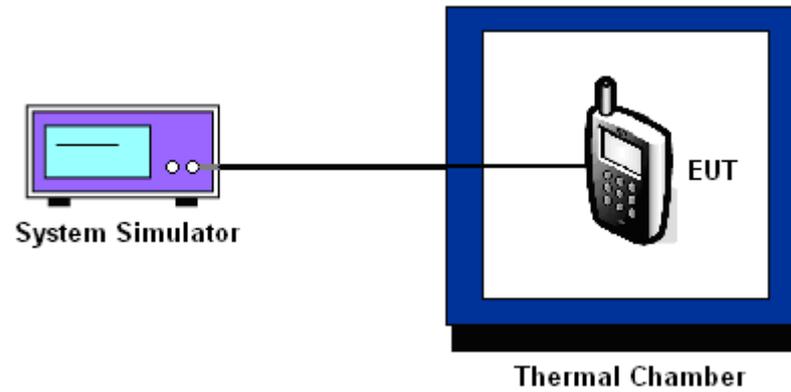

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-31	-0.04	-33	-0.04	PASS
-20	-23	-0.03	-20	-0.02	
-10	-16	-0.02	-12	-0.01	
0	-8	-0.01	-7	-0.01	
10	-11	-0.01	-15	-0.02	
20	-21	-0.02	-23	-0.03	
30	-27	-0.03	-28	-0.03	
40	-35	-0.04	-34	-0.04	
50	-38	-0.04	-40	-0.05	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GSM		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-23	-0.01	-26	-0.01	PASS
-20	-15	-0.01	-15	-0.01	
-10	-11	-0.01	-14	-0.01	
0	10	+0.01	9	0.00	
10	-12	-0.01	-11	-0.01	
20	-19	-0.01	-18	-0.01	
30	-26	-0.01	-27	-0.01	
40	-33	-0.02	-31	-0.02	
50	-39	-0.02	-38	-0.02	



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-33	-0.04	PASS
-20	-25	-0.03	
-10	-14	-0.02	
0	-6	-0.01	
10	-16	-0.02	
20	-21	-0.02	
30	-29	-0.03	
40	-33	-0.04	
50	-39	-0.05	

<b>Band :</b>	WCDMA Band IV	<b>Channel :</b>	1413
<b>Limit (ppm) :</b>	2.5	<b>Frequency :</b>	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-38	-0.02	PASS
-20	35	+0.02	
-10	28	+0.02	
0	19	+0.01	
10	17	+0.01	
20	15	+0.01	
30	-22	-0.01	
40	-21	-0.01	
50	-19	-0.01	



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-23	-0.01	PASS
-20	-16	-0.01	
-10	-10	-0.01	
0	9	0.00	
10	-12	-0.01	
20	-21	-0.01	
30	-29	-0.02	
40	-33	-0.02	
50	-39	-0.02	



3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	3.8	-8	-0.01	2.5	PASS
		BEP	-12	-0.01		
		4.35	-10	-0.01		
	EDGE class 8	3.8	-10	-0.01		
		BEP	-15	-0.02		
		4.35	-7	-0.01		
GSM 1900 CH661	GSM	3.8	10	+0.01		
		BEP	-12	-0.01		
		4.35	-11	-0.01		
	EDGE class 8	3.8	11	+0.01		
		BEP	-14	-0.01		
		4.35	-16	-0.01		
WCDMA Band V CH4182	RMC 12.2Kbps	3.8	-5	-0.01		
		BEP	-12	-0.01		
		4.35	-11	-0.01		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.8	-38	-0.02		
		BEP	19	+0.01		
		4.35	-22	-0.01		
WCDMA Band II CH9400	RMC 12.2Kbps	3.8	11	+0.01		
		BEP	-13	-0.01		
		4.35	-16	-0.01		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.5 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz; Max 30dBm	Dec. 29, 2012~ Dec. 27, 2013	Dec. 19, 2013~ Jan. 14, 2014	Dec. 28, 2013~ Dec. 26, 2014	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	100845	9kHz~30GHz; Max input Power 30dBm	Dec. 04, 2013	Dec. 19, 2013~ Jan. 14, 2014	Dec. 03, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz (-20~+20dBm)	Feb. 28, 2013	Dec. 19, 2013~ Jan. 14, 2014	Feb. 27, 2014	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 28, 2013	Dec. 19, 2013~ Jan. 14, 2014	Feb. 27, 2014	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	(-40~+150)	Dec. 10, 2013	Dec. 19, 2013~ Jan. 14, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz / Max-input30dBm	Nov. 05, 2013	Dec. 25, 2013	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz;Max-in tput 30dBm	May 23, 2013	Dec. 25, 2013	May 22, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 06, 2013	Dec. 25, 2013	Dec. 05, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	75959	1GHz~18GHz	Dec. 06, 2012	Dec. 25, 2013	Dec. 05, 2014	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz /32 dB	May 23, 2013	Dec. 25, 2013	May 22, 2014	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz >23dB	Dec. 28, 2013	Dec. 25, 2013	Dec. 27, 2014	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz /AMP 25dB +/- 2	Nov. 18, 2013	Dec. 25, 2013	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA17024 9	15GHz~40GHz	Nov. 22, 2013	Dec. 25, 2013	Nov. 21, 2014	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 25, 2013	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 25, 2013	NCR	Radiation (03CH01-KS)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP 7	100819	9kHz~7GHz	May 23, 2013	Jan. 14, 2014	May 22, 2014	ERP/EIRP (OTA01-KS)
Switch Control Manframe	Agilent	3499A	MY42005452	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Dual 1-to-6(4) MW MUX	Agilent	N2276A	MY42000841	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Microwave Switch	Agilent	44476A	MY42002573	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Microwave Switch	Agilent	44476A	MY42002586	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Diagonal Dual Polarized Horn	ETS-Lindgren	3164-04	00066993	700MHz~6GHz	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Multi-Devices Controller	ETS-Lindgren	2090-OPT1	00066604	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Conical Log Spiral (Small)	ETS-Lindgren	3102	00066951	1~10GHz	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Turn Table	ETS-Lindgren	2088	N/A	Resolution : 0.1degree	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Limiting Amplifier	ETS-lindgren	109643	920326	10MHz~2.5GHz	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
EMQuest	ETS-Lindgren	EMQ-100	1125	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)
Medium Duty Holder	ETS-Lindgren	2015	N/A	N/A	N/A	Jan. 14, 2014	N/A	ERP/EIRP (OTA01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------