



中国认可  
国际互认  
检测  
TESTING  
CNAS L2264

# EMC TEST REPORT

**Applicant** ZTE CORPORATION  
**FCC ID** SRQ-ZTU31  
**Product** LTE/WCDMA/GSM (GPRS)  
Multi-Mode Digital Mobile Phone  
**Model** ZTU31/ZTE Blade V770/Blade V770  
**Report No.** RXC1611-0258EMC01R1  
**Issue Date** January 19, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2015)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Wei Liu*

*Guangchang Fan*

*Performed by: Wei Liu/ Manager*

*Approved by: Guangchang Fan/ Director*

**TA Technology (Shanghai) Co., Ltd.**

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL:+86-021-50791141/2/3*

*FAX:+86-021-50791141/2/3-8000*

## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results.....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	15
4	Main Test Equipment.....	18
	ANNEX A: The EUT Appearance and Test Configuration.....	19
	A.1 EUT Appearance.....	19
	A.2 Test Setup.....	21
	A.3 Host Product.....	23

### Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	15.107, ANSI C63.4-2014	PASS
Test Date: November 21, 2016 ~ December 14, 2016			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

## 1.2 Test facility

### **CNAS (accreditation number:L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number isC-4595, T-2154, R-4113, G-766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### 2.1 Client Information

<b>Applicant</b>	ZTE CORPORATION
<b>Applicant address</b>	ZTE Plaza,Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
<b>Manufacturer</b>	ZTE CORPORATION
<b>Manufacturer address</b>	ZTE Plaza,Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China

### 2.2 General information

EUT Description	
Device Type:	Portable Device
Model Number:	ZTU31/ZTE Blade V770/Blade V770
IMEI:	863682030001706
HW Version:	uu9A
SW Version:	KDDI_JP_BV770_V1.0
Antenna Type:	Internal Antenna
Used Host Product:	PCManufacturer: lenovo Model:Thinkpad T540p(SN : SL10E37685)
Test Mode:	Transfer Data Mode
EUT Accessory	
Battery	Manufacturer: SCUD (Fujian) Electronics Co., Ltd Model: Li3925T44P8h786035
Adapter	Manufacturer: MITSUMI Input: AC100-240V 50/60Hz 0.3A Output: DC 5.0V 2.0A Model: WPS-056
USB Cable	100cm Cable, Shielded
Remark: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	

## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B(2015)**

**ANSI C63.4 (2014)**

## 2.4 Test Mode

Test Mode	
Mode 1:	Adapter + USB cable+ Camera On +GPS Rx +Idle
Mode 2:	Adapter + USB cable+FM +Idle
Mode 3:	Adapter + USB cable+ Mp3 +Idle
Mode 4:	Adapter + USB cable+ Idle
Mode 5:	USB Copy(EUT with PC) + USB cable +Idle
Mode 6:	Camera On + GPS Rx +Idle
Mode 7:	MP3+Idle
Mode 8:	Idle

During the test, the preliminary test was performed in all modes (Camera/FM/ MP3) with all frequency bands (GSM/ WCDMA/ LTE/ BT/ Wi-Fi), mode 5 (with Camera + FM + MP3 + GPS Rx + GSM/ WCDMA/ LTE/ BT/ Wi-Fi idle) selected as the worst condition. The test data of the worst-case condition was recorded in this report.

### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

**Test Setup**

**Below 1GHz**

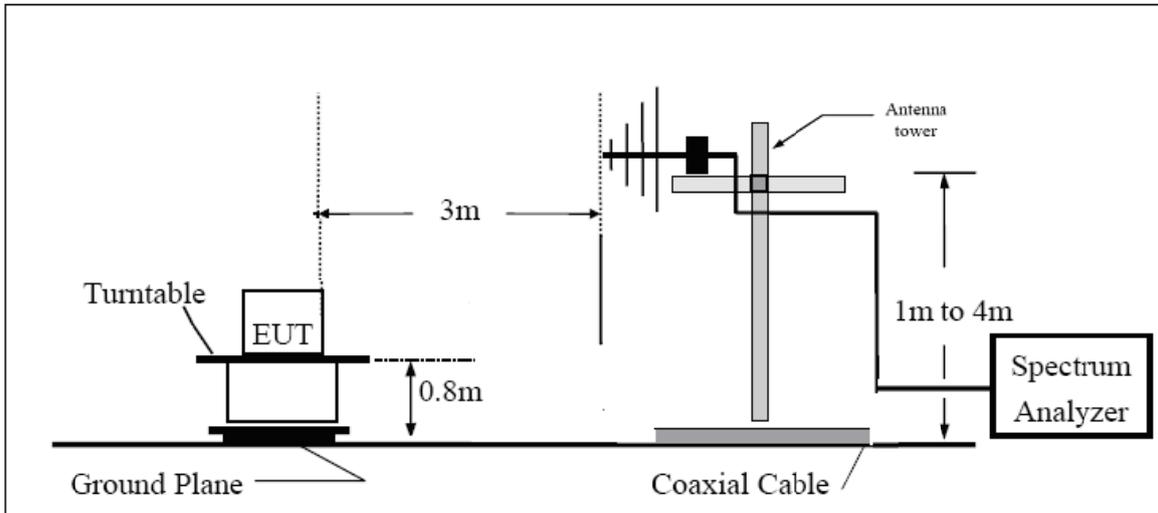

**Above 1GHz**

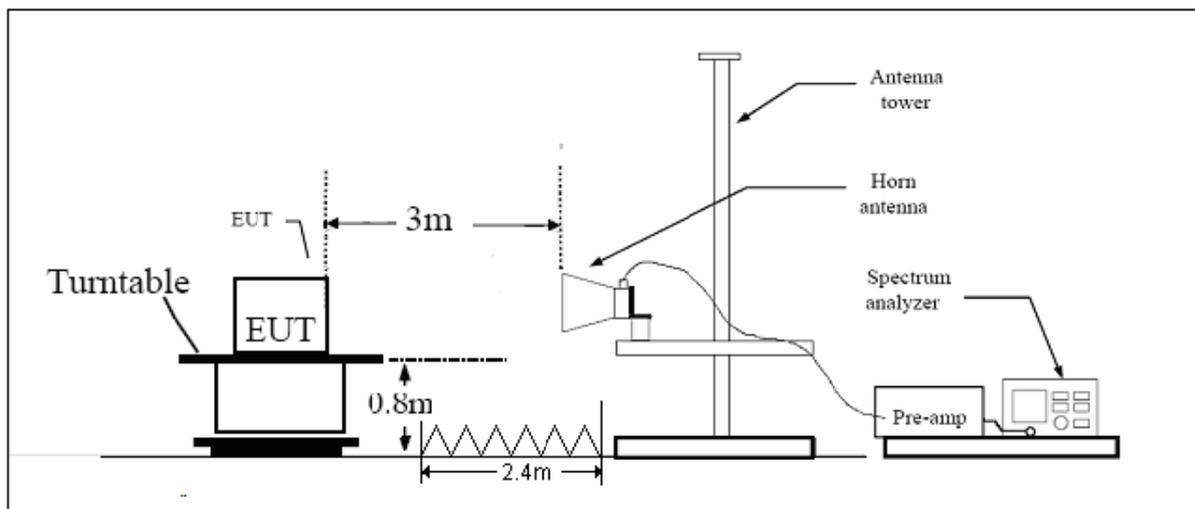

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**


Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U=3.92$  dB.

**Test Results**

The following graphs display the maximum values of horizontal and vertical by software.  
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

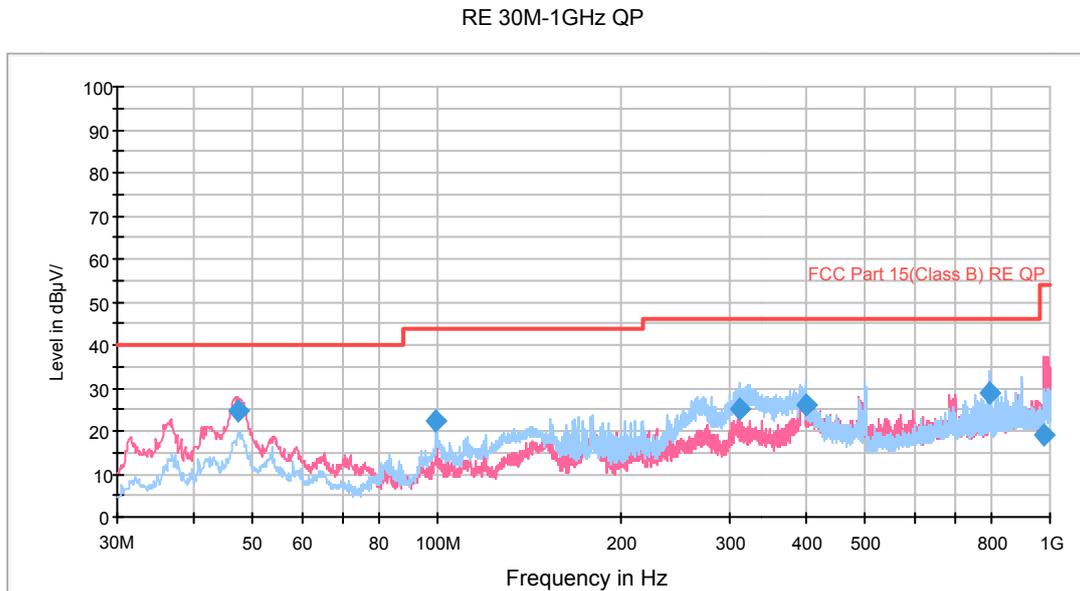


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
47.213991	24.8	45.1	100.0	V	162.0	-20.3	15.2	40.0
99.628506	22.1	47.4	226.0	H	32.0	-25.3	21.4	43.5
311.349000	25.0	48.1	101.0	H	161.0	-23.1	21.0	46.0
399.090250	25.9	46.8	101.0	H	321.0	-20.9	20.1	46.0
796.555750	28.8	43.6	100.0	H	61.0	-14.8	17.2	46.0
976.209500	18.9	31.3	101.0	V	115.0	-12.4	35.1	54.0

- Remark:**
1. Quasi-Peak = Reading value + Correction factor
  2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
  3. Margin = Limit –Quasi-Peak

RE 1G-3GHz PK+AV

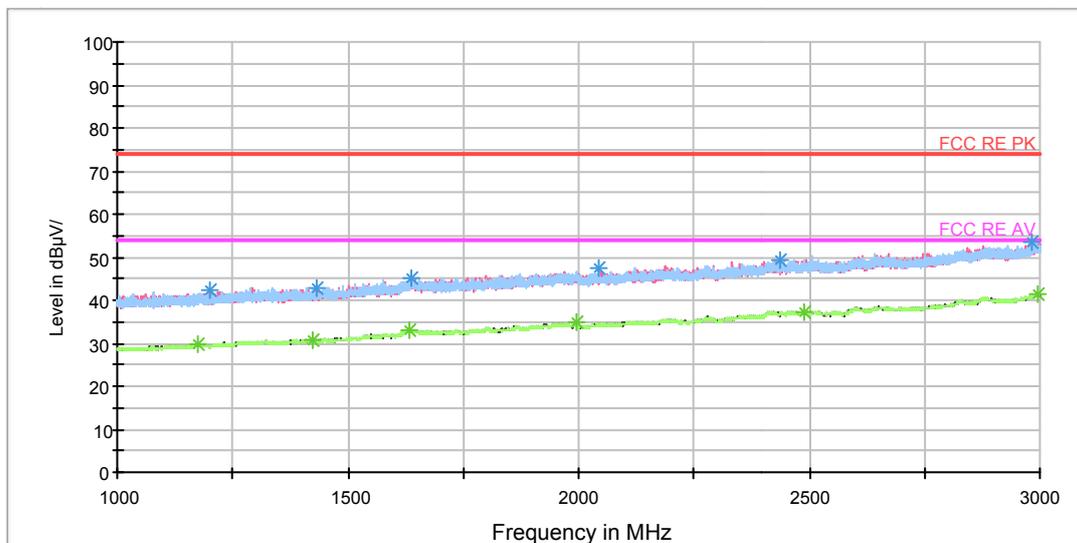


Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.250000	42.5	50.7	102.0	V	0.0	-8.2	31.5	74
1431.000000	42.9	49.8	102.0	V	0.0	-6.9	31.1	74
1639.000000	45.2	49.9	102.0	H	119.0	-4.7	28.8	74
2042.500000	47.4	50.6	102.0	V	0.0	-3.2	26.6	74
2435.750000	49.4	50.0	102.0	H	26.0	-0.6	24.6	74
2982.250000	53.6	55.8	102.0	H	0.0	2.2	20.4	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1176.750000	29.8	37.8	102.0	H	188.0	-8.0	24.2	54
1424.750000	30.8	37.7	102.0	V	235.0	-6.9	23.2	54
1632.500000	33.0	37.7	102.0	V	189.0	-4.7	21.0	54
1995.000000	34.7	37.9	102.0	V	351.0	-3.2	19.3	54
2488.750000	37.4	37.6	102.0	V	212.0	0.2	16.6	54
2997.750000	41.4	43.7	102.0	V	143.0	2.3	12.6	54

RE 3-18GHz PK+AV

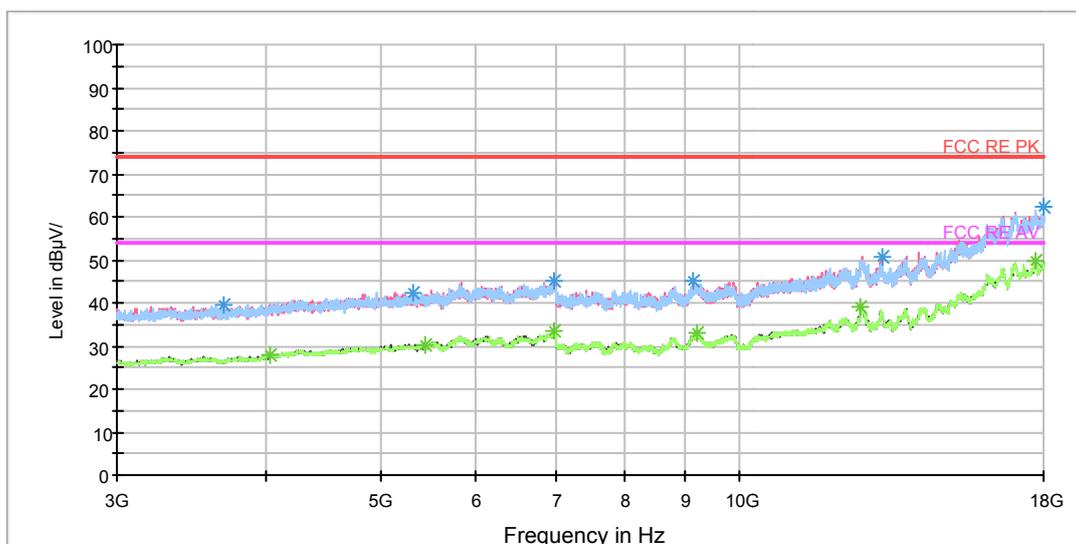

Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3684.375000	39.7	41.4	102.0	H	169.0	-1.7	34.3	74
5323.125000	42.5	44.9	102.0	V	109.0	2.4	31.5	74
6995.625000	45.2	51.7	102.0	V	138.0	6.5	28.8	74
9155.625000	45.0	55.3	102.0	V	0.0	10.3	29.0	74
13160.625000	50.7	64.8	102.0	V	246.0	14.1	23.3	74
17996.250000	62.2	87.6	102.0	V	0.0	25.4	11.8	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4027.500000	27.9	29.0	102.0	H	169.0	-1.1	26.1	54
5441.250000	30.2	33.1	102.0	H	197.0	2.9	23.8	54
6997.500000	33.4	39.9	102.0	V	165.0	6.5	20.6	54
9195.000000	32.8	43.0	102.0	H	87.0	10.2	21.2	54
12641.250000	38.9	53.4	102.0	H	0.0	14.5	15.1	54
17711.250000	49.6	74.3	102.0	V	192.0	24.7	4.4	54

## 3.2 Conducted Emission

### Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

### Test Setup

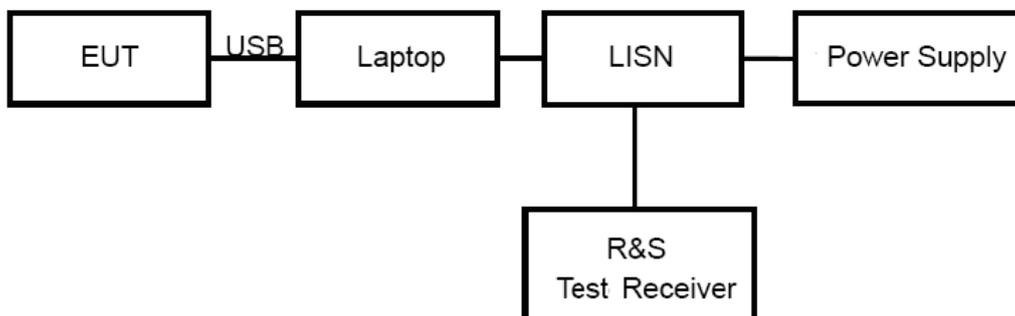

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50


\*: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U=2.69$  dB.

**Test Results**

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

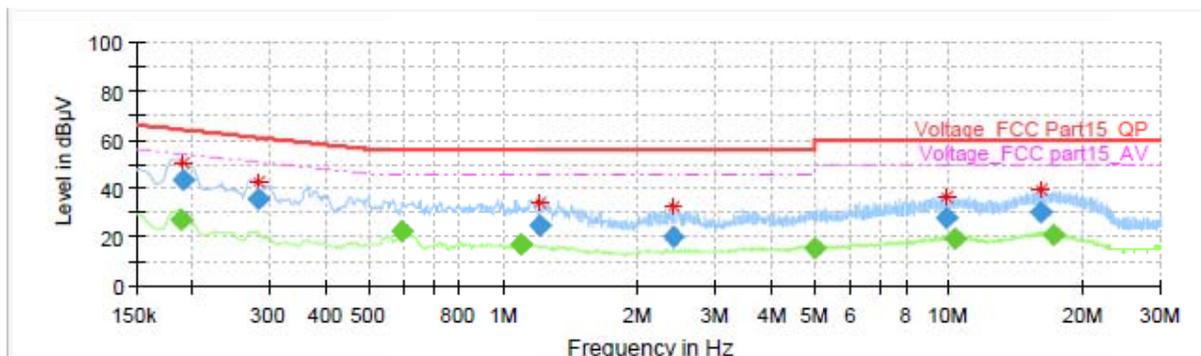


**Final Result**

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.188250	---	27.44	54.11	26.68	1000.0	9.000	L1	ON	19.2
0.190500	43.41	---	64.02	20.61	1000.0	9.000	L1	ON	19.2
0.282750	35.29	---	60.74	25.44	1000.0	9.000	L1	ON	19.2
0.595500	---	22.42	46.00	23.58	1000.0	9.000	L1	ON	19.3
1.090500	---	16.70	46.00	29.30	1000.0	9.000	L1	ON	19.2
1.205250	25.13	---	56.00	30.87	1000.0	9.000	L1	ON	19.2
2.395500	19.96	---	56.00	36.04	1000.0	9.000	L1	ON	19.0
4.994250	---	15.77	46.00	30.23	1000.0	9.000	L1	ON	19.1
9.883500	27.58	---	60.00	32.42	1000.0	9.000	L1	ON	19.4
10.333500	---	19.60	50.00	30.40	1000.0	9.000	L1	ON	19.4
16.014750	30.07	---	60.00	29.93	1000.0	9.000	L1	ON	19.4
17.216250	---	20.55	50.00	29.45	1000.0	9.000	L1	ON	19.6

L line

Conducted Emission from 150 KHz to 30MHz

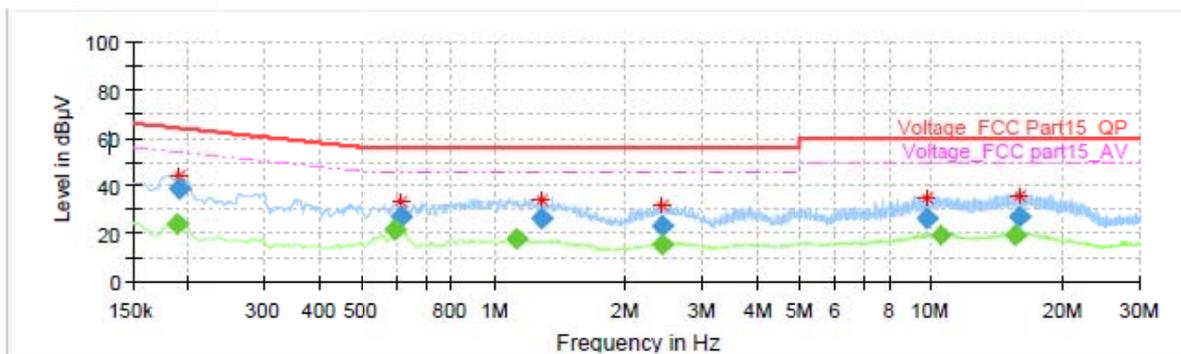

## Final Result

Frequency (MHz)	Quasi Peak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.188250	---	23.97	54.11	30.14	1000.0	9.000	N	ON	19.2
0.190500	38.95	---	64.02	25.07	1000.0	9.000	N	ON	19.2
0.593250	---	21.75	46.00	24.25	1000.0	9.000	N	ON	19.3
0.613500	26.97	---	56.00	29.03	1000.0	9.000	N	ON	19.3
1.135500	---	18.09	46.00	27.91	1000.0	9.000	N	ON	19.2
1.293000	26.27	---	56.00	29.73	1000.0	9.000	N	ON	19.2
2.440500	22.95	---	56.00	33.05	1000.0	9.000	N	ON	19.0
2.445000	---	15.61	46.00	30.39	1000.0	9.000	N	ON	19.0
9.692250	25.98	---	60.00	34.02	1000.0	9.000	N	ON	19.4
10.533750	---	19.36	50.00	30.64	1000.0	9.000	N	ON	19.4
15.558000	---	19.49	50.00	30.51	1000.0	9.000	N	ON	19.4
15.839250	27.08	---	60.00	32.92	1000.0	9.000	N	ON	19.4

N line


Conducted Emission from 150 KHz to 30MHz

## 4 Main Test Equipment

Name	Type	Manufacturer	Serial Number	Last Cal.	Cal. Due Date
EMI Test Receiver	ESC13	R&S	100948	2016-06-01	2017-05-31
Signal Analyzer	FSV30	R&S	100815	2015-12-17	2016-12-16
Trilog Antenna	VULB 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
EMI Test Receiver	ESCS30	R&S	100138	2015-12-17	2016-12-16
LISN	ENV216	R&S	101171	2013-12-18	2016-12-17
Bore Sight Antenna mast	2171B	ETS	00058752	NA	NA

## ANNEX A: The EUT Appearance and Test Configuration

### A.1 EUT Appearance

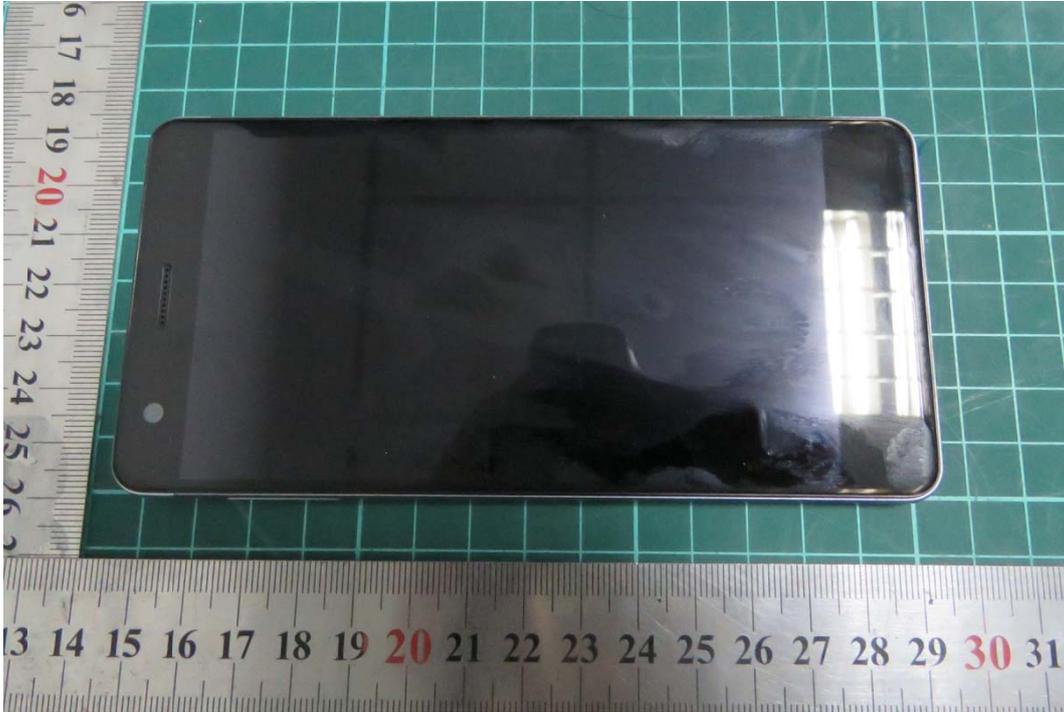

Front Side



Back Side


a: EUT




b: Adapter

Picture 1 EUT and Accessory

## A.2 Test Setup

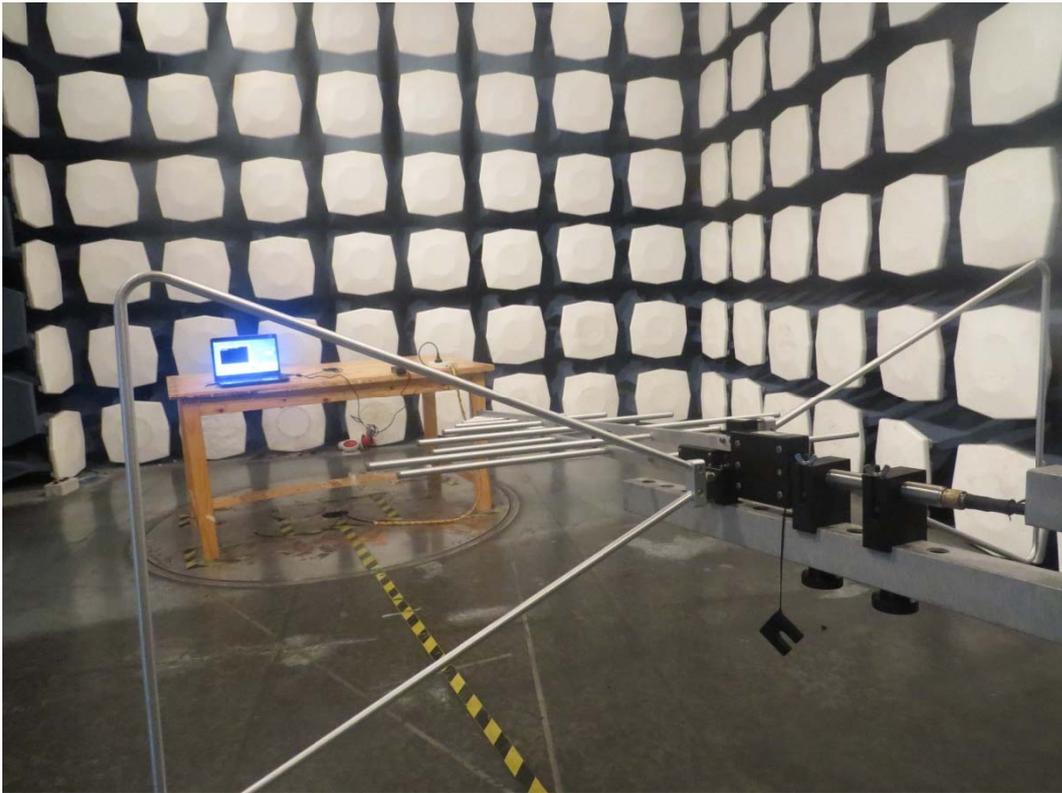

a: Below 1GHz

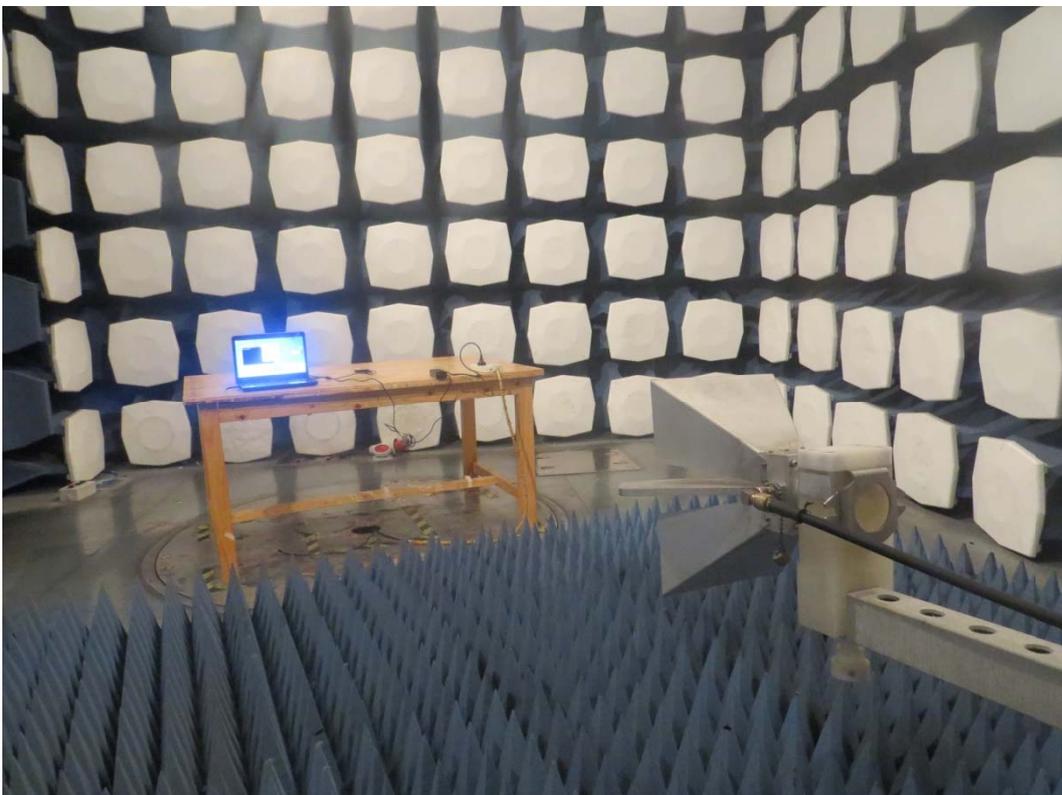

b: Above 1GHz

**Picture 2 Radiated Emission Test Setup**



**Picture 3 Conducted Emission Test Setup**

### A.3 Host Product

