



The Photos of SAR test

No. I14Z45278-SEM02

For

ZTE CORPORATION

GSM/DC HSPA+ uFi

Mode Name: R209-Z

With

Hardware Version: ddxB

Software Version: BD_R209V0.1

FCC ID: SRQR209-Z

Issued Date: 2014-04-09



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of MIIT

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.



Tel:+86(0)10-62304633-2079, Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com





Picture 1: Constituents of the sample

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

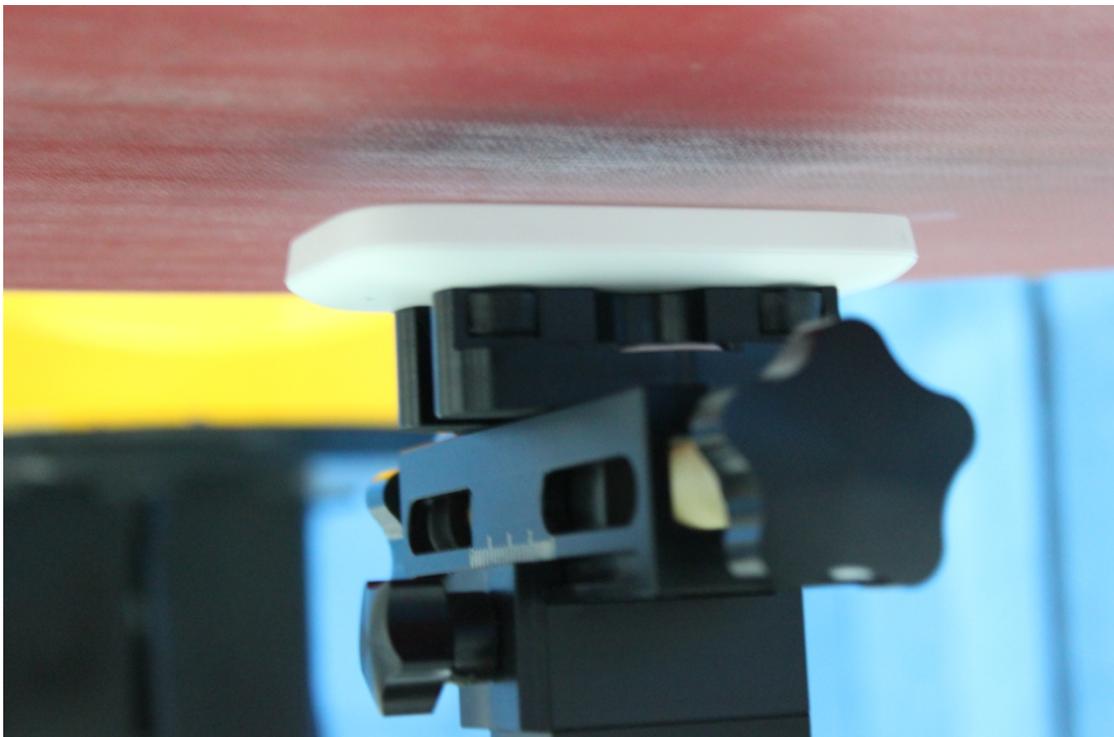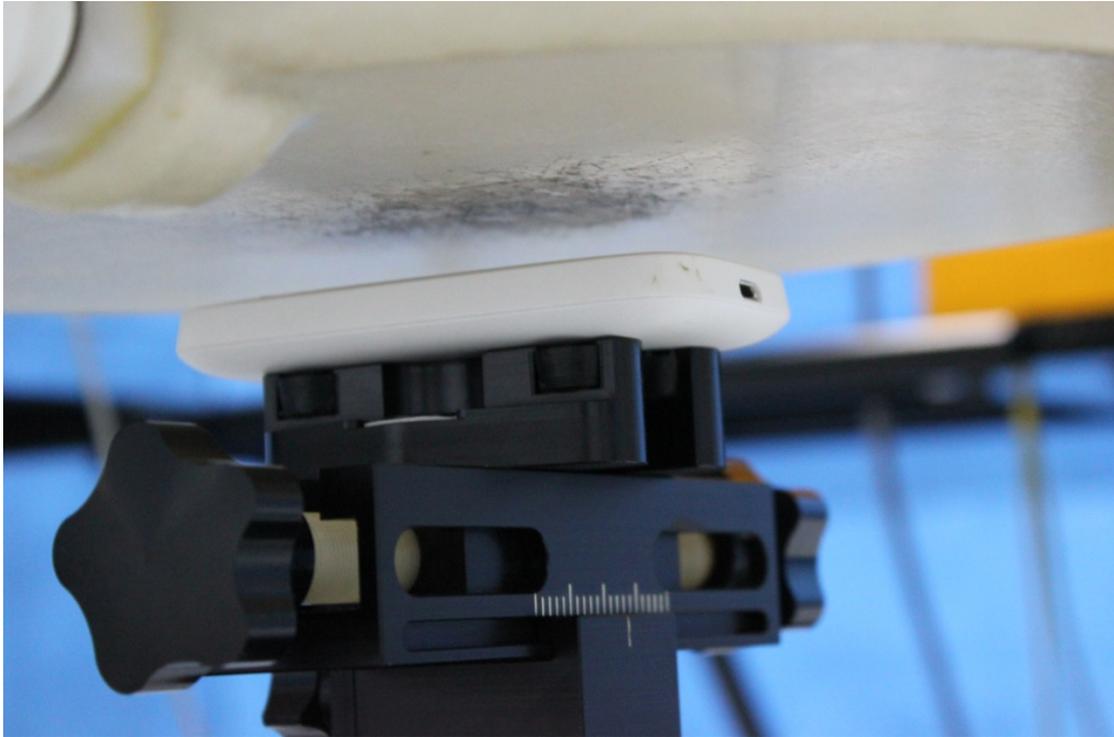



Picture 2: Position 1

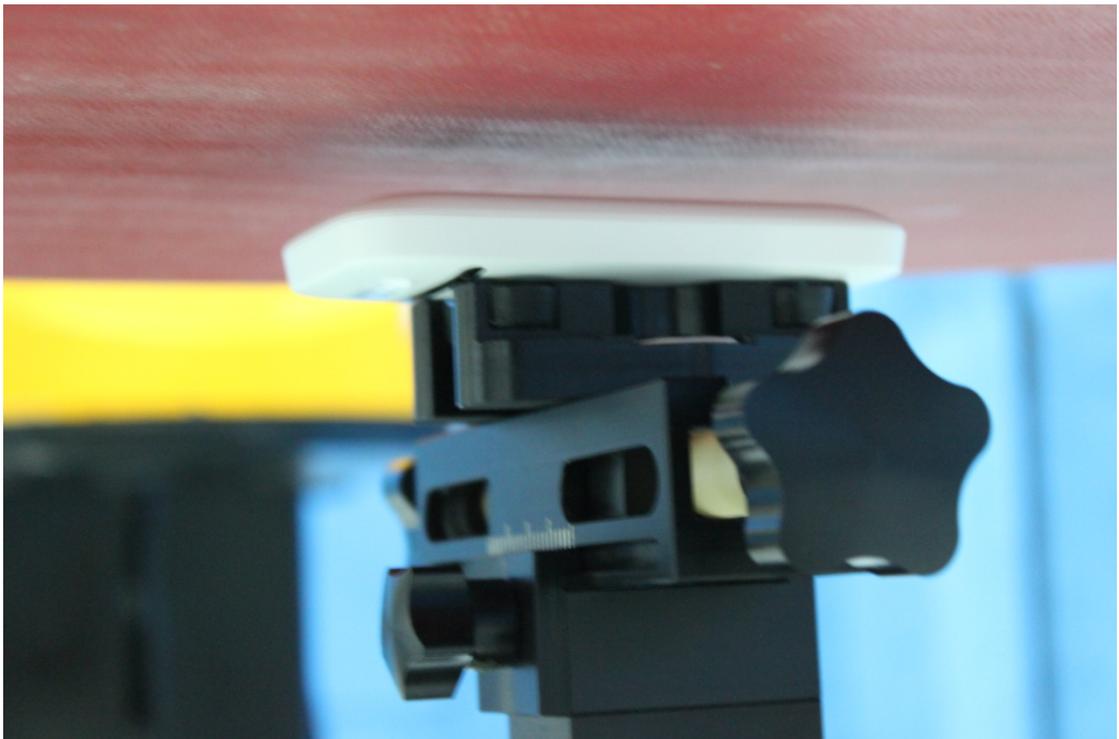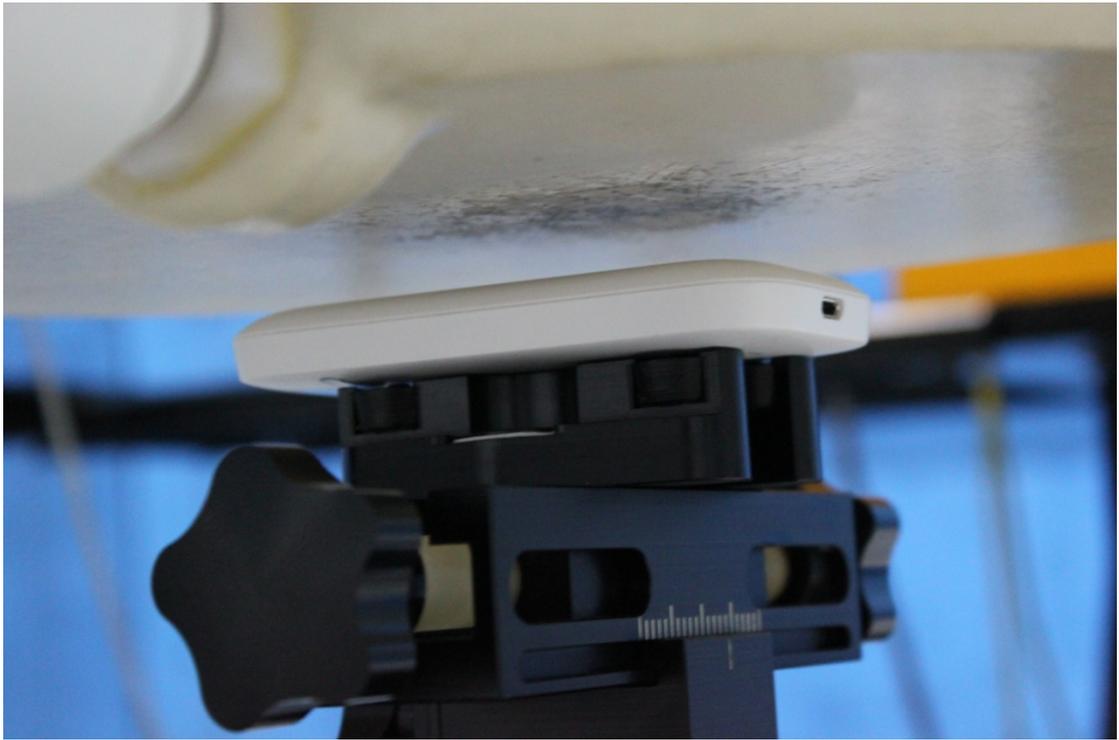

Picture 3: Position 2

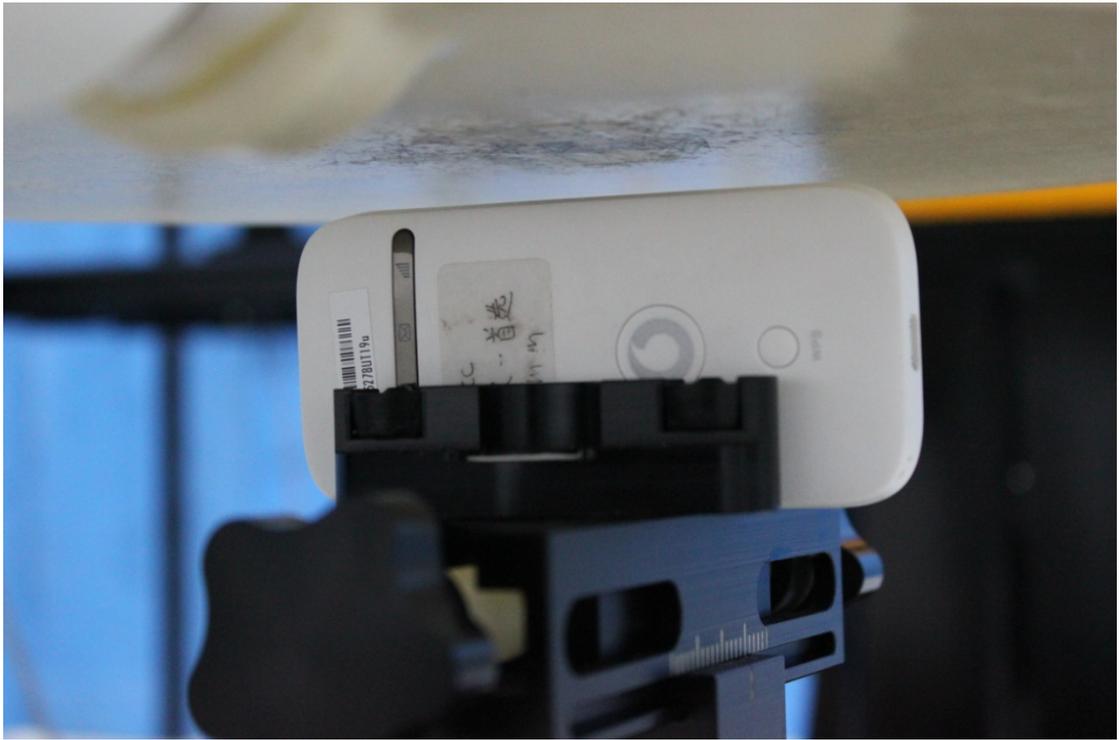


Picture 4: Position 3

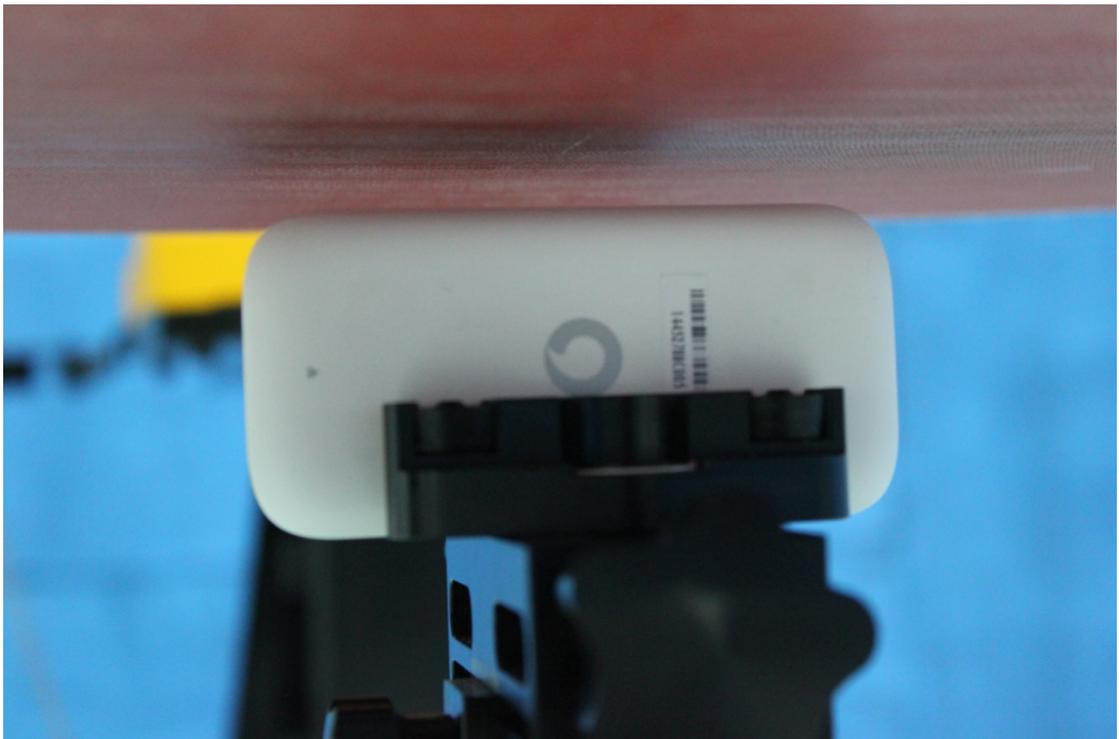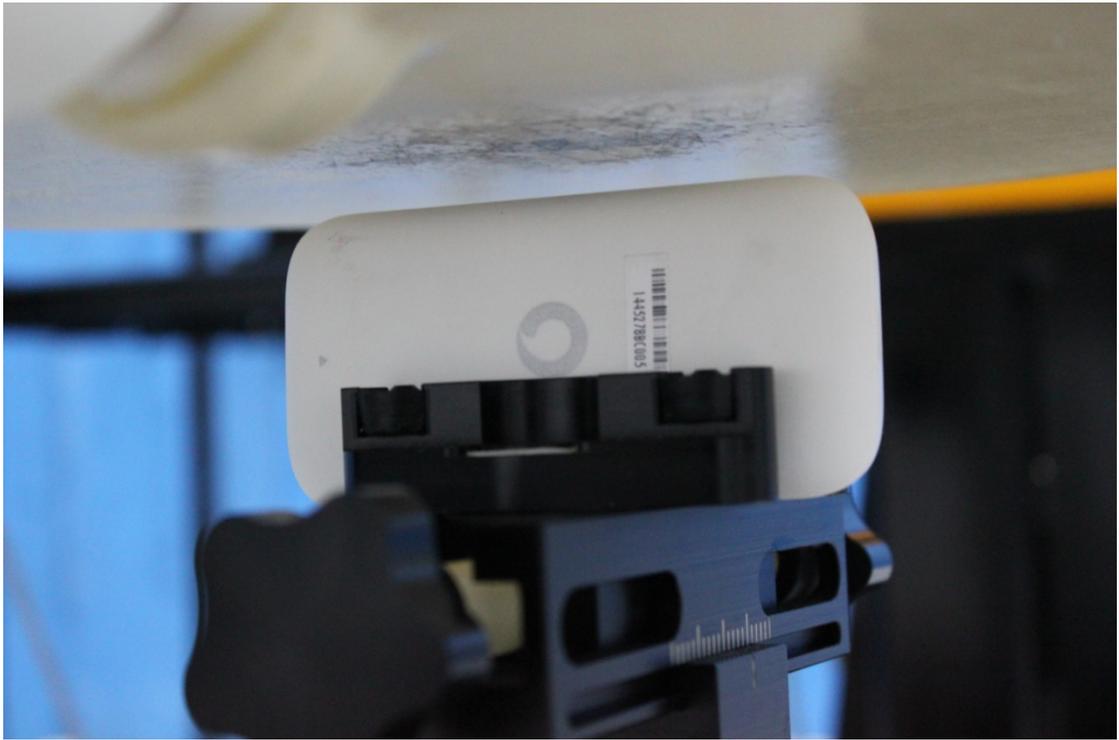

Picture 5: Position 5



Picture 6: Position 4

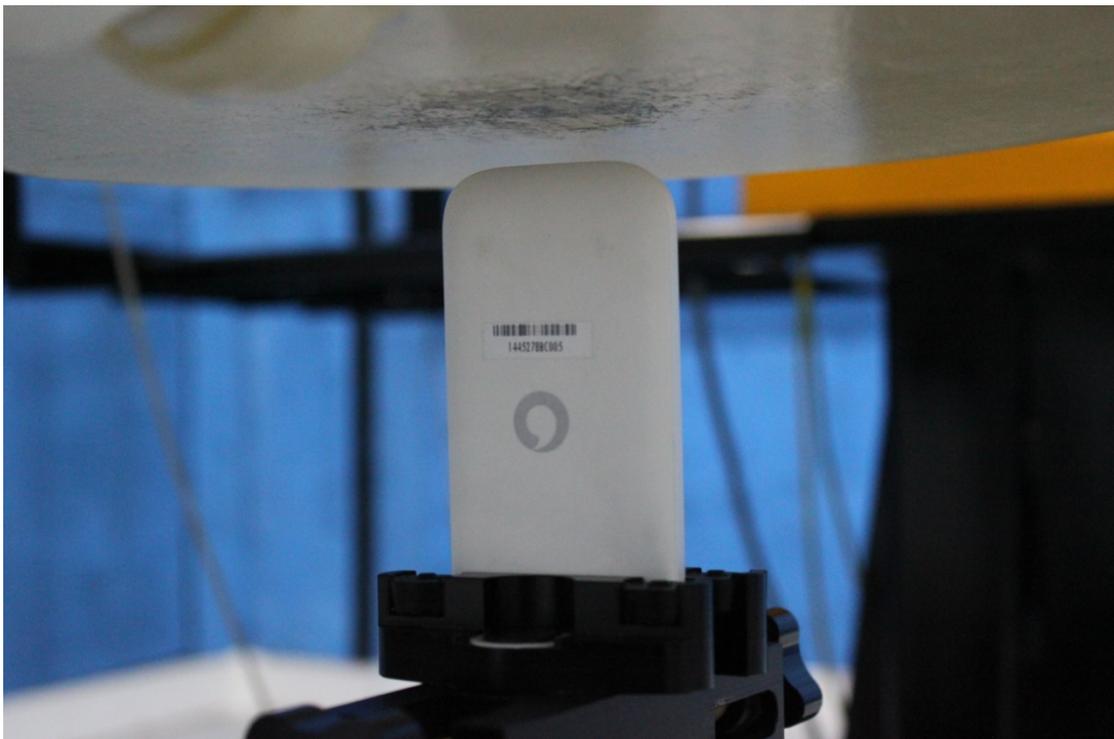

Picture 7: Position 6