

HCT CO., LTD.**CERTIFICATE OF COMPLIANCE**
FCC Certification**Applicant Name:**

LG Electronics Inc.

Date of Issue:

June 03, 2011

Location:HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si,
Kyunggi-Do, Korea**Test Report No.:** HCTR1106FR01-1**HCT FRN:** 0005866421**FCC ID** :SSNKNC9U0302**APPLICANT** :LG Electronics Inc.**FCC Model(s):** CK-900**EUT Type:** Wireless Keyboard**Max. RF Output Power** 69.85 dBuV/m**Frequency Range:** 2402 MHz - 2480 MHz**Modulation type** GFSK**FCC Classification:** FCC Part 15 Low Power Communication Device Transmitter**FCC Rule Part(s):** Part 15 subpart C 15.249

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Jong Seok Lee
Report prepared by
: Jong Seok Lee
Test Engineer of RF Team


Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.249 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCCID : SSNKNC9U0302	Page 1 of 18



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1106FR01	June 02, 2011	First Approval Report
HCTR1106FR01-1	June 03, 2011	Modify of Fundamental Emission Limit

FCC PT.15.249 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 2 of 18

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION.....	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS.....	6
7. SUMMARY OF TEST RESULTS.....	7
8. FCC PART 15.249 REQUIREMENTS.....	8
8.1 RADIATED EMISSIONS	8
8.1.1 RADIATED EMISSIONS	8
8.1.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....	16
8.2 POWERLINE CONDUCTED EMISSIONS.....	17
9. LIST OF TEST EQUIPMENT.....	18

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 3 of 18



1. GENERAL INFORMATION

Applicant Name: LG Electronics Inc.
Address: 50 Hyangjeong-dong, Heungdeok-gu, Cheongju-si,
Chungcheongbuk-do, 361-480 South Korea
FCC ID: SSNKNC9U0302
EUT: Wireless Keyboard
Model name(s): CK-900
Date(s) of Tests: May 23, 2011 ~ May 26, 2011
Contact Person: Name: Ruan Yaokun
Phone #: +82-571-8672-9118
Fax #: +82-571-8672-9061
Place of Tests: HCT Co., Ltd.
105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Wireless Keyboard
FCC Model Name	CK-900
Power Supply	DC 1.8 V ~ DC 3.2 V
Battery Type	AAA alkaline battery X 2
Frequency Range	2402 MHz ~ 2480 MHz
Transmit Power	69.85 dBuV/m
Modulation Type	GFSK
Antenna Specification	Manufacturer: Shenzhen DingHengXin Precision Electronics co., LTD Antenna type: Printed PCB Antenna Peak Gain : -5.55 dBi

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 4 of 18

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz(ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" were used in the measurement of the **LG Electronics Inc.**

Wireless Keyboard FCC ID: SSNKNC9U0302

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 5 of 18



Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 6 of 18



7. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Radiated Emissions	§15.249, 15.209	cf. Section 8.1.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.205, 15.209	cf. Section 8.1.2		PASS

FCC PT.15.249 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 7 of 18



8. FCC PART 15.249 REQUIREMENTS

8.1 RADIATED EMISSIONS

8.1.1 RADIATED EMISSIONS

LIMIT : §15.249, §15.205, §15.209

1. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


2. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following :

Frequency (MHz)	Field Strength of Fundamental(mV/m)	Field Strength of Harmonics(uV/m)
902 - 928	50	500
2400 – 2483.5	50	500
5725 – 5875	50	500
24000 - 24250	250	2500


FCC PT.15.249 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 8 of 18

Test Configuration

Below 30 MHz

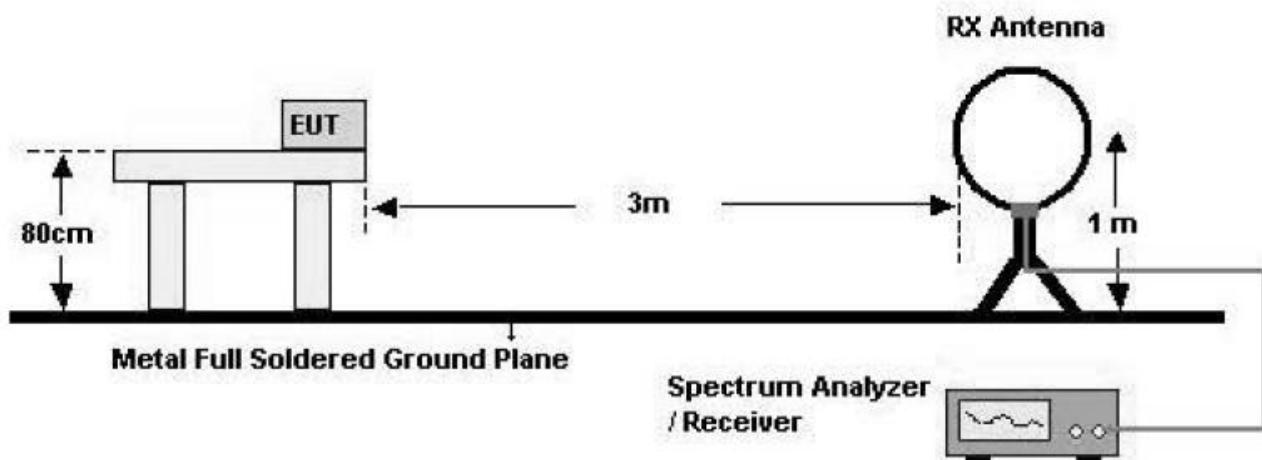


30 MHz - 1 GHz

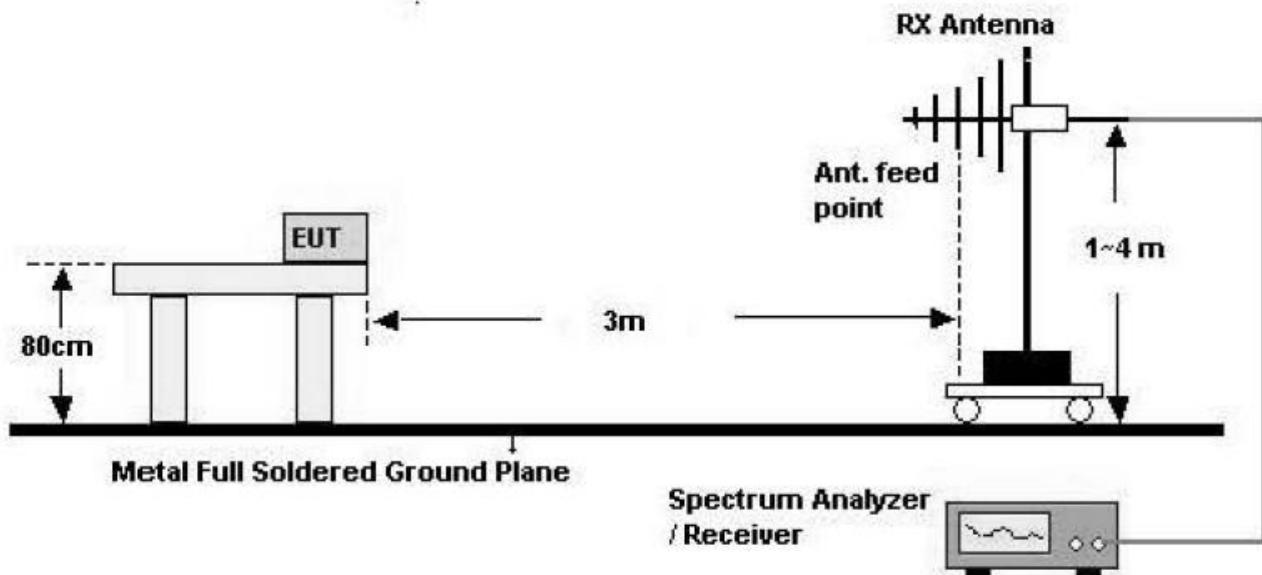

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302		Page 9 of 18

Above 1 GHz

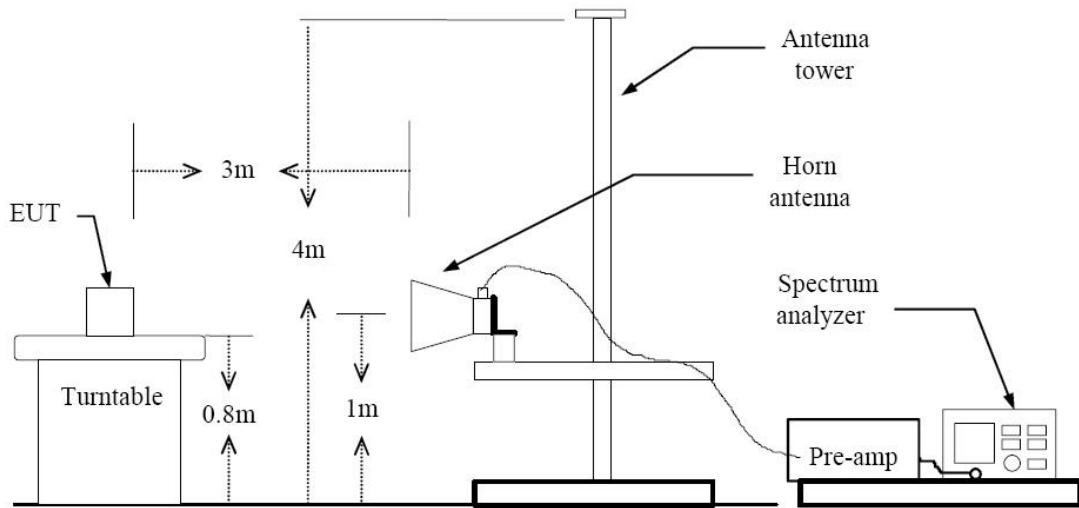

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302		Page 10 of 18



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID :		
HCTR1106FR01-1	June 03, 2011	Wireless Keyboard	SSNKNC9U0302	Page 11 of 18	



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID :		
HCTR1106FR01-1	June 03, 2011	Wireless Keyboard	SSNKNC9U0302	Page 12 of 18	



Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading dBuV	*A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2402	29.17	33.26	V	62.43	114	51.57	PK
2402	23.32	33.26	V	56.58	94	37.42	AV
2402	36.59	33.26	H	69.85	114	44.15	PK
2402	34.04	33.26	H	67.3	94	26.70	AV
4804	54.48	-3.82	V	50.66	74	23.34	PK
4804	44.99	-3.82	V	41.17	54	12.83	AV
4804	57.2	-3.82	H	53.38	74	20.62	PK
4804	50.13	-3.82	H	46.31	54	7.69	AV

* A-F: ANTENNA FACTOR

C-L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.249 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 13 of 18

**Operation Mode: CH Mid(GFSK)**

Frequency [MHz]	Reading dBuV	※A.F+CL-AMP GAIN. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2441	28.77	33.54	V	62.31	114	51.69	PK
2441	23.01	33.54	V	56.55	94	37.45	AV
2441	35.51	33.54	H	69.05	114	44.95	PK
2441	32.79	33.54	H	66.33	94	27.67	AV
4882	53.71	-3.68	V	50.03	74	23.97	PK
4882	44.08	-3.68	V	40.4	54	13.6	AV
4882	56.89	-3.68	H	53.21	74	20.79	PK
4882	48.04	-3.68	H	44.36	54	9.64	AV

※ A-F: ANTENNA FACTOR

C-L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302		Page 14 of 18



Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	*A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2480	28.15	33.81	V	61.96	114	52.04	PK
2480	22.74	33.81	V	56.55	94	37.45	AV
2480	34.95	33.81	H	68.76	114	45.24	PK
2480	32.05	33.81	H	65.86	94	28.14	AV
4960	53.09	-3.57	V	49.52	74	24.48	PK
4960	44.01	-3.57	V	40.44	54	13.56	AV
4960	55.69	-3.57	H	52.12	74	21.88	PK
4960	46.44	-3.57	H	42.87	54	11.13	AV

* A-F: ANTENNA FACTOR

C-L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 10 Hz.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No.	Date of Issue:	EUT Type:	FCC ID :		
HCTR1106FR01-1	June 03, 2011	Wireless Keyboard	SSNKNC9U0302	Page 15 of 18	



8.1.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.205, §15.209

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Operation Mode

GFSK(Normal)

Operating Frequency

2402, 2480 MHz

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	24.09	33.25	H	57.34	74	16.66	PK
2390.0	10.59	33.25	H	43.84	54	10.16	AV
2390.0	24.40	33.25	V	57.65	74	16.35	PK
2390.0	10.66	33.25	V	43.91	54	10.09	AV
2483.5	23.07	33.73	H	56.80	74	17.20	PK
2483.5	10.01	33.73	H	43.74	54	10.26	AV
2483.5	23.44	33.73	V	57.17	74	16.83	PK
2483.5	10.08	33.73	V	43.81	54	10.19	AV

※ A-F: ANTENNA FACTOR

C-L: CABLE LOSS

Notes:

1. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW=1 MHz, VBW= 10 Hz.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302		Page 16 of 18



8.2 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

Note : We don't perform powerline conducted emission test. Because this EUT uses AAA battery type.

FCC PT.15.249 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 17 of 18



9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ESH2-Z5/ LISN	Annual	02/01/2012	861741/013
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	9168-200
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	ESH3-Z2/ PULSE LIMITER	Annual	10/25/2011	375.8810.352
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/29/2011	10094
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	09/23/2011	296
Rohde & Schwarz	FSP30 / Spectrum Analyzer	Annual	03/23/2012	839117/011
Agilent	E4440A / Spectrum Analyzer	Annual	05/02/2012	US45303008
Agilent	E4416A /Power Meter	Annual	01/04/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2012	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2012	1
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2012	1
Hewlett Packard	11636B/Power Divider	Annual	12/29/2011	11377
Hewlett Packard	11667B / Power Splitter	Annual	11/08/2011	10126
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	01/04/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	12/01/2011	010002156287001199
TESCOM	TC-3000A / BLUETOOTH TESTER	Annual	01/10/2012	3000A490112
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2012	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/13/2012	9009-2536

FCC PT.15.249 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1106FR01-1	Date of Issue: June 03, 2011	EUT Type: Wireless Keyboard	FCC ID : SSNKNC9U0302	Page 18 of 18