

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

---

## **TEST REPORT**

### **SIMOCO SRP9180 AC VHF Portable Transceiver**

*tested to the*

**Code of Federal Regulations (CFR) 47**

**Part 90 –Private Land Mobile Services**


**Part 22 – Public Mobile Services**

**Part 15 – Radio Frequency Device**

*for*

**TMC Radio Pty Ltd**

This Test Report is issued with the authority of:



---

**Andrew Cutler - General Manager**



All tests reported  
herein have been  
performed in accordance  
with the laboratory's  
scope of accreditation

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

---

## **Table of Contents**

<b>1. CLIENT INFORMATION</b>	<b>3</b>
<b>2. DESCRIPTION OF TEST SAMPLE</b>	<b>3</b>
<b>3. COMPLIANCE STATEMENT AND RESULT SUMMARY</b>	<b>4</b>
<b>4. TEST SAMPLE DESCRIPTION</b>	<b>5</b>
<b>5. TEST CONDITIONS</b>	<b>5</b>
<b>6. ATTESTATION</b>	<b>7</b>
<b>7. TEST RESULTS</b>	<b>8</b>
<b>8. TEST EQUIPMENT USED</b>	<b>38</b>
<b>9. ACCREDITATIONS</b>	<b>38</b>
<b>10. PHOTOGRAPH (S)</b>	<b>39</b>

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## 1. CLIENT INFORMATION

**Company Name** TMC Radio Pty Ltd

**Address** 1270 Ferntree Gully Road  
Scoresby

**City** Victoria, 3179

**Country** Australia

**Contact** Mr Robert Stowell

## 2. DESCRIPTION OF TEST SAMPLE

**Brand Name** SIMOCO

**Model Number** SRP9180 AC

**Product** VHF Portable Transceiver

**Manufacturer** TMC Radio Pty Ltd

**Designed in** Australia

**Manufactured in** Taiwan

**Serial Number** ET9AX09100107

**FCC ID** STZSRP9170AC

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

## 3. COMPLIANCE STATEMENT AND RESULT SUMMARY

The **SIMOCO SRP9180 AC VHF Portable Transceiver** complies with the limits defined in 47 CFR Part 15, 47 CFR Part 22, 47 CFR Part 90 and 47 CFR Part 2 when tested in accordance with the test methods described in 47 CFR Part 2.

Clause	Description	Result
90.203	Certification required	Noted
2.1046 90.205	RF power output Power and antenna height limits	Noted Complies
2.1047 2.1047(a) 2.1047(b) 90.211(a)	Modulation Characteristics Low pass filter response Modulation limiting characteristics Modulation characteristics	Noted Noted Noted Complies
2.1049 2.202 22.357 22.359(a) 90.207 90.209 90.210	Occupied bandwidth Bandwidths Emission types Emission masks Types of emissions Bandwidth limitations Emission masks	Noted Noted Complies Complies Complies Complies Complies
2.1051	Spurious emissions at antenna terminals	Complies
2.1053	Field strength of spurious radiation	Complies
2.1055 22.355 90.213	Frequency stability Frequency stability Frequency stability	Noted Complies Complies
90.214	Transient frequency behaviour	Complies
15.109 15.111	Receiver radiated emissions Receiver local oscillator voltage	Complies Complies
1.1310	Radio frequency exposure limits	SAR measurements supplied in a separate report

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

---

## 4. TEST SAMPLE DESCRIPTION

The sample tested has the following specifications:

### Rated Transmitter Output Power

5.0 Watts (36.9 dBm)

### Transmitter FCC frequency range

150 - 174 MHz

### Test frequencies

Chl	Frequency MHz	Power Watts	Spacing kHz
1	150.075	5.0	12.5
2	162.075	5.0	12.5
3	173.975	5.0	12.5
4	150.075	5.0	25.0
5	162.075	5.0	25.0
6	173.975	5.0	25.0

### FCC Bands

Part 90: 150- 174 MHz

Part 22: 50- 450 MHz

### Emission Designators / Modes of operation

11k2F3E – Analogue speech

11k2F1D – 1200 baud FFSK

8k10F1E – C4FM digital speech

16k0F3E – Analogue speech

16k0F1D – 1200 baud FFSK

### Power Supply

Li-ION rechargeable battery DC voltage supply typically 7.2 Vdc

## 5. TEST CONDITIONS

---

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## Standard Temperature and Humidity

Temperature: +15°C to + 30° maintained.

Relative Humidity: 20% to 75% observed.

## Standard Test Power Source

Standard Test Voltage: 7.2 Vdc.

## Extreme Temperature

High Temperature: + 50°C maintained.

Low Temperature: - 30 °C maintained.

## Extreme Test Voltages

Low Voltage: 6.5 Vdc

---

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## 6. ATTESTATION

The **SIMOCO SRP9180 AC VHF Portable Transceiver** complies with the Code of Federal Regulations (CFR) 47 Part 90 –Private Land Mobile Services , Part 22 – Public Land Mobile Services and 47 Part 15 – Radio Frequency Devices.

This report describes the tests and measurements performed for the purpose of determining compliance with the specification with the following conditions:

**The client selected the test sample.**

**The report relates only to the sample tested.**


**This report does not contain corrections or erasures.**

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

In addition this equipment has been tested in accordance with the requirements contained in the appropriate Commission regulations.

To the best of my knowledge, these tests were performed using measurement procedures that are consistent with industry or Commission standards and demonstrate that the equipment complies with the appropriate standards.

I further certify that the necessary measurements were made by EMC Technologies NZ Ltd, 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand.



Andrew Cutler  
General Manager  
EMC Technologies NZ Ltd

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## 7. TEST RESULTS

### Certification required

Certification of this device is sought for transmissions using 12.5 and 25 kHz channel spacing.

12.5 and 25 kHz channel bandwidth certification is sought for this transmitter under section 90.203(j)(3) as:

- certification has been sought after February 14, 1997 and before January 1, 2011.
- the equipment meets the spectrum efficiency standard of one voice channel per 12.5 kHz of channel bandwidth
- the equipment can operate with a data rate greater than 4.8 kbps per 6.25 kHz of channel bandwidth

**Result:** Complies.

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## RF power output

Measurements were carried out at the RF output terminals of the transmitter using a 30 dB power attenuator and a 50  $\Omega$  dummy load.

Measurements were carried out when the transmitter was not being modulated.

Measurements were made with the input voltage set to 7.2 Vdc and when decreased to 6.5 Vdc.

Testing was carried out at maximum power output.

Frequency (MHz)	Voltage (Vdc)	Rated (dBm)	Measured (dBm)
150.075	7.2	36.9	37.0
162.075	7.2	36.9	36.9
173.975	7.2	36.9	36.9

Frequency (MHz)	Voltage (Vdc)	Rated (dBm)	Measured (dBm)
162.075	6.5	36.9	36.4
162.075	7.2	36.9	36.9

### Limits:

Clause 90.205(h) of Part 90 specifies that in the band 150 – 174 MHz the maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and the required service area.

Part 22 does not specify the transmitter output power.

**Result:** Complies

**Measurement Uncertainty:**  $\pm 0.5$  dB

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## Modulation Characteristics

This transmitter is capable of producing analogue speech and digital speech modulations.

(a) Frequency response of the audio frequency low pass filter between 100 Hz and 15 kHz.

This measurement was carried out using an audio signal generator and an audio modulation analyser.


At 1 kHz an audio signal was applied which was used as a 0 dB response reference.

The frequency of the input signal was then varied and the output response noted.

This measurement was carried out from 100 Hz to 5000 Hz as required by Part 2 with further measurements carried out in order to show the full range of this filter.

The peak deviation response was found to be at 2000 Hz.

The -3dB roll off from peak deviation occurs at 2600 Hz, and is denoted as a red data series point on the following graph.

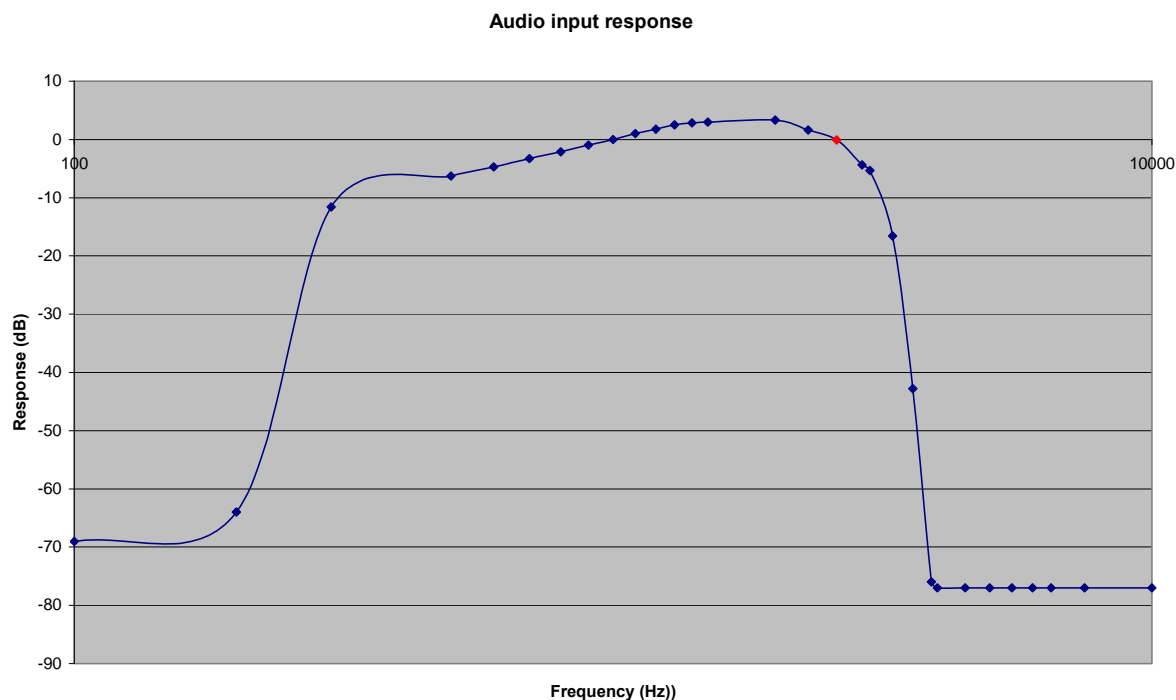

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No 090714.3


Report date: 11th August 2009

- (b) A family of curves showing the percentage of modulation versus the modulation input voltage.

Measurements were made between 100 Hz to 4 kHz.

At each frequency the input voltage was slowly increased with the resulting frequency deviation of the transmitter being recorded.

This deviation was then converted to a modulation percentage where 5 kHz deviation is 100% for 25 kHz channels and 2.5 kHz deviation is 100% for 12.5 kHz channels.

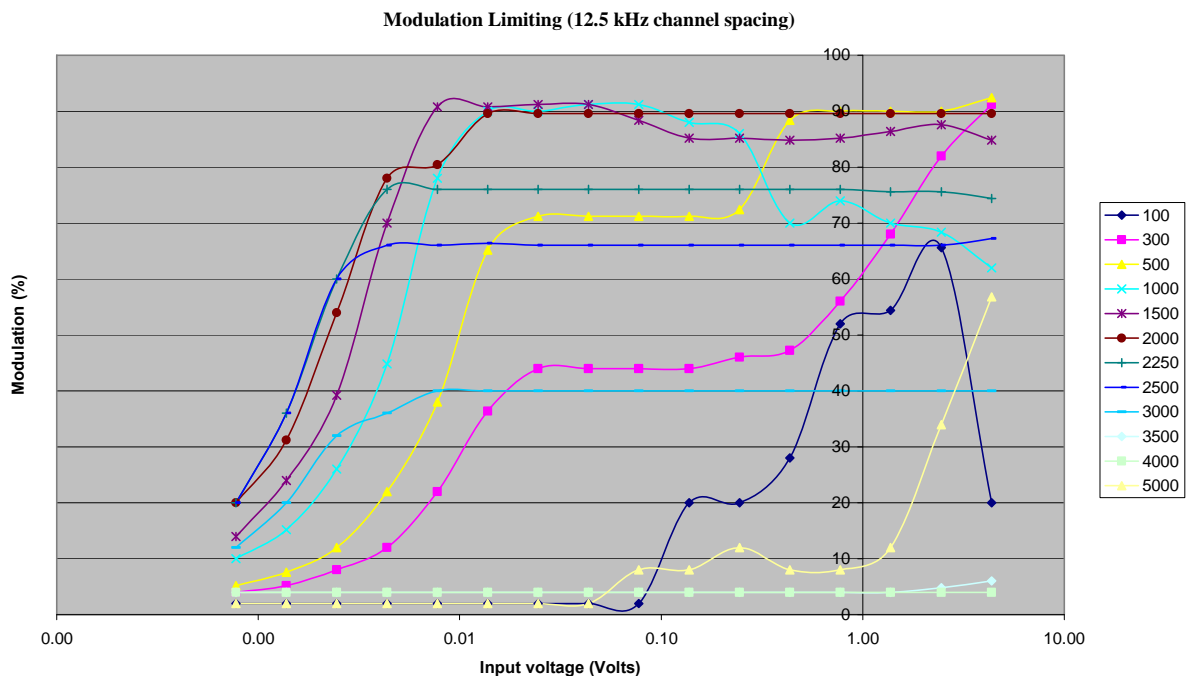


# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

Modulation limiting (25 kHz channel spacing transmitter)

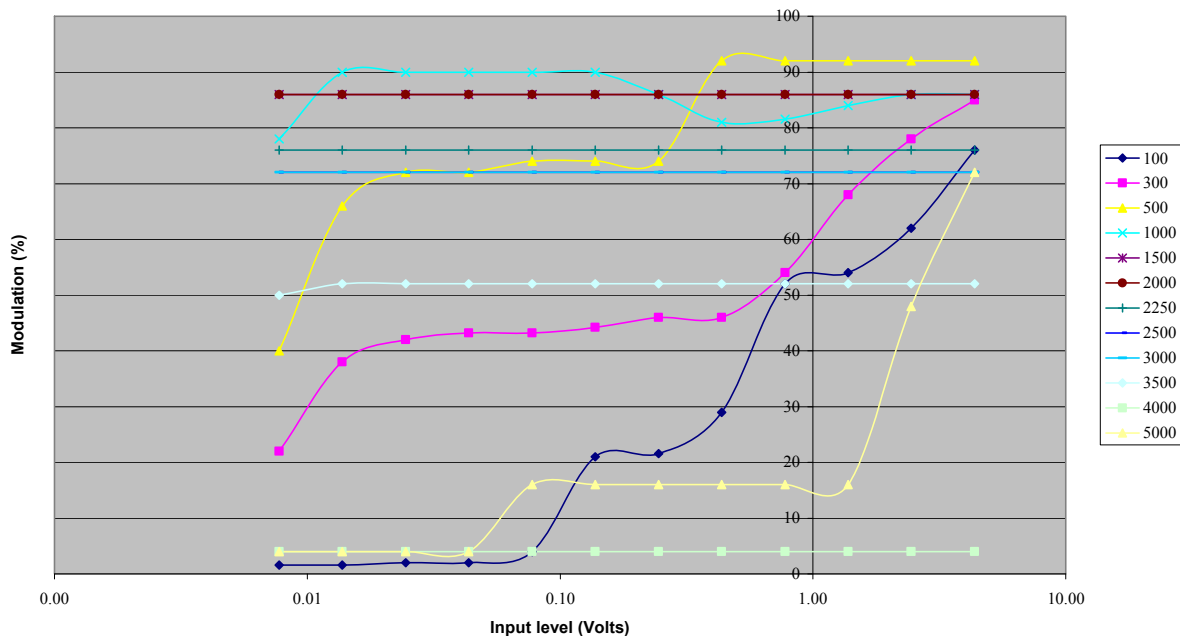

(d) A curve or equivalent data that shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

The following other modulation types are used with this transmitter.

C4FM digital modulation is used for digital telephony (F1E).

1200 baud FFSK data is used for data transmissions (F1D).

## Limit:

Part 90.211 – Modulation requirements states the transmitter must meet the emission requirements of 90.210. Refer to the Occupied Bandwidth measurements in this report.

**Result:** Complies

**Measurement Uncertainty:**  $\pm 1\%$ .

## Part 90.207 – Emission types:

The following emission types are used:

- F3E: Frequency modulation with analogue speech.
- F1E: Digital telephony using C4FM.
- F1D: Data transmission using 1200 baud FFSK data.

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

---

## Part 90.209 – Bandwidth limitations:

The authorised bandwidth is taken to be the necessary bandwidth.

Using the formulas contained in Part 2.202 the necessary bandwidth calculation for the 25 kHz channel step emission is:

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 5.0 kHz

Where M = maximum modulation frequency: 3 kHz

$$B_n = \underline{16 \text{ kHz}}$$

Measurements show the following

$$B_n = 2 \times 4600 \text{ Hz} + 2 \times 2600 \text{ Hz}$$

$$B_n = \underline{14.4 \text{ kHz}}$$

This is confirmed in the emission designation 16k0F3E.

Using the formulas contained in Part 2.202 the necessary bandwidth calculation for the 12.5 kHz channel step emission is:

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 2.5 kHz

Where M = maximum modulation frequency: 3 kHz

$$B_n = \underline{11 \text{ kHz}}$$

Measurements show the following

$$B_n = 2 \times 2300 \text{ Hz} + 2 \times 2600 \text{ Hz}$$

$$B_n = \underline{9.8 \text{ kHz}}$$

This is confirmed in the emission designation 11k0F3E

For F1E according to the APCO 25 information, supplied by the client, C4FM modulation is used and the occupied bandwidth is calculated from the P25 high deviation pattern of 2827 Hz deviation at a 1200 Hz symbol rate.

$$B_n = 2 \times D + 2 \times M$$

Where D = high deviation pattern: 2827 kHz

Where M = symbol rate: 1200Hz

$$B_n = \underline{8054 \text{ Hz or } 8.1 \text{ kHz}}$$

This is confirmed in the emission designation 8k10F1E

---

## EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

---

For F1D the occupied bandwidth is derived as follows

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 3.0 kHz

Where M = maximum modulation frequency: 2.5 kHz (12.5 kHz), 5 kHz (25 kHz)

$$B_n = \underline{11 \text{ kHz or } 16 \text{ kHz}}$$

This is confirmed in the emission designations 11k0F1D and 16k0F1D

## **Part 22.359– Bandwidth limitations:**

Part 22.359(a) – Analog modulation. No authorised bandwidth is defined.

The necessary bandwidth is taken to be the authorised bandwidth.

See the previous part 90 discussions relating to the use of formulas contained in Part 2.202 to calculate the necessary bandwidths.

Measurements have also been made to verify these calculated and declared bandwidths.

The occupied bandwidth has been measured and compared against the occupied bandwidth declared by the client.

Measurements have been made of each modulation type using a spectrum analyser operating in peak hold mode and a 30 dB attenuator.

Initially power measurements are made using a resolution bandwidth of 120 kHz.

This level is used as a reference level on the spectrum analyser.

The resolution bandwidth is then changed to 100 Hz and the reference level minus 23 dB (99%) absolute bandwidth points determined

Emission	Channel	Measured	Designated
F1D	12.5 kHz	7.30 kHz	11.0 kHz
F1E	12.5 kHz	7.75 kHz	8.10 kHz
F1D	25.0 kHz	11.15 kHz	16.0 kHz

---

## **EMC Technologies (NZ) Ltd**


STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## F1D – 12.5 kHz channel spacing

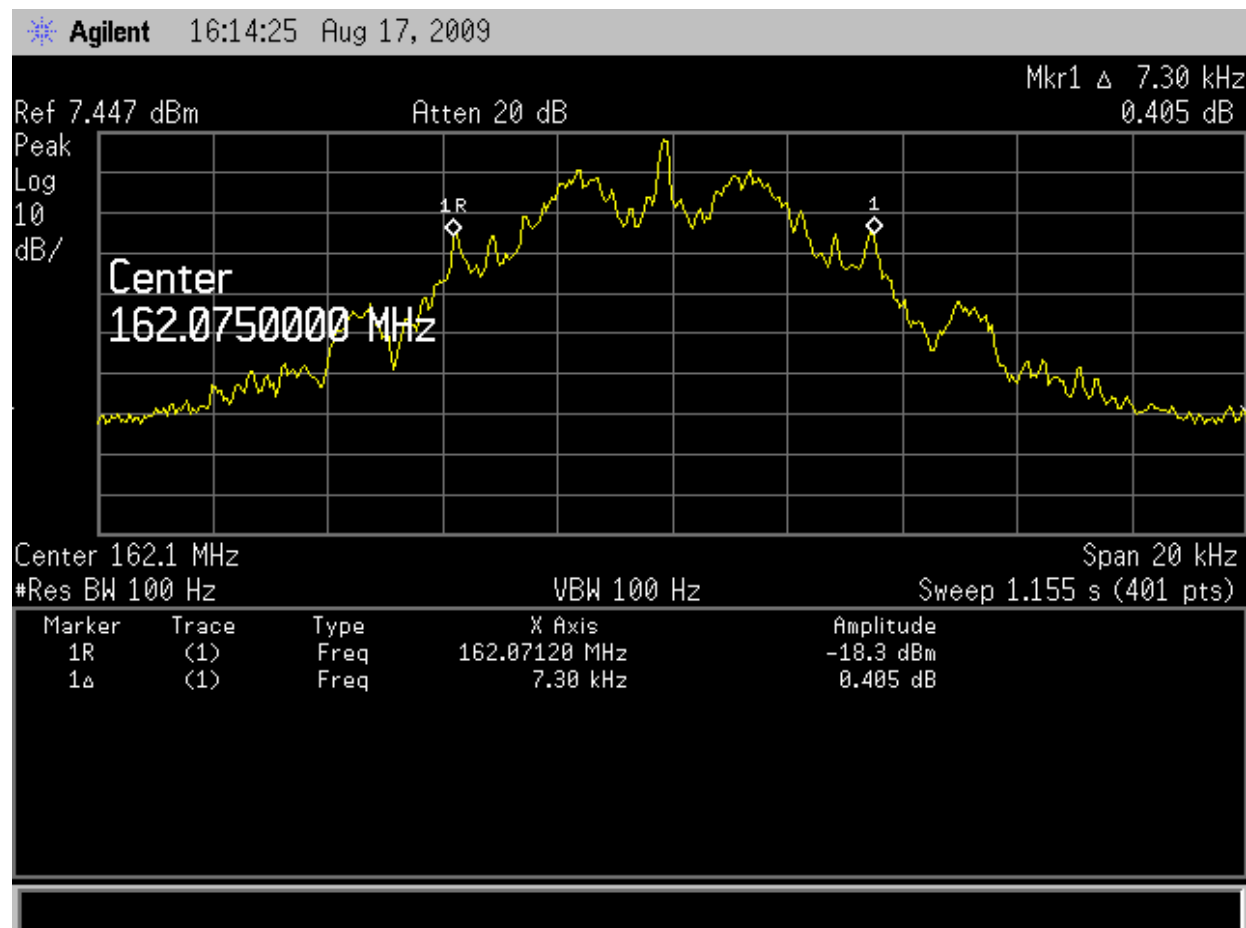

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## F1E – 12.5 KHz spacing

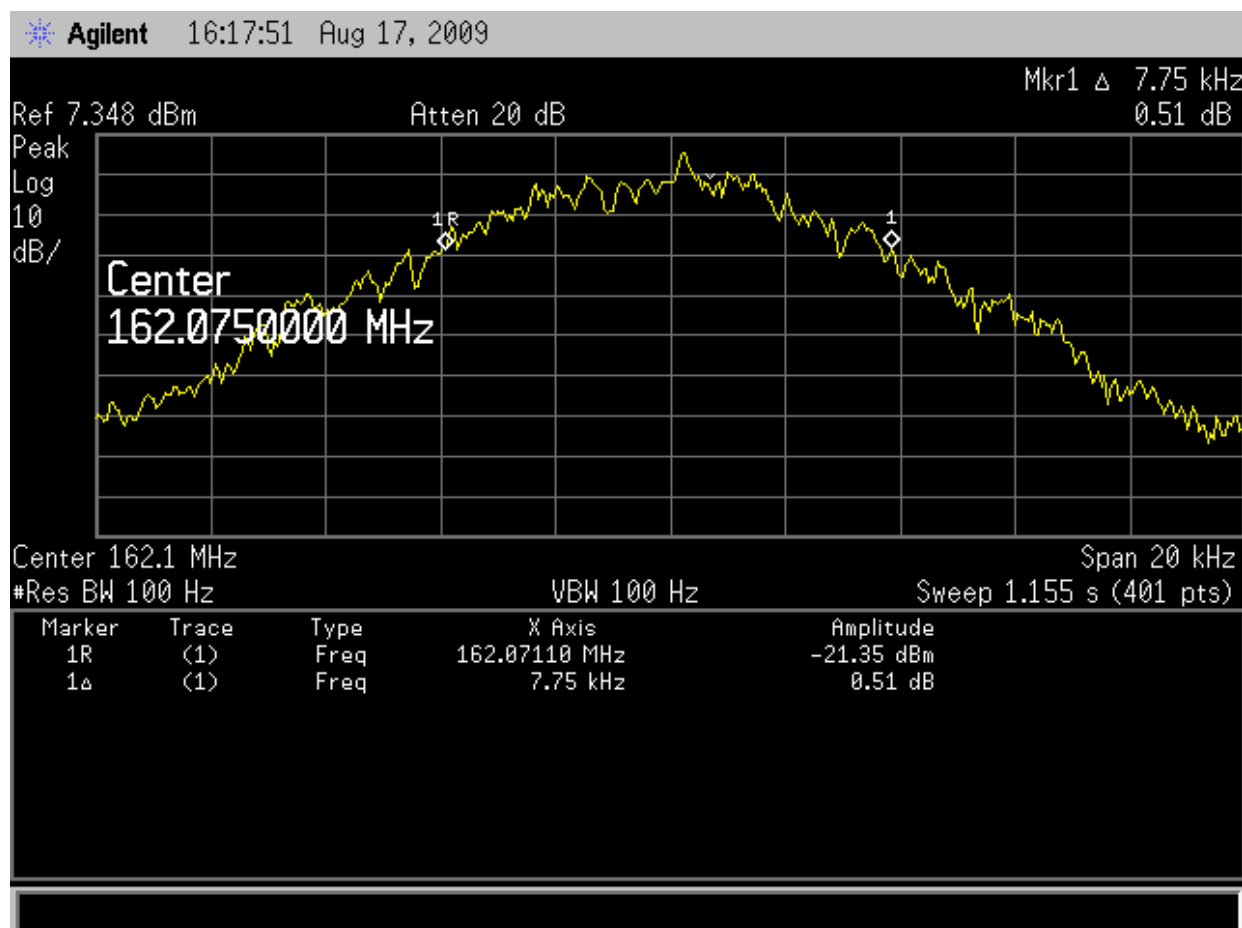

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## F1D – 25.0 kHz channel spacing

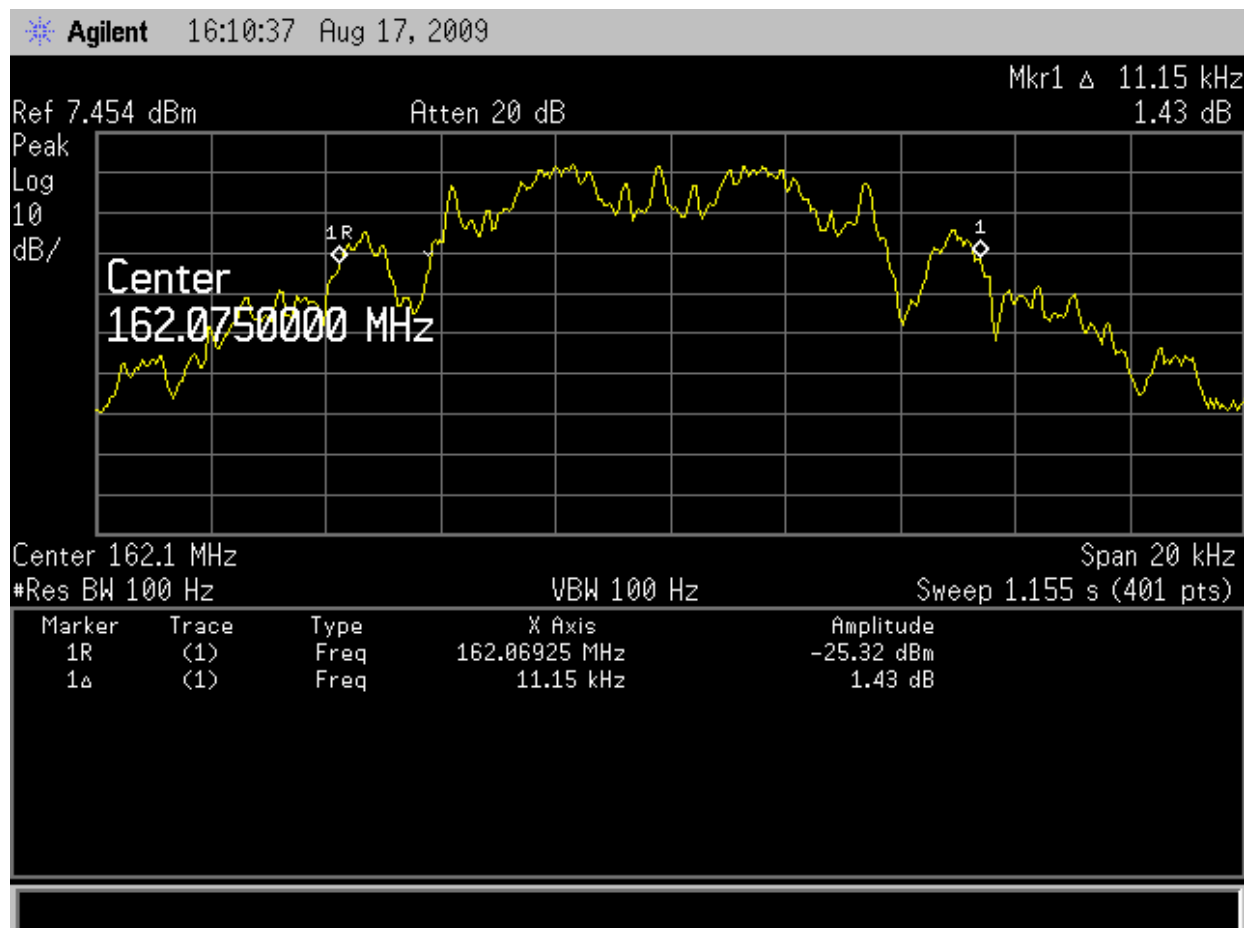

**Result:** Complies

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## Spectrum Masks

The spectrum masks are defined in:

Section 90.210(d) – Masks B and D have been applied as the transmitter can operate in the band 150-174 MHz using an authorised bandwidth of 25.0 kHz and 12.5 kHz as per Section 90.209(b)(5).

The reference level for the following emission mask measurements has been determined using a resolution bandwidth of 120 kHz with the transmitter modulated.

All measurements have been made with a -30 dB correction factor as a 30dB attenuator is placed between the transmitter and the spectrum analyser.

Measurements were made in peak hold with the transmitter operating on 162.075 MHz.

When operating in F3E mode a 2500 Hz tone, which was found to be the frequency of maximum response, that was applied at a level 16 dB higher than that required to achieve 50% modulation.

For the F1E and F1D modes the transmitter was modulated uses modulation sources internal to the transmitter as supplied by the client.


**Result:** Complies

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## Part 90: F3E 12.5 kHz

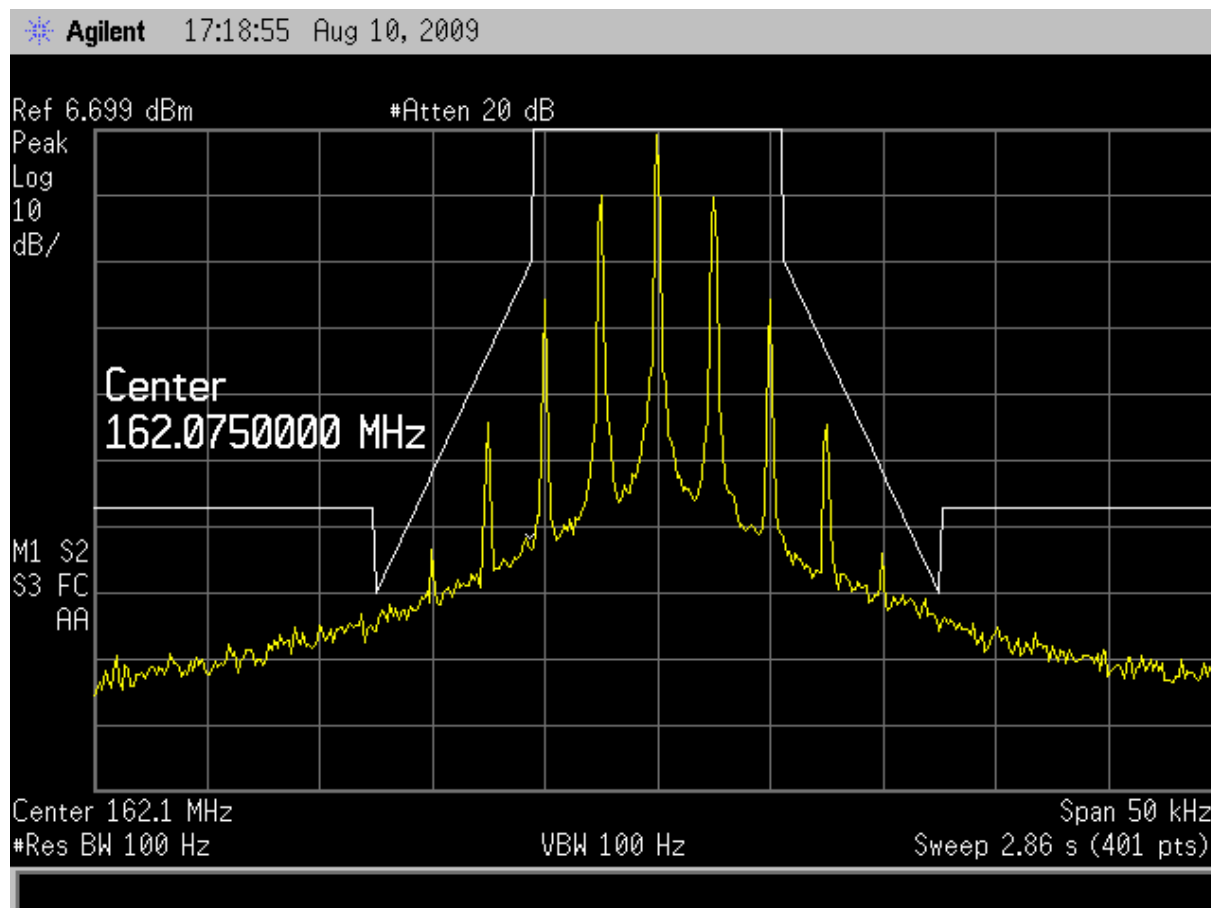

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## Part 90: F1D 12.5 kHz

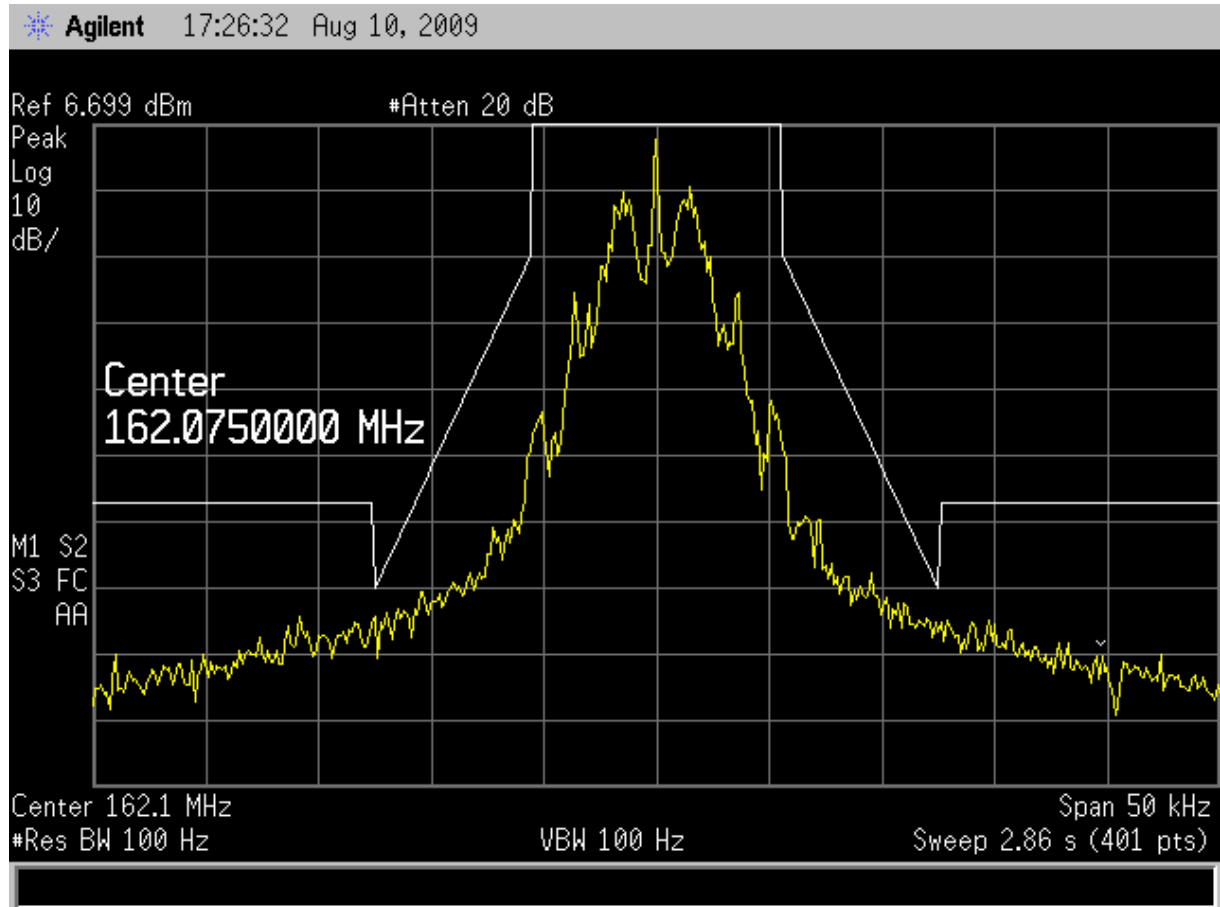

### EMC Technologies (NZ) Ltd


STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## Part 90: F1E 12.5 kHz

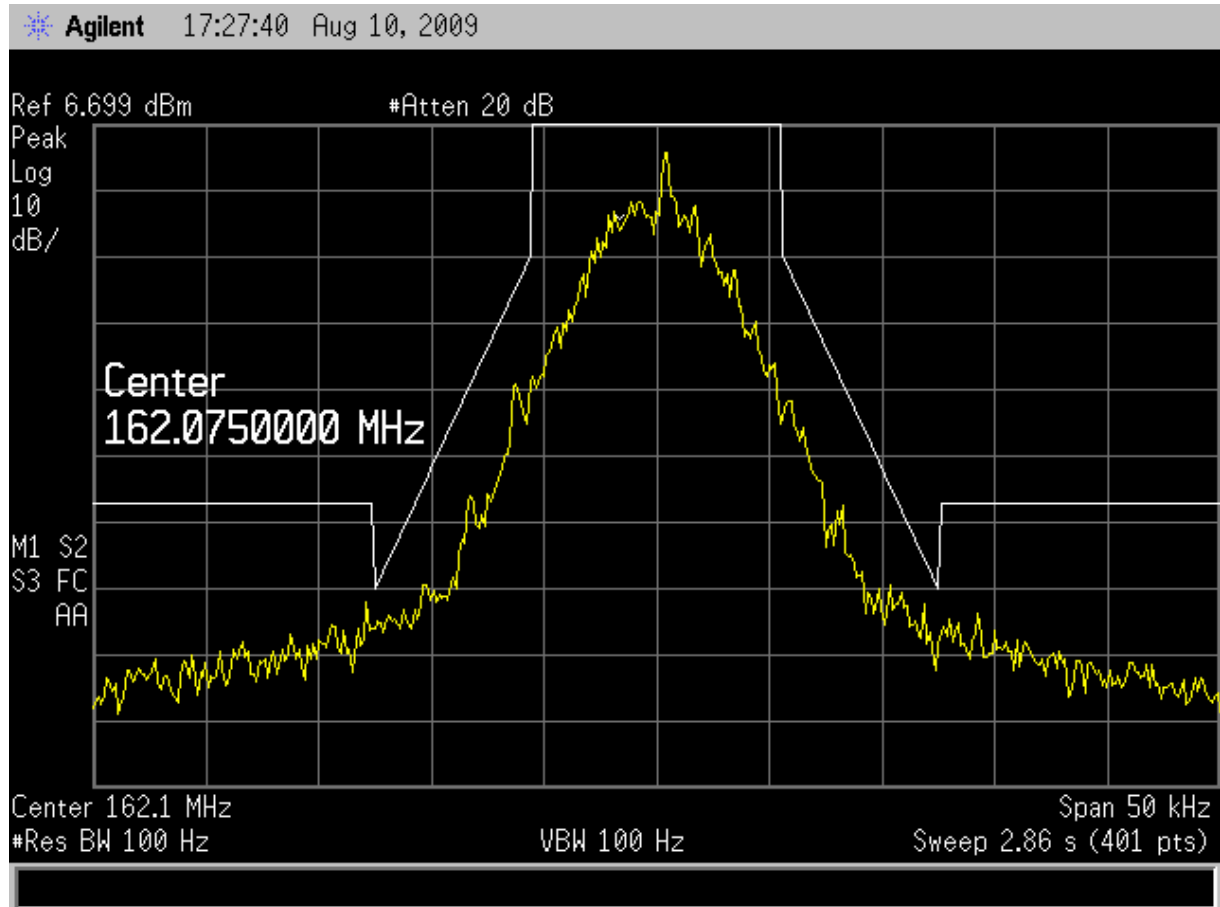

### EMC Technologies (NZ) Ltd


STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## Part 90: F3E 25 kHz

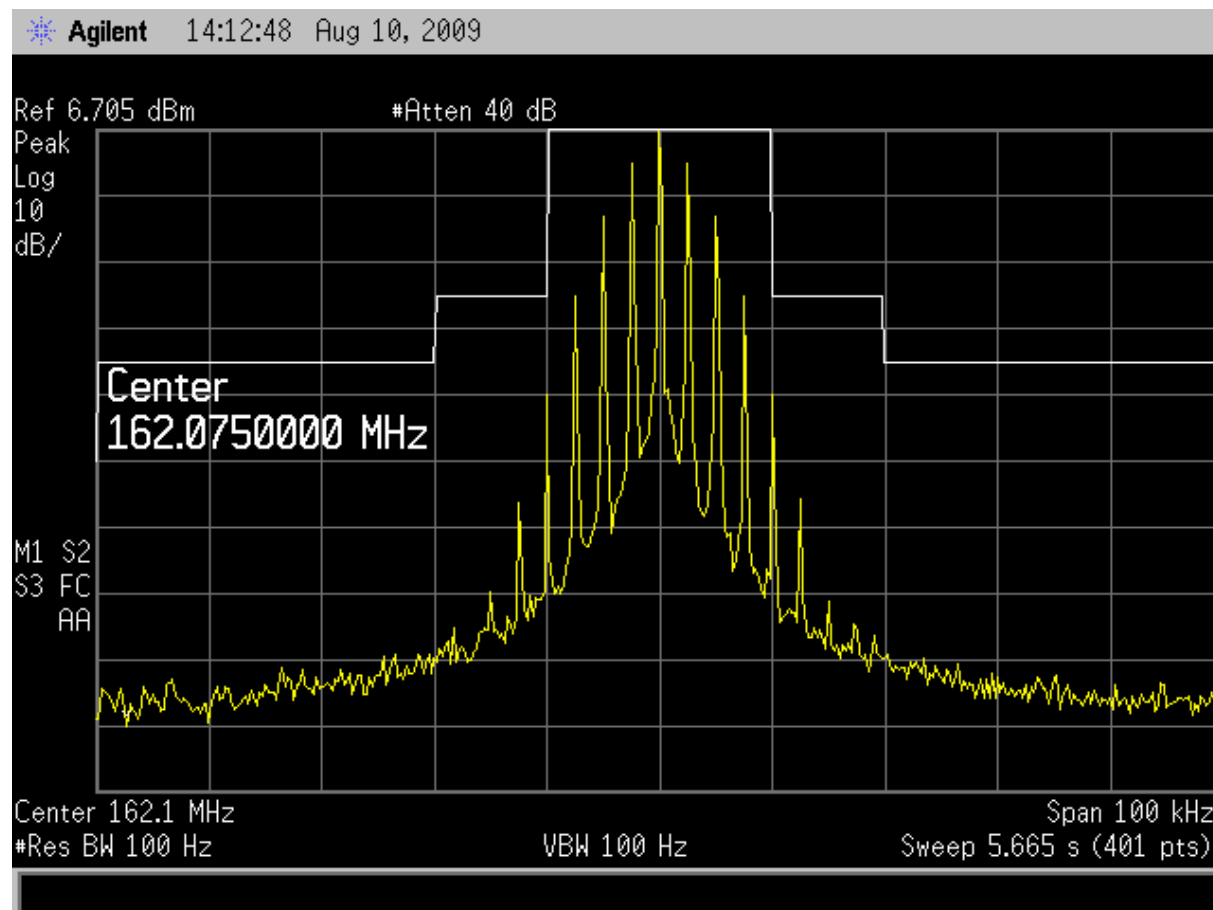

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## Part 90: F1D 25kHz

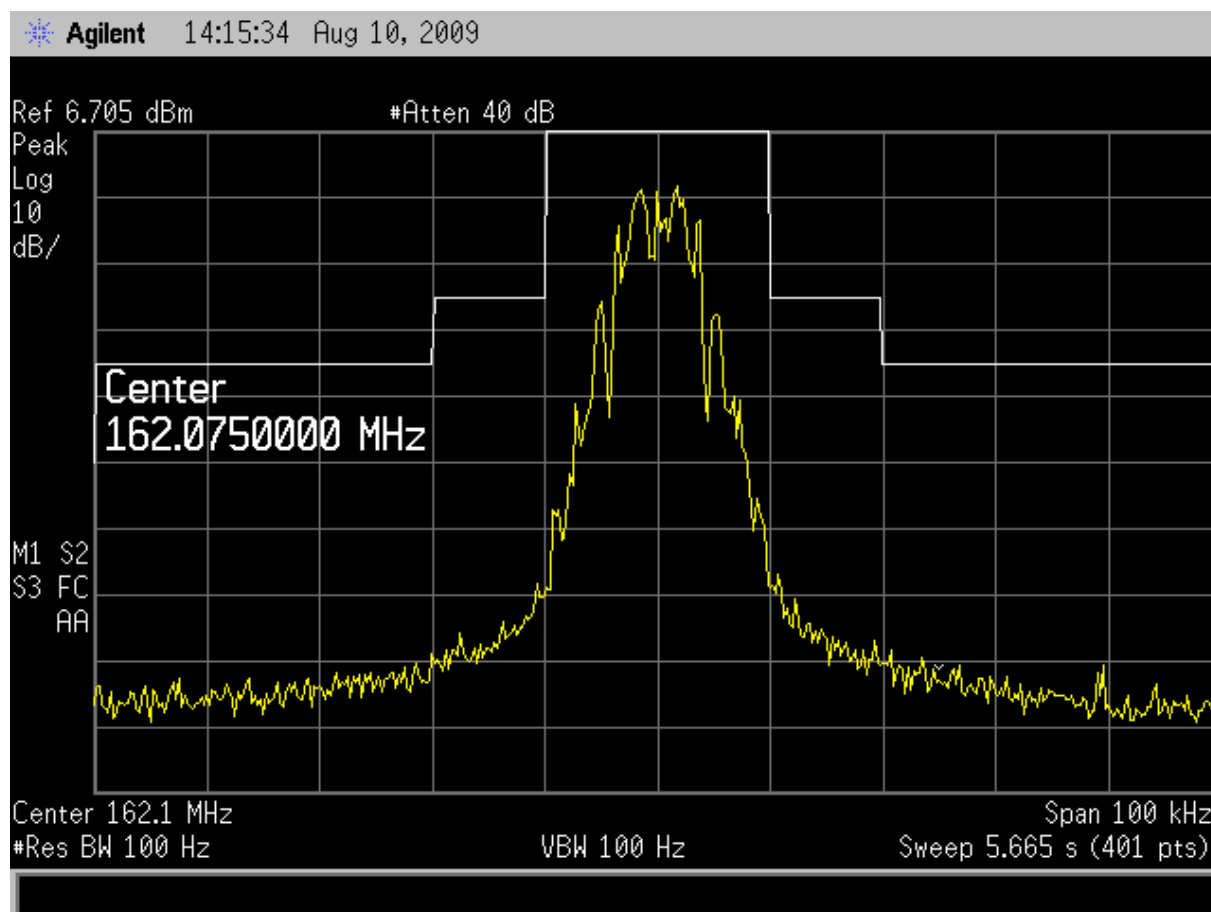

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

---

## Transmitter spurious emissions at the antenna terminals

**Frequency:** 162.075 MHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
324.150	-40.0	-20.0
486.225	-43.8	-20.0
648.300	-48.3	-20.0
810.375	-55.9	-20.0
972.450	-55.8	-20.0
1134.525	-53.3	-20.0
1296.600	-65.4	-20.0

No other emissions were observed

### Limit:

Part 90.210(d) Mask D, (3) on any frequency removed from the centre of the authorised bandwidth by a displacement frequency of more than 12.5 kHz shall be attenuated by at least  $50 + 10 \log (P)$  or 70 dB whichever is the lesser attenuation.

The spurious emission limit defined by Mask D has been applied as this transmitter can operate using channel spacings of 12.5 kHz.

Part 2.1051 states that emissions greater than 20 dB below the limit need not be specified.

Part 2.1057 states that the spectrum should be investigated up to the 10<sup>th</sup> harmonic if the transmitter operates below 10 GHz.

A rated power of 5.0 watts gives a limit of -20.0 dBm.

Some emissions less than -40 dBm have been reported for completeness.

No measurements were made above the 10<sup>th</sup> harmonic.

**Result:** Complies

**Measurement Uncertainty:**  $\pm 3.3$  dB

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## Receiver spurious emissions at antenna terminals

**Receive frequency:** 150.075 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)
195.075	-97.5	-57.0
585.220	-97.4	-57.0
975.365	-88.6	-57.0

**Receive frequency:** 162.075 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)
207.075	-85.9	-57.0
828.295	-97.8	-57.0
1035.365	-81.2	-57.0
1656.585	-82.3	-57.0

**Receive frequency:** 173.975 MHz

Frequency (MHz)	Level (dBm)	Limit (dBm)
218.975	-83.6	-57.0
875.895	-91.0	-57.0
1094.865	-84.6	-57.0
1313.840	-93.0	-57.0
1751.785	-90.0	-57.0
1970.760	-90.5	-57.0

The receiver has an intermediate frequency of 45 MHz

No other emissions within 30 dB of the limit were observed.

### Limit:

In accordance with CFR 47 Part 15, section 15.111 the power of any emission at the antenna terminal should not exceed 2 nW (-57.0 dBm).

**Result:** Complies

**Measurement Uncertainty:**  $\pm 3.3$  dB

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## Field strength of the transmitter spurious emissions

**Frequency:** 162.075 MHz

Emission frequency (MHz)	Level (dB $\mu$ V/m)	Level (dBm)	Limit (dBm)	Polarity	Margin (dB)
324.1500	50.0	-47.4	-20.0	Vertical	27.4
324.1500	50.2	-47.2	-20.0	Horizontal	27.2
486.2250	45.1	-52.3	-20.0	Vertical	32.3
486.2250	45.5	-51.9	-20.0	Horizontal	31.9
648.3000	28.0	-69.4	-20.0	Vertical	49.4
648.3000	30.6	-66.8	-20.0	Horizontal	46.8
810.3750	31.1	-66.3	-20.0	Vertical	46.3
810.3750	31.5	-65.9	-20.0	Horizontal	45.9
972.4500	26.0	-71.4	-20.0	Vertical	51.4
972.4500	23.0	-74.4	-20.0	Horizontal	54.4
1134.525	35.2	-62.2	-20.0	Vertical	42.2
1134.525	38.7	-58.7	-20.0	Horizontal	38.7
1296.600	35.0	-62.4	-20.0	Vertical	42.4
1296.600	37.4	-60.0	-20.0	Horizontal	40.0
1458.675	38.8	-58.6	-20.0	Vertical	38.6
1458.675	42.3	-55.1	-20.0	Horizontal	35.1
1620.750	36.8	-60.6	-20.0	Vertical	40.6
1620.750	36.5	-60.9	-20.0	Horizontal	40.9

The transmitter was tested while transmitting continuously while attached to a dummy load.

When operating in transmit mode no significant emissions were detected between the harmonic emissions that were detected.

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on January 18th, 2007

The level recorded is the signal generator output level in dBm less any gains / losses due to the coax cable and the dipole antenna.

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## **Limit:**

All spurious emissions are to be attenuated by at least  $50 + 10 \log (P)$ .

The rated power of 5 watts gives a limit of  $-20$  dBm.

No measurements were made above the 10<sup>th</sup> harmonic.

**Result:** Complies

**Measurement Uncertainty:**  $\pm 4.1$  dB

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

---

## Field strength of the receiver spurious emissions

**Frequencies:** 150.075 MHz, 162.075 MHz, 173.975 MHz

**Frequency:** 150.075 MHz

Frequency (MHz)	Level (dBmV/m)	Limit (dBuV/m)	Polarity	Margin (dB)
195.0750	25.0	43.5	Horizontal	18.5
195.0750	29.1	43.5	Vertical	14.4
390.1500	-	46.0	Horizontal	-
390.1500	-	46.0	Vertical	-
585.2250	-	46.0	Horizontal	-
585.2250	-	46.0	Vertical	-
780.3000	24.1	46.0	Horizontal	21.9
780.3000	-	46.0	Vertical	-
975.3750	31.8	46.0	Horizontal	14.2
975.3750	27.3	46.0	Vertical	18.7
1170.4500	34.0	46.0	Horizontal	12.0
1170.4500	33.8	46.0	Vertical	12.2
1365.5250	-	46.0	Horizontal	-
1365.5250	-	46.0	Vertical	-
1560.6000	30.5	46.0	Horizontal	15.5
1560.6000	31.7	46.0	Vertical	14.3
1755.6750	32.5	46.0	Horizontal	13.5
1755.6750	35.6	46.0	Vertical	10.4
1950.7500	-	46.0	Horizontal	-
1950.7500	-	46.0	Vertical	-

---

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

**Frequency:** 162.075 MHz

Frequency (MHz)	Level (dBmV/m)	Limit (dBuV/m)	Antenna	Margin (dB)
207.0750	32.0	43.5	Vertical	11.5
207.0750	37.3	43.5	Horizontal	6.2
414.1500	-	46.0	Vertical	-
414.1500	-	46.0	Horizontal	-
621.2250	-	46.0	Vertical	-
621.2250	-	46.0	Horizontal	-
828.3000	24.8	46.0	Vertical	21.2
828.3000	25.9	46.0	Horizontal	20.1
1035.3750	31.7	54.0	Vertical	22.3
1035.3750	35.6	54.0	Horizontal	18.4
1242.4500	30.6	54.0	Vertical	23.4
1242.4500	29.6	54.0	Horizontal	24.4
1449.5250	-	54.0	Vertical	-
1449.5250	-	54.0	Horizontal	-
1656.6000	35.6	54.0	Vertical	18.4
1656.6000	35.6	54.0	Horizontal	18.4
1863.6750	-	54.0	Vertical	-
1863.6750	-	54.0	Horizontal	-
2070.7500	-	54.0	Vertical	-
2070.7500	-	54.0	Horizontal	-

---

**EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

**Frequency:** 173.975 MHz

Frequency (MHz)	Level (dBmV/m)	Limit (dBuV/m)	Polarity	Margin (dB)
218.975	37.8	46.0	Vertical	8.2
218.975	41.5	46.0	Horizontal	4.5
437.950	-	46.0	Vertical	-
437.950	-	46.0	Horizontal	-
656.925	-	46.0	Vertical	-
656.925	-	46.0	Horizontal	-
875.900	24.7	46.0	Vertical	21.3
875.900	-	46.0	Horizontal	-
1094.875	34.3	54.0	Vertical	19.7
1094.875	35.1	54.0	Horizontal	18.9
1313.850	-	54.0	Vertical	-
1313.850	-	54.0	Horizontal	-
1532.825	-	54.0	Vertical	-
1532.825	-	54.0	Horizontal	-
1751.800	33.9	54.0	Vertical	20.1
1751.800	36.0	54.0	Horizontal	18.0
1970.775	-	54.0	Vertical	-
1970.775	-	54.0	Horizontal	-
2189.750	-	54.0	Vertical	-
2189.750	-	54.0	Horizontal	-

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

The receiver has an intermediate frequency of 45 MHz

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on January 18th, 2007.

Below 1000 MHz a quasi peak detector was used with a bandwidth of 120 kHz.

Above 1000 MHz an average detector was used with a bandwidth of 1 MHz.

The receiver was tested while receiving continuously while attached to a dummy load.

**Limit:**

The field strength limits as per CFR 47 Part 15, section 15.109 have been applied.

**Result:** Complies

**Measurement Uncertainty:**  $\pm 4.1$  dB

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## Frequency Stability

Frequency stability measurements were between - 30 °C and + 50°C in 10°C increments.

At each temperature the transmitter was given a period of 30 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were made with the supply decreased to 7.0 Vdc minimum operational voltage from battery voltage supply.

**Frequency:** 162.075 MHz

Temperature	Voltage 7.0 Vdc	Voltage 7.2 Vdc
+50°C	-201.0	-201.0
+40°C	-197.0	-195.0
+30°C	-195.0	-194.0
+20°C	-223.0	-210.0
+10°C	-243.0	-242.0
0°C	-237.0	-235.0
-10°C	-259.0	-257.0
-20°C	-249.0	-248.0
-30°C	-251.0	-253.0

### Limit:

Part 22.355 and Part 90.213 state that mobile station transmitters operating between 150 – 174 MHz and 50 – 450 MHz with 12.5 kHz channelling are required to have a frequency tolerance of 5.0 ppm.

This transmitter was tested on 162.075 MHz.  $5.0 \text{ ppm} = 5 \times 163.0 = 815 \text{ Hz}$ .

**Result:** Complies

**Measurement Uncertainty:**  $\pm 30 \text{ Hz}$

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

## Transient frequency behaviour

Transient frequency behaviour measurements are applicable to wide band and narrow band transmitters operating in the frequency band 150-174 MHz. Measurements were carried out at 162.975 MHz using the method described in TIA-603 and EN 300-086. In summary this method calls for the use of an external signal generator tuned to 162.075 MHz with a output level 0.1 % (-30 dB) of the level from the transmitter with a 1 kHz tone with a frequency deviation of 12.5 kHz being applied to the input of a modulation analyser along with the output from the transmitter.

The modulation analyser produces an amplitude difference signal and a frequency difference signal, which are applied to the input of a storage oscilloscope.

The unmodulated transmitter is then keyed which produces a trigger pulse that is AC coupled to the oscilloscope that produces a display on the screen.

The result of the change in the ratio of power between the test signal from the signal generator and the transmitter output will produce 2 separate sides on the oscilloscope picture. One will show the 1000 Hz test modulation and the other will be the frequency difference of the transmitter versus time.

Channel Spacing	Period $t_1$ (kHz)	Period $t_2$ (kHz)	Period $t_3$ (kHz)
12.5 kHz	nil	nil	<12.5 kHz
25.0 kHz	nil	nil	<12.5 kHz

## Limits:

Time Interval	Period	12.5 kHz	25 kHz
		Deviation (kHz)	Deviation (kHz)
$t_1$	5 ms	$\pm 12.5$	$\pm 25.0$
$t_2$	20 ms	$\pm 6.25$	$\pm 12.5$
$t_3$	5 ms	$\pm 12.5$	$\pm 25.0$

**Result:** Complies

**Measurement Uncertainty:** Frequency difference  $\pm 1.6$  kHz, Time period  $\pm 1$  ms

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## 12.5 kHz transmitter turn on

Green Trace = 1 kHz tone with FM deviation of 12.5 kHz and any transient.

Green trace has been maximised to give full screen indication of a  $\pm 12.5$  kHz.

Therefore each Y axis division = 3.125 kHz per division.


The X axis has been set to a sweep rate of 10 ms/division.

Triggering has been set to occur 2 divisions from the left hand edge (20 ms). This is position  $t_{on}$ .

$t_1$  occurs between 2.0 and 2.5 divisions from the left-hand edge.

$t_2$  occurs between 2.5 and 4.5 divisions from the left-hand edge.

No transient can be observed just after  $t_{on}$ .

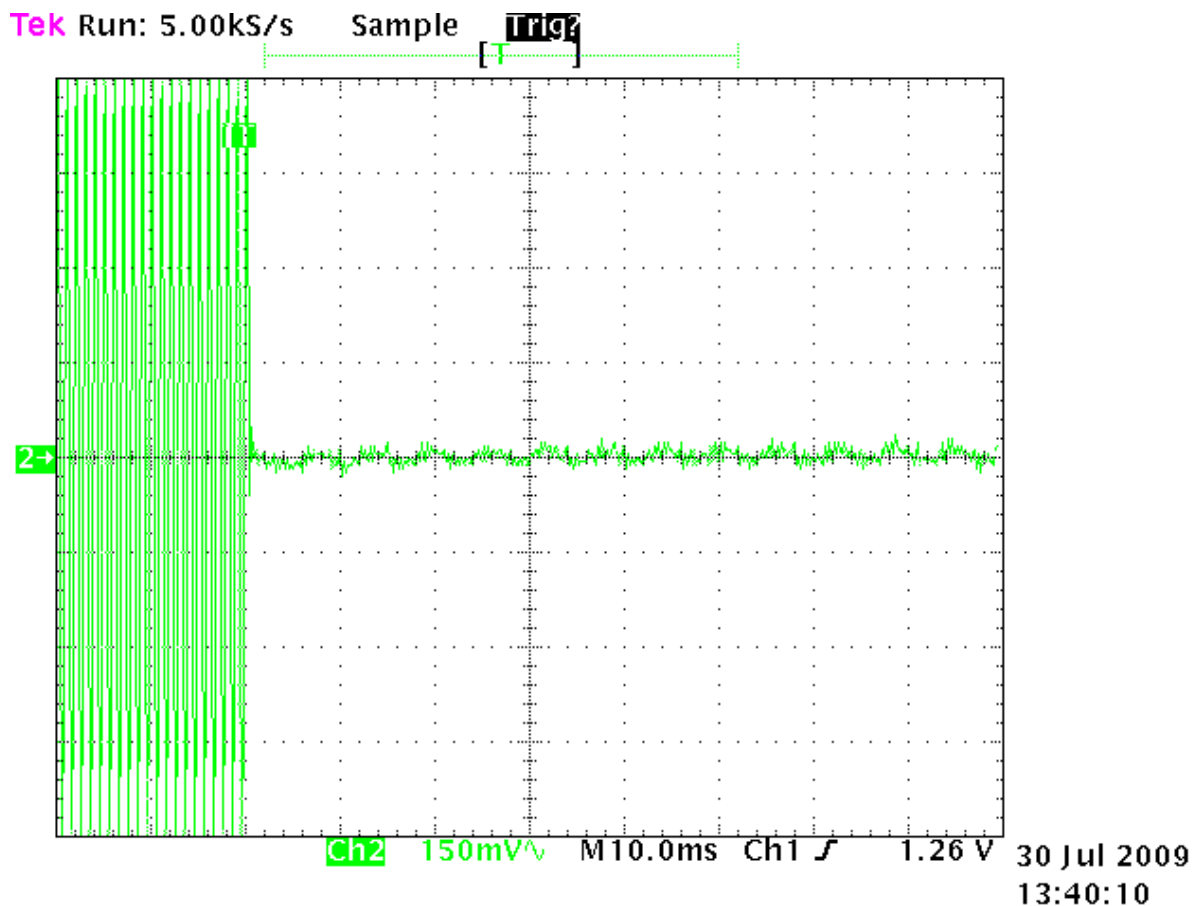

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## 12.5 kHz transmitter turn off

Green Trace = 1 kHz tone with FM deviation of 12.5 kHz and any transient.

Green trace has been maximised to give full screen indication of a  $\pm 12.5$  kHz.

Therefore each Y axis division = 3.125 kHz per division.


The X axis has been set to a sweep rate of 10 ms/division.

The display of the 1 kHz signal rising has been positioned 5 divisions from the left hand edge (50 ms).

This is position  $t_{off}$ .

$t_3$  occurs between 4.5 and 5.0 divisions from the left hand edge.

A small transient response can be observed just before  $t_{off}$ .

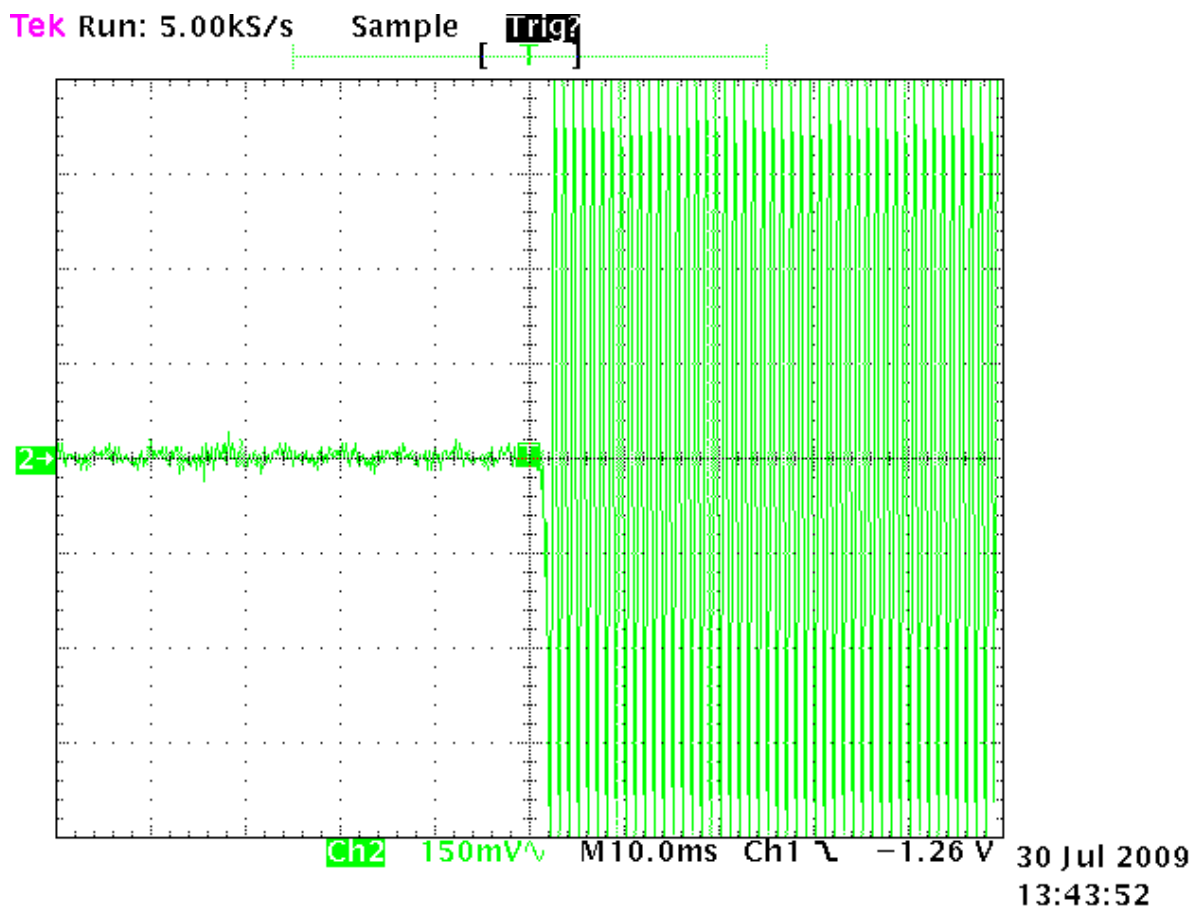

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## 25 kHz transmitter turn on

Green Trace = 1 kHz tone with FM deviation of 25 kHz and any transient.

Green trace has been maximised to give full screen indication of a  $\pm 25$  kHz.

Therefore each Y axis division = 6.25 kHz per division.


The X axis has been set to a sweep rate of 10 ms/division.

Triggering has been set to occur 2 divisions from the left hand edge (20 ms). This is position  $t_{on}$ .

$t_1$  occurs between 2.0 and 2.5 divisions from the left-hand edge.

$t_2$  occurs between 2.5 and 4.5 divisions from the left-hand edge.

No transients can be observed just after  $t_{on}$ .

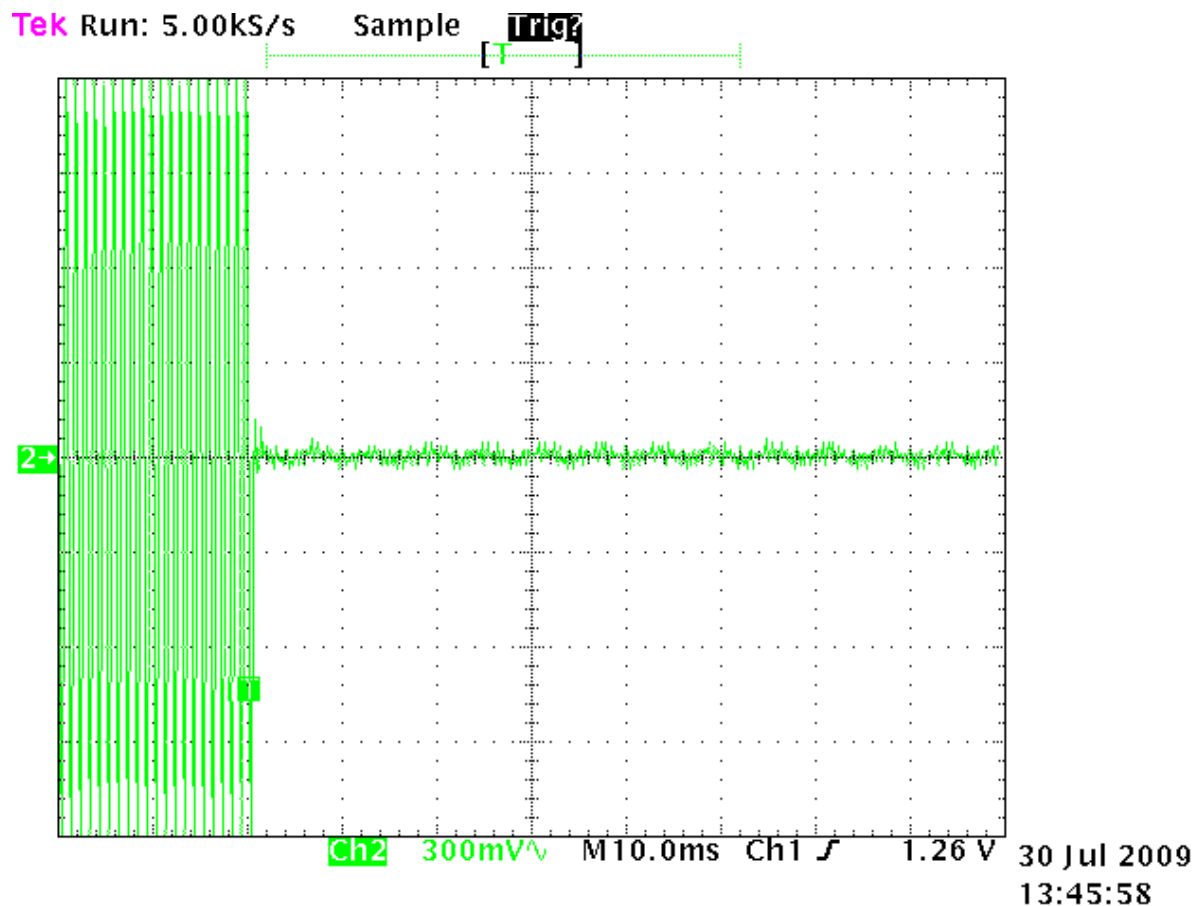

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**  
Report date: 11th August 2009

## 25 kHz transmitter turn off

Green Trace = 1 kHz tone with FM deviation of 25 kHz and any transient.

Green trace has been maximised to give full screen indication of a  $\pm 25$  kHz.

Therefore each Y axis division = 6.25 kHz per division.


The X axis has been set to a sweep rate of 10 ms/division.

The display of the 1 kHz signal rising has been positioned 5 divisions from the left hand edge (50 ms).

This is position *toff*.

*t3* occurs between 4.5 and 5.0 divisions from the left hand edge.

A small transient can be observed just before *toff*.

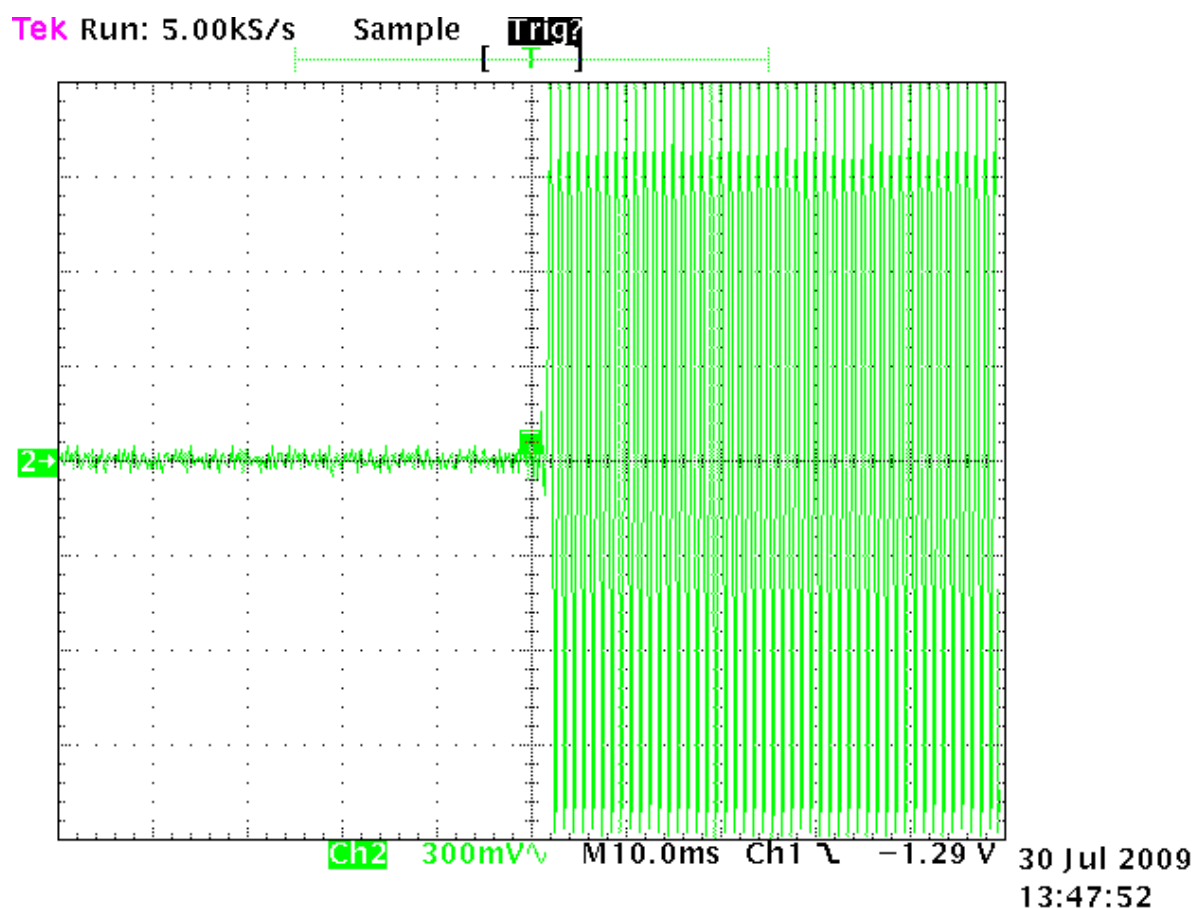

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

## 8. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial #	Asset
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Audio Analyzer	Hewlett Packard	8903A	2216A01713	E1146
Biconical Antenna	Schwarzbeck	BBA 9106	-	RFS 3612
Frequency Counter	Hewlett Packard	HP 5342A	1916A01713	E1224
Level generator	Anritsu	MG443B	M61689	E1143
Log Periodic	Schwarzbeck	VUSLP9111	9111-228	3785
Receiver	Rohde & Schwarz	ESCS 30	847124/020	E1595
Modulation Analyzer	Rohde & Schwarz	FMA	837807/020	E1552
Modulation Analyzer	Hewlett Packard	8901B	2608A00782	E1090
Oscilloscope	Tektronics	745A	B010643	1569
Power Attenuator	Weinschel	49-20-43	GC104	E1308
Power Supply	Hewlett Packard	6032A	2743A-02859	E1069
RF Power Meter	Hewlett Packard	HP 436A	2512A22439	E1198
Selective Level Meter	Anritsu	ML422C	M35386	E1140
Signal Generator	Rohde & Schwarz	SMHU.58	838923/028	E1493
Spectrum Analyzer	Hewlett Packard	E7405A	US39150142	3776
Thermal chamber	Contherm	M180F	86025	E1129
Thermometer	DSIR	RT200	035	E1049
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709

## 9. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd registration with the Federal Communications Commission as a listed facility, Registration Number: 90838, which was last updated on January 18<sup>th</sup>, 2007.

All testing has been carried out in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

## 10. PHOTOGRAPH (S)

External views –



### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz


# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## Internal Views

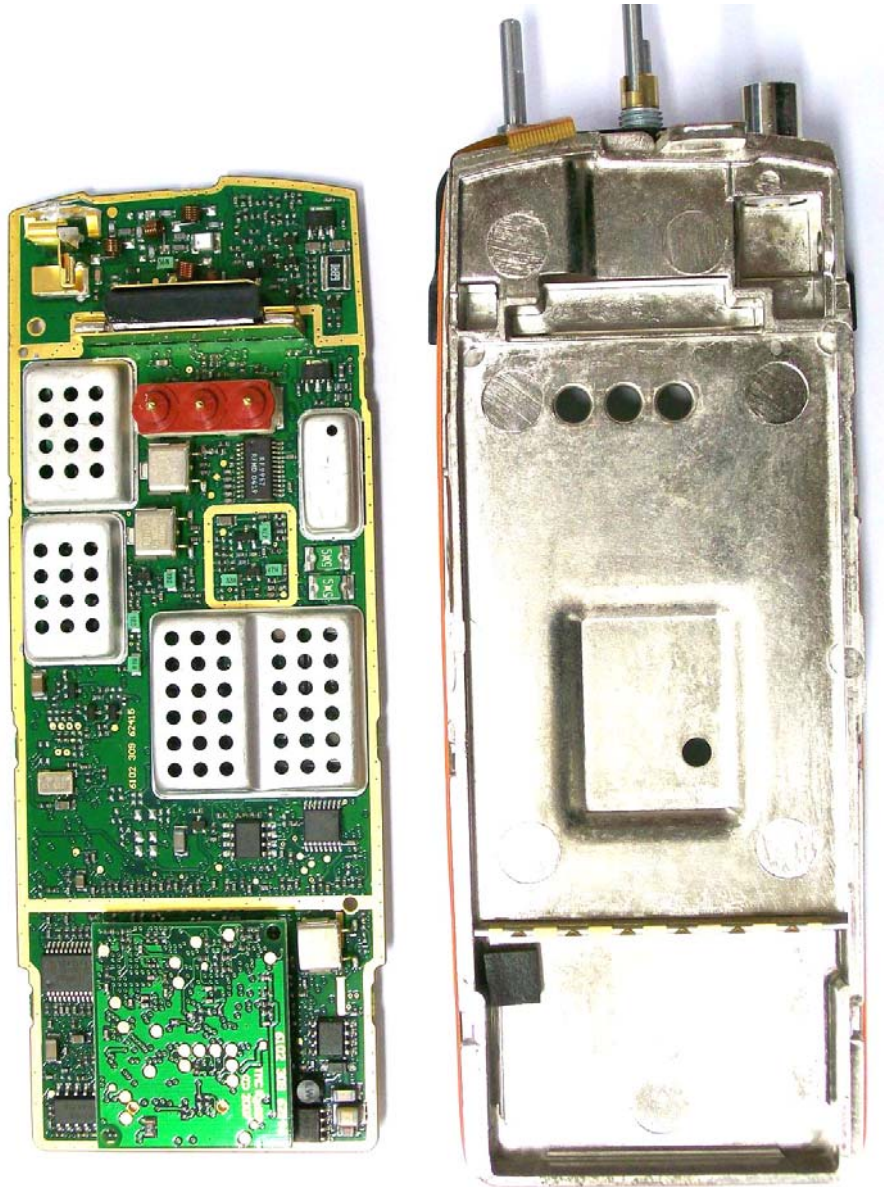

---

### EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

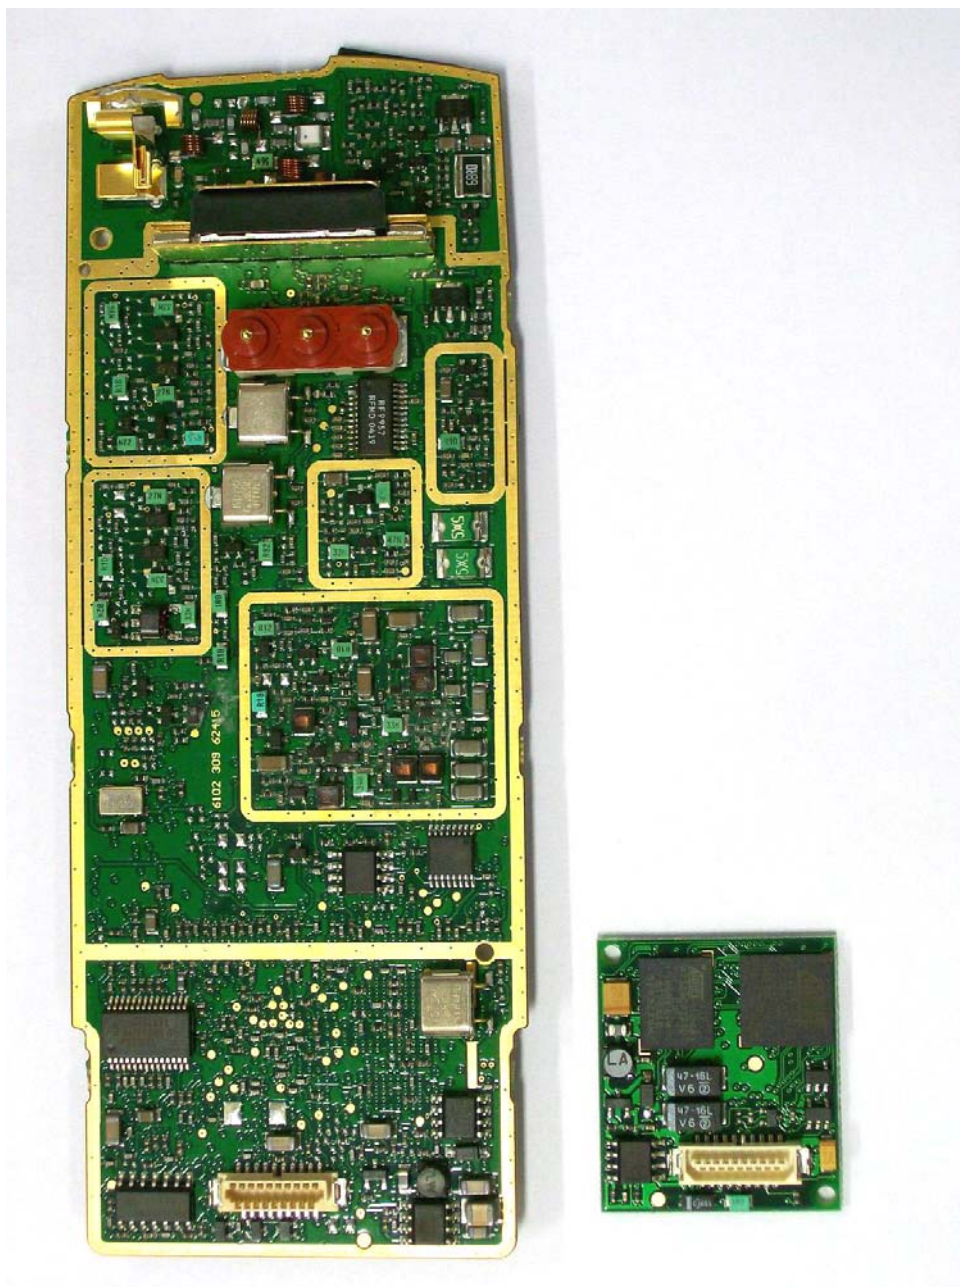

---

## **EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

# EMC Technologies (NZ) Ltd

Test Report No 090714.3

Report date: 11th August 2009

---

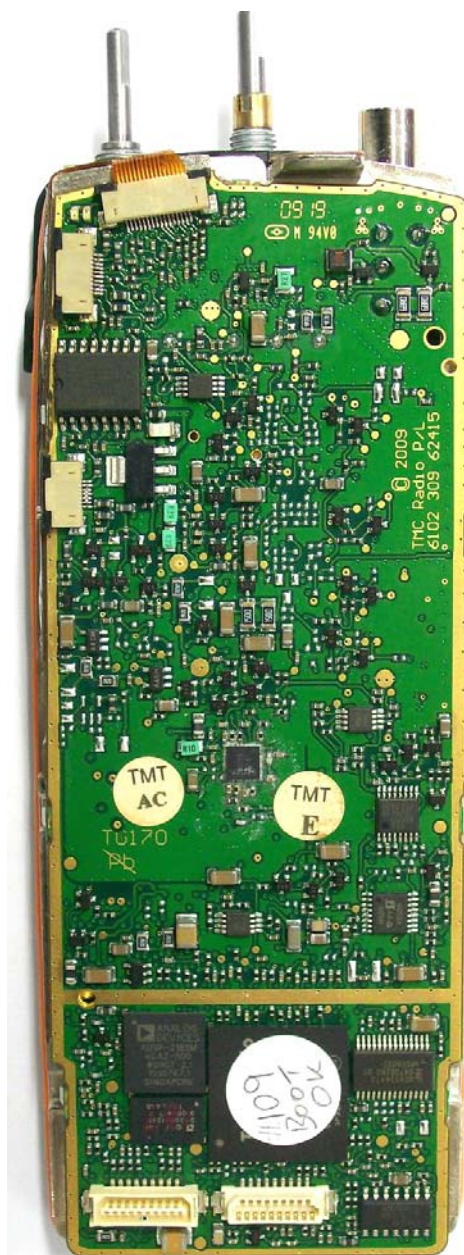

---

## EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: aucklab@ihug.co.nz


# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

---

## Radiated Emissions Setup

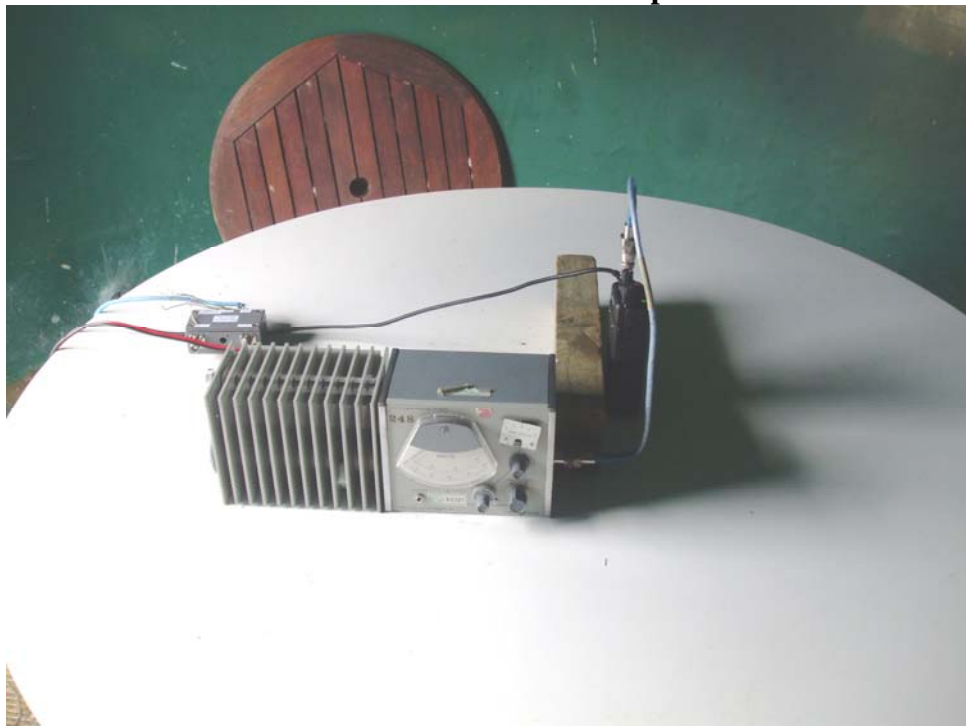

---

### EMC Technologies (NZ) Ltd



STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)

# EMC Technologies (NZ) Ltd

Test Report No **090714.3**

Report date: 11th August 2009

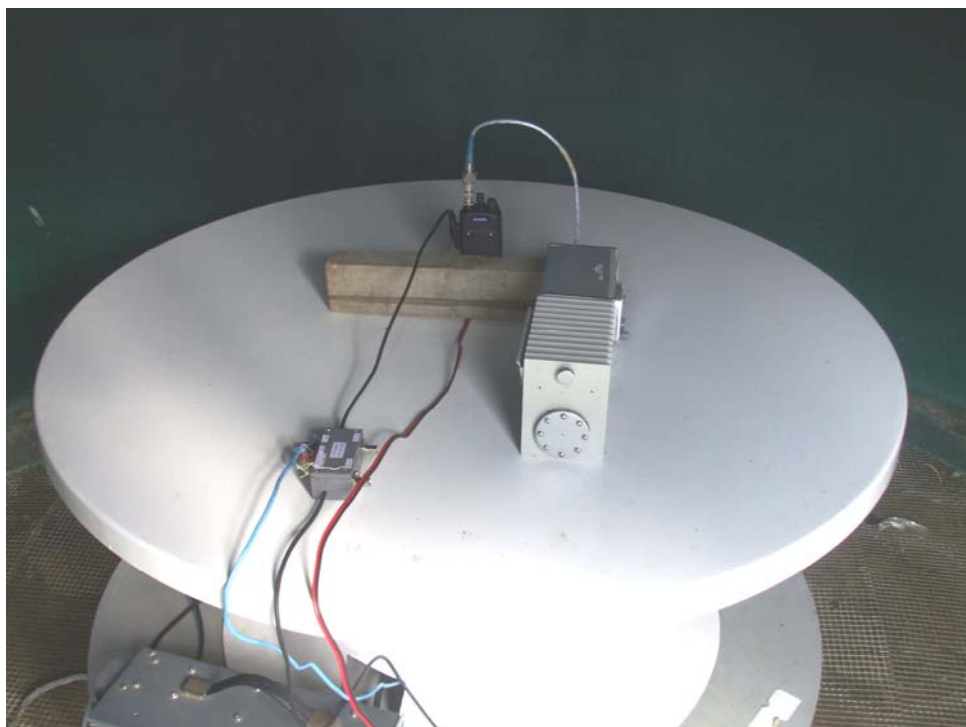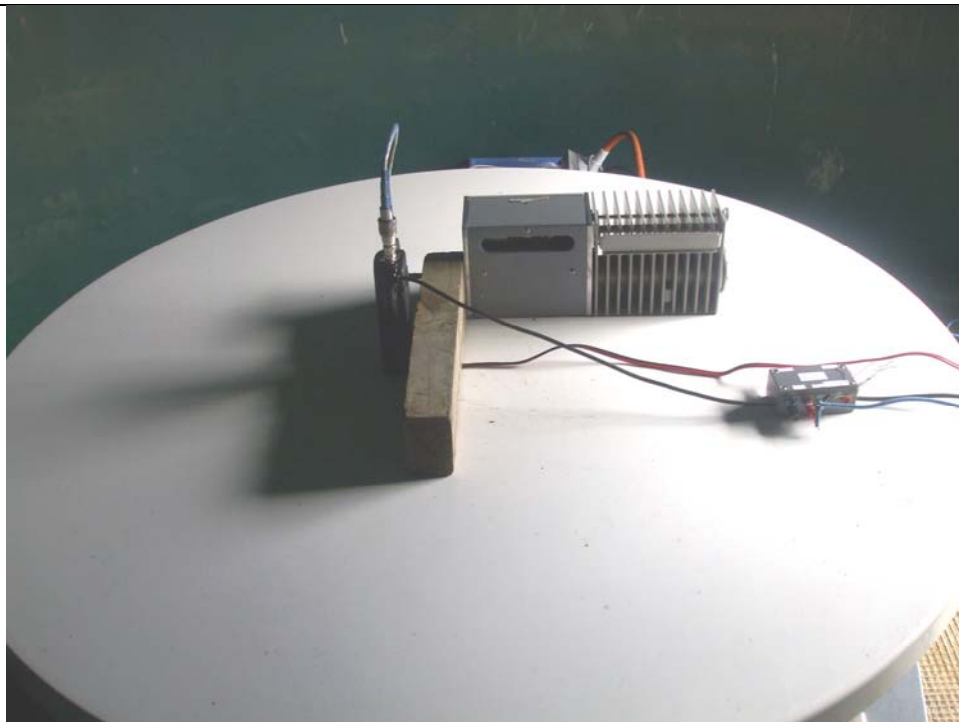

---

## **EMC Technologies (NZ) Ltd**

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ  
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861  
E-mail: [aucklab@ihug.co.nz](mailto:aucklab@ihug.co.nz)