


Site: WZ-AC2	Time: 2022/07/16 - 12:20
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

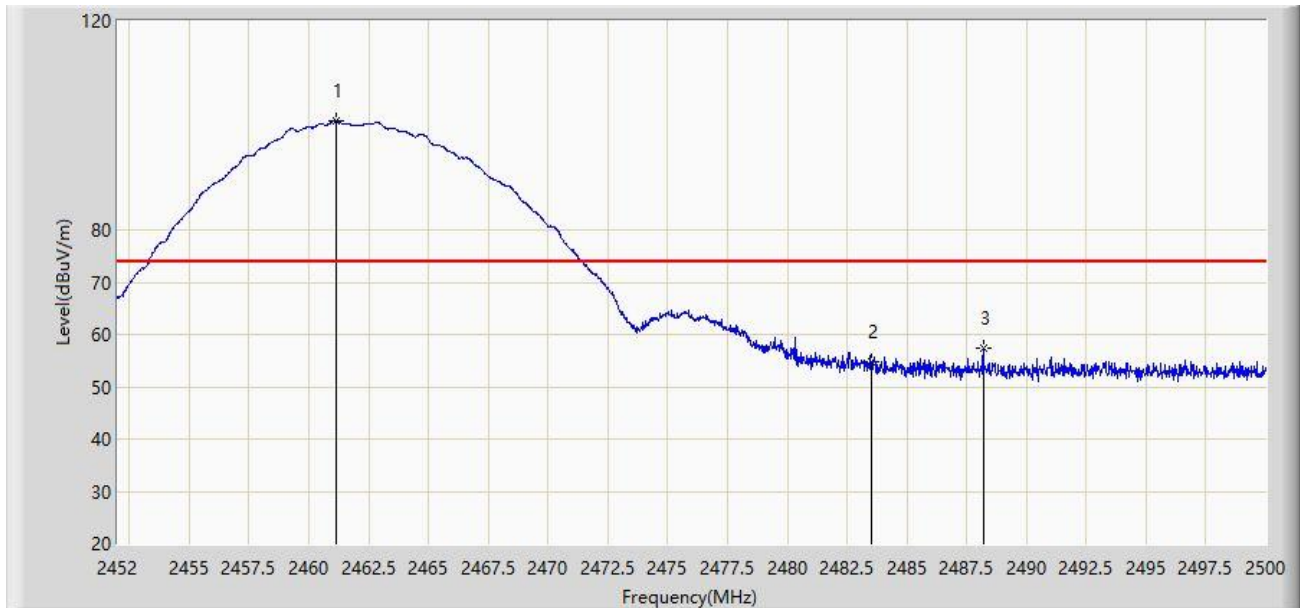

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.168	100.957	69.626	N/A	N/A	31.331	PK
2		2483.500	54.910	23.595	-19.090	74.000	31.315	PK
3	*	2488.192	57.440	26.117	-16.560	74.000	31.323	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 12:26
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.096	98.734	67.402	N/A	N/A	31.332	AV
2	*	2483.500	40.254	8.939	-13.746	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 12:48
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

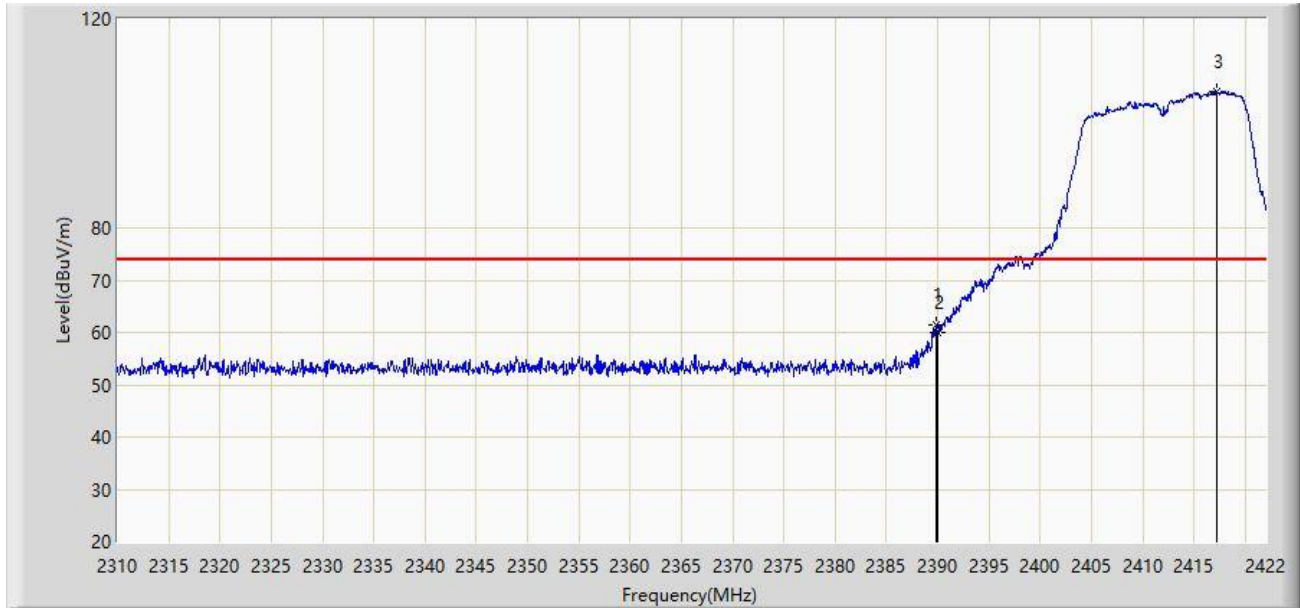


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	61.525	30.091	-12.475	74.000	31.433	PK
2		2390.000	59.896	28.463	-14.104	74.000	31.433	PK
3		2417.240	105.946	74.601	N/A	N/A	31.345	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 12:44
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

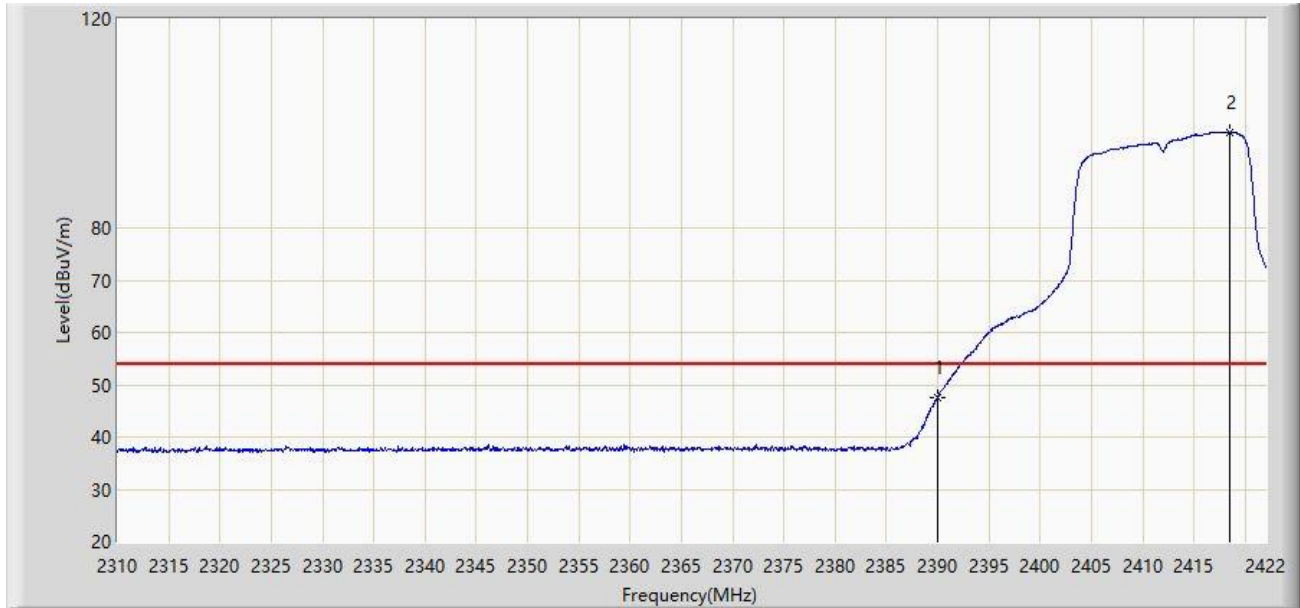


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	47.560	16.127	-6.440	54.000	31.433	AV
2		2418.472	98.248	66.906	N/A	N/A	31.342	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 12:43
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

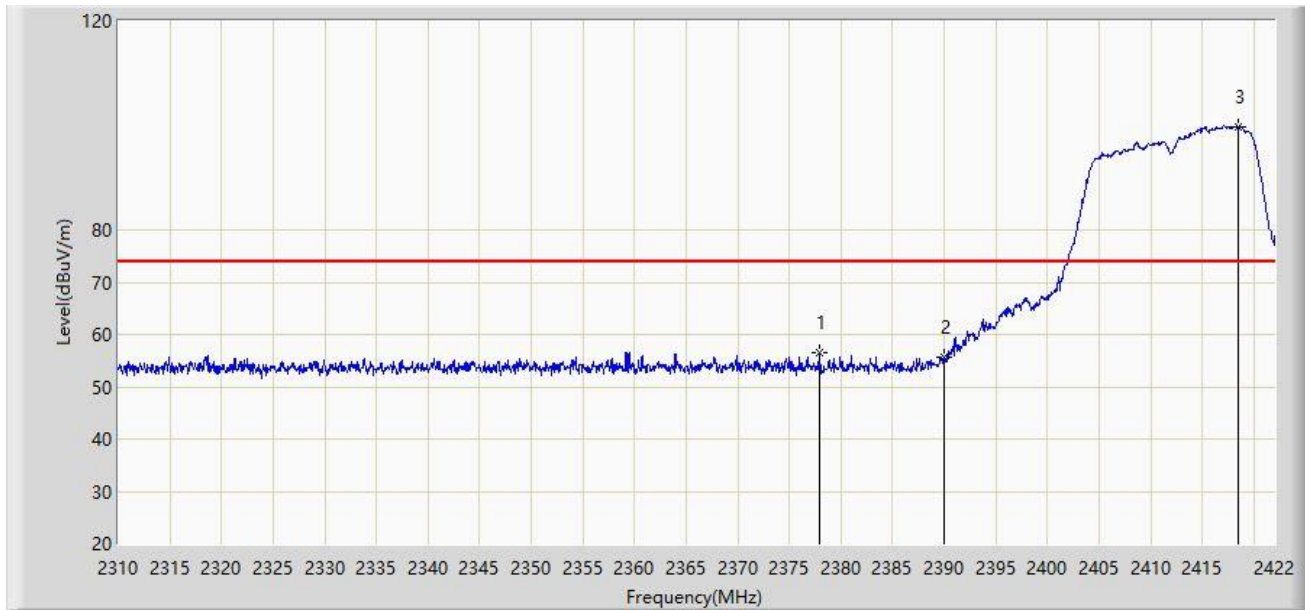


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2377.928	56.576	25.094	-17.424	74.000	31.482	PK
2		2390.000	55.564	24.131	-18.436	74.000	31.433	PK
3		2418.472	99.726	68.384	N/A	N/A	31.342	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 12:31
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

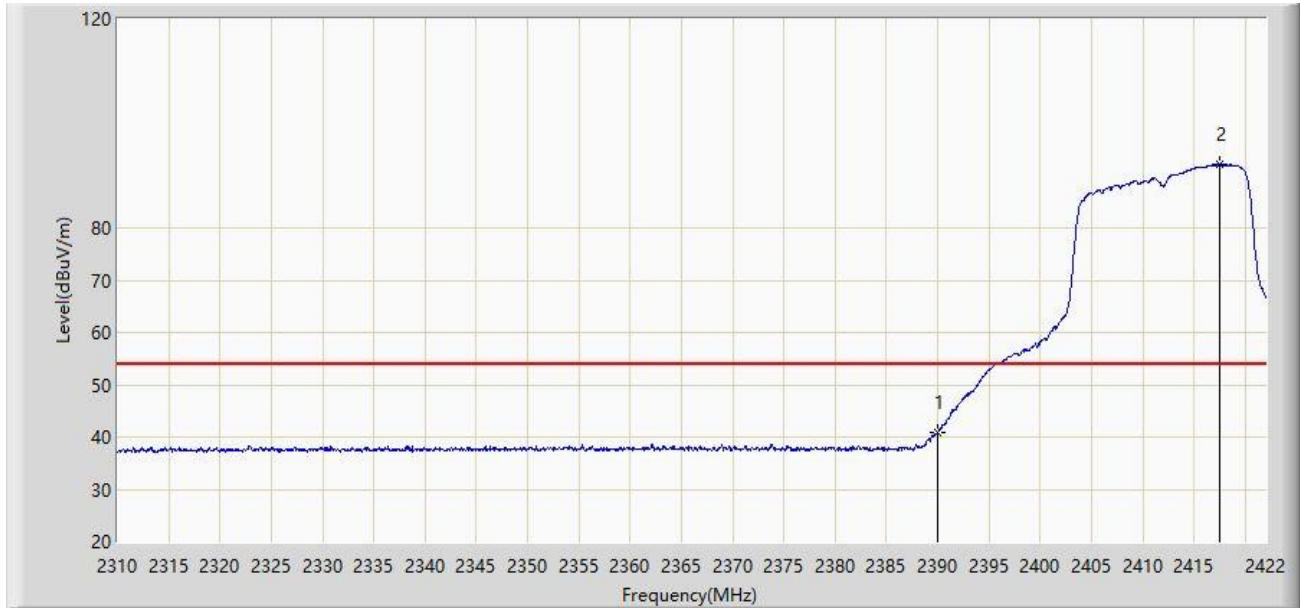

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	40.728	9.295	-13.272	54.000	31.433	AV
2		2417.576	92.049	60.705	N/A	N/A	31.344	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 12:58
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.728	106.314	74.979	N/A	N/A	31.335	PK
2		2483.500	64.543	33.228	-9.457	74.000	31.315	PK
3	*	2483.560	65.251	33.936	-8.749	74.000	31.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:01
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

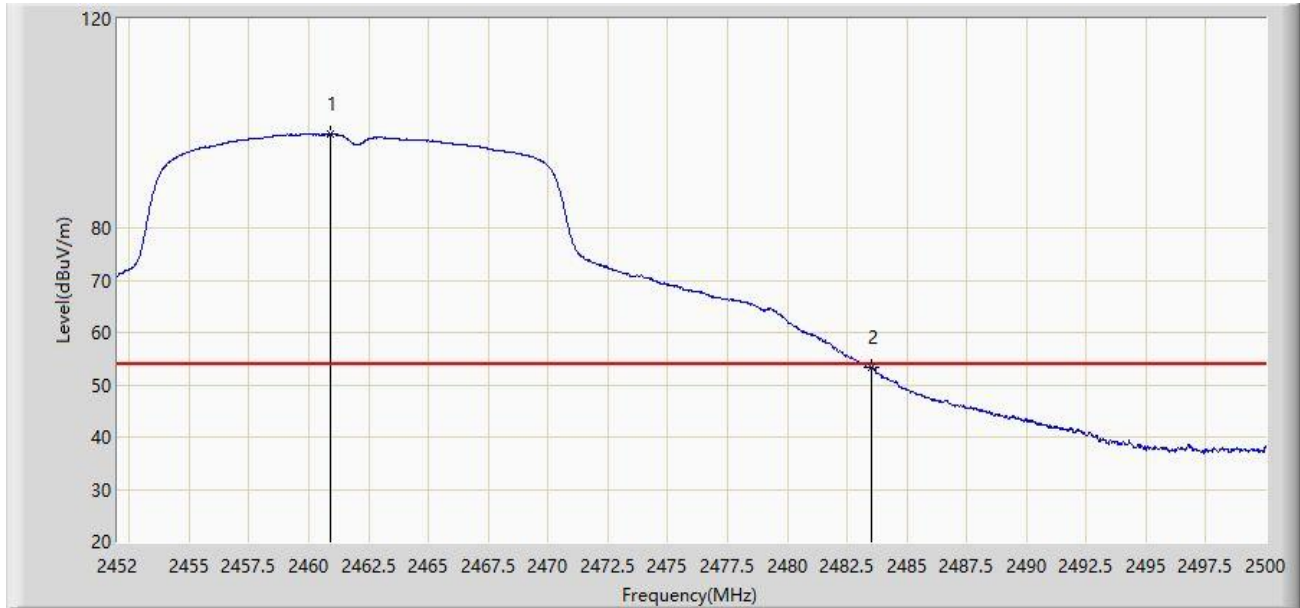

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.928	97.842	66.510	N/A	N/A	31.332	AV
2	*	2483.500	53.335	22.020	-0.665	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:02
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	



No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.880	102.463	71.131	N/A	N/A	31.332	PK
2		2483.500	63.868	32.553	-10.132	74.000	31.315	PK
3	*	2483.560	64.733	33.418	-9.267	74.000	31.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:04
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.904	94.081	62.749	N/A	N/A	31.332	AV
2	*	2483.500	52.618	21.303	-1.382	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:06
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

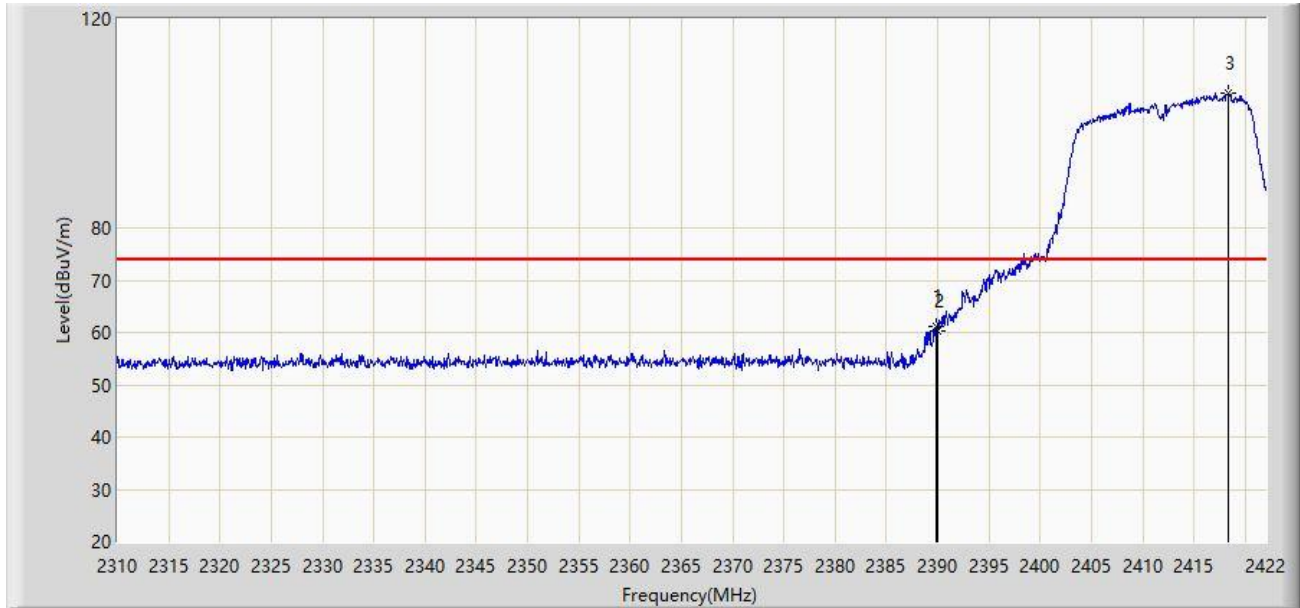


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.912	61.199	29.765	-12.801	74.000	31.433	PK
2		2390.000	60.323	28.890	-13.677	74.000	31.433	PK
3		2418.304	105.704	74.361	N/A	N/A	31.342	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:11
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

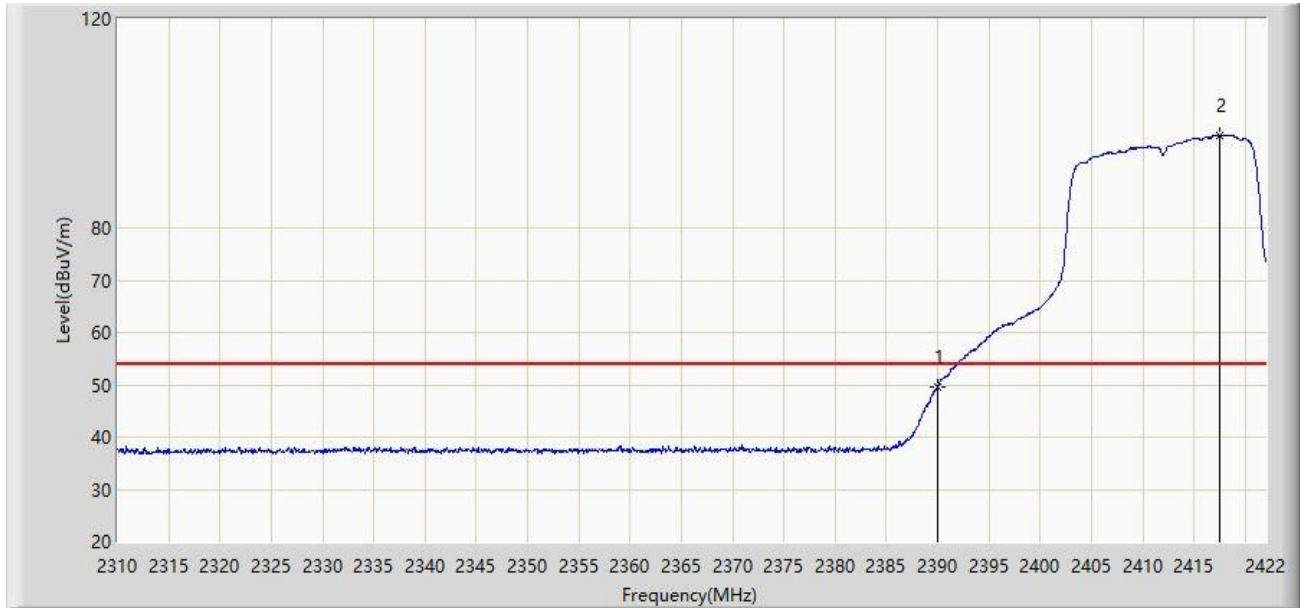


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	49.686	18.253	-4.314	54.000	31.433	AV
2		2417.576	97.796	66.452	N/A	N/A	31.344	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:14
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

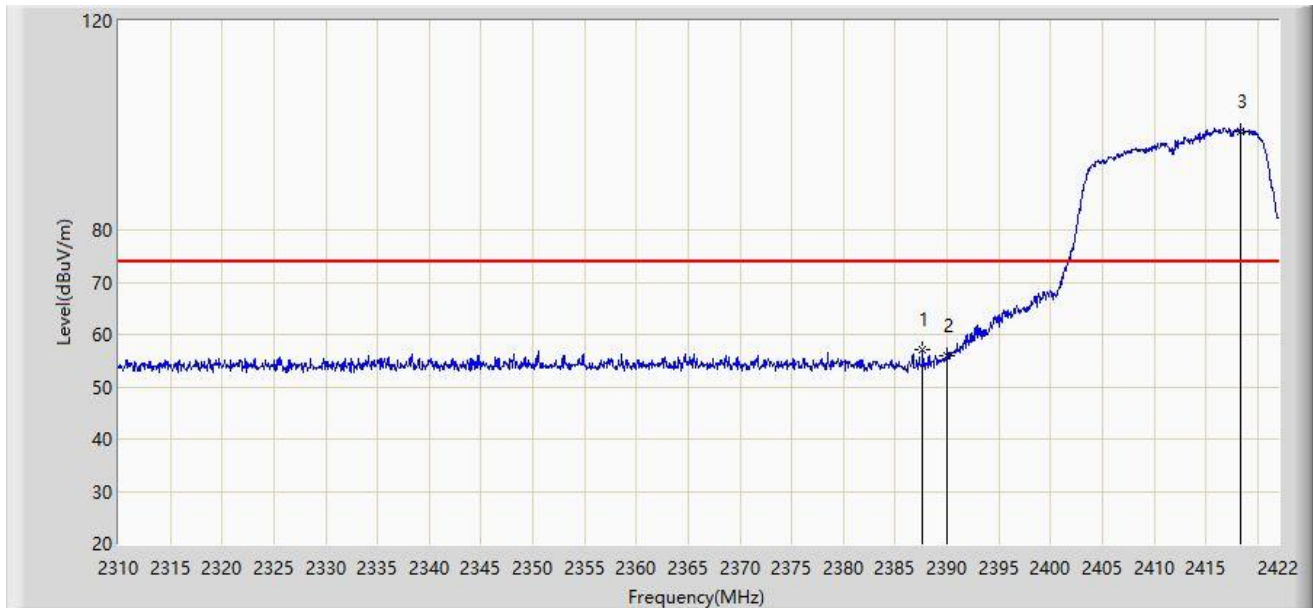


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.672	57.211	25.766	-16.789	74.000	31.444	PK
2		2390.000	56.055	24.622	-17.945	74.000	31.433	PK
3		2418.304	98.928	67.585	N/A	N/A	31.342	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:19
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

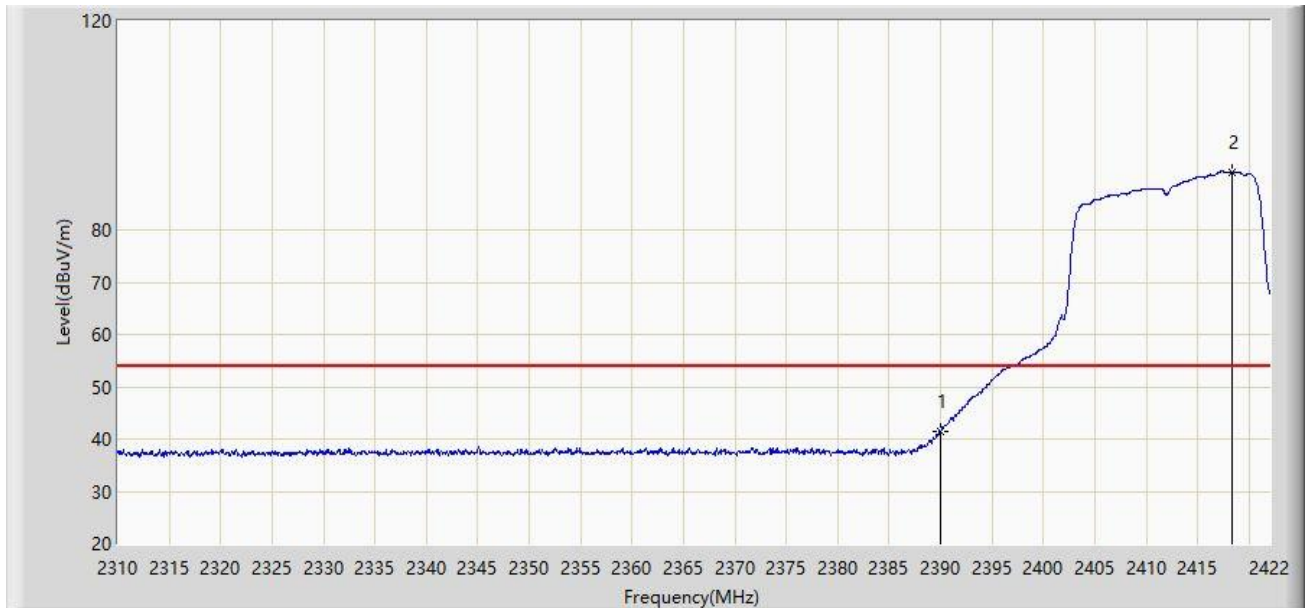

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	41.554	10.121	-12.446	54.000	31.433	AV
2		2418.304	91.048	59.705	N/A	N/A	31.342	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:27
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.216	105.265	73.934	N/A	N/A	31.331	PK
2		2483.500	62.953	31.638	-11.047	74.000	31.315	PK
3	*	2483.776	64.308	32.993	-9.692	74.000	31.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:32
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

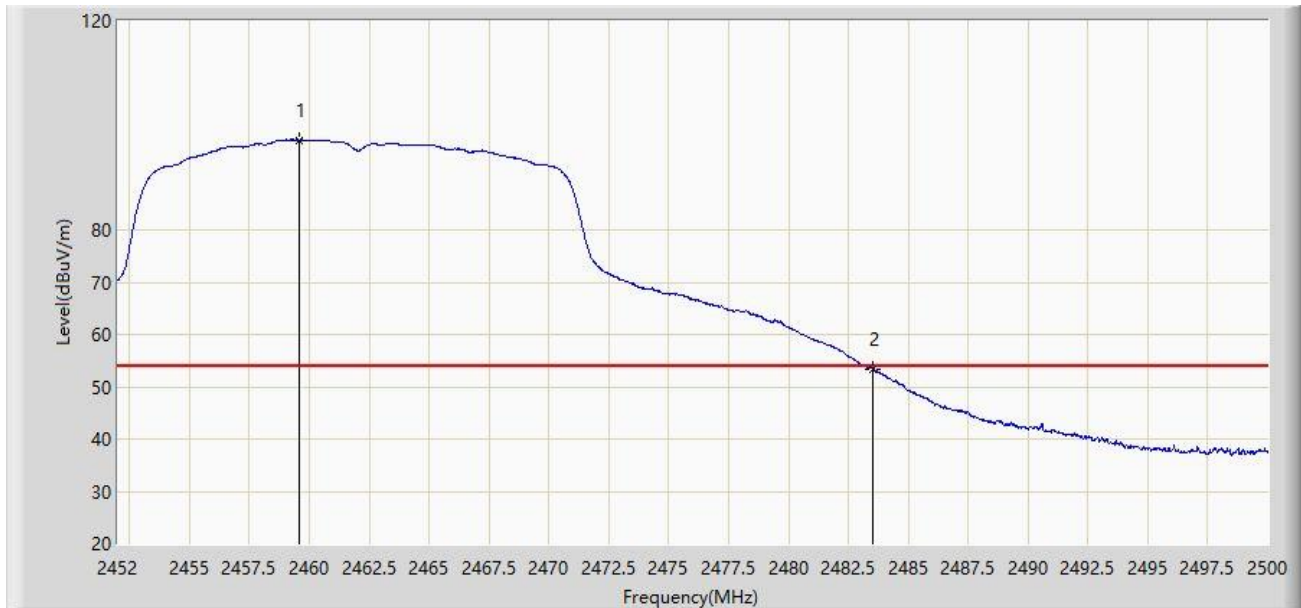


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2459.584	97.203	65.868	N/A	N/A	31.336	AV
2	*	2483.500	53.463	22.148	-0.537	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:36
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

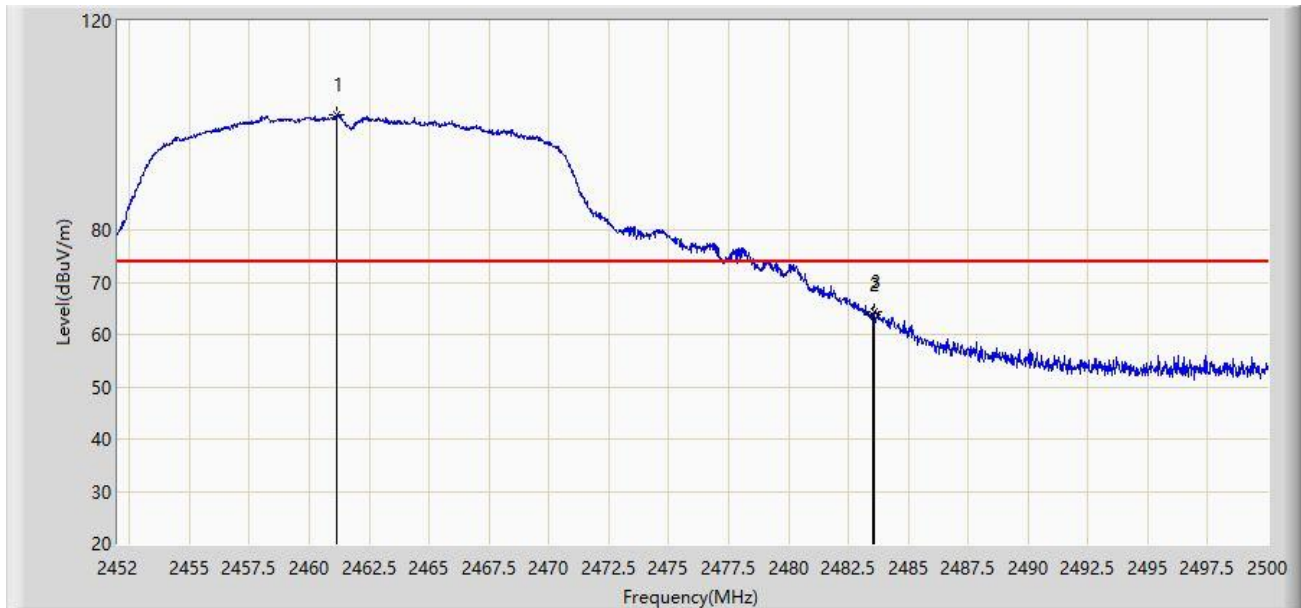

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2461.144	101.895	70.564	N/A	N/A	31.332	PK
2		2483.500	63.858	32.543	-10.142	74.000	31.315	PK
3	*	2483.584	64.267	32.952	-9.733	74.000	31.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:39
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	




No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.784	94.096	62.764	N/A	N/A	31.332	AV
2	*	2483.500	53.346	22.031	-0.654	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:44
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

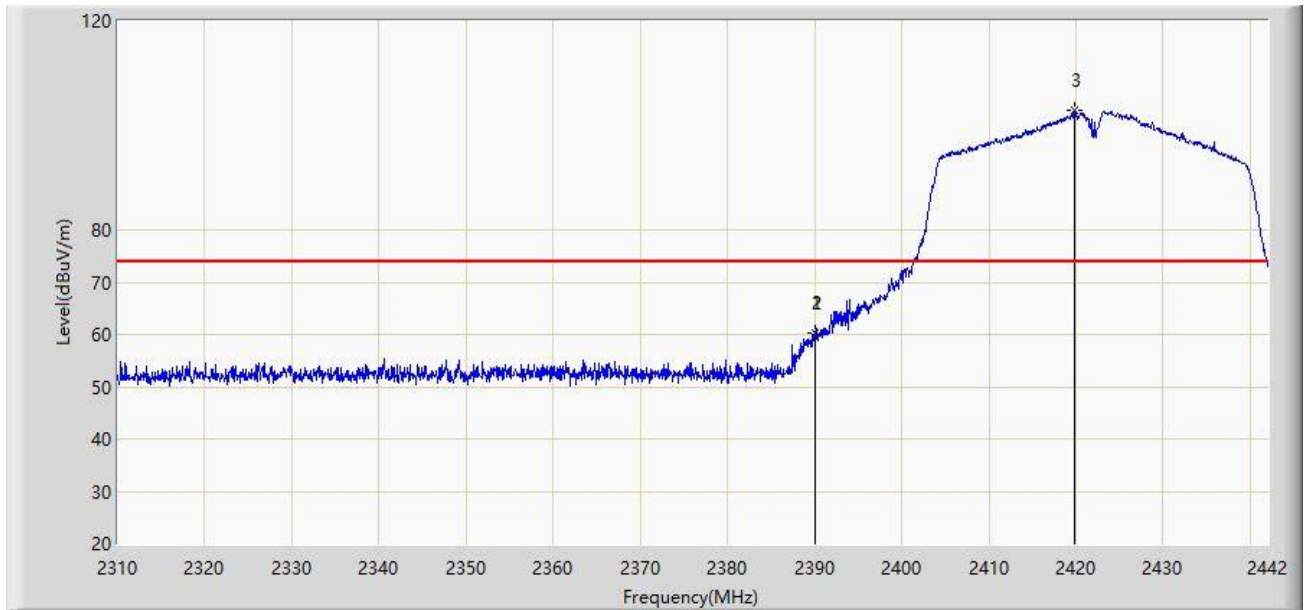


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.992	60.351	28.918	-13.649	74.000	31.433	PK
2		2390.000	60.171	28.738	-13.829	74.000	31.433	PK
3		2419.824	102.767	71.429	N/A	N/A	31.339	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:54
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

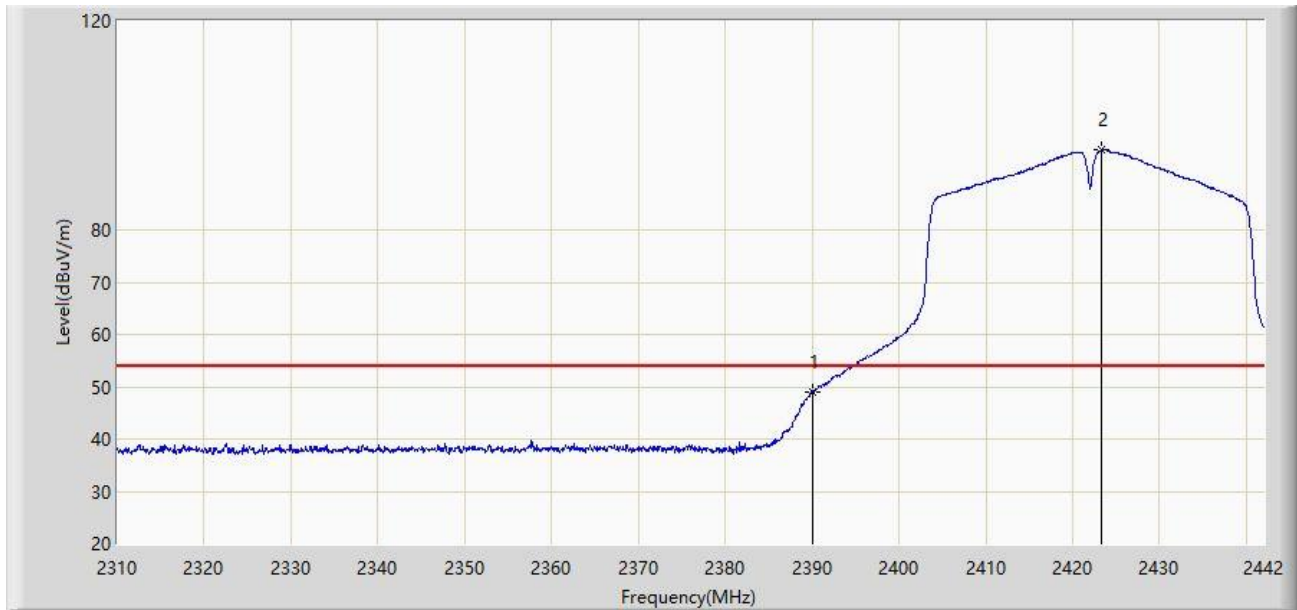


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	48.931	17.498	-5.069	54.000	31.433	AV
2		2423.388	95.318	63.986	N/A	N/A	31.332	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 13:58
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

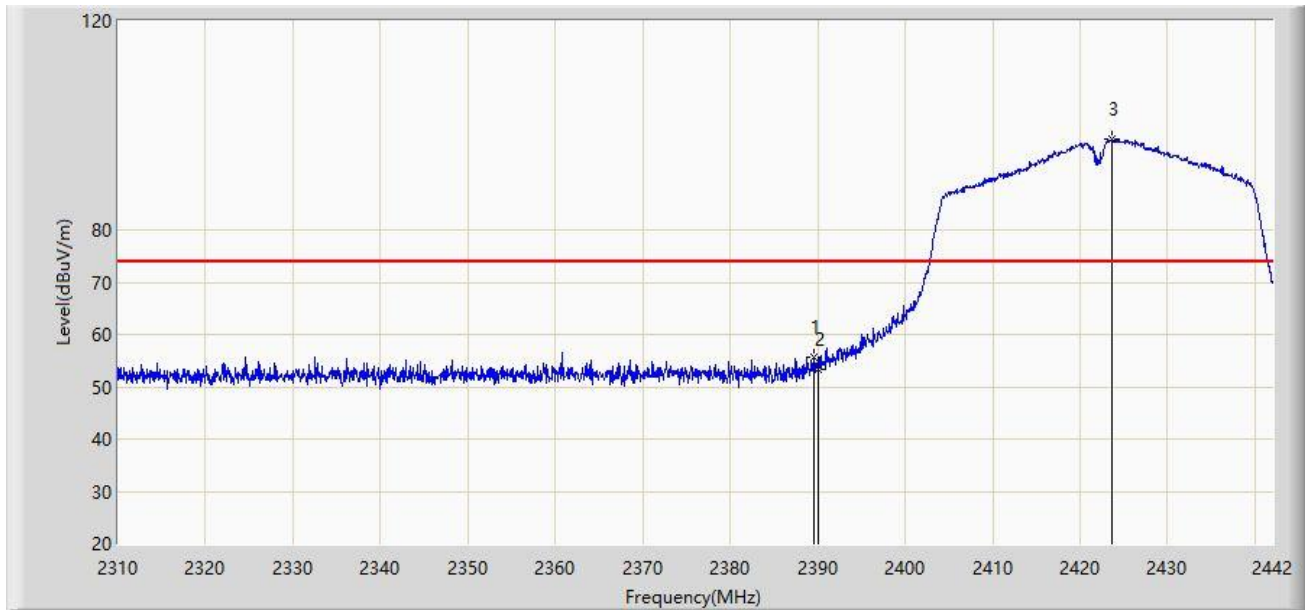


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.530	55.752	24.316	-18.248	74.000	31.436	PK
2		2390.000	53.354	21.921	-20.646	74.000	31.433	PK
3		2423.586	97.255	65.924	N/A	N/A	31.331	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 14:00
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

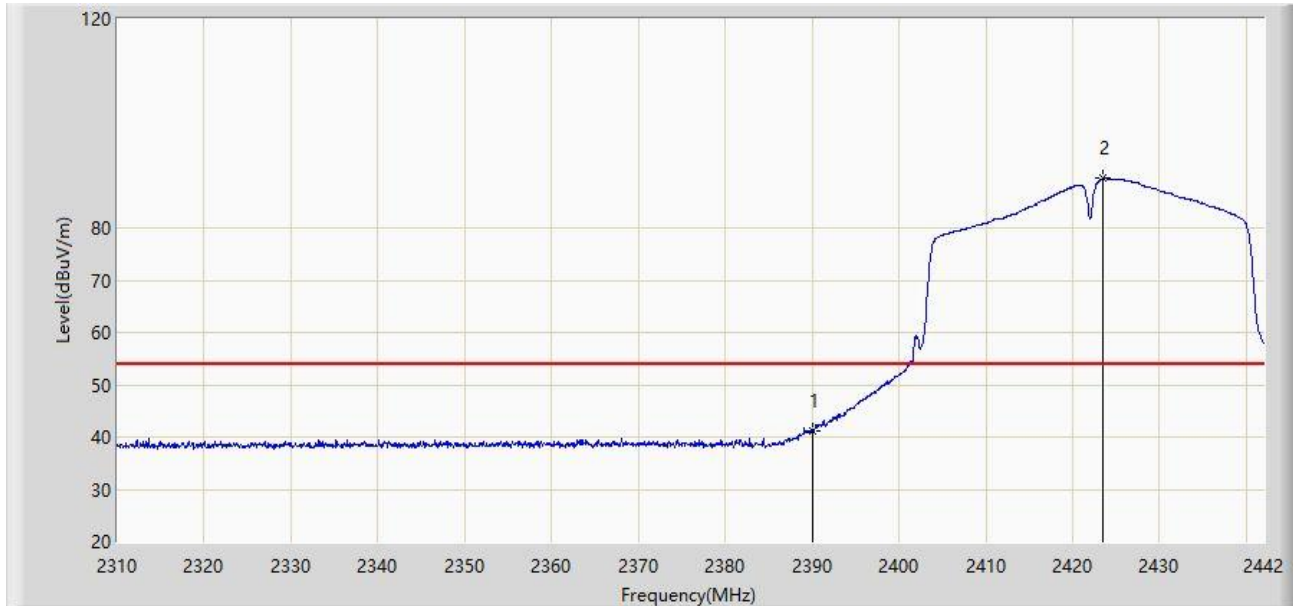


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	2390.000	41.176	9.743	-12.824	54.000	31.433	AV
2		2423.454	89.460	58.128	N/A	N/A	31.332	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 14:21
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

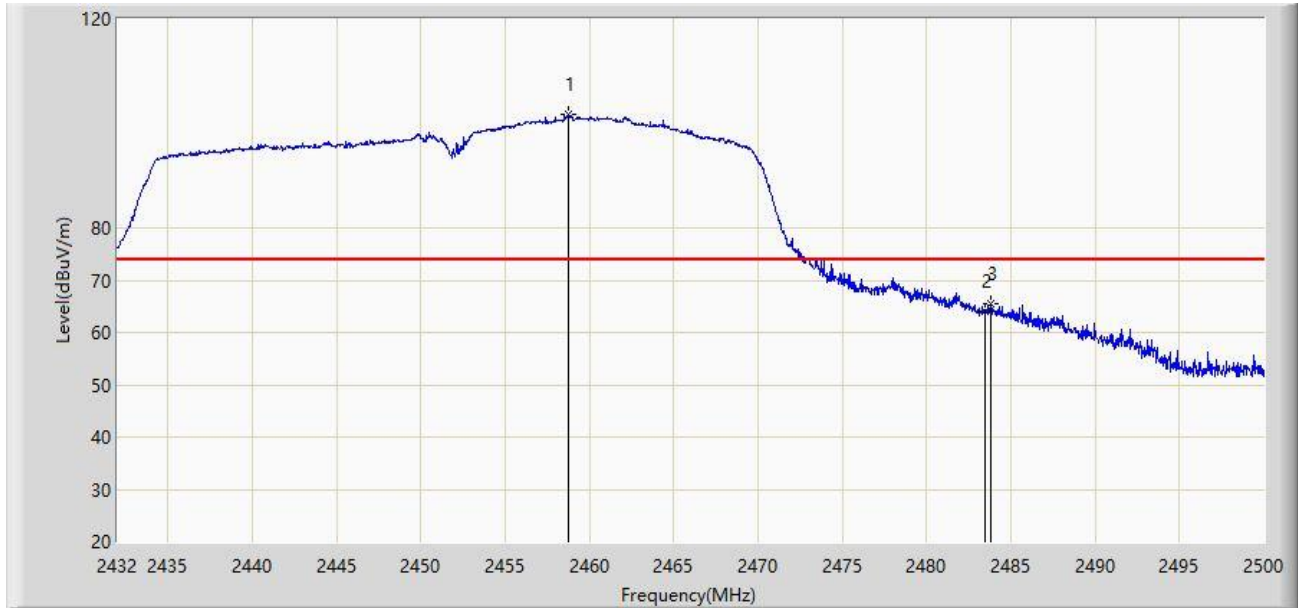


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.758	101.658	70.321	N/A	N/A	31.338	PK
2		2483.500	63.963	32.648	-10.037	74.000	31.315	PK
3	*	2483.816	65.447	34.132	-8.553	74.000	31.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 14:20
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

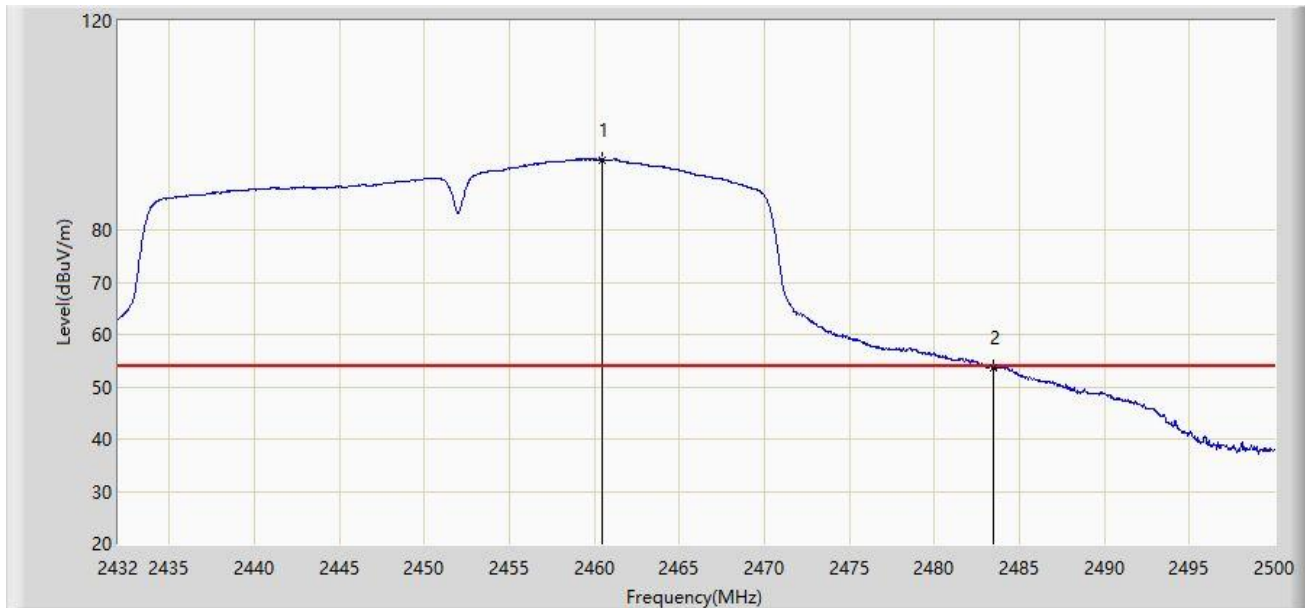


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.458	93.454	62.121	N/A	N/A	31.333	AV
2	*	2483.500	53.553	22.238	-0.447	54.000	31.315	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 14:22
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

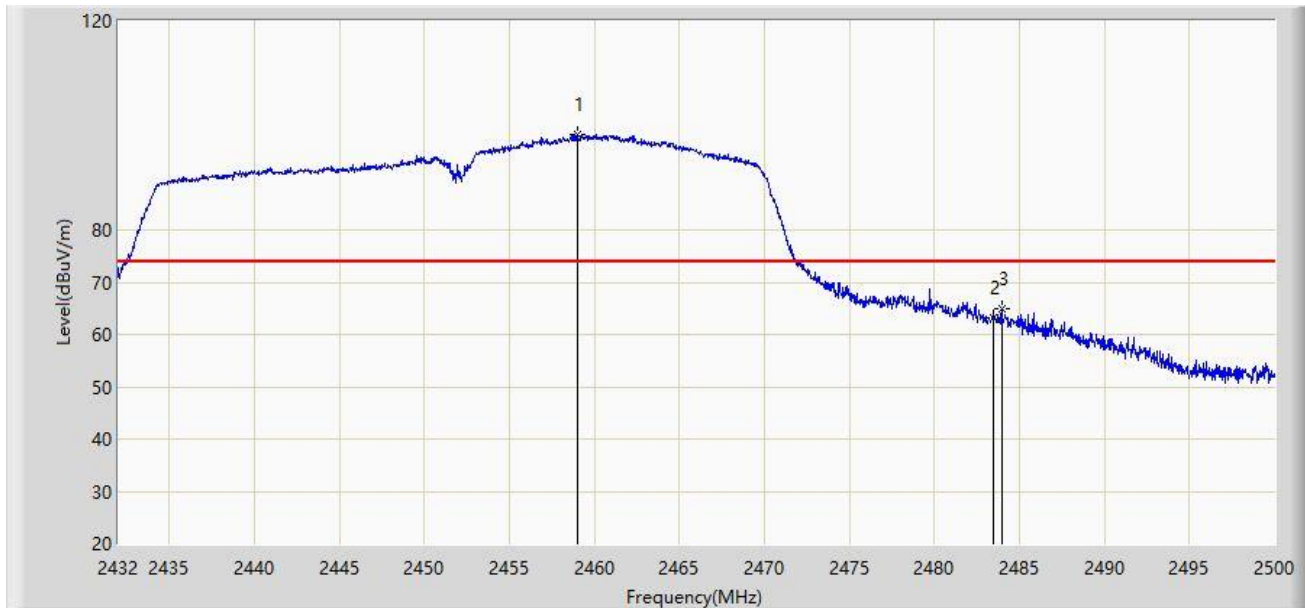


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.996	98.223	66.886	N/A	N/A	31.336	PK
2		2483.500	63.054	31.739	-10.946	74.000	31.315	PK
3	*	2483.952	65.012	33.697	-8.988	74.000	31.315	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: WZ-AC2	Time: 2022/07/16 - 14:24
Limit: FCC_2.4G_RE(3m)	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2452MHz	

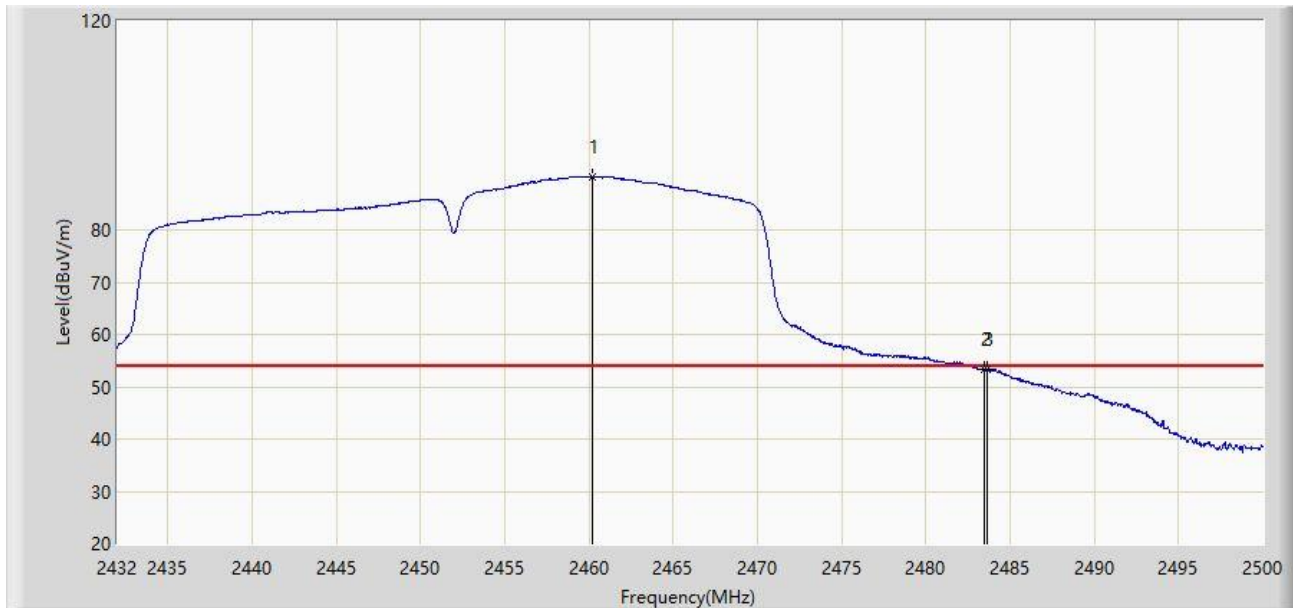

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2460.186	90.147	58.813	N/A	N/A	31.334	AV
2		2483.500	53.291	21.976	-0.709	54.000	31.315	AV
3	*	2483.612	53.401	22.086	-0.599	54.000	31.315	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: WZ-SR2	Time: 2022/07/26 - 15:08
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Line
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2437MHz	

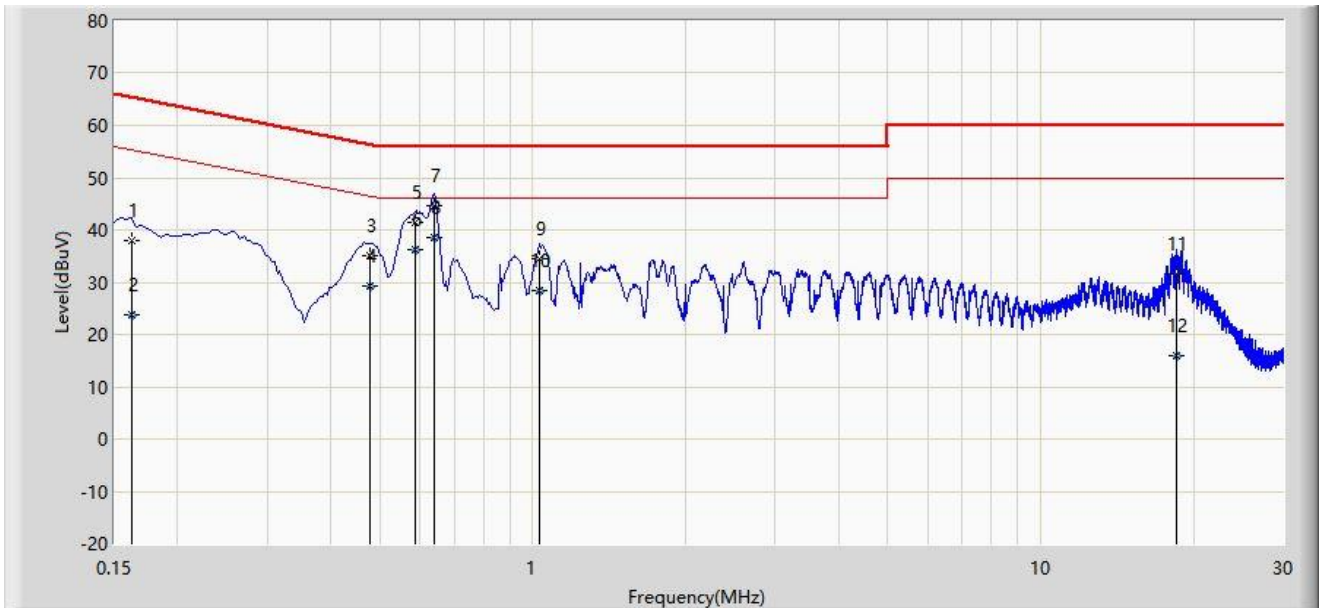


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.162	38.065	28.185	-27.296	65.361	9.880	QP
2			0.162	23.639	13.759	-31.722	55.361	9.880	AV
3			0.478	35.215	25.271	-21.159	56.374	9.944	QP
4			0.478	29.338	19.394	-17.036	46.374	9.944	AV
5			0.586	41.371	31.422	-14.629	56.000	9.949	QP
6			0.586	36.190	26.241	-9.810	46.000	9.949	AV
7			0.638	44.550	34.601	-11.450	56.000	9.949	QP
8		*	0.638	38.598	28.649	-7.402	46.000	9.949	AV
9			1.034	34.432	24.451	-21.568	56.000	9.981	QP
10			1.034	28.370	18.389	-17.630	46.000	9.981	AV
11			18.478	31.671	20.239	-28.329	60.000	11.433	QP
12			18.478	15.896	4.463	-34.104	50.000	11.433	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Time: 2022/07/26 - 15:13
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_E	Polarity: Neutral
Wireless Audio Source Adapter	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at channel 2437MHz	

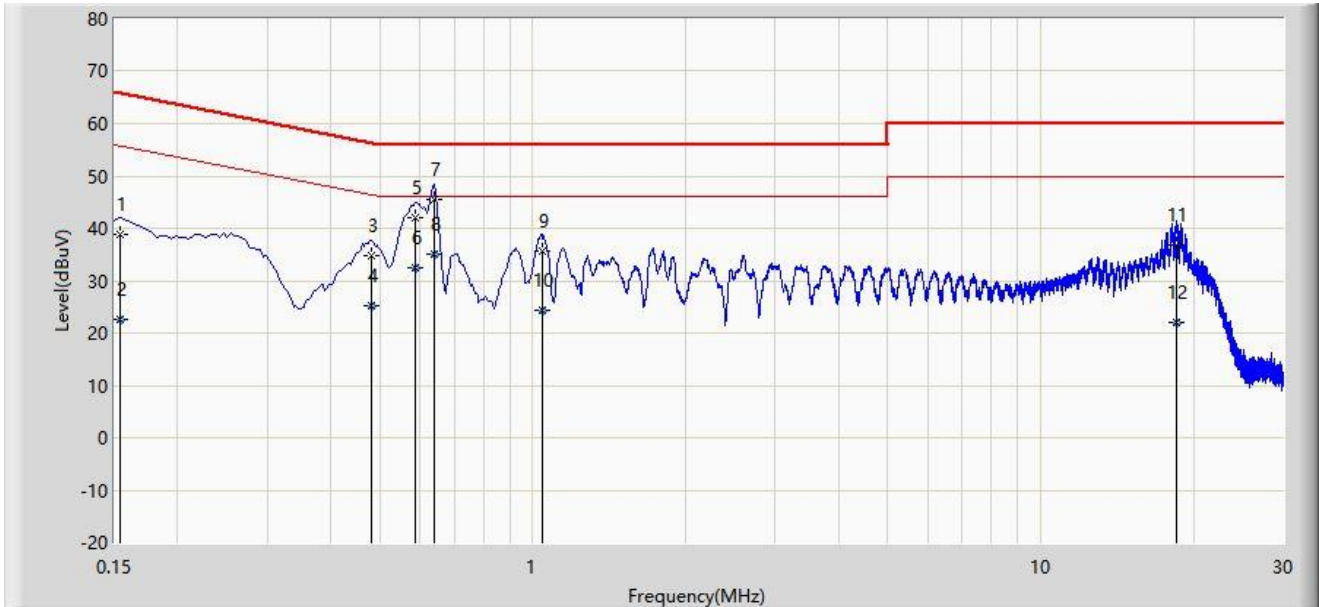

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	38.914	29.013	-26.867	65.781	9.901	QP
2			0.154	22.618	12.717	-33.163	55.781	9.901	AV
3			0.482	34.888	24.931	-21.417	56.305	9.957	QP
4			0.482	25.151	15.194	-21.153	46.305	9.957	AV
5			0.586	42.111	32.143	-13.889	56.000	9.967	QP
6			0.586	32.407	22.439	-13.593	46.000	9.967	AV
7		*	0.638	45.643	35.670	-10.357	56.000	9.973	QP
8			0.638	35.139	25.166	-10.861	46.000	9.973	AV
9			1.042	35.722	25.721	-20.278	56.000	10.001	QP
10			1.042	24.410	14.409	-21.590	46.000	10.001	AV
11			18.494	36.807	25.350	-23.193	60.000	11.458	QP
12			18.494	21.975	10.517	-28.025	50.000	11.458	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2206RSU073-UT” file.

Appendix C – EUT Photograph

Refer to “2206RSU073-UE” file.

_____ The End _____