

*FCC PART 15, SUBPART B and C  
TEST REPORT**for*

InfoCube PAGER

MODEL: 1

Prepared for

EMBEDDED PROCESSOR DESIGNS, INC.  
677 CASE COVE ROAD  
CANDLER, NORTH CAROLINA 28715

Prepared by: \_\_\_\_\_

KYLE FUJIMOTO

Approved by: \_\_\_\_\_

MICHAEL CHRISTENSEN

COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500

DATE: FEBRUARY 25, 2005

|       | REPORT<br>BODY | APPENDICES |   |   |    |    | TOTAL |
|-------|----------------|------------|---|---|----|----|-------|
|       |                | A          | B | C | D  | E  |       |
| PAGES | 16             | 2          | 2 | 2 | 19 | 61 | 102   |

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

---

**TABLE OF CONTENTS**

| <b>Section / Title</b>                                 | <b>PAGE</b> |
|--------------------------------------------------------|-------------|
| <b>GENERAL REPORT SUMMARY</b>                          | <b>4</b>    |
| <b>SUMMARY OF TEST RESULTS</b>                         | <b>4</b>    |
| <b>1. PURPOSE</b>                                      | <b>5</b>    |
| <b>2. ADMINISTRATIVE DATA</b>                          | <b>6</b>    |
| 2.1 Location of Testing                                | 6           |
| 2.2 Traceability Statement                             | 6           |
| 2.3 Cognizant Personnel                                | 6           |
| 2.4 Date Test Sample was Received                      | 6           |
| 2.5 Disposition of the Test Sample                     | 6           |
| 2.6 Abbreviations and Acronyms                         | 6           |
| <b>3. APPLICABLE DOCUMENTS</b>                         | <b>7</b>    |
| <b>4. DESCRIPTION OF TEST CONFIGURATION</b>            | <b>8</b>    |
| 4.1 Description Of Test Configuration - EMI            | 8           |
| 4.1.1 Cable Construction and Termination               | 9           |
| <b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b> | <b>10</b>   |
| 5.1 EUT and Accessory List                             | 10          |
| 5.2 EMI Test Equipment (Part 1)                        | 11          |
| 5.3 EMI Test Equipment for Brea Facility – Part 2      | 12          |
| <b>6. TEST SITE DESCRIPTION</b>                        | <b>13</b>   |
| 6.1 Test Facility Description                          | 13          |
| 6.2 EUT Mounting, Bonding and Grounding                | 13          |
| <b>7. TEST PROCEDURES</b>                              | <b>14</b>   |
| 7.1 Conducted Emissions Test                           | 14          |
| 7.2 Radiated Emissions (Spurious and Harmonics) Test   | 15          |
| <b>8. CONCLUSIONS</b>                                  | <b>16</b>   |

**LIST OF APPENDICES**

| APPENDIX | TITLE                                                                                                                                                                 |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A        | Laboratory Recognitions                                                                                                                                               |
| B        | Modifications to the EUT                                                                                                                                              |
| C        | Additional Models Covered Under This Report                                                                                                                           |
| D        | Diagrams, Charts, and Photos <ul style="list-style-type: none"><li>• Test Setup Diagrams</li><li>• Test Photos</li><li>• Antenna and Effective Gain Factors</li></ul> |
| E        | Data Sheets                                                                                                                                                           |

**LIST OF FIGURES**

| FIGURE | TITLE                                                 |
|--------|-------------------------------------------------------|
| 1      | Conducted Emissions Test Setup                        |
| 2      | Plot Map and Layout of the 3 Meter Radiated Test Site |

## GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested: InfoCube Pager  
Model: 1  
S/N: N/A

Product Description: See Expository Statement

Modifications: The EUT was not modified during the testing.

Manufacturer: Embedded Processor Designs, Inc.  
677 Case Cove Road  
Candler, North Carolina 28715

Test Dates: January 17, 18, and 19; and February 25, 2005

Test Specifications: EMI requirements  
CFR Title 47, Part 15 Subpart B; and Subpart C, Sections 15.205, 15.207, 15.209 and 15.249

Test Procedure: ANSI C63.4

Test Deviations: The test procedure was not deviated from during the testing.

## SUMMARY OF TEST RESULTS

| TEST | DESCRIPTION                              | RESULTS                                                                                                                                        |
|------|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | Conducted RF Emissions, 150 kHz - 30 MHz | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of Subpart C, section 15.207.                      |
| 2    | Radiated RF Emissions, 10 kHz - 9300 MHz | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and the limits of Subpart C, sections 15.205, 15.209, and 15.249. |

## 1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the InfoCube Pager Model: 1. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the **Class B** specification limits defined by CFR Title 47, Part 15, Subpart B; and the limits defined in Subpart C, sections 15.205, 15.207, 15.209, and 15.249.



## **2. ADMINISTRATIVE DATA**

### **2.1 Location of Testing**

The EMI tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California 92823.

### **2.2 Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### **2.3 Cognizant Personnel**

Embedded Processor Designs, Inc.

David Thompson      President

Compatible Electronics, Inc.

James Ross      Test Engineer

Kyle Fujimoto      Test Engineer

Michael Christensen      Lab Manager

### **2.4 Date Test Sample was Received**

The test sample was received on January 17, 2005.

### **2.5 Disposition of the Test Sample**

The sample has not been returned to Embedded Processor Designs, Inc. as of February 25, 2005.

### **2.6 Abbreviations and Acronyms**

The following abbreviations and acronyms may be used in this document.

|      |                                      |
|------|--------------------------------------|
| RF   | Radio Frequency                      |
| EMI  | Electromagnetic Interference         |
| EUT  | Equipment Under Test                 |
| P/N  | Part Number                          |
| S/N  | Serial Number                        |
| HP   | Hewlett Packard                      |
| ITE  | Information Technology Equipment     |
| CML  | Corrected Meter Limit                |
| LISN | Line Impedance Stabilization Network |
| LCD  | Liquid Crystal Display               |

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

| SPEC                     | TITLE                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| CFR Title 47,<br>Part 15 | FCC Rules – Radio frequency devices (including digital devices)                                                                      |
| ANSI C63.4<br>2003       | Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz |

#### 4. DESCRIPTION OF TEST CONFIGURATION

##### 4.1 Description Of Test Configuration - EMI

Setup and operation of the equipment under test.

Specifics of the EUT and Peripherals Tested

**Configuration #1:** The InfoCube Pager Model: 1 (EUT) was tested as a stand alone unit and tested in three orthogonal axis. The EUT was continuously transmitting and receiving while displaying graphics on the LCD. The low, middle, and high channels were tested.

**Configuration #2:** The InfoCube Pager Model: 1 (EUT) was directly connected to a charging board. The charging board was connected to an AC Adapter. The EUT's batteries were being charged by the charging board. Also, the EUT was continuously transmitting and receiving while displaying graphics on the LCD. The low, middle, and high channels were tested.

The EUT during the Transmit portion of the test was investigated for emissions to the limits of 15.205, 15.207, 15.209, and 15.249.

The EUT during the Receive portion of the test was investigated for emissions to the **Class B** limits CFR Title 47, Part 15, Subpart B.

The EUT during the Digital portion of the test was investigated for emissions to the **Class B** limits CFR Title 47, Part 15, Subpart B.

The final radiated data as well as conducted data were taken in the modes described above. Please see Appendix E for the data sheets.

#### 4.1.1 Cable Construction and Termination

**Cable 1** This is a 2 meter unshielded cable connecting the AC Adapter to the charging board. The cable is hard wired at each end.



**5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT****5.1 EUT and Accessory List**

| EQUIPMENT                     | MANUFACTURER                     | MODEL NUMBER | SERIAL NUMBER | FCC ID |
|-------------------------------|----------------------------------|--------------|---------------|--------|
| InfoCube PAGER (EUT)          | EMBEDDED PROCESSOR DESIGNS, INC. | 1            | N/A           | SWWTBD |
| AC ADAPTER FOR CHARGING BOARD | PHILIPS                          | 10PS306/17   | N/A           | N/A    |
| CHARGING BOARD                | EMBEDDED PROCESSOR DESIGNS, INC. | N/A          | N/A           | N/A    |

**5.2 EMI Test Equipment (Part 1)**

| <b>EQUIPMENT<br/>TYPE</b>                 | <b>MANU-<br/>FACTURER</b> | <b>MODEL<br/>NUMBER</b> | <b>SERIAL<br/>NUMBER</b> | <b>CAL. DATE</b>   | <b>CAL. DUE DATE</b> |
|-------------------------------------------|---------------------------|-------------------------|--------------------------|--------------------|----------------------|
| Radiate Emissions<br>Data Capture Program | Compatible<br>Electronics | 2.0                     | N/A                      | N/A                | N/A                  |
| Conducted Emissions<br>Test Program       | Compatible<br>Electronics | 2.3 (SR19)              | N/A                      | N/A                | N/A                  |
| Spectrum Analyzer –<br>Main Section       | Hewlett Packard           | 8566B                   | 3638A08784               | June 16, 2004      | June 16, 2005        |
| Spectrum Analyzer –<br>Display Section    | Hewlett Packard           | 85662A                  | 3701A22279               | June 16, 2004      | June 16, 2005        |
| Quasi-Peak Adapter                        | Hewlett Packard           | 85650A                  | 2430A00424               | June 16, 2004      | June 16, 2005        |
| Preamplifier                              | Com Power                 | PA-103                  | 1582                     | March 11, 2004     | March 11, 2005       |
| Biconical Antenna                         | Com Power                 | AB-900                  | 15250                    | March 12, 2004     | March 12, 2005       |
| Log Periodic Antenna                      | Com Power                 | AL-100                  | 16202                    | February 18, 2004  | Feb. 18, 2006        |
| Computer                                  | Hewlett Packard           | D5251A 888              | US74458128               | N/A                | N/A                  |
| Monitor                                   | Hewlett Packard           | D5258A                  | DK74889705               | N/A                | N/A                  |
| LISN                                      | Com Power                 | LI-215                  | 12076                    | October 26, 2004   | Oct. 26, 2005        |
| LISN                                      | Com Power                 | LI-215                  | 12090                    | October 26, 2004   | Oct. 26, 2005        |
| Transient Limiter                         | Seaward                   | 252A910                 | K39-0220                 | September 20, 2004 | Sept. 20, 2005       |

**5.3 EMI Test Equipment for Brea Facility – Part 2**

| <b>EQUIPMENT<br/>TYPE</b> | <b>MANU-<br/>FACTURER</b> | <b>MODEL<br/>NUMBER</b> | <b>SERIAL<br/>NUMBER</b> | <b>CAL. DATE</b>  | <b>CAL. DUE DATE</b> |
|---------------------------|---------------------------|-------------------------|--------------------------|-------------------|----------------------|
| EMI Receiver              | Rohde &<br>Schwarz        | ESIB40                  | 100172                   | October 28, 2004  | Oct. 28, 2005        |
| Loop Antenna              | Com-Power                 | AL-130                  | 17089                    | September 4, 2004 | Sept. 4, 2005        |
| Horn Antenna              | Antenna<br>Research       | DRG-118/A               | 1053                     | January 16, 2004  | Jan. 16, 2006        |
| Microwave<br>Preamplifier | Com Power                 | PA-122                  | 25195                    | August 19, 2004   | Aug. 19, 2005        |


**6. TEST SITE DESCRIPTION****6.1 Test Facility Description**

Please refer to section 2.1 and 7.1 of this report for EMI test location.

**6.2 EUT Mounting, Bonding and Grounding**

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

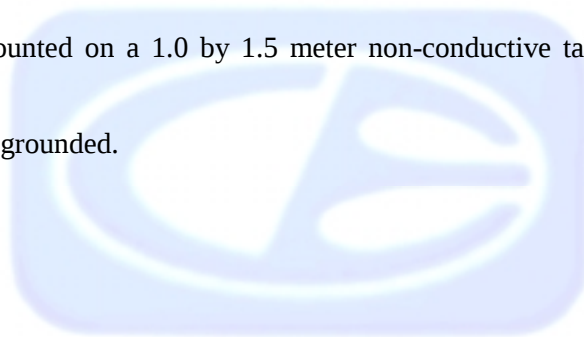

## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 Conducted Emissions Test

The spectrum analyzer was used as a measuring meter. The data was collected with the spectrum analyzer in the peak detect mode with the “Max Hold” feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the spectrum analyzer input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the spectrum analyzer. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics conducted emissions software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

#### Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Section 15.207.

## 7.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer was used as a measuring meter along with the quasi-peak adapter. Amplifiers were used to increase the sensitivity of the instrument. The Com-Power Preamplifier Model: PA-102 was used for frequencies from 30 MHz to 1 GHz, and the Com-Power Microwave Preamplifier Model: PA-122 was used for frequencies from 1 GHz to 9.3 GHz. Below 1 GHz the spectrum analyzer was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer records the highest measured reading over all the sweeps. Above 1 GHz the EMI receiver was utilized in recording measurements.

The measurement bandwidths and transducers used for the radiated emissions test were:

| FREQUENCY RANGE   | EFFECTIVE MEASUREMENT BANDWIDTH | TRANSDUCER           |
|-------------------|---------------------------------|----------------------|
| 9 kHz to 150 kHz  | 200 Hz                          | Active Loop Antenna  |
| 150 kHz to 30 MHz | 9 kHz                           | Active Loop Antenna  |
| 30 MHz to 300 MHz | 120 kHz                         | Biconical Antenna    |
| 300 MHz to 1 GHz  | 120 kHz                         | Log Periodic Antenna |
| 1 GHz to 9.3 GHz  | 1 MHz                           | Horn Antenna         |

The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4: 2003. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength) to maximize emissions (excluding the loop antenna where the height remained at 1 meter). The gunsight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance to obtain final test data. The final qualification data sheets are located in Appendix E.

### Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Sections 15.205, 15.209, and 15.249.

## 8. CONCLUSIONS

The InfoCube Pager Model: 1 meets all of the **Class B** specification limits defined in CFR Title 47, Part 15, Subpart B; and the specification limits of Subpart C, sections 15.205, 15.207, 15.209, and 15.249.





**APPENDIX A**

***LABORATORY RECOGNITIONS***

---

## ***LABORATORY RECOGNITIONS***

**Compatible Electronics has the following agency accreditations:**

National Voluntary Laboratory Accreditation Program - Lab Code: 200528-0

Voluntary Control Council for Interference - Registration Numbers: R-983, C-1026, R-984 and C-1027

Bureau of Standards and Metrology Inspection - Reference Number: SL2-IN-E-1031

Conformity Assessment Body for the EMC Directive Under the US/EU MRA Appointed by NIST

**Compatible Electronics is recognized or on file with the following agencies:**

Federal Communications Commission

Industry Canada

Radio-Frequency Technologies (Competent Body)



**APPENDIX B**


***MODIFICATIONS TO THE EUT***

## MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.249 specifications:

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

No modifications were made to the EUT during the testing.

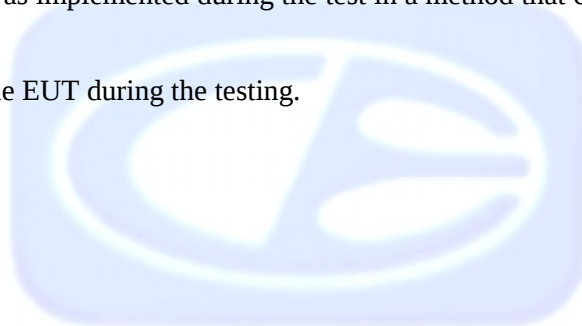



**APPENDIX C**

***ADDITIONAL MODELS COVERED  
UNDER THIS REPORT***

## **ADDITIONAL MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST


InfoCube Pager  
Model: 1  
S/N: N/A

There are no additional models covered under this report.



  
**APPENDIX D*****DIAGRAMS, CHARTS, AND PHOTOS***


**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

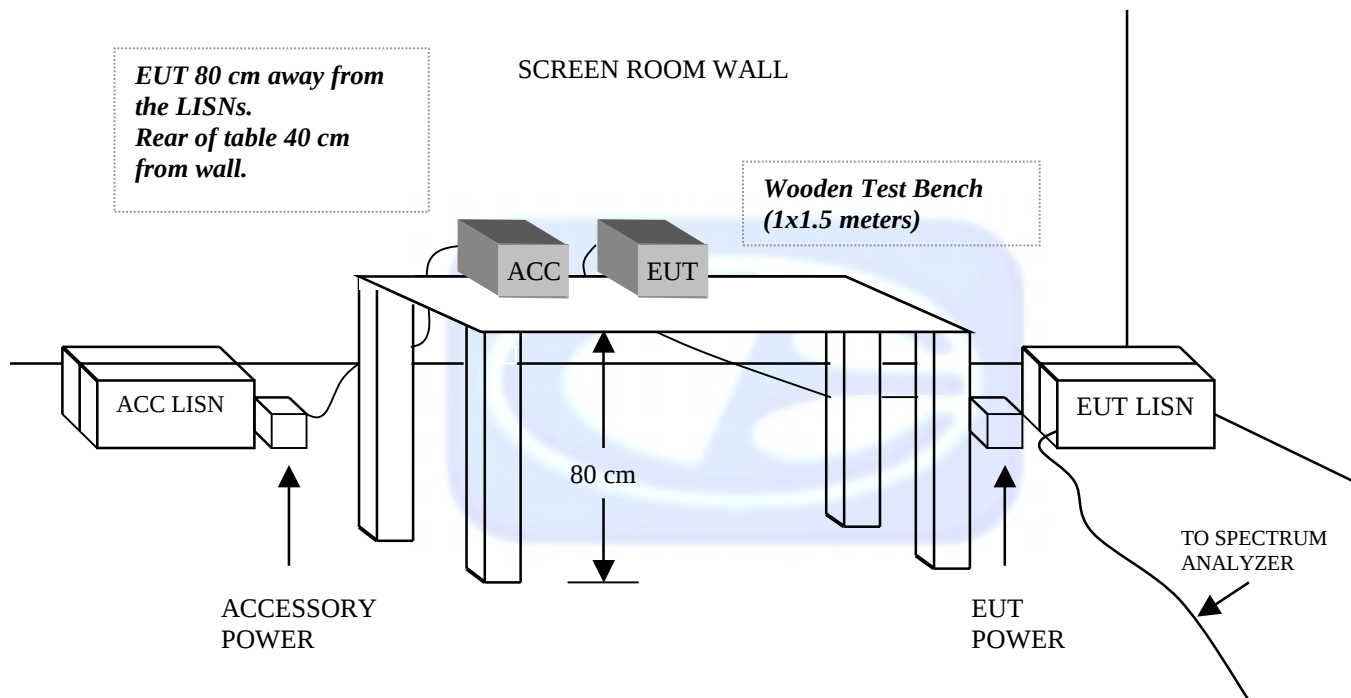

**FIGURE 2: PLOT MAP AND LAYOUT OF THE  
3 METER RADIATED TEST SITE**

**OPEN LAND > 15 METERS**

OPEN LAND > 15 METERS

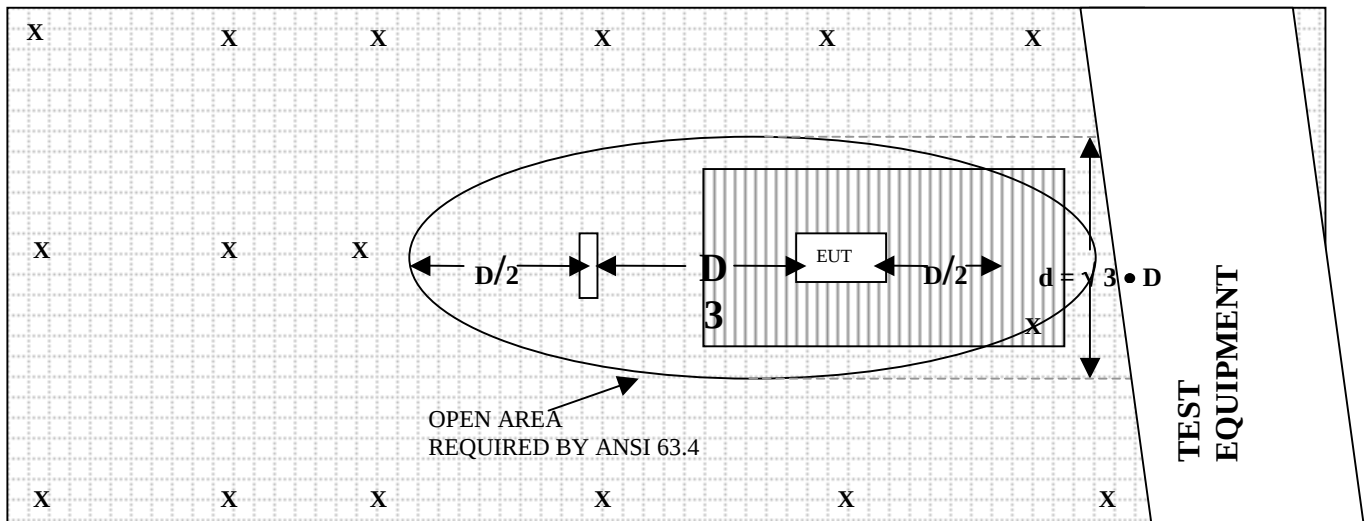

**OPEN LAND > 15 METERS**

|   |                          |                                                                                     |                 |
|---|--------------------------|-------------------------------------------------------------------------------------|-----------------|
| X | = GROUND RODS            |  | = GROUND SCREEN |
| D | = TEST DISTANCE (meters) |  | = WOOD COVER    |

COM-POWER AB-900

BICONICAL ANTENNA

S/N: 15250

CALIBRATION DATE: MARCH 12, 2004

| FREQUENCY<br>(MHz) | FACTOR<br>(dB) | FREQUENCY<br>(MHz) | FACTOR<br>(dB) |
|--------------------|----------------|--------------------|----------------|
| 30                 | 9.80           | 120                | 12.90          |
| 35                 | 10.40          | 125                | 13.20          |
| 40                 | 12.20          | 140                | 11.70          |
| 45                 | 12.40          | 150                | 11.90          |
| 50                 | 10.60          | 160                | 13.20          |
| 60                 | 8.00           | 175                | 15.90          |
| 70                 | 8.40           | 180                | 16.40          |
| 80                 | 6.70           | 200                | 16.40          |
| 90                 | 8.90           | 250                | 17.70          |
| 100                | 10.50          | 300                | 19.10          |

COM-POWER AL-100

LOG PERIODIC ANTENNA

S/N: 16202

CALIBRATION DATE: FEBRUARY 18, 2004

| FREQUENCY<br>(MHz) | FACTOR<br>(dB) | FREQUENCY<br>(MHz) | FACTOR<br>(dB) |
|--------------------|----------------|--------------------|----------------|
| 300                | 12.90          | 700                | 19.60          |
| 400                | 14.40          | 800                | 21.80          |
| 500                | 17.40          | 900                | 20.50          |
| 600                | 18.90          | 1000               | 22.70          |

**COM-POWER PA-103****PREAMPLIFIER**

S/N: 1582

CALIBRATION DATE: MARCH 11, 2004

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 30                         | 32.4                   | 300                        | 32.3                   |
| 40                         | 32.4                   | 350                        | 32.2                   |
| 50                         | 32.4                   | 400                        | 32.2                   |
| 60                         | 32.5                   | 450                        | 32.0                   |
| 70                         | 32.4                   | 500                        | 32.0                   |
| 80                         | 32.3                   | 550                        | 31.8                   |
| 90                         | 32.3                   | 600                        | 31.7                   |
| 100                        | 32.3                   | 650                        | 31.7                   |
| 125                        | 32.4                   | 700                        | 31.7                   |
| 150                        | 32.2                   | 750                        | 31.9                   |
| 175                        | 32.4                   | 800                        | 31.4                   |
| 200                        | 32.4                   | 850                        | 31.4                   |
| 225                        | 32.5                   | 900                        | 31.0                   |
| 250                        | 32.3                   | 950                        | 31.4                   |
| 275                        | 32.1                   | 1000                       | 31.4                   |

**COM-POWER PA-122****MICROWAVE PREAMPLIFIER**

S/N: 25195

CALIBRATION DATE: AUGUST 19, 2004

| <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 1.0                        | 30.50                  | 6.0                        | 30.57                  |
| 1.1                        | 30.24                  | 6.5                        | 30.39                  |
| 1.2                        | 30.44                  | 7.0                        | 30.08                  |
| 1.3                        | 30.38                  | 7.5                        | 29.92                  |
| 1.4                        | 30.11                  | 8.0                        | 28.88                  |
| 1.5                        | 29.91                  | 8.5                        | 28.08                  |
| 1.6                        | 29.74                  | 9.0                        | 28.08                  |
| 1.7                        | 30.26                  | 9.5                        | 29.11                  |
| 1.8                        | 30.41                  | 10.0                       | 30.21                  |
| 1.9                        | 30.19                  | 11.0                       | 29.00                  |
| 2.0                        | 30.37                  | 12.0                       | 29.10                  |
| 2.5                        | 30.69                  | 13.0                       | 29.77                  |
| 3.0                        | 31.63                  | 14.0                       | 28.67                  |
| 3.5                        | 31.61                  | 15.0                       | 29.72                  |
| 4.0                        | 31.46                  | 16.0                       | 30.54                  |
| 4.5                        | 31.45                  | 17.0                       | 30.05                  |
| 5.0                        | 31.33                  | 18.0                       | 28.47                  |
| 5.5                        | 31.15                  |                            |                        |

**ANTENNA RESEARCH DRG-118/A****HORN ANTENNA**

S/N: 1053

CALIBRATION DATE: JANUARY 16, 2004

| <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(GHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 1.0                        | 24.4                   | 10.0                       | 38.7                   |
| 1.5                        | 25.2                   | 10.5                       | 39.0                   |
| 2.0                        | 28.2                   | 11.0                       | 38.9                   |
| 2.5                        | 28.5                   | 11.5                       | 41.3                   |
| 3.0                        | 30.1                   | 12.0                       | 40.5                   |
| 3.5                        | 31.0                   | 12.5                       | 40.0                   |
| 4.0                        | 31.2                   | 13.0                       | 40.2                   |
| 4.5                        | 31.9                   | 13.5                       | 40.5                   |
| 5.0                        | 33.2                   | 14.0                       | 41.6                   |
| 5.5                        | 33.7                   | 14.5                       | 44.8                   |
| 6.0                        | 34.3                   | 15.0                       | 41.4                   |
| 6.5                        | 35.0                   | 15.5                       | 39.2                   |
| 7.0                        | 36.7                   | 16.0                       | 39.4                   |
| 7.5                        | 37.3                   | 16.5                       | 40.9                   |
| 8.0                        | 37.1                   | 17.0                       | 42.6                   |
| 8.5                        | 37.3                   | 17.5                       | 45.1                   |
| 9.0                        | 37.7                   | 18.0                       | 41.7                   |
| 9.5                        | 38.6                   |                            |                        |

**COM-POWER AL-130****LOOP ANTENNA**

S/N: 17089

CALIBRATION DATE: SEPTEMBER 4, 2004

| <b>FREQUENCY<br/>(MHz)</b> | <b>MAGNETIC<br/>(dB/m)</b> | <b>ELECTRIC<br/>(dB/m)</b> |
|----------------------------|----------------------------|----------------------------|
| 0.009                      | -40.8                      | 10.7                       |
| 0.01                       | -40.9                      | 10.6                       |
| 0.02                       | -41.8                      | 9.7                        |
| 0.05                       | -42.0                      | 9.5                        |
| 0.07                       | -41.5                      | 10.0                       |
| 0.1                        | -41.7                      | 9.8                        |
| 0.2                        | -44.1                      | 7.4                        |
| 0.3                        | -41.6                      | 9.9                        |
| 0.5                        | -41.5                      | 10.0                       |
| 0.7                        | -41.4                      | 10.1                       |
| 1                          | -41.0                      | 10.5                       |
| 2                          | -40.6                      | 10.9                       |
| 3                          | -40.8                      | 10.7                       |
| 4                          | -41.0                      | 10.5                       |
| 5                          | -40.4                      | 11.1                       |
| 10                         | -40.7                      | 10.8                       |
| 15                         | -41.6                      | 9.9                        |
| 20                         | -41.3                      | 10.2                       |
| 25                         | -43.0                      | 8.5                        |
| 30                         | -42.6                      | 8.9                        |



**FRONT VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

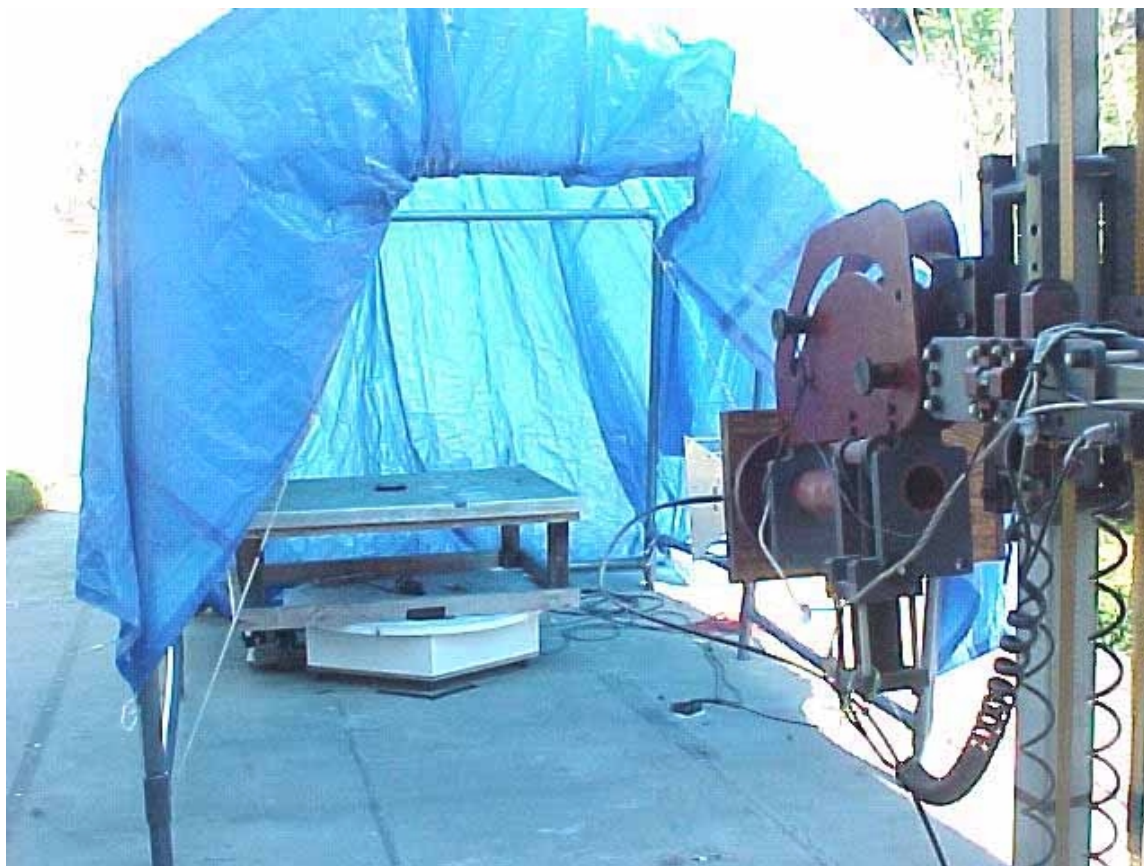

**REAR VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND FCC SUBPART C – RADIATED EMISSIONS


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

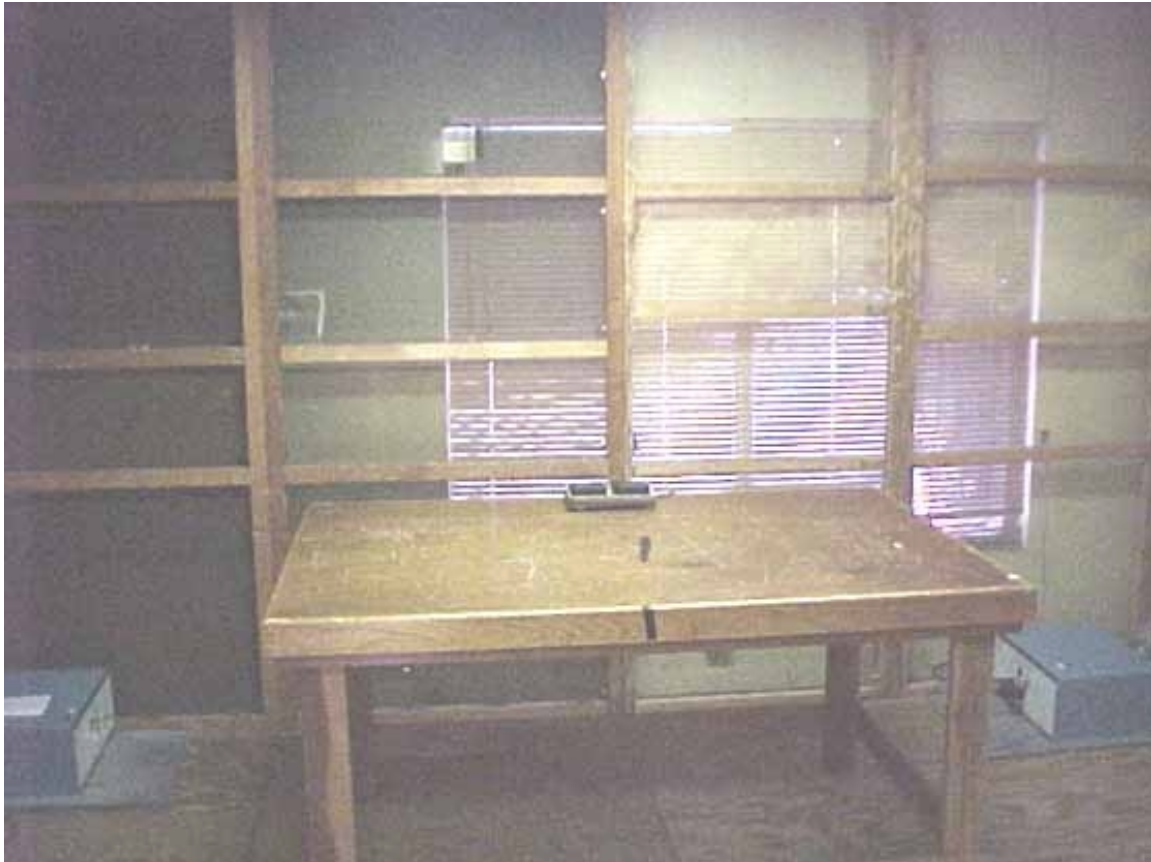

**FRONT VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND C – CONDUCTED EMISSIONS


**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

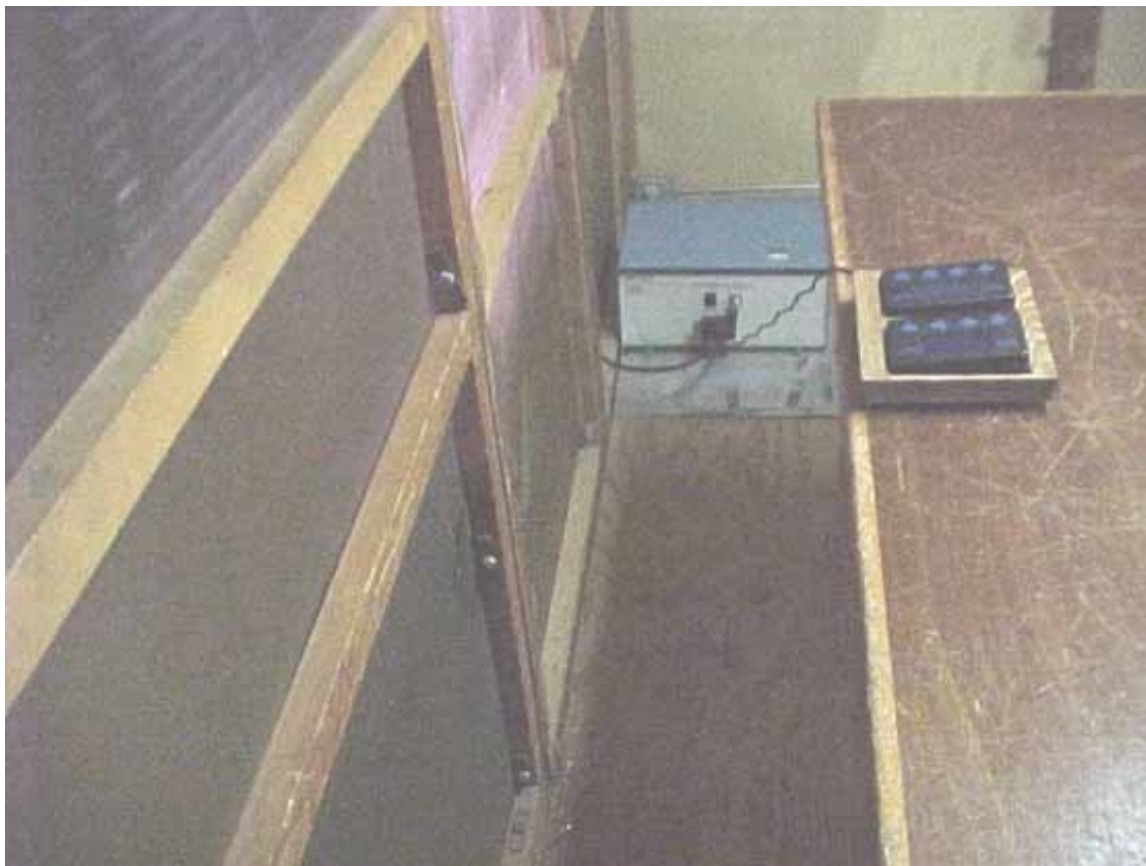

**REAR VIEW**

EMBEDDED PROCESSOR DESIGNS, INC.

InfoCube PAGER

MODEL: 1

FCC SUBPART B AND C – CONDUCTED EMISSIONS

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

**Brea Division**  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

**Agoura Division**  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

**Silverado Division**  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

**Lake Forest Division**  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400