



## FCC&IC TEST REPORT

FCC ID: SY4-A02032

On Behalf of

Shanghai Huace Navigation Technology Ltd.

Unmanned Surface Vessel

Model No.: APACHE 3

Prepared for : Shanghai Huace Navigation Technology Ltd.  
Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
518103, Shenzhen, Guangdong, China

Report Number : A2109128-C01-R04  
Date of Receipt : September 7, 2021  
Date of Test : September 7, 2021 – October 13, 2021  
Date of Report : October 14, 2021  
Version Number : V0

## TABLE OF CONTENT

Description	Page
<b>1. GENERAL INFORMATION -----</b>	<b>5</b>
1.1.Description of Device (EUT) -----	5
1.2.Accessories of Device (EUT)-----	6
1.3.Tested Supporting System Details -----	6
1.4.Block Diagram of connection between EUT and simulators-----	6
<b>2. EMC EQUIPMENT LIST -----</b>	<b>7</b>
<b>3. SUMMARY OF MEASUREMENT -----</b>	<b>8</b>
3.1.    Summary of test result-----	8
3.2.    Equipment Type -----	9
3.3.Test Conditions and channel -----	9
3.4.Measurement Uncertainty (95% confidence levels, k=2) -----	9
<b>4. DFS PARAMETERS -----</b>	<b>10</b>
4.1.    DFS Parameters -----	10
4.2.    DFS –Test Results-----	16

## TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology Ltd.  
Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China  
Manufacturer : Shanghai Huace Navigation Technology Ltd.  
Address : Building D, 599 Gaojing Road, Qingpu District, Shanghai, China  
EUT Description : Unmanned Surface Vessel  
                  (A) Model No. : APACHE 3  
                  (B) Trademark : 

Measurement Standard Used:

**FCC Part 15 Subpart E, FCC KDB 905462 D02, FCC KDB 905462 D03**

**RSS-247 Issue 2**


The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC limits. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Reak Yang  
Project Engineer



Approved by (name + signature).....:

Simple Guan  
Project Manager



Date of issue..... : October 14, 2021

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	October 14, 2021	Initial released Issue	Reak Yang

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT Name : Unmanned Surface Vessel

Trademark : 

Model No. : APACHE 3

DIFF. : /

Power supply : DC 18V From Battery

Radio Technology : 5GHz Technology

Operation Frequency : 802.11a(10) / 802.11n(HT10): 5175-5245MHz, 5255-5325MHz, 5495-5705MHz, 5740-5830MHz  
802.11a(20) / 802.11n(HT20): 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz  
802.11n(HT30): 5185-5235MHz, 5265-5315MHz, 5505-5695MHz, 5750-5800MHz

Channel separation : 10MHz, 20MHz for 802.11a/802.11n  
30MHz for 802.11n

Modulation technology: : IEEE 802.11a: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)  
IEEE 802.11n: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Type : Rod antenna, Maximum Gain is 13dBi.

Software version : V1.0

Hardware version : V1.0

Intend use environment : Residential, commercial and light industrial environment

Remark: The worst-case simultaneous transmission configuration was evaluated with no non-compliance found. Results in this report are only for 5G function, and there is no other transmitter involved.

## 1.2. Accessories of Device (EUT)


Accessories1 : /  
Manufacturer : /  
Model : /  
Ratings : /

## 1.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification Or SDOC
1	Router	HUAWEI	K562	N/A	N/A

Note: master ping IP 192.168.1.2 for slave.

## 1.4. Block Diagram of connection between EUT and simulators

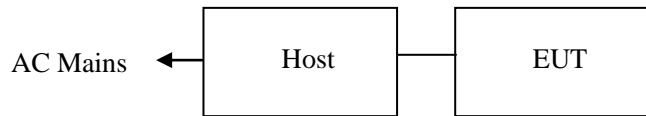

## 2. EMC EQUIPMENT LIST

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal. Due day
Vector Signal Generator	Agilent	N5182A	MY49060042	2021.08.25	2022.08.24
Vector Signal Generator	Agilent	E4438C	US44271917	2021.08.25	2022.08.24
Spectrum analyzer	R&S	FSV40-N	102137	2021.08.25	2022.08.24
Attenuator	ICPROBING	IATS1	82347	2021.08.25	2022.08.24
Temp. & Humid. Chamber	Weihuang	WHTH-1000-40-880	100631	2021.04.21	2022.04.20

### 3. SUMMARY OF MEASUREMENT

#### 3.1. Summary of test result

UNII	Bandwidth and Channel	Description	Measured	Limit	Result
U-NII-2C 5250-5350MHz	80MHz (CH58) 5290MHz	Channel Move Time	1.4 sec	10 sec	Pass
		Channel Closing Transmission time	<200ms +3.6 ms (aggregate)	200 ms + aggregate of 60 ms over remaining 10 s period	Pass
		Non-Occupancy Period and Client Beacon Test	No transmission or Beacons occurred	30 minutes	Pass
U-NII-2C 5470-5725MHz	80MHz (CH106) 5530MHz	Channel Move Time	1.4 sec	10 sec	Pass
		Channel Closing Transmission time	<200ms +3.6 ms (aggregate)	200 ms + aggregate of 60 ms over remaining 10 s period	Pass
		Non-Occupancy Period and Client Beacon Test	No transmission or Beacons occurred	30 minutes	Pass

Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test are required to be performed.

RSS-247			
Requirement	Operational Mode		RESULTS
	Master	Client	
Non-Occupancy Period	Yes	Yes	Pass
DFS Detection Threshold	Yes	Not required	Not required
Channel Availability Check Time	Yes	Not required	Not required
Channel Closing Transmission Time	Yes	Yes	Pass
Channel Move Time	Yes	Yes	Pass
U-NII Detection Bandwidth	Yes	Not required	Not required

### 3.2. Equipment Type

Master Device

Client Device(No Ad-Hoc mode, without radar detection function and TPC)

### 3.3. Test Conditions and channel

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

Channel List for 802.11a (10)		
Band Frequency	EUT Channel	Test Frequency (MHz)
Band II	CH51	5285
Band III	CH99	5495

Note: (1) The measurements are performed at the lowest available channels.

### 3.4. Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for conducted RF Power	0.37dB	

## 4. DFS PARAMETERS

### 4.1. DFS Parameters

**Table 1: Applicability of DFS Requirements Prior to Use of a Channel**

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<b>Non-Occupancy Period</b>	Yes	Not required	Yes
<b>DFS Detection Threshold</b>	Yes	Not required	Yes
<b>Channel Availability Check Time</b>	Yes	Not required	Not required
<b>U-NII Detection Bandwidth</b>	Yes	Not required	Yes

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<b>DFS Detection Threshold</b>	Yes	Not required	Yes
<b>Channel Closing Transmission Time</b>	Yes	Yes	Yes
<b>Channel Move Time</b>	Yes	Yes	Yes
<b>U-NII Detection Bandwidth</b>	Yes	Not required	Yes
<b>Client Beacon Test</b>	N/A	Yes	Yes

Additional requirements for devices with multiple bandwidth modes	Operational Mode	
	Master or Client With Radar Detection	Client Without Radar Detection
<b>U-NII Detection Bandwidth and Statistical Performance Check</b>	All BW modes must be tested	Not required
<b>Channel Move Time and Channel Closing Transmission Time</b>	Test using widest BW mode available	Test using the widest BW mode available for the link
<b>All other tests</b>	Any single BW mode	Not required

**Note**  
Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection**

Maximum Transmit Power	Value (see notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP $<$ 200 milliwatt and power spectral density $<$ 10 dBm/MHz	-62 dBm
EIRP $<$ 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna.

**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Note 3:** EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

The radar Detection Threshold, lowest antenna gain is the parameter of Interference radar DFS detection threshold, The Interference Detection Threshold is the ( -62dBm) + (0) [dBi]+ 1 dB= -61 dBm.

**Table 4: DFS Response Requirement Values**

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the 99% power bandwidth See Note 3.

**Note 1:** The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

**Note 2:** The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the *U-NII Detection Bandwidth* detection test, radar type 0 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

**Table 5 – Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\lceil \left( \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
<b>Aggregate (Radar Types 1-4)</b>				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

**Table 5a - Pulse Repetition Intervals Values for Test A**

<b>Pulse Repetition Frequency Number</b>	<b>Pulse Repetition Frequency (Pulses Per Second)</b>	<b>Pulse Repetition Interval (Microseconds)</b>
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.


Radar Type	Number of Trials	Number of Successful Detections	Minimum Percentage of Successful Detection
1	35	29	82.9%
2	30	18	60%
3	30	27	90%
4	50	44	88%
<b>Aggregate <math>(82.9\% + 60\% + 90\% + 88\%) / 4 = 80.2\%</math></b>			

Long Pulse Radar Test Waveform

**Table 6 – Long Pulse Radar Test Waveform**

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Figure 1 provides a graphical representation of the Long Pulse Radar Test Waveform.

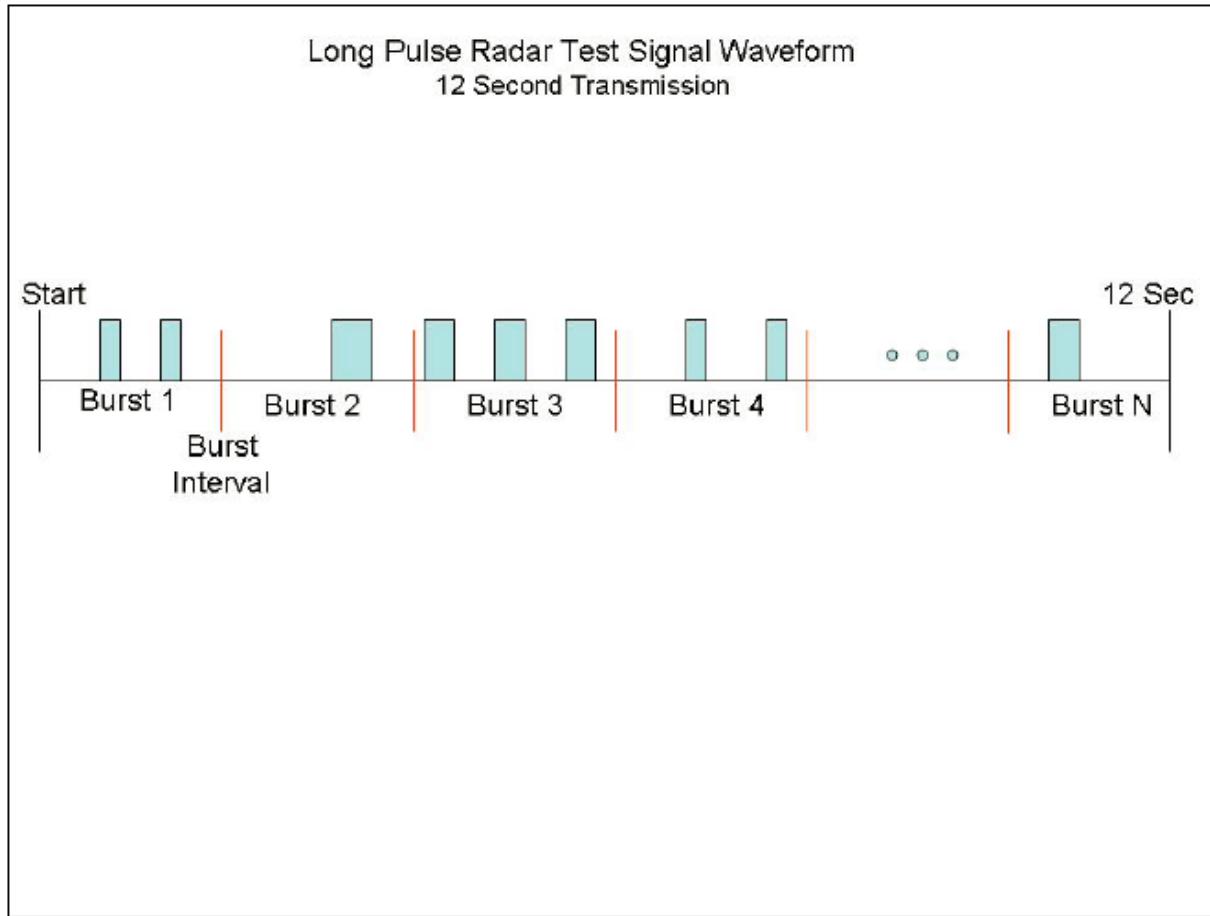**Table 7 – Frequency Hopping Radar Test Waveform**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

## 4.2. DFS –Test Results

### 4.2.1 DFS MEASUREMENT METHODS

#### a.DFS – CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME

Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

#### b.DFS – CHANNEL NON-OCCUPANCY AND VERIFICATION OF PASSIVE SCANNING

Non-occupancy Period. A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

#### c.CHANNEL AVAILABILITY CHECK TIME

Channel Availability Check Time. A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values listed in paragraph (h)(2) of this section, is detected within 60 seconds.

#### d.CONTROL (TPC)

Compliance with the transmit power control requirements for devices is demonstrated through measurements showing multiple power levels and manufacturer statements explaining how the power control is implemented.

#### e.DETECTION PROBABILITY / SUCCESS RATE

During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. Minimum 100% of the U-NII 99% transmission power bandwidth.

#### f.NON- OCCUPANCY PERIOD

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring

### 4.2.2 DFS CONDUCTIONTEST METHOD


a. The signal level of the simulated waveform is set to a reference level equal to the threshold level (plus 1dB if testing against FCC requirements).

Lower levels may also be applied on request of the manufacturer.

The signal level is verified by measuring the CW signal level at the coupling point to the RDD antenna port. The radar signal level is calculated from the measured level, R (dBm) and the lowest gain antenna assembly intended for use with the RDD

If both master and client devices have radar detection capability then the radar level at the non RDD is verified to be at least 20dB below the threshold level to ensure that any responses are due to the RDD detecting radar.

The antenna connected to the channel monitoring subsystem is positioned to allow both master and client transmissions to be observed, with the level of the EUT's transmissions between 6 and 10dB higher than those from the other device.

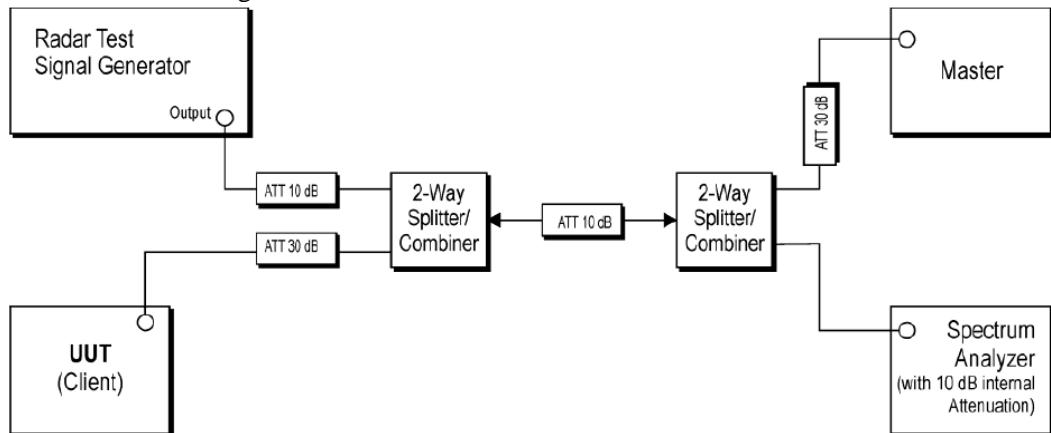

b. *Set-up B* is a set-up whereby the UUT is an RLAN device operating in slave mode, with or without Radar Interference Detection function.

This set-up also contains an RLAN device operating in master mode.

The radar test signals are injected into the master device.


The UUT (slave device) is associated with the master device.

Figure 5 shows an example for *Set-up B*. The set-up used shall be documented in the test report.


## Radar Waveform Calibration Result

## &lt;10MHz / 5255 MHz&gt; In-Service Monitoring


## Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

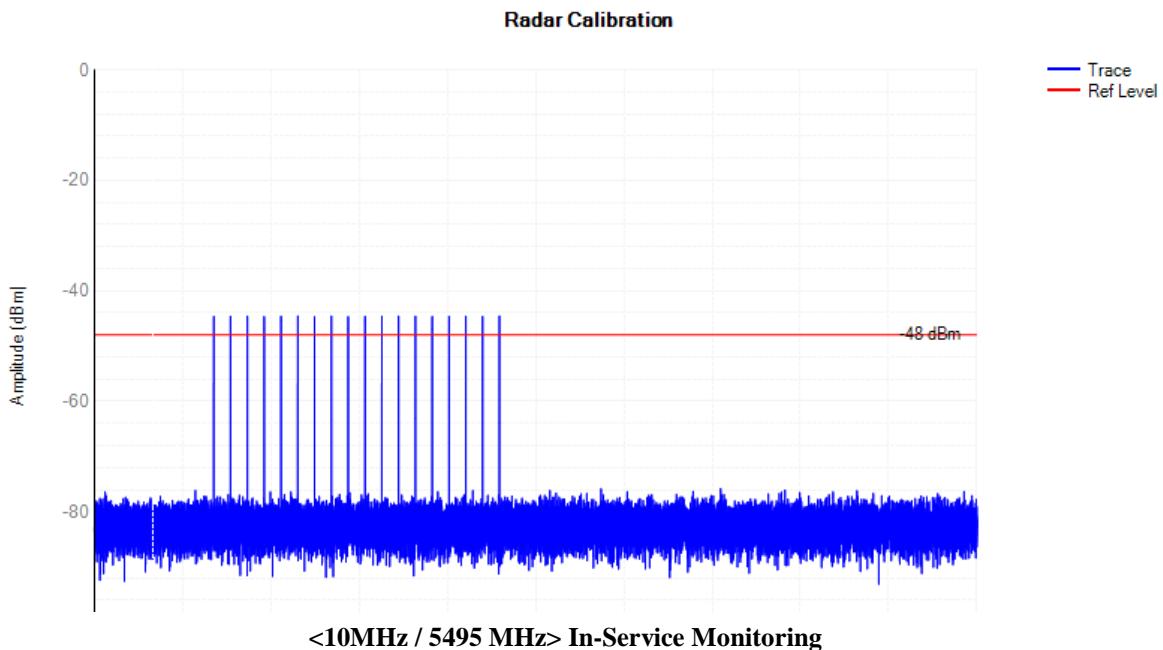



## Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

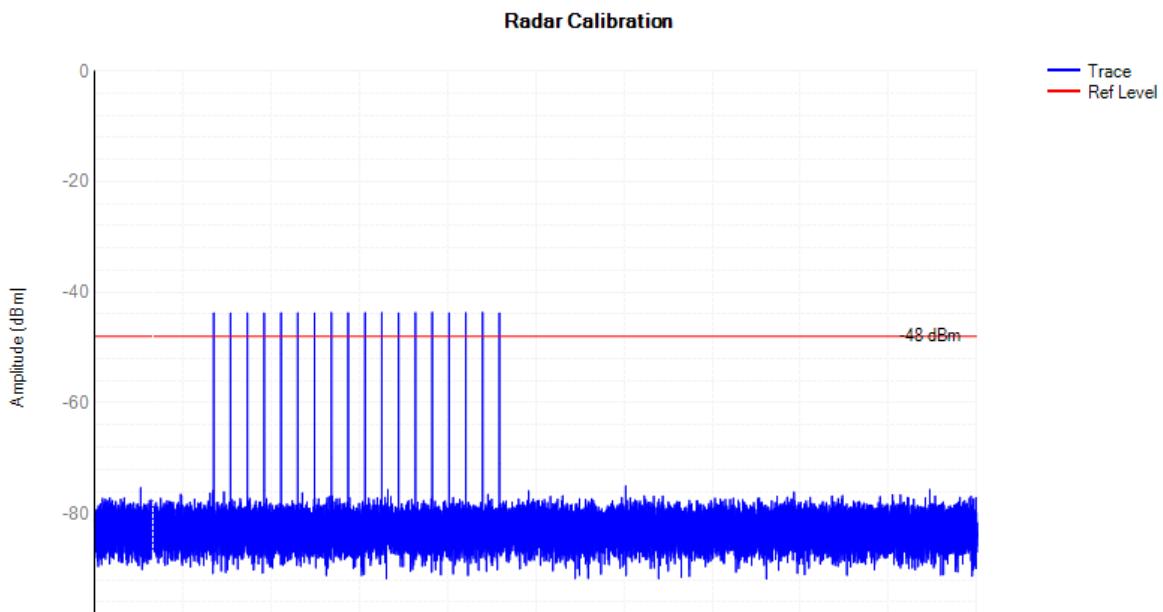

## Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test Plots

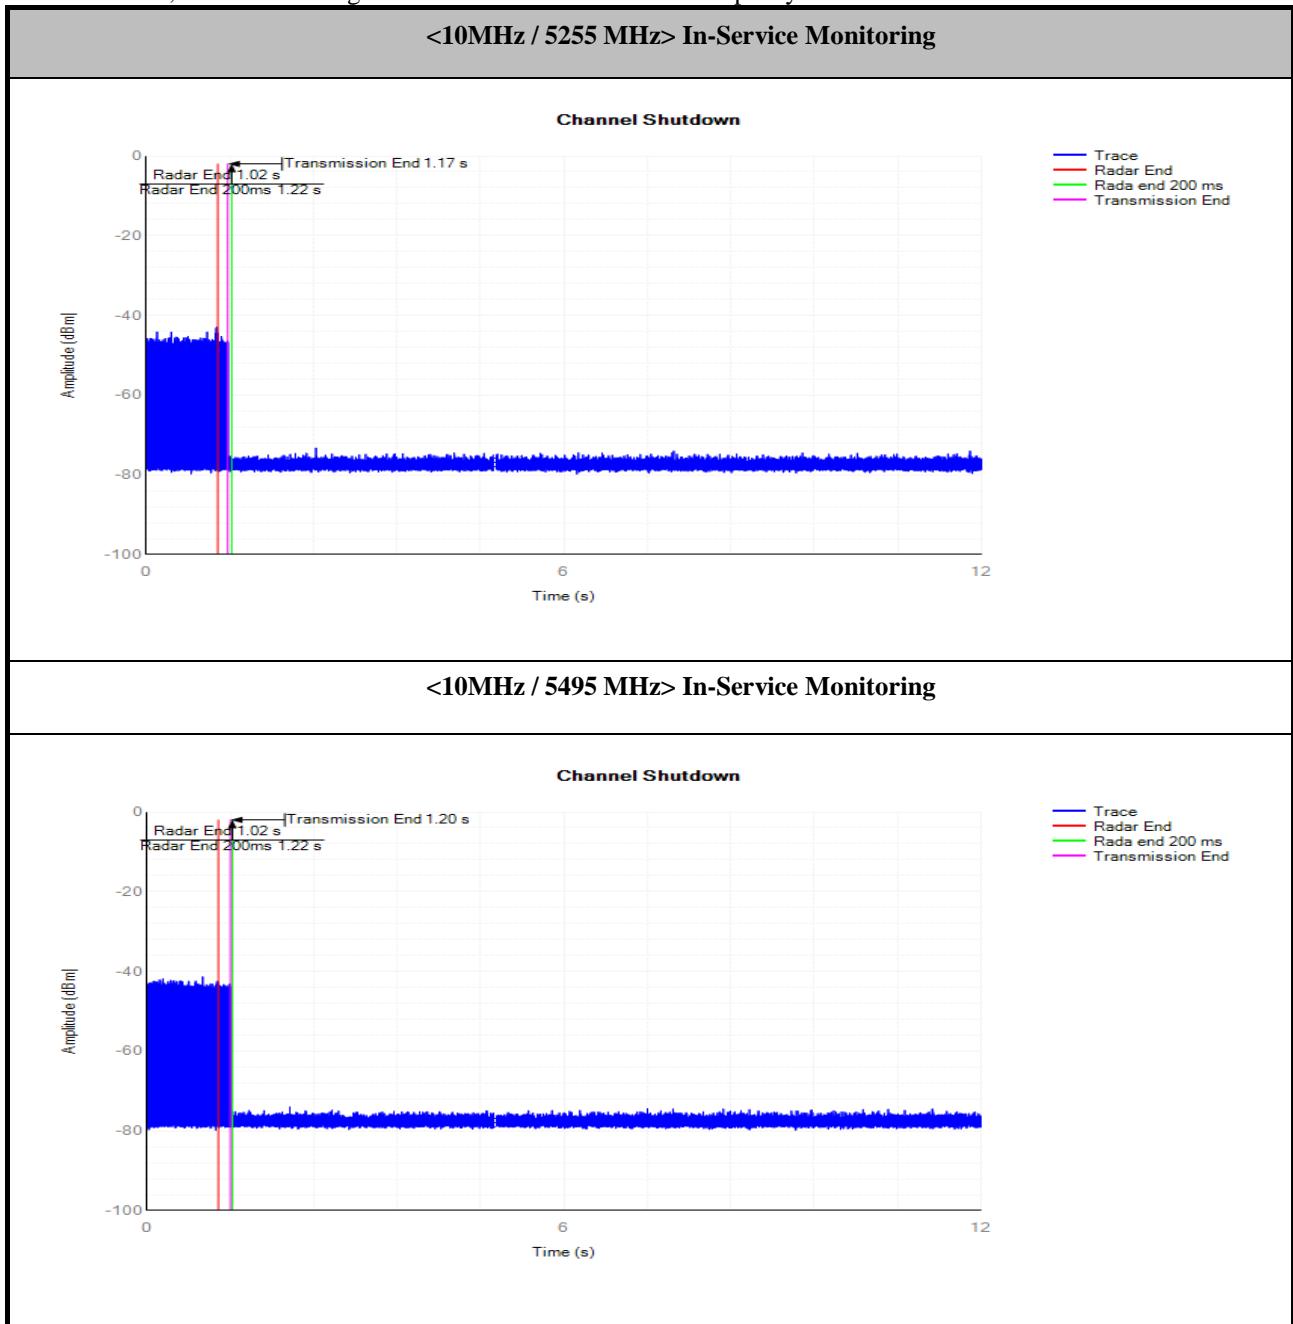

## Data Traffic and Noise Floor Plots

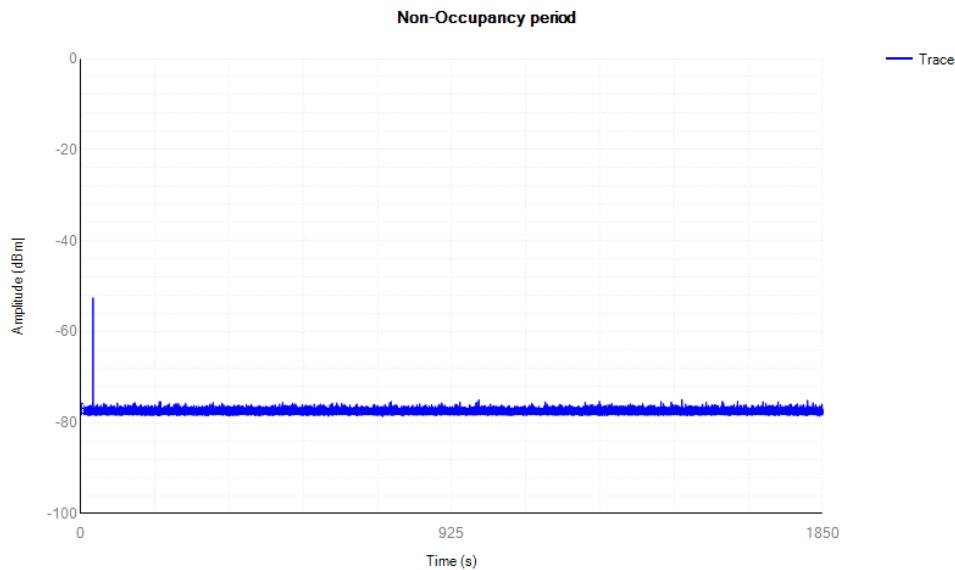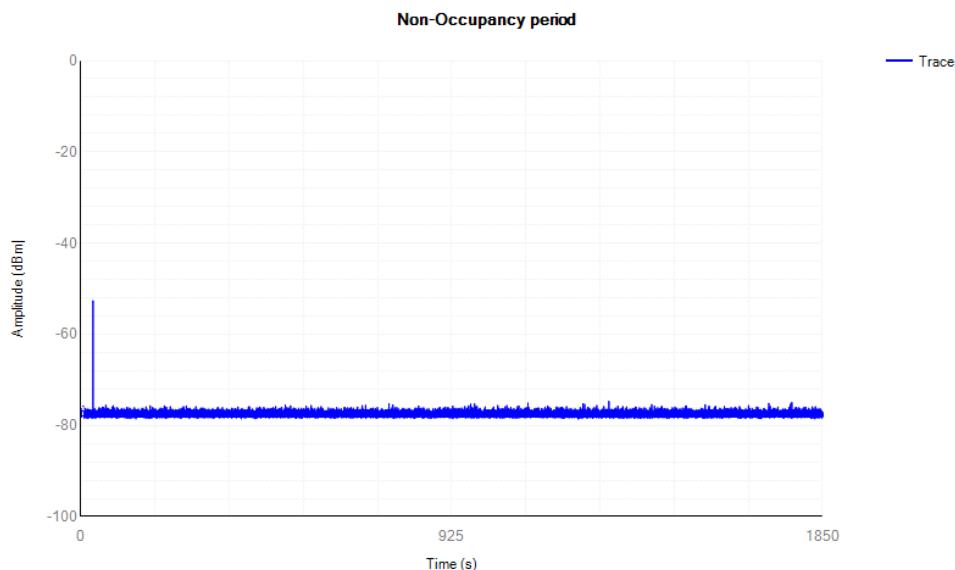**Noise Floor (No transmission)****<10MHz / 5255 MHz Non-Occupancy >****<10MHz / 5495 MHz Non-Occupancy >**

Note: All the test modes completed for test. The test data of this mode was reported.

**-----END OF REPORT-----**