

# Test Report

Verified code: 781402

Report No.: E202411154120-2EN

Customer: Shanghai Huace Navigation Technology Ltd.

Address: 577 Songying Road, Qingpu District, 201706 Shanghai, China

Sample Name: X500 Rotor UAV

Sample Model: X500

Receive Sample Date: Dec.05,2024

Test Date: Dec.16,2024 ~ Dec.19,2024

Reference Document: 47 CFR, FCC Part 15 Subpart C  
RADIO FREQUENCY DEVICES:Subpart C—Intentional Radiators

Test Result: Pass

Prepared by: Wen Wenwen  
Wen Wenwen

Reviewed by: Jiang Tao  
Jiang Tao

Approved by: Xiao Liang  
Xiao Liang

GRG METROLOGY & TEST GROUP CO., LTD.

Issued Date: 2025-01-13

GRG METROLOGY & TEST GROUP CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China  
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



## Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. This testing report is only for scientific research, teaching, internal quality control, etc.

—Blank space below this page—

## TABLE OF CONTENTS

1.	TEST RESULT SUMMARY .....	6
2.	GENERAL DESCRIPTION OF EUT .....	7
2.1	APPLICANT .....	7
2.2	MANUFACTURER .....	7
2.3	FACTORY .....	7
2.4	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	7
2.5	CHANNELLIST .....	8
2.6	TEST OPERATION MODE .....	8
2.7	LOCAL SUPPORTIVE .....	8
2.8	CONFIGURATION OF SYSTEM UNDER TEST .....	8
2.9	DUTY CYCLE .....	9
3.	LABORATORY AND ACCREDITATIONS .....	10
3.1	LABORATORY .....	10
3.2	ACCREDITATIONS .....	10
4.	MEASUREMENT UNCERTAINTY .....	11
5.	LIST OF USED TEST EQUIPMENT AT GRGT .....	12
6.	RADIATED SPURIOUS EMISSIONS .....	13
6.1	LIMITS .....	13
6.2	TEST PROCEDURES .....	13
6.3	TEST SETUP .....	16
6.4	DATA SAMPLE .....	18
6.5	TEST RESULTS .....	19
7.	6dB BANDWIDTH .....	26
7.1	LIMITS .....	26
7.2	TEST PROCEDURES .....	26
7.3	TEST SETUP .....	26
7.4	TEST RESULTS .....	27
8.	MAXIMUM PEAK OUTPUT POWER .....	29
8.1	LIMITS .....	29
8.2	TEST PROCEDURES .....	29
8.3	TEST SETUP .....	29
8.4	TEST RESULTS .....	29
9.	POWER SPECTRAL DENSITY .....	30
9.1	LIMITS .....	30
9.2	TEST PROCEDURES .....	30
9.3	TEST SETUP .....	30
9.4	TEST RESULTS .....	31
10.	CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS .....	33
10.1	LIMITS .....	33
10.2	TEST PROCEDURES .....	33
10.3	TEST SETUP .....	33

10.4	TEST RESULTS .....	34
11.	RESTRICTED BANDS OF OPERATION.....	40
11.1	LIMITS.....	40
11.2	TEST PROCEDURES .....	41
11.3	TEST SETUP .....	41
11.4	TEST RESULTS .....	41
	APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM .....	46
	APPENDIX B. PHOTOGRAPH OF THE EUT .....	46

—Blank space below this page—

**REPORT ISSUED HISTORY**

Report Version	Report No.	Description	Compile Date
1.0	E202411154120-2EN	Original Issue	2024-12-25

—Blank space below this page—

## 1. TEST RESULT SUMMARY

<b>Technical Requirements</b>		
47 CFR, FCC Part 15 Subpart C 15.247 ANSI C63.10-2020 KDB 558074 D01 15.247 measurement guidance v05r02		
Limit / Severity	Item	Result
§15.203	Antenna Requirement	Pass <sup>1)</sup>
§15.207(a)	Conducted Emission	N/A <sup>2)</sup>
§15.247(d)&15.205& 15.209	Radiated Spurious Emission	Pass
§15.247(b)(3)	Maximum Peak Output Power	Pass
§15.247(e)	Power Spectral Density	Pass
§15.247(a)(2)	6dB bandwidth	Pass
§15.247(d)	Conducted band edges and Spurious Emission	Pass
§15.247(d)&15.205& 15.209	Restricted bands of operation	Pass

Note:

- 1) The EUT have two Internal antennas. The max gain of antenna is 2.64dBi. The antenna 1 is support transmitting and receiving, the antenna 2 is receiving only. which accordance 15.203.is considered sufficient to comply with the provisions of this section.
- 2) The EUT is powered by DC, the Conducted Emission is not applicable.

—Blank space below this page—

## 2. GENERAL DESCRIPTION OF EUT

### 2.1 APPLICANT

Name: Shanghai Huace Navigation Technology Ltd.  
Address: 577 Songying Road, Qingpu District, 201706 Shanghai, China

### 2.2 MANUFACTURER

Name: Shanghai Huace Navigation Technology Ltd.  
Address: 577 Songying Road, Qingpu District, 201706 Shanghai, China

### 2.3 FACTORY

Name: Shanghai Huace Navigation Technology Ltd.  
Address: 577 Songying Road, Qingpu District, 201706 Shanghai, China

### 2.4 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Product Name: X500 Rotor UAV  
Product Model: X500  
Trade Name: /  
Additional /  
Model:  
Power Supply: DC 47.04V by batteries  
Battery: Model: B10  
Max charge voltage: 53.4V, rated capacity: 10000mAh, 470.4Wh, nominal voltage: 47.04V  
FCC ID: SY4-A02061  
Frequency 2406.5MHz – 2476.5MHz  
Band:  
Maximum 10.65dBm  
Transmit Power:  
Modulation OFDM  
type:  
Antenna Type: The EUT have two antennas, the antenna 1 support transmitting and receiving, the antenna 2 is receiving only.  
Internal antenna 1 & antenna 2 with 2.64dBi (Max.)  
Temperature -20 °C ~ +50 °C  
Range:  
Hardware v2.1.0  
Version:  
Software v2.9.6  
Version:  
Sample No: E202411154120-0001, E202411154120-0002

**Note:**

The EUT antenna gain is provided by the applicant. This report is made solely on the basis of such data and/or information. We accept no responsibility for the authenticity and completeness of the above data and information and the validity of the results and/or conclusions.

**2.5 CHANNELLIST**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
*00	<b>2406.5</b>	*08	<b>2444.0</b>
01	2409.0	09	2449.0
02	2414.0	10	2454.0
03	2419.0	11	2459.0
04	2424.0	12	2464.0
05	2429.0	13	2469.0
06	2434.0	14	2474.0
07	2439.0	<b>*15</b>	<b>2476.5</b>

\* is the test frequency.

**2.6 TEST OPERATION MODE**


Mode No.	Description of the modes
1	2.4G fixed frequency transmitting

**2.7 LOCAL SUPPORTIVE**

No.	Name of Equipment	Manufacturer	Model	Serial Number
A	Notebook	DELL	Latitude3300	2C6CFW2

No.	Cable Type	Qty.	Shielded Type	Ferrite Core(Qty.)	Length
1	RJ45 cable	1	No	0	1.0m

Note: The notebook is just used to produce fixed frequency transmitting.

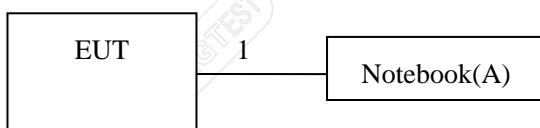**2.8 CONFIGURATION OF SYSTEM UNDER TEST**

**Test software:**


Software version	Test level
Internet explorer	6

**2.9 DUTY CYCLE**

Environment: 23.6°C/52%RH/101.0kPa  
Tested By: Qin tingting

Voltage:DC 47.04V  
Date: 2024-12-19

Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	DC [%]	T [s]
Ant1	2444	19.00	19.00	100.00	/

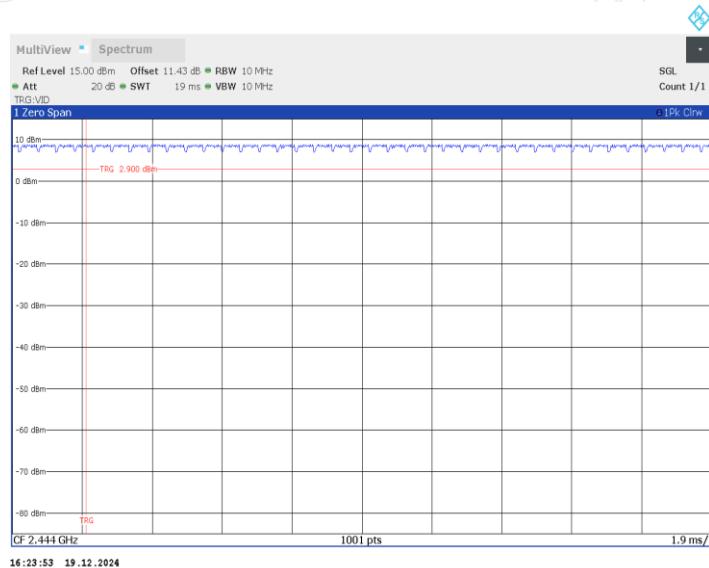**2444MHz****—Blank space below this page—**

### 3. LABORATORY AND ACCREDITATIONS

#### 3.1 LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of GRG METROLOGY & TEST GROUP CO., LTD.

Add.: No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District  
Shenzhen, 518110, People's Republic of China

P.C.: 518110

Tel : 0755-61180008

Fax: 0755-61180008

#### 3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

**USA** A2LA(Certificate #2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

**Canada** ISED (Company Number: 24897, CAB identifier:CN0069)

**USA** FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,  
<http://www.grgtest.com>

—Blank space below this page—

#### 4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	X	9kHz~30MHz	4.4dB <sup>1)</sup>
	Y	9kHz~30MHz	4.4dB <sup>1)</sup>
	Z	9kHz~30MHz	4.4dB <sup>1)</sup>
	Horizontal	30MHz~200MHz	4.6dB <sup>1)</sup>
		200MHz~1000MHz	4.8dB <sup>1)</sup>
		1GHz~18GHz	5.0dB <sup>1)</sup>
		18GHz~26.5GHz	5.2dB <sup>1)</sup>
	Vertical	30MHz~200MHz	4.7dB <sup>1)</sup>
		200MHz~1000MHz	4.7dB <sup>1)</sup>
		1GHz~18GHz	5.1dB <sup>1)</sup>
		18GHz~26.5GHz	5.4dB <sup>1)</sup>

Measurement	Uncertainty
RF frequency	$6.0 \times 10^{-6}$
RF power conducted	0.80dB
Power spectral density conducted	0.80dB
Occupied channel bandwidth	0.40dB
Unwanted emission, conducted	0.70dB
Humidity	6.0%
Temperature	2.0°C

Note:

<sup>1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95%.  
This uncertainty represents an expanded uncertainty factor of  $k=2$ .

## 5. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
<b>Radiated Spurious Emission &amp; Restricted bands of operation</b>				
Loop Antenna	Schwarzbeck	FMZB 1513-60	1513-60-56	2025-05-07
Bi-log Antenna	Schwarzbeck	VULB9160	VULB9160-3402	2025-09-11
Horn Antenna	Schwarzbeck	BBHA 9120D	02143	2025-06-15
Test Receiver	R&S	ESR26	101758	2025-09-10
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	2025-08-24
Amplifier	EMEC	EM330	060662	2025-06-14
Amplifier	Tonscend	TAP01018048	AP20E8060075	2025-03-01
Amplifier	Tonscend	TAP184050	AP20E806071	2025-03-01
Amplifier	SHIRONG ELECTRONIC	DLNA-1G18G-G40	20200928005	2025-07-19
Test S/W	Tonscend	JS32-RE/5.0.0		
Test S/W	FARAD	EZ_EMC		
<b>6dB Bandwidth &amp; Conducted band edges and Spurious Emission &amp; Power Spectral Density</b>				
Spectrum Analyzer	R&S	FSW43	102072	2025-03-30
Automatic control unit	TONSCEND	JS0806-2	21B8060365	2025-06-14
BT/WIFI System	Tonscend	JS1120-3		
<b>Maximum peak output power</b>				
Pulse power sensor	Anristu	MA2411B	1126150	2025-01-11
Power meter	Anristu	ML2495A	1204003	2025-01-11

Note: The calibration cycle of the above instruments is 12 months.

## 6. RADIATED SPURIOUS EMISSIONS

### 6.1 LIMITS

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak( $\mu$ V/m)	Measurement distance(m)	Quasi-peak(dB $\mu$ V/m)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

#### NOTE:

- (1) The emission limits for the ranges 9-90kHz and 110-490kHz are based on measurements employing a linear average detector.
- (2) The lower limit shall apply at the transition frequencies.
- (3) Above 18GHz test distance is 1m, so the Peak Limit=74+20\*log(3/1)=83.54 (dB $\mu$ V/m).  
The Avg Limit=54+20\*log(3/1)=63.54 (dB $\mu$ V/m).

### 6.2 TEST PROCEDURES

#### a) Sequence of testing 9kHz to 30MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The EUT is power by battery.
- The measurement distance is 3meter.
- The EUT was set into operation.

##### Pre measurement:

- The turntable rotates from 0 ° to 360 °.
- The antenna height is 1.0 meter.
- The antenna is polarized X, Y and Z.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the pre measurement the software maximizes by rotating the turntable

position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).

- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

### **b) Sequence of testing 30MHz to 1GHz**

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The EUT is power by battery.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### **Pre measurement:**

- The turntable rotates from 0 ° to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

#### **Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

### **c) Sequence of testing 1GHz to 18GHz**

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The EUT is power by battery.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Pre measurement:**

- The turntable rotates from 0 ° to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

**d) Sequence of testing above 18GHz****Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate fixed frequency transmitting conditions.
- The EUT is power by battery.
- The measurement distance is 1 meter.
- The EUT was set into operation.

**Pre measurement:**

- The turntable rotates from 0 ° to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.


**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of pre measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.


## NOTE:

- (1).The frequency from 9kHz to 150kHz, Set RBW=300Hz(for Peak&AVG), VBW=300Hz(for Peak&AVG). The frequency from 150kHz to 30MHz, Set RBW=9kHz, VBW=9kHz, (for QP Detector).
- (2).The frequency from 30MHz to 1GHz, Set RBW=120kHz, VBW=300kHz, (for QP Detector).
- (3).The frequency above 1GHz, for Peak detector: Set RBW=1MHz,VBW=3MHz.
- (4). The frequency above 1GHz, for Avg detector: Set RBW=1MHz,if the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set  $VBW \leq RBW/100$  (i.e.,10kHz) but not less than 10 Hz. If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ , Where T is defined in section 2.9.


### 6.3 TEST SETUP

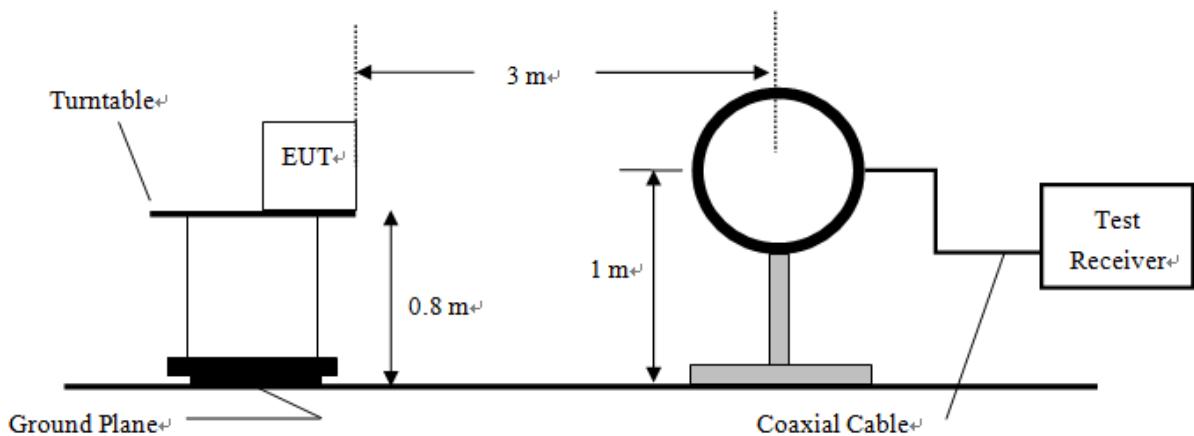


**Figure 1. 9kHz to 30MHz radiated emissions test configuration**

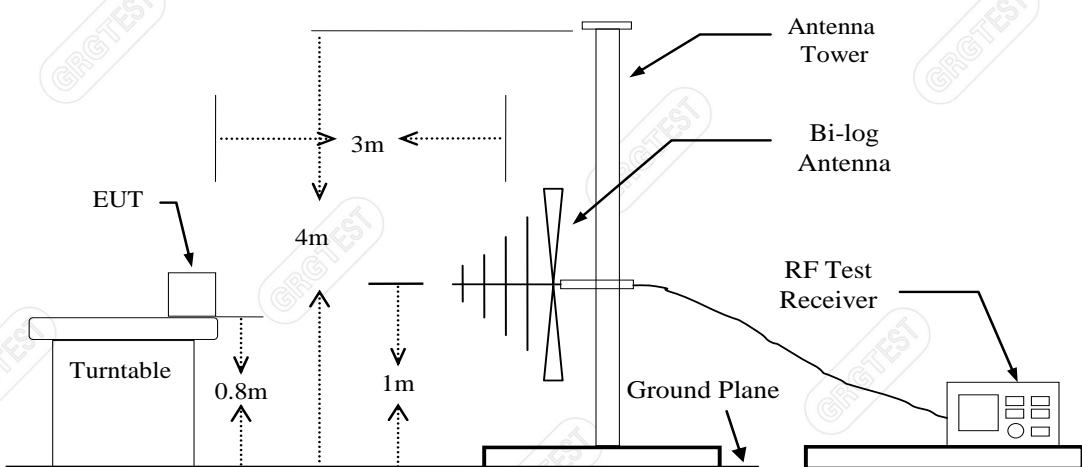

**Figure 2. 30MHz to 1GHz radiated emissions test configuration**

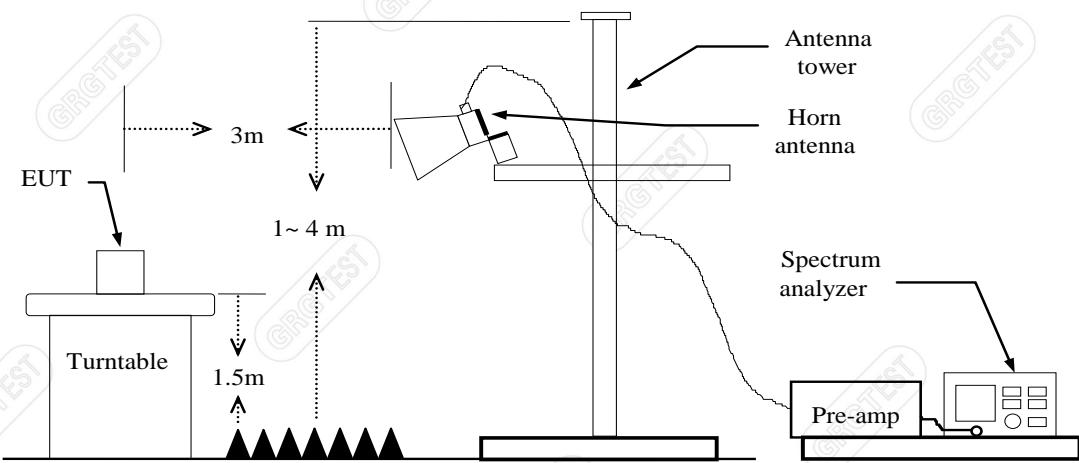

**Figure 3. 1GHz to 18GHz radiated emissions test configuration**

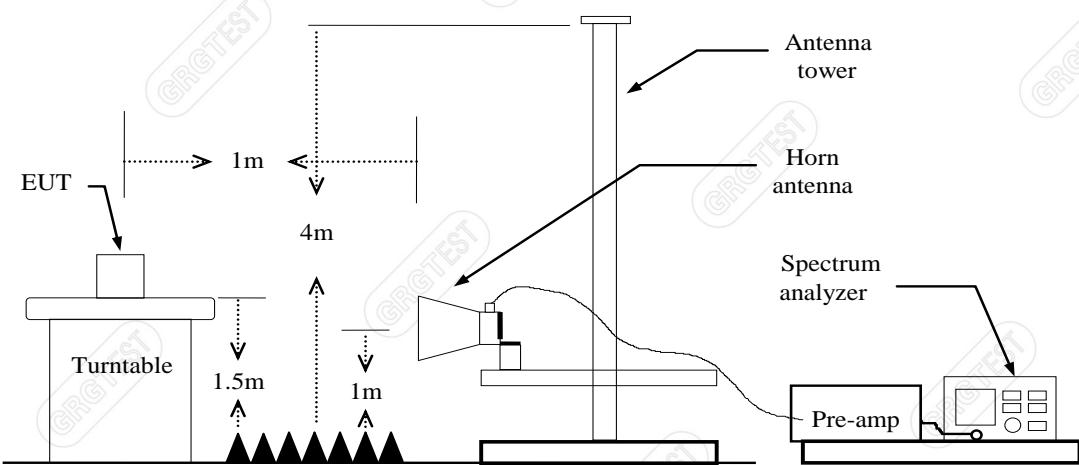

**Figure 4. 18GHz to 26.5GHz radiated emissions test configuration**

—Blank space below this page—

#### 6.4 DATA SAMPLE

##### 30MHz to 1GHz

NO.	Freq. [MHz]	Reading [dB $\mu$ V]	Correction Factor [dB/m]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Detector type
xxx	86.5096	67.55	-33.72	33.83	40.00	-6.17	200	118	QP

Frequency (MHz)

= Emission frequency in MHz

Reading (dB $\mu$ V)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dB $\mu$ V/m)= Reading (dB $\mu$ V) + Correction Factor (dB/m)Limit (dB $\mu$ V/m)

= Limit stated in standard

Margin (dB)

= Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

QP

= Quasi-peak Reading

##### 1GHz-18GHz

No.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
xxx	xxxx	78.01	55.30	-22.71	74.00	18.70	100	50	Horizontal
xxx	xxxx	66.37	43.66	-22.71	54.00	10.34	100	50	Horizontal

##### Above 18GHz

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level for 1m [dB $\mu$ V/m]	Level for 3m [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
xxx	xxx	62.46	45.31	35.77	-17.15	74	38.23	100	19	Horizontal

Frequency (MHz)

= Emission frequency in MHz

Reading (dB $\mu$ V/m)

= Uncorrected Analyzer / Receiver reading

Factor (dB)

= Antenna factor + Cable loss – Amplifier gain

Level for 1m (dB $\mu$ V/m)= Reading (dB $\mu$ V/m) + Factor (dB)Level for 3m (dB $\mu$ V/m)= Level for 1m (dB $\mu$ V/m) +  $20 \cdot \log(1/3)$ Limit (dB $\mu$ V/m)

= Limit stated in standard

Margin (dB)

= Limit (dB $\mu$ V/m) – Level (dB $\mu$ V/m)

Polarity

= Antenna polarization

Peak

= Peak Reading

AVG

= Average Reading

—Blank space below this page—


## 6.5 TEST RESULTS

### Below 1GHz


Note: Pre-scan all modes , only the worst case(TX\_2444MHz) was recorded in this report.

Product	X500 Rotor UAV	Model No.	X500
Power supply:	DC 47.04V	Environmental Conditions:	23.1 °C/47%RH/101.0kPa
Test Engineer:	Zhao yaru	Test Date:	2024-12-16
Sample No:	E202411154120-0001	/	/

Horizontal:

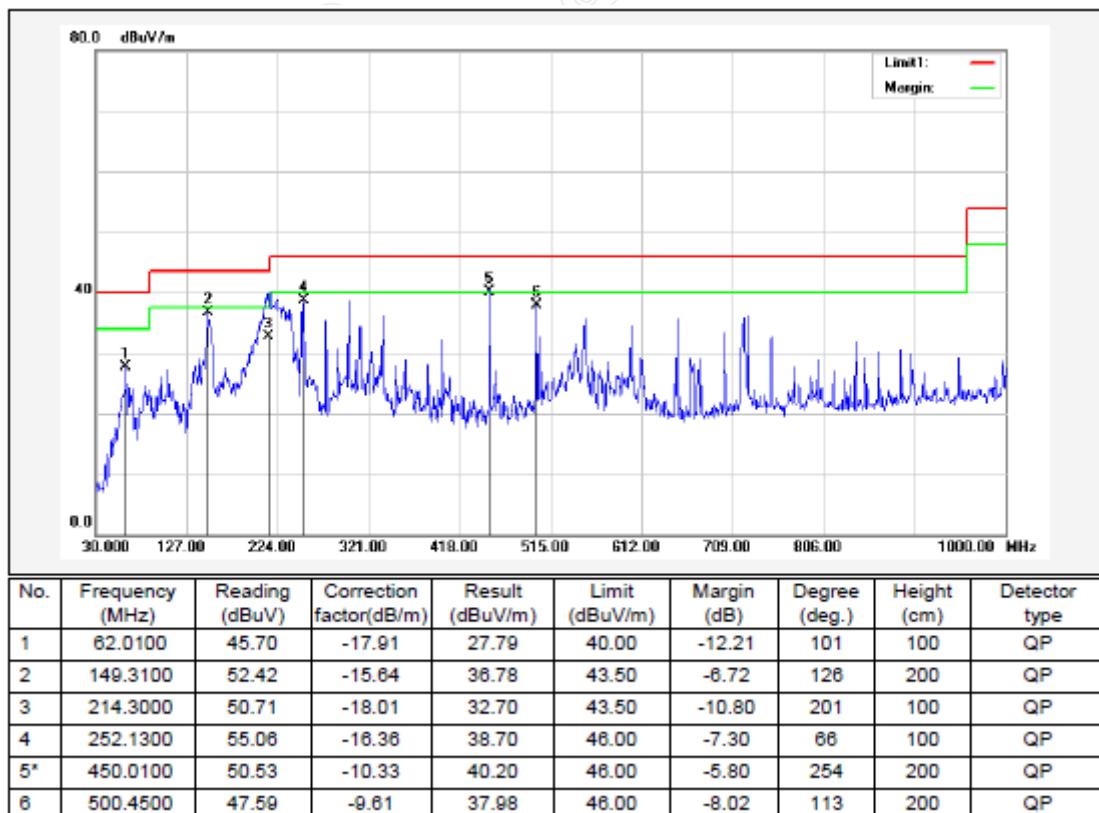

Vertical:

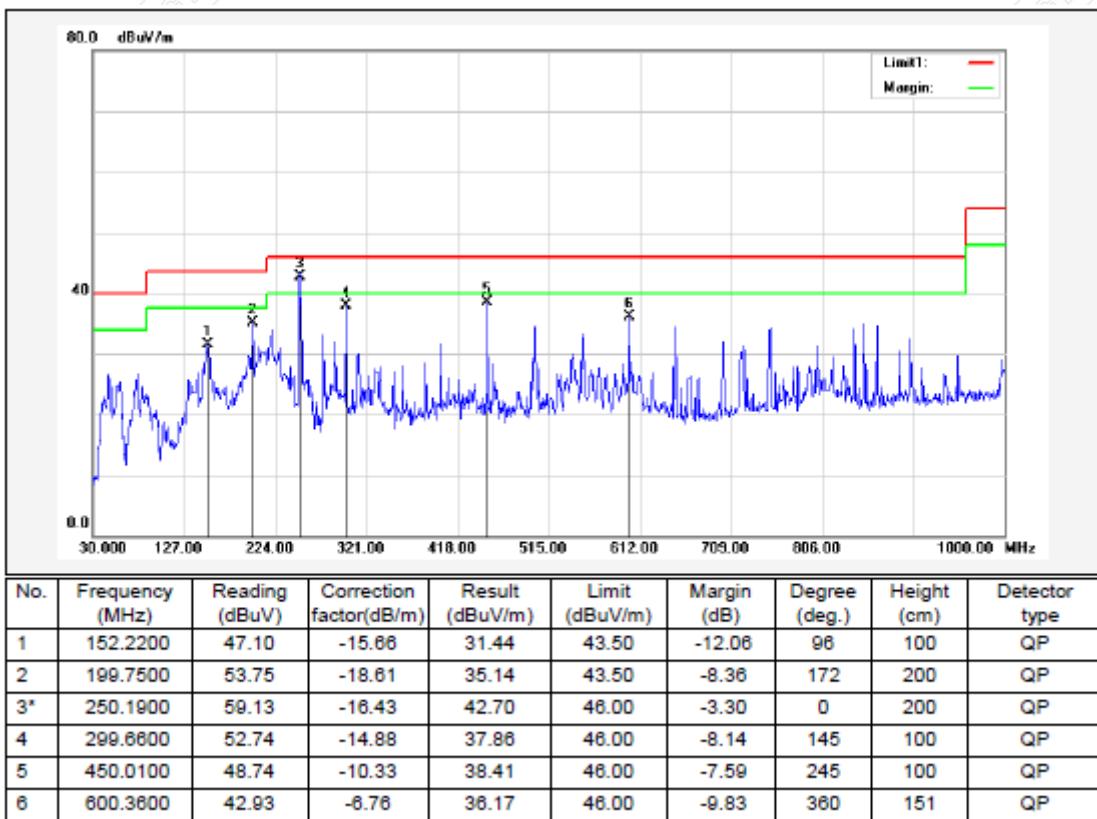

**Remark:**

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3 The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
- 4 If the margin of the pre-test results is greater than 6dB, it meets the requirements of quasi peak or average values, and final testing is no longer required.

**1GHz-18GHz:**

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Product	X500 Rotor UAV	Model No.	X500
Sample No:	E202411154120-0001	/	/

Mode: TX

Lowest Frequency (2406.5MHz)

Environment: 23.1 °C/47%RH/101.0kPa

Tested By: Zhao yaru

Voltage:DC 47.04V

Date: 2024-12-16

Suspected Data List									
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1901.2000	48.07	43.98	-4.09	74.00	30.02	200	137	Horizontal
2	2503.2000	47.78	47.44	-0.34	74.00	26.56	100	187	Horizontal
3	3589.5000	54.28	41.82	-12.46	74.00	32.18	200	338	Horizontal
4	6724.5000	46.22	45.51	-0.71	74.00	28.49	100	273	Horizontal
5	13107.0000	36.65	52.67	16.02	74.00	21.33	100	66	Horizontal
6	14698.5000	35.59	50.37	14.78	74.00	23.63	100	81	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	13106.7156	16.02	23.45	39.47	54.00	14.53	100	66	Horizontal
2	14698.3576	14.78	23.46	38.24	54.00	15.76	100	81	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1906.8000	48.00	43.37	-4.63	74.00	30.63	200	21	Vertical
2	2502.8000	47.43	46.84	-0.59	74.00	27.16	200	233	Vertical
3	3594.0000	54.27	41.45	-12.82	74.00	32.55	200	338	Vertical
4	7168.5000	44.61	45.40	0.79	74.00	28.60	200	0	Vertical
5	13128.0000	35.68	49.91	14.23	74.00	24.09	100	211	Vertical
6	14692.5000	36.11	53.83	17.72	74.00	20.17	100	224	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	13128.0000	14.23	23.47	37.70	54.00	16.30	100	211	Vertical
2	14701.6475	17.72	24.28	42.00	54.00	12.00	161	198.6	Vertical

Mode: TX  
 Middle Frequency (2444MHz)  
 Environment: 23.1 °C/47%RH/101.0kPa  
 Tested By: Zhao yaru

Voltage:DC 47.04V  
 Date: 2024-12-16

#### Suspected Data List

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1899.2000	48.07	43.97	-4.10	74.00	30.03	200	58	Horizontal
2	2493.8000	48.02	47.78	-0.24	74.00	26.22	100	86	Horizontal
3	3594.0000	55.03	42.52	-12.51	74.00	31.48	200	314	Horizontal
4	7924.5000	43.25	46.35	3.10	74.00	27.65	200	288	Horizontal
5	13099.5000	36.01	52.22	16.21	74.00	21.78	200	155	Horizontal
6	14707.5000	36.47	51.18	14.71	74.00	22.82	200	168	Horizontal

#### AV Final Data List

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	13099.5000	16.21	23.56	39.77	54.00	14.23	200	155	Horizontal
2	14707.5000	14.71	24.17	38.88	54.00	15.12	200	168	Horizontal

#### Suspected Data List

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1505.4000	48.32	40.94	-7.38	74.00	33.06	200	178	Vertical
2	2500.8000	47.37	46.86	-0.51	74.00	27.14	200	19	Vertical
3	4479.0000	49.86	41.57	-8.29	74.00	32.43	100	340	Vertical
4	6553.5000	47.57	46.47	-1.10	74.00	27.53	100	127	Vertical
5	13096.5000	35.71	50.27	14.56	74.00	23.73	100	0	Vertical
6	14697.0000	35.68	53.78	18.10	74.00	20.22	200	90	Vertical

#### AV Final Data List

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	13113.9375	14.56	23.24	37.80	54.00	16.20	100	21.8	Vertical
2	14701.6750	18.10	23.95	42.05	54.00	11.95	137	105.8	Vertical

Mode: TX  
 Highest Frequency (2476.5MHz)  
 Environment: 23.1°C/47%RH/101.0kPa  
 Tested By: Zhao yaru

Voltage:DC 47.04V  
 Date: 2024-12-16

Suspected Data List									
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2493.0000	46.84	46.59	-0.25	74.00	27.41	100	114	Horizontal
2	3595.5000	53.99	41.47	-12.52	74.00	32.53	200	350	Horizontal
3	6715.5000	46.59	45.87	-0.72	74.00	28.13	100	60	Horizontal
4	10156.5000	38.88	48.39	9.51	74.00	25.61	100	233	Horizontal
5	13099.5000	34.87	51.08	16.21	74.00	22.92	200	20	Horizontal
6	14703.0000	35.39	50.19	14.80	74.00	23.81	100	246	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	10195.8875	9.51	26.39	35.90	54.00	18.10	100	257	Horizontal
2	13101.0125	16.21	22.90	39.11	54.00	14.89	158	20.7	Horizontal
3	14700.4450	14.80	23.20	38.00	54.00	16.00	153	223.6	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1890.0000	47.75	42.93	-4.82	74.00	31.07	100	75	Vertical
2	2472.4000	47.62	46.55	-1.07	74.00	27.45	200	300	Vertical
3	5044.5000	47.53	41.56	-5.97	74.00	32.44	100	46	Vertical
4	6544.5000	44.87	43.82	-1.05	74.00	30.18	100	124	Vertical
5	7923.0000	41.83	45.12	3.29	74.00	28.88	100	193	Vertical
6	13101.0000	34.73	49.34	14.61	74.00	24.66	100	33	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value [dB $\mu$ V/m]	AV Limit [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	13104.7950	14.61	22.76	37.37	54.00	16.63	100	164.2	Vertical

#### Remark:

- 1 Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- 2 Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3 Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**18GHz to 26.5GHz**

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Note: Pre-scan all modes, only the worst case(TX\_2444MHz) was recorded in this report.

Environment: 23.5°C/47%RH/101.0kPa

Tested By: Zhao yaru

Voltage:DC 47.04V

Date: 2024-12-17

Suspected Data List										
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level for 1m [dB $\mu$ V/m]	Level for 3m [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19199.35	58.64	61.73	52.19	3.09	74	21.81	120	339	Horizontal
2	19838.125	50.5	54.06	44.52	3.56	74	29.48	100	110	Horizontal
3	21615.9	53.14	57.1	47.56	3.96	74	26.44	100	23	Horizontal
4	22210.05	49.38	52.83	43.29	3.45	74	30.71	100	339	Horizontal
5	24018	47.11	51.85	42.31	4.74	74	31.69	100	277	Horizontal
6	24663.15	51.2	56.63	47.09	5.43	74	26.91	100	67	Horizontal

AV Final Data List											
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value in 1m [dB $\mu$ V/m]	AV Value in 3m [dB $\mu$ V/m]	AV Limit in 1m [dB $\mu$ V/m]	AV Limit in 3m [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19216.8533	3.09	37.89	40.98	31.44	63.54	54	22.56	120	25.1	Horizontal

Suspected Data List										
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level for 1m [dB $\mu$ V/m]	Level for 3m [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19001.725	64.38	67.68	58.14	3.30	74	15.86	100	41	Vertical
2	19450.525	51.1	54.82	45.28	3.72	74	28.72	100	41	Vertical
3	19598	59.01	62.81	53.27	3.80	74	20.73	190	82	Vertical
4	22016.25	61.37	65.43	55.89	4.06	74	18.11	100	82	Vertical
5	2406.53.1	46.42	51.76	42.22	5.34	74	31.78	100	146	Vertical
6	24658.05	50.73	56.73	47.19	6.00	74	26.81	100	82	Vertical

**AV Final Data List**

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dB $\mu$ V/m]	AV Value in 1m [dB $\mu$ V/m]	AV Value in 3m [dB $\mu$ V/m]	AV Limit in 1m [dB $\mu$ V/m]	AV Limit in 3m [dB $\mu$ V/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	19001.9964	3.3	40.23	43.53	33.99	63.54	54	20.01	100	338.7	Vertical
2	19566.52	3.8	35.9	39.7	30.16	63.54	54	23.84	190	108.2	Vertical
3	22096.8588	4.06	34.08	38.14	28.6	63.54	54	25.40	100	196.1	Vertical

**Remark:**

- 1 Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2 Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3 Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4 Above 18G test distance is 1m, so the Level for 3m= Level for 1m + 20\*log(1/3)

—Blank space below this page—

## 7. 6dB BANDWIDTH


### 7.1 LIMITS

Systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

### 7.2 TEST PROCEDURES

- a) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the Automatic power measuring unit.
- b) Set resolution bandwidth (RBW) = 100kHz. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- c) Repeat above procedures until all frequencies measured were complete.

### 7.3 TEST SETUP

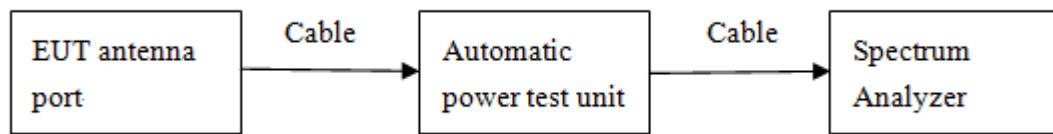

—Blank space below this page—

## 7.4 TEST RESULTS

Environment: 23.6°C/52%RH/101.0kPa


Tested By: Qin tingting

Voltage:DC 47.04V


Date: 2024-12-19

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Lowest	2406.5	9040	≥500	PASS
Middle	2444.0	9020		PASS
Highest	2476.5	9020		PASS


### Lowest Frequency (2406.5MHz)

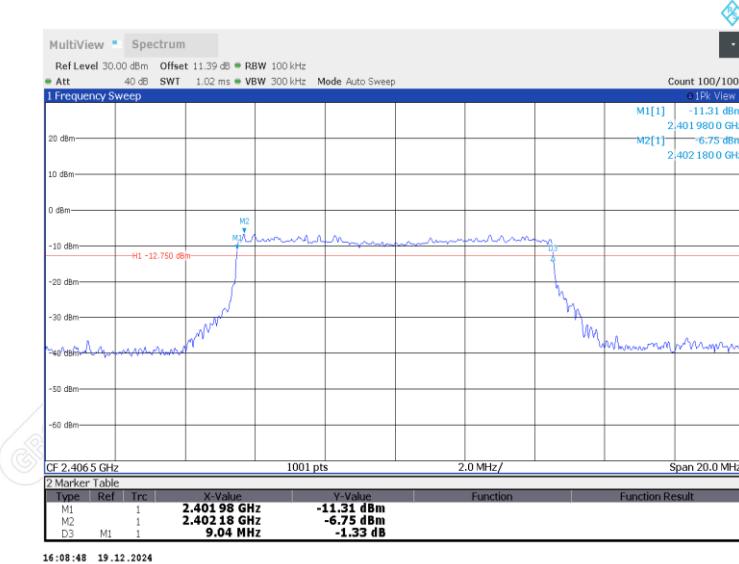

### Middle Frequency (2444 MHz)

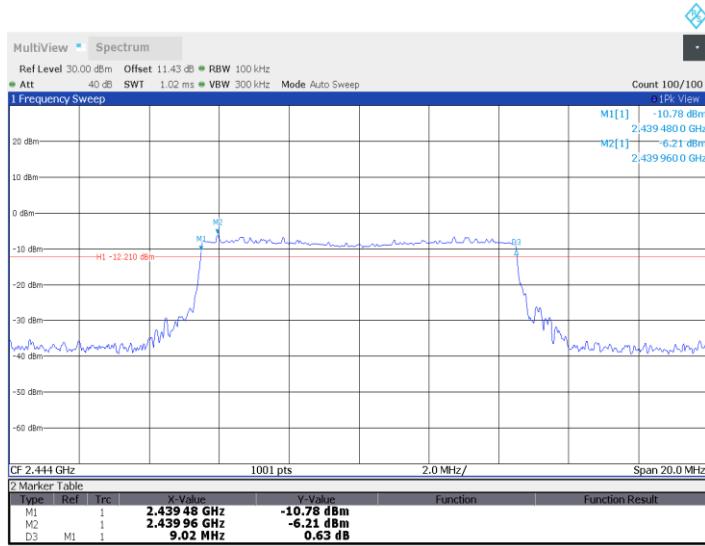

## Highest Frequency (2476.5MHz)

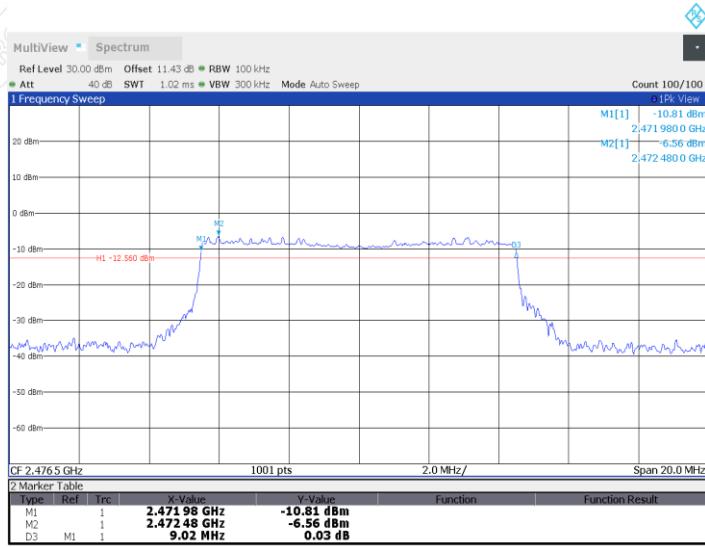

—Blank space below this page—

## 8. MAXIMUM PEAK OUTPUT POWER


### 8.1 LIMITS

The maximum Peak output power measurement is 1W

### 8.2 TEST PROCEDURES

- RF output of EUT was connected to the broadband peak RF power meter by RF cable. The path loss was compensated to the results for each measurement.
- Set to the maximum power setting and enable the EUT transmit continuously.
- Measure the conducted output power and record the results in the test report.

### 8.3 TEST SETUP

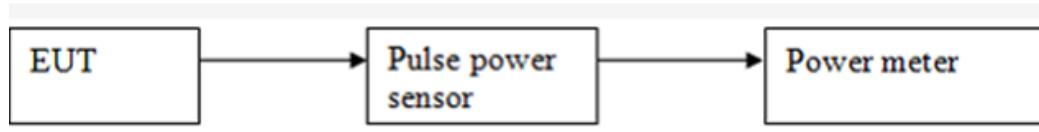

### 8.4 TEST RESULTS

Environment: 23.6°C/52%RH/101.0kPa  
Tested By: Qin tingting

Voltage:DC 47.04V  
Date: 2024-12-19

Channel	Frequency (MHz)	Maximum Power (dBm)	Limit	Peak/Average	Result
Lowest	2406.5	10.41	1W (30dBm)	Peak	Pass
Middle	2444.0	10.65			Pass
Highest	2476.5	10.56			Pass

## 9. POWER SPECTRAL DENSITY


### 9.1 LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 9.2 TEST PROCEDURES

- a) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- b) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:
  - a) Set analyzer center frequency to DTS channel center frequency.
  - b) Set the span to at least 1.5 times the DTS bandwidth.
  - c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
  - d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
  - e) Detector = peak
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- d) Repeat above procedures until all frequencies measured were complete.

### 9.3 TEST SETUP

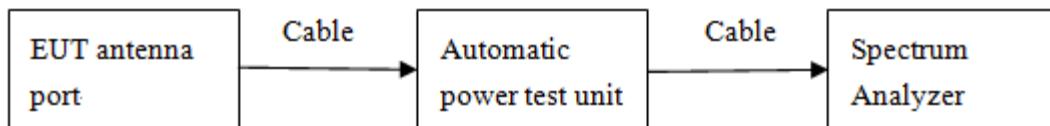

## 9.4 TEST RESULTS

Environment: 23.6°C/52%RH/101.0kPa


Tested By: Qin tingting

Voltage:DC 47.04V


Date: 2024-12-19

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Test Result
Lowest	2406.5	-21.43	8.00	PASS
Middle	2444.0	-20.98		PASS
Highest	2476.5	-21.28		PASS


Lowest Frequency (2406.5MHz)

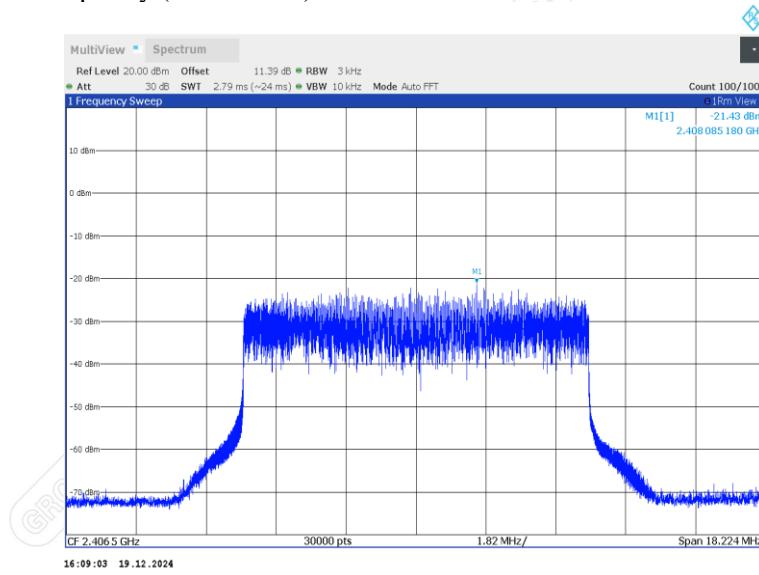

Middle Frequency (2444 MHz)

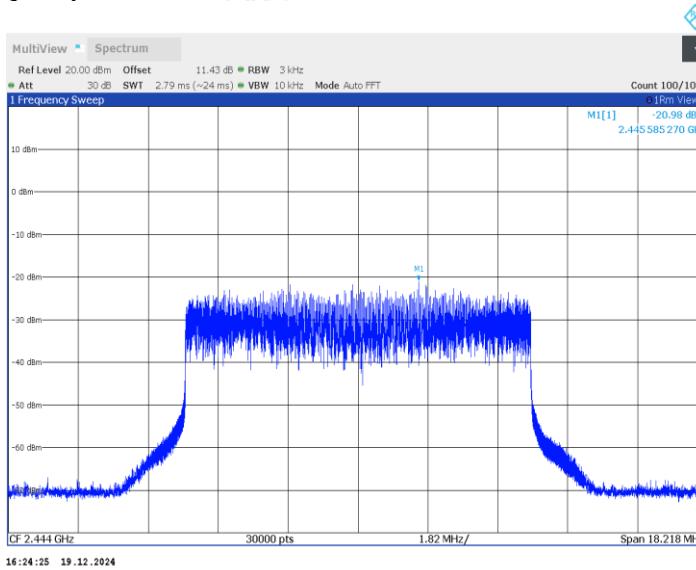

## Highest Frequency (2476.5MHz)

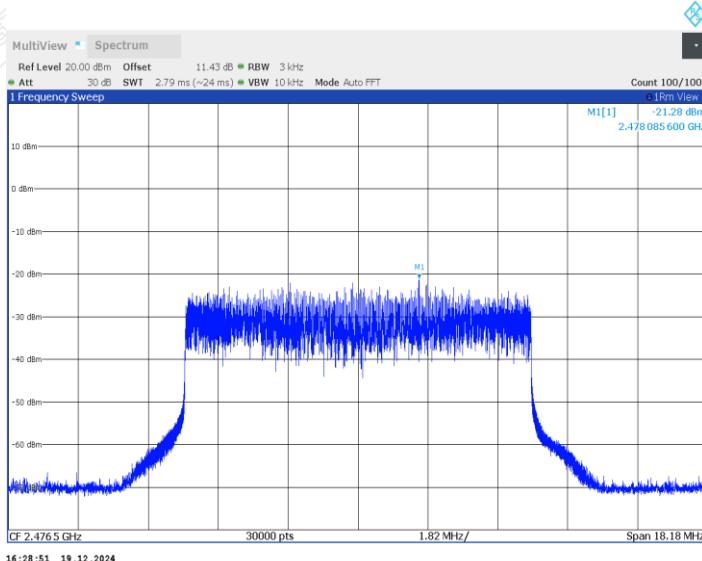

—Blank space below this page—

## 10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

### 10.1 LIMITS


In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.

### 10.2 TEST PROCEDURES

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.

- a) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- b) Set the spectrum analyzer: RBW =100kHz; VBW =300kHz, Frequency range = 30MHz to 26.5GHz; Sweep = auto; Detector Function = Peak. Trace = Max, hold.
- c) Measure and record the results in the test report.
- d) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 10.3 TEST SETUP

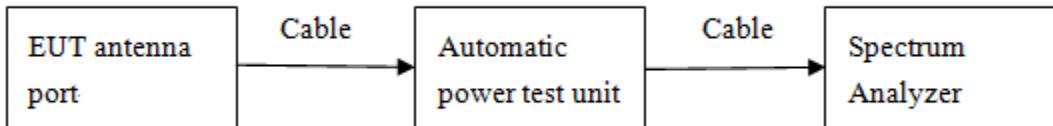

## 10.4 TEST RESULTS

Environment: 23.6 °C/52%RH/101.0kPa

Tested By: Qin tingting


Voltage:DC 47.04V

Date: 2024-12-19


### Band edge measurements

Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
Ant1	Low	2406.5	-6.18	-45.1	≤-26.18	PASS
	High	2476.5	-5.85	-44.2	≤-25.85	PASS

Lowest Frequency (2406.5MHz)  
2.3GHz-2.43GHz

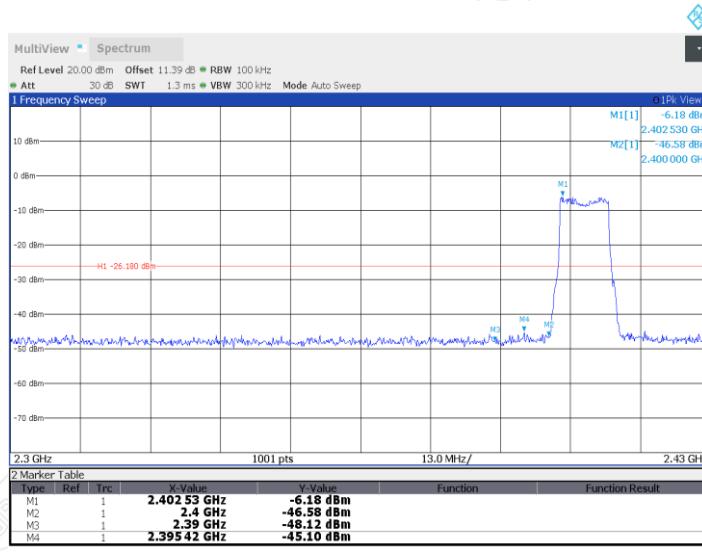


Highest Frequency (2476.5MHz)  
2.44GHz-2.55GHz


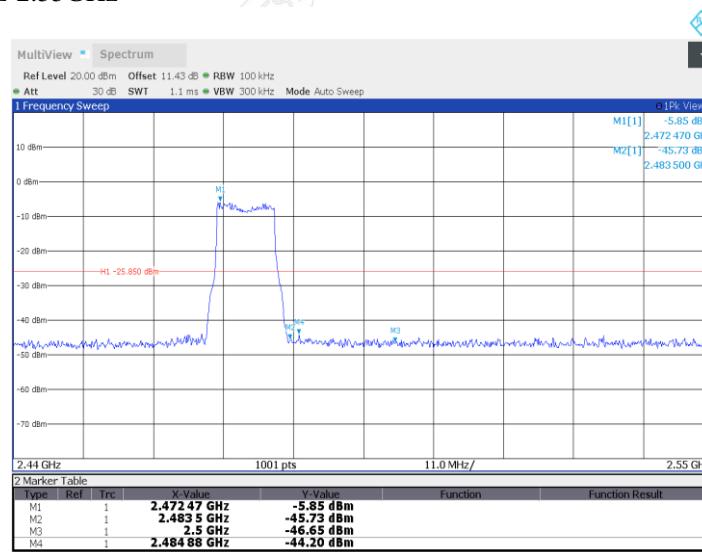


### Conducted Spurious Emission

Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
Ant1	2406.5	Reference	-6.65	-6.65	---	PASS
		30~1000	-6.65	-54.62	≤-26.65	PASS
		1000~26500	-6.65	-41.13	≤-26.65	PASS
	2444.0	Reference	-6.19	-6.19	---	PASS
		30~1000	-6.19	-54.63	≤-26.19	PASS
		1000~26500	-6.19	-41.23	≤-26.19	PASS
	2476.5	Reference	-6.50	-6.50	---	PASS
		30~1000	-6.50	-54.19	≤-26.5	PASS
		1000~26500	-6.50	-41.24	≤-26.5	PASS



#### Lowest Frequency (2406.5MHz)

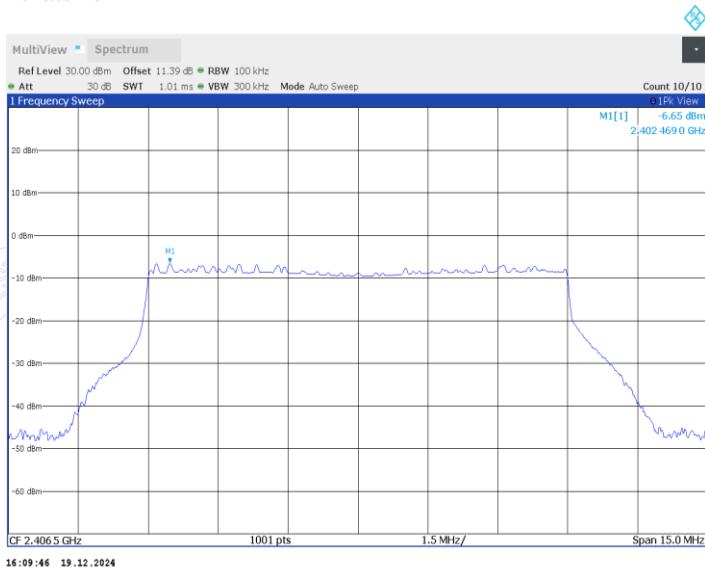


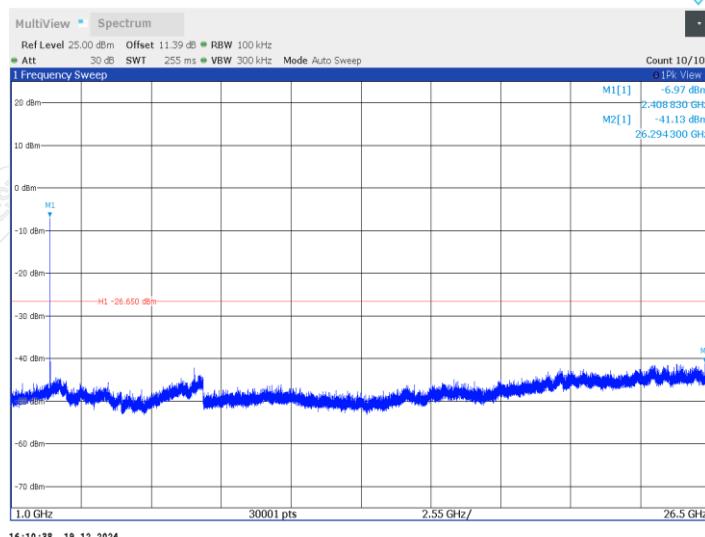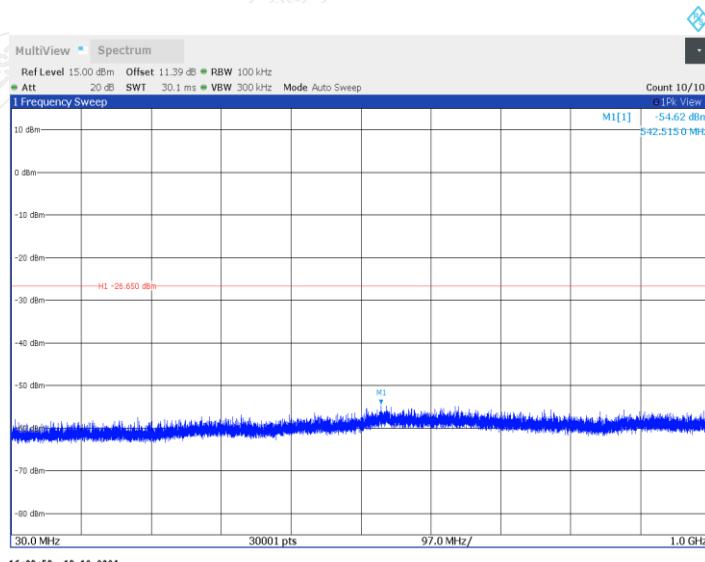

— Blank space below this page —


## Middle Frequency (2444MHz)

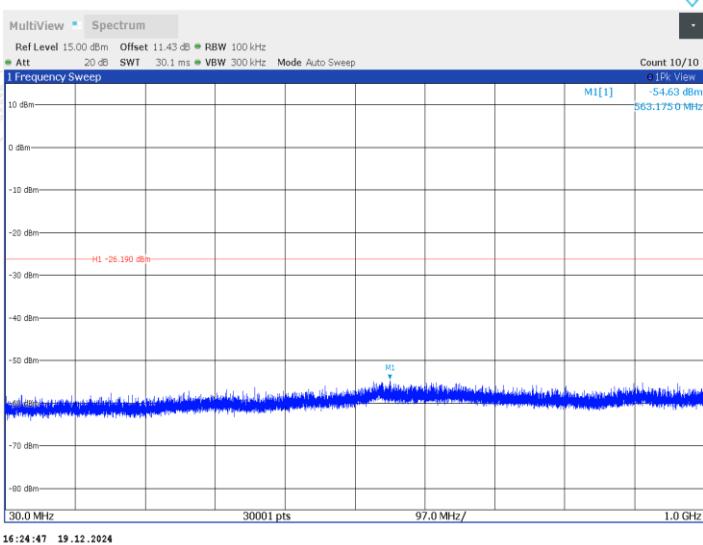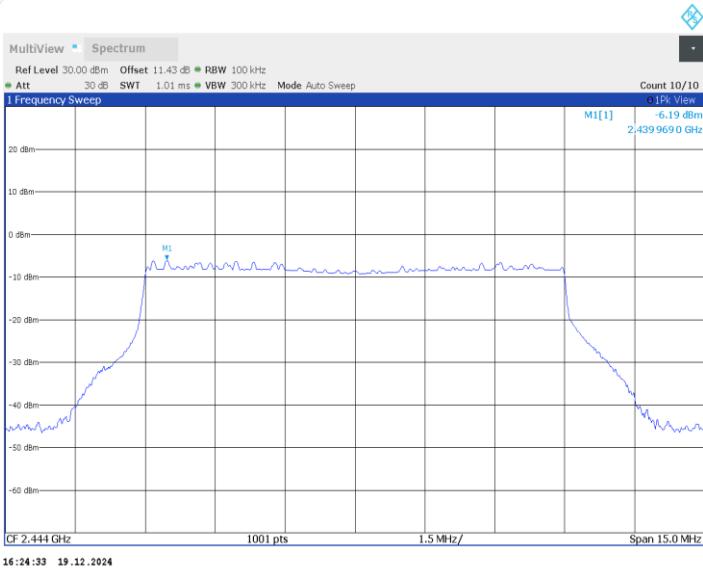


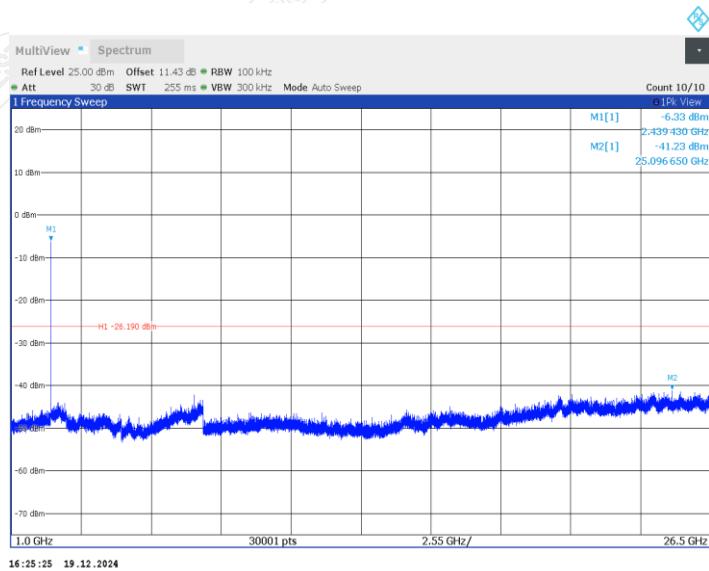


16:25:25 19.12.2024

### Highest Frequency (2476.5MHz)

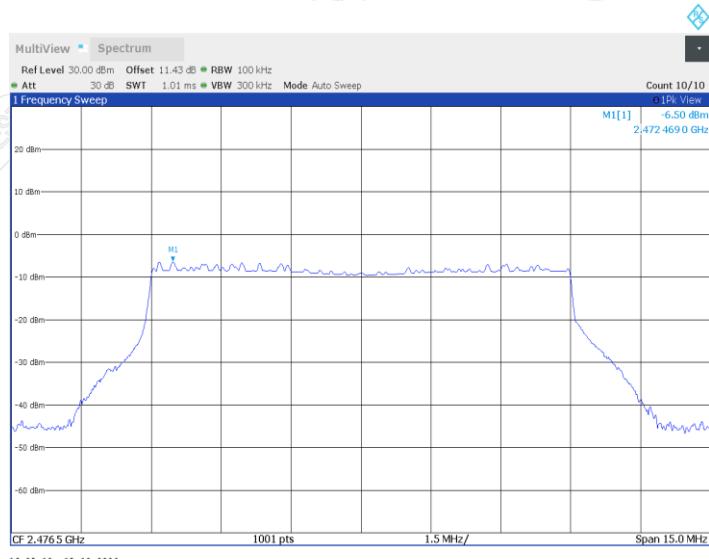

16:29:10 19.12.2024

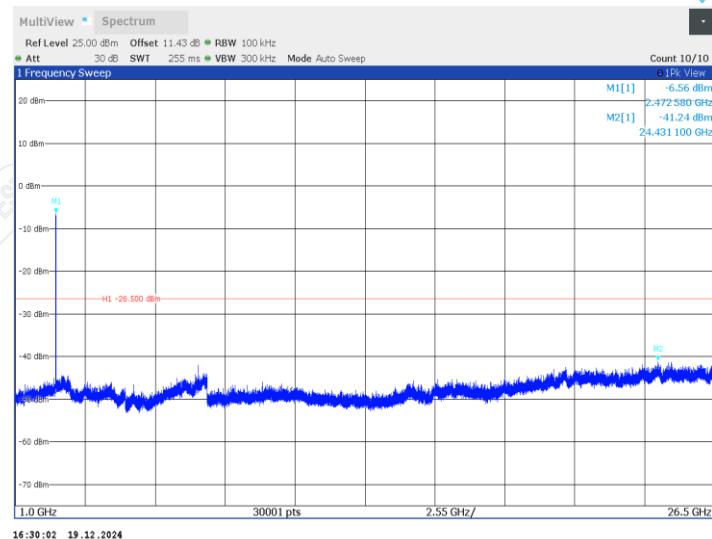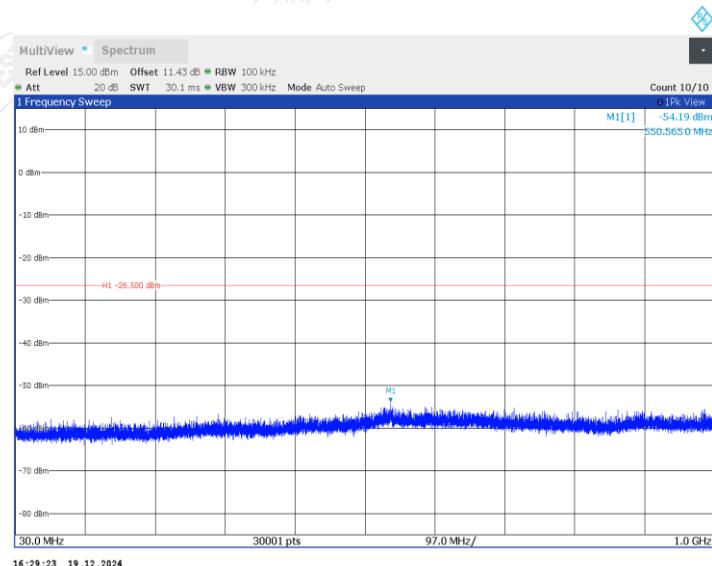

—Blank space below this page—

## 11. RESTRICTED BANDS OF OPERATION

### 11.1 LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

Frequency (MHz)	Quasi-peak( $\mu$ V/m)	Measurement distance(m)	Quasi-peak(dB $\mu$ V/m)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

## 11.2 TEST PROCEDURES

- The EUT is placed on a turntable, which is 1.5m above the ground plane.
- The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO.
  - AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO.
- If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set  $VBW \leq RBW/100$  (i.e., 10kHz) but not less than 10 Hz. If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ , Where T is defined in section 2.9.
- Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

## 11.3 TEST SETUP

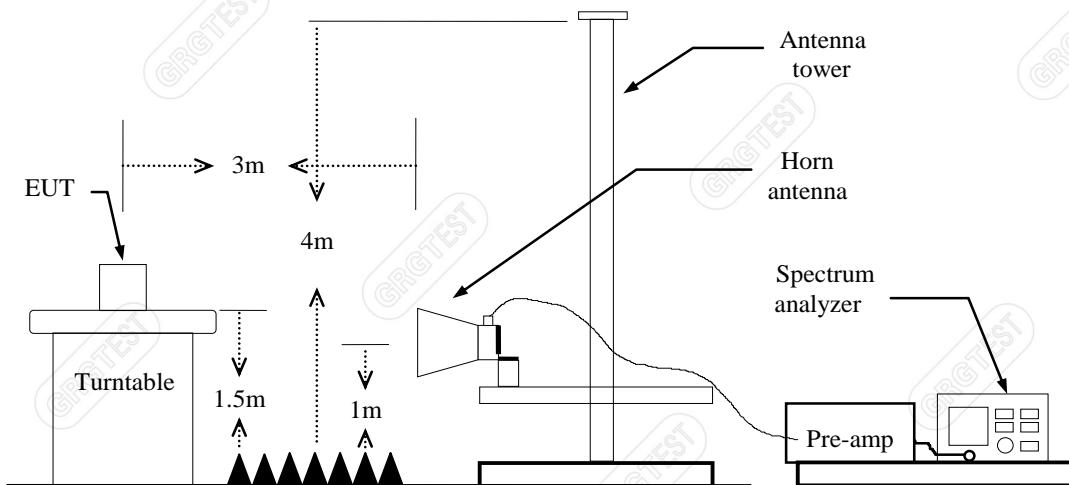


## 11.4 TEST RESULTS

Product	X500 Rotor UAV	Model No.	X500
Test Voltage:	DC 47.04V	Test Engineer:	Qin tingting
Test Date	2024-12-16	Environmental Conditions	23.1 °C/47%RH/101.0kPa
Sample No:	E202411154120-0001	/	/


**Lowest Frequency**  
Frequency 2406.5MHz  
Detector mode: Peak

Polarity: Horizontal

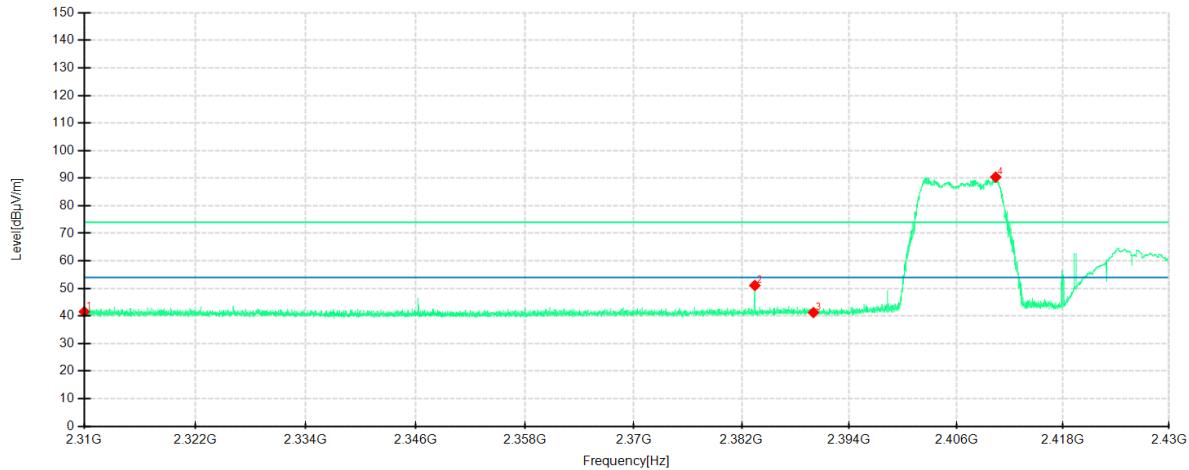

Detector mode: Peak

Polarity: Vertical

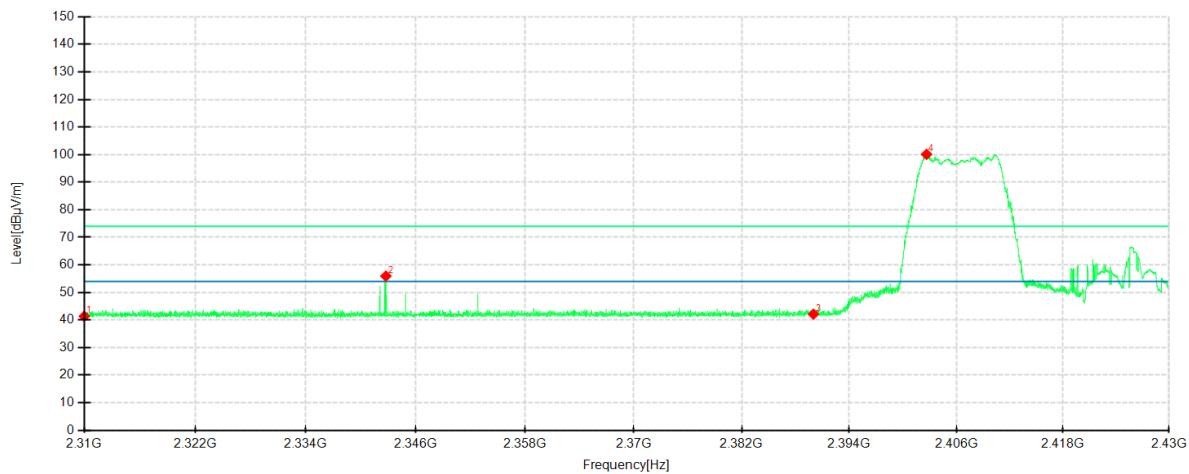


No.	Frequency MHz	Reading dB $\mu$ V/m	Level dB $\mu$ V/m	Factor dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	47.43	41.53	-5.90	74.00	32.47	100	190	Horizontal	/
2	2383.4700	56.91	51.08	-5.83	74.00	22.92	100	291	Horizontal	/
3	2390.0000	46.98	41.25	-5.73	74.00	32.75	100	280	Horizontal	/
4	2410.4250	95.72	90.39	-5.33	74.00	-16.39	100	88	Horizontal	No limit
1	2310.0000	46.65	41.35	-5.30	74.00	32.65	100	188	Vertical	/
2	2342.7600	61.28	55.92	-5.36	74.00	18.08	100	188	Vertical	/
3	2390.0000	47.57	42.12	-5.45	74.00	31.88	200	121	Vertical	/
4	2402.6550	105.56	100.11	-5.45	74.00	-26.11	200	171	Vertical	No limit

**Lowest Frequency**

Frequency 2406.5MHz


Detector mode: Average

Polarity: Horizontal

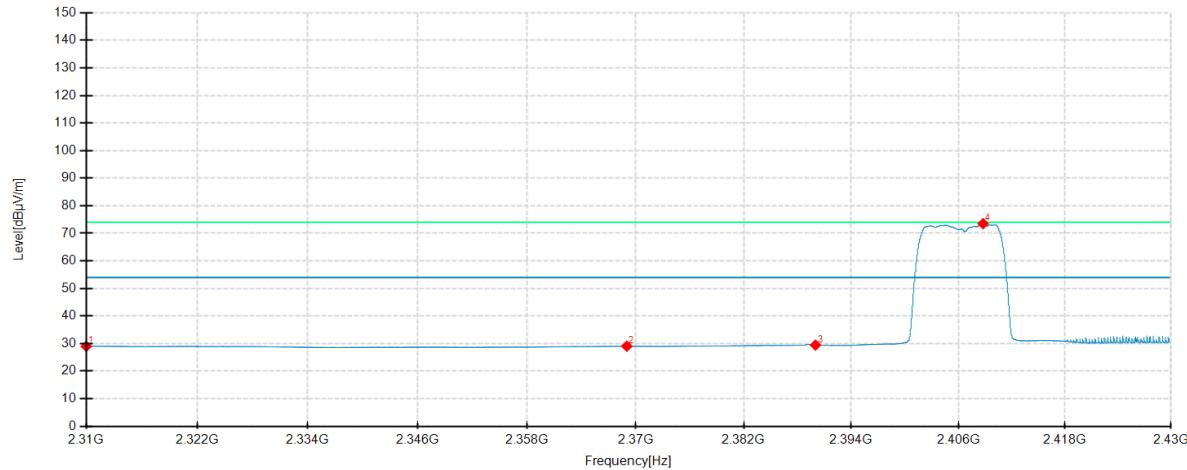

Detector mode: Average


Polarity: Vertical

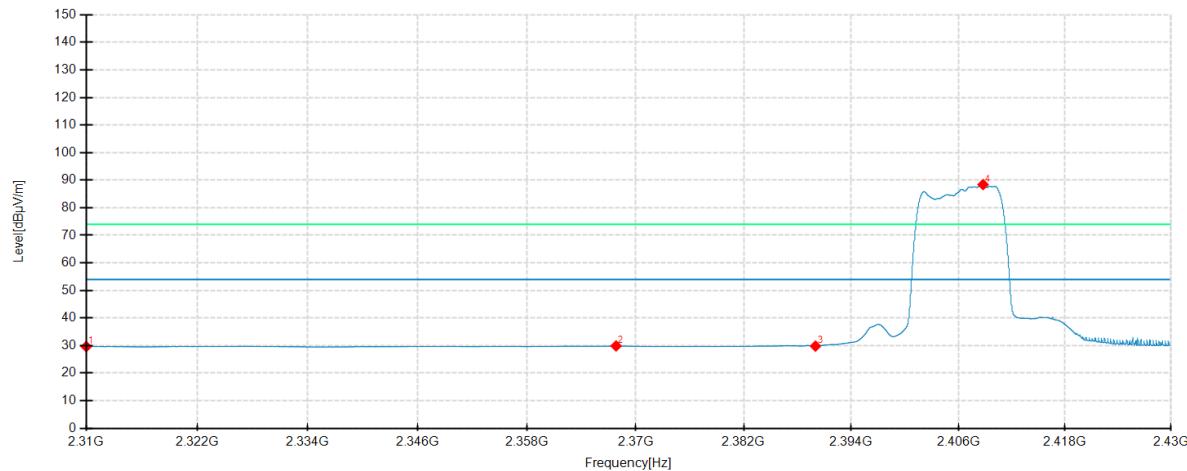

No.	Frequency MHz	Reading dB $\mu$ V/m	Level dB $\mu$ V/m	Factor dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	34.89	28.99	-5.90	54.00	25.01	100	90	Horizontal	/
2	2369.0400	35.10	29.03	-6.07	54.00	24.97	100	270	Horizontal	/
3	2390.0000	35.16	29.43	-5.73	54.00	24.57	100	90	Horizontal	/
4	2408.7750	78.88	73.51	-5.37	54.00	-19.51	100	360	Horizontal	No limit
1	2310.0000	34.92	29.62	-5.30	54.00	24.38	200	26	Vertical	/
2	2367.8550	35.27	29.86	-5.41	54.00	24.14	100	335	Vertical	/
3	2390.0000	35.24	29.79	-5.45	54.00	24.21	100	335	Vertical	/
4	2408.7750	93.82	88.39	-5.43	54.00	-34.39	100	335	Vertical	No limit


**Highest Frequency**  
Frequency 2476.5MHz  
Detector mode: Peak

Polarity: Horizontal

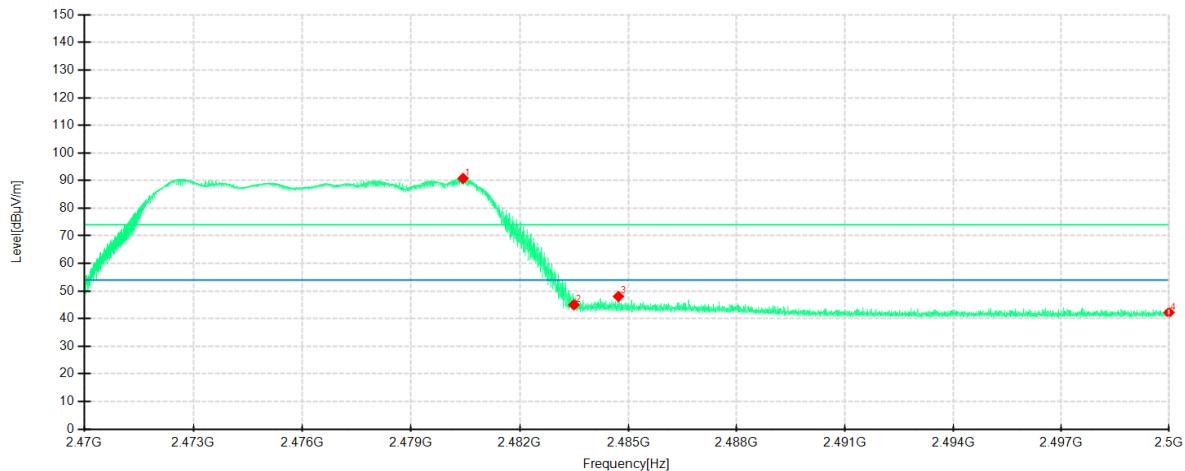

Detector mode: Peak

Polarity: Vertical

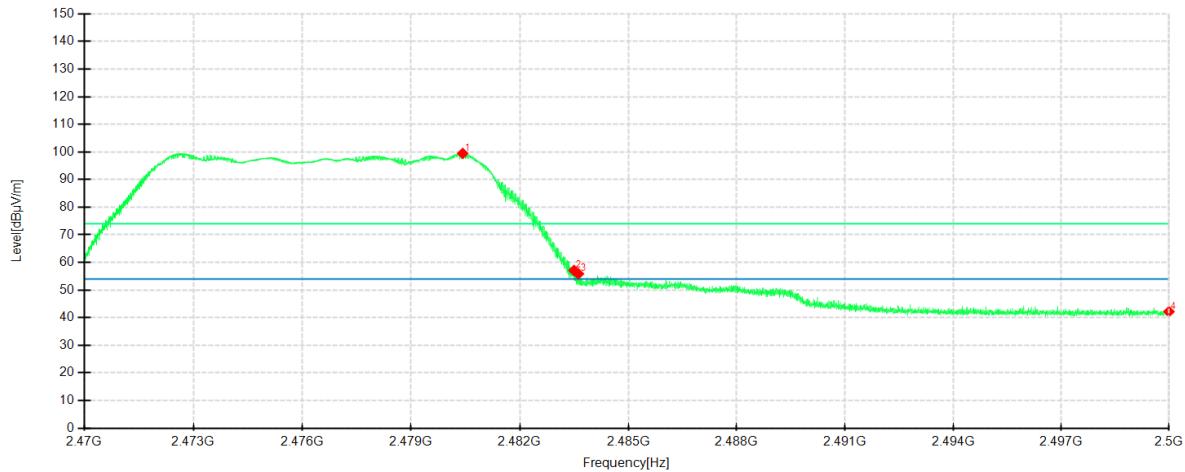


No.	Frequency MHz	Reading dB $\mu$ V/m	Level dB $\mu$ V/m	Factor dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2480.4363	95.42	90.77	-4.65	74.00	-16.77	100	90	Horizontal	No limit
2	2483.5000	49.67	45.00	-4.67	74.00	29.00	100	115	Horizontal	/
3	2484.7300	52.71	48.03	-4.68	74.00	25.97	100	90	Horizontal	/
4	2500.0000	46.99	42.20	-4.79	74.00	31.80	100	293	Horizontal	/
1	2480.4250	104.62	99.47	-5.15	74.00	-25.47	200	296	Vertical	No limit
2	2483.5000	62.21	57.08	-5.13	74.00	16.92	200	322	Vertical	/
3	2483.6238	60.99	55.86	-5.13	74.00	18.14	200	169	Vertical	/
4	2500.0000	47.27	42.18	-5.09	74.00	31.82	200	309	Vertical	/

**Highest Frequency**

Frequency 2476.5MHz


Detector mode: Average

Polarity: Horizontal

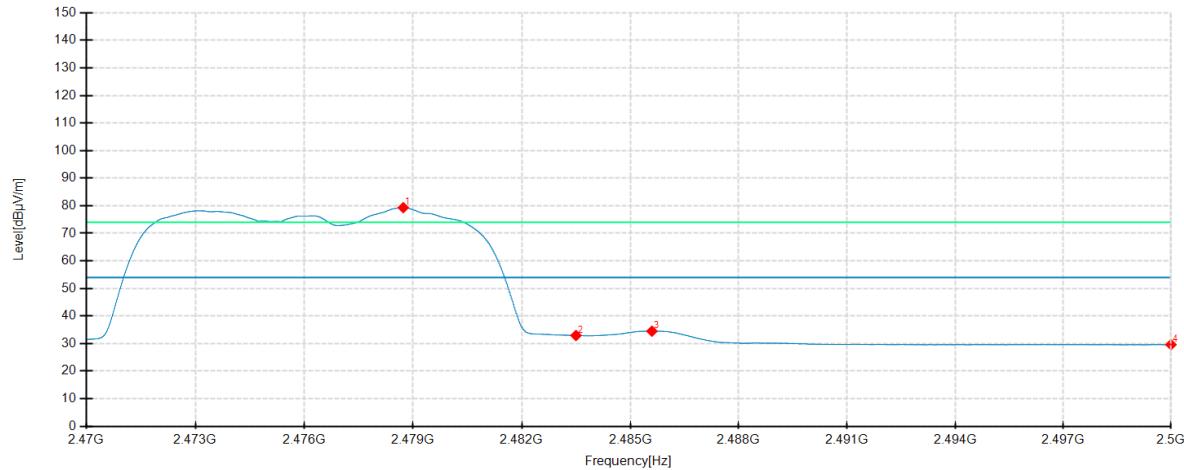

Detector mode: Average

Polarity: Vertical

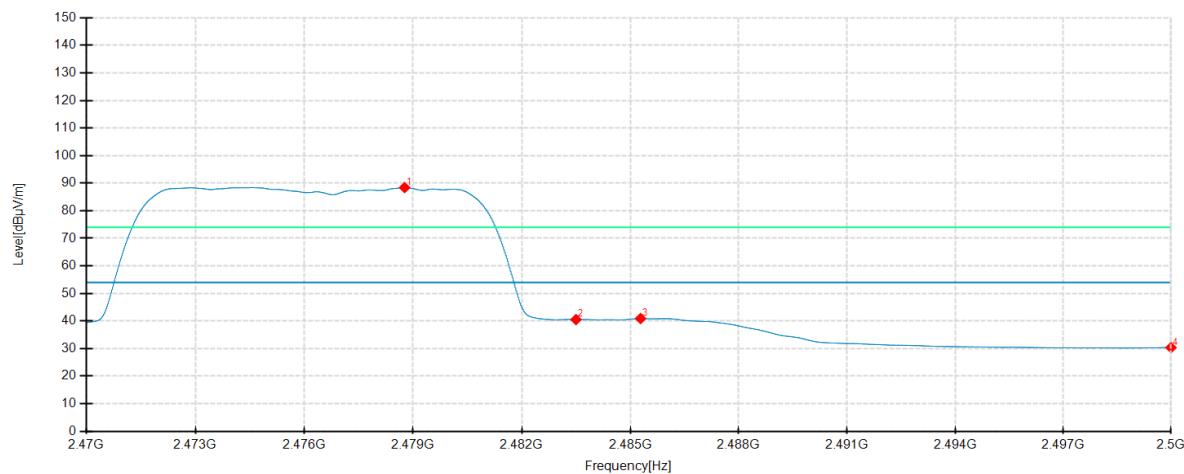

No.	Frequency MHz	Reading dB $\mu$ V/m	Level dB $\mu$ V/m	Factor dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2478.7300	83.94	79.30	-4.64	54.00	-25.30	100	110	Horizontal	No limit
2	2483.5000	37.59	32.92	-4.67	54.00	21.08	100	97	Horizontal	/
3	2485.6000	39.16	34.48	-4.68	54.00	19.52	100	84	Horizontal	/
4	2500.0000	34.39	29.60	-4.79	54.00	24.40	100	147	Horizontal	/
1	2478.7675	93.56	88.41	-5.15	54.00	-34.41	200	90	Vertical	No limit
2	2483.5000	45.65	40.52	-5.13	54.00	13.48	200	90	Vertical	/
3	2485.2850	46.02	40.89	-5.13	54.00	13.11	200	90	Vertical	/
4	2500.0000	35.43	30.34	-5.09	54.00	23.66	200	180	Vertical	/

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

## **APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM**

Please refer to the attached document E202411154120-Test Photo-FCC.

## **APPENDIX B. PHOTOGRAPH OF THE EUT**

Please refer to the attached document E202411154120-EUT photo.

----- End of Report -----