

LTE Band 12 -1	QPSK (10MHz)	Front	23130	711	1	0	24.88	25.00	1.54	0.18	1.028	0.19
					25	0	24.62	25.00	-0.24	0.15	1.091	0.16
		Back	23130	711	1	0	24.88	25.00	-0.45	0.33	1.028	0.34
					25	0	24.62	25.00	-1.67	0.30	1.091	0.33
		Left	23130	711	1	0	24.88	25.00	1.61	0.02	1.028	0.02
					25	0	24.62	25.00	0.67	0.01	1.091	0.01
		Bottom	23130	711	1	0	24.88	25.00	-0.16	0.02	1.028	0.02
					25	0	24.62	25.00	-3.30	0.01	1.091	0.01
LTE Band 17 -1	QPSK (10MHz)	Front	23800	711	1	0	24.84	25.00	2.04	0.20	1.038	0.21
					25	0	24.75	25.00	0.67	0.18	1.059	0.19
		Back	23800	711	1	0	24.84	25.00	0.36	0.35	1.038	0.36
					25	0	24.75	25.00	2.04	0.31	1.059	0.33
		Left	23800	711	1	0	24.84	25.00	-1.33	0.02	1.038	0.02
					25	0	24.75	25.00	-1.22	0.01	1.059	0.01
		Bottom	23800	711	1	0	24.84	25.00	2.12	0.02	1.038	0.02
					25	0	24.75	25.00	0.07	0.01	1.059	0.01
LTE Band 26 -1	QPSK (10MHz)	Front	26740	819	1	24	24.82	25.00	2.01	0.26	1.042	0.27
					25	0	24.53	25.00	-2.86	0.22	1.114	0.25
		Back	26740	819	1	24	24.82	25.00	-1.35	0.51	1.042	0.53
					25	0	24.53	25.00	-2.46	0.48	1.114	0.53
		Left	26740	819	1	24	24.82	25.00	1.14	0.02	1.042	0.02
					25	0	24.53	25.00	-0.86	0.01	1.114	0.01
		Bottom	26740	819	1	24	24.82	25.00	0.67	0.02	1.042	0.02
					25	0	24.53	25.00	-0.47	0.01	1.114	0.01
LTE Band 41 -1	QPSK (20MHz)	Front	39750	2506	1	0	24.62	25.00	-1.24	0.27	1.091	0.29
					50	0	24.55	25.00	0.94	0.24	1.109	0.27
		Back	39750	2506	1	0	24.62	25.00	-1.81	0.47	1.091	0.51
					50	0	24.55	25.00	0.47	0.44	1.109	0.49
		Left	39750	2506	1	0	24.62	25.00	-1.21	0.02	1.091	0.02
					50	0	24.55	25.00	0.78	0.01	1.109	0.01
		Bottom	39750	2506	1	0	24.62	25.00	0.41	0.02	1.091	0.02
					50	0	24.55	25.00	0.53	0.01	1.109	0.01

Band	Mode	Test Position with 0mm	CH.	Freq. (MHz)	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)	Limit (W/Kg)
GSM850 -2	GPRS 4 slots	Front	190	836.6	33.68	34.00	-3.62	0.32	1.074	0.34	1.60
		Back	190	836.6	33.68	34.00	0.62	0.68	1.074	0.73	
		Left	190	836.6	33.68	34.00	3.20	0.02	1.074	0.02	
		Bottom	190	836.6	33.68	34.00	-1.63	0.01	1.074	0.01	
GSM1900 -2	GPRS 4 slots	Front	661	1880	29.31	29.50	1.21	0.31	1.045	0.32	
		Back	661	1880	29.31	29.50	-2.71	0.67	1.045	0.70	
		Left	661	1880	29.31	29.50	-1.05	0.02	1.045	0.02	
		Bottom	661	1880	29.31	29.50	2.62	0.01	1.045	0.01	
WCDMA Band II -2	RMC	Front	9538	1907.6	23.86	24.00	3.29	0.32	1.033	0.33	
		Back	9538	1907.6	23.86	24.00	0.45	0.68	1.033	0.70	
		Left	9538	1907.6	23.86	24.00	0.16	0.02	1.033	0.02	
		Bottom	9538	1907.6	23.86	24.00	2.88	0.01	1.033	0.01	
WCDMA Band IV -2	RMC	Front	1450	1740	24.95	25.00	-2.22	0.29	1.012	0.29	
		Back	1450	1740	24.95	25.00	-3.48	0.58	1.012	0.59	
		Left	1450	1740	24.95	25.00	-0.03	0.02	1.012	0.02	
		Bottom	1450	1740	24.95	25.00	0.60	0.01	1.012	0.01	
WCDMA Band V -2	RMC	Front	4182	836.4	23.92	24.00	-2.34	0.15	1.019	0.15	
		Back	4182	836.4	23.92	24.00	0.12	0.30	1.019	0.31	
		Left	4182	836.4	23.92	24.00	1.14	0.02	1.019	0.02	
		Bottom	4182	836.4	23.92	24.00	1.71	0.01	1.019	0.01	
2.4G -2	802.11b	Front	06	2437	17.993	18.00	-2.11	0.12	1.002	0.12	
		Back	06	2437	17.993	18.00	-2.17	0.26	1.002	0.26	
		Right	06	2437	17.993	18.00	0.61	0.02	1.002	0.02	
		Top	06	2437	17.993	18.00	-3.16	0.01	1.002	0.01	

Band	Mode	Test Position with 0mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR1g (W/kg)	Scaling Factor	Reported SAR1g (W/kg)
LTE Band 2 -2	QPSK (20MHz)	Front	19100	1900	1	0	24.97	25.00	2.10	0.35	1.007	0.35
					50	0	24.59	25.00	-2.50	0.30	1.099	0.33
		Back	19100	1900	1	0	24.97	25.00	-1.31	0.65	1.007	0.65
					50	0	24.59	25.00	1.94	0.60	1.099	0.64
		Left	19100	1900	1	0	24.97	25.00	1.44	0.02	1.007	0.02
					50	0	24.59	25.00	3.46	0.01	1.099	0.01
LTE Band 4 -2	QPSK (20MHz)	Front	20175	1732.5	1	49	24.92	25.00	-0.68	0.32	1.019	0.33
					50	0	24.58	25.00	-1.14	0.29	1.102	0.32
		Back	20175	1732.5	1	49	24.92	25.00	2.31	0.62	1.019	0.63
					50	0	24.58	25.00	-1.81	0.59	1.102	0.60
		Left	20175	1732.5	1	49	24.92	25.00	0.42	0.02	1.019	0.02
					50	0	24.58	25.00	1.66	0.01	1.102	0.01
LTE Band 5 -2	QPSK (10MHz)	Front	20450	829	1	0	24.72	25.00	-0.77	0.12	1.067	0.13
					25	0	24.52	25.00	-1.22	0.10	1.117	0.11
		Back	20450	829	1	0	24.72	25.00	2.50	0.22	1.067	0.23
					25	0	24.52	25.00	1.02	0.18	1.117	0.20
		Left	20450	829	1	0	24.72	25.00	-2.61	0.02	1.067	0.02
					25	0	24.52	25.00	1.52	0.01	1.117	0.01
LTE Band 7 -2	QPSK (10MHz)	Front	21100	2535	1	0	24.70	25.00	1.07	0.25	1.072	0.27
					50	0	24.53	25.00	2.43	0.22	1.114	0.25
		Back	21100	2535	1	0	24.70	25.00	1.24	0.50	1.072	0.54
					50	0	24.53	25.00	-4.26	0.48	1.114	0.53
		Left	21100	2535	1	0	24.70	25.00	-2.07	0.02	1.072	0.02
					50	0	24.53	25.00	2.15	0.01	1.114	0.01
		Bottom	21100	2535	1	0	24.70	25.00	1.62	0.02	1.072	0.02
					50	0	24.53	25.00	1.34	0.01	1.114	0.01

LTE Band 12 -2	QPSK (10MHz)	Front	23130	711	1	0	24.88	25.00	-2.02	0.17	1.028	0.17
					25	0	24.62	25.00	1.60	0.15	1.091	0.16
		Back	23130	711	1	0	24.88	25.00	-2.41	0.32	1.028	0.33
					25	0	24.62	25.00	-2.09	0.30	1.091	0.33
		Left	23130	711	1	0	24.88	25.00	1.55	0.02	1.028	0.02
					25	0	24.62	25.00	-2.04	0.01	1.091	0.01
		Bottom	23130	711	1	0	24.88	25.00	1.07	0.02	1.028	0.02
					25	0	24.62	25.00	1.84	0.01	1.091	0.01
		Front	23800	711	1	0	24.84	25.00	-1.91	0.18	1.038	0.19
					25	0	24.75	25.00	-2.15	0.16	1.059	0.17
LTE Band 17 -2	QPSK (10MHz)	Back	23800	711	1	0	24.84	25.00	2.68	0.33	1.038	0.34
					25	0	24.75	25.00	1.46	0.31	1.059	0.33
		Left	23800	711	1	0	24.84	25.00	-2.67	0.02	1.038	0.02
					25	0	24.75	25.00	-2.11	0.01	1.059	0.01
		Bottom	23800	711	1	0	24.84	25.00	2.64	0.02	1.038	0.02
					25	0	24.75	25.00	-0.24	0.01	1.059	0.01
LTE Band 26 -2	QPSK (10MHz)	Front	26740	819	1	24	24.82	25.00	3.07	0.24	1.042	0.25
					25	0	24.53	25.00	-3.14	0.21	1.114	0.23
		Back	26740	819	1	24	24.82	25.00	2.64	0.48	1.042	0.50
					25	0	24.53	25.00	1.87	0.42	1.114	0.47
		Left	26740	819	1	24	24.82	25.00	-3.52	0.02	1.042	0.02
					25	0	24.53	25.00	-2.42	0.01	1.114	0.01
		Bottom	26740	819	1	24	24.82	25.00	1.09	0.02	1.042	0.02
					25	0	24.53	25.00	-0.51	0.01	1.114	0.01
LTE Band 41 -2	QPSK (20MHz)	Front	39750	2506	1	0	24.62	25.00	-2.34	0.23	1.091	0.25
					50	0	24.55	25.00	-1.59	0.21	1.109	0.23
		Back	39750	2506	1	0	24.62	25.00	-2.12	0.45	1.091	0.49
					50	0	24.55	25.00	2.06	0.41	1.109	0.45
		Left	39750	2506	1	0	24.62	25.00	-2.90	0.02	1.091	0.02
					50	0	24.55	25.00	-2.68	0.01	1.109	0.01
		Bottom	39750	2506	1	0	24.62	25.00	3.09	0.02	1.091	0.02
					50	0	24.55	25.00	-1.10	0.01	1.109	0.01


Note:

- Per KDB447498 D04, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
- Per KDB447498 D04, body-worn with hotspot use is evaluated with the device positioned at 10 mm from a flat phantom filled with head tissue-equivalent medium.
- Per KDB447498 D04, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor = $10^{[(\text{tune-up limit power(dBm)} - \text{Ave. power (dBm)})/10]}$, where tune-up limit is the maximum rated power among all production units.
Reported SAR(W/kg) = Measured SAR (W/kg) * Scaling Factor.
- Per KDB865664D01 v01r04 perform a second repeated measurement only the ratio of largest to smallest SAR for the original and first repeated measurement is >1.20 or when the original or repeated measurement is $\geq 1.45W/kg$.
- Perform a second measurement only if the original, first and second repeated measurement is $\geq 1.5w/kg$ and the ratio of largest to smallest SAR for the original, first and second repeated measurement is >1.20 .

10.4. Simultaneous Transmission Conclusion

Multi-Band Simultaneous Transmission Considerations

According to FCC KDB Publication 447498 D01v05r02, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

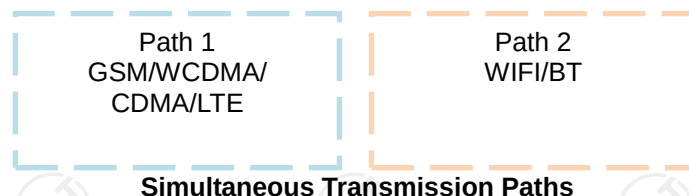

Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Configuration	Head	Body-Worn	Hotspot
1	GSM850/1900(Voice)+WIFI(2.4/5G)	YES	YES	NO
2	GPRS 850/1900(DATA)+WIFI(2.4)	NO	YES	YES
3	GPRS 850/1900(DATA)+WIFI(5G)	NO	YES	NO
4	WCDMA+ WIFI(2.4)	YES	YES	YES
5	WCDMA+ WIFI(5G)	YES	YES	NO
6	LTE+WIFI(2.4)	YES	YES	YES
7	LTE+WIFI(5G)	YES	YES	NO
8	GSM850/1900(Voice)+BT	YES	YES	NO
9	GPRS/EDGE 850/1900(DATA)+BT	YES	YES	NO
10	WCDMA+ BT	YES	YES	NO
11	LTE+BT	YES	YES	NO

10.5. SAR Simultaneous Transmission Analysis

Band	Test Position	Scaled SAR				Σ SAR (W/kg)	SPLSR	Remark
		Head	WIFI 2.4G	WIFI 5 G	BT			
GSM850 (voice) -1	Front	0.19	0.17	0.15	0.02	0.36	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
GSM1900 (voice) -1	Front	0.31	0.17	0.15	0.02	0.48	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
WCDMA Band II -1	Front	0.39	0.17	0.15	0.02	0.56	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
WCDMA Band IV -1	Front	0.33	0.17	0.15	0.02	0.50	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
WCDMA Band V -1	Front	0.17	0.17	0.15	0.02	0.34	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg)	SPLSR	Remark
			Head	WIFI 2.4G	WIFI 5G	Bluetooth			
LTE Band 2 QPSK (20MHz) -1	Front	1	0.35	0.17	0.15	0.02	0.52	N/A	N/A
		50	0.33	0.17	0.15	0.02	0.50	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 4 QPSK (20MHz) -1	Front	1	0.34	0.17	0.15	0.02	0.51	N/A	N/A
		50	0.33	0.17	0.15	0.02	0.50	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 5 QPSK (10MHz) -1	Front	1	0.14	0.17	0.15	0.02	0.31	N/A	N/A
		25	0.11	0.17	0.15	0.02	0.28	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 7 QPSK (20MHz) -1	Front	1	0.27	0.17	0.15	0.02	0.44	N/A	N/A
		50	0.23	0.17	0.15	0.02	0.40	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 12 QPSK (10MHz) -1	Front	1	0.20	0.17	0.15	0.02	0.37	N/A	N/A
		25	0.15	0.17	0.15	0.02	0.32	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A

LTE Band 17 QPSK (10MHz) -1	Front	1	0.17	0.17	0.15	0.02	0.34	N/A	N/A
		25	0.11	0.17	0.15	0.02	0.28	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 26 QPSK (10MHz) -1	Front	1	0.27	0.17	0.15	0.02	0.44	N/A	N/A
		25	0.23	0.17	0.15	0.02	0.40	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 41 QPSK (20MHz) -1	Front	1	0.24	0.17	0.15	0.02	0.41	N/A	N/A
		50	0.21	0.17	0.15	0.02	0.38	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A

Band	Test Position	Scaled SAR				Σ SAR (W/kg)	SPLSR	Remark
		Body-Worn	WIFI 2.4G	WIFI 5G	BT			
GSM850 (voice) -1	Front	0.19	0.17	0.15	0.02	0.36	N/A	N/A
	Back	0.34	0.27	0.26	0.04	0.61	N/A	N/A
GSM850 (GPRS 4slot) -1	Front	0.35	0.17	0.15	0.02	0.52	N/A	N/A
	Back	0.71	0.27	0.26	0.04	0.98	N/A	N/A
GSM1900 (voice) -1	Front	0.31	0.17	0.15	0.02	0.48	N/A	N/A
	Back	0.57	0.27	0.26	0.04	0.84	N/A	N/A
GSM1900 (GPRS 4slot) -1	Front	0.41	0.17	0.15	0.02	0.58	N/A	N/A
	Back	0.72	0.27	0.26	0.04	0.99	N/A	N/A
WCDMA Band II -1	Front	0.39	0.17	0.15	0.02	0.56	N/A	N/A
	Back	0.70	0.27	0.26	0.04	0.97	N/A	N/A
WCDMA Band IV -1	Front	0.33	0.17	0.15	0.02	0.50	N/A	N/A
	Back	0.59	0.27	0.26	0.04	0.86	N/A	N/A
WCDMA Band V -1	Front	0.17	0.17	0.15	0.02	0.34	N/A	N/A
	Back	0.33	0.27	0.26	0.04	0.60	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg)	SPLSR	Remark
			Body-Worn	WIFI 2.4G	WIFI 5G	Bluetooth			
LTE Band 2 QPSK (20MHz) -1	Front	1	0.35	0.17	0.15	0.02	0.52	N/A	N/A
		50	0.33	0.17	0.15	0.02	0.50	N/A	N/A
	Back	1	0.65	0.27	0.26	0.04	0.92	N/A	N/A
		50	0.64	0.27	0.26	0.04	0.91	N/A	N/A
LTE Band 4 QPSK (20MHz) -1	Front	1	0.34	0.17	0.15	0.02	0.51	N/A	N/A
		50	0.33	0.17	0.15	0.02	0.50	N/A	N/A
	Back	1	0.64	0.27	0.26	0.04	0.91	N/A	N/A
		50	0.63	0.27	0.26	0.04	0.90	N/A	N/A
LTE Band 5 QPSK (10MHz) -1	Front	1	0.14	0.17	0.15	0.02	0.31	N/A	N/A
		25	0.11	0.17	0.15	0.02	0.28	N/A	N/A
	Back	1	0.25	0.27	0.26	0.04	0.52	N/A	N/A
		25	0.22	0.27	0.26	0.04	0.49	N/A	N/A
LTE Band 7 QPSK (20MHz) -1	Front	1	0.27	0.17	0.15	0.02	0.44	N/A	N/A
		50	0.23	0.17	0.15	0.02	0.40	N/A	N/A
	Back	1	0.54	0.27	0.26	0.04	0.81	N/A	N/A
		50	0.52	0.27	0.26	0.04	0.79	N/A	N/A
LTE Band 12 QPSK (10MHz) -1	Front	1	0.20	0.17	0.15	0.02	0.37	N/A	N/A
		25	0.15	0.17	0.15	0.02	0.32	N/A	N/A
	Back	1	0.30	0.27	0.26	0.04	0.57	N/A	N/A
		25	0.24	0.27	0.26	0.04	0.51	N/A	N/A
LTE Band 17 QPSK (10MHz) -1	Front	1	0.17	0.17	0.15	0.02	0.34	N/A	N/A
		25	0.11	0.17	0.15	0.02	0.28	N/A	N/A
	Back	1	0.32	0.27	0.26	0.04	0.59	N/A	N/A
		25	0.29	0.27	0.26	0.04	0.56	N/A	N/A
LTE Band 26 QPSK (10MHz) -1	Front	1	0.27	0.17	0.15	0.02	0.44	N/A	N/A
		25	0.23	0.17	0.15	0.02	0.40	N/A	N/A
	Back	1	0.52	0.27	0.26	0.04	0.79	N/A	N/A
		25	0.52	0.27	0.26	0.04	0.79	N/A	N/A
LTE Band 41 QPSK (20MHz) -1	Front	1	0.24	0.17	0.15	0.02	0.41	N/A	N/A
		50	0.21	0.17	0.15	0.02	0.38	N/A	N/A
	Back	1	0.46	0.27	0.26	0.04	0.73	N/A	N/A
		50	0.43	0.27	0.26	0.04	0.70	N/A	N/A

Band	Test Position	Scaled SAR		Σ SAR (W/kg)	SPLSR	Remark
		Hotspot	WIFI 2.4G			
GSM850 (GPRS) -1	Front	0.39	0.14	0.53	N/A	N/A
	Back	0.76	0.29	1.05	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
GSM1900 (GPRS) -1	Front	0.40	0.14	0.54	N/A	N/A
	Back	0.75	0.29	1.04	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
WCDMA Band II -1	Front	0.36	0.14	0.50	N/A	N/A
	Back	0.73	0.29	1.02	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
WCDMA Band IV -1	Front	0.30	0.14	0.44	N/A	N/A
	Back	0.61	0.29	0.90	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
WCDMA Band V -1	Front	0.17	0.14	0.31	N/A	N/A
	Back	0.33	0.29	0.62	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A

Band	Test Position	RB allocation	Scaled		Σ SAR (W/kg)	SPLSR	Remark
			Hotspot	WIFI2.4G			
LTE Band 2 QPSK (20MHz) -1	Front	1	0.38	0.14	0.52	N/A	N/A
		50	0.35	0.14	0.49	N/A	N/A
	Back	1	0.68	0.29	0.97	N/A	N/A
		50	0.67	0.29	0.96	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A
LTE Band 4 QPSK (20MHz) -1	Front	1	0.38	0.14	0.52	N/A	N/A
		50	0.36	0.14	0.50	N/A	N/A
	Back	1	0.68	0.29	0.97	N/A	N/A
		50	0.67	0.29	0.96	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A
LTE Band 5 QPSK (10MHz) -1	Front	1	0.16	0.14	0.30	N/A	N/A
		25	0.11	0.14	0.25	N/A	N/A
	Back	1	0.27	0.29	0.56	N/A	N/A
		25	0.22	0.29	0.51	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A

LTE Band 7 QPSK (20MHz) -1	Front	1	0.30	0.14	0.44	N/A	N/A
		50	0.28	0.14	0.42	N/A	N/A
	Back	1	0.57	0.29	0.86	N/A	N/A
		50	0.56	0.29	0.85	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A
LTE Band 12 QPSK (10MHz) -1	Front	1	0.19	0.14	0.33	N/A	N/A
		25	0.16	0.14	0.30	N/A	N/A
	Back	1	0.34	0.29	0.63	N/A	N/A
		25	0.33	0.29	0.62	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A
LTE Band 17 QPSK (10MHz) -1	Front	1	0.21	0.14	0.35	N/A	N/A
		25	0.19	0.14	0.33	N/A	N/A
	Back	1	0.36	0.29	0.65	N/A	N/A
		25	0.33	0.29	0.62	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A

LTE Band 26 QPSK (10MHz) -1	Front	1	0.27	0.14	0.41	N/A	N/A
		25	0.25	0.14	0.39	N/A	N/A
	Back	1	0.53	0.29	0.82	N/A	N/A
		25	0.53	0.29	0.82	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A
LTE Band 41 QPSK (20MHz) -1	Front	1	0.29	0.14	0.43	N/A	N/A
		50	0.27	0.14	0.41	N/A	N/A
	Back	1	0.51	0.29	0.80	N/A	N/A
		50	0.49	0.29	0.78	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A

Band	Test Position	Scaled SAR				Σ SAR (W/kg)	SPLSR	Remark
		Head	WIFI 2.4G	WIFI 5 G	BT			
GSM850 (voice) -2	Front	0.15	0.14	0.10	0.02	0.29	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
GSM1900 (voice) -2	Front	0.26	0.14	0.10	0.02	0.40	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
WCDMA Band II -2	Front	0.35	0.14	0.10	0.02	0.49	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
WCDMA Band IV -2	Front	0.30	0.14	0.10	0.02	0.44	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A
WCDMA Band V -2	Front	0.14	0.14	0.10	0.02	0.28	N/A	N/A
	Botoom	0.01	0.01	0.01	0.01	0.02	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg)	SPLSR	Remark
			Head	WIFI 2.4G	WIFI 5G	Bluetooth			
LTE Band 2 QPSK (20MHz) -2	Front	1	0.32	0.14	0.10	0.02	0.46	N/A	N/A
		50	0.32	0.14	0.10	0.02	0.46	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 4 QPSK (20MHz) -2	Front	1	0.31	0.14	0.10	0.02	0.45	N/A	N/A
		50	0.30	0.14	0.10	0.02	0.44	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 5 QPSK (10MHz) -2	Front	1	0.11	0.14	0.10	0.02	0.25	N/A	N/A
		25	0.10	0.14	0.10	0.02	0.24	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 7 QPSK (20MHz) -2	Front	1	0.23	0.14	0.10	0.02	0.37	N/A	N/A
		50	0.22	0.14	0.10	0.02	0.36	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 12 QPSK (10MHz) -2	Front	1	0.15	0.14	0.10	0.02	0.29	N/A	N/A
		25	0.12	0.14	0.10	0.02	0.26	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A

LTE Band 17 QPSK (10MHz) -2	Front	1	0.12	0.14	0.10	0.02	0.26	N/A	N/A
		25	0.11	0.14	0.10	0.02	0.25	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 26 QPSK (10MHz) -2	Front	1	0.26	0.14	0.10	0.02	0.40	N/A	N/A
		25	0.22	0.14	0.10	0.02	0.36	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		25	0.01	0.01	0.01	0.01	0.02	N/A	N/A
LTE Band 41 QPSK (20MHz) -2	Front	1	0.22	0.14	0.10	0.02	0.36	N/A	N/A
		50	0.18	0.14	0.10	0.02	0.32	N/A	N/A
	Bottom	1	0.02	0.01	0.01	0.01	0.03	N/A	N/A
		50	0.01	0.01	0.01	0.01	0.02	N/A	N/A

Band	Test Position	Scaled SAR				Σ SAR (W/kg)	SPLSR	Remark
		Body-Worn	WIFI 2.4G	WIFI 5G	BT			
GSM850 (voice) -2	Front	0.15	0.14	0.12	0.02	0.29	N/A	N/A
	Back	0.30	0.24	0.23	0.03	0.54	N/A	N/A
GSM850 (GPRS 4slot) -2	Front	0.32	0.14	0.12	0.02	0.46	N/A	N/A
	Back	0.67	0.24	0.23	0.03	0.91	N/A	N/A
GSM1900 (voice) -2	Front	0.26	0.14	0.12	0.02	0.40	N/A	N/A
	Back	0.53	0.24	0.23	0.03	0.77	N/A	N/A
GSM1900 (GPRS 4slot) -2	Front	0.37	0.14	0.12	0.02	0.51	N/A	N/A
	Back	0.68	0.24	0.23	0.03	0.92	N/A	N/A
WCDMA Band II -2	Front	0.35	0.14	0.12	0.02	0.49	N/A	N/A
	Back	0.66	0.24	0.23	0.03	0.90	N/A	N/A
WCDMA Band IV -2	Front	0.30	0.14	0.12	0.02	0.44	N/A	N/A
	Back	0.56	0.24	0.23	0.03	0.80	N/A	N/A
WCDMA Band V -2	Front	0.14	0.14	0.12	0.02	0.28	N/A	N/A
	Back	0.30	0.24	0.23	0.03	0.54	N/A	N/A

Band	Test Position	RB allocation	Scaled				Σ SAR (W/kg)	SPLSR	Remark
			Body-Worn	WIFI 2.4G	WIFI 5G	Bluetooth			
LTE Band 2 QPSK (20MHz) -2	Front	1	0.32	0.14	0.12	0.02	0.46	N/A	N/A
		50	0.32	0.14	0.12	0.02	0.46	N/A	N/A
	Back	1	0.62	0.24	0.23	0.03	0.86	N/A	N/A
		50	0.60	0.24	0.23	0.03	0.84	N/A	N/A
LTE Band 4 QPSK (20MHz) -2	Front	1	0.31	0.14	0.12	0.02	0.45	N/A	N/A
		50	0.30	0.14	0.12	0.02	0.44	N/A	N/A
	Back	1	0.61	0.24	0.23	0.03	0.85	N/A	N/A
		50	0.60	0.24	0.23	0.03	0.84	N/A	N/A
LTE Band 5 QPSK (10MHz) -2	Front	1	0.11	0.14	0.12	0.02	0.25	N/A	N/A
		25	0.10	0.14	0.12	0.02	0.24	N/A	N/A
	Back	1	0.21	0.24	0.23	0.03	0.45	N/A	N/A
		25	0.20	0.24	0.23	0.03	0.44	N/A	N/A
LTE Band 7 QPSK (20MHz) -2	Front	1	0.23	0.14	0.12	0.02	0.37	N/A	N/A
		50	0.22	0.14	0.12	0.02	0.36	N/A	N/A
	Back	1	0.51	0.24	0.23	0.03	0.75	N/A	N/A
		50	0.49	0.24	0.23	0.03	0.73	N/A	N/A
LTE Band 12 QPSK (10MHz) -2	Front	1	0.15	0.14	0.12	0.02	0.29	N/A	N/A
		25	0.12	0.14	0.12	0.02	0.26	N/A	N/A
	Back	1	0.26	0.24	0.23	0.03	0.50	N/A	N/A
		25	0.23	0.24	0.23	0.03	0.47	N/A	N/A
LTE Band 17 QPSK (10MHz) -2	Front	1	0.12	0.14	0.12	0.02	0.26	N/A	N/A
		25	0.11	0.14	0.12	0.02	0.25	N/A	N/A
	Back	1	0.30	0.24	0.23	0.03	0.54	N/A	N/A
		25	0.26	0.24	0.23	0.03	0.50	N/A	N/A
LTE Band 26 QPSK (10MHz) -2	Front	1	0.26	0.14	0.12	0.02	0.40	N/A	N/A
		25	0.22	0.14	0.12	0.02	0.36	N/A	N/A
	Back	1	0.47	0.24	0.23	0.03	0.71	N/A	N/A
		25	0.45	0.24	0.23	0.03	0.69	N/A	N/A
LTE Band 41 QPSK (20MHz) -2	Front	1	0.22	0.14	0.12	0.02	0.36	N/A	N/A
		50	0.18	0.14	0.12	0.02	0.32	N/A	N/A
	Back	1	0.44	0.24	0.23	0.03	0.68	N/A	N/A
		50	0.41	0.24	0.23	0.03	0.65	N/A	N/A

Band	Test Position	Scaled SAR		Σ SAR (W/kg)	SPLSR	Remark
		Hotspot	WIFI 2.4G			
GSM850 (GPRS) -2	Front	0.34	0.12	0.46	N/A	N/A
	Back	0.73	0.26	0.99	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
GSM1900 (GPRS) -2	Front	0.32	0.12	0.44	N/A	N/A
	Back	0.70	0.26	0.96	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
WCDMA Band II -2	Front	0.33	0.12	0.45	N/A	N/A
	Back	0.70	0.26	0.96	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
WCDMA Band IV -2	Front	0.29	0.12	0.41	N/A	N/A
	Back	0.59	0.26	0.85	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A
WCDMA Band V -2	Front	0.15	0.12	0.27	N/A	N/A
	Back	0.31	0.26	0.57	N/A	N/A
	Left	0.02	/	0.02	N/A	N/A
	Bottom	0.01	/	0.01	N/A	N/A
	Right	/	0.02	0.02	N/A	N/A
	Top	/	0.01	0.01	N/A	N/A

Band	Test Position	RB allocation	Scaled		Σ SAR (W/kg)	SPLSR	Remark
			Hotspot	WIFI2.4G			
LTE Band 2 QPSK (20MHz) -2	Front	1	0.35	0.12	0.47	N/A	N/A
		50	0.33	0.12	0.45	N/A	N/A
	Back	1	0.65	0.26	0.91	N/A	N/A
		50	0.64	0.26	0.90	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A
LTE Band 4 QPSK (20MHz) -2	Front	1	0.33	0.12	0.45	N/A	N/A
		50	0.32	0.12	0.44	N/A	N/A
	Back	1	0.63	0.26	0.89	N/A	N/A
		50	0.60	0.26	0.86	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A
LTE Band 5 QPSK (10MHz) -2	Front	1	0.13	0.12	0.25	N/A	N/A
		25	0.11	0.12	0.23	N/A	N/A
	Back	1	0.23	0.26	0.49	N/A	N/A
		25	0.20	0.26	0.46	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A

LTE Band 7 QPSK (20MHz) -2	Front	1	0.27	0.12	0.39	N/A	N/A
		50	0.25	0.12	0.37	N/A	N/A
	Back	1	0.54	0.26	0.80	N/A	N/A
		50	0.53	0.26	0.79	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50		0.01	0.01	N/A	N/A
LTE Band 12 QPSK (10MHz) -2	Front	1	0.17	0.12	0.29	N/A	N/A
		25	0.16	0.12	0.28	N/A	N/A
	Back	1	0.33	0.26	0.59	N/A	N/A
		25	0.33	0.26	0.59	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A
LTE Band 17 QPSK (10MHz) -2	Front	1	0.19	0.12	0.31	N/A	N/A
		25	0.17	0.12	0.29	N/A	N/A
	Back	1	0.34	0.26	0.60	N/A	N/A
		25	0.33	0.26	0.59	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A

LTE Band 26 QPSK (10MHz) -2	Front	1	0.25	0.12	0.37	N/A	N/A
		25	0.23	0.12	0.35	N/A	N/A
	Back	1	0.50	0.26	0.76	N/A	N/A
		25	0.47	0.26	0.73	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		25	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		25	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		25	/	0.01	0.01	N/A	N/A
LTE Band 41 QPSK (20MHz) -2	Front	1	0.25	0.12	0.37	N/A	N/A
		50	0.23	0.12	0.35	N/A	N/A
	Back	1	0.49	0.26	0.75	N/A	N/A
		50	0.45	0.26	0.71	N/A	N/A
	Left	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Bottom	1	0.02	/	0.02	N/A	N/A
		50	0.01	/	0.01	N/A	N/A
	Right	1	/	0.02	0.02	N/A	N/A
		50	/	0.02	0.02	N/A	N/A
	Top	1	/	0.01	0.01	N/A	N/A
		50	/	0.01	0.01	N/A	N/A

Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore measured volumetric simultaneous SAR summation is not required per FCC KDB Publication 447498 D01v05r02.

10.6. Measurement Uncertainty (450MHz-3GHz)

UNCERTAINTY EVALUATION FOR HEADSET SAR									
Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
Measurement system									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
Test sample related									
Test sample positioning	7.2.2.4.4	2.6	N	1	1	1	2.60	2.60	∞
Device holder uncertainty	7.2.2.4.2 7.2.2.4.3	3	N	1	1	1	3.00	3.00	∞
output power variation-SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	7.2.5	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.83	10.54	
Expanded uncertainty (95%CONFIDENCEINTERVAL)			k				21.26	21.08	

UNCERTAINTY FOR PERFORMANCE CHECK

Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
Measurement system									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	0.00	0.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
Dipole									
Deviation of experimental source from numerical source		4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance		2	R	$\sqrt{3}$	1	1			∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.15	10.05	
Expanded uncertainty (95%CONFIDENCEINTE RVAL			k				20.29	20.10	

10.7. Test Equipment List

Test Equipment	Manufacturer	Model	Serial Number	Calibration	
				Calibration Date (D.M.Y)	Calibration Due (D.M.Y)
PC	Lenovo	H3050	N/A	N/A	N/A
Signal Generator	Agilent	N5182A	MY47070282	Jul. 04, 2022	Jul. 03, 2023
Multimeter	Keithley	Multimeter 2000	4078275	Jul. 04, 2022	Jul. 03, 2023
Network Analyzer	Agilent	8753E	US38432457	Jul. 04, 2022	Jul. 03, 2023
Wideband Radio Communication Tester	R&S	CMW500	114220	Jul. 04, 2022	Jul. 03, 2023
Power Meter	Agilent	E4418B	GB43312526	Jul. 04, 2022	Jul. 03, 2023
Power Meter	Agilent	E4416A	MY45101555	Jul. 04, 2022	Jul. 03, 2023
Power Meter	Agilent	N1912A	MY50001018	Jul. 04, 2022	Jul. 03, 2023
Power Sensor	Agilent	E9301A	MY41497725	Jul. 04, 2022	Jul. 03, 2023
Power Sensor	Agilent	E9327A	MY44421198	Jul. 04, 2022	Jul. 03, 2023
Power Sensor	Agilent	E9323A	MY53070005	Jul. 04, 2022	Jul. 03, 2023
Power Amplifier	PE	PE15A4019	112342	N/A	N/A
Directional Coupler	Agilent	722D	MY52180104	N/A	N/A
Attenuator	Chensheng	FF779	134251	N/A	N/A
E-Field PROBE	MVG	SSE2	SN 25/22 EPGO375	Jun. 29, 2022	Jun. 28, 2023
DIPOLE 750	MVG	SID750	SN 16/15 DIP 0G750-368	Jun. 05, 2021	Jun. 04, 2024
DIPOLE 835	MVG	SID835	SN 16/15 DIP 0G835-369	Jun. 05, 2021	Jun. 04, 2024
DIPOLE 1800	MVG	SID 1800	SN 16/15 DIP 1G800-371	Jun. 05, 2021	Jun. 04, 2024
DIPOLE 1900	MVG	SID1900	SN 16/15 DIP 1G900-372	Jun. 05, 2021	Jun. 04, 2024
DIPOLE 2450	MVG	SID 2450	SN 16/15 DIP 2G450-374	Jun. 05, 2021	Jun. 04, 2024
DIPOLE 2600	MVG	SID 2600	SN 16/15 DIP 2G600-375	Jun. 05, 2021	Jun. 04, 2024
DIPOLE 5G	MVG	SID 5G	SN 13/14 WGA32	May. 15, 2021	May. 14, 2024
Limesar Dielectric Probe	MVG	SCLMP	SN 19/15 OCPG71	Jun. 05, 2021	Jun. 04, 2024
Communication Antenna	MVG	ANTA59	SN 39/14 ANTA59	N/A	N/A
Mobile Phone Position Device	MVG	MSH101	SN 19/15 MSH101	N/A	N/A
Dummy Probe	MVG	DP66	SN 13/15 DP66	N/A	N/A
SAM PHANTOM	MVG	SAM120	SN 19/15 SAM120	N/A	N/A
PHANTOM TABLE	MVG	TABP101	SN 19/15 TABP101	N/A	N/A
Robot TABLE	MVG	TABP61	SN 19/15 TABP61	N/A	N/A
6 AXIS ROBOT	KUKA	KR6-R900	501822	N/A	N/A

Note:1.N/A means this equipment no need to calibrate

2.Each Time means this device need to calibrate every use time

3. The dipole was not damaged properly repaired.

4. The measured SAR deviates from the calibrated SAR value by less than 10%

5. The most recent return-loss result meets the required 20 dB minimum return-loss requirement

6. The most recent measurement of the real or imaginary parts of the impedance deviates by less than 5 Ω from the previous measurement.

11. System Check Results

Date of measurement: 11/04/2022 Test mode: 750 (Head)


Product Description: Validation

Dipole Model: SID750



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	1.71
Frequency (MHz)	750.000000
Relative permittivity (real part)	40.761260
Relative permittivity (imaginary part)	17.130904
Conductivity (S/m)	0.931220
Variation (%)	-0.090000
SAR 10g (W/Kg)	0.540421
SAR 1g (W/Kg)	0.804230


SURFACE SAR

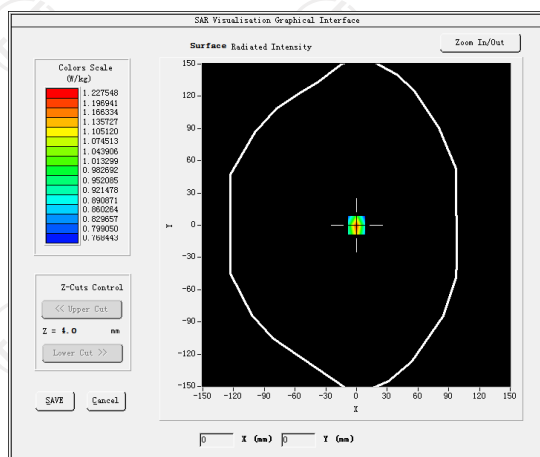

VOLUME SAR

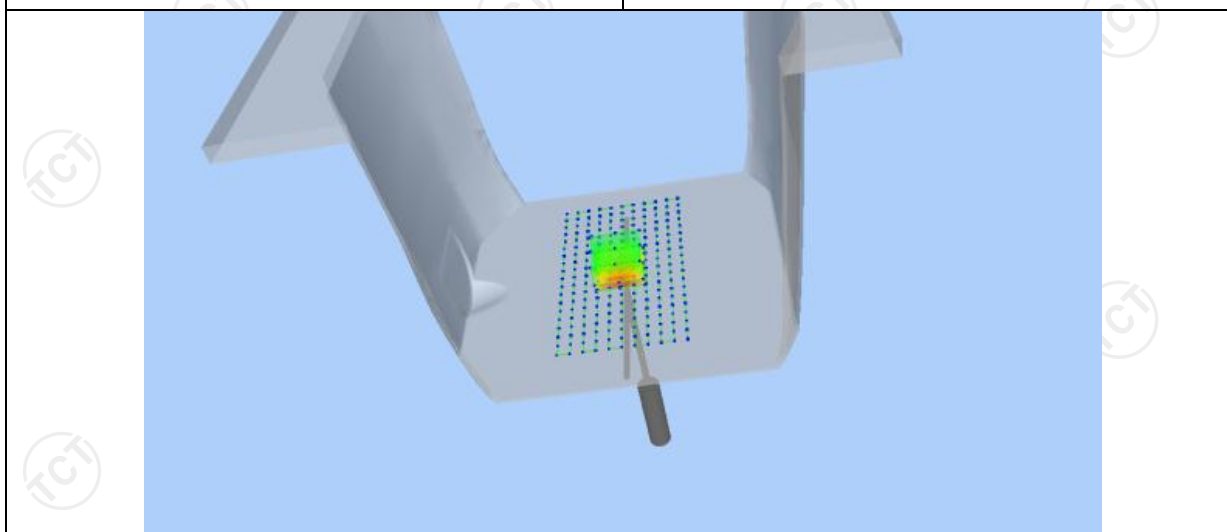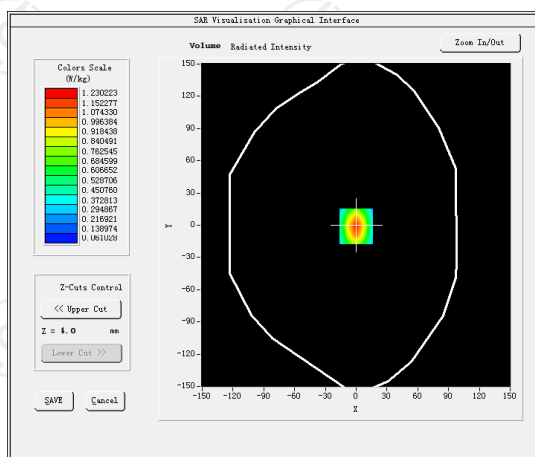

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0014	0.4404	0.3024	0.2342	0.2221

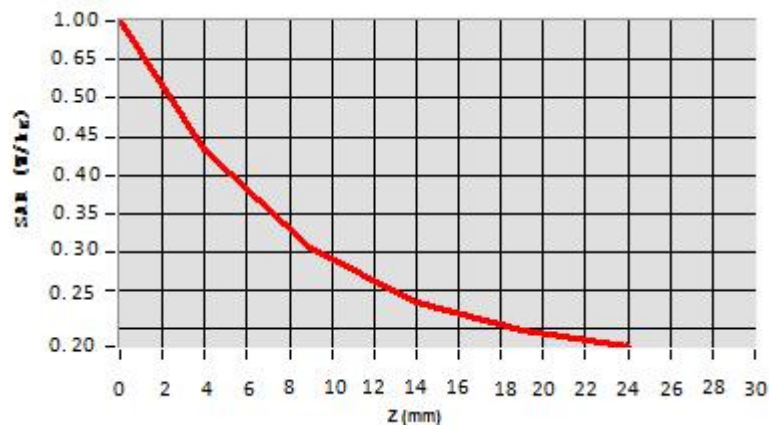

Hot spot position



Date of measurement: 11/11/2022 Test mode: 835 (Head)


Product Description: Validation

Dipole Model: SID835



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	1.80
Frequency (MHz)	835.000000
Relative permittivity (real part)	41.417760
Relative permittivity (imaginary part)	18.129852
Conductivity (S/m)	0.874923
Variation (%)	-0.090000
SAR 10g (W/Kg)	0.570250
SAR 1g (W/Kg)	0.886135


SURFACE SAR

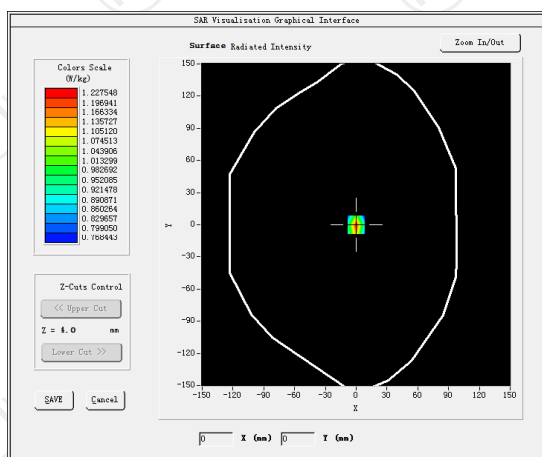

VOLUME SAR

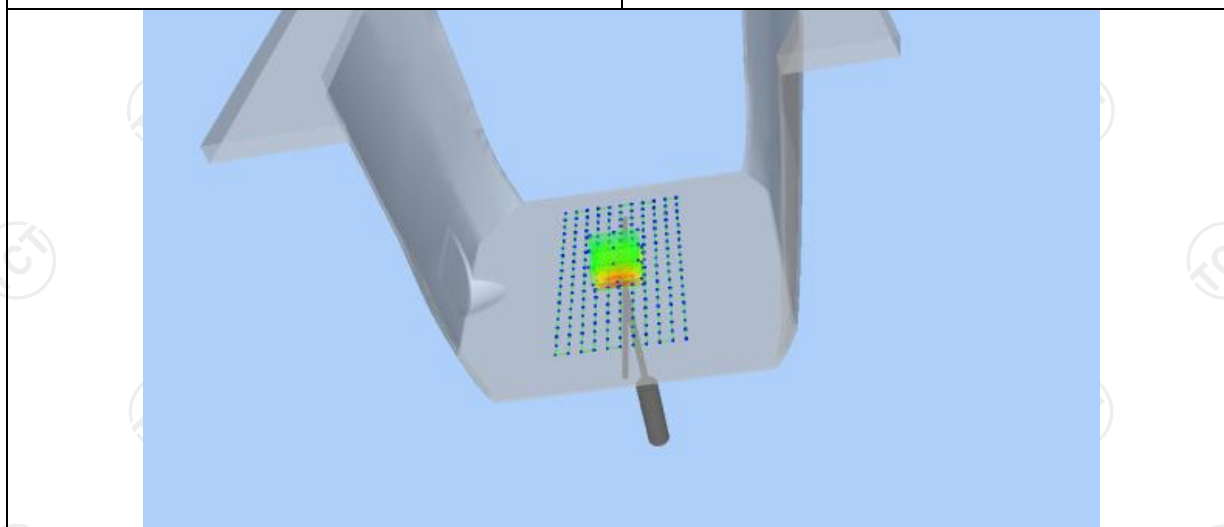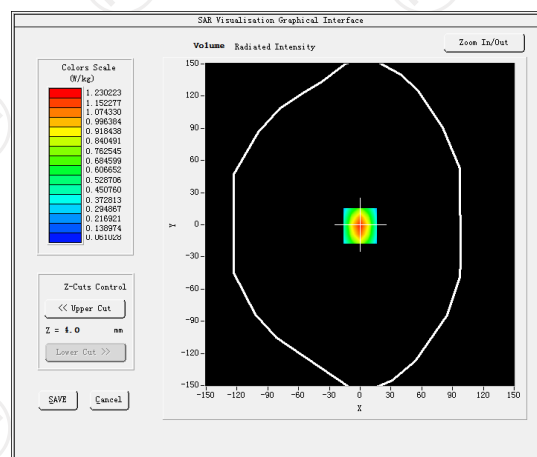

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8625	0.5302	0.2594	0.1302	0.1025

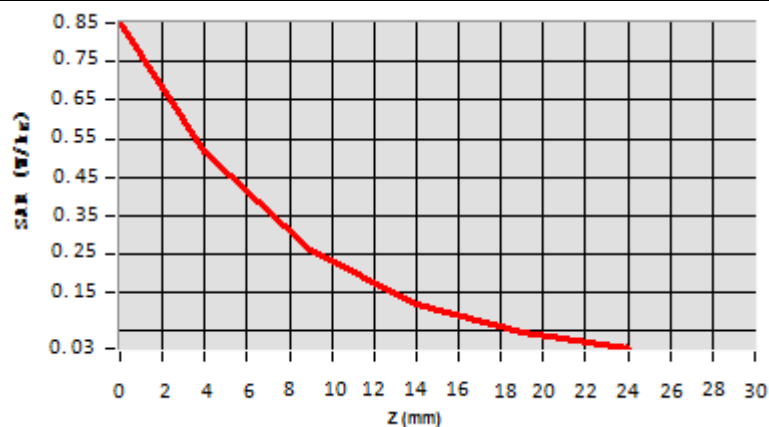

Hot spot position



Date of measurement: 11/15/2022 Test mode: 1800MHz (Head)


Product Description: Validation

Dipole Model: SID1800



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.08
Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.070000
Relative permittivity (imaginary part)	14.000000
Conductivity (S/m)	1.380000
Variation (%)	1.250000
SAR 10g (W/Kg)	2.201458
SAR 1g (W/Kg)	3.752497


SURFACE SAR

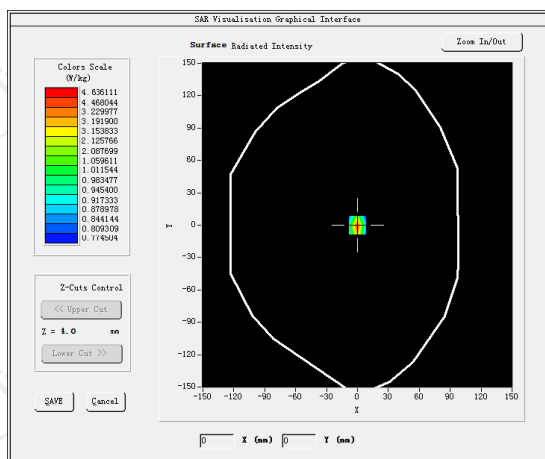

VOLUME SAR

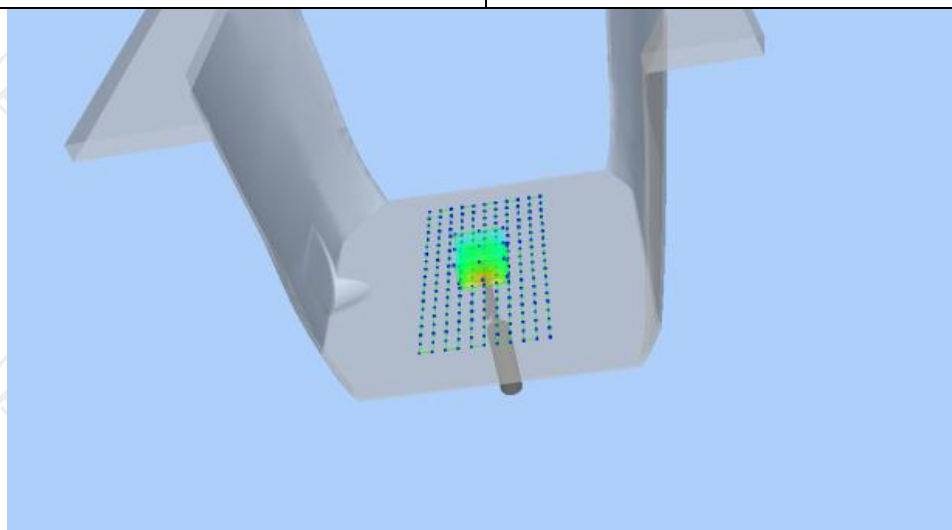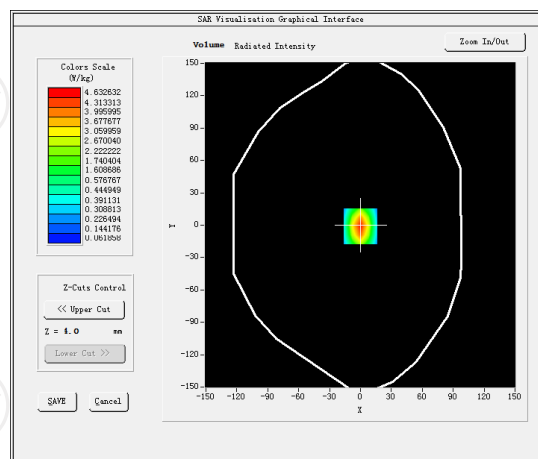

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.7625	2.6254	2.0245	1.6254	1.0214

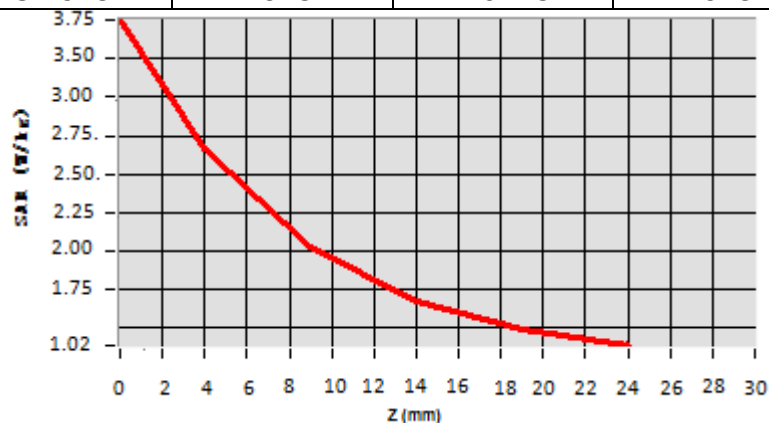

Hot spot position



Date of measurement: 11/18/2022 Test mode: 1900MHz (Head)


Product Description: Validation

Dipole Model: SID1900



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.23
Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.076721
Relative permittivity (imaginary part)	12.607061
Conductivity (S/m)	1.367609
Variation (%)	-0.910000
SAR 10g (W/Kg)	1.899324
SAR 1g (W/Kg)	3.576354


SURFACE SAR

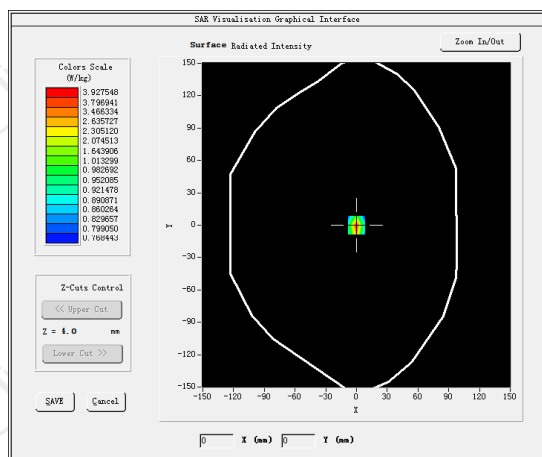

VOLUME SAR

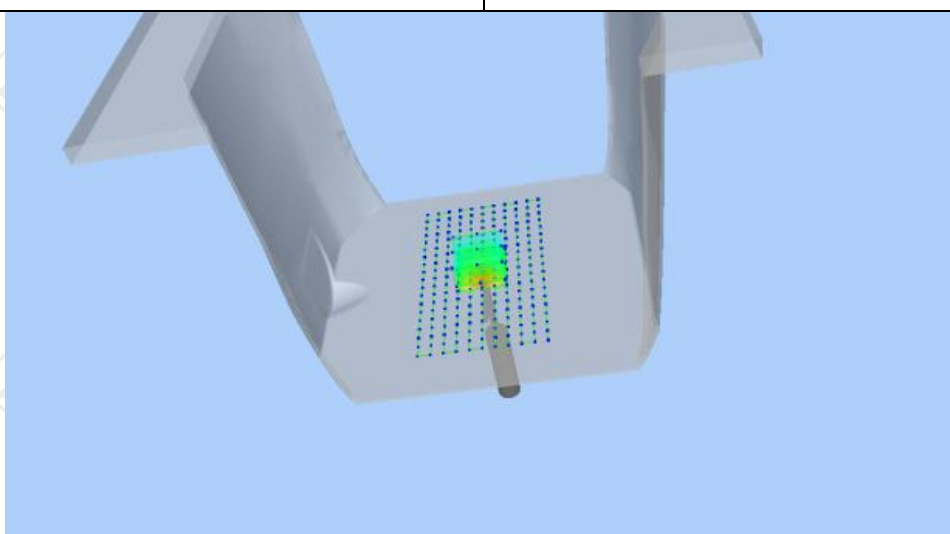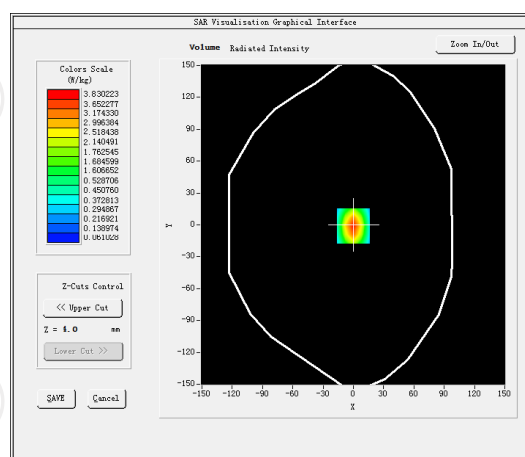

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.5325	2.5687	1.7025	1.3025	0.1125

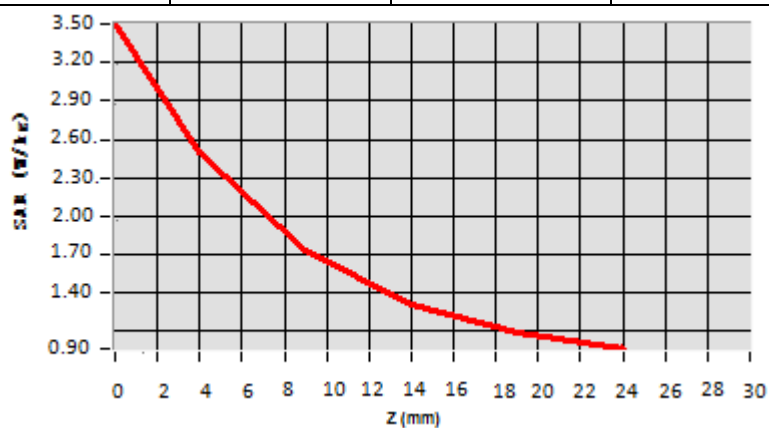

Hot spot position



Date of measurement: 11/22/2022 Test mode: 2450MHz (Head)


Product Description: Validation

Dipole Model: SID2450



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.31
Frequency (MHz)	2450.000000
Relative permittivity (real part)	37.821613
Relative permittivity (imaginary part)	13.546980
Conductivity (S/m)	1.834111
Variation (%)	-0.470000
SAR 10g (W/Kg)	2.364445
SAR 1g (W/Kg)	4.994244


SURFACE SAR

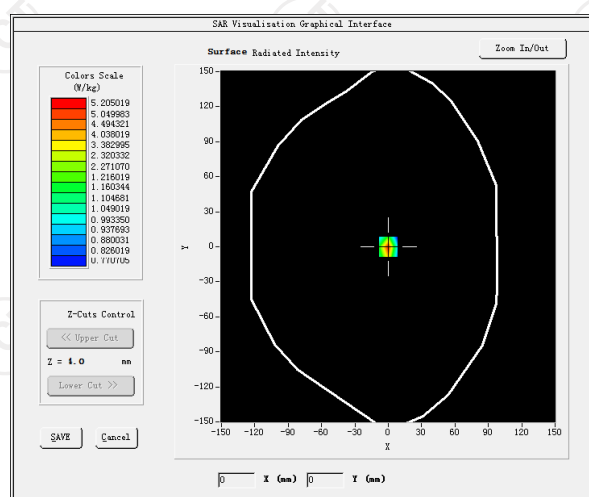

VOLUME SAR

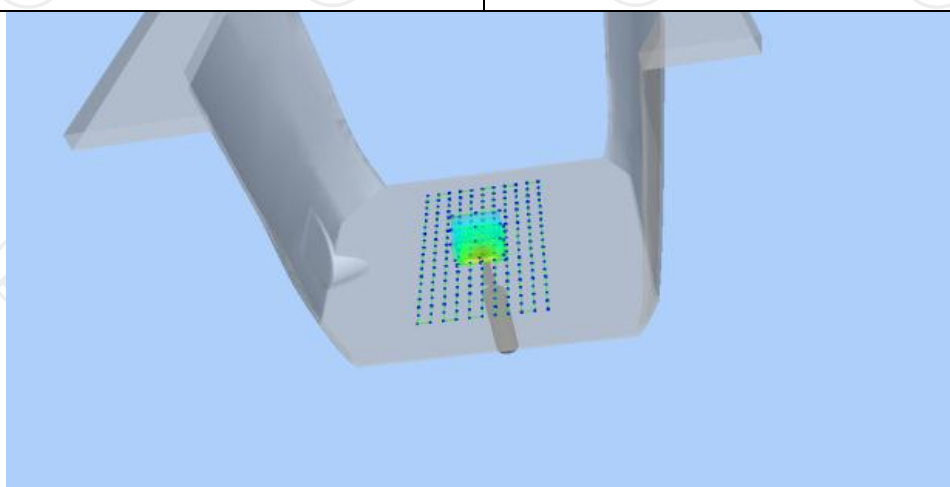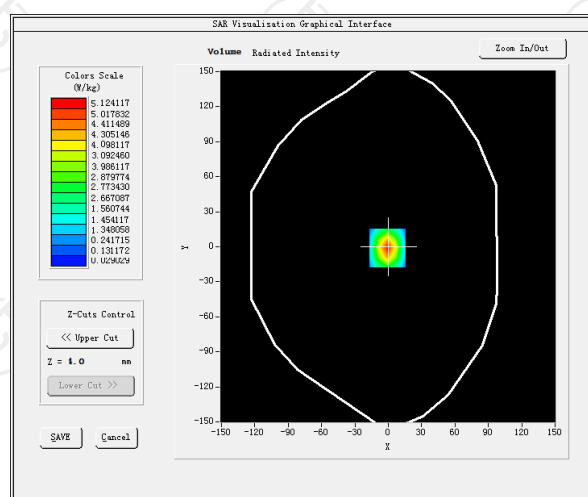

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.0262	2.7584	1.5026	0.8252	0.4125

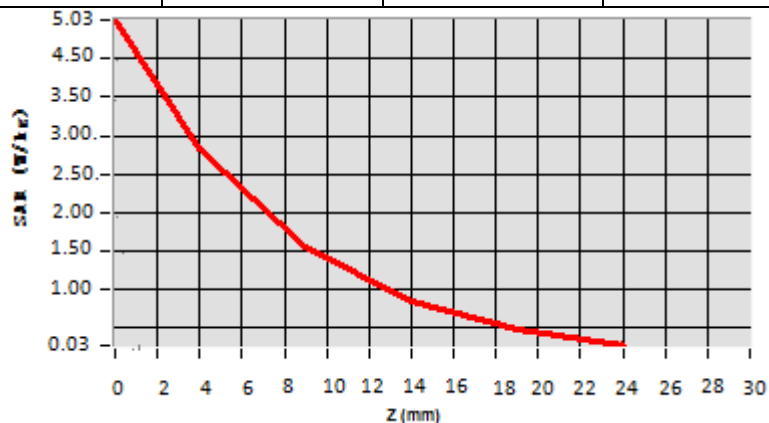

Hot spot position



Date of measurement: 11/25/2022 Test mode: 2600MHz (Head)


Product Description: Validation

Dipole Model: SID2600



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	4.36
Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.853477
Relative permittivity (imaginary part)	13.545489
Conductivity (S/m)	1.922567
Variation (%)	-1.360000
SAR 10g (W/Kg)	2.430127
SAR 1g (W/Kg)	5.413744


SURFACE SAR

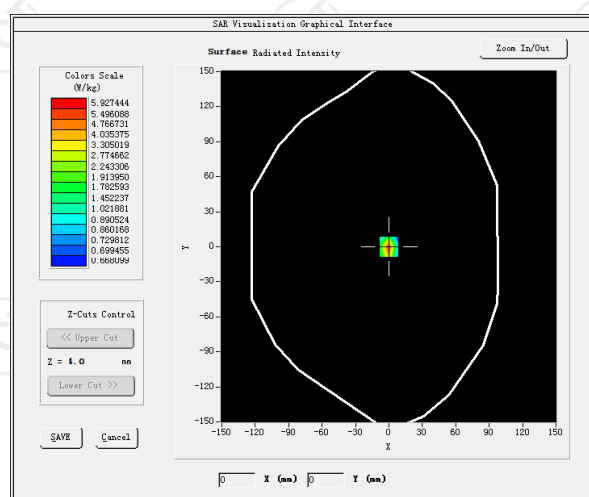

VOLUME SAR

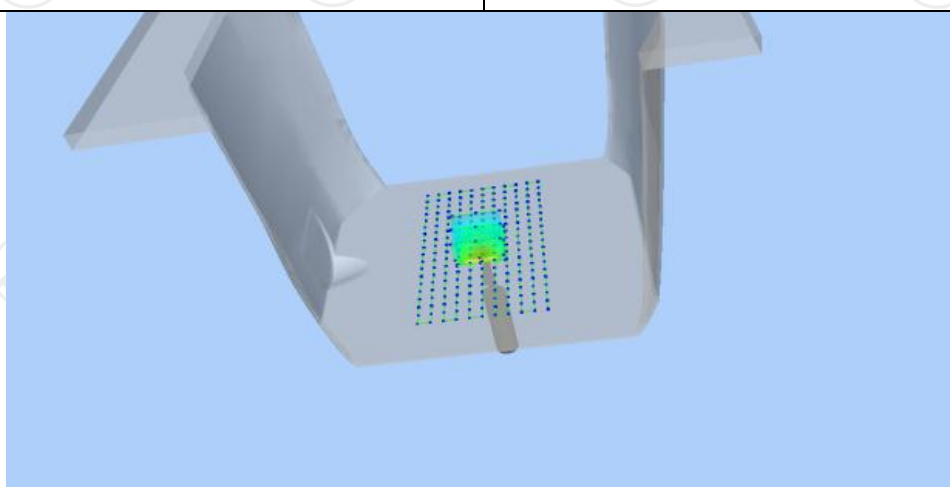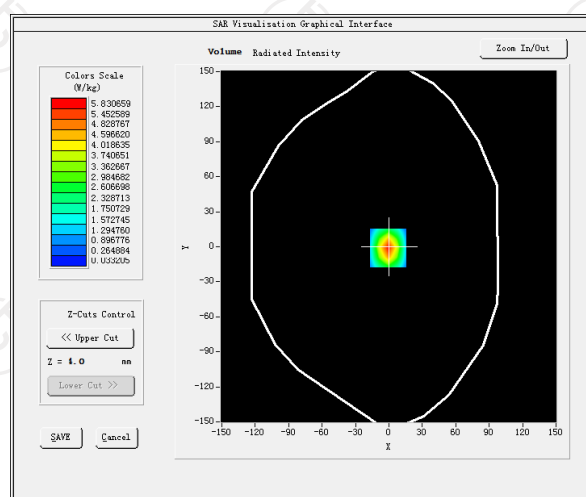

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.7893	3.2375	0.2098	0.0387	0.0249

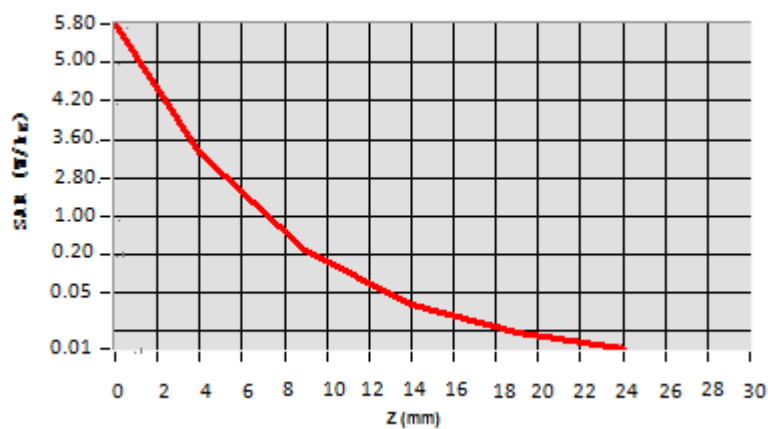


Hot spot position





Date of measurement: 11/28/2022 Test mode: 5200MHz (Head)
 Product Description: Validation
 Dipole Model: SID5200
 E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.01
Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.068832
Relative permittivity (imaginary part)	13.679428
Conductivity (S/m)	5.220788
Variation (%)	-0.820000
SAR 10g (W/Kg)	1.807521
SAR 1g (W/Kg)	5.012481


SURFACE SAR

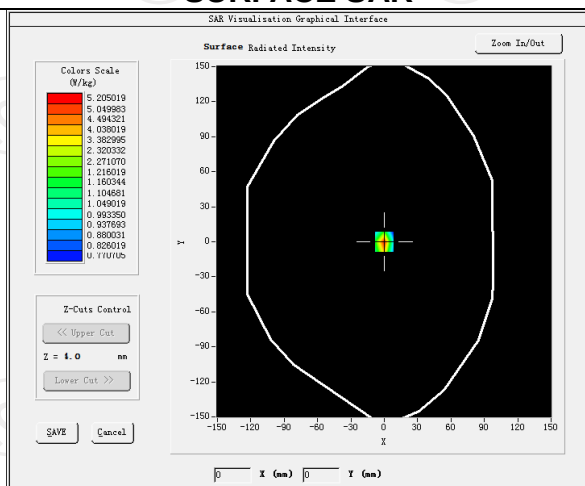

VOLUME SAR

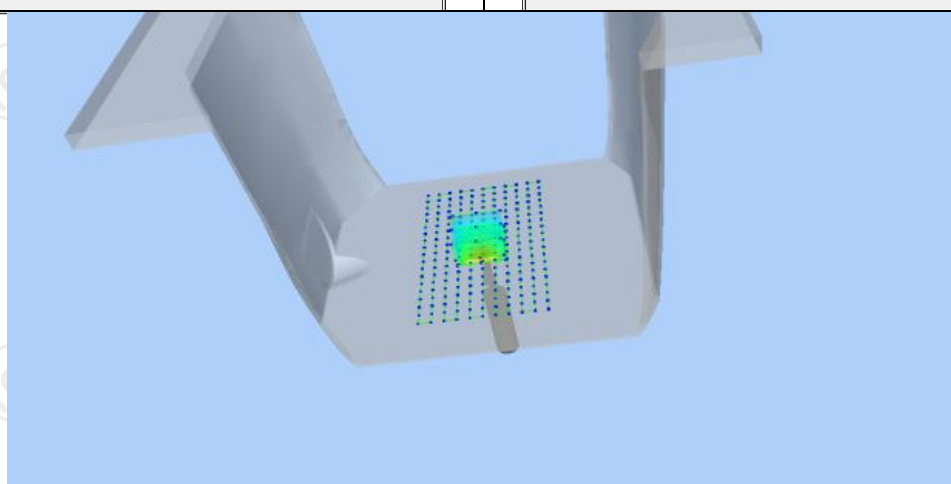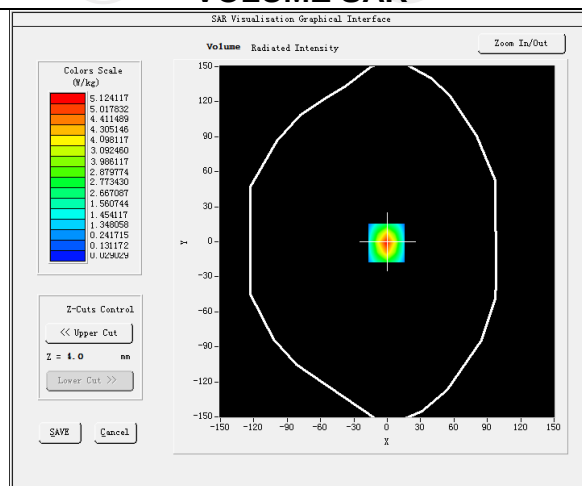

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.0132	2.7584	1.5026	0.8252	0.4125

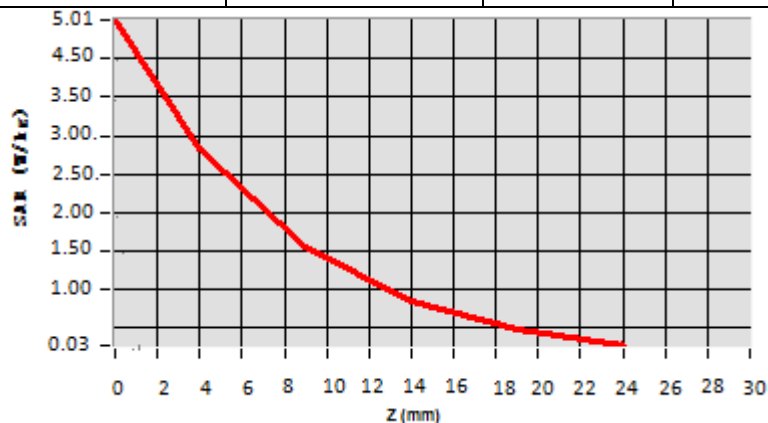


Hot spot position





Date of measurement: 12/02/2022 Test mode: 5300MHz (Head)
 Product Description: Validation
 Dipole Model: SID5300
 E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	1.94
Frequency (MHz)	5300.000000
Relative permittivity (real part)	36.068832
Relative permittivity (imaginary part)	13.680430
Conductivity (S/m)	4.690788
Variation (%)	-0.820000
SAR 10g (W/Kg)	17.217521
SAR 1g (W/Kg)	5.922481


SURFACE SAR

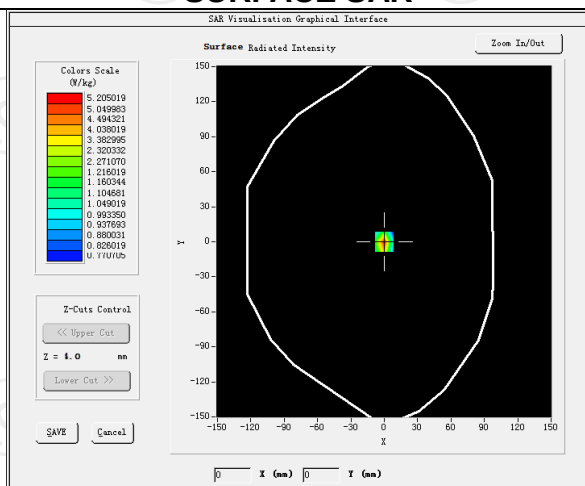

VOLUME SAR

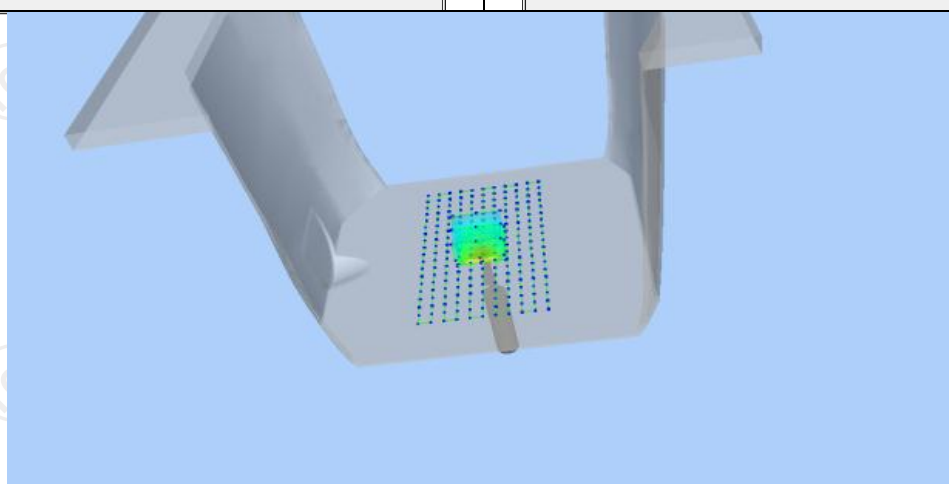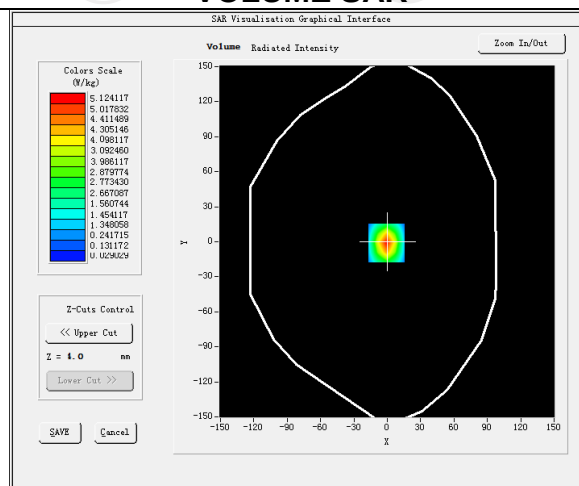

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	49.15	27.584	20.346	11.252	5.4125

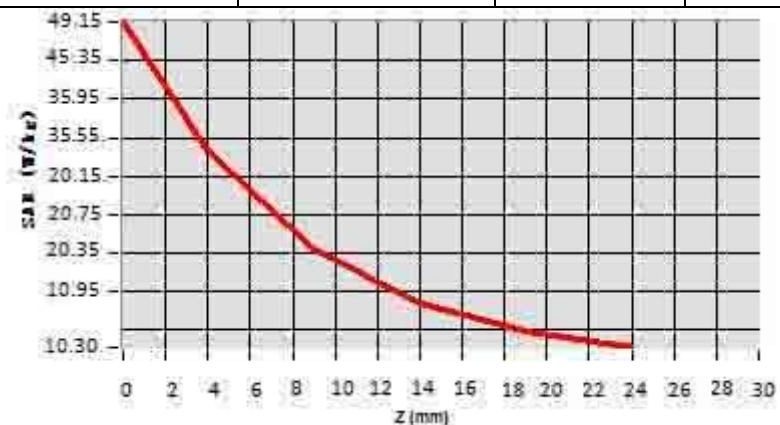

Hot spot position



Date of measurement: 12/07/2022 Test mode: 5600MHz (Body)


Product Description: Validation

Dipole Model: SID5000



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.12
Frequency (MHz)	5600.000000
Relative permittivity (real part)	47.599999
Relative permittivity (imaginary part)	13.329440
Conductivity (S/m)	5.770354
Variation (%)	1.410000
SAR 10g (W/Kg)	5.994255
SAR 1g (W/Kg)	18.066112


SURFACE SAR

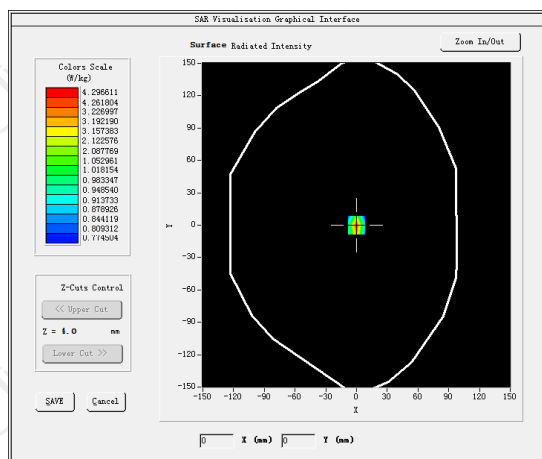

VOLUME SAR

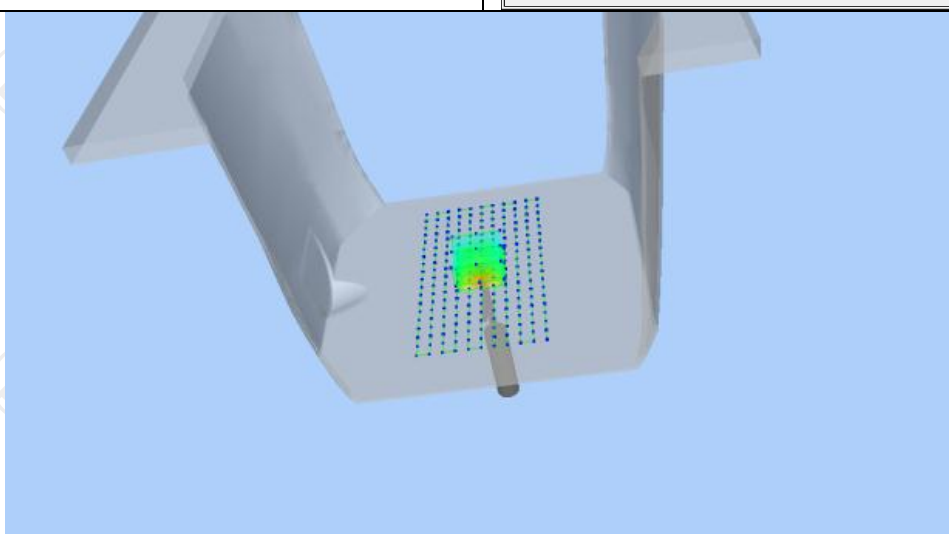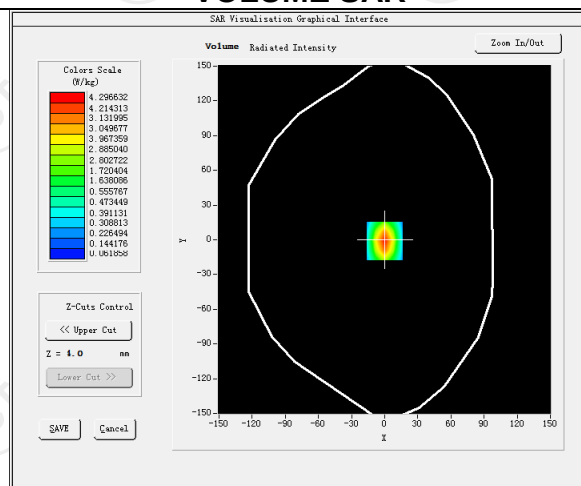

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	51.4532	30.7154	20.9525	10.5194	10.3514

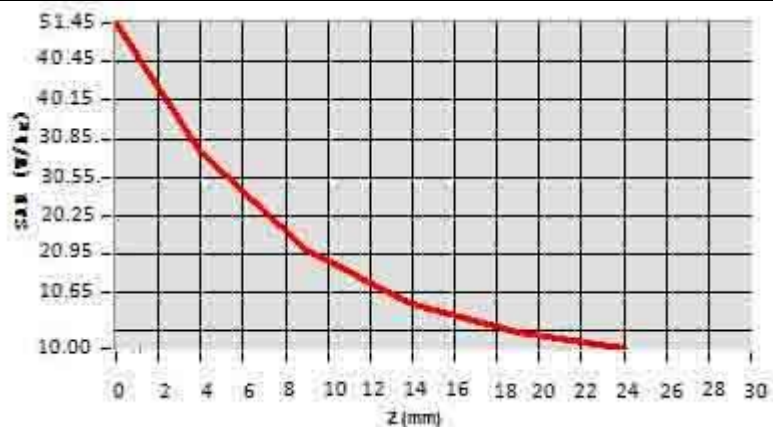

Hot spot position



Date of measurement: 12/13/2022 Test mode: 5800MHz (Head)


Product Description: Validation

Dipole Model: SID5800



E-Field Probe: SSE2 (SN 25/220 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.06
Frequency (MHz)	5800.000000
Relative permittivity (real part)	38.352823
Relative permittivity (imaginary part)	13.671675
Conductivity (S/m)	5.430828
Variation (%)	-2.800000
SAR 10g (W/Kg)	2.005121
SAR 1g (W/Kg)	5.063573


SURFACE SAR

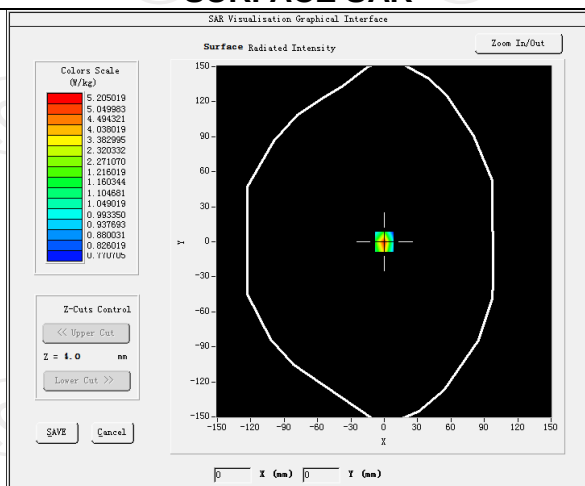


VOLUME SAR

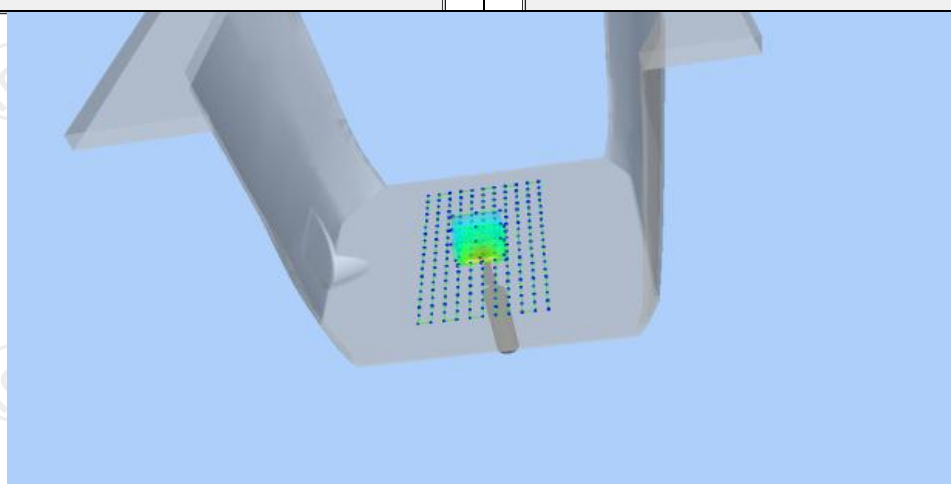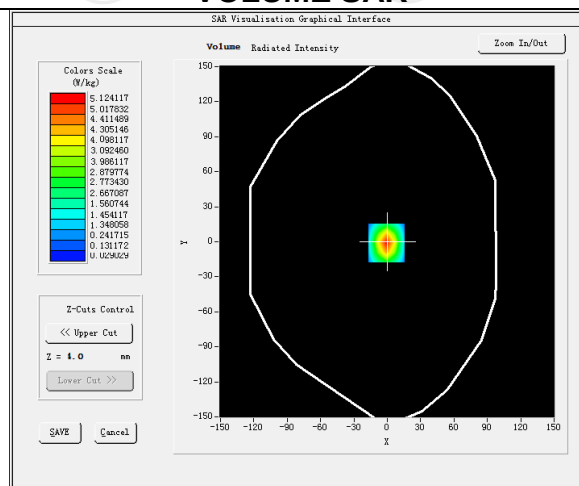

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	5.0622	2.8054	1.5421	0.8321	0.4130

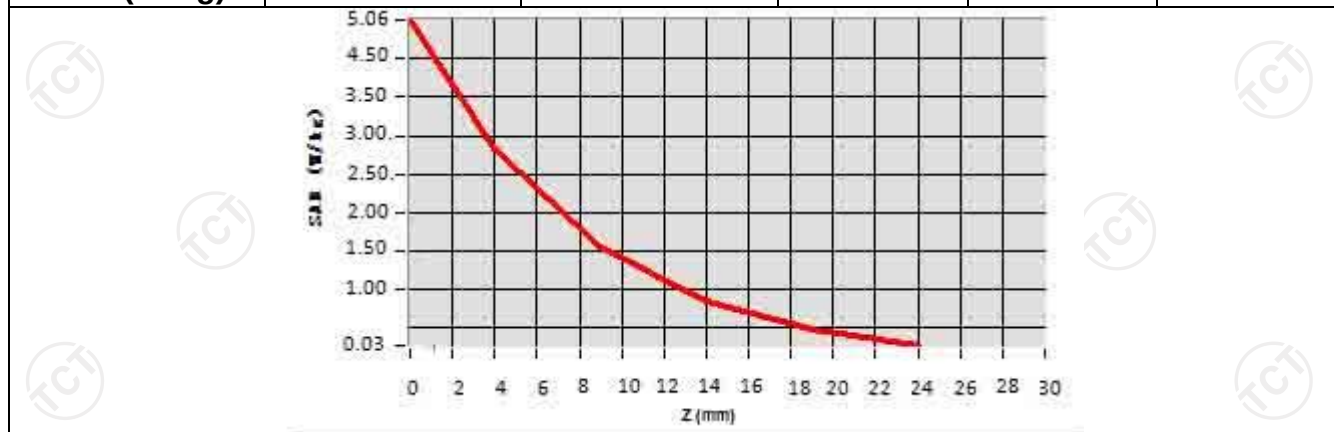

Hot spot position

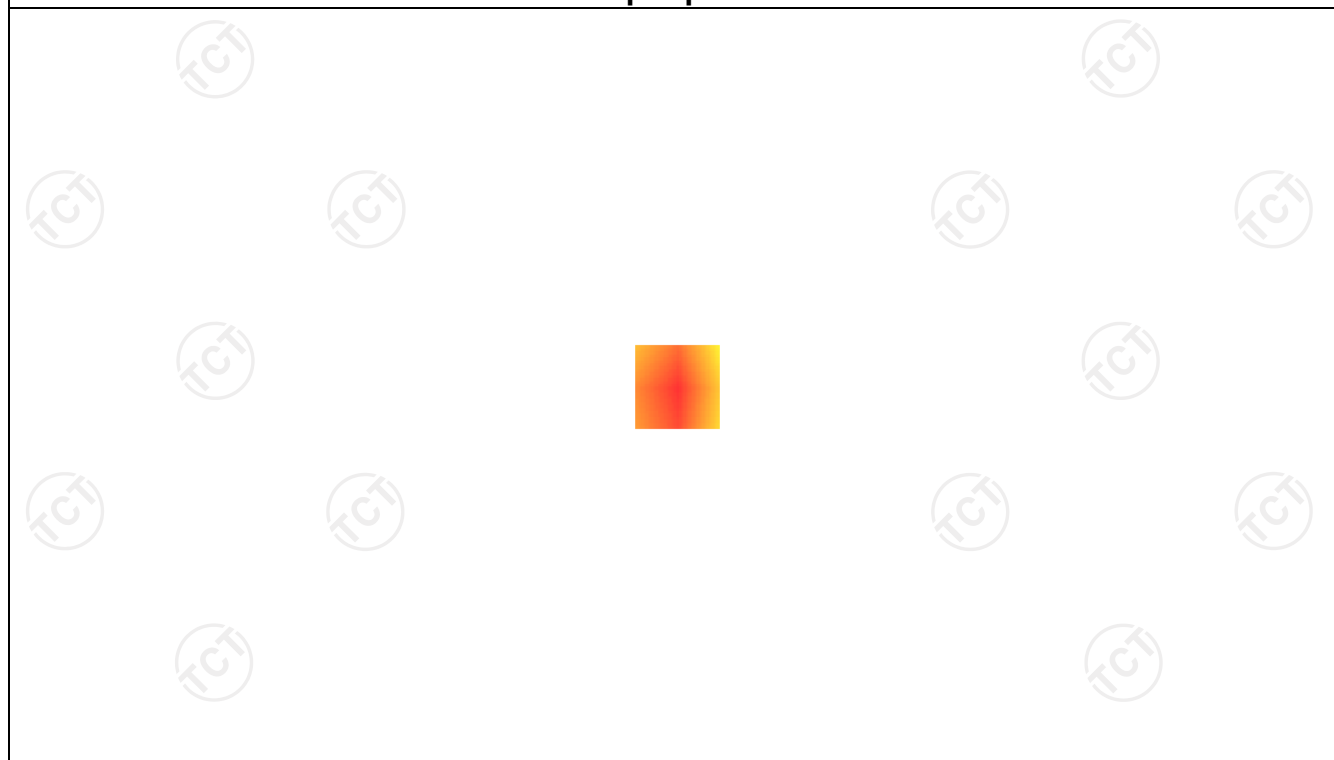

12. SAR Test Data

GSM850-1


MEASUREMENT 1

Middle Band SAR (Channel 190):


Date: 11/11/2022

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.212927
Relative permittivity (imaginary part)	21.368266
Conductivity (S/m)	0.971230
Variation (%)	0.820000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body front(0mm)
Band	GSM850(Voice)

SURFACE SAR

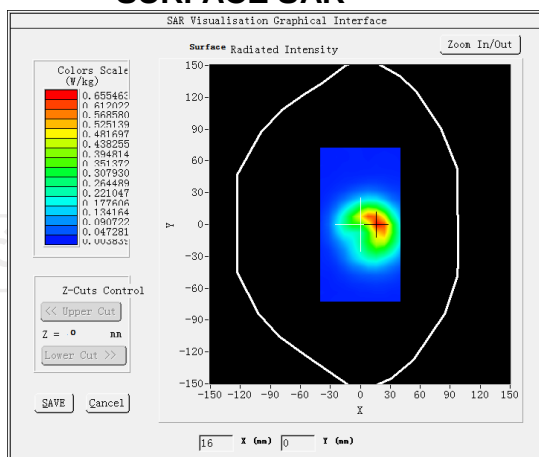


VOLUME SAR

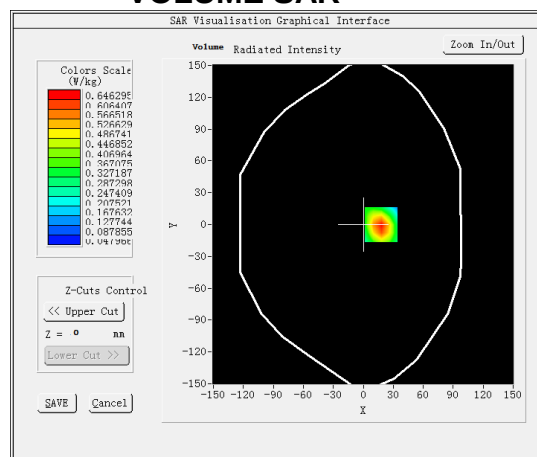


Maximum location: X=18.00, Y=0.00 SAR Peak: 1.02 W/kg


SAR 10g (W/Kg)	0.336175
SAR 1g (W/Kg)	0.185283

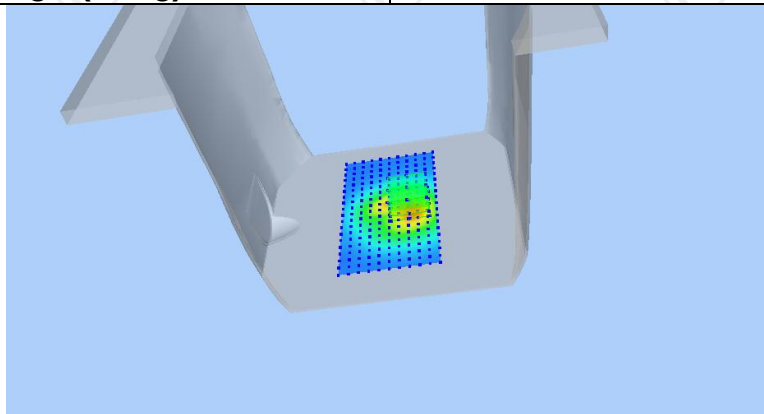

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0079	0.6463	0.3653	0.2129	0.1346

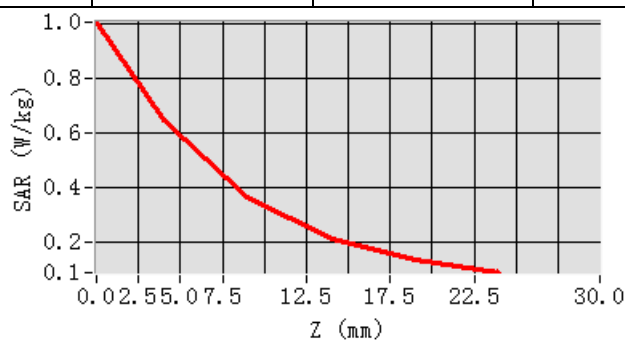

Hot spot position

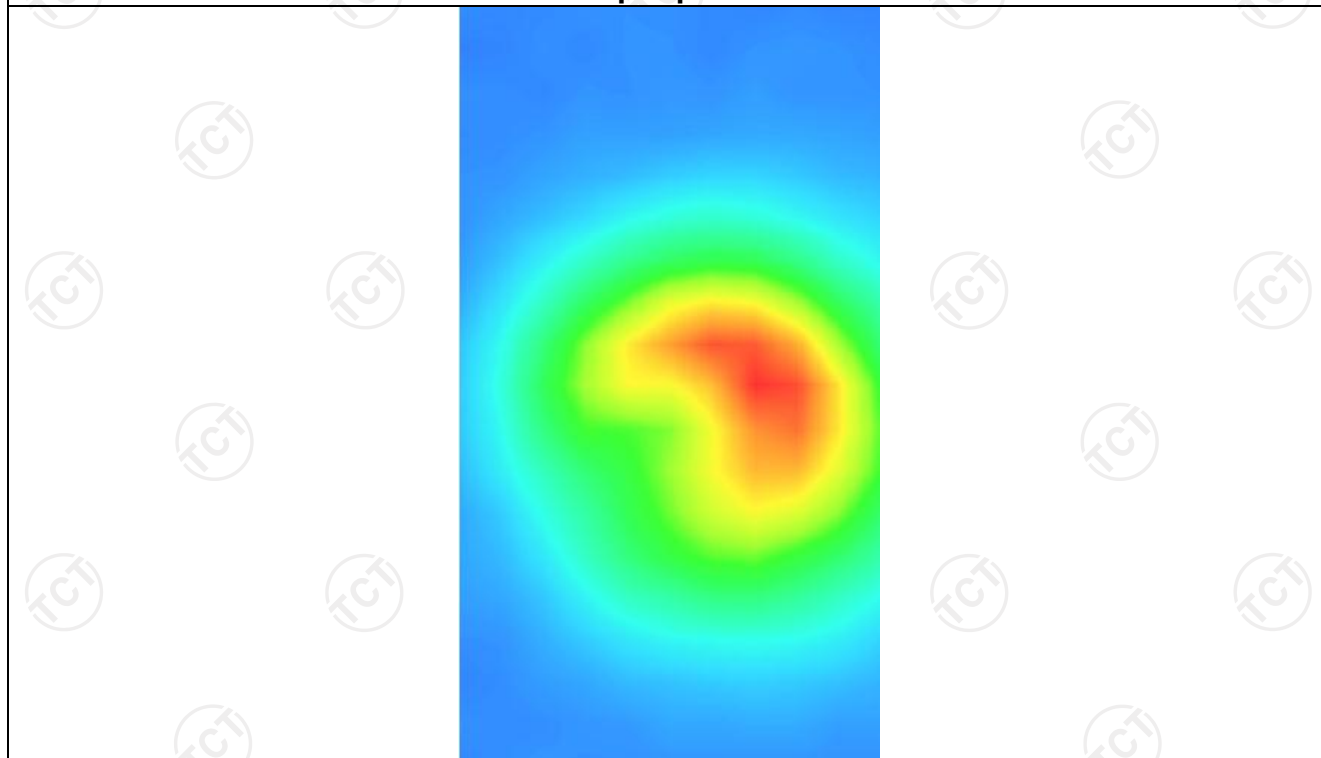


MEASUREMENT 2

Middle Band SAR (Channel 190):


Date: 11/11/2022

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.212927
Relative permittivity (imaginary part)	21.368266
Conductivity (S/m)	0.971230
Variation (%)	-2.600000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(0mm)
Band	GSM850(Voice)

SURFACE SAR

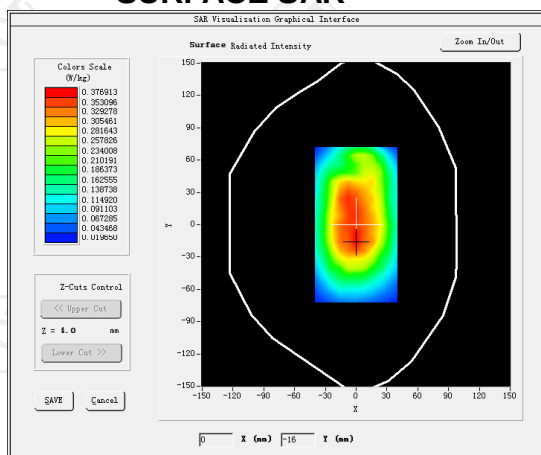


VOLUME SAR

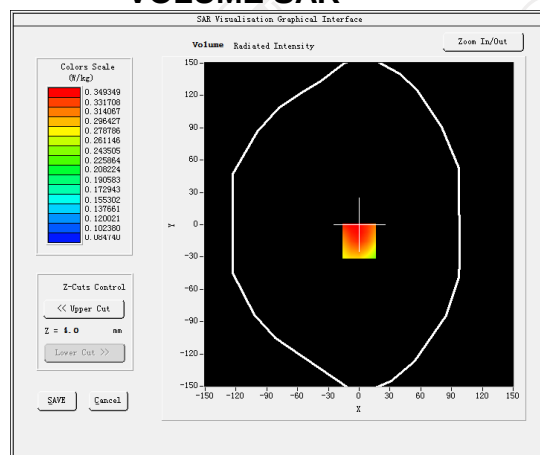


Maximum location: X=0.00, Y=-15.00 SAR Peak: 0.43 W/kg


SAR 10g (W/Kg)	0.259375
SAR 1g (W/Kg)	0.339121

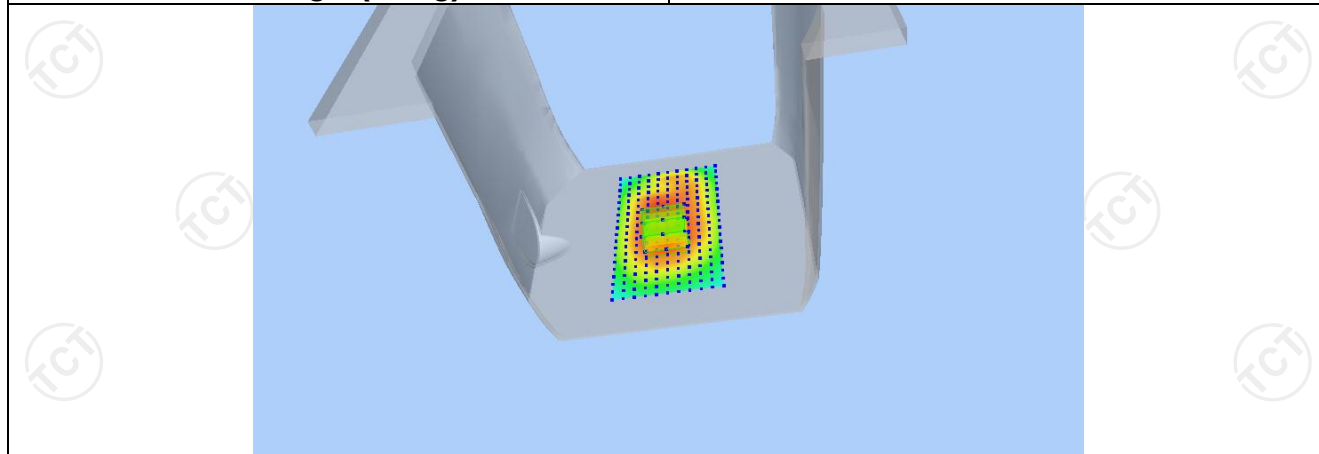

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9547	0.3493	0.2145	0.2163	0.1300

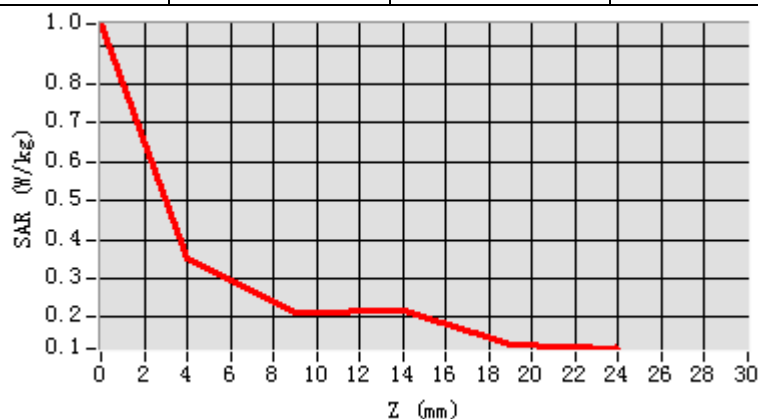

Hot spot position

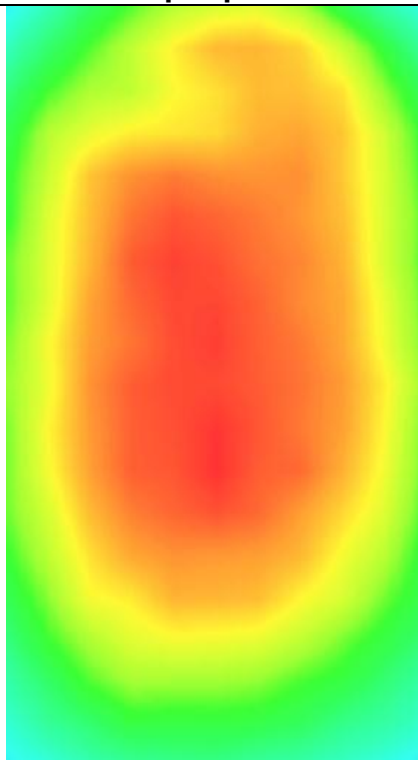


MEASUREMENT 3

Middle Band SAR (Channel 190)


Date: 11/11/2022

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.212927
Relative permittivity (imaginary part)	21.368266
Conductivity (S/m)	0.971230
Variation (%)	0.200000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(0mm)</u>
Band	<u>GSM850(GPRS 4slot)</u>

SURFACE SAR

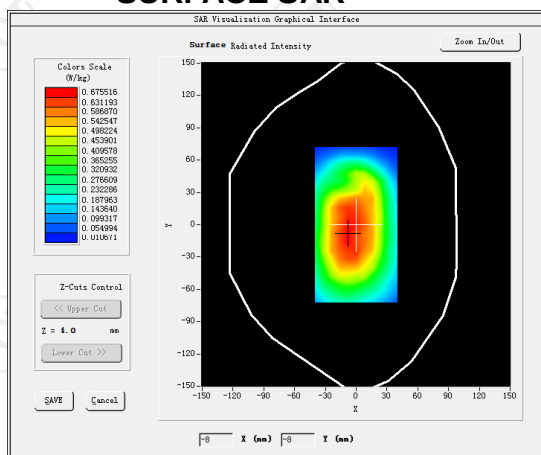


VOLUME SAR

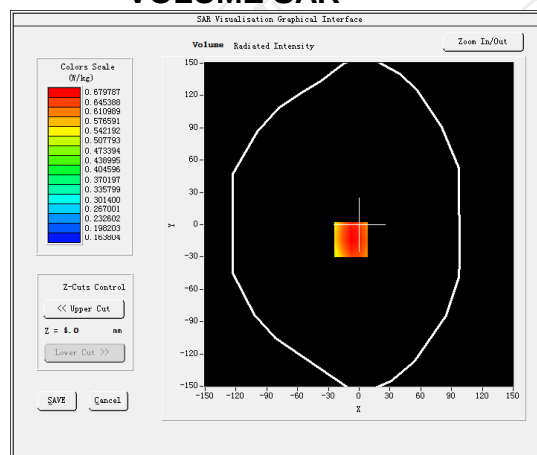


Maximum location: X=-8.00, Y=-14.00 SAR Peak: 0.84 W/kg


SAR 10g (W/Kg)	0.494016
SAR 1g (W/Kg)	0.660314

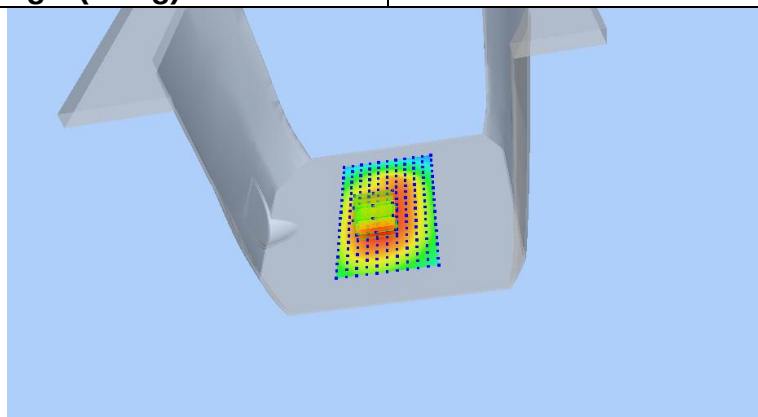

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8297	0.6798	0.5281	0.4101	0.3180

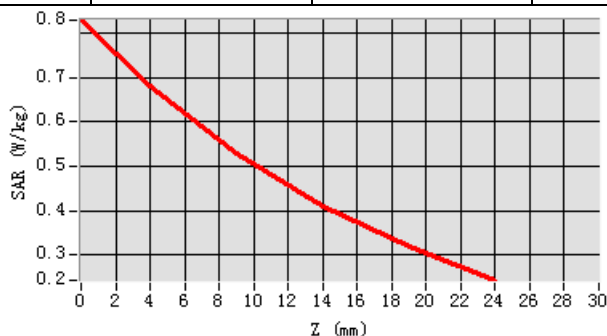

Hot spot position

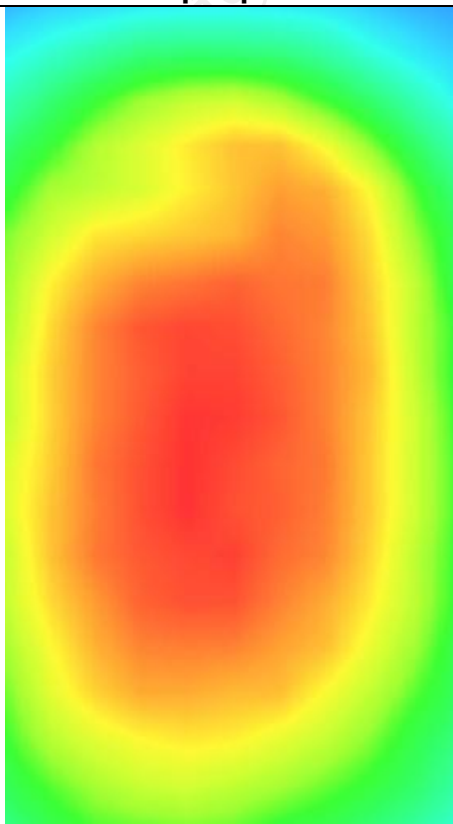


MEASUREMENT 4

Middle Band SAR (Channel 190)


Date: 11/11/2022

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.212927
Relative permittivity (imaginary part)	21.378266
Conductivity (S/m)	0.971230
Variation (%)	-0.370000
Crest Factor:	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	Validation plane
Device Position	Body back(0mm)
Band	GSM850(GPRS 4slot hotspot)

SURFACE SAR

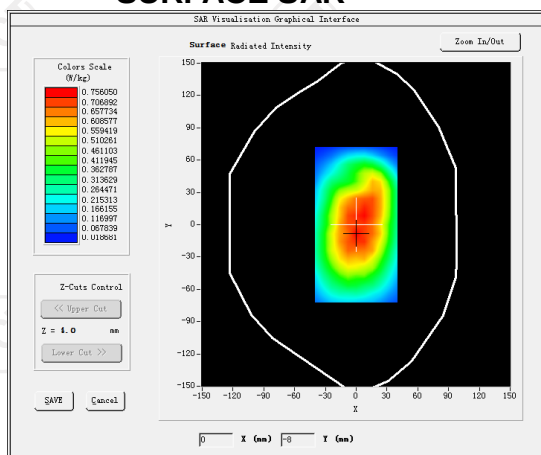


VOLUME SAR

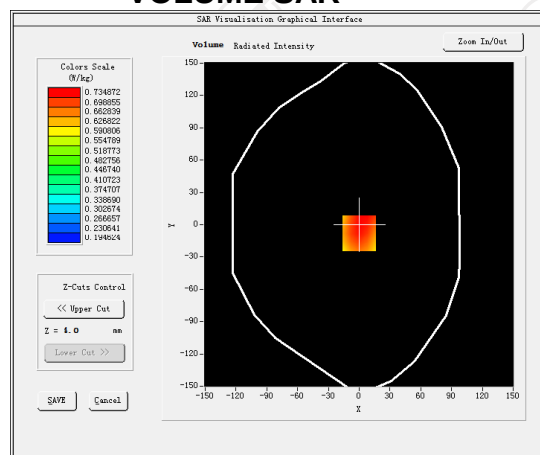


Maximum location: X=0.00, Y=-8.00 SAR Peak: 0.92 W/kg


SAR 10g (W/Kg)	0.530886
SAR 1g (W/Kg)	0.709812

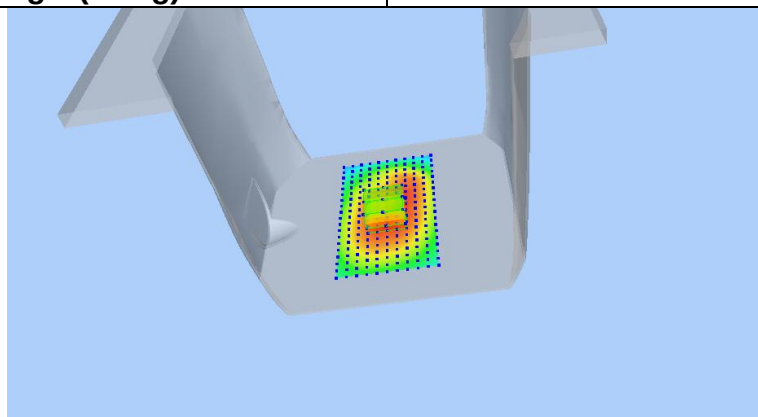

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0470	0.7349	0.5467	0.4377	0.3352

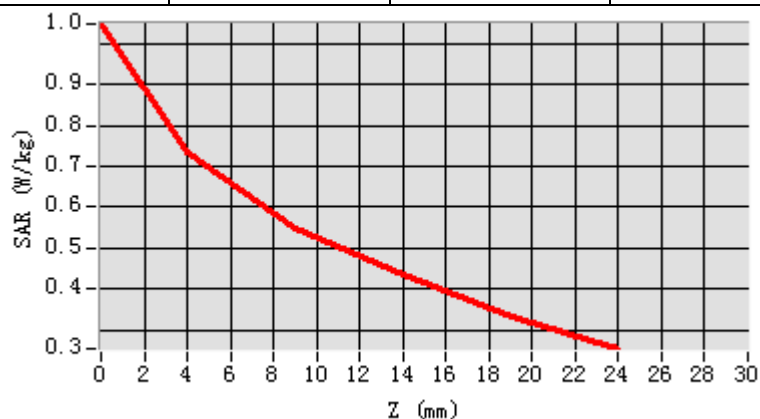

Hot spot position

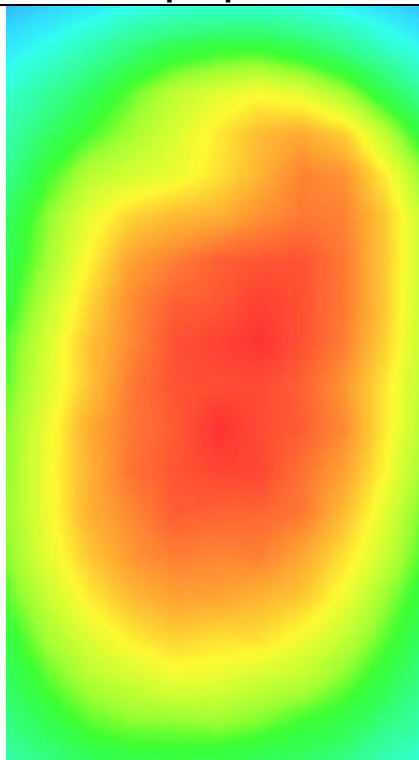

GSM1900 -1


MEASUREMENT 1

Hight Band SAR (Channel 810):


Date: 11/18/2022

Frequency (MHz)	1909.800000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.322400
Conductivity (S/m)	1.531736
Variation (%)	0.770000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body front(0mm)</u>
Band	<u>GSM1900(voice)</u>

SURFACE SAR

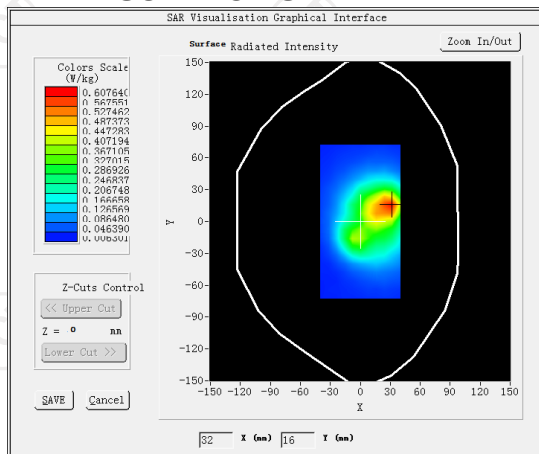


VOLUME SAR

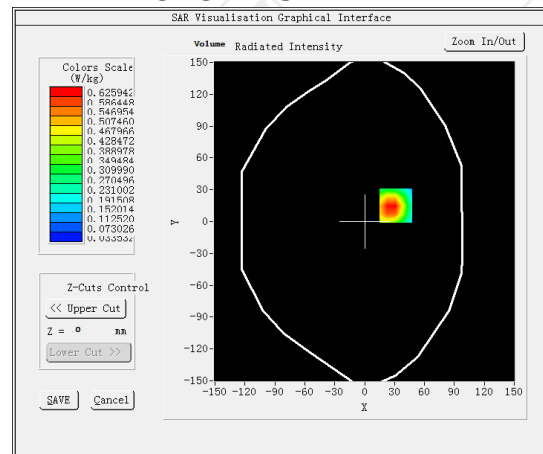


Maximum location: X=31.00, Y=15.00 SAR Peak: 1.05 W/kg


SAR 10g (W/Kg)	0.345131
SAR 1g (W/Kg)	0.291621

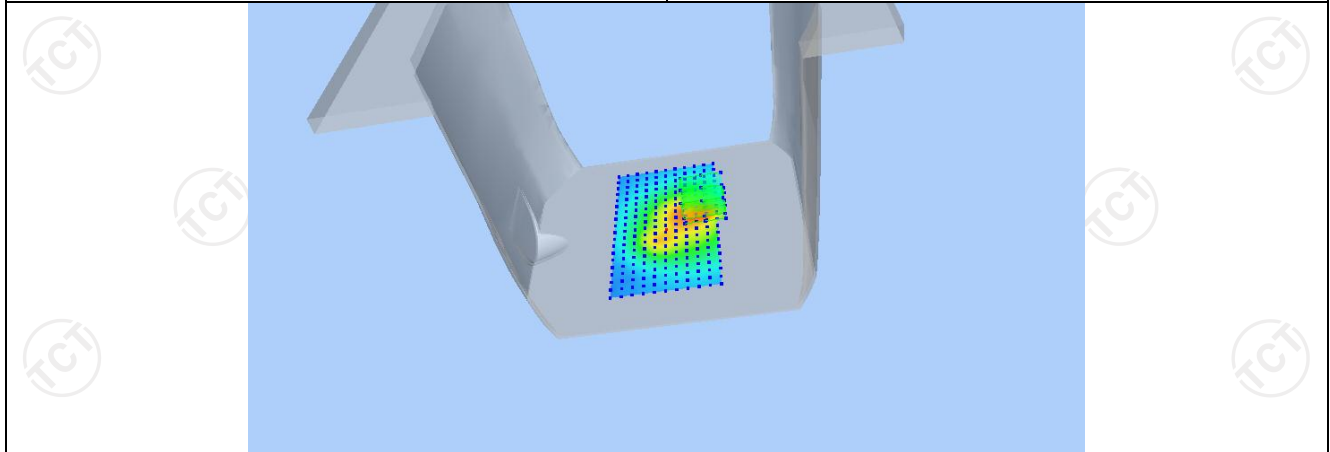

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0215	0.6259	0.3339	0.1881	0.1217

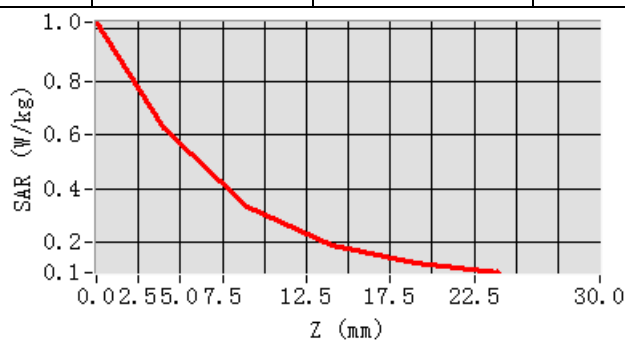

Hot spot position

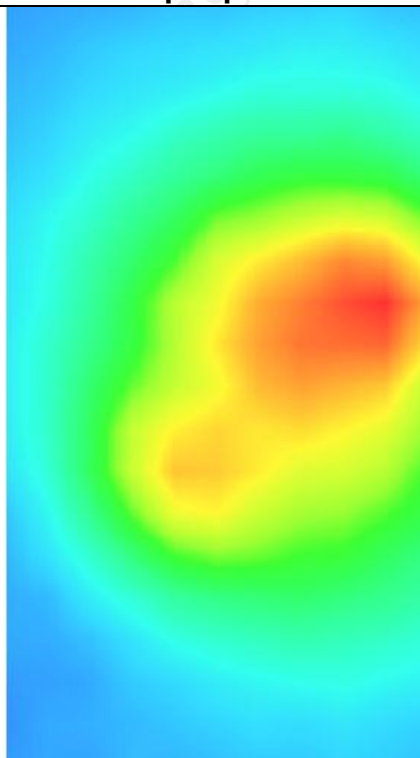


MEASUREMENT 2

Hight Band SAR (Channel 810):


Date: 11/18/2022

Frequency (MHz)	1909.800000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.322400
Conductivity (S/m)	1.531736
Variation (%)	-1.680000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(0mm)</u>
Band	<u>GSM1900(voice)</u>

SURFACE SAR

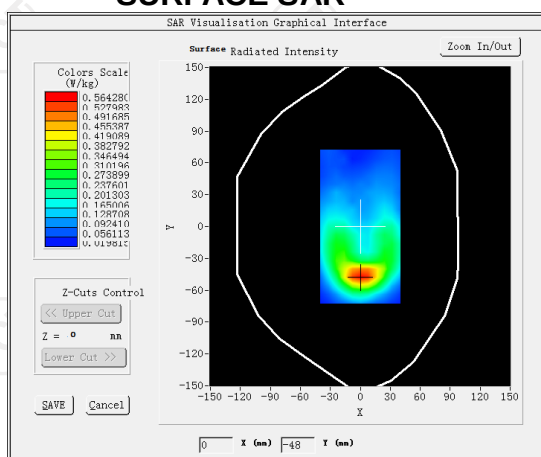


VOLUME SAR

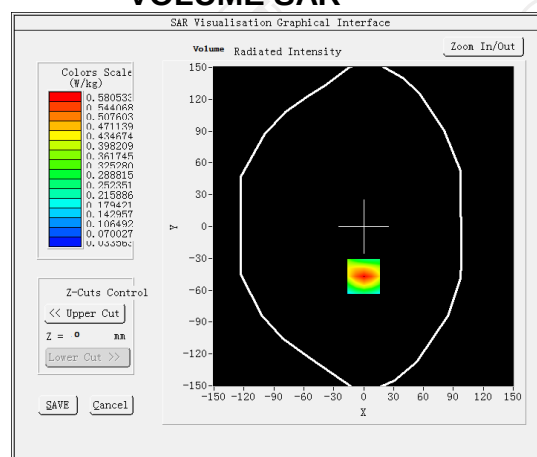


Maximum location: X=0.00, Y=-47.00 SAR Peak: 0.84 W/kg


SAR 10g (W/Kg)	0.305824
SAR 1g (W/Kg)	0.540363

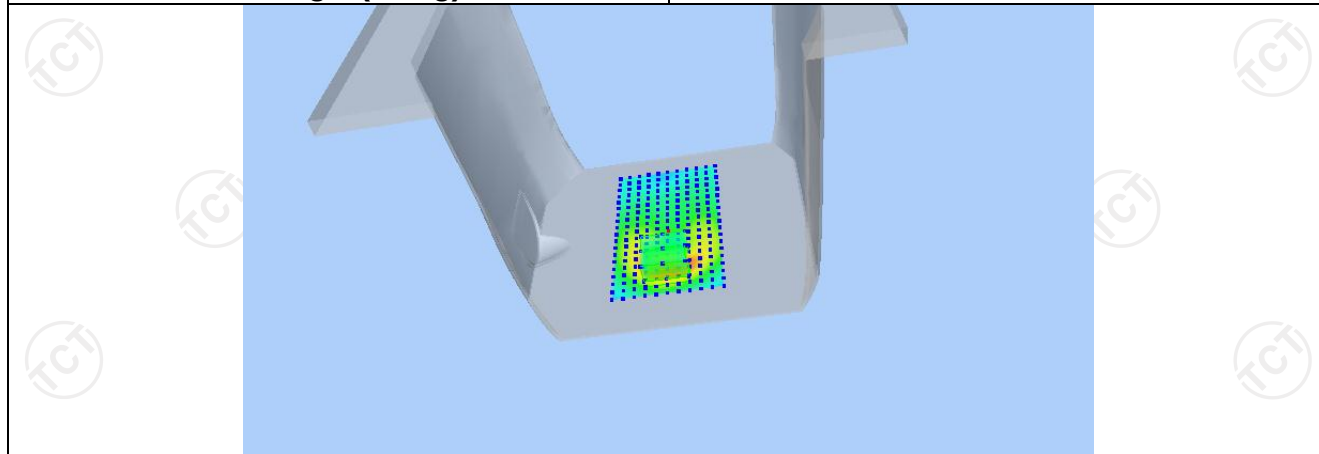

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.8414	0.5805	0.3567	0.2159	0.1294

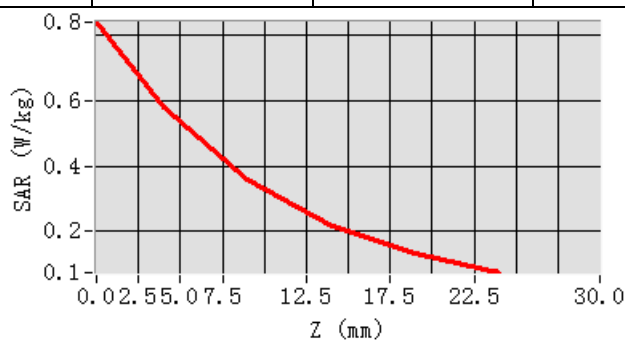

Hot spot position

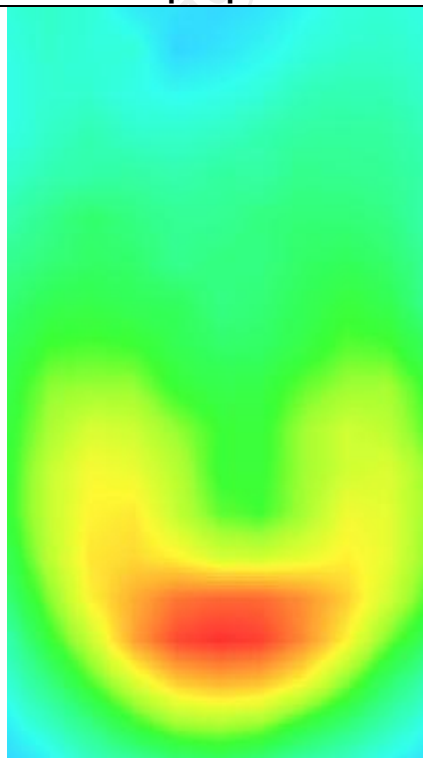


MEASUREMENT 3

Middle Band SAR (Channel 661):


Date: 11/18/2022

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.322400
Conductivity (S/m)	1.531736
Variation (%)	-0.930000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(0mm)</u>
Band	<u>GSM1900(GPRS 4slot)</u>

SURFACE SAR

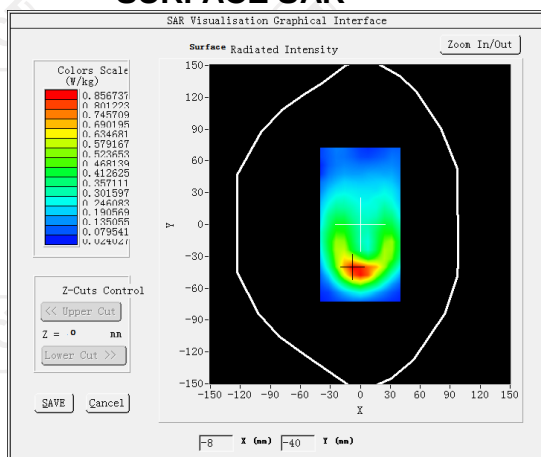


VOLUME SAR

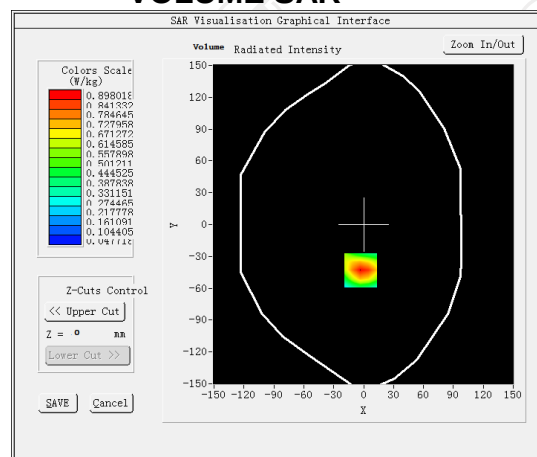


Maximum location: X=-3.00, Y=-43.00 SAR Peak: 1.36 W/kg


SAR 10g (W/Kg)	0.469354
SAR 1g (W/Kg)	0.690432

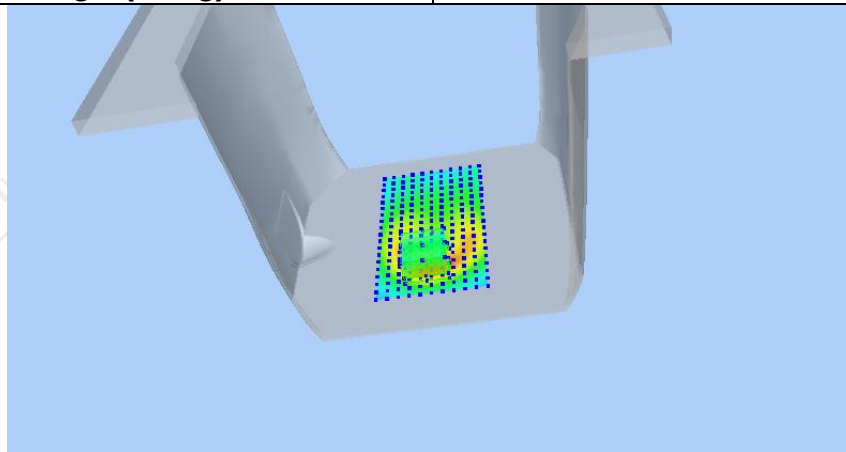

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3494	0.8980	0.5288	0.3119	0.1885

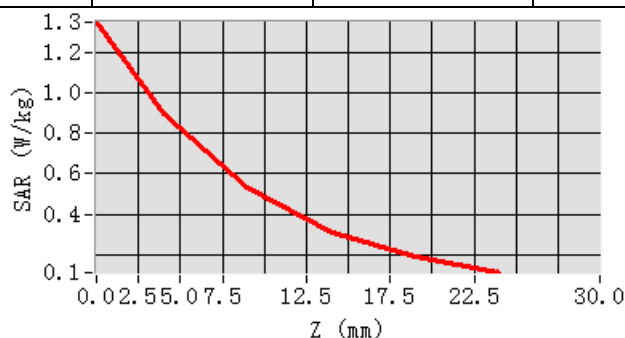

Hot spot position

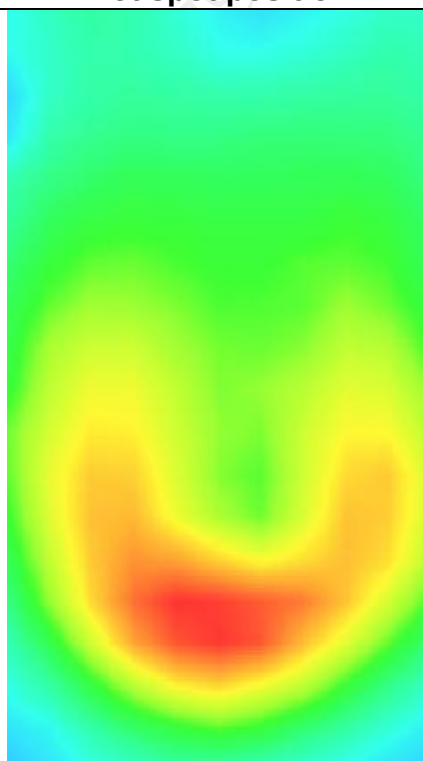


MEASUREMENT 4

Middle Band SAR (Channel 661):


Date: 11/18/2022

Frequency (MHz)	1880.000000
Relative permittivity (real part)	53.341337
Relative permittivity (imaginary part)	14.322400
Conductivity (S/m)	1.491736
Variation (%)	1.840000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(0mm)</u>
Band	<u>GSM1900(GPRS 4slot hotspot)</u>

SURFACE SAR

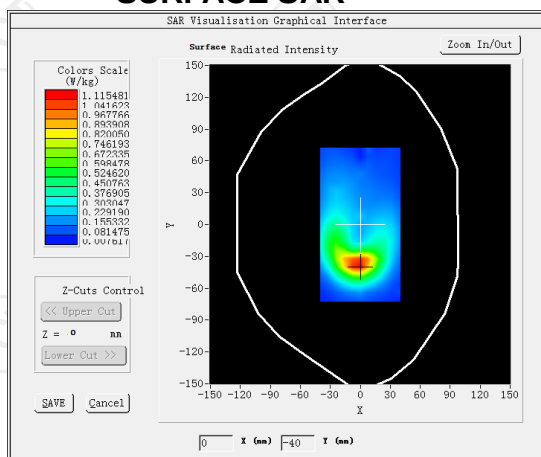


VOLUME SAR

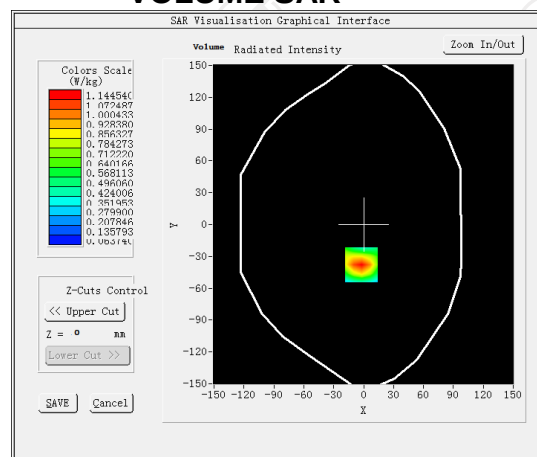


Maximum location: X=-2.00, Y=-38.00 SAR Peak: 1.80 W/kg


SAR 10g (W/Kg)	0.365070
SAR 1g (W/Kg)	0.721860

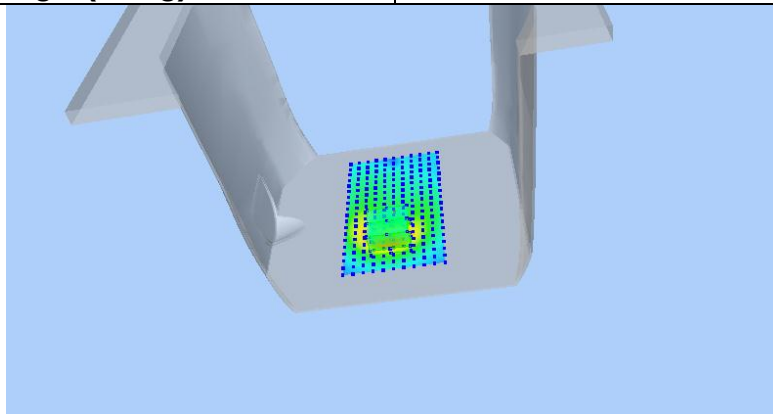

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.7861	1.1445	0.6398	0.3597	0.2111

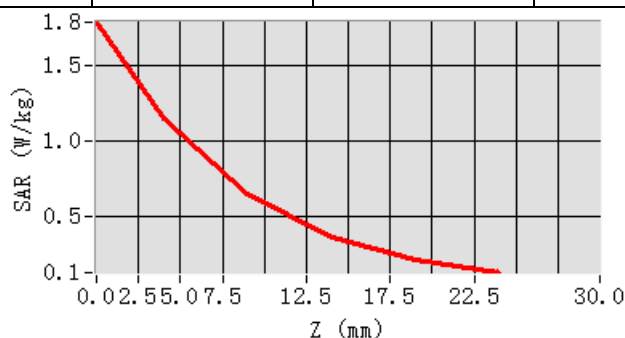


Hot spot position

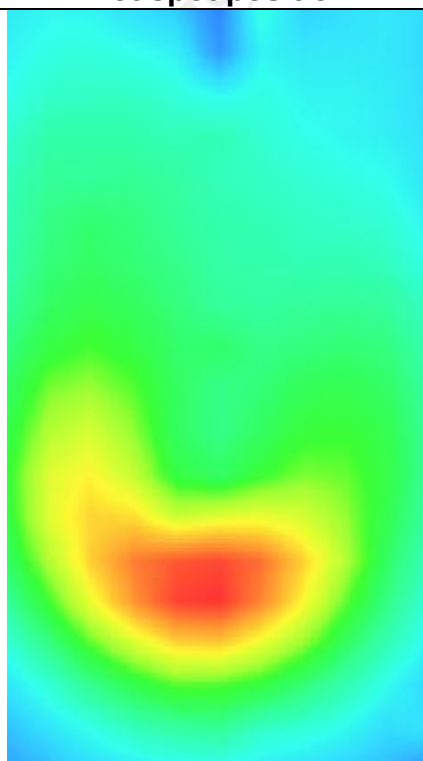


WCDMA Band II -1 MEASUREMENT 1

Hight Band SAR (Channel 9538):		Date: 11/18/2022
Frequency (MHz)	1907.600000	
Relative permittivity (real part)	53.291337	
Relative permittivity (imaginary part)	14.232400	
Conductivity (S/m)	1.526736	
Variation (%)	-2.630000	
Crest Factor	1.0	
Probe Conversion factor	2.32	
E-Field Probe:	SSE2 (SN 25/22 EPGO375)	
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>	
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>	
Phantom	Validation plane	
Device Position	Body front(0mm)	
Band	BAND2 WCDMA1900	

SURFACE SAR

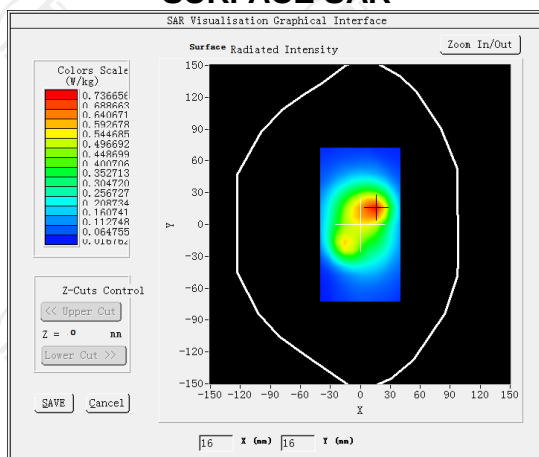


VOLUME SAR

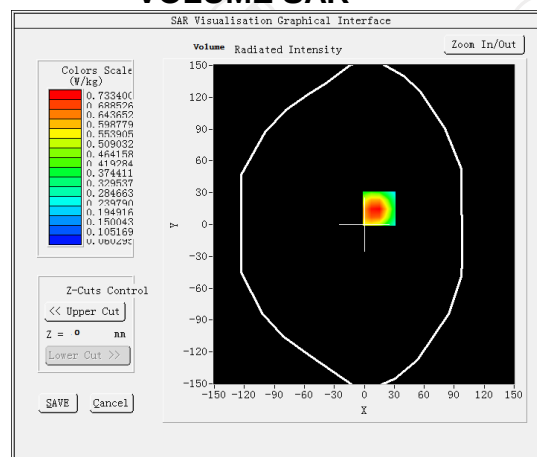


Maximum location: X=15.00, Y=15.00 SAR Peak: 1.15 W/kg


SAR 10g (W/Kg)	0.426900
SAR 1g (W/Kg)	0.379640

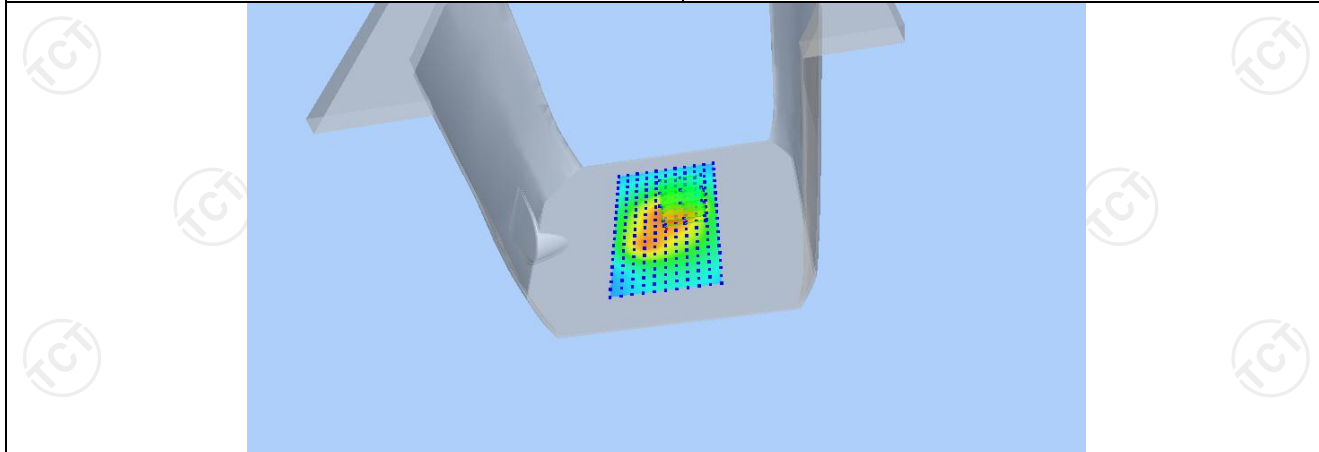

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1366	0.7334	0.4226	0.2572	0.1752

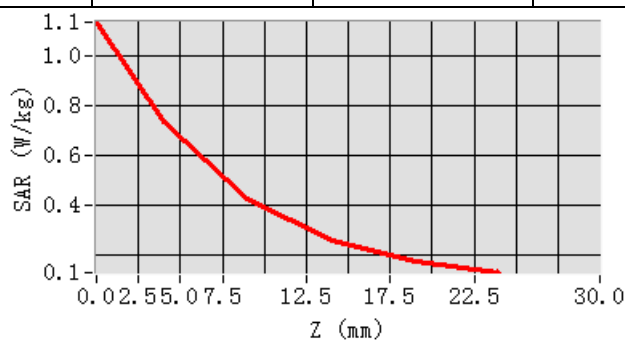

Hot spot position

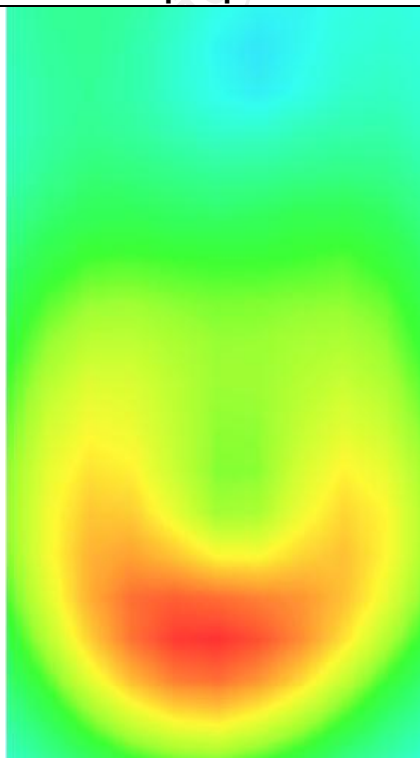


MEASUREMENT 2

Hight Band SAR (Channel 9538):


Date: 11/18/2022

Frequency (MHz)	1907.600000
Relative permittivity (real part)	53.291337
Relative permittivity (imaginary part)	14.232400
Conductivity (S/m)	1.526736
Variation (%)	-1.730000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPGO375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back(0mm)</u>
Band	<u>BAND2 WCDMA1900</u>

SURFACE SAR

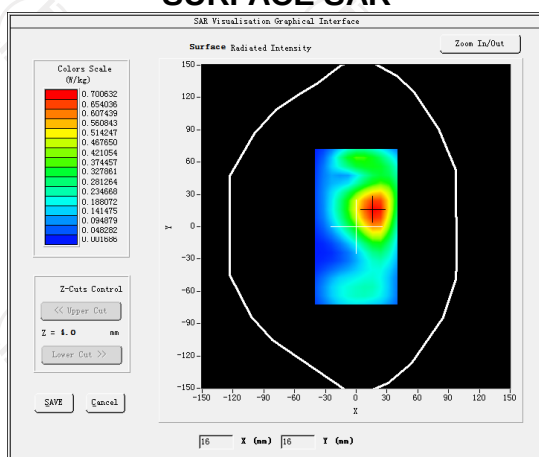

VOLUME SAR

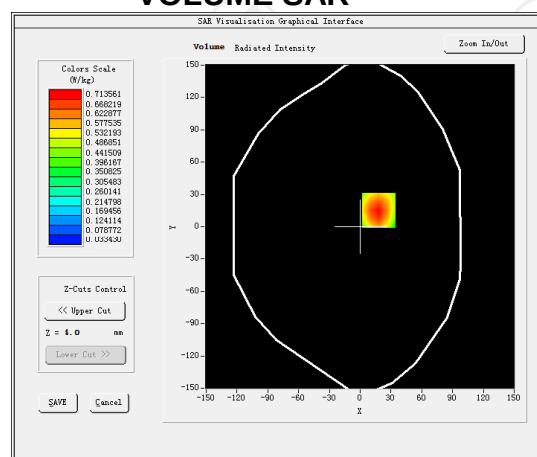

Maximum location: X=18.00, Y=15.00 SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)

0.403860

SAR 1g (W/Kg)

0.676382

